

FCC ID: XELST-88

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

www.we-com.net

stereo headset
sound on the go!



WE.COM™
bluetooth headset



CLIP MY ST-88 **user guide**

Thank you for selecting ST-88 Headset

ST-88 Bluetooth Headset gives you more freedom on the move. Pair with compatible Bluetooth mobile phones and this headset makes it easier for you to carry on with your tasks whilst making or taking a call.

ST-88 Bluetooth Headset is compliant with Bluetooth Version 2.0 specifications, and is compatible with latest mobile phones supporting Bluetooth Bluetooth Headset or Handsfree Profiles.

Contents

ST-88 Bluetooth Headset Overview	1
Display Information	2
Getting Started	3
Charging Your Headset	3
Turning Your Headset On and Off	5
Pairing Your Headset	6
Using Your Headset	8
Activate/Inactivate Caller ID	13
Turning the Built-in Buzzer On and Off	13
Troubleshooting	15
Safety Information	16
Care and Maintenance	17
Compatibility	19
Products Specifications	19

ST-88 Bluetooth Headset Overview



(Fig1)

- | | |
|---|--------------------|
| 1. Built-in Buzzer | 8. Charging Socket |
| 2. LCD Screen | 9. Last Track key |
| 3. Audio Jack | 10. Next Track key |
| 4. Built-in Microphone | 11. Volume + Key |
| 5. Built-in Rechargeable Li-ion Battery | 12. Volume - Key |
| 6. Earpiece | |
| 7. Multi-function Button(MFB) | |

— 1 —

Display Information

	Full Battery		
	Half Battery		
	Low / Empty Battery		
Pairing	Ready to pair / Pairing		
Connected	The headset is connected with the mobile phone		
Power on	Displaying " power on "		
2h	Multi-HFP Profile Mode without stereo		
Ready	If haven't been connected , it will shows "ready"		
ha	Headset + A2DP Profile Mode		
	AV service	Charging	Charging
	Connection Status Icon	Connecting	Pairing status
	Communication mode	Multi-HFP on	Multi-HFP Mode on
Power off	Displaying " power off "	Multi-HFP off	Multi-HFP Mode off
Charge complete	Charging finished	Reset headset	Delete all pairing status
Outgoing call	Dialling status	Caller ID on	Activate Caller ID
Incoming call	Inactivate caller ID display	Caller ID off	Inactivate Caller ID

— 2 —

Getting Started

To use your ST-88 Bluetooth Headset, please follow the steps below:

- Ensure your headset is fully charged.
- Pair your charged headset with a Bluetooth-enabled mobile phone.

Charging Your Headset

Connect the charger to the A/C wall outlet(mains socket) and the charger plug to the headset's charging socket (fig.2), the LCD will display "Charging....."

- IMPORTANT: Charging indication will be delayed for a few seconds if the headset has no been used for a long time or the battery is drained.


Nominal Charging Time

Charging the battery fully is normally within 2 hours. When the battery is fully charged, the battery Icon will be displaying fully filled and LCD displays "Charger complete" . Disconnect the charger from AC wall outlet(mains socket).

— 3 —

Talk ,Standby and Stereo Music Playing Time

A fully charged battery can offer up to 7 hours talk time , 4 hours stereo music playing time, and up to 180 hours of standby time. When there are no calls the headset should remain in standby mode.

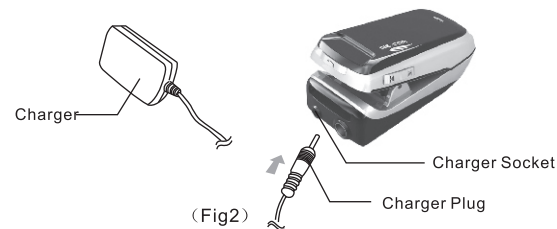

— 4 —

Turning Your Headset On and Off

Turning on the headset

Press and hold the MFB button (fig. 1) for 3 seconds until a beep is heard. The LCD will display "Power on". Afterwards the display will shift to "Connecting" to connect with the last paired device. After successfully paired, LCD will display "Connected". If failed to pair, the LCD will display "Ready". For pairing, please refer to "pairing your headset" on page 7.

Turning off the Headset

In power on status, long press MFB button for 5 seconds until a beep is heard, afterwards LCD will display "Power off".

- Attention: If you will not be using the headset for a while, you should consider turning off the Bluetooth function on your mobile phone as well.


— 5 —

Pairing Your Headset

The headset works with Bluetooth-enabled phones. Prior to using and pairing your headset for the first time, please check if your mobile phone is Bluetooth-enabled.

This information will normally feature on the packaging or user guide that is provided with your mobile phone.

The pairing instructions for typical Bluetooth-enabled mobile phone are explained on the next page. The headset pairing procedure may vary depending on the setting of your mobile phone. Please contact the manufacturer of your mobile phone or its agent for further information.

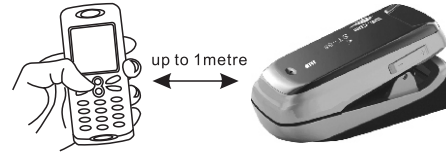

— 6 —

Pairing Your Headset

1. Place the headset and the mobile phone no more than one meter apart.
2. Ensure the headset is turned off.
3. Press and hold the MFB button for 5 seconds until 2 beeps are active. The LCD displays "pairing".
4. The upper left corner of LCD Screen shows working mode, "ha" on the LCD screen expresses the headset is in A2DP (Advanced Audio Distribution Profile) mode, "2h" expresses the headset is in Multi-points Pairing Mode without stereo.
5. Transfer the working mode: Hold "Volume +" and "Volume -" for 5 seconds to transfer the working mode. Then the headset will turn off automatically. The headset will be in the mode you have transferred after restarted.
 - Attention: When activate Multi-points pairing mode, the LCD screen displays "Multi-HFP on"; Inactivate Multi-points pairing mode, the LCD screen does "Multi-HFP off".
6. Pair the headset with two mobile phones separately under the Multi-points Mode. The headset will connect to the two mobile

— 7 —

phones automatically after restarted.

- Attention: In pairing status, if you want to cancel the connecting status, long press MFB button for 5 seconds to exit.
7. Activate your mobile phone's Bluetooth function. Please refer to your mobile phone user guide for details.
 8. Set the mobile phone to search for Bluetooth devices within range, and select "ST-88" from the list of devices shown.
 9. Enter the passkey "0000" and press "ok" to pair your headset with the mobile phone. When the pairing is completed, the headset's LCD display will show "connected".
 10. If prompted by the mobile phone to connect, select "Yes" (this will vary among mobile phone mode).
 11. Go back to your mobile phone's main menu.
 12. For some mobile phone, when they are re-started, the headset will be connected with the mobile phone automatically.

Using Your Headset

Answering/Rejecting Call

When a call is coming, the ring tone will be heard (if the buzzer is

— 8 —

available , the continuous beeps will be heard. If the earphone activate the caller ID displaying function , then the caller ID will display on the LCD screen ;if not, the LCD will display only “Incoming call”). Press the MFB once to accept the call or answer the call via your mobile phone in the normal way;To answer the second call, the first call must be terminated whilst there is a second Incoming call,. To terminate the first call, please press the MFB once and you will then hear the ringer tone coming through the earpiece, press the MFB again to pick the second call up. At the same time, the LCD screen displays the talk time during your talking.

Double press MFB button to reject the incoming call.

Ending a Call

Press the MFB once to end your call or end the call via your mobile phone in the normal way.

— 9 —

Adjusting the Volume

When you are on the phone or listening to the music, press the volume button repeatedly until you reach the desired volume level. Volume has been divided 7 level. The volume may be affected by the volume setting of your mobile phone as well. Re-adjust the listening volume again when necessary.

Muting the Microphone

In communication mode , double press MFB button to mute the built-in mic. In mute mode, double press MFB button to reactivate the mic with synchronized two beeps every 3 seconds from the earphone.

Delete the Pairing Status

When Power off, hold “Last Track Key” and “Next Track Key” for 5 seconds until “Reset headset” displays on the LCD screen with two beeps. Afterwards the earphone is power off and delete the pairing status. The headset needs to be re-paired with your mobile phone after power on again.

— 10 —

Dialling from Your Mobile Phone

Simply make calls on your mobile phone in the normal way. Press MFB button to cancel this call.

Voice Dialling from Your Headset

If you mobile phone is equipped with voice dialling function, simply press the “ Volume +” Key for 3 seconds, and please say the voice tag when you hear a beep.

- **IMPORTANT:** For voice dialling, you must record the voice tag (the person name) into your mobile phone before using the voice Dialling function on the headset. Please refer to your mobile phone's user guide on how to record the voice tag.

Last Number Redialling from Your Headset

In standby Mode, double press the MFB on your headset.

— 11 —

- **IMPORTANT:** The above functions are only applicable to mobile phones with Bluetooth Handsfree profile. Functionality varies depending on the mobile phone model you have. Please refer to your mobile phone user guide for additional information .

Play / Pause Music

The music play list will be started by pressing the MFB button on the condition of the headset is connected with the stereo mobile phone. After the starting, press the MFB a time, it will turn to pause. And when being connected with the AV Source, the functions of the MFB are music play and pause.

Last Track / Next Track Key

When using a mobile phone supporting A2DP profile, please have a short press of the “Last/Next track” key respectively and you will hear the desirable music.

— 12 —

Activate / Inactivate caller ID

To activate caller ID, please hold the “Last Track” key for 5 seconds until a beep is heard, then “Caller ID On” is displayed on LCD screen.

In caller ID displaying mode, repeat the above procedure to Inactivate caller ID displaying function, then “Caller ID Off” is displayed on the LCD screen.

In caller ID activated mode, when a call is coming, caller ID is displayed on the LCD screen.

In caller ID inactivated mode, when a call is coming, “Incoming Call” is displayed on the LCD screen.

Turning the Built-in Buzzer On and Off

Turning on the built-in buzzer

Press and hold the “Next Track” key for 5 seconds until you hear a long beep.

— 13 —

Notes: 1. The built-in buzzer is set to be “on”.

2. You will hear “beep” ----- “beep” ----- when there is an incoming call

Turn off the Built-in Buzzer

Press the “Next Track” key for 5 seconds until you hear two short beeps to turn off the buzzer.

When there is an incoming call, the ring tone will only be heard through the earphone.

NOTES: The built-in buzzer will not sound when you are using a mobile phone supporting A2DP profile, but you will hear a sound noting the incoming call from the headset. However, when using a single track mobile phone, you'll find the built-in buzzer recover to note you with beeps.

— 14 —

Troubleshooting

If you are unable to connect your headset and mobile phone, please try the following:

- Ensure your headset is turned off and is properly charged.
- Ensure the headset is paired with your mobile phone.
- Ensure your mobile phone's Bluetooth feature is activated. Please refer to your mobile phone user guide for specific instructions.
- Ensure the headset is within a 10-meter range of your mobile phone and there are no obstructions, such as walls or other electronic devices in between.

If the above steps do not solve your problem, please recharge the headset and remove your mobile phone battery for a short time.

— 15 —

Safety Information

- Check local laws regarding the use of mobile phones and headsets while driving. If you use the headset while driving, ensure your attention and focus remain on the road and you drive in a responsible and safe manner.
- Never allow children to play with the headset---small parts may be a choking hazard.
- Observe all signs that require an electrical device or RF radio product to be switched off in designated areas. These could include hospitals, blasting areas, and potentially explosive environments.
- Turn off your headset prior to boarding an aircraft. Do not use your headset in an aircraft.
- Never mount or store your headset over any air bag deployment area as serious injury may result when the air bag deploys.
- Do not open or mutilate the built-in battery.
- Dispose of batteries according to local regulations. Do not dispose as household waste.

— 16 —

Care and Maintenance

Headset

- Consider turning your headset off before placing it in your pocket or bag. If the MFB is accidentally activated, your mobile phone may place an unintended call.
- Do not expose the headset to liquid, moisture or humidity as it is not waterproof.
- Do not use abrasive cleaning solvents to clean the headset.
- Do not expose the headset to extreme temperature conditions. The best store temperature range is from -10°C to +60°C, otherwise the life of the headset will be influenced.
- Do not dispose of the headset as a fire as it this may result in an explosion.
- Do not bring your headset into contact with sharp objects as this will cause scratches and damage.
- Do not stick anything inside the headset as this may damage the internal components.
- Do not attempt to disassemble the headset as it does not contain serviceable components.

— 17 —

- If you do not use the headset for long periods, be sure to store it in a dry place, free from extreme temperature conditions and dust.

Built-in Battery

- Do not attempt to replace the headset's battery yourself as it is built into the headset and is non-changeable.
- Charge the battery in accordance with the instructions supplied with this user guide.

Charging

- Only use the manufacturer supplied charger when charging the headset
- Do not disassemble the charger as it may expose you to dangerous voltages and other risks. Incorrect reassembly can cause electric shocks when the headset is subsequently used.
- Do not use the charger outdoors or in damp areas.
- Only charge the headset's built-in battery in accordance with the instructions contained in this user guide.
- Avoid charging the headset in extreme temperature conditions.

— 18 —

Compatibility

Works with all Bluetooth-enabled phones and PDA.

Product Specifications

Version: V 2.0

Bluetooth profile supported: Headset, Handsfree

Range of frequency: 2400.0~2483.5MHz

Nominal charging time: Within 2 hours

Talk time: Up to 7 hours

Music playing time: Up to 4 hours

Standby time: Up to 180 hours

Dimensions: 51.4(L)×24(W)×24(H)mm

Weight: 18 grams

This manual is just for reference. If the specification and design of the product need to be changed, we will do it without notification. If there is some tiny difference between the picture and the real product, please take the real product as correct.

— 19 —