

# Antenna YE0038AA Datasheet

# **Antenna Services**

Version: 3.0

Date: 2022-07-06

Status: Preliminary



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

#### Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236 Email: info@quectel.com

#### Or our local offices. For more information, please visit:

http://www.quectel.com/support/sales.htm.

#### For technical support, or to report documentation errors, please visit:

http://www.quectel.com/support/technical.htm.

Or email us at: support@quectel.com.

# **Legal Notices**

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an "as available" basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

# **Use and Disclosure Restrictions**

# **License Agreements**

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

# Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Antenna\_Datasheet 1 / 23



#### **Trademarks**

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

# **Third-Party Rights**

This document may refer to hardware, software and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

# **Privacy Policy**

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

# **Disclaimer**

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2022. All rights reserved.

Antenna\_Datasheet 2 / 23



# **About the Document**

# **Revision History**

Version	Date	Author	Note
-	2020-11-24	Kenny YIN	Creation of the document
1.0	2020-11-24	Kenny YIN	First official release
1.1	2021-01-27	Kenny YIN	Added IP rating description.
2.0	2021-04-28	Aria CHU	Updated all test data in the datasheets.
2.1	2021-07-25	Aria CHU	Updated working temperature (Chapter 3).
2.2	2021-11-16	Aria CHU	Updated the information of product features (Chapter 3).
2.3	2021-11-30	Aria CHU	Updated the product description in Chapter 1.
2.4	2022-01-18	Kenny YIN	Updated the drawing (Chapter 5).
3.0	2022-07-05	Aria CHU	Updated all data in this datasheet

Antenna\_Datasheet 3 / 23



# **Contents**

Abo	out th	e Document	
		S	
1	Prod	luct Description	5
2	Prod	luct Features	5
3	Prod	luct Specifications	6
4		rall Performance	
	4.1.	Test Environment	7
	4.2.	Data-WIFI	8
		Data-Band48	
	4.4.	Radiation Pattern-WIFI	15
	4.5.	Radiation Pattern-Band48	20
5	Prod	luct Size	23



# 1 Product Description

Quectel Wi-Fi antenna covers 2.4 GHz, 5 GHz, and up to 7 GHz bands, fully satisfying customers' requirements for Wi-Fi 5, Wi-Fi 6, and Wi-Fi 6E. There are various antenna types, including built-in FPC antenna, ceramic patch antenna, and other external antennas of different shapes or sizes. The antenna performance meets the customers' demands for efficiency, gain, and radiation and ensures the superior experience of the customers' products in use.

#### 2 Product Features

- Wi-Fi+Band48
- High efficiency
- Excellent performance



Antenna\_Datasheet 5 / 23



# 3 Product Specifications

#### WIFI

Passive Electrical Specifications				
Frequency Range	2.4–2.5 GHz, 5.15–5.85 GHz			
Input Impendence	50 Ω			
VSWR	≤ 2.0			
Gain	≤ 1.14 dBi			
Polarization Type	Linear			

#### Band48

Passive Electrical Specifications				
Frequency Range	3400-3800MHz			
Input Impendence	50 Ω			
VSWR	≤ 6.0			
Peak Gain	≤ -0.56 dBi			
Polarization Type	Linear			

Mechanical Specifications				
Antenna Size	195 mm x Ф 13 mm			
Casing	ABS			
Connector Type	SMA Male (Center Pin)			
Working Temperature	-40 °C to +85 °C			
Radome Color	Black			
IP Rating	IP55			

Antenna\_Datasheet 6 / 23



# 4 Overall Performance

# 4.1. Test Environment

- KEYSIGHT ENA Network Analyzer E5063A 100 kHz 8.5 GHz
- RayZone® 2800 Chamber 5G (FR1) SISO/MIMO, 600 MHz 8.5 GHz




Antenna\_Datasheet 7 / 23



# 4.2. Data-WIFI

#### VSWR

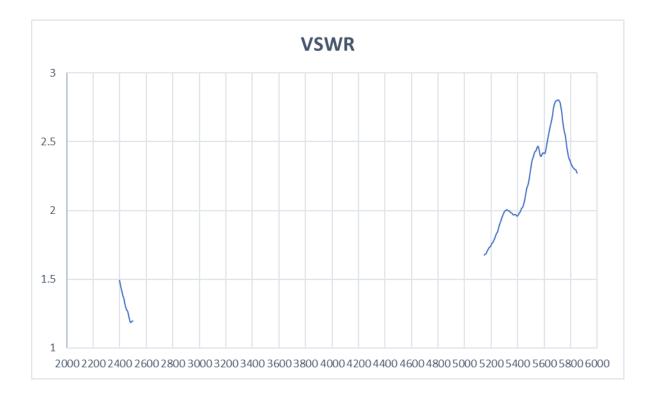



Frequency (MHz)	2400	2500	5150	5850
VSWR	1.49	1.19	1.67	2.27

Antenna\_Datasheet 8 / 23



# Efficiency

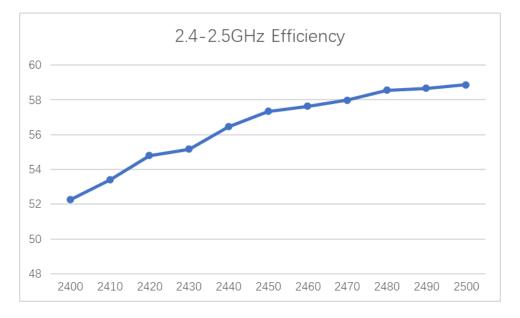

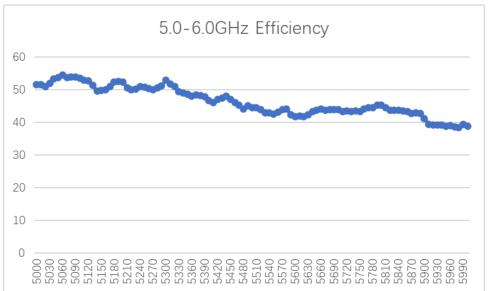


Frequency (MHz)	2400	2500	5150	5850
Efficiency (%)	52.26	59.64	49.76	43.45

Antenna\_Datasheet 9 / 23



# Gain



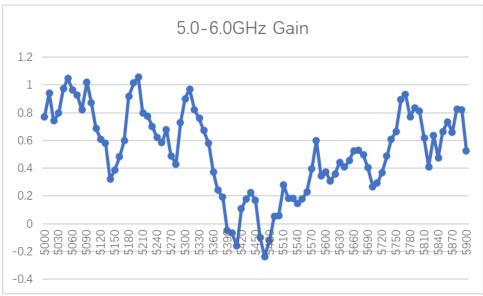

Frequency (MHz)	2400	2480	2500	5150	5180	5850
Gain (dBi)	0.52	0.73	0.50	0.38	1.14	0.66

Antenna\_Datasheet 10 / 23



# 4.3. Data-Band48


#### Detailed Band48 data

1	Frequency(MHz)	Efficiency(%)	Gain(dBi)	VSWR	
	3400	31.31	-0.62	1.7595953	
	3410	30.54	-0.6	1.7594879	
	3420	30.27	-0.56	1.7583804	
	3430	29.99	-0.6	1.7557133	
	3440	29.58	-0.67	1.7407261	
	3450	29.52	-0.72	1.7120283	
	3460	29.22	-0.7	1.6657989	
	3470	28.71	-0.85	1.6026738	
	3480	28.37	-0.89	1.5193631	
	3490	28.14	-1.02	1.4232132	
	3500	27.8	-1.1	1.3214646	
	3510	27.73	-1.21	1.2190003	
	3520	26.99	-1.24	1.1431093	
	3530	26.8	-1.16	1.1454306	
	3540	26.01	-1.3	1.2251233	
	3550	25.45	-1.36	1.3391756	
	3560	24.91	-1.42	1.4751243	
	3570	24.52	-1.48	1.6197301	
	3580	24.18	-1.5	1.7623735	
	3590	23.06	-1.73	1.9009234	
	3600	22.27	-2.09	2.046213	
	3610	21.58	-2.25	2.1994422	
1	3610	21.58	-2.25	2.1994422	
	3620	20.81	-2.44	2.3669588	
	3630	20.19	-2.46	2.5564068	
	3640	20.17	-2.44	2.7623186	
	3650	19.58	-2.61	3.0100725	
	3660	19.5	-2.46	3.283869	
	3670	19.34	-2.51	3.5730605	
	3680	18.15	-2.77	3.8926434	
	3690	18.59	-2.63	4.2036292	
	3700	18.34	-2.72	4.5103584	
	3710	17.64	-3	4.8055132	-
	3720	17.31	-3	5.0332462	
	3730	16.93	-3.14	5.2320687	
	3740	16.36	-3.21	5.3770512	
	3750	16.24	-3.23	5.5003468	
	3760	16.63	-3.26	5.5554026	
	3770	15.87	-3.42	5.608513	
	3780	15.96	-3.26	5.6901719	
	3790	16.14	-3.16	5.6804135	
	3800	16.84	-3.08	5.6561165	

Antenna\_Datasheet 11 / 23



#### VSWR

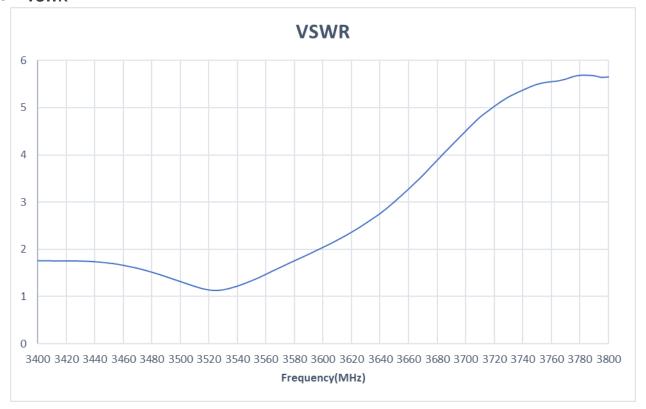


Frequency (MHz)	3400	3600	3800
VSWR	1.75	2.04	5.65

Antenna\_Datasheet 12 / 23



# Efficiency

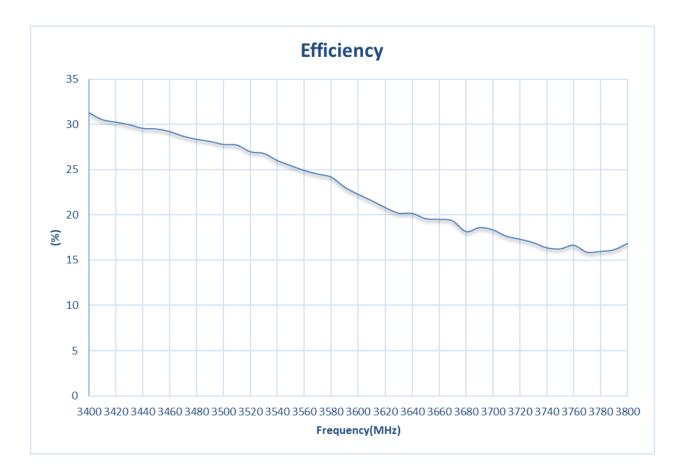


Frequency (MHz)	3400	3600	3800
Efficiency (%)	31.31	22.27	16.84

Antenna\_Datasheet 13 / 23



#### Gain

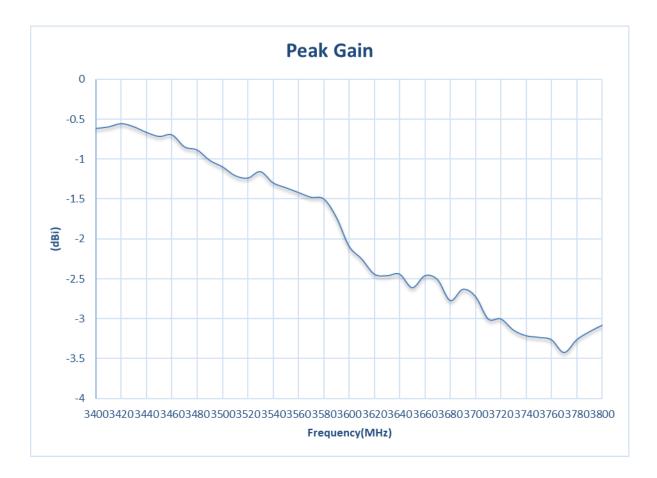


Frequency (MHz)	3400	3600	3800
Gain (dBi)	-0.62	-2.09	-3.08


Antenna\_Datasheet 14 / 23



# 4.4. Radiation Pattern-WIFI

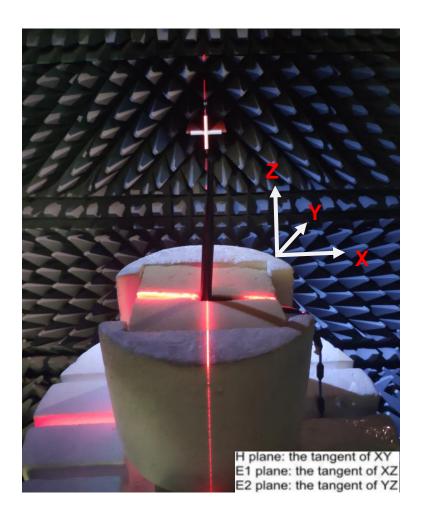



#### 2400 MHz

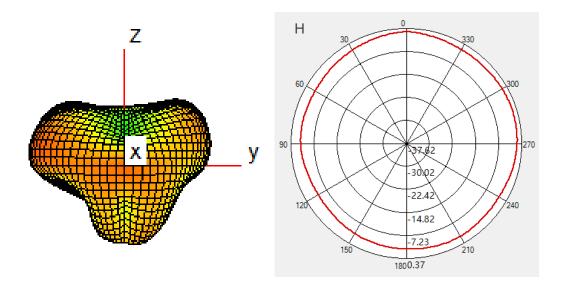



Antenna\_Datasheet 15 / 23




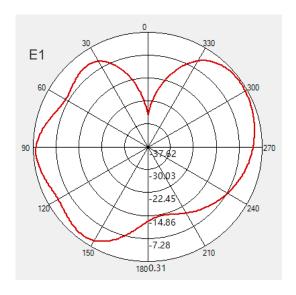


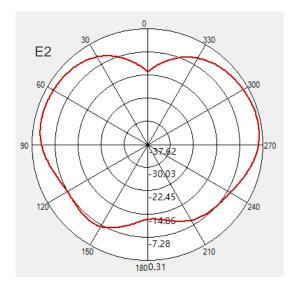

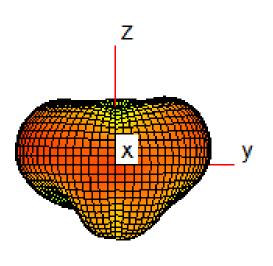

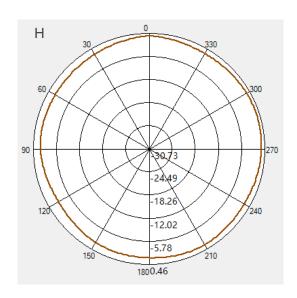


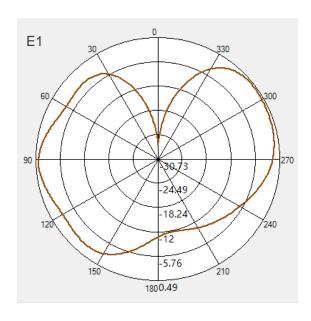


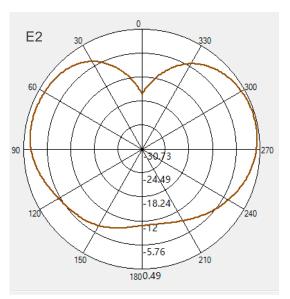



Antenna\_Datasheet 16 / 23



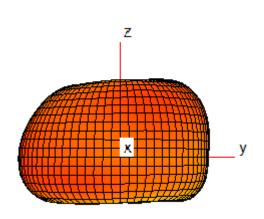


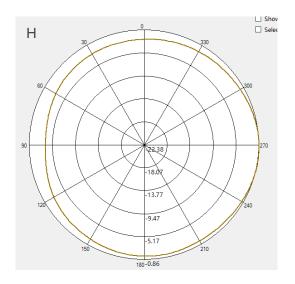


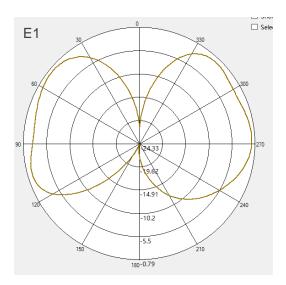

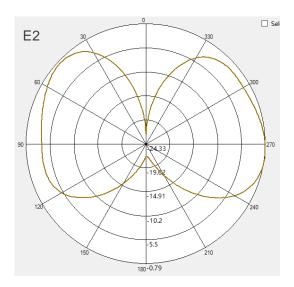


5300 MHz

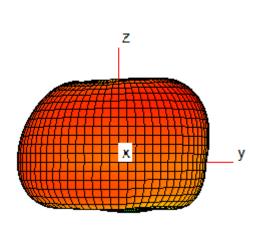


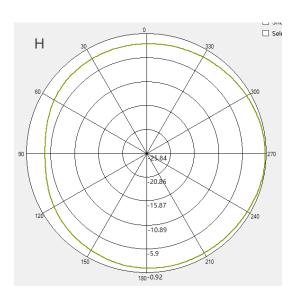


Antenna\_Datasheet 17 / 23




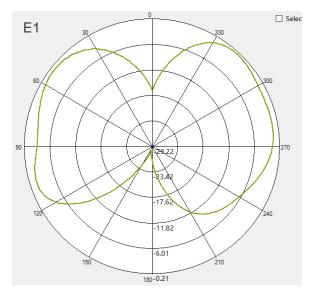


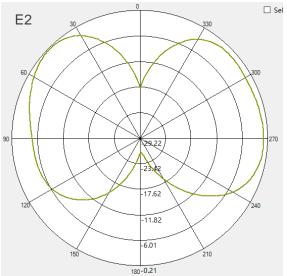


5725 MHz



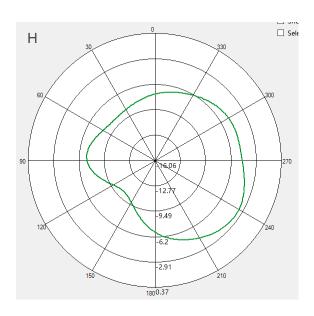


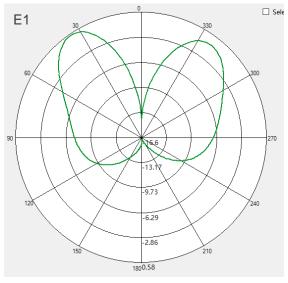


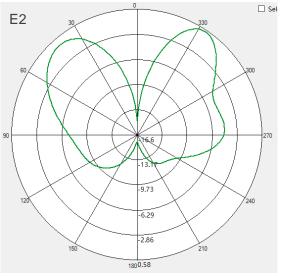



Antenna\_Datasheet 18 / 23





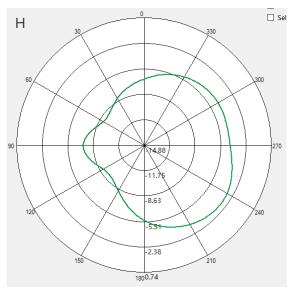

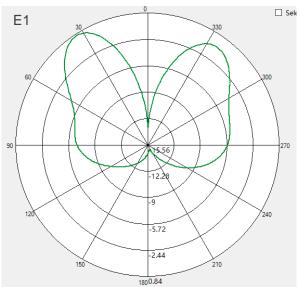


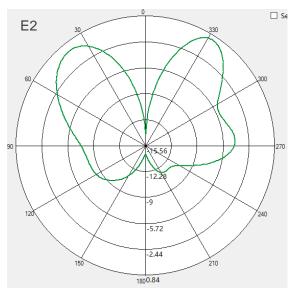

Antenna\_Datasheet 19 / 23





# 4.5. Radiation Pattern-Band48

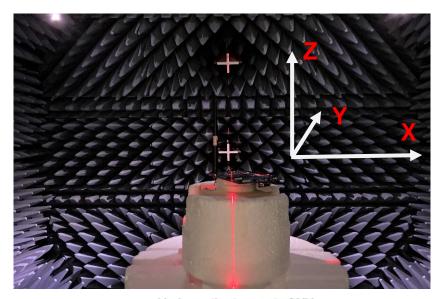

H plane: the tangent of XY E1 plane: the tangent of XZ E2 plane: the tangent of YZ


# 3400MHz




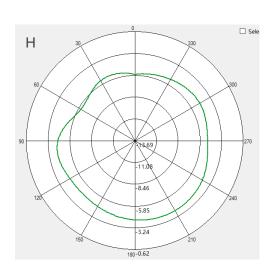



Antenna\_Datasheet 20 / 23




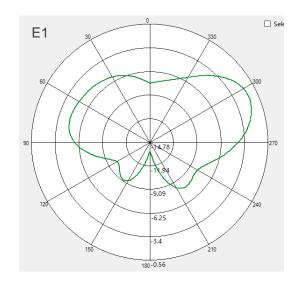


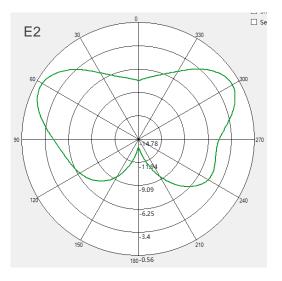



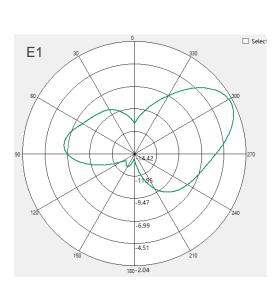


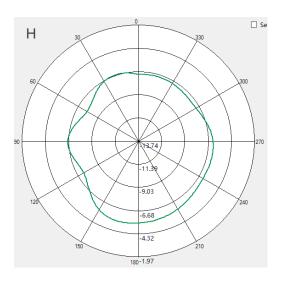


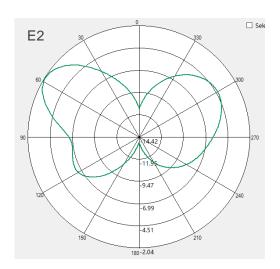



Antenna\_Datasheet 21 / 23





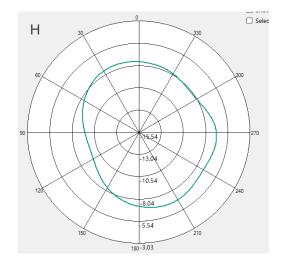

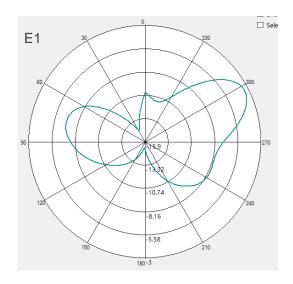


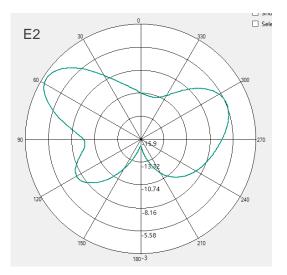


Antenna\_Datasheet 22 / 23



# 5 Product Size

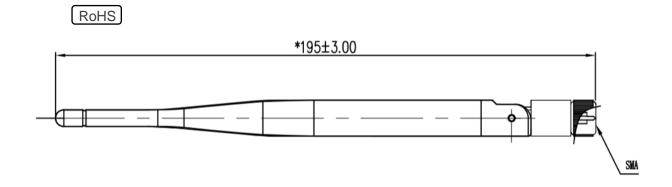

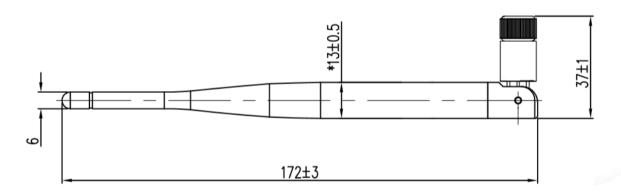



Antenna\_Datasheet 23 / 23