

# FCC PART 18

## EMI MEASUREMENT AND TEST REPORT

For

**Dongguan City General Success Industry Co., Ltd.**

Caibai the First Industry Area, Daojiao Town, Dongguan City, Guangdong Province, China

**FCC ID: XOU261326**

Aug 28, 2009

<b>Product Name:</b>	CFL
<b>Model No:</b>	GS-E26-13W/GS-E26-26W
<b>Sample</b>	
<b>Received Date:</b>	Jun 23, 2009
<b>Test</b>	
<b>Performed Date:</b>	Jun 23, 2009
<b>Test Engineer:</b>	Paul Tan
<b>Reviewed By:</b>	Chris Zeng
<b>Prepared By:</b>	<p><b>BEST Test Service Shenzhen Co., Ltd.</b> C, 310-316, Huameiju Business Center, 82 Block, Baoan District, Shenzhen, China TEL: +86-755-28236006 FAX: +86-755-28236249 Email: <a href="mailto:certification@bestcert.cn">certification@bestcert.cn</a></p>

**Note:** This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of BEST Test Service Shenzhen Co., Ltd. This test report contains data that are not covered by NVLAP accreditation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION .....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(s)/GRANT(s) .....	3
TEST METHODOLOGY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION.....	4
SCHEMATICS / BLOCK DIAGRAM.....	4
EQUIPMENT MODIFICATIONS .....	4
CONFIGURATION OF TEST SYSTEM .....	4
TEST SETUP BLOCK DIAGRAM.....	4
<b>CONDUCTED EMISSIONS TEST DATA.....</b>	<b>5</b>
APPLICABLE STANDARD.....	5
MEASUREMENT UNCERTAINTY .....	5
EUT SETUP .....	5
TEST EQUIPMENTS.....	6
TEST PROCEDURE .....	6
SUMMARY OF TEST RESULTS.....	6
CONDUCTED EMISSIONS TEST DATA AND PLOTS.....	7

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The Dongguan City General Success Industry Co., Ltd.'s model GS-E26-13W/GS-E26-26W or the "EUT" as referred to in this report is CFL, rated input voltage: AC 120V/60Hz, operation frequency between 40 KHz to 60 KHz.

Model	GS-E26-13W	Electrical Power	13W
Model	GS-E26-26W	Electrical Power	26W

*The test data was only good for the test sample. It may have deviation for other test sample.*

### Objective

The following test report is prepared on behalf of Dongguan City General Success Industry Co., Ltd.. in accordance with Part 2, Subpart J, and Part 18, Subparts A, B, and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to demonstrate compliance with FCC Part 18 limit requirements for Industrial, Scientific, and Medical Equipment.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with MP-5 1986, FCC Method of measurements of radio noise emission from Industrial, Scientific and Medical equipments.

### Test Facility

All measurement facilities used to collect the data are located at Huatongwei Building , Keji Rd, 12 S, high-Tech Park, Nanshan District, Shenzhen, China.

The sites are constructed in conformance with the requirements of ANSI C63.7/634 and CISPR 22, The site was accredited by FCC (662850), A2LA( 2243.01) and CNAL (L1225)

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was tested under normal mode as used by a common (typical) user.


### Schematics / Block Diagram

N/A.


### Equipment Modifications

No modifications were made by BEST TEST SERVICE (SHENZHEN) CO., LTD. to ensure the EUT to comply with the application limits and requirements.

### Configuration of Test System



### Test Setup Block Diagram

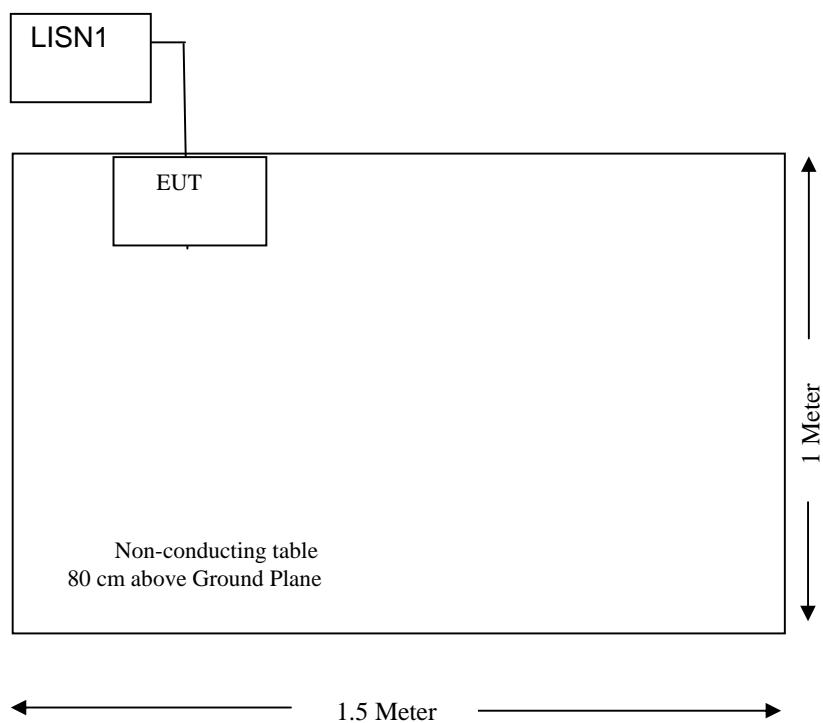

## CONDUCTED EMISSIONS TEST DATA

### Applicable Standard

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).


Frequency Range (MHz)	Max RF Voltage (uV)	Max RF Voltage (dBuV)
Non-consumer equipment		
0.45 to 1.6	1,000	60.0
1.6 to 30	3,000	69.0
Consumer equipment		
0.45 to 2.51	250	48.0
2.51 to 3.0	3000	69.0
3.0 to 30	250	48.0

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are EMI Test Receiver, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BEST TEST SERVICE (SHENZHEN) CO., LTD. is  $\pm 2.0$  dB.

### EUT Setup

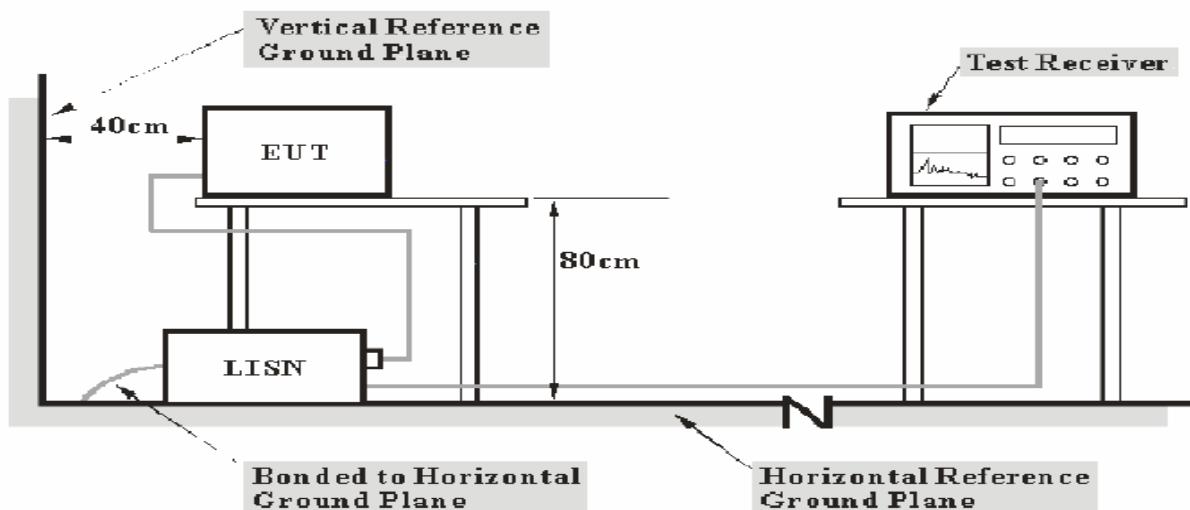

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5 measurement procedure. The specification used was the FCC Part 18 limits.

The EUT was connected to the power cord extension and placed on the left of the back edge on the test table.

The power cord extension was connected with 120 VAC/60 Hz power source.

## Test Equipments

Manufacturer	Description	Model	Serial Number	Cal. Date	Cal. Due. Date
ROHDE & SCHWARZ	EMI TEST RECEIVER	ESCS30	100038	2008-08-05	2009-08-05
ROHDE & SCHWARZ	L.I.S.N	ESH2-Z5	100028	2008-08-05	2009-08-05
ROHDE & SCHWARZ	Pulse Limiter	ESHSZ2	100044	2008-08-05	2009-08-05

Statement of traceability: BEST attests that all calibrations have been performed per the CNAL /A2LA requirements, traceable to NIM China

## Test Procedure

During the conducted emission test, the power cord of the power cord extension was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within 4 dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

The EUT was tested under the normal modes during the final qualification test to represent the worst-case results.

## Summary of Test Results

### Pass

The EUT complied with the FCC 18 Conducted margin for industry, scientific and medical device, and with the worst margin reading of:

## Conducted Emissions Test Data and Plots


**BEST TEST SERVICE SHENZHEN CO., LTD**

**Voltage Mains Test FCC PART 18**

EUT: CFL M/N:GS-E26-13W  
Manufacturer: General Success  
Operating Condition: ON  
Test Site: 3# SHIELDED ROOM  
Operator: BYRON  
Test Specification: AC 120V/60Hz  
Comment:  
Start of Test: 06/23/2009

**SCAN TABLE: "FCC 18 LIGHT FIN"**

Short Description: 150K-30M Voltage

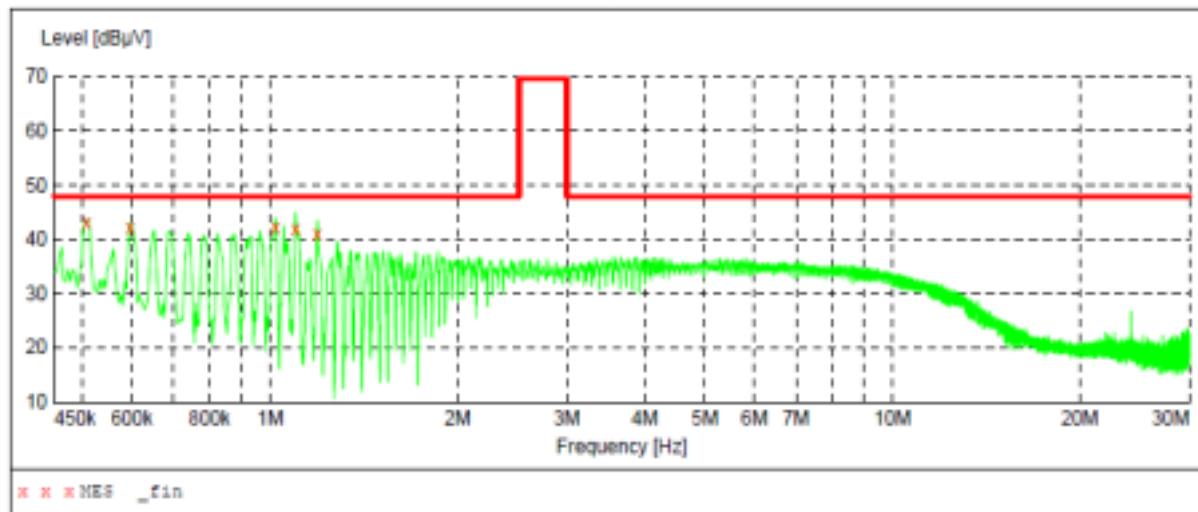

### MEASUREMENT RESULT:


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.508000	43.10	10.4	48	4.8	QP	N	GND
0.596000	42.10	10.4	48	5.8	QP	N	GND
1.020000	42.30	10.5	48	5.6	QP	N	GND
1.100000	41.80	10.5	48	6.1	QP	N	GND
1.192000	40.90	10.5	48	7.0	QP	N	GND

**BEST TEST SERVICE SHENZHEN CO., LTD****Voltage Mains Test FCC PART 18**

EUT: CFL M/N:GS-E26-13W  
Manufacturer: Genral Success  
Operating Condition: ON  
Test Site: 3# SHIELDED ROOM  
Operator: BYRON  
Test Specification: AC 120V/60Hz  
Comment:  
Start of Test: 06/23/2009

**SCAN TABLE: "FCC 18 LIGHT FIN"**

Short Description: 150K-30M Voltage

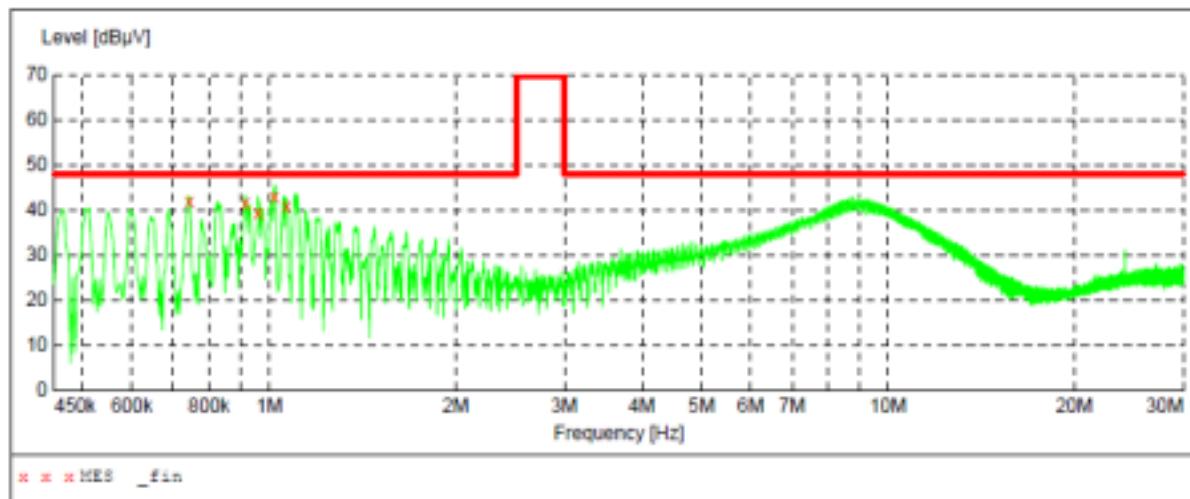**MEASUREMENT RESULT:**


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.744000	42.00	10.4	48	5.9	QP	L1	GND
0.916000	41.50	10.4	48	6.4	QP	L1	GND
0.960000	39.30	10.5	48	8.6	QP	L1	GND
1.020000	42.80	10.5	48	5.1	QP	L1	GND
1.069000	40.80	10.5	48	7.1	QP	L1	GND

**BEST TEST SERVICE SHENZHEN CO., LTD****Voltage Mains Test FCC PART 18**

EUT: CFL M/N:GS-E26-26W  
Manufacturer: General Success  
Operating Condition: ON  
Test Site: 3# SHIELDED ROOM  
Operator: BYRON  
Test Specification: AC 120V/60Hz  
Comment:  
Start of Test: 06/23/2009

**SCAN TABLE: "FCC 18 LIGHT FIN"**

Short Description: 150K-30M Voltage

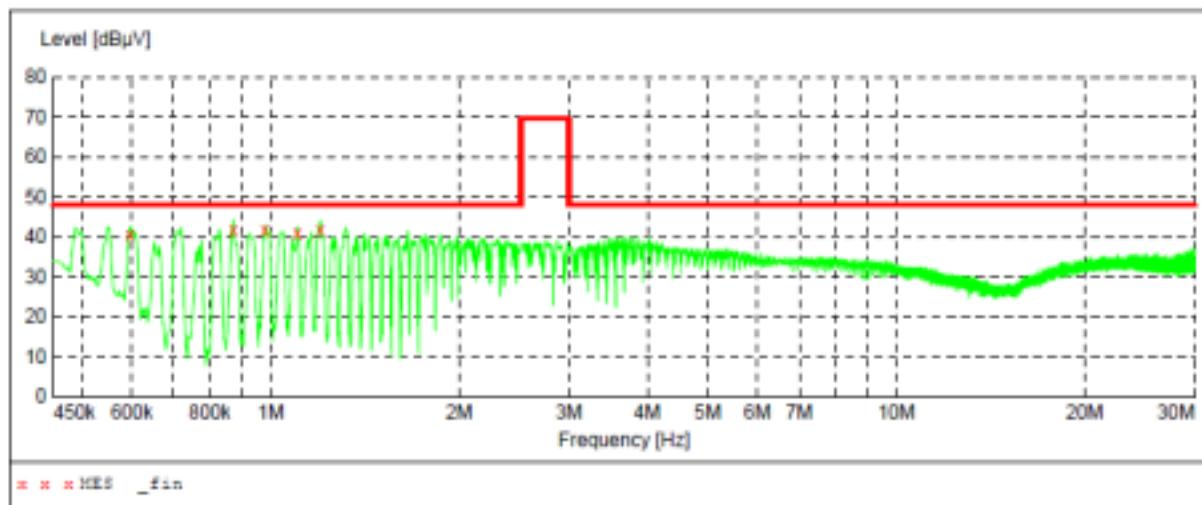**MEASUREMENT RESULT:**


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.596000	40.60	10.4	48	7.3	QP	N	GND
0.872000	41.70	10.4	48	6.2	QP	N	GND
0.980000	41.70	10.5	48	6.2	QP	N	GND
1.104000	40.80	10.5	48	7.1	QP	N	GND
1.200000	41.80	10.5	48	6.1	QP	N	GND

**BEST TEST SERVICE SHENZHEN CO., LTD****Voltage Mains Test FCC PART 18**

EUT: CFL M/N:GS-E26-26W  
Manufacturer: General Success  
Operating Condition: ON  
Test Site: 3# SHIELDED ROOM  
Operator: BYRON  
Test Specification: AC 120V/60Hz  
Comment:  
Start of Test: 06/23/2009

**SCAN TABLE: "FCC 18 LIGHT FIN"**

Short Description: 150K-30M Voltage

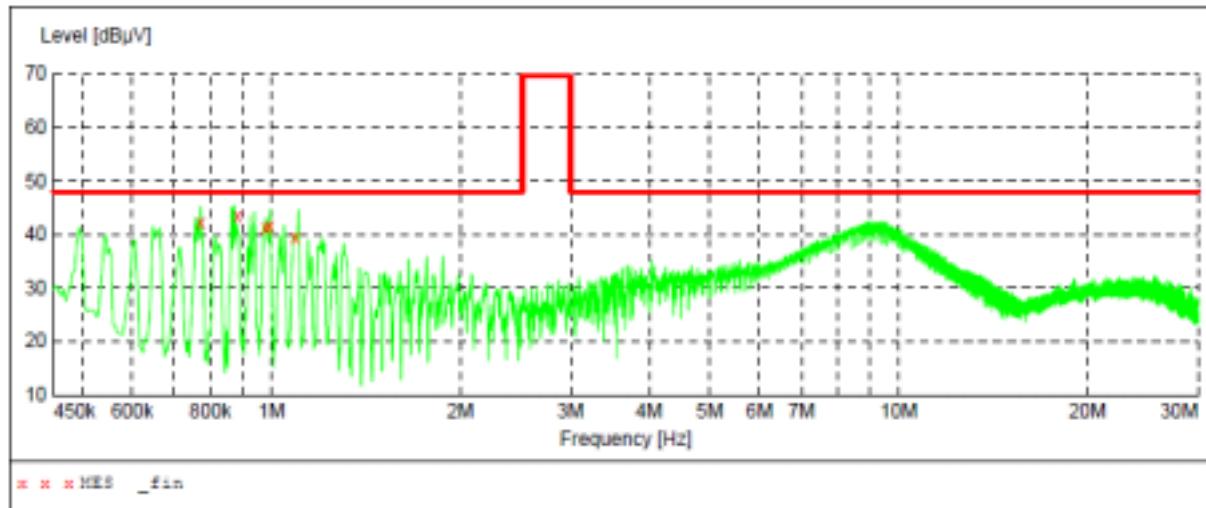**MEASUREMENT RESULT:**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.772000	42.20	10.4	48	5.7	QP	L1	GND
0.884000	43.40	10.4	48	4.5	QP	L1	GND
0.980000	41.30	10.5	48	6.6	QP	L1	GND
0.996000	41.50	10.5	48	6.4	QP	L1	GND
1.092000	39.50	10.5	48	8.4	QP	L1	GND