

---

# Antenna specification

## Electrical Specification

Model	Meander line
Frequency Range(MHz)	2402-2480
Bandwidth (MHz)	79
VSWR	$\leq 2$
Gain (dBi)	3.29
Input Impedance( $\Omega$ )	50
Polarization Type	Linear
Antenna Length(mm)	29mm
Pattern	Omni-directional
Antenna type	PCB antenna
MANUFACTURER	Shenzhen Jinjiaxing Electronics

---

---


## Gain&Efficiency

frequency (MHz)	gain (dB)	mingain (dB)	CO Gain (dB)	CP Gain (dB)	efficiency (dB)	efficiency
2400	0.27	-12.26	-0.46	-0.96	-3.2	47.85%
2410	0.08	-12	-0.67	-1.28	-3.52	44.47%
2420	0.67	-10.78	-0.08	-0.53	-3.09	49.09%
2430	0.88	-10.13	0.13	-0.16	-3.07	49.30%
2440	1.14	-9.53	0.32	0.17	-3.01	49.95%
2450	1.5	-8.82	0.69	0.61	-2.75	53.08%
2460	1.67	-8.71	0.82	0.8	-2.67	54.10%
2470	2.04	-8.46	1.08	1.07	-2.4	57.57%
2480	2.5	-8.2	1.37	1.32	-2.02	62.86%
2490	2.23	-8.71	0.88	0.8	-2.33	58.50%
2500	2.65	-8.43	1.17	1.01	-1.86	65.14%
2510	2.88	-8.33	1.18	1.01	-1.66	68.29%
2520	2.99	-8.38	1.04	0.82	-1.57	69.70%
2530	3.26	-8.16	1.26	0.91	-1.2	75.93%
2540	3.2	-8.22	1.23	0.83	-1.15	76.65%
2550	3.11	-8.22	1.3	0.76	-1.13	77.12%
2560	3.29	-8.18	1.67	1.06	-0.88	81.67%
2570	3.17	-8.36	1.81	1.15	-0.91	81.14%
2580	2.73	-8.78	1.82	1.18	-1.2	75.81%
2590	2.99	-8.72	2.41	1.85	-0.92	80.93%
2600	2.65	-9.22	2.37	1.83	-1.27	74.73%

---

---


# Dimension

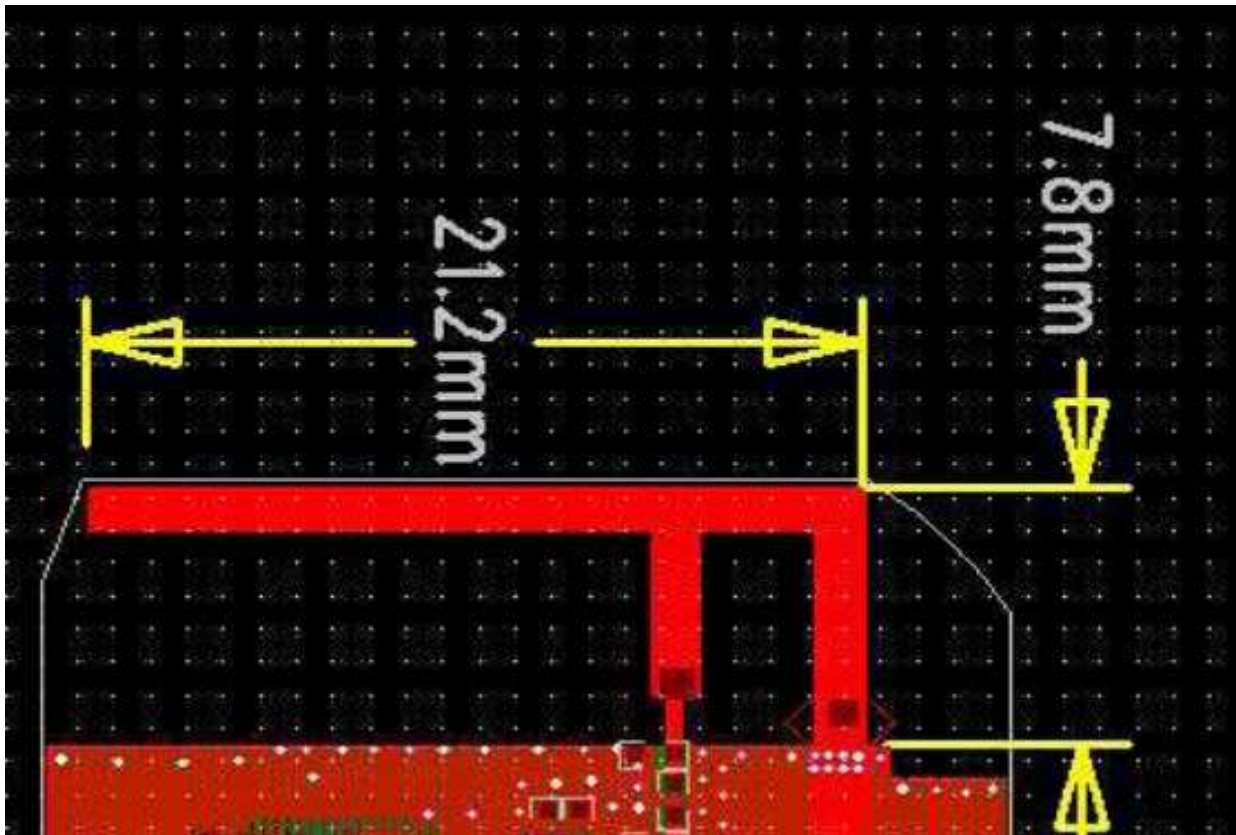


---

# PolarGraphs (2400/2440/2480MHz)


### H Theta=90 freq=2400MHz

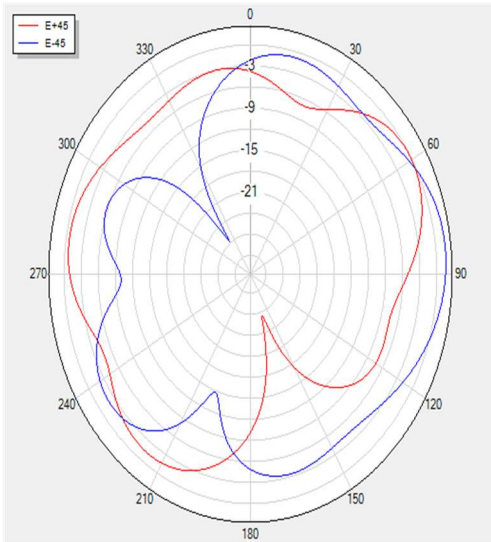


### H Theta=0 freq=2400MHz

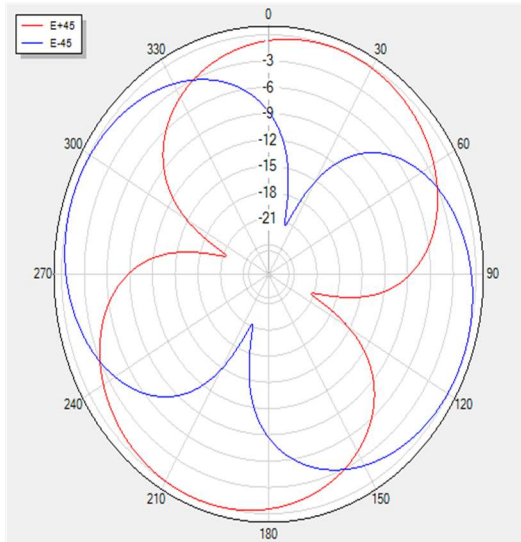

### H Theta=90 freq=2440MHz

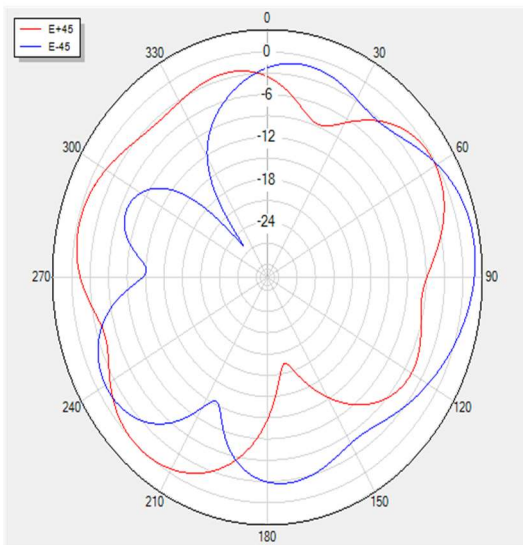


### H Theta=0 freq=2440MHz

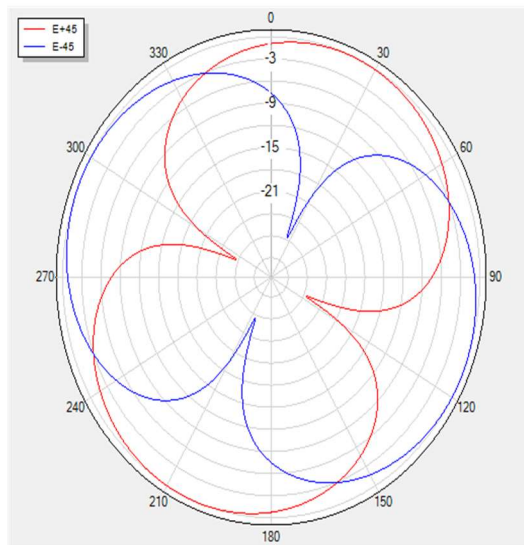


---

**H Theta=90 freq=2480MHz**

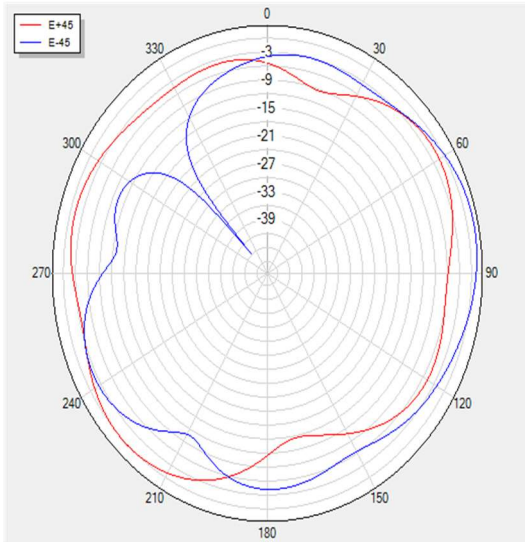


**H Theta=0 freq=2480MHz**

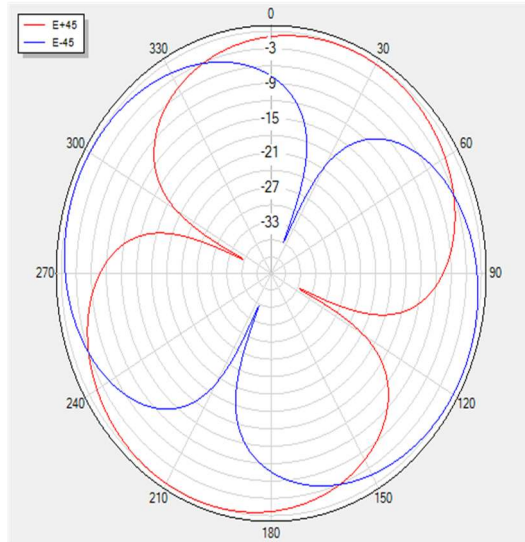


## EtotalGraphs


**H Theta=90**

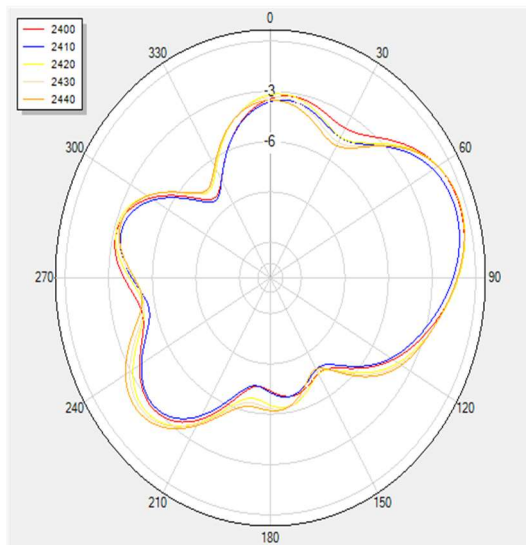


**H Theta=0**

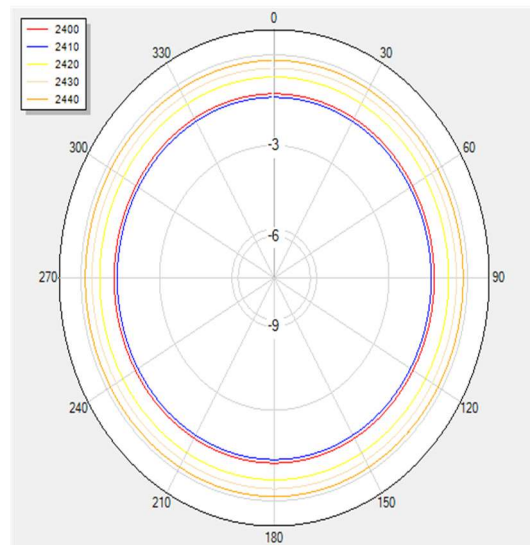


**H Theta=0**

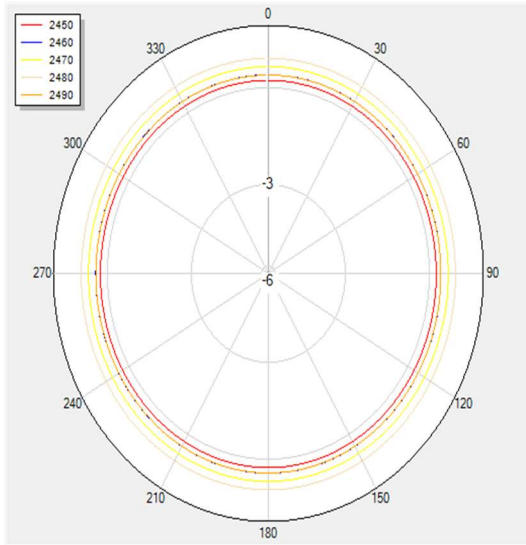


**H Theta=90**

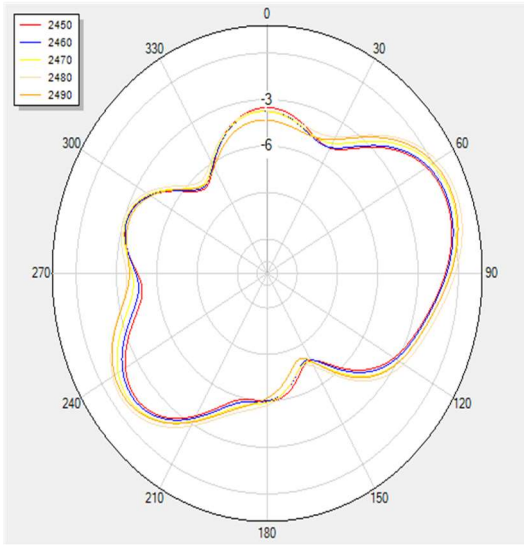


**H Theta=90**

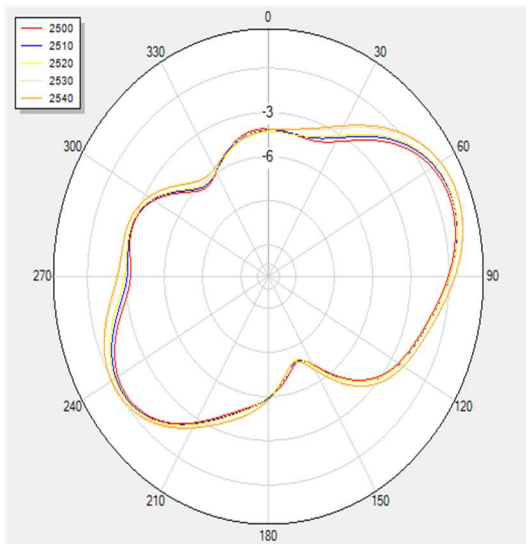


**H Theta=0**

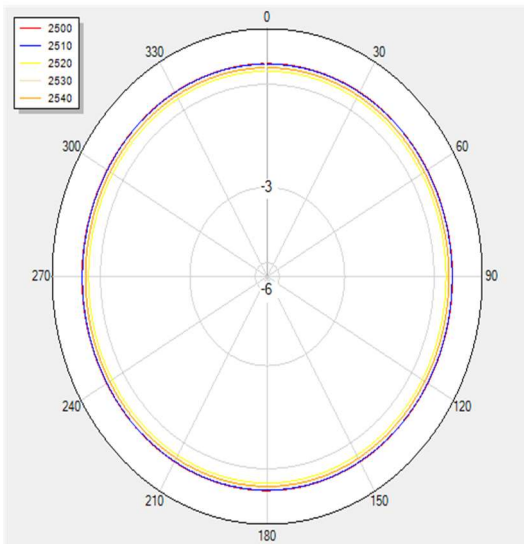


**H Theta=90**

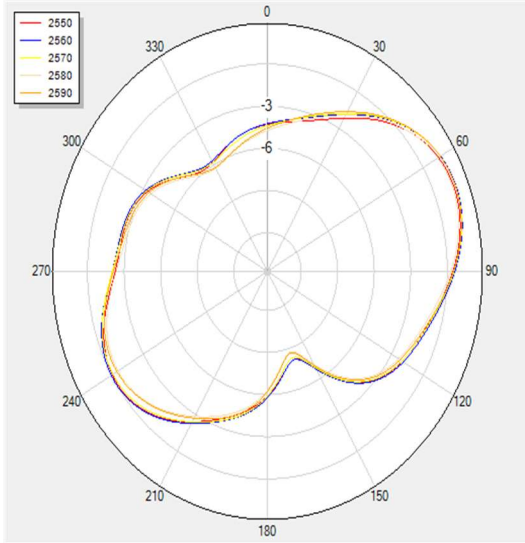


**H Theta=0**

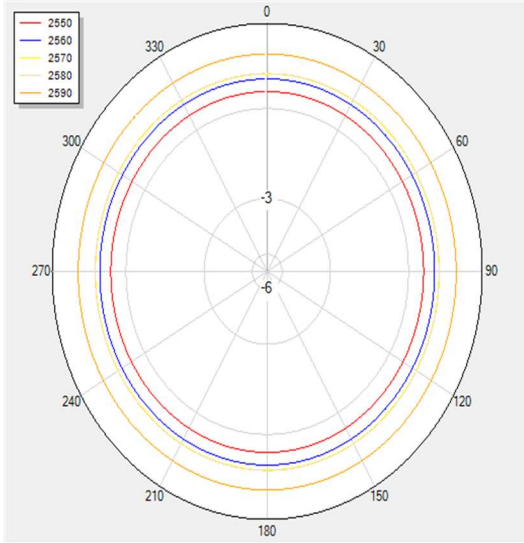


**H Theta=90**

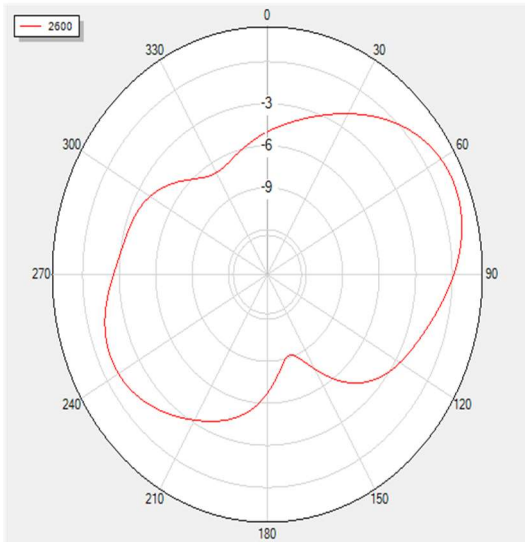


**H Theta=0**

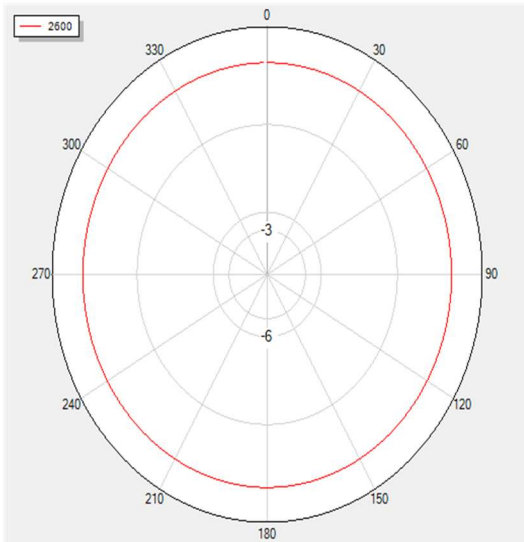


**V Phi=90**

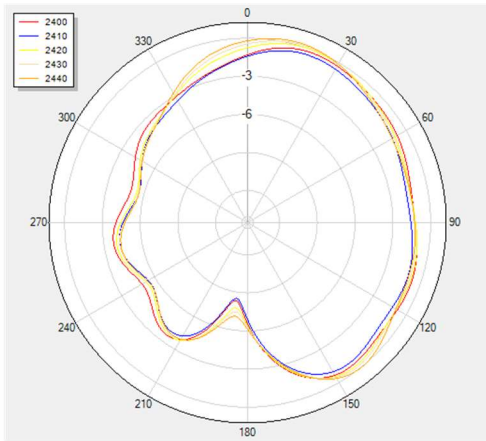


**V Phi=0**

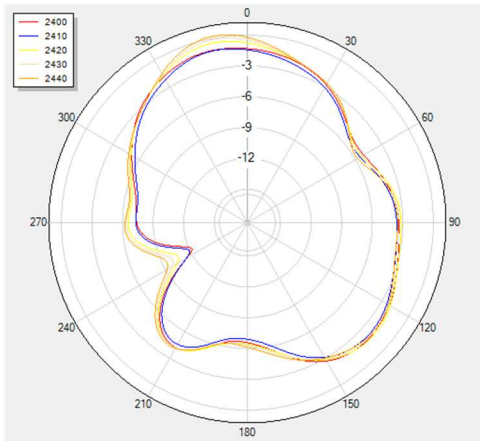


**V Phi=90**

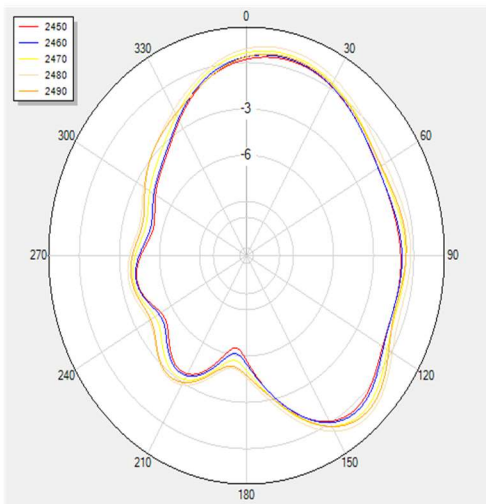


**V Phi=0**

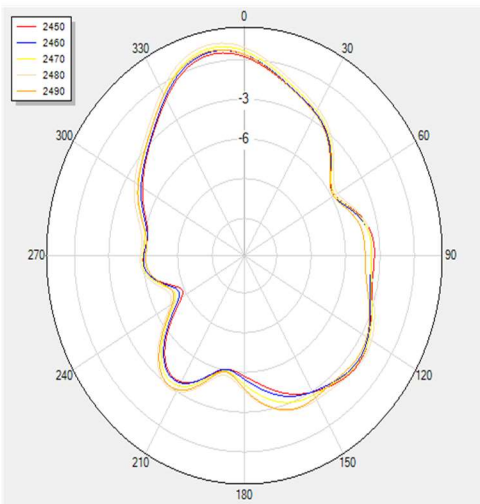

**V Phi=90**

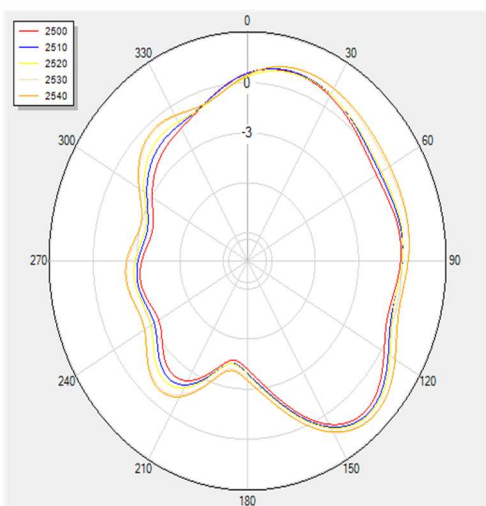


**V Phi=0**

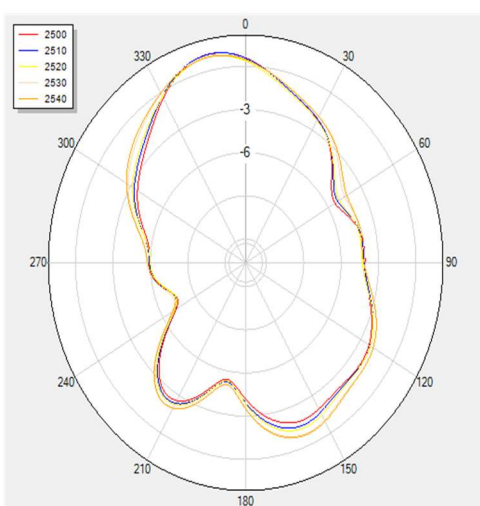





**V Phi=90**

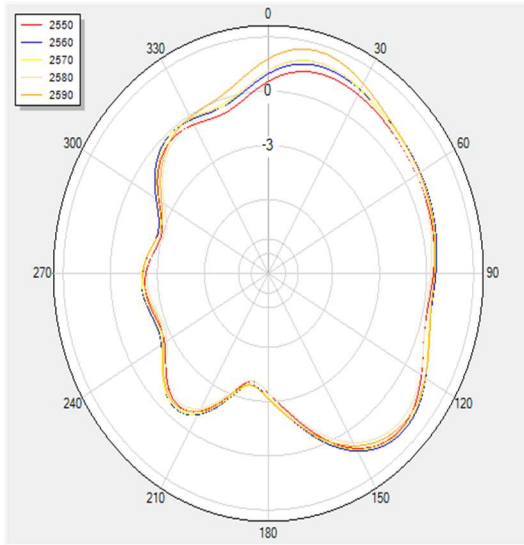


**V Phi=0**

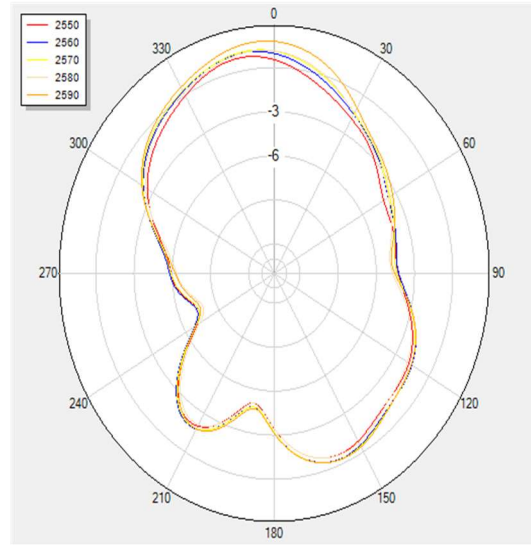

**V Phi=90**

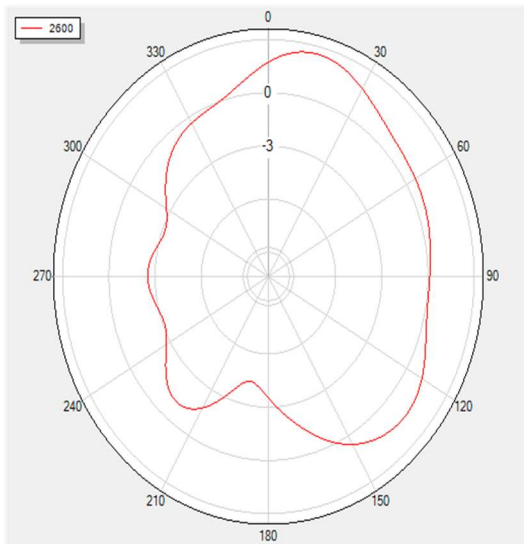


**V Phi=0**

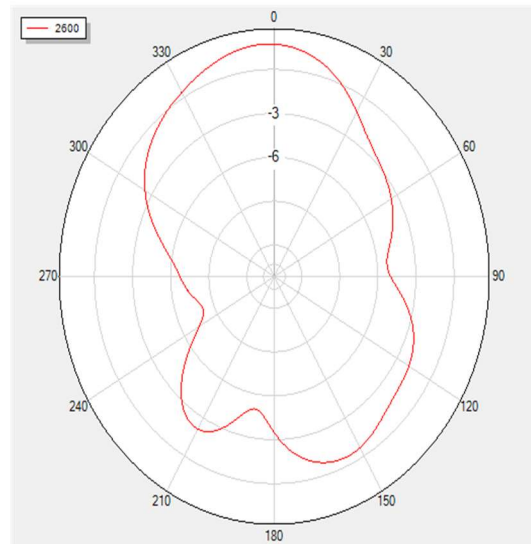


---

# Radiation Pattern 3D

2402MHZ



2441MHZ



2483MHZ

