


## I .Introduction

Thank you for purchasing the Aoni-883 stereo Headset with Bluetooth® Wireless technology; we encourage you to read this quick installation guide thoroughly to get the most of this innovative wireless headset.

### Main features

- Enjoy hands free conversations and a clear signal reception up to 10 meters away from your computer or audio source.
- Compatible with other Bluetooth enabled devices, such as CD, DVD and MP3/4 players, desktop or laptop computers, smart phones, PDAs and iPods.
- Ideal for PC interactive game, internet voice chats and conferencing.
- Wide adjustable headband and leatherette ear pads provide comfortable listening for hours on end.
- Noise cancelling microphone for clear voice chats
- Li-polymer rechargeable battery
- Battery status showing on Mobile device ,Like IPHONE .

## II .Product components

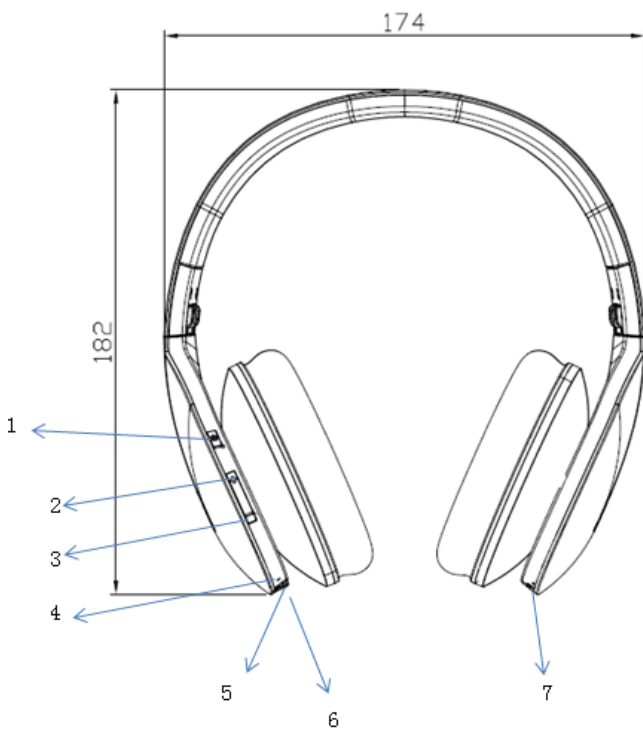

1. Power ON/OFF(press the button down for long time)/play/pause button.
2. Volume up/ Next track
3. Volume down/ Previous track
4. LED Light
5. Line in port
6. Microphone
7. USB interface for charging

## III-Basic Operation

### Charge your headset

- Use the supplied USB cable to charge the battery directly from your PC.
- Make sure that your aoni-883 headset is fully charged before using it for the first time.

- The headset battery has to be initially charged for at least for 4 hours.
- While charging, the LED is solid red. When the battery has reached full capacity, the solid red LED will go off.

#### **Turing your headset on and off**

1. Press and hold the power button for several seconds to turn on the headset.
2. To power off the device, press and hold the power button again for a few seconds.

### **IV-Advanced operation**

Note: Before installing this product, please make sure your computer or laptop has the available built-in Bluetooth feature. If your computer is not Bluetooth-enabled, you must purchase a Bluetooth dongle, preferably version 2.1 or above.

#### **a. Pairing the headset with your laptop**

1. Make sure the headset is off.
2. Activate the bluetooth program in your laptop to begin setup.
3. The “Search new device” screen will be displayed.
4. Place both devices not more than one meter away from each other.
5. Press the power button on the headset for about 4 seconds. When the blue and red LED will blink alternately, it indicates that the headset has entered pairing mode.
6. You will find the product name **aoni-883** occurs on your laptop, press “pairing”.
7. If the pairing is successful, the blue LED will blink every 3 seconds.

#### **b. Pairing the headset with your phone**

1. Make sure the headset is off.
2. Set your bluetooth phone to “discover” the wireless headset.
3. Place both devices not more than one meter away from each other.
4. Press the power button on the headset for about 4 seconds. When the blue and red LED will blink alternately, it indicates that the headset has entered pairing mode.
5. You will find the product name **aoni-883** occurs on your laptop, press “pairing”.
6. If the pairing is successful, the blue LED will blink every 3 seconds.

**Please note:** If your laptop/phone device is under version 2.1, please enter the passkey =”0000”(4 zero).

Press the power button on the headset for about 2 seconds will enter pairing mode automatically when your device and the headset disconnected and the headset is on.

### **Using the Bluetooth® wireless headset.**

1. Answering and ending a call using your mobile phone.
  - When there is an incoming call, the headset will ring.
  - Briefly press the power button to answer an incoming call. You may also press the answer button on your cellular phone to receive the call in your headset.
  - To end a call, simply tap the power button once again. Likewise, you may also end the call directly using your cell phone.
  - Double-click the power button can activate the voice command feature.(Please refer to your handset manual for more information about using the “voice dial feature”).
  - You can also press the power button for about two seconds to redial the last call.
2. Initiating /answering and ending a call on VOIP
  - To make a call, simply dial the number by using your internet calling application.
  - When there is an incoming call, press the power button briefly. Music playback pauses temporarily.
  - To answer an incoming call, press the power button briefly. Music playback pauses temporarily.
  - To end a call, simply tap the power button once again.

### 3. Music play back.

- Adjust volume controls for a comfortable listening Level.
- Long press the volume up buttons to play the next track.
- Long press the volume down buttons to play the previous track.
- Short press the volume up buttons to increase the volume.
- Short press the volume down buttons to down the volume.
- Short press the power button music will be paused,press again will play
- When listening to music using your mobile phone, playback will resume automatically once the call is ended.

## Specifications

### Mic.Spec.:

- Microphone Unit :  $\varnothing$  4\*1.5mm
- Directivity: omnidirectional
- S.P.L:-42  $\pm$  3db
- Impedance: $\leq$ 2.2K  $\Omega$
- Frequency response:20Hz-20,000Hz
- Operating Voltage:2V

### Speaker Spec.

- Speaker diameter:  $\varnothing$  40mm
- Impedance:32  $\Omega$
- S.P.L:118 $\pm$ 3dB S.P.L at 1KHZ
- Rated capability:20Mw
- Frequency response:20Hz-20,000Hz

## POWER

- |                           |                                                      |
|---------------------------|------------------------------------------------------|
| ● Battery type            | Built-in 400mAh lithium-polymer rechargeable battery |
| ● Charging connector type | Micro USB 5V/1A plug                                 |
| ● Run time                | UP to 12 hours of talk or music playback time        |
| ● Standby time            | Up to 168 hours                                      |
| ● Charging time           | Approximately 3 hours                                |
| ● Operating temperature   | -10°C -45°C                                          |
| ● Storage temperature     | -25°C -60°C                                          |

## Precautions

- Do not drop, hit or shake the device.
- Do not disassemble, repair or modify the headset by yourself.
- Do not use cleaning products that contain benzene, solvents or alcohol.
- Do not expose headset to excessive heat or direct sunlight for long periods of time.
- Do not store the device in a place with high humidity or dust.
- Do not place heavy objects on top of the headset.
- Do not use near a microwave oven or wireless LAN products.

## Warning

Adjust headset sounds to the proper volume, loud sound may damage your ears. In the circumstance that will cause dangerous, please don't use the headset. When you wear headset, please take care of "L" and "R".

### Caution:

We will no longer guarantee the performance or warranty if the user attempts to inspect and modify this product in anyway.

## FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.