


EDIFIER®

HECATE EDF700006

TRUE WIRELESS GAMING EARBUDS

■ Product description and accessories



Earbuds



Charging case



Silicone ear tips



Strap



Charging cable



User manual

There are different size of ear tips attached in the package, please select the suitable ones to wear.

Note: Images are for illustrative purposes only and may differ from the actual product.

■ Take earbuds out

Take the earbuds out of the charging case and tear insulating films off.

■ Charge

For initial use, place the earbuds in the charging case and close the case, then connect the case to power source with the included Type-C charging cable for charging.

● Charge the earbuds

- You may hear a warning tone when at low battery level, please place the earbuds in the case for charging.
- Ice blue indicator steady lit = charging Ice blue indicator off = fully charged

● Charge the charging case

- Open the charging case to show its battery level; if red light of the charging case flashes rapidly, it indicates the charging case has a low battery capacity, please charge it in time.
- LED light flashing = charging Three LED lights steady lit = fully charged

Input: 5V $\overline{=}$ 50mA(earbuds) 5V $\overline{=}$ 500mA(charging case)

Warning: The rechargeable batteries that provide power for this product must be disposed properly for recycling.

Do not dispose of batteries in fire to prevent an explosion.

If not used for long periods of time, please charge the product with lithium battery every three months.

abel

EDIFIER **GM5**
Model:EDF700006
Input:5V $\overline{=}$ 50mA(Earbuds)
 5V $\overline{=}$ 500mA(Charging Case)
FCC ID:Z9G-EDF122
IC:10004A-EDF122
Made in China



■ Power on/off

● Automatically

- Power on automatically when taken out of the charging case.
- Power off automatically while placed in the charging case.

● Manually

- When powered off, respectively press and hold the touch zones of the left and right earbuds for around 3 seconds to power on;
- When powered on, respectively press and hold the touch zones of the left and right earbuds for around 5 seconds to power off.

■ Bluetooth connection

● Two earbuds mode

- For initial use, take the earbuds out of the charging case and they will automatically power on (white lights lit for around 2 seconds);
- Then the left and right earbuds will auto-connect to each other, after interconnection is done, the earbuds will enter Bluetooth pairing state (white and ice blue lights flashing alternately);
- Set Bluetooth device to search for and connect to "HECATE GM5", after pairing is successful, the indicators of the earbuds will flash once per 4 seconds.

● One earbud mode

Please take the left or right earbud out of the charging case, and refer to the procedures mentioned in "Two earbuds mode" to pair with Bluetooth devices.

● Re-connect automatically

- Take the earbuds out of the charging case, they will auto-connect to the Bluetooth device connected last time.
- When the earbuds are disconnected from Bluetooth device for not in the effective distance, they can auto-connect to the Bluetooth device if return to the effective distance within 5 minutes.

● TWS pairing of the left and right earbuds

The left and right earbuds have finished TWS pairing before leaving factory. If the wireless connection fails to resume, please follow the steps below to re-pair:

- After powered on, simultaneously double click the left and right earbuds to start TWS pairing, and the white lights of the earbuds will flash in a breathing pattern;
- After TWS pairing is done, the earbuds will enter Bluetooth pairing state (white and ice blue lights of the earbuds flashing alternately and rapidly).
- Please refer to the procedures mentioned in "Two earbuds mode" to pair with Bluetooth device again.

■ Restore to factory settings (use with caution)


Restoring to factory settings will clear all pairing records of the earbuds.

- When powered off, respectively press and hold the touch zone of the left and right earbuds for 8 seconds; then double click the touch zone when the indicator is steady lit; the factory settings have been restored when the light flashes twice.
- Please refer to the procedures mentioned in "TWS pairing of the left and right earbuds" to complete TWS pairing again.


■ Functional operation

Music playback mode

🅁 Left earbud

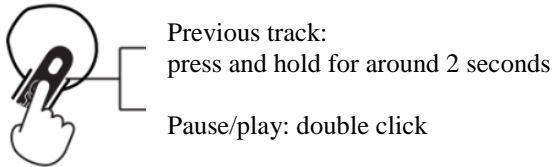


🅂 Right earbud

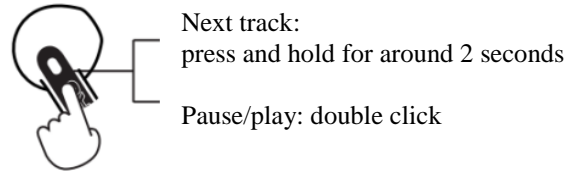


Low-latency game mode

🅂 Right earbud(music mode)

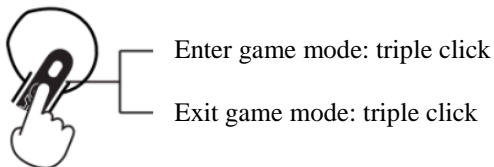


Enable/disable monitor mode

🅁 Left earbud

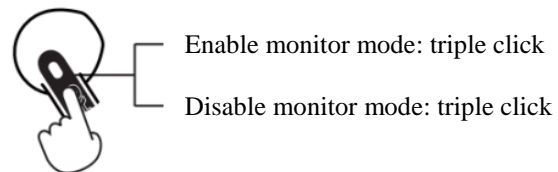


Call mode

🅁🅂 Left/right earbud

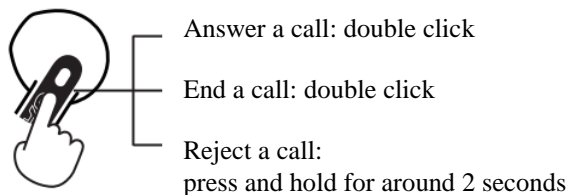

Voice Assistant

Except when you are in a conversation, four-click the touch zone of the left earbud to enable the voice assistant function (ensure the connected Bluetooth device supports this function).

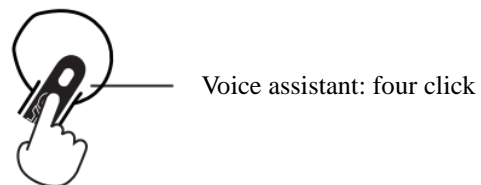

■ FAQs

No sound

- Check if the earbuds are operating.
- Check if the earbuds volume are at an appropriate level.
- Check if the earbuds are correctly connected with Bluetooth device.
- Check if the earbuds are operating within a normal working range.

The call quality of the earbuds are not good.

- Check if Bluetooth device is in an area with strong signal.
- Please ensure the earbuds are within effective distance (10m) and no obstacle between the earbuds and Bluetooth device.

When playing music, cannot control pause/play/previous track/next track via the earbuds.

- Please ensure the paired Bluetooth device supports AVRCP (Audio/Video Remote Control Profile) profile.

■ Maintenance

- Keep the product away from humid places to avoid affecting internal circuit. Do not use the product during intense exercise or with much sweat to prevent sweat from dropping into the product to make damage.
- Do not put the product in places exposed to sun or with high temperature. High temperature will shorten service life of electronic components, damage battery and make plastic components deformed.
- Do not put the product in cold places to avoid damaging internal circuit board.
- Do not dismantle the product. Non-professional personnel may damage the product.
- Do not drop, strongly vibrate, strike the product with hard object to avoid damaging internal circuit.
- Do not use drastic chemicals or cleaner to clean the product.
- Do not use sharp objects to scratch product surface to avoid damaging shell and affecting facade.

CAUTION

Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type.

A warning that batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like.



- "To prevent possible hearing damage, do not listen at high volume levels for long periods."
 - "Fully understand user manual before use."
 - "Ensure your player at low volume levels or power off before you leaving."
-



Correct Disposal of this product. This marking indicates that this product should not be disposed with other household disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.



WARNING!

Danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type. For products with removable battery, the battery must be properly recycled or disposed. For products with built-in battery, disassembling is prohibited.

Never disassemble, hit with force, squeeze batteries or dispose of batteries in fire. Do not expose batteries in conductive materials, liquid, fire or heat. Do not let metal object contact two battery poles. If the battery looks swollen, leaking, discolored, having odor or any abnormal appearance, stop using it. Do not use the battery after immersed in water.

Improper use of battery may lead to explosion or leakage, causing skin burn or other injuries; in the event of battery leakage, handle it with care and immediately dispose of the battery in the manner in compliance with applicable laws and regulations in your locality.

FCC statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IC statement: CAN ICES-3(B)/NMB-3(B).

FCC Regulatory Compliance

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Compliance

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

D éclaration FCC:

Cet appareil est conforme à la partie 15 des règles FCC. Son utilisation est soumise aux deux conditions suivantes:

(1) cet appareil ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences susceptibles de provoquer un fonctionnement indésirable.

D éclaration IC: CAN ICES-3(B)/NMB-3(B).

ISED Regulatory compliance

This device contains licence-exempt transmitters that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

This device may not cause interference.

This device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

L'émetteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

L'appareil ne doit pas produire de brouillage;

L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé