

# Bluetooth Speaker User Manual

Model: BC06L



Please keep this manual well for future use and this company will not notify you about any updated versions.

# Table of Contents

Introduction .....	1
Precautions .....	2
Definitions of Keypads and Jacks .....	2
Start Up .....	4
Bluetooth Pair Mode .....	4
Precautions .....	5
Standby Mode .....	5
Users use Hands-free Function .....	5
Answer Calls .....	5
Hang up Calls .....	5
AUX IN mode .....	5
Mobile phones Support .....	6
Power off .....	6
Product Specification .....	6
Package Contents .....	7

## Introduction

This product is a kind of Bluetooth sound system supporting stereo music, hands-free for answering calls, equipped with digital signal processing technology, echo and noise removal feature. It is applied to the different circumstances like office and house, etc., and it may be connected to most other equipment and mobile phones supporting Bluetooth feature by means of wireless for hi-quality hands-free calls and play the stereo music from other equipment and mobile phones.

## Precautions

First thanks for buying the digital sound system produced by this company!

Please read the User's Instructions before using it properly. The contents stated herein may be modified from time to time for better service as the product properties and functions are changed and this company will not notify you otherwise.

For the sound performances of the product, never use it in too cold, too hot, too dusty or humid places, especially:

1. Moist or underwater places
  2. Near the heater or hi-temperature service
  3. Solarization
  4. Places apt to fall
  5. Never disassemble the combination audio
- Otherwise, it may invalidate the warranty.

## Warning:



1. Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.



2. Where the mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

**NOTE:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.









changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Definitions of Keypads and Jacks

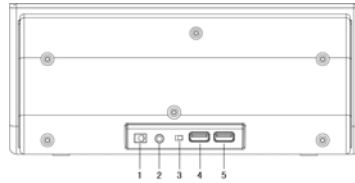
There are 7 keys and 4 jacks defined as below:

### Front View



- 1、  **MIC:** MIC
- 2、  : Press it shortly to power ON/ OFF.
- 3、  : Press to activate the speakerphone function.
- 4、  : Press and hold to begin connecting a Bluetooth device. Press to play or pause.
- 5、  : Click for previous music in Bluetooth Model
- 6、  : Click for next music in Bluetooth Model
- 7、  : Volume down.
- 8、  : Volume up

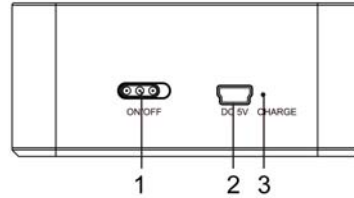
## Black View



1、 **DC input jack:** DC 5V input source jack

2、 **AUX IN :** 3.5mm jack to connect the input jack of external sound source;

3、 **SAMSUNG/iPad:** The switches between Samsung with iPad;



4、 **USB (2.1A) Port**

5、 **USB (0.5A) Port**


### **LED INDICATOR LAMP:**

**LED (Red):** The red power indicator LED will keep ON in standby status;

**LED (Green):** The green LED indicator lamp will keep ON in startup status;


**LED (Blue):** The blue LED indicator lamp will flicker during the Bluetooth connecting and pairing and then will keep ON after it;

## HANDS-FREE MICROPHONE

**MIC:** It's designed to locate in the left of  key as a small hole;

**Note:** The user is recommended to keep at least 5m from the product to keep the normal service quality!

## Start Up

Press  key shortly after power-on to startup,

1. During the first use, the blue LED lamp will flicker to access to PAIR mode.
2. In case of once PAIR was succeeded, the blue LED lamp will turn on and flicker once every one second to access to SEARCH mode, the Bluetooth will connect the equipment and mobile phone used last time automatically.
3. Access to SEARCH mode: The Bluetooth will connect the equipment and mobile phone used last time automatically, and the product will come into the CONNECTION mode when it connects successfully within 10 seconds and will come into the standby mode if not.

## Bluetooth Pair Mode




Users can enter into this status from two states:

1. Press "PAIR/▶||" for more than 3 seconds in SEARCH mode or standby mode.
2. During startup for the first time use,
  - 1). Put the mobile phone within 3 meters;
  - 2). Press "PAIR/▶||" key for more than 3 seconds, the blue lamp will flicker to enter into PAIR status;
  - 3). Activate the Bluetooth functions of Bluetooth mobile phone so that the mobile phone starts to search for the Bluetooth device; please refer to the user's manual of mobile phone;
  - 4). Select "BC06L" from the device having already been searched by the cell phone;
  - 5). In case of some kinds of cell phones, users have to key in the identification code "0000" and press ENTER key to match the product and mobile phone and after success, the green /the blue LED lamps will keep ON.
- 6). Press RETURN key of mobile phone to exit from the mobile phone menu and make sure that the distance between the hands-free and mobile phone is within 10 meters and free from any obstacle, users can answer calls and play music at this moment.

### **Standby Mode**


The blue LED lamp will flicker slowly and the blue lamp will flicker once every 5 seconds; while in the standby mode, it will accept to connect to all equipment once paired, 8 at most in records.

### **In Bluetooth music play mode, users can**


Shortly press or press ")" or ")" key for a longer time to adjust the volume.  
Shortly press "PAIR/)" key to play/ pause the music play.

### **Users use Hands-free Function**


#### **Answer Calls**

The speaker will ring up when there are incoming calls during music play, just press ")" key shortly to answer.



#### **Hang up Calls**

Press ")" key shortly during hands-free call to hang up calls and then return to the music play mode.

#### **Refuse Calls**

When there are incoming calls, just press for a longer time ")" key for more than 3 seconds to refuse calls.

#### **Aux-in Mode**

When AUX IN line is connected to AUX IN Jack, the system will automatically pause the Bluetooth, the blue LED turns off and the unit enters into AUX IN mode. Then users can press or press ")" key or ")" key shortly or for a longer time to adjust the volume.



When users disconnected AUX IN line completely out of AUX IN Jack, the system will re-enter into the Bluetooth SEARCH mode and search for the equipment connected last time.

### **Mobile Phone support**

Note:

The Speaker can support most of the smart phone and device with the Bluetooth function to play music wirelessly.

In theory, it can also support the equipment with Bluetooth 'Music Play' features.

### **Power Off**

Shortly press "⏻" key in the standby mode to access POWER-OFF mode and the red LED lamp keeps ON.

### **Product Specification**

Bluetooth specifications: Bluetooth 2. 1+EDR

Output power: Output Level 2, and the longest connecting distance of 10 meters

Working frequency scope: 2. 402GHz -2. 480GHz

Supporting Profiles: HSP, HFP 1. 5, A2DP and AVRCP Profiles

Dimensions: 259×137×117(mm) (LxWxH)

Weight: Approximately 0. 810KG (mainframe)

Power output/Current (Adaptor):

### **PACKAGE CONTENTS**

1 Bluetooth Speaker

1 AC/DC adaptor

1 instruction manual