



# TEST REPORT

REPORT NUMBER: I23W00033-EMC

ON

Type of Equipment:	Tracker
Type of Designation:	PT201B
Brand Name:	Prime
Manufacturer:	Micron Electronics LLC.
FCC ID:	ZKQ-AHALO

ACCORDING TO

Subpart B, PART 15, RADIO FREQUENCY DEVICES

**Chongqing Academy of Information and Communications Technology**

*Month date, year*

*Aug.15,2023*

*Signature*

**Xiang Luoyong**

**Director**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of Chongqing Academy of Information and Communications Technology.



Report No.: I23W00033-EMC

Revision Version

Report Number	Revision	Date	Memo
I23W00033-EMC	00	2023-07-31	Initial creation of test report
I23W00033-EMC-Rev1	01	2023-08-15	--

**Chongqing Academy of Information and Communication Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777



**CONTENTS**

1. Test Laboratory ..... 4

1.1. Testing Location ..... 4

1.2. Testing Environment ..... 4

1.3. Project data ..... 4

1.4. Signature ..... 4

2. Client Information ..... 5

2.1. Applicant Information ..... 5

2.2. Manufacturer Information ..... 5

3. Equipment under Test (EUT) and Ancillary Equipment (AE) ..... 6

3.1. About EUT ..... 6

3.2. Internal Identification of EUT used during the test ..... 6

3.3. Internal Identification of AE used during the test ..... 6

4. Reference Documents ..... 7

4.1. Reference Documents for testing ..... 7

5. Test Equipments Utilized ..... 8

6. Test Results ..... 9

6.1. Summary of Test Results ..... 9

7. Test Results ..... 10

7.1. Radiated Emission ..... 10

Annex A EUT Photos ..... 19

ANNEX B Deviations from Prescribed Test Methods ..... 20

**Chongqing Academy of Information and Communication Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

## 1. Test Laboratory

### 1.1. Testing Location

Name:	Chongqing Academy of Information and Communications Technology
FCC Registration Number:	CN1239
Address:	No.19 East Road, Xiantao Big-data Valley, Yubei District, Chongqing, People's Republic of China Building C, Technology Innovation Center, No.8, Yuma Road, Chayuan New Area, Nan'an District, Chongqing, People's Republic of China
Postal Code:	401336
Telephone:	0086-23-88069965
Fax:	0086-23-88608777

### 1.2. Testing Environment

Normal Temperature:	24.9-27.2°C
Relative Humidity:	55-56%

### 1.3. Project data

Testing Start Date:	2023-07-20
Testing End Date:	2023-07-21

### 1.4. Signature



2023-08-15

**Li Runhao**  
(Prepared this test report)

Date



2023-08-15

**Xiao Yu**  
(Reviewed this test report)

Date



2023-08-15

**Xiang Luoyong** Director of the  
laboratory (Approved this test report)

Date

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777



## 2. Client Information

### 2.1. Applicant Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
City:	Boca Raton
Country:	USA
Telephone:	+1 888 538 3489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng

### 2.2. Manufacturer Information

Company Name:	Micron Electronics LLC.
Address /Post:	1001 Yamato Road, Suite 400, Boca Raton, FL 33431, USA
City:	Boca Raton
Country:	USA
Telephone:	+1 888 538 3489
Fax:	--
Email:	pcheng@micron-electronics.com
Contact Person:	Ping Cheng

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

### 3. Equipment under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	Tracker
Model name	PT201B
Brand name	Prime
LTE Frequency Band	2/4/12/14/66
Type of modulation	QPSK/16QAM
Extreme Temperature	-10/+60°C
Battery Voltage	3.8VDC
Adapter power supply	5VDC

Note: Photographs of EUT are shown in ANNEX B of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version	Date of receipt
S6	IMEI:353258101297653	A506_V1_P CBA	PT201BV01.01B04.I01	2023-07-12

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID	Instrument	Manufacturer	Model	SN
Adapter	--	SHENZHEN TIANYIN ELECTRONICS CO.LTD	TPA-46B050100UU Input: AC 100-240V 0.2A Output: DC 5V 1A	--

\*AE ID: is used to identify the test sample in the lab internally.

AE Information is provided by the customer..



## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC CFR Part 15, Subpart B,	RADIO FREQUENCY DEVICES	--

## 5. Test Equipments Utilized

No.	Equipment	Model	SN	HW Version	SW Version	Manufacture	Cal.Due Date
1	Universal Radio Communication Tester	CMW500	128181	--	--	R&S	2024-06-28
2	Test Receiver	ESU40	100350	01	4.43 SP3	R&S	2024-06-28
3	Test Receiver	ESW 26	101382	00	1.50 SP1	R&S	2024-06-28
4	Ultra-wideband Log Periodic Antenna	VULB 9163	9163-586	--	--	Schwarzbeck	2024-10-28
5	Double Ridged Guide Antenna	9120D	9120D-1083	--	--	Schwarzbeck	2024-12-14
6	Ultra-wideband Log Periodic Antenna	VULB 9163	01392			Schwarzbeck	2025-05-04
7	Double Ridged Guide Antenna	9120D	9120D-1103	--	--	Schwarzbeck	2024-05-05
8	Fully-Anechoic Chamber	FAC5	--	--	--	TDK	2024-09-22
9	Generator	SMU 200A	104517	--	--	R&S	2024-06-28
10	Amplifier1	SCU-08F1	8320027	--	--	R&S	--
11	Amplifier2	SCU-18F	180093	--	--	R&S	--
12	Test Receiver	ESR 3	101382	03	3.48 SP2	R&S	2024-06-28
13	LISN	ENV216	102368	--	--	R&S	2024-05-27

### Test software

No.	Name	version	SN	Manufacture
1	EMC32	V 9.26.01	--	R&S
2	EMC32	V10.20.01	--	R&S

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777





## 6. Test Results

### 6.1. Summary of Test Results

FCC Rules	Name of Test	Result
15.109	Radiated Emission	Pass
15.107	Conducted Emission	Pass
Note: N/A means not applicable.		



## 7. Test Results

### 7.1. Radiated Emission

<b>Specifications:</b>	15.109
<b>DUT Serial Number:</b>	S6:353258101297653
<b>Date of Tests</b>	2023.07.21
<b>Test conditions:</b>	Ambient Temperature:24.9°C Relative Humidity:56% Air pressure: 98.0kPa
<b>Operation Mode</b>	1、 Charging +Normal working 2、 Normal working
<b>Test Results:</b>	Pass


#### Limit Level Construction(Except for Class A digital devices):

Frequency Range (MHz)	Quasi-Peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Frequency Range (MHz)	Peak (dBuV/m)	Average (dBuV/m)
Above 1000	74	54

## Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777

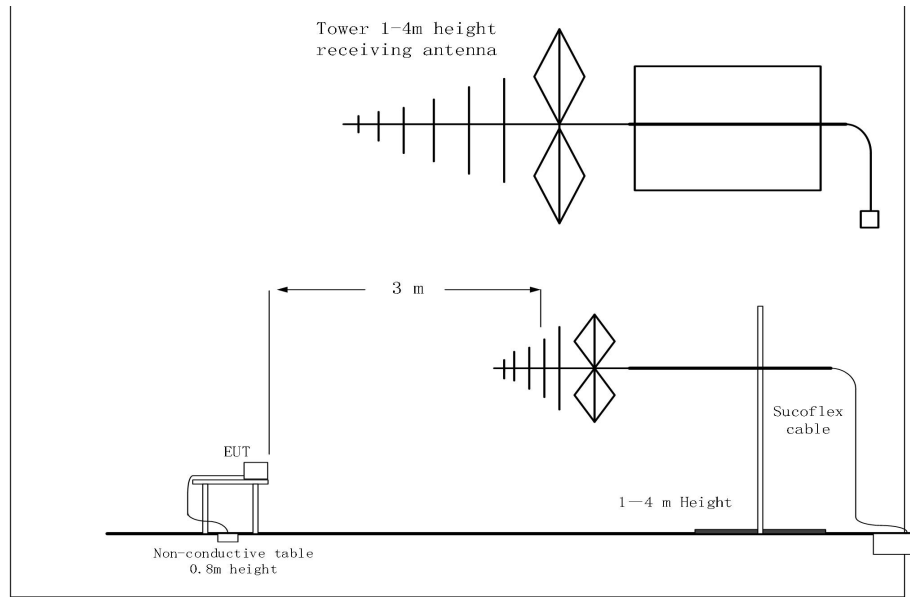

**Test Method:**

For 30-1000MHz, the EUT was placed on the top of a rotating 0.8m table above the ground at a semi-anechoic chamber. The distance between the EUT and the received antenna was 3 meters. The table was rotated 360 degree and the received antenna mounted on a variable-height antenna tower was varied from 1m to 4m to find the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement. Tested in accordance with the procedures of ANSI C63.4-2014, section 8.3.

For 1000-18000MHz, the maximal emission value was acquired by adjusting the antenna height, and the table was rotated 360 degree to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna were set during the measurement.

**Test Result:**

A “reference path loss” is established and Corr is the attenuation of “reference path loss”, and including the factor of receive antenna , the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Corr (dB/m)} = \text{Cable loss (dB)} + \text{Antenna Factor(dB/m)} - \text{Preamplifier gain (dB)}$$

$$\text{Result (dB } \mu \text{V/m)} = \text{PMea (dB } \mu \text{V)} + \text{Corr (dB/m)}$$

**Uncertainty Measurement:**

Item	Uncertainty	
Expanded Uncertainty (30MHz-150MHz)	3.12dB (k=2) (H)	3.38dB (k=2) (V)
Expanded Uncertainty (150MHz-1000MHz)	2.87dB (k=2) (H)	4.09dB (k=2) (V)

**Chongqing Academy of Information and Communication Technology**

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
 Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I23W00033-EMC


Expanded Uncertainty (1GHz-6GHz)	4.84dB (k=2)
Expanded Uncertainty (6GHz-18GHz)	4.52dB (k=2)
Expanded Uncertainty (18GHz-26GHz)	6.19dB (k=2)
Expanded Uncertainty (26GHz-40GHz)	6.03dB (k=2)

Test mode: ALL modes, Only the worst case test data was reported.

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

Test Data

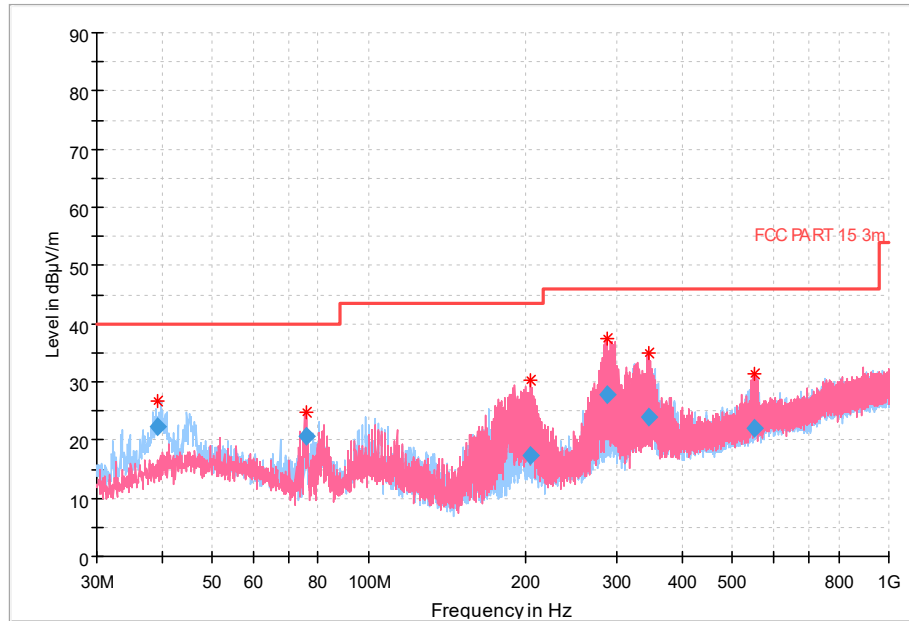

Final\_Result


RE 30MHz-1GHz

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
39.348500	22.21	40.00	17.79	1000.0	120.000	110.0	H	231.0	-14.8
75.705000	20.52	40.00	19.48	1000.0	120.000	100.0	V	288.0	-18.0
204.694500	17.47	43.50	26.03	1000.0	120.000	150.0	V	260.0	-12.7
286.784500	27.90	46.00	18.10	1000.0	120.000	100.0	V	283.0	-9.7
345.583500	23.87	46.00	22.13	1000.0	120.000	106.0	V	95.0	-7.4
550.179500	22.08	46.00	23.92	1000.0	120.000	100.0	V	-26.0	-3.3

Note: Both H polarization and V polarization are tested. The figure shows the blue value of H polarization and the red value of V polarization synthesis

Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
 Tel: 0086-23-88069965 FAX: 0086-23-88608777

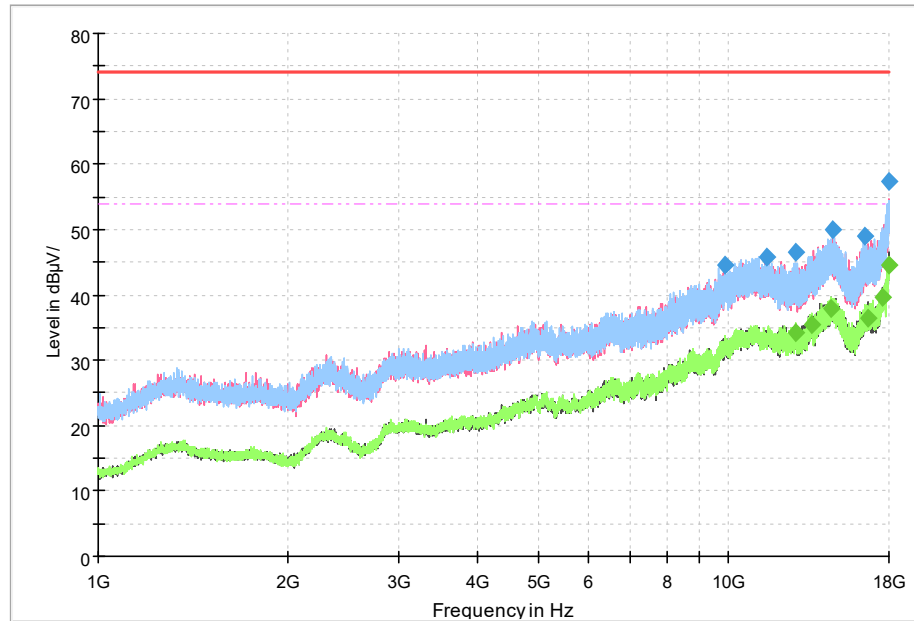

**Final\_Result**

RE 1GHz-18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
9876.545000	44.56	---	74.00	29.44	50.0	1000.000	200.0	H	0.0	9.9
11548.875500	45.85	---	74.00	28.15	50.0	1000.000	200.0	V	270.0	11.7
12772.500000	---	34.28	54.00	19.72	50.0	1000.000	200.0	H	180.0	11.4
12778.099500	46.50	---	74.00	27.50	50.0	1000.000	200.0	H	180.0	11.4
13597.500000	---	35.36	54.00	18.64	50.0	1000.000	200.0	H	180.0	13.5
14590.200000	---	37.98	54.00	16.02	50.0	1000.000	200.0	V	270.0	15.8
14688.942000	49.99	---	74.00	24.01	50.0	1000.000	200.0	V	180.0	16.0
16507.740500	49.02	---	74.00	24.98	50.0	1000.000	200.0	H	0.0	15.4
16698.300000	---	36.39	54.00	17.61	50.0	1000.000	200.0	V	90.0	15.1
17567.400000	---	39.74	54.00	14.26	50.0	1000.000	200.0	V	90.0	17.7
17979.300000	---	44.57	54.00	9.43	50.0	1000.000	200.0	V	0.0	22.7
17995.785500	57.44	---	74.00	16.56	50.0	1000.000	200.0	H	180.0	23.1

Note: Both H polarization and V polarization are tested. The figure shows the blue value of H polarization and the red value of V polarization synthesis

**Chongqing Academy of Information and Communication Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
 Tel: 0086-23-88069965 FAX: 0086-23-88608777

## 7.2. Conducted Emission


<b>Specifications:</b>	15.107
<b>DUT Serial Number:</b>	S6:353258101297653
<b>Date of Tests</b>	2023.07.20
<b>Test conditions:</b>	Ambient Temperature:27.2°C Relative Humidity:55% Air pressure: 97.9kPa
<b>Operation Mode</b>	Charging +Normal working
<b>Test Results:</b>	Pass

### Limit Level Construction:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### EUT Setup:

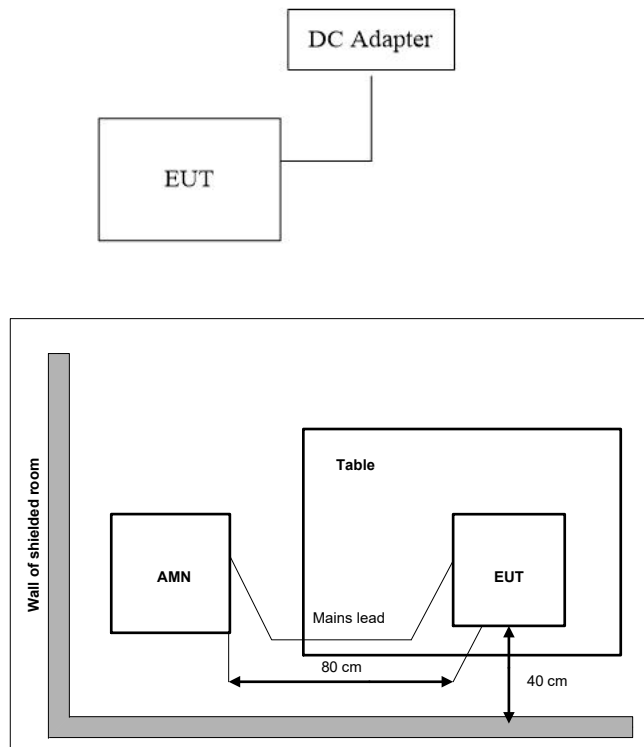

## Chongqing Academy of Information and Communication Technology

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777

**Test Method:**

For equipment that is designed to be connected to the public utility (DC) power line, the radio frequency voltage that is conducted back onto the DC power line on any frequency or frequencies with the band 150 kHz to 30MHz shall not exceed the limits. Both lines of the power mains connected to the EUT were checked for maximum conducted interference. Tested in accordance with the procedures of ANSI C63.4-2014, section 7.3

**Test results:**


Emission level(quasi-peak or Average peak)(dB $\mu$ V)=Raw value by receiver(dB $\mu$ V) + Corr(Insertion loss+ cable loss) (dB)  
The raw value is used to calculate by software which is not shown in the sheet. Margin (dB) =limit value(dB $\mu$ V) – emission level(dB $\mu$ V).

**Uncertainty Measurement:**

The measurement uncertainty is 1.97 dB (k=2).



Test Data

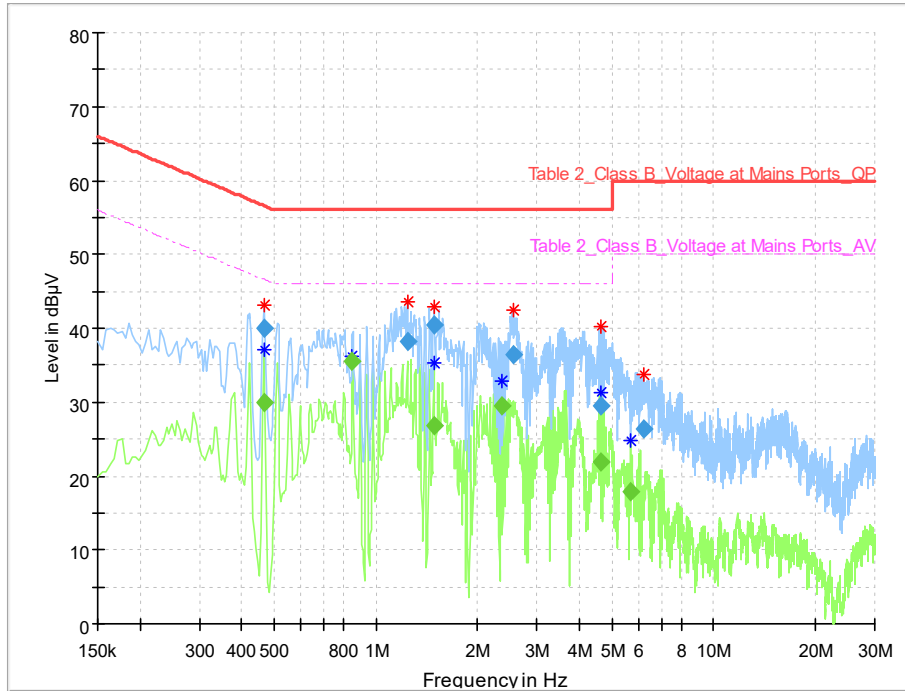


CE-150KHz-30MHz-L

Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.465000	40.04	---	56.60	16.57	1000.0	9.000	L1	ON	9.7
0.469500	---	29.88	46.52	16.64	1000.0	9.000	L1	ON	9.7
0.852000	---	35.52	46.00	10.48	1000.0	9.000	L1	ON	9.7
1.243500	38.12	---	56.00	17.88	1000.0	9.000	L1	ON	9.7
1.482000	---	26.73	46.00	19.27	1000.0	9.000	L1	ON	9.7
1.486500	40.51	---	56.00	15.49	1000.0	9.000	L1	ON	9.7
2.350500	---	29.42	46.00	16.58	1000.0	9.000	L1	ON	9.8
2.553000	36.44	---	56.00	19.56	1000.0	9.000	L1	ON	9.8
4.650000	---	21.86	46.00	24.14	1000.0	9.000	L1	ON	9.8
4.654500	29.45	---	56.00	26.55	1000.0	9.000	L1	ON	9.8
5.685000	---	17.84	50.00	32.16	1000.0	9.000	L1	ON	9.9
6.220500	26.36	---	60.00	33.64	1000.0	9.000	L1	ON	9.9

Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
 Tel: 0086-23-88069965 FAX:0086-23-88608777

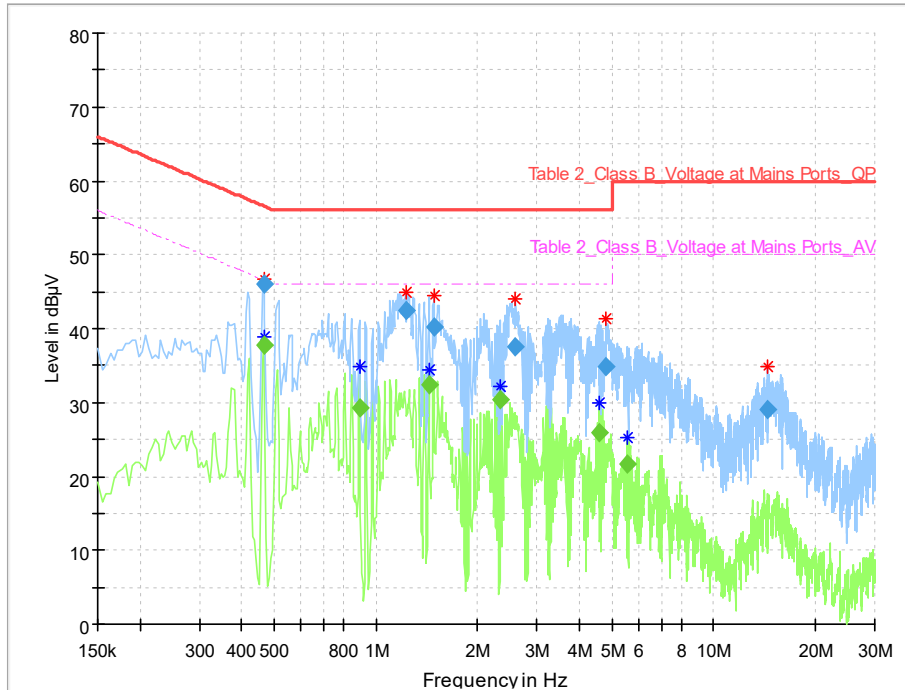

CE-150KHz-30MHz-N

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV )	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.465000	46.14	---	56.60	10.46	1000.0	9.000	N	ON	9.7
0.465000	---	37.75	46.60	8.86	1000.0	9.000	N	ON	9.7
0.892500	---	29.27	46.00	16.73	1000.0	9.000	N	ON	9.8
1.230000	42.42	---	56.00	13.58	1000.0	9.000	N	ON	9.8
1.441500	---	32.31	46.00	13.69	1000.0	9.000	N	ON	9.8
1.486500	40.21	---	56.00	15.79	1000.0	9.000	N	ON	9.8
2.332500	---	30.31	46.00	15.69	1000.0	9.000	N	ON	9.8
2.589000	37.60	---	56.00	18.40	1000.0	9.000	N	ON	9.9
4.591500	---	25.90	46.00	20.10	1000.0	9.000	N	ON	9.9
4.821000	34.92	---	56.00	21.08	1000.0	9.000	N	ON	10.0
5.559000	---	21.65	50.00	28.35	1000.0	9.000	N	ON	10.0
14.509500	29.13	---	60.00	30.87	1000.0	9.000	N	ON	10.2

### Chongqing Academy of Information and Communication Technology

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
 Tel: 0086-23-88069965 FAX:0086-23-88608777



**Report No.: I23W00033-EMC**

## **Annex A EUT Photos**

See the document" I23W00033-External Photos".

See the document" I23W00033-Internal Photos ".

Test photo See the document"I23W00033 \_EMC Test Setup Photos".

## **Chongqing Academy of Information and Communication Technology**

Address: No. 8,Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China,401336  
Tel: 0086-23-88069965 FAX:0086-23-88608777



Report No.: I23W00033-EMC

## **ANNEX B Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**\*\*\*END OF REPORT\*\*\***

**Chongqing Academy of Information and Communication Technology**

Address: No. 8, Yuma Road, Chayuan New City, Nan'an District, Chongqing, P. R. China, 401336  
Tel: 0086-23-88069965 FAX: 0086-23-88608777