



LG


Life's Good

English

LG TONE^{PRO}™

HBS-750 User Manual

BLUETOOTH® Stereo Headset

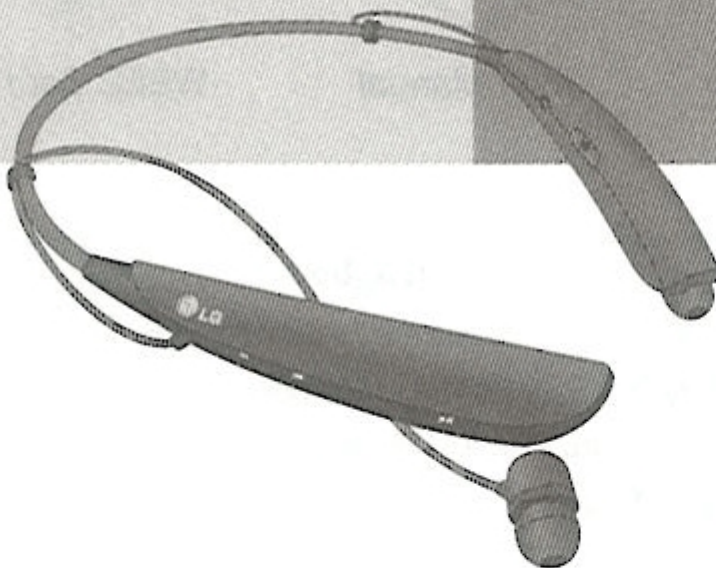


All rights reserved.
LG Electronics Inc., 2014


Note: For the best performance and to prevent any damage to, or misuse of the HBS-750, please read all of the information carefully prior to using the HBS-750.

Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

Description of parts

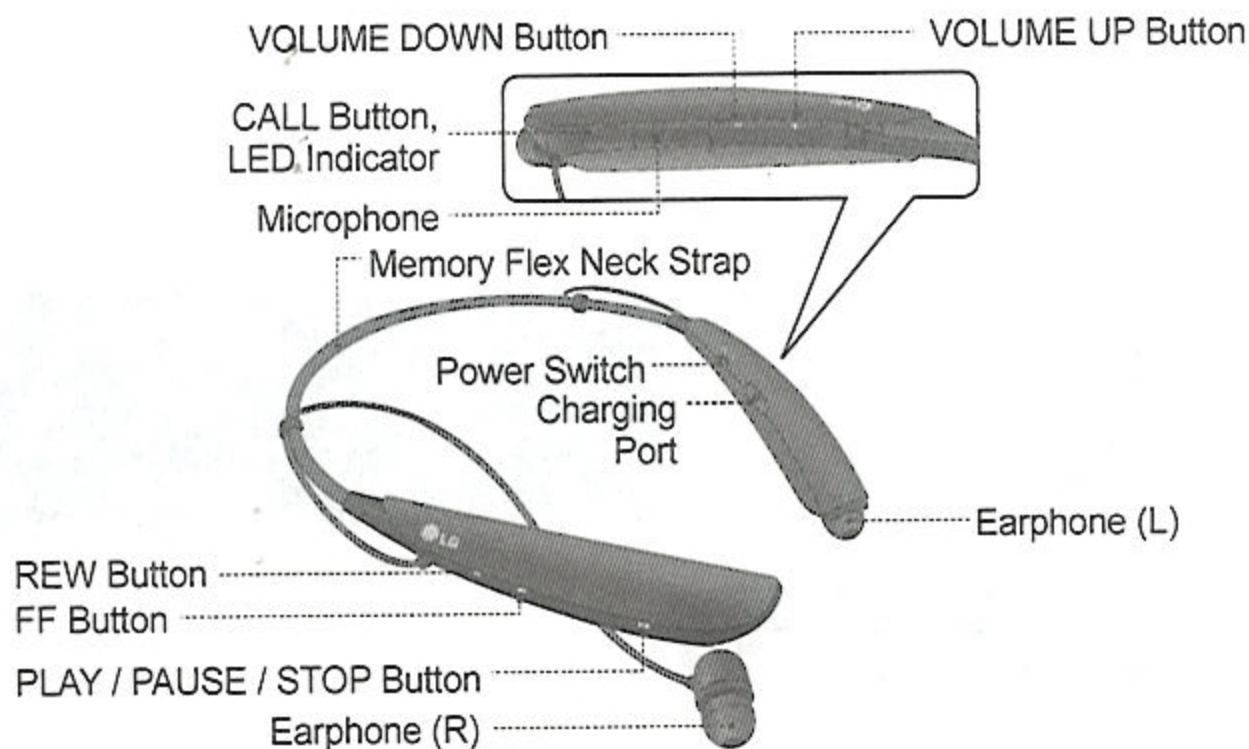

Package Contents



Earbuds (2 Sets)



USB Charging Cable



User Manual



WEEE Card

Specification

Item	Description
Bluetooth® specification	3.0 (Headset / Hands-Free / A2DP Profiles)
Battery	Battery 3.7V / 195mAh Li-Polymer
Standby time / Talk Time	Up to 500Hrs / Up to 15Hrs
Music play time	Up to 10Hrs
Charging time	< 2.0Hrs
Charging rated input	DC 4.75 V ~ 5.6 V, 400mA
Operation temperature	-10°C ~ 60°C
Dimension / weight	138.5(W) X 173.1mm(L) X 17.5mm(T) / 36g

Power On / Power Off

- Move the Power switch to the 'ON' or 'OFF' side.

Charging

- When the charger is connected, with the power on or off, the headset will turn off.
- While charging, the LED indicator will show a solid red light and change to violet when charged 80% and above.
- When charging is completed, the LED indicator will show a solid blue light.

Low Battery

- An announcement will be made once every 2 minutes.
- If the battery is not charged, the headset will turn off.

Battery Status Alert

- Press and hold the VOLUME DOWN button for 1 second.
- There are 3 levels of battery status

Battery status	High	Medium	Low
Voice Prompt	Battery High	Battery Medium	Battery Low
LED display	Blinking Blue LED 3 times	Blinking Violet LED 3 times	Blinking Red LED 3 times

- HBS-750 battery status indicator will appear on the iPhone screen.

Pairing

ENG

- Before using the headset for the first time, you must pair it with a Bluetooth-enabled handset.
- To pair your headset with an additional handset, the headset must be placed in Pairing Mode.
- There are 2 Pairing Mode Methods with the HBS-750.

Easy Pairing (First Time Pairing)

1. Move the Power switch to the 'ON' side to turn on the HBS-750. When the headset enters Pairing Mode, the LED indicator will show a solid blue light.
2. Using your handset, find the Bluetooth Menu and "search for" or "add" new devices.
 - Select "LG HBS750" from the list of devices and pair it with your handset.
3. If asked for the Pass/PIN code please enter "0000" (4 Zeros).
 - * Note : If your handset supports Secure Simple Pairing (SSP), you will not need to enter Pass/PIN code.
 - Once pairing has completed successfully, you will hear "Your headset paired."
4. Some handsets might ask for permission to access the phone's contact list. If you receive a message from your handset, please select "OK" or "Allow access"
 - The HBS-750 will automatically turn off if not paired within 3 minutes.

Manual Pairing (Pairing with another phone or re-pairing)

- With the power off, press the CALL button and move the Power switch to the 'ON' side at the same time for 2 seconds.
- When the headset enters Pairing Mode, the LED indicator will show a solid blue light. After the procedure repeat Easy Pairing steps 2 through 4.

Multi-connection**Advanced Multipoint**

The HBS-750 is capable of having two devices connected to the headset at the same time. This will give you the freedom of using call waiting between calls on both of your connected phones.

Connection

- Pair the headset with one of your Bluetooth-enabled handsets. (per the pairing instructions on page 2).
- Turn off the headset.
- With the power off, press the CALL button and move the Power switch to the 'ON' side at the same time for 1 second to enter Manual Pairing mode.
- Now, pair and connect the headset with your other Bluetooth-enabled handset. (this will be your primary handset).
- Once this handset is paired and connected, go back and connect the originally paired handset to the headset. This will now be your secondary handset.
- * NOTE: When the HBS-750 is connected to two handsets at the same time(Multipoint), the headset calling functions will work with the primary handset.
- * NOTE: In case of failure to connect to the primary phone through Easy Pairing, HBS-750 will enter pairing mode.

Calling Function

- Voice Dialing and Last Number Redial features work with the primary handset (or handset which made the last outgoing call).

Call Waiting

- While speaking on an active call, press the CALL button for 1 second to switch to an incoming call.
- To switch between 2 active calls, press the CALL button for 1 second.
- To terminate the active call or both calls at once, briefly press the CALL button.
- If both handsets are receiving an incoming call, the headset will default to the primary device.

How to Use

Auto Reconnect

- If the HBS-750 is turned off (either accidentally or intentionally) while connected to a handset, the headset and handset will disconnect. The headset and handset will automatically reconnect when the HBS-750 is turned back on while in range.
- Secondary handset need to be connected via selecting "LG HBS750" from the list of devices at Bluetooth menu.

Out of range

- If the paired devices are separated by a range of 10 meters(33 feet) or more, the headset and handset will disconnect and HBS-750 will vibrate to alert.
- * If vibrate is set to off by pressing VOLUME UP button for 3 seconds, HBS-750 will not vibrate.
- If the headset and handset do not automatically reconnect when they are back within the required range, briefly press the CALL button on the HBS-750 to reconnect manually.
- * It is possible to use these functions only when your handset supports them. For further information about using these features, please consult your handset's user manual.
- While in multi-connection and streaming, the inactive paired device, which is out of range, will be disconnected. The HBS-750 will alert once with no attempt to reconnect.

Calling

Answering a call / Ending a call

- When there is an incoming call, the headset will ring and vibrate.
- * If vibrate is set to off by pressing VOLUME UP button for 3 seconds, HBS-750 will not vibrate.
- Briefly press the VOLUME DOWN button to stop vibration.
- Briefly press the CALL button.

Transferring a call

- While on a call on your handset, press and hold VOLUME UP button for 3 seconds to transfer the audio either from headset to handset or from handset to headset.

Voice dialing

- Briefly press the CALL button to activate "Voice Command".
Note: If the handset does not support Voice Dialing, it is possible that performing this action will activate Last Number Redial.

Last number redial

- Press and hold the CALL button for 1second to activate "Last Number Redial".
The headset will beep, and call the last number dialed.

Call waiting

- Answer a second call without hanging up the first call by pressing the CALL button for 1 second (you will hear a beep). Press the CALL button for 1second to turn to the original call.
- Briefly press the CALL button to terminate the active call or both calls at once. (subject to handset's support)

Rejecting a Call

- Press the CALL button for 1second when the handset rings.

Mic Mute

- Press and hold the VOLUME UP and VOLUME DOWN buttons simultaneously for 1 second to mute/unmute the Mic during conversation.

Volume control

- Briefly press the VOLUME button.

Audio streaming controls

- PLAY : Briefly press the PLAY/PAUSE button.
- PAUSE : Briefly press the PLAY/PAUSE button.
- STOP : Press and hold the PLAY/PAUSE button.
- NEXT SONG : Briefly press the FF button.
- PREVIOUS SONG : Briefly press the REW button.
- FAST FORWARD : Press and hold the FF button.
- REWIND : Press and hold the REW button.