

---

## **Android Platform to introduce and use of guidance**

*July 2014*

**Version 4.2.2**

---

## CONTENTS

How Introduction.....	- 5 -
Introduction phone keys .....	- 5 -
Introduction widgets .....	- 5 -
Information Function .....	- 5 -
Contact Features .....	- 8 -
Call History Features .....	- 10 -
Paste the text / copy Features.....	- 11 -
E-mail Features .....	- 12 -
Desktop Features .....	- 13 -
Bluetooth Function .....	- 16 -
Wifi Features .....	- 17 -
Flight mode Function .....	- 17 -
Black unlock .....	- 18 -
Restore to factory default .....	- 19 -
Storage Settings .....	- 19 -
GPS Settings.....	- 20 -
English language switching phone .....	- 20 -
Replacement mobile phone input method .....	- 22 -
Android phone data cable links .....	- 22 -
Introduce cross-screen display.....	- 23 -
Browser Features .....	- 23 -
Q/A	- 24 -
1. How to turn off the software running in the background too much.....	- 24 -
2. How to quickly set up Email .....	- 25 -
3. How do I view the capacity of SD card case.....	- 25 -
4. How to save electricity Andy 5EI .....	- 25 -
5. How Andy 5EI lock screen, to prevent others from using.....	- 25 -
6. Why does not the USB data cable links your computer.....	- 26 -
7. How to install a program on a non-Android Market .....	- 26 -
8. In browsing the web or other applications, how to switch to other applications-	26 -
9. How to enter the silent mode quickly .....	- 26 -
10. How to forward SMS / MMS.....	- 26 -
11. how to paste and copy text.....	- 26 -
12. download and install the application installation path can be set to SD card . -	26 -
13. In the phone program group is installed too many applications, how to solve-	27 -
14. Contacts are sorted, can change .....	- 27 -
15. Contacts whether to support the group .....	- 27 -

---

16. contacts and SMS storage capacity limits the number of .....	- 27 -
17. How to set the SD card, personalized ring tones.....	- 27 -
18. How to sync the phone contacts to the original Andy 5EI .....	- 27 -
19. How to use the Andy 5EI access Wifi (WLAN).....	- 27 -
20. How to Find Contact.....	- 28 -
21. how to download applications for the Andy 5EI .....	- 28 -
22. What are commonly used android forum .....	- 28 -
23. How do I delete the downloaded software .....	- 28 -
24. How to view mobile phone version information.....	- 28 -
25. How do I copy SIM card contact information .....	- 29 -
26. why the message has a different time and date display .....	- 29 -
27.Andy 5EI whether to support the Java....	- 29 -
28.How to open developer options .....	- 29 -

---

## **Basic terms**

**Root:** Super Android system is the administrator user account, which has the authority to control the whole system, and only have the privileges to the original system can be refreshed for the revision of the various systems;

**APK:** Android application types, with the cab and the Windows Mobile platform, like exe files, the user can be installed directly;

**Eclari :** The name of one of the Android platform, version, and the corresponding version number is 2.6, Andy 5EI use this version;

**Webkit:** Core Android platform, browser, and now Apple's Safari, Google's Chrome and FireFox are using this kernel as a web page rendering mechanism;

**GPhone:** To use Google Android mobile phone operating system developed collectively, Andy 5EI, etc.;

**ActiveSync:** Push email solution to support Microsoft proprietary technology, pre-primary mailbox servers at Microsoft (Exchange server) to provide support, and now Google's Gmail also provided support

**G-Sensor:** Is the acceleration sensors for mobile phones can provide the direction of gravity sensors, which begin with the letter G represents the gravity, the latter Snesor meant to represent the sensor

---

## How Introduction

### Introduction phone keys

Menu button: Click on the program display the corresponding menu item, the user can choose the corresponding sub-menu functions;

Home button: Click on the background into the current application will, and enter the main interface; Note that using this key will not really exit the application, the application will continue to run in the background;

Back button: Click to fall back to previous step of the operation of the interface;

### Introduction widgets


1, add widgets to the main screen: in the widgets interface - > Long press a widget can add to the main screen

2, change the position of widgets: in the main interface, Long press a widget, sliding the widget can change the position of the widget in the main screen


3. Delete widgets: in the main interface, Long press a widget, the top of the main screen will be delete ", sliding the widget to delete , when there is red ", can let go, the widget is deleted

### Information Function


To sort the information by contacts, the conversational arrangement, user understanding of the history of the entire communication information, information sorted according to first contacts, including contact name for the first numbers, then letters (A-Z)

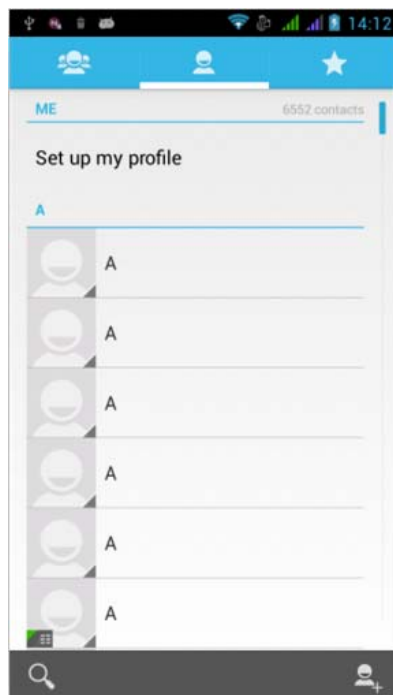

## Send MMS


New information -"click  , add "function - " to select the desired additional content;

New information-click the menu button -add theme

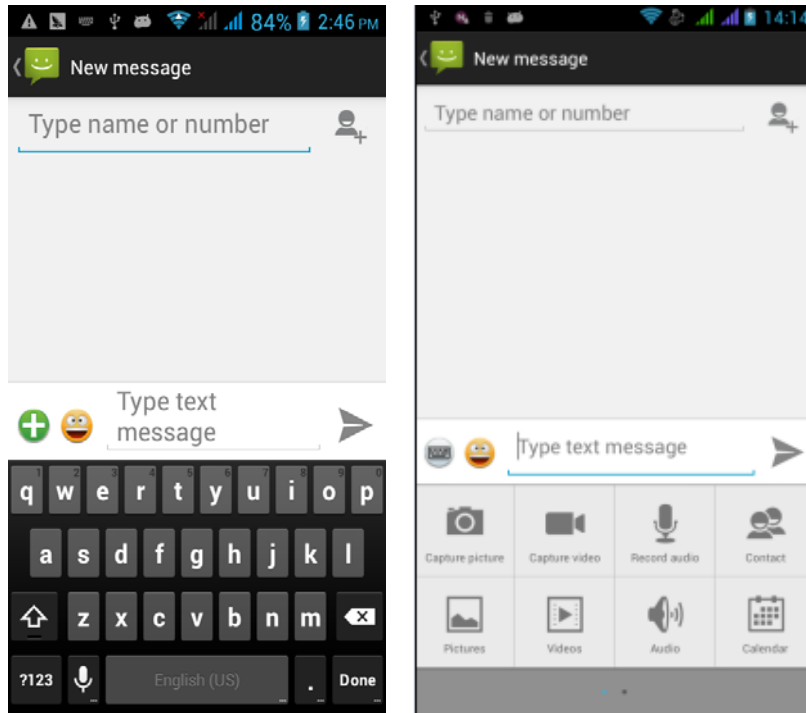


## Replacement SMS reminder tone

Access to the information interface - "click the menu button, select "Settings  
"function ,select "Notifications "function ,Select "Ringtone"function;

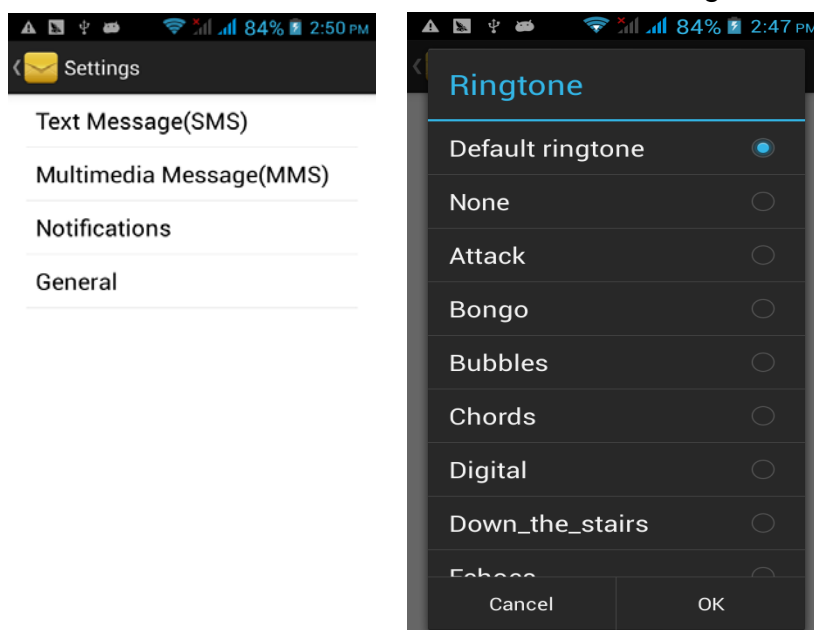


---

View the sender information


Access to the information screen - "Select the message - " click  -

"click,can view the sender information

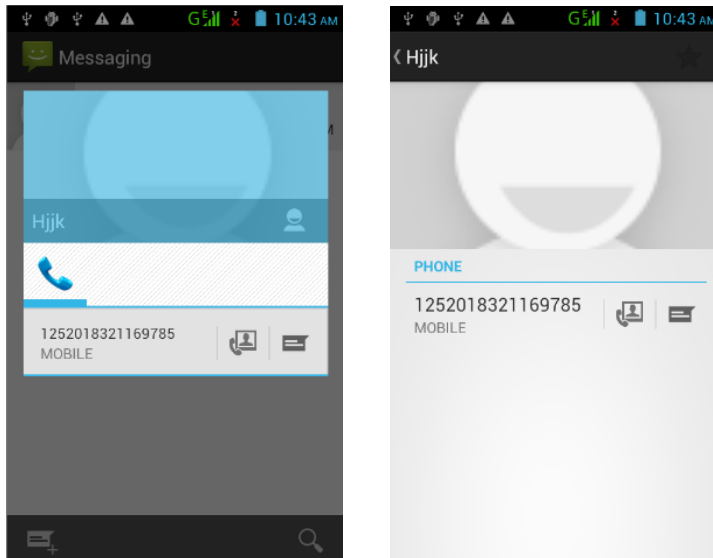

Forwards


Access to the information screen - "Select the message - " Long press the Information, there shortcut keys - "select"Forward "function

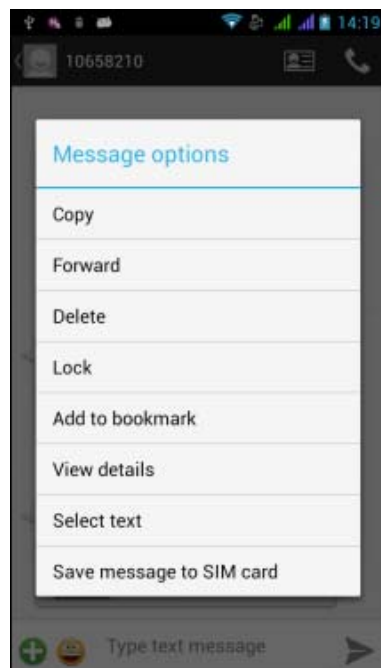


View information details

---

Access to the information screen- "Select the message-" Long press the Information, there shortcut keys -"select View details "function

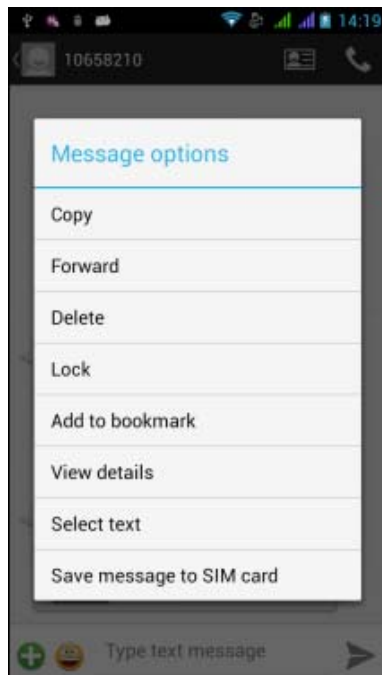

Delete information session specific information on a particular  
Access to the information screen - "Select the message - " Long press and  
Information, there shortcut keys - "select "Delete "function

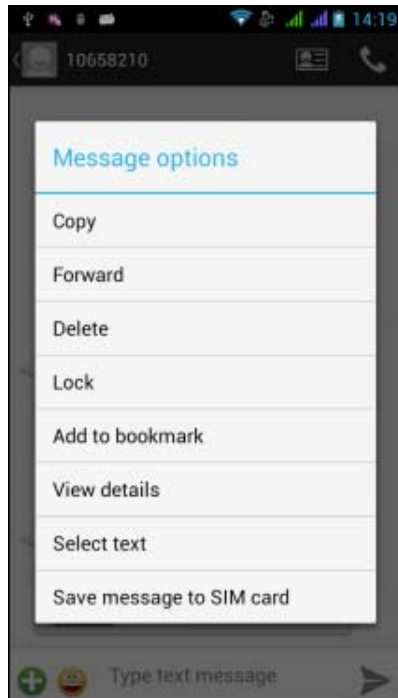


## Contact Features

contacts groups, contacts and favorites feature;

Book description


By the first number, then sort the way English characters (A-Z)



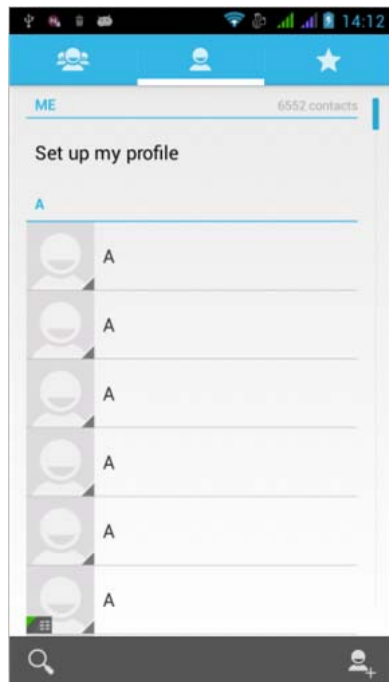

### Favorites Introduction


Included collection of contacts, and users often call the recent contact information, part of the overall fabric Top of the contact information for the user collection, lower often call into the system default contact information;

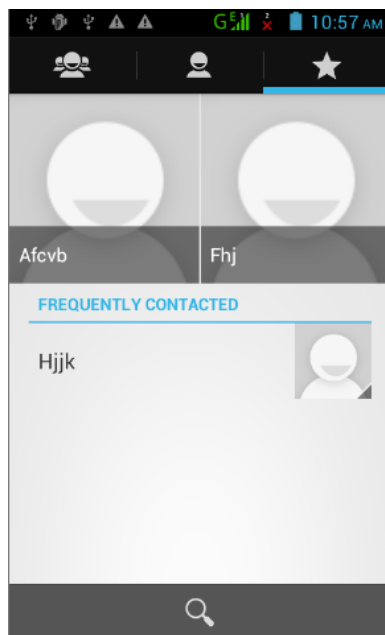

### Contact Search

Into the contact interface - "click  button



Search supported by the first letter and the entire search string

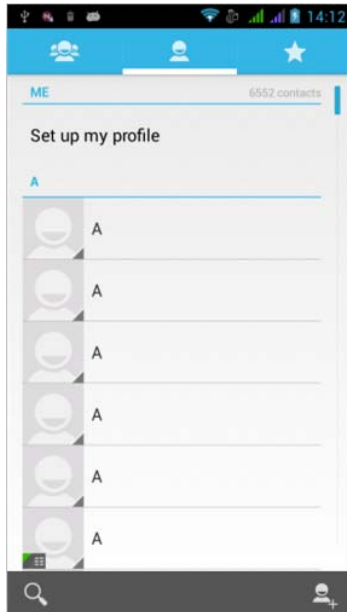

Import contact information methods  
using Bluetooth to achieve data synchronization  
Andy 5Ei phone and the original binding, using Bluetooth to achieve  
synchronization of contacts;

## Call History Features

One by one to delete call records  
Enter the call log interface - "Click the menu button –Select the delete  
Function- " Choose the delete call records- click ok button

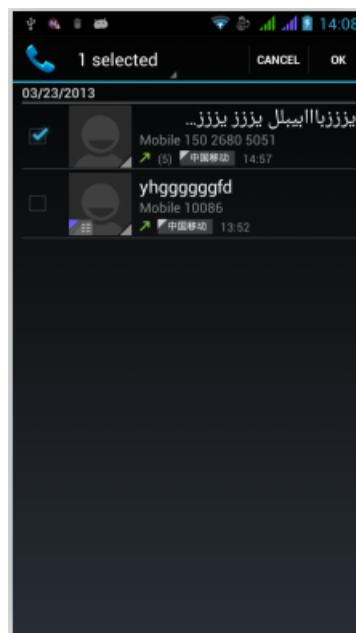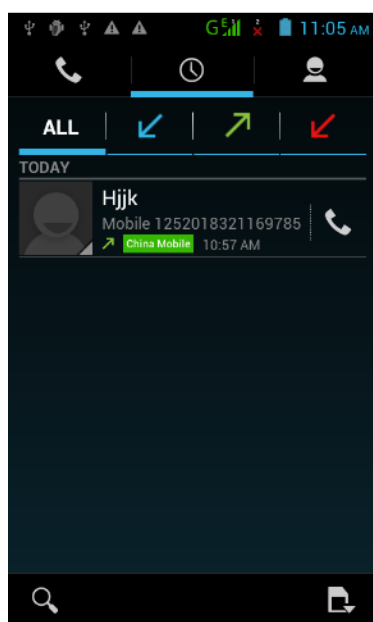


Contact information stored call records  
Enter the call log screen - "Select the Save call log - " click- "select "Add to

---

Contacts "feature


Or directly into the call log entry, -click  button -select "Add to Contacts

"feature

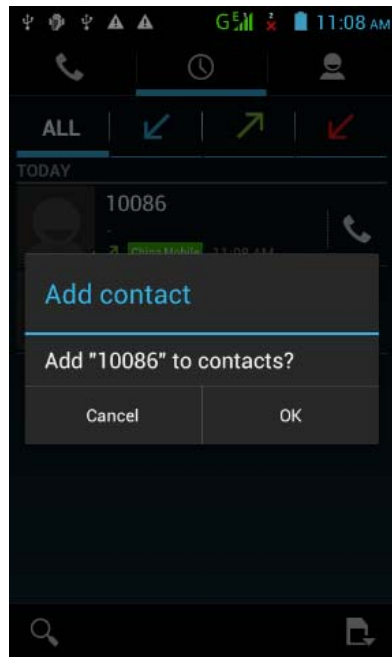

### Paste the text / copy Features

Into the input field - "input string, long press and enter the region, there shortcut keys - " select All " " cut All " ,"copy All", "paste All"

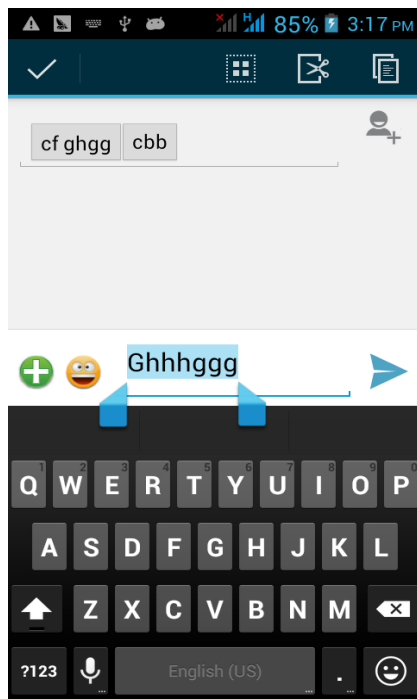

---

## E-mail Features

Configuring mail account

Enter the Program Group screen - "Select"Email"application -"Enter e-mail address and password

If the system automatically recognizes the mailbox information, will automatically configure; if the system does not recognize, will require users to type IMAP mailbox, or POP3, enter the appropriate configuration information.


Gmail For example:

E-mail Address: [fulai89@gmail.com](mailto:fulai89@gmail.com)

Password:


Configure multiple email accounts

Enter the Program Group screen - "Select"Email"application -" Click on the menu button-select setting function -select "Add Account"feature

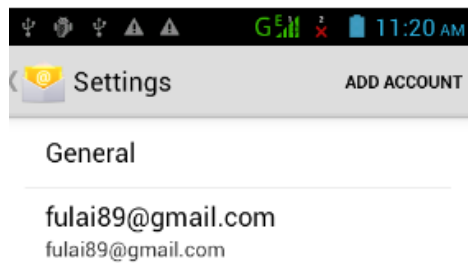


Delete email account

Enter the Program Group screen - "Select"Email"application - Click on the menu button-select setting function –select account - " select the "Remove Account"function

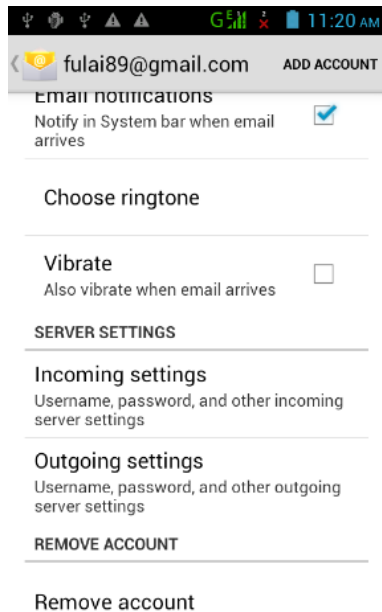

### Email check frequency setting

Enter the Program Group screen - "Select"Email"application - Click on the menu button-select setting function –select account - " select I nbox check frequency "function

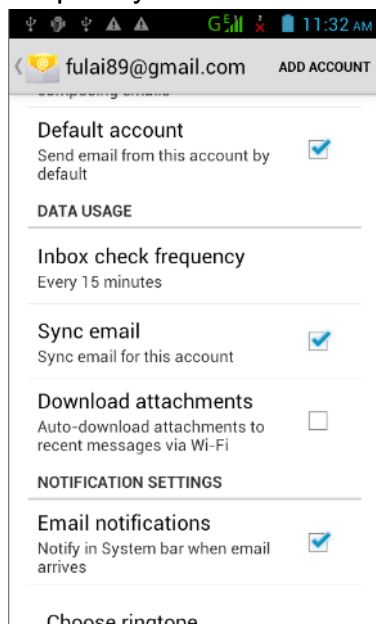

### Desktop Features

The common features into the desktop

Interface into the program group - "Select the desktop into the application

-"long by application, the application will be placed to the desktop;


---

## Wallpapers

In the desktop space - the "long Click the desktop, the shortcut keys  
-"Select"Wallpaper"feature.


## Application Packet

In the desktop space – sliding the application to another application – click the application to open New Folder

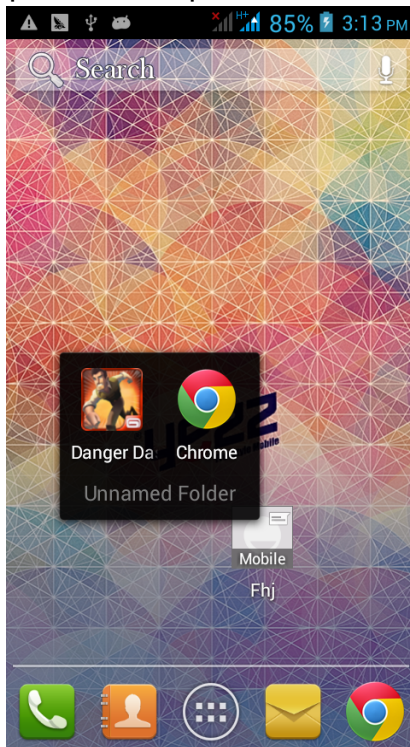


## Change the folder name

Open the folder on the desktop - " click Input box - Rename Folder

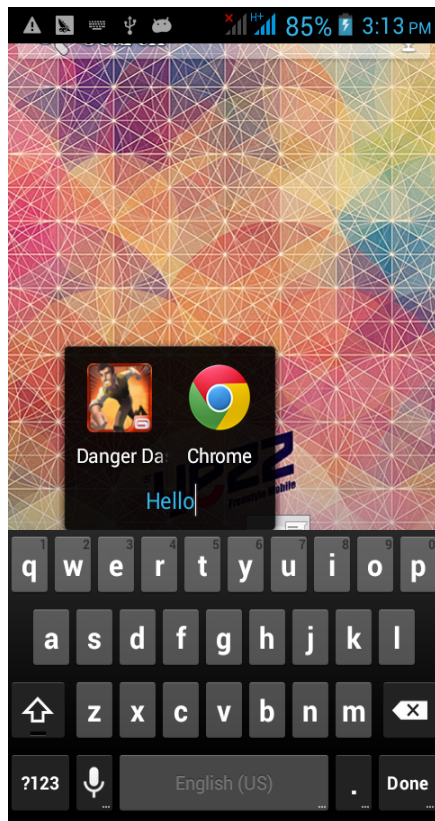


Add contacts to your desktop

In the widgets space -long press the contact widget -" choose a contact

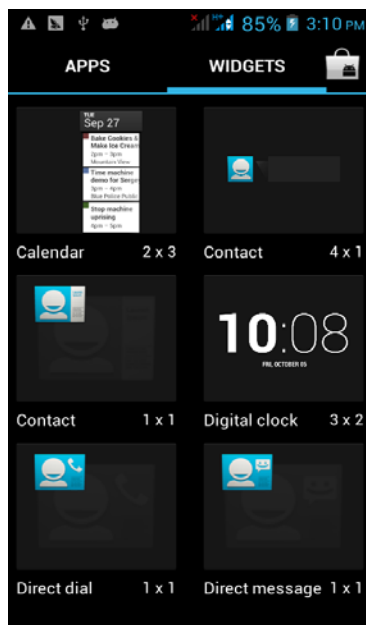

Add URL to the desktop

In the widgets space -long press the Bookmark widget -" choose a bookmark

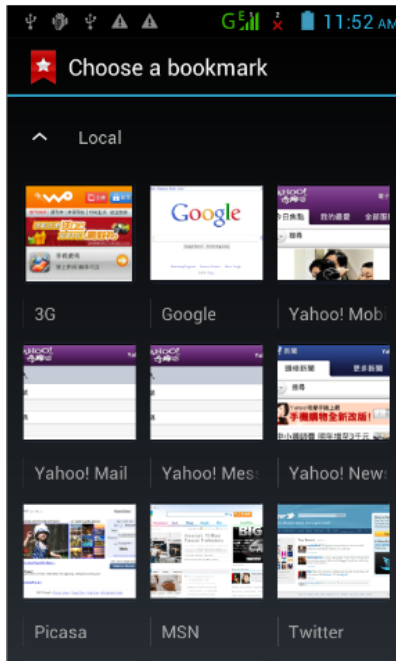

Add a playlist to your desktop

In the widgets space -long press the Music playlist widget -" Select a playlist  
(operation method and procedure as above)


Delete the contents of the desktop

Select the desktop content - then "Long press the icon - " into the remove icon  
to the lower right corner of the screen

## **Bluetooth Function**



Select "Settings" -" Select "Bluetooth"function



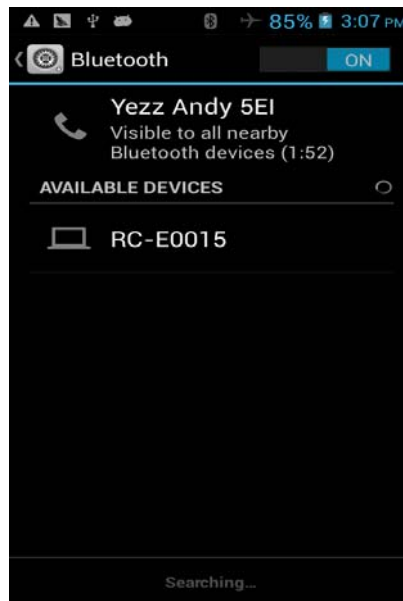


## Wifi Features

Select "Settings"->"Select Wi-Fi"- select "Add NETWORK ", select the desired access APN

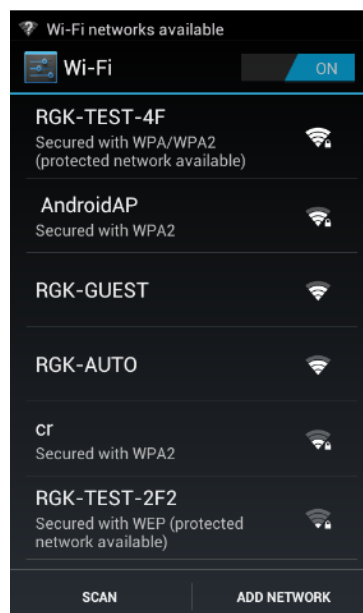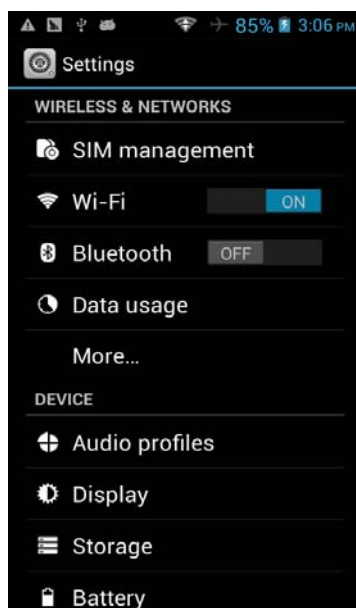


## Flight mode Function

Select "Settings"->"Select More"-> choose "Airplane Mode"function


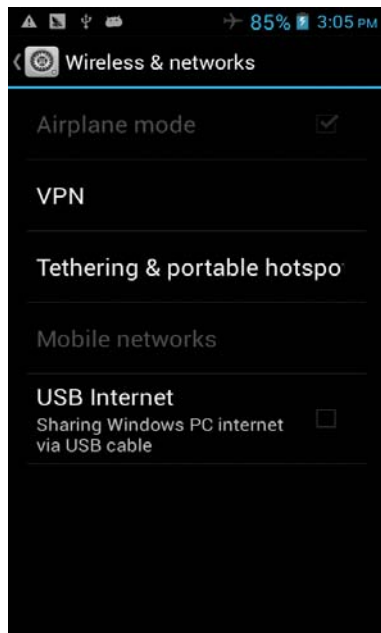


Or select the phone, "Off"button - "select the"Flight Mode "function

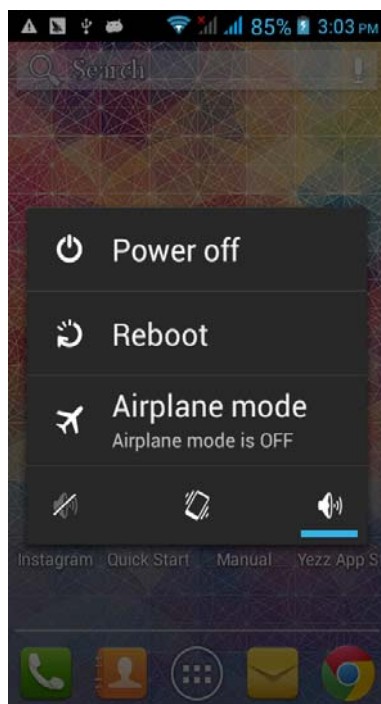



## Black unlock

Select "Settings"->"Select " security "-> Select the " Screen lock"-Pattern

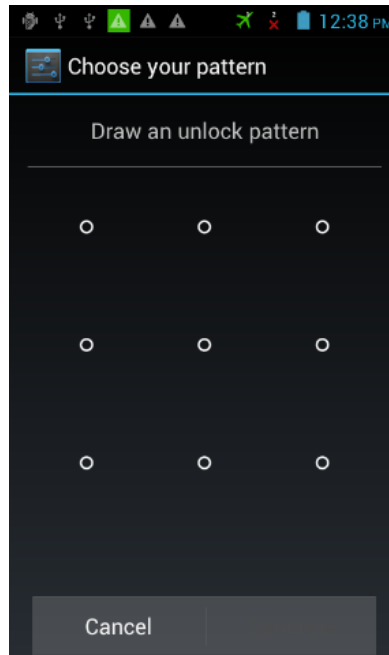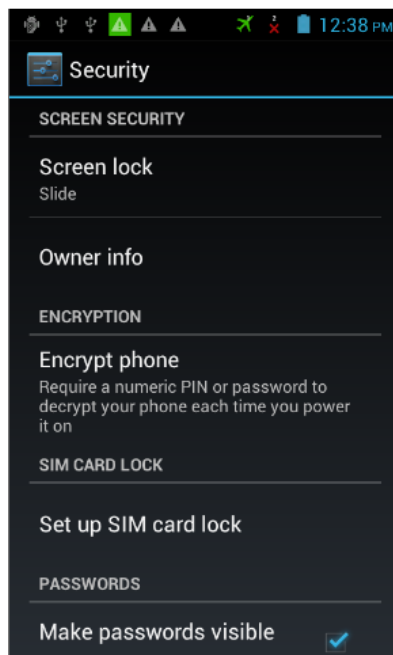


## Restore to factory default

Select "Settings"->"Select"Backup&reset "-> select "Factory data reset"

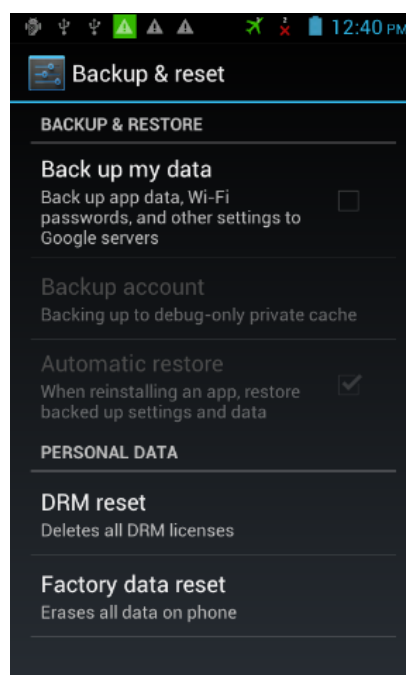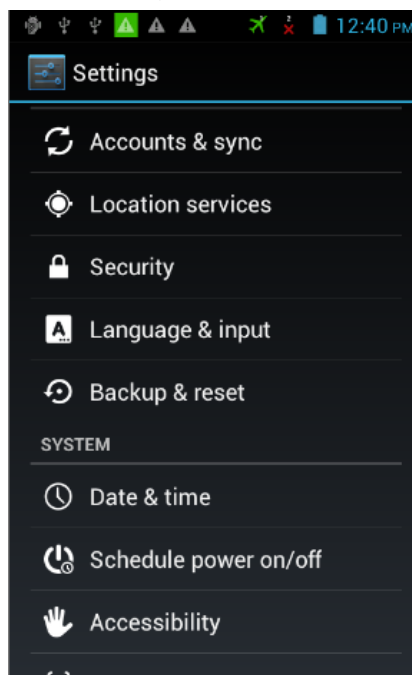


## Storage Settings

Select "Settings"->"Select"storage"

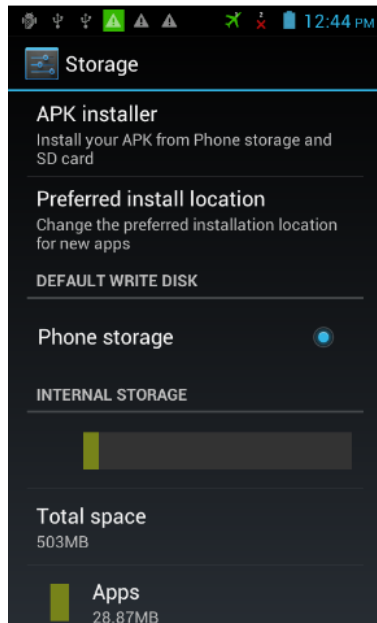


## GPS Settings

Select "Settings"- "Select " location access"- Check the "Access to my location "

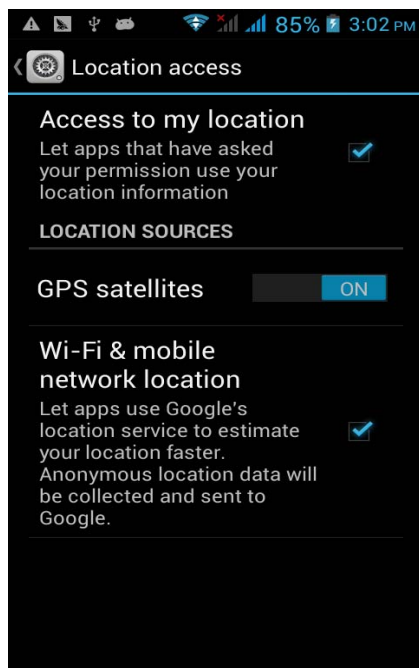

## English language switching phone

Select "Settings"- "Language & input "- Select " Language ", select English or other

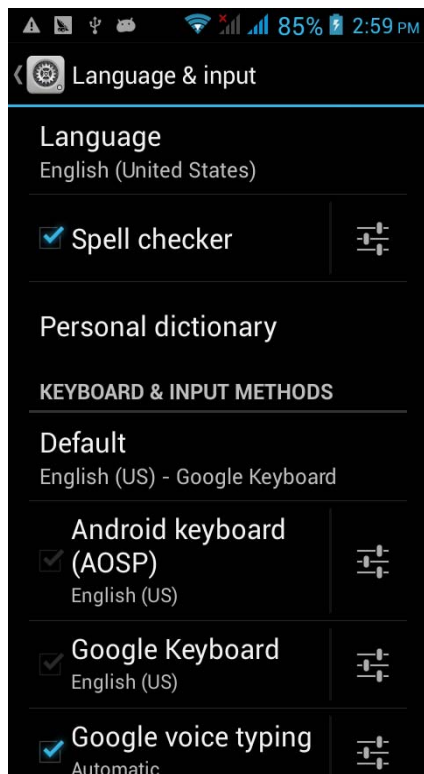


Input set

Select "Settings"- " Language & input "-click




button

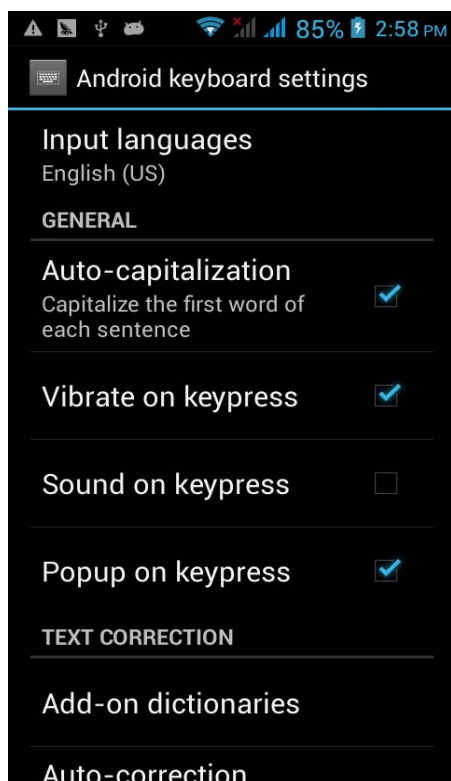

---


## Replacement mobile phone input method

Select "Settings"- " Language & input "-Default

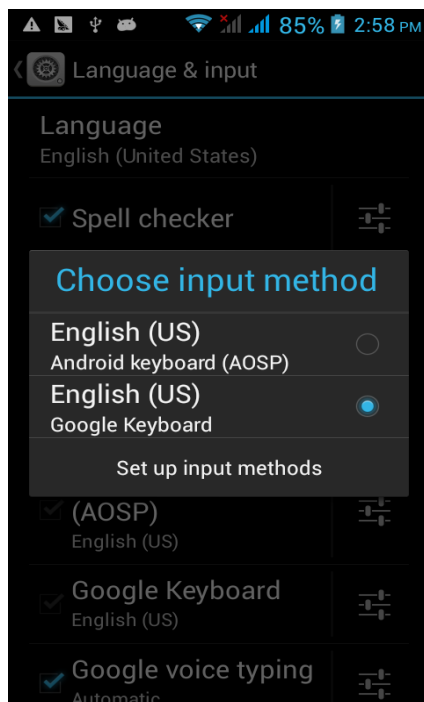

## Android phone data cable links


Select "Settings"- "Select"Developer options"- "Check"USB debugging " Products installed on your computer drive, the link on the USB cable;

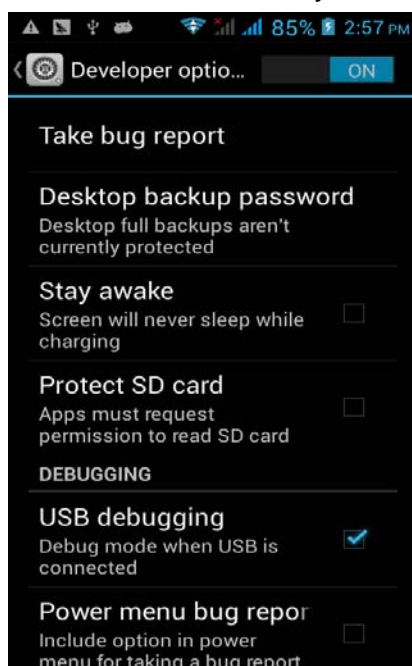

---

## Introduce cross-screen display

Select "Settings"->"Display "->"Check"Auto- rotate screen, " according to the phone automatically change the direction of rotation

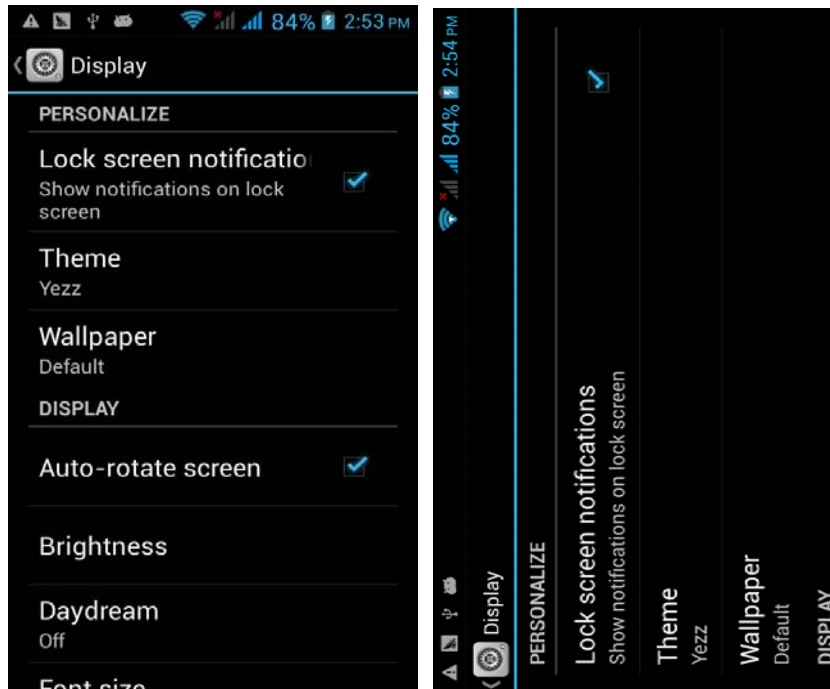

## Browser Features

Visit the website

Browser - "Click url input area "- Enter the URL of web browsing-click



button




Download Web page images or other objects

Browser - "browse the web, long press on the picture, there shortcut keys, choose "Save Image "function

Browser settings / search page

Browser - "browse the web -"click "menu button",-select settings / find on page

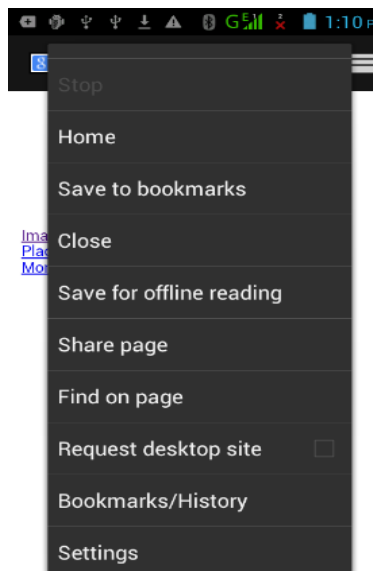

Q/A

**1. How to turn off the software running in the background too much**



---

Download Advanced Task Manager Advanced Task Manager and select install, it can help you achieve, automatic end of the program services, to switch between programs, display memory information, exclusion list, an end of all widgets, fast uninstall program and other functions, To free up memory space, reducing the CPU's operation long pressure, increase speed, to extend the purpose of standby time.

Download:

[http://m.91.com/soft/detail.aspx?platform=android&f\\_id=4001520](http://m.91.com/soft/detail.aspx?platform=android&f_id=4001520)

## **2. How to quickly set up Email**

In the Android system, can automatically set the POP3 or IMAP e-mail most accounts, the e-mail application, directly enter the e-mail address and password, if not automatically fit in the mailbox, the mailbox will be required by user Server information. See details in front of the "E-mail Features" section.

## **3. How do I view the capacity of SD card case**

Select the "Settings"-Select Storage -select "SD card and phone memory", will see the current SD card capacity information phone

## **4. How to save electricity NIU TEK 4D2**

First, reduce the screen brightness can be used in peacetime by reducing the brightness to reduce battery consumption, in the "Settings " in the "sound and display" found on "brightness", and then sliding scale in respect of the brightness can be set Android phones;

Close GPS global positioning, in the "Settings"and select" location services" -uncheck the following "Enable GPS satellite set" can be;

Usually if you do not use the Wi-Fi, Bluetooth headset can be improved by turning off these options to the standby time, turn off the WLAN search can save about 30% to 40% of standby time;

Usually close calls and text messages to remind vibration;

## **5. How NIU TEK 4D2 lock screen, to prevent others from using**

In the "Settings", select " Security "and then select "screen lock""pattern", to set individual unlock pattern, to prevent strangers use or purpose of ensuring privacy of confidential documents.

---

## **6. Why does not the USB data cable links your computer**

Confirmed in the phone's "Settings"->"Developer options"-> in the "USB debugging" functionality check; also installed the correct USB driver

## **7. How to install a program on a non-Android Market**

Select "Settings"->" Security ", the "unknown source " function check

## **8. In browsing the web or other applications, how to switch to other applications**

If you need to open when browsing other applications, you can long press the Home key to achieving long task switch, long press return directly to the desktop (note that the system default task only last 6 months)

## **9. How to enter the silent mode quickly**

In addition to continuing foreign long press the volume down key, and directly into the status bar select the silent mode.

## **10. How to forward SMS / MMS**

Long press and Information applications in the information content of an item in the list, until the pop-up shortcut menu, select "Forward" can be realized.

## **11. how to paste and copy text**

Into the input field - "input string, long press and enter the region, there shortcut keys - " select All " " cut All " , "copy All", "paste All"

## **12. download and install the application installation path can be set to SD card**

Platform reason, the application can only be installed in the phone flash memory

---

**13. In the phone program group is installed too many applications, how to solve**

In the desktop space – sliding the application to another application – click the application to open New Folder

**14. Contacts are sorted, can change**

Sort of way platform, the first number, then letters, then the Chinese way of sorting; the user can not set their own sort

**15. Contacts whether to support the group**

In the contacts interface-select group

**16. contacts and SMS storage capacity limits the number of**

Platform reason, contacts and SMS storage for no clear limit value, depending on the size of the current mobile phone memory space

**17. How to set the SD card, personalized ring tones**

In the SD card, are established "ringtones" (ringtones) "alarms" (alarm tone) "notifications" (SMS notification tone), the ring tones into a different folder, the phone can be automatically identified.

**18. How to sync the phone contacts to the original Andy 5EI**

using Bluetooth the way, the two cellphone, sync contacts;

**19. How to use the Andy 5EI access Wifi (WLAN)**

Wifi signal at the scene to ensure that the premise of the specific see "Wifi function "

---

## 20. How to Find Contact

Into the contact interface, select the "Search" menu, you can search for contacts, you can use the first letter of query letters;

## 21. how to download applications for the Andy 5E1

1) Visit Google Market <http://www.android.com/market/>; need to pay to download some software;

2) third-party sites, access to applications, such sites are:

<http://www.waptw.com/>

<http://android.sj.91.com/list/rjyxhj.shtml>

.....

More downloaded software will be installed in the SD card and some software may vary depending on operating system version, network access nodes, size or other reasons can not be used.

## 22. What are commonly used android forum

<http://www.waptw.com/>

<http://sj.91.com/>

<http://www.android123.com/>

<http://www.android86.com.cn/>

<http://www.androidin.net/bbs/index.php>

<http://bbs.zhiqi.com.cn/forum-33-1.html>

<http://www.androidin.net/bbs/>

<http://www.hiapk.com/bbs/>

## 23. How do I delete the downloaded software

"Settings" - "Manage app" - "Select the application to be deleted"

## 24. How to view mobile phone version information

"Settings" - "About phone" - "mobile phone version information" can be obtained, including the Android version, Linux version, software version, hardware version, etc.

---

## **25. How do I copy SIM card contact information**

Into the Contacts application, click the menu button, select "Import Contacts", then you can see the SIM card contacts, if only to import one, you can click an item. If all the import needs to long press the menu key, select Import to import all.

## **26. why the message has a different time and date display**

Message displayed on the principle that the display of the day time and date have shown that non-day

## **27.Andy 5EI whether to support the Java**

Platform reason, Andy 5EI does not support Java, if you need to install third-party Java applications, you need to install the Java runtime environment Andy 5EI.

## **28.How to open developer options**

Enter the Settings -- the About phone -- click the Build number five times, system will be generated developer options

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

---

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

SAR tests are conducted using standard operating positions accepted by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value, in general, the closer you are to a wireless base station antenna, the lower the power output.

Before a new model phone is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the exposure limit established by the FCC, Tests for each phone are performed in positions and locations (e.g. at the ear and worn on the body) as required by the FCC.

For body worn operation, this model phone has been tested and meets the FCC RF exposure guidelines when used with an accessory designated for this product or when used with an accessory that contains no metal and that positions the handset a minimum of 1.0 cm from the body.

Non-compliance with the above restrictions may result in violation of RF exposure guidelines