



The Ezurio Wi-Fi 6E Mini NanoBlade Flex 6 GHz is a flexible PCB antenna that supports 3 bands of WLAN applications, including the 6 to 7.125 GHz band enabling Wi-Fi 6E. These small flexible printed circuit antennas can be embedded in space-sensitive applications. They offer excellent efficiency over all 3 Wi-Fi bands. The antennas are specifically designed to be embedded inside various IoT devices for aesthetically pleasing integration.

1 Features and Benefits

- Three-band frequency coverage
- Support for Wi-Fi 6E
- Excellent Omni Gain Patterns
- High Efficiency
- Medical Devices
- Home Automation Equipment
- Smart Grid Applications

Electrical Specifications			
Operating Frequency (MHz)	2400-2500	4900-6000	6000-7125
VSWR - Avg	1.7:1	1.5:1	1.4:1
VSWR - Max	<2.0:1		
Peak Gain - Avg (dBi)	2.0	3.5	4.6
Peak Gain - Max (dBi)	2.4	4.4	5.2
Efficiency - Avg (%)	68%	76%	74%
Efficiency - Avg (dB)	-1.7	-1.2	-1.3
Nominal Impedance (Ohms)	50		
Max Power - Ambient 25°C (W)	5		
Polarization	Linear, Vertical		
Number of Ports	1		
Horizontal Plane 3 dB Beamwidth	360°, Omnidirectional		

Note: Electrical data measured on 1.7mm thick polycarbonate



Mechanical Specifications	
Dimensions - diameter x height - mm (inches)	36 x 12 x 0.3 (1.42 x .47 x .012)
Radome Material	Flexible Printed Circuit Board (FPC)

Environmental Specifications	
Operating Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Storage Temperature - °C (°F)	-40 to +85°C (-40 to +185°F)
Material Substance Compliance	RoHS


2 Configuration

Part Number	Cable Length	Connector
EMF2471A3S-10MHF1	100 mm	MHF1
EMF2471A3S-10MH4L	100 mm	MHF4L




3 Mechanical Drawings

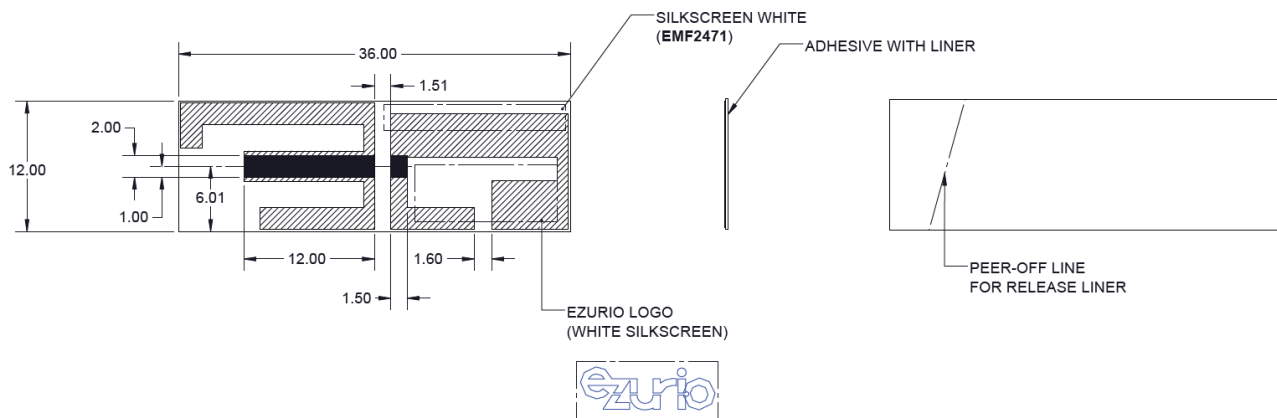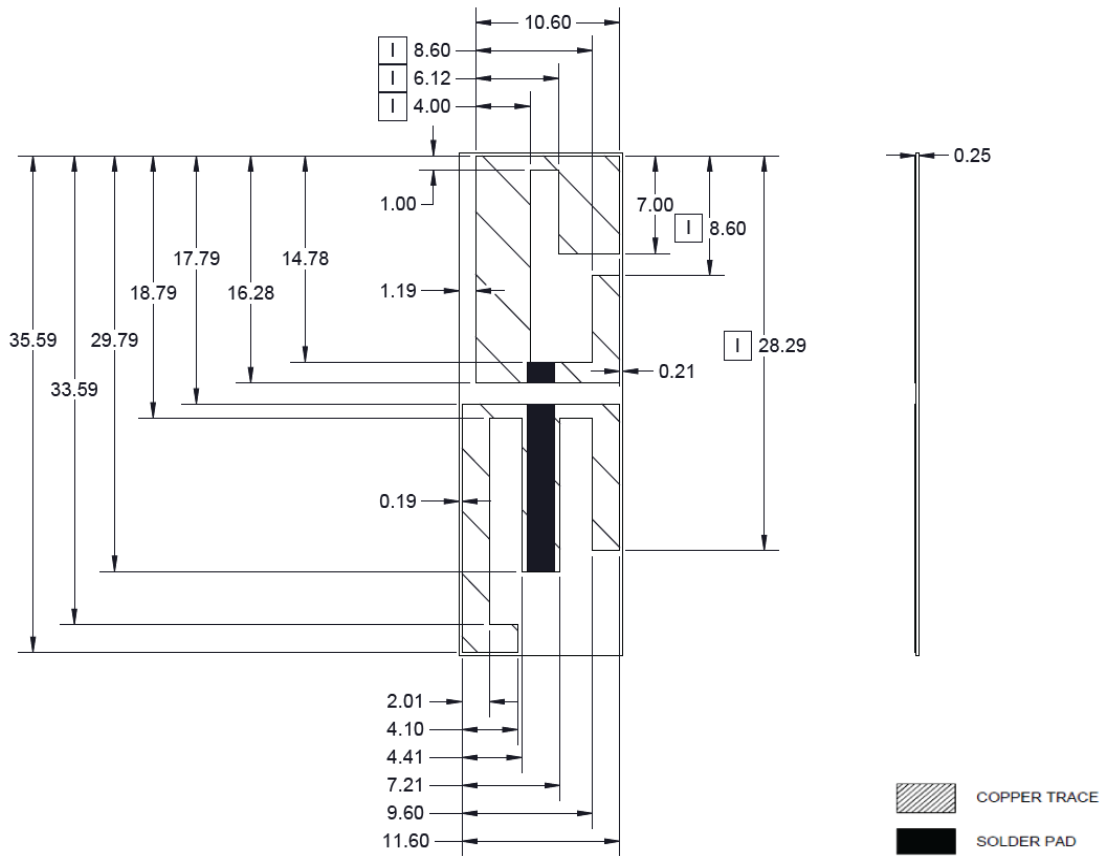




4 Radiation Patterns

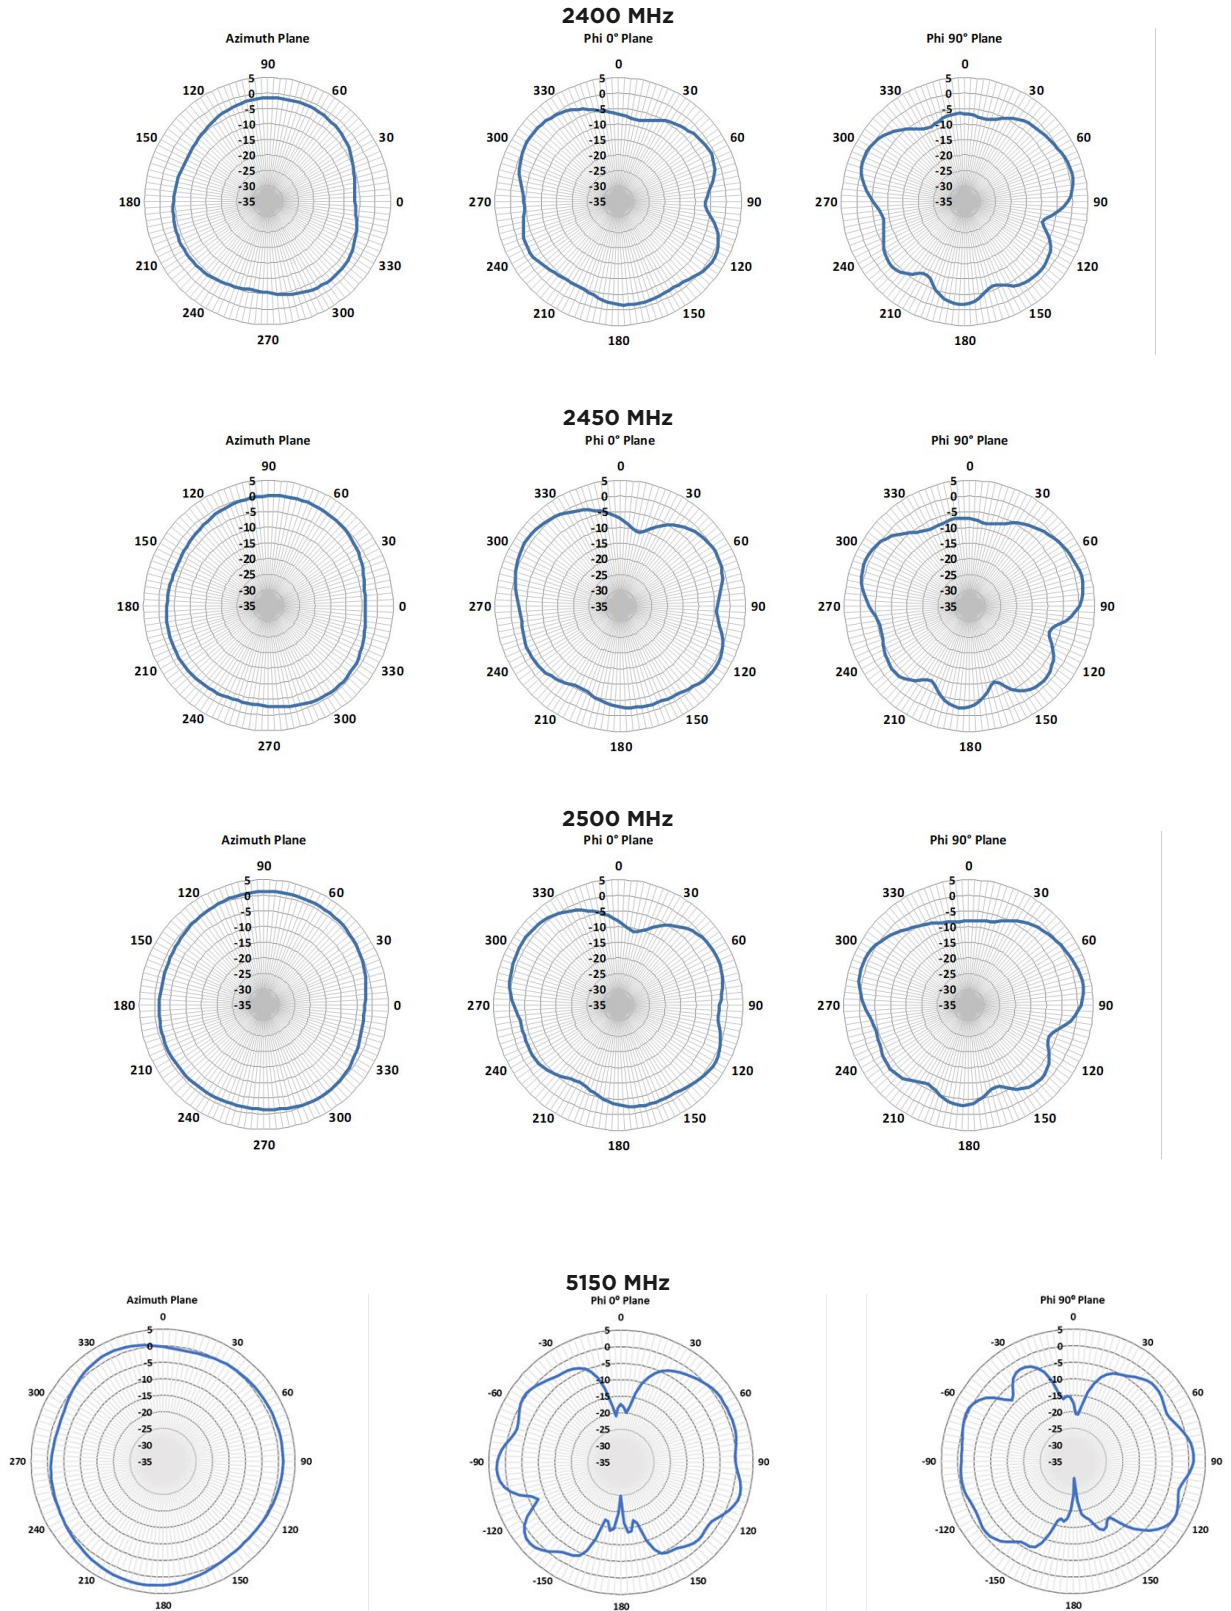




5470 MHz






5500 MHz






5850 MHz

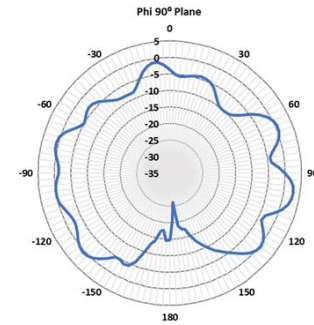




5925 MHz

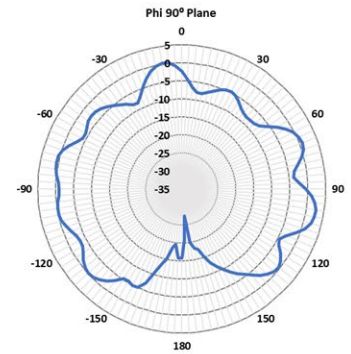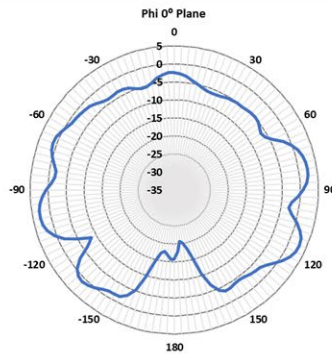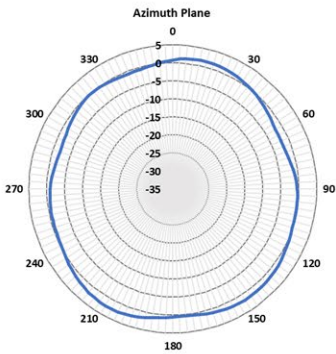




6425 MHz

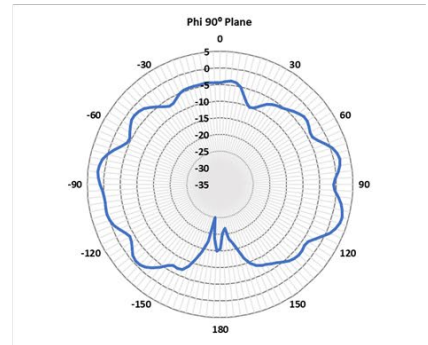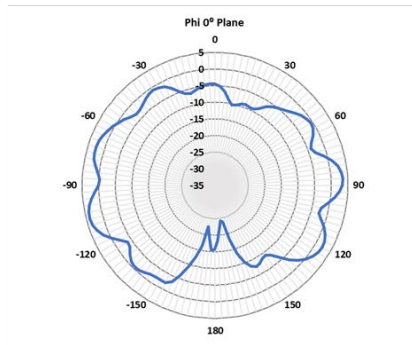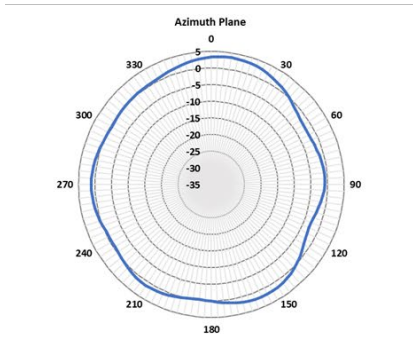




6525 MHz

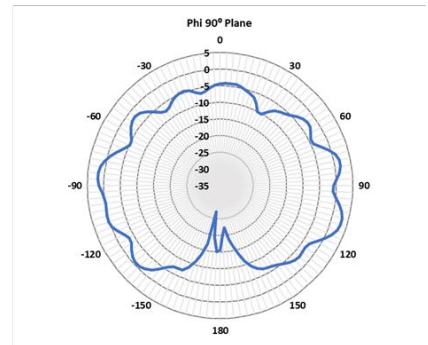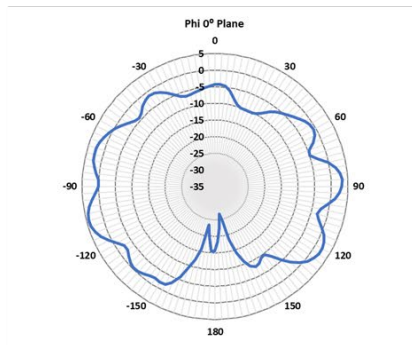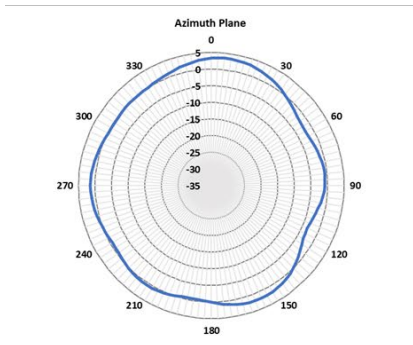

6875 MHz

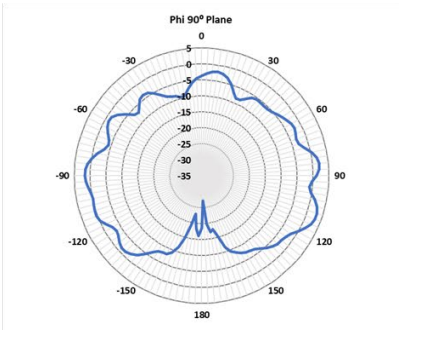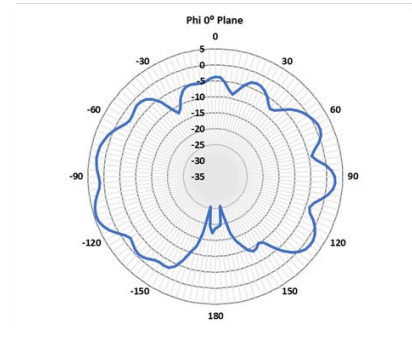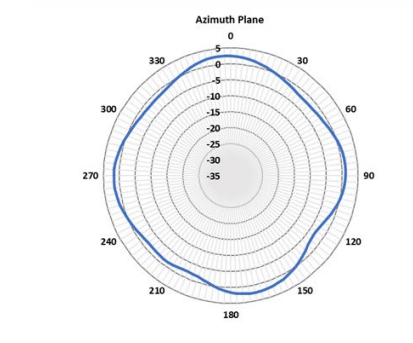

7125 MHz

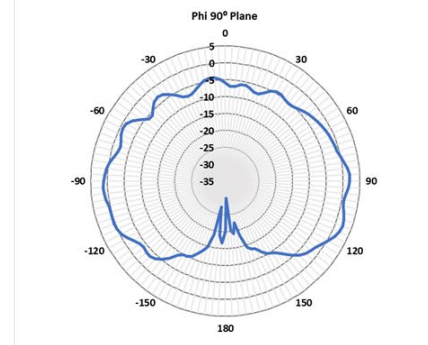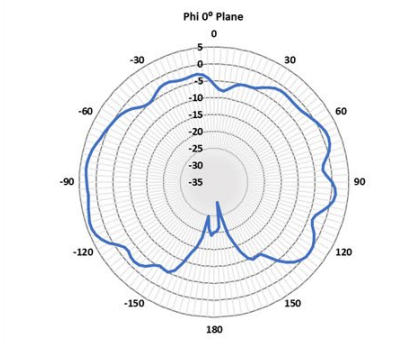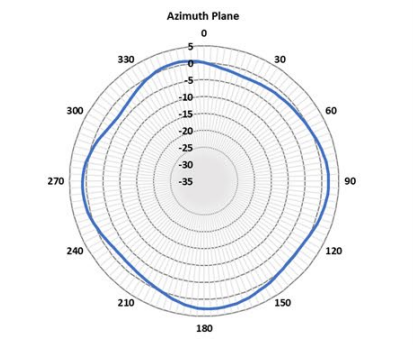

5 Additional Information

Please contact your local sales representative or our support team for further assistance:

Headquarters	Ezurio 50 S. Main St. Suite 1100 Akron, OH 44308 USA
Phone	Americas: +1-800-492-2320 Europe: +44-1628-858-940 Hong Kong: +852-2762-4823
Website	http://www.ezurio.com
Technical Support	http://www.ezurio.com/resources/support
Sales Contact	http://www.ezurio.com/contact

Note: Information contained in this document is subject to change.

Ezurio's products are subject to standard [Terms & Conditions](#).

<http://www.ezurio.com>

© Copyright 2024 Ezurio. All Rights Reserved. Any information furnished by Ezurio and its agents is believed to be accurate but cannot be guaranteed. All specifications are subject to change without notice. Responsibility for the use and application of Ezurio materials or products rests with the end user since Ezurio and its agents cannot be aware of all potential uses. Ezurio makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Ezurio materials or products for any specific or general uses. Ezurio or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Ezurio products are sold pursuant to the Ezurio Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Ezurio or any third-party intellectual property right. Ezurio and its associated logos are trademarks owned by Ezurio and/or its affiliates.