

Engineering Statement

Intelsat North America LLC (“Intelsat”) proposes to relocate its Intelsat 705 (“IS 705”) spacecraft to operate from 29.5° W.L. The spacecraft will utilize the frequency bands 5925 – 6425 MHz, 14000 – 14500 MHz, 3700 – 4200 MHz, 10950 – 11200 MHz, 11450 – 11700 MHz, 11700 – 11950 MHz and 12500 – 12750 MHz to provide service to the visible portions of Asia and North America, South America, Europe and Africa.

Intelsat also requests that the Part 25 waivers originally granted to the Intelsat 705 spacecraft continue to apply at the 29.5° W.L. location, namely, the waivers of Sections 25.202(g), 25.210(a)(1), 25.210(a)(3), 25.210(i)(1) and 25.211(a) of the Commission’s rules¹.

On August 2002, the Commission granted Intelsat authorization to operate Intelsat 705 from 50° W.L. (see FCC File Nos.: SAT-MOD-20020418-00064). As part of its overall satellite fleet management, Intelsat now proposes to relocate Intelsat 705 from 50° W.L. to 29.5° W.L.

This engineering statement updates the following technical information for Intelsat 705: (1) frequency plan (2) beam performance and gain contours, (3) emissions designators, (4) power flux density calculations, (5) link budget analysis, (6) adjacent satellite link analysis, (7) Schedule S information and (8) orbital debris mitigation plan. In all other respects, the characteristics of IS 705 are the same as those described in SAT-MOD-20020418-00064.

Frequency Plan

The Intelsat 705 frequency and polarization plan is provided in Exhibit 1.

Gain Contours

The co-polarized coverage patterns of Intelsat 705 operating from 29.5° W.L. are shown in Exhibits 2-1 through 2-42. The peak antenna gain, G/T, SFD (“Saturated Flux Density”) and EIRP levels for each uplink and downlink beam, as appropriate, are also provided in these exhibits.

¹ See Applications of Intelsat LLC for Authority to Operate and Further Construct, Launch, and Operate C-Band and Ku-Band Satellites that Form a Global Communications System in Geostationary Orbit, 15 FCC Rcd 15460, 15529 (Appendix C)(2000)(Memorandum Opinion and Order and Authorization), *recon. denied*, 15 FCC Rcd 25234(2000)(Order on Reconsideration).

Given that the cross-polarization isolation performance of Intelsat 705 with respect to the axis of each satellite beam will not change as a result of the proposed relocation of Intelsat 705 from 50° W.L. to 29.5° W.L., no cross-polarization patterns are provided herein.

Emission Designators

Emission designators and allocated bandwidths for representative communication carriers are provided in Exhibit 3.

Power Flux Density Levels

The power flux density (“PFD”) limits for space stations operating in the 3700 – 4200 MHz, 10950 – 11200 MHz and 11450 – 11700 MHz bands are contained in section 25.208 of the Commission’s Rules. With respect to the 12500 – 12750 MHz band, the PFD limits are specified in No. 21.16 of the ITU Radio Regulations. Neither the FCC rules nor the ITU Radio Regulations specify any PFD limits for the 11700 – 11950 MHz frequency band.

The maximum PFD levels for the Intelsat 705 transmissions were calculated for a number of TV/FM and/or digital carriers listed in Exhibit 3 operating in the 3700 – 4200 MHz, 10950 – 11200 MHz, 11450 – 11700 MHz and 12500 – 12750 MHz bands. The PFD levels were also calculated for the Intelsat 705 telemetry and uplink power control (“ULPC”) carriers. These carriers were chosen because they generally produce high PFD levels on the Earth’s surface. The results are provided in Exhibit 4 and show that the downlink power flux density levels of the Intelsat 705 carriers do not exceed limits specified in section 25.208 of the Commission’s Rules and No. 21.16 of the ITU Radio Regulations.

Link Budgets and Interference Analysis

Link analysis for Intelsat 705 was conducted for a number of representative carriers. For the analyses, it was assumed that the nearest satellites to Intelsat 705 were a hypothetical satellite operating from 27.5° W.L. and a hypothetical satellite operating from 31.5° W.L. The hypothetical satellites were assumed to have the same operational parameters as Intelsat 705.

At C-band, the uplink power density of the emissions to each of the hypothetical satellites was assumed to be -38.7 dBW/Hz, the maximum level specified in section 25.212(d) of the Commission’s Rules for digital C-band carriers. At Ku-band, the uplink power density of the emissions to each of the hypothetical satellites was assumed to be -50 dBW/Hz, and the downlink EIRP density was assumed to be -26 dBW/Hz, the maximum levels specified in sections 25.212(c) of

the Commission's Rules for digital Ku-band carriers.

Other assumptions made for the link budget analysis were as follows:

- a) In the plane of the geostationary satellite orbit, all transmitting and receiving earth station antennas have off-axis co-polar gains that are compliant with the limits specified in section 25.209(a)(1) of the FCC Regulations.
- b) All transmitting and receiving earth stations have a cross-polarization isolation value of at least 30 dB within their main beam lobe.
- c) At C-band frequencies, degradation due to rain was not considered, given that rain (attenuation) effects are insignificant at C-band.
- d) At Ku-band frequencies rain attenuation predictions are derived using Recommendation ITU-R 618.
- e) At Ku-band frequencies, increase in noise temperature of the receiving earth station due to rain is taken into account.
- f) For the cases where the transponder operates in a multi-carrier mode, the effects due to intermodulation interference are taken into account.

The impact of the TV/FM carriers from the adjacent satellites at 27.5° W.L. and 31.5° W.L. on the transmissions of Intelsat 705 was not considered due to the fact that TV/FM carriers are known to be high-density carriers with most of the energy contained within the near vicinity of the carrier center frequency. Operation of sensitive narrow-band carriers is typically precluded within these high power density areas of the TV/FM carrier. Accordingly, placement and operation of TV/FM carriers are normally achieved through internal coordination and/or coordination discussions with the adjacent satellite operator, whichever may be the case, rather than through C/I calculations – since the results of such calculations would show that narrow-band carriers typically could not operate on a co-frequency basis with TV/FM carriers.

As shown in Exhibit 1, the Intelsat 705 beam connectivity is extensive. In order to keep the number the Intelsat 705 link calculations to a manageable number, worst-case performance values were assumed for each beam type. The worst-case beam parameters were derived from the beam parameters listed in Exhibit 2 and chosen in such a manner that would make carrier links utilizing any specific uplink / downlink beam combination as sensitive to adjacent satellite interference as possible. This would ensure that the link performance objectives would be achieved for all possible IS 705 uplink and downlink beam combinations. The worst-case beam performance for each IS 705 beam type is provided below:

Beam Name	Aggregate Beam Designation	Worst-Case Beam Peak G/T (dB/K)	Worst-Case Beam SFD Range @ Peak G/T (dBW/m ²)	Worst-Case Beam EIRP (dBW)
Global A	Global	-7.0	-92.9 to -78.9	29.5
Global B				
East Hemi	Hemi	-1.5	-91.8 to -77.8	36.8
West Hemi				
Northwest Zone	Zone	1.0	-92.5 to -78.5	36.7
Northeast Zone				
Southwest Zone				
Southeast Zone				
Combined Northwest and Southeast Zone				
Combined Northeast and Southwest Zone				
C-Spot A	C-Spot	3.0	-95.4 to -81.4	36.3
C-Spot B				
Spot 1	Ku-Spot	10.0	-93.2 to -79.2	47.2
Spot 2				
Spot 2A				
Spot 3				
Spot 3X				

As shown in Exhibit 1, Intelsat 705 employs, with each beam, channels having varying bandwidths. In an effort to keep the number of link calculations to a manageable level, link calculations were not performed for each channel size, but rather for only one channel size. The channel size chosen for each beam was based upon the level of adjacent satellite downlink interference. As an example, if a channel having a bandwidth of 77 MHz and a channel having a bandwidth of 34 MHz have the same associated adjacent satellite downlink interfering EIRP density, then link budgets were performed only for emissions that were transmitted through the 77 MHz channel, since the carrier level would typically have less (uplink and downlink) power in comparison to those which would be transmitted through the 34 MHz channel; and thus the impact of the adjacent satellite

interference would be greater on the former. As a second example, if the level of downlink interfering EIRP density to which the 34 MHz channel was subjected was larger than that for the 77 MHz channel (as may happen for the C-band link budgets), and if this additional level of interference was larger than ten times the logarithmic ratio of the two channel bandwidths (i.e. $10\log[77/34]$), then link calculations were performed only for the emissions of the 34 MHz channel, since the impact of adjacent satellite interference is greater on emissions of this channel (in comparison to those being transmitted through the 77 MHz channel).

As previously mentioned, at Ku-band, Intelsat 705 can utilize the downlink frequency bands of 10950 – 11200 MHz, 11450 – 11700 MHz, 11700 – 19950 MHz and 12500 – 12750 MHz. In order to keep the number the Intelsat 709 link calculations to a manageable number, all Ku-band link calculations were conducted at the single representative uplink frequency of 14250 MHz and downlink frequency of 11950 MHz (that is approximately midway between 10950 MHz and 12750 MHz). At C-band, all calculations were conducted at the single representative frequency of 6175 MHz for the uplink and 3950 MHz for the downlink.

The results of the C-band and Ku-band analyses are shown in Exhibit 5 and demonstrate that operation of the Intelsat 705 satellite from 29.5° W.L. would permit the intended services to achieve their respective performance objectives while maintaining sufficient link margin. Additionally, the EIRP density levels of the carriers listed in Exhibit 5 comply with the FCC limits contained in section 25.212(c) and 25.212(d) of the Commission's Rules.

Adjacent Satellite Link Analysis

The impact of the Intelsat 705 emissions on the transmissions of adjacent satellites was not analyzed because the power levels of Intelsat 705 transmissions will be limited to those levels contained in section 25.212(c) and (d) of the FCC rules. In those cases where Intelsat may need to transmit carriers with higher power levels, it will coordinate with the affected adjacent satellite operators as part of the normal coordination process.

Schedule S Submission

Intelsat is providing with its application a Schedule S for the operations of Intelsat 705 from 29.5° W.L. The Schedule S contains only those Intelsat 705 data items whose inclusion was required in order for the software application to function properly.

In column “g” of section S13 of the Schedule S, a link budget file has been included for the first link (i.e. the first of row of data) contained in that section. This link budget file is applicable to all of the links listed in section S13 and should have been included with each row of data in that section of the Schedule S. However, given that the link budget file is rather large and its inclusion with each link (or data row) would lead to the Schedule S file having an unmanageable size, all other links (or rows of data) contain a small ASCII file that references the link budget file that is attached to the first link (i.e. the link budget file attached to the first row of data).

Orbital Debris Mitigation Plan

Intelsat is proactive in ensuring safe operation and disposal of this and all spacecraft under its control. The four elements of debris mitigation are addressed below.

Spacecraft Hardware Design: The spacecraft is designed such that no debris will be released during normal operations. Intelsat has assessed the probability of collision with meteoroids and other small debris (<1 cm diameter) and has taken the following steps to limit the effects of such collisions: (1) critical spacecraft components are located inside the protective body of the spacecraft and properly shielded; and (2) all spacecraft subsystems have redundant components to ensure no single-point failures. The spacecraft does not use any subsystems for end-of-life disposal that are not used for normal operations.

Minimizing Accidental Explosions: Intelsat has assessed the probability of accidental explosions during and after completion of mission operations. The spacecraft is designed in a manner to minimize the potential for such explosions. Propellant tanks and thrusters are isolated using redundant valves and electrical power systems are shielded in accordance with standard industry practices. At the completion of the mission, and upon disposal of the spacecraft, Intelsat will ensure the removal of all stored energy on the spacecraft by depleting all propellant tanks, venting all pressurized systems, and turning off all active units.

Safe Flight Profiles: Intelsat has assessed and limited the probability of the space station becoming a source of debris as a result of collisions with large debris or other operational space stations. Intelsat 705 will be located at the same proposed orbital location as Intelsat 801. Intelsat, which is also the licensee of Intelsat 801, has pending before the Commission an application for a Special Temporary Authority (“STA”) to relocate this spacecraft to 29.5° W.L. Intelsat shall internally

coordinate the orbital operations of Intelsat 705 and Intelsat 801 in order to minimize the risk of collision between these two spacecraft.

With the exception of Intelsat 801, Intelsat is not aware of any other FCC licensed system, or any other system applied for and under consideration by the FCC, having an overlapping stationkeeping volume with Intelsat 705. Intelsat is also not aware of any non-Intelsat system with an overlapping stationkeeping volume with Intelsat 705 that is the subject of an ITU filing and that is either in orbit or progressing towards launch.

Post Mission Disposal: At the end of the mission, Intelsat expects to dispose of the spacecraft by moving it to a planned minimum altitude of 150 kilometers (perigee) above the geostationary arc.² Nevertheless, as the Commission is aware, because there is no mechanism for precisely calculating the amount of fuel left on the spacecraft once it is in orbit, it is possible that the spacecraft will not meet the planned minimum de-orbit altitude.

In its Second Report and Order in IB Docket 02-54 (FCC Document Number: 04-130), the FCC declared that satellites launched prior to March 18, 2002, such as Intelsat 705, would be designated as grandfathered satellites not subject to a specific disposal altitude. Therefore, the Intelsat 705 planned disposal orbit complies with the FCC's rules.

In addition, Intelsat provides the following information:

- 1) Planned orbital eccentricity: 0.00041695 (This is a best estimate of optimal eccentricity to match the natural eccentricity circle due to Sun and Moon perturbations after decommission.³)
- 2) Planned apogee altitude: 167 km⁴

² Intelsat has reserved 23.48 kilograms of fuel for this purpose. The fuel gauging uncertainty has been taken into account in these calculations.

³ Because it is extremely difficult to anticipate end-of-life thruster performance and operational conditions, it is extremely difficult to achieve the planned eccentricity. Intelsat's priority is to achieve the planned minimum perigee of 150 kilometers. In order to achieve the planned eccentricity, not only must there be sufficient propellant reserved but, in addition, individual thrusters must be fired at specific times during satellite decommissioning because the timing of thruster firing will affect eccentricity. Due to difficulties in predicting the thruster end-of-life performance, as well as earth station availability and visibility as the satellite drifts, it may not be possible to fire the right thrusters at the optimal times. Thus, optimal eccentricity may not be achieved, which, in turn, will affect the apogee altitude.

⁴ See n. 2.

- 3) Information concerning the methods that will be used to assess and provide adequate margins concerning fuel gauging uncertainty: For the Intelsat 705 spacecraft, in addition to the nominal hold-back and reserves provided to us by the manufacturer, Intelsat propulsion engineers review the current propellant usage – particularly the mixing ratio – to properly allocate sufficient margin to account for unavailable propellant that may result from a non-optimal mixing ratio. In addition, Intelsat performs thermal gauging near the spacecraft’s end of life by inferring the remaining propellant from the thermal signature when Intelsat applies heat to different parts of the propellant tank system. This information is considered when determining the additional hold-back and adjustments to book values to attempt to ensure sufficient propellant to achieve the planned minimum altitude. There are, however, many uncertainties to both methods that could lead to incorrect conclusions regarding remaining fuel.

ITU Filing

Intelsat currently has no filing with the ITU for a satellite network that specifies operation on the frequency band of 11700 – 11950 MHz from 29.5° W.L. The 11700 – 11950 MHz band is allocated to the Broadcast Satellite Service (“BSS”) in ITU Region 1 and to the Fixed Satellite Service (“FSS”) in ITU Region 2.

Intelsat will separately submit to the Commission the Advanced Publication Information (“API”), for a new FSS satellite network that utilizes the 11700 – 11950 MHz band at 29.5° W.L. Intelsat will also submit to the Commission the necessary coordination filing for a new BSS satellite network that utilizes the frequency band 11700 – 11950 MHz at 29.5° W.L.

Certification Statement

I hereby certify that I am a technically qualified person and am familiar with Part 25 of the Commission's Rules and Regulations. The contents of this engineering statement were prepared by me or under my direct supervision and to the best of my knowledge are complete and accurate.

/s/ Jose Albuquerque

Jose Albuquerque
Intelsat
Senior Director
Spectrum Engineering

January 14, 2010

Date

Exhibit 1: Frequency and Beam Assignments

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
AUA	Global A	LHCP	6280	ADA	Global A	RHCP	4055	36	118.9
AUB	Global A	LHCP	6320	ADB	Global A	RHCP	4095	36	118.9
AUC	Global A	LHCP	6360	ADC	Global A	RHCP	4135	36	118.9
AUD	Global A	LHCP	6402.5	ADD	Global A	RHCP	4177.5	41	118.9
AUA	Global A	LHCP	6280	CDA	C-Spot A	RHCP	4055	36	118.7
AUB	Global A	LHCP	6320	CDB	C-Spot A	RHCP	4095	36	118.7
AUC	Global A	LHCP	6360	CDC	C-Spot A	RHCP	4135	36	118.7
AUD	Global A	LHCP	6402.5	CDD	C-Spot A	RHCP	4177.5	41	118.7
AUA	Global A	LHCP	6280	EDA	West Hemi	RHCP	4055	36	120.7
BUA	Global B	RHCP	6280	BDA	Global B	LHCP	4055	36	119.6
BUB	Global B	RHCP	6320	BDB	Global B	LHCP	4095	36	119.6
BUC	Global B	RHCP	6360	BDC	Global B	LHCP	4135	36	119.6
BUD	Global B	RHCP	6402.5	BDD	Global B	LHCP	4177.5	41	119.6
BUA	Global B	RHCP	6280	DDA	C-Spot B	LHCP	4055	36	118.9
BUB	Global B	RHCP	6320	DDB	C-Spot B	LHCP	4095	36	118.9
BUC	Global B	RHCP	6360	DDC	C-Spot B	LHCP	4135	36	118.9
BUD	Global B	RHCP	6402.5	DDD	C-Spot B	LHCP	4177.5	41	118.9
BUA	Global B	LHCP	6280	FDA	East Hemi	RHCP	4055	36	122.6
CUA	C-Spot A	LHCP	6280	CDA	C-Spot A	RHCP	4055	36	111.2
CUB	C-Spot A	LHCP	6320	CDB	C-Spot A	RHCP	4095	36	111.2
CUC	C-Spot A	LHCP	6360	CDC	C-Spot A	RHCP	4135	36	111.2
CUD	C-Spot A	LHCP	6402.5	CDD	C-Spot A	RHCP	4177.5	41	111.2
CUA	C-Spot A	LHCP	6280	ADA	Global A	RHCP	4055	36	111.4
CUB	C-Spot A	LHCP	6320	ADB	Global A	RHCP	4095	36	111.4
CUC	C-Spot A	LHCP	6360	ADC	Global A	RHCP	4135	36	111.4
CUD	C-Spot A	LHCP	6402.5	ADD	Global A	RHCP	4177.5	41	111.4
CUA	C-Spot A	LHCP	6280	EDA	West Hemi	RHCP	4055	36	113.2
DUA	C-Spot B	RHCP	6280	DDA	C-Spot B	LHCP	4055	36	111.7
DUB	C-Spot B	RHCP	6320	DDB	C-Spot B	LHCP	4095	36	111.7
DUC	C-Spot B	RHCP	6360	DDC	C-Spot B	LHCP	4135	36	111.7
DUD	C-Spot B	RHCP	6402.5	DDD	C-Spot B	LHCP	4177.5	41	111.7
DUA	C-Spot B	RHCP	6280	ADA	Global B	LHCP	4055	36	112.4
DUB	C-Spot B	RHCP	6320	ADB	Global B	LHCP	4095	36	112.4
DUC	C-Spot B	RHCP	6360	ADC	Global B	LHCP	4135	36	112.4
DUD	C-Spot B	RHCP	6402.5	ADD	Global B	LHCP	4177.5	41	112.4
DUA	C-Spot B	RHCP	6280	EDA	East Hemi	RHCP	4055	36	115.4
EU1	West Hemi	LHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	114.1
EU2	West Hemi	LHCP	6050	ED2	West Hemi	RHCP	3825	72	114.1
EU3	West Hemi	LHCP	6111	ED3	West Hemi	RHCP	3886	34	114.1
EU4	West Hemi	LHCP	6149	ED4	West Hemi	RHCP	3924	34	114.1
EU5	West Hemi	LHCP	6130	ED5	West Hemi	RHCP	3905	72	114.1
EU6	West Hemi	LHCP	6220	ED6	West Hemi	RHCP	3995	72	114.1
EUA	West Hemi	LHCP	6280	EDA	West Hemi	RHCP	4055	36	114.1
EU1	West Hemi	LHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	116.3
EU2	West Hemi	LHCP	6050	FD2	East Hemi	RHCP	3825	72	116.3

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
EU3	West Hemi	LHCP	6111	FD3	East Hemi	RHCP	3886	34	116.3
EU4	West Hemi	LHCP	6149	FD4	East Hemi	RHCP	3924	34	116.3
EU5	West Hemi	LHCP	6130	FD5	East Hemi	RHCP	3905	72	116.3
EU6	West Hemi	LHCP	6220	FD6	East Hemi	RHCP	3995	72	116.3
EUA	West Hemi	LHCP	6280	FDA	East Hemi	RHCP	4055	36	116.3
EU1	West Hemi	LHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	113.7
EU2	West Hemi	LHCP	6050	GD2	NW Zone	LHCP	3825	72	113.7
EU3	West Hemi	LHCP	6111	GD3	NW Zone	LHCP	3886	34	113.7
EU4	West Hemi	LHCP	6149	GD4	NW Zone	LHCP	3924	34	113.7
EU5	West Hemi	LHCP	6130	GD5	NW Zone	LHCP	3905	72	113.7
EU6	West Hemi	LHCP	6220	GD6	NW Zone	LHCP	3995	72	113.7
EUA	West Hemi	LHCP	6280	GDA	NW Zone	LHCP	4055	36	113.7
EU1	West Hemi	LHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	113.0
EU2	West Hemi	LHCP	6050	JD2	SE Zone	LHCP	3825	72	113.0
EU3	West Hemi	LHCP	6111	JD3	SE Zone	LHCP	3886	34	113.0
EU4	West Hemi	LHCP	6149	JD4	SE Zone	LHCP	3924	34	113.0
EU5	West Hemi	LHCP	6130	JD5	SE Zone	LHCP	3905	72	113.0
EU6	West Hemi	LHCP	6220	JD6	SE Zone	LHCP	3995	72	113.0
EUA	West Hemi	LHCP	6280	JDA	SE Zone	LHCP	4055	36	113.0
EU1	West Hemi	LHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	111.5
EU2	West Hemi	LHCP	6050	HD2	NE Zone	LHCP	3825	72	111.5
EU3	West Hemi	LHCP	6111	HD3	NE Zone	LHCP	3886	34	111.5
EU4	West Hemi	LHCP	6149	HD4	NE Zone	LHCP	3924	34	111.5
EU5	West Hemi	LHCP	6130	HD5	NE Zone	LHCP	3905	72	111.5
EU6	West Hemi	LHCP	6220	HD6	NE Zone	LHCP	3995	72	111.5
EUA	West Hemi	LHCP	6280	HDA	NE Zone	LHCP	4055	36	111.5
EU1	West Hemi	LHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	111.0
EU2	West Hemi	LHCP	6050	ID2	SW Zone	LHCP	3825	72	111.0
EU3	West Hemi	LHCP	6111	ID3	SW Zone	LHCP	3886	34	111.0
EU4	West Hemi	LHCP	6149	ID4	SW Zone	LHCP	3924	34	111.0
EU5	West Hemi	LHCP	6130	ID5	SW Zone	LHCP	3905	72	111.0
EU6	West Hemi	LHCP	6220	ID6	SW Zone	LHCP	3995	72	111.0
EUA	West Hemi	LHCP	6280	IDA	SW Zone	LHCP	4055	36	111.0
EUA	West Hemi	LHCP	6280	ADA	Global A	RHCP	4055	36	112.3
EUA	West Hemi	LHCP	6280	CDA	C-Spot A	RHCP	4055	36	112.1
FU1	East Hemi	LHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	118.0
FU2	East Hemi	LHCP	6050	FD2	East Hemi	RHCP	3825	72	118.0
FU3	East Hemi	LHCP	6111	FD3	East Hemi	RHCP	3886	34	118.0
FU4	East Hemi	LHCP	6149	FD4	East Hemi	RHCP	3924	34	118.0
FU5	East Hemi	LHCP	6130	FD5	East Hemi	RHCP	3905	72	118.0
FU6	East Hemi	LHCP	6220	FD6	East Hemi	RHCP	3995	72	118.0
FUA	East Hemi	LHCP	6280	FDA	East Hemi	RHCP	4055	36	118.0
FU1	East Hemi	LHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	115.8
FU2	East Hemi	LHCP	6050	ED2	West Hemi	RHCP	3825	72	115.8
FU3	East Hemi	LHCP	6111	ED3	West Hemi	RHCP	3886	34	115.8
FU4	East Hemi	LHCP	6149	ED4	West Hemi	RHCP	3924	34	115.8
FU5	East Hemi	LHCP	6130	ED5	West Hemi	RHCP	3905	72	115.8
FU6	East Hemi	LHCP	6220	ED6	West Hemi	RHCP	3995	72	115.8
FUA	East Hemi	LHCP	6280	EDA	West Hemi	RHCP	4055	36	115.8
FU1	East Hemi	LHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	115.4
FU2	East Hemi	LHCP	6050	GD2	NW Zone	LHCP	3825	72	115.4
FU3	East Hemi	LHCP	6111	GD3	NW Zone	LHCP	3886	34	115.4

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
FU4	East Hemi	LHCP	6149	GD4	NW Zone	LHCP	3924	34	115.4
FU5	East Hemi	LHCP	6130	GD5	NW Zone	LHCP	3905	72	115.4
FU6	East Hemi	LHCP	6220	GD6	NW Zone	LHCP	3995	72	115.4
FUA	East Hemi	LHCP	6280	GDA	NW Zone	LHCP	4055	36	115.4
FU1	East Hemi	LHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	114.7
FU2	East Hemi	LHCP	6050	JD2	SE Zone	LHCP	3825	72	114.7
FU3	East Hemi	LHCP	6111	JD3	SE Zone	LHCP	3886	34	114.7
FU4	East Hemi	LHCP	6149	JD4	SE Zone	LHCP	3924	34	114.7
FU5	East Hemi	LHCP	6130	JD5	SE Zone	LHCP	3905	72	114.7
FU6	East Hemi	LHCP	6220	JD6	SE Zone	LHCP	3995	72	114.7
FUA	East Hemi	LHCP	6280	JDA	SE Zone	LHCP	4055	36	114.7
FU1	East Hemi	LHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	113.2
FU2	East Hemi	LHCP	6050	HD2	NE Zone	LHCP	3825	72	113.2
FU3	East Hemi	LHCP	6111	HD3	NE Zone	LHCP	3886	34	113.2
FU4	East Hemi	LHCP	6149	HD4	NE Zone	LHCP	3924	34	113.2
FU5	East Hemi	LHCP	6130	HD5	NE Zone	LHCP	3905	72	113.2
FU6	East Hemi	LHCP	6220	HD6	NE Zone	LHCP	3995	72	113.2
FUA	East Hemi	LHCP	6280	HDA	NE Zone	LHCP	4055	36	113.2
FU1	East Hemi	LHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	112.7
FU2	East Hemi	LHCP	6050	ID2	SW Zone	LHCP	3825	72	112.7
FU3	East Hemi	LHCP	6111	ID3	SW Zone	LHCP	3886	34	112.7
FU4	East Hemi	LHCP	6149	ID4	SW Zone	LHCP	3924	34	112.7
FU5	East Hemi	LHCP	6130	ID5	SW Zone	LHCP	3905	72	112.7
FU6	East Hemi	LHCP	6220	ID6	SW Zone	LHCP	3995	72	112.7
FUA	East Hemi	LHCP	6280	IDA	SW Zone	LHCP	4055	36	112.7
FUA	East Hemi	LHCP	6280	BDA	Global B	LHCP	4055	36	113.0
FUA	East Hemi	LHCP	6280	DDA	C-Spot B	LHCP	4055	36	114.3
GU1	NW Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	112.5
GU2	NW Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	112.5
GU3	NW Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	112.5
GU4	NW Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	112.5
GU5	NW Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	112.5
GU6	NW Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	112.5
GUA	NW Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	112.5
GU1	NW Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	111.8
GU2	NW Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	111.8
GU3	NW Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	111.8
GU4	NW Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	111.8
GU5	NW Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	111.8
GU6	NW Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	111.8
GUA	NW Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	111.8
GU1	NW Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	110.3
GU2	NW Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	110.3
GU3	NW Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	110.3
GU4	NW Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	110.3
GU5	NW Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	110.3
GU6	NW Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	110.3
GUA	NW Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	110.3
GU1	NW Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	109.8
GU2	NW Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	109.8
GU3	NW Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	109.8
GU4	NW Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	109.8

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
GU5	NW Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	109.8
GU6	NW Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	109.8
GUA	NW Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	109.8
GU1	NW Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	112.9
GU2	NW Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	112.9
GU3	NW Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	112.9
GU4	NW Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	112.9
GU5	NW Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	112.9
GU6	NW Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	112.9
GUA	NW Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	112.9
GU1	NW Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	115.1
GU2	NW Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	115.1
GU3	NW Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	115.1
GU4	NW Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	115.1
GU5	NW Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	115.1
GU6	NW Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	115.1
GUA	NW Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	115.1
JU1	SE Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	113.4
JU2	SE Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	113.4
JU3	SE Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	113.4
JU4	SE Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	113.4
JU5	SE Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	113.4
JU6	SE Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	113.4
JUA	SE Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	113.4
JU1	SE Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	112.7
JU2	SE Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	112.7
JU3	SE Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	112.7
JU4	SE Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	112.7
JU5	SE Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	112.7
JU6	SE Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	112.7
JUA	SE Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	112.7
JU1	SE Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	111.2
JU2	SE Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	111.2
JU3	SE Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	111.2
JU4	SE Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	111.2
JU5	SE Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	111.2
JU6	SE Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	111.2
JUA	SE Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	111.2
JU1	SE Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	110.7
JU2	SE Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	110.7
JU3	SE Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	110.7
JU4	SE Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	110.7
JU5	SE Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	110.7
JU6	SE Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	110.7
JUA	SE Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	110.7
JU1	SE Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	113.8
JU2	SE Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	113.8
JU3	SE Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	113.8
JU4	SE Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	113.8
JU5	SE Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	113.8
JU6	SE Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	113.8
JUA	SE Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	113.8
JU1	SE Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	116.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
JU2	SE Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	116.0
JU3	SE Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	116.0
JU4	SE Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	116.0
JU5	SE Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	116.0
JU6	SE Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	116.0
JUA	SE Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	116.0
HU1	NE Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	110.8
HU2	NE Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	110.8
HU3	NE Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	110.8
HU4	NE Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	110.8
HU5	NE Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	110.8
HU6	NE Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	110.8
HUA	NE Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	110.8
HU1	NE Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	110.1
HU2	NE Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	110.1
HU3	NE Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	110.1
HU4	NE Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	110.1
HU5	NE Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	110.1
HU6	NE Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	110.1
HUA	NE Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	110.1
HU1	NE Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	108.6
HU2	NE Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	108.6
HU3	NE Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	108.6
HU4	NE Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	108.6
HU5	NE Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	108.6
HU6	NE Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	108.6
HUA	NE Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	108.6
HU1	NE Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	108.1
HU2	NE Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	108.1
HU3	NE Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	108.1
HU4	NE Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	108.1
HU5	NE Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	108.1
HU6	NE Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	108.1
HUA	NE Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	108.1
HU1	NE Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	111.2
HU2	NE Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	111.2
HU3	NE Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	111.2
HU4	NE Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	111.2
HU5	NE Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	111.2
HU6	NE Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	111.2
HUA	NE Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	111.2
HU1	NE Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	113.4
HU2	NE Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	113.4
HU3	NE Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	113.4
HU4	NE Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	113.4
HU5	NE Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	113.4
HU6	NE Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	113.4
HUA	NE Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	113.4
IU1	SW Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	110.0
IU2	SW Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	110.0
IU3	SW Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	110.0
IU4	SW Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	110.0
IU5	SW Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	110.0
IU6	SW Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	110.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
IUA	SW Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	110.0
IU1	SW Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	109.3
IU2	SW Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	109.3
IU3	SW Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	109.3
IU4	SW Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	109.3
IU5	SW Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	109.3
IU6	SW Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	109.3
IUA	SW Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	109.3
IU1	SW Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	107.8
IU2	SW Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	107.8
IU3	SW Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	107.8
IU4	SW Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	107.8
IU5	SW Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	107.8
IU6	SW Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	107.8
IUA	SW Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	107.8
IU1	SW Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	107.3
IU2	SW Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	107.3
IU3	SW Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	107.3
IU4	SW Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	107.3
IU5	SW Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	107.3
IU6	SW Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	107.3
IUA	SW Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	107.3
IU1	SW Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	110.4
IU2	SW Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	110.4
IU3	SW Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	110.4
IU4	SW Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	110.4
IU5	SW Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	110.4
IU6	SW Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	110.4
IUA	SW Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	110.4
IU1	SW Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	112.6
IU2	SW Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	112.6
IU3	SW Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	112.6
IU4	SW Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	112.6
IU5	SW Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	112.6
IU6	SW Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	112.6
IUA	SW Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	112.6
KU1	Combined NW+SE Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	115.1
KU2	Combined NW+SE Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	115.1
KU3	Combined NW+SE Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	115.1
KU4	Combined NW+SE Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	115.1
KU5	Combined NW+SE Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	115.1
KU6	Combined NW+SE Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	115.1
KUA	Combined NW+SE Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	115.1
KU1	Combined NW+SE Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	114.4
KU2	Combined NW+SE Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	114.4
KU3	Combined NW+SE Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	114.4
KU4	Combined NW+SE Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	114.4
KU5	Combined NW+SE Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	114.4
KU6	Combined NW+SE Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	114.4
KUA	Combined NW+SE Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	114.4
KU1	Combined NW+SE Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	112.9
KU2	Combined NW+SE Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	112.9
KU3	Combined NW+SE Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	112.9

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
KU4	Combined NW+SE Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	112.9
KU5	Combined NW+SE Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	112.9
KU6	Combined NW+SE Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	112.9
KUA	Combined NW+SE Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	112.9
KU1	Combined NW+SE Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	112.4
KU2	Combined NW+SE Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	112.4
KU3	Combined NW+SE Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	112.4
KU4	Combined NW+SE Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	112.4
KU5	Combined NW+SE Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	112.4
KU6	Combined NW+SE Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	112.4
KUA	Combined NW+SE Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	112.4
KU1	Combined NW+SE Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	115.5
KU2	Combined NW+SE Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	115.5
KU3	Combined NW+SE Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	115.5
KU4	Combined NW+SE Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	115.5
KU5	Combined NW+SE Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	115.5
KU6	Combined NW+SE Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	115.5
KUA	Combined NW+SE Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	115.5
KU1	Combined NW+SE Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	117.7
KU2	Combined NW+SE Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	117.7
KU3	Combined NW+SE Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	117.7
KU4	Combined NW+SE Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	117.7
KU5	Combined NW+SE Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	117.7
KU6	Combined NW+SE Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	117.7
KUA	Combined NW+SE Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	117.7
LU1	Combined NE+SW Zone	RHCP	5967.5	GD1	NW Zone	LHCP	3742.5	77	113.1
LU2	Combined NE+SW Zone	RHCP	6050	GD2	NW Zone	LHCP	3825	72	113.1
LU3	Combined NE+SW Zone	RHCP	6111	GD3	NW Zone	LHCP	3886	34	113.1
LU4	Combined NE+SW Zone	RHCP	6149	GD4	NW Zone	LHCP	3924	34	113.1
LU5	Combined NE+SW Zone	RHCP	6130	GD5	NW Zone	LHCP	3905	72	113.1
LU6	Combined NE+SW Zone	RHCP	6220	GD6	NW Zone	LHCP	3995	72	113.1
LUA	Combined NE+SW Zone	RHCP	6280	GDA	NW Zone	LHCP	4055	36	113.1
LU1	Combined NE+SW Zone	RHCP	5967.5	JD1	SE Zone	LHCP	3742.5	77	112.4
LU2	Combined NE+SW Zone	RHCP	6050	JD2	SE Zone	LHCP	3825	72	112.4
LU3	Combined NE+SW Zone	RHCP	6111	JD3	SE Zone	LHCP	3886	34	112.4
LU4	Combined NE+SW Zone	RHCP	6149	JD4	SE Zone	LHCP	3924	34	112.4
LU5	Combined NE+SW Zone	RHCP	6130	JD5	SE Zone	LHCP	3905	72	112.4
LU6	Combined NE+SW Zone	RHCP	6220	JD6	SE Zone	LHCP	3995	72	112.4
LUA	Combined NE+SW Zone	RHCP	6280	JDA	SE Zone	LHCP	4055	36	112.4
LU1	Combined NE+SW Zone	RHCP	5967.5	HD1	NE Zone	LHCP	3742.5	77	110.9
LU2	Combined NE+SW Zone	RHCP	6050	HD2	NE Zone	LHCP	3825	72	110.9
LU3	Combined NE+SW Zone	RHCP	6111	HD3	NE Zone	LHCP	3886	34	110.9
LU4	Combined NE+SW Zone	RHCP	6149	HD4	NE Zone	LHCP	3924	34	110.9
LU5	Combined NE+SW Zone	RHCP	6130	HD5	NE Zone	LHCP	3905	72	110.9
LU6	Combined NE+SW Zone	RHCP	6220	HD6	NE Zone	LHCP	3995	72	110.9
LUA	Combined NE+SW Zone	RHCP	6280	HDA	NE Zone	LHCP	4055	36	110.9
LU1	Combined NE+SW Zone	RHCP	5967.5	ID1	SW Zone	LHCP	3742.5	77	110.4
LU2	Combined NE+SW Zone	RHCP	6050	ID2	SW Zone	LHCP	3825	72	110.4
LU3	Combined NE+SW Zone	RHCP	6111	ID3	SW Zone	LHCP	3886	34	110.4
LU4	Combined NE+SW Zone	RHCP	6149	ID4	SW Zone	LHCP	3924	34	110.4
LU5	Combined NE+SW Zone	RHCP	6130	ID5	SW Zone	LHCP	3905	72	110.4
LU6	Combined NE+SW Zone	RHCP	6220	ID6	SW Zone	LHCP	3995	72	110.4
LUA	Combined NE+SW Zone	RHCP	6280	IDA	SW Zone	LHCP	4055	36	110.4

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
LU1	Combined NE+SW Zone	RHCP	5967.5	ED1	West Hemi	RHCP	3742.5	77	113.5
LU2	Combined NE+SW Zone	RHCP	6050	ED2	West Hemi	RHCP	3825	72	113.5
LU3	Combined NE+SW Zone	RHCP	6111	ED3	West Hemi	RHCP	3886	34	113.5
LU4	Combined NE+SW Zone	RHCP	6149	ED4	West Hemi	RHCP	3924	34	113.5
LU5	Combined NE+SW Zone	RHCP	6130	ED5	West Hemi	RHCP	3905	72	113.5
LU6	Combined NE+SW Zone	RHCP	6220	ED6	West Hemi	RHCP	3995	72	113.5
LUA	Combined NE+SW Zone	RHCP	6280	EDA	West Hemi	RHCP	4055	36	113.5
LU1	Combined NE+SW Zone	RHCP	5967.5	FD1	East Hemi	RHCP	3742.5	77	115.7
LU2	Combined NE+SW Zone	RHCP	6050	FD2	East Hemi	RHCP	3825	72	115.7
LU3	Combined NE+SW Zone	RHCP	6111	FD3	East Hemi	RHCP	3886	34	115.7
LU4	Combined NE+SW Zone	RHCP	6149	FD4	East Hemi	RHCP	3924	34	115.7
LU5	Combined NE+SW Zone	RHCP	6130	FD5	East Hemi	RHCP	3905	72	115.7
LU6	Combined NE+SW Zone	RHCP	6220	FD6	East Hemi	RHCP	3995	72	115.7
LUA	Combined NE+SW Zone	RHCP	6280	FDA	East Hemi	RHCP	4055	36	115.7
SU1	Spot 1	H	14042.5	S1D1	Spot 1	V	10992.5	77	113.2
SU2	Spot 1	H	14125	S1D2	Spot 1	V	11075	72	113.2
SU3	Spot 1	H	14186	S1D3	Spot 1	V	11136	34	113.2
SU4	Spot 1	H	14224	S1D4	Spot 1	V	11174	34	113.2
SU5	Spot 1	H	14205	S1D5	Spot 1	V	11155	72	113.2
SU6	Spot 1	H	14314	S1D6	Spot 1	V	11514	112	113.2
SU7	Spot 1	H	14438	S1D7	Spot 1	V	11638	112	113.2
SU1	Spot 1	H	14042.5	U1D1	Spot 2	H	10992.5	77	113.9
SU2	Spot 1	H	14125	U1D2	Spot 2	H	11075	72	113.9
SU3	Spot 1	H	14186	U1D3	Spot 2	H	11136	34	113.9
SU4	Spot 1	H	14224	U1D4	Spot 2	H	11174	34	113.9
SU5	Spot 1	H	14205	U1D5	Spot 2	H	11155	72	113.9
SU6	Spot 1	H	14314	U1D6	Spot 2	H	11514	112	113.9
SU7	Spot 1	H	14438	U1D7	Spot 2	H	11638	112	113.9
SU1	Spot 1	H	14042.5	Y1D1	Spot 2A	H	10992.5	77	113.8
SU2	Spot 1	H	14125	Y1D2	Spot 2A	H	11075	72	113.8
SU3	Spot 1	H	14186	Y1D3	Spot 2A	H	11136	34	113.8
SU4	Spot 1	H	14224	Y1D4	Spot 2A	H	11174	34	113.8
SU5	Spot 1	H	14205	Y1D5	Spot 2A	H	11155	72	113.8
SU6	Spot 1	H	14314	Y1D6	Spot 2A	H	11514	112	113.8
SU7	Spot 1	H	14438	Y1D7	Spot 2A	H	11638	112	113.8
SU1	Spot 1	H	14042.5	W1D1	Spot 3	V	10992.5	77	113.2
SU2	Spot 1	H	14125	W1D2	Spot 3	V	11075	72	113.2
SU3	Spot 1	H	14186	W1D3	Spot 3	V	11136	34	113.2
SU4	Spot 1	H	14224	W1D4	Spot 3	V	11174	34	113.2
SU5	Spot 1	H	14205	W1D5	Spot 3	V	11155	72	113.2
SU6	Spot 1	H	14314	W1D6	Spot 3	V	11514	112	113.2
SU7	Spot 1	H	14438	W1D7	Spot 3	V	11638	112	113.2
SU1	Spot 1	H	14042.5	X1D1	Spot 3X	H	10992.5	77	113.2
SU2	Spot 1	H	14125	X1D2	Spot 3X	H	11075	72	113.2
SU3	Spot 1	H	14186	X1D3	Spot 3X	H	11136	34	113.2
SU4	Spot 1	H	14224	X1D4	Spot 3X	H	11174	34	113.2
SU5	Spot 1	H	14205	X1D5	Spot 3X	H	11155	72	113.2
SU6	Spot 1	H	14314	X1D6	Spot 3X	H	11514	112	113.2
SU7	Spot 1	H	14438	X1D7	Spot 3X	H	11638	112	113.2
UU1	Spot 2	V	14042.5	S1D1	Spot 1	V	10992.5	77	116.7
UU2	Spot 2	V	14125	S1D2	Spot 1	V	11075	72	116.7
UU3	Spot 2	V	14186	S1D3	Spot 1	V	11136	34	116.7
UU4	Spot 2	V	14224	S1D4	Spot 1	V	11174	34	116.7
UU5	Spot 2	V	14205	S1D5	Spot 1	V	11155	72	116.7

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
UU6	Spot 2	V	14314	S1D6	Spot 1	V	11514	112	116.7
UU7	Spot 2	V	14438	S1D7	Spot 1	V	11638	112	116.7
UU1	Spot 2	V	14042.5	U1D1	Spot 2	H	10992.5	77	117.4
UU2	Spot 2	V	14125	U1D2	Spot 2	H	11075	72	117.4
UU3	Spot 2	V	14186	U1D3	Spot 2	H	11136	34	117.4
UU4	Spot 2	V	14224	U1D4	Spot 2	H	11174	34	117.4
UU5	Spot 2	V	14205	U1D5	Spot 2	H	11155	72	117.4
UU6	Spot 2	V	14314	U1D6	Spot 2	H	11514	112	117.4
UU7	Spot 2	V	14438	U1D7	Spot 2	H	11638	112	117.4
UU1	Spot 2	V	14042.5	Y1D1	Spot 2A	H	10992.5	77	117.3
UU2	Spot 2	V	14125	Y1D2	Spot 2A	H	11075	72	117.3
UU3	Spot 2	V	14186	Y1D3	Spot 2A	H	11136	34	117.3
UU4	Spot 2	V	14224	Y1D4	Spot 2A	H	11174	34	117.3
UU5	Spot 2	V	14205	Y1D5	Spot 2A	H	11155	72	117.3
UU6	Spot 2	V	14314	Y1D6	Spot 2A	H	11514	112	117.3
UU7	Spot 2	V	14438	Y1D7	Spot 2A	H	11638	112	117.3
UU1	Spot 2	V	14042.5	W1D1	Spot 3	V	10992.5	77	116.7
UU2	Spot 2	V	14125	W1D2	Spot 3	V	11075	72	116.7
UU3	Spot 2	V	14186	W1D3	Spot 3	V	11136	34	116.7
UU4	Spot 2	V	14224	W1D4	Spot 3	V	11174	34	116.7
UU5	Spot 2	V	14205	W1D5	Spot 3	V	11155	72	116.7
UU6	Spot 2	V	14314	W1D6	Spot 3	V	11514	112	116.7
UU7	Spot 2	V	14438	W1D7	Spot 3	V	11638	112	116.7
UU1	Spot 2	V	14042.5	X1D1	Spot 3X	H	10992.5	77	116.7
UU2	Spot 2	V	14125	X1D2	Spot 3X	H	11075	72	116.7
UU3	Spot 2	V	14186	X1D3	Spot 3X	H	11136	34	116.7
UU4	Spot 2	V	14224	X1D4	Spot 3X	H	11174	34	116.7
UU5	Spot 2	V	14205	X1D5	Spot 3X	H	11155	72	116.7
UU6	Spot 2	V	14314	X1D6	Spot 3X	H	11514	112	116.7
UU7	Spot 2	V	14438	X1D7	Spot 3X	H	11638	112	116.7
YU1	Spot 2A	V	14042.5	S1D1	Spot 1	V	10992.5	77	118.7
YU2	Spot 2A	V	14125	S1D2	Spot 1	V	11075	72	118.7
YU3	Spot 2A	V	14186	S1D3	Spot 1	V	11136	34	118.7
YU4	Spot 2A	V	14224	S1D4	Spot 1	V	11174	34	118.7
YU5	Spot 2A	V	14205	S1D5	Spot 1	V	11155	72	118.7
YU6	Spot 2A	V	14314	S1D6	Spot 1	V	11514	112	118.7
YU7	Spot 2A	V	14438	S1D7	Spot 1	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	U1D1	Spot 2	H	10992.5	77	119.4
YU2	Spot 2A	V	14125	U1D2	Spot 2	H	11075	72	119.4
YU3	Spot 2A	V	14186	U1D3	Spot 2	H	11136	34	119.4
YU4	Spot 2A	V	14224	U1D4	Spot 2	H	11174	34	119.4
YU5	Spot 2A	V	14205	U1D5	Spot 2	H	11155	72	119.4
YU6	Spot 2A	V	14314	U1D6	Spot 2	H	11514	112	119.4
YU7	Spot 2A	V	14438	U1D7	Spot 2	H	11638	112	119.4
YU1	Spot 2A	V	14042.5	Y1D1	Spot 2A	H	10992.5	77	119.3
YU2	Spot 2A	V	14125	Y1D2	Spot 2A	H	11075	72	119.3
YU3	Spot 2A	V	14186	Y1D3	Spot 2A	H	11136	34	119.3
YU4	Spot 2A	V	14224	Y1D4	Spot 2A	H	11174	34	119.3
YU5	Spot 2A	V	14205	Y1D5	Spot 2A	H	11155	72	119.3
YU6	Spot 2A	V	14314	Y1D6	Spot 2A	H	11514	112	119.3
YU7	Spot 2A	V	14438	Y1D7	Spot 2A	H	11638	112	119.3
YU1	Spot 2A	V	14042.5	W1D1	Spot 3	V	10992.5	77	118.7
YU2	Spot 2A	V	14125	W1D2	Spot 3	V	11075	72	118.7

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
YU3	Spot 2A	V	14186	W1D3	Spot 3	V	11136	34	118.7
YU4	Spot 2A	V	14224	W1D4	Spot 3	V	11174	34	118.7
YU5	Spot 2A	V	14205	W1D5	Spot 3	V	11155	72	118.7
YU6	Spot 2A	V	14314	W1D6	Spot 3	V	11514	112	118.7
YU7	Spot 2A	V	14438	W1D7	Spot 3	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	X1D1	Spot 3X	H	10992.5	77	118.7
YU2	Spot 2A	V	14125	X1D2	Spot 3X	H	11075	72	118.7
YU3	Spot 2A	V	14186	X1D3	Spot 3X	H	11136	34	118.7
YU4	Spot 2A	V	14224	X1D4	Spot 3X	H	11174	34	118.7
YU5	Spot 2A	V	14205	X1D5	Spot 3X	H	11155	72	118.7
YU6	Spot 2A	V	14314	X1D6	Spot 3X	H	11514	112	118.7
YU7	Spot 2A	V	14438	X1D7	Spot 3X	H	11638	112	118.7
WU1	Spot 3	H	14042.5	S1D1	Spot 1	V	10992.5	77	113.5
WU2	Spot 3	H	14125	S1D2	Spot 1	V	11075	72	113.5
WU3	Spot 3	H	14186	S1D3	Spot 1	V	11136	34	113.5
WU4	Spot 3	H	14224	S1D4	Spot 1	V	11174	34	113.5
WU5	Spot 3	H	14205	S1D5	Spot 1	V	11155	72	113.5
WU6	Spot 3	H	14314	S1D6	Spot 1	V	11514	112	113.5
WU7	Spot 3	H	14438	S1D7	Spot 1	V	11638	112	113.5
WU1	Spot 3	H	14042.5	U1D1	Spot 2	H	10992.5	77	114.2
WU2	Spot 3	H	14125	U1D2	Spot 2	H	11075	72	114.2
WU3	Spot 3	H	14186	U1D3	Spot 2	H	11136	34	114.2
WU4	Spot 3	H	14224	U1D4	Spot 2	H	11174	34	114.2
WU5	Spot 3	H	14205	U1D5	Spot 2	H	11155	72	114.2
WU6	Spot 3	H	14314	U1D6	Spot 2	H	11514	112	114.2
WU7	Spot 3	H	14438	U1D7	Spot 2	H	11638	112	114.2
WU1	Spot 3	H	14042.5	Y1D1	Spot 2A	H	10992.5	77	114.1
WU2	Spot 3	H	14125	Y1D2	Spot 2A	H	11075	72	114.1
WU3	Spot 3	H	14186	Y1D3	Spot 2A	H	11136	34	114.1
WU4	Spot 3	H	14224	Y1D4	Spot 2A	H	11174	34	114.1
WU5	Spot 3	H	14205	Y1D5	Spot 2A	H	11155	72	114.1
WU6	Spot 3	H	14314	Y1D6	Spot 2A	H	11514	112	114.1
WU7	Spot 3	H	14438	Y1D7	Spot 2A	H	11638	112	114.1
WU1	Spot 3	H	14042.5	W1D1	Spot 3	V	10992.5	77	113.5
WU2	Spot 3	H	14125	W1D2	Spot 3	V	11075	72	113.5
WU3	Spot 3	H	14186	W1D3	Spot 3	V	11136	34	113.5
WU4	Spot 3	H	14224	W1D4	Spot 3	V	11174	34	113.5
WU5	Spot 3	H	14205	W1D5	Spot 3	V	11155	72	113.5
WU6	Spot 3	H	14314	W1D6	Spot 3	V	11514	112	113.5
WU7	Spot 3	H	14438	W1D7	Spot 3	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	S1D1	Spot 1	V	10992.5	77	113.5
XU2	Spot 3X	V	14125	S1D2	Spot 1	V	11075	72	113.5
XU3	Spot 3X	V	14186	S1D3	Spot 1	V	11136	34	113.5
XU4	Spot 3X	V	14224	S1D4	Spot 1	V	11174	34	113.5
XU5	Spot 3X	V	14205	S1D5	Spot 1	V	11155	72	113.5
XU6	Spot 3X	V	14314	S1D6	Spot 1	V	11514	112	113.5
XU7	Spot 3X	V	14438	S1D7	Spot 1	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	U1D1	Spot 2	H	10992.5	77	114.2
XU2	Spot 3X	V	14125	U1D2	Spot 2	H	11075	72	114.2
XU3	Spot 3X	V	14186	U1D3	Spot 2	H	11136	34	114.2
XU4	Spot 3X	V	14224	U1D4	Spot 2	H	11174	34	114.2
XU5	Spot 3X	V	14205	U1D5	Spot 2	H	11155	72	114.2
XU6	Spot 3X	V	14314	U1D6	Spot 2	H	11514	112	114.2
XU7	Spot 3X	V	14438	U1D7	Spot 2	H	11638	112	114.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
XU1	Spot 3X	V	14042.5	Y1D1	Spot 2A	H	10992.5	77	114.1
XU2	Spot 3X	V	14125	Y1D2	Spot 2A	H	11075	72	114.1
XU3	Spot 3X	V	14186	Y1D3	Spot 2A	H	11136	34	114.1
XU4	Spot 3X	V	14224	Y1D4	Spot 2A	H	11174	34	114.1
XU5	Spot 3X	V	14205	Y1D5	Spot 2A	H	11155	72	114.1
XU6	Spot 3X	V	14314	Y1D6	Spot 2A	H	11514	112	114.1
XU7	Spot 3X	V	14438	Y1D7	Spot 2A	H	11638	112	114.1
XU1	Spot 3X	V	14042.5	X1D1	Spot 3X	H	10992.5	77	113.5
XU2	Spot 3X	V	14125	X1D2	Spot 3X	H	11075	72	113.5
XU3	Spot 3X	V	14186	X1D3	Spot 3X	H	11136	34	113.5
XU4	Spot 3X	V	14224	X1D4	Spot 3X	H	11174	34	113.5
XU5	Spot 3X	V	14205	X1D5	Spot 3X	H	11155	72	113.5
XU6	Spot 3X	V	14314	X1D6	Spot 3X	H	11514	112	113.5
XU7	Spot 3X	V	14438	X1D7	Spot 3X	H	11638	112	113.5
SU1	Spot 1	H	14042.5	S2D1	Spot 1	V	12547.5	77	113.2
SU2	Spot 1	H	14125	S2D2	Spot 1	V	12630	72	113.2
SU3	Spot 1	H	14186	S2D3	Spot 1	V	12691	34	113.2
SU4	Spot 1	H	14224	S2D4	Spot 1	V	12729	34	113.2
SU5	Spot 1	H	14205	S2D5	Spot 1	V	12710	72	113.2
SU6	Spot 1	H	14314	S2D6	Spot 1	V	11514	112	113.2
SU7	Spot 1	H	14438	S2D7	Spot 1	V	11638	112	113.2
SU1	Spot 1	H	14042.5	U2D1	Spot 2	H	12547.5	77	113.9
SU2	Spot 1	H	14125	U2D2	Spot 2	H	12630	72	113.9
SU3	Spot 1	H	14186	U2D3	Spot 2	H	12691	34	113.9
SU4	Spot 1	H	14224	U2D4	Spot 2	H	12729	34	113.9
SU5	Spot 1	H	14205	U2D5	Spot 2	H	12710	72	113.9
SU6	Spot 1	H	14314	U2D6	Spot 2	H	11514	112	113.9
SU7	Spot 1	H	14438	U2D7	Spot 2	H	11638	112	113.9
SU1	Spot 1	H	14042.5	Y2D1	Spot 2A	H	12547.5	77	113.8
SU2	Spot 1	H	14125	Y2D2	Spot 2A	H	12630	72	113.8
SU3	Spot 1	H	14186	Y2D3	Spot 2A	H	12691	34	113.8
SU4	Spot 1	H	14224	Y2D4	Spot 2A	H	12729	34	113.8
SU5	Spot 1	H	14205	Y2D5	Spot 2A	H	12710	72	113.8
SU6	Spot 1	H	14314	Y2D6	Spot 2A	H	11514	112	113.8
SU7	Spot 1	H	14438	Y2D7	Spot 2A	H	11638	112	113.8
SU1	Spot 1	H	14042.5	W2D1	Spot 3	V	12547.5	77	113.2
SU2	Spot 1	H	14125	W2D2	Spot 3	V	12630	72	113.2
SU3	Spot 1	H	14186	W2D3	Spot 3	V	12691	34	113.2
SU4	Spot 1	H	14224	W2D4	Spot 3	V	12729	34	113.2
SU5	Spot 1	H	14205	W2D5	Spot 3	V	12710	72	113.2
SU6	Spot 1	H	14314	W2D6	Spot 3	V	11514	112	113.2
SU7	Spot 1	H	14438	W2D7	Spot 3	V	11638	112	113.2
SU1	Spot 1	H	14042.5	X2D1	Spot 3X	H	12547.5	77	113.2
SU2	Spot 1	H	14125	X2D2	Spot 3X	H	12630	72	113.2
SU3	Spot 1	H	14186	X2D3	Spot 3X	H	12691	34	113.2
SU4	Spot 1	H	14224	X2D4	Spot 3X	H	12729	34	113.2
SU5	Spot 1	H	14205	X2D5	Spot 3X	H	12710	72	113.2
SU6	Spot 1	H	14314	X2D6	Spot 3X	H	11514	112	113.2
SU7	Spot 1	H	14438	X2D7	Spot 3X	H	11638	112	113.2
UU1	Spot 2	V	14042.5	S2D1	Spot 1	V	12547.5	77	116.7
UU2	Spot 2	V	14125	S2D2	Spot 1	V	12630	72	116.7
UU3	Spot 2	V	14186	S2D3	Spot 1	V	12691	34	116.7
UU4	Spot 2	V	14224	S2D4	Spot 1	V	12729	34	116.7

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
UU5	Spot 2	V	14205	S2D5	Spot 1	V	12710	72	116.7
UU6	Spot 2	V	14314	S2D6	Spot 1	V	11514	112	116.7
UU7	Spot 2	V	14438	S2D7	Spot 1	V	11638	112	116.7
UU1	Spot 2	V	14042.5	U2D1	Spot 2	H	12547.5	77	117.4
UU2	Spot 2	V	14125	U2D2	Spot 2	H	12630	72	117.4
UU3	Spot 2	V	14186	U2D3	Spot 2	H	12691	34	117.4
UU4	Spot 2	V	14224	U2D4	Spot 2	H	12729	34	117.4
UU5	Spot 2	V	14205	U2D5	Spot 2	H	12710	72	117.4
UU6	Spot 2	V	14314	U2D6	Spot 2	H	11514	112	117.4
UU7	Spot 2	V	14438	U2D7	Spot 2	H	11638	112	117.4
UU1	Spot 2	V	14042.5	Y2D1	Spot 2A	H	12547.5	77	117.3
UU2	Spot 2	V	14125	Y2D2	Spot 2A	H	12630	72	117.3
UU3	Spot 2	V	14186	Y2D3	Spot 2A	H	12691	34	117.3
UU4	Spot 2	V	14224	Y2D4	Spot 2A	H	12729	34	117.3
UU5	Spot 2	V	14205	Y2D5	Spot 2A	H	12710	72	117.3
UU6	Spot 2	V	14314	Y2D6	Spot 2A	H	11514	112	117.3
UU7	Spot 2	V	14438	Y2D7	Spot 2A	H	11638	112	117.3
UU1	Spot 2	V	14042.5	W2D1	Spot 3	V	12547.5	77	116.7
UU2	Spot 2	V	14125	W2D2	Spot 3	V	12630	72	116.7
UU3	Spot 2	V	14186	W2D3	Spot 3	V	12691	34	116.7
UU4	Spot 2	V	14224	W2D4	Spot 3	V	12729	34	116.7
UU5	Spot 2	V	14205	W2D5	Spot 3	V	12710	72	116.7
UU6	Spot 2	V	14314	W2D6	Spot 3	V	11514	112	116.7
UU7	Spot 2	V	14438	W2D7	Spot 3	V	11638	112	116.7
UU1	Spot 2	V	14042.5	X2D1	Spot 3X	H	12547.5	77	116.7
UU2	Spot 2	V	14125	X2D2	Spot 3X	H	12630	72	116.7
UU3	Spot 2	V	14186	X2D3	Spot 3X	H	12691	34	116.7
UU4	Spot 2	V	14224	X2D4	Spot 3X	H	12729	34	116.7
UU5	Spot 2	V	14205	X2D5	Spot 3X	H	12710	72	116.7
UU6	Spot 2	V	14314	X2D6	Spot 3X	H	11514	112	116.7
UU7	Spot 2	V	14438	X2D7	Spot 3X	H	11638	112	116.7
YU1	Spot 2A	V	14042.5	S2D1	Spot 1	V	12547.5	77	118.7
YU2	Spot 2A	V	14125	S2D2	Spot 1	V	12630	72	118.7
YU3	Spot 2A	V	14186	S2D3	Spot 1	V	12691	34	118.7
YU4	Spot 2A	V	14224	S2D4	Spot 1	V	12729	34	118.7
YU5	Spot 2A	V	14205	S2D5	Spot 1	V	12710	72	118.7
YU6	Spot 2A	V	14314	S2D6	Spot 1	V	11514	112	118.7
YU7	Spot 2A	V	14438	S2D7	Spot 1	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	U2D1	Spot 2	H	12547.5	77	119.4
YU2	Spot 2A	V	14125	U2D2	Spot 2	H	12630	72	119.4
YU3	Spot 2A	V	14186	U2D3	Spot 2	H	12691	34	119.4
YU4	Spot 2A	V	14224	U2D4	Spot 2	H	12729	34	119.4
YU5	Spot 2A	V	14205	U2D5	Spot 2	H	12710	72	119.4
YU6	Spot 2A	V	14314	U2D6	Spot 2	H	11514	112	119.4
YU7	Spot 2A	V	14438	U2D7	Spot 2	H	11638	112	119.4
YU1	Spot 2A	V	14042.5	Y2D1	Spot 2A	H	12547.5	77	119.3
YU2	Spot 2A	V	14125	Y2D2	Spot 2A	H	12630	72	119.3
YU3	Spot 2A	V	14186	Y2D3	Spot 2A	H	12691	34	119.3
YU4	Spot 2A	V	14224	Y2D4	Spot 2A	H	12729	34	119.3
YU5	Spot 2A	V	14205	Y2D5	Spot 2A	H	12710	72	119.3
YU6	Spot 2A	V	14314	Y2D6	Spot 2A	H	11514	112	119.3
YU7	Spot 2A	V	14438	Y2D7	Spot 2A	H	11638	112	119.3
YU1	Spot 2A	V	14042.5	W2D1	Spot 3	V	12547.5	77	118.7

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
YU2	Spot 2A	V	14125	W2D2	Spot 3	V	12630	72	118.7
YU3	Spot 2A	V	14186	W2D3	Spot 3	V	12691	34	118.7
YU4	Spot 2A	V	14224	W2D4	Spot 3	V	12729	34	118.7
YU5	Spot 2A	V	14205	W2D5	Spot 3	V	12710	72	118.7
YU6	Spot 2A	V	14314	W2D6	Spot 3	V	11514	112	118.7
YU7	Spot 2A	V	14438	W2D7	Spot 3	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	X2D1	Spot 3X	H	12547.5	77	118.7
YU2	Spot 2A	V	14125	X2D2	Spot 3X	H	12630	72	118.7
YU3	Spot 2A	V	14186	X2D3	Spot 3X	H	12691	34	118.7
YU4	Spot 2A	V	14224	X2D4	Spot 3X	H	12729	34	118.7
YU5	Spot 2A	V	14205	X2D5	Spot 3X	H	12710	72	118.7
YU6	Spot 2A	V	14314	X2D6	Spot 3X	H	11514	112	118.7
YU7	Spot 2A	V	14438	X2D7	Spot 3X	H	11638	112	118.7
WU1	Spot 3	H	14042.5	S2D1	Spot 1	V	12547.5	77	113.5
WU2	Spot 3	H	14125	S2D2	Spot 1	V	12630	72	113.5
WU3	Spot 3	H	14186	S2D3	Spot 1	V	12691	34	113.5
WU4	Spot 3	H	14224	S2D4	Spot 1	V	12729	34	113.5
WU5	Spot 3	H	14205	S2D5	Spot 1	V	12710	72	113.5
WU6	Spot 3	H	14314	S2D6	Spot 1	V	11514	112	113.5
WU7	Spot 3	H	14438	S2D7	Spot 1	V	11638	112	113.5
WU1	Spot 3	H	14042.5	U2D1	Spot 2	H	12547.5	77	114.2
WU2	Spot 3	H	14125	U2D2	Spot 2	H	12630	72	114.2
WU3	Spot 3	H	14186	U2D3	Spot 2	H	12691	34	114.2
WU4	Spot 3	H	14224	U2D4	Spot 2	H	12729	34	114.2
WU5	Spot 3	H	14205	U2D5	Spot 2	H	12710	72	114.2
WU6	Spot 3	H	14314	U2D6	Spot 2	H	11514	112	114.2
WU7	Spot 3	H	14438	U2D7	Spot 2	H	11638	112	114.2
WU1	Spot 3	H	14042.5	Y2D1	Spot 2A	H	12547.5	77	114.1
WU2	Spot 3	H	14125	Y2D2	Spot 2A	H	12630	72	114.1
WU3	Spot 3	H	14186	Y2D3	Spot 2A	H	12691	34	114.1
WU4	Spot 3	H	14224	Y2D4	Spot 2A	H	12729	34	114.1
WU5	Spot 3	H	14205	Y2D5	Spot 2A	H	12710	72	114.1
WU6	Spot 3	H	14314	Y2D6	Spot 2A	H	11514	112	114.1
WU7	Spot 3	H	14438	Y2D7	Spot 2A	H	11638	112	114.1
WU1	Spot 3	H	14042.5	W2D1	Spot 3	V	12547.5	77	113.5
WU2	Spot 3	H	14125	W2D2	Spot 3	V	12630	72	113.5
WU3	Spot 3	H	14186	W2D3	Spot 3	V	12691	34	113.5
WU4	Spot 3	H	14224	W2D4	Spot 3	V	12729	34	113.5
WU5	Spot 3	H	14205	W2D5	Spot 3	V	12710	72	113.5
WU6	Spot 3	H	14314	W2D6	Spot 3	V	11514	112	113.5
WU7	Spot 3	H	14438	W2D7	Spot 3	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	S2D1	Spot 1	V	12547.5	77	113.5
XU2	Spot 3X	V	14125	S2D2	Spot 1	V	12630	72	113.5
XU3	Spot 3X	V	14186	S2D3	Spot 1	V	12691	34	113.5
XU4	Spot 3X	V	14224	S2D4	Spot 1	V	12729	34	113.5
XU5	Spot 3X	V	14205	S2D5	Spot 1	V	12710	72	113.5
XU6	Spot 3X	V	14314	S2D6	Spot 1	V	11514	112	113.5
XU7	Spot 3X	V	14438	S2D7	Spot 1	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	U2D1	Spot 2	H	12547.5	77	114.2
XU2	Spot 3X	V	14125	U2D2	Spot 2	H	12630	72	114.2
XU3	Spot 3X	V	14186	U2D3	Spot 2	H	12691	34	114.2
XU4	Spot 3X	V	14224	U2D4	Spot 2	H	12729	34	114.2
XU5	Spot 3X	V	14205	U2D5	Spot 2	H	12710	72	114.2
XU6	Spot 3X	V	14314	U2D6	Spot 2	H	11514	112	114.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
XU7	Spot 3X	V	14438	U2D7	Spot 2	H	11638	112	114.2
XU1	Spot 3X	V	14042.5	Y2D1	Spot 2A	H	12547.5	77	114.1
XU2	Spot 3X	V	14125	Y2D2	Spot 2A	H	12630	72	114.1
XU3	Spot 3X	V	14186	Y2D3	Spot 2A	H	12691	34	114.1
XU4	Spot 3X	V	14224	Y2D4	Spot 2A	H	12729	34	114.1
XU5	Spot 3X	V	14205	Y2D5	Spot 2A	H	12710	72	114.1
XU6	Spot 3X	V	14314	Y2D6	Spot 2A	H	11514	112	114.1
XU7	Spot 3X	V	14438	Y2D7	Spot 2A	H	11638	112	114.1
XU1	Spot 3X	V	14042.5	X2D1	Spot 3X	H	12547.5	77	113.5
XU2	Spot 3X	V	14125	X2D2	Spot 3X	H	12630	72	113.5
XU3	Spot 3X	V	14186	X2D3	Spot 3X	H	12691	34	113.5
XU4	Spot 3X	V	14224	X2D4	Spot 3X	H	12729	34	113.5
XU5	Spot 3X	V	14205	X2D5	Spot 3X	H	12710	72	113.5
XU6	Spot 3X	V	14314	X2D6	Spot 3X	H	11514	112	113.5
XU7	Spot 3X	V	14438	X2D7	Spot 3X	H	11638	112	113.5
SU1	Spot 1	H	14042.5	S3D1	Spot 1	V	11747.5	77	113.2
SU2	Spot 1	H	14125	S3D2	Spot 1	V	11830	72	113.2
SU3	Spot 1	H	14186	S3D3	Spot 1	V	11891	34	113.2
SU4	Spot 1	H	14224	S3D4	Spot 1	V	11929	34	113.2
SU5	Spot 1	H	14205	S3D5	Spot 1	V	11910	72	113.2
SU6	Spot 1	H	14314	S3D6	Spot 1	V	11514	112	113.2
SU7	Spot 1	H	14438	S3D7	Spot 1	V	11638	112	113.2
SU1	Spot 1	H	14042.5	U3D1	Spot 2	H	11747.5	77	113.9
SU2	Spot 1	H	14125	U3D2	Spot 2	H	11830	72	113.9
SU3	Spot 1	H	14186	U3D3	Spot 2	H	11891	34	113.9
SU4	Spot 1	H	14224	U3D4	Spot 2	H	11929	34	113.9
SU5	Spot 1	H	14205	U3D5	Spot 2	H	11910	72	113.9
SU6	Spot 1	H	14314	U3D6	Spot 2	H	11514	112	113.9
SU7	Spot 1	H	14438	U3D7	Spot 2	H	11638	112	113.9
SU1	Spot 1	H	14042.5	Y3D1	Spot 2A	H	11747.5	77	113.8
SU2	Spot 1	H	14125	Y3D2	Spot 2A	H	11830	72	113.8
SU3	Spot 1	H	14186	Y3D3	Spot 2A	H	11891	34	113.8
SU4	Spot 1	H	14224	Y3D4	Spot 2A	H	11929	34	113.8
SU5	Spot 1	H	14205	Y3D5	Spot 2A	H	11910	72	113.8
SU6	Spot 1	H	14314	Y3D6	Spot 2A	H	11514	112	113.8
SU7	Spot 1	H	14438	Y3D7	Spot 2A	H	11638	112	113.8
SU1	Spot 1	H	14042.5	W3D1	Spot 3	V	11747.5	77	113.2
SU2	Spot 1	H	14125	W3D2	Spot 3	V	11830	72	113.2
SU3	Spot 1	H	14186	W3D3	Spot 3	V	11891	34	113.2
SU4	Spot 1	H	14224	W3D4	Spot 3	V	11929	34	113.2
SU5	Spot 1	H	14205	W3D5	Spot 3	V	11910	72	113.2
SU6	Spot 1	H	14314	W3D6	Spot 3	V	11514	112	113.2
SU7	Spot 1	H	14438	W3D7	Spot 3	V	11638	112	113.2
SU1	Spot 1	H	14042.5	X3D1	Spot 3X	H	11747.5	77	113.2
SU2	Spot 1	H	14125	X3D2	Spot 3X	H	11830	72	113.2
SU3	Spot 1	H	14186	X3D3	Spot 3X	H	11891	34	113.2
SU4	Spot 1	H	14224	X3D4	Spot 3X	H	11929	34	113.2
SU5	Spot 1	H	14205	X3D5	Spot 3X	H	11910	72	113.2
SU6	Spot 1	H	14314	X3D6	Spot 3X	H	11514	112	113.2
SU7	Spot 1	H	14438	X3D7	Spot 3X	H	11638	112	113.2
UU1	Spot 2	V	14042.5	S3D1	Spot 1	V	11747.5	77	116.7
UU2	Spot 2	V	14125	S3D2	Spot 1	V	11830	72	116.7
UU3	Spot 2	V	14186	S3D3	Spot 1	V	11891	34	116.7

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
UU4	Spot 2	V	14224	S3D4	Spot 1	V	11929	34	116.7
UU5	Spot 2	V	14205	S3D5	Spot 1	V	11910	72	116.7
UU6	Spot 2	V	14314	S3D6	Spot 1	V	11514	112	116.7
UU7	Spot 2	V	14438	S3D7	Spot 1	V	11638	112	116.7
UU1	Spot 2	V	14042.5	U3D1	Spot 2	H	11747.5	77	117.4
UU2	Spot 2	V	14125	U3D2	Spot 2	H	11830	72	117.4
UU3	Spot 2	V	14186	U3D3	Spot 2	H	11891	34	117.4
UU4	Spot 2	V	14224	U3D4	Spot 2	H	11929	34	117.4
UU5	Spot 2	V	14205	U3D5	Spot 2	H	11910	72	117.4
UU6	Spot 2	V	14314	U3D6	Spot 2	H	11514	112	117.4
UU7	Spot 2	V	14438	U3D7	Spot 2	H	11638	112	117.4
UU1	Spot 2	V	14042.5	Y3D1	Spot 2A	H	11747.5	77	117.3
UU2	Spot 2	V	14125	Y3D2	Spot 2A	H	11830	72	117.3
UU3	Spot 2	V	14186	Y3D3	Spot 2A	H	11891	34	117.3
UU4	Spot 2	V	14224	Y3D4	Spot 2A	H	11929	34	117.3
UU5	Spot 2	V	14205	Y3D5	Spot 2A	H	11910	72	117.3
UU6	Spot 2	V	14314	Y3D6	Spot 2A	H	11514	112	117.3
UU7	Spot 2	V	14438	Y3D7	Spot 2A	H	11638	112	117.3
UU1	Spot 2	V	14042.5	W3D1	Spot 3	V	11747.5	77	116.7
UU2	Spot 2	V	14125	W3D2	Spot 3	V	11830	72	116.7
UU3	Spot 2	V	14186	W3D3	Spot 3	V	11891	34	116.7
UU4	Spot 2	V	14224	W3D4	Spot 3	V	11929	34	116.7
UU5	Spot 2	V	14205	W3D5	Spot 3	V	11910	72	116.7
UU6	Spot 2	V	14314	W3D6	Spot 3	V	11514	112	116.7
UU7	Spot 2	V	14438	W3D7	Spot 3	V	11638	112	116.7
UU1	Spot 2	V	14042.5	X3D1	Spot 3X	H	11747.5	77	116.7
UU2	Spot 2	V	14125	X3D2	Spot 3X	H	11830	72	116.7
UU3	Spot 2	V	14186	X3D3	Spot 3X	H	11891	34	116.7
UU4	Spot 2	V	14224	X3D4	Spot 3X	H	11929	34	116.7
UU5	Spot 2	V	14205	X3D5	Spot 3X	H	11910	72	116.7
UU6	Spot 2	V	14314	X3D6	Spot 3X	H	11514	112	116.7
UU7	Spot 2	V	14438	X3D7	Spot 3X	H	11638	112	116.7
YU1	Spot 2A	V	14042.5	S3D1	Spot 1	V	11747.5	77	118.7
YU2	Spot 2A	V	14125	S3D2	Spot 1	V	11830	72	118.7
YU3	Spot 2A	V	14186	S3D3	Spot 1	V	11891	34	118.7
YU4	Spot 2A	V	14224	S3D4	Spot 1	V	11929	34	118.7
YU5	Spot 2A	V	14205	S3D5	Spot 1	V	11910	72	118.7
YU6	Spot 2A	V	14314	S3D6	Spot 1	V	11514	112	118.7
YU7	Spot 2A	V	14438	S3D7	Spot 1	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	U3D1	Spot 2	H	11747.5	77	119.4
YU2	Spot 2A	V	14125	U3D2	Spot 2	H	11830	72	119.4
YU3	Spot 2A	V	14186	U3D3	Spot 2	H	11891	34	119.4
YU4	Spot 2A	V	14224	U3D4	Spot 2	H	11929	34	119.4
YU5	Spot 2A	V	14205	U3D5	Spot 2	H	11910	72	119.4
YU6	Spot 2A	V	14314	U3D6	Spot 2	H	11514	112	119.4
YU7	Spot 2A	V	14438	U3D7	Spot 2	H	11638	112	119.4
YU1	Spot 2A	V	14042.5	Y3D1	Spot 2A	H	11747.5	77	119.3
YU2	Spot 2A	V	14125	Y3D2	Spot 2A	H	11830	72	119.3
YU3	Spot 2A	V	14186	Y3D3	Spot 2A	H	11891	34	119.3
YU4	Spot 2A	V	14224	Y3D4	Spot 2A	H	11929	34	119.3
YU5	Spot 2A	V	14205	Y3D5	Spot 2A	H	11910	72	119.3
YU6	Spot 2A	V	14314	Y3D6	Spot 2A	H	11514	112	119.3
YU7	Spot 2A	V	14438	Y3D7	Spot 2A	H	11638	112	119.3

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
YU1	Spot 2A	V	14042.5	W3D1	Spot 3	V	11747.5	77	118.7
YU2	Spot 2A	V	14125	W3D2	Spot 3	V	11830	72	118.7
YU3	Spot 2A	V	14186	W3D3	Spot 3	V	11891	34	118.7
YU4	Spot 2A	V	14224	W3D4	Spot 3	V	11929	34	118.7
YU5	Spot 2A	V	14205	W3D5	Spot 3	V	11910	72	118.7
YU6	Spot 2A	V	14314	W3D6	Spot 3	V	11514	112	118.7
YU7	Spot 2A	V	14438	W3D7	Spot 3	V	11638	112	118.7
YU1	Spot 2A	V	14042.5	X3D1	Spot 3X	H	11747.5	77	118.7
YU2	Spot 2A	V	14125	X3D2	Spot 3X	H	11830	72	118.7
YU3	Spot 2A	V	14186	X3D3	Spot 3X	H	11891	34	118.7
YU4	Spot 2A	V	14224	X3D4	Spot 3X	H	11929	34	118.7
YU5	Spot 2A	V	14205	X3D5	Spot 3X	H	11910	72	118.7
YU6	Spot 2A	V	14314	X3D6	Spot 3X	H	11514	112	118.7
YU7	Spot 2A	V	14438	X3D7	Spot 3X	H	11638	112	118.7
WU1	Spot 3	H	14042.5	S3D1	Spot 1	V	11747.5	77	113.5
WU2	Spot 3	H	14125	S3D2	Spot 1	V	11830	72	113.5
WU3	Spot 3	H	14186	S3D3	Spot 1	V	11891	34	113.5
WU4	Spot 3	H	14224	S3D4	Spot 1	V	11929	34	113.5
WU5	Spot 3	H	14205	S3D5	Spot 1	V	11910	72	113.5
WU6	Spot 3	H	14314	S3D6	Spot 1	V	11514	112	113.5
WU7	Spot 3	H	14438	S3D7	Spot 1	V	11638	112	113.5
WU1	Spot 3	H	14042.5	U3D1	Spot 2	H	11747.5	77	114.2
WU2	Spot 3	H	14125	U3D2	Spot 2	H	11830	72	114.2
WU3	Spot 3	H	14186	U3D3	Spot 2	H	11891	34	114.2
WU4	Spot 3	H	14224	U3D4	Spot 2	H	11929	34	114.2
WU5	Spot 3	H	14205	U3D5	Spot 2	H	11910	72	114.2
WU6	Spot 3	H	14314	U3D6	Spot 2	H	11514	112	114.2
WU7	Spot 3	H	14438	U3D7	Spot 2	H	11638	112	114.2
WU1	Spot 3	H	14042.5	Y3D1	Spot 2A	H	11747.5	77	114.1
WU2	Spot 3	H	14125	Y3D2	Spot 2A	H	11830	72	114.1
WU3	Spot 3	H	14186	Y3D3	Spot 2A	H	11891	34	114.1
WU4	Spot 3	H	14224	Y3D4	Spot 2A	H	11929	34	114.1
WU5	Spot 3	H	14205	Y3D5	Spot 2A	H	11910	72	114.1
WU6	Spot 3	H	14314	Y3D6	Spot 2A	H	11514	112	114.1
WU7	Spot 3	H	14438	Y3D7	Spot 2A	H	11638	112	114.1
WU1	Spot 3	H	14042.5	W3D1	Spot 3	V	11747.5	77	113.5
WU2	Spot 3	H	14125	W3D2	Spot 3	V	11830	72	113.5
WU3	Spot 3	H	14186	W3D3	Spot 3	V	11891	34	113.5
WU4	Spot 3	H	14224	W3D4	Spot 3	V	11929	34	113.5
WU5	Spot 3	H	14205	W3D5	Spot 3	V	11910	72	113.5
WU6	Spot 3	H	14314	W3D6	Spot 3	V	11514	112	113.5
WU7	Spot 3	H	14438	W3D7	Spot 3	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	S3D1	Spot 1	V	11747.5	77	113.5
XU2	Spot 3X	V	14125	S3D2	Spot 1	V	11830	72	113.5
XU3	Spot 3X	V	14186	S3D3	Spot 1	V	11891	34	113.5
XU4	Spot 3X	V	14224	S3D4	Spot 1	V	11929	34	113.5
XU5	Spot 3X	V	14205	S3D5	Spot 1	V	11910	72	113.5
XU6	Spot 3X	V	14314	S3D6	Spot 1	V	11514	112	113.5
XU7	Spot 3X	V	14438	S3D7	Spot 1	V	11638	112	113.5
XU1	Spot 3X	V	14042.5	U3D1	Spot 2	H	11747.5	77	114.2
XU2	Spot 3X	V	14125	U3D2	Spot 2	H	11830	72	114.2
XU3	Spot 3X	V	14186	U3D3	Spot 2	H	11891	34	114.2
XU4	Spot 3X	V	14224	U3D4	Spot 2	H	11929	34	114.2
XU5	Spot 3X	V	14205	U3D5	Spot 2	H	11910	72	114.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
XU6	Spot 3X	V	14314	U3D6	Spot 2	H	11514	112	114.2
XU7	Spot 3X	V	14438	U3D7	Spot 2	H	11638	112	114.2
XU1	Spot 3X	V	14042.5	Y3D1	Spot 2A	H	11747.5	77	114.1
XU2	Spot 3X	V	14125	Y3D2	Spot 2A	H	11830	72	114.1
XU3	Spot 3X	V	14186	Y3D3	Spot 2A	H	11891	34	114.1
XU4	Spot 3X	V	14224	Y3D4	Spot 2A	H	11929	34	114.1
XU5	Spot 3X	V	14205	Y3D5	Spot 2A	H	11910	72	114.1
XU6	Spot 3X	V	14314	Y3D6	Spot 2A	H	11514	112	114.1
XU7	Spot 3X	V	14438	Y3D7	Spot 2A	H	11638	112	114.1
XU1	Spot 3X	V	14042.5	X3D1	Spot 3X	H	11747.5	77	113.5
XU2	Spot 3X	V	14125	X3D2	Spot 3X	H	11830	72	113.5
XU3	Spot 3X	V	14186	X3D3	Spot 3X	H	11891	34	113.5
XU4	Spot 3X	V	14224	X3D4	Spot 3X	H	11929	34	113.5
XU5	Spot 3X	V	14205	X3D5	Spot 3X	H	11910	72	113.5
XU6	Spot 3X	V	14314	X3D6	Spot 3X	H	11514	112	113.5
XU7	Spot 3X	V	14438	X3D7	Spot 3X	H	11638	112	113.5
EU1	West Hemi	LHCP	5967.5	S1D1	Spot 1	V	10992.5	77	117.2
EU2	West Hemi	LHCP	6050	S1D2	Spot 1	V	11075	72	117.2
EU3	West Hemi	LHCP	6111	S1D3	Spot 1	V	11136	34	117.2
EU4	West Hemi	LHCP	6149	S1D4	Spot 1	V	11174	34	117.2
EU5	West Hemi	LHCP	6130	S1D5	Spot 1	V	11155	72	117.2
EU6	West Hemi	LHCP	6220	S1DC	Spot 1	V	11495	72	117.2
EU1	West Hemi	LHCP	5967.5	U1D1	Spot 2	H	10992.5	77	117.9
EU2	West Hemi	LHCP	6050	U1D2	Spot 2	H	11075	72	117.9
EU3	West Hemi	LHCP	6111	U1D3	Spot 2	H	11136	34	117.9
EU4	West Hemi	LHCP	6149	U1D4	Spot 2	H	11174	34	117.9
EU5	West Hemi	LHCP	6130	U1D5	Spot 2	H	11155	72	117.9
EU6	West Hemi	LHCP	6220	U1DC	Spot 2	H	11495	72	117.9
EU1	West Hemi	LHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	117.8
EU2	West Hemi	LHCP	6050	Y1D2	Spot 2A	H	11075	72	117.8
EU3	West Hemi	LHCP	6111	Y1D3	Spot 2A	H	11136	34	117.8
EU4	West Hemi	LHCP	6149	Y1D4	Spot 2A	H	11174	34	117.8
EU5	West Hemi	LHCP	6130	Y1D5	Spot 2A	H	11155	72	117.8
EU6	West Hemi	LHCP	6220	Y1DC	Spot 2A	H	11495	72	117.8
EU1	West Hemi	LHCP	5967.5	W1D1	Spot 3	V	10992.5	77	117.2
EU2	West Hemi	LHCP	6050	W1D2	Spot 3	V	11075	72	117.2
EU3	West Hemi	LHCP	6111	W1D3	Spot 3	V	11136	34	117.2
EU4	West Hemi	LHCP	6149	W1D4	Spot 3	V	11174	34	117.2
EU5	West Hemi	LHCP	6130	W1D5	Spot 3	V	11155	72	117.2
EU6	West Hemi	LHCP	6220	W1DC	Spot 3	V	11495	72	117.2
EU1	West Hemi	LHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	117.2
EU2	West Hemi	LHCP	6050	X1D2	Spot 3X	H	11075	72	117.2
EU3	West Hemi	LHCP	6111	X1D3	Spot 3X	H	11136	34	117.2
EU4	West Hemi	LHCP	6149	X1D4	Spot 3X	H	11174	34	117.2
EU5	West Hemi	LHCP	6130	X1D5	Spot 3X	H	11155	72	117.2
EU6	West Hemi	LHCP	6220	X1DC	Spot 3X	H	11495	72	117.2
FU1	East Hemi	LHCP	5967.5	S1D1	Spot 1	V	10992.5	77	118.9
FU2	East Hemi	LHCP	6050	S1D2	Spot 1	V	11075	72	118.9
FU3	East Hemi	LHCP	6111	S1D3	Spot 1	V	11136	34	118.9
FU4	East Hemi	LHCP	6149	S1D4	Spot 1	V	11174	34	118.9
FU5	East Hemi	LHCP	6130	S1D5	Spot 1	V	11155	72	118.9
FU6	East Hemi	LHCP	6220	S1DC	Spot 1	V	11495	72	118.9

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
FU1	East Hemi	LHCP	5967.5	U1D1	Spot 2	H	10992.5	77	119.6
FU2	East Hemi	LHCP	6050	U1D2	Spot 2	H	11075	72	119.6
FU3	East Hemi	LHCP	6111	U1D3	Spot 2	H	11136	34	119.6
FU4	East Hemi	LHCP	6149	U1D4	Spot 2	H	11174	34	119.6
FU5	East Hemi	LHCP	6130	U1D5	Spot 2	H	11155	72	119.6
FU6	East Hemi	LHCP	6220	U1DC	Spot 2	H	11495	72	119.6
FU1	East Hemi	LHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	119.5
FU2	East Hemi	LHCP	6050	Y1D2	Spot 2A	H	11075	72	119.5
FU3	East Hemi	LHCP	6111	Y1D3	Spot 2A	H	11136	34	119.5
FU4	East Hemi	LHCP	6149	Y1D4	Spot 2A	H	11174	34	119.5
FU5	East Hemi	LHCP	6130	Y1D5	Spot 2A	H	11155	72	119.5
FU6	East Hemi	LHCP	6220	Y1DC	Spot 2A	H	11495	72	119.5
FU1	East Hemi	LHCP	5967.5	W1D1	Spot 3	V	10992.5	77	118.9
FU2	East Hemi	LHCP	6050	W1D2	Spot 3	V	11075	72	118.9
FU3	East Hemi	LHCP	6111	W1D3	Spot 3	V	11136	34	118.9
FU4	East Hemi	LHCP	6149	W1D4	Spot 3	V	11174	34	118.9
FU5	East Hemi	LHCP	6130	W1D5	Spot 3	V	11155	72	118.9
FU6	East Hemi	LHCP	6220	W1DC	Spot 3	V	11495	72	118.9
FU1	East Hemi	LHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	118.9
FU2	East Hemi	LHCP	6050	X1D2	Spot 3X	H	11075	72	118.9
FU3	East Hemi	LHCP	6111	X1D3	Spot 3X	H	11136	34	118.9
FU4	East Hemi	LHCP	6149	X1D4	Spot 3X	H	11174	34	118.9
FU5	East Hemi	LHCP	6130	X1D5	Spot 3X	H	11155	72	118.9
FU6	East Hemi	LHCP	6220	X1DC	Spot 3X	H	11495	72	118.9
GU1	NW Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	116.0
GU2	NW Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	116.0
GU3	NW Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	116.0
GU4	NW Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	116.0
GU5	NW Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	116.0
GU6	NW Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	116.7
GU2	NW Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	116.7
GU3	NW Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	116.7
GU4	NW Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	116.7
GU5	NW Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	116.7
GU6	NW Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	116.7
GU1	NW Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	116.6
GU2	NW Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	116.6
GU3	NW Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	116.6
GU4	NW Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	116.6
GU5	NW Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	116.6
GU6	NW Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	116.6
GU1	NW Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	116.0
GU2	NW Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	116.0
GU3	NW Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	116.0
GU4	NW Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	116.0
GU5	NW Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	116.0
GU6	NW Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	116.0
GU2	NW Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	116.0
GU3	NW Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	116.0
GU4	NW Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	116.0
GU5	NW Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	116.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
GU6	NW Zone	RHCP	6220	X1DC	Spot 3X	H	11495	72	116.0
JU1	SE Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	116.9
JU2	SE Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	116.9
JU3	SE Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	116.9
JU4	SE Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	116.9
JU5	SE Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	116.9
JU6	SE Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	117.6
JU2	SE Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	117.6
JU3	SE Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	117.6
JU4	SE Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	117.6
JU5	SE Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	117.6
JU6	SE Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	117.6
JU1	SE Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	117.5
JU2	SE Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	117.5
JU3	SE Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	117.5
JU4	SE Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	117.5
JU5	SE Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	117.5
JU6	SE Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	117.5
JU1	SE Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	116.9
JU2	SE Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	116.9
JU3	SE Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	116.9
JU4	SE Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	116.9
JU5	SE Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	116.9
JU6	SE Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	116.9
JU2	SE Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	116.9
JU3	SE Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	116.9
JU4	SE Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	116.9
JU5	SE Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	116.9
JU6	SE Zone	RHCP	6220	X1DC	Spot 3X	H	11495	72	116.9
HU1	NE Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	114.3
HU2	NE Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	114.3
HU3	NE Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	114.3
HU4	NE Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	114.3
HU5	NE Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	114.3
HU6	NE Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	115.0
HU2	NE Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	115.0
HU3	NE Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	115.0
HU4	NE Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	115.0
HU5	NE Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	115.0
HU6	NE Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	115.0
HU1	NE Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	114.9
HU2	NE Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	114.9
HU3	NE Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	114.9
HU4	NE Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	114.9
HU5	NE Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	114.9
HU6	NE Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	114.9
HU1	NE Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	114.3
HU2	NE Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	114.3
HU3	NE Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	114.3

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
HU4	NE Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	114.3
HU5	NE Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	114.3
HU6	NE Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	114.3
HU2	NE Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	114.3
HU3	NE Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	114.3
HU4	NE Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	114.3
HU5	NE Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	114.3
HU6	NE Zone	RHCP	6220	X1DC	Spot 3X	H	11495	72	114.3
IU1	SW Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	113.5
IU2	SW Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	113.5
IU3	SW Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	113.5
IU4	SW Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	113.5
IU5	SW Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	113.5
IU6	SW Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	114.2
IU2	SW Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	114.2
IU3	SW Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	114.2
IU4	SW Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	114.2
IU5	SW Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	114.2
IU6	SW Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	114.2
IU1	SW Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	114.1
IU2	SW Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	114.1
IU3	SW Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	114.1
IU4	SW Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	114.1
IU5	SW Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	114.1
IU6	SW Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	114.1
IU1	SW Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	113.5
IU2	SW Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	113.5
IU3	SW Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	113.5
IU4	SW Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	113.5
IU5	SW Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	113.5
IU6	SW Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	113.5
IU2	SW Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	113.5
IU3	SW Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	113.5
IU4	SW Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	113.5
IU5	SW Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	113.5
IU6	SW Zone	RHCP	6220	X1DC	Spot 3X	H	11495	72	113.5
KU1	Combined NW+SE Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	119.3
KU2	Combined NW+SE Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	119.3
KU3	Combined NW+SE Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	119.3
KU4	Combined NW+SE Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	119.3
KU5	Combined NW+SE Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	119.3
KU6	Combined NW+SE Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	119.3
KU1	Combined NW+SE Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	119.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
KU2	Combined NW+SE Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	119.2
KU3	Combined NW+SE Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	119.2
KU4	Combined NW+SE Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	119.2
KU5	Combined NW+SE Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	119.2
KU6	Combined NW+SE Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	119.2
KU1	Combined NW+SE Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	X1DC	Spot 3X	H	11494	72	118.6
LU1	Combined NE+SW Zone	RHCP	5967.5	S1D1	Spot 1	V	10992.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	S1D2	Spot 1	V	11075	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	S1D3	Spot 1	V	11136	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	S1D4	Spot 1	V	11174	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	S1D5	Spot 1	V	11155	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	S1DC	Spot 1	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	U1D1	Spot 2	H	10992.5	77	117.3
LU2	Combined NE+SW Zone	RHCP	6050	U1D2	Spot 2	H	11075	72	117.3
LU3	Combined NE+SW Zone	RHCP	6111	U1D3	Spot 2	H	11136	34	117.3
LU4	Combined NE+SW Zone	RHCP	6149	U1D4	Spot 2	H	11174	34	117.3
LU5	Combined NE+SW Zone	RHCP	6130	U1D5	Spot 2	H	11155	72	117.3
LU6	Combined NE+SW Zone	RHCP	6220	U1DC	Spot 2	H	11495	72	117.3
LU1	Combined NE+SW Zone	RHCP	5967.5	Y1D1	Spot 2A	H	10992.5	77	117.2
LU2	Combined NE+SW Zone	RHCP	6050	Y1D2	Spot 2A	H	11075	72	117.2
LU3	Combined NE+SW Zone	RHCP	6111	Y1D3	Spot 2A	H	11136	34	117.2
LU4	Combined NE+SW Zone	RHCP	6149	Y1D4	Spot 2A	H	11174	34	117.2
LU5	Combined NE+SW Zone	RHCP	6130	Y1D5	Spot 2A	H	11155	72	117.2
LU6	Combined NE+SW Zone	RHCP	6220	Y1DC	Spot 2A	H	11495	72	117.2
LU1	Combined NE+SW Zone	RHCP	5967.5	W1D1	Spot 3	V	10992.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	W1D2	Spot 3	V	11075	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	W1D3	Spot 3	V	11136	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	W1D4	Spot 3	V	11174	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	W1D5	Spot 3	V	11155	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	W1DC	Spot 3	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	X1D1	Spot 3X	H	10992.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	X1D2	Spot 3X	H	11075	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	X1D3	Spot 3X	H	11136	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	X1D4	Spot 3X	H	11174	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	X1D5	Spot 3X	H	11155	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	X1DC	Spot 3X	H	11495	72	116.6
EU1	West Hemi	LHCP	5967.5	S2D1	Spot 1	V	12547.5	77	117.2
EU2	West Hemi	LHCP	6050	S2D2	Spot 1	V	12630	72	117.2
EU3	West Hemi	LHCP	6111	S2D3	Spot 1	V	12691	34	117.2
EU4	West Hemi	LHCP	6149	S2D4	Spot 1	V	12729	34	117.2
EU5	West Hemi	LHCP	6130	S2D5	Spot 1	V	12710	72	117.2
EU6	West Hemi	LHCP	6220	S2DC	Spot 1	V	11495	72	117.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
EU1	West Hemi	LHCP	5967.5	U2D1	Spot 2	H	12547.5	77	117.9
EU2	West Hemi	LHCP	6050	U2D2	Spot 2	H	12630	72	117.9
EU3	West Hemi	LHCP	6111	U2D3	Spot 2	H	12691	34	117.9
EU4	West Hemi	LHCP	6149	U2D4	Spot 2	H	12729	34	117.9
EU5	West Hemi	LHCP	6130	U2D5	Spot 2	H	12710	72	117.9
EU6	West Hemi	LHCP	6220	U2DC	Spot 2	H	11495	72	117.9
EU1	West Hemi	LHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	117.8
EU2	West Hemi	LHCP	6050	Y2D2	Spot 2A	H	12630	72	117.8
EU3	West Hemi	LHCP	6111	Y2D3	Spot 2A	H	12691	34	117.8
EU4	West Hemi	LHCP	6149	Y2D4	Spot 2A	H	12729	34	117.8
EU5	West Hemi	LHCP	6130	Y2D5	Spot 2A	H	12710	72	117.8
EU6	West Hemi	LHCP	6220	Y2DC	Spot 2A	H	11495	72	117.8
EU1	West Hemi	LHCP	5967.5	W2D1	Spot 3	V	12547.5	77	117.2
EU2	West Hemi	LHCP	6050	W2D2	Spot 3	V	12630	72	117.2
EU3	West Hemi	LHCP	6111	W2D3	Spot 3	V	12691	34	117.2
EU4	West Hemi	LHCP	6149	W2D4	Spot 3	V	12729	34	117.2
EU5	West Hemi	LHCP	6130	W2D5	Spot 3	V	12710	72	117.2
EU6	West Hemi	LHCP	6220	W2DC	Spot 3	V	11495	72	117.2
EU1	West Hemi	LHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	117.2
EU2	West Hemi	LHCP	6050	X2D2	Spot 3X	H	12630	72	117.2
EU3	West Hemi	LHCP	6111	X2D3	Spot 3X	H	12691	34	117.2
EU4	West Hemi	LHCP	6149	X2D4	Spot 3X	H	12729	34	117.2
EU5	West Hemi	LHCP	6130	X2D5	Spot 3X	H	12710	72	117.2
EU6	West Hemi	LHCP	6220	X2DC	Spot 3X	H	11495	72	117.2
FU1	East Hemi	LHCP	5967.5	S2D1	Spot 1	V	12547.5	77	118.9
FU2	East Hemi	LHCP	6050	S2D2	Spot 1	V	12630	72	118.9
FU3	East Hemi	LHCP	6111	S2D3	Spot 1	V	12691	34	118.9
FU4	East Hemi	LHCP	6149	S2D4	Spot 1	V	12729	34	118.9
FU5	East Hemi	LHCP	6130	S2D5	Spot 1	V	12710	72	118.9
FU6	East Hemi	LHCP	6220	S2DC	Spot 1	V	11495	72	118.9
FU1	East Hemi	LHCP	5967.5	U2D1	Spot 2	H	12547.5	77	119.6
FU2	East Hemi	LHCP	6050	U2D2	Spot 2	H	12630	72	119.6
FU3	East Hemi	LHCP	6111	U2D3	Spot 2	H	12691	34	119.6
FU4	East Hemi	LHCP	6149	U2D4	Spot 2	H	12729	34	119.6
FU5	East Hemi	LHCP	6130	U2D5	Spot 2	H	12710	72	119.6
FU6	East Hemi	LHCP	6220	U2DC	Spot 2	H	11495	72	119.6
FU1	East Hemi	LHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	119.5
FU2	East Hemi	LHCP	6050	Y2D2	Spot 2A	H	12630	72	119.5
FU3	East Hemi	LHCP	6111	Y2D3	Spot 2A	H	12691	34	119.5
FU4	East Hemi	LHCP	6149	Y2D4	Spot 2A	H	12729	34	119.5
FU5	East Hemi	LHCP	6130	Y2D5	Spot 2A	H	12710	72	119.5
FU6	East Hemi	LHCP	6220	Y2DC	Spot 2A	H	11495	72	119.5
FU1	East Hemi	LHCP	5967.5	W2D1	Spot 3	V	12547.5	77	118.9
FU2	East Hemi	LHCP	6050	W2D2	Spot 3	V	12630	72	118.9
FU3	East Hemi	LHCP	6111	W2D3	Spot 3	V	12691	34	118.9
FU4	East Hemi	LHCP	6149	W2D4	Spot 3	V	12729	34	118.9
FU5	East Hemi	LHCP	6130	W2D5	Spot 3	V	12710	72	118.9
FU6	East Hemi	LHCP	6220	W2DC	Spot 3	V	11495	72	118.9
FU1	East Hemi	LHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	118.9
FU2	East Hemi	LHCP	6050	X2D2	Spot 3X	H	12630	72	118.9
FU3	East Hemi	LHCP	6111	X2D3	Spot 3X	H	12691	34	118.9
FU4	East Hemi	LHCP	6149	X2D4	Spot 3X	H	12729	34	118.9

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
FU5	East Hemi	LHCP	6130	X2D5	Spot 3X	H	12710	72	118.9
FU6	East Hemi	LHCP	6220	X2DC	Spot 3X	H	11495	72	118.9
GU1	NW Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	116.0
GU2	NW Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	116.0
GU3	NW Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	116.0
GU4	NW Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	116.0
GU5	NW Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	116.0
GU6	NW Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	116.7
GU2	NW Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	116.7
GU3	NW Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	116.7
GU4	NW Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	116.7
GU5	NW Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	116.7
GU6	NW Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	116.7
GU1	NW Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	116.6
GU2	NW Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	116.6
GU3	NW Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	116.6
GU4	NW Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	116.6
GU5	NW Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	116.6
GU6	NW Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	116.6
GU1	NW Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	116.0
GU2	NW Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	116.0
GU3	NW Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	116.0
GU4	NW Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	116.0
GU5	NW Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	116.0
GU6	NW Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	116.0
GU2	NW Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	116.0
GU3	NW Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	116.0
GU4	NW Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	116.0
GU5	NW Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	116.0
GU6	NW Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	116.0
JU1	SE Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	116.9
JU2	SE Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	116.9
JU3	SE Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	116.9
JU4	SE Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	116.9
JU5	SE Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	116.9
JU6	SE Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	117.6
JU2	SE Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	117.6
JU3	SE Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	117.6
JU4	SE Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	117.6
JU5	SE Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	117.6
JU6	SE Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	117.6
JU1	SE Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	117.5
JU2	SE Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	117.5
JU3	SE Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	117.5
JU4	SE Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	117.5
JU5	SE Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	117.5
JU6	SE Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	117.5
JU1	SE Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	116.9
JU2	SE Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	116.9

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
JU3	SE Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	116.9
JU4	SE Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	116.9
JU5	SE Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	116.9
JU6	SE Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	116.9
JU2	SE Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	116.9
JU3	SE Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	116.9
JU4	SE Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	116.9
JU5	SE Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	116.9
JU6	SE Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	116.9
HU1	NE Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	114.3
HU2	NE Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	114.3
HU3	NE Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	114.3
HU4	NE Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	114.3
HU5	NE Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	114.3
HU6	NE Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	115.0
HU2	NE Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	115.0
HU3	NE Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	115.0
HU4	NE Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	115.0
HU5	NE Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	115.0
HU6	NE Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	115.0
HU1	NE Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	114.9
HU2	NE Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	114.9
HU3	NE Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	114.9
HU4	NE Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	114.9
HU5	NE Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	114.9
HU6	NE Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	114.9
HU1	NE Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	114.3
HU2	NE Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	114.3
HU3	NE Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	114.3
HU4	NE Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	114.3
HU5	NE Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	114.3
HU6	NE Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	114.3
HU2	NE Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	114.3
HU3	NE Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	114.3
HU4	NE Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	114.3
HU5	NE Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	114.3
HU6	NE Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	114.3
IU1	SW Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	113.5
IU2	SW Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	113.5
IU3	SW Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	113.5
IU4	SW Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	113.5
IU5	SW Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	113.5
IU6	SW Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	114.2
IU2	SW Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	114.2
IU3	SW Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	114.2
IU4	SW Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	114.2
IU5	SW Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	114.2
IU6	SW Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	114.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
IU1	SW Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	114.1
IU2	SW Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	114.1
IU3	SW Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	114.1
IU4	SW Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	114.1
IU5	SW Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	114.1
IU6	SW Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	114.1
IU1	SW Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	113.5
IU2	SW Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	113.5
IU3	SW Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	113.5
IU4	SW Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	113.5
IU5	SW Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	113.5
IU6	SW Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	113.5
IU2	SW Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	113.5
IU3	SW Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	113.5
IU4	SW Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	113.5
IU5	SW Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	113.5
IU6	SW Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	113.5
KU1	Combined NW+SE Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	119.3
KU2	Combined NW+SE Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	119.3
KU3	Combined NW+SE Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	119.3
KU4	Combined NW+SE Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	119.3
KU5	Combined NW+SE Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	119.3
KU6	Combined NW+SE Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	119.3
KU1	Combined NW+SE Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	119.2
KU2	Combined NW+SE Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	119.2
KU3	Combined NW+SE Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	119.2
KU4	Combined NW+SE Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	119.2
KU5	Combined NW+SE Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	119.2
KU6	Combined NW+SE Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	119.2
KU1	Combined NW+SE Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	118.6
LU1	Combined NE+SW Zone	RHCP	5967.5	S2D1	Spot 1	V	12547.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	S2D2	Spot 1	V	12630	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	S2D3	Spot 1	V	12691	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	S2D4	Spot 1	V	12729	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	S2D5	Spot 1	V	12710	72	116.6

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
LU6	Combined NE+SW Zone	RHCP	6220	S2DC	Spot 1	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	U2D1	Spot 2	H	12547.5	77	117.3
LU2	Combined NE+SW Zone	RHCP	6050	U2D2	Spot 2	H	12630	72	117.3
LU3	Combined NE+SW Zone	RHCP	6111	U2D3	Spot 2	H	12691	34	117.3
LU4	Combined NE+SW Zone	RHCP	6149	U2D4	Spot 2	H	12729	34	117.3
LU5	Combined NE+SW Zone	RHCP	6130	U2D5	Spot 2	H	12710	72	117.3
LU6	Combined NE+SW Zone	RHCP	6220	U2DC	Spot 2	H	11495	72	117.3
LU1	Combined NE+SW Zone	RHCP	5967.5	Y2D1	Spot 2A	H	12547.5	77	117.2
LU2	Combined NE+SW Zone	RHCP	6050	Y2D2	Spot 2A	H	12630	72	117.2
LU3	Combined NE+SW Zone	RHCP	6111	Y2D3	Spot 2A	H	12691	34	117.2
LU4	Combined NE+SW Zone	RHCP	6149	Y2D4	Spot 2A	H	12729	34	117.2
LU5	Combined NE+SW Zone	RHCP	6130	Y2D5	Spot 2A	H	12710	72	117.2
LU6	Combined NE+SW Zone	RHCP	6220	Y2DC	Spot 2A	H	11495	72	117.2
LU1	Combined NE+SW Zone	RHCP	5967.5	W2D1	Spot 3	V	12547.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	W2D2	Spot 3	V	12630	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	W2D3	Spot 3	V	12691	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	W2D4	Spot 3	V	12729	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	W2D5	Spot 3	V	12710	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	W2DC	Spot 3	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	X2D1	Spot 3X	H	12547.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	X2D2	Spot 3X	H	12630	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	X2D3	Spot 3X	H	12691	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	X2D4	Spot 3X	H	12729	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	X2D5	Spot 3X	H	12710	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	X2DC	Spot 3X	H	11495	72	116.6
EU1	West Hemi	LHCP	5967.5	S3D1	Spot 1	V	11747.5	77	117.2
EU2	West Hemi	LHCP	6050	S3D2	Spot 1	V	11830	72	117.2
EU3	West Hemi	LHCP	6111	S3D3	Spot 1	V	11891	34	117.2
EU4	West Hemi	LHCP	6149	S3D4	Spot 1	V	11929	34	117.2
EU5	West Hemi	LHCP	6130	S3D5	Spot 1	V	11910	72	117.2
EU6	West Hemi	LHCP	6220	S3DC	Spot 1	V	11495	72	117.2
EU1	West Hemi	LHCP	5967.5	U3D1	Spot 2	H	11747.5	77	117.9
EU2	West Hemi	LHCP	6050	U3D2	Spot 2	H	11830	72	117.9
EU3	West Hemi	LHCP	6111	U3D3	Spot 2	H	11891	34	117.9
EU4	West Hemi	LHCP	6149	U3D4	Spot 2	H	11929	34	117.9
EU5	West Hemi	LHCP	6130	U3D5	Spot 2	H	11910	72	117.9
EU6	West Hemi	LHCP	6220	U3DC	Spot 2	H	11495	72	117.9
EU1	West Hemi	LHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	117.8
EU2	West Hemi	LHCP	6050	Y3D2	Spot 2A	H	11830	72	117.8
EU3	West Hemi	LHCP	6111	Y3D3	Spot 2A	H	11891	34	117.8
EU4	West Hemi	LHCP	6149	Y3D4	Spot 2A	H	11929	34	117.8
EU5	West Hemi	LHCP	6130	Y3D5	Spot 2A	H	11910	72	117.8
EU6	West Hemi	LHCP	6220	Y3DC	Spot 2A	H	11495	72	117.8
EU1	West Hemi	LHCP	5967.5	W3D1	Spot 3	V	11747.5	77	117.2
EU2	West Hemi	LHCP	6050	W3D2	Spot 3	V	11830	72	117.2
EU3	West Hemi	LHCP	6111	W3D3	Spot 3	V	11891	34	117.2
EU4	West Hemi	LHCP	6149	W3D4	Spot 3	V	11929	34	117.2
EU5	West Hemi	LHCP	6130	W3D5	Spot 3	V	11910	72	117.2
EU6	West Hemi	LHCP	6220	W3DC	Spot 3	V	11495	72	117.2
EU1	West Hemi	LHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	117.2
EU2	West Hemi	LHCP	6050	X3D2	Spot 3X	H	11830	72	117.2
EU3	West Hemi	LHCP	6111	X3D3	Spot 3X	H	11891	34	117.2

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
EU4	West Hemi	LHCP	6149	X3D4	Spot 3X	H	11929	34	117.2
EU5	West Hemi	LHCP	6130	X3D5	Spot 3X	H	11910	72	117.2
EU6	West Hemi	LHCP	6220	X3DC	Spot 3X	H	11495	72	117.2
FU1	East Hemi	LHCP	5967.5	S3D1	Spot 1	V	11747.5	77	118.9
FU2	East Hemi	LHCP	6050	S3D2	Spot 1	V	11830	72	118.9
FU3	East Hemi	LHCP	6111	S3D3	Spot 1	V	11891	34	118.9
FU4	East Hemi	LHCP	6149	S3D4	Spot 1	V	11929	34	118.9
FU5	East Hemi	LHCP	6130	S3D5	Spot 1	V	11910	72	118.9
FU6	East Hemi	LHCP	6220	S3DC	Spot 1	V	11495	72	118.9
FU1	East Hemi	LHCP	5967.5	U3D1	Spot 2	H	11747.5	77	119.6
FU2	East Hemi	LHCP	6050	U3D2	Spot 2	H	11830	72	119.6
FU3	East Hemi	LHCP	6111	U3D3	Spot 2	H	11891	34	119.6
FU4	East Hemi	LHCP	6149	U3D4	Spot 2	H	11929	34	119.6
FU5	East Hemi	LHCP	6130	U3D5	Spot 2	H	11910	72	119.6
FU6	East Hemi	LHCP	6220	U3DC	Spot 2	H	11495	72	119.6
FU1	East Hemi	LHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	119.5
FU2	East Hemi	LHCP	6050	Y3D2	Spot 2A	H	11830	72	119.5
FU3	East Hemi	LHCP	6111	Y3D3	Spot 2A	H	11891	34	119.5
FU4	East Hemi	LHCP	6149	Y3D4	Spot 2A	H	11929	34	119.5
FU5	East Hemi	LHCP	6130	Y3D5	Spot 2A	H	11910	72	119.5
FU6	East Hemi	LHCP	6220	Y3DC	Spot 2A	H	11495	72	119.5
FU1	East Hemi	LHCP	5967.5	W3D1	Spot 3	V	11747.5	77	118.9
FU2	East Hemi	LHCP	6050	W3D2	Spot 3	V	11830	72	118.9
FU3	East Hemi	LHCP	6111	W3D3	Spot 3	V	11891	34	118.9
FU4	East Hemi	LHCP	6149	W3D4	Spot 3	V	11929	34	118.9
FU5	East Hemi	LHCP	6130	W3D5	Spot 3	V	11910	72	118.9
FU6	East Hemi	LHCP	6220	W3DC	Spot 3	V	11495	72	118.9
FU1	East Hemi	LHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	118.9
FU2	East Hemi	LHCP	6050	X3D2	Spot 3X	H	11830	72	118.9
FU3	East Hemi	LHCP	6111	X3D3	Spot 3X	H	11891	34	118.9
FU4	East Hemi	LHCP	6149	X3D4	Spot 3X	H	11929	34	118.9
FU5	East Hemi	LHCP	6130	X3D5	Spot 3X	H	11910	72	118.9
FU6	East Hemi	LHCP	6220	X3DC	Spot 3X	H	11495	72	118.9
GU1	NW Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	116.0
GU2	NW Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	116.0
GU3	NW Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	116.0
GU4	NW Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	116.0
GU5	NW Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	116.0
GU6	NW Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	116.7
GU2	NW Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	116.7
GU3	NW Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	116.7
GU4	NW Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	116.7
GU5	NW Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	116.7
GU6	NW Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	116.7
GU1	NW Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	116.6
GU2	NW Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	116.6
GU3	NW Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	116.6
GU4	NW Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	116.6
GU5	NW Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	116.6
GU6	NW Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	116.6
GU1	NW Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	116.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
GU2	NW Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	116.0
GU3	NW Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	116.0
GU4	NW Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	116.0
GU5	NW Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	116.0
GU6	NW Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	116.0
GU1	NW Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	116.0
GU2	NW Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	116.0
GU3	NW Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	116.0
GU4	NW Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	116.0
GU5	NW Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	116.0
GU6	NW Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	116.0
JU1	SE Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	116.9
JU2	SE Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	116.9
JU3	SE Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	116.9
JU4	SE Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	116.9
JU5	SE Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	116.9
JU6	SE Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	117.6
JU2	SE Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	117.6
JU3	SE Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	117.6
JU4	SE Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	117.6
JU5	SE Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	117.6
JU6	SE Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	117.6
JU1	SE Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	117.5
JU2	SE Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	117.5
JU3	SE Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	117.5
JU4	SE Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	117.5
JU5	SE Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	117.5
JU6	SE Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	117.5
JU1	SE Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	116.9
JU2	SE Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	116.9
JU3	SE Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	116.9
JU4	SE Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	116.9
JU5	SE Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	116.9
JU6	SE Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	116.9
JU1	SE Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	116.9
JU2	SE Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	116.9
JU3	SE Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	116.9
JU4	SE Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	116.9
JU5	SE Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	116.9
JU6	SE Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	116.9
HU1	NE Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	114.3
HU2	NE Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	114.3
HU3	NE Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	114.3
HU4	NE Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	114.3
HU5	NE Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	114.3
HU6	NE Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	115.0
HU2	NE Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	115.0
HU3	NE Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	115.0
HU4	NE Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	115.0
HU5	NE Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	115.0
HU6	NE Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	115.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
HU1	NE Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	114.9
HU2	NE Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	114.9
HU3	NE Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	114.9
HU4	NE Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	114.9
HU5	NE Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	114.9
HU6	NE Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	114.9
HU1	NE Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	114.3
HU2	NE Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	114.3
HU3	NE Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	114.3
HU4	NE Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	114.3
HU5	NE Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	114.3
HU6	NE Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	114.3
HU1	NE Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	114.3
HU2	NE Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	114.3
HU3	NE Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	114.3
HU4	NE Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	114.3
HU5	NE Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	114.3
HU6	NE Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	114.3
IU1	SW Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	113.5
IU2	SW Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	113.5
IU3	SW Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	113.5
IU4	SW Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	113.5
IU5	SW Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	113.5
IU6	SW Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	114.2
IU2	SW Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	114.2
IU3	SW Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	114.2
IU4	SW Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	114.2
IU5	SW Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	114.2
IU6	SW Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	114.2
IU1	SW Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	114.1
IU2	SW Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	114.1
IU3	SW Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	114.1
IU4	SW Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	114.1
IU5	SW Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	114.1
IU6	SW Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	114.1
IU1	SW Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	113.5
IU2	SW Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	113.5
IU3	SW Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	113.5
IU4	SW Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	113.5
IU5	SW Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	113.5
IU6	SW Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	113.5
IU1	SW Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	113.5
IU2	SW Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	113.5
IU3	SW Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	113.5
IU4	SW Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	113.5
IU5	SW Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	113.5
IU6	SW Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	113.5
KU1	Combined NW+SE Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	118.6

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
KU5	Combined NW+SE Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	119.3
KU2	Combined NW+SE Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	119.3
KU3	Combined NW+SE Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	119.3
KU4	Combined NW+SE Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	119.3
KU5	Combined NW+SE Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	119.3
KU6	Combined NW+SE Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	119.3
KU1	Combined NW+SE Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	119.2
KU2	Combined NW+SE Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	119.2
KU3	Combined NW+SE Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	119.2
KU4	Combined NW+SE Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	119.2
KU5	Combined NW+SE Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	119.2
KU6	Combined NW+SE Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	119.2
KU1	Combined NW+SE Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	118.6
KU1	Combined NW+SE Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	118.6
KU2	Combined NW+SE Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	118.6
KU3	Combined NW+SE Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	118.6
KU4	Combined NW+SE Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	118.6
KU5	Combined NW+SE Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	118.6
KU6	Combined NW+SE Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	118.6
LU1	Combined NE+SW Zone	RHCP	5967.5	S3D1	Spot 1	V	11747.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	S3D2	Spot 1	V	11830	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	S3D3	Spot 1	V	11891	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	S3D4	Spot 1	V	11929	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	S3D5	Spot 1	V	11910	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	S3DC	Spot 1	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	U3D1	Spot 2	H	11747.5	77	117.3
LU2	Combined NE+SW Zone	RHCP	6050	U3D2	Spot 2	H	11830	72	117.3
LU3	Combined NE+SW Zone	RHCP	6111	U3D3	Spot 2	H	11891	34	117.3
LU4	Combined NE+SW Zone	RHCP	6149	U3D4	Spot 2	H	11929	34	117.3
LU5	Combined NE+SW Zone	RHCP	6130	U3D5	Spot 2	H	11910	72	117.3
LU6	Combined NE+SW Zone	RHCP	6220	U3DC	Spot 2	H	11495	72	117.3
LU1	Combined NE+SW Zone	RHCP	5967.5	Y3D1	Spot 2A	H	11747.5	77	117.2
LU2	Combined NE+SW Zone	RHCP	6050	Y3D2	Spot 2A	H	11830	72	117.2
LU3	Combined NE+SW Zone	RHCP	6111	Y3D3	Spot 2A	H	11891	34	117.2
LU4	Combined NE+SW Zone	RHCP	6149	Y3D4	Spot 2A	H	11929	34	117.2
LU5	Combined NE+SW Zone	RHCP	6130	Y3D5	Spot 2A	H	11910	72	117.2
LU6	Combined NE+SW Zone	RHCP	6220	Y3DC	Spot 2A	H	11495	72	117.2
LU1	Combined NE+SW Zone	RHCP	5967.5	W3D1	Spot 3	V	11747.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	W3D2	Spot 3	V	11830	72	116.6
LU3	Combined NE+SW Zone	RHCP	6111	W3D3	Spot 3	V	11891	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	W3D4	Spot 3	V	11929	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	W3D5	Spot 3	V	11910	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	W3DC	Spot 3	V	11495	72	116.6
LU1	Combined NE+SW Zone	RHCP	5967.5	X3D1	Spot 3X	H	11747.5	77	116.6
LU2	Combined NE+SW Zone	RHCP	6050	X3D2	Spot 3X	H	11830	72	116.6

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
LU3	Combined NE+SW Zone	RHCP	6111	X3D3	Spot 3X	H	11891	34	116.6
LU4	Combined NE+SW Zone	RHCP	6149	X3D4	Spot 3X	H	11929	34	116.6
LU5	Combined NE+SW Zone	RHCP	6130	X3D5	Spot 3X	H	11910	72	116.6
LU6	Combined NE+SW Zone	RHCP	6220	X3DC	Spot 3X	H	11495	72	116.6
SU1	Spot 1	H	14042.5	ED1	West Hemi	RHCP	3742.5	77	110.1
SU2	Spot 1	H	14125	ED2	West Hemi	RHCP	3825	72	110.1
SU3	Spot 1	H	14186	ED3	West Hemi	RHCP	3886	34	110.1
SU4	Spot 1	H	14224	ED4	West Hemi	RHCP	3924	34	110.1
SU5	Spot 1	H	14205	ED5	West Hemi	RHCP	3905	72	110.1
SUC	Spot 1	H	14295	ED6	West Hemi	RHCP	3995	72	110.1
SU1	Spot 1	H	14042.5	FD1	East Hemi	RHCP	3742.5	77	112.3
SU2	Spot 1	H	14125	FD2	East Hemi	RHCP	3825	72	112.3
SU3	Spot 1	H	14186	FD3	East Hemi	RHCP	3886	34	112.3
SU4	Spot 1	H	14224	FD4	East Hemi	RHCP	3924	34	112.3
SU5	Spot 1	H	14205	FD5	East Hemi	RHCP	3905	72	112.3
SUC	Spot 1	H	14295	FD6	East Hemi	RHCP	3995	72	112.3
SU1	Spot 1	H	14042.5	GD1	NW Zone	LHCP	3742.5	77	109.7
SU2	Spot 1	H	14125	GD2	NW Zone	LHCP	3825	72	109.7
SU3	Spot 1	H	14186	GD3	NW Zone	LHCP	3886	34	109.7
SU4	Spot 1	H	14224	GD4	NW Zone	LHCP	3924	34	109.7
SU5	Spot 1	H	14205	GD5	NW Zone	LHCP	3905	72	109.7
SUC	Spot 1	H	14295	GD6	NW Zone	LHCP	3995	72	109.7
SU1	Spot 1	H	14042.5	JD1	SE Zone	LHCP	3742.5	77	109.0
SU2	Spot 1	H	14125	JD2	SE Zone	LHCP	3825	72	109.0
SU3	Spot 1	H	14186	JD3	SE Zone	LHCP	3886	34	109.0
SU4	Spot 1	H	14224	JD4	SE Zone	LHCP	3924	34	109.0
SU5	Spot 1	H	14205	JD5	SE Zone	LHCP	3905	72	109.0
SUC	Spot 1	H	14295	JD6	SE Zone	LHCP	3995	72	109.0
SU1	Spot 1	H	14042.5	HD1	NE Zone	LHCP	3742.5	77	107.5
SU2	Spot 1	H	14125	HD2	NE Zone	LHCP	3825	72	107.5
SU3	Spot 1	H	14186	HD3	NE Zone	LHCP	3886	34	107.5
SU4	Spot 1	H	14224	HD4	NE Zone	LHCP	3924	34	107.5
SU5	Spot 1	H	14205	HD5	NE Zone	LHCP	3905	72	107.5
SUC	Spot 1	H	14295	HD6	NE Zone	LHCP	3995	72	107.5
SU1	Spot 1	H	14042.5	ID1	SW Zone	LHCP	3742.5	77	107.0
SU2	Spot 1	H	14125	ID2	SW Zone	LHCP	3825	72	107.0
SU3	Spot 1	H	14186	ID3	SW Zone	LHCP	3886	34	107.0
SU4	Spot 1	H	14224	ID4	SW Zone	LHCP	3924	34	107.0
SU5	Spot 1	H	14205	ID5	SW Zone	LHCP	3905	72	107.0
SUC	Spot 1	H	14295	ID6	SW Zone	LHCP	3995	72	107.0
UU1	Spot 2	V	14042.5	ED1	West Hemi	RHCP	3742.5	77	113.6
UU2	Spot 2	V	14125	ED2	West Hemi	RHCP	3825	72	113.6
UU3	Spot 2	V	14186	ED3	West Hemi	RHCP	3886	34	113.6
UU4	Spot 2	V	14224	ED4	West Hemi	RHCP	3924	34	113.6
UU5	Spot 2	V	14205	ED5	West Hemi	RHCP	3905	72	113.6
UUC	Spot 2	V	14295	ED6	West Hemi	RHCP	3995	72	113.6
UU1	Spot 2	V	14042.5	FD1	East Hemi	RHCP	3742.5	77	115.8
UU2	Spot 2	V	14125	FD2	East Hemi	RHCP	3825	72	115.8
UU3	Spot 2	V	14186	FD3	East Hemi	RHCP	3886	34	115.8
UU4	Spot 2	V	14224	FD4	East Hemi	RHCP	3924	34	115.8
UU5	Spot 2	V	14205	FD5	East Hemi	RHCP	3905	72	115.8
UUC	Spot 2	V	14295	FD6	East Hemi	RHCP	3995	72	115.8

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
UU1	Spot 2	V	14042.5	GD1	NW Zone	LHCP	3742.5	77	113.2
UU2	Spot 2	V	14125	GD2	NW Zone	LHCP	3825	72	113.2
UU3	Spot 2	V	14186	GD3	NW Zone	LHCP	3886	34	113.2
UU4	Spot 2	V	14224	GD4	NW Zone	LHCP	3924	34	113.2
UU5	Spot 2	V	14205	GD5	NW Zone	LHCP	3905	72	113.2
UUC	Spot 2	V	14295	GD6	NW Zone	LHCP	3995	72	113.2
UU1	Spot 2	V	14042.5	JD1	SE Zone	LHCP	3742.5	77	112.5
UU2	Spot 2	V	14125	JD2	SE Zone	LHCP	3825	72	112.5
UU3	Spot 2	V	14186	JD3	SE Zone	LHCP	3886	34	112.5
UU4	Spot 2	V	14224	JD4	SE Zone	LHCP	3924	34	112.5
UU5	Spot 2	V	14205	JD5	SE Zone	LHCP	3905	72	112.5
UUC	Spot 2	V	14295	JD6	SE Zone	LHCP	3995	72	112.5
UU1	Spot 2	V	14042.5	HD1	NE Zone	LHCP	3742.5	77	111.0
UU2	Spot 2	V	14125	HD2	NE Zone	LHCP	3825	72	111.0
UU3	Spot 2	V	14186	HD3	NE Zone	LHCP	3886	34	111.0
UU4	Spot 2	V	14224	HD4	NE Zone	LHCP	3924	34	111.0
UU5	Spot 2	V	14205	HD5	NE Zone	LHCP	3905	72	111.0
UUC	Spot 2	V	14295	HD6	NE Zone	LHCP	3995	72	111.0
UU1	Spot 2	V	14042.5	ID1	SW Zone	LHCP	3742.5	77	110.5
UU2	Spot 2	V	14125	ID2	SW Zone	LHCP	3825	72	110.5
UU3	Spot 2	V	14186	ID3	SW Zone	LHCP	3886	34	110.5
UU4	Spot 2	V	14224	ID4	SW Zone	LHCP	3924	34	110.5
UU5	Spot 2	V	14205	ID5	SW Zone	LHCP	3905	72	110.5
UUC	Spot 2	V	14295	ID6	SW Zone	LHCP	3995	72	110.5
YU1	Spot 2A	V	14042.5	ED1	West Hemi	RHCP	3742.5	77	115.6
YU2	Spot 2A	V	14125	ED2	West Hemi	RHCP	3825	72	115.6
YU3	Spot 2A	V	14186	ED3	West Hemi	RHCP	3886	34	115.6
YU4	Spot 2A	V	14224	ED4	West Hemi	RHCP	3924	34	115.6
YU5	Spot 2A	V	14205	ED5	West Hemi	RHCP	3905	72	115.6
YUC	Spot 2A	V	14295	ED6	West Hemi	RHCP	3995	72	115.6
YU1	Spot 2A	V	14042.5	FD1	East Hemi	RHCP	3742.5	77	117.8
YU2	Spot 2A	V	14125	FD2	East Hemi	RHCP	3825	72	117.8
YU3	Spot 2A	V	14186	FD3	East Hemi	RHCP	3886	34	117.8
YU4	Spot 2A	V	14224	FD4	East Hemi	RHCP	3924	34	117.8
YU5	Spot 2A	V	14205	FD5	East Hemi	RHCP	3905	72	117.8
YUC	Spot 2A	V	14295	FD6	East Hemi	RHCP	3995	72	117.8
YU1	Spot 2A	V	14042.5	GD1	NW Zone	LHCP	3742.5	77	115.2
YU2	Spot 2A	V	14125	GD2	NW Zone	LHCP	3825	72	115.2
YU3	Spot 2A	V	14186	GD3	NW Zone	LHCP	3886	34	115.2
YU4	Spot 2A	V	14224	GD4	NW Zone	LHCP	3924	34	115.2
YU5	Spot 2A	V	14205	GD5	NW Zone	LHCP	3905	72	115.2
YUC	Spot 2A	V	14295	GD6	NW Zone	LHCP	3995	72	115.2
YU1	Spot 2A	V	14042.5	JD1	SE Zone	LHCP	3742.5	77	115.1
YU2	Spot 2A	V	14125	JD2	SE Zone	LHCP	3825	72	115.1
YU3	Spot 2A	V	14186	JD3	SE Zone	LHCP	3886	34	115.1
YU4	Spot 2A	V	14224	JD4	SE Zone	LHCP	3924	34	115.1
YU5	Spot 2A	V	14205	JD5	SE Zone	LHCP	3905	72	115.1
YUC	Spot 2A	V	14295	JD6	SE Zone	LHCP	3995	72	115.1
YU1	Spot 2A	V	14042.5	HD1	NE Zone	LHCP	3742.5	77	113.0
YU2	Spot 2A	V	14125	HD2	NE Zone	LHCP	3825	72	113.0
YU3	Spot 2A	V	14186	HD3	NE Zone	LHCP	3886	34	113.0
YU4	Spot 2A	V	14224	HD4	NE Zone	LHCP	3924	34	113.0
YU5	Spot 2A	V	14205	HD5	NE Zone	LHCP	3905	72	113.0

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
YUC	Spot 2A	V	14295	HD6	NE Zone	LHCP	3995	72	113.0
YU1	Spot 2A	V	14042.5	ID1	SW Zone	LHCP	3742.5	77	112.5
YU2	Spot 2A	V	14125	ID2	SW Zone	LHCP	3825	72	112.5
YU3	Spot 2A	V	14186	ID3	SW Zone	LHCP	3886	34	112.5
YU4	Spot 2A	V	14224	ID4	SW Zone	LHCP	3924	34	112.5
YU5	Spot 2A	V	14205	ID5	SW Zone	LHCP	3905	72	112.5
YUC	Spot 2A	V	14295	ID6	SW Zone	LHCP	3995	72	112.5
WU1	Spot 3	H	14042.5	ED1	West Hemi	RHCP	3742.5	77	110.4
WU2	Spot 3	H	14125	ED2	West Hemi	RHCP	3825	72	110.4
WU3	Spot 3	H	14186	ED3	West Hemi	RHCP	3886	34	110.4
WU4	Spot 3	H	14224	ED4	West Hemi	RHCP	3924	34	110.4
WU5	Spot 3	H	14205	ED5	West Hemi	RHCP	3905	72	110.4
WUC	Spot 3	H	14295	ED6	West Hemi	RHCP	3995	72	110.4
WU1	Spot 3	H	14042.5	FD1	East Hemi	RHCP	3742.5	77	112.6
WU2	Spot 3	H	14125	FD2	East Hemi	RHCP	3825	72	112.6
WU3	Spot 3	H	14186	FD3	East Hemi	RHCP	3886	34	112.6
WU4	Spot 3	H	14224	FD4	East Hemi	RHCP	3924	34	112.6
WU5	Spot 3	H	14205	FD5	East Hemi	RHCP	3905	72	112.6
WUC	Spot 3	H	14295	FD6	East Hemi	RHCP	3995	72	112.6
WU1	Spot 3	H	14042.5	GD1	NW Zone	LHCP	3742.5	77	110.0
WU2	Spot 3	H	14125	GD2	NW Zone	LHCP	3825	72	110.0
WU3	Spot 3	H	14186	GD3	NW Zone	LHCP	3886	34	110.0
WU4	Spot 3	H	14224	GD4	NW Zone	LHCP	3924	34	110.0
WU5	Spot 3	H	14205	GD5	NW Zone	LHCP	3905	72	110.0
WUC	Spot 3	H	14295	GD6	NW Zone	LHCP	3995	72	110.0
WU1	Spot 3	H	14042.5	JD1	SE Zone	LHCP	3742.5	77	109.3
WU2	Spot 3	H	14125	JD2	SE Zone	LHCP	3825	72	109.3
WU3	Spot 3	H	14186	JD3	SE Zone	LHCP	3886	34	109.3
WU4	Spot 3	H	14224	JD4	SE Zone	LHCP	3924	34	109.3
WU5	Spot 3	H	14205	JD5	SE Zone	LHCP	3905	72	109.3
WUC	Spot 3	H	14295	JD6	SE Zone	LHCP	3995	72	109.3
WU1	Spot 3	H	14042.5	HD1	NE Zone	LHCP	3742.5	77	107.8
WU2	Spot 3	H	14125	HD2	NE Zone	LHCP	3825	72	107.8
WU3	Spot 3	H	14186	HD3	NE Zone	LHCP	3886	34	107.8
WU4	Spot 3	H	14224	HD4	NE Zone	LHCP	3924	34	107.8
WU5	Spot 3	H	14205	HD5	NE Zone	LHCP	3905	72	107.8
WUC	Spot 3	H	14295	HD6	NE Zone	LHCP	3995	72	107.8
WU1	Spot 3	H	14042.5	ID1	SW Zone	LHCP	3742.5	77	107.3
WU2	Spot 3	H	14125	ID2	SW Zone	LHCP	3825	72	107.3
WU3	Spot 3	H	14186	ID3	SW Zone	LHCP	3886	34	107.3
WU4	Spot 3	H	14224	ID4	SW Zone	LHCP	3924	34	107.3
WU5	Spot 3	H	14205	ID5	SW Zone	LHCP	3905	72	107.3
WUC	Spot 3	H	14295	ID6	SW Zone	LHCP	3995	72	107.3
XU1	Spot 3X	V	14042.5	ED1	West Hemi	RHCP	3742.5	77	110.4
XU2	Spot 3X	V	14125	ED2	West Hemi	RHCP	3825	72	110.4
XU3	Spot 3X	V	14186	ED3	West Hemi	RHCP	3886	34	110.4
XU4	Spot 3X	V	14224	ED4	West Hemi	RHCP	3924	34	110.4
XU5	Spot 3X	V	14205	ED5	West Hemi	RHCP	3905	72	110.4
XUC	Spot 3X	V	14295	ED6	West Hemi	RHCP	3995	72	110.4
XU1	Spot 3X	V	14042.5	FD1	East Hemi	RHCP	3742.5	77	112.6
XU2	Spot 3X	V	14125	FD2	East Hemi	RHCP	3825	72	112.6
XU3	Spot 3X	V	14186	FD3	East Hemi	RHCP	3886	34	112.6

Uplink Transponder Designation	Uplink Beam Name	Uplink Polarization	Uplink Center Frequency (MHz)	Downlink Transponder Designation	Downlink Beam Name	Downlink Polarization	Downlink Center Frequency (MHz)	Channel Bandwidth (MHz)	Channel Gain (dB)
XU4	Spot 3X	V	14224	FD4	East Hemi	RHCP	3924	34	112.6
XU5	Spot 3X	V	14205	FD5	East Hemi	RHCP	3905	72	112.6
XUC	Spot 3X	V	14295	FD6	East Hemi	RHCP	3995	72	112.6
XU1	Spot 3X	V	14042.5	GD1	NW Zone	LHCP	3742.5	77	110.0
XU2	Spot 3X	V	14125	GD2	NW Zone	LHCP	3825	72	110.0
XU3	Spot 3X	V	14186	GD3	NW Zone	LHCP	3886	34	110.0
XU4	Spot 3X	V	14224	GD4	NW Zone	LHCP	3924	34	110.0
XU5	Spot 3X	V	14205	GD5	NW Zone	LHCP	3905	72	110.0
XUC	Spot 3X	V	14295	GD6	NW Zone	LHCP	3995	72	110.0
XU1	Spot 3X	V	14042.5	JD1	SE Zone	LHCP	3742.5	77	109.3
XU2	Spot 3X	V	14125	JD2	SE Zone	LHCP	3825	72	109.3
XU3	Spot 3X	V	14186	JD3	SE Zone	LHCP	3886	34	109.3
XU4	Spot 3X	V	14224	JD4	SE Zone	LHCP	3924	34	109.3
XU5	Spot 3X	V	14205	JD5	SE Zone	LHCP	3905	72	109.3
XUC	Spot 3X	V	14295	JD6	SE Zone	LHCP	3995	72	109.3
XU1	Spot 3X	V	14042.5	HD1	NE Zone	LHCP	3742.5	77	107.8
XU2	Spot 3X	V	14125	HD2	NE Zone	LHCP	3825	72	107.8
XU3	Spot 3X	V	14186	HD3	NE Zone	LHCP	3886	34	107.8
XU4	Spot 3X	V	14224	HD4	NE Zone	LHCP	3924	34	107.8
XU5	Spot 3X	V	14205	HD5	NE Zone	LHCP	3905	72	107.8
XUC	Spot 3X	V	14295	HD6	NE Zone	LHCP	3995	72	107.8
XU1	Spot 3X	V	14042.5	ID1	SW Zone	LHCP	3742.5	77	107.3
XU2	Spot 3X	V	14125	ID2	SW Zone	LHCP	3825	72	107.3
XU3	Spot 3X	V	14186	ID3	SW Zone	LHCP	3886	34	107.3
XU4	Spot 3X	V	14224	ID4	SW Zone	LHCP	3924	34	107.3
XU5	Spot 3X	V	14205	ID5	SW Zone	LHCP	3905	72	107.3
XUC	Spot 3X	V	14295	ID6	SW Zone	LHCP	3995	72	107.3
CMD1	Global	LHCP	6173.7					1.0	
CMD2	Global	LHCP	6176.3					1.0	
				TM1	Global	RHCP	3947.5	0.5	
				TM2	Global	RHCP	3952.5	0.5	
				TM3	Global	RHCP	3948	0.5	
				TM4	Global	RHCP	3952	0.5	
				BC1	Global	V	3950	0.025	
				BK1	Global	RHCP	11198	0.025	
				BK2	Global	RHCP	11452	0.025	
				BK3	Spot 1	V	11701	0.025	
				BK4	Spot 2	H	11701	0.025	
				BK5	Spot 2A	H	11701	0.025	
				BK6	Spot 3	V	11701	0.025	
				BK7	Spot 3X	H	11701	0.025	
				BK8	Spot 1	V	12501	0.025	
				BK9	Spot 2	H	12501	0.025	
				BK10	Spot 2A	H	12501	0.025	
				BK11	Spot 3	V	12501	0.025	
				BK12	Spot 3X	H	12501	0.025	

Note:

H: Linear horizontal polarization
V: Linear vertical polarization

RHCP: Right hand circular polarization
LHCP: Left hand circular polarization

Exhibit 2-1: C-Band Global A Uplink Beam
[Schedule S Beam Designation: GAUL]

Beam Peak Gain: 20.3 dBi

Beam Polarization: Left Hand Circular

Beam Peak G/T: -7 dB/K

Saturated Flux Density @ Beam Peak G/T: -92.9 to -78.9 dBW/m²

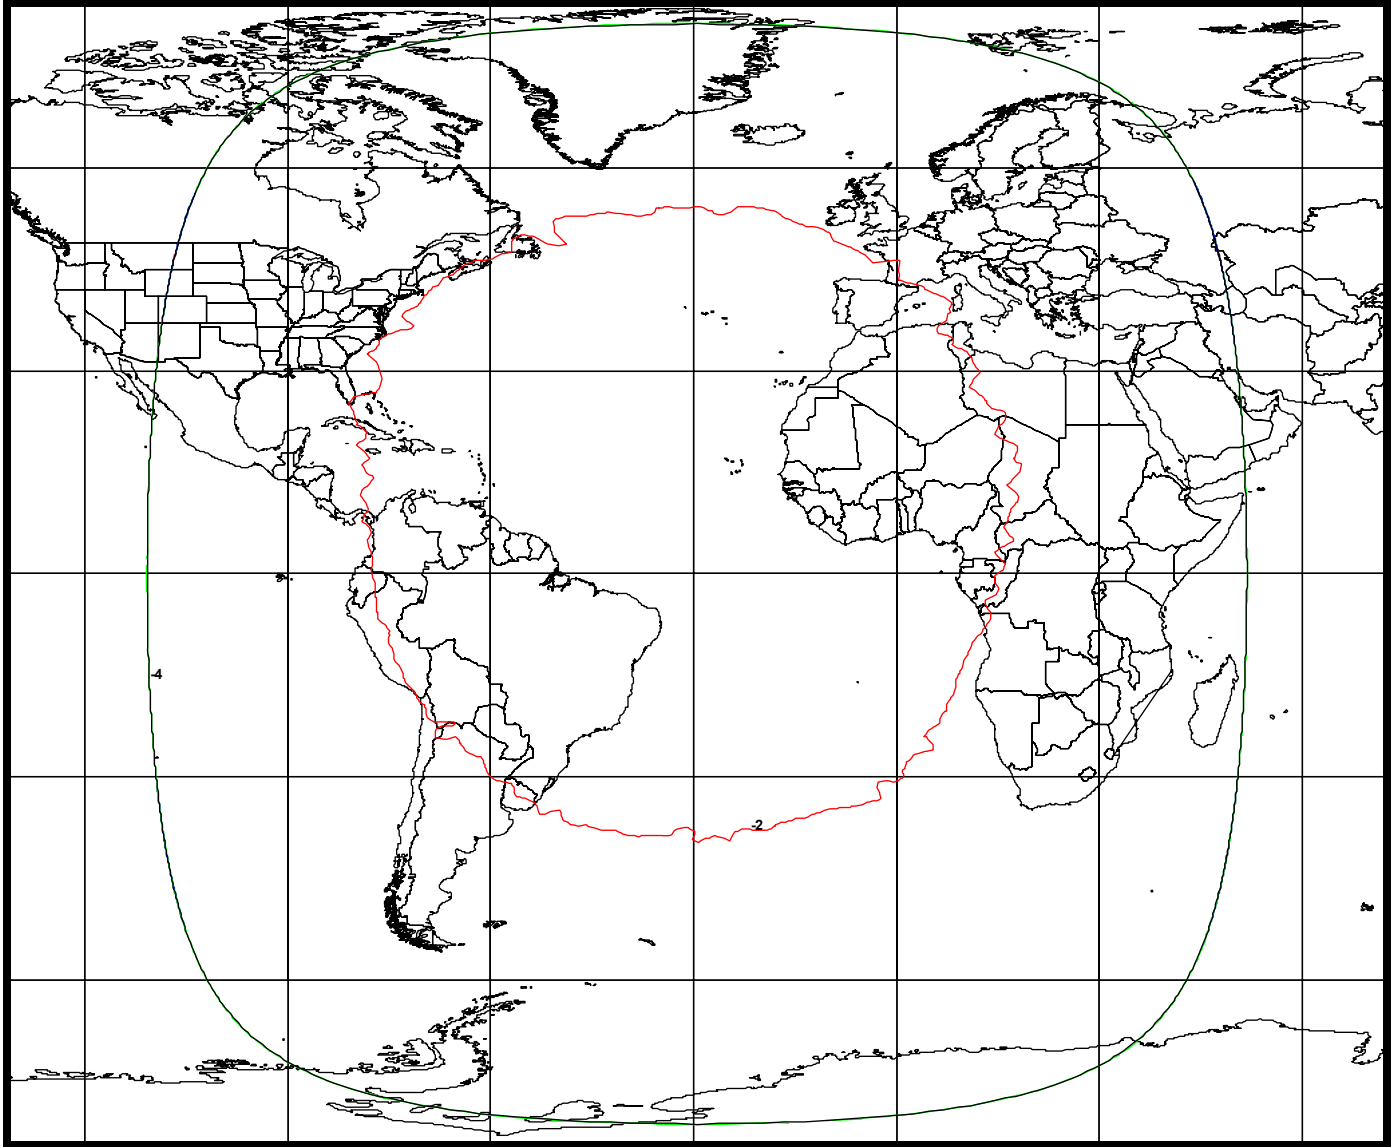


Exhibit 2-2: C-Band Global B Uplink Beam
[Schedule S Beam Designation: GBUL]

Beam Peak Gain: 20.3 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: -7 dB/K
Saturated Flux Density @ Beam Peak G/T: -92.6 to -78.6 dBW/m²

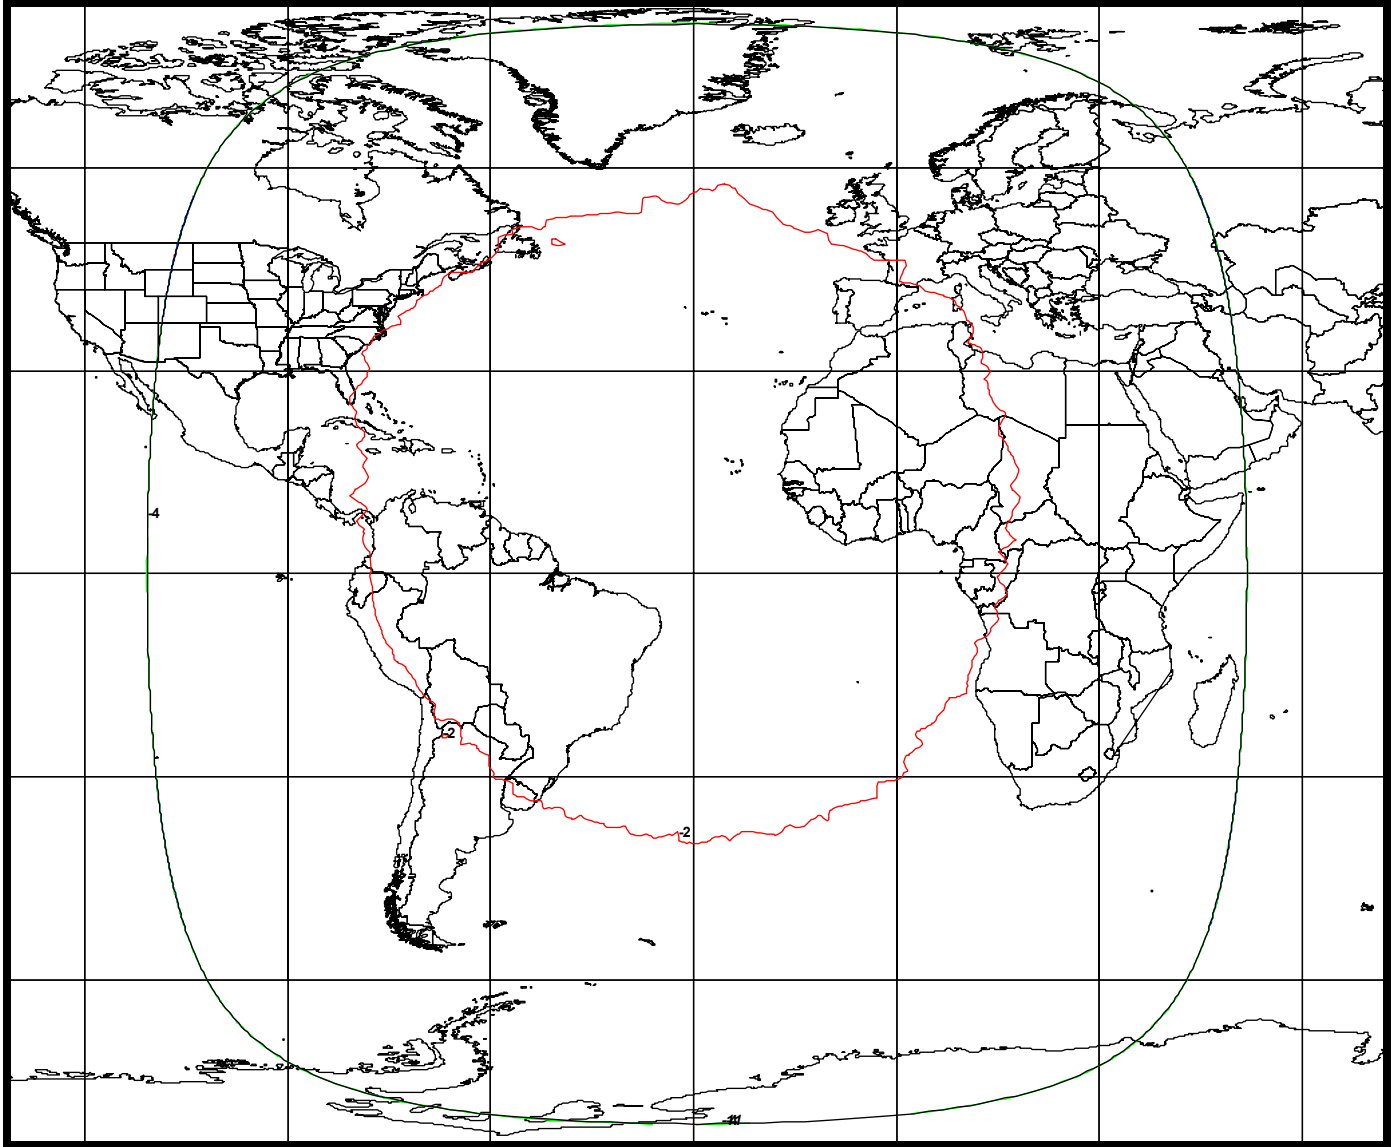


Exhibit 2-3: C-Band West Hemi Uplink Beam
[Schedule S Beam Designation: WHUL]

Beam Peak Gain: 25.6 dBi
Beam Polarization: Left Hand Circular
Beam Peak G/T: -1.5 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.6 to -77.6 dBW/m²

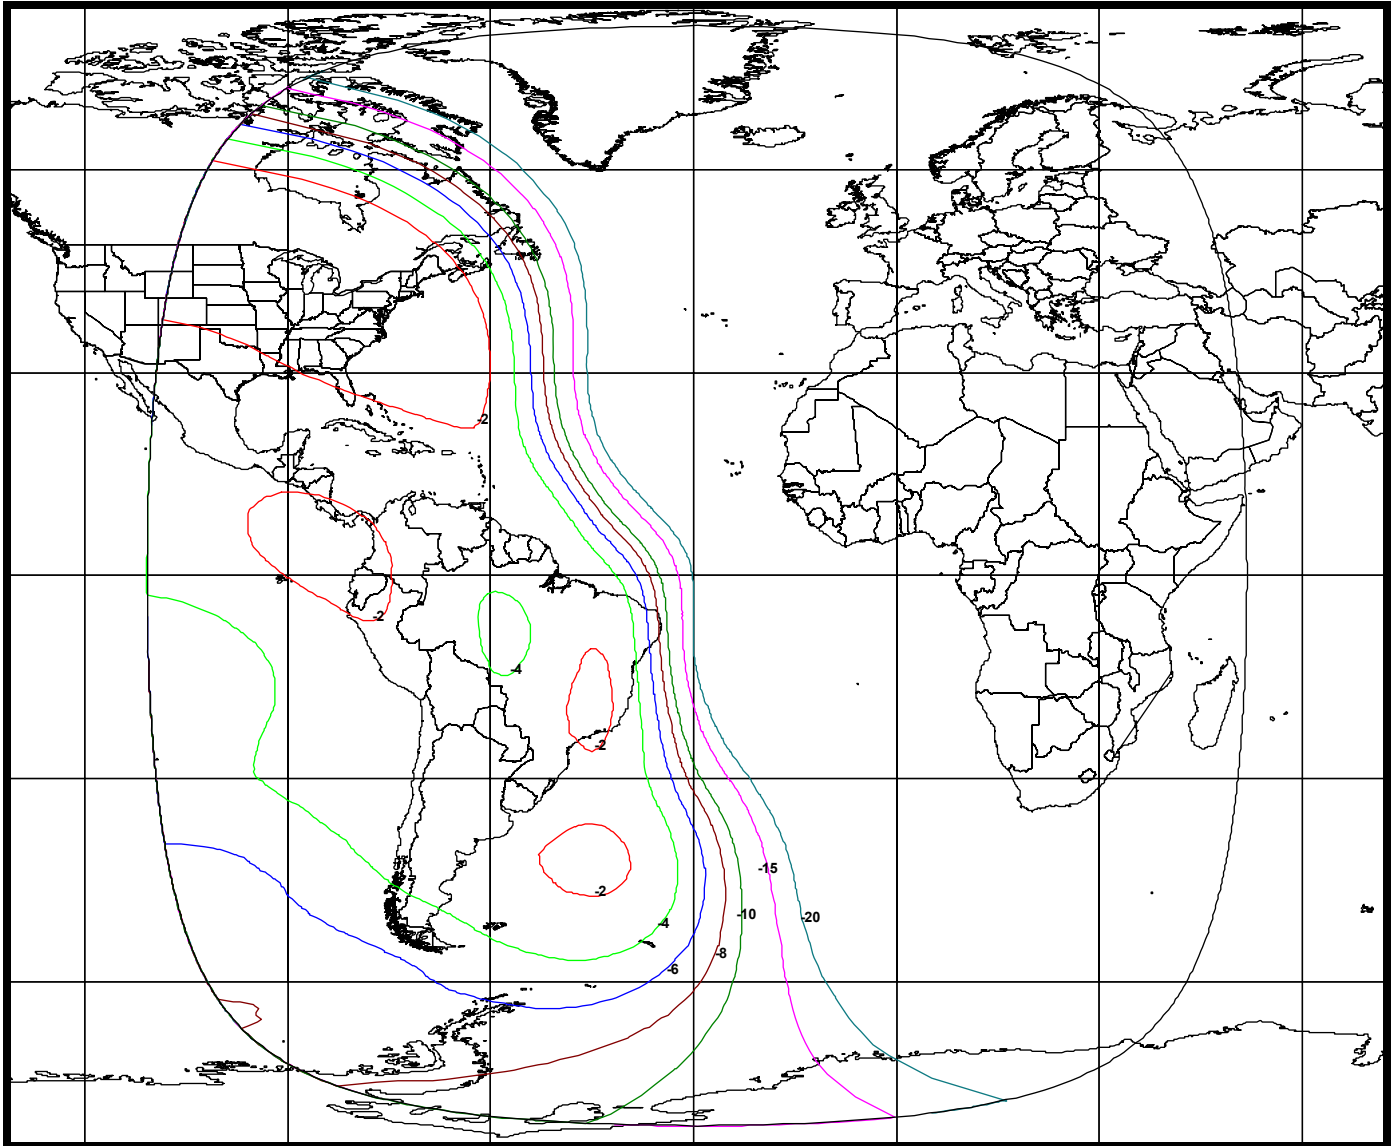


Exhibit 2-4: C-Band East Hemi Uplink Beam
[Schedule S Beam Designation: EHUL]

Beam Peak Gain: 24.1 dBi
Beam Polarization: Left Hand Circular
Beam Peak G/T: -3.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.8 to -77.8 dBW/m²

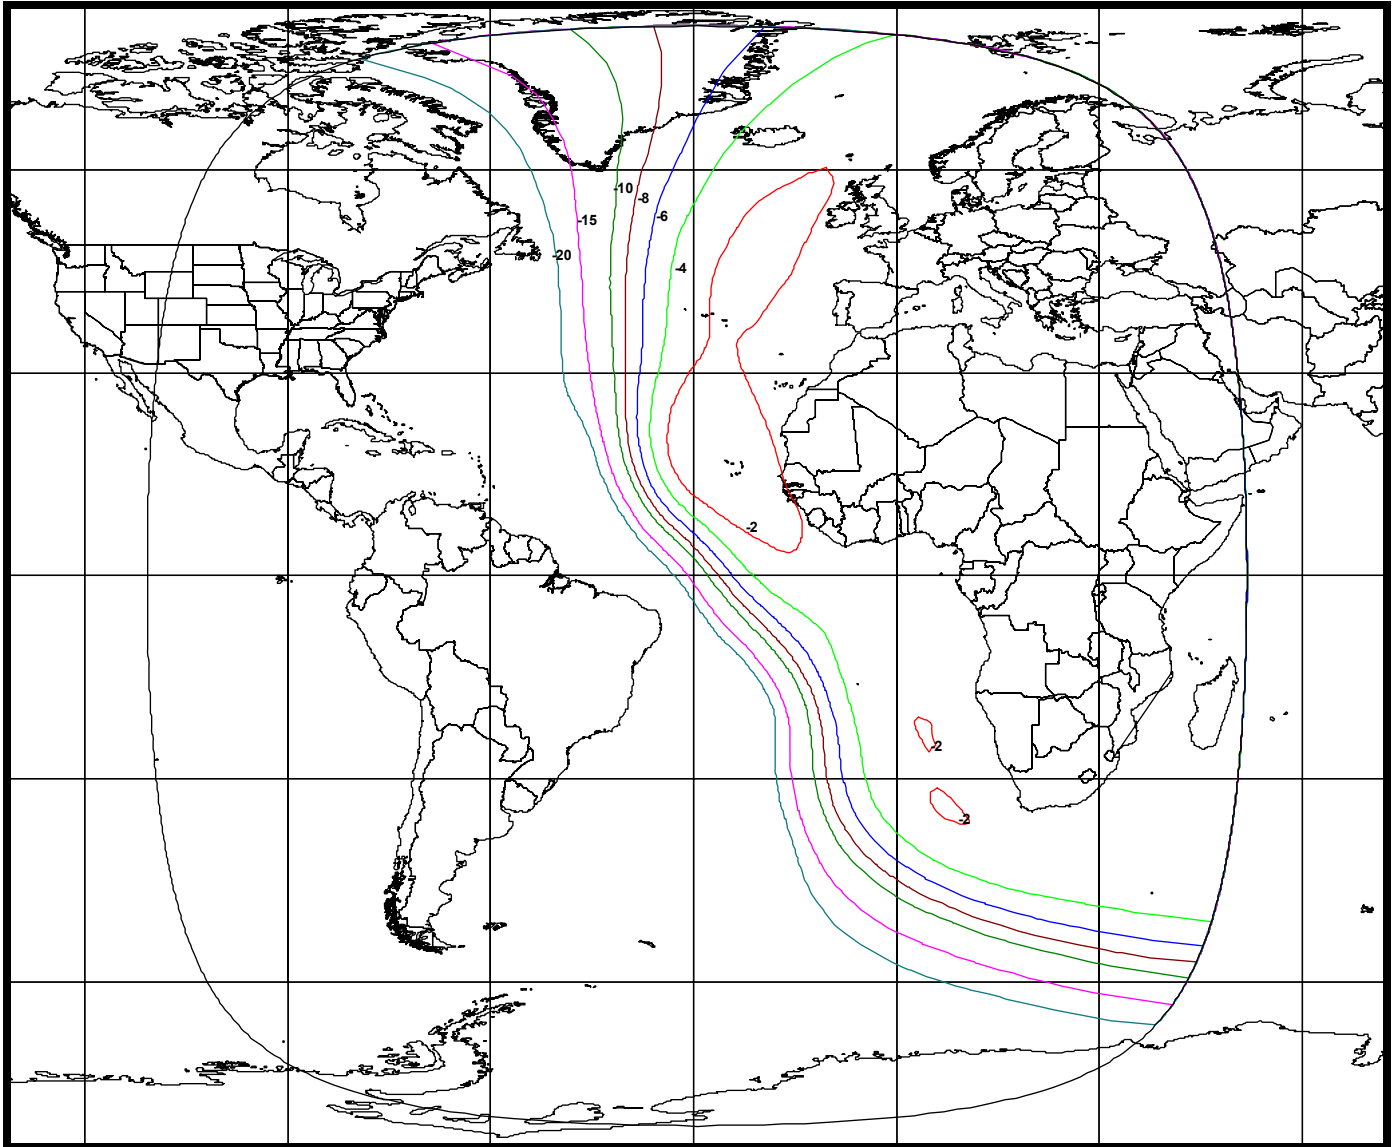


Exhibit 2-5: C-Band Northwest Zone Uplink Beam
[Schedule S Beam Designation: NWUL]

Beam Peak Gain: 27.0 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: 0.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.8 to -77.8 dBW/m²

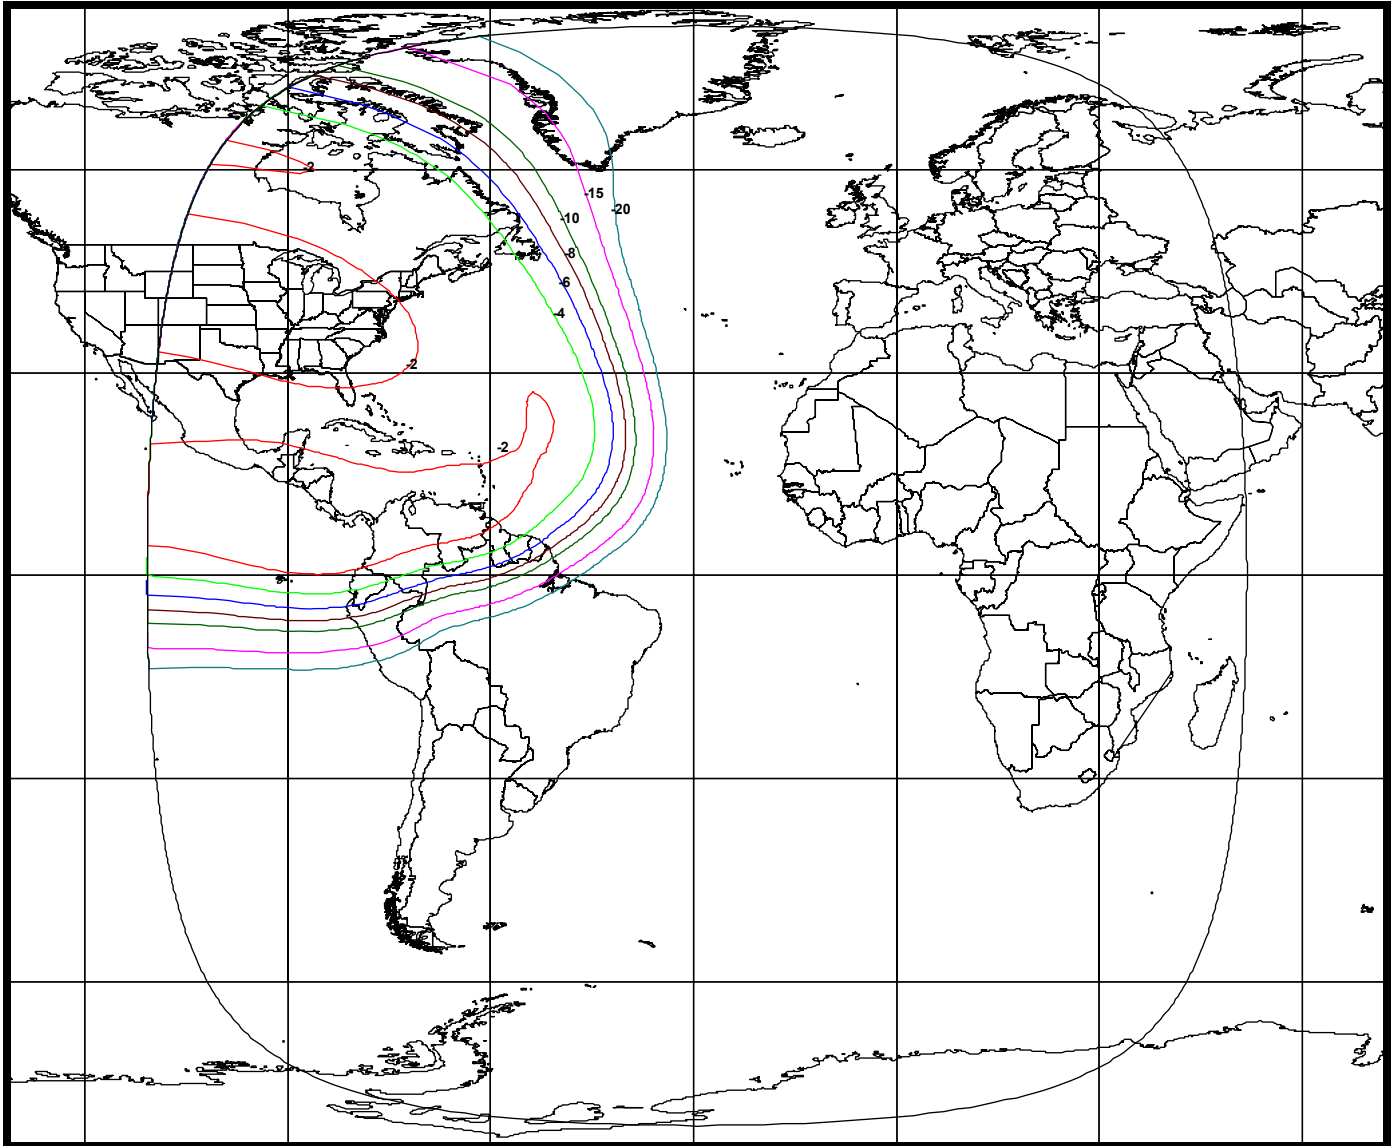


Exhibit 2-6: C-Band Northeast Zone Uplink Beam
[Schedule S Beam Designation: NEUL]

Beam Peak Gain: 27.9 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: 1.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.0 to -77.0 dBW/m²

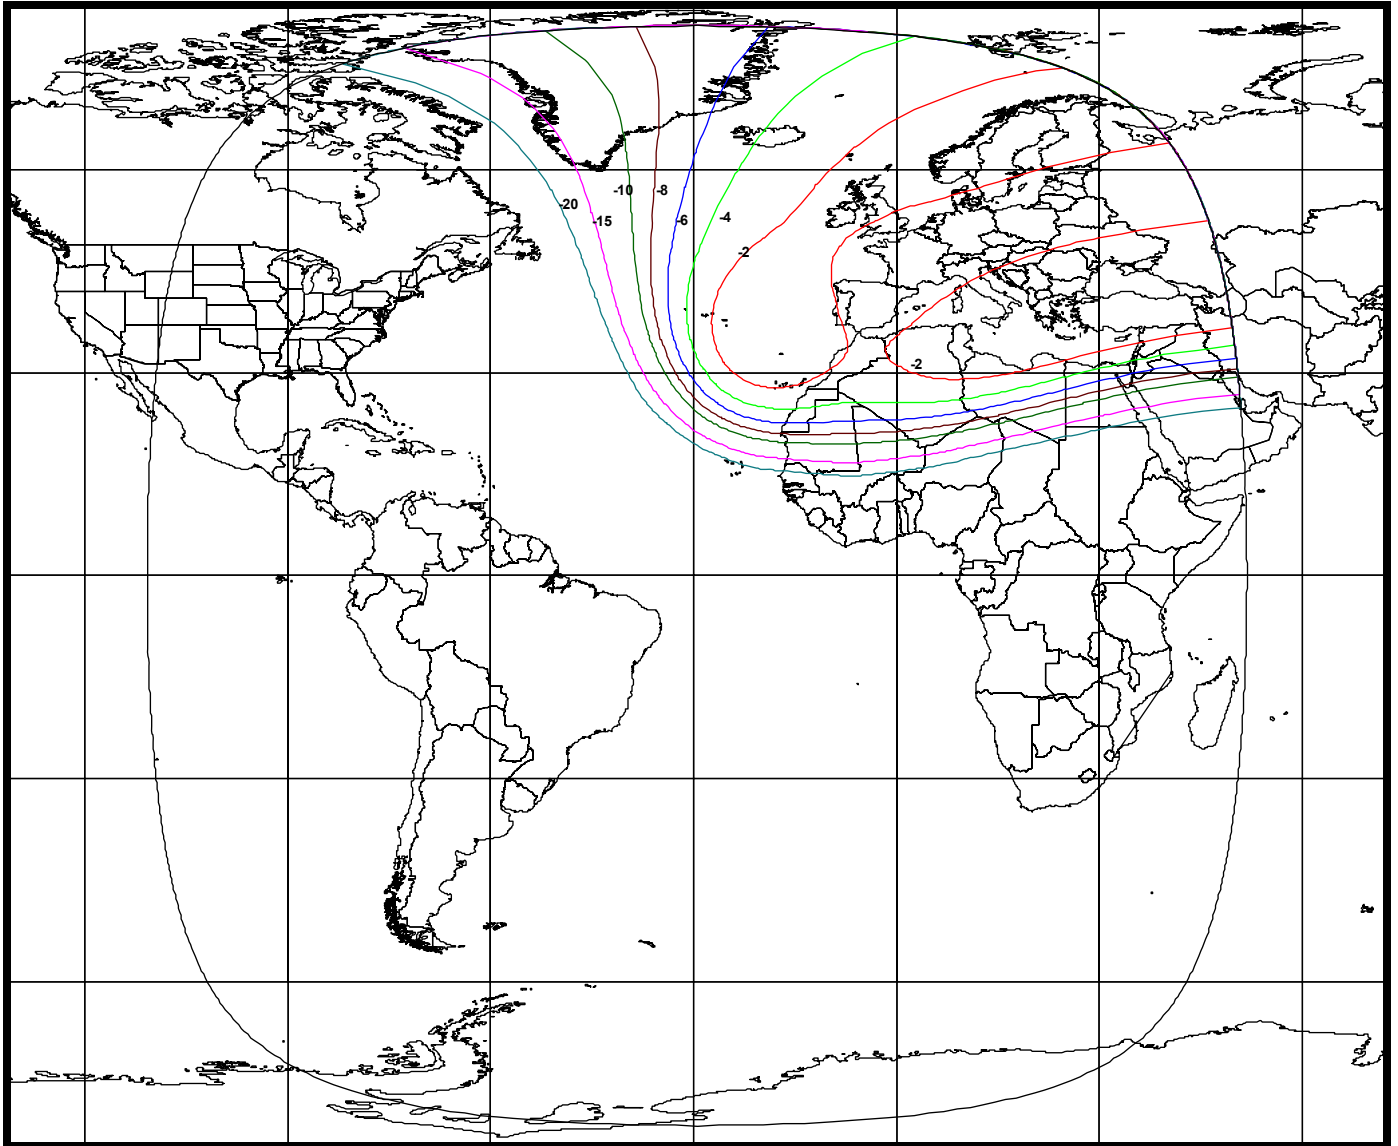


Exhibit 2-7: C-Band Southwest Zone Uplink Beam
[Schedule S Beam Designation: SWUL]

Beam Peak Gain: 28.7 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: 0.9 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.0 to -77.0 dBW/m²

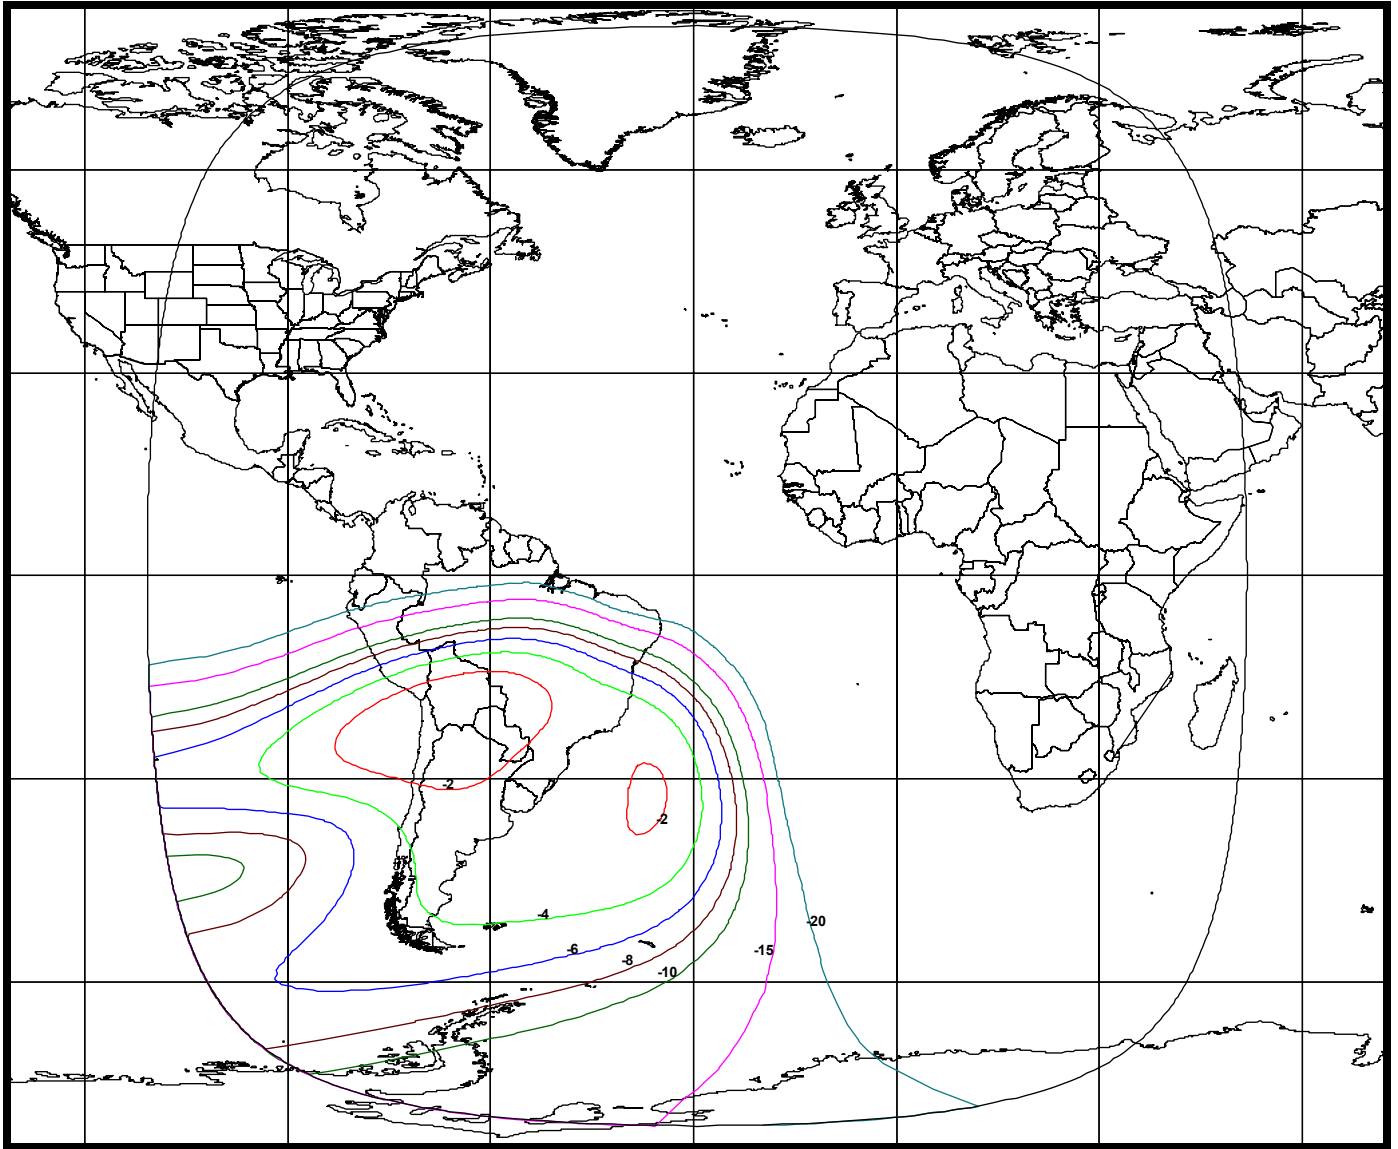


Exhibit 2-8: C-Band Southeast Zone Uplink Beam
[Schedule S Beam Designation: SEUL]

Beam Peak Gain: 26.8 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: -0.5 dB/K
Saturated Flux Density @ Beam Peak G/T: -92.5 to -78.5 dBW/m²

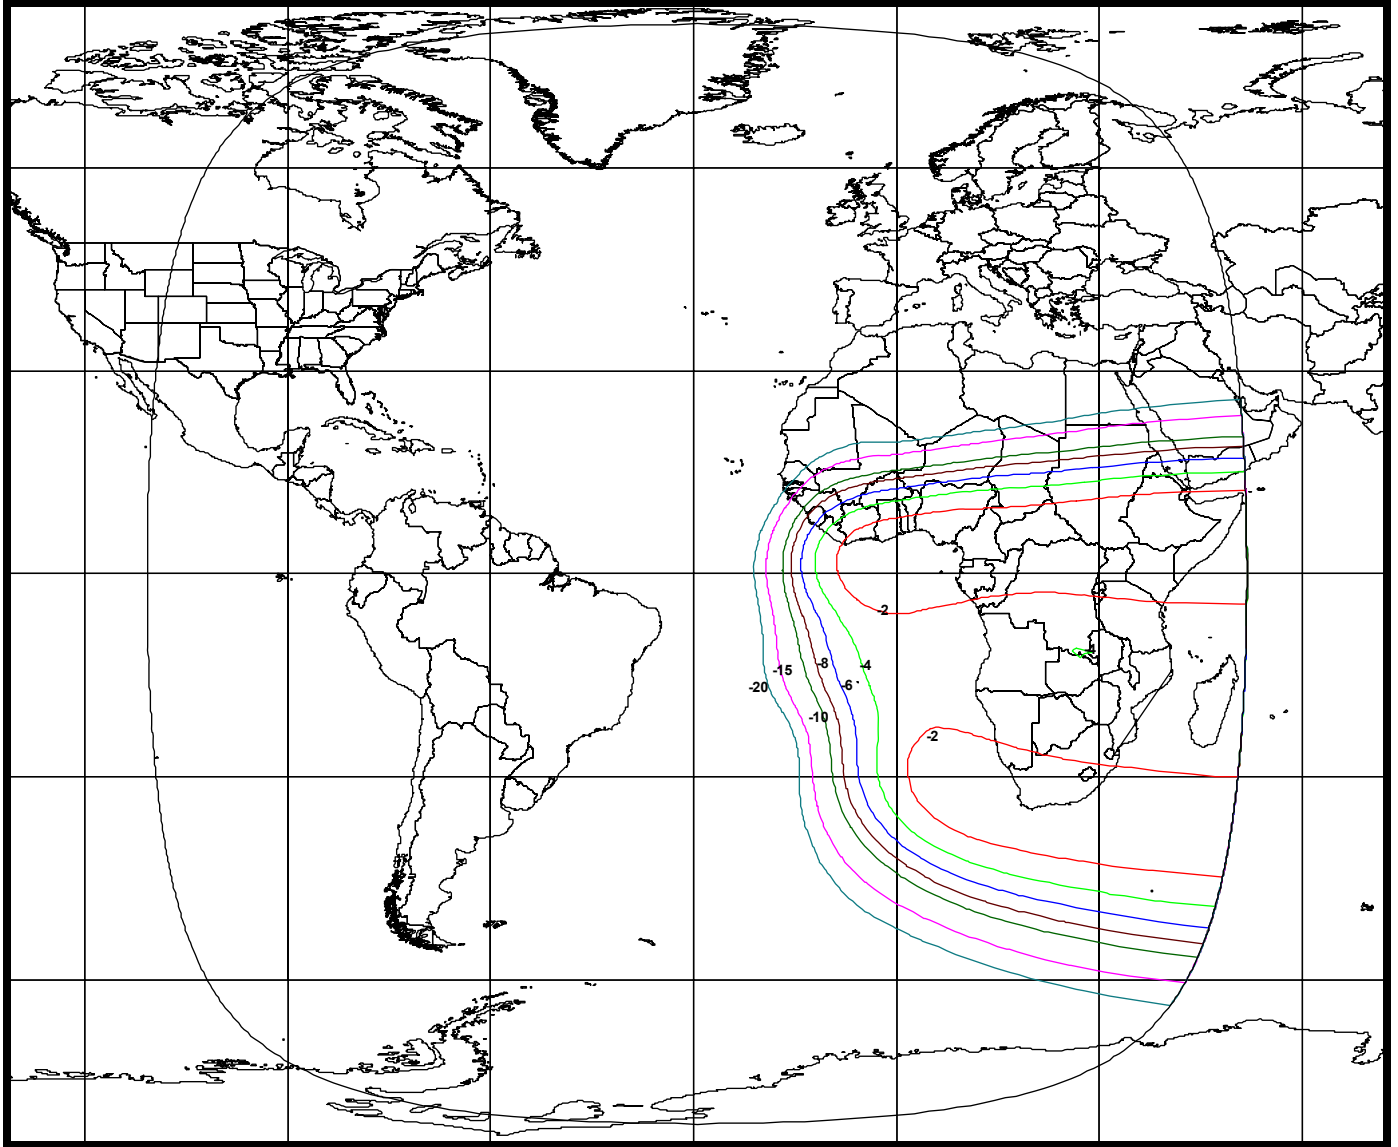


Exhibit 2-9: C-Band Combined Northwest and Southeast Zone Uplink Beam
[Schedule S Beam Designation: X1UL]

Beam Peak Gain: 23.9 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: -3.5 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.3 to -77.3 dBW/m²

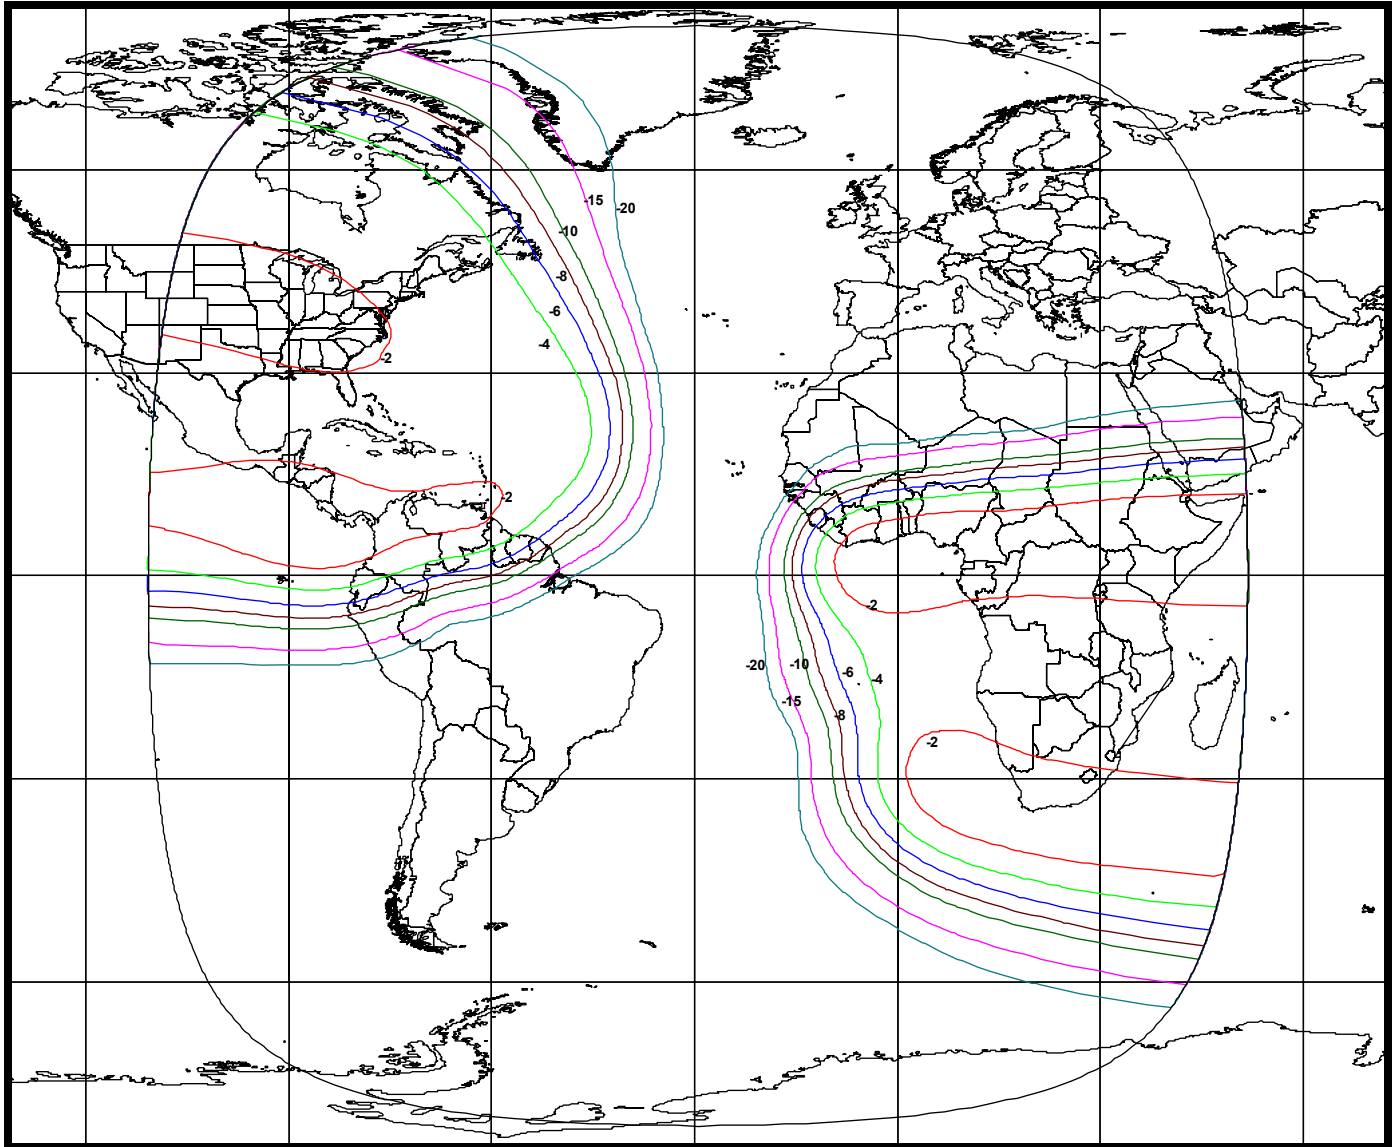


Exhibit 2-10: C-Band Combined Northeast and Southwest Zone Uplink Beam
[Schedule S Beam Designation: X2UL]

Beam Peak Gain: 24.9 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: -2.5 dB/K
Saturated Flux Density @ Beam Peak G/T: -90.3 to -76.3 dBW/m²

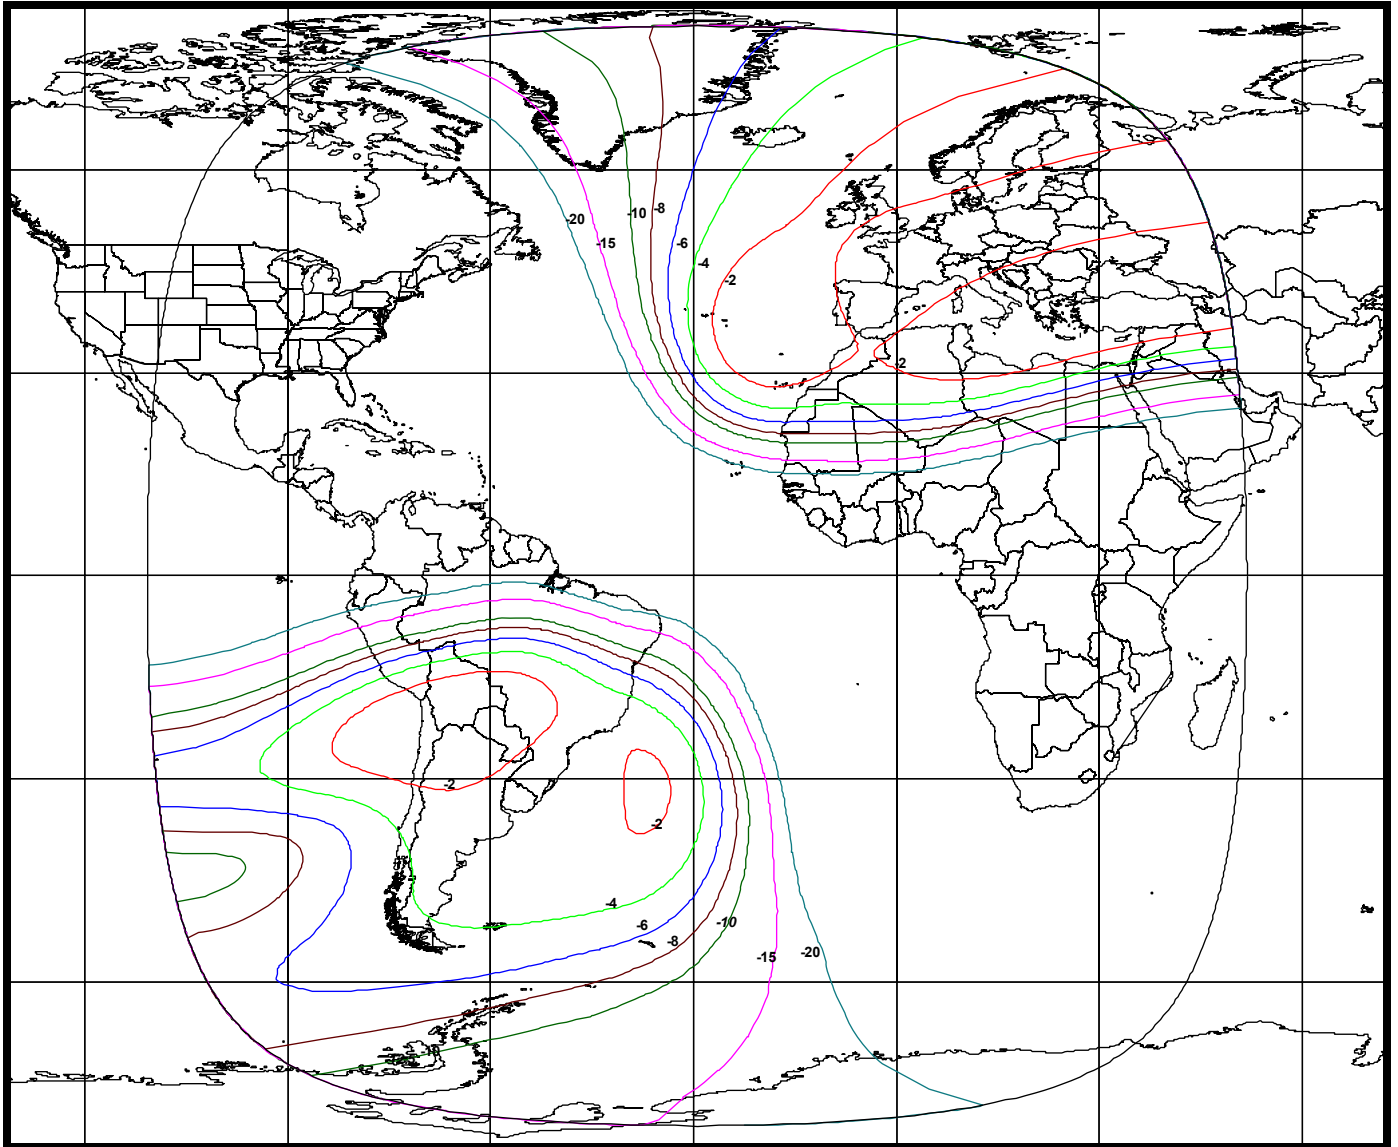


Exhibit 2-11: C-Spot A Uplink Beam
[Schedule S Beam Designation: CAUL]

Beam Peak Gain: 30.3 dBi
Beam Polarization: Left Hand Circular
Beam Peak G/T: 3.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -95.4 to -81.4 dBW/m²

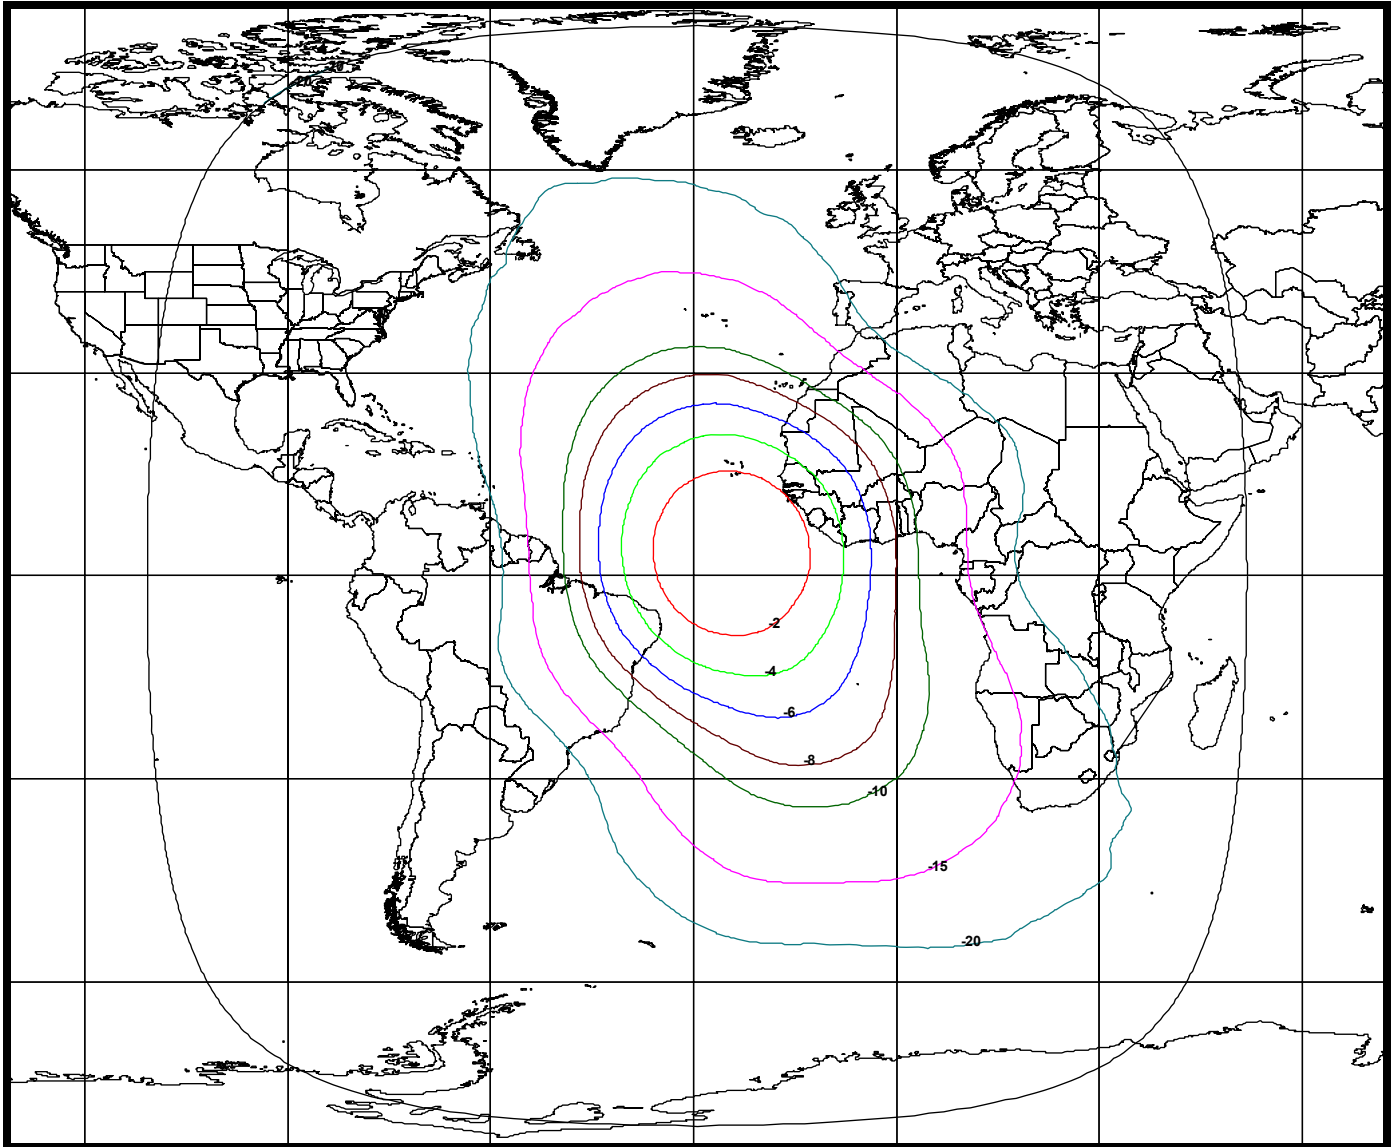


Exhibit 2-12: C-Spot B Uplink Beam
[Schedule S Beam Designation: CBUL]

Beam Peak Gain: 30.3 dBi
Beam Polarization: Right Hand Circular
Beam Peak G/T: 3.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -95.4 to -81.4 dBW/m²

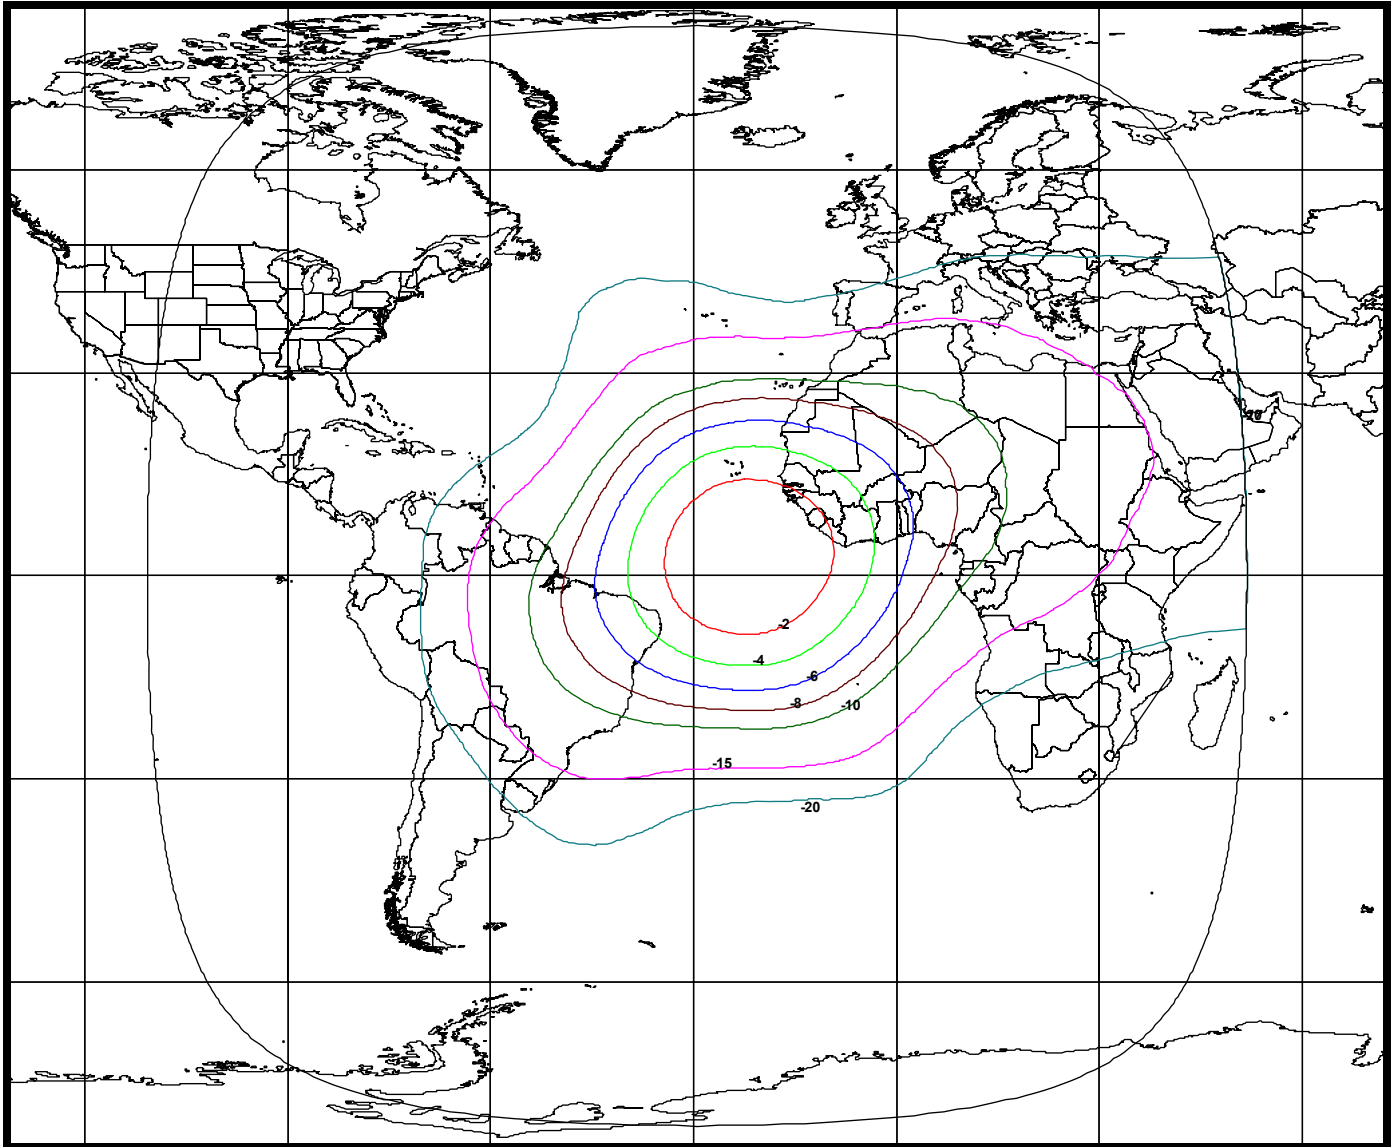


Exhibit 2-13: Ku-Band Spot 1 Uplink Beam
[Schedule S Beam Designation: S1UL]

Beam Peak Gain: 36.9 dBi
Beam Polarization: Horizontal
Beam Peak G/T: 9.5 dB/K
Saturated Flux Density @ Beam Peak G/T: -91.7 to -77.7 dBW/m²

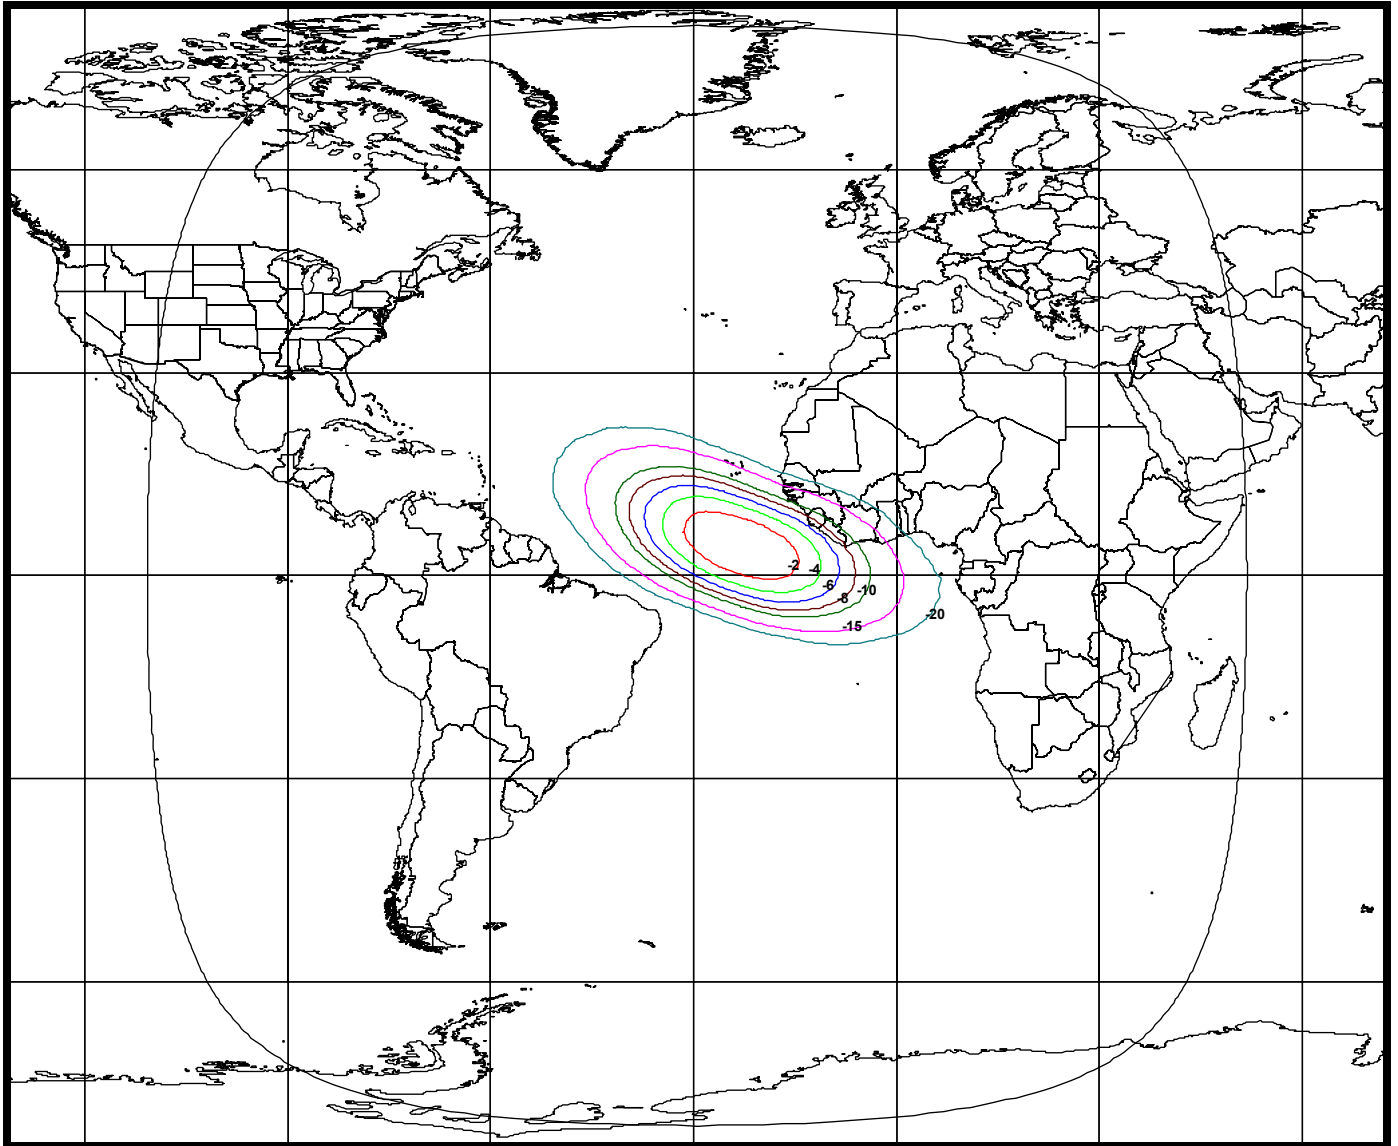


Exhibit 2-14: Ku-Band Spot 2 Uplink Beam
[Schedule S Beam Designation: S2UL]

Beam Peak Gain: 34.8 dBi
Beam Polarization: Vertical
Beam Peak G/T: 7.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -93.1 to -79.1 dBW/m²

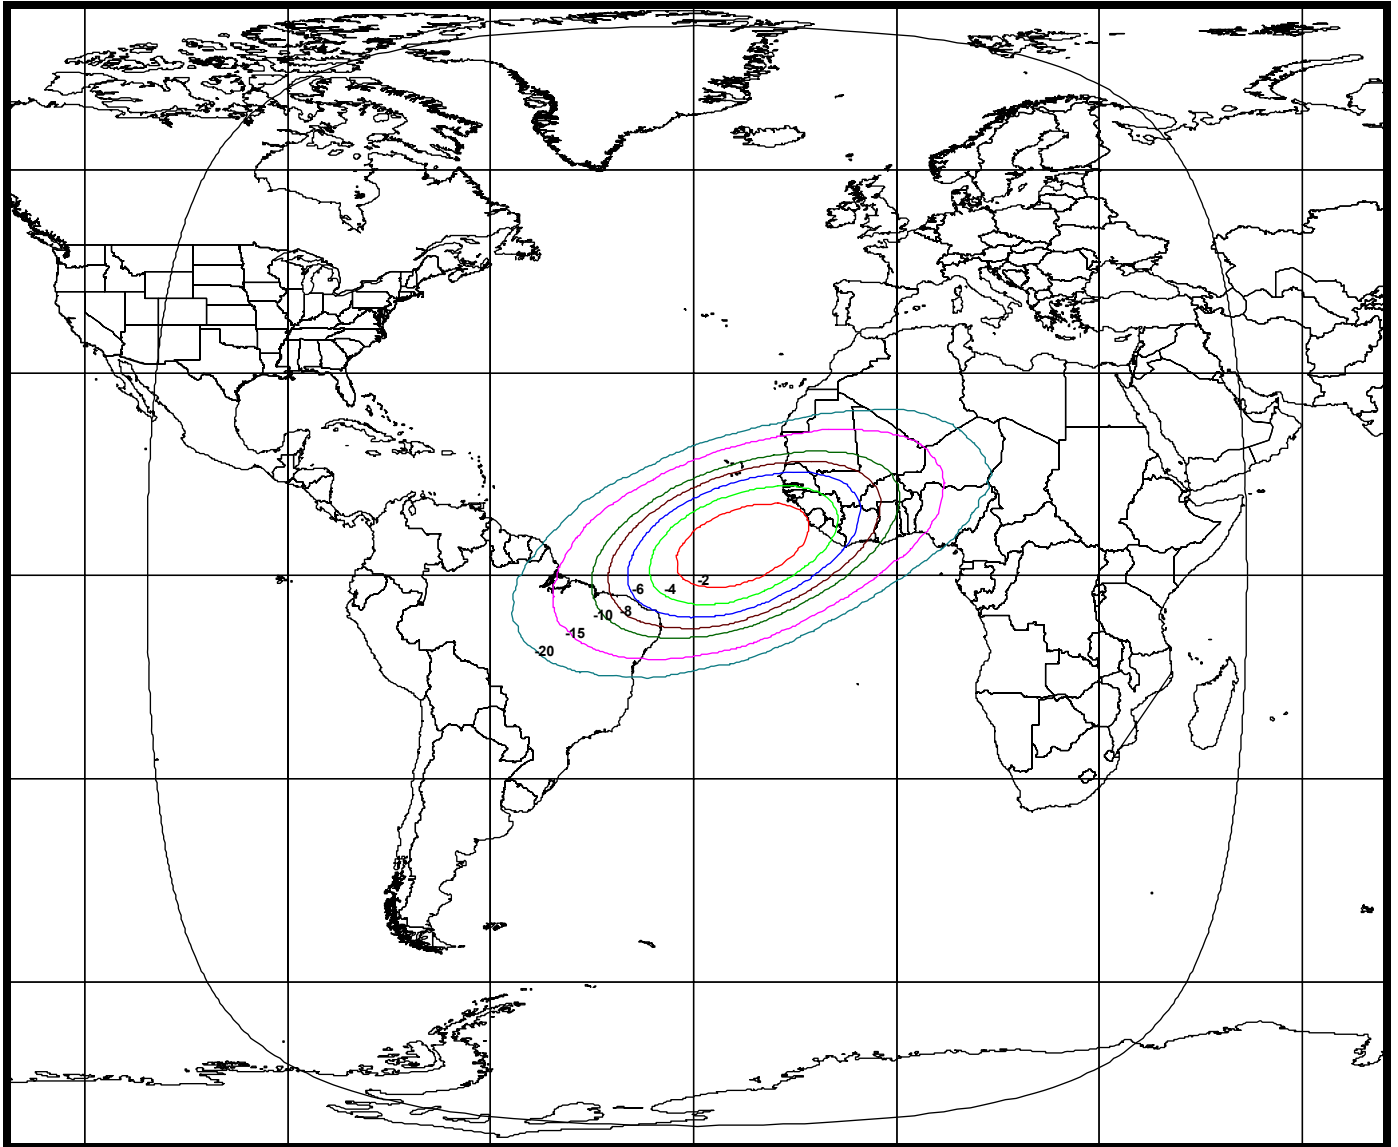


Exhibit 2-15: Ku-Band Spot 2A Uplink Beam
[Schedule S Beam Designation: S2AU]

Beam Peak Gain: 32.9 dBi
Beam Polarization: Vertical
Beam Peak G/T: 5.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -93.2 to -79.2 dBW/m²

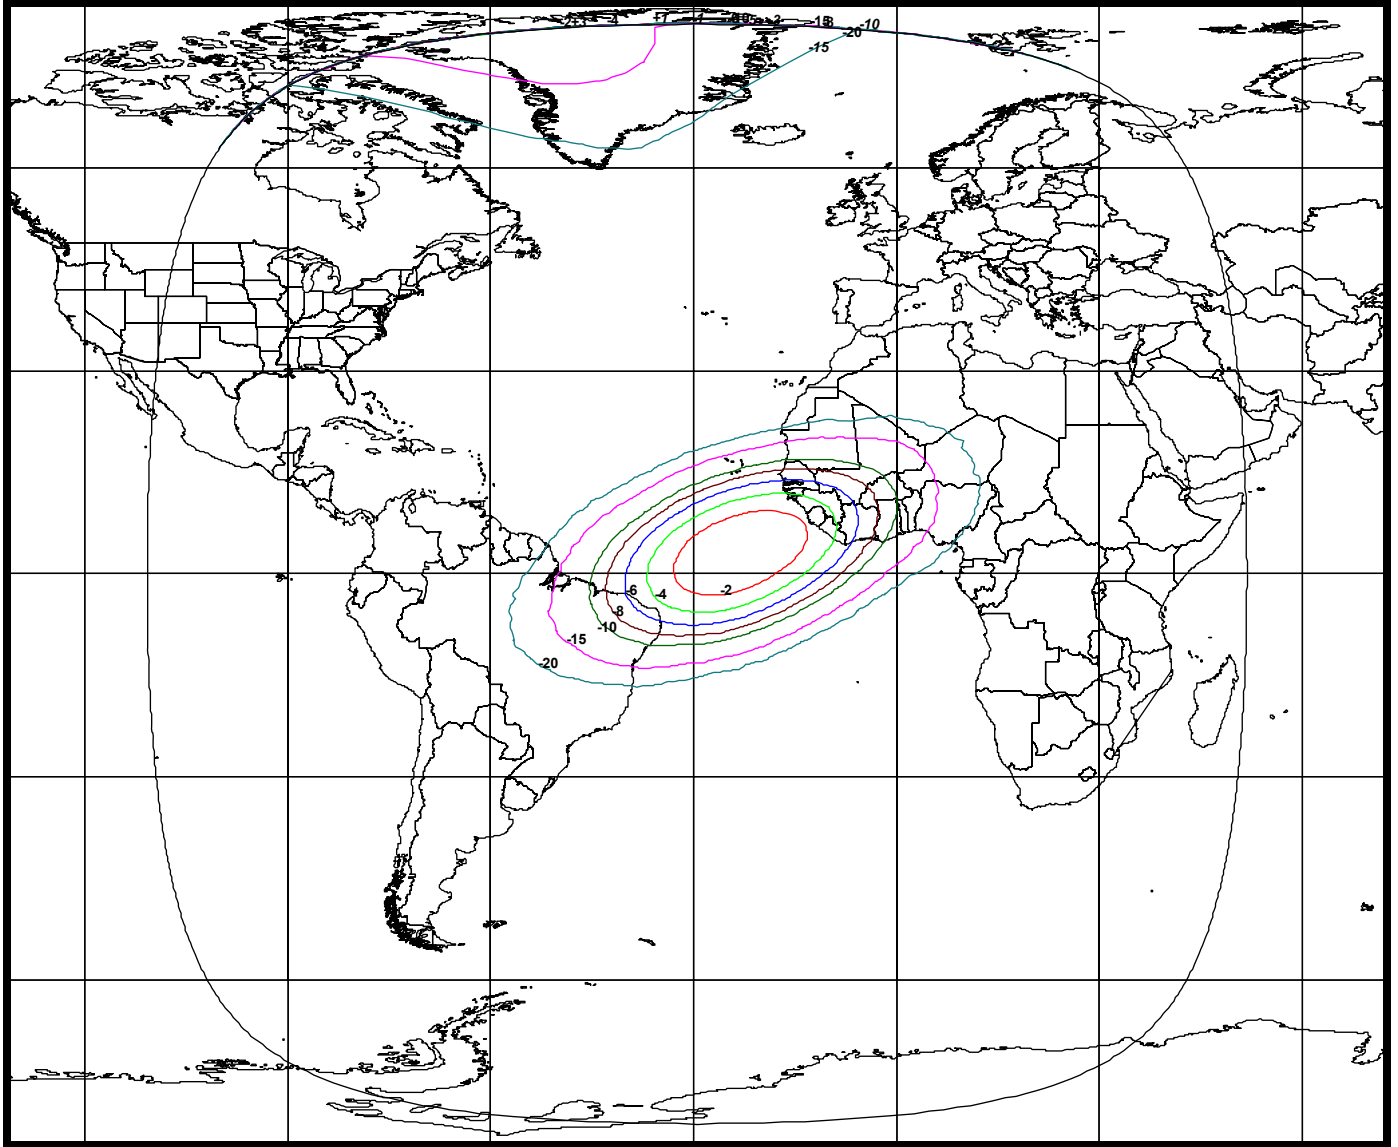


Exhibit 2-16: Ku-Band Spot 3 Uplink Beam
[Schedule S Beam Designation: S3UL]

Beam Peak Gain: 37.8 dBi
Beam Polarization: Horizontal
Beam Peak G/T: 10.0 dB/K
Saturated Flux Density @ Beam Peak G/T: -92.9 to -78.9 dBW/m²

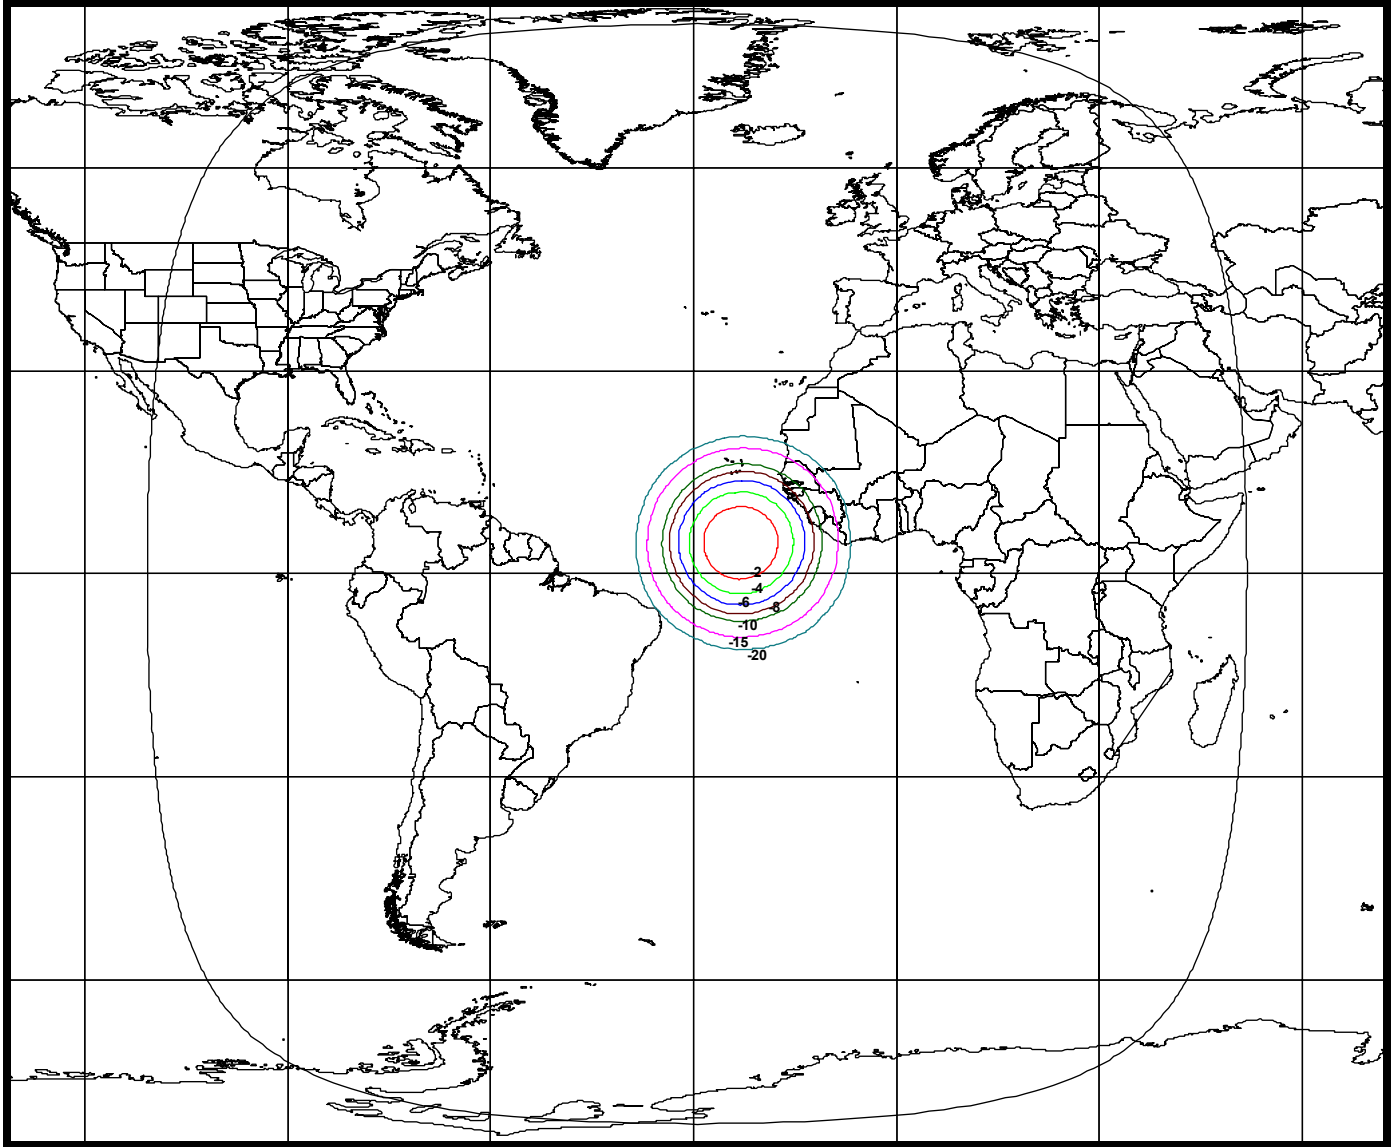


Exhibit 2-17: Ku-Band Spot 3 Uplink Beam
[Schedule S Beam Designation: S3XU]

Beam Peak Gain: 37.8 dBi
Beam Polarization: Vertical
Beam Peak G/T: 10 dB/K
Saturated Flux Density @ Beam Peak G/T: -92.9 to -78.9 dBW/m²

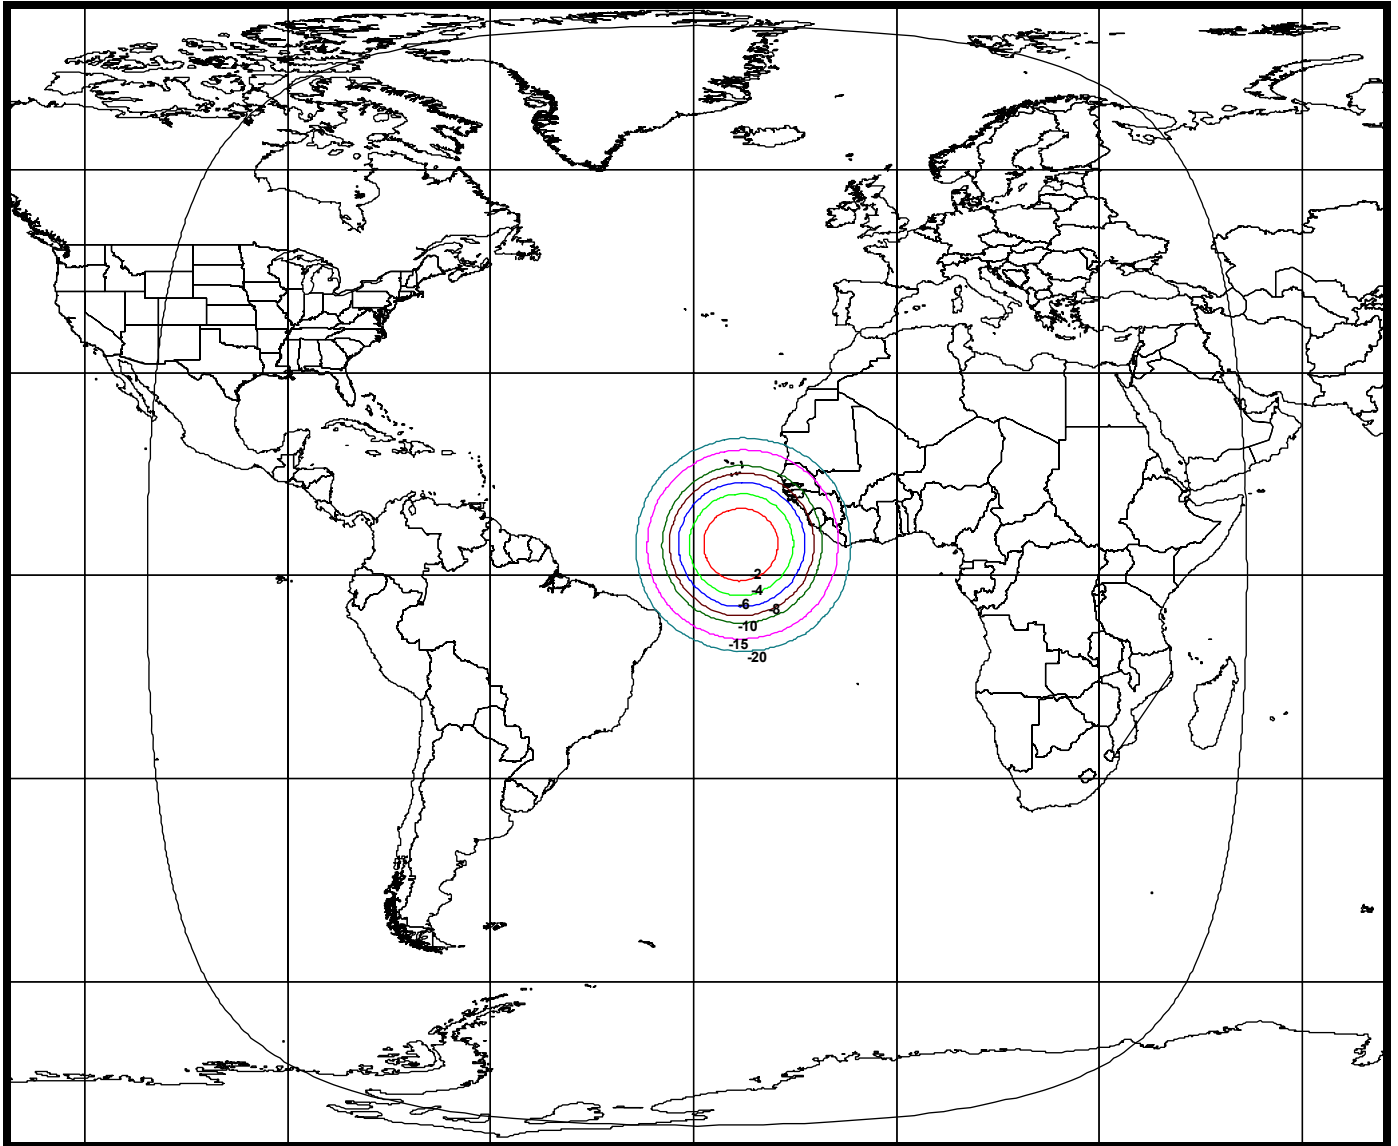


Exhibit 2-18: C-Band Global A Downlink Beam
[Schedule S Beam Designation: GADL]

Beam Peak Gain: 20.5 dBi
Beam Polarization: Right Hand Circular
Beam Peak EIRP: 29.5 dBW

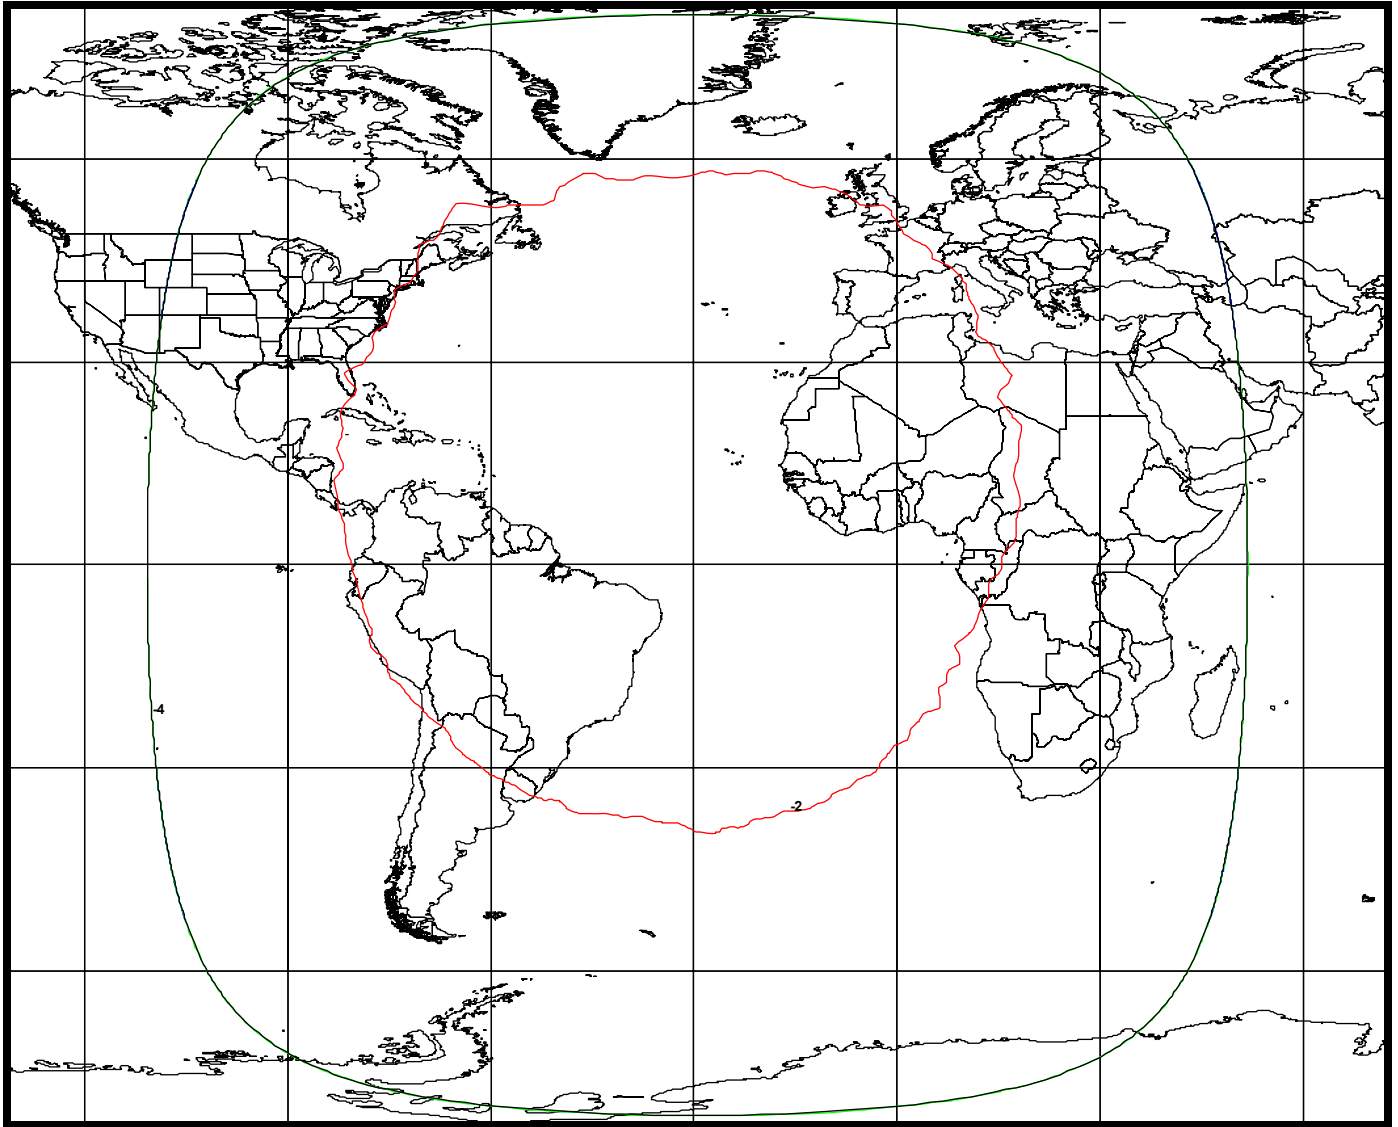


Exhibit 2-19: C-Band Global B Downlink Beam
[Schedule S Beam Designation: GBDL]

Beam Peak Gain: 20.5 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 30.5 dBW

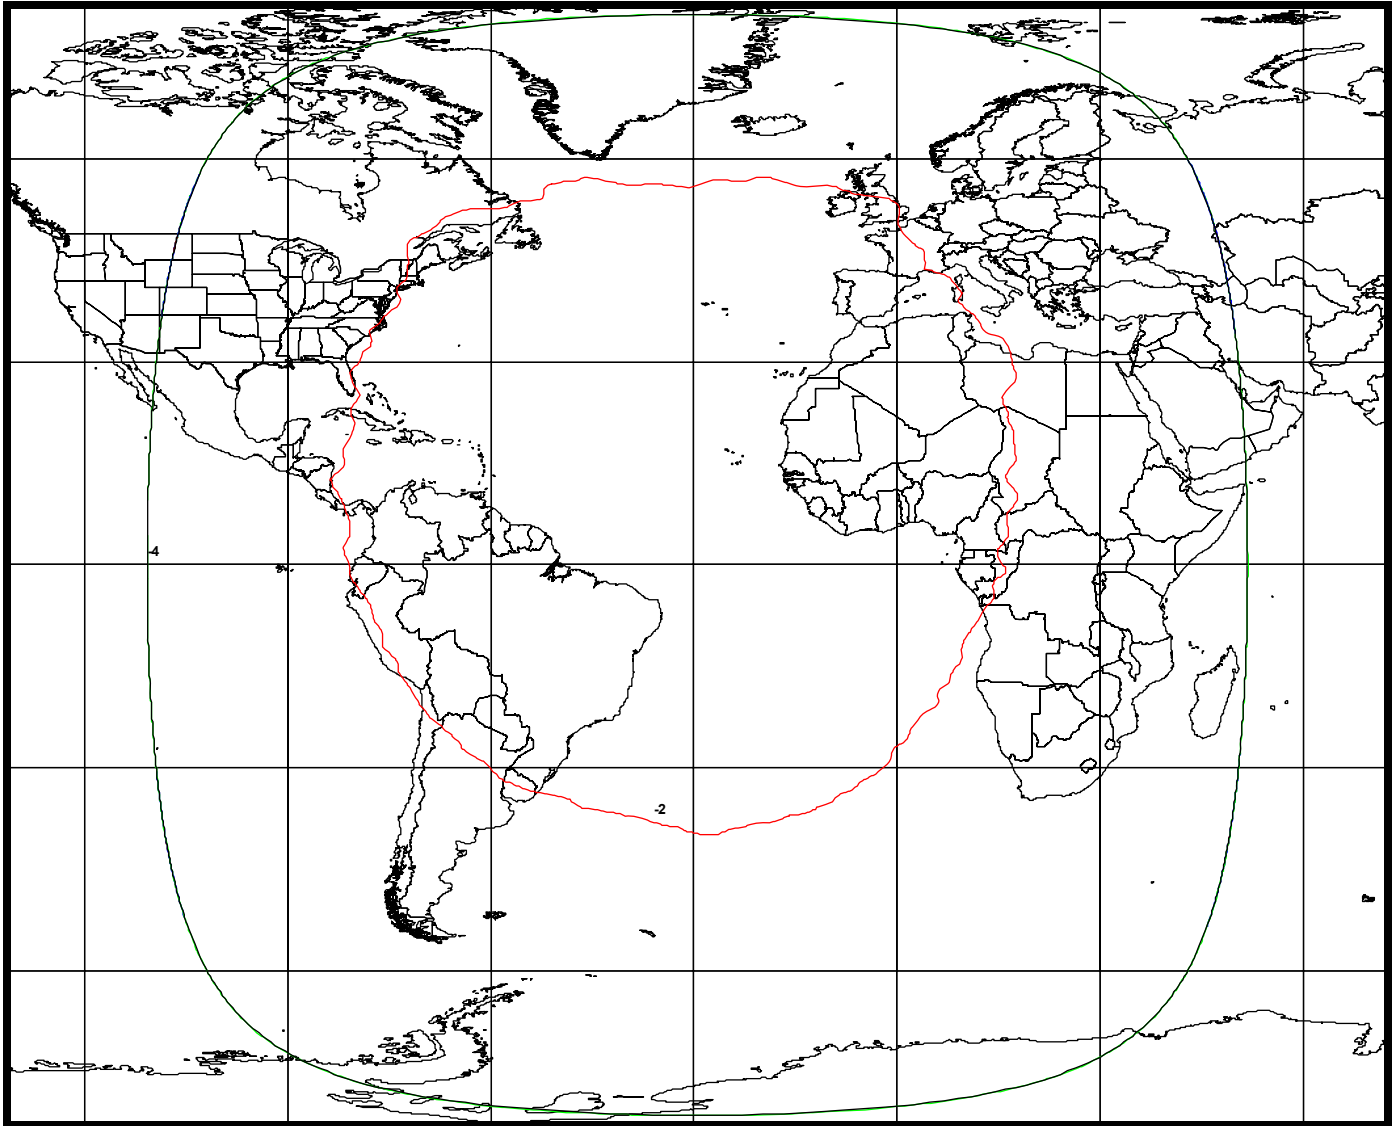


Exhibit 2-20: C-Band West Hemi Downlink Beam
[Schedule S Beam Designation: WHDL]

Beam Peak Gain: 27.5 dBi
Beam Polarization: Right Hand Circular
Beam Peak EIRP: 38.3 dBW

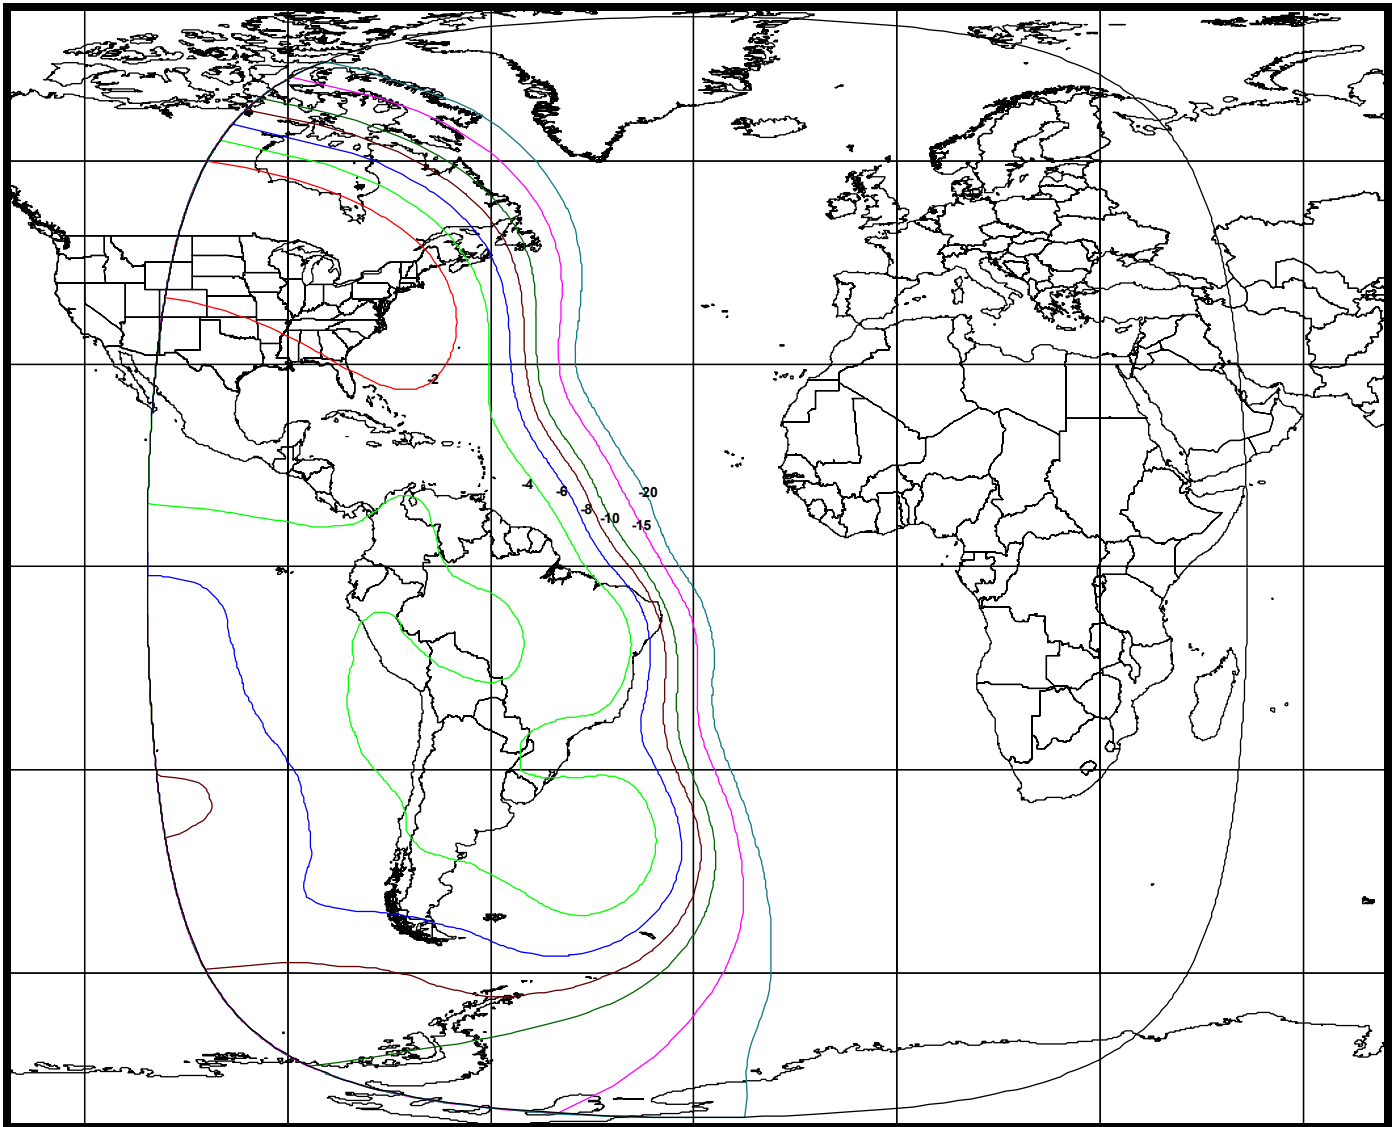


Exhibit 2-21: C-Band East Hemi Downlink Beam
[Schedule S Beam Designation: EHDL]

Beam Peak Gain: 23.8 dBi
Beam Polarization: Right Hand Circular
Beam Peak EIRP: 36.8 dBW

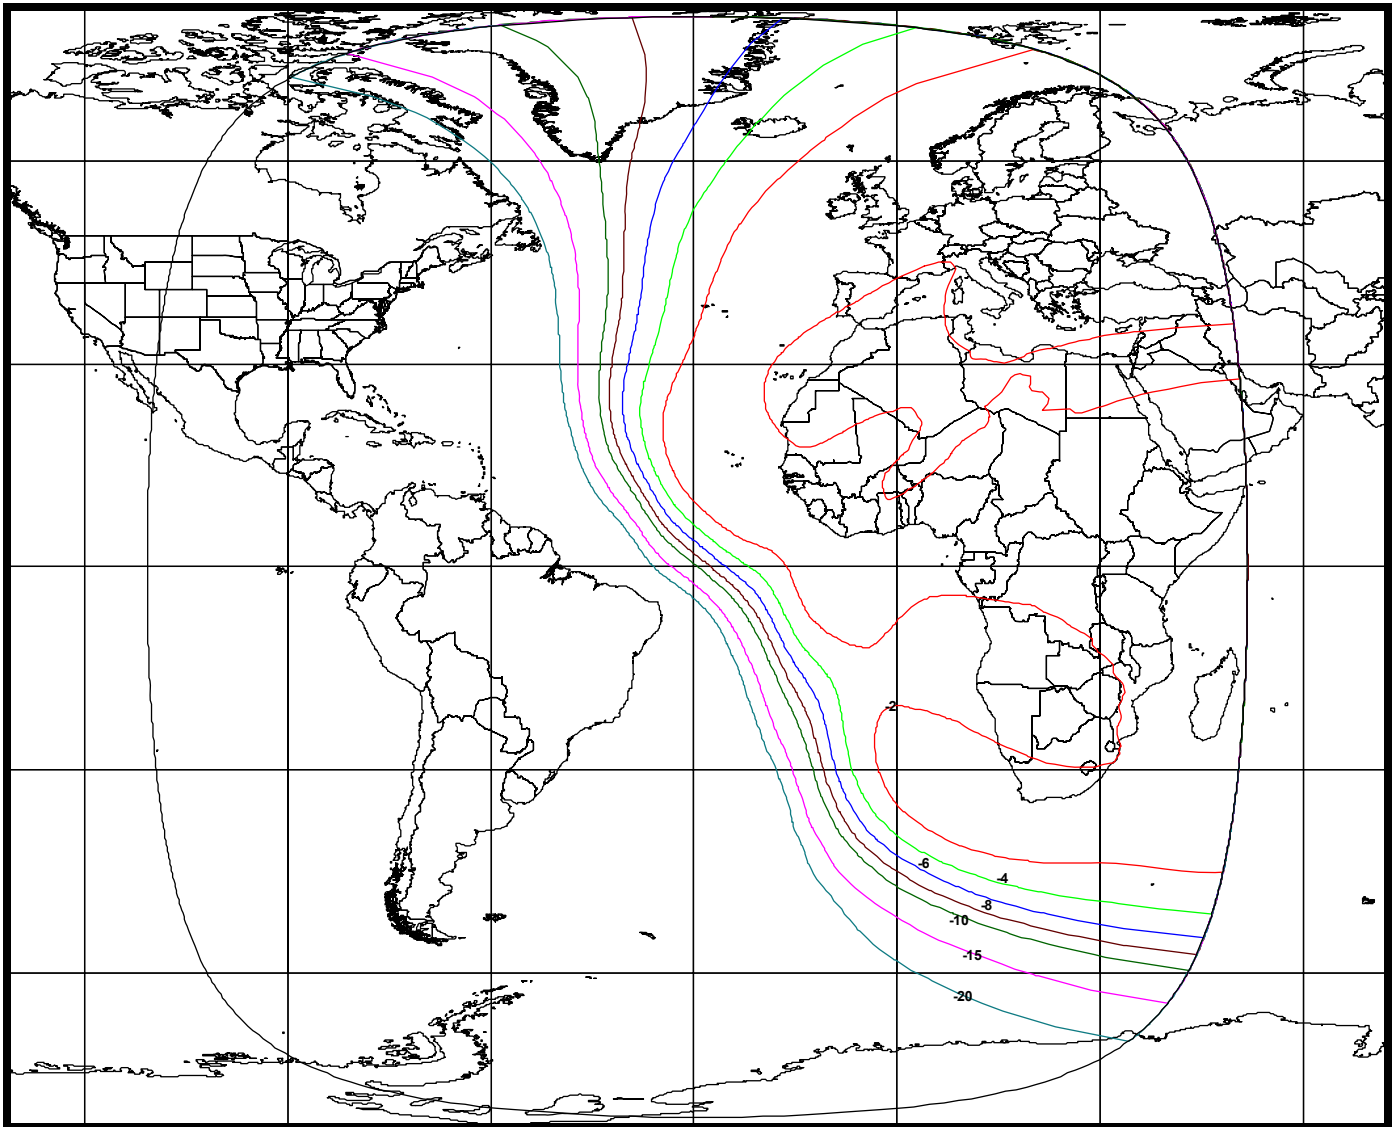


Exhibit 2-22: C-Band Northwest Downlink Beam
[Schedule S Beam Designation: NWDL]

Beam Peak Gain: 28.1 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 38.5 dBW

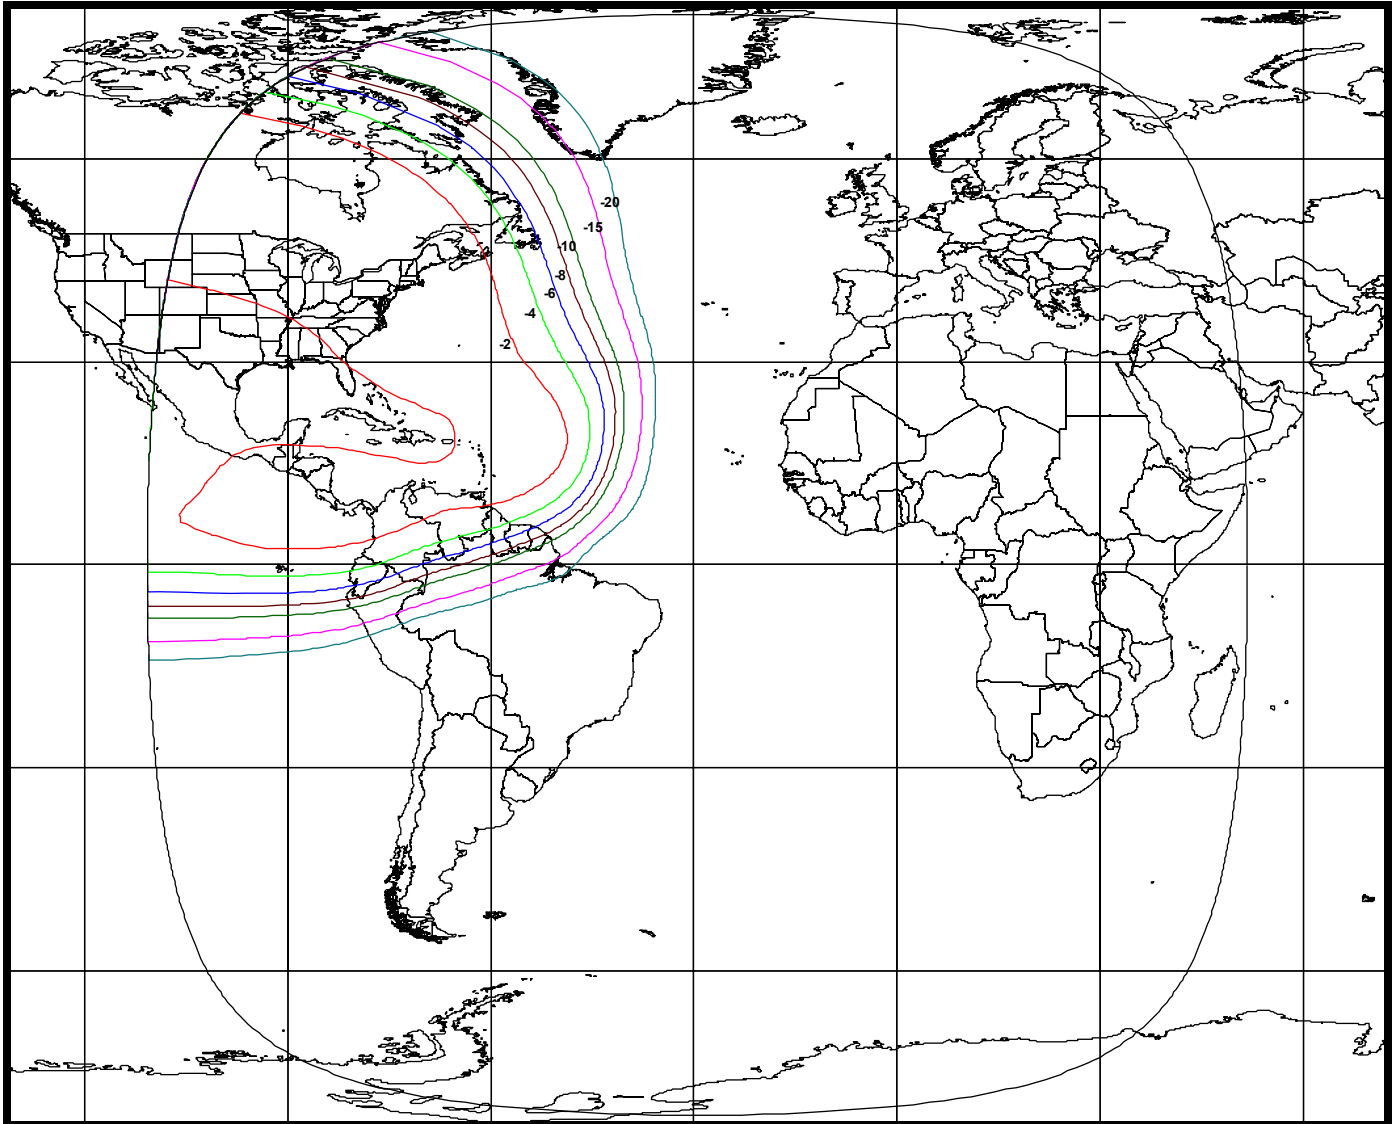


Exhibit 2-23: C-Band Northeast Downlink Beam
[Schedule S Beam Designation: NEDL]

Beam Peak Gain: 28.5 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 36.7 dBW

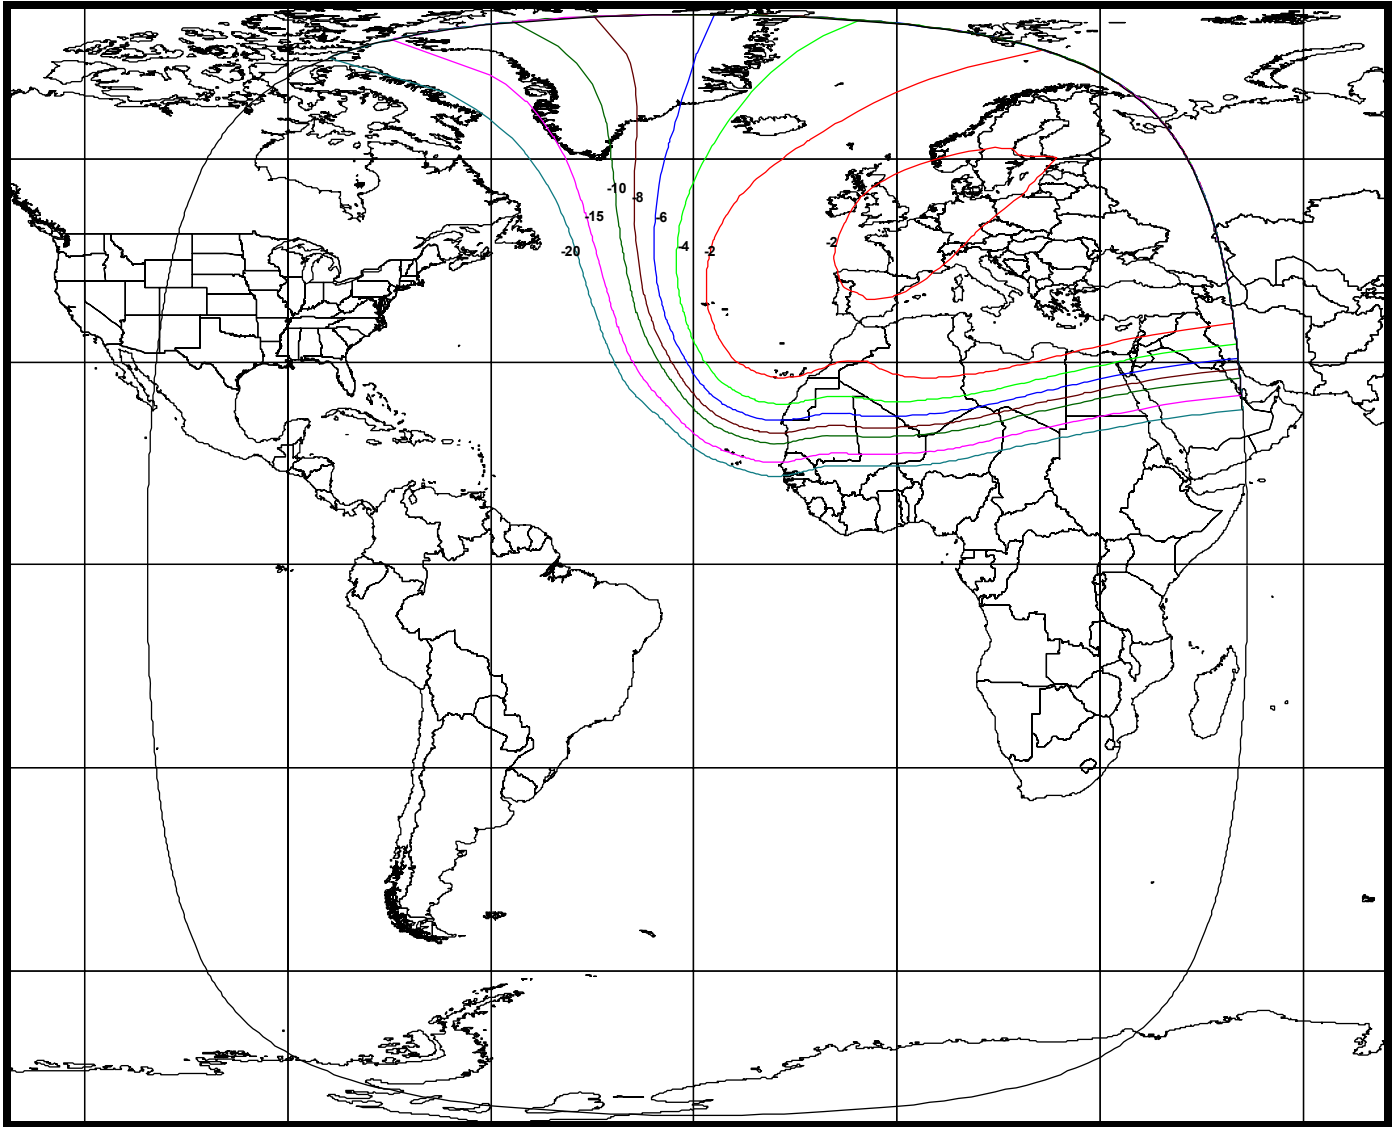


Exhibit 2-24: C-Band Southwest Downlink Beam
[Schedule S Beam Designation: SWDL]

Beam Peak Gain: 30.7 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 38.4 dBW

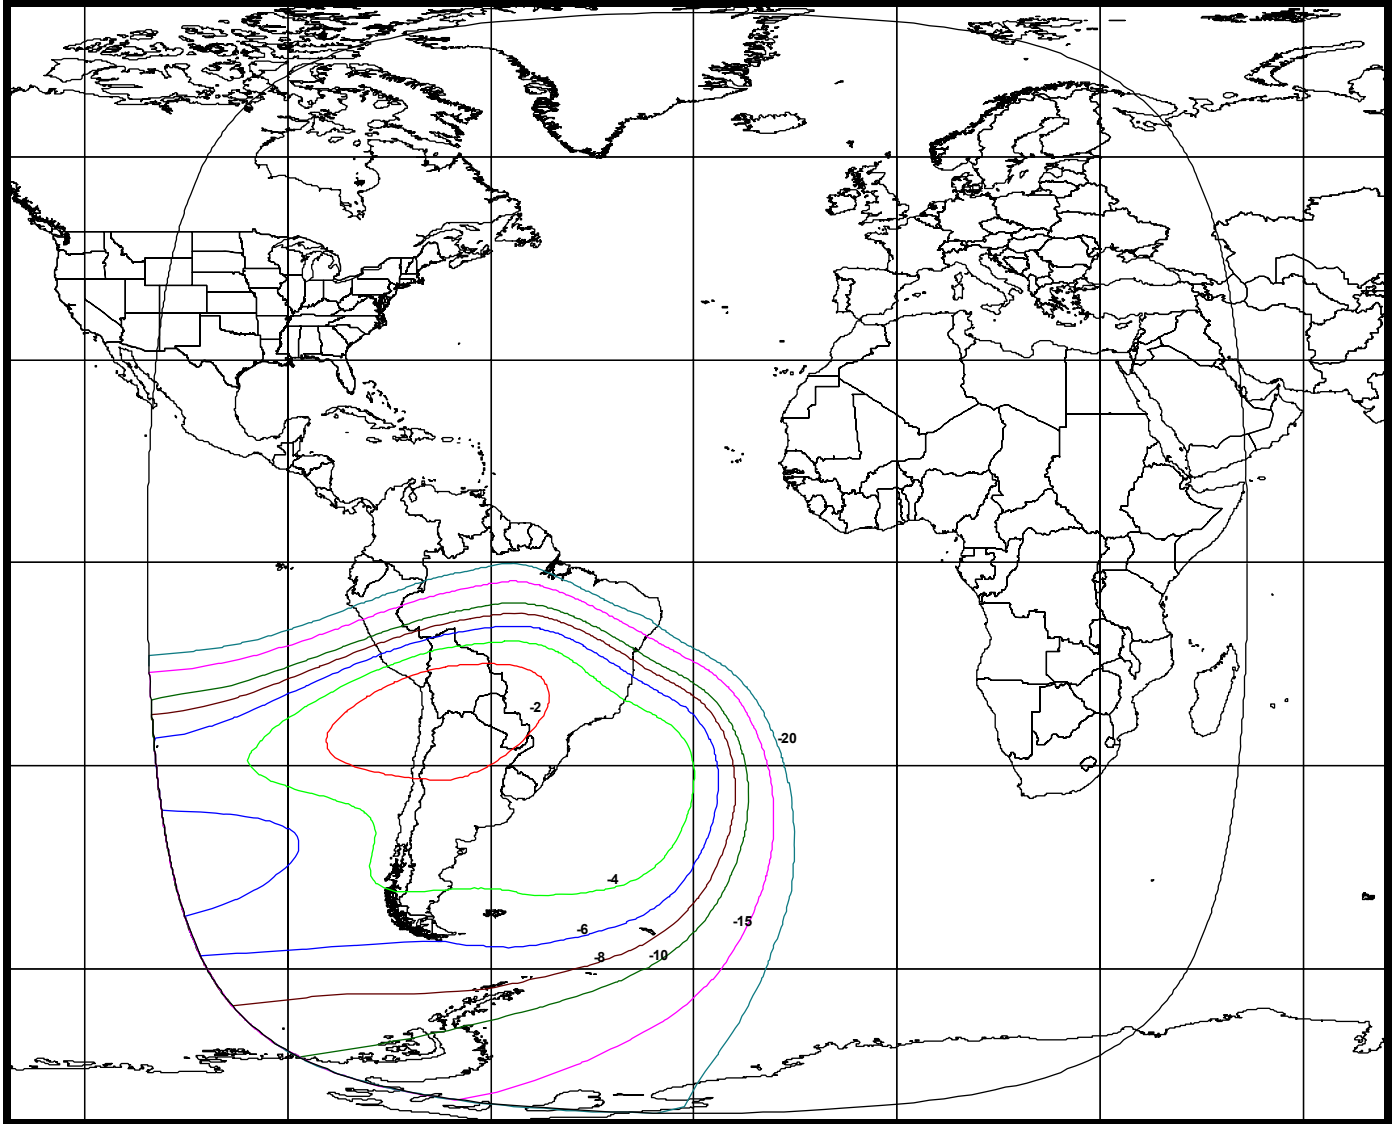


Exhibit 2-25: C-Band Southeast Downlink Beam
[Schedule S Beam Designation: SEDL]

Beam Peak Gain: 28.2 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 37.9 dBW

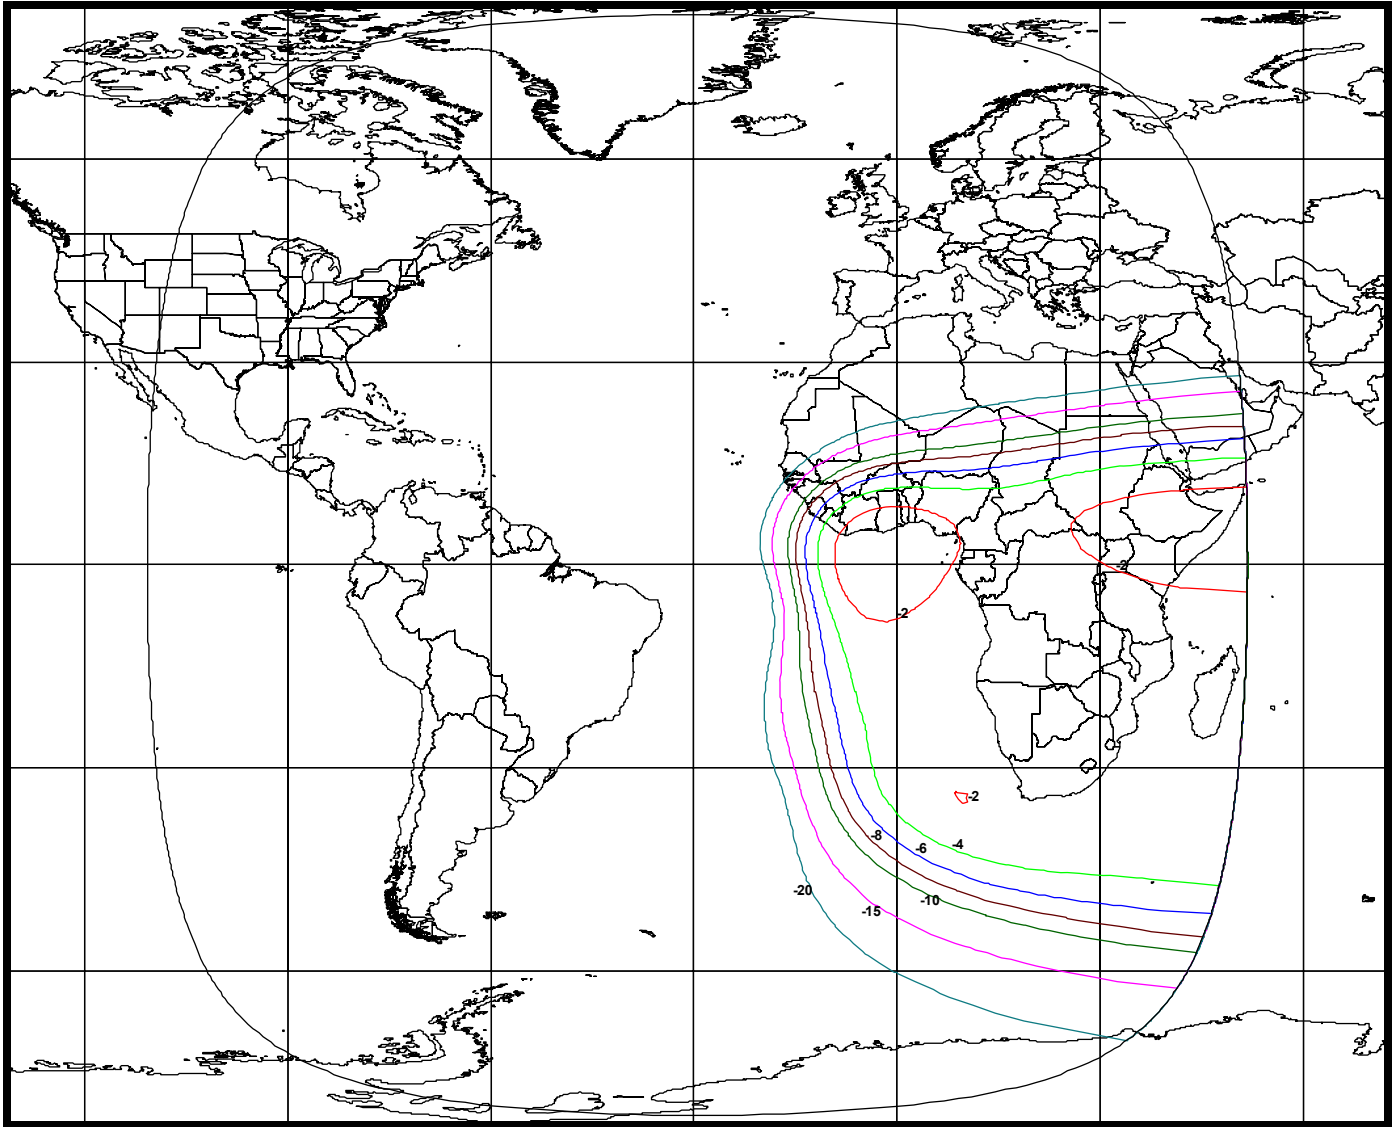


Exhibit 2-26: C-Spot A Downlink Beam
[Schedule S Beam Designation: CADL]

Beam Peak Gain: 27.5 dBi
Beam Polarization: Right Hand Circular
Beam Peak EIRP: 36.3 dBW

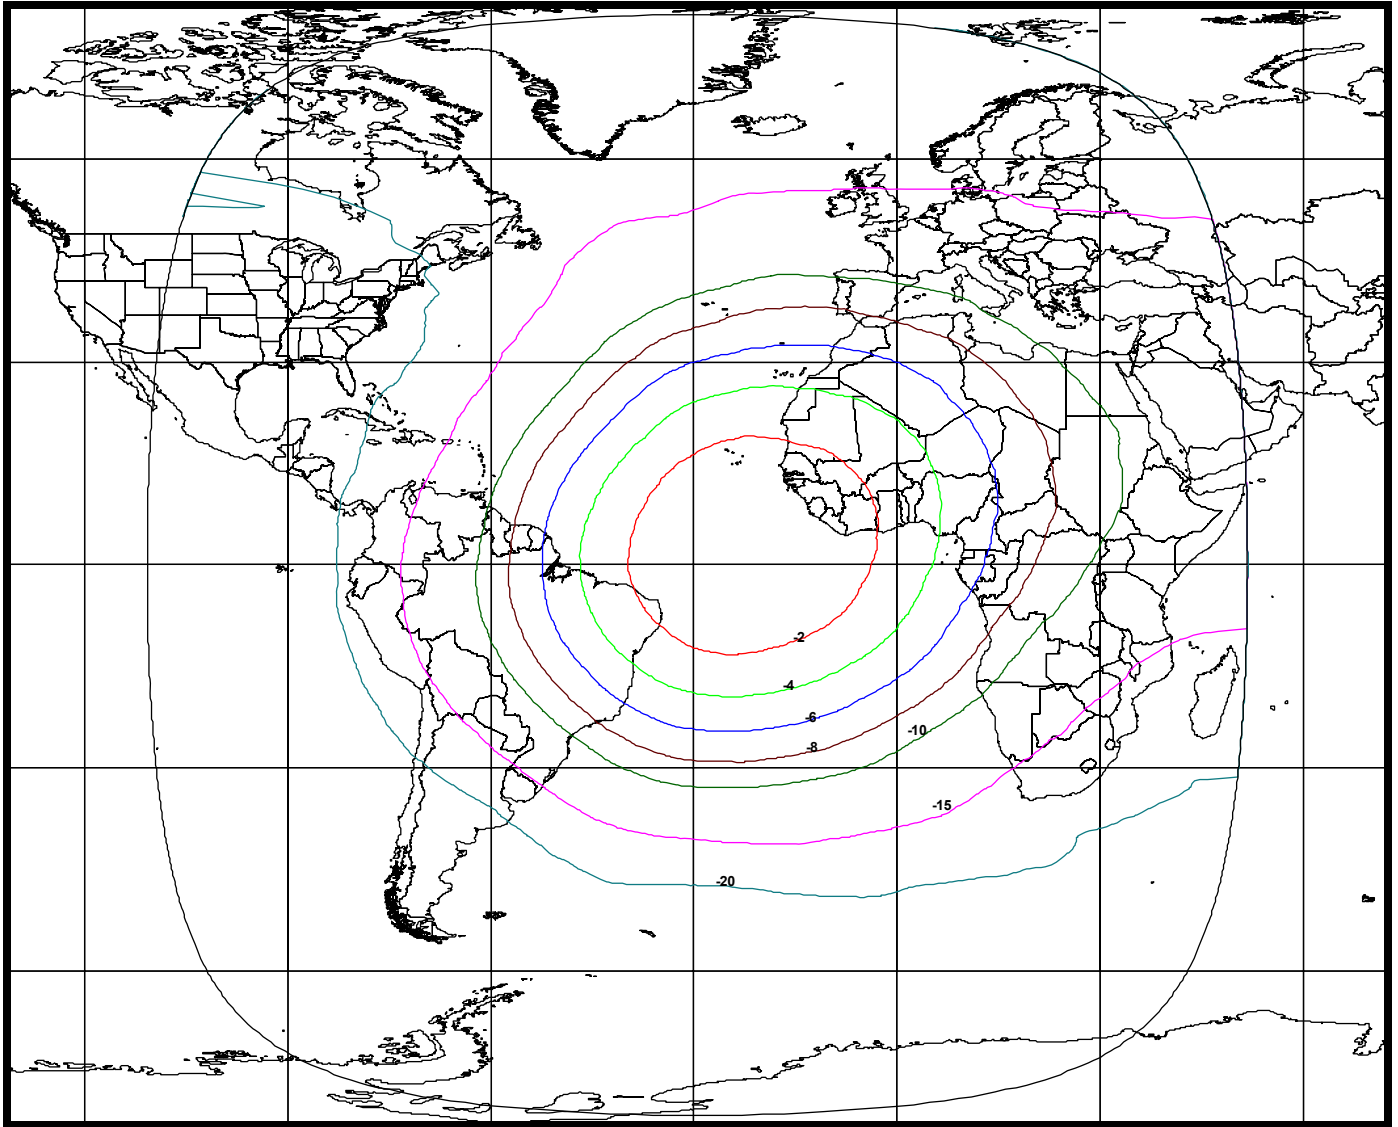


Exhibit 2-27: C-Spot B Downlink Beam
[Schedule S Beam Designation: CBDL]

Beam Peak Gain: 27.5 dBi
Beam Polarization: Left Hand Circular
Beam Peak EIRP: 36.8 dBW


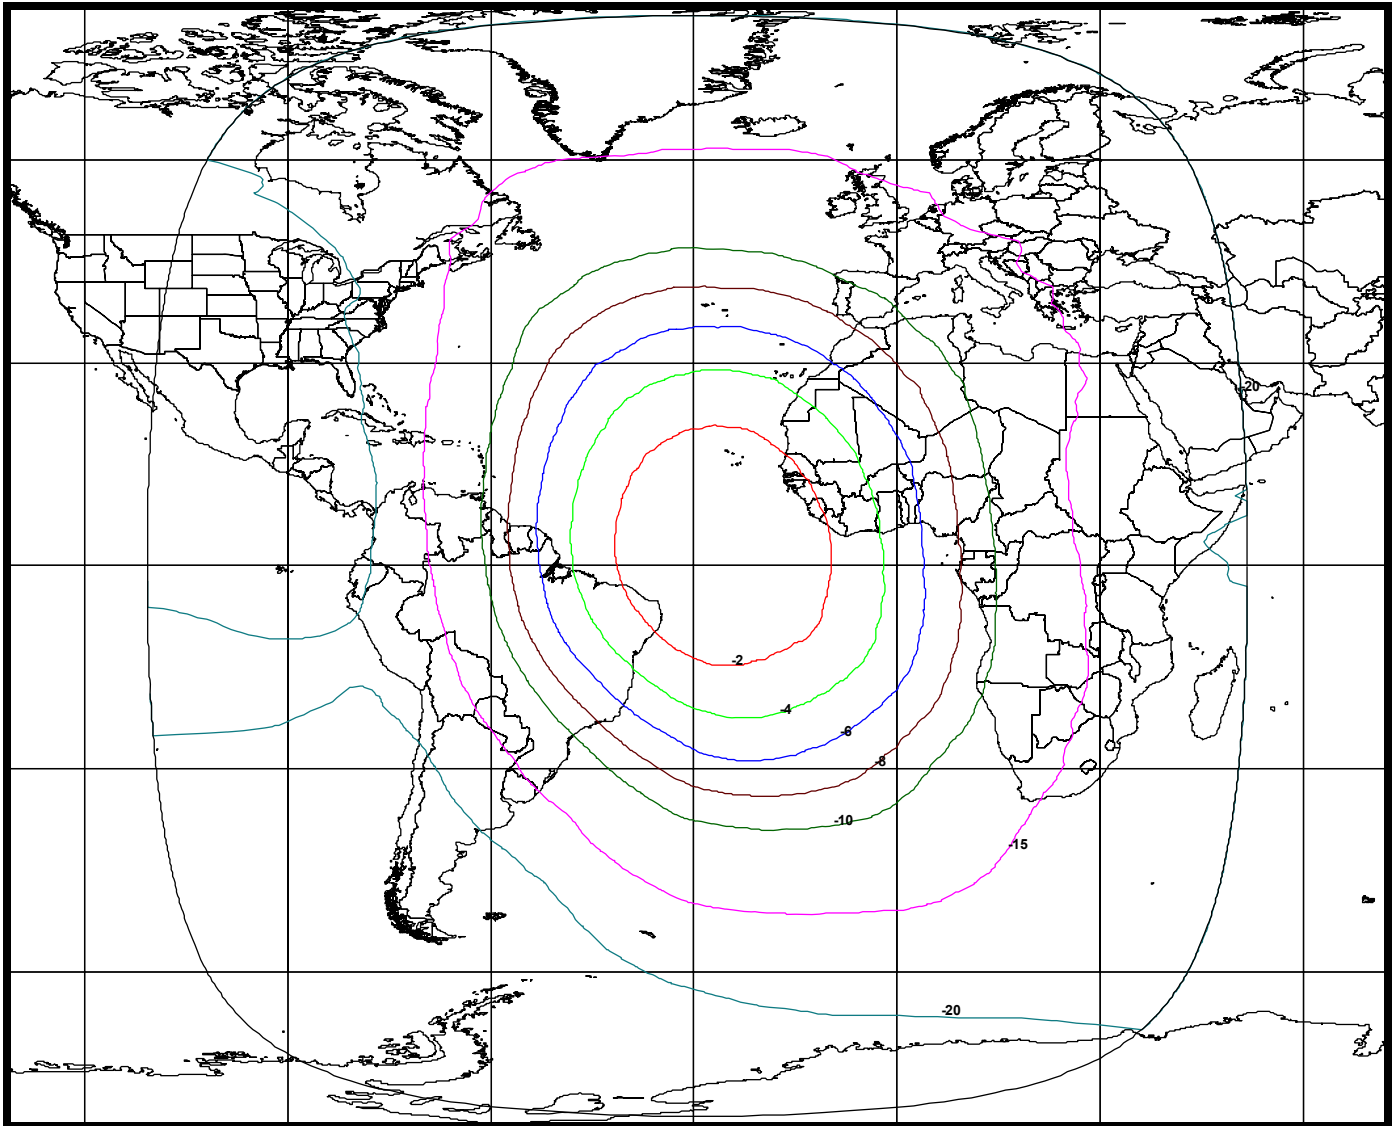


Exhibit 2-28: Ku-Band Spot 1 Downlink Beam
[Schedule S Beam Designation: S1DL]


Beam Peak Gain: 36.2 dBi
Beam Polarization: Vertical
Beam Peak EIRP: 50.1 dBW

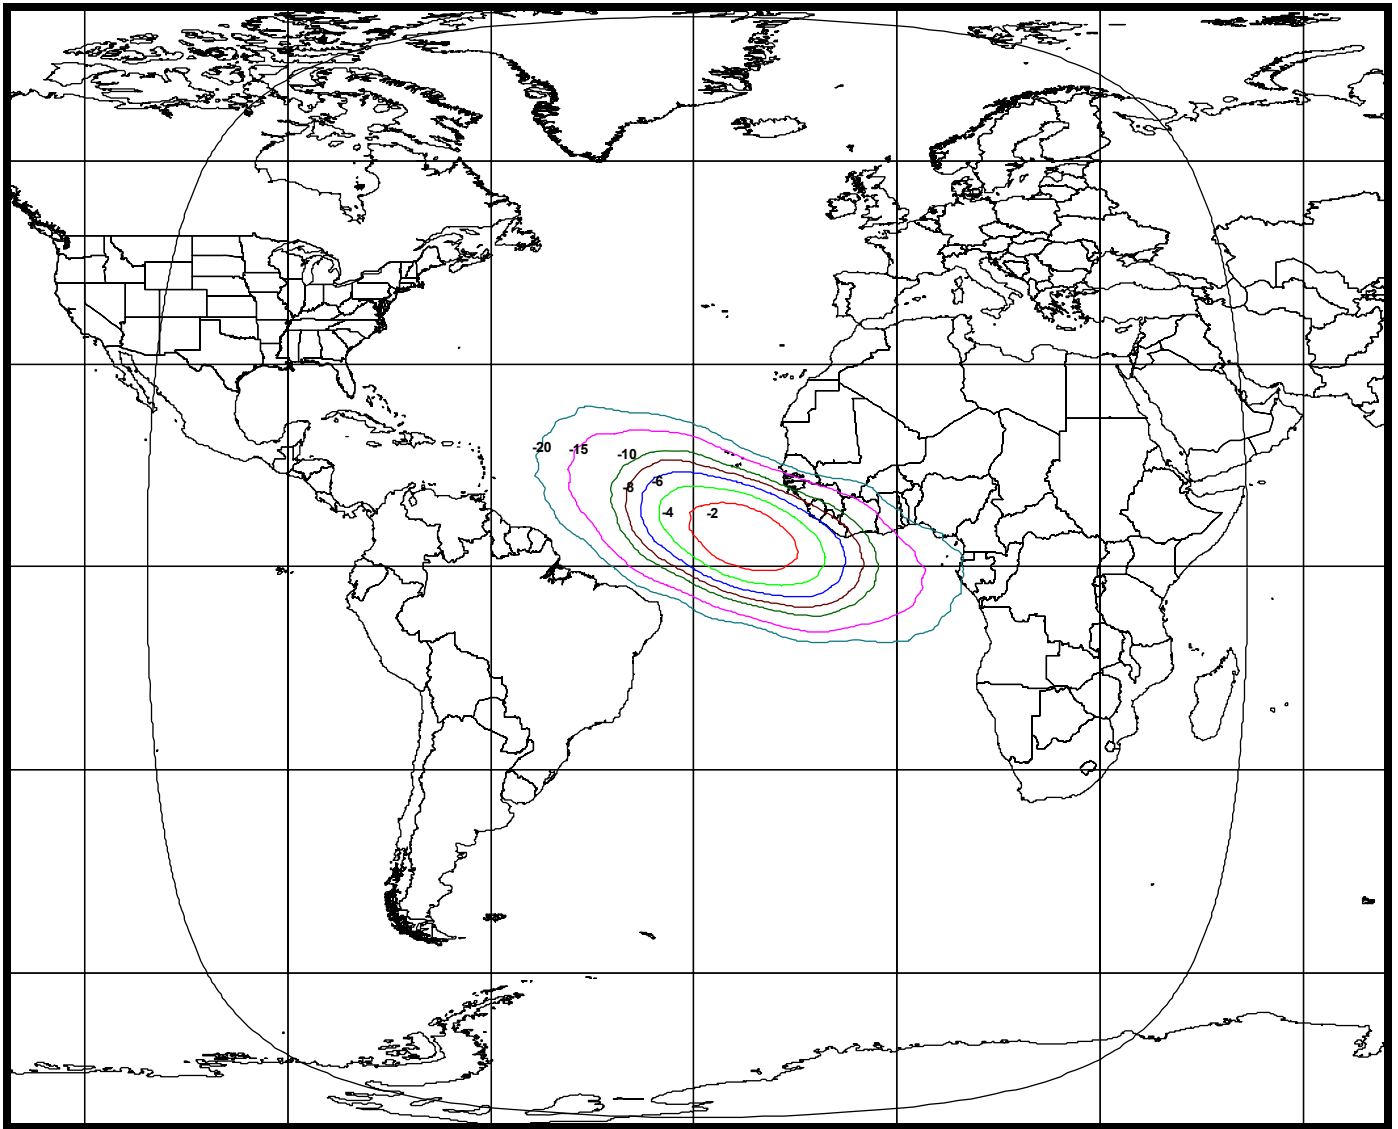

Note: This beam can also be operated in a low power mode with a corresponding beam peak EIRP of 48.9 dBW.

Exhibit 2-29: Ku-Band Spot 2 Downlink Beam
[Schedule S Beam Designation: S2DL]

Beam Peak Gain: 34.5 dBi
Beam Polarization: Horizontal
Beam Peak EIRP: 49.1 dBW

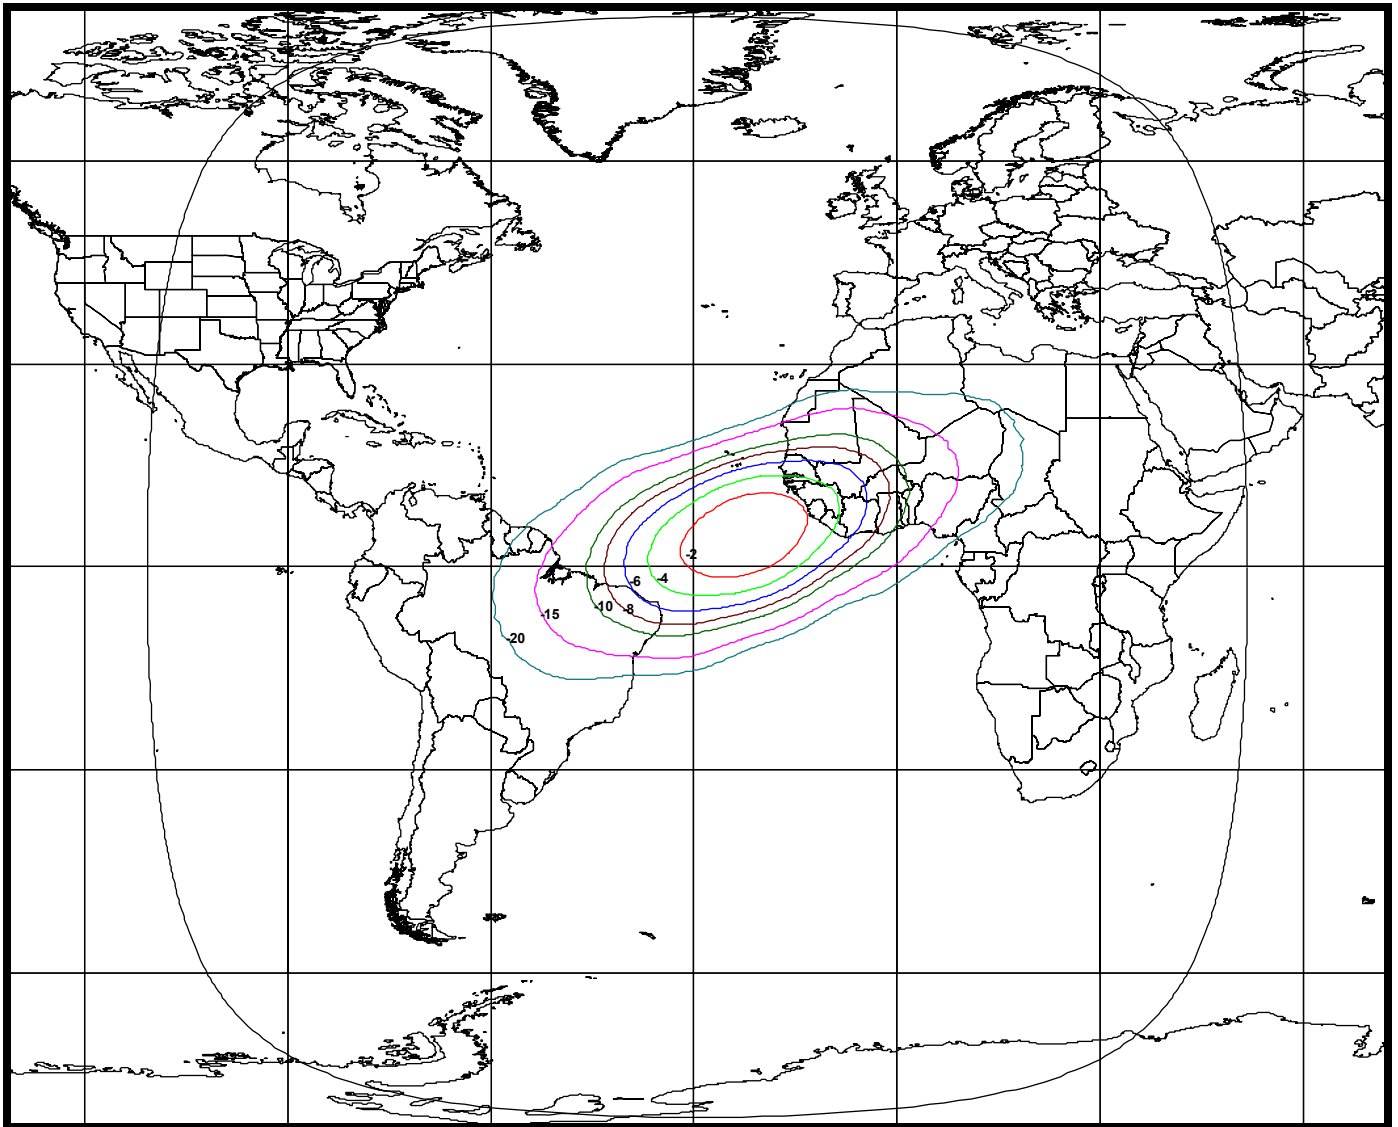

Note: This beam can also be operated in a low power mode with a corresponding beam peak EIRP of 47.9 dBW.

Exhibit 2-30: Ku-Band Spot 2A Downlink Beam

[Schedule S Beam Designation: S2AD]

Beam Peak Gain: 32.7 dBi
Beam Polarization: Horizontal
Beam Peak EIRP: 47.2 dBW


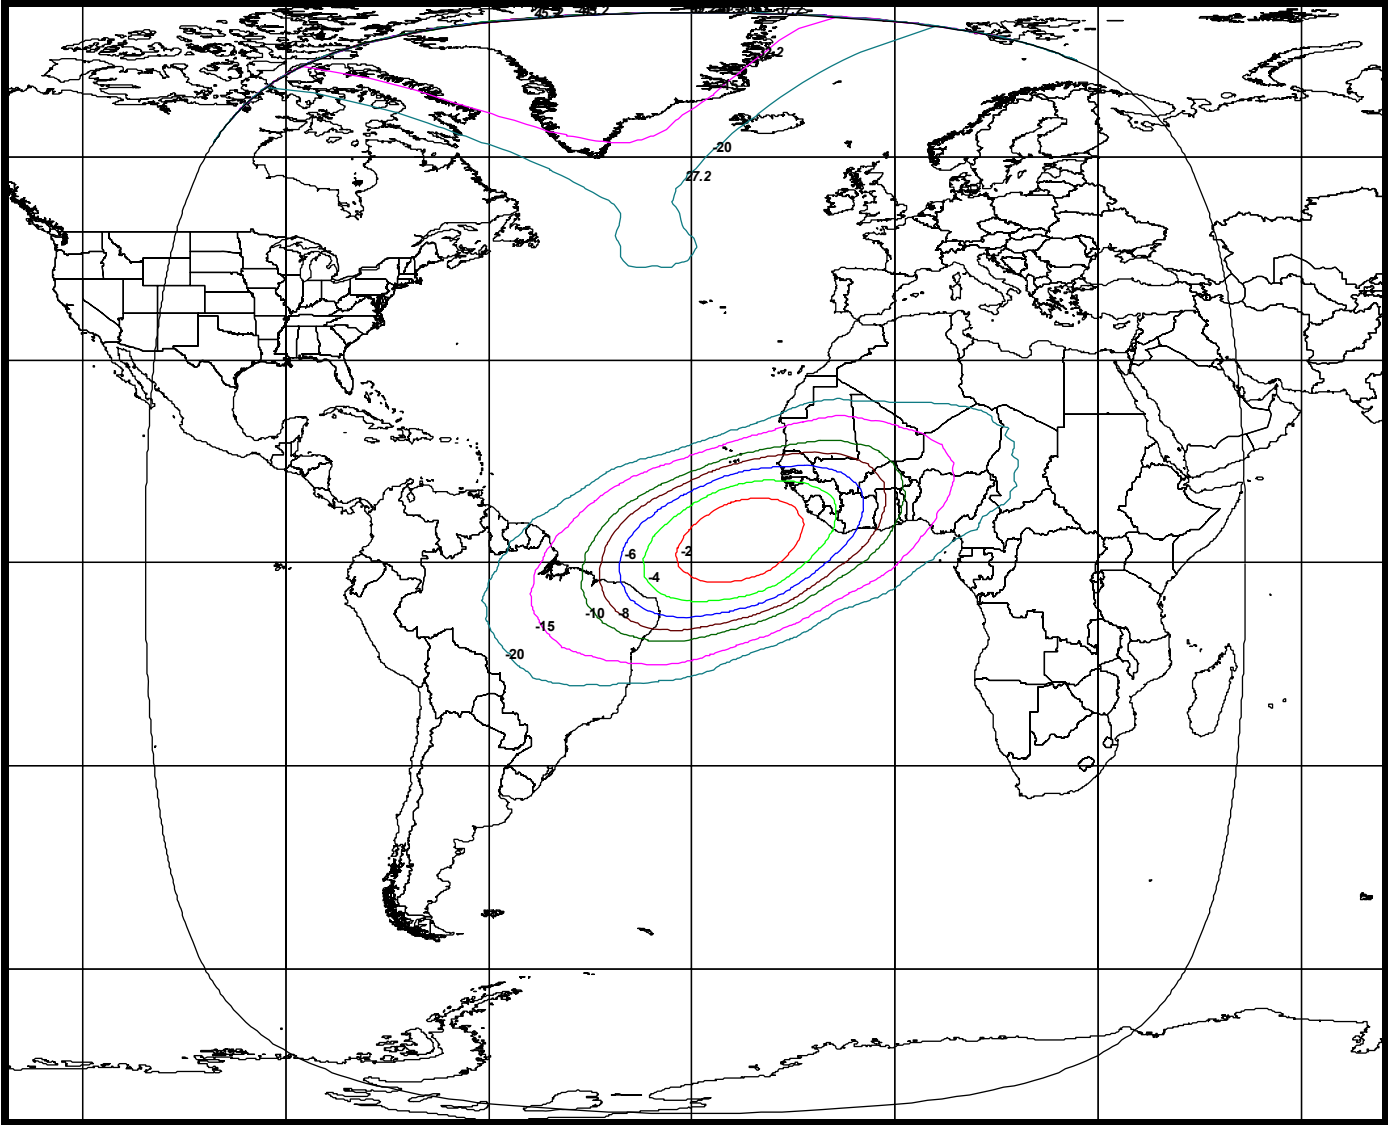


Exhibit 2-31: Ku-Band Spot 3 Downlink Beam
[Schedule S Beam Designation: S3DL]

Beam Peak Gain: 36.6 dBi
Beam Polarization: Vertical
Beam Peak EIRP: 50.5 dBW

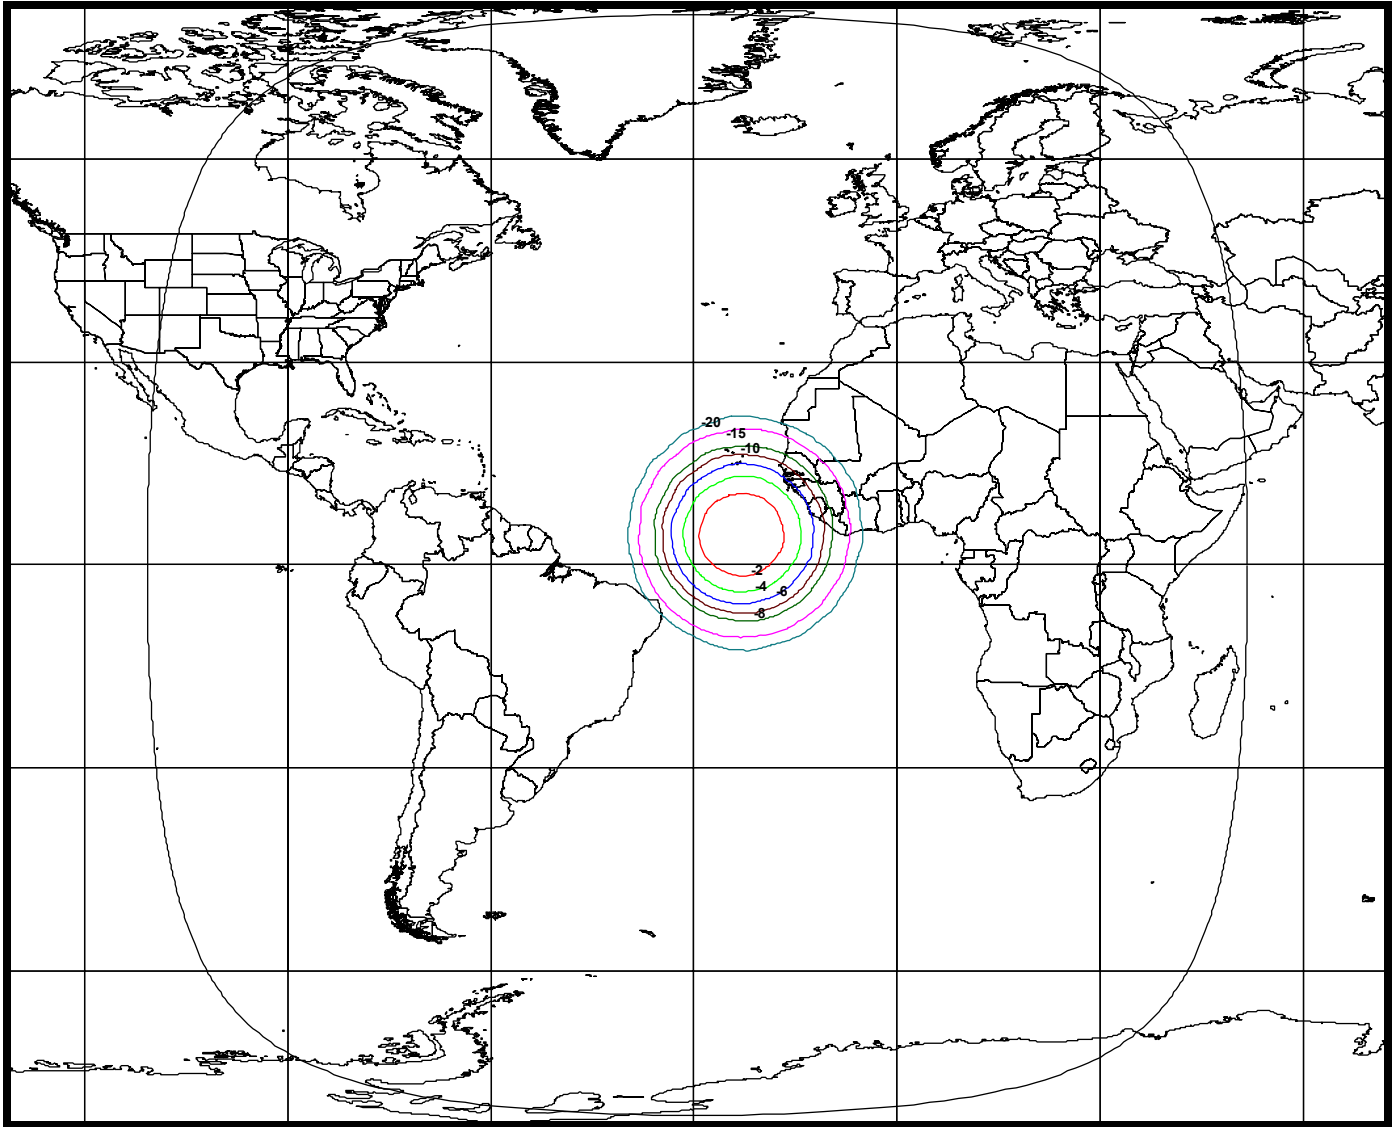


Note: This beam can also be operated in a low power mode with a corresponding beam peak EIRP of 49.0 dBW.

Exhibit 2-32: Ku-Band Spot 3X Downlink Beam

[Schedule S Beam Designation: S3XD]


Beam Peak Gain: 36.6 dBi
Beam Polarization: Horizontal
Beam Peak EIRP: 50.5 dBW

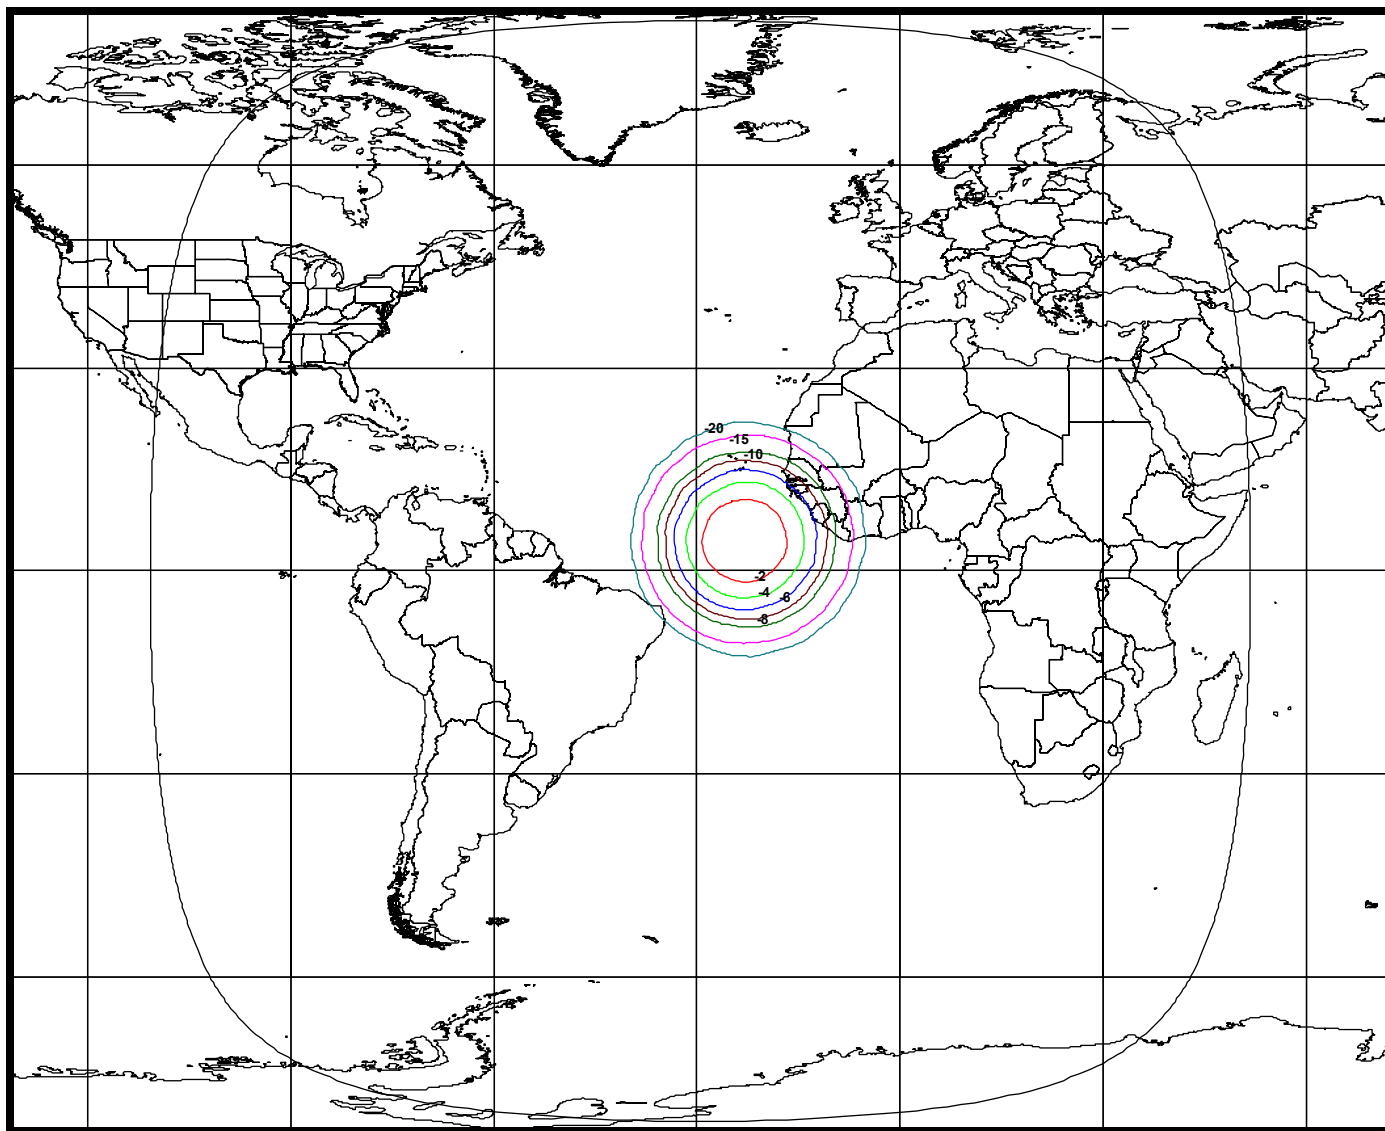

Note: This beam can also be operated in a low power mode with a corresponding beam peak EIRP of 49.0 dBW.

Exhibit 2-33: Command Uplink Beam
[Schedule S Beam Designation: CMD]


Peak Beam Gain: 8.3 dBi
Polarization: Left Hand Circular
Peak G/T: -28.5 dB/K
Command Threshold Flux Density @ Peak G/T: -107.4 dBW/m²

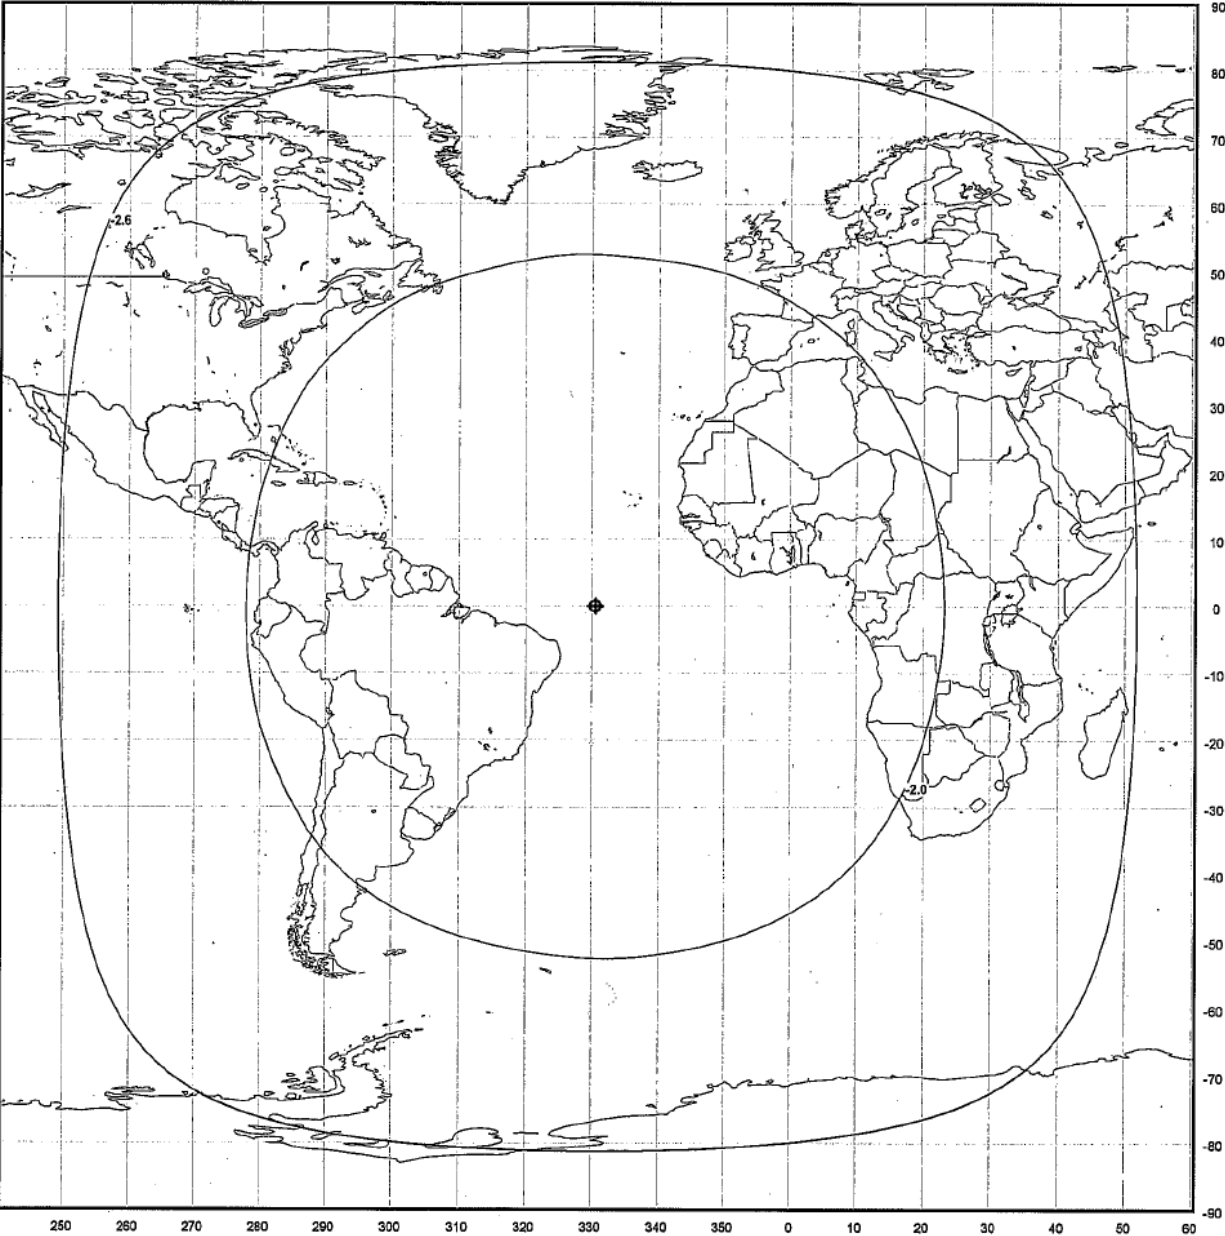

Relative Gain Contours Shown: -2.0, -2.6 dB

Exhibit 2-34: On-Station Telemetry Downlink Beam
[Schedule S Beam Designation: TLMO]


Peak Beam Gain: 16.5 dBi
Polarization: Right Hand Circular
Peak EIRP: 8.2 dBW

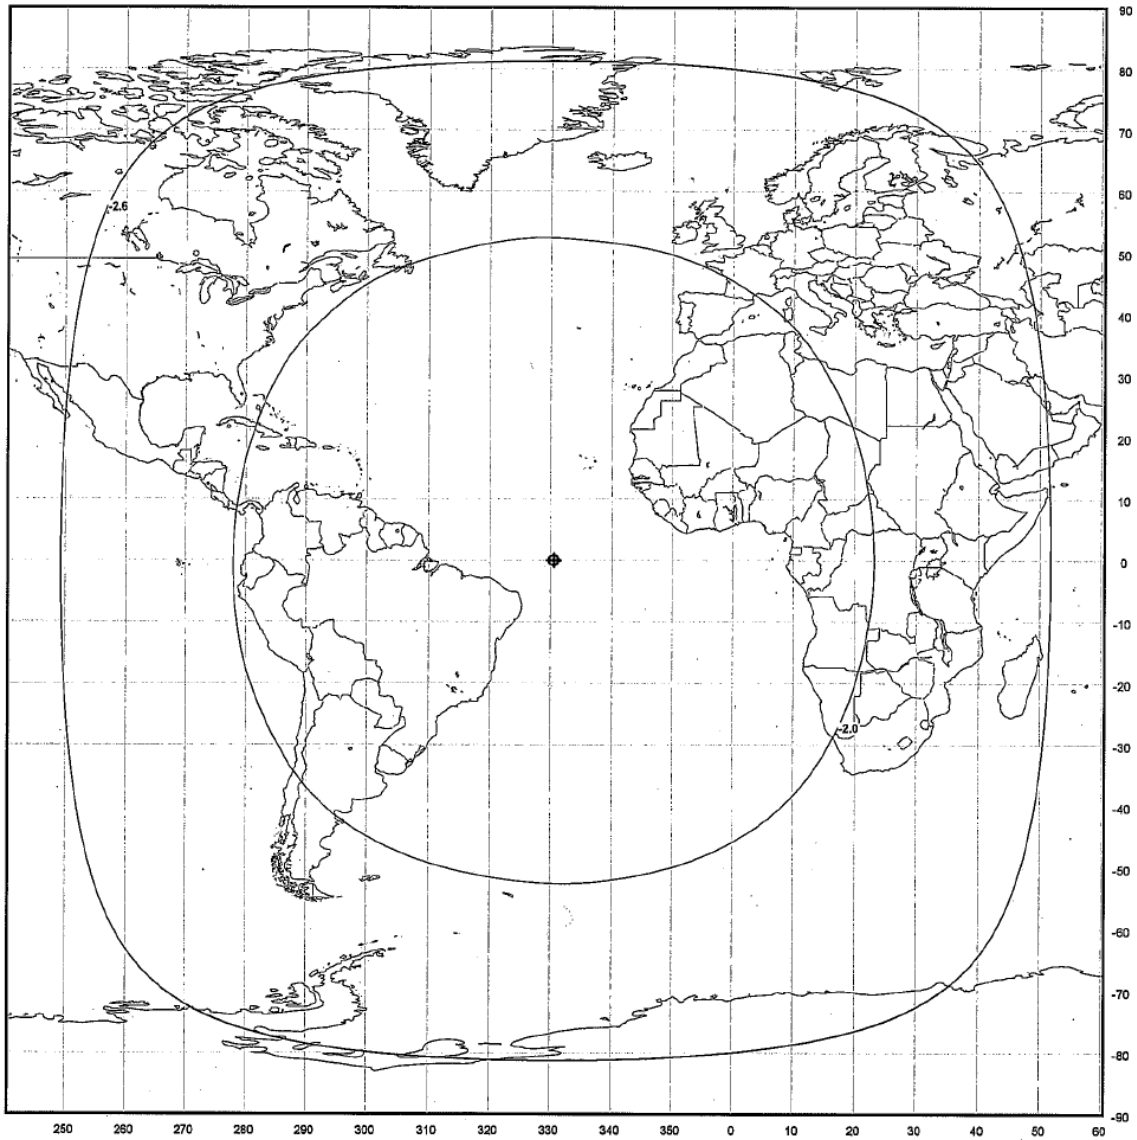

Relative Gain Contours Shown: -2.0, -2.6 dB

Exhibit 2-35: Back-up Telemetry Downlink Beam
[Schedule S Beam Designation: TLMB]


Peak Beam Gain: -5.3 dBi
Polarization: Right Hand Circular
Peak EIRP: 0.7 dBW

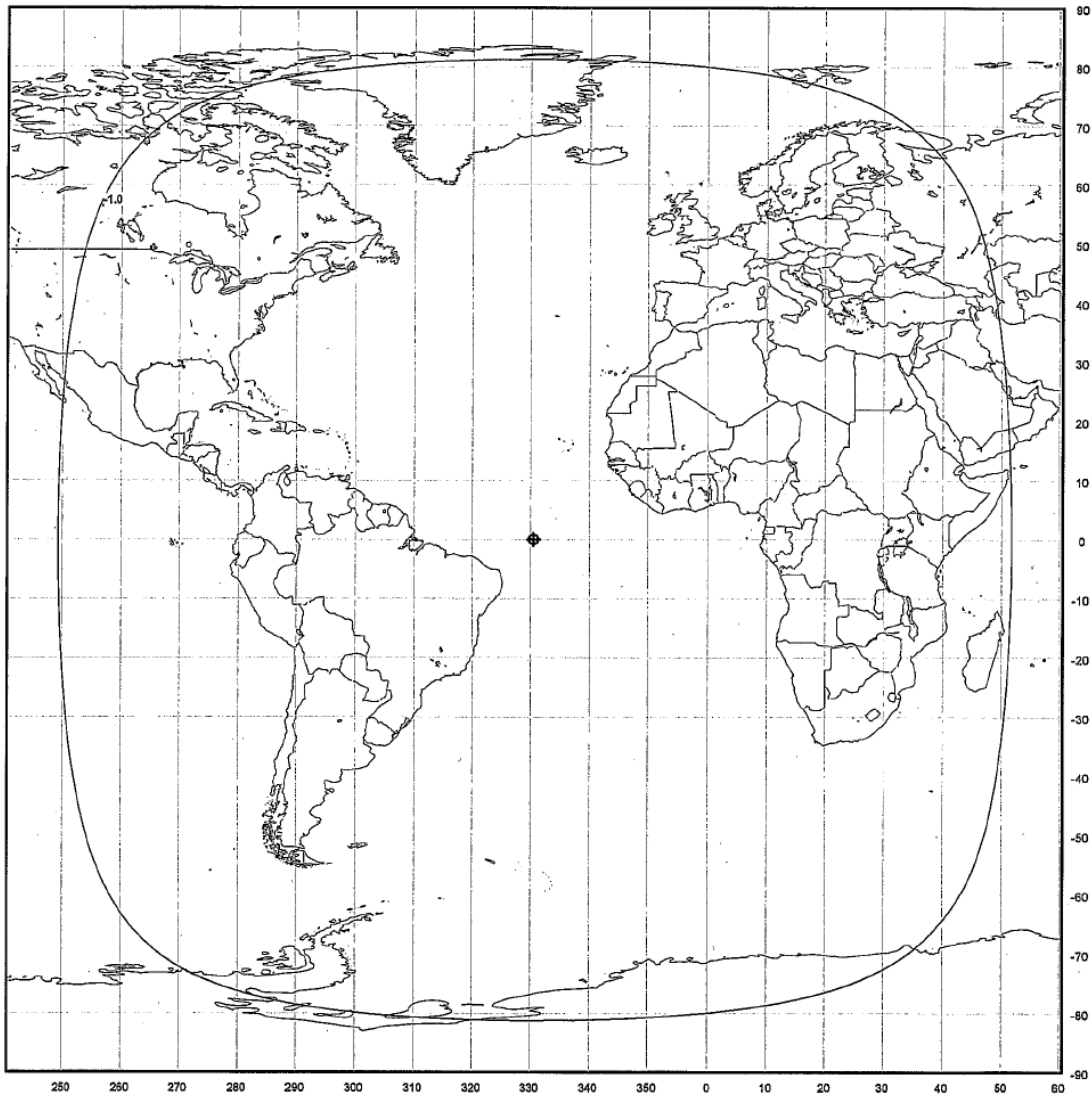

Relative Gain Contour Shown: -1 dB

Exhibit 2-36: C-Band Uplink Power Control Downlink Beam
[Schedule S Beam Designation: BNC]


Peak Beam Gain: 10.7 dBi
Polarization: Linear Vertical
Peak EIRP: 11.8 dBW

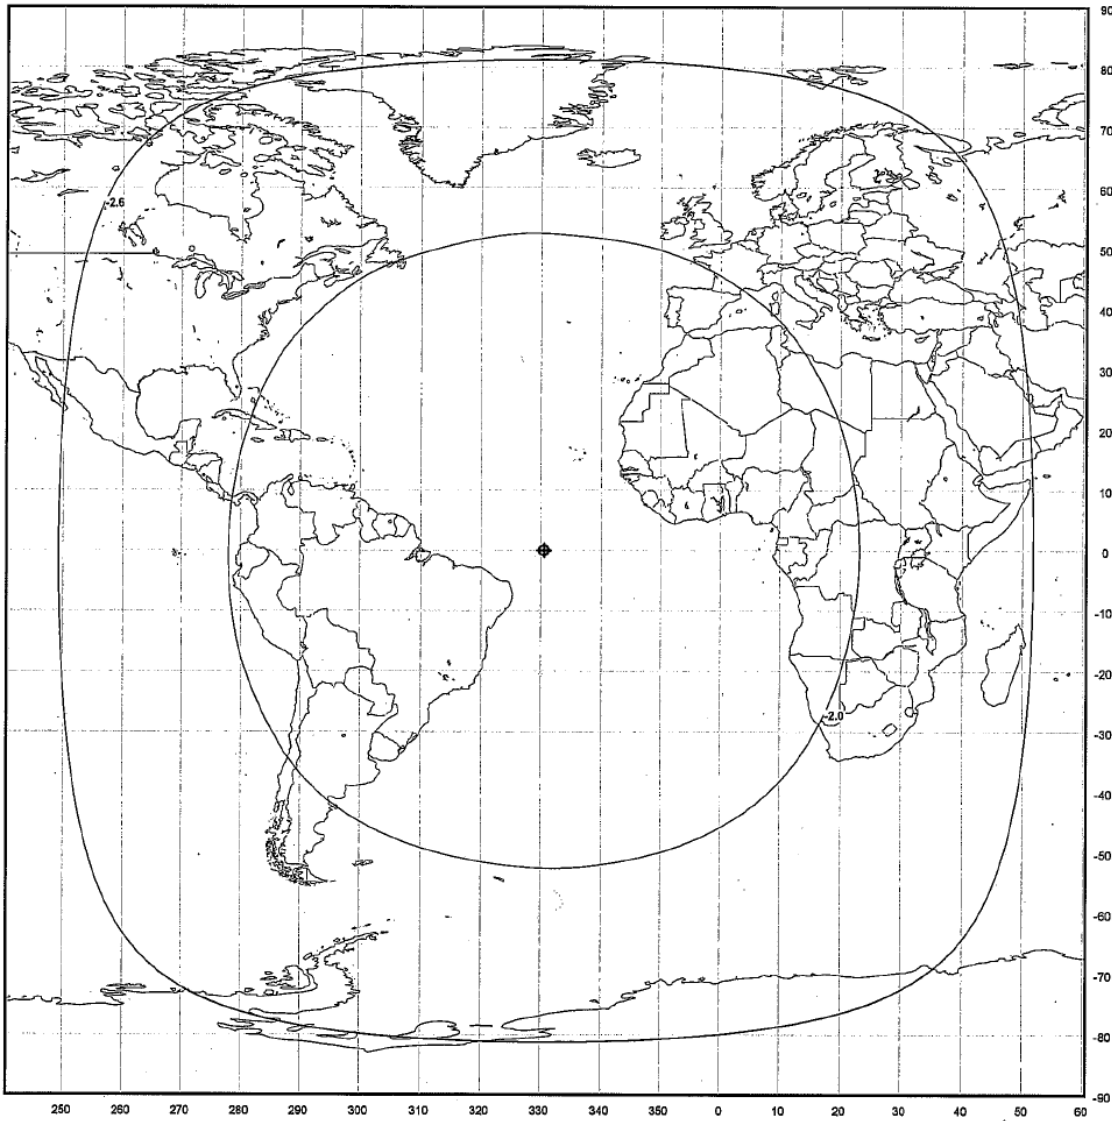

Relative Gain Contours Shown: -2.0, -2.6 dB

Exhibit 2-37: Ku-Band Uplink Power Control Downlink Beam
[Schedule S Beam Designation: BNK1]

Peak Beam Gain: 16.7 dBi
Polarization: Right Hand Circular
Peak EIRP: 8.0 dBW

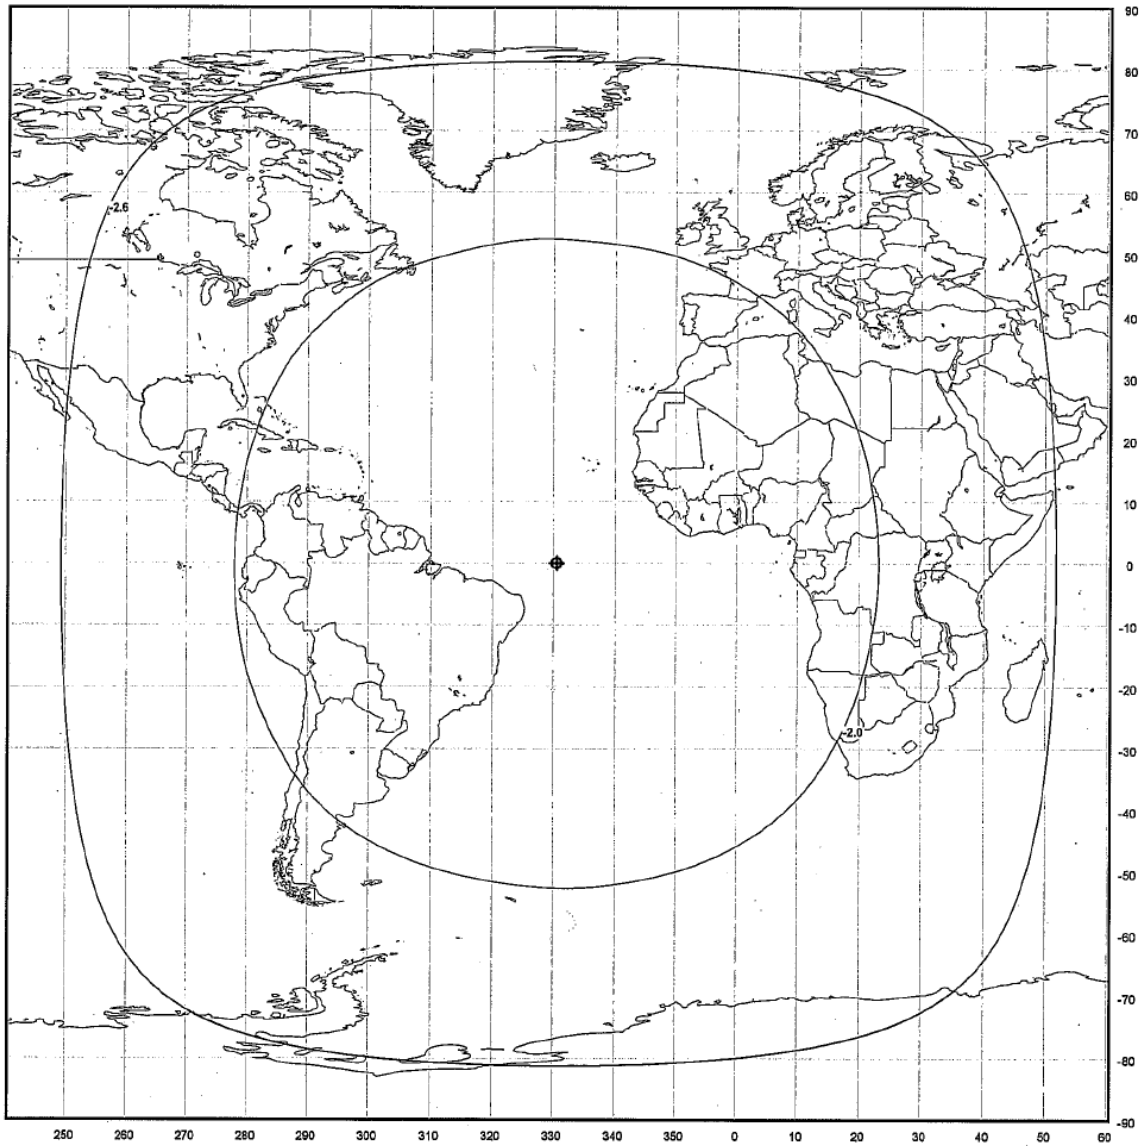

Relative Gain Contours Shown: -2.0, -2.6 dB

Exhibit 2-38: Ku-Band Uplink Power Control Downlink Beam (Spot 1)
[Schedule S Beam Designation: BNK2]

Peak Beam Gain: 36.2 dBi
Polarization: Linear Vertical
Peak EIRP: 20.2 dBW

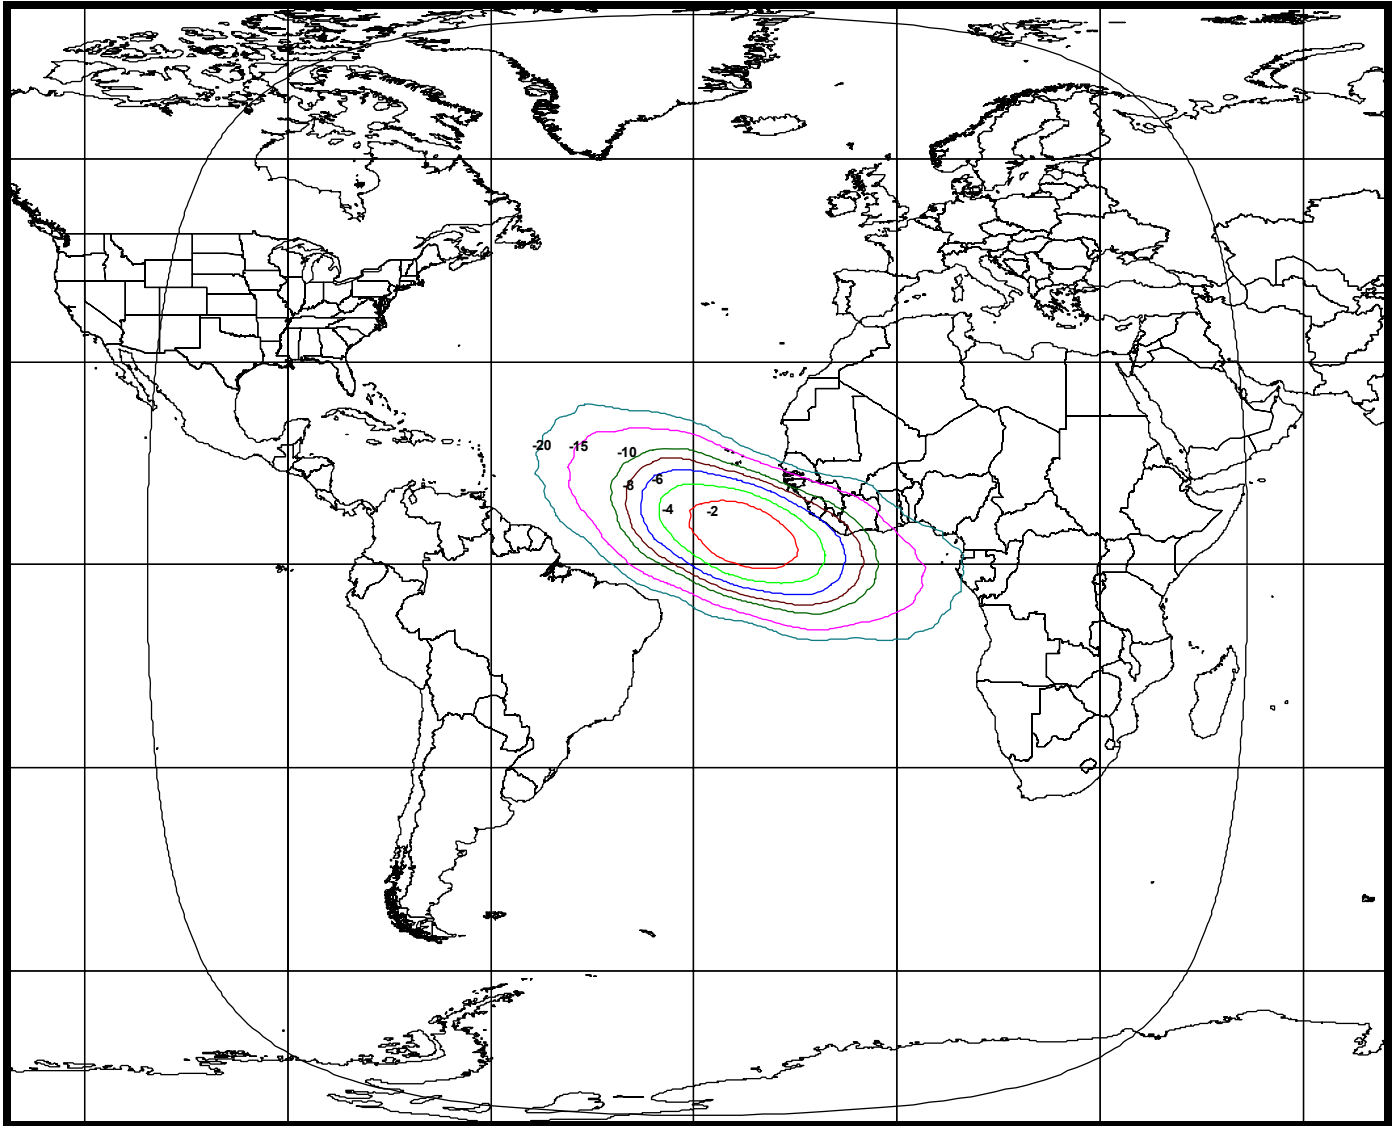


Exhibit 2-39: Ku-Band Uplink Power Control Downlink Beam (Spot 2)
[Schedule S Beam Designation: BNK3]

Peak Beam Gain: 34.5 dBi
Polarization: Linear Horizontal
Peak EIRP: 20.1 dBW

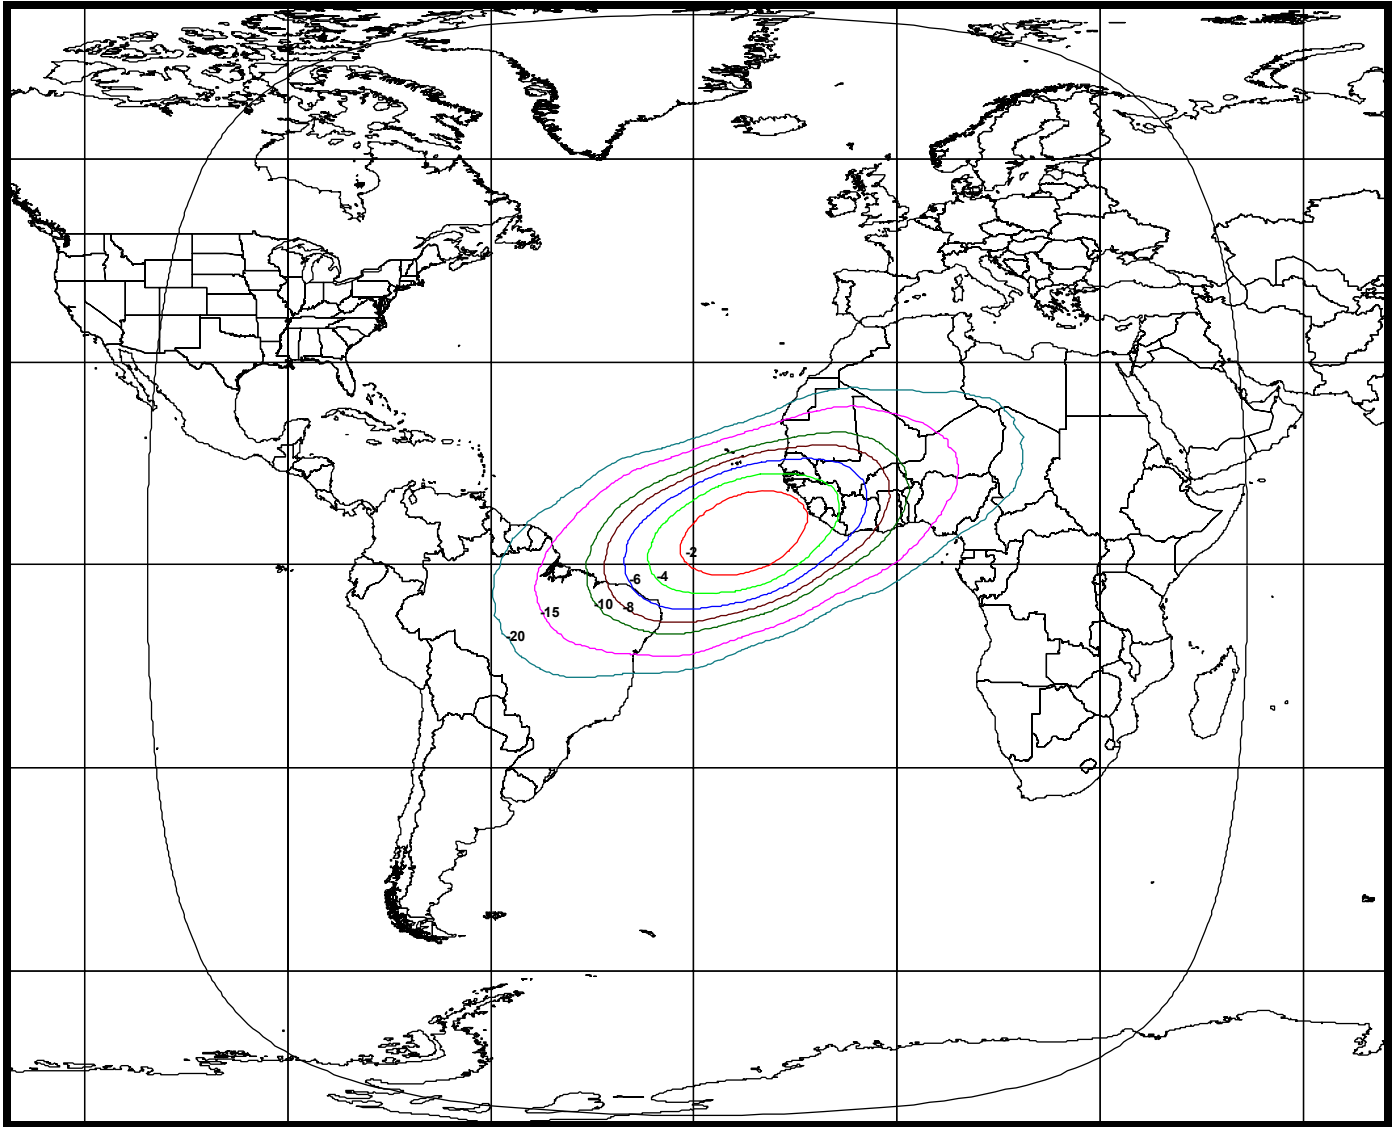


Exhibit 2-40: Ku-Band Uplink Power Control Downlink Beam (Spot 2A)
[Schedule S Beam Designation: BNK4]

Peak Beam Gain: 32.7 dBi
Polarization: Linear Horizontal
Peak EIRP: 18.3 dBW

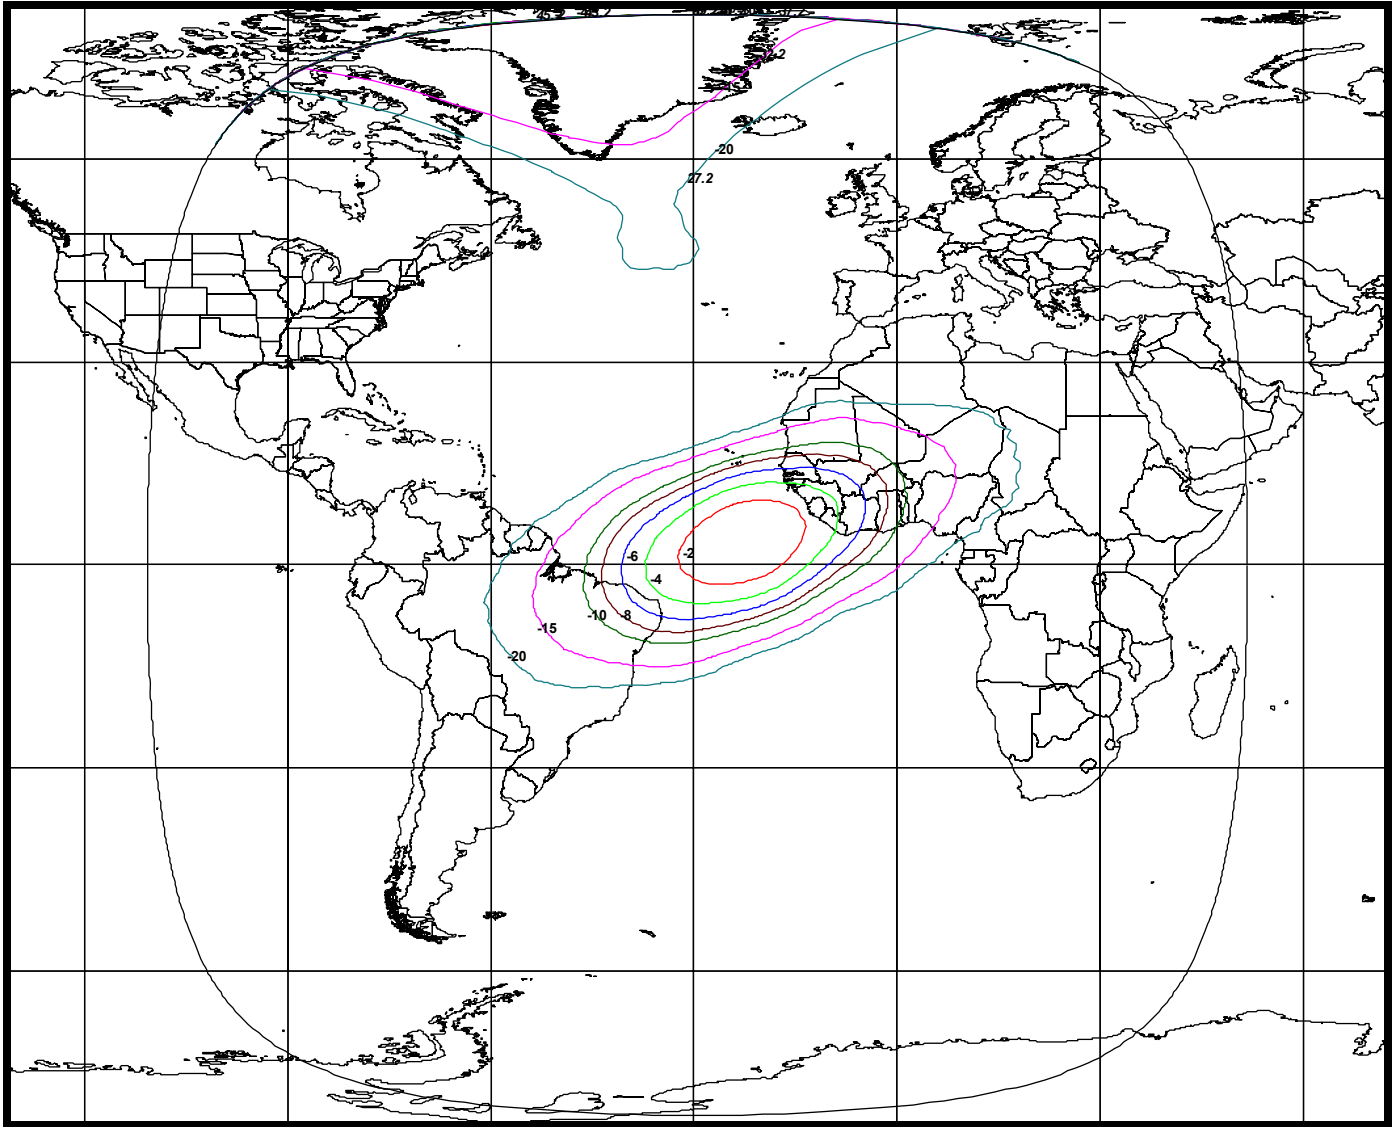


Exhibit 2-41: Ku-Band Uplink Power Control Downlink Beam (Spot 3)
[Schedule S Beam Designation: BNK5]

Peak Beam Gain: 36.6 dBi
Polarization: Linear Vertical
Peak EIRP: 19.8 dBW

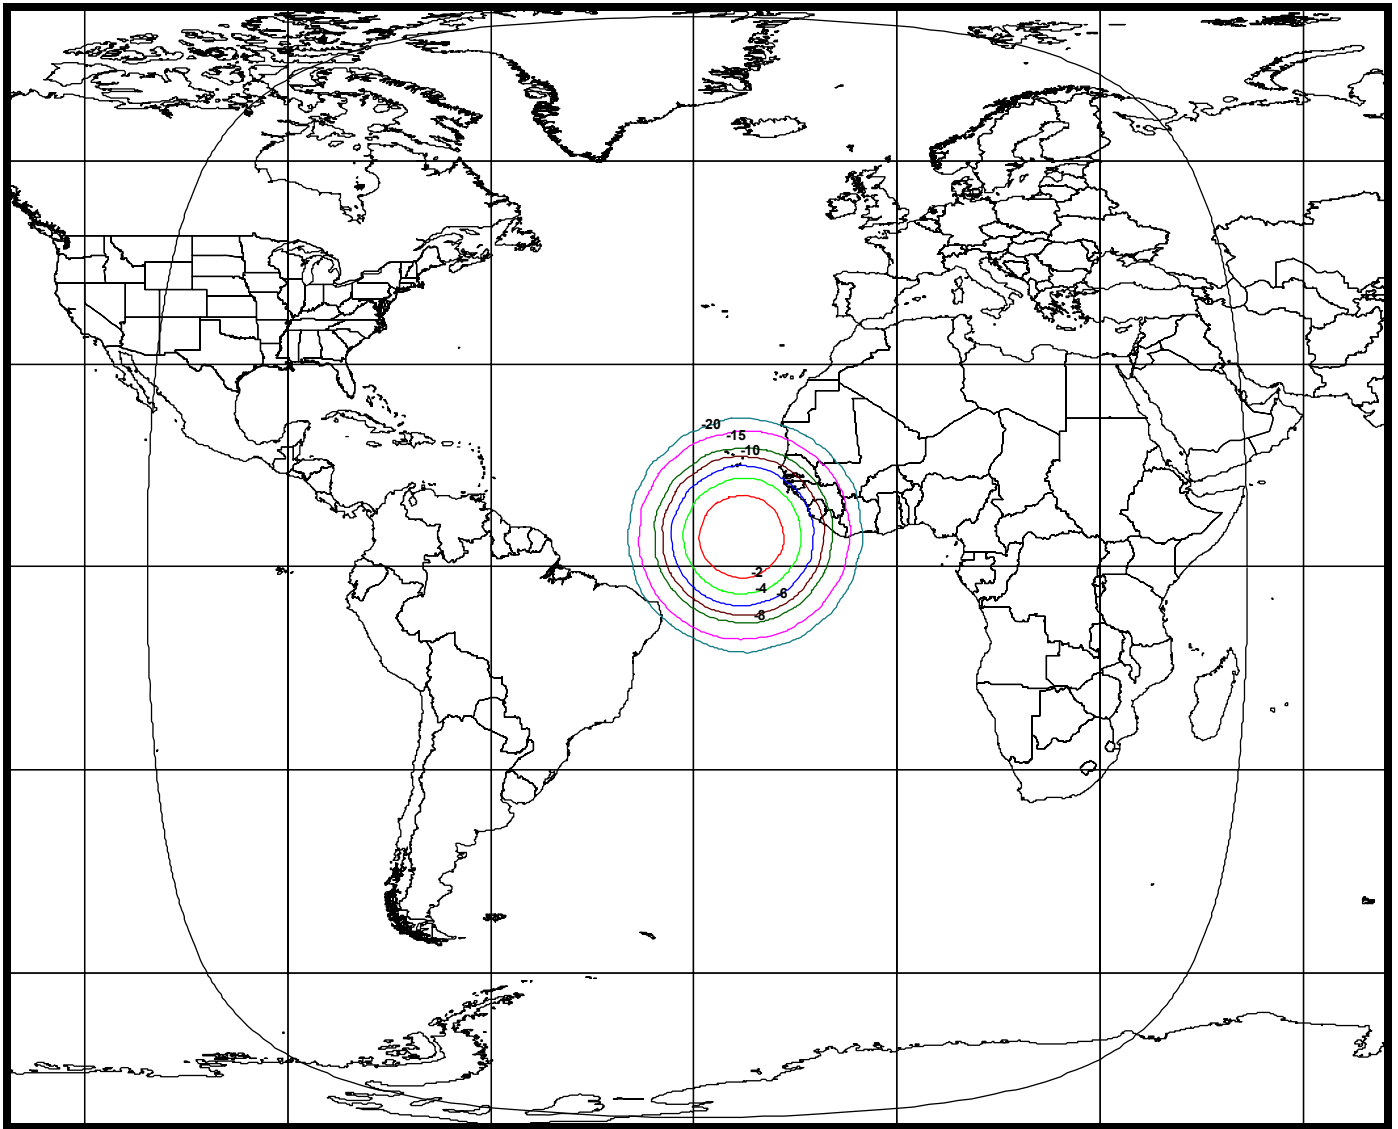


Exhibit 2-42: Ku-Band Uplink Power Control Downlink Beam (Spot 3X)
[Schedule S Beam Designation: BNK6]

Peak Beam Gain: 36.6 dBi
Polarization: Linear Horizontal
Peak EIRP: 19.8 dBW

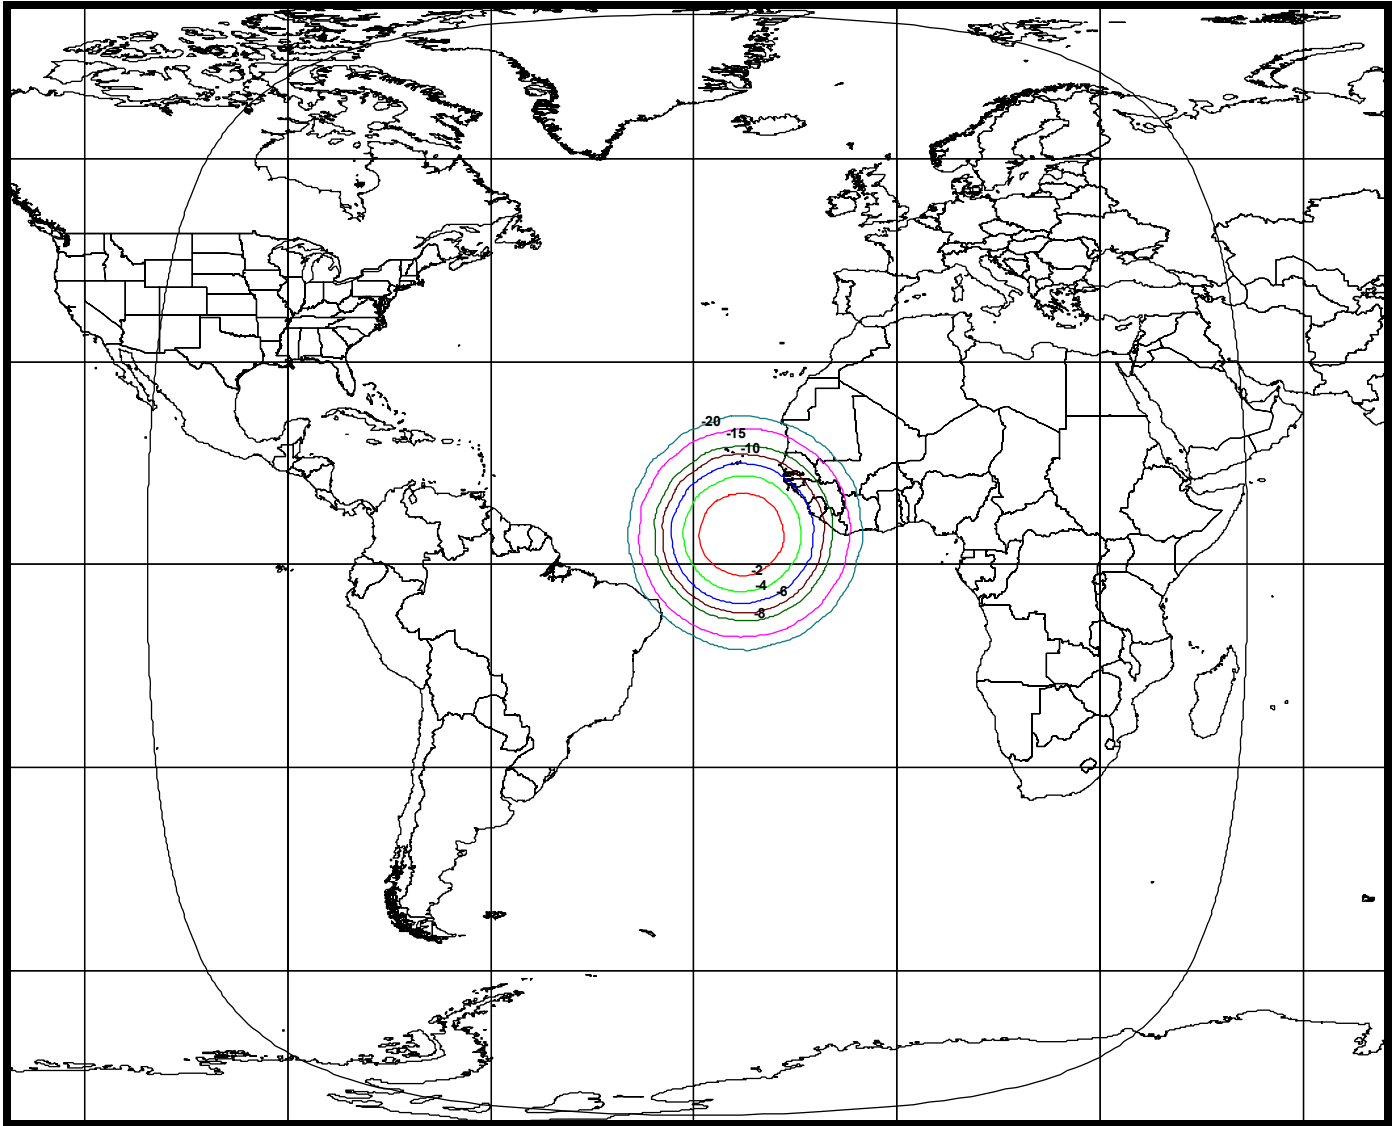


EXHIBIT 3: EMISSION DESIGNATORS

Signal Type	Emission Designator	Allocated Bandwidth (kHz)
Analog TV/FM Carrier	30M0F3F	30000
Analog TV/FM Carrier	36M0F3F	36000
76436 kbps Carrier	112MG7W	112000
52550 kbps Carrier	77M0G7W	77000
49138 kbps Carrier	72M0G7W	72000
27981 kbps Carrier	41M0G7W	41000
24575 kbps Carrier	36M0G7W	36000
23204 kbps Carrier	34M0G7W	34000
6000 kbps carrier	10M3G7W	10300
64 kbps Carrier	100KG7W	100
512 kbps Carrier	1M45G7W	1450
128 kbps Carrier	400KG7W	400

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS

FREQUENCY BAND : 3.7 - 4.2 GHz							
Global A Beam: 36M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	29.5	29.5	29.5	29.5	29.5	29.5	29.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-163.9	-163.8	-163.7	-163.5	-163.4	-163.3	-162.6
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	11.9	11.8	14.2	16.5	18.9	21.3	20.6
Global A Beam: 36M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	29.5	29.5	29.5	29.5	29.5	29.5	29.5
Occupied Bandwidth (kHz)	30133	30133	30133	30133	30133	30133	30133
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-172.7	-172.5	-172.4	-172.3	-172.2	-172.1	-171.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	20.7	20.5	22.9	25.3	27.7	30.1	29.3
Global B Beam: 36M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	30.5	30.5	30.5	30.5	30.5	30.5	30.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-162.9	-162.8	-162.7	-162.5	-162.4	-162.3	-161.6
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	10.9	10.8	13.2	15.5	17.9	20.3	19.6
Global B Beam: 36M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	30.5	30.5	30.5	30.5	30.5	30.5	30.5
Occupied Bandwidth (kHz)	30133	30133	30133	30133	30133	30133	30133
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-171.7	-171.5	-171.4	-171.3	-171.2	-171.1	-170.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	19.7	19.5	21.9	24.3	26.7	29.1	28.3

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

West Hemi Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.3	38.3	38.3	38.3	38.3	38.3	38.3
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-155.1	-155.0	-154.9	-154.7	-154.6	-154.5	-153.8
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	3.1	3.0	5.4	7.7	10.1	12.5	11.8
West Hemi Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.3	38.3	38.3	38.3	38.3	38.3	38.3
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-163.6	-163.5	-163.4	-163.3	-163.2	-163.0	-162.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	11.6	11.5	13.9	16.3	18.7	21.0	20.3
East Hemi Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-156.6	-156.5	-156.4	-156.2	-156.1	-156.0	-155.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	4.6	4.5	6.9	9.2	11.6	14.0	13.3
East Hemi Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-165.1	-165.0	-164.9	-164.8	-164.7	-164.5	-163.8
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	13.1	13.0	15.4	17.8	20.2	22.5	21.8

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Northwest Zone Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.5	38.5	38.5	38.5	38.5	38.5	38.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-154.9	-154.8	-154.7	-154.5	-154.4	-154.3	-153.6
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	2.9	2.8	5.2	7.5	9.9	12.3	11.6
Northwest Zone Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.5	38.5	38.5	38.5	38.5	38.5	38.5
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-163.4	-163.3	-163.2	-163.1	-163.0	-162.8	-162.1
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	11.4	11.3	13.7	16.1	18.5	20.8	20.1
Northeast Zone Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.7	36.7	36.7	36.7	36.7	36.7	36.7
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-156.7	-156.6	-156.5	-156.3	-156.2	-156.1	-155.4
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	4.7	4.6	7.0	9.3	11.7	14.1	13.4
Northeast Zone Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.7	36.7	36.7	36.7	36.7	36.7	36.7
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-165.2	-165.1	-165.0	-164.9	-164.8	-164.6	-163.9
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	13.2	13.1	15.5	17.9	20.3	22.6	21.9

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Southwest Zone Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.4	38.4	38.4	38.4	38.4	38.4	38.4
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-155.0	-154.9	-154.8	-154.6	-154.5	-154.4	-153.7
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	3.0	2.9	5.3	7.6	10.0	12.4	11.7
Southwest Zone Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	38.4	38.4	38.4	38.4	38.4	38.4	38.4
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-163.5	-163.4	-163.3	-163.2	-163.1	-162.9	-162.2
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	11.5	11.4	13.8	16.2	18.6	20.9	20.2
Southeast Zone Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	37.9	37.9	37.9	37.9	37.9	37.9	37.9
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-155.5	-155.4	-155.3	-155.1	-155.0	-154.9	-154.2
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	3.5	3.4	5.8	8.1	10.5	12.9	12.2
Southeast Zone Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	37.9	37.9	37.9	37.9	37.9	37.9	37.9
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-164.0	-163.9	-163.8	-163.7	-163.6	-163.4	-162.7
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	12.0	11.9	14.3	16.7	19.1	21.4	20.7

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

C-Spot A Beam: 36M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.3	36.3	36.3	36.3	36.3	36.3	36.3
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-157.1	-157.0	-156.9	-156.7	-156.6	-156.5	-155.8
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	5.1	5.0	7.4	9.7	12.1	14.5	13.8
C-Spot A Beam: 36M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.3	36.3	36.3	36.3	36.3	36.3	36.3
Occupied Bandwidth (kHz)	30133	30133	30133	30133	30133	30133	30133
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-165.9	-165.7	-165.6	-165.5	-165.4	-165.3	-164.5
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	13.9	13.7	16.1	18.5	20.9	23.3	22.5
C-Spot B Beam: 36M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-156.6	-156.5	-156.4	-156.2	-156.1	-156.0	-155.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	4.6	4.5	6.9	9.2	11.6	14.0	13.3
C-Spot B Beam: 36M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Occupied Bandwidth (kHz)	30133	30133	30133	30133	30133	30133	30133
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-165.4	-165.2	-165.1	-165.0	-164.9	-164.8	-164.0
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	13.4	13.2	15.6	18.0	20.4	22.8	22.0

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Telemetry - Global Beam (On-Station Operation)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	8.2	8.2	8.2	8.2	8.2	8.2	8.2
Occupied Bandwidth (kHz)	250	250	250	250	250	250	250
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-173.1	-173.0	-172.9	-172.8	-172.7	-172.6	-171.8
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	21.1	21.0	23.4	25.8	28.2	30.6	29.8
Telemetry - Global Beam (Back-up Operation)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	0.7	0.7	0.7	0.7	0.7	0.7	0.7
Occupied Bandwidth (kHz)	250	250	250	250	250	250	250
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-180.6	-180.5	-180.4	-180.3	-180.2	-180.1	-179.3
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	28.6	28.5	30.9	33.3	35.7	38.1	37.3
C-Band ULPC -- Global Beam							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	11.8	11.8	11.8	11.8	11.8	11.8	11.8
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-159.5	-159.4	-159.3	-159.2	-159.1	-159.0	-158.2
PFD Limit (dBW/m ² /4kHz)	-152	-152	-149.5	-147.0	-144.5	-142.0	-142.0
Margin (dB)	7.5	7.4	9.8	12.2	14.6	17.0	16.2
FREQUENCY BAND : 10.95 - 11.7 GHz & 11.45 - 11.70 GHz							
Spot 1 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	43.4*	43.3*	45.7*	48.0*	50.1	50.1	50.1
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-150.0	-150.0	-147.5	-145.0	-142.8	-142.7	-142.0
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	0.0	0.0	0.0	0.0	0.3	2.7	2.0

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Spot 1 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.1	50.1	50.1	50.1	50.1	50.1	50.1
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.8	-151.7	-151.6	-151.5	-151.4	-151.2	-150.5
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	1.8	1.7	4.1	6.5	8.9	11.2	10.5
Spot 2 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	43.4*	43.3*	45.7*	48.0*	49.1	49.1	49.1
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-150.0	-150.0	-147.5	-145.0	-143.8	-143.7	-143.0
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	0.0	0.0	0.0	0.0	1.3	3.7	3.0
Spot 2 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	49.1	49.1	49.1	49.1	49.1	49.1	49.1
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-152.8	-152.7	-152.6	-152.5	-152.4	-152.2	-151.5
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	2.8	2.7	5.1	7.5	9.9	12.2	11.5
Spot 2A Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	43.4*	43.3*	45.7*	47.2	47.2	47.2	47.2
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-150.0	-150.0	-147.5	-145.8	-145.7	-145.6	-144.9
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	0.0	0.0	0.0	0.8	3.2	5.6	4.9

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Spot 2A Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	47.2	47.2	47.2	47.2	47.2	47.2	47.2
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-154.7	-154.6	-154.5	-154.4	-154.3	-154.1	-153.4
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	4.7	4.6	7.0	9.4	11.8	14.1	13.4
Spot 3 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	43.4*	43.3*	45.7*	48.0*	50.4*	50.5	50.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-150.0	-150.0	-147.5	-145.0	-142.5	-142.3	-141.6
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	0.0	0.0	0.0	0.0	0.0	2.3	1.6
Spot 3 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.5	50.5	50.5	50.5	50.5	50.5	50.5
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.4	-151.3	-151.2	-151.1	-151.0	-150.8	-150.1
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	1.4	1.3	3.7	6.1	8.5	10.8	10.1
Spot 3X Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	43.4*	43.3*	45.7*	48.0*	50.4*	50.5	50.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-150.0	-150.0	-147.5	-145.0	-142.5	-142.3	-141.6
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	0.0	0.0	0.0	0.0	0.0	2.3	1.6

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Spot 3X Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.5	50.5	50.5	50.5	50.5	50.5	50.5
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.4	-151.3	-151.2	-151.1	-151.0	-150.8	-150.1
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	3.4	3.3	5.7	6.1	8.5	10.8	10.1
Ku-Band ULPC (Global Beam)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	8.0	8.0	8.0	8.0	8.0	8.0	8.0
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-163.3	-163.2	-163.1	-163.0	-162.9	-162.8	-162.0
PFD Limit (dBW/m ² /4kHz)	-150	-150	-147.5	-145.0	-142.5	-140.0	-140.0
Margin (dB)	13.3	13.2	15.6	18.0	20.4	22.8	22.0
FREQUENCY BAND : 12.50 - 12.750 GHz							
Spot 1 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	45.4*	45.3*	47.7*	50.0*	50.1	50.1	50.1
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-148.0	-148.0	-145.5	-143.0	-142.8	-142.7	-142.0
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	0.0	0.0	0.0	0.0	2.3	4.7	4.0
Spot 1 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.1	50.1	50.1	50.1	50.1	50.1	50.1
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.8	-151.7	-151.6	-151.5	-151.4	-151.2	-150.5
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.8	3.7	6.1	8.5	10.9	13.2	12.5

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Spot 2 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	45.4*	45.3*	47.7*	49.1	49.1	49.1	49.1
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-148.0	-148.0	-145.5	-143.9	-143.8	-143.7	-143.0
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	0.0	0.0	0.0	0.9	3.3	5.7	5.0
Spot 2 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	49.1	49.1	49.1	49.1	49.1	49.1	49.1
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-152.8	-152.7	-152.6	-152.5	-152.4	-152.2	-151.5
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	4.8	4.7	7.1	9.5	11.9	14.2	13.5
Spot 2A Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	45.4*	45.3*	47.2	47.2	47.2	47.2	47.2
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-148.0	-148.0	-146.0	-145.8	-145.7	-145.6	-144.9
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	0.0	0.0	0.5	2.8	5.2	7.6	6.9
Spot 2A Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	47.2	47.2	47.2	47.2	47.2	47.2	47.2
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-154.7	-154.6	-154.5	-154.4	-154.3	-154.1	-153.4
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	6.7	6.6	9.0	11.4	13.8	16.1	15.4

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Spot 3 Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	45.4*	45.3*	47.7*	50.0*	50.5	50.5	50.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-148.0	-148.0	-145.5	-143.0	-142.4	-142.3	-141.6
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	0.0	0.0	0.0	0.0	1.9	4.3	3.6
Spot 3 Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.5	50.5	50.5	50.5	50.5	50.5	50.5
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.4	-151.3	-151.2	-151.1	-151.0	-150.8	-150.1
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.4	3.3	5.7	8.1	10.5	12.8	12.1
Spot 3X Beam: 30M0F3F							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	45.4*	45.3*	47.7*	50.0*	50.5	50.5	50.5
Occupied Bandwidth (kHz)	4000	4000	4000	4000	4000	4000	4000
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-148.0	-148.0	-145.5	-143.0	-142.4	-142.3	-141.6
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	0.0	0.0	0.0	0.0	1.9	4.3	3.6
Spot 3X Beam: 34M0G7W							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	50.5	50.5	50.5	50.5	50.5	50.5	50.5
Occupied Bandwidth (kHz)	28452	28452	28452	28452	28452	28452	28452
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.4	-151.3	-151.2	-151.1	-151.0	-150.8	-150.1
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.4	3.3	5.7	8.1	10.5	12.8	12.1

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Ku-Band ULPC (Spot 1)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	20.2	20.2	20.2	20.2	20.2	20.2	20.2
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.1	-151.0	-150.9	-150.8	-150.7	-150.6	-149.8
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.1	3.0	5.4	7.8	10.2	12.6	11.8
Ku-Band ULPC (Spot 2)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	20.1	20.1	20.1	20.1	20.1	20.1	20.1
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.2	-151.1	-151.0	-150.9	-150.8	-150.7	-149.9
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.2	3.1	5.5	7.9	10.3	12.7	11.9
Ku-Band ULPC (Spot 2A)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	18.3	18.3	18.3	18.3	18.3	18.3	18.3
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-153.0	-152.9	-152.8	-152.7	-152.6	-152.5	-151.7
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	5.0	4.9	7.3	9.7	12.1	14.5	13.7
Ku-Band ULPC (Spot 3)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	19.8	19.8	19.8	19.8	19.8	19.8	19.8
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.5	-151.4	-151.3	-151.2	-151.1	-151.0	-150.2
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.5	3.4	5.8	8.2	10.6	13.0	12.2

EXHIBIT 4: POWER FLUX DENSITY CALCULATIONS (continued)

Ku-Band ULPC (Spot 3X)							
Elevation Angle (degrees)	0	5	10	15	20	25	90
Assumed EIRP (dBW)	19.8	19.8	19.8	19.8	19.8	19.8	19.8
Occupied Bandwidth (kHz)	25	25	25	25	25	25	25
Spreading Loss (dB/m ²)	163.4	163.3	163.2	163.0	162.9	162.8	162.1
Maximum EIRP Spectral Density (dBW/m ² /4kHz)	-151.5	-151.4	-151.3	-151.2	-151.1	-151.0	-150.2
PFD Limit (dBW/m ² /4kHz)	-148	-148	-145.5	-143.0	-140.5	-138.0	-138.0
Margin (dB)	3.5	3.4	5.8	8.2	10.6	13.0	12.2

* This is the maximum allowable EIRP level at the specified elevation angle. The actual EIRP level of the beam at this particular elevation angle will be made to be equal to or lower than the value listed in the table through reduction in the output power of the channel and/or restriction on the movement/placement of the beam.

Exhibit 5: Link Budgets

UPLINK BEAM INFORMATION				
Uplink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-11.0	-11.0	-11.0	-11.0
Uplink SFD (dBW/m2)	-79.9	-88.9	-78.9	-78.9
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	25.5	25.5	25.5	25.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	13.1	6.1	7.0	6.1
Earth Station Gain (dBi)	53.5	46.5	47.5	46.5
Earth Station G/T (dB/K)	33.0	26.2	26.6	26.2
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
LINK FADE TYPE	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	83.0	74.0	71.8	52.0
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-11.0	-11.0	-11.0	-11.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	24.8	16.6	20.9	20.6
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	25.5	25.5	18.0	-1.8
Antenna Pointing Error (dB)	-5	-5	-5	-5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	33.0	26.2	26.6	26.2
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	14.7	8.7	8.1	7.4
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	24.8	16.6	20.9	20.6
C/N Downlink (dB)	14.7	8.7	8.1	7.4
C/I Intermodulation (dB)	N/A	N/A	19.9	19.6
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.4	28.8
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.4	28.8
C/I Uplink Adjacent Satellite 1 (dB)	24.1	15.9	20.2	19.9
C/I Downlink Adjacent Satellite 1 (dB)	17.8	11.0	11.2	9.7
C/I Uplink Adjacent Satellite 2 (dB)	24.1	15.9	20.2	19.9
C/I Downlink Adjacent Satellite 2 (dB)	18.6	12.9	12.7	11.6
C/(N+I) Composite (dB)	11.0	4.7	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.0	3.7	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	0.0	.3	0.0	0.0
Number of Carriers	1	1.0	2.5	239.2
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-41.4	-51.8	-47.5	-47.8
Downlink EIRP Density At Beam Peak (dBW/Hz)	-36.5	-45.3	-46.3	-46.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-11.0	-11.0	-11.0	-11.0
Uplink SFD (dBW/m2)	-79.9	-88.9	-78.9	-78.9
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	HEMI	HEMI	HEMI	HEMI
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Downlink Contour EIRP (dBW)	30.8	30.8	30.8	30.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	3.5	3.5	3.5
Earth Station Gain (dBi)	47.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	83.0	74.0	72.1	51.7
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-11.0	-11.0	-11.0	-11.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	24.8	16.6	21.2	20.3
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	30.8	30.8	23.6	3.1
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	13.6	8.8	8.0	7.1
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	24.8	16.6	21.2	20.3
C/N Downlink (dB)	13.6	8.8	8.0	7.1
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Uplink Adjacent Satellite 1 (dB)	24.1	15.9	20.5	19.6
C/I Downlink Adjacent Satellite 1 (dB)	18.9	10.8	10.1	9.2
C/I Uplink Adjacent Satellite 2 (dB)	24.1	15.9	20.5	19.6
C/I Downlink Adjacent Satellite 2 (dB)	20.5	15.6	14.9	14.0
C/(N+I) Composite (dB)	11.0	5.0	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.0	4.0	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	0.0	.6	0.0	0.0
Number of Carriers	1	1.0	2.4	258.9
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-41.4	-51.8	-47.2	-48.1
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.2	-38.0	-38.7	-39.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-11.0	-11.0	-11.0	-11.0
Uplink SFD (dBW/m2)	-81.9	-88.9	-81.9	-81.9
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.3	32.3	32.3	32.3
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	3.5	3.5	3.5
Earth Station Gain (dBi)	47.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	81.0	74.0	69.1	48.7
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-11.0	-11.0	-11.0	-11.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	22.8	16.6	18.2	17.3
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.3	32.3	25.1	4.7
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	15.1	10.3	9.6	8.7
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	22.8	16.6	18.2	17.3
C/N Downlink (dB)	15.1	10.3	9.6	8.7
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.5
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.5
C/I Uplink Adjacent Satellite 1 (dB)	22.1	15.9	17.5	16.6
C/I Downlink Adjacent Satellite 1 (dB)	18.2	10.1	9.4	8.5
C/I Uplink Adjacent Satellite 2 (dB)	22.1	15.9	17.5	16.6
C/I Downlink Adjacent Satellite 2 (dB)	19.8	14.9	14.2	13.3
C/(N+I) Composite (dB)	11.1	5.2	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.1	4.2	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.1	.9	0.0	0.0
Number of Carriers	1	1.0	2.3	257.2
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-43.4	-51.8	-50.2	-51.1
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.7	-38.5	-39.2	-40.1

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	HEMI	HEMI	HEMI	HEMI
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Uplink Contour G/T (dB/K)	-7.5	-7.5	-7.5	-7.5
Uplink SFD (dBW/m2)	-81.8	-85.8	-78.8	-78.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	25.5	25.5	25.5	25.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	9.0	7.0	7.0
Earth Station Gain (dBi)	58.4	53.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	6.1	7.0	6.1
Earth Station Gain (dBi)	55.0	46.5	47.5	46.5
Earth Station G/T (dB/K)	34.5	26.2	26.6	26.2
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	81.1	77.1	72.0	52.2
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-7.5	-7.5	-7.5	-7.5
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	26.4	23.2	24.6	24.3
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	25.5	25.5	18.1	-1.7
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	34.5	26.2	26.6	26.2
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	16.2	8.7	8.1	7.5
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	26.4	23.2	24.6	24.3
C/N Downlink (dB)	16.2	8.7	8.1	7.5
C/I Intermodulation (dB)	N/A	N/A	20.0	19.7
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.5	28.8
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.5	28.8
C/I Uplink Adjacent Satellite 1 (dB)	20.2	17.0	18.4	18.1
C/I Downlink Adjacent Satellite 1 (dB)	19.4	11.0	11.3	9.8
C/I Uplink Adjacent Satellite 2 (dB)	20.2	17.0	18.4	18.1
C/I Downlink Adjacent Satellite 2 (dB)	20.1	12.9	12.8	11.7
C/(N+I) Composite (dB)	11.5	5.0	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.5	4.0	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.5	.7	0.0	0.0
Number of Carriers	1	1.0	2.5	235.5
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-43.3	-51.1	-47.3	-47.6
Downlink EIRP Density At Beam Peak (dBW/Hz)	-36.5	-45.3	-46.2	-46.5

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	HEMI	HEMI	HEMI	HEMI
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Uplink Contour G/T (dB/K)	-7.5	-7.5	-7.5	-7.5
Uplink SFD (dBW/m2)	-82.8	-85.8	-77.8	-77.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	HEMI	HEMI	HEMI	HEMI
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Downlink Contour EIRP (dBW)	30.8	30.8	30.8	30.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	13.0	9.0	7.0	7.0
Earth Station Gain (dBi)	56.4	53.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	8.1	3.5	3.5	3.5
Earth Station Gain (dBi)	49.3	41.1	41.1	41.1
Earth Station G/T (dB/K)	28.4	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	80.1	77.1	73.2	52.8
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-7.5	-7.5	-7.5	-7.5
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	25.4	23.2	25.8	24.9
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	30.8	30.8	23.6	3.1
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	28.4	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	15.4	8.8	8.0	7.1
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	25.4	23.2	25.8	24.9
C/N Downlink (dB)	15.4	8.8	8.0	7.1
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Uplink Adjacent Satellite 1 (dB)	19.2	17.0	19.6	18.7
C/I Downlink Adjacent Satellite 1 (dB)	20.8	10.8	10.1	9.2
C/I Uplink Adjacent Satellite 2 (dB)	19.2	17.0	19.6	18.7
C/I Downlink Adjacent Satellite 2 (dB)	22.2	15.6	14.9	14.0
C/(N+I) Composite (dB)	11.3	5.4	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.3	4.4	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.3	1.0	0.0	0.0
Number of Carriers	1	1.0	2.4	259.6
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.3	-51.1	-46.1	-47.0
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.2	-38.0	-38.8	-39.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	HEMI	HEMI	HEMI	HEMI
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Uplink Contour G/T (dB/K)	-7.5	-7.5	-7.5	-7.5
Uplink SFD (dBW/m2)	-81.8	-80.8	-83.8	-83.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	ZONE	ZONE	ZONE	ZONE
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.7	32.7	32.7	32.7
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.0	-38.0	-38.0	-38.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.0	-38.0	-38.0	-38.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	15.2	7.0	7.0
Earth Station Gain (dBi)	58.4	58.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	3.0	3.5	3.5
Earth Station Gain (dBi)	46.5	39.7	41.1	41.1
Earth Station G/T (dB/K)	26.2	19.2	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	81.1	82.1	66.9	46.5
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-7.5	-7.5	-7.5	-7.5
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	26.4	28.2	19.5	18.6
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.7	32.7	25.2	4.8
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.2	19.2	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	15.1	8.9	9.7	8.8
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	26.4	28.2	19.5	18.6
C/N Downlink (dB)	15.1	8.9	9.7	8.8
C/I Intermodulation (dB)	N/A	N/A	19.9	19.0
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.5	28.2
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.5	28.2
C/I Uplink Adjacent Satellite 1 (dB)	20.2	22.0	13.3	12.4
C/I Downlink Adjacent Satellite 1 (dB)	19.2	7.1	11.2	10.4
C/I Uplink Adjacent Satellite 2 (dB)	20.2	22.0	13.3	12.4
C/I Downlink Adjacent Satellite 2 (dB)	21.0	15.8	16.0	15.1
C/(N+I) Composite (dB)	11.2	4.3	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.2	3.3	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.2	0.0	0.0	0.0
Number of Carriers	1	1.0	2.5	275.0
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-43.3	-51.1	-52.4	-53.3
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.3	-38.1	-39.1	-40.0

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	HEMI	HEMI	HEMI	HEMI
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Uplink Contour G/T (dB/K)	-7.5	-7.5	-7.5	-7.5
Uplink SFD (dBW/m2)	-80.8	-85.8	-80.8	-80.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.3	32.3	32.3	32.3
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	9.0	7.0	7.0
Earth Station Gain (dBi)	58.4	53.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	3.5	3.5	3.5
Earth Station Gain (dBi)	47.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	82.1	77.1	70.2	49.8
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-7.5	-7.5	-7.5	-7.5
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	27.4	23.2	22.8	21.9
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.3	32.3	25.1	4.7
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	15.1	10.3	9.5	8.6
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	27.4	23.2	22.8	21.9
C/N Downlink (dB)	15.1	10.3	9.5	8.6
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Uplink Adjacent Satellite 1 (dB)	21.2	17.0	16.6	15.7
C/I Downlink Adjacent Satellite 1 (dB)	18.2	10.1	9.4	8.5
C/I Uplink Adjacent Satellite 2 (dB)	21.2	17.0	16.6	15.7
C/I Downlink Adjacent Satellite 2 (dB)	19.8	14.9	14.2	13.3
C/(N+I) Composite (dB)	11.1	5.7	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.1	4.7	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.1	1.3	0.0	0.0
Number of Carriers	1	1.0	2.3	258.6
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.3	-51.1	-49.1	-50.0
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.7	-38.5	-39.2	-40.1

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-1.0	-1.0	-1.0	-1.0
Uplink SFD (dBW/m2)	-81.4	-88.4	-80.4	-80.4
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	GLOBAL	GLOBAL	GLOBAL	GLOBAL
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	25.5	25.5	25.5	25.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	13.1	6.1	7.0	6.1
Earth Station Gain (dBi)	53.5	46.5	47.5	46.5
Earth Station G/T (dB/K)	33.0	26.2	26.6	26.2
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	81.5	74.5	70.3	50.5
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-1.0	-1.0	-1.0	-1.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	33.3	27.1	29.4	29.1
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	25.5	25.5	18.0	-1.8
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	33.0	26.2	26.6	26.2
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	14.7	8.7	8.1	7.4
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	33.3	27.1	29.4	29.1
C/N Downlink (dB)	14.7	8.7	8.1	7.4
C/I Intermodulation (dB)	N/A	N/A	19.9	19.6
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.5	28.8
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.5	28.8
C/I Uplink Adjacent Satellite 1 (dB)	22.6	16.4	18.7	18.5
C/I Downlink Adjacent Satellite 1 (dB)	17.8	11.0	11.2	9.8
C/I Uplink Adjacent Satellite 2 (dB)	22.6	16.4	18.7	18.5
C/I Downlink Adjacent Satellite 2 (dB)	18.6	12.9	12.8	11.6
C/(N+I) Composite (dB)	11.0	5.0	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.0	4.0	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	0.0	.6	0.0	0.0
Number of Carriers	1	1.0	2.5	238.6
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.9	-51.3	-49.0	-49.3
Downlink EIRP Density At Beam Peak (dBW/Hz)	-36.5	-45.3	-46.3	-46.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-1.0	-1.0	-1.0	-1.0
Uplink SFD (dBW/m2)	-80.4	-88.4	-80.4	-80.4
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	HEMI	HEMI	HEMI	HEMI
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Downlink Contour EIRP (dBW)	30.8	30.8	30.8	30.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	3.5	3.5	3.5
Earth Station Gain (dBi)	47.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	82.5	74.5	70.6	50.2
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-1.0	-1.0	-1.0	-1.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	34.3	27.1	29.7	28.8
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	30.8	30.8	23.6	3.2
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	13.6	8.8	8.0	7.1
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	34.3	27.1	29.7	28.8
C/N Downlink (dB)	13.6	8.8	8.0	7.1
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.4
C/I Uplink Adjacent Satellite 1 (dB)	23.6	16.4	19.0	18.1
C/I Downlink Adjacent Satellite 1 (dB)	18.9	10.8	10.1	9.2
C/I Uplink Adjacent Satellite 2 (dB)	23.6	16.4	19.0	18.1
C/I Downlink Adjacent Satellite 2 (dB)	20.5	15.6	14.9	14.0
C/(N+I) Composite (dB)	11.1	5.3	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.1	4.3	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.1	1.0	0.0	0.0
Number of Carriers	1	1.0	2.3	258.3
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-41.9	-51.3	-48.7	-49.6
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.2	-38.0	-38.7	-39.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	ZONE	ZONE	ZONE	ZONE
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-3.0	-3.0	-3.0	-3.0
Uplink SFD (dBW/m2)	-80.5	-88.5	-80.5	-80.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	HEMI	HEMI	HEMI	HEMI
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Downlink Contour EIRP (dBW)	30.8	30.8	30.8	30.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.5	-38.5	-38.5	-38.5
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	3.5	3.5	3.5
Earth Station Gain (dBi)	47.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	82.4	74.4	70.5	50.1
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-3.0	-3.0	-3.0	-3.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	32.2	25.0	27.6	26.7
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	30.8	30.8	23.6	3.2
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.6	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	13.6	8.8	8.1	7.2
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	32.2	25.0	27.6	26.7
C/N Downlink (dB)	13.6	8.8	8.1	7.2
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.7	28.5
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.7	28.5
C/I Uplink Adjacent Satellite 1 (dB)	23.5	16.3	18.9	18.0
C/I Downlink Adjacent Satellite 1 (dB)	18.9	10.8	10.1	9.2
C/I Uplink Adjacent Satellite 2 (dB)	23.5	16.3	18.9	18.0
C/I Downlink Adjacent Satellite 2 (dB)	20.5	15.6	14.9	14.0
C/(N+I) Composite (dB)	11.1	5.3	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.1	4.3	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.1	.9	0.0	0.0
Number of Carriers	1	1.0	2.3	257.3
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.0	-51.4	-48.8	-49.7
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.2	-38.0	-38.7	-39.6

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	ZONE	ZONE	ZONE	ZONE
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-3.0	-3.0	-3.0	-3.0
Uplink SFD (dBW/m2)	-83.5	-88.5	-86.5	-86.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	ZONE	ZONE	ZONE	ZONE
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.7	32.7	32.7	32.7
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.0	-38.0	-38.0	-38.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-38.0	-38.0	-38.0	-38.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	11.0	7.0	7.0	7.0
Earth Station Gain (dBi)	55.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	3.5	3.5	3.5
Earth Station Gain (dBi)	46.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.2	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	79.4	74.4	64.4	44.0
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-3.0	-3.0	-3.0	-3.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	29.2	25.0	21.5	20.6
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.7	32.7	25.4	4.9
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.2	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	15.1	10.7	9.8	8.9
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	29.2	25.0	21.5	20.6
C/N Downlink (dB)	15.1	10.7	9.8	8.9
C/I Intermodulation (dB)	N/A	N/A	20.1	19.2
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.6	28.3
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.6	28.3
C/I Uplink Adjacent Satellite 1 (dB)	20.5	16.3	12.8	11.9
C/I Downlink Adjacent Satellite 1 (dB)	19.2	12.2	11.4	10.5
C/I Uplink Adjacent Satellite 2 (dB)	20.5	16.3	12.8	11.9
C/I Downlink Adjacent Satellite 2 (dB)	21.0	17.0	16.2	15.3
C/(N+I) Composite (dB)	11.3	6.6	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.3	5.6	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.3	2.2	0.0	0.0
Number of Carriers	1	1.0	2.4	264.9
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.0	-51.4	-54.9	-55.8
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.3	-38.1	-38.9	-39.8

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-1.0	-1.0	-1.0	-1.0
Uplink SFD (dBW/m2)	-80.4	-88.4	-83.4	-83.4
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	CSPOT	CSPOT	CSPOT	CSPOT
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.3	32.3	32.3	32.3
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-36.3	-36.3	-36.3	-36.3
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	36M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	24575	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	30133	6771.1	75.4
Allocated Bandwidth(kHz)	36000	36000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	15.2	7.0	7.0	7.0
Earth Station Gain (dBi)	58.4	51.0	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	3.5	3.5	3.5
Earth Station Gain (dBi)	46.5	41.1	41.1	41.1
Earth Station G/T (dB/K)	26.2	21.0	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	82.5	74.5	67.6	47.2
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-1.0	-1.0	-1.0	-1.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Uplink C/N(dB)	34.3	27.1	26.7	25.8
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.3	32.3	25.1	4.7
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.2	21.0	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-74.8	-68.3	-48.8
Downlink C / N(dB)	14.7	10.3	9.6	8.7
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	34.3	27.1	26.7	25.8
C/N Downlink (dB)	14.7	10.3	9.6	8.7
C/I Intermodulation (dB)	N/A	N/A	20.2	19.3
C/I Uplink Co-Channel (dB)*	27.0	27.0	28.8	28.5
C/I Downlink Co-Channel (dB)*	27.0	27.0	28.8	28.5
C/I Uplink Adjacent Satellite 1 (dB)	23.6	16.4	16.0	15.1
C/I Downlink Adjacent Satellite 1 (dB)	17.1	10.1	9.4	8.6
C/I Uplink Adjacent Satellite 2 (dB)	23.6	16.4	16.0	15.1
C/I Downlink Adjacent Satellite 2 (dB)	18.9	14.9	14.2	13.3
C/(N+I) Composite (dB)	11.0	5.6	4.9	4.0
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.0	4.6	3.9	3.0
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	0.0	1.3	0.0	0.0
Number of Carriers	1	1.0	2.3	255.9
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-41.9	-51.3	-51.7	-52.6
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.7	-38.5	-39.2	-40.1

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION						
Uplink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT	KSPOT	KSPOT
Uplink Frequency (GHz)	14.250	14.250	14.250	14.250	14.250	14.250
Uplink Beam Polarization	Linear	Linear	Linear	Linear	Linear	Linear
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	6.0	6.0	6.0	6.0	6.0	6.0
Uplink SFD (dBW/m2)	-75.2	-82.2	-81.2	-81.2	-81.2	-81.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0	42.0	42.0
DOWNLINK BEAM INFORMATION						
Downlink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT	KSPOT	KSPOT
Downlink Frequency (GHz)	11.950	11.950	11.950	11.950	11.950	11.950
Downlink Beam Polarization	Linear	Linear	Linear	Linear	Linear	Linear
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	43.2	43.2	43.2	43.2	43.2	43.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0	42.0	42.0
ADJACENT SATELLITE 1						
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2						
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0	0.0	0.0
CARRIER INFORMATION						
Carrier ID	36M0F3F	112MG7W	10M3G7W	1M45G7W	400KG7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	BPSK	BPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A	N/A	N/A
Information Rate(kbps)	N/A	76436	6000	512	128	64
Code Rate	N/A	1/2x188/204	1/2x188/204	R1/2	R1/2	1/2x239/256
Occupied Bandwidth(kHz)	36000	93724	6771.1	1229.0	307.0	75.4
Allocated Bandwidth(kHz)	36000	112000	10300	1450.0	400.0	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	3.4	3.4	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.7	2.7	2.79
UPLINK EARTH STATION						
Earth Station Diameter (meters)	6.1	6.1	6.1	6.1	3.0	6.1
Earth Station Gain (dBi)	56.9	56.9	56.9	56.9	49.7	56.9
Earth Station Elevation Angle	20	20	20	20	20	20
DOWNLINK EARTH STATION						
Earth Station Diameter (meters)	11.0	2.4	3.0	3.0	6.1	3.0
Earth Station Gain (dBi)	60.4	47.5	49.2	49.2	55.5	49.2
Earth Station G/T (dB/K)	38.0	25.0	26.7	26.7	33.1	26.7
Earth Station Elevation Angle	20	20	20	20	20	20
LINK FADE TYPE						
	Clear Sky	Clear Sky	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE						
Uplink Earth Station EIRP (dBW)	74.7	80.7	64.6	56.4	44.9	44.4
Uplink Path Loss, Clear Sky (dB)	-207.5	-207.5	-207.5	-207.5	-207.5	-207.5
Uplink Rain Attenuation	0.0	0.0	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	6.0	6.0	6.0	6.0	6.0	6.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-79.7	-68.3	-60.9	-54.9	-48.8
Uplink C/N(dB)	26.3	28.1	23.5	22.6	17.1	22.7
DOWNLINK PERFORMANCE						
Downlink EIRP per Carrier (dBW)	34.9	43.2	29.2	21.0	9.5	9.0
Antenna Pointing Error (dB)	-5	-5	-5	-5	-5	-5
Downlink Path Loss, Clear Sky (dB)	-205.9	-205.9	-205.9	-205.9	-205.9	-205.9
Downlink Rain Attenuation	0.0	0.0	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	38.0	25.0	26.7	26.7	33.1	26.7
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-79.7	-68.3	-60.9	-54.9	-48.8
Downlink C / N(dB)	19.5	10.6	9.8	8.9	9.9	9.0
COMPOSITE LINK PERFORMANCE						
C/N Uplink (dB)	26.3	28.1	23.5	22.6	17.1	22.7
C/N Downlink (dB)	19.5	10.6	9.8	8.9	9.9	9.0
C/I Intermodulation (dB)	16.8	N/A	26.4	25.6	20.1	25.7
C/I Uplink Co-Channel (dB)*	27.2	27.0	28.5	28.8	22.8	28.3
C/I Downlink Co-Channel (dB)*	27.2	27.0	28.5	28.8	22.8	28.3
C/I Uplink Adjacent Satellite 1 (dB)	27.2	29.0	24.3	23.5	18.0	23.6
C/I Downlink Adjacent Satellite 1 (dB)	24.1	14.7	14.0	13.1	14.3	13.2
C/I Uplink Adjacent Satellite 2 (dB)	27.2	29.0	24.3	23.5	18.0	23.6
C/I Downlink Adjacent Satellite 2 (dB)	24.4	16.2	15.3	14.4	14.9	14.5
C/(N+I) Composite (dB)	13.0	8.2	7.2	6.3	6.1	6.4
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	12.0	7.2	6.2	5.3	5.1	5.4
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.4	-3.4	-3.0
Excess Link Margin (dB)	2.0	3.8	2.3	1.9	1.7	2.4
Number of Carriers	3	1.0	7.7	51.6	280.0	821.8
CARRIER DENSITY LEVELS						
Uplink Power Density (dBW/Hz)	-48.2	-55.9	-60.6	-61.4	-59.7	-61.3
Downlink EIRP Density At Beam Peak (dBW/Hz)	-27.1	-32.5	-35.1	-35.9	-41.4	-35.8

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	HEMI	HEMI	HEMI	HEMI
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Uplink Contour G/T (dB/K)	-7.5	-7.5	-7.5	-7.5
Uplink SFD (dBW/m2)	-72.8	-85.8	-78.8	-78.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT
Downlink Frequency (GHz)	11.950	11.950	11.950	11.950
Downlink Beam Polarization	Linear	Linear	Linear	Linear
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	43.2	43.2	43.2	43.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	77M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	52550	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	64435	6771.1	75.4
Allocated Bandwidth(kHz)	36000	77000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	11.0	9.0	7.0	7.0
Earth Station Gain (dBi)	55.4	53.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	2.4	2.4	2.4
Earth Station Gain (dBi)	57.0	47.5	47.5	47.5
Earth Station G/T (dB/K)	34.6	25.0	25.0	25.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	78.9	77.1	68.9	48.6
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-7.5	-7.5	-7.5	-7.5
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-78.1	-68.3	-48.8
Uplink C/N(dB)	24.2	19.9	21.4	20.7
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	37.0	43.2	31.1	10.8
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-205.9	-205.9	-205.9	-205.9
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	34.6	25.0	25.0	25.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-78.1	-68.3	-48.8
Downlink C / N(dB)	18.2	12.2	9.9	9.1
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	24.2	19.9	21.4	20.7
C/N Downlink (dB)	18.2	12.2	9.9	9.1
C/I Intermodulation (dB)	N/A	N/A	26.6	25.9
C/I Uplink Co-Channel (dB)*	27.3	27.0	28.7	28.5
C/I Downlink Co-Channel (dB)*	27.3	27.0	28.7	28.5
C/I Uplink Adjacent Satellite 1 (dB)	18.0	13.7	15.3	14.5
C/I Downlink Adjacent Satellite 1 (dB)	22.7	16.3	14.0	13.2
C/I Uplink Adjacent Satellite 2 (dB)	18.0	13.7	15.3	14.5
C/I Downlink Adjacent Satellite 2 (dB)	23.2	17.9	15.5	14.7
C/(N+I) Composite (dB)	11.9	7.0	6.2	5.4
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.9	6.0	5.2	4.4
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.9	2.7	1.3	1.4
Number of Carriers	2	1.0	5.0	542.6
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.5	-54.4	-50.4	-51.2
Downlink EIRP Density At Beam Peak (dBW/Hz)	-25.0	-30.9	-33.2	-34.0

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	ZONE	ZONE	ZONE	ZONE
Uplink Frequency (GHz)	6.175	6.175	6.175	6.175
Uplink Beam Polarization	Circular	Circular	Circular	Circular
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	-3.0	-3.0	-3.0	-3.0
Uplink SFD (dBW/m2)	-74.5	-84.5	-80.5	-80.5
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT
Downlink Frequency (GHz)	11.950	11.950	11.950	11.950
Downlink Beam Polarization	Linear	Linear	Linear	Linear
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	43.2	43.2	43.2	43.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-38.7	-38.7	-38.7	-38.7
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-26.0	-26.0	-26.0	-26.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	36M0F3F	77M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	52550	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	36000	64435	6771.1	75.4
Allocated Bandwidth(kHz)	36000	77000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	9.0	11.0	7.0	7.0
Earth Station Gain (dBi)	53.4	55.4	51.0	51.0
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	7.0	1.8	2.4	2.4
Earth Station Gain (dBi)	57.0	44.8	47.5	47.5
Earth Station G/T (dB/K)	34.6	22.3	25.0	25.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	77.2	78.4	67.1	46.8
Uplink Path Loss, Clear Sky (dB)	-200.2	-200.2	-200.2	-200.2
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	-3.0	-3.0	-3.0	-3.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-78.1	-68.3	-48.8
Uplink C/N(dB)	27.0	25.7	24.2	23.4
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	37.0	43.2	31.0	10.7
Antenna Pointing Error (dB)	-5	-5	-5	-5
Downlink Path Loss, Clear Sky (dB)	-205.9	-205.9	-205.9	-205.9
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	34.6	22.3	25.0	25.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-75.6	-78.1	-68.3	-48.8
Downlink C / N(dB)	18.2	9.5	9.8	9.0
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	27.0	25.7	24.2	23.4
C/N Downlink (dB)	18.2	9.5	9.8	9.0
C/I Intermodulation (dB)	N/A	N/A	26.6	25.8
C/I Uplink Co-Channel (dB)*	27.3	27.0	28.6	28.4
C/I Downlink Co-Channel (dB)*	27.3	27.0	28.6	28.4
C/I Uplink Adjacent Satellite 1 (dB)	18.3	17.0	15.5	14.7
C/I Downlink Adjacent Satellite 1 (dB)	22.7	13.3	13.9	13.1
C/I Uplink Adjacent Satellite 2 (dB)	18.3	17.0	15.5	14.7
C/I Downlink Adjacent Satellite 2 (dB)	23.2	15.4	15.4	14.7
C/(N+I) Composite (dB)	12.2	6.3	6.2	5.4
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	11.2	5.3	5.2	4.4
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	1.2	2.0	1.3	1.4
Number of Carriers	2	1.0	5.2	554.3
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.2	-55.1	-52.2	-53.0
Downlink EIRP Density At Beam Peak (dBW/Hz)	-25.0	-30.9	-33.3	-34.1

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT
Uplink Frequency (GHz)	14.250	14.250	14.250	14.250
Uplink Beam Polarization	Linear	Linear	Linear	Linear
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	6.0	6.0	6.0	6.0
Uplink SFD (dBW/m2)	-83.2	-83.2	-84.2	-84.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	HEMI	HEMI	HEMI	HEMI
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-6.0	-6.0	-6.0	-6.0
Downlink Contour EIRP (dBW)	30.8	30.8	30.8	30.8
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-42.2	-42.2	-42.2	-42.2
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-42.2	-42.2	-42.2	-42.2
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	30M0F3F	34M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	23204	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	30000	28452	6771.1	75.4
Allocated Bandwidth(kHz)	30000	34000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	6.1	6.1	6.1
Earth Station Gain (dBi)	56.9	56.9	56.9	56.9
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	3.0	3.5	3.5
Earth Station Gain (dBi)	46.5	39.7	41.1	41.1
Earth Station G/T (dB/K)	26.2	19.2	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	79.7	79.7	66.9	46.9
Uplink Path Loss, Clear Sky (dB)	-207.5	-207.5	-207.5	-207.5
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	6.0	6.0	6.0	6.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-74.8	-74.5	-68.3	-48.8
Uplink C/N(dB)	32.1	32.3	25.7	25.2
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	30.8	30.8	22.1	2.1
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	26.2	19.2	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-74.8	-74.5	-68.3	-48.8
Downlink C / N(dB)	14.0	7.2	6.6	6.1
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	32.1	32.3	25.7	25.2
C/N Downlink (dB)	14.0	7.2	6.6	6.1
C/I Intermodulation (dB)	N/A	N/A	26.5	26.0
C/I Uplink Co-Channel (dB)*	27.5	27.0	28.6	28.7
C/I Downlink Co-Channel (dB)*	27.5	27.0	28.6	28.7
C/I Uplink Adjacent Satellite 1 (dB)	32.9	33.2	26.6	26.1
C/I Downlink Adjacent Satellite 1 (dB)	22.3	9.6	12.3	11.8
C/I Uplink Adjacent Satellite 2 (dB)	32.9	33.2	26.6	26.1
C/I Downlink Adjacent Satellite 2 (dB)	24.1	18.4	17.1	16.6
C/(N+I) Composite (dB)	12.6	5.0	5.1	4.6
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	11.6	4.0	4.1	3.6
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	1.6	.6	.2	.6
Number of Carriers	1	1.0	2.3	230.8
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-43.2	-51.7	-58.3	-58.8
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.2	-37.7	-40.2	-40.7

Exhibit 5: Link Budgets (continued)

UPLINK BEAM INFORMATION				
Uplink Beam Name	KSPOT	KSPOT	KSPOT	KSPOT
Uplink Frequency (GHz)	14.250	14.250	14.250	14.250
Uplink Beam Polarization	Linear	Linear	Linear	Linear
Uplink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Uplink Contour G/T (dB/K)	6.0	6.0	6.0	6.0
Uplink SFD (dBW/m2)	-82.2	-82.2	-89.2	-89.2
Rain Rate (mm/hr)	42.0	42.0	42.0	42.0
DOWNLINK BEAM INFORMATION				
Downlink Beam Name	ZONE	ZONE	ZONE	ZONE
Downlink Frequency (GHz)	3.950	3.950	3.950	3.950
Downlink Beam Polarization	Circular	Circular	Circular	Circular
Downlink Relative Contour Level (dB)	-4.0	-4.0	-4.0	-4.0
Downlink Contour EIRP (dBW)	32.7	32.7	32.7	32.7
Rain Rate (mm/hr)	n/a	n/a	n/a	n/a
ADJACENT SATELLITE 1				
Satellite 1 Orbital Location	27.5W	27.5W	27.5W	27.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-40.0	-40.0	-40.0	-40.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
ADJACENT SATELLITE 2				
Satellite 1 Orbital Location	31.5W	31.5W	31.5W	31.5W
Uplink Power Density (dBW/Hz)	-50.0	-50.0	-50.0	-50.0
Uplink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
Downlink EIRP Density (dBW/Hz)	-40.0	-40.0	-40.0	-40.0
Downlink Polarization Advantage (dB)	0.0	0.0	0.0	0.0
CARRIER INFORMATION				
Carrier ID	30M0F3F	34M0G7W	10M3G7W	100KG7W
Carrier Modulation	TV/FM	QPSK	QPSK	QPSK
Peak to Peak Bandwidth of EDS (MHz)	4	N/A	N/A	N/A
Information Rate(kbps)	N/A	23204	6000	64
Code Rate	N/A	1/2x188/204	1/2x188/204	1/2x239/256
Occupied Bandwidth(kHz)	30000	28452	6771.1	75.4
Allocated Bandwidth(kHz)	30000	34000	10300	100
Minimum C/N, Clear Sky (dB)	10.0	3.36	3.87	2.99
Minimum C/N, Rain (dB)	10.0	3.36	3.57	2.79
UPLINK EARTH STATION				
Earth Station Diameter (meters)	6.1	6.1	6.1	6.1
Earth Station Gain (dBi)	56.9	56.9	56.9	56.9
Earth Station Elevation Angle	20	20	20	20
DOWNLINK EARTH STATION				
Earth Station Diameter (meters)	4.6	3.0	3.5	3.5
Earth Station Gain (dBi)	43.9	39.7	41.1	41.1
Earth Station G/T (dB/K)	23.6	19.2	21.0	21.0
Earth Station Elevation Angle	20	20	20	20
LINK FADE TYPE				
Link Fade Type	Clear Sky	Clear Sky	Clear Sky	Clear Sky
UPLINK PERFORMANCE				
Uplink Earth Station EIRP (dBW)	80.7	80.7	61.2	41.1
Uplink Path Loss, Clear Sky (dB)	-207.5	-207.5	-207.5	-207.5
Uplink Rain Attenuation	0.0	0.0	0.0	0.0
Satellite G/T(dB/K)	6.0	6.0	6.0	6.0
Boltzman Constant(dBW/K-Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-74.8	-74.5	-68.3	-48.8
Uplink C/N(dB)	33.1	33.3	20.0	19.4
DOWNLINK PERFORMANCE				
Downlink EIRP per Carrier (dBW)	32.7	32.7	23.3	3.2
Antenna Pointing Error (dB)	-.5	-.5	-.5	-.5
Downlink Path Loss, Clear Sky (dB)	-196.3	-196.3	-196.3	-196.3
Downlink Rain Attenuation	0.0	0.0	0.0	0.0
Earth Station G/T (dB/K)	23.6	19.2	21.0	21.0
Boltzman Constant(dBW / K - Hz)	228.6	228.6	228.6	228.6
Carrier Noise Bandwidth (dB-Hz)	-74.8	-74.5	-68.3	-48.8
Downlink C / N(dB)	13.3	9.1	7.7	7.2
COMPOSITE LINK PERFORMANCE				
C/N Uplink (dB)	33.1	33.3	20.0	19.4
C/N Downlink (dB)	13.3	9.1	7.7	7.2
C/I Intermodulation (dB)	N/A	N/A	25.8	25.2
C/I Uplink Co-Channel (dB)*	27.5	27.0	27.8	27.9
C/I Downlink Co-Channel (dB)*	27.5	27.0	27.8	27.9
C/I Uplink Adjacent Satellite 1 (dB)	33.9	34.2	20.9	20.3
C/I Downlink Adjacent Satellite 1 (dB)	19.1	9.3	11.3	10.8
C/I Uplink Adjacent Satellite 2 (dB)	33.9	34.2	20.9	20.3
C/I Downlink Adjacent Satellite 2 (dB)	21.5	18.1	16.1	15.5
C/(N+I) Composite (dB)	11.5	5.9	5.2	4.7
Required System Margin (dB)	-1.0	-1.0	-1.0	-1.0
Net C/(N+I) Composite (dB)	10.5	4.9	4.2	3.7
Minimum Required C/N (dB)	-10.0	-3.4	-3.9	-3.0
Excess Link Margin (dB)	.5	1.5	.4	.7
Number of Carriers	1	1.0	2.7	276.5
CARRIER DENSITY LEVELS				
Uplink Power Density (dBW/Hz)	-42.2	-50.7	-64.0	-64.6
Downlink EIRP Density At Beam Peak (dBW/Hz)	-29.3	-37.8	-41.0	-41.6