


ANNEX D TEST DATA

For

Project No.:	8227EU010708W
Client:	Zeroplus Technology Corporation
Product Description:	Pocket Auto Catch ND
Model No.:	ZPP006J
FCC ID:	2ADKM006J
Technology:	Bluetooth BLE
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2024-03-11

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass

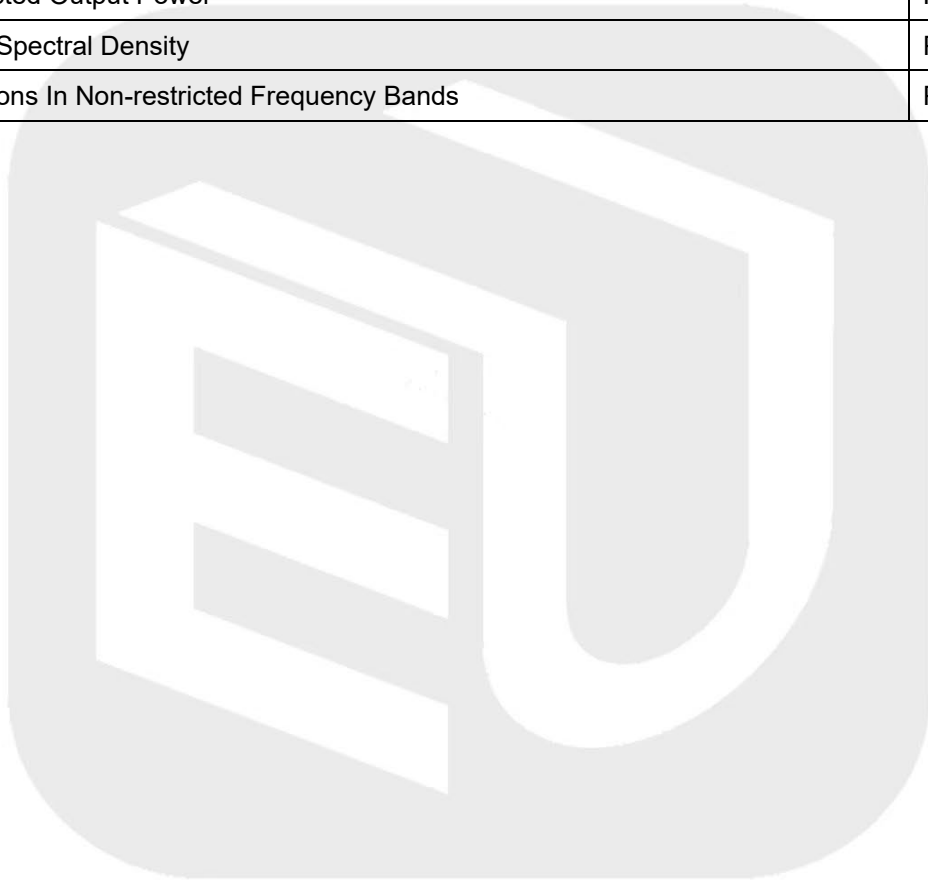

1. Duty Cycle


1.1 Module 1


1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.392	0.625	62.72	2.03	0.00
		2440	0.392	0.625	62.72	2.03	0.03
		2480	0.393	0.625	62.88	2.01	0.00



1.1.2 Test Graph

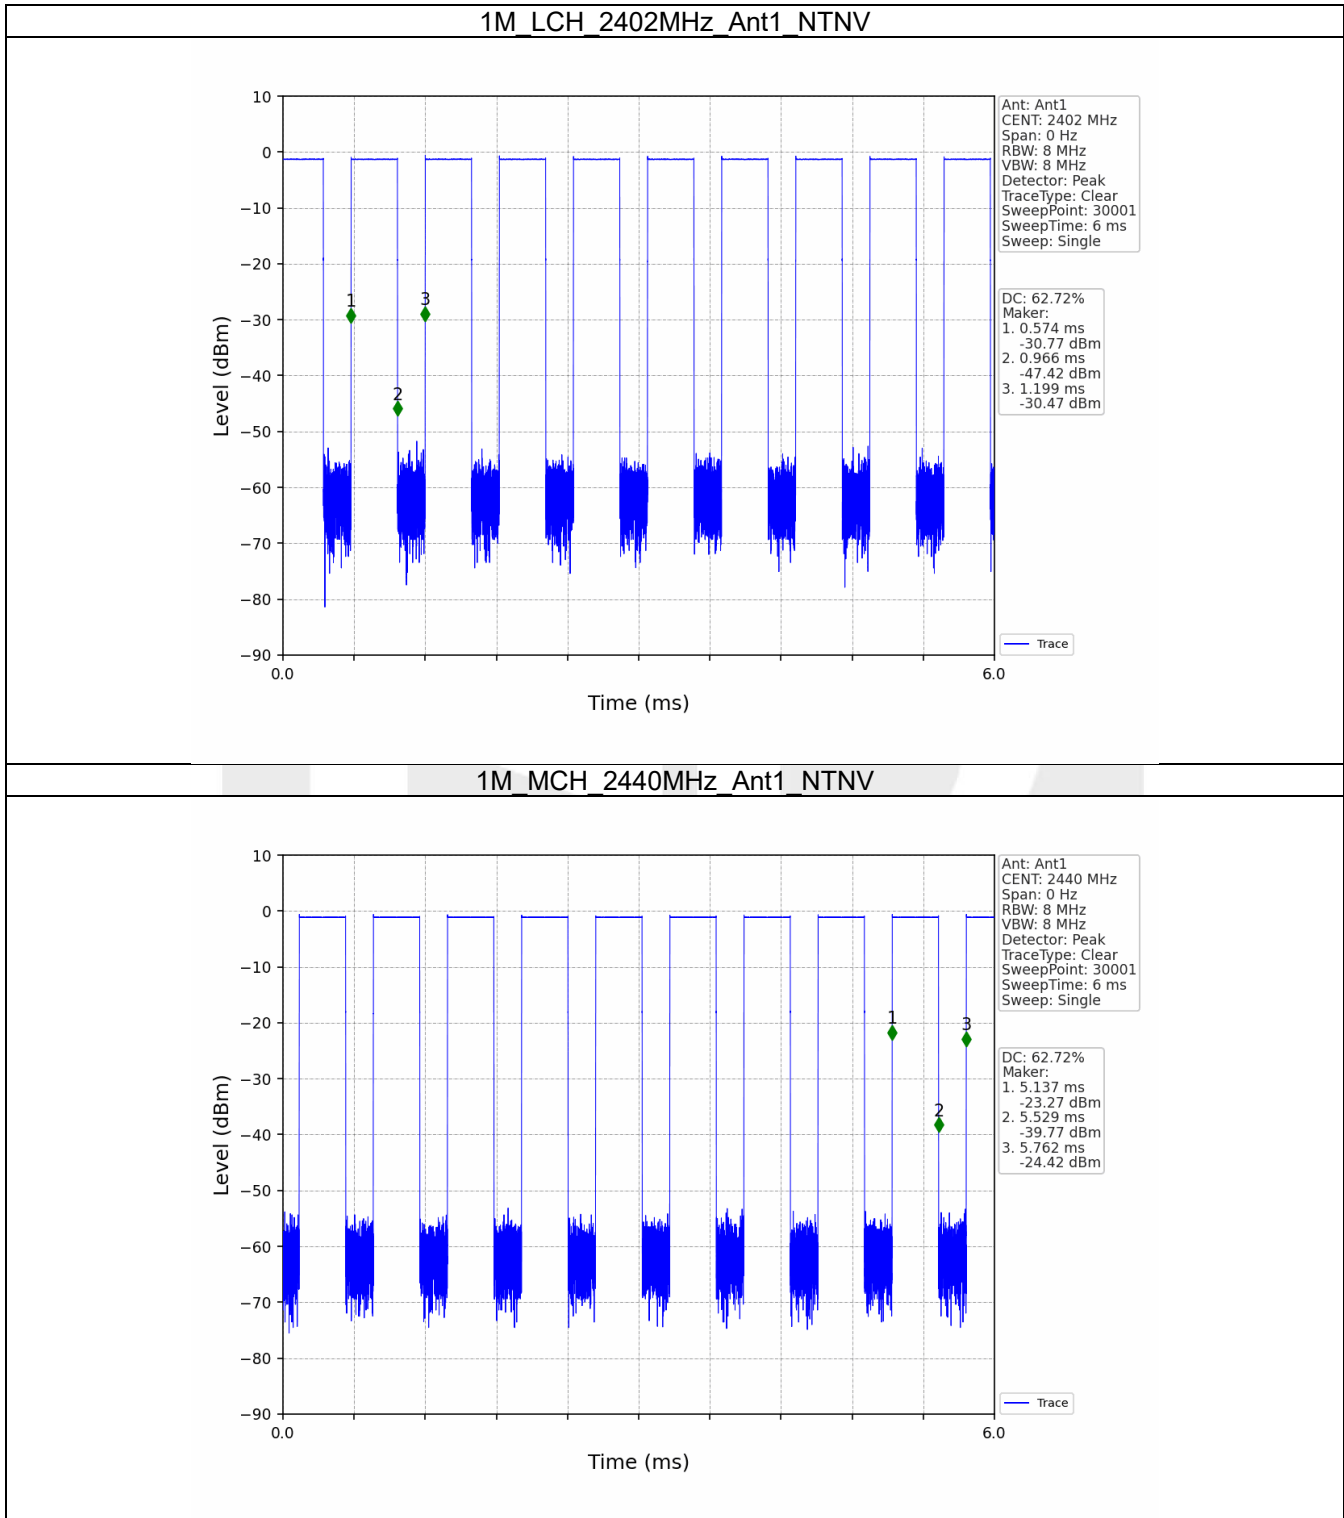

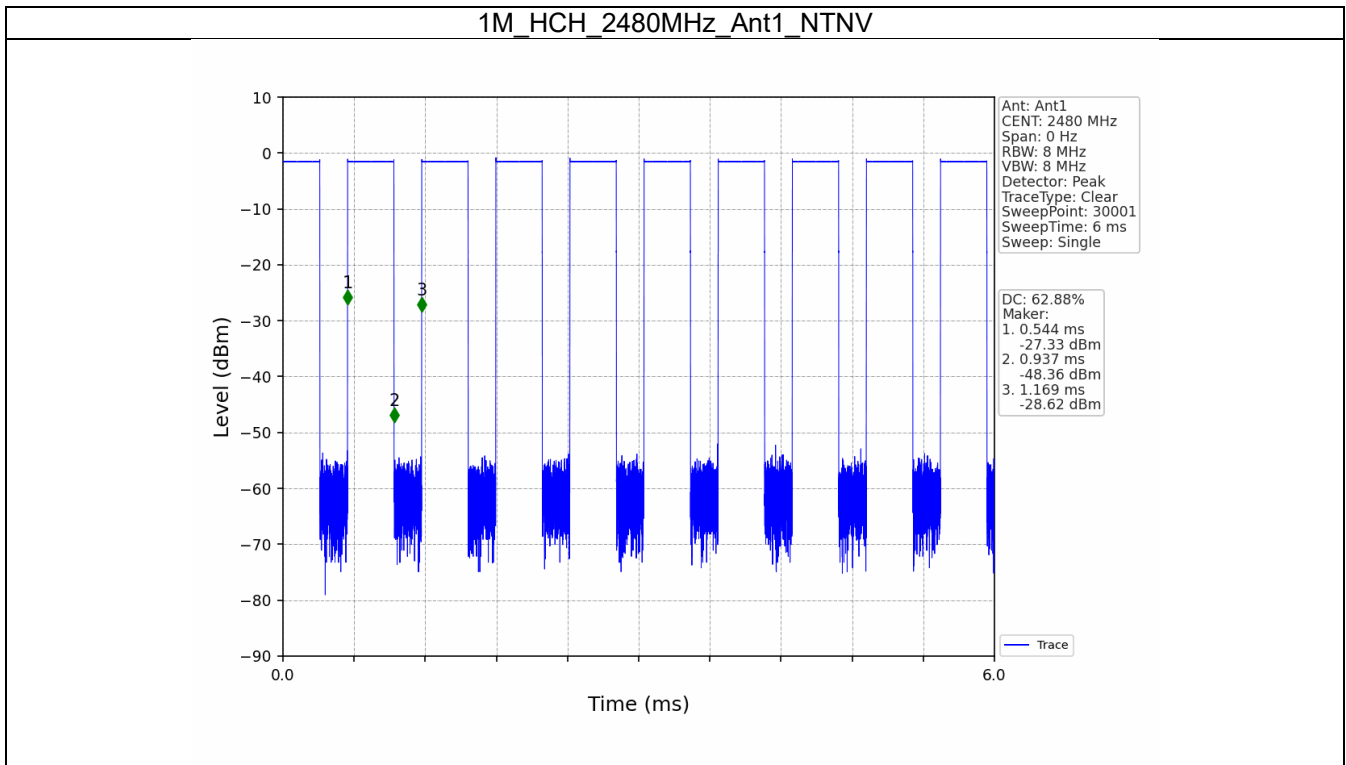


1.2 Module 2


1.2.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.391	0.625	62.56	2.04	0.01
		2440	0.392	0.626	62.62	2.03	0.02
		2480	0.392	0.625	62.72	2.03	0.00



1.2.2 Test Graph

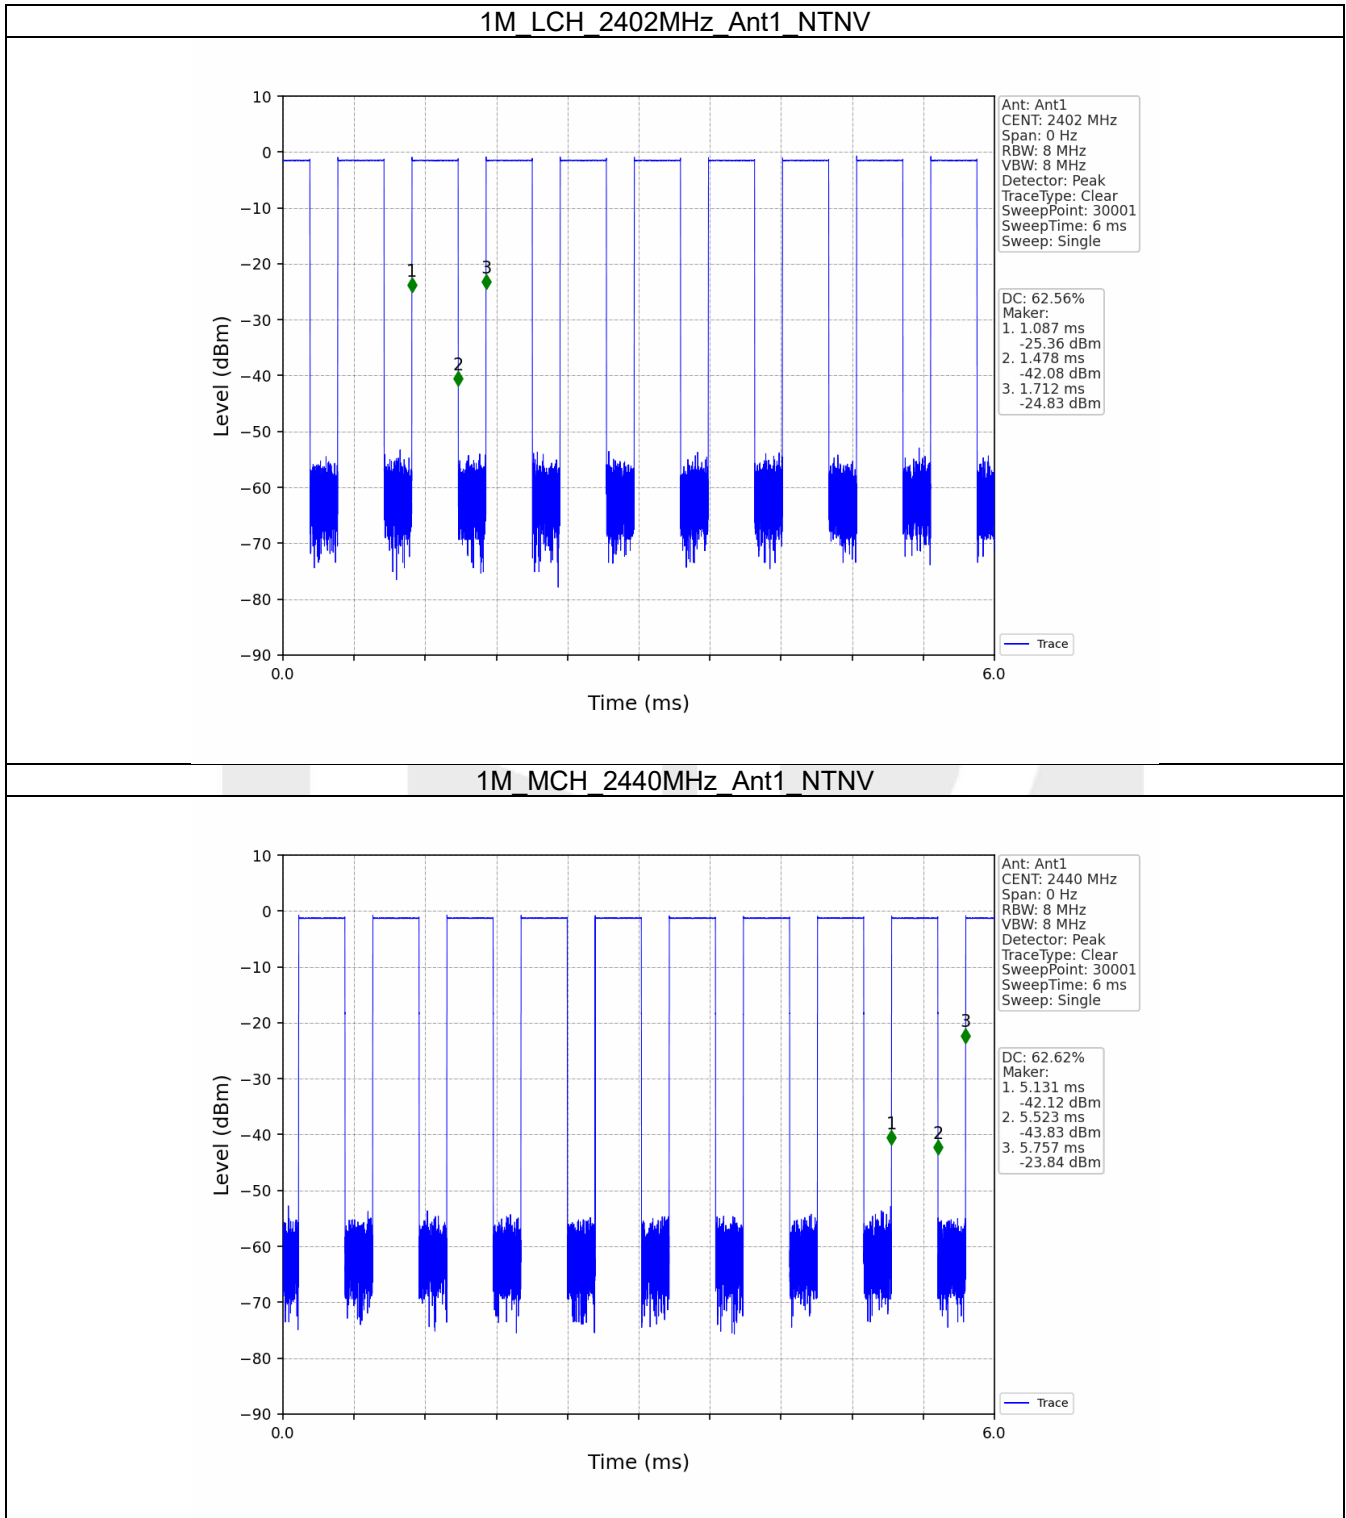

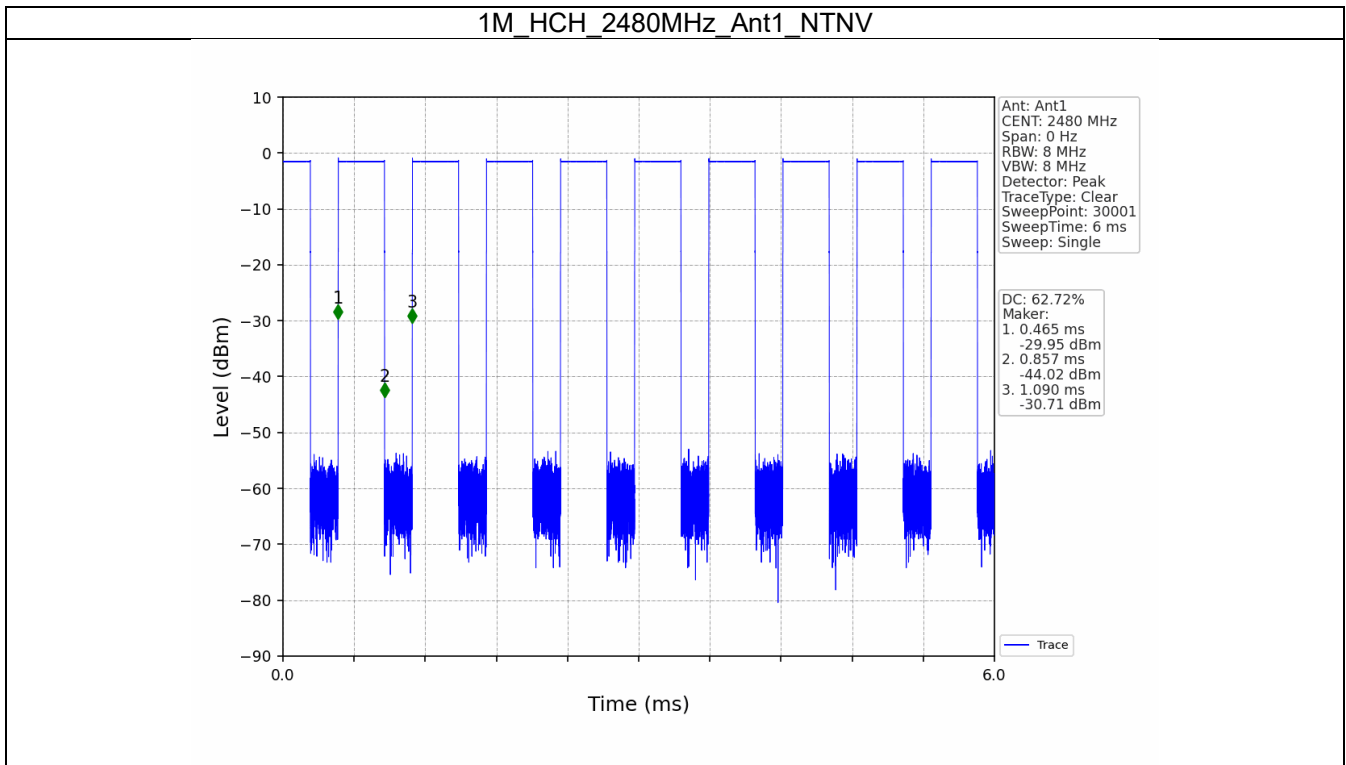


2. Bandwidth


2.1 OBW (Module 1)

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.059	Pass
		2440	1	1.062	Pass
		2480	1	1.065	Pass

2.1.2 Test Graph

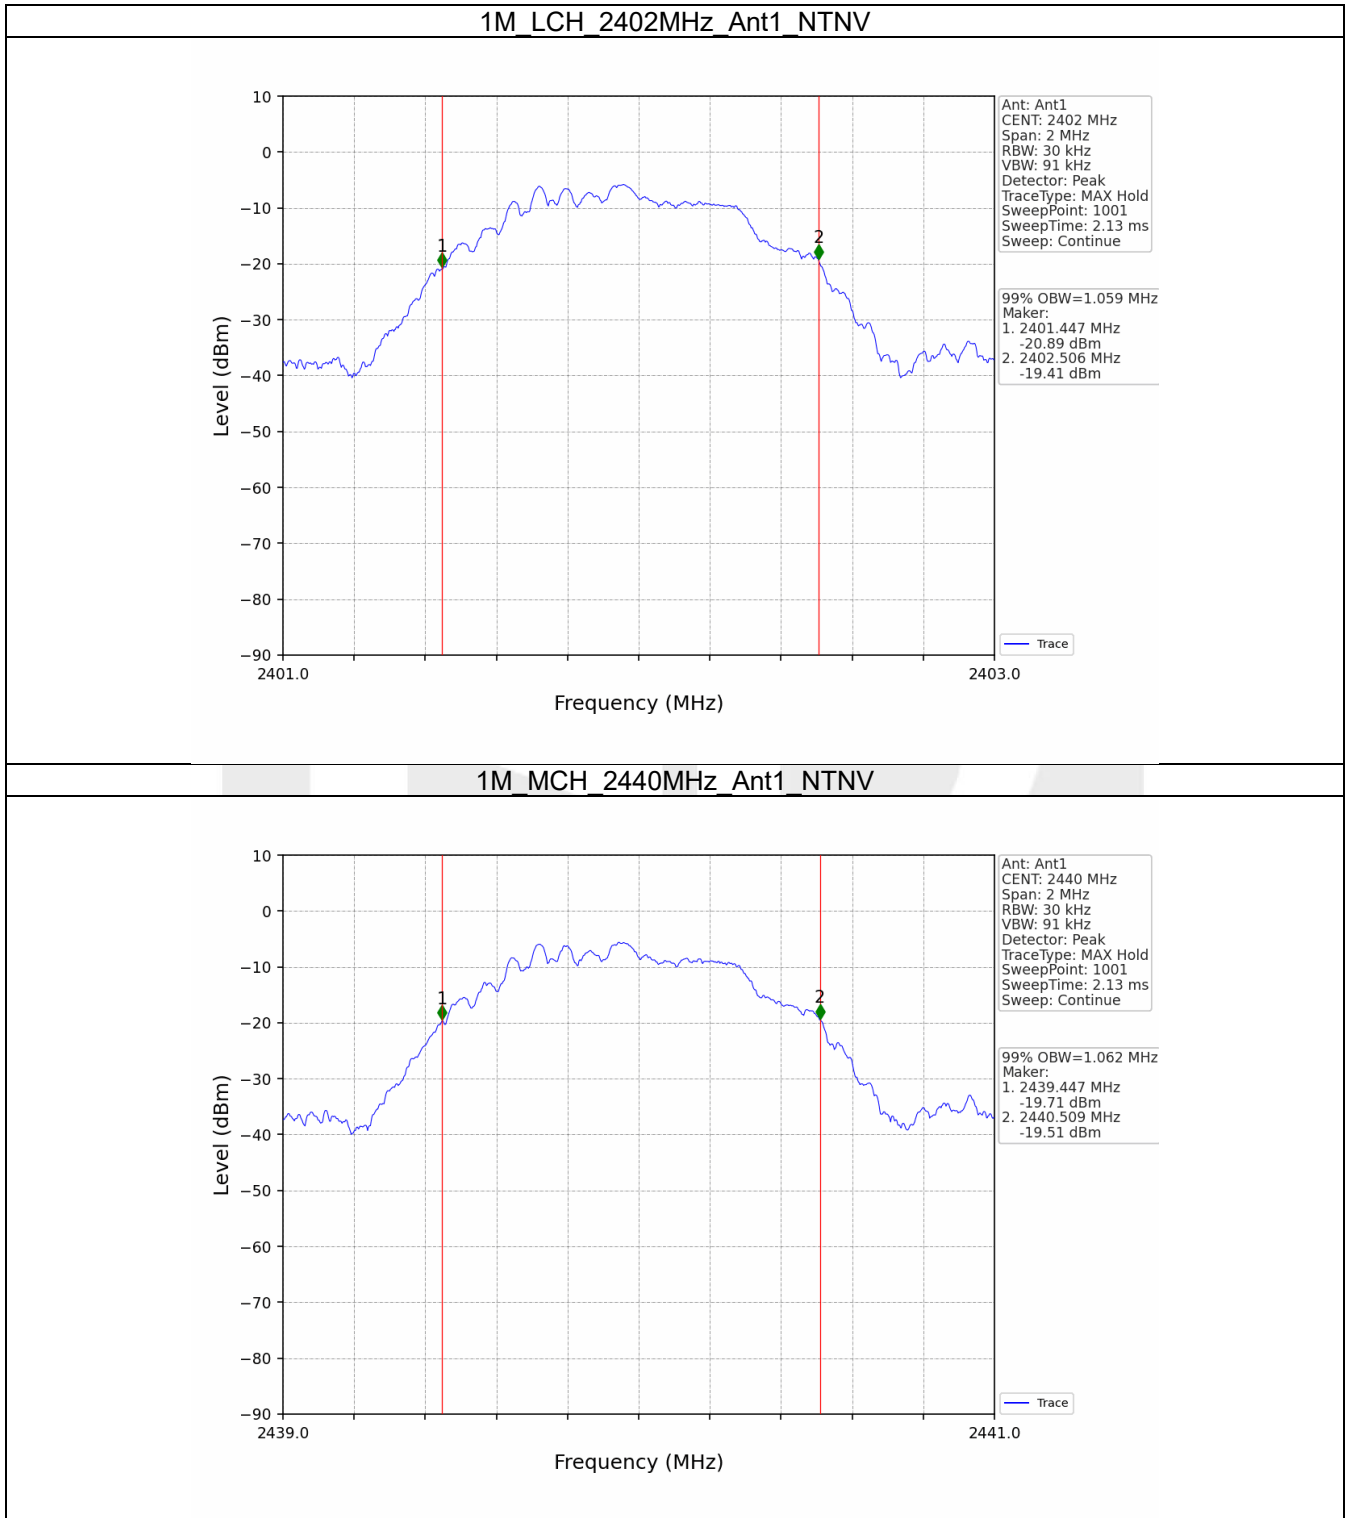

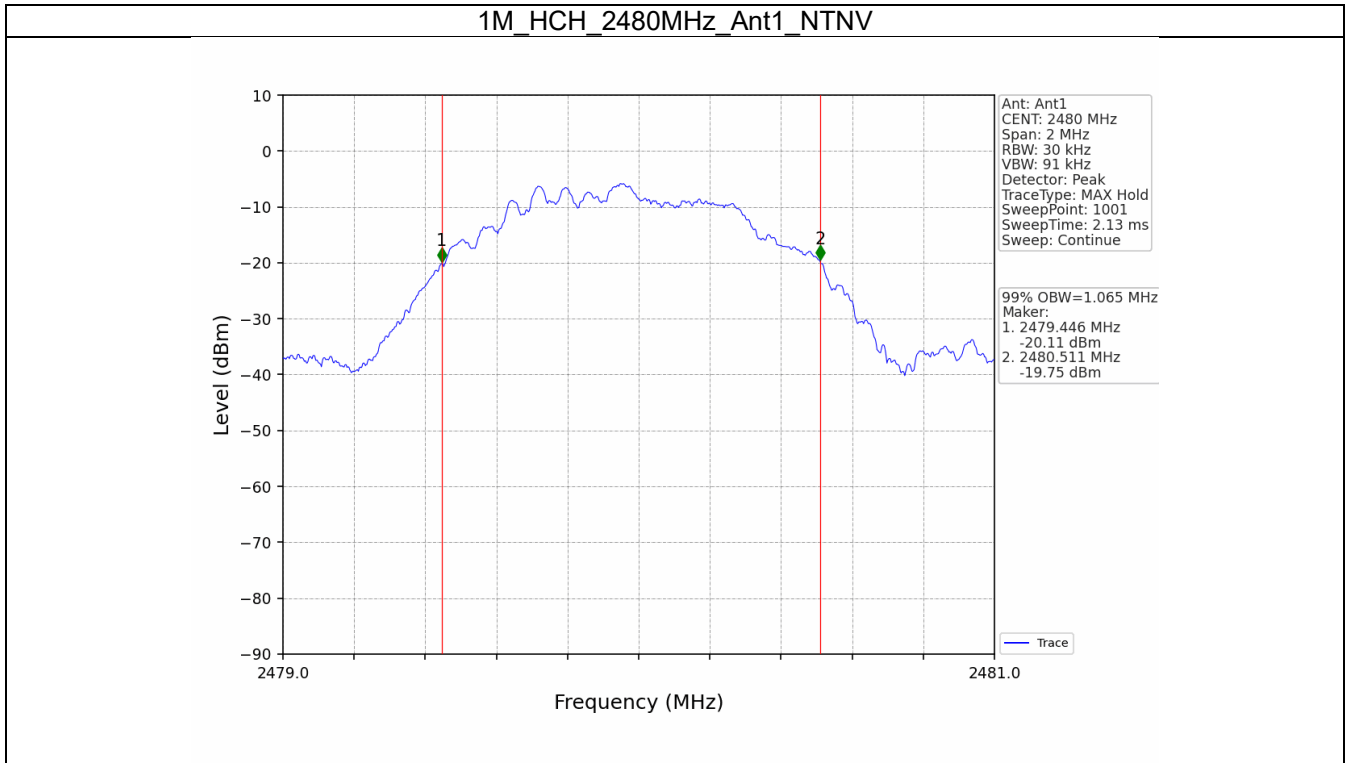


2.2 OBW (Module 2)


2.1.2 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.057	Pass
		2440	1	1.066	Pass
		2480	1	1.067	Pass



2.2.2 Test Graph

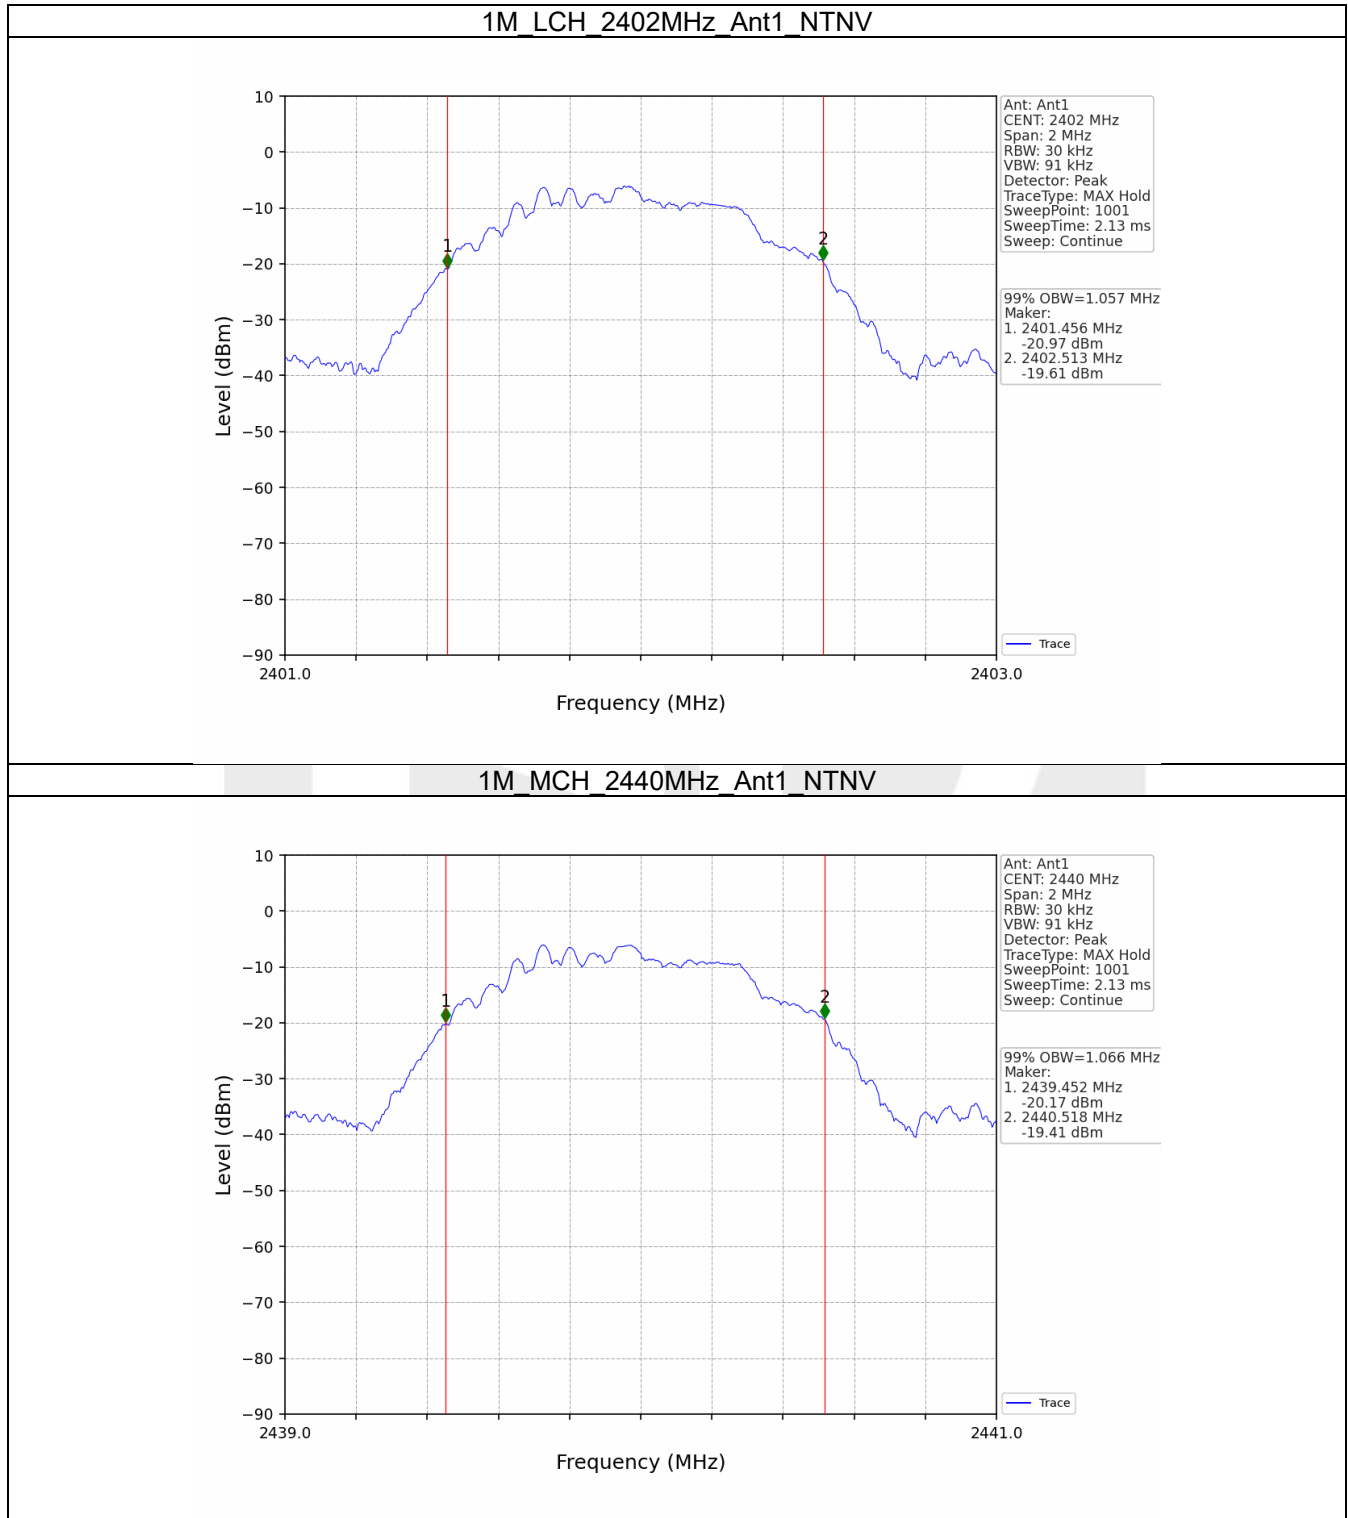

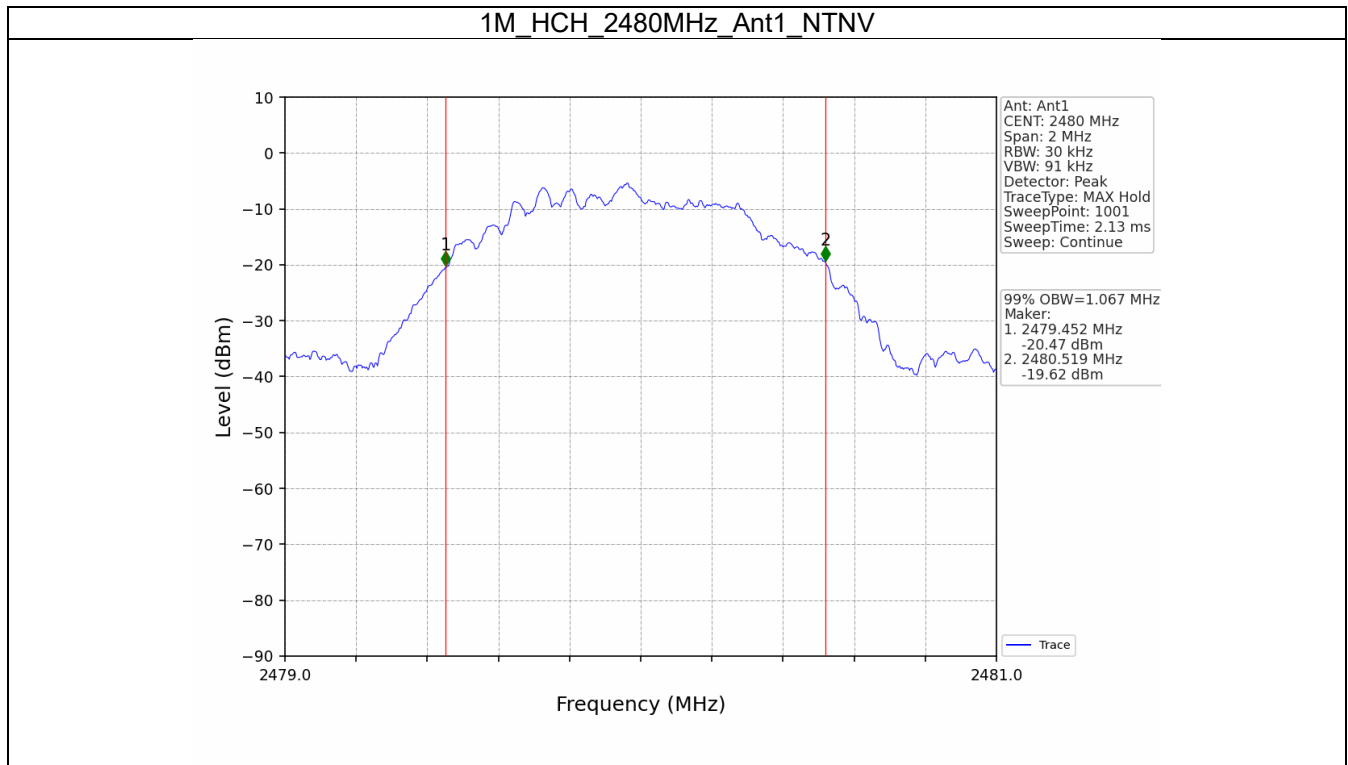


2.3 6dB BW (Module 1)


2.3.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.693	≥ 0.5	Pass
		2440	1	0.710	≥ 0.5	Pass
		2480	1	0.713	≥ 0.5	Pass



2.3.2 Test Graph

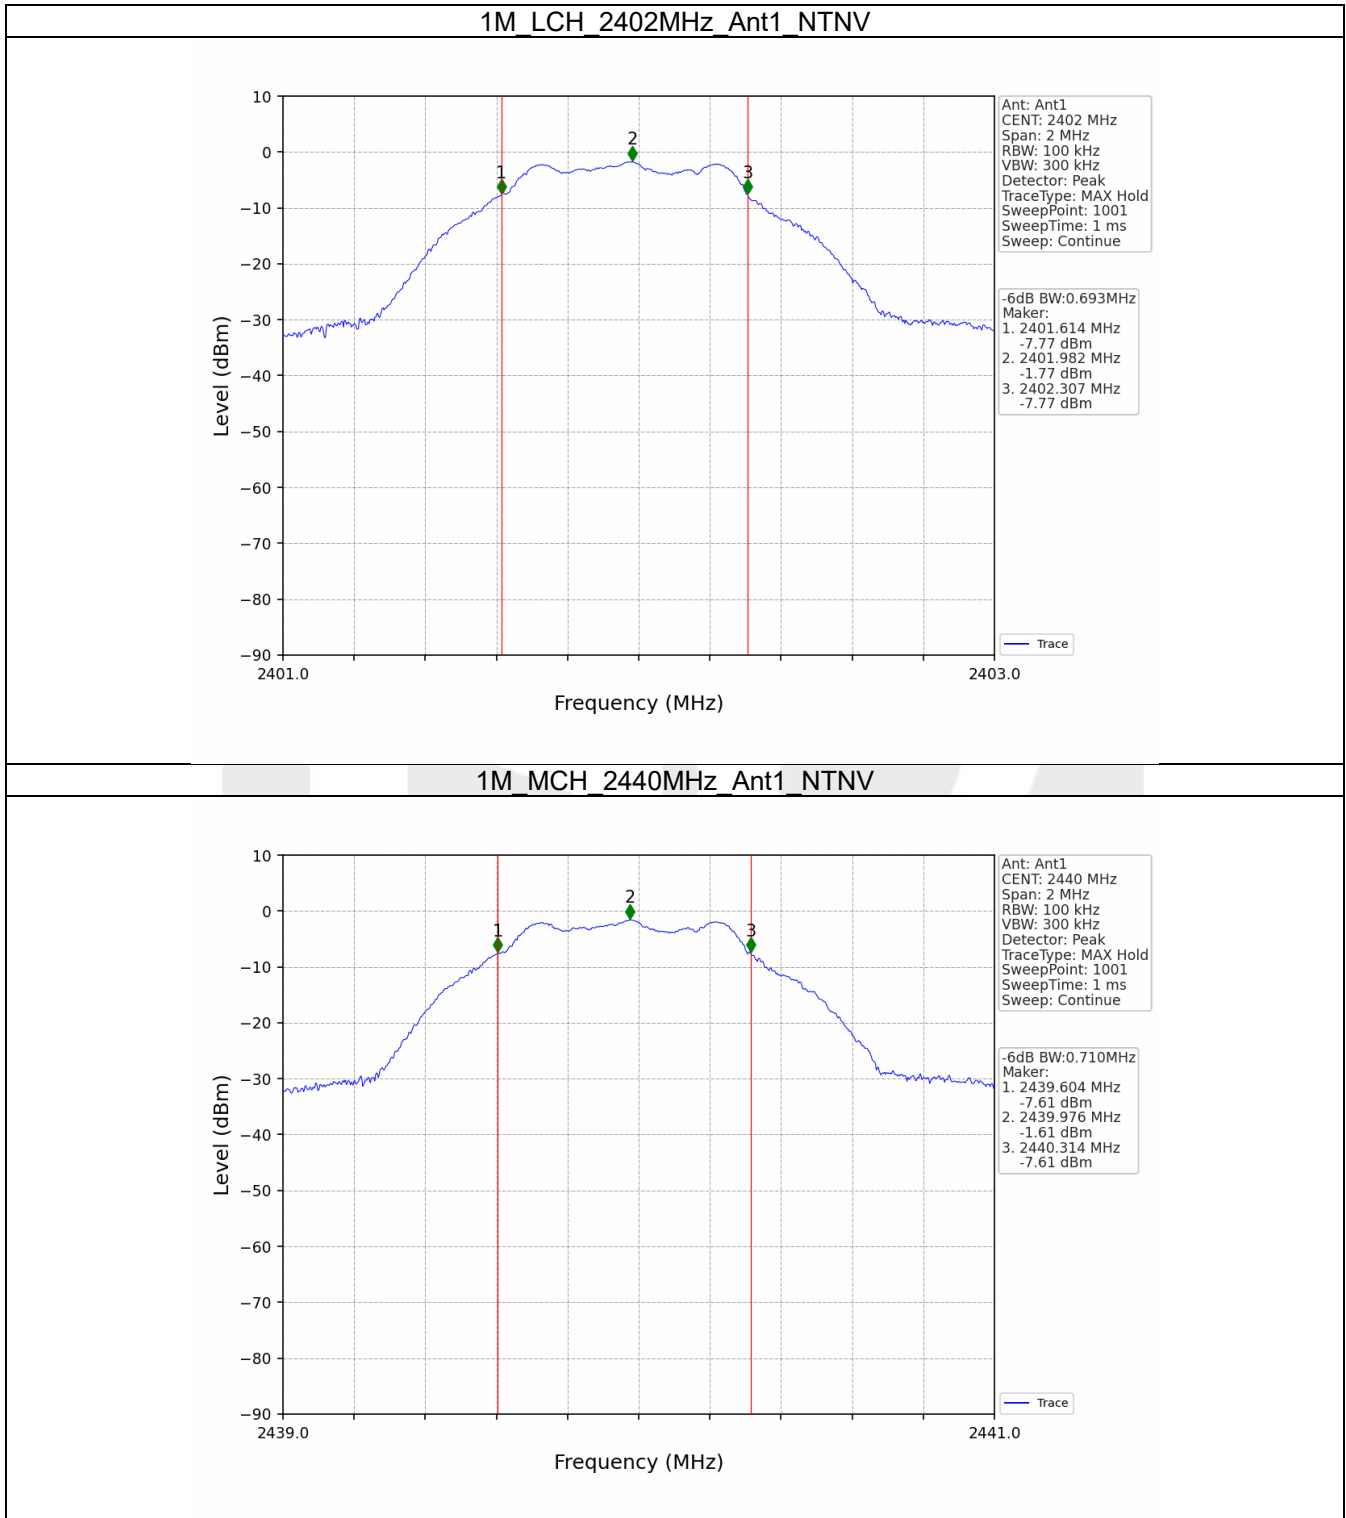

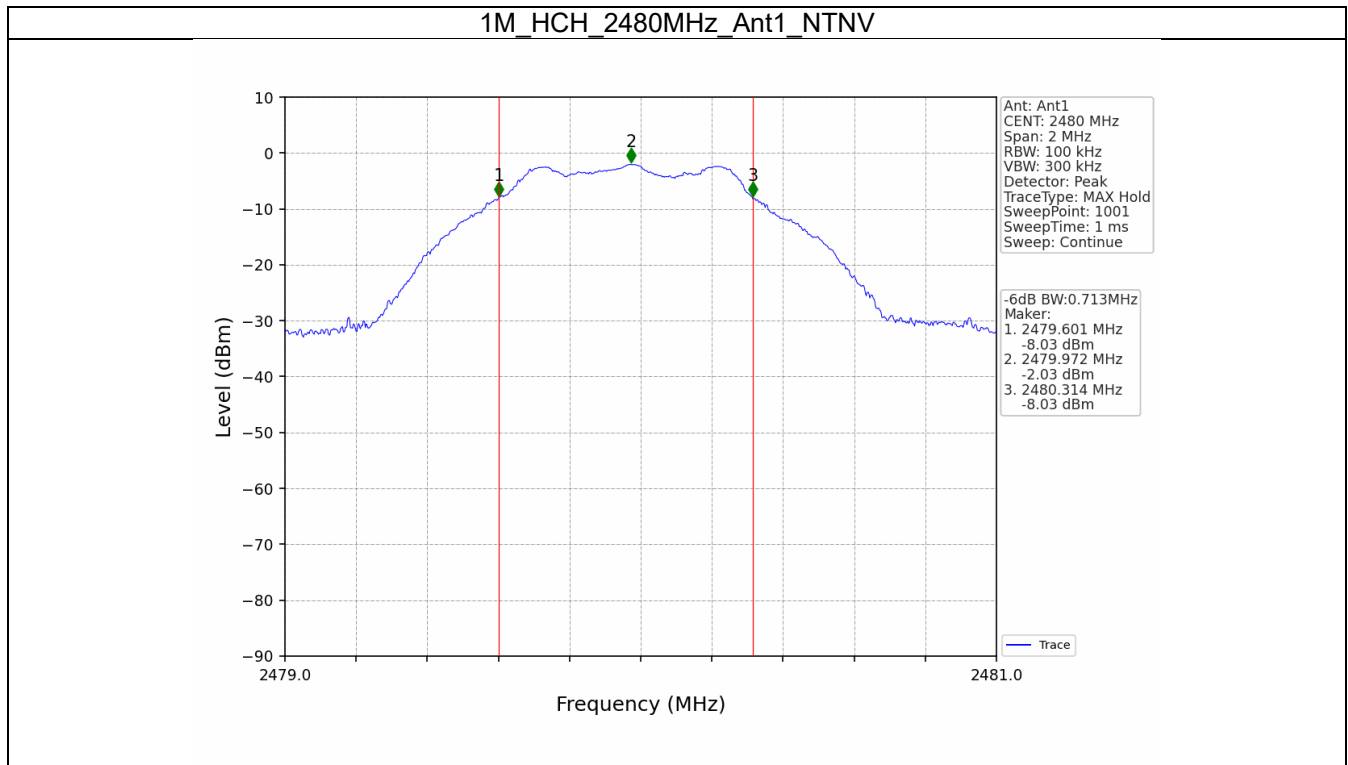


2.4 6dB BW (Module 2)


2.4.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.688	≥ 0.5	Pass
		2440	1	0.710	≥ 0.5	Pass
		2480	1	0.742	≥ 0.5	Pass



2.4.2 Test Graph

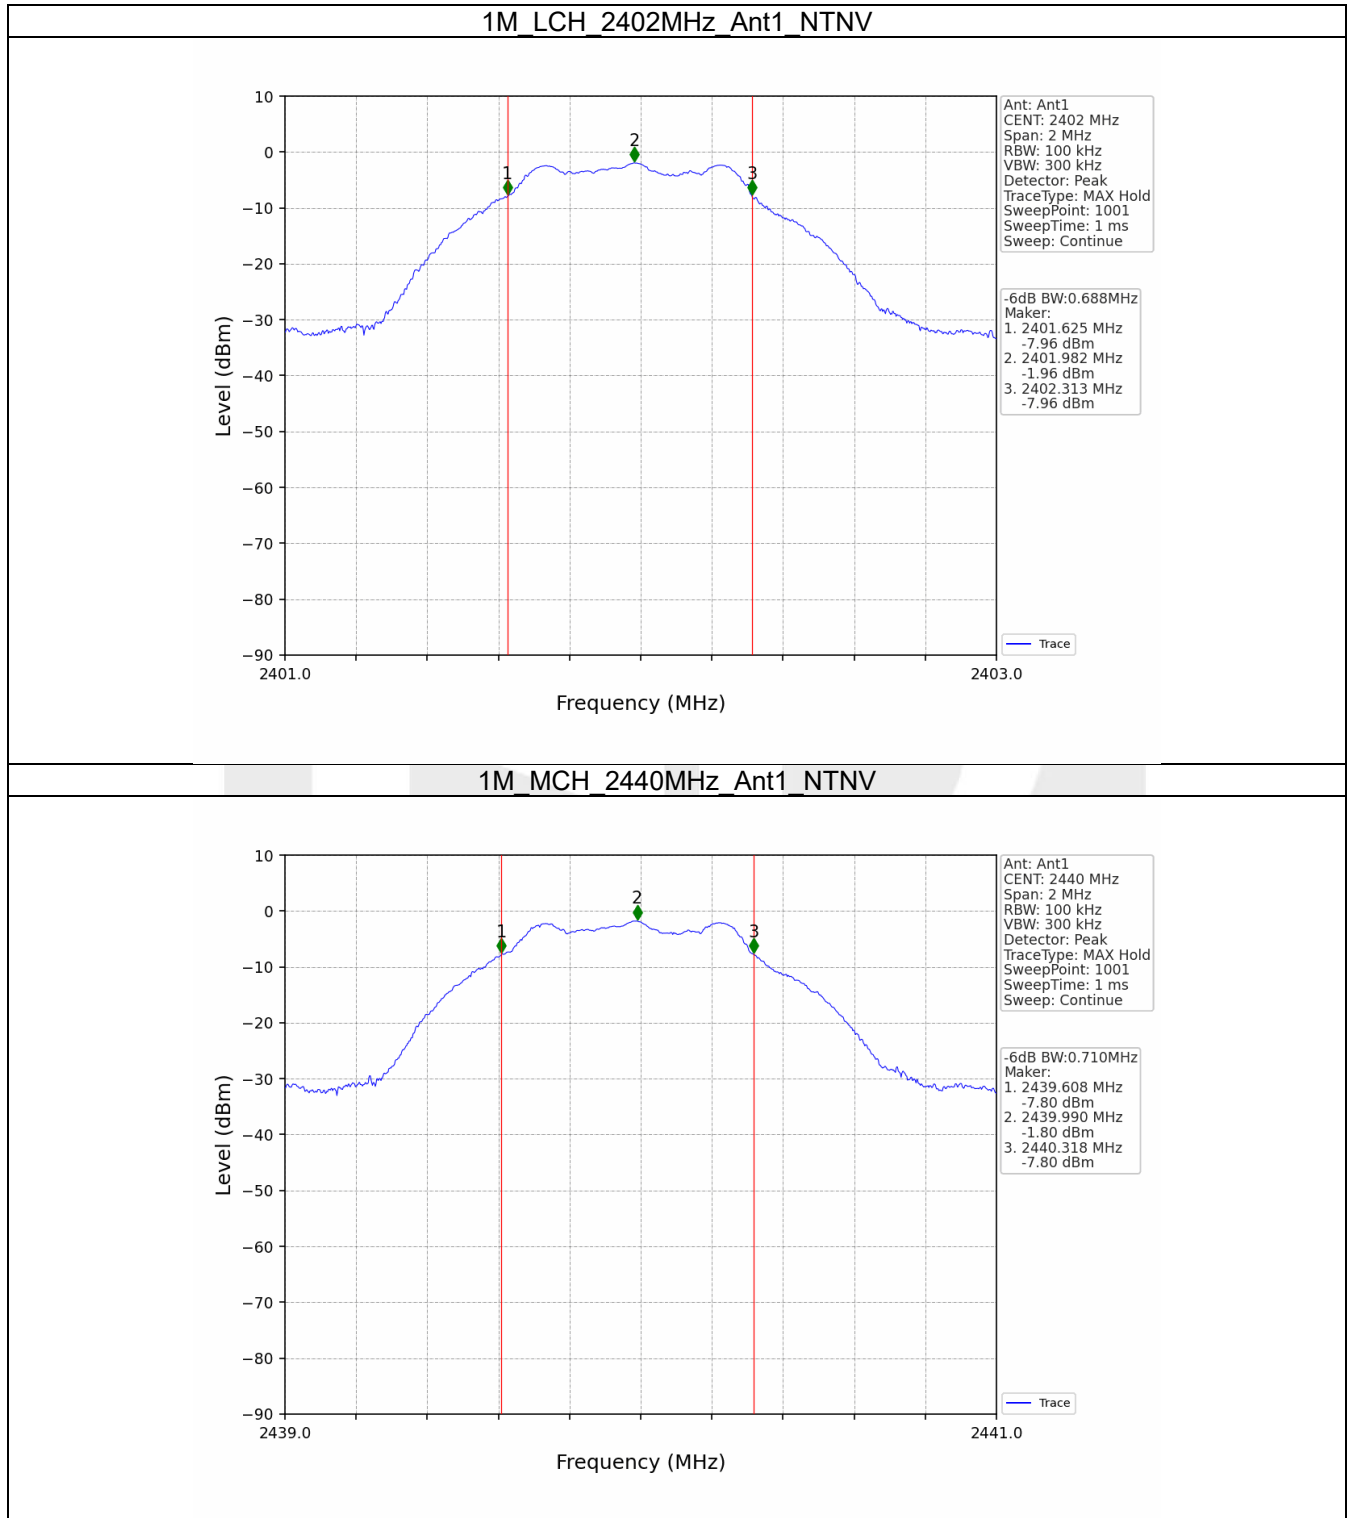

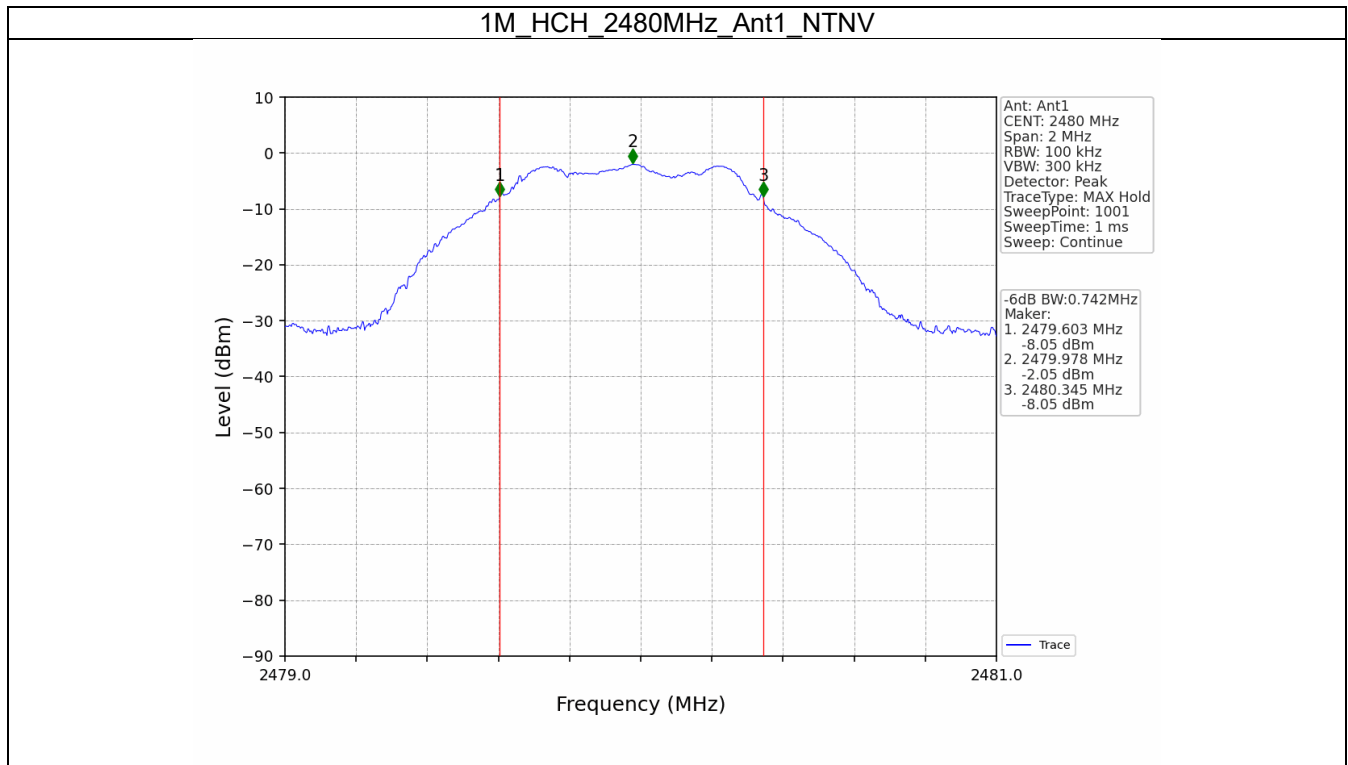


3. Maximum Conducted Output Power


3.1 Power (Module 1)

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.29	<=30	Pass
		2440	-1.10	<=30	Pass
		2480	-1.54	<=30	Pass
Note1: Antenna Gain: Ant1: -1.98dBi;					

3.1.2 Test Graph

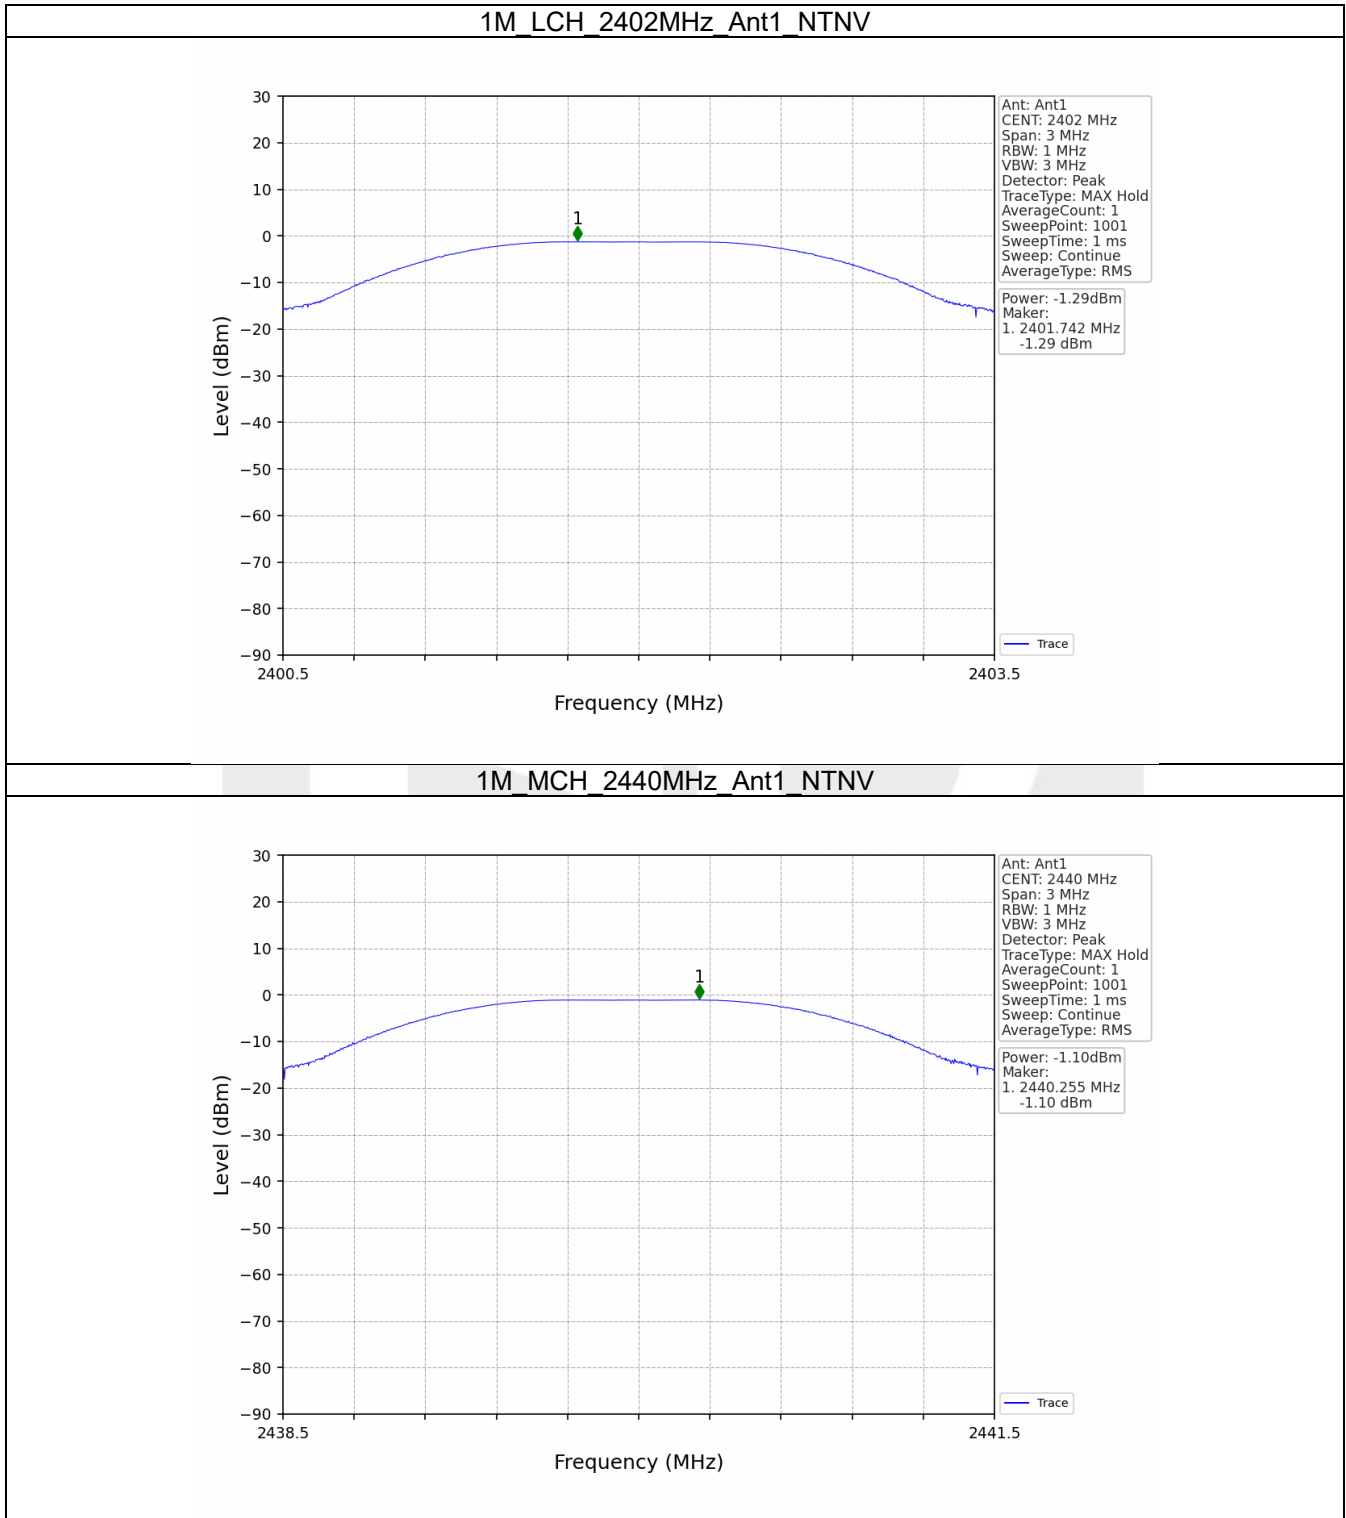

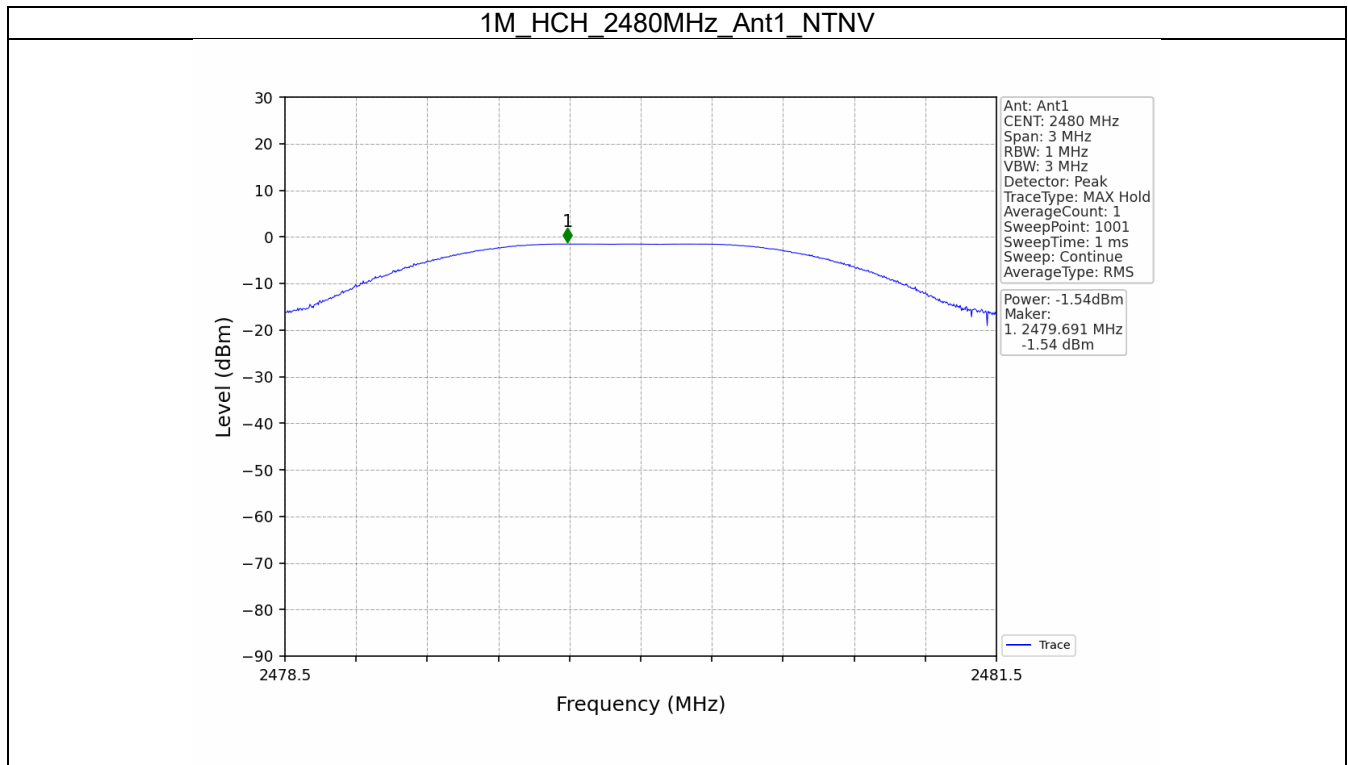


3.2 Power (Module 2)


3.1.2 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-1.47	<=30	Pass
		2440	-1.28	<=30	Pass
		2480	-1.51	<=30	Pass
Note1: Antenna Gain: Ant1: -1.98dBi;					



3.1.2 Test Graph

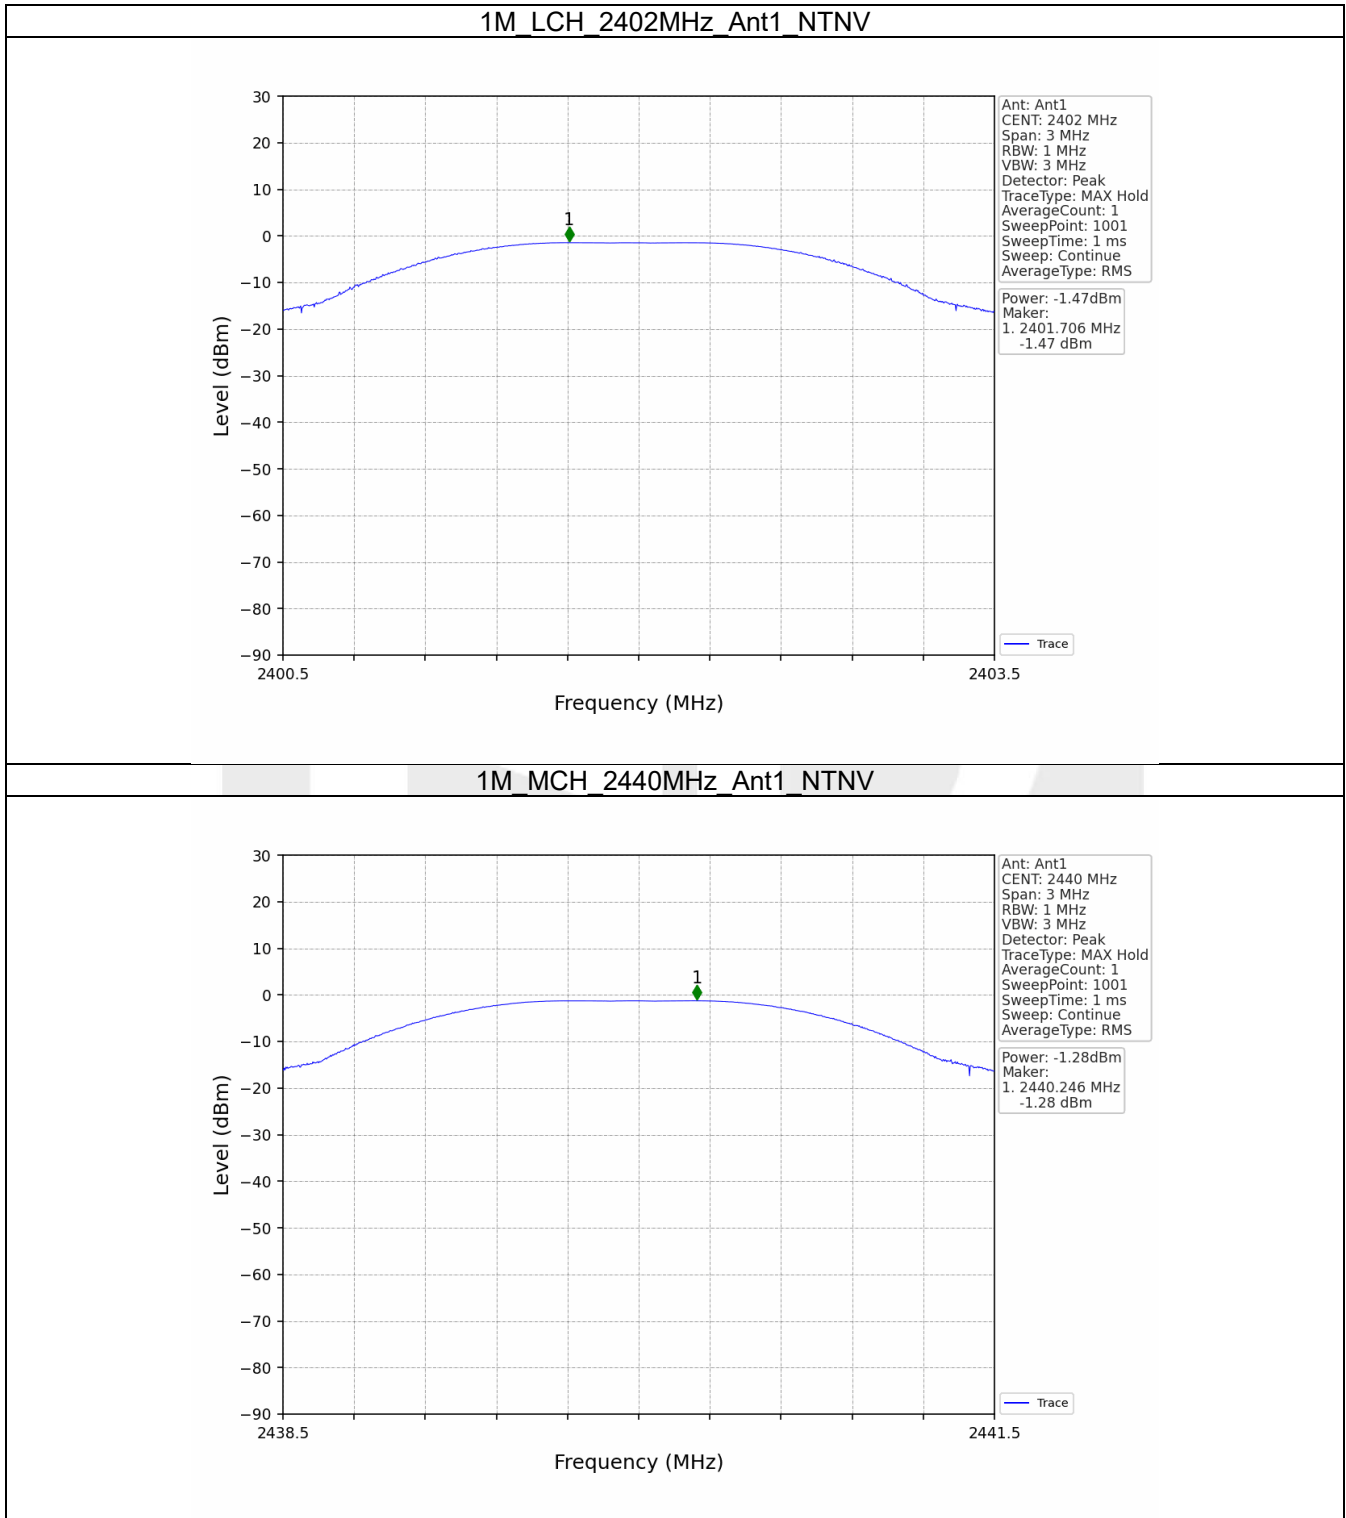

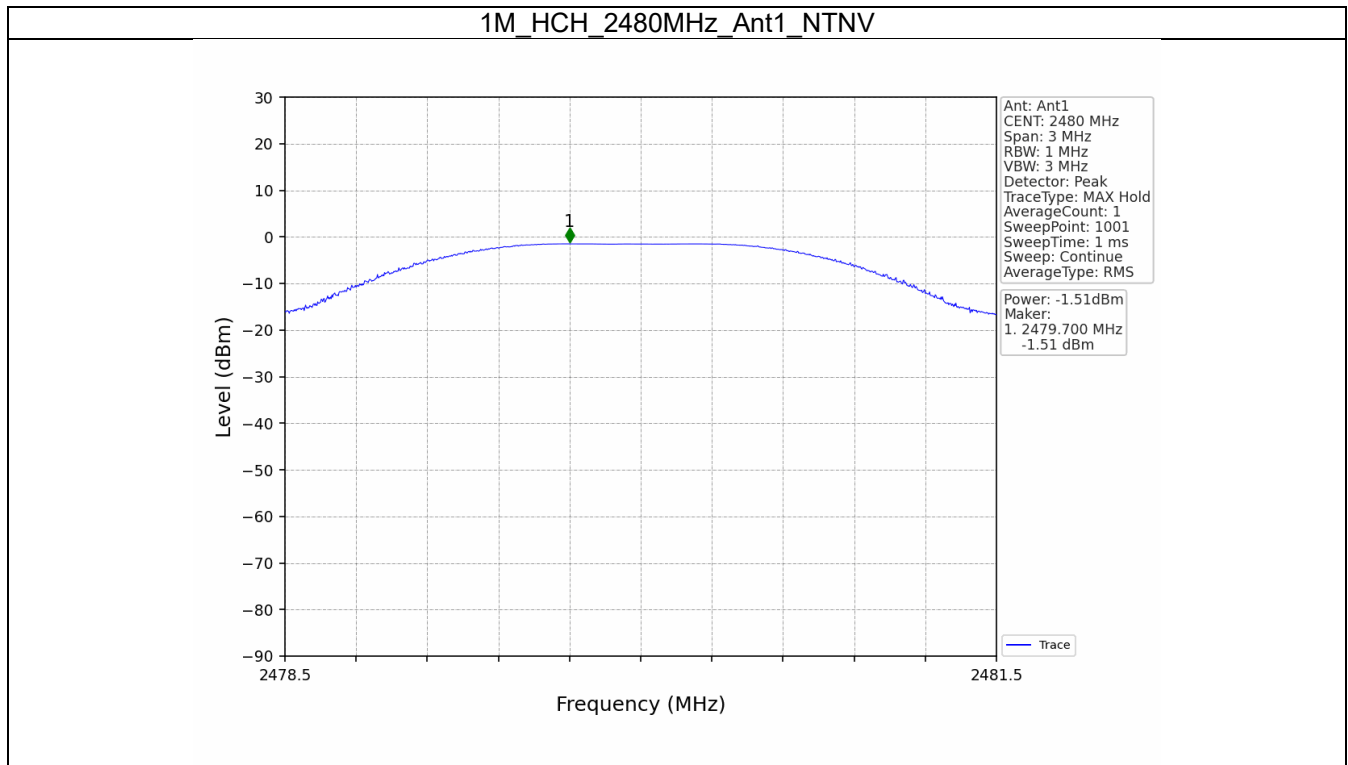

4. Maximum Power Spectral Density

4.1 PSD (Module 1)


4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-15.73	<=8	Pass
		2440	-15.78	<=8	Pass
		2480	-16.02	<=8	Pass

Note1: Antenna Gain: Ant1: -1.98dBi;



4.1.2 Test Graph

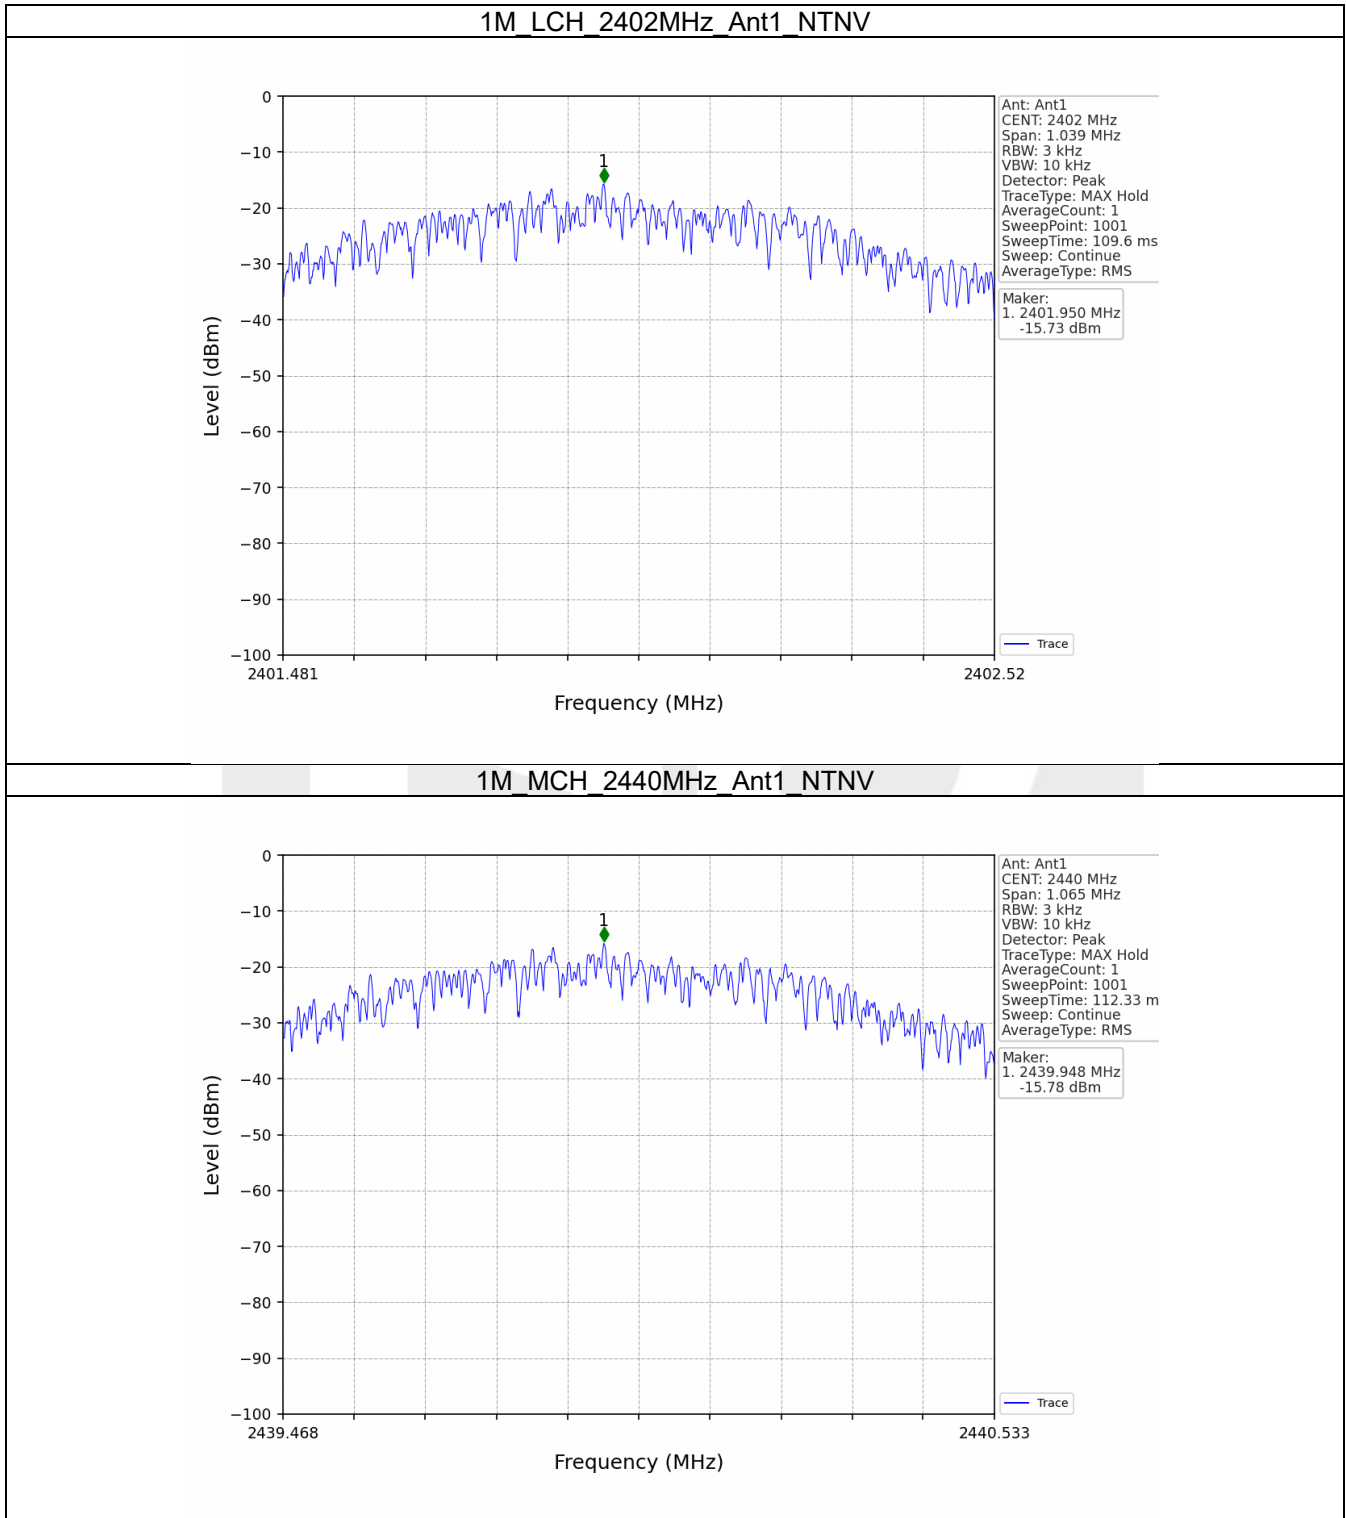

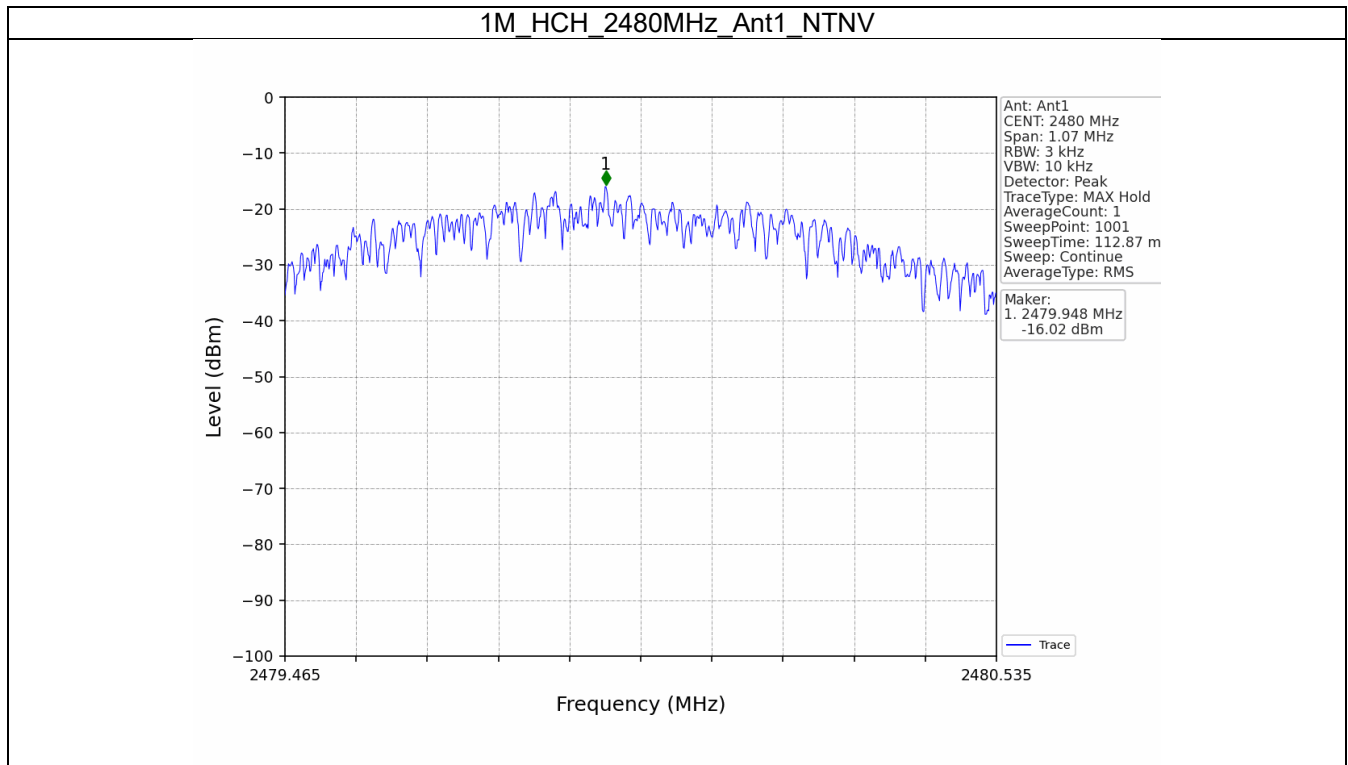

4.2 PSD (Module 2)


4.1.2 Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-16.02	<=8	Pass
		2440	-15.96	<=8	Pass
		2480	-16.35	<=8	Pass

Note1: Antenna Gain: Ant1: -1.98dBi;



4.2.2 Test Graph

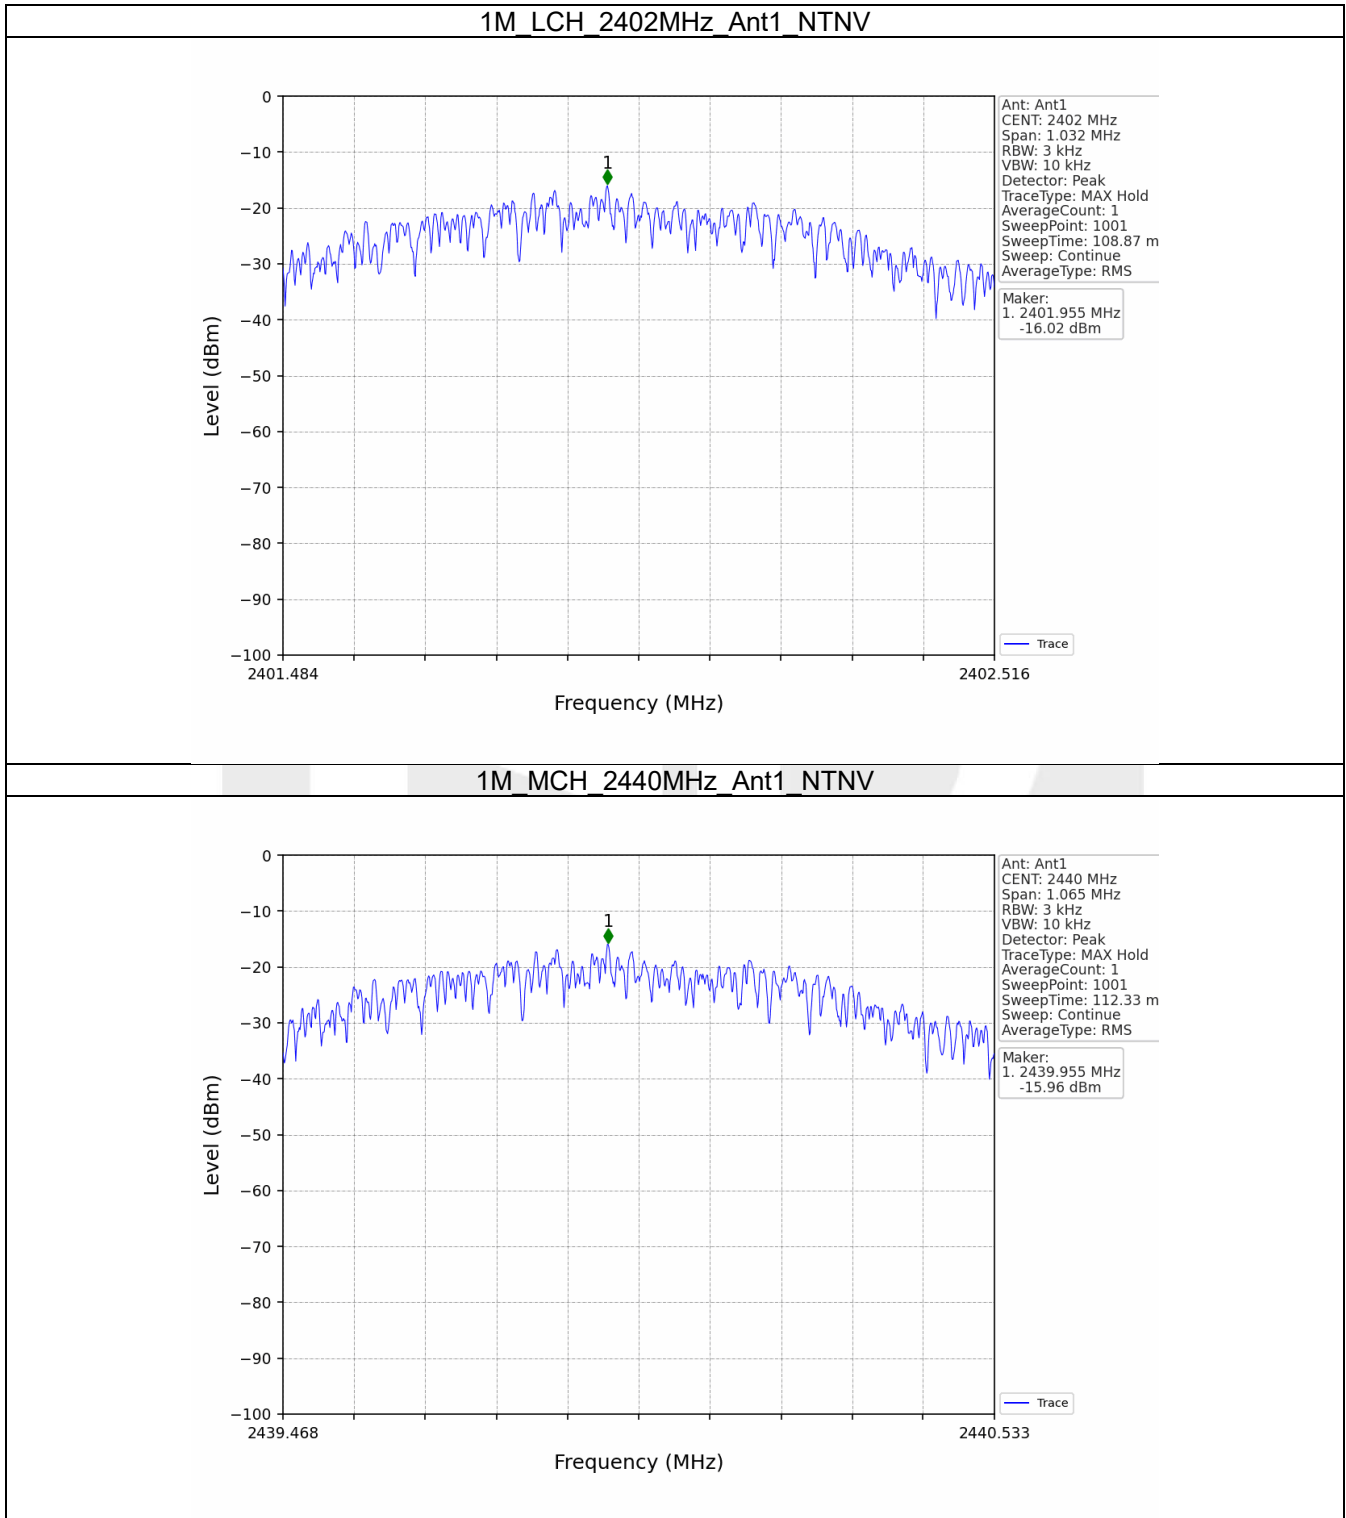

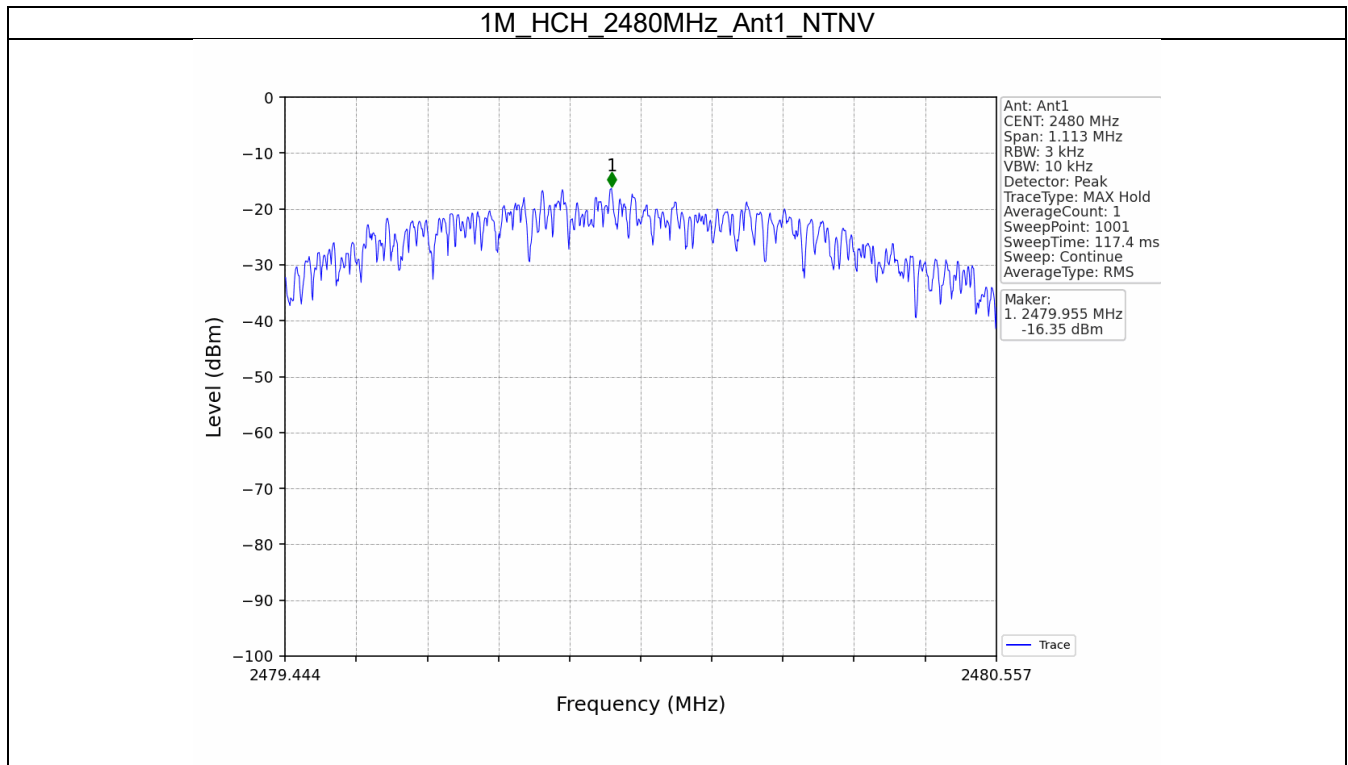

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref (Module 1)


5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-1.75
		2440	1	-1.59
		2480	1	-2.06

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

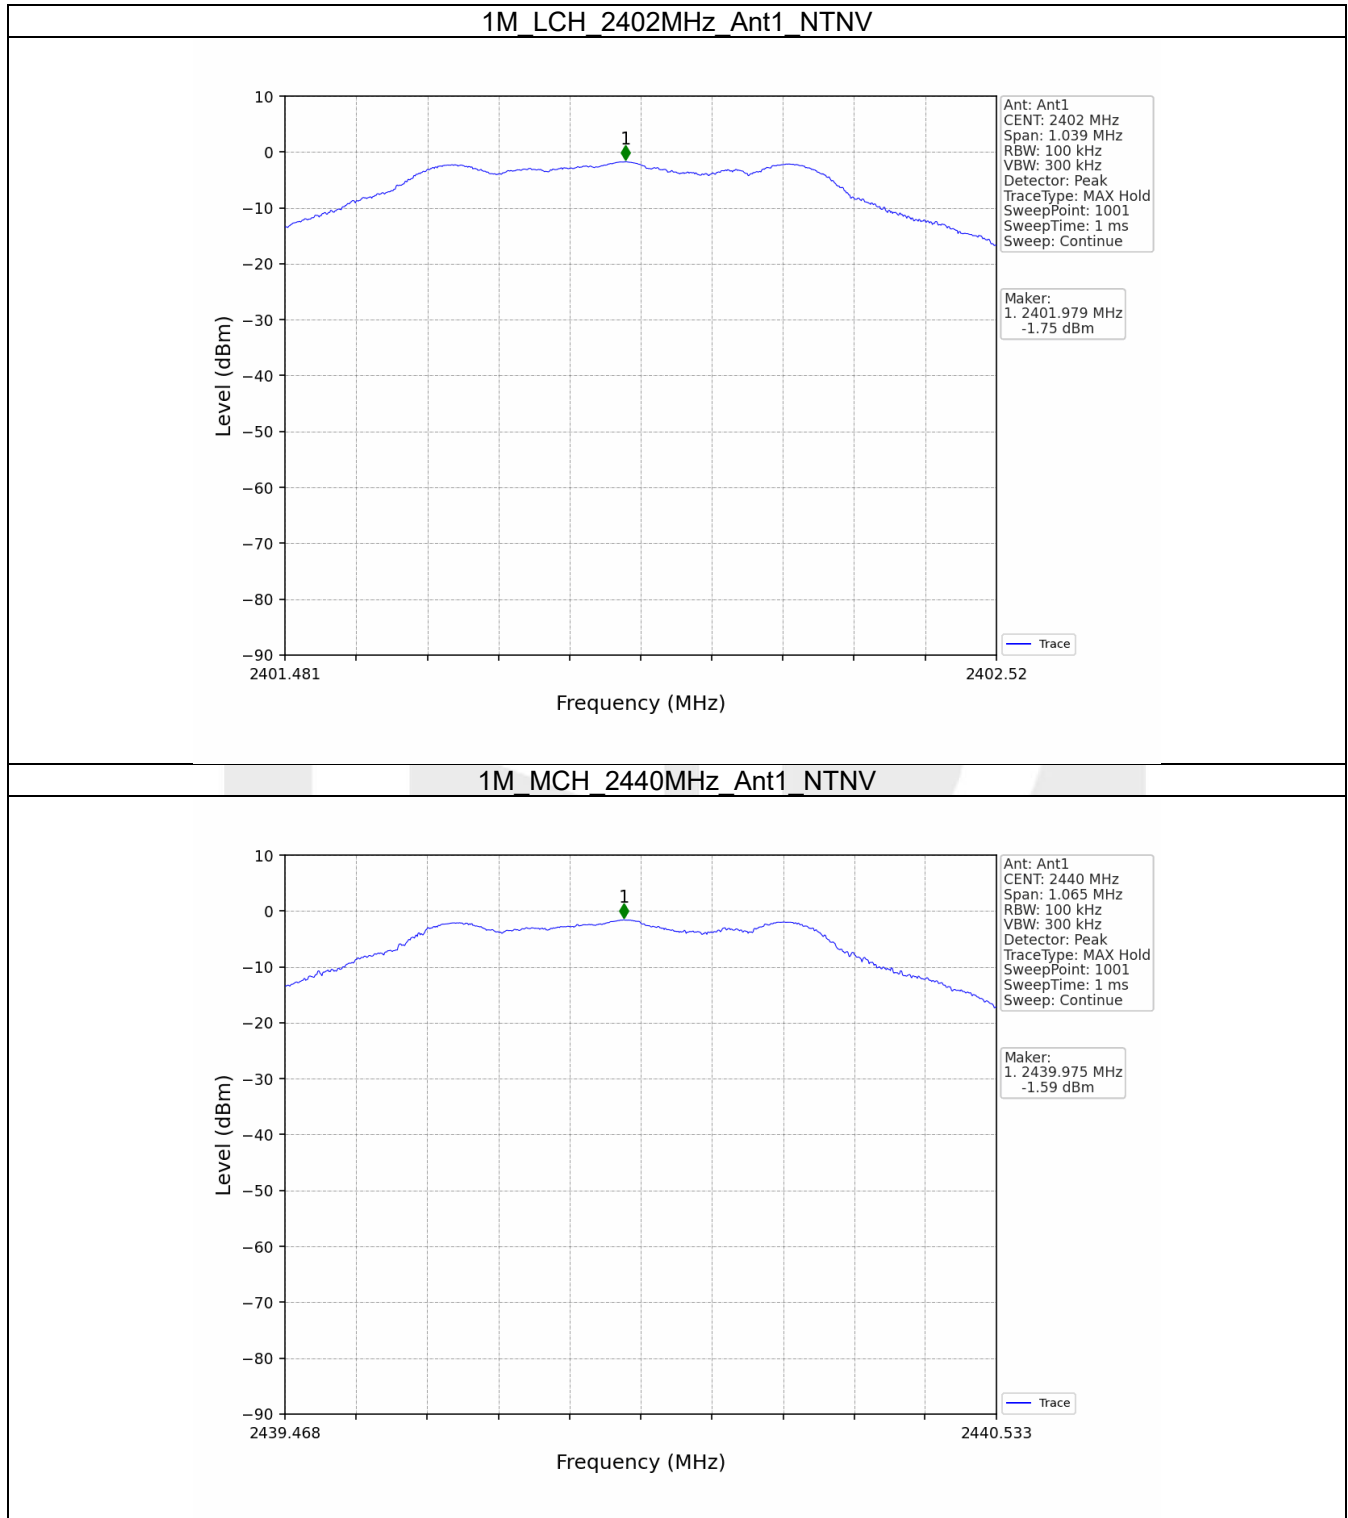

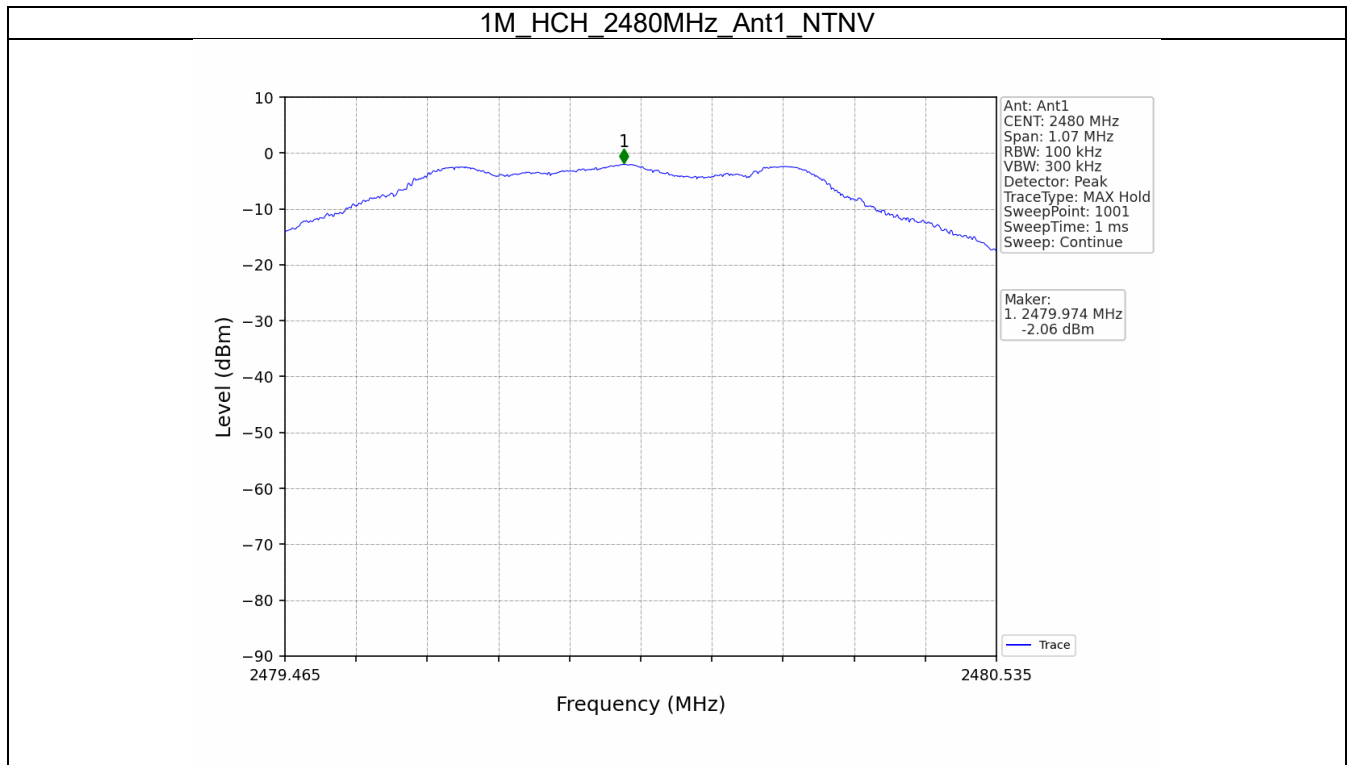



5.2 Ref (Module 2)**5.1.2 Test Result**

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-1.95
		2440	1	-1.77
		2480	1	-2.04

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.2.2 Test Graph

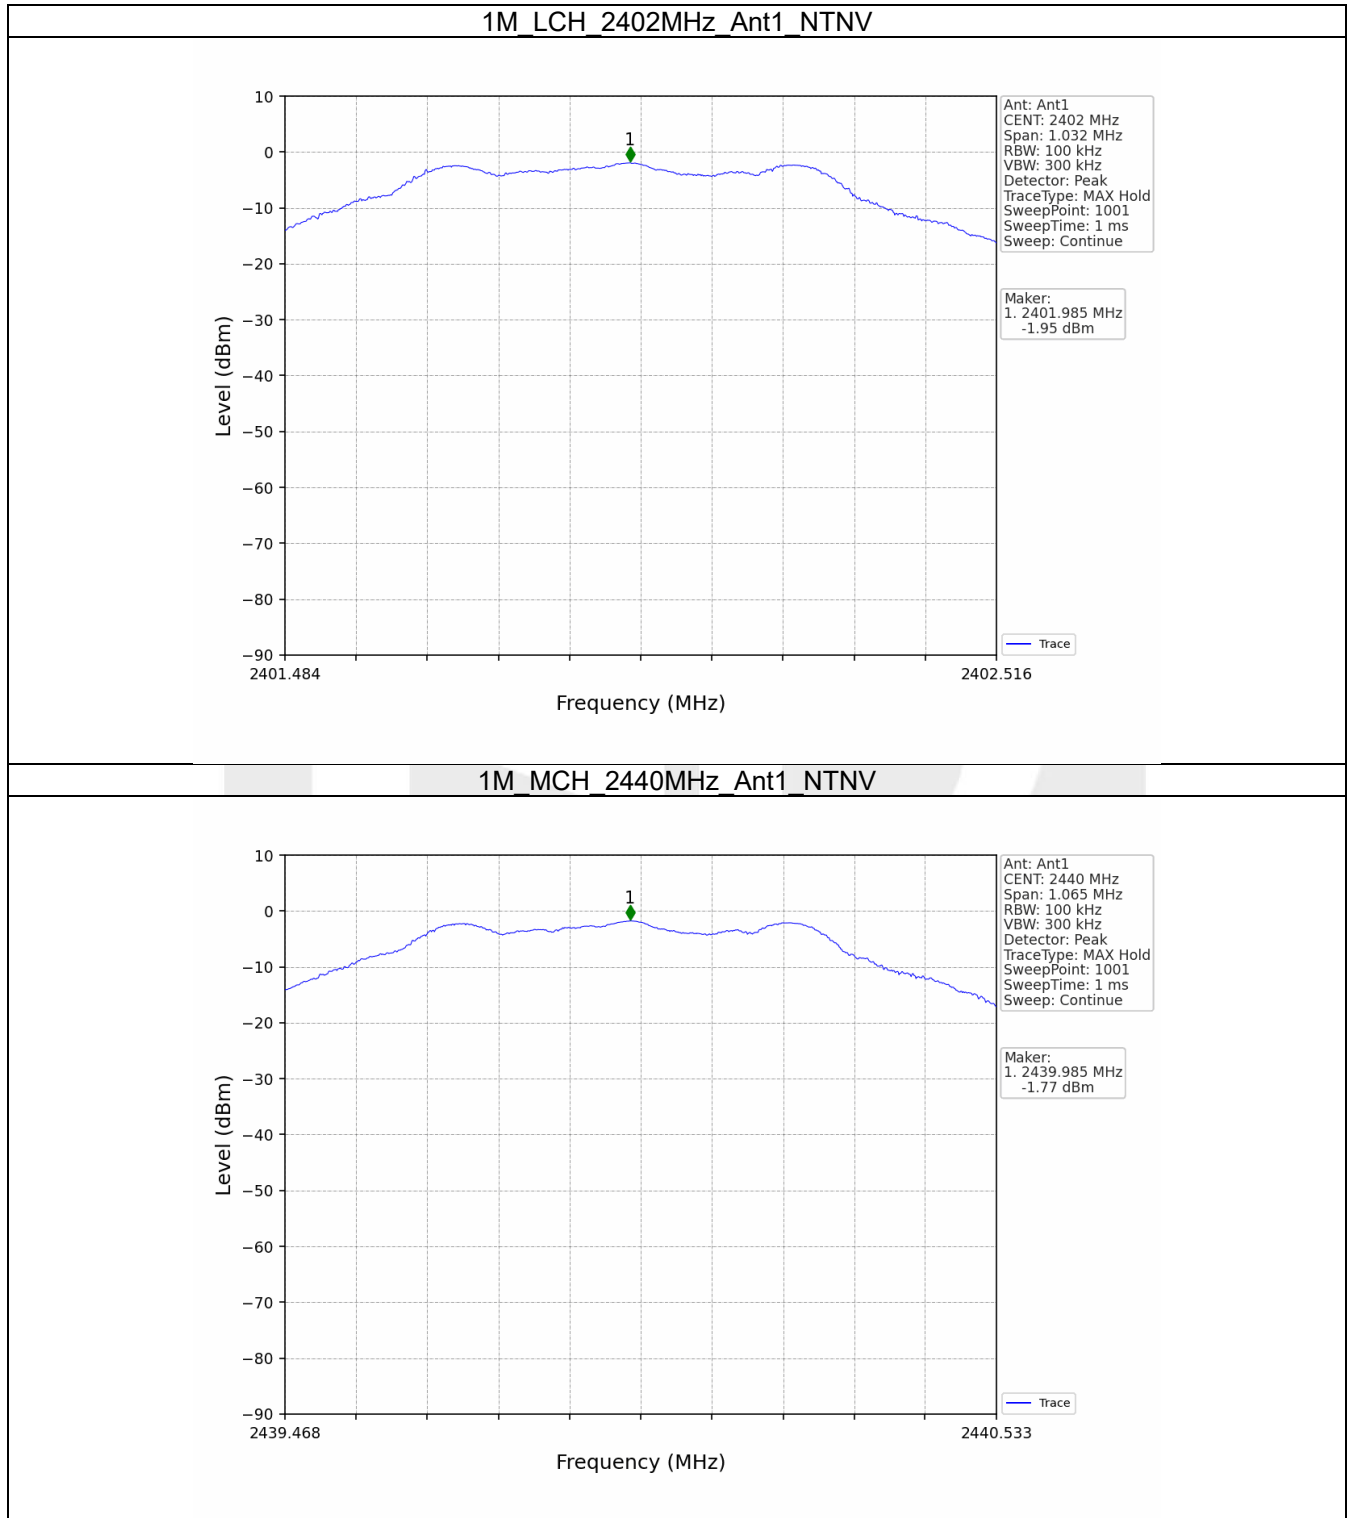

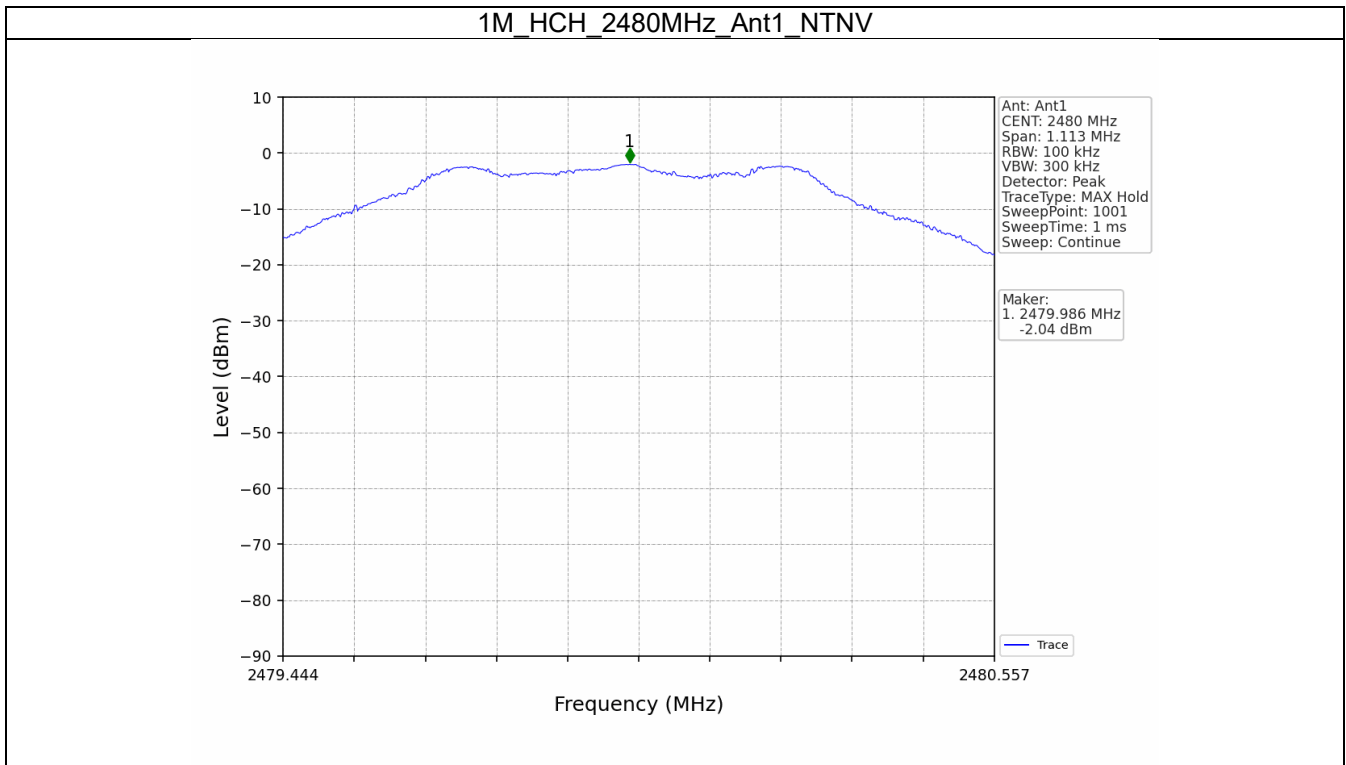


5.3 CSE (Module 1)


5.3.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.59	-21.59	Pass
		2440	1	-1.59	-21.59	Pass
		2480	1	-1.59	-21.59	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

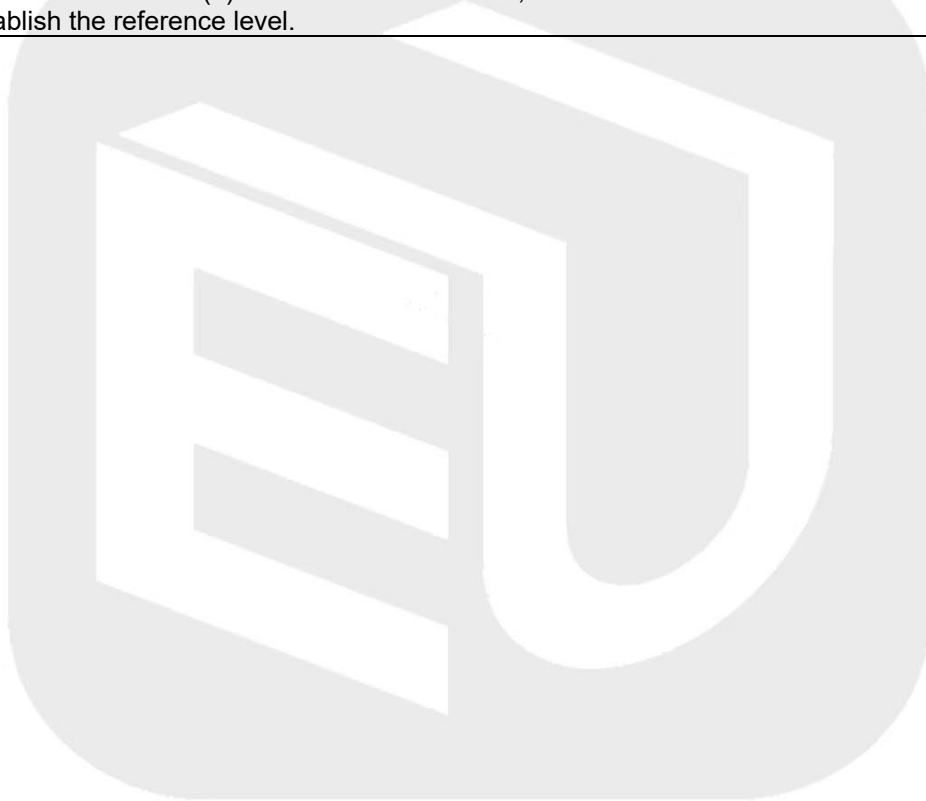

5.3.2 Test Graph

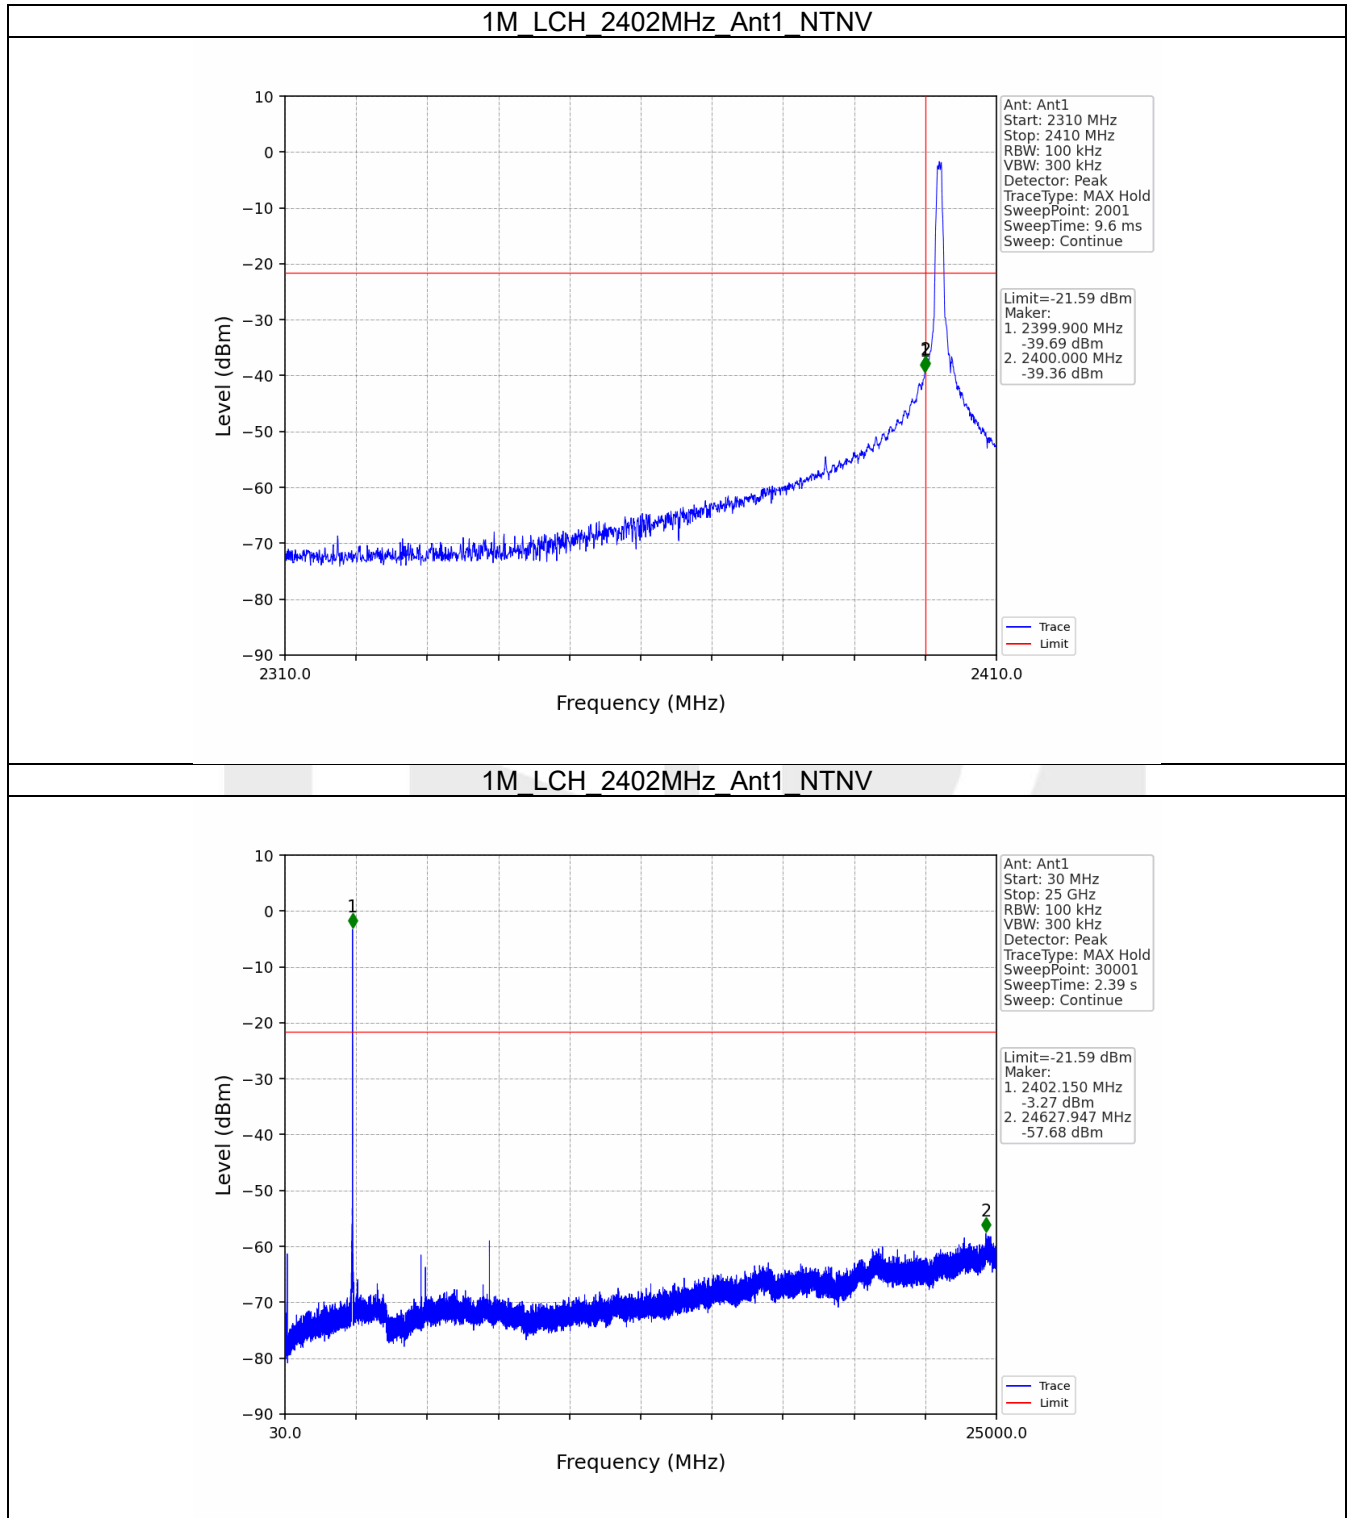

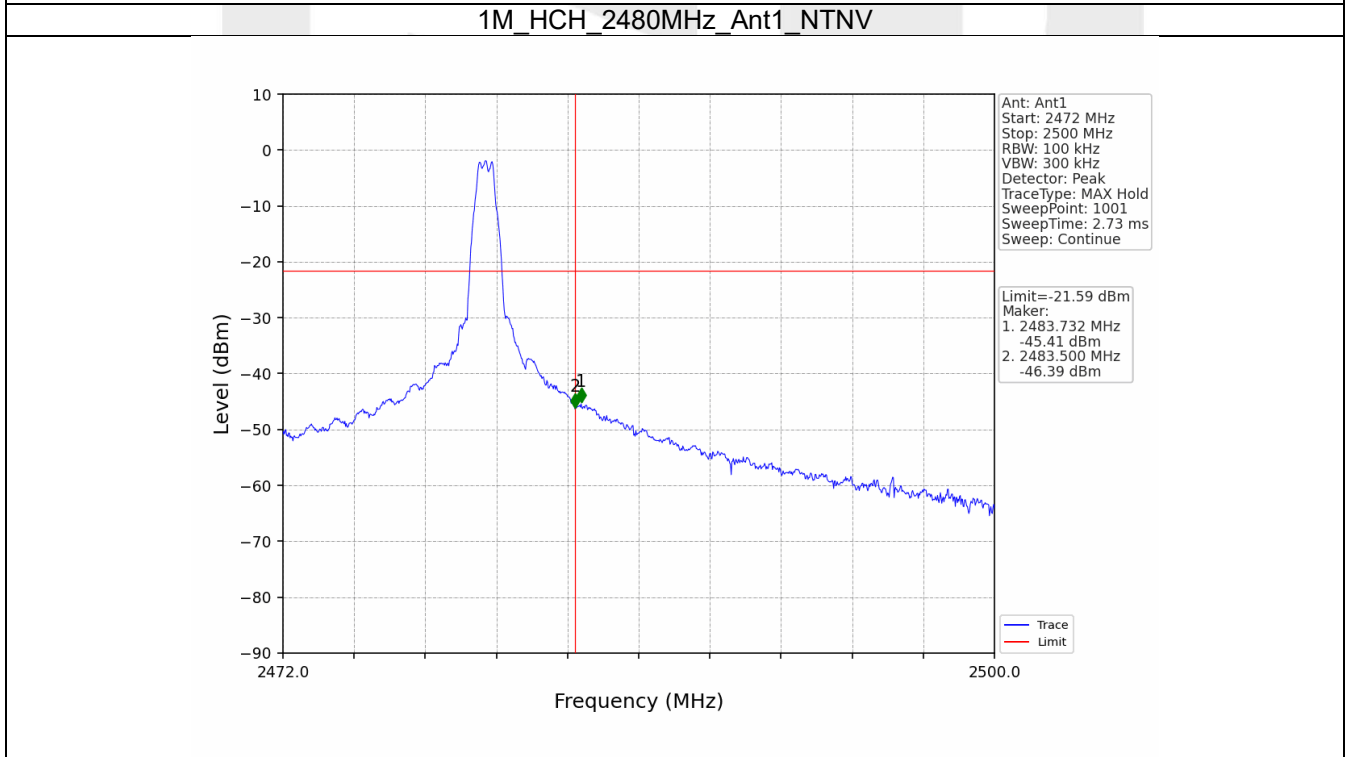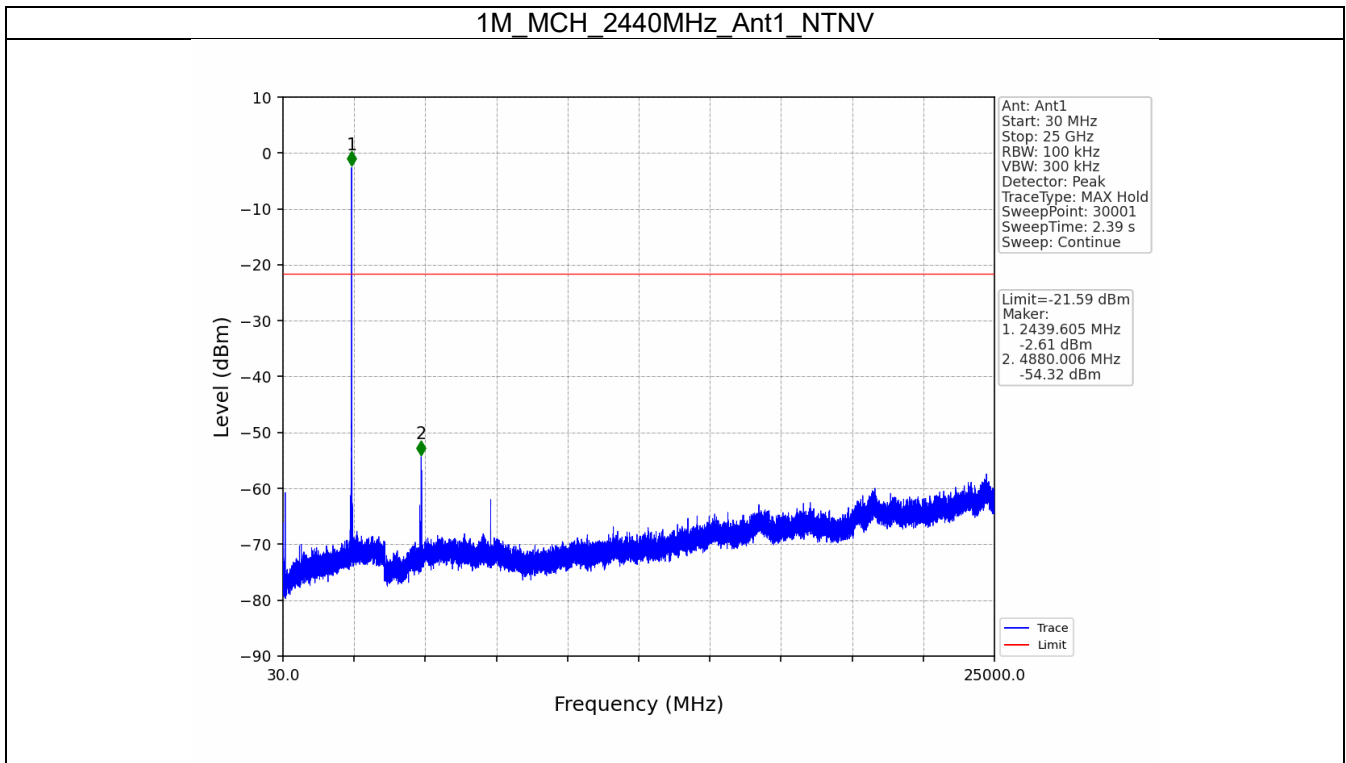

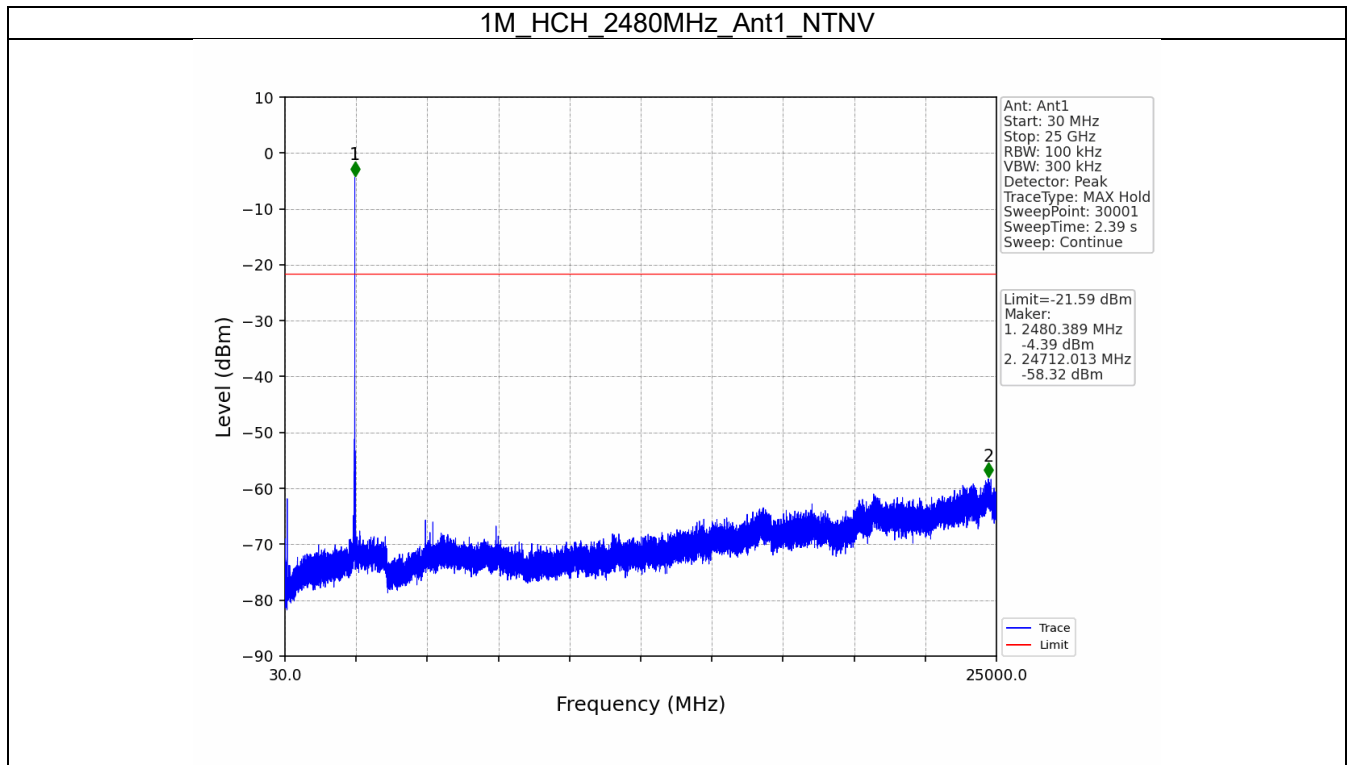


5.4 CSE (Module 2)



5.4.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.77	-21.77	Pass
		2440	1	-1.77	-21.77	Pass
		2480	1	-1.77	-21.77	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

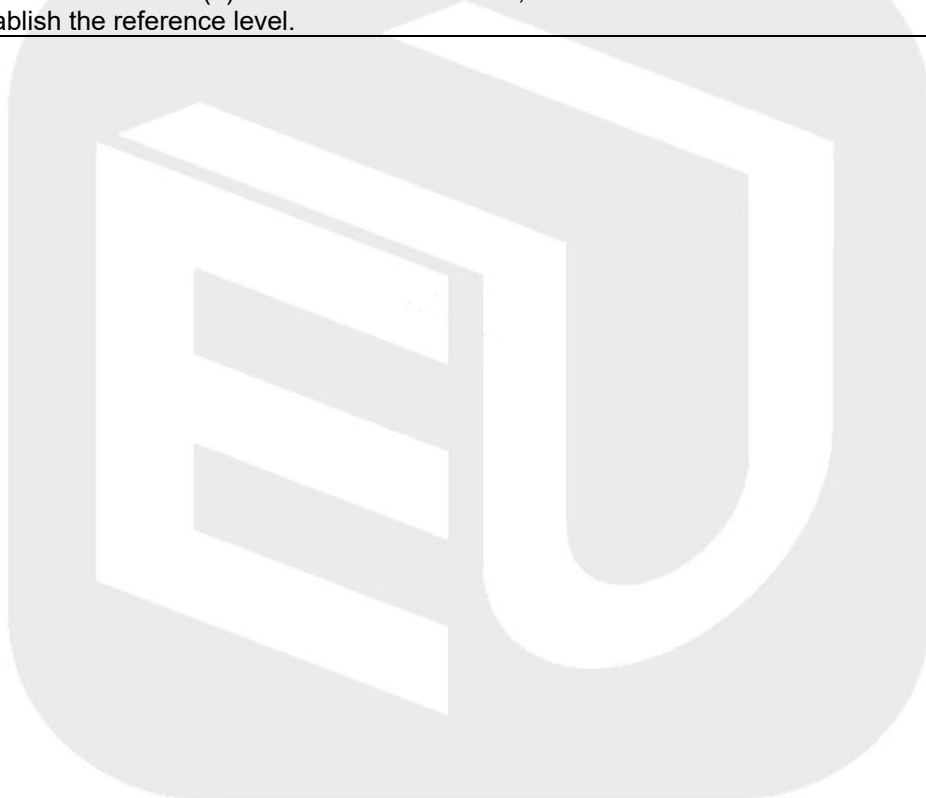

5.4.2 Test Graph

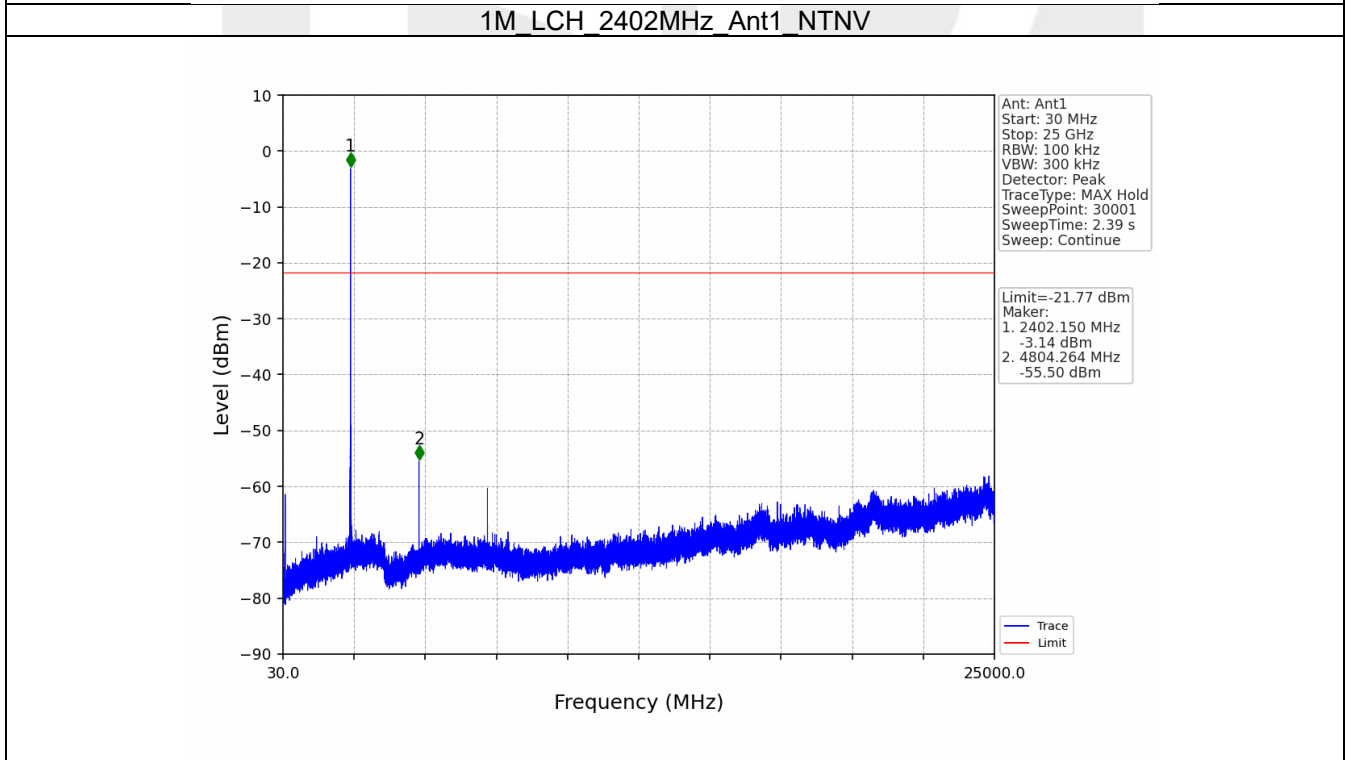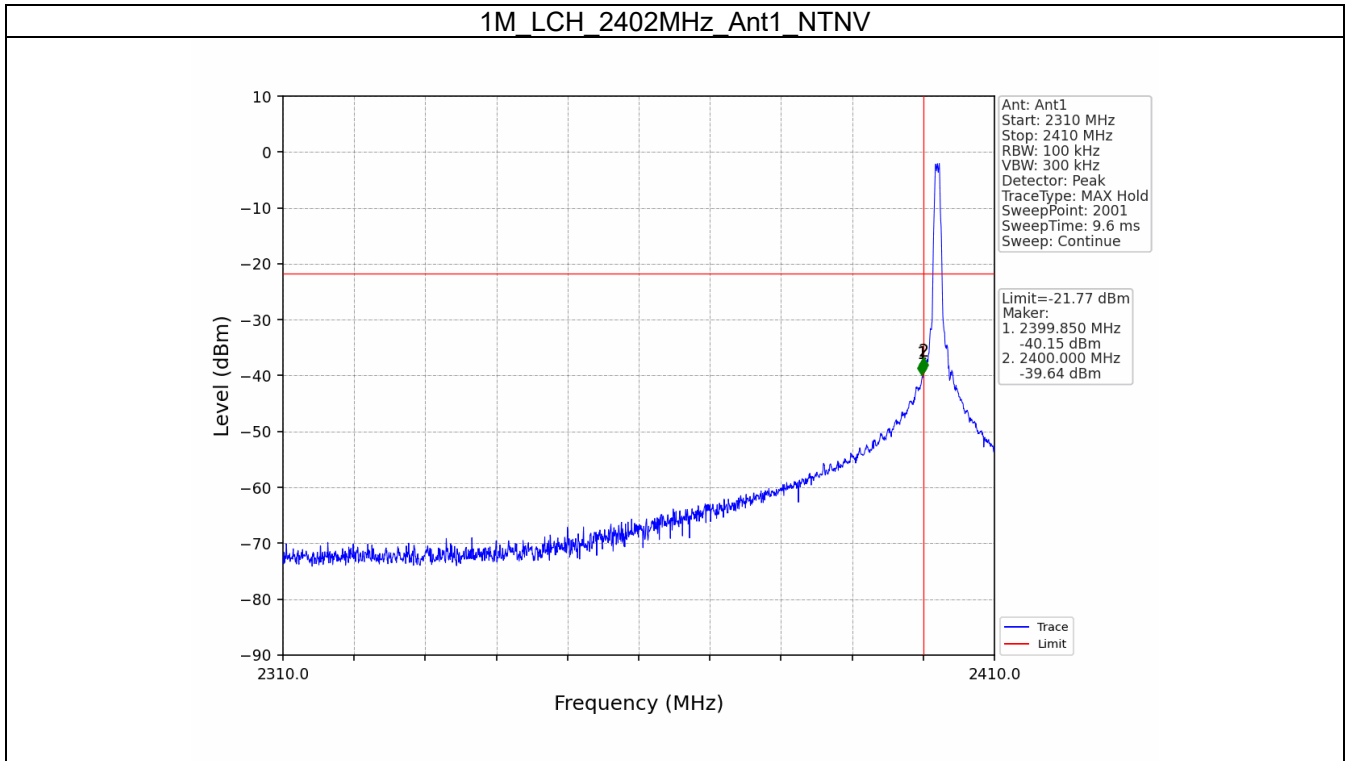

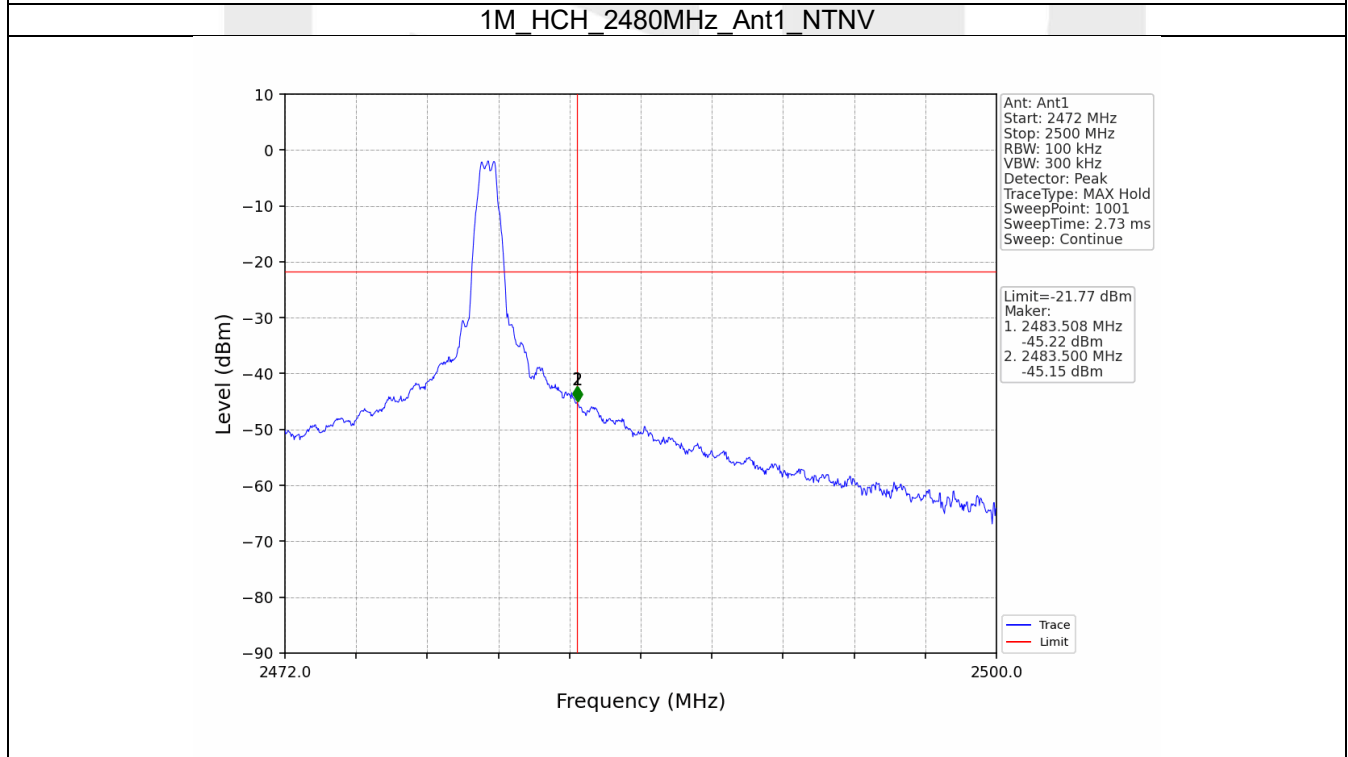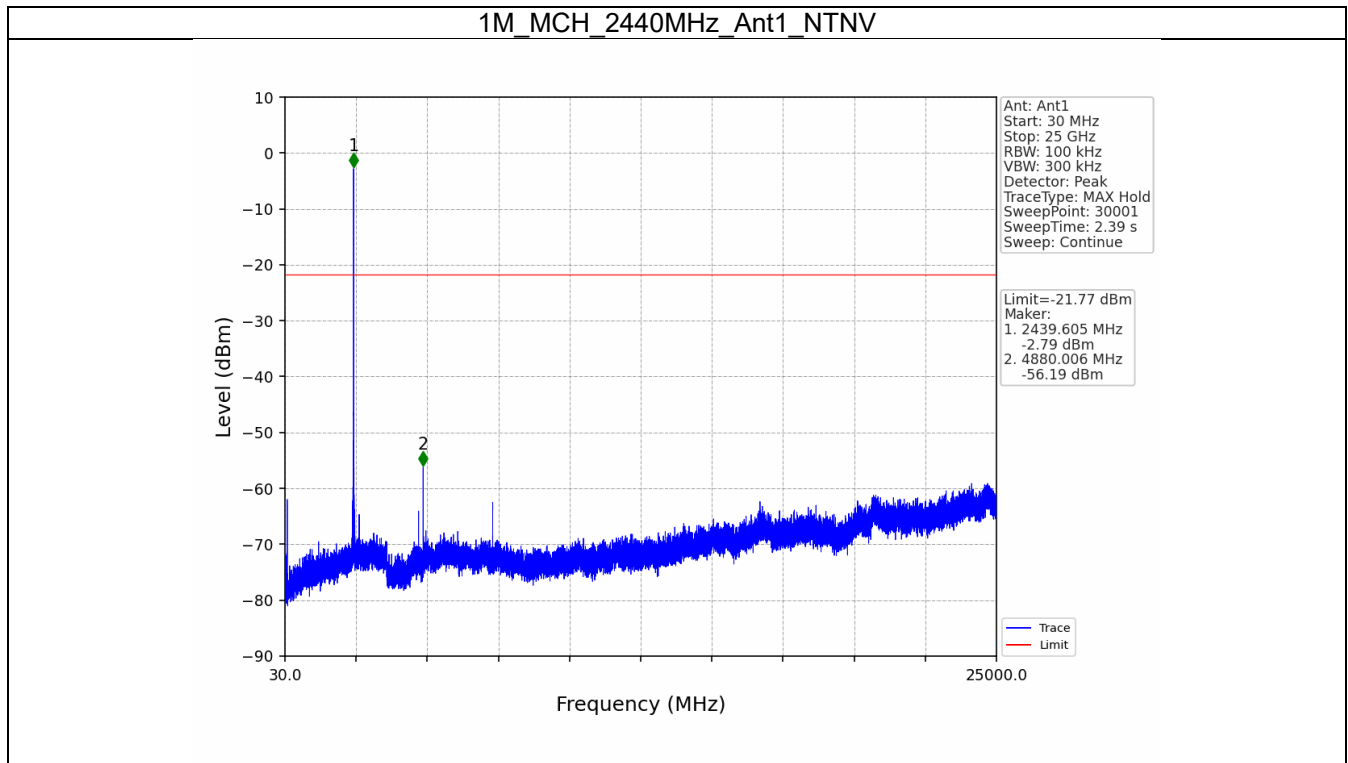

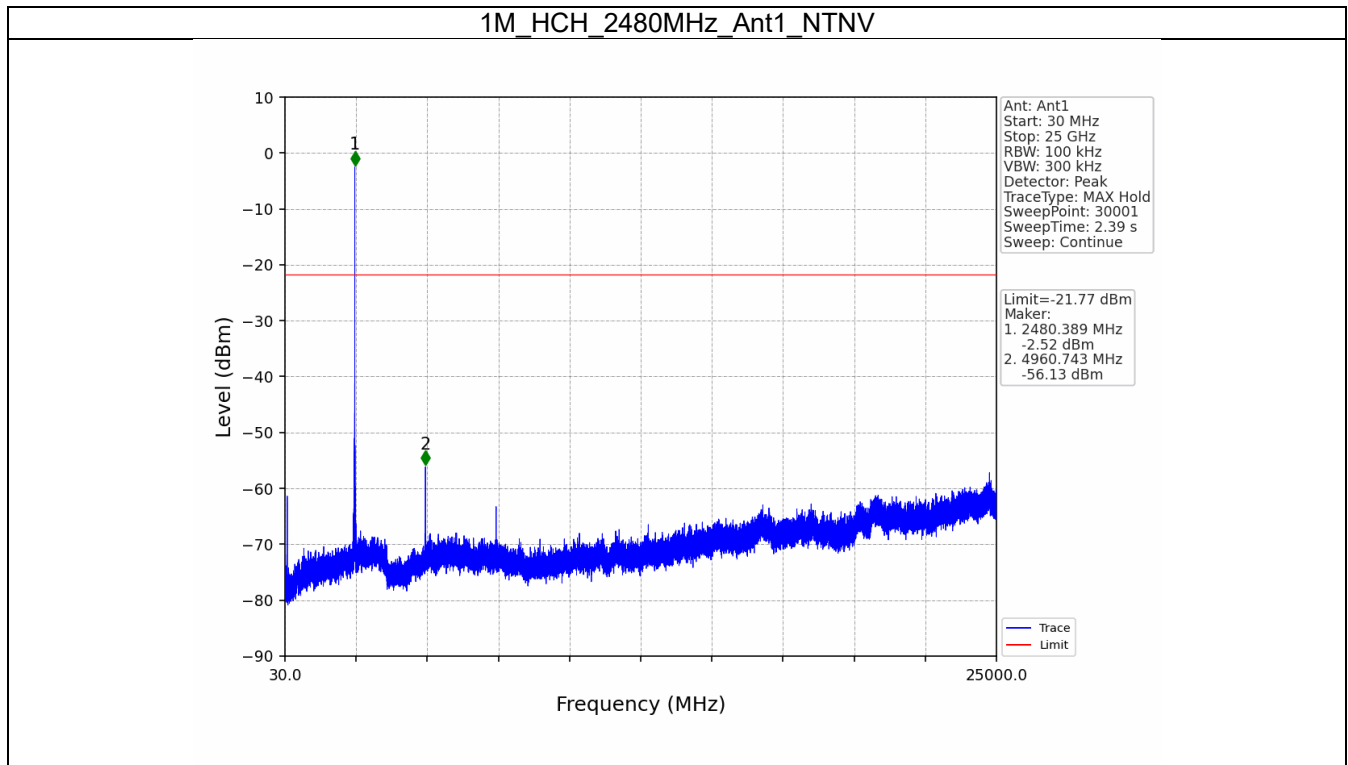

----- End of Report -----