

Appendix A

RF Test Data for 2.4G WIFI (Conducted Measurement)

Product Name: WIFI Digital Frame

Trade Mark: N/A

Test Model: M10R5


Environmental Conditions

Temperature:	20.6 ° C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Carl Fu
Supervised by:	Li Huan


A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
11B	2437	Ant1	100	PASS
11G	2437	Ant1	100	PASS
11N20SISO	2437	Ant1	100	PASS
11N40SISO	2437	Ant1	100	PASS


Duty Cycle_11B_2437_Ant1

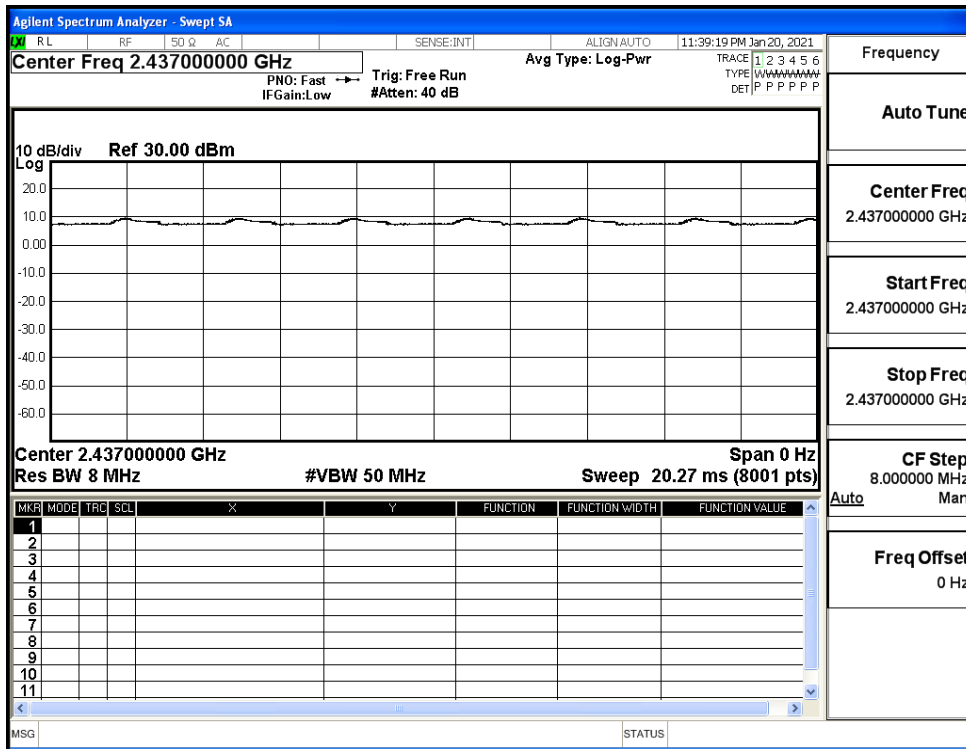


Duty Cycle_11G_2437_Ant1

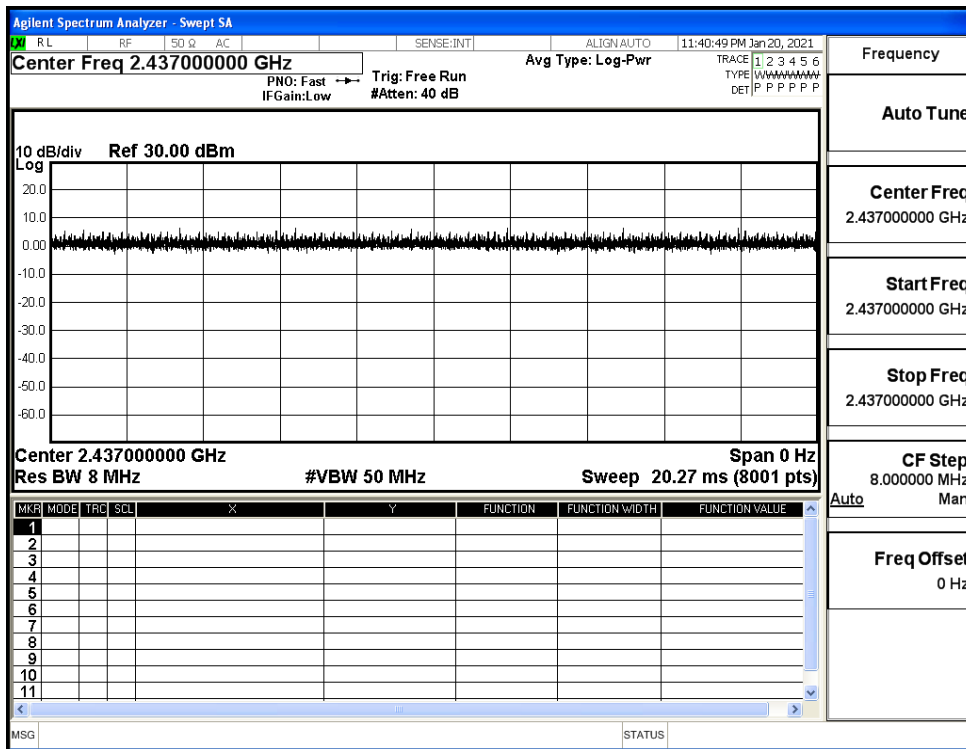

Duty Cycle_11N20SISO_2437_Ant1

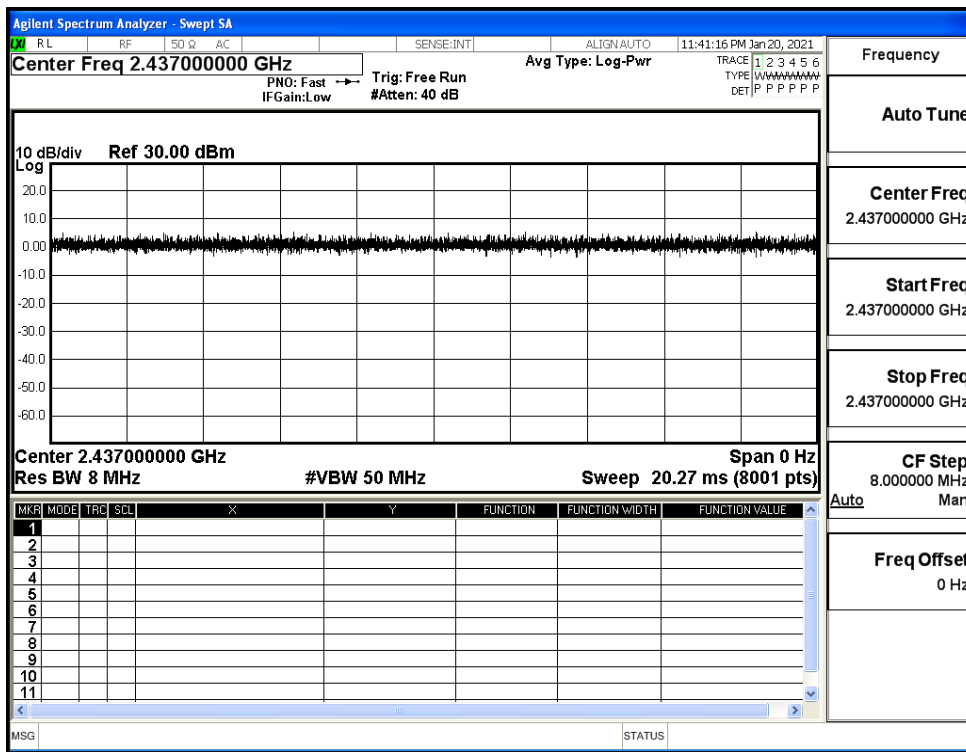


Duty Cycle_11N40SISO_2437_Ant1

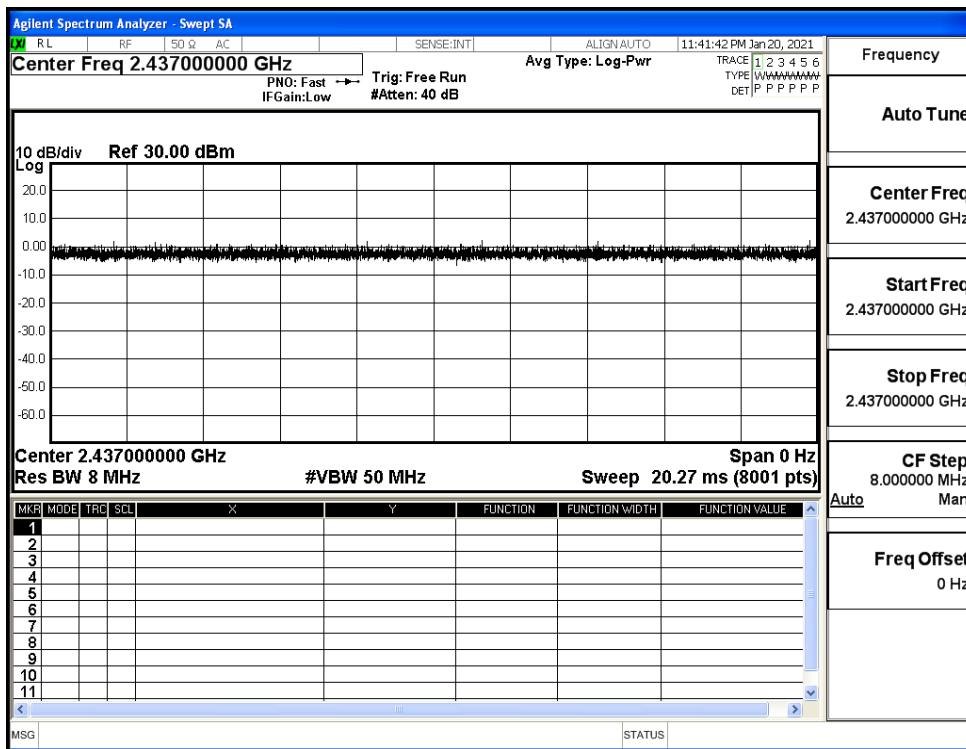


A.2 Maximum Conducted Output Power

Mode	Channel	Meas.Level [dBm]	Limit [dBm]	Verdict
11B	LCH	14.64	30	PASS
	MCH	15.08	30	PASS
	HCH	14.77	30	PASS
11G	LCH	13.69	30	PASS
	MCH	14.17	30	PASS
	HCH	13.79	30	PASS
11N20SISO	LCH	13.97	30	PASS
	MCH	14.25	30	PASS
	HCH	13.83	30	PASS
11N40SISO	LCH	13.42	30	PASS
	MCH	13.53	30	PASS
	HCH	13.66	30	PASS

Test Graphs

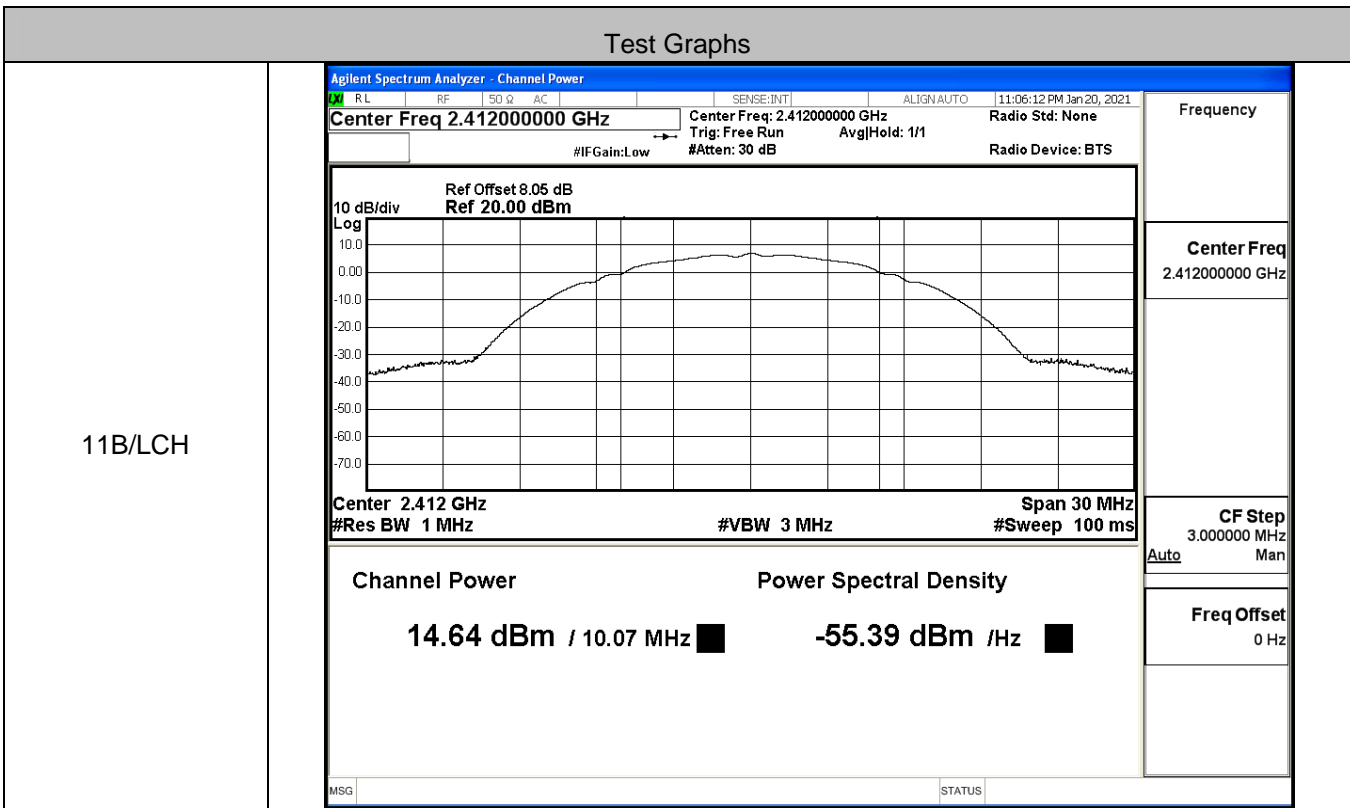


11B/MCH

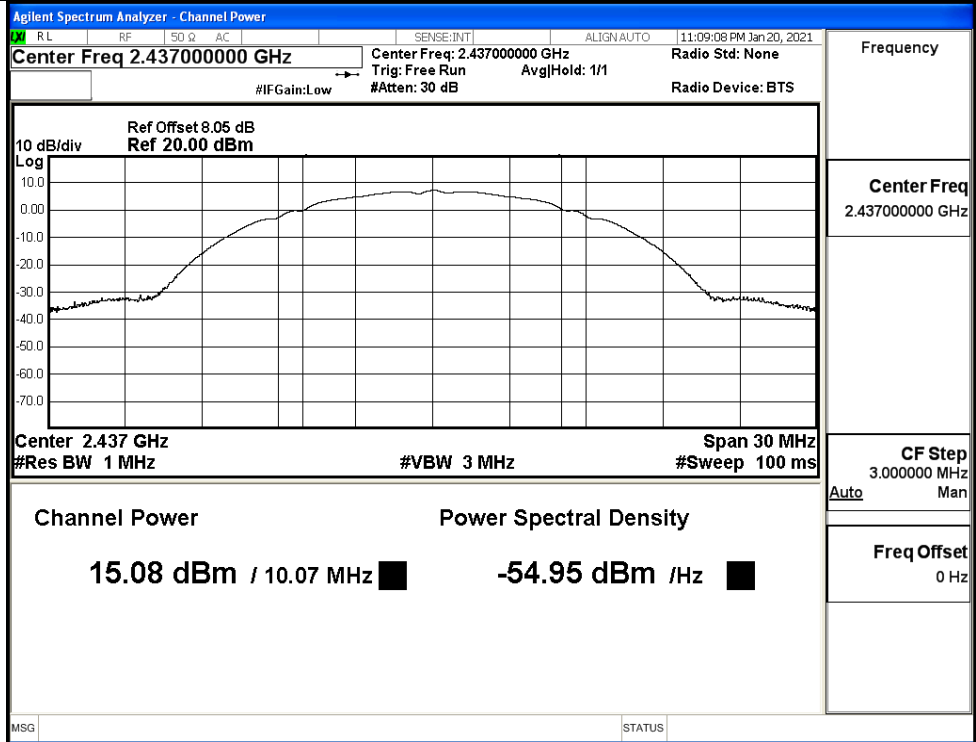


Frequency	Center Freq 2.437000000 GHz
CF Step	3.000000 MHz Auto Man
Freq Offset	0 Hz

11B/HCH

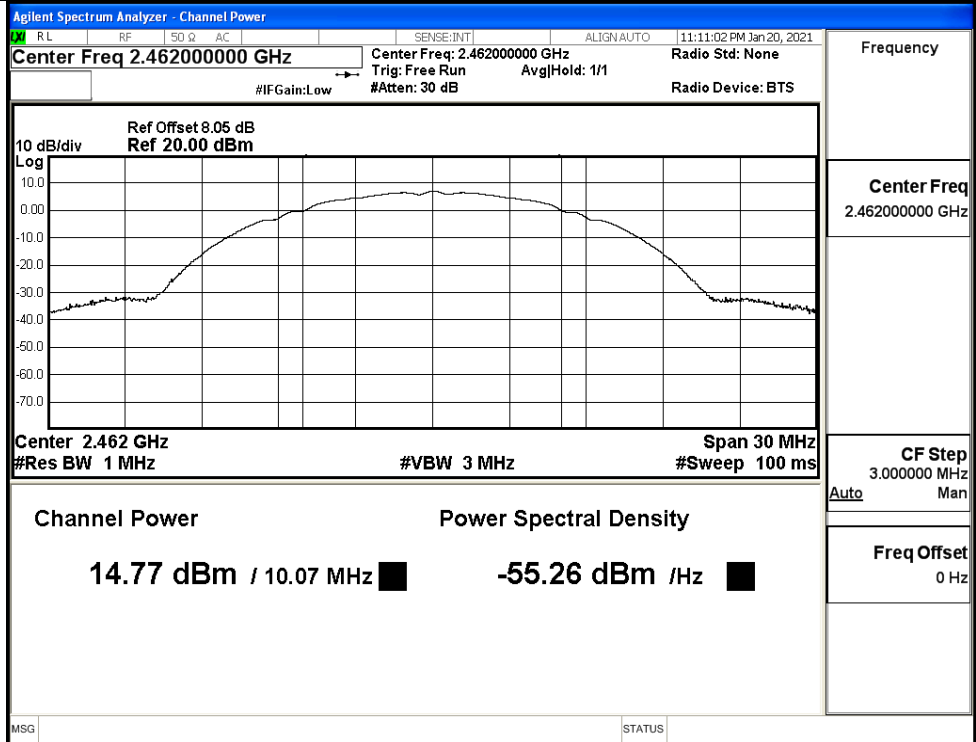


Frequency	Center Freq 2.462000000 GHz
CF Step	3.000000 MHz Auto Man
Freq Offset	0 Hz

11G/LCH

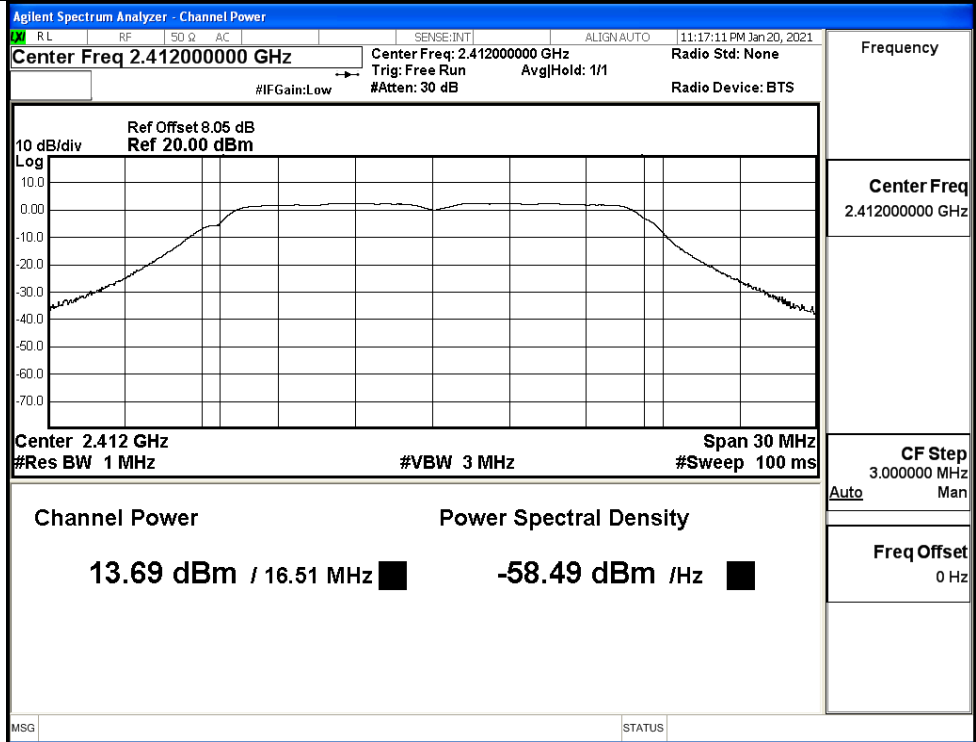


Frequency	2.41200000 GHz
Center Freq	2.41200000 GHz
CF Step	3.000000 MHz Auto Man
Freq Offset	0 Hz

11G/MCH

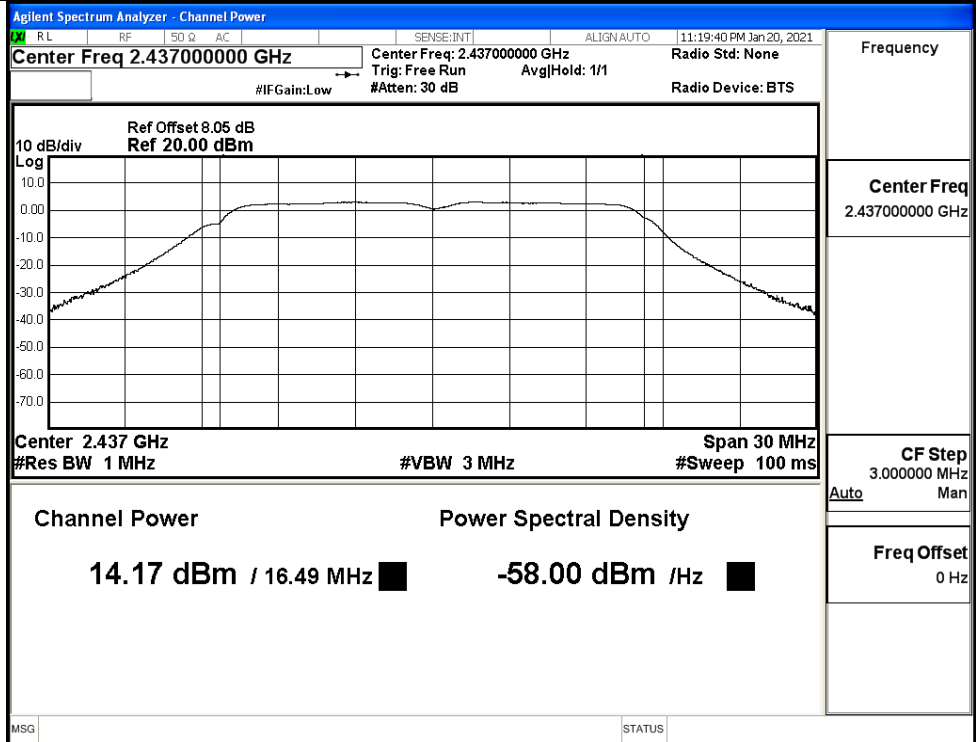


Frequency	2.43700000 GHz
Center Freq	2.43700000 GHz
CF Step	3.000000 MHz Auto Man
Freq Offset	0 Hz


11G/HCH

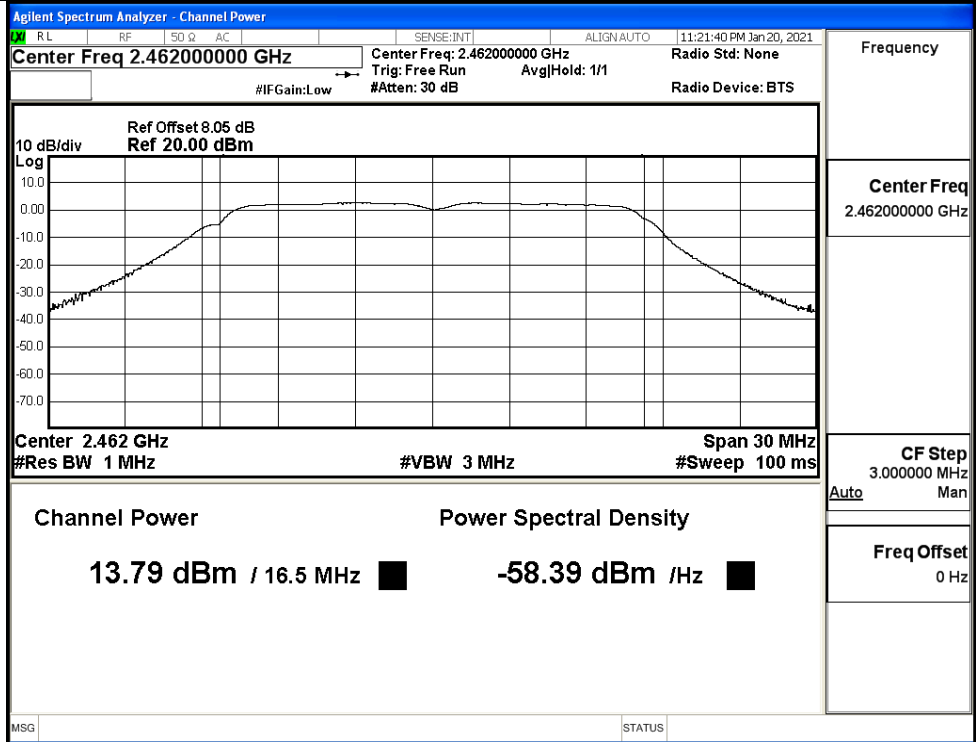

11N20SISO/LCH

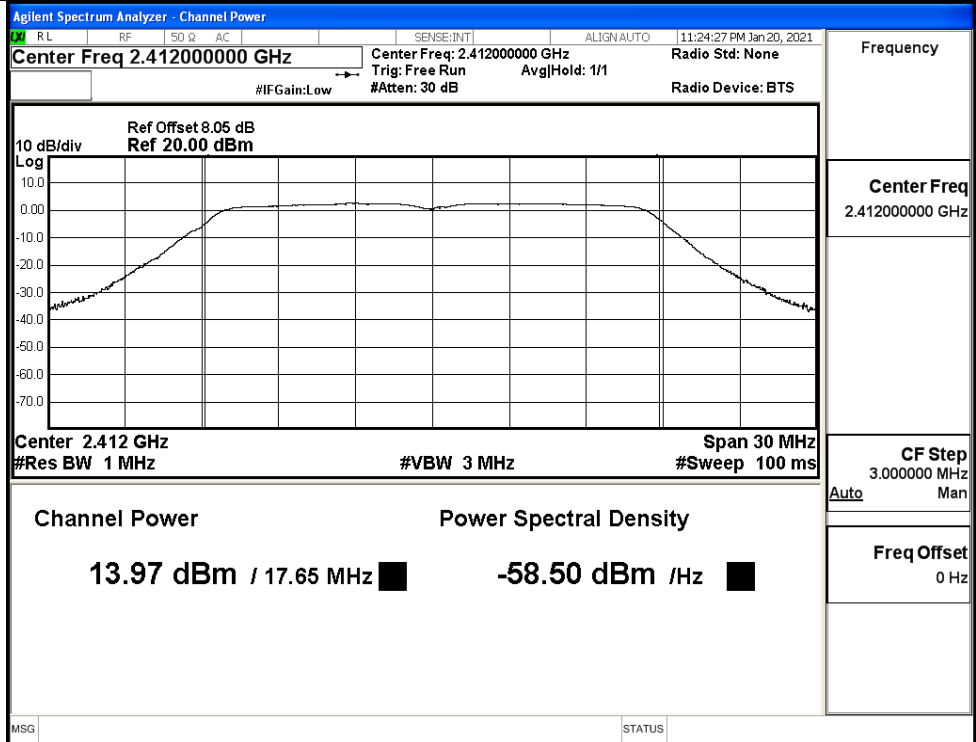


11N20SISO/MCH

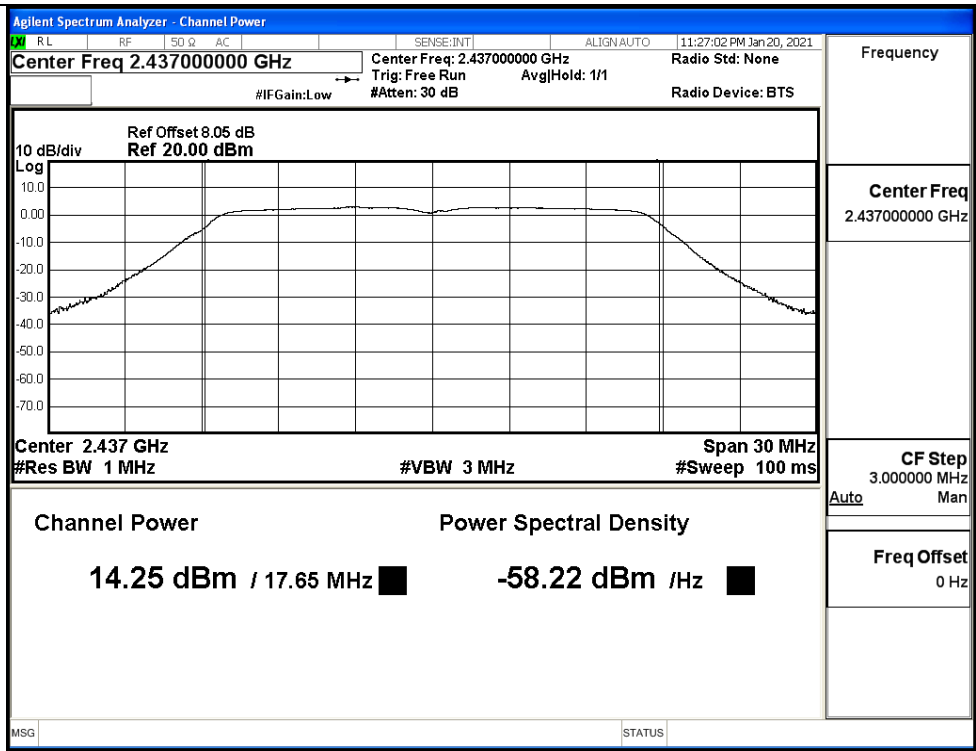


Frequency
 Center Freq
 2.437000000 GHz
 CF Step
 3.000000 MHz
 Auto Man
 Freq Offset
 0 Hz

11N20SISO/HCH

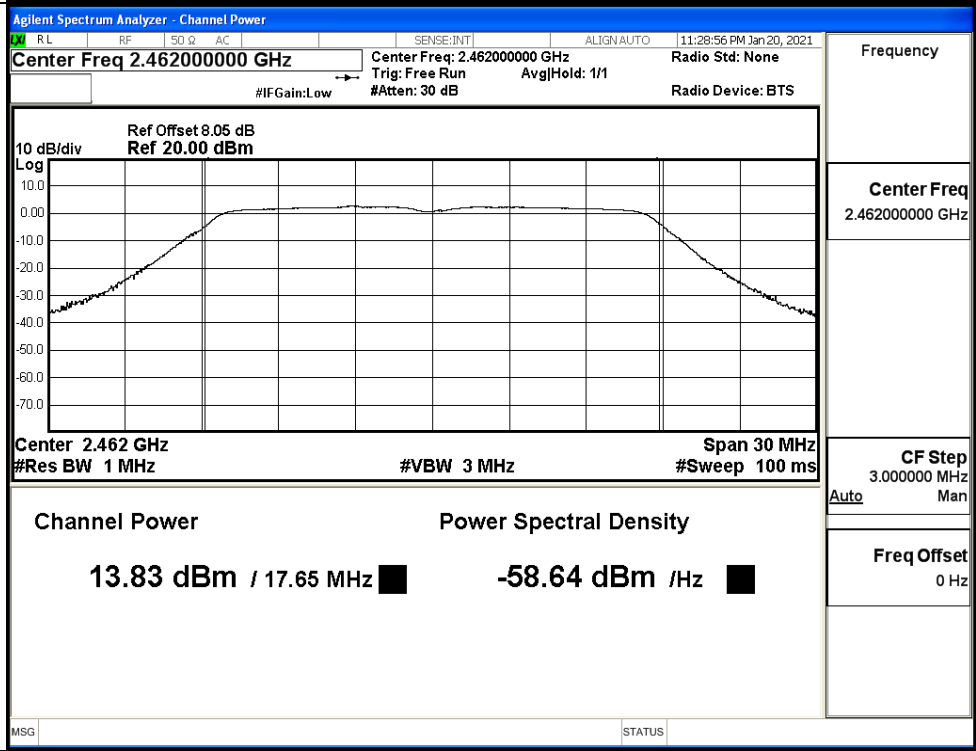


Frequency
 Center Freq
 2.462000000 GHz
 CF Step
 3.000000 MHz
 Auto Man
 Freq Offset
 0 Hz


11N40SISO/LCH

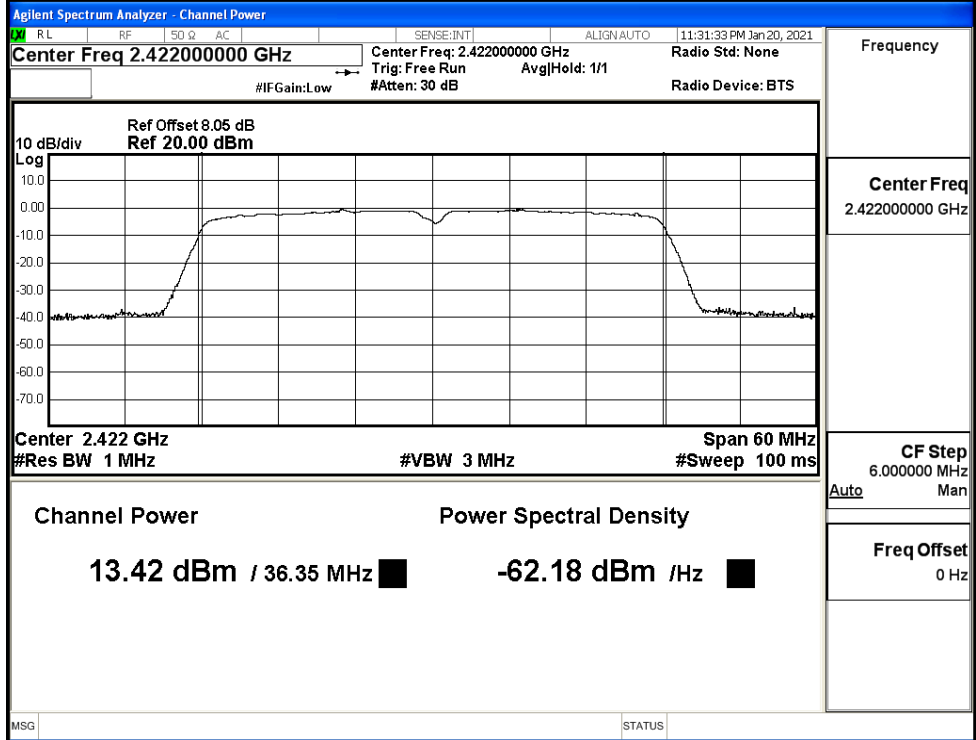

11N40SISO/MCH

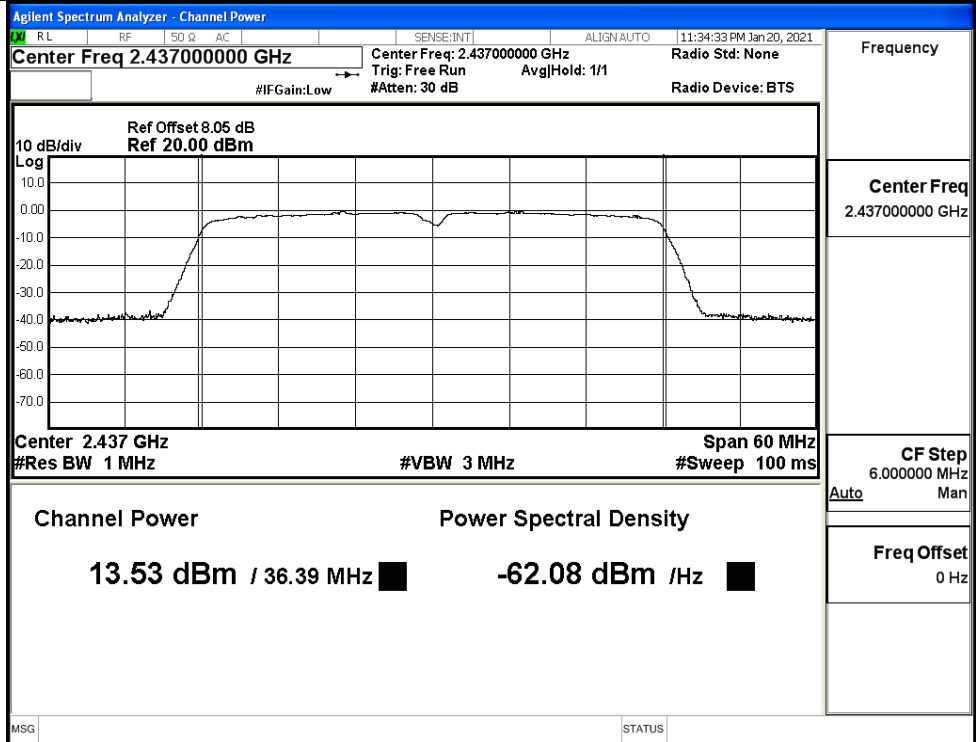


11N40SISO/HCH

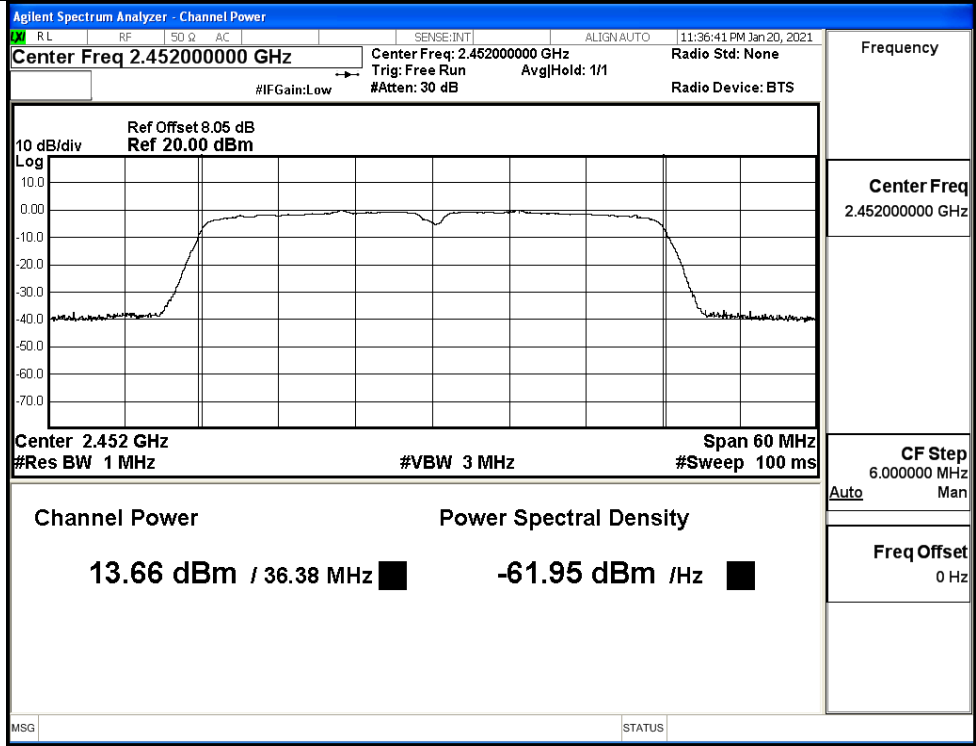


A.3 Maximum Power Spectral Density


Mode	Channel	Meas.Level [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
11B	LCH	-17.874	8	PASS
	MCH	-17.587	8	PASS
	HCH	-17.825	8	PASS
11G	LCH	-22.971	8	PASS
	MCH	-21.794	8	PASS
	HCH	-22.372	8	PASS
11N20SISO	LCH	-22.277	8	PASS
	MCH	-21.887	8	PASS
	HCH	-22.285	8	PASS
11N40SISO	LCH	-22.698	8	PASS
	MCH	-23.698	8	PASS
	HCH	-24.998	8	PASS

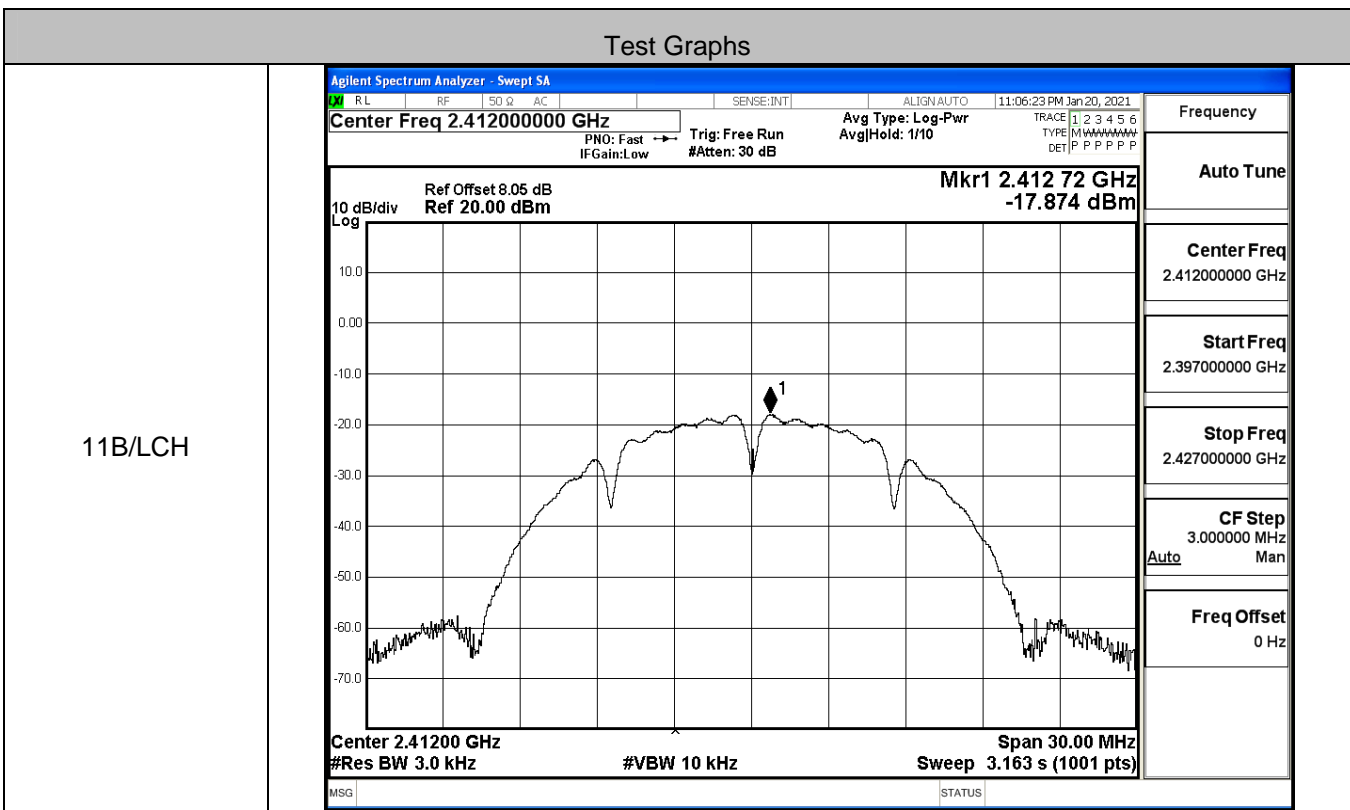


11B/MCH

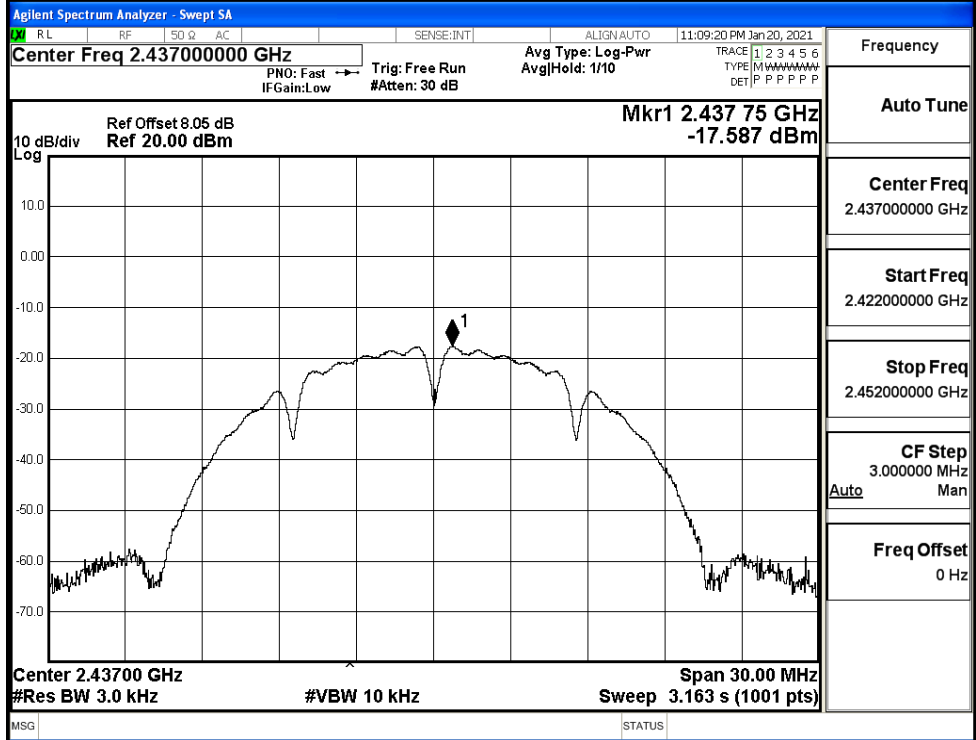


11B/HCH

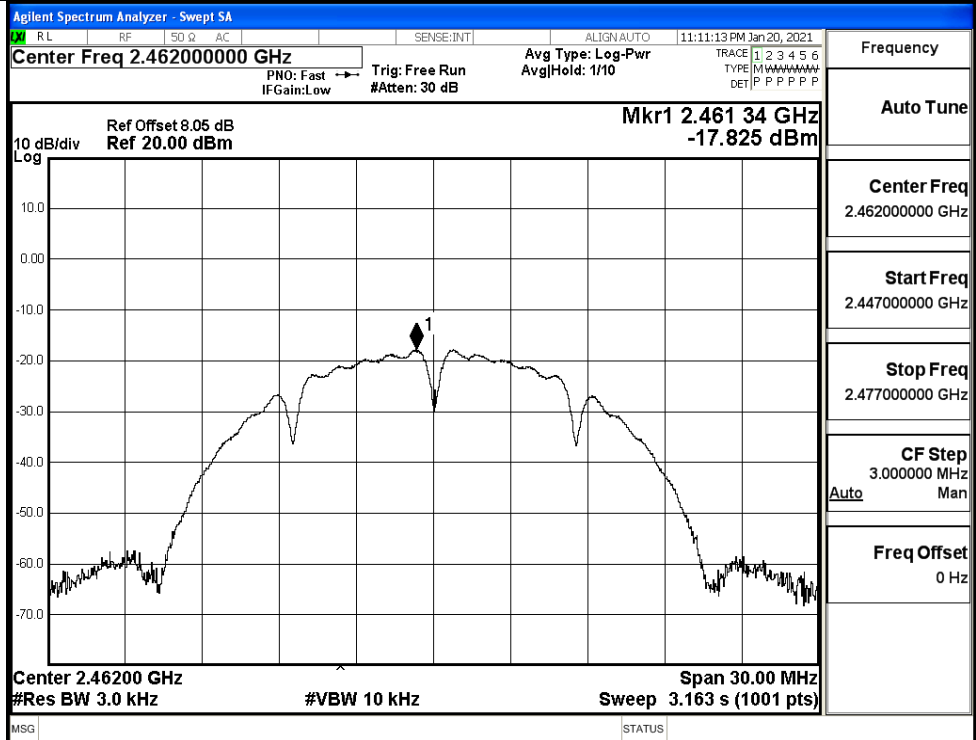


11G/LCH

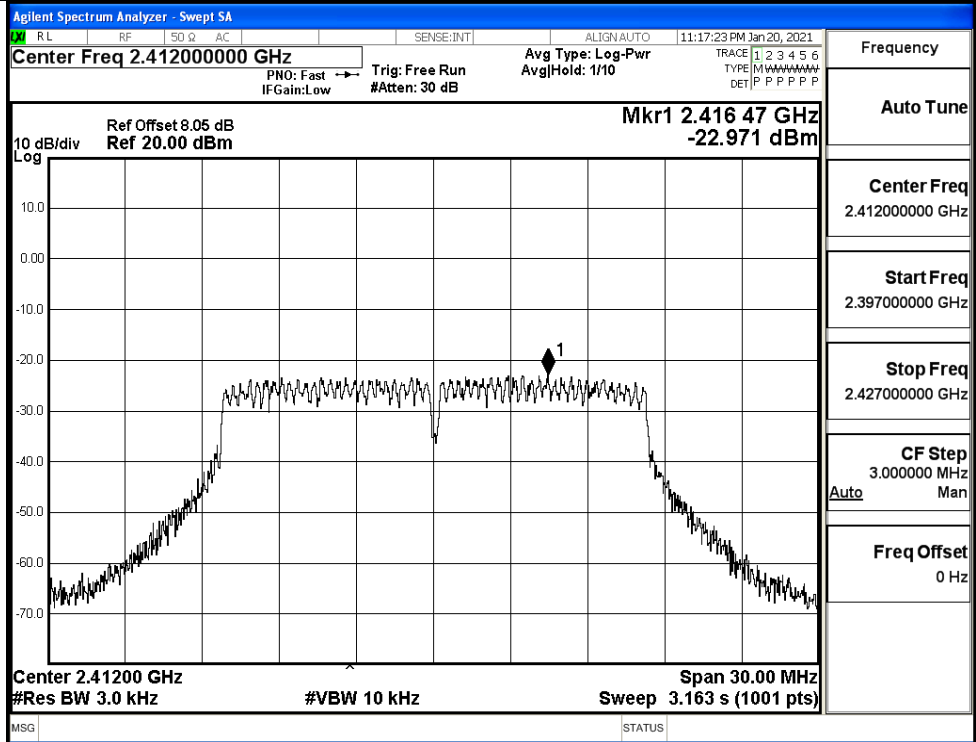

11G/MCH

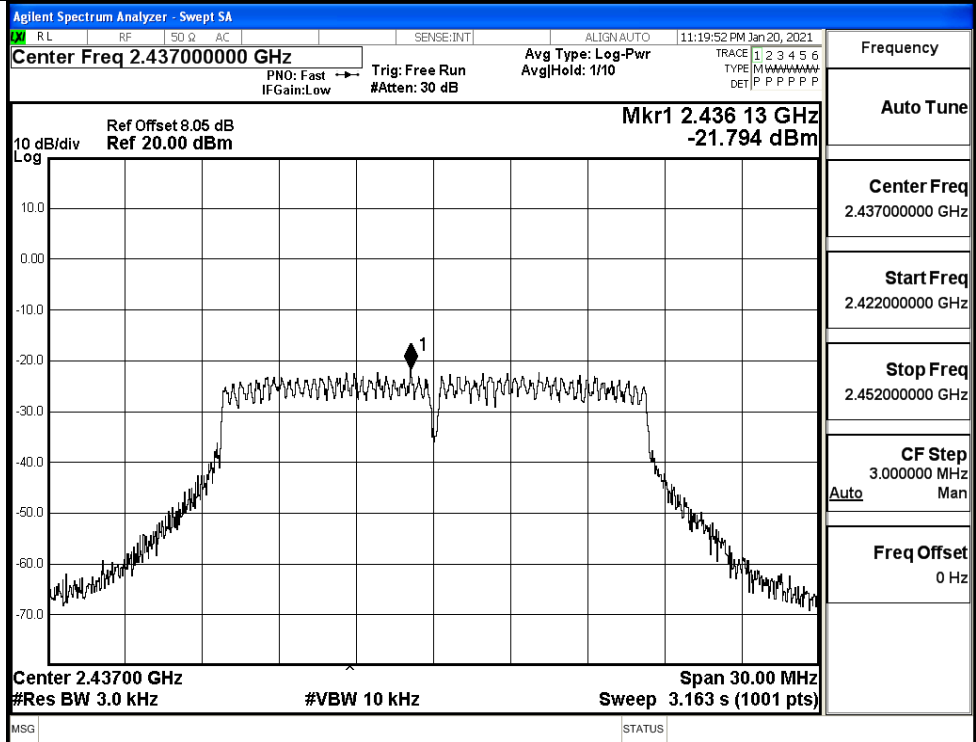


11G/HCH

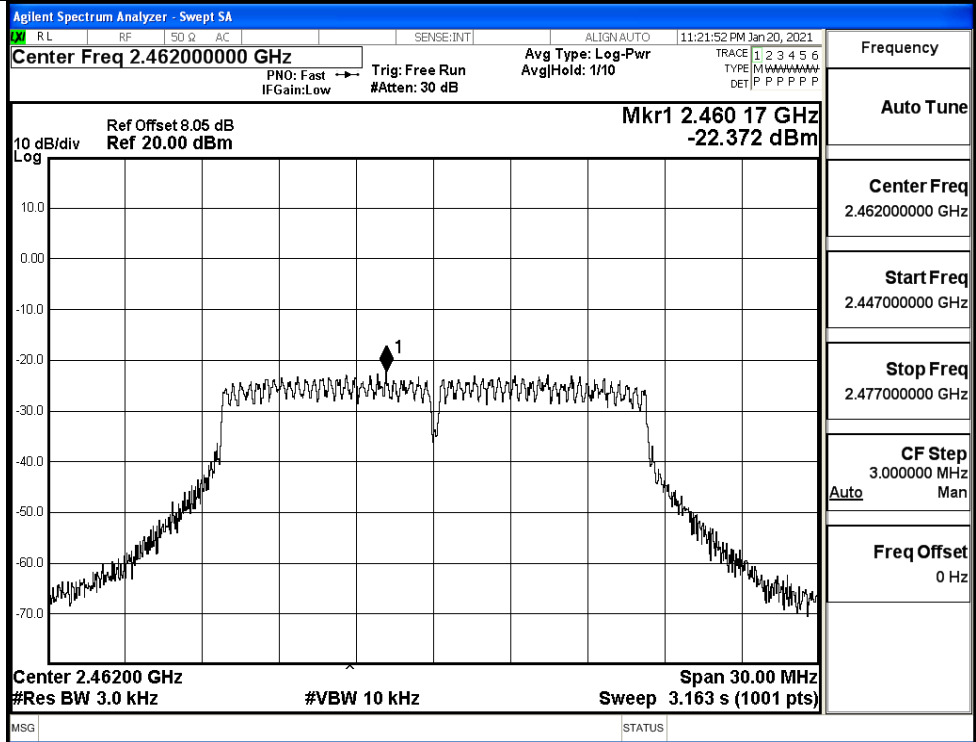


Frequency
Auto Tune
Center Freq 2.46200000 GHz
Start Freq 2.447000000 GHz
Stop Freq 2.477000000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz

11N20SISO/LCH

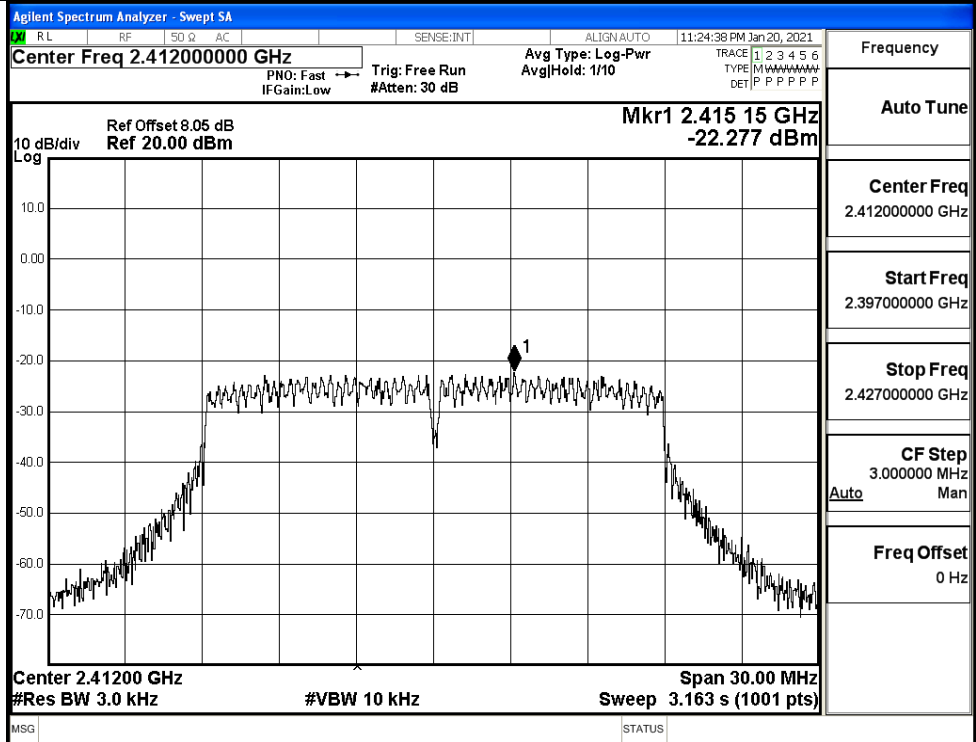


Frequency
Auto Tune
Center Freq 2.412000000 GHz
Start Freq 2.397000000 GHz
Stop Freq 2.427000000 GHz
CF Step 3.000000 MHz Auto Man
Freq Offset 0 Hz


11N20SISO/MCH

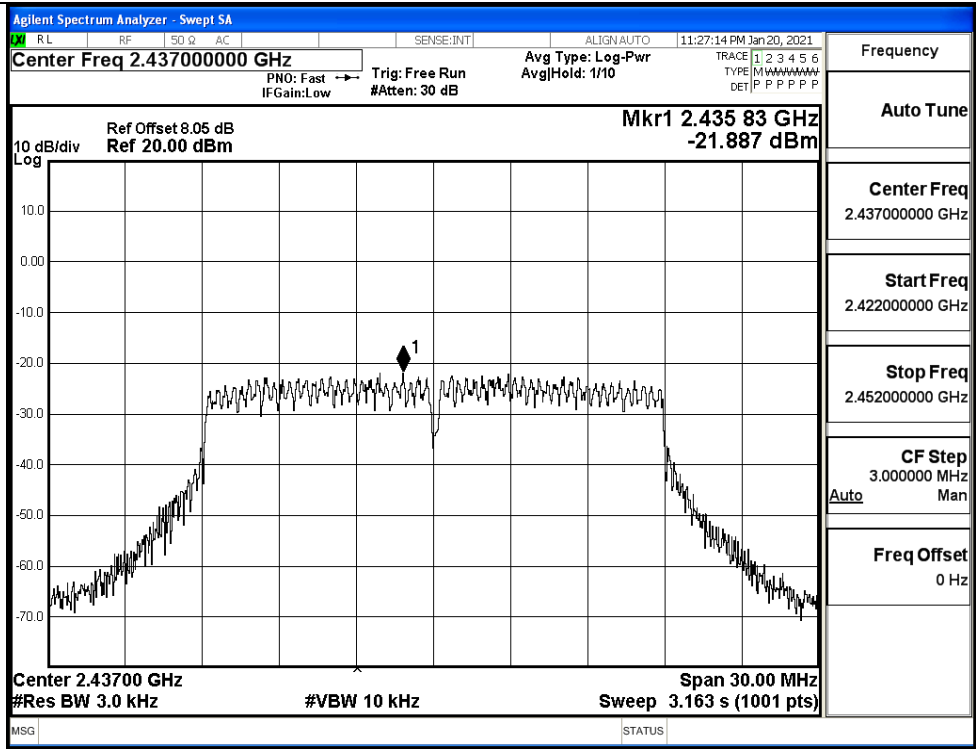


11N20SISO/HCH

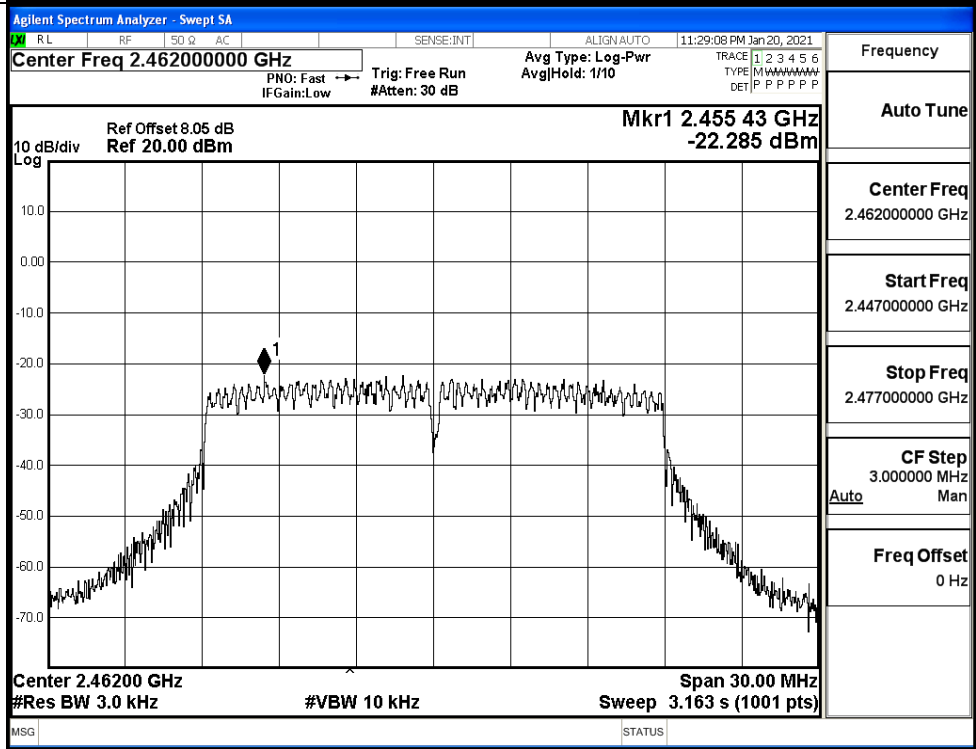


11N40SISO/LCH

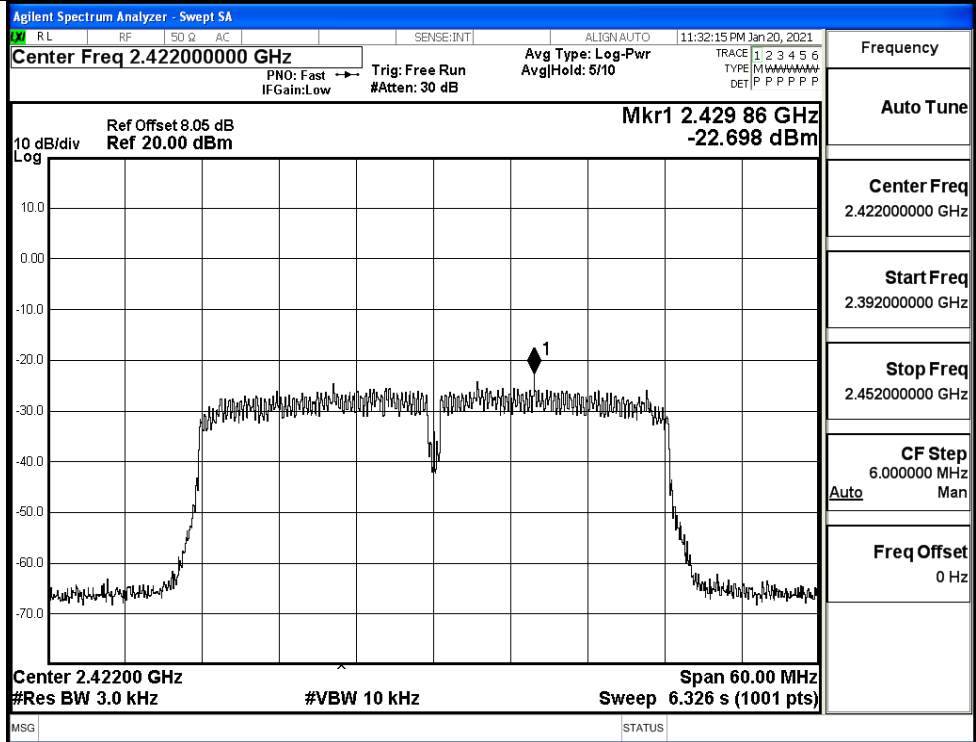

11N40SISO/MCH

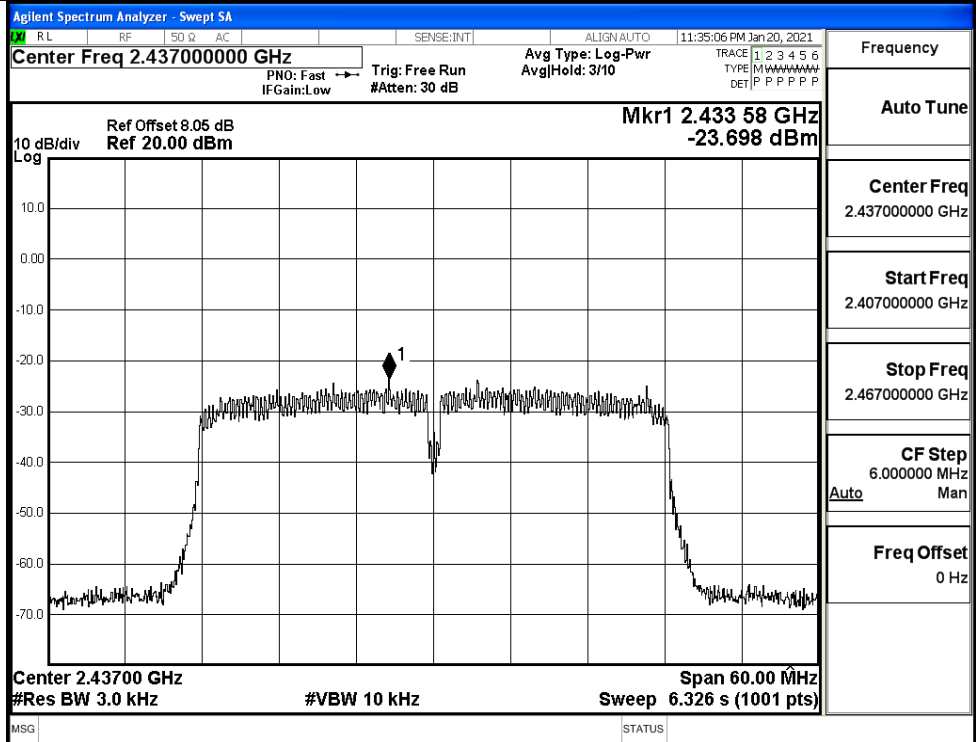


11N40SISO/HCH

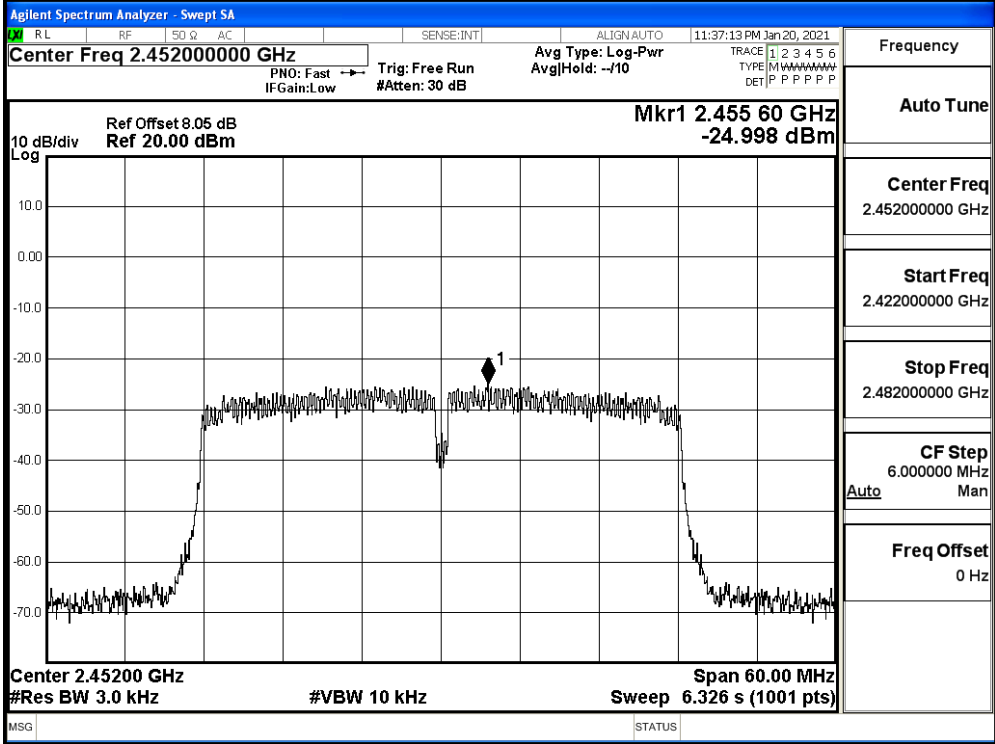


A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
11B	LCH	10.07	≥0.5	PASS
	MCH	10.07	≥0.5	PASS
	HCH	10.07	≥0.5	PASS
11G	LCH	16.51	≥0.5	PASS
	MCH	16.49	≥0.5	PASS
	HCH	16.50	≥0.5	PASS
11N20SISO	LCH	17.65	≥0.5	PASS
	MCH	17.65	≥0.5	PASS
	HCH	17.65	≥0.5	PASS
11N40SISO	LCH	36.35	≥0.5	PASS
	MCH	36.39	≥0.5	PASS
	HCH	36.38	≥0.5	PASS


Test Graphs

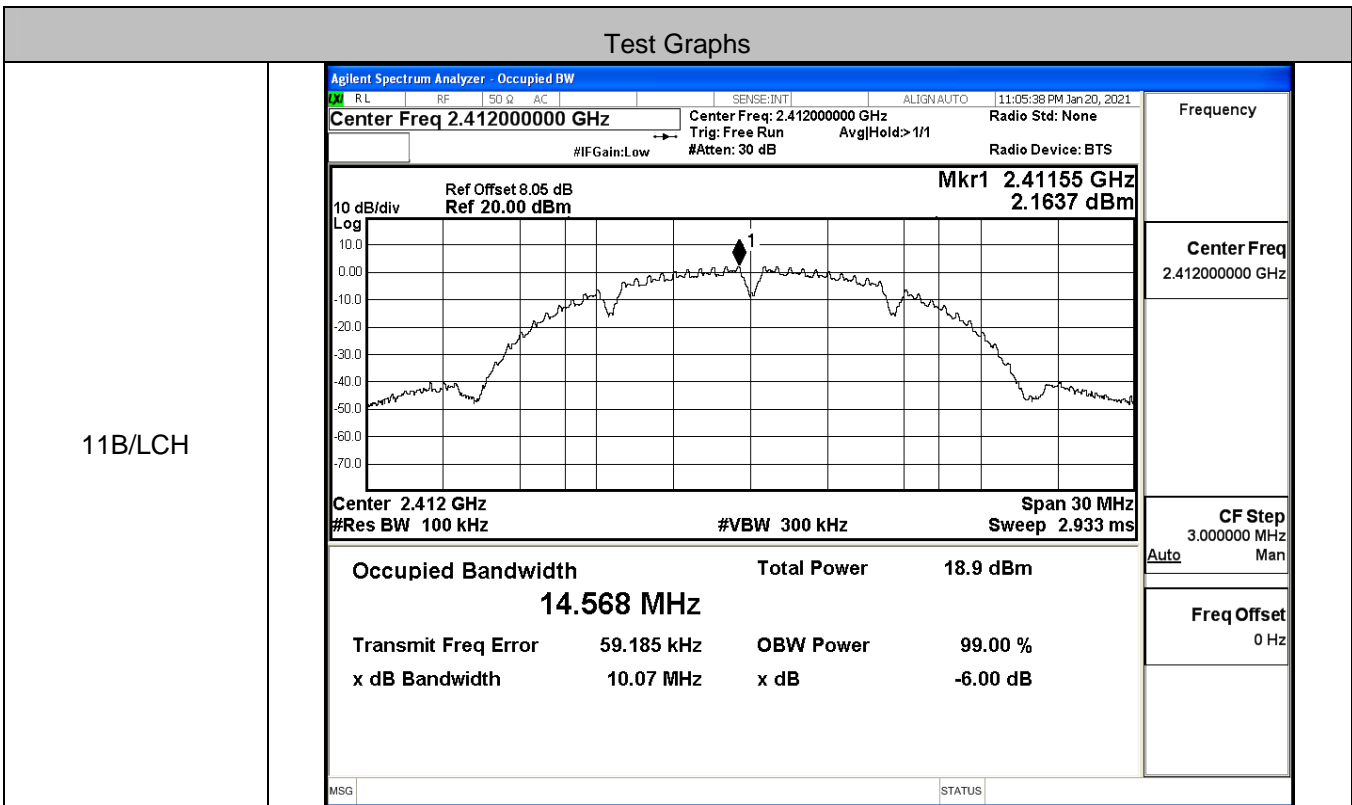


11B/MCH

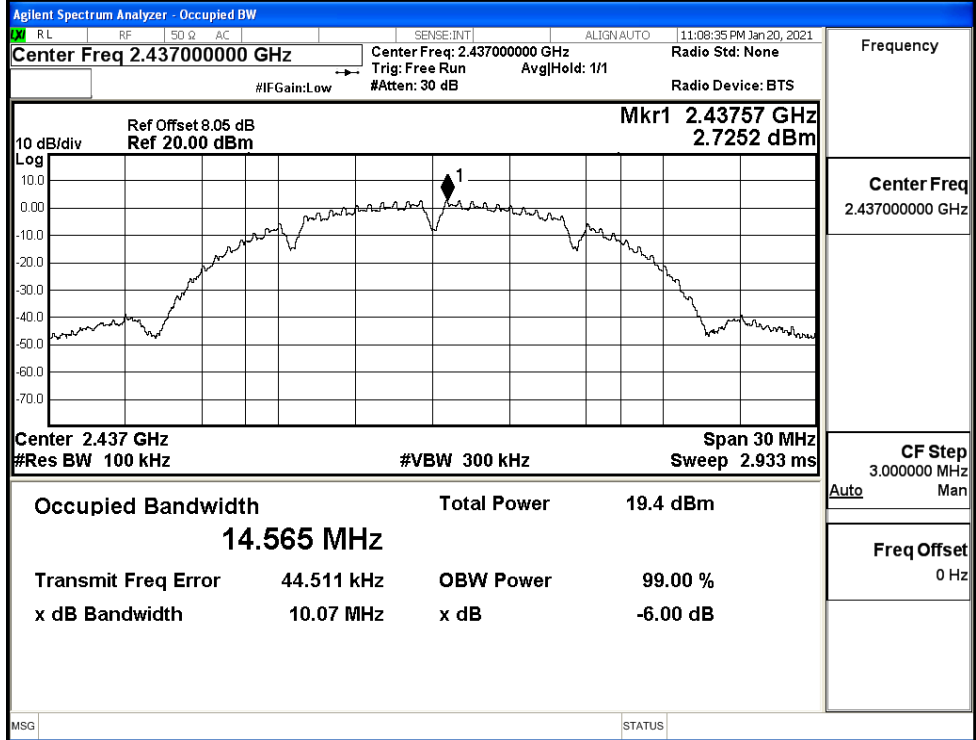


11B/HCH

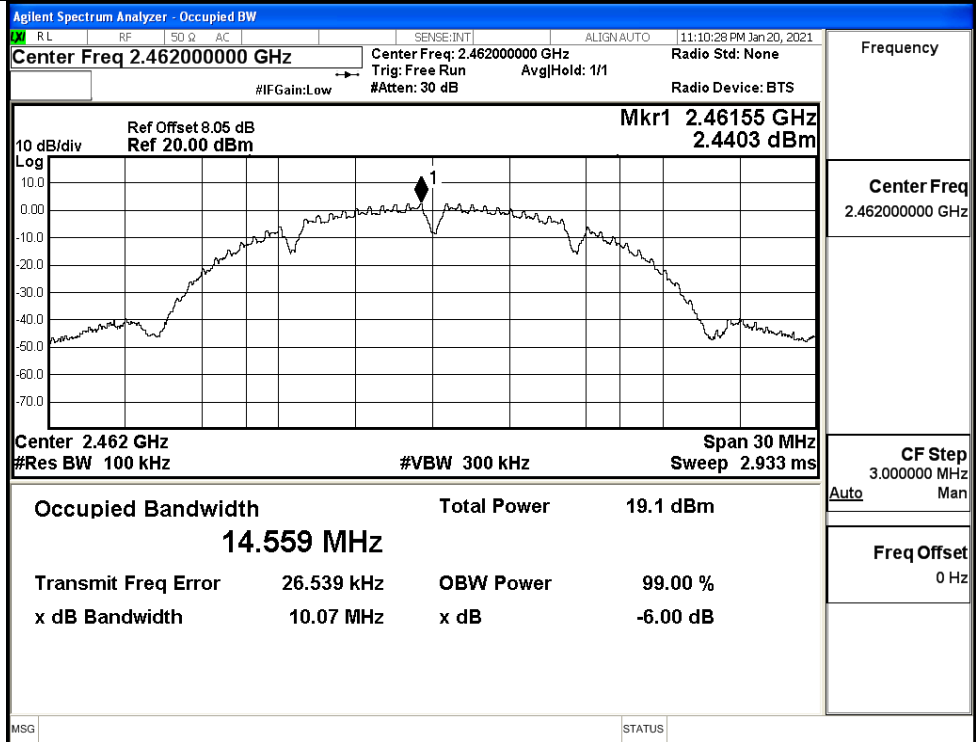


11G/LCH

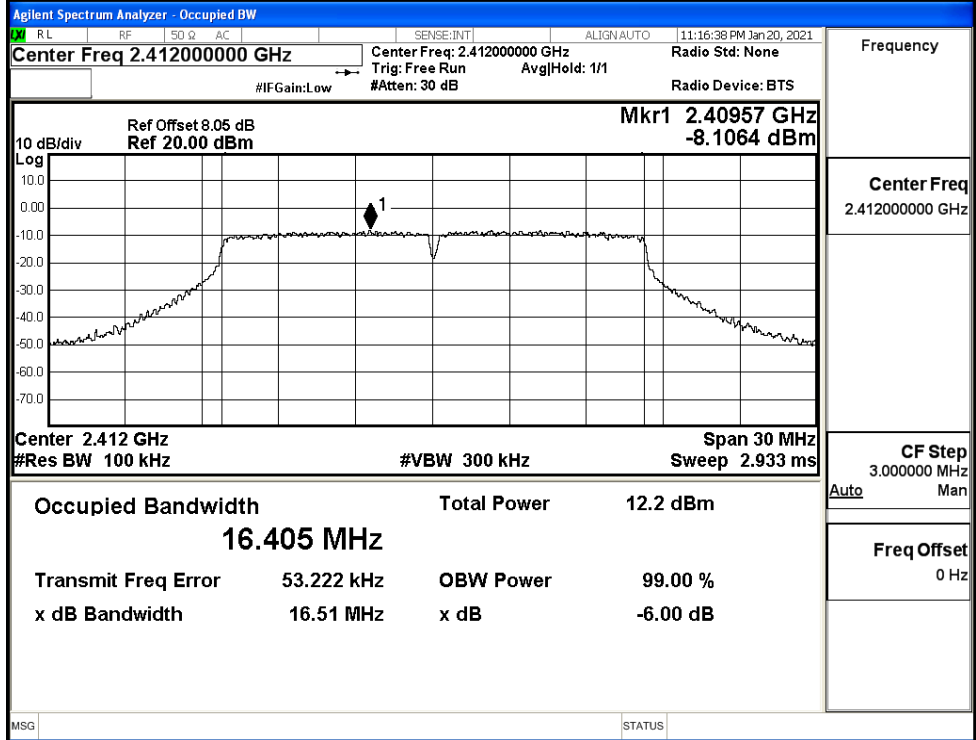


11G/MCH

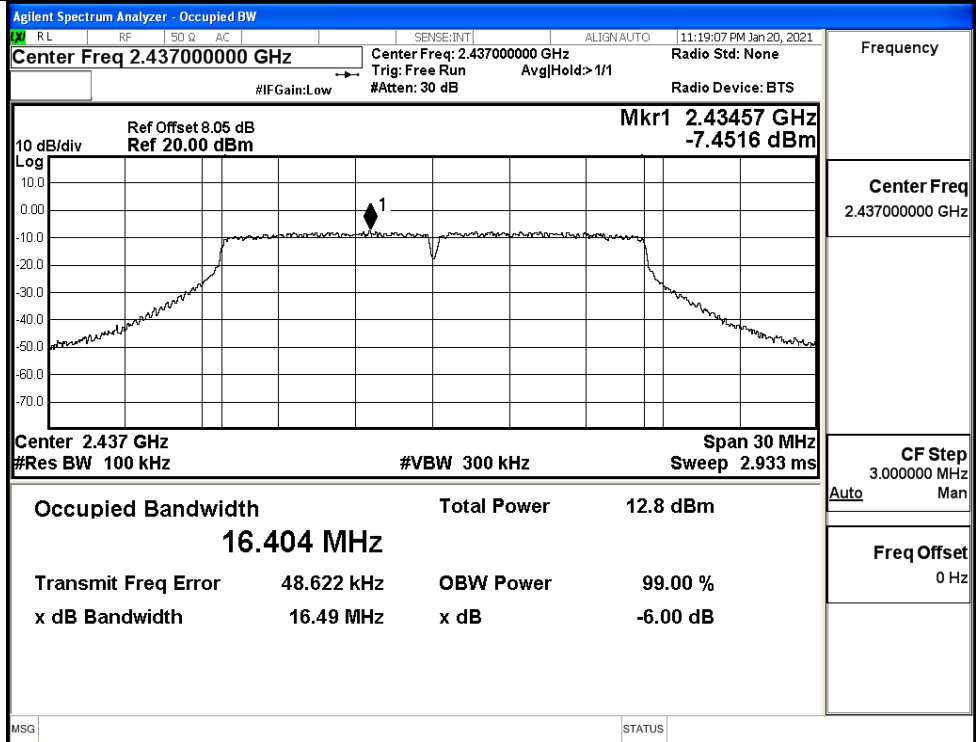


11G/HCH

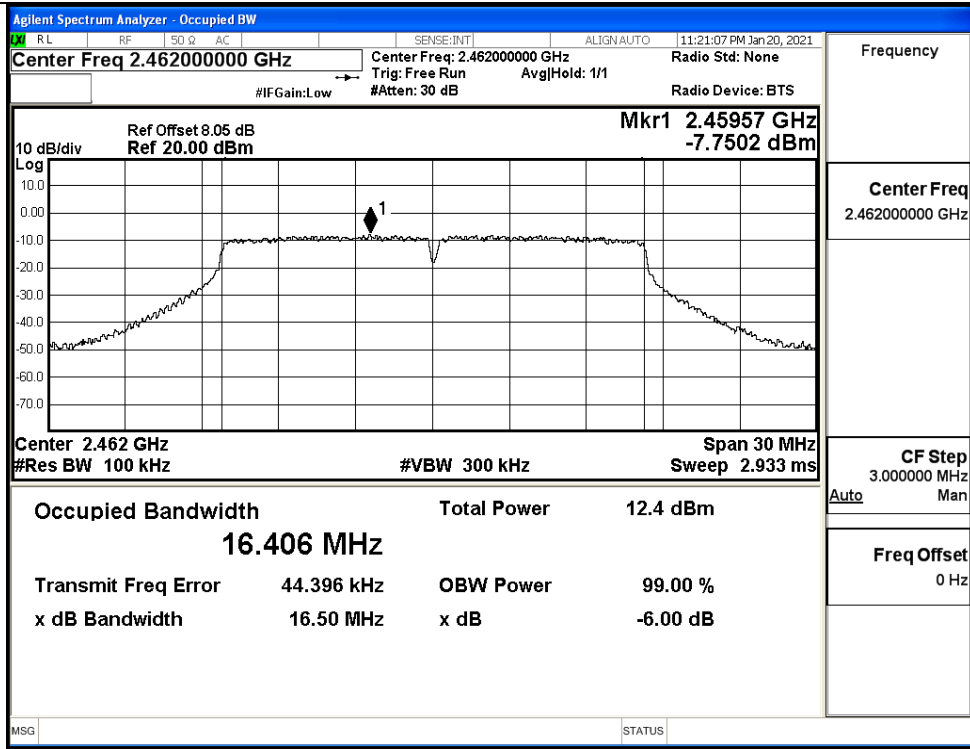


11N20SISO/LCH

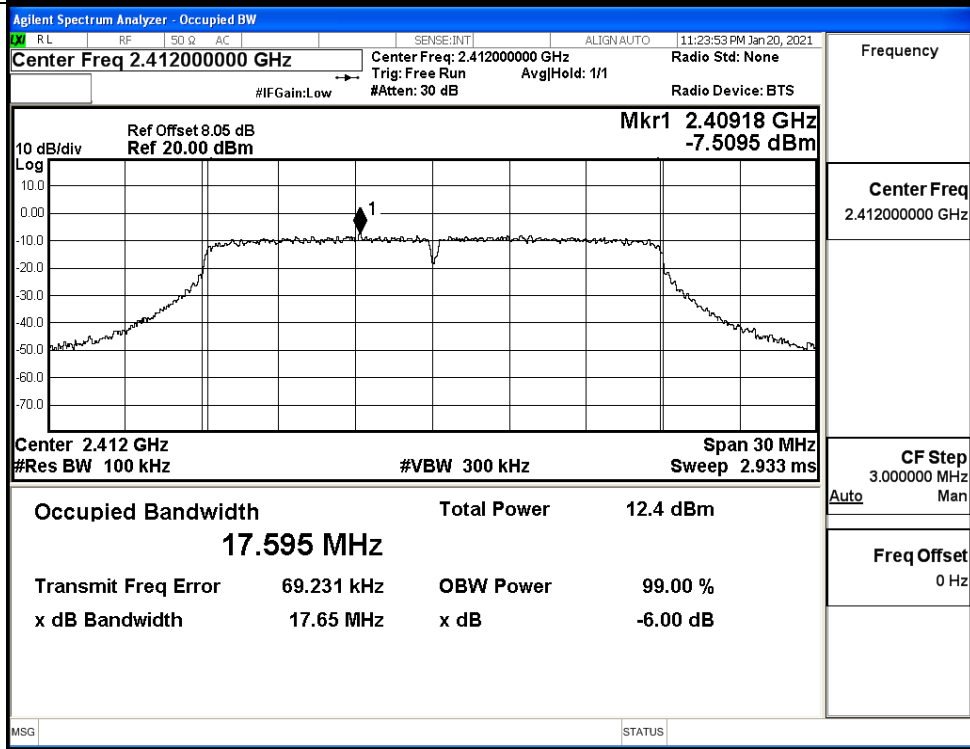


11N20SISO/MCH

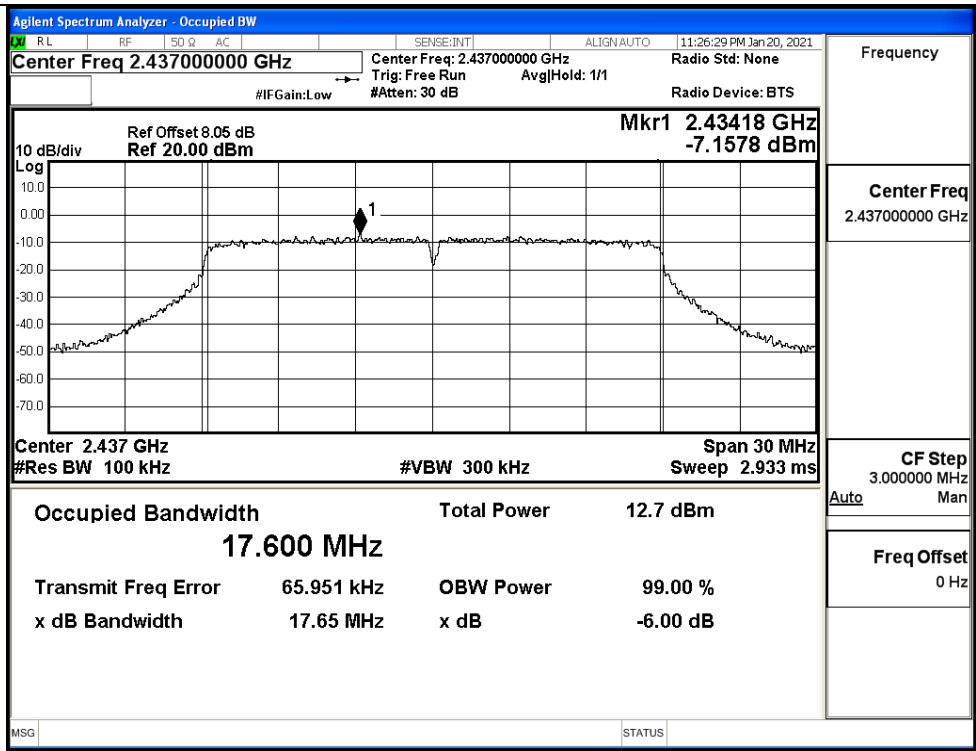


11N20SISO/HCH

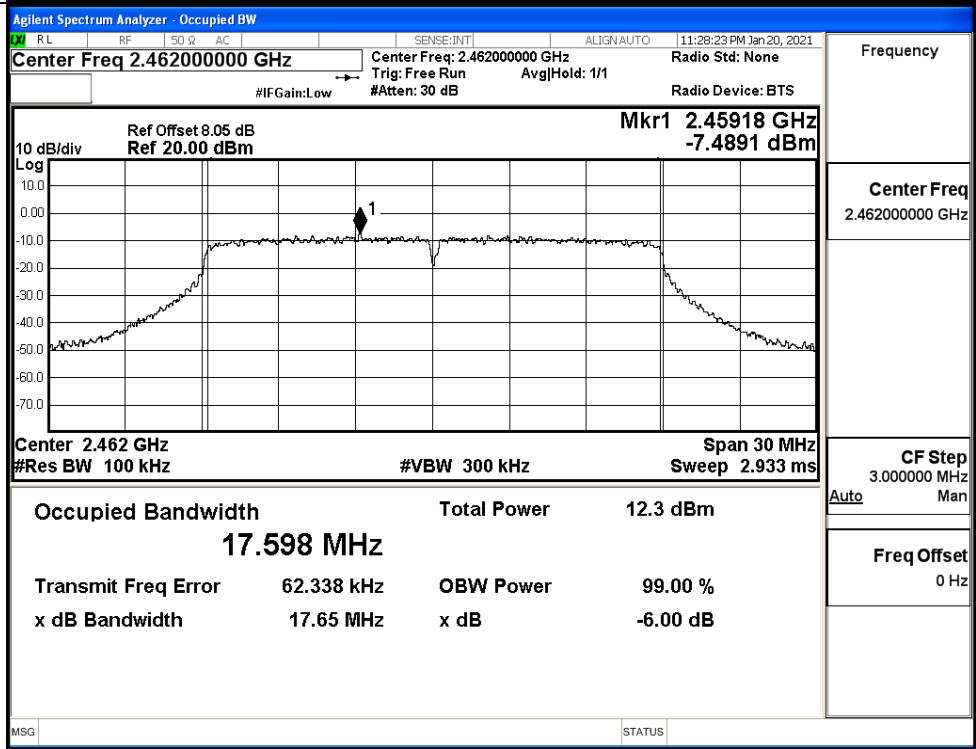


11N40SISO/LCH

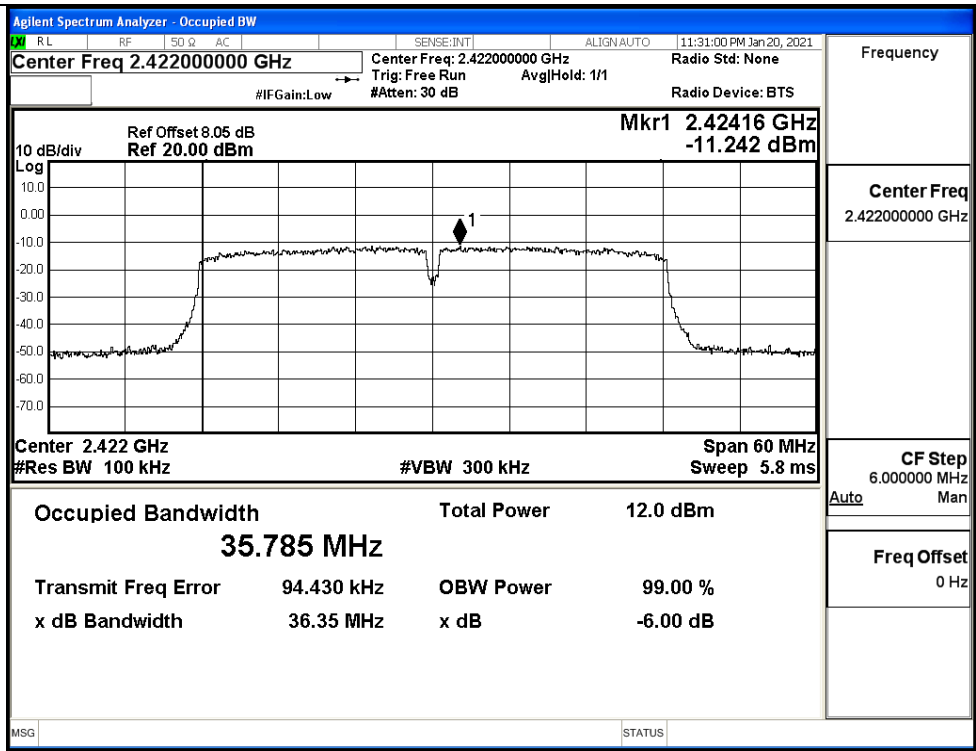

11N40SISO/MCH

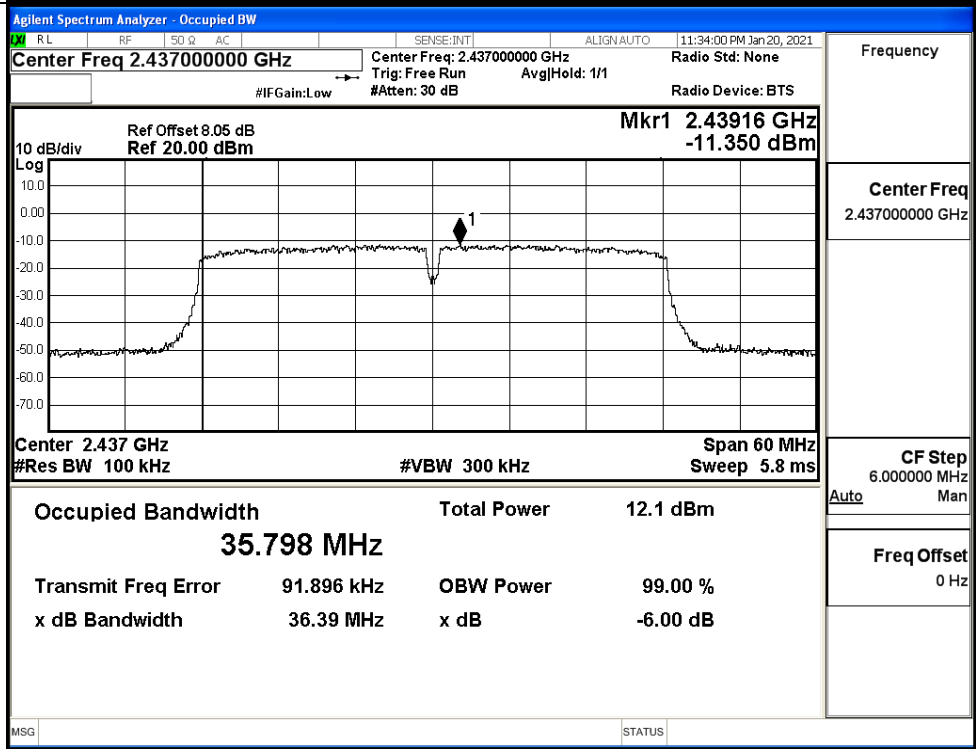

11N40SISO/HCH

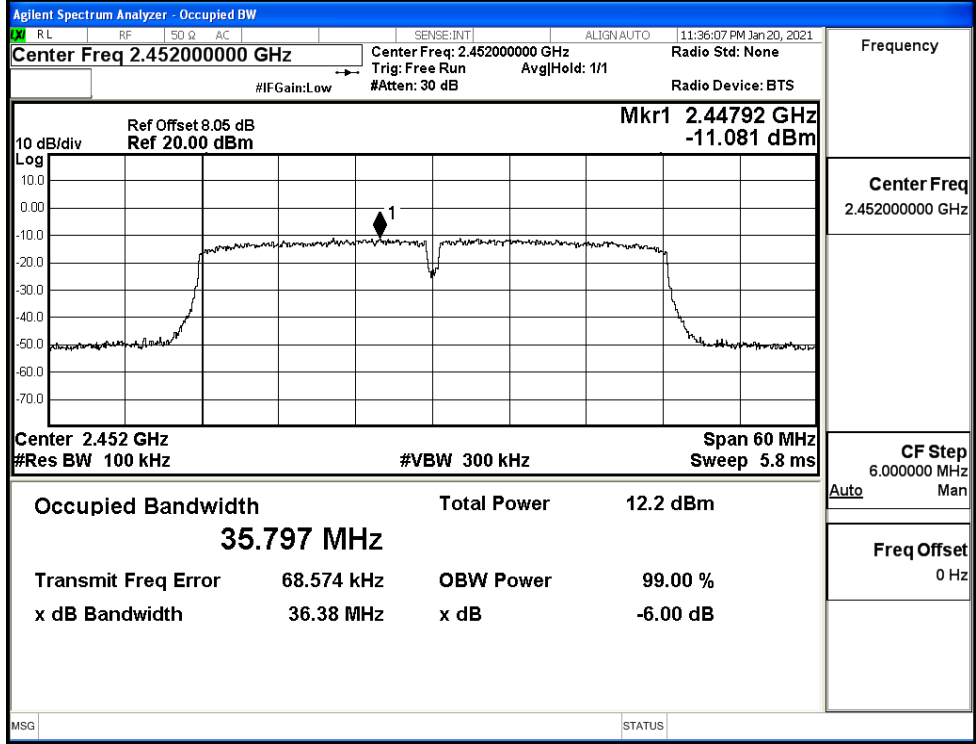


A.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	LCH	2.082	-36.899	-17.918	PASS
	MCH	2.503	-38.045	-17.497	PASS
	HCH	2.121	-38.292	-17.879	PASS
11G	LCH	-8.132	-36.014	-28.132	PASS
	MCH	-7.614	-38.327	-27.614	PASS
	HCH	-7.953	-38.008	-27.953	PASS
11N20 SISO	LCH	-7.798	-37.948	-27.798	PASS
	MCH	-7.424	-38.011	-27.424	PASS
	HCH	-8.349	-37.186	-28.349	PASS
11N40 SISO	LCH	-11.473	-37.325	-31.473	PASS
	MCH	-11.298	-37.701	-31.298	PASS
	HCH	-11.564	-37.532	-31.564	PASS

11B_LCH_Graphs

Pref/11B/LCH

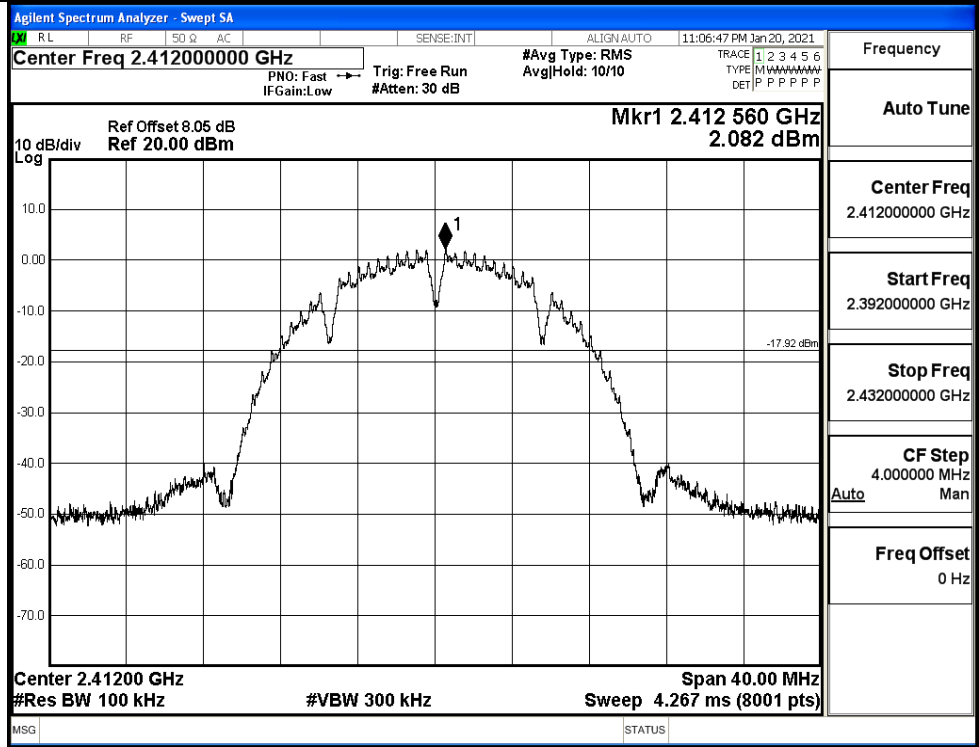


Puw/11B/LCH

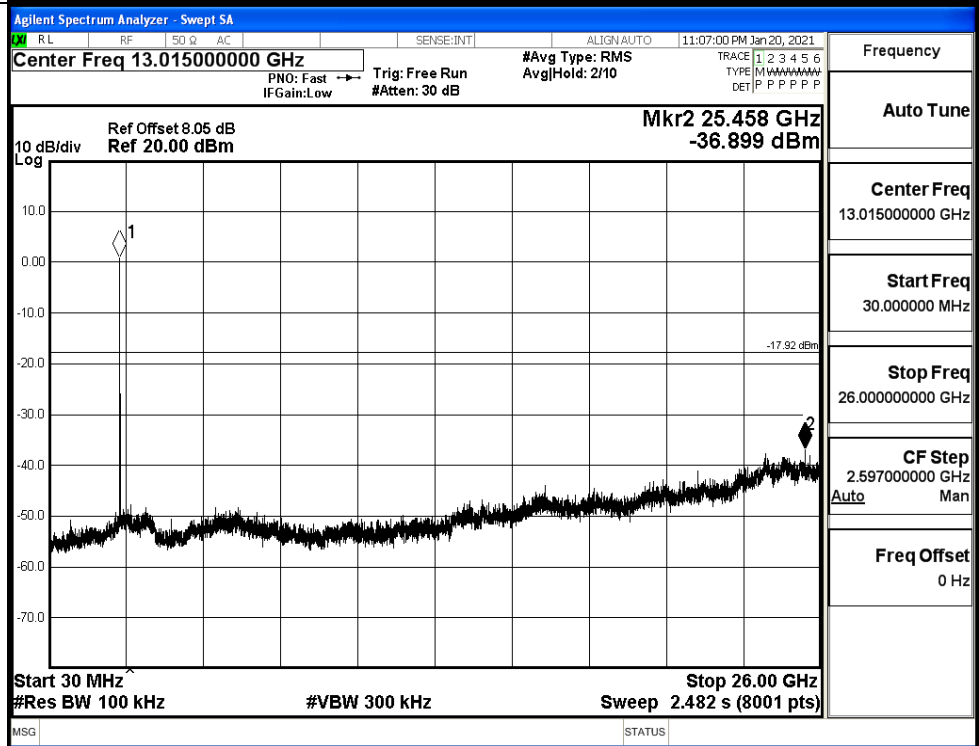


11B_MCH_Graphs

Pref/11B/MCH

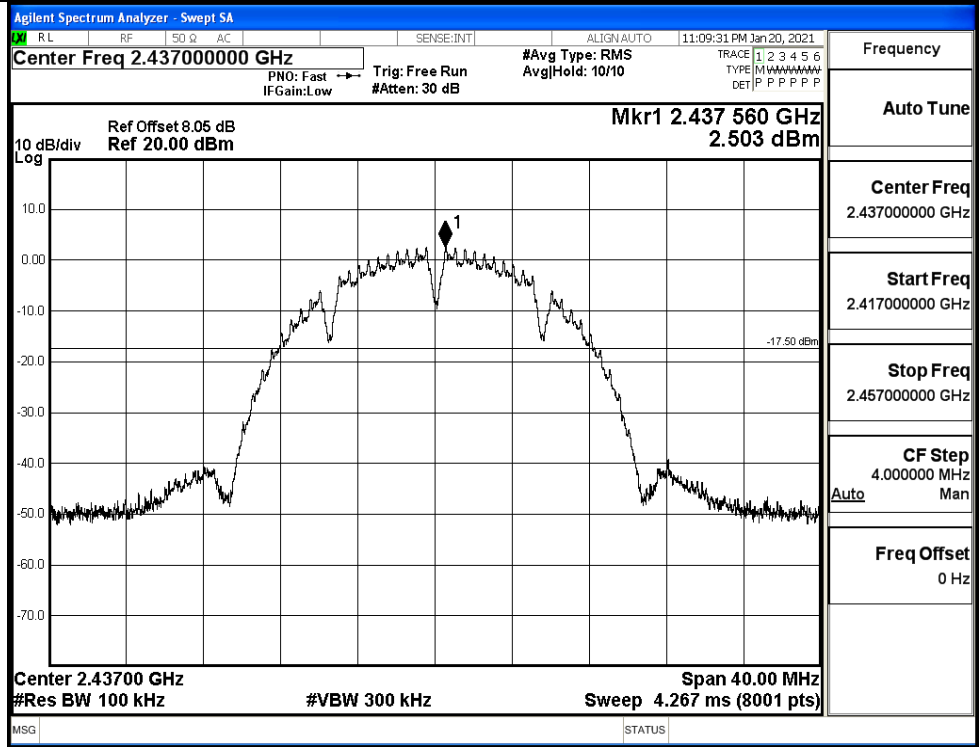


Puw/11B/MCH

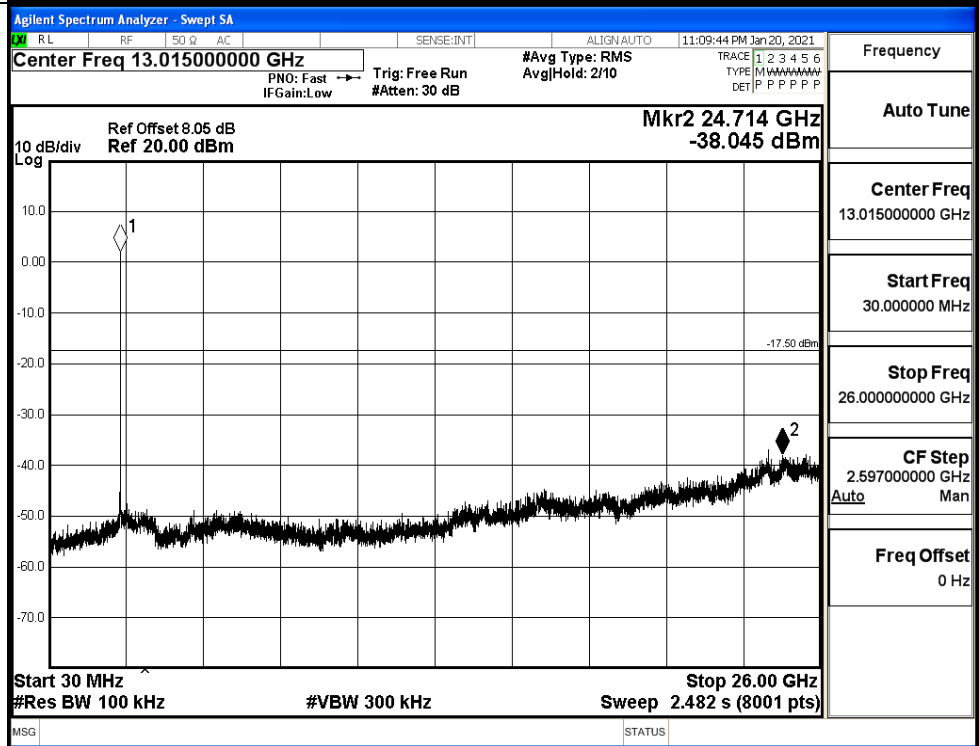


11B_HCH_Graphs

Pref/11B/HCH

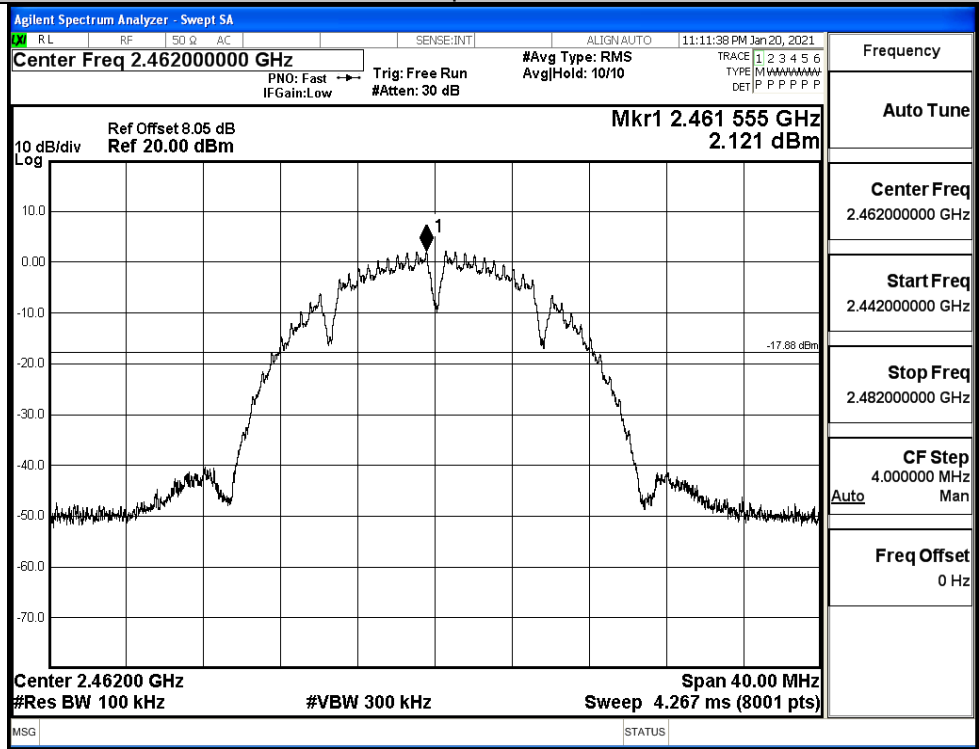


Puw/11B/HCH

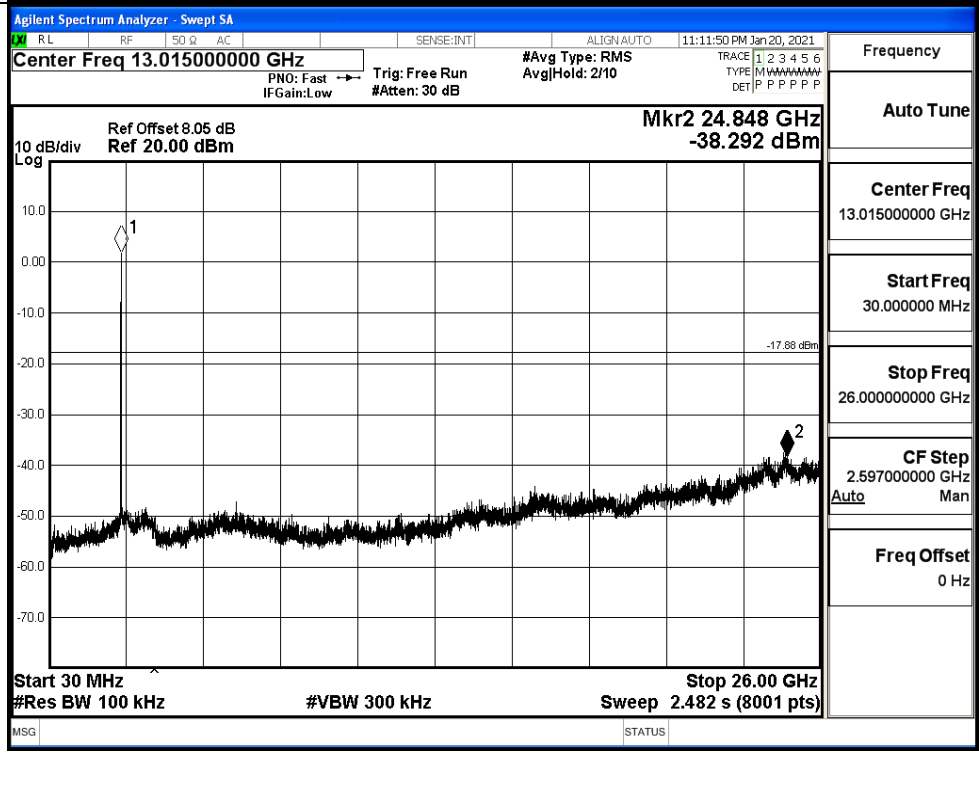


11G_LCH_Graphs

Pref/11G/LCH

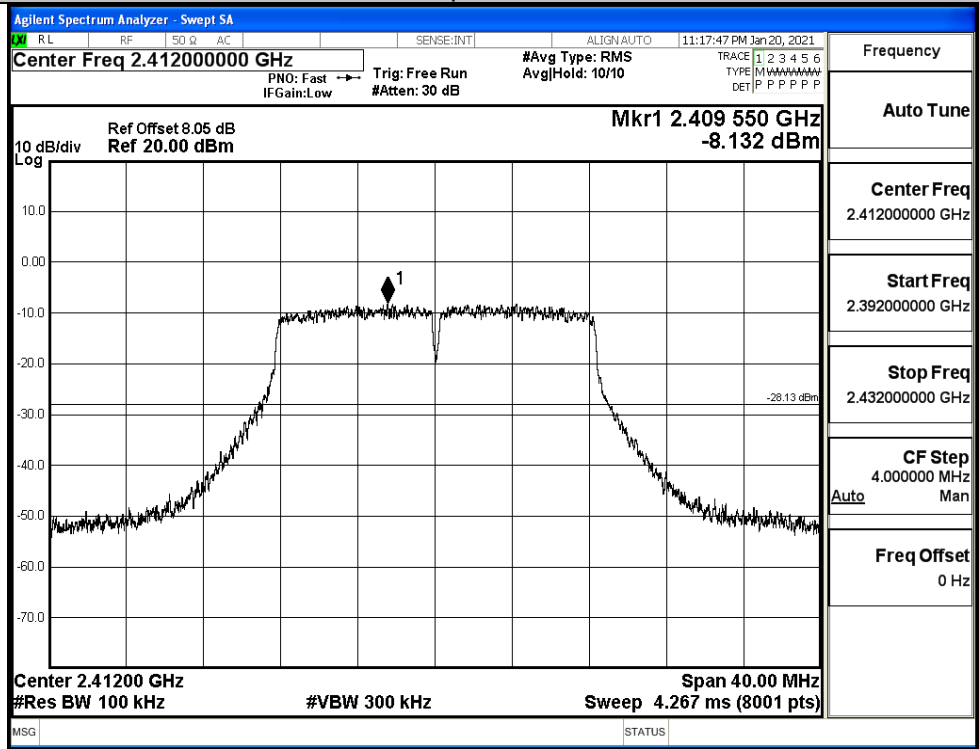


Puw/11G/LCH

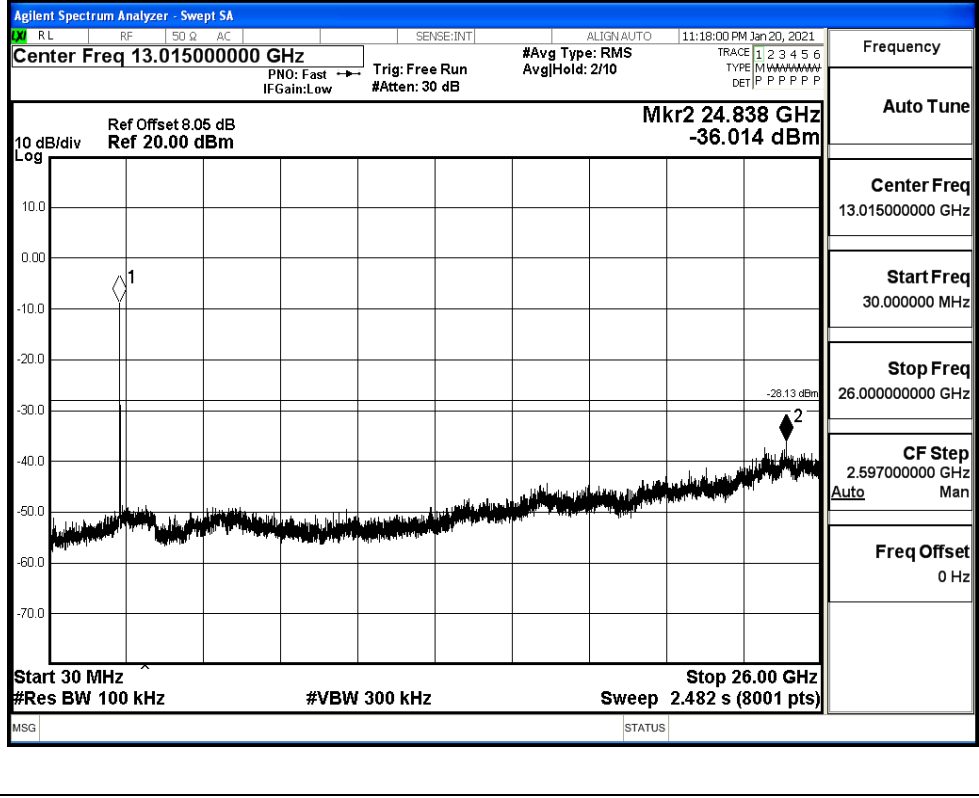


11G_MCH_Graphs

Pref/11G/MCH

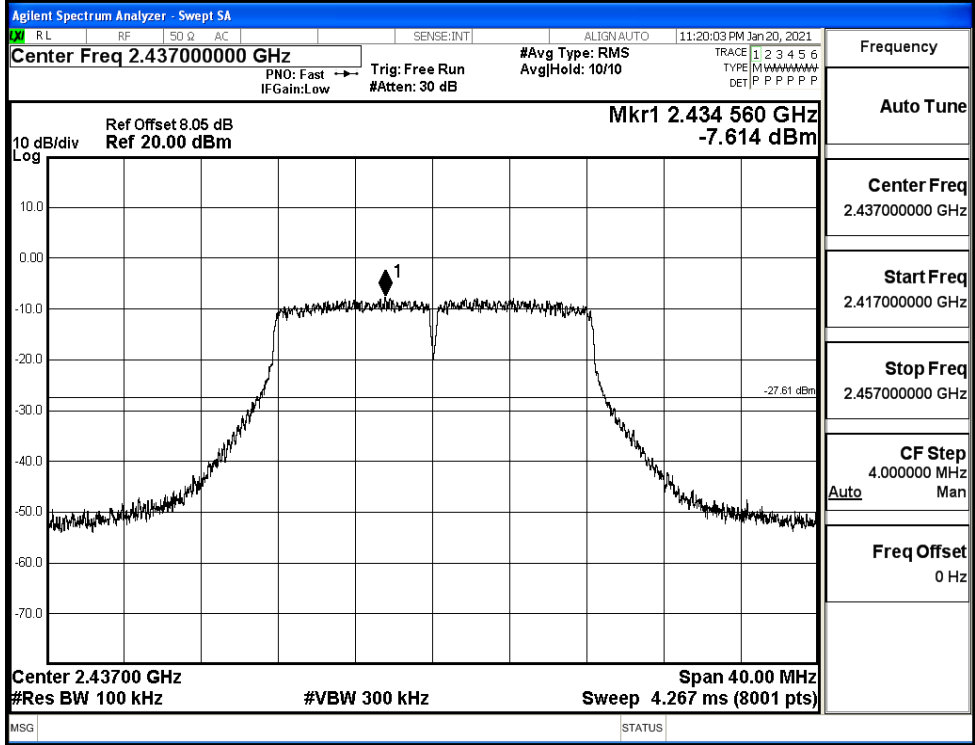


Puw/11G/MCH

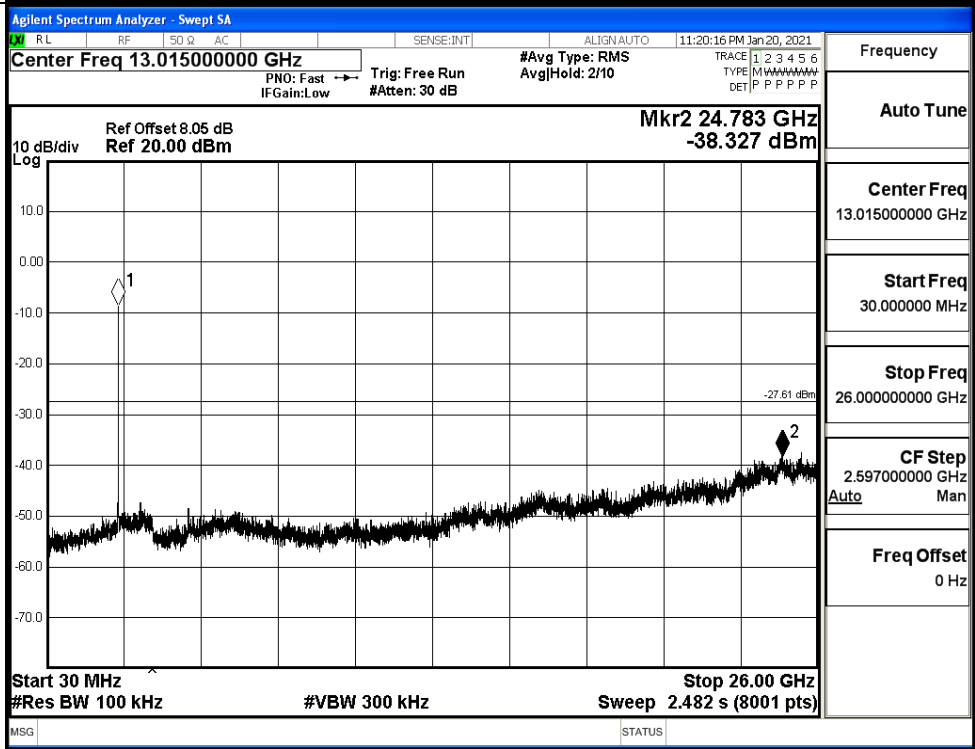


11G_HCH_Graphs

Pref/11G/HCH

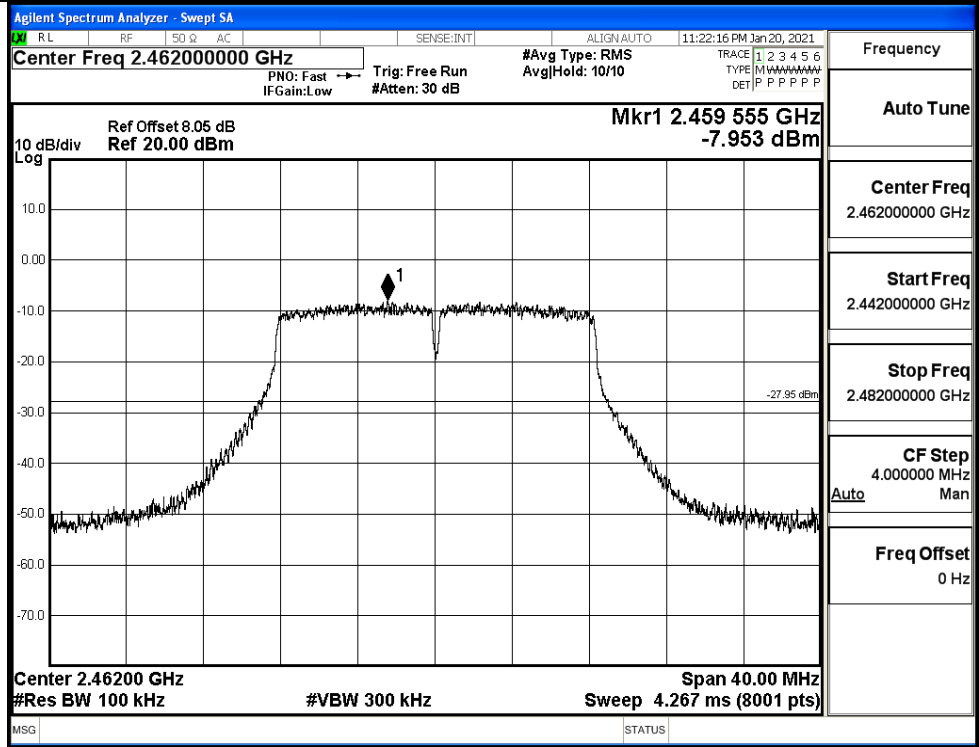


Puw/11G/HCH

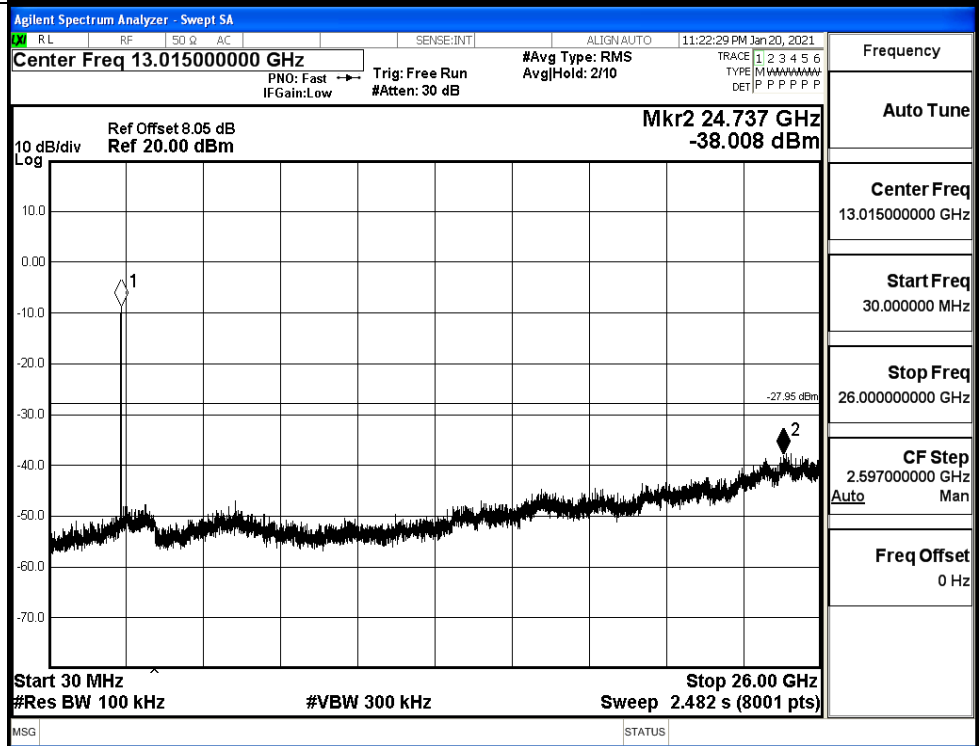


11N20SISO_LCH_Graphs

Pref/11N20SIS
O/LCH

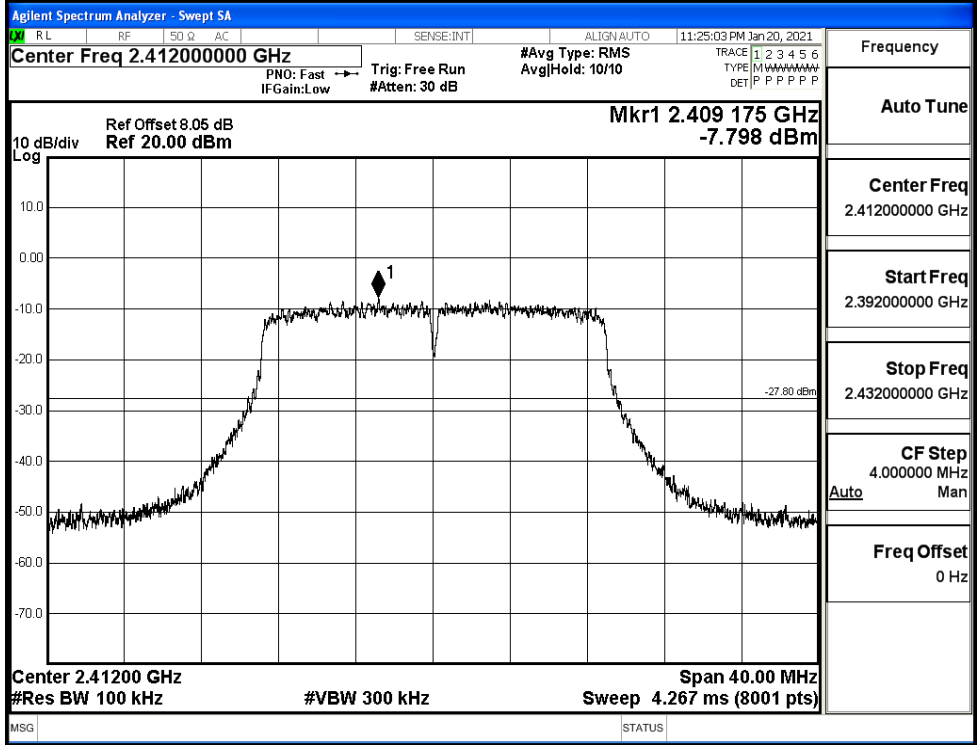


Puw/11N20
SISO/LCH

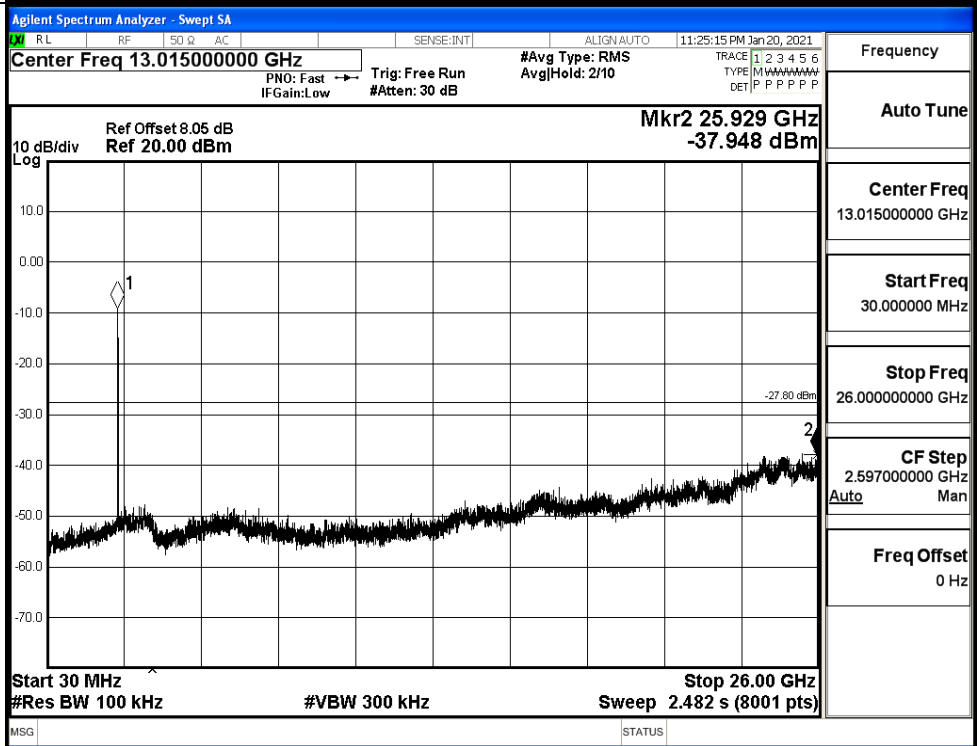


11N20SISO_MCH_Graphs

Pref/11N20
SISO/MCH

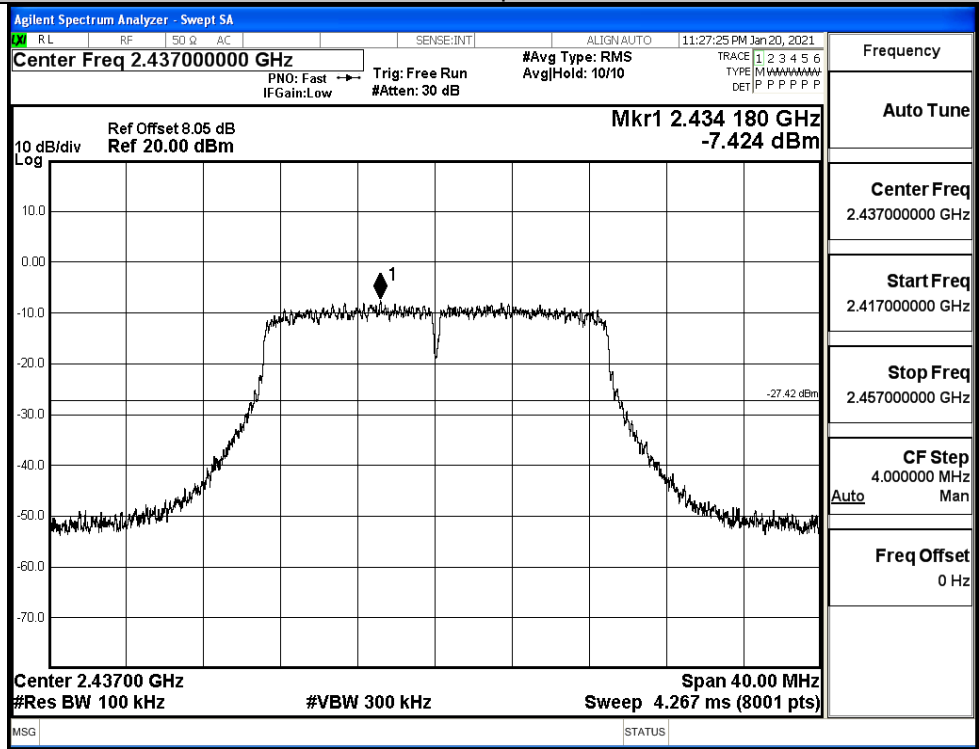


Puw/11N20
SISO/MCH

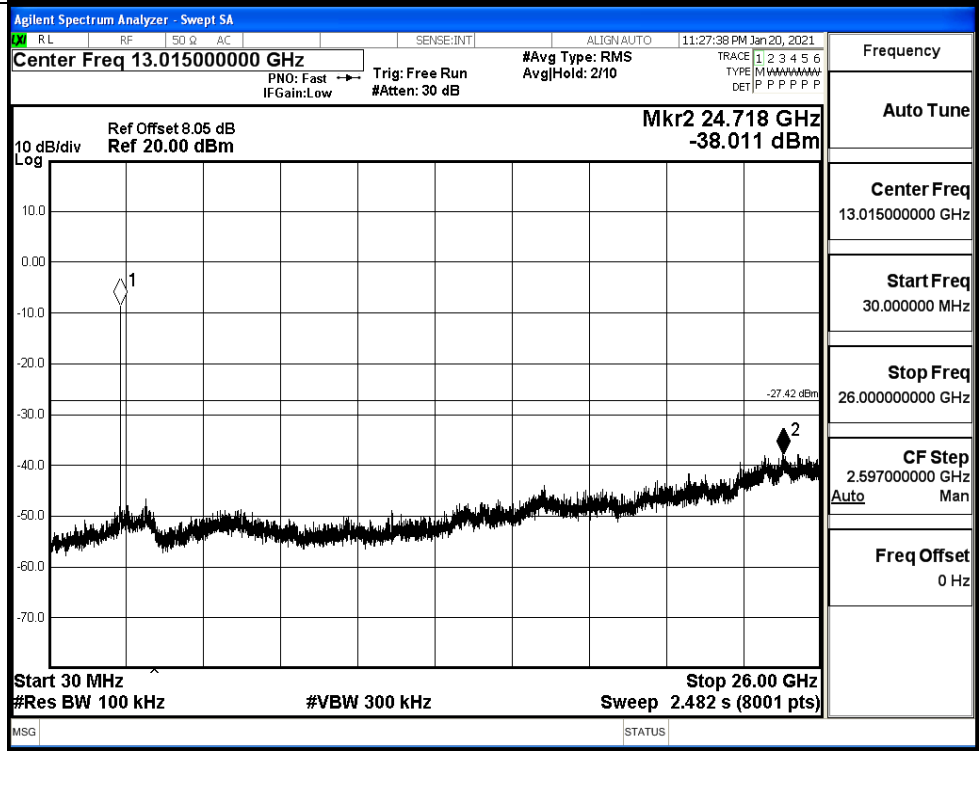


11N20SISO_HCH_Graphs

Pref/11N20
SISO/HCH

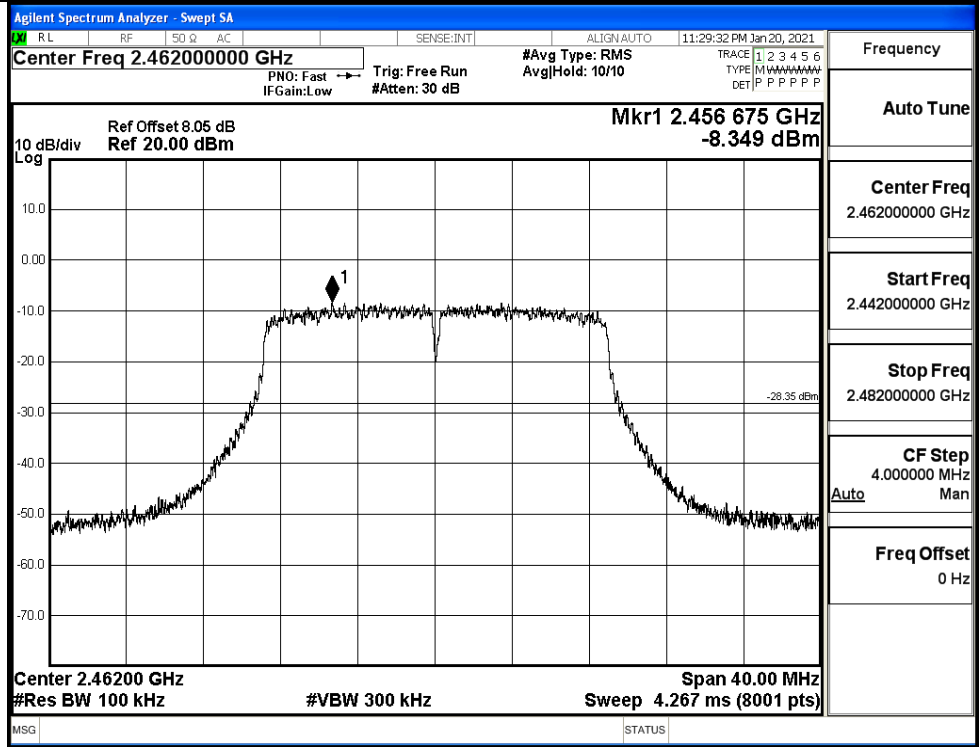


Puw/11N20
SISO/HCH

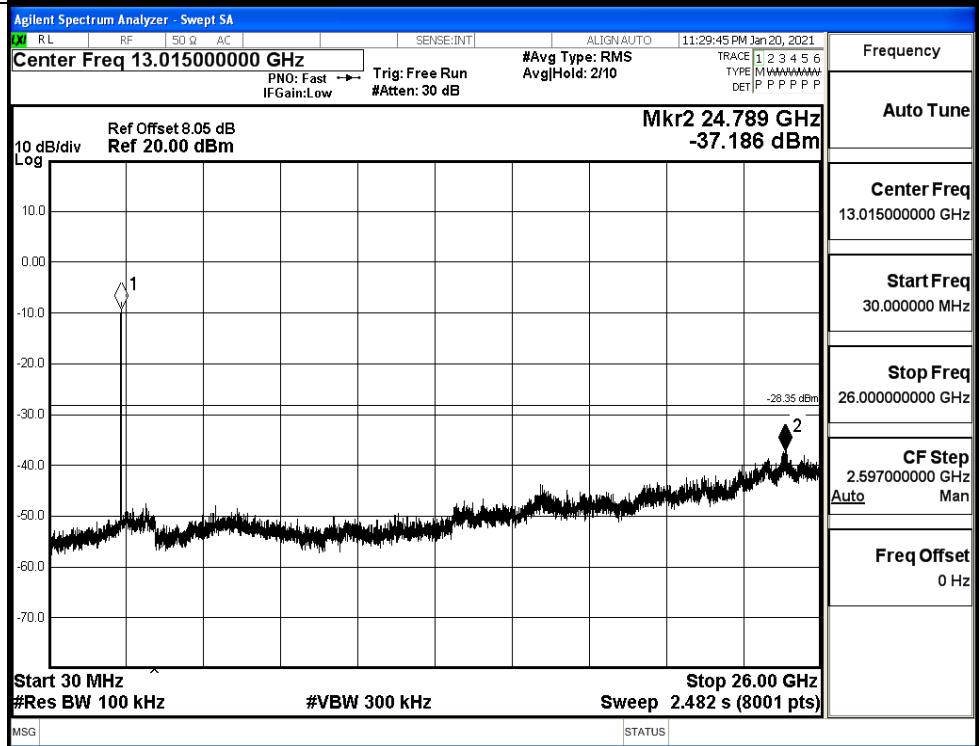


11N40SISO_LCH_Graphs

Pref/11N40
SISO/LCH

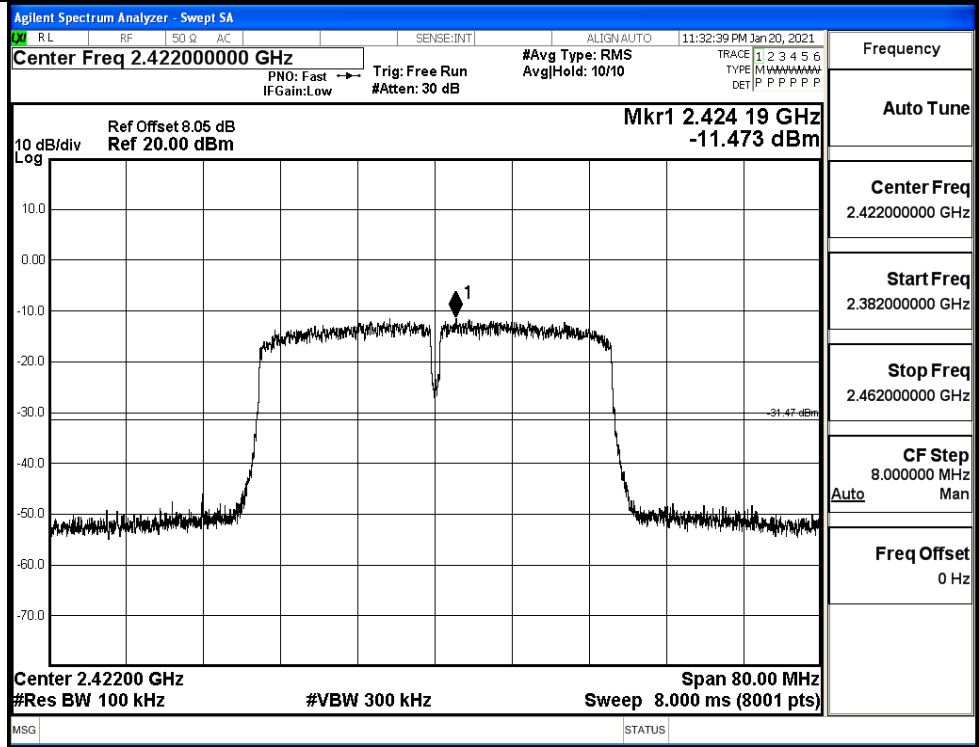


Puw/11N40
SISO/LCH

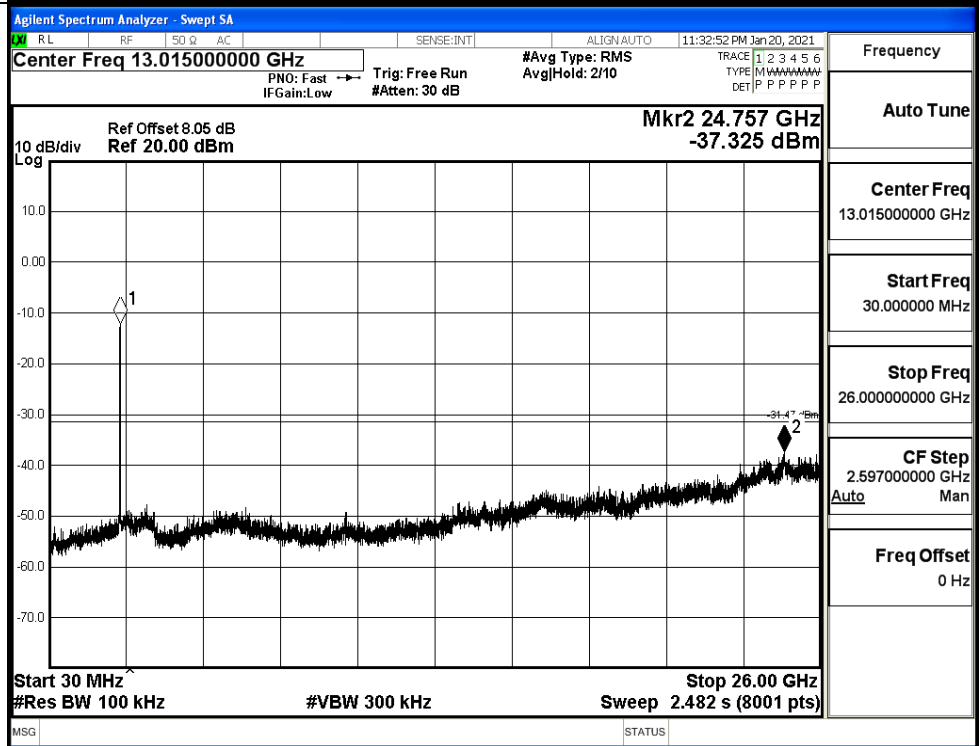

11N40SISO_MCH_Graphs

Pref/11N40
SISO/MCH

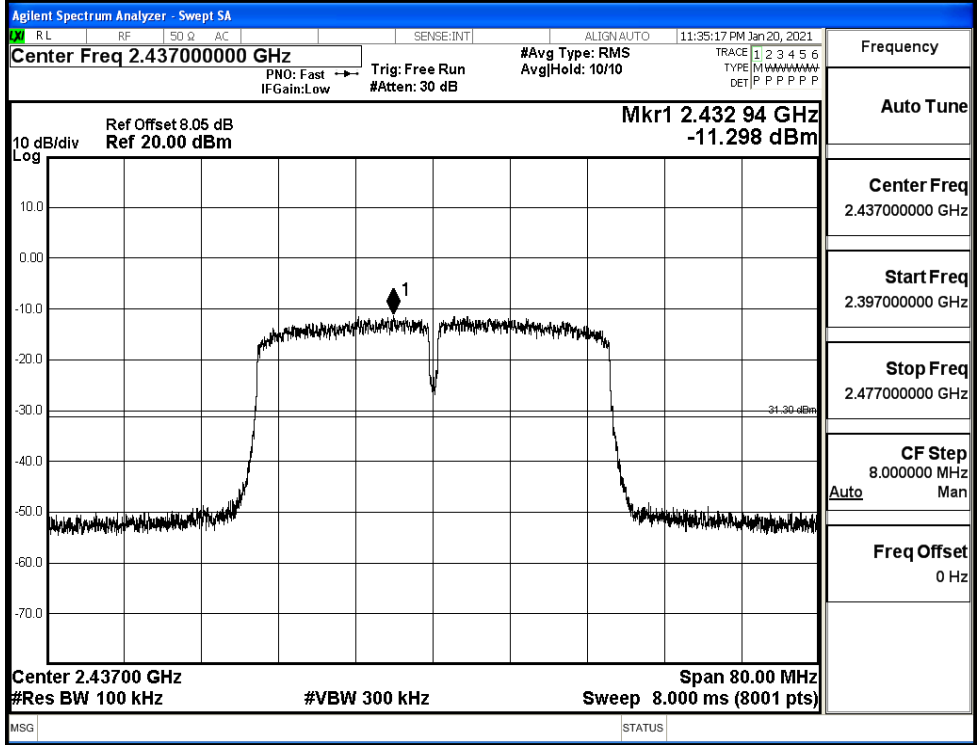


Puw/11N40
SISO/MCH




11N40SISO_HCH_Graphs

Pref/11N40
SISO/HCH

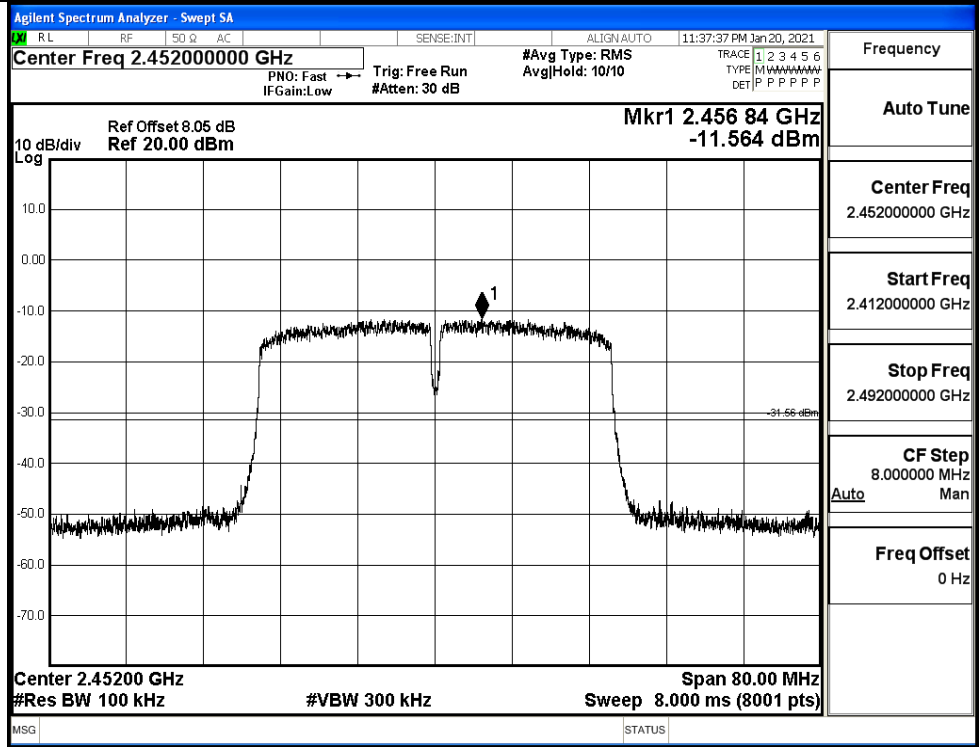


Puw/11N40
SISO/HCH

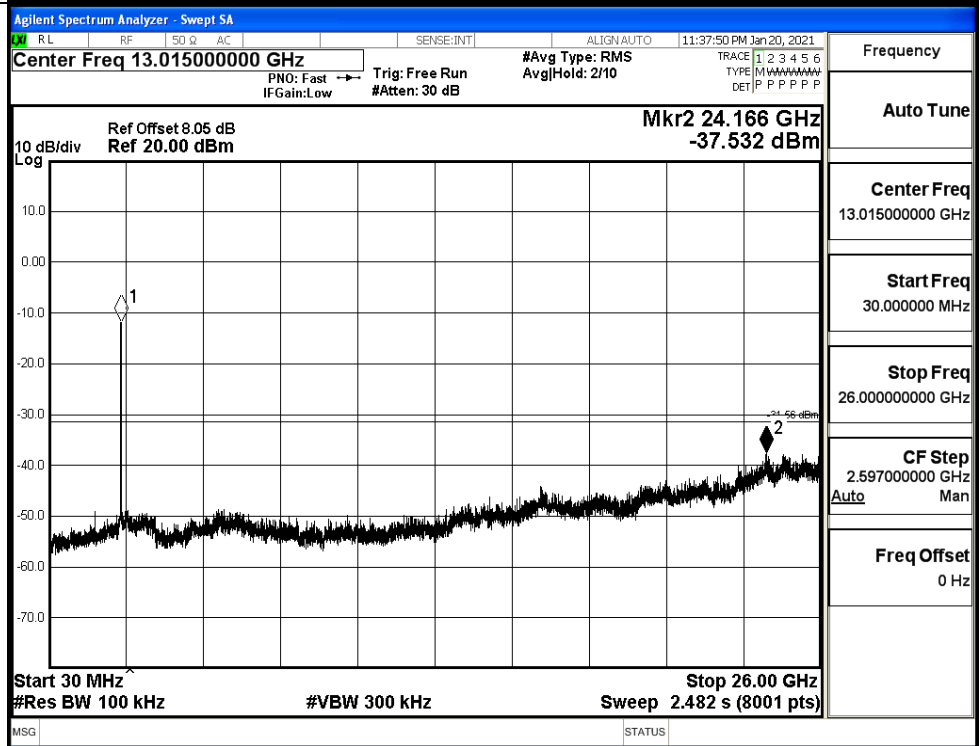


A.6 Band-edge for RF Conducted Emissions


Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	2.158	-48.900	-17.84	PASS
	HCH	2.223	-47.717	-17.78	PASS
11G	LCH	-8.247	-50.145	-28.25	PASS
	HCH	-7.928	-49.806	-27.93	PASS
11N20SISO	LCH	-7.628	-50.134	-27.63	PASS
	HCH	-7.779	-48.561	-27.78	PASS
11N40SISO	LCH	-11.487	-49.857	-31.49	PASS
	HCH	-11.207	-48.997	-31.21	PASS

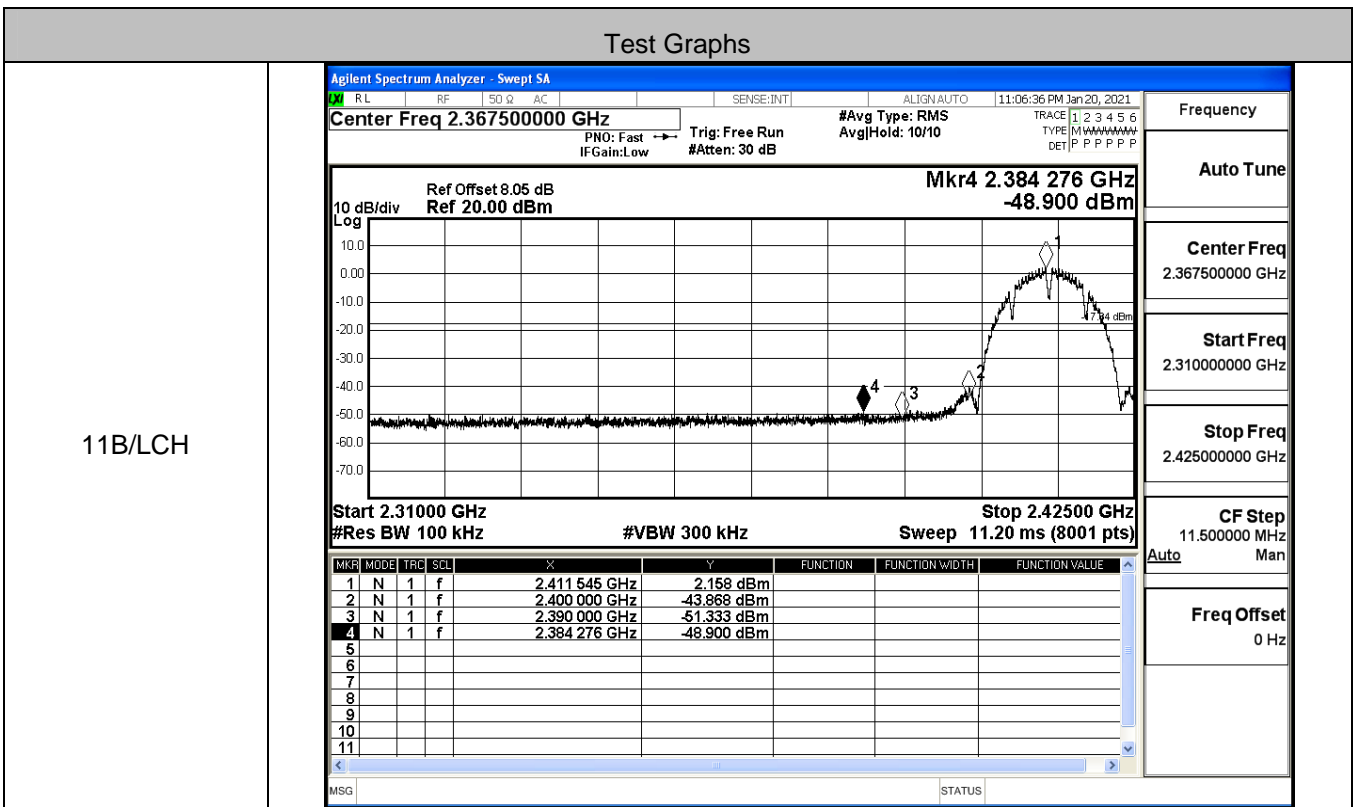


11B/HCH

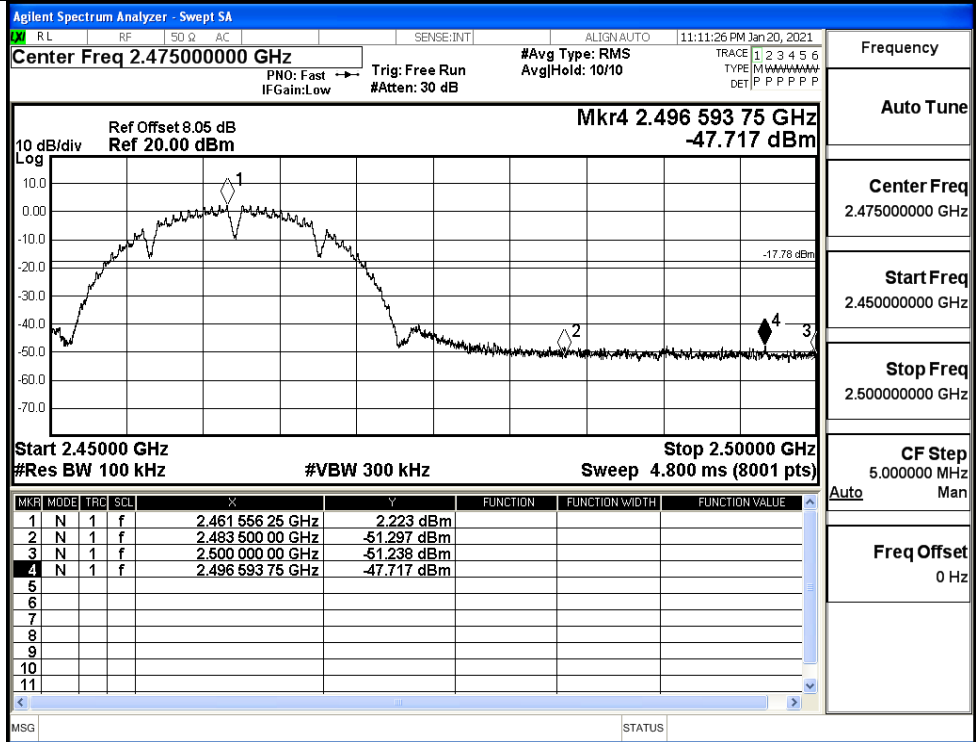

11G/LCH

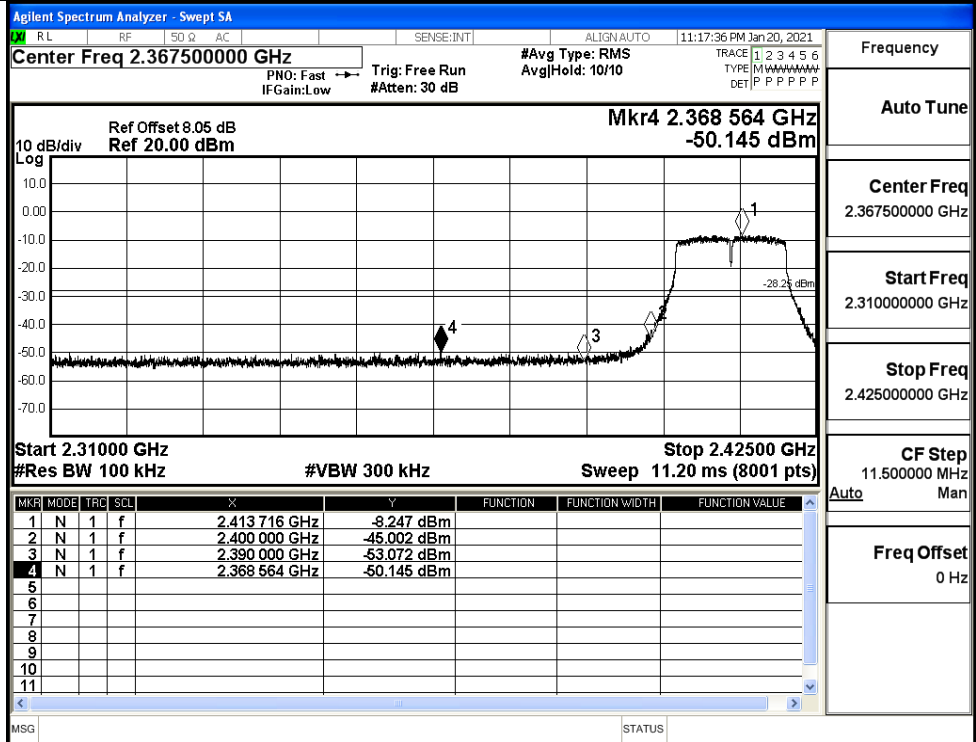


11G/HCH

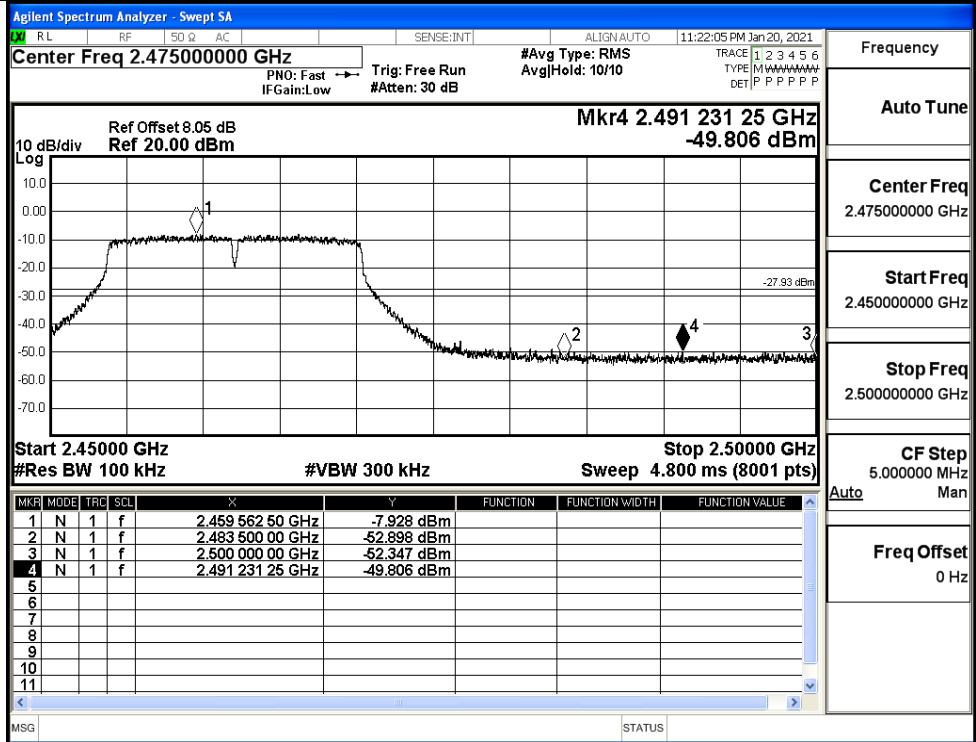


Frequency
Auto Tune
Center Freq 2.475000000 GHz
Start Freq 2.450000000 GHz
Stop Freq 2.500000000 GHz
CF Step 5.000000 MHz
Freq Offset 0 Hz

11N20SISO/LCH

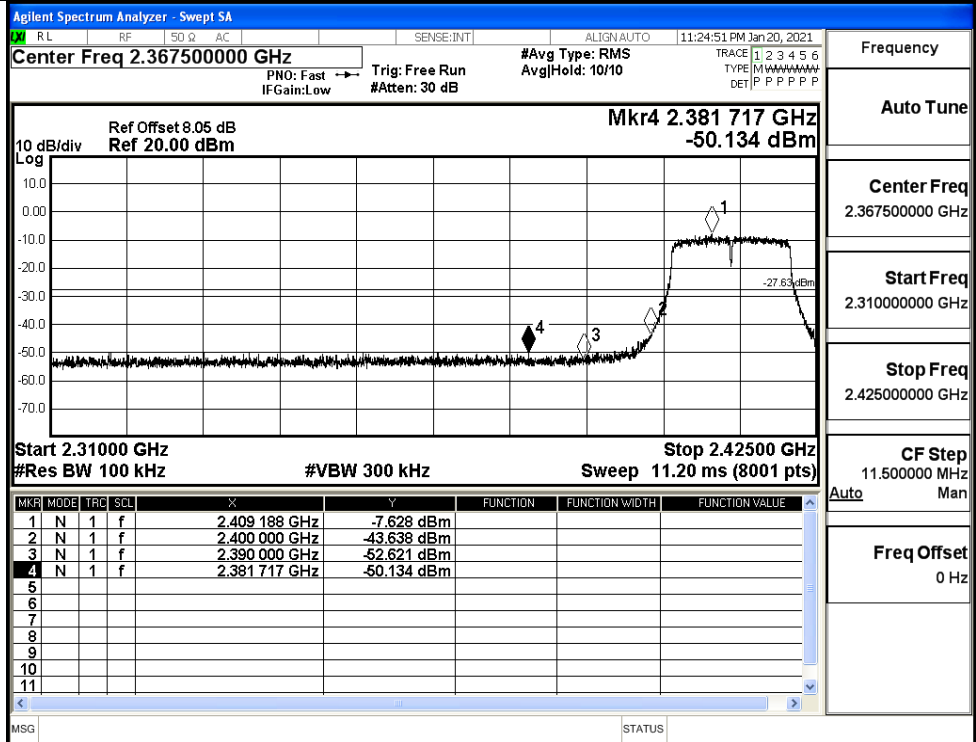


Frequency
Auto Tune
Center Freq 2.367500000 GHz
Start Freq 2.310000000 GHz
Stop Freq 2.425000000 GHz
CF Step 11.500000 MHz
Freq Offset 0 Hz


11N20SISO/HCH

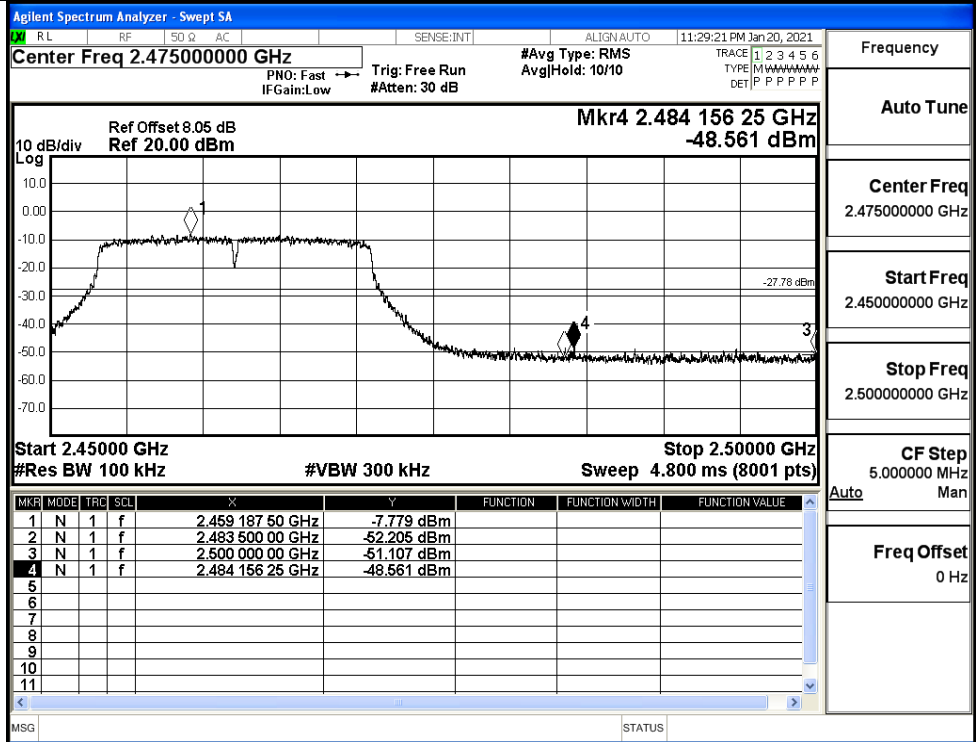

11N40SISO/LCH

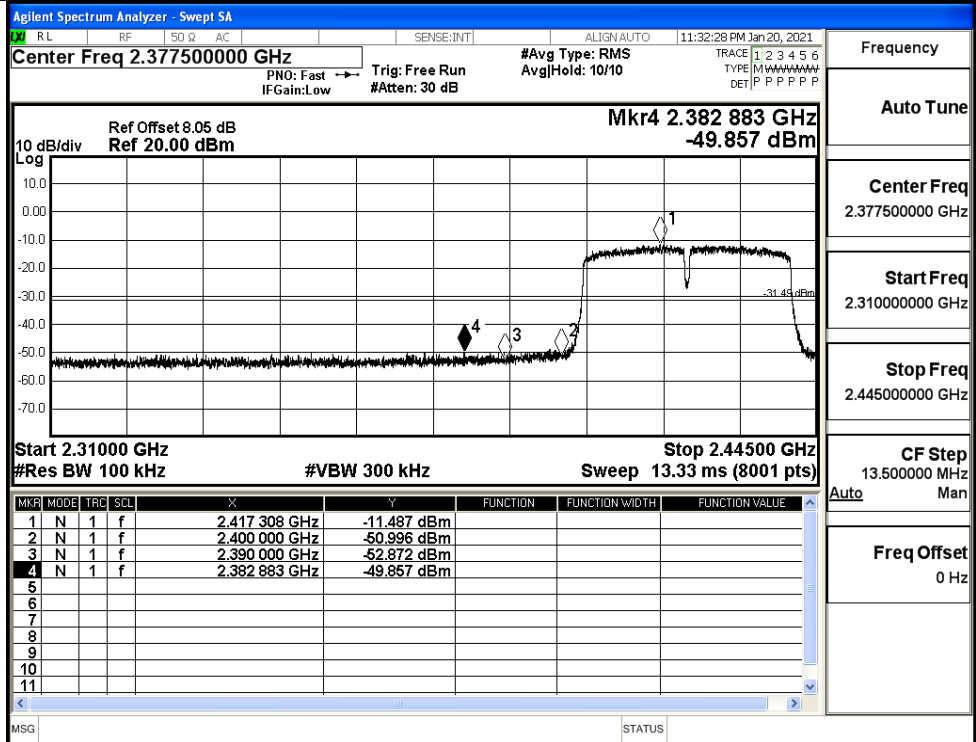

11N40SISO/HCH

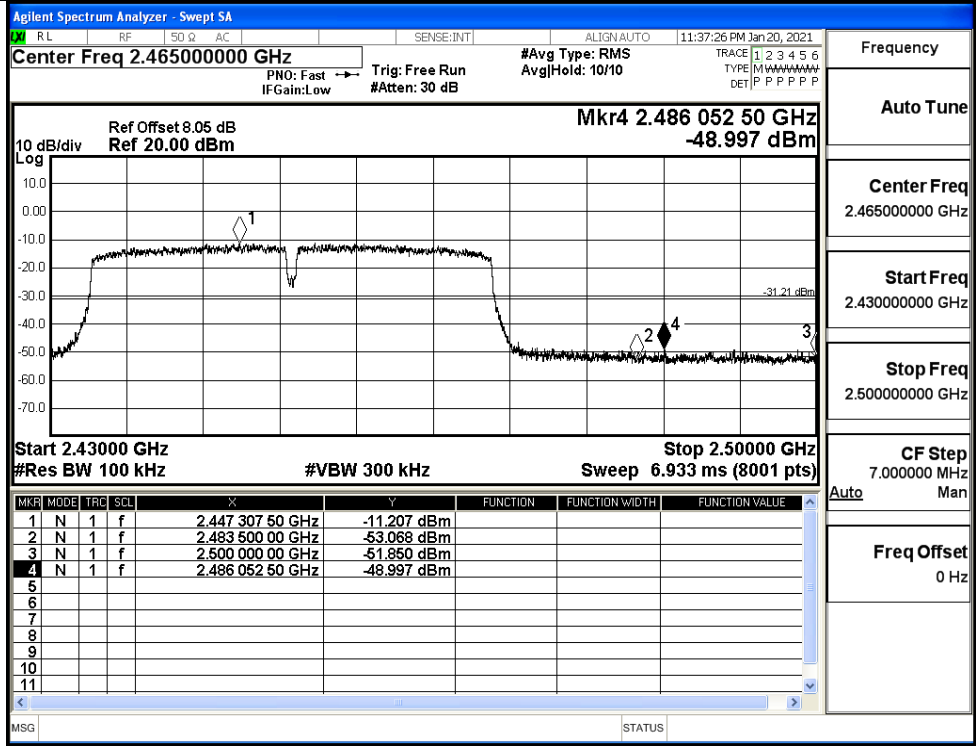

Frequency

Auto Tune

Center Freq
2.46500000 GHz

Start Freq
2.43000000 GHz

Stop Freq
2.50000000 GHz

CF Step
7.000000 MHz
Auto Man


Freq Offset
0 Hz

A.7 Restrict-band band-edge measurements


Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBu V/m]	Verdict
11B	2412	Ant1	2310.0	-43.61	2.0	0	53.62	PEAK	74	PASS
	2412	Ant1	2310.0	-53.24	2.0	0	43.99	AV	54	PASS
	2412	Ant1	2390.0	-40.19	2.0	0	57.04	PEAK	74	PASS
	2412	Ant1	2390.0	-51.17	2.0	0	46.06	AV	54	PASS
	2462	Ant1	2483.5	-39.47	2.0	0	57.76	PEAK	74	PASS
	2462	Ant1	2483.5	-50.55	2.0	0	46.68	AV	54	PASS
	2462	Ant1	2500.0	-40.85	2.0	0	56.38	PEAK	74	PASS
	2462	Ant1	2500.0	-51.34	2.0	0	45.89	AV	54	PASS
11G	2412	Ant1	2310.0	-43.42	2.0	0	53.81	PEAK	74	PASS
	2412	Ant1	2310.0	-53.67	2.0	0	43.56	AV	54	PASS
	2412	Ant1	2390.0	-41.38	2.0	0	55.85	PEAK	74	PASS
	2412	Ant1	2390.0	-52.88	2.0	0	44.35	AV	54	PASS
	2462	Ant1	2483.5	-42.32	2.0	0	54.91	PEAK	74	PASS
	2462	Ant1	2483.5	-52.45	2.0	0	44.78	AV	54	PASS
	2462	Ant1	2500.0	-41.05	2.0	0	56.18	PEAK	74	PASS
	2462	Ant1	2500.0	-52.56	2.0	0	44.67	AV	54	PASS
11N20 SISO	2412	Ant1	2310.0	-43.19	2.0	0	54.04	PEAK	74	PASS
	2412	Ant1	2310.0	-53.67	2.0	0	43.56	AV	54	PASS
	2412	Ant1	2390.0	-42.58	2.0	0	54.65	PEAK	74	PASS
	2412	Ant1	2390.0	-52.72	2.0	0	44.51	AV	54	PASS
	2462	Ant1	2483.5	-40.70	2.0	0	56.53	PEAK	74	PASS
	2462	Ant1	2483.5	-52.33	2.0	0	44.9	AV	54	PASS
	2462	Ant1	2500.0	-41.16	2.0	0	56.07	PEAK	74	PASS
	2462	Ant1	2500.0	-52.56	2.0	0	44.67	AV	54	PASS
11N40 SISO	2422	Ant1	2310.0	-42.35	2.0	0	54.88	PEAK	74	PASS
	2422	Ant1	2310.0	-53.69	2.0	0	43.54	AV	54	PASS

	2422	Ant1	2390.0	-42.36	2.0	0	54.87	PEAK	74	PASS
	2422	Ant1	2390.0	-52.41	2.0	0	44.82	AV	54	PASS
	2452	Ant1	2483.5	-41.52	2.0	0	55.71	PEAK	74	PASS
	2452	Ant1	2483.5	-52.02	2.0	0	45.21	AV	54	PASS
	2452	Ant1	2500.0	-41.30	2.0	0	55.93	PEAK	74	PASS
	2452	Ant1	2500.0	-52.51	2.0	0	44.72	AV	54	PASS


Restrict-band band-edge measurements_11B_2412_Ant1_PEAK

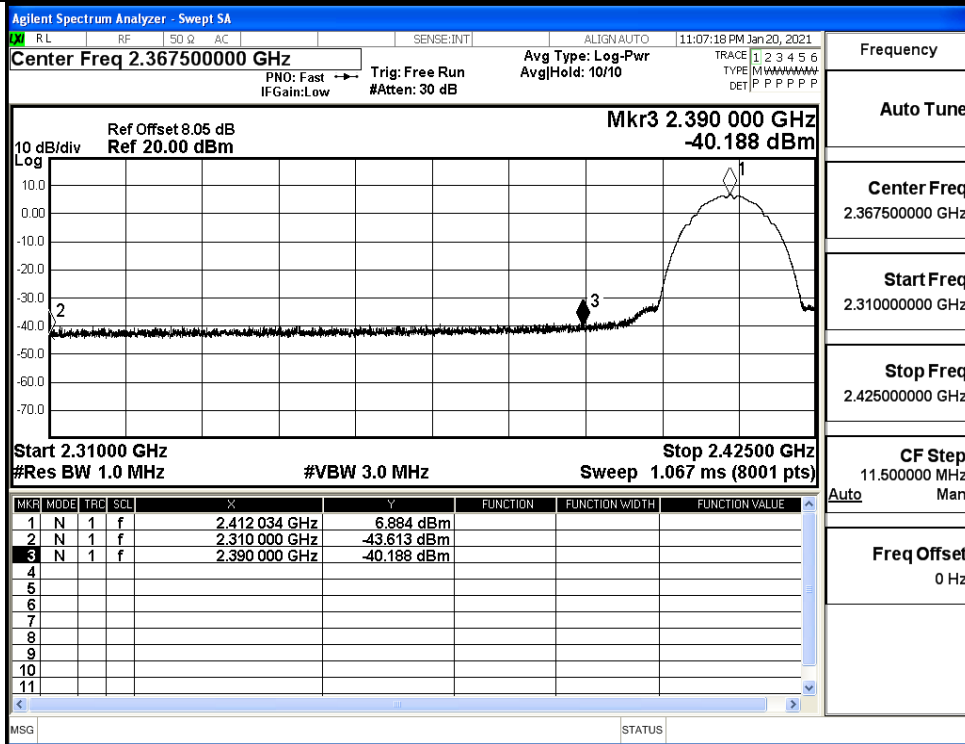


Restrict-band band-edge measurements_11B_2412_Ant1_AV

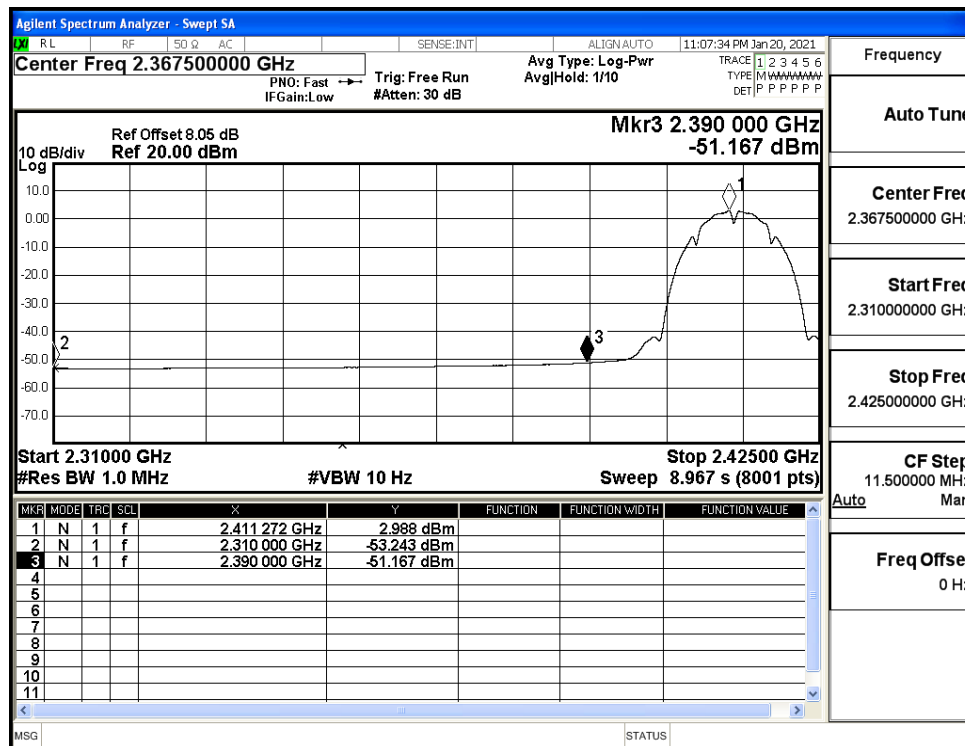


Restrict-band band-edge measurements_11B_2462_Ant1_PEAK

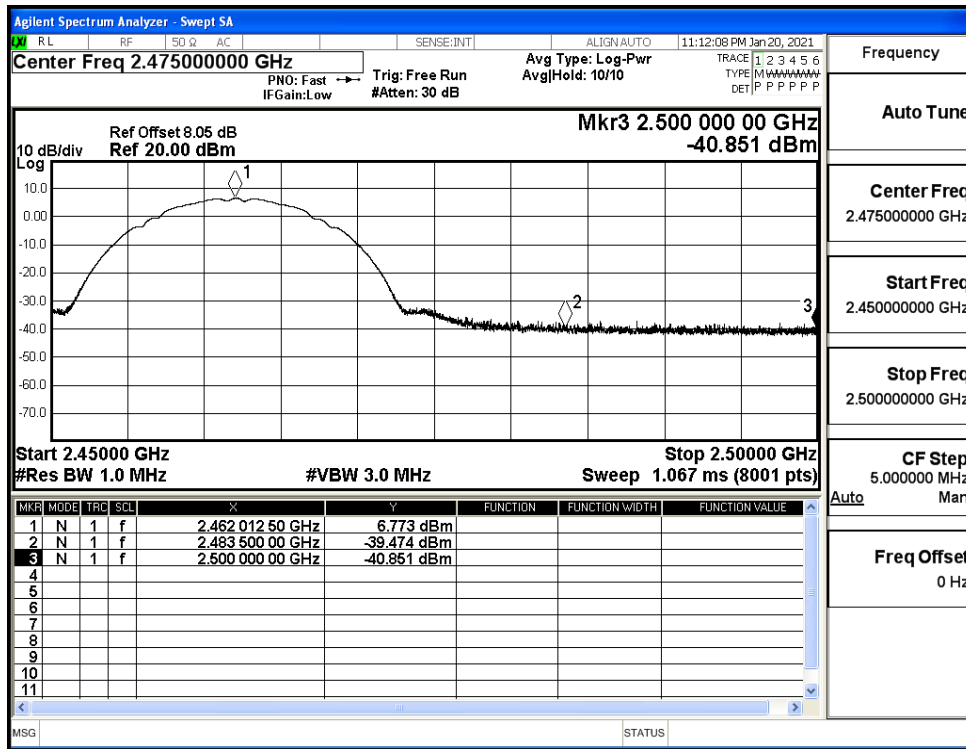


Restrict-band band-edge measurements_11B_2462_Ant1_AV

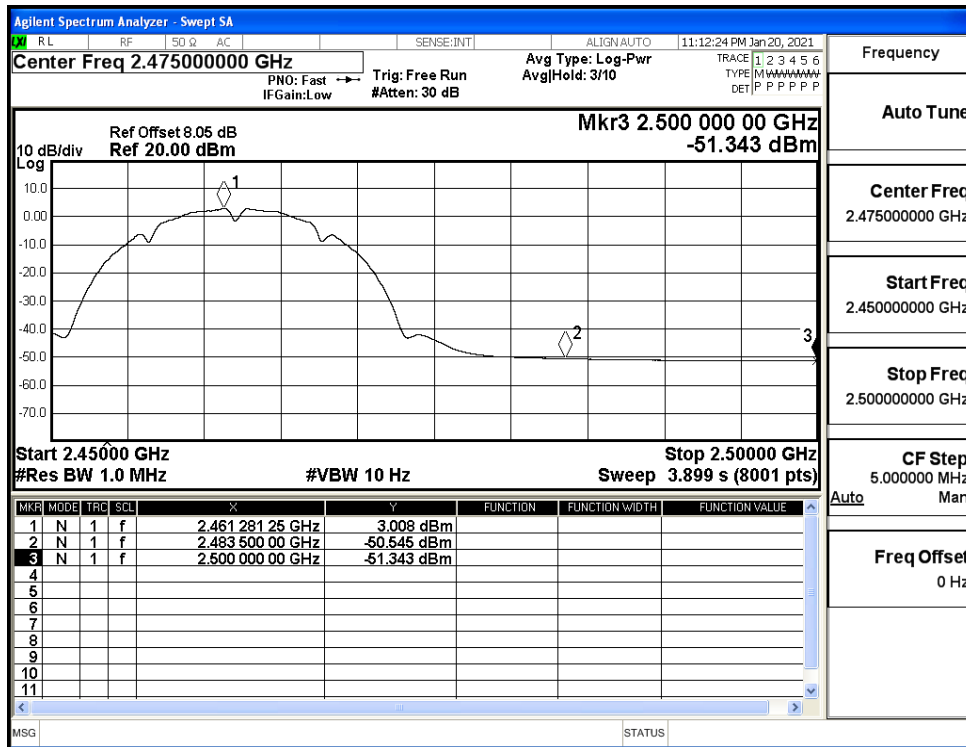


Restrict-band band-edge measurements_11G_2412_Ant1_PEAK

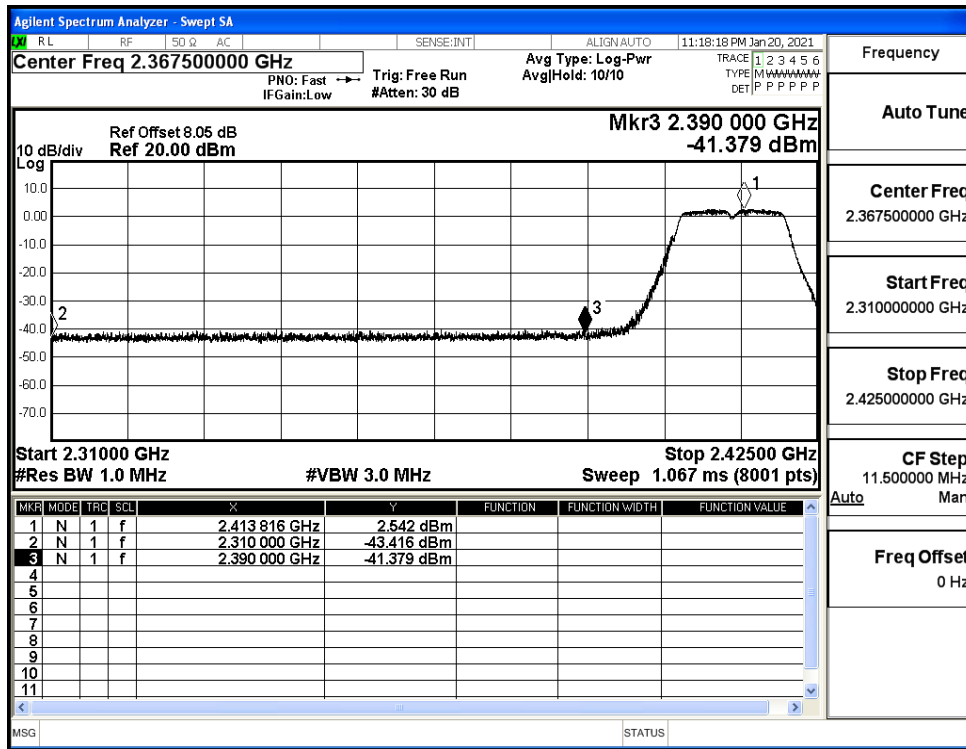


Restrict-band band-edge measurements_11G_2412_Ant1_AV

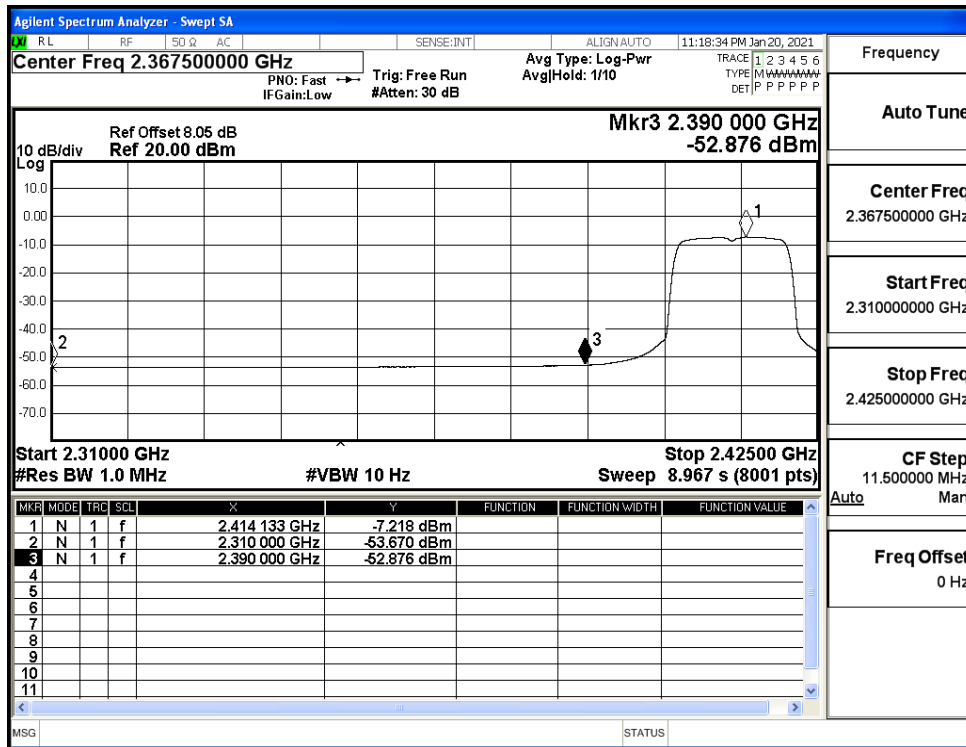


Restrict-band band-edge measurements_11G_2462_Ant1_PEAK

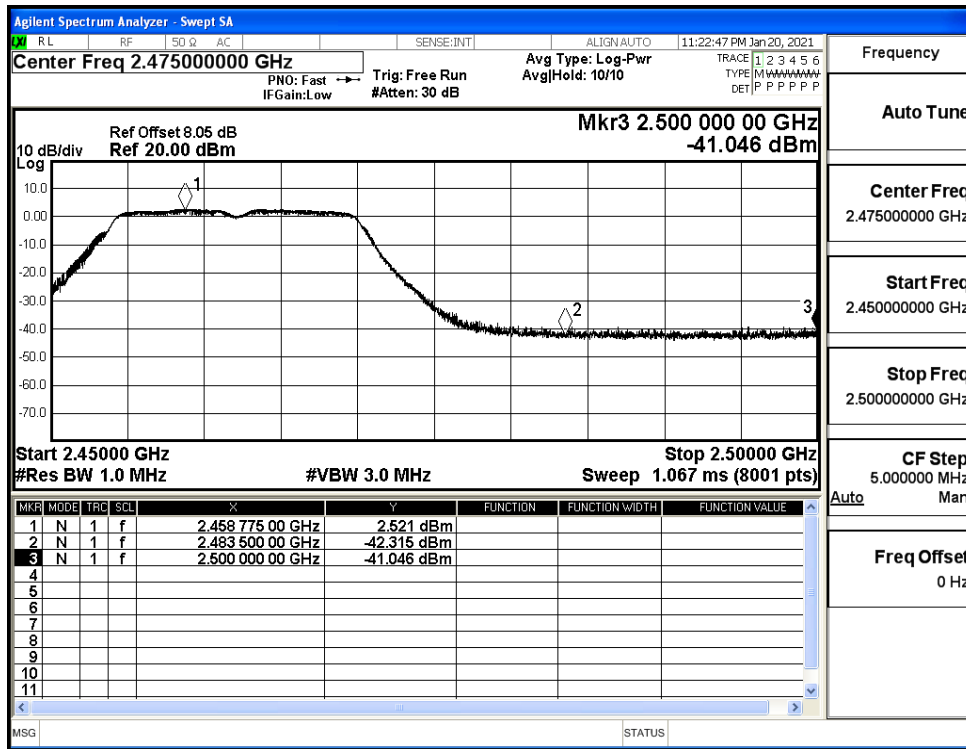


Restrict-band band-edge measurements_11G_2462_Ant1_AV

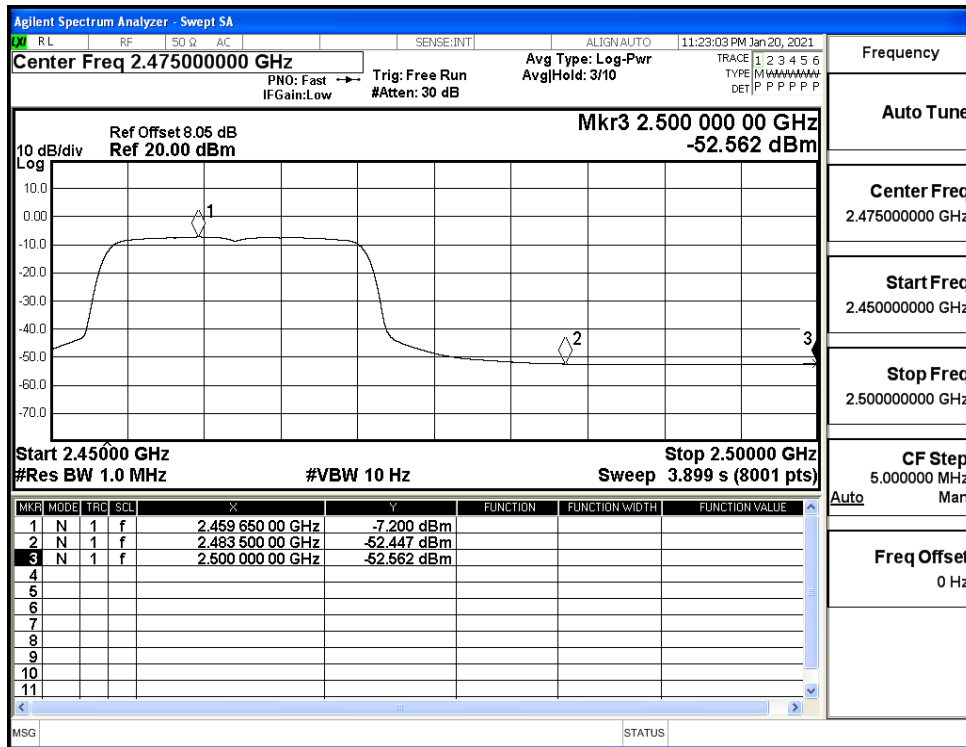


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_PEAK

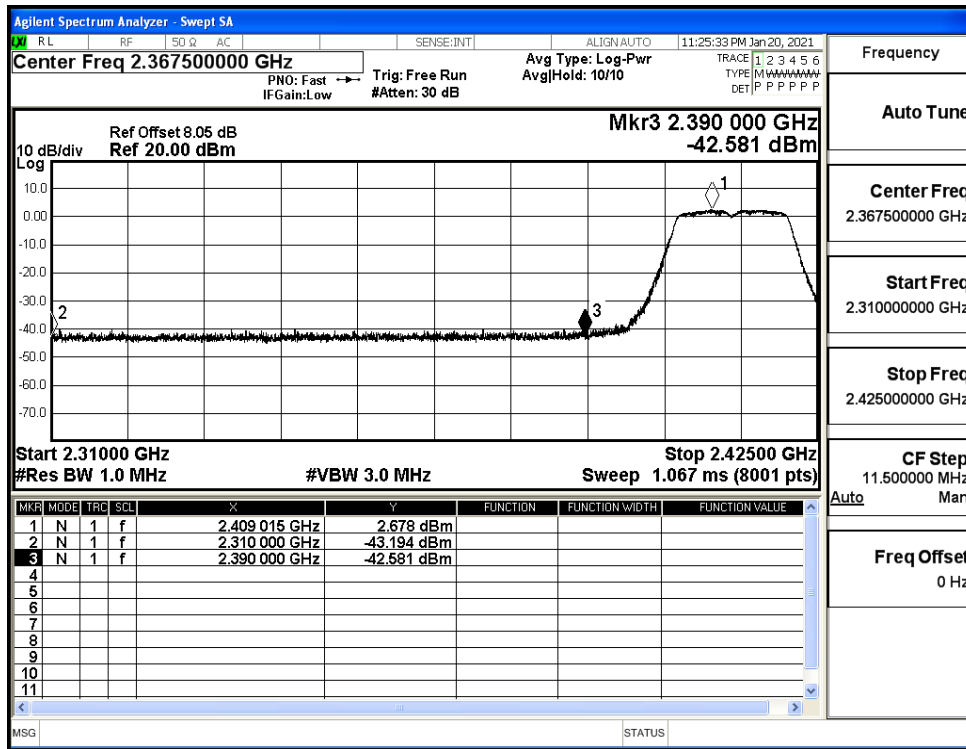


Restrict-band band-edge measurements_11N20SISO_2412_Ant1_AV

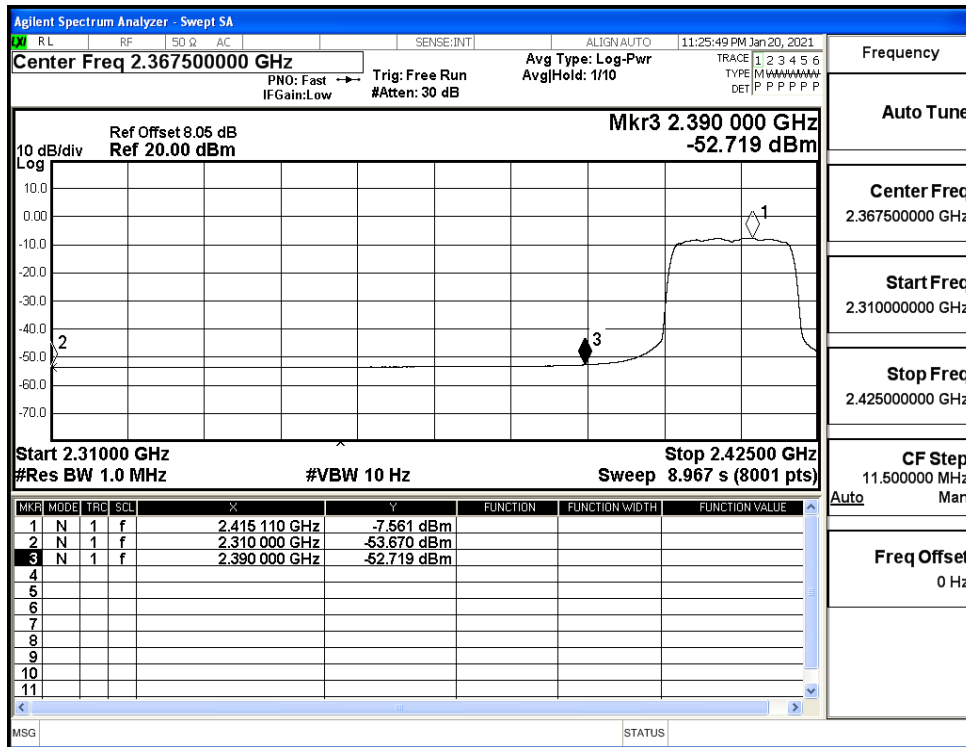


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_PEAK

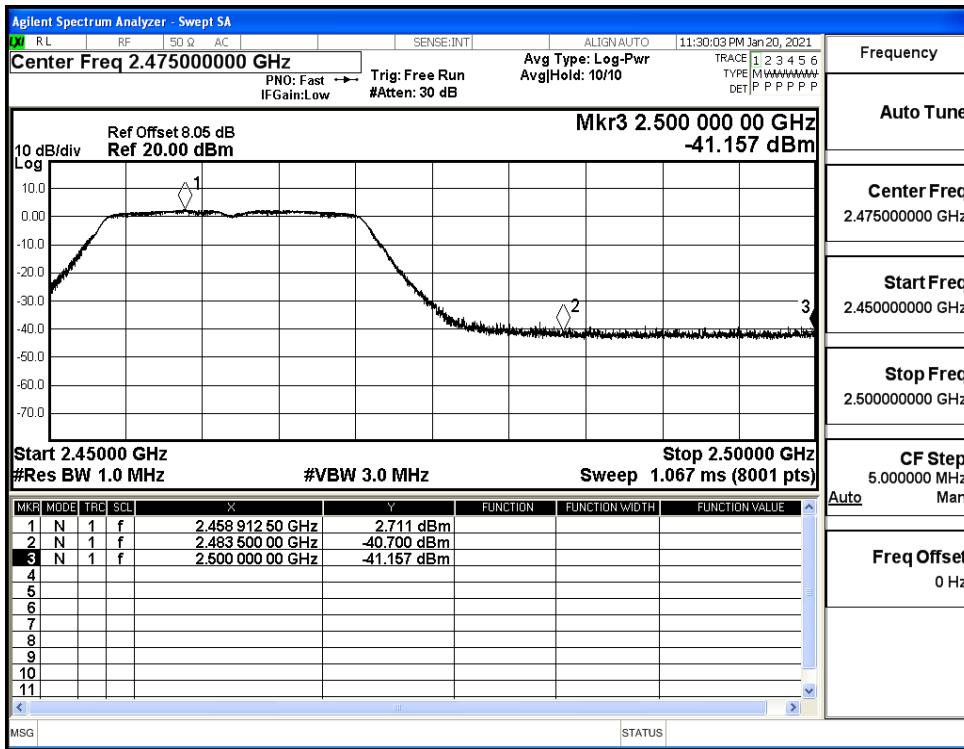


Restrict-band band-edge measurements_11N20SISO_2462_Ant1_AV

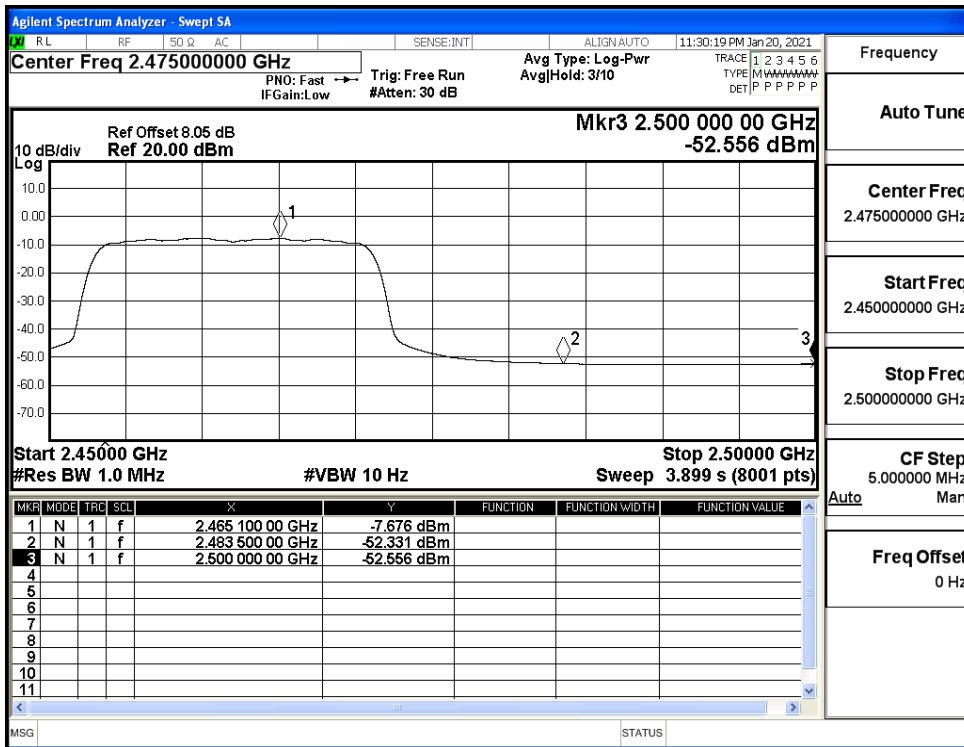


Restrict-band band-edge measurements_11N40SISO_2422_Ant1_PEAK

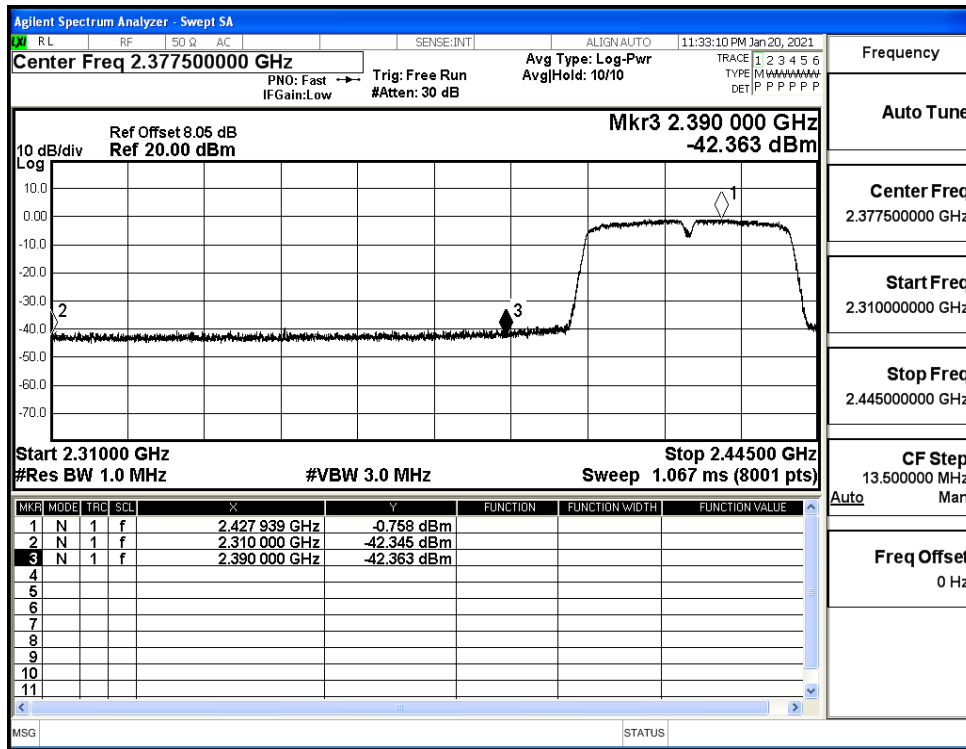

Restrict-band band-edge measurements_11N40SISO_2422_Ant1_AV

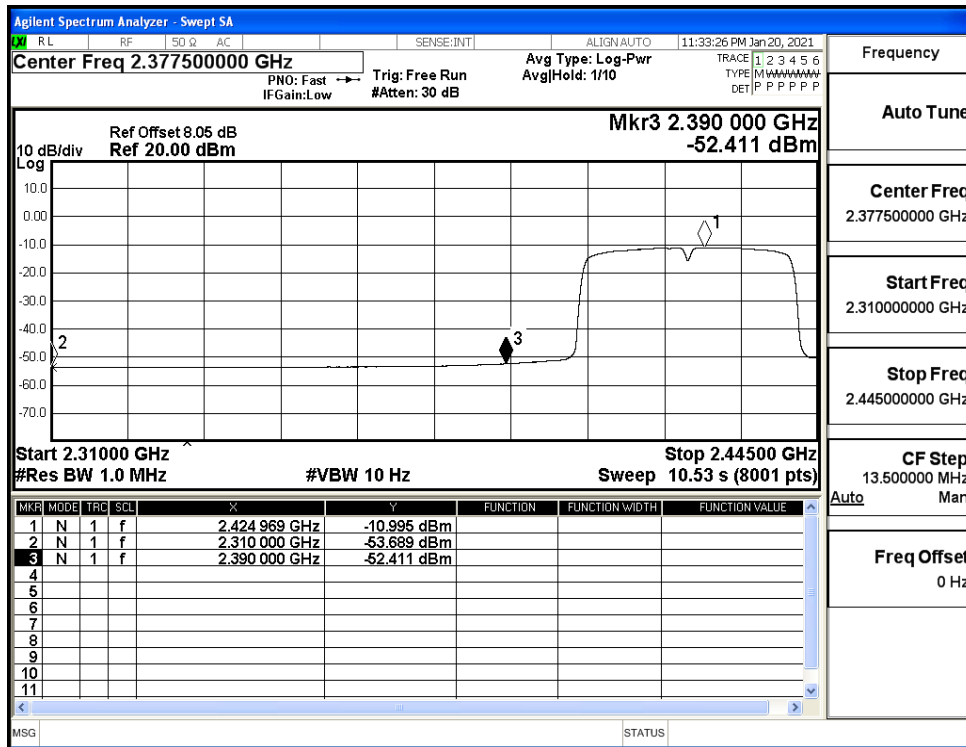

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_PEAK

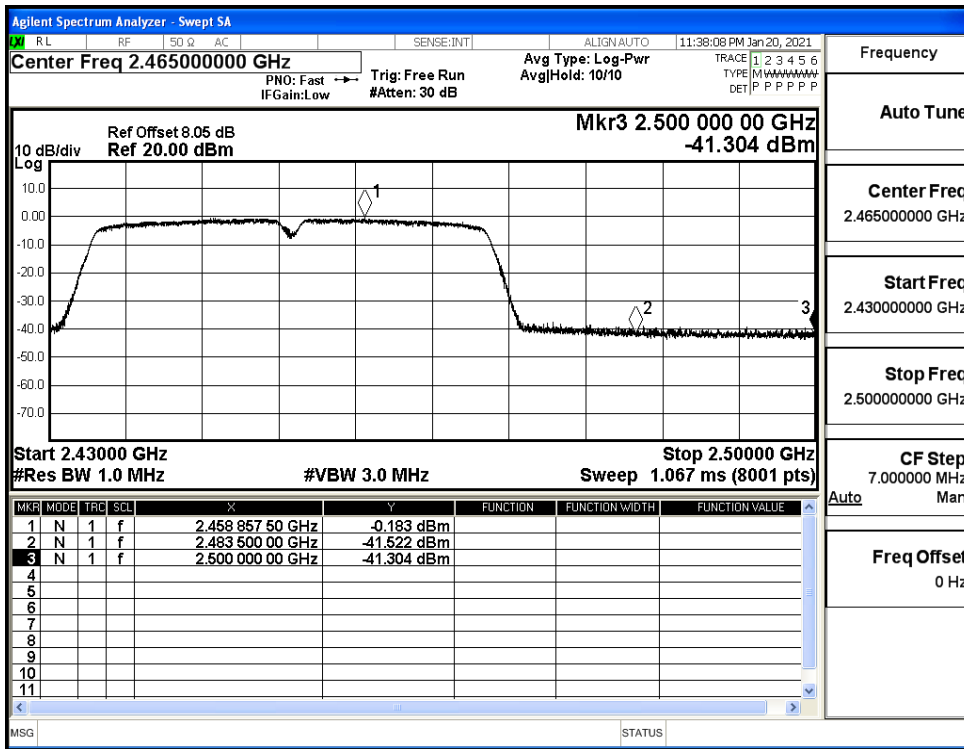

Restrict-band band-edge measurements_11N40SISO_2452_Ant1_AV

