

DFS Test Report

Applicant : Plume Design, Inc.
 Product Name : SuperPod with WiFi 6E
 Trade Name : Plume Design, Inc.
 Model Number : M1A
 Applicable Standard : FCC 47 CFR PART 15 SUBPART E
 ANSI C63.10:2013
 Received Date : Dec. 12, 2022
 Test Period : Feb. 09 ~ Feb. 21, 2023
 Issued Date : Jan. 11, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
 No. 140-1, Changan Street, Bade District,
 Taoyuan City 334025, Taiwan (R.O.C.)
 Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
 Frequency Range : 9 kHz to 40 GHz
 Test Firm Registration Number: 226252 (Bade test site)
 Test Firm Registration Number: 191812 (Wugu test site)

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Version	Issued Date	Revisions	Revised By
00	Jan. 11, 2024	Initial Issue	Emma Chao

Verification of Compliance

Applicant : Plume Design, Inc.
 Product Name : SuperPod with WiFi 6E
 Trade Name : Plume Design, Inc.
 Model Number : M1A
 FCC ID : 2AG7G-M1A
 Applicable Standard : FCC 47 CFR PART 15 SUBPART E
 ANSI C63.10:2013
 Test Result : Complied
 Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
 No. 140-1, Changan Street, Bade District,
 Taoyuan City 334025, Taiwan (R.O.C.)
 Tel : +886-3-2710188 / Fax : +886-3-2710190
 Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology.....	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	10
3.3.	Test Instruments	10
4	Dynamic Frequency Selection	11
4.1.	Limits	11
4.2.	Test and Measurement System	15
5	Test Results	17
5.1.	Radar Waveforms and Traffic	17
5.2.	Channel Loading	32
5.3.	Channel Availability Check Time.....	35
5.4.	Channel Move Time and Channel Closing Transmission Time.....	37
5.5.	Non-Occupancy Period	39
5.6.	U-NII Detection Bandwidth	40
5.7.	Statistical Performance check	43

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	Plume Design, Inc. 325 Lytton Ave., Palo Alto, CA 94301, United States			
Product Name	SuperPod with WiFi 6E			
Trade Name	Plume Design, Inc.			
Model Number	M1A			
FCC ID	2AG7G-M1A			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	802.11a / 802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 2-A	5260 – 5320	4
		U-NII Band 2-C	5500 – 5720	7
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 2-A	5270 – 5310	2
		U-NII Band 2-C	5510 – 5710	5
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 2-A	5290	1
U-NII Band 2-C		5530 – 5690	3	
Modulation Type	OFDM/OFDMA			
Antenna information	Antenna	Type	Max. Gain (dBi)	
	ANT-0 (Ant.1)	IFA Antenna	4.20	
	ANT-1 (Ant.2)		4.30	
	ANT-2 (Ant.3)		3.20	
ANT-3 (Ant.4)	3.10			
Antenna Delivery	802.11a / 802.11n HT 20 / HT 40 / 802.11ac VHT 20 / VHT 40 / VHT 80 / 802.11ax HE 20 / HE 40 / HE 80 : 4TX			
EUT Power Rating	100-240 V, 50-60 Hz, 0.6 A			

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600 ~ 5650 MHz)	<input checked="" type="checkbox"/> With 5600 ~ 5650 MHz	<input type="checkbox"/> Without 5600 ~ 5650 MHz
Beamforming Function	<input checked="" type="checkbox"/> With Beamforming	<input type="checkbox"/> Without Beamforming
Equipment Type	<input type="checkbox"/> Outdoor access point (point-to-point)	
	<input type="checkbox"/> Outdoor access point (point-to-multipoint)	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Client devices	
Operating mode	<input checked="" type="checkbox"/> Master	
	<input type="checkbox"/> Client with radar detection	
	<input type="checkbox"/> Client without radar detection	
	<input type="checkbox"/> Ad-Hoc	
	<input checked="" type="checkbox"/> Bridge	
	<input type="checkbox"/> MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
 Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80

802.11ax HE20 Continuous TX mode:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5500 MHz

802.11ax HE40 Continuous TX mode:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5510 MHz

802.11ax HE80 Continuous TX mode:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5530 MHz

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Feb. 09 ~ Feb. 21, 2023

Testing Engineer: An Wu

Test Site		RF01-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~44 GHz)	R&S	FSV3044	101255	Nov. 30, 2022	1 year
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMM100A	101740	Feb. 10, 2022 Feb. 10, 2023	1 year
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMM100A	101740	Feb. 10, 2022 Feb. 10, 2023	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues	
Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms					
Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\{ \begin{array}{l} \left(\frac{1}{360} \right) \cdot \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A		
Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066


Table 6 – Long Pulse Radar Test Signal							
Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30

Table 7 – Frequency Hopping Radar Test Signal							
Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

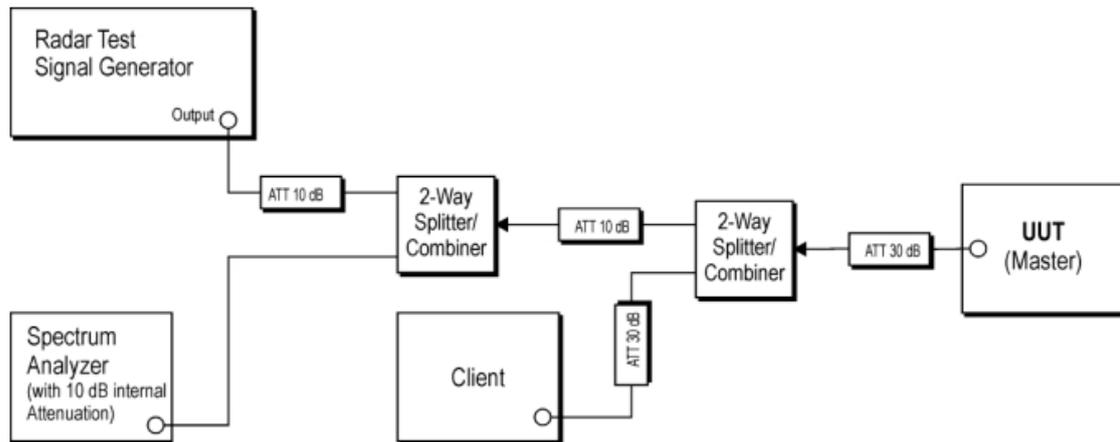

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	ID
1 SuperPod with Wifi 6E	Plume Design, Inc.	M1A	2AG7G-M1A

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.


4.2.4. Adjustment of Displayed Traffic Level


A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results


5.1. Radar Waveforms and Traffic

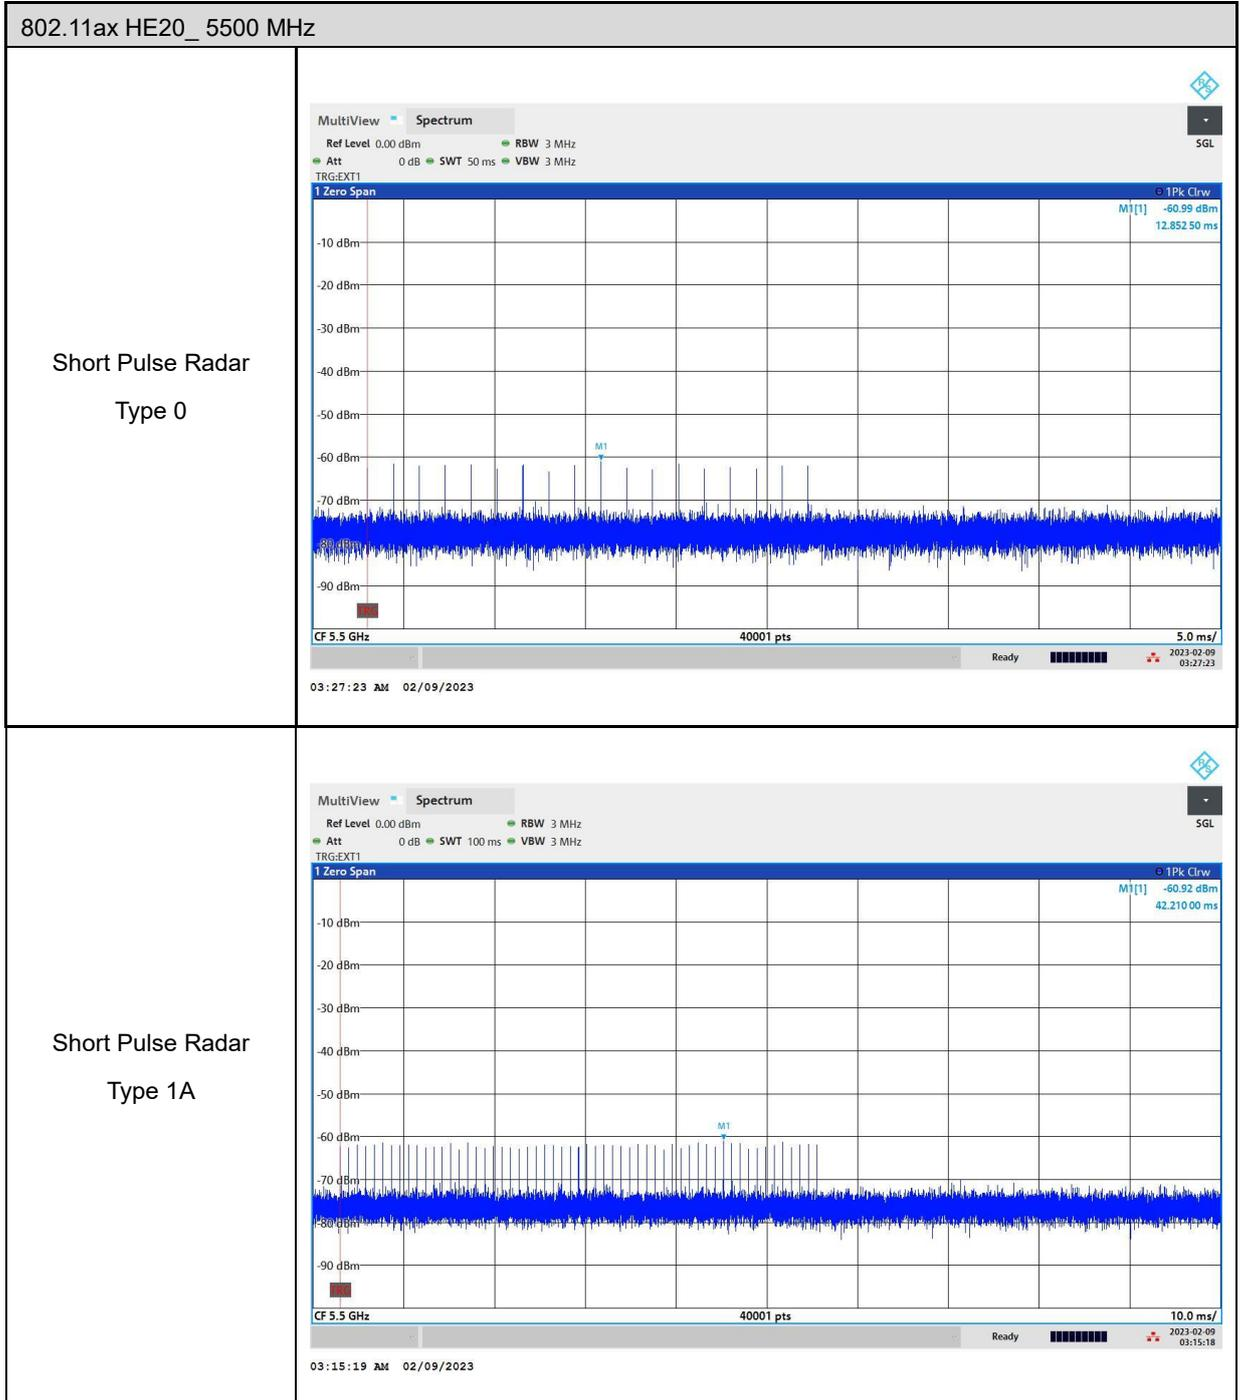


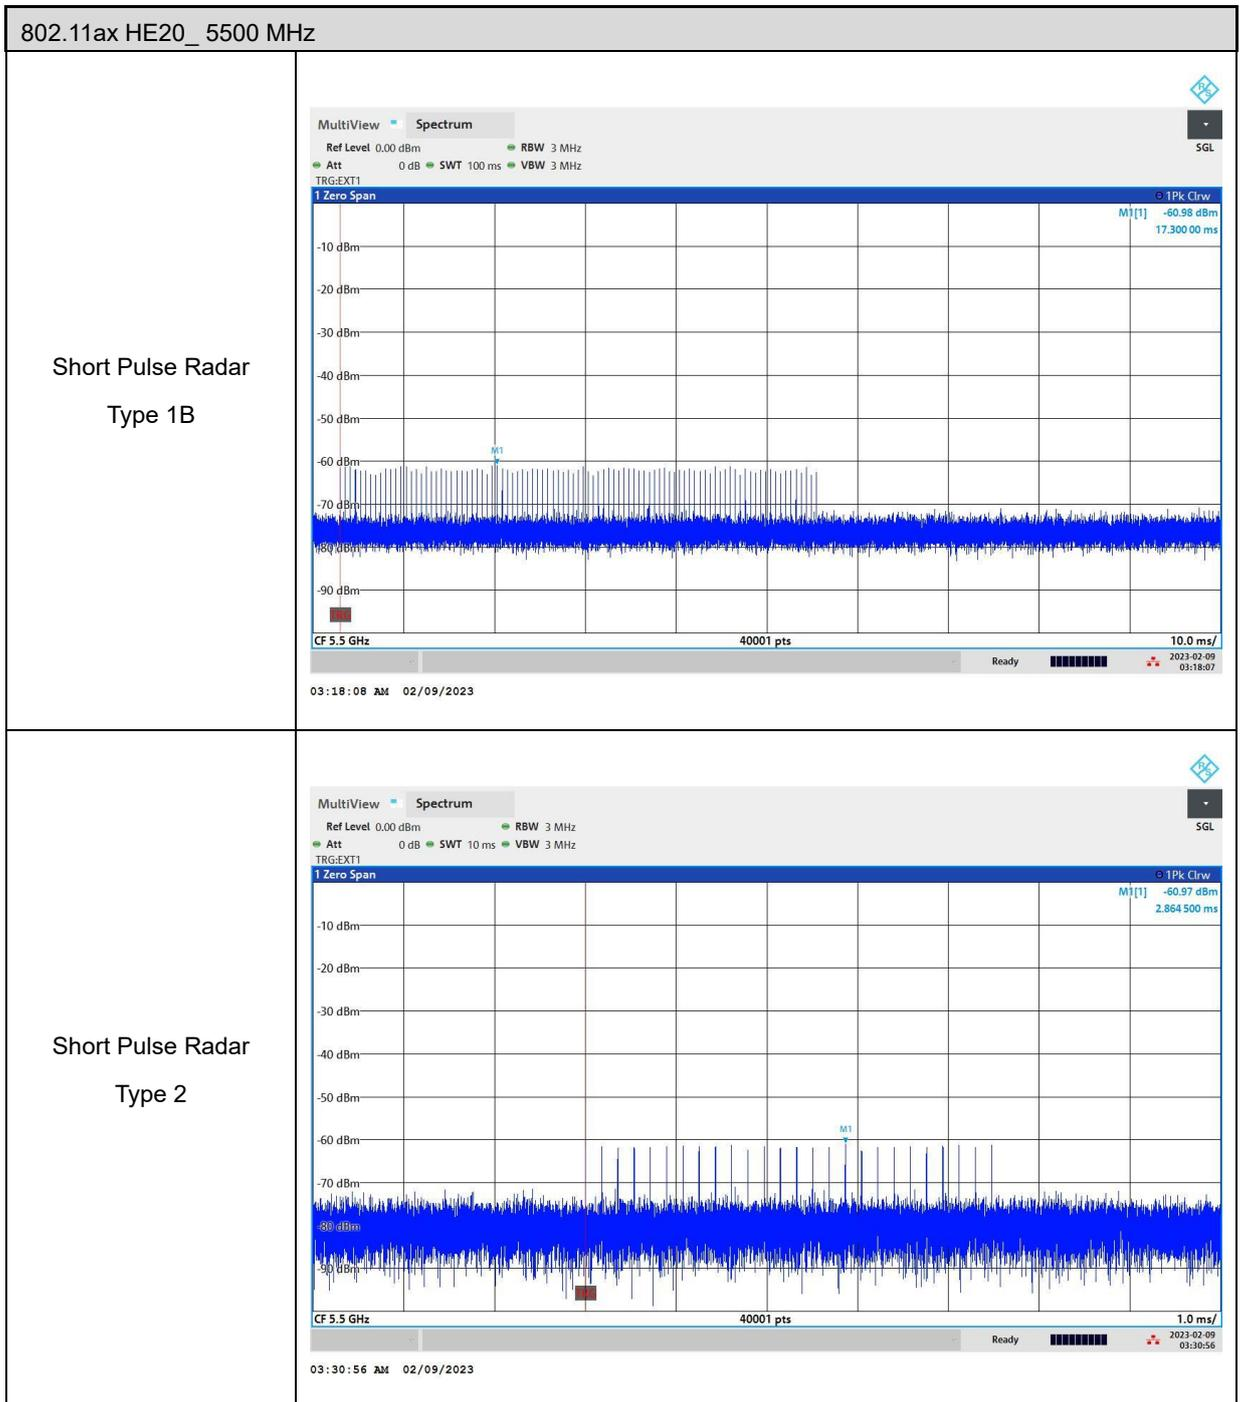


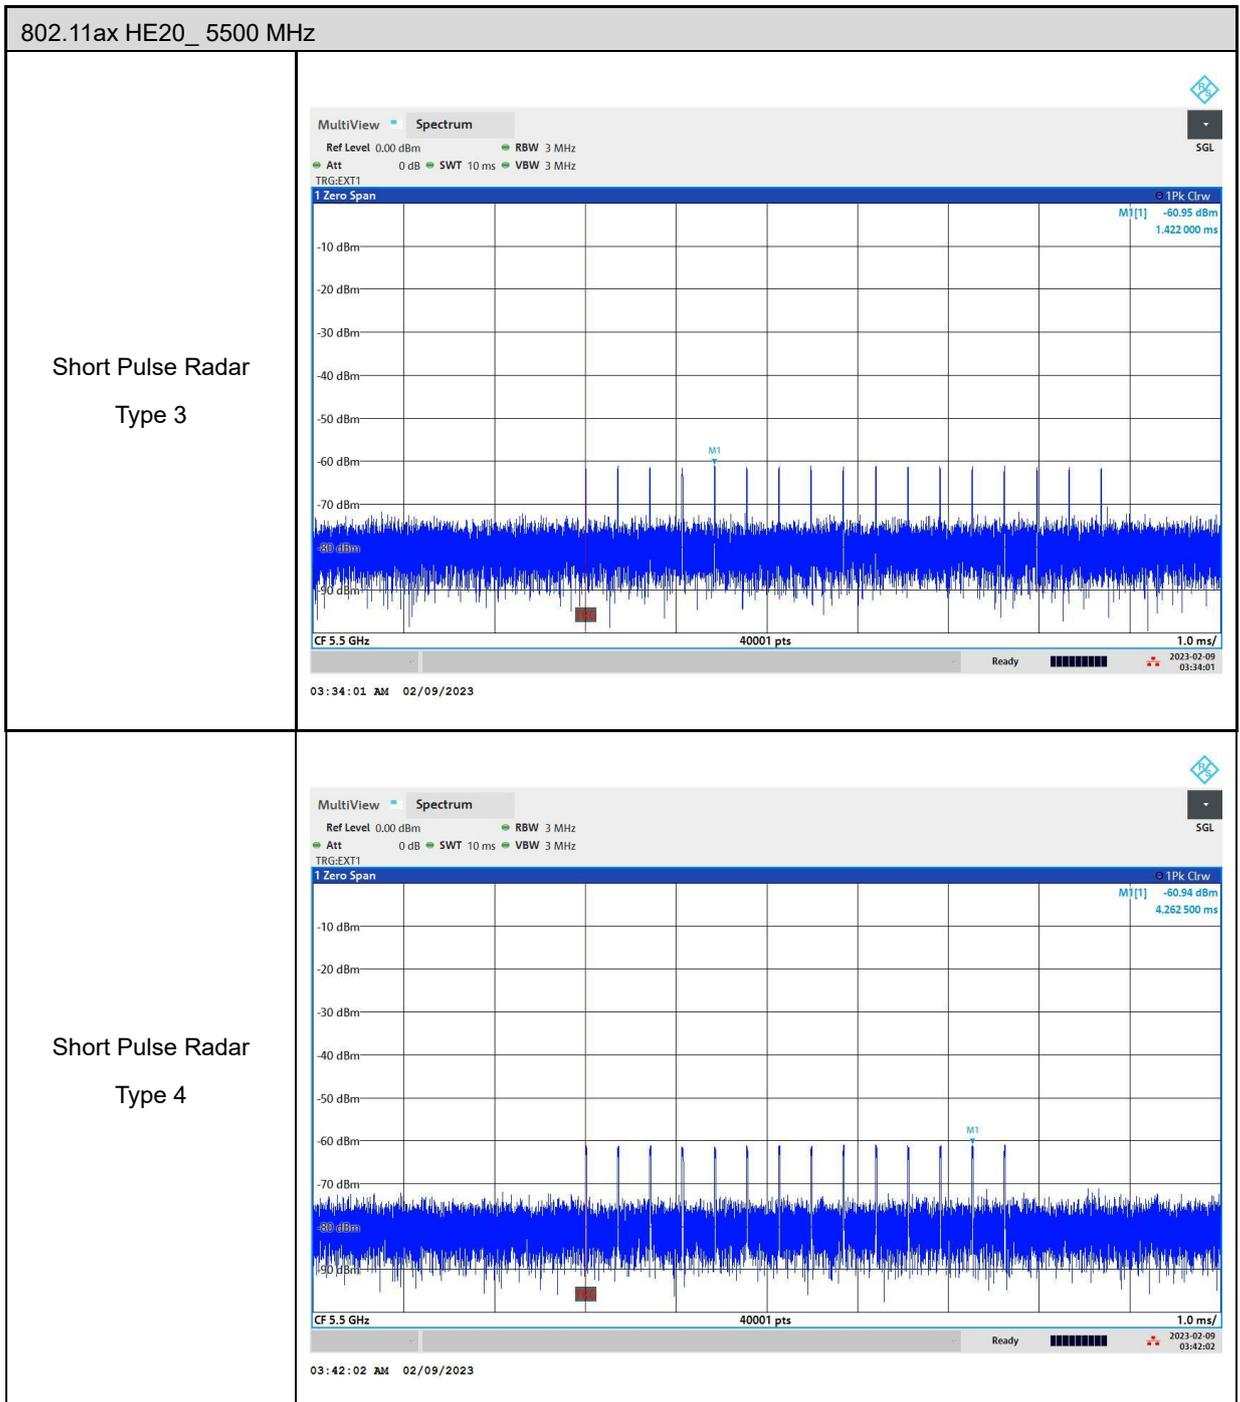


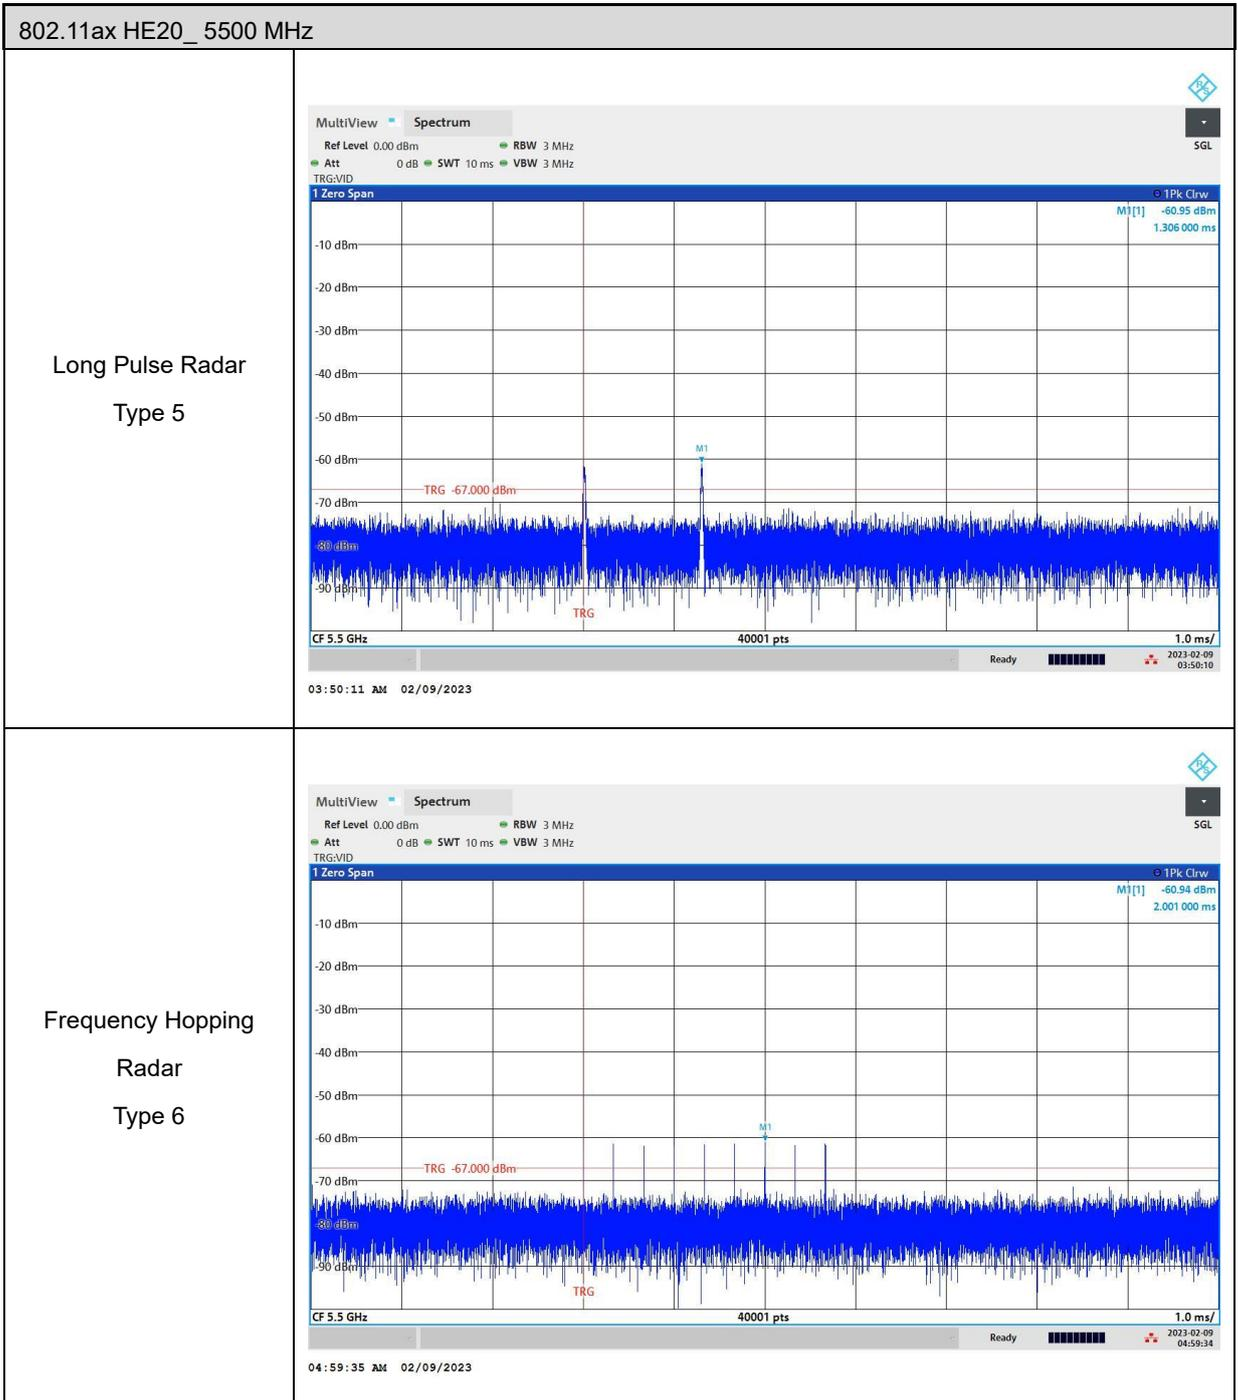


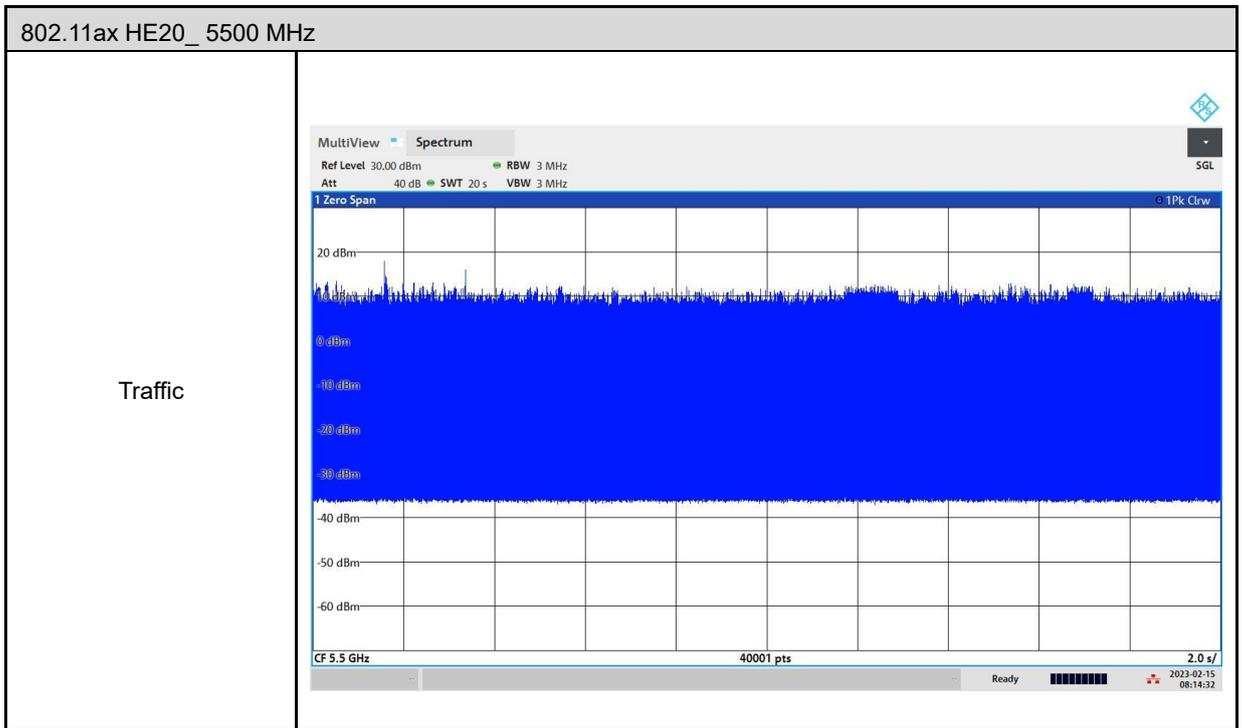


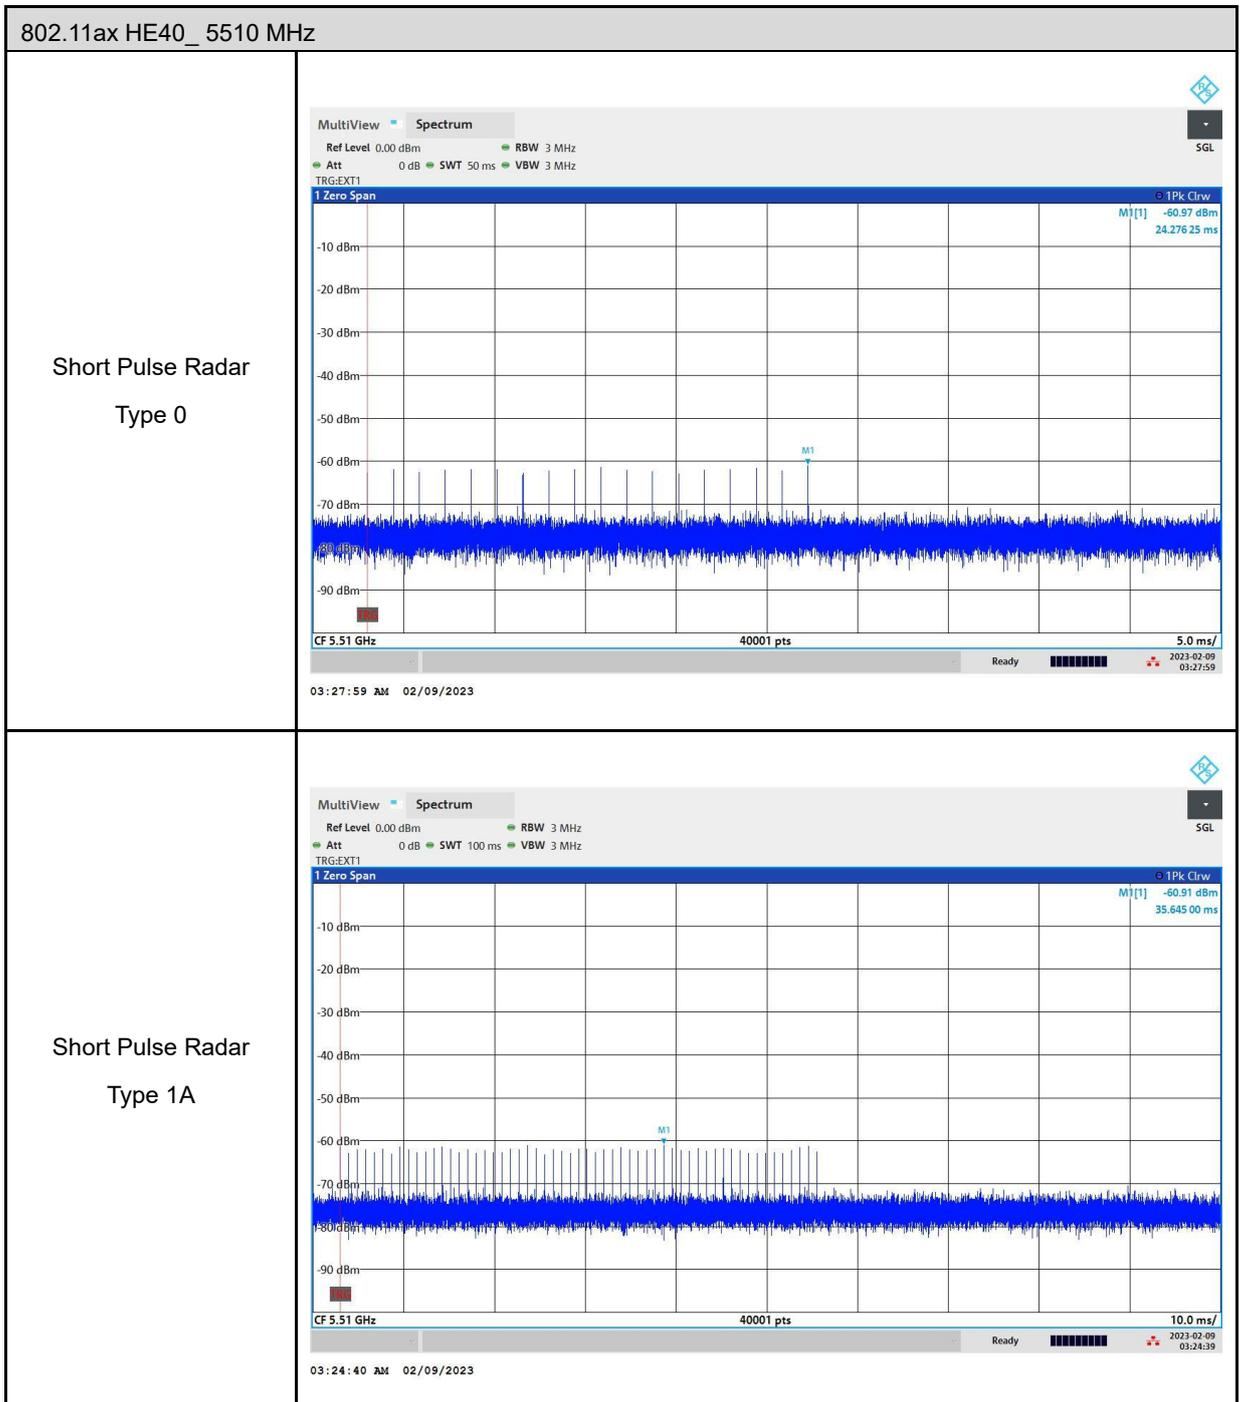


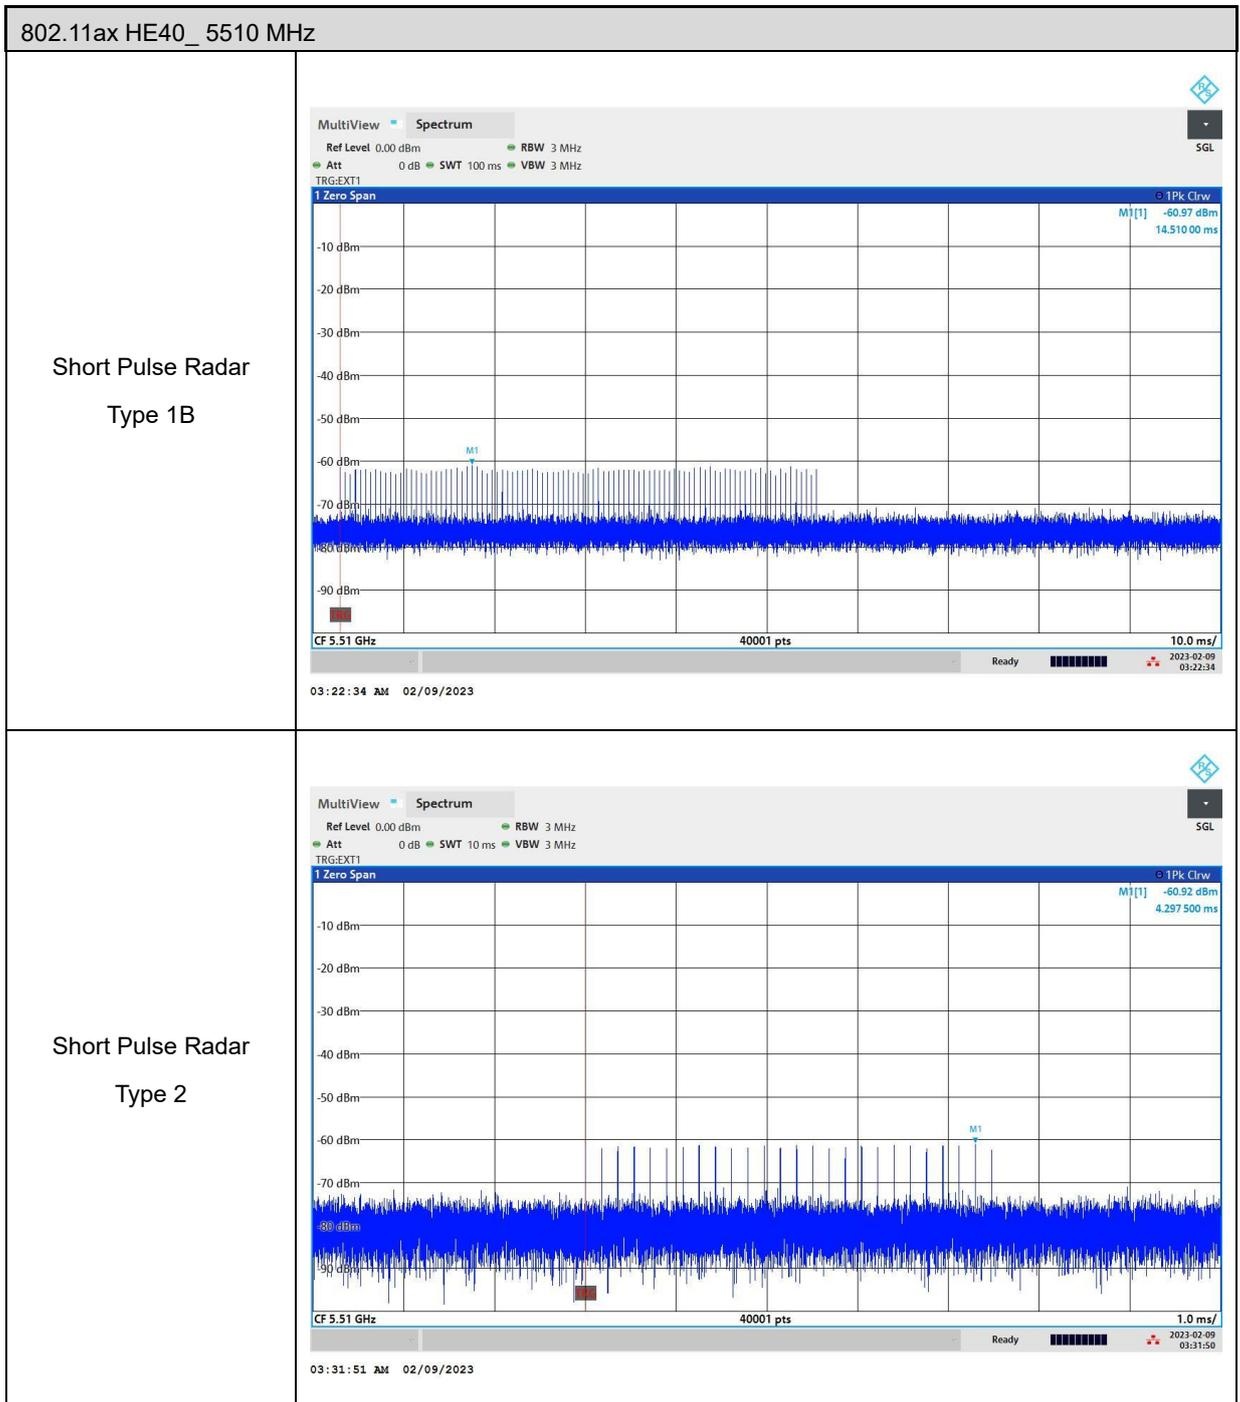


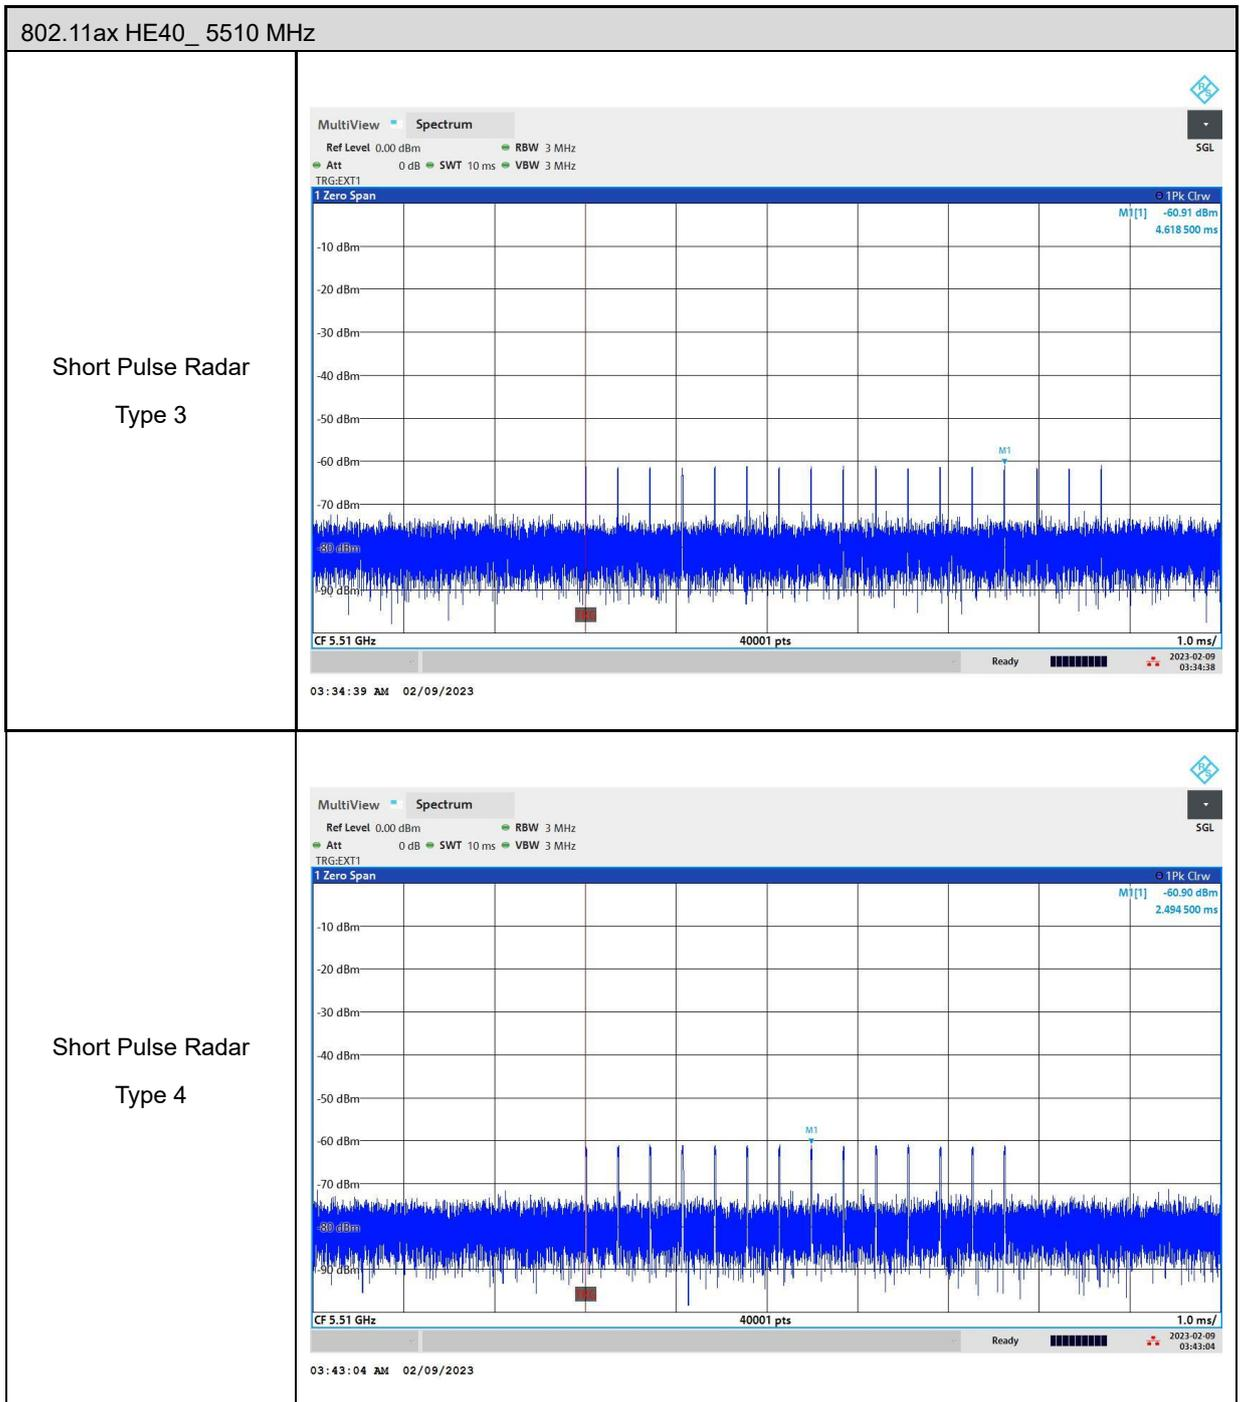


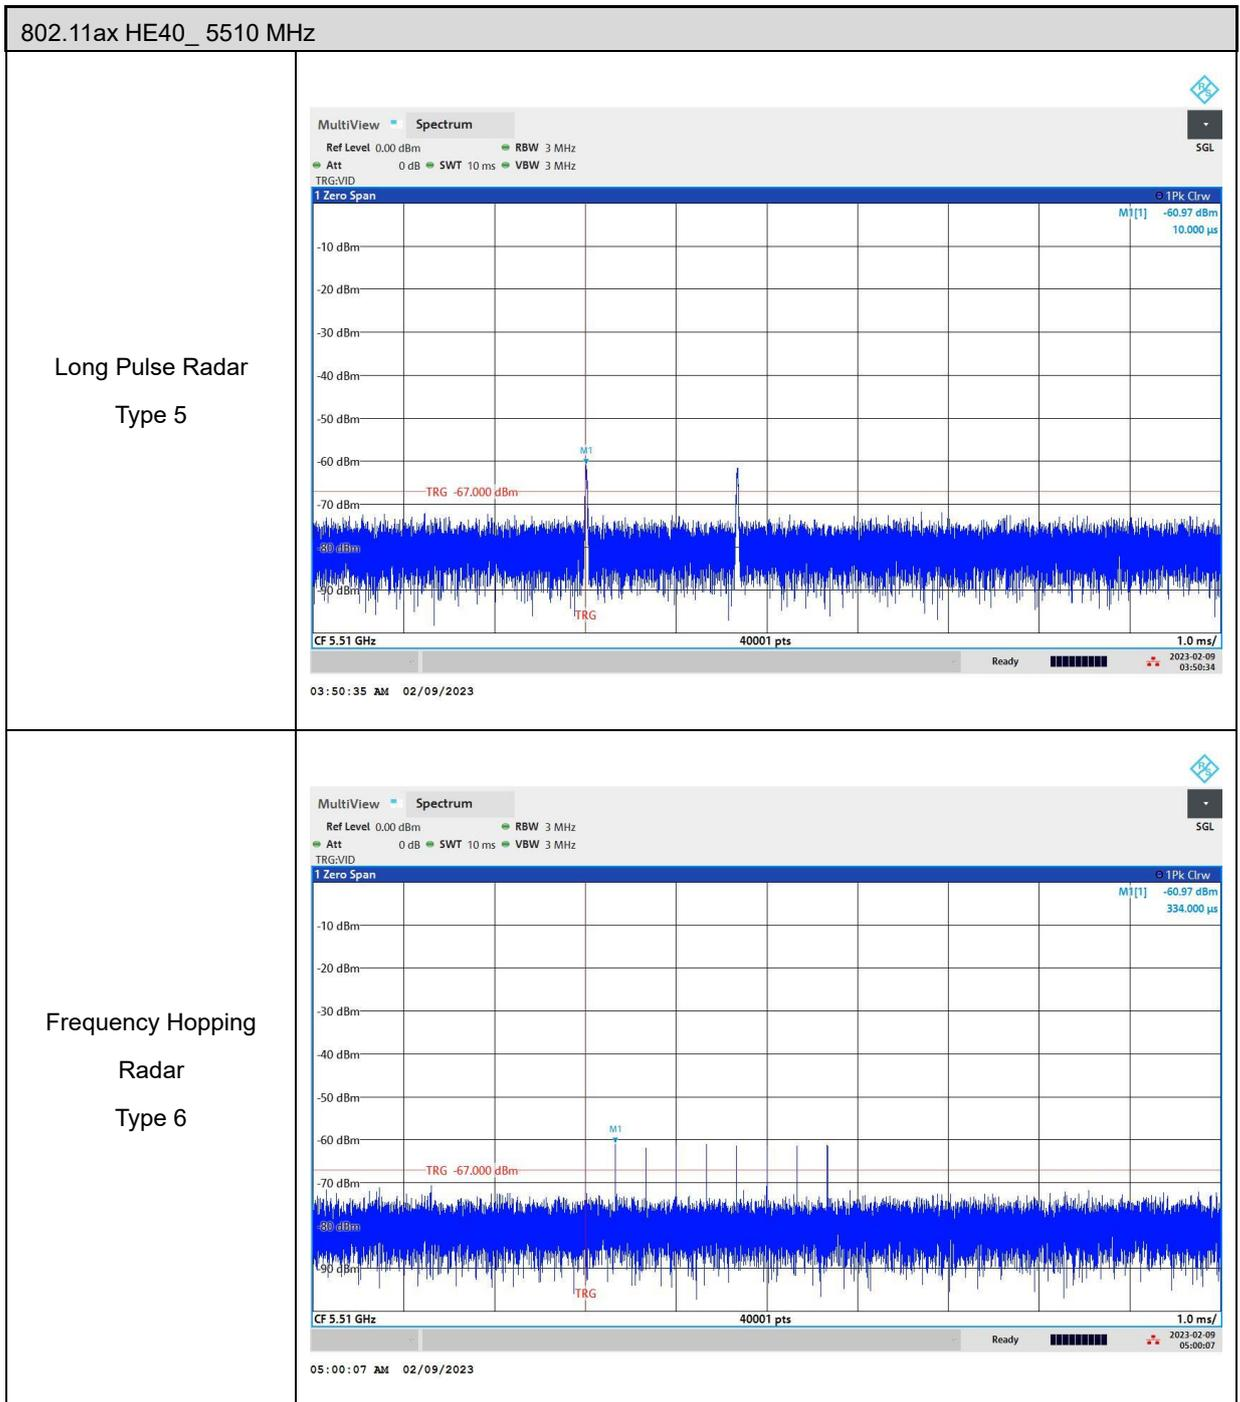


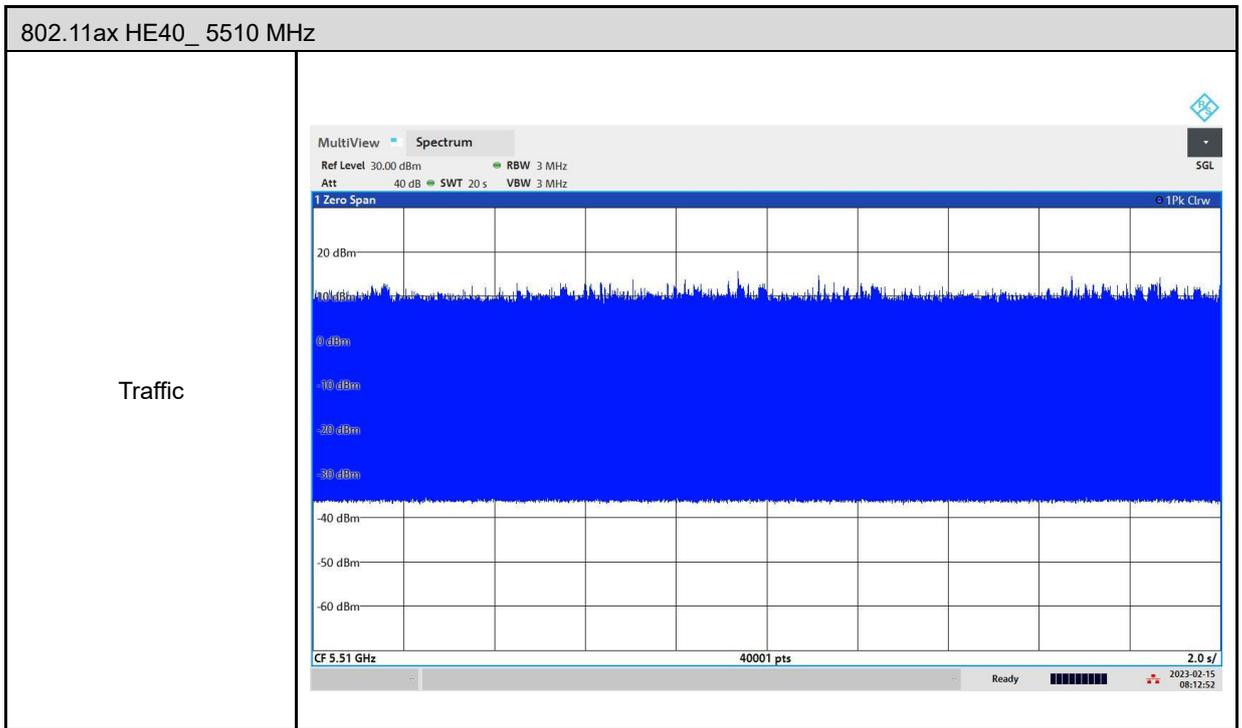


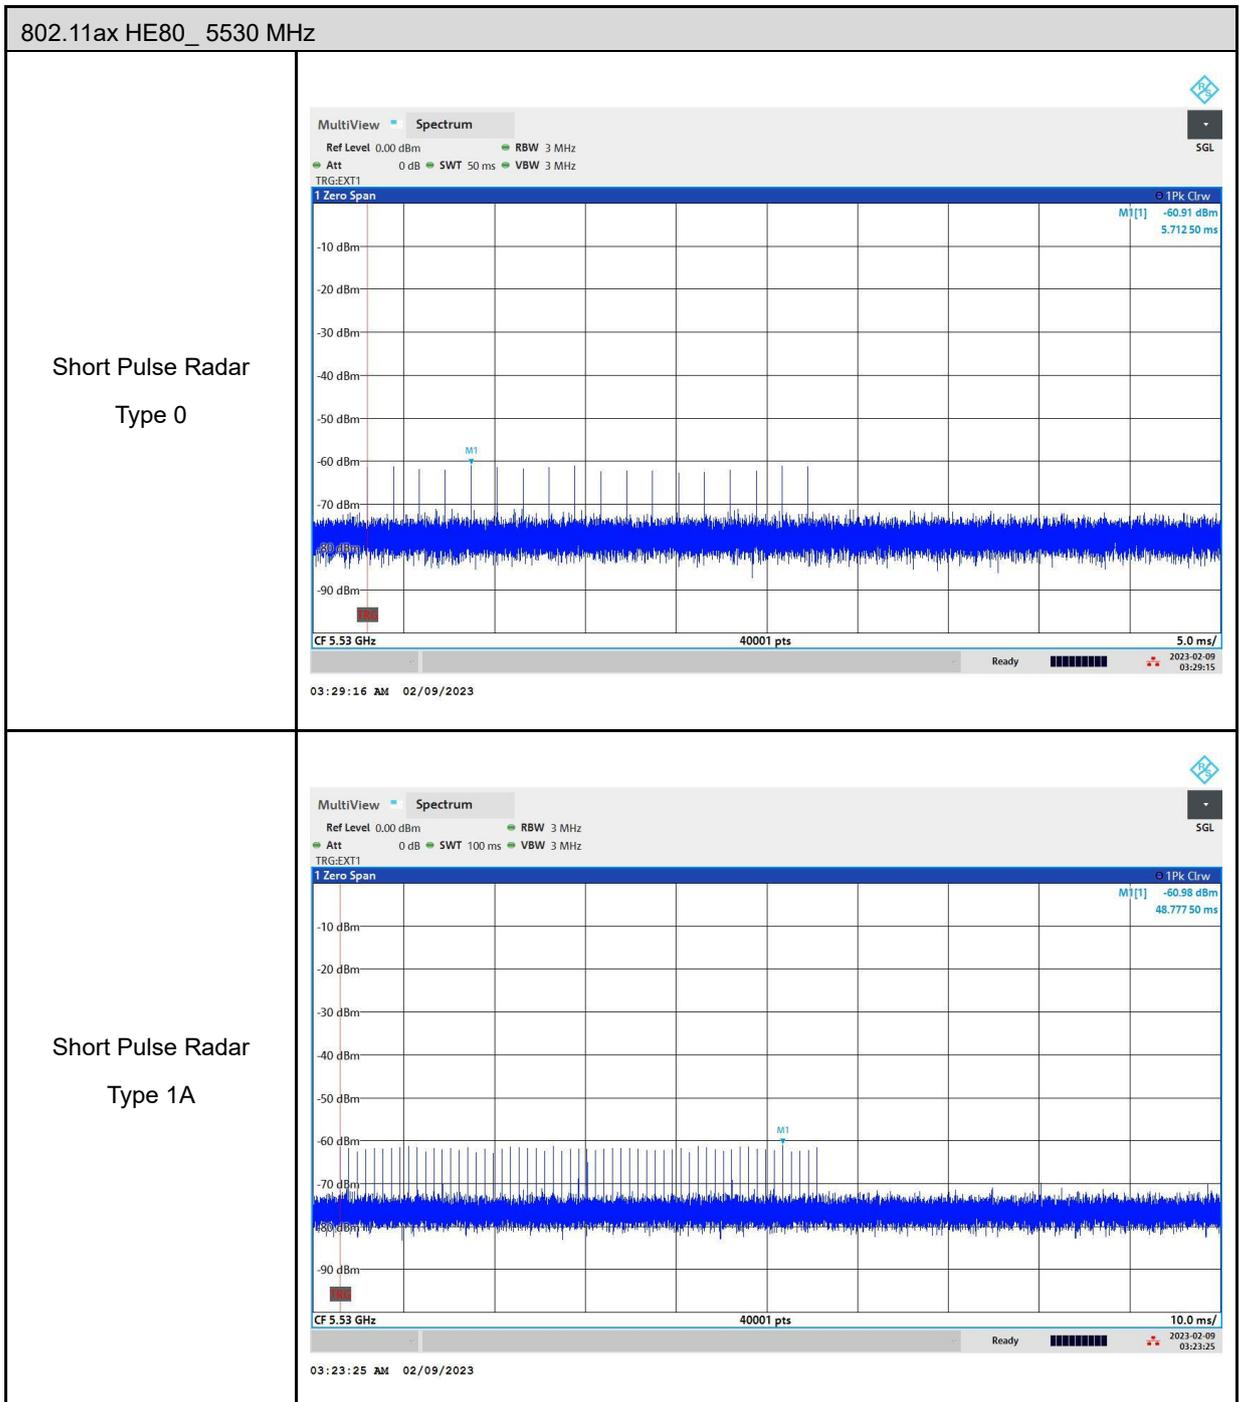

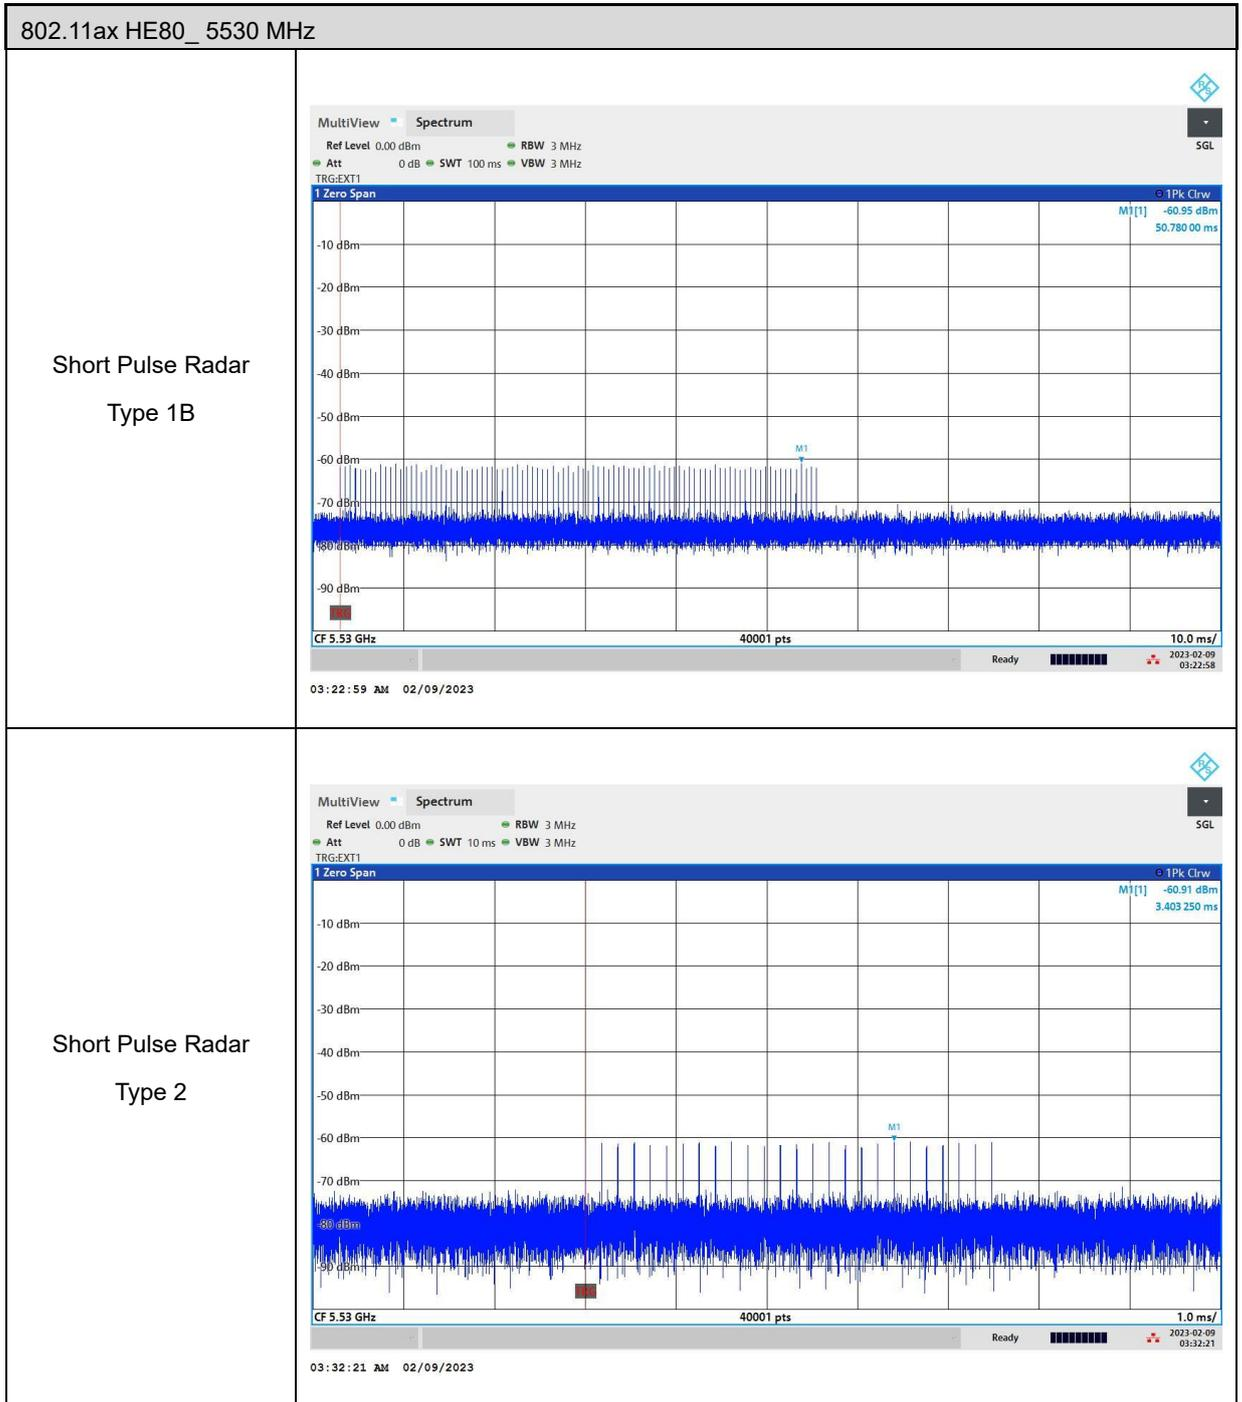

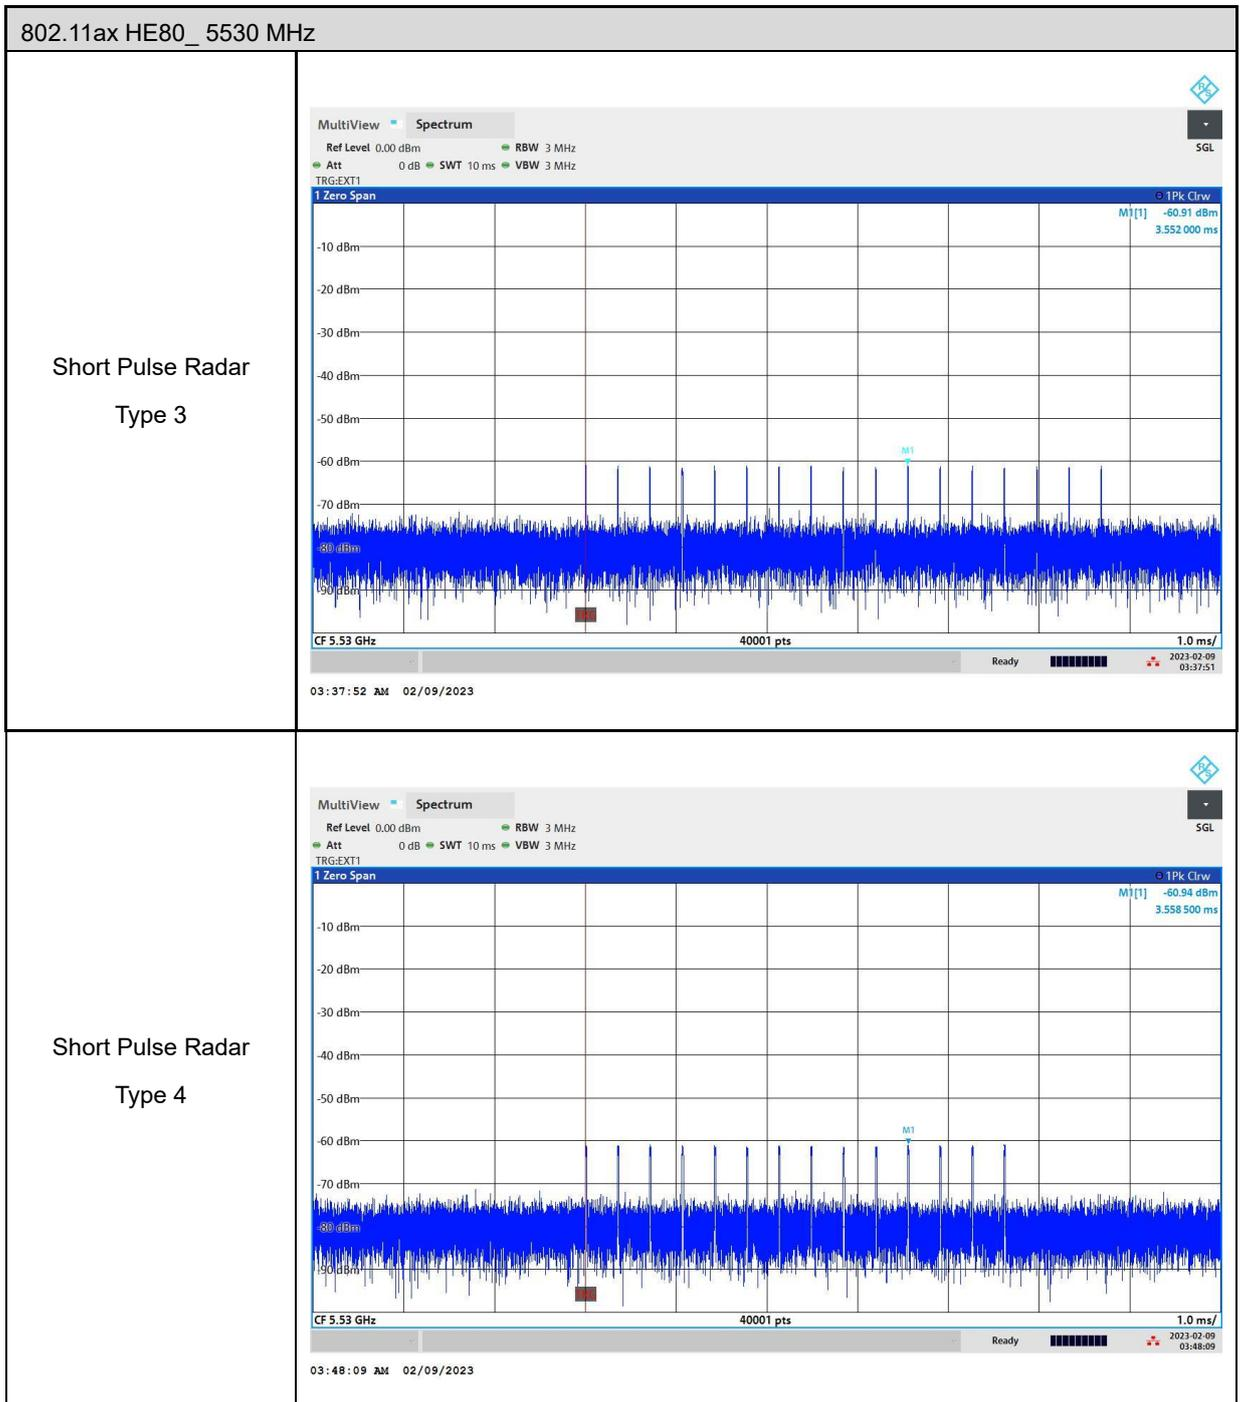


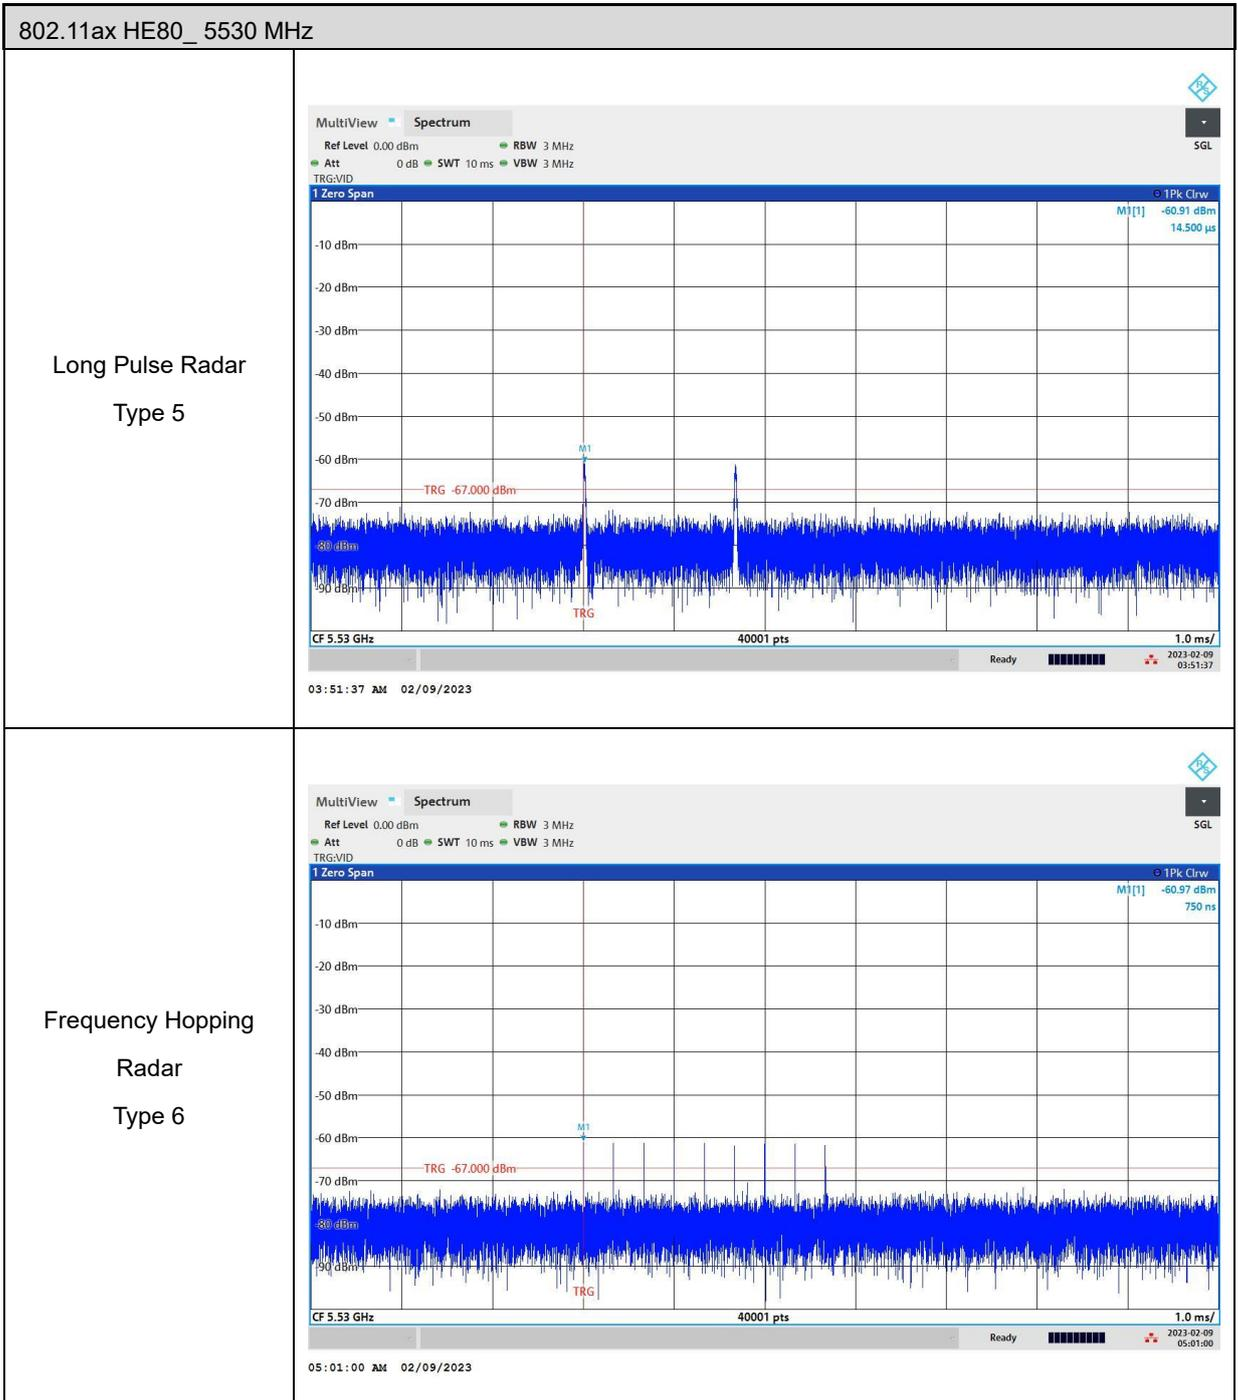


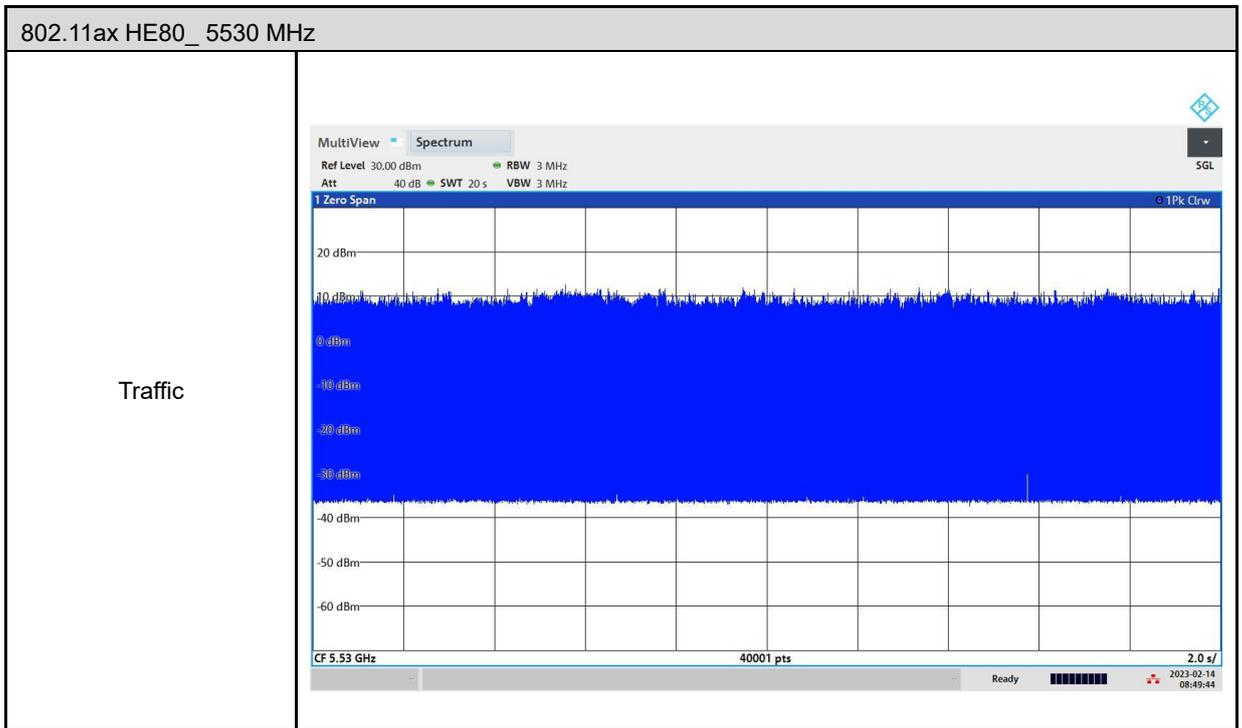

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

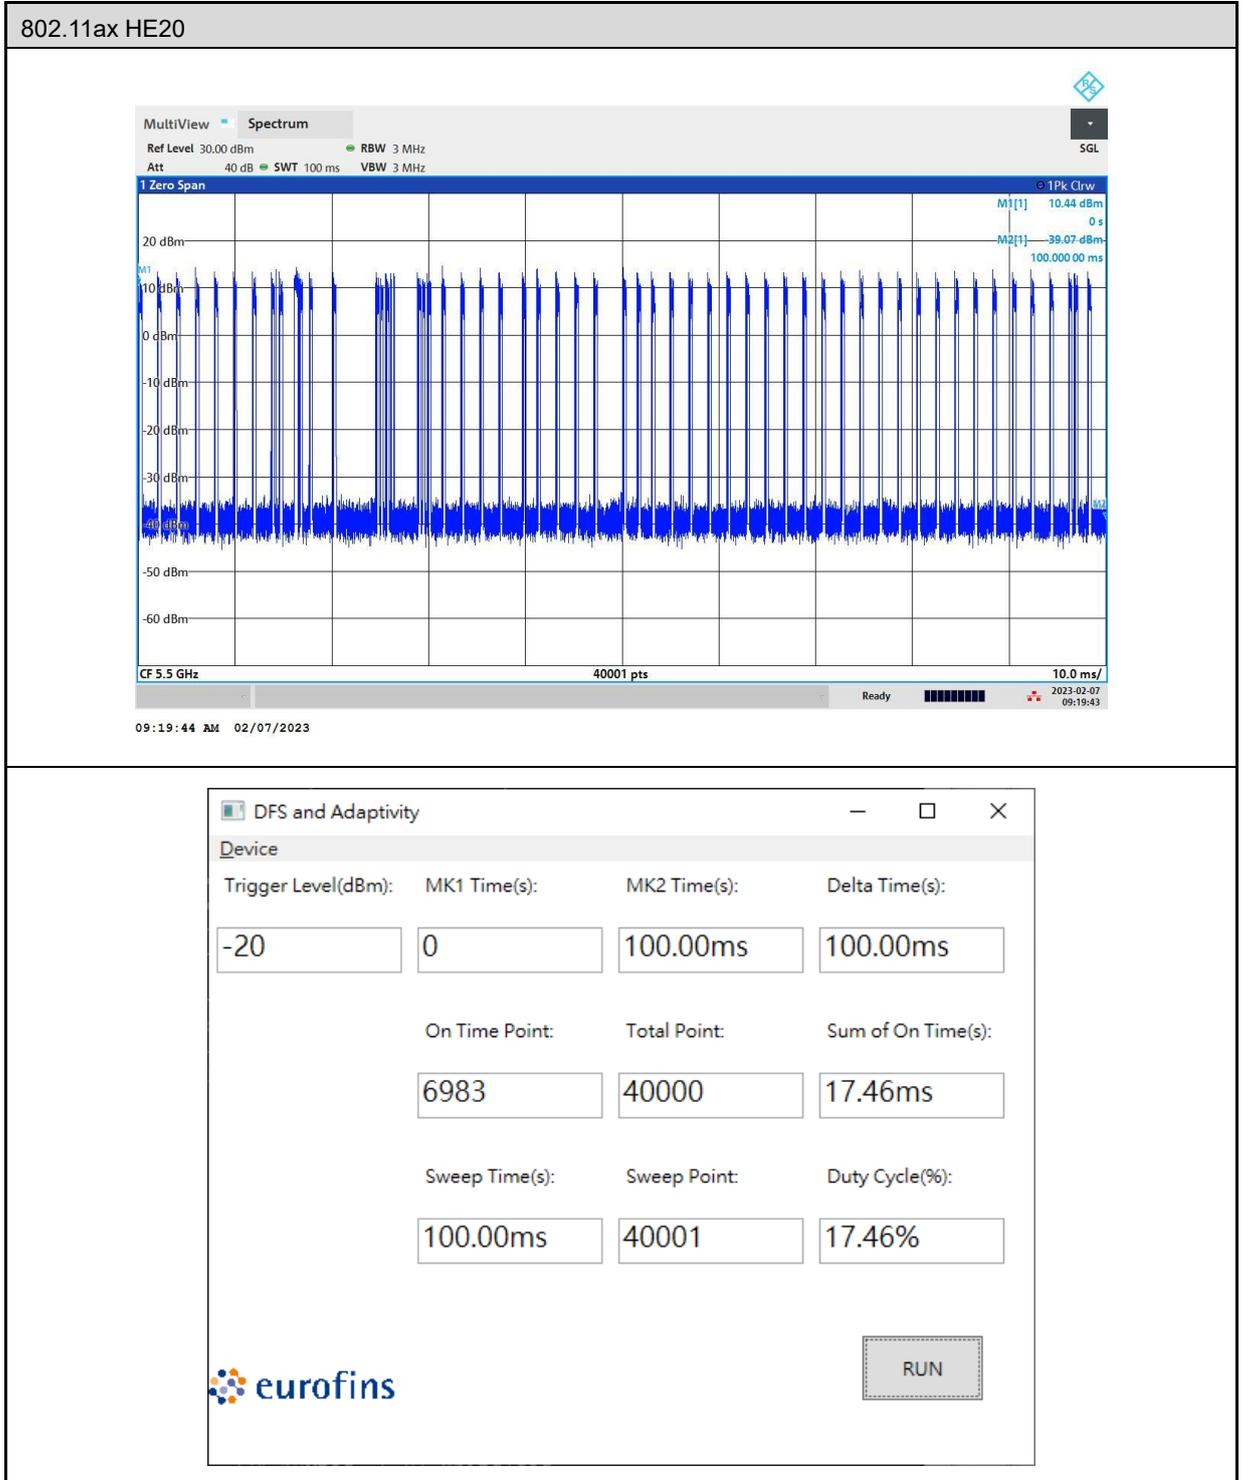

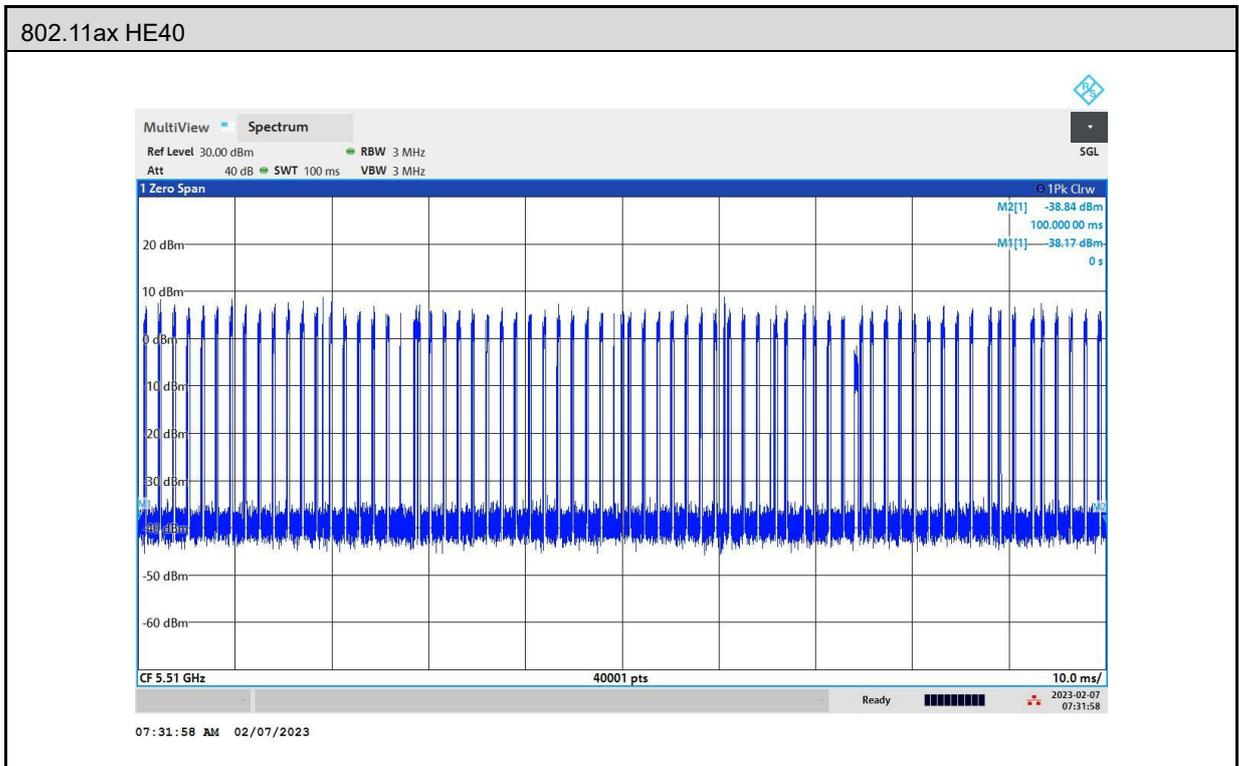


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-20	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
7333	40000	18.33ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
100.00ms	40001	18.33%	

euofins

RUN

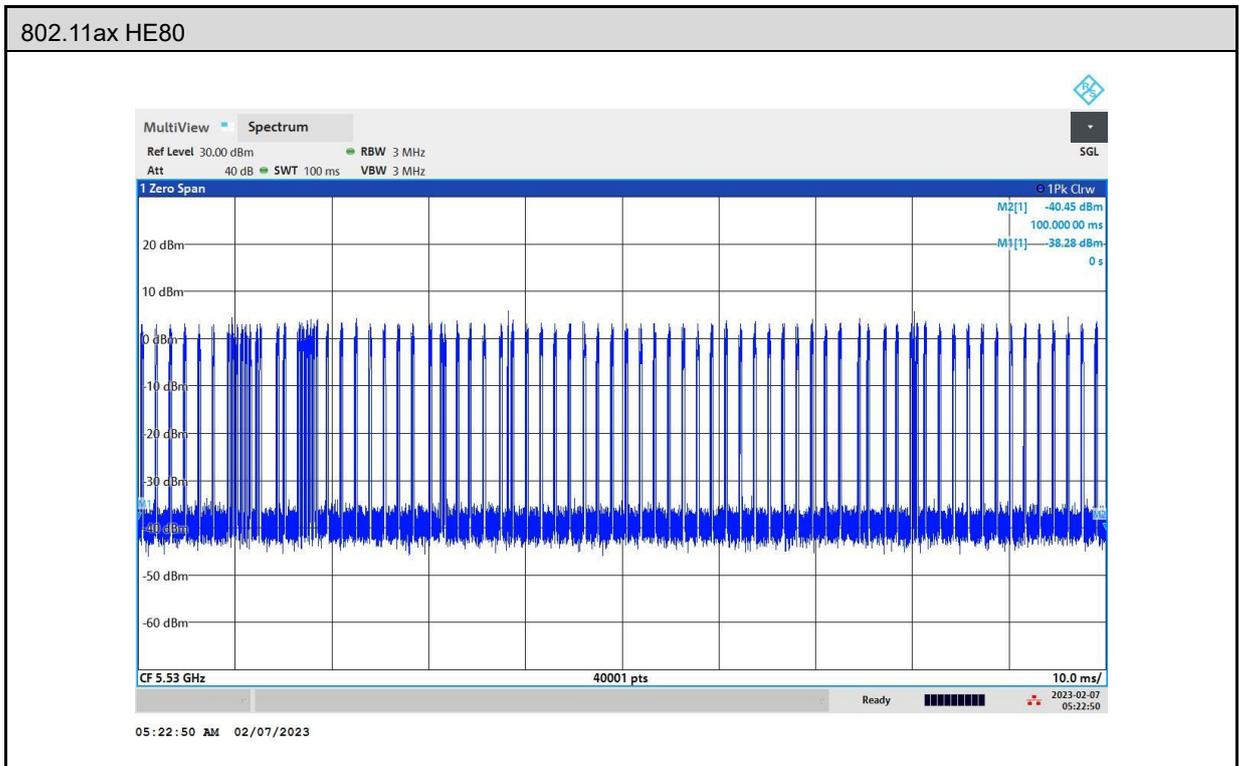

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-20	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
7344	40000	18.36ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
100.00ms	40001	18.36%	

euofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time


A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.


5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results

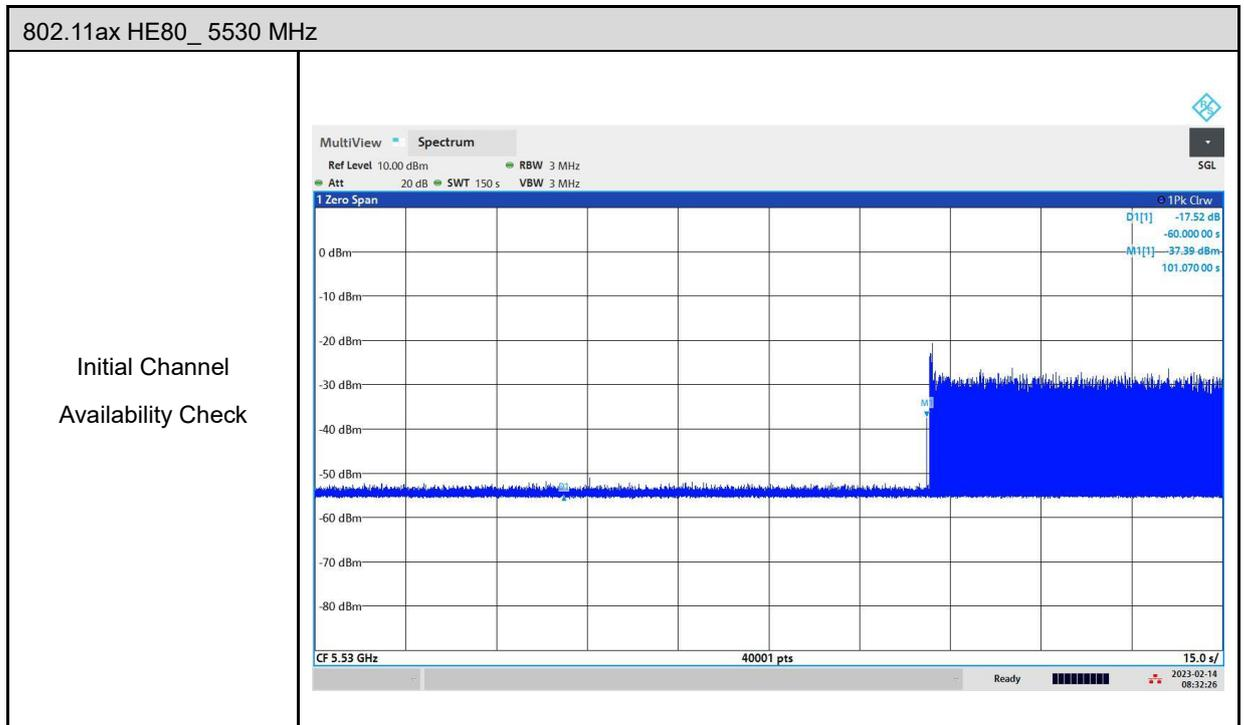

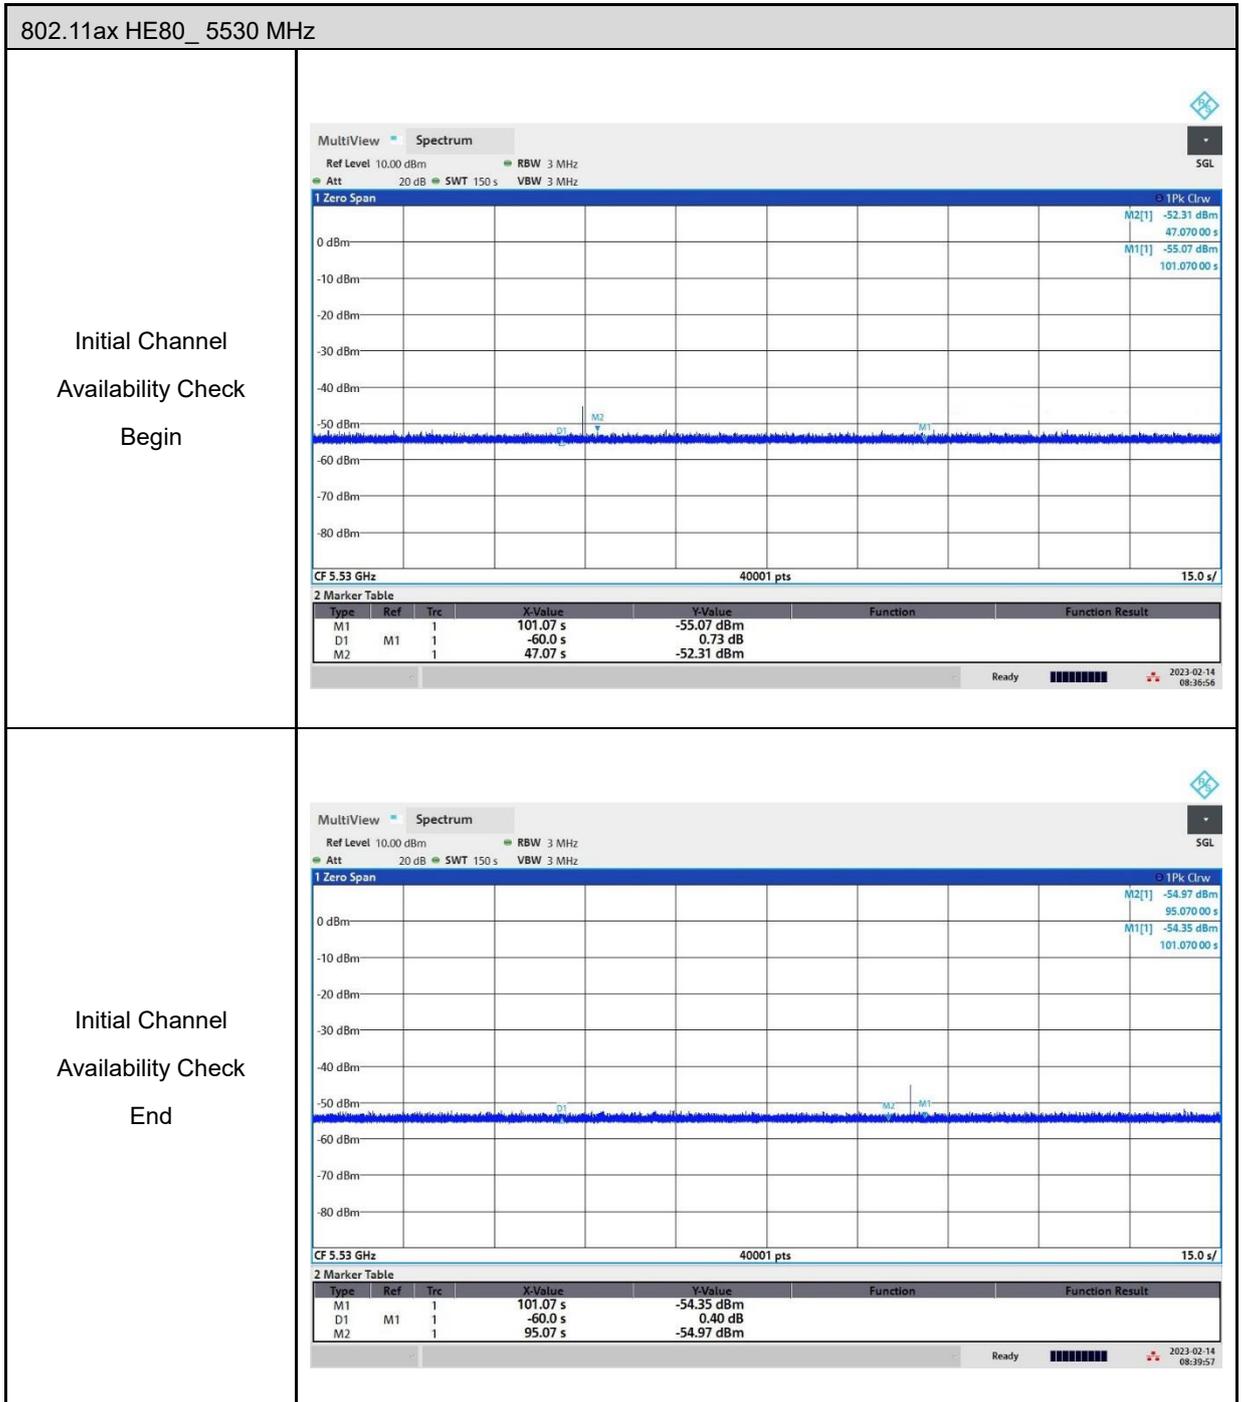

Delta1 : 60 seconds before End of Channel Availability Check

Marker 1 : End of Channel Availability Check

Marker 2 : 54 seconds or 6 seconds before End of Channel Availability Check

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
 This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
		Master	
5530	Type 0	631.0000	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
		Master	
5530	Type 0	9.5000	60

802.11ax HE80_ 5530 MHz

Channel Move and
Closing Time

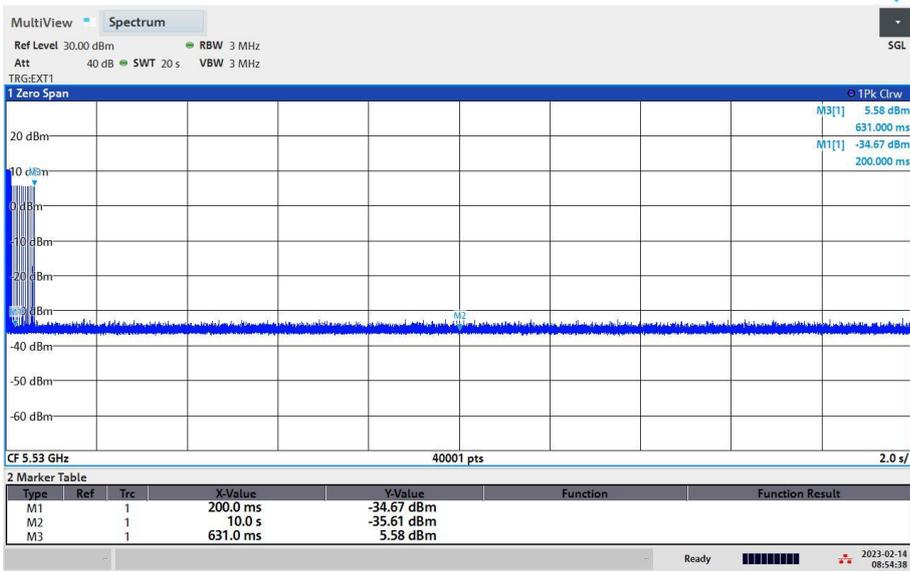

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		200.0 ms	-34.67 dBm		
M2	1		10.0 s	-35.61 dBm		
M3	1		631.0 ms	5.58 dBm		


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-30	200.00ms	10000.00ms	9800.00ms
On Time Point:		Total Point:	Sum of On Time(s):
19		19600	9.50ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
20000.00ms	40001	0.10%	

RUN

5.5. Non-Occupancy Period

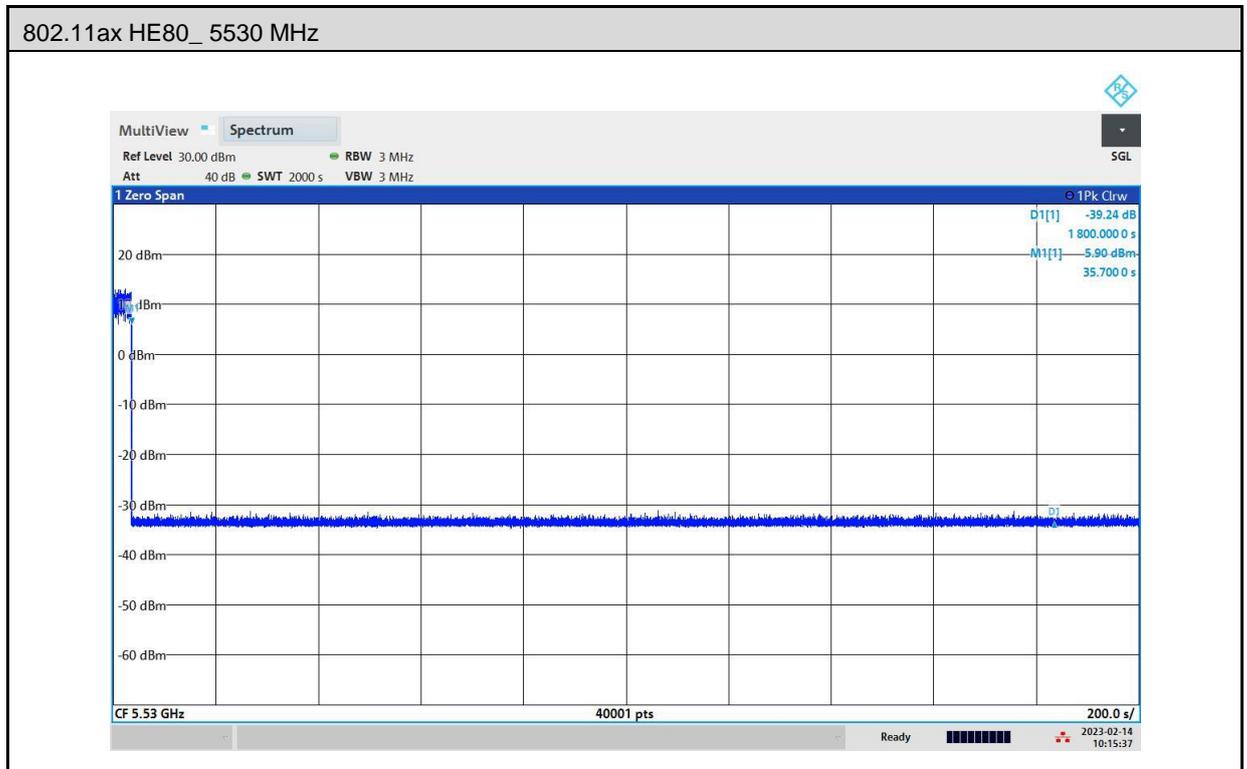

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth


■ Test Results


Test Mode		802.11ax HE20				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5500	5490	5510	20	18.993	105.30	≥ 100

Test Mode		802.11ax HE40				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5510	5530	5570	40	37.518	106.62	≥ 100

Test Mode		802.11ax HE80				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5530	5490	5570	80	76.652	104.37	≥ 100

Test Graphs

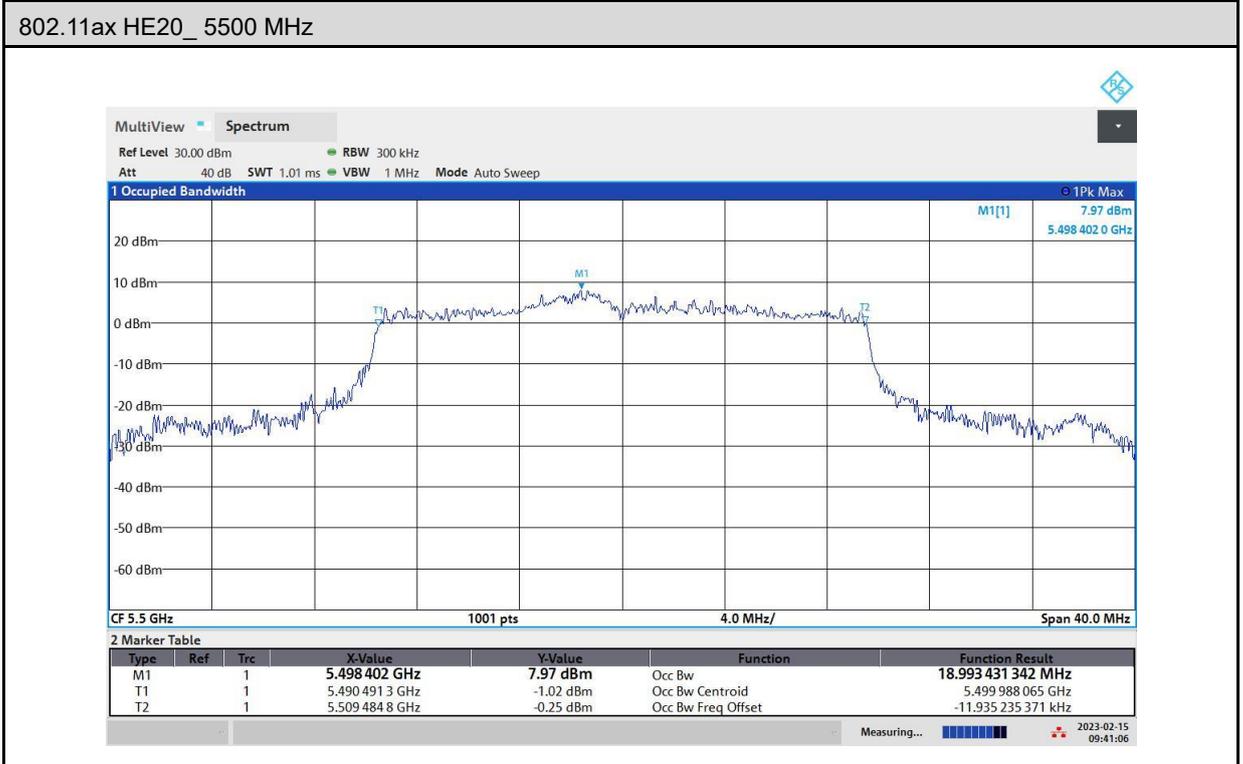

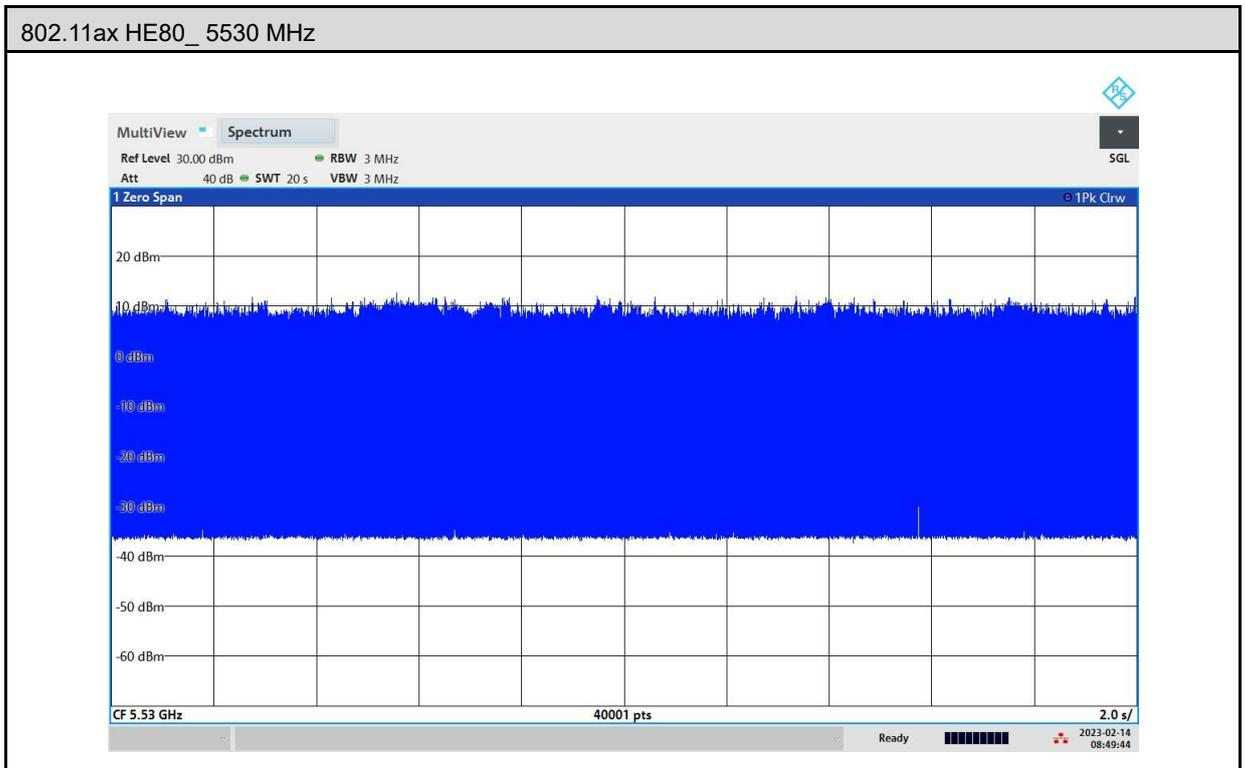

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5500	Type1	Table 5a	1	29	1	96.67%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	25	5	83.33%	≥ 60 %
	Type4	Random	Random	24	6	80.00%	≥ 60 %
	Type1~4					89.17%	≥ 80 %
	Type5	Random	Random	30	0	100.00%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5510	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	25	5	83.33%	≥ 60 %
	Type3	Random	Random	23	7	76.67%	≥ 60 %
	Type4	Random	Random	24	6	80.00%	≥ 60 %
	Type1~4					83.33%	≥ 80 %
	Type5	Random	Random	28	2	93.33%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	27	3	90.00%	≥ 60 %
	Type2	Random	Random	27	3	90.00%	≥ 60 %
	Type3	Random	Random	24	6	80.00%	≥ 60 %
	Type4	Random	Random	25	5	83.33%	≥ 60 %
	Type1~4					85.83%	≥ 80 %
	Type5	Random	Random	26	4	86.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode	802.11ax HE20					
Frequency	5500 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	1	638	83	1567	1
2	5500	1	558	95	1792	1
3	5500	1	658	81	1520	0
4	5500	1	858	62	1166	1
5	5500	1	798	67	1253	1
6	5500	1	858	62	1166	1
7	5500	1	638	83	1567	1
8	5500	1	578	92	1730	1
9	5500	1	838	63	1193	1
10	5500	1	758	70	1319	1
11	5500	1	558	95	1792	1
12	5500	1	578	92	1730	1
13	5500	1	918	58	1089	1
14	5500	1	738	72	1355	1
15	5500	1	758	70	1319	1
16	5500	1	2455	22	407	1
17	5500	1	3052	18	328	1
18	5500	1	2081	26	481	1
19	5500	1	1398	38	715	1
20	5500	1	2679	20	373	1
21	5500	1	1526	35	655	1
22	5500	1	1087	49	920	1
23	5500	1	669	79	1495	1
24	5500	1	2884	19	347	1
25	5500	1	2451	22	408	1
26	5500	1	2503	22	400	1
27	5500	1	2792	19	358	1
28	5500	1	2285	24	438	1
29	5500	1	1627	33	615	1
30	5500	1	2357	23	424	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	3.70	168.80	27	5924	1
2	5500	1.10	213.70	28	4679	1
3	5500	1.80	183.40	24	5453	1
4	5500	4.30	158.60	29	6305	1
5	5500	2.10	166.70	26	5999	1
6	5500	1.70	191.50	25	5222	1
7	5500	3.40	190.00	24	5263	1
8	5500	2.90	172.40	23	5800	1
9	5500	1.60	220.90	27	4527	1
10	5500	3.80	205.30	23	4871	1
11	5500	3.10	193.80	23	5160	1
12	5500	2.50	205.80	29	4859	0
13	5500	2.10	160.40	27	6234	1
14	5500	1.30	207.10	28	4829	1
15	5500	2.60	221.50	26	4515	1
16	5500	1.70	221.50	26	4515	1
17	5500	3.40	205.90	27	4857	1
18	5500	3.90	160.40	27	6234	1
19	5500	1.50	213.30	25	4688	1
20	5500	1.60	154.40	29	6477	1
21	5500	4.50	215.90	24	4632	1
22	5500	2.80	223.00	24	4484	1
23	5500	3.80	221.90	25	4507	1
24	5500	1.60	167.90	27	5956	1
25	5500	3.50	200.30	24	4993	1
26	5500	2.10	204.90	24	4880	1
27	5500	3.30	210.30	26	4755	1
28	5500	1.60	222.80	26	4488	1
29	5500	3.70	185.30	25	5397	1
30	5500	4.60	211.50	24	4728	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	7.80	414.70	16	2411.38	1
2	5500	7.50	421.20	17	2374.17	1
3	5500	8.30	421.40	17	2373.04	0
4	5500	7.20	397.60	18	2515.09	1
5	5500	6.80	373.50	17	2677.38	1
6	5500	7.50	203.70	18	4909.18	1
7	5500	8.30	320.70	17	3118.18	1
8	5500	9.50	266.80	18	3748.13	0
9	5500	7.20	264.80	16	3776.44	1
10	5500	7.70	396.90	18	2519.53	1
11	5500	8.20	330.60	16	3024.80	0
12	5500	6.40	214.00	18	4672.90	1
13	5500	6.20	246.80	17	4051.86	1
14	5500	7.20	201.10	18	4972.65	1
15	5500	6.90	369.10	16	2709.29	1
16	5500	9.10	448.10	18	2231.64	0
17	5500	8.00	408.30	18	2449.18	1
18	5500	8.00	362.80	16	2756.34	1
19	5500	8.70	425.80	16	2348.52	1
20	5500	8.20	221.00	17	4524.89	1
21	5500	6.60	221.90	16	4506.53	1
22	5500	6.80	346.30	18	2887.67	1
23	5500	7.00	430.80	17	2321.26	1
24	5500	9.50	275.30	18	3632.40	1
25	5500	6.90	419.70	17	2382.65	0
26	5500	6.70	367.80	18	2718.87	1
27	5500	7.10	224.30	17	4458.31	1
28	5500	9.60	305.20	17	3276.54	1
29	5500	7.20	318.30	17	3141.69	1
30	5500	6.70	324.30	16	3083.56	1
Detection Percentage (%)						83.33

Test Mode	802.11ax HE20					
Frequency	5500 MHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	14.00	316.80	16	3157	1
2	5500	17.70	378.40	12	2643	0
3	5500	12.80	486.40	14	2056	1
4	5500	13.90	363.00	13	2755	1
5	5500	17.10	262.60	16	3808	1
6	5500	13.90	409.80	13	2440	1
7	5500	15.30	207.80	13	4812	0
8	5500	19.60	304.20	15	3287	1
9	5500	19.50	285.30	13	3505	0
10	5500	11.10	414.10	13	2415	1
11	5500	17.90	292.30	15	3421	1
12	5500	17.60	302.60	15	3305	0
13	5500	17.40	209.40	16	4776	1
14	5500	12.20	358.60	14	2789	1
15	5500	18.90	340.20	15	2939	1
16	5500	12.10	296.20	13	3376	1
17	5500	19.60	237.30	16	4214	1
18	5500	14.30	470.30	13	2126	0
19	5500	13.60	250.80	16	3987	1
20	5500	19.90	390.80	16	2559	1
21	5500	15.70	313.30	15	3192	1
22	5500	19.10	264.90	15	3775	1
23	5500	17.10	279.30	14	3580	1
24	5500	14.40	442.90	14	2258	1
25	5500	14.00	458.60	14	2181	1
26	5500	18.00	389.40	16	2568	1
27	5500	19.10	455.30	15	2196	0
28	5500	12.60	488.60	16	2047	1
29	5500	13.10	489.80	15	2042	1
30	5500	14.00	408.20	12	2450	1
Detection Percentage (%)						80.00

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5492.5	1	93.5	6	1113.8	1	1
	5498.5	2	68.7	19	1975.8	3	
	5496.5	3	71.8	14	1962.0	1	
	5494.5	4	86.3	11	1515.1	2	
	5494.5	5	80.5	10	1272.2	2	
	5496.5	6	88.4	14	1471.3	1	
	5494.5	7	69.6	9	1625.3	3	
	5497.5	8	93.5	18	1963.1	2	
	5496.5	9	78.5	16	1642.5	2	
	5492.5	10	56.4	5	1059.3	3	
	5497.5	11	87.2	17	1646.2	3	
2	5497.5	1	74.8	17	1914.3	1	1
	5493.5	2	52.7	7	1571.8	2	
	5494.5	3	79.3	10	1902.4	3	
	5492.5	4	83.0	6	1108.3	1	
	5497.5	5	51.0	18	1564.4	2	
	5498.5	6	97.9	19	1902.1	3	
	5493.5	7	65.4	7	1825.7	1	
	5494.5	8	84.4	9	1448.8	1	
	5496.5	9	62.2	16	1654.0	1	
	5494.5	10	84.5	9	1461.7	2	
	5496.5	11	95.9	15	1342.3	2	
	5498.5	12	54.8	19	1331.0	2	
3	5494.5	1	78.4	11	1683.9	3	1
	5496.5	2	78.0	16	1616.7	3	
	5494.5	3	58.4	9	1413.9	3	
	5493.5	4	54.0	7	1913.5	1	
	5496.5	5	63.2	14	1451.0	1	
	5496.5	6	66.9	16	1392.8	2	
	5494.5	7	63.5	9	1711.3	2	
	5493.5	8	79.4	7	1467.9	2	
	5494.5	9	91.7	11	1375.7	1	
	5497.5	10	97.4	17	1049.8	2	
	5496.5	11	55.6	14	1114.1	2	
	5495.5	12	98.1	13	1713.8	3	
	5494.5	13	99.9	11	1366.2	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5494.5	1	61.8	10	1903.1	1	1
	5497.5	2	73.4	17	1829.7	2	
	5492.5	3	50.3	5	1073.0	1	
	5498.5	4	62.3	19	1764.1	3	
	5493.5	5	56.5	8	1128.1	1	
	5492.5	6	53.8	5	1040.0	3	
	5496.5	7	88.0	14	1892.3	2	
	5496.5	8	71.2	16	1916.5	3	
5	5494.5	1	58.8	10	1905.2	2	1
	5496.5	2	98.4	15	1681.7	3	
	5492.5	3	79.0	5	1289.4	2	
	5494.5	4	70.2	9	1928.8	3	
	5493.5	5	81.9	7	1540.6	3	
	5496.5	6	60.9	14	1605.8	2	
	5496.5	7	94.7	15	1355.8	2	
	5494.5	8	92.8	11	1158.1	1	
	5495.5	9	73.0	13	1941.8	1	
	5498.5	10	70.7	19	1967.5	2	
	5493.5	11	60.9	8	1963.2	3	
	5494.5	12	60.3	10	1114.2	3	
	5495.5	13	50.2	12	1992.9	2	
	5495.5	14	51.0	13	1812.7	2	
	5494.5	15	66.9	10	1987.1	1	
6	5494.5	1	84.5	10	1082.4	3	1
	5492.5	2	68.5	6	1252.4	3	
	5497.5	3	52.1	17	1078.2	3	
	5496.5	4	54.1	16	1854.1	1	
	5496.5	5	78.0	14	1711.1	2	
	5493.5	6	58.1	8	1536.9	2	
	5498.5	7	54.0	20	1668.3	2	
	5494.5	8	55.2	11	1856.6	3	
	5494.5	9	97.9	10	1780.9	1	
	5492.5	10	60.9	6	1611.3	3	
	5498.5	11	55.3	20	1187.6	3	
	5498.5	12	55.9	19	1579.1	3	
	5494.5	13	66.9	11	1912.5	1	
	5498.5	14	65.2	19	1867.2	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5496.5	1	78.8	15	1565.1	3	1
	5494.5	2	55.5	10	1552.9	3	
	5496.5	3	97.5	15	1360.1	2	
	5497.5	4	60.6	18	1709.6	2	
	5496.5	5	59.0	16	1315.7	3	
	5495.5	6	85.8	12	1760.6	3	
	5494.5	7	90.7	9	1558.2	1	
	5497.5	8	66.0	18	1933.3	3	
	5495.5	9	71.6	12	1691.7	2	
	5497.5	10	77.9	17	1871.4	1	
	5496.5	11	55.7	15	1263.6	1	
	5495.5	12	59.7	12	1068.2	2	
	5496.5	13	54.0	16	1088.5	2	
	5495.5	14	61.9	13	1297.4	1	
	5494.5	15	94.4	10	1262.5	3	
	5498.5	16	76.7	19	1536.1	2	
	5494.5	17	92.5	9	1643.6	1	
8	5496.5	1	61.6	15	1086.3	2	1
	5492.5	2	75.9	6	1623.0	2	
	5493.5	3	99.6	7	1708.2	1	
	5495.5	4	54.0	12	1332.5	1	
	5493.5	5	82.8	8	1463.6	3	
	5498.5	6	83.9	19	1862.8	2	
	5498.5	7	89.9	20	1685.0	2	
	5493.5	8	84.9	7	1247.1	3	
	5494.5	9	86.8	9	1867.8	1	
	5497.5	10	63.5	17	1019.5	2	
	5497.5	11	77.6	18	1071.3	2	
	5498.5	12	76.9	19	1813.0	1	
	5495.5	13	54.9	13	1193.5	1	
	5493.5	14	75.4	7	1227.8	2	
	5492.5	15	95.3	6	1213.1	3	
	5492.5	16	58.9	5	1025.2	3	
	5492.5	17	93.3	6	1826.3	3	
	5496.5	18	83.5	16	1105.9	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5494.5	1	93.0	9	1366.4	2	1
	5496.5	2	89.2	16	1236.2	2	
	5497.5	3	95.5	17	1905.7	3	
	5495.5	4	56.9	13	1345.7	3	
	5498.5	5	81.2	19	1109.4	2	
	5493.5	6	75.4	8	1840.3	2	
	5496.5	7	63.0	14	1102.6	3	
	5492.5	8	67.5	6	1252.6	3	
	5495.5	9	95.0	12	1721.9	3	
	5496.5	10	88.5	16	1611.7	1	
	5496.5	11	59.9	15	1004.5	2	
	5496.5	12	50.1	15	1259.9	1	
	5494.5	13	85.6	9	1256.2	2	
	5496.5	14	62.2	16	1927.7	3	
	5496.5	15	96.5	16	1325.7	3	
	5494.5	16	50.6	11	1434.2	2	
	5498.5	17	95.5	19	1280.7	2	
	5494.5	18	62.2	10	1463.9	3	
	5494.5	19	67.1	10	1101.1	3	
10	5496.5	1	51.1	14	1499.6	3	1
	5492.5	2	51.8	5	1661.7	1	
	5495.5	3	54.9	13	1766.5	1	
	5497.5	4	62.7	18	1350.2	2	
	5496.5	5	71.2	14	1311.2	3	
	5496.5	6	67.3	15	1291.1	3	
	5496.5	7	83.0	14	1256.8	3	
	5496.5	8	95.1	14	1653.4	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5500	1	64.9	17	1153.4	2	1
	5500	2	79.5	12	1562.3	2	
	5500	3	94.9	17	1042.2	1	
	5500	4	89.3	14	1162.5	2	
	5500	5	97.3	20	1580.6	3	
	5500	6	64.5	15	1639.2	2	
	5500	7	63.5	9	1035.2	3	
	5500	8	62.3	6	1702.1	3	
	5500	9	79.1	19	1566.3	2	
	5500	10	77.7	6	1874.9	2	
	5500	11	82.7	9	1834.5	3	
	5500	12	91.9	6	1089.0	2	
	5500	13	67.2	19	1371.3	3	
	5500	14	50.4	13	1504.6	3	
	5500	15	88.2	15	1847.2	3	
	5500	16	63.7	13	1903.2	1	
12	5500	1	75.3	18	1034.2	1	1
	5500	2	70.7	17	1353.4	3	
	5500	3	89.0	15	1727.6	1	
	5500	4	76.7	19	1813.6	3	
	5500	5	93.7	20	1236.1	1	
	5500	6	89.2	9	1836.7	3	
	5500	7	99.5	5	1058.5	1	
	5500	8	95.6	16	1420.9	2	
	5500	9	97.3	7	1618.8	2	
	5500	10	51.0	9	1995.2	3	
	5500	11	89.0	6	1327.7	1	
	5500	12	53.9	12	1130.6	3	
	5500	13	83.2	12	1096.7	3	
	5500	14	92.5	7	1925.4	2	
	5500	15	75.9	17	1891.2	2	
	5500	16	81.5	18	1640.2	2	
	5500	17	50.5	18	1875.7	2	
	5500	18	64.8	14	1122.0	1	
	5500	19	69.7	19	1515.5	2	
	5500	20	67.3	8	1729.0	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5500	1	82.3	19	1017.0	1	1
	5500	2	77.4	13	1124.8	1	
	5500	3	90.2	17	1648.0	1	
	5500	4	79.5	19	1663.3	3	
	5500	5	83.7	15	1689.3	1	
	5500	6	65.5	10	1944.5	2	
	5500	7	80.7	9	1874.6	2	
	5500	8	79.2	19	1932.6	1	
	5500	9	61.9	16	1397.2	3	
	5500	10	87.6	11	1067.9	3	
14	5500	1	70.7	19	1816.0	1	1
	5500	2	50.3	7	1187.8	2	
	5500	3	89.4	10	1717.7	3	
	5500	4	95.9	7	1435.5	2	
	5500	5	80.9	16	1863.1	2	
	5500	6	71.6	18	1715.5	1	
	5500	7	88.5	16	1943.4	1	
	5500	8	99.0	7	1836.8	1	
	5500	9	66.2	13	1529.3	2	
	5500	10	62.6	13	1207.8	3	
	5500	11	56.2	8	1953.6	2	
	5500	12	79.4	8	1973.8	3	
	5500	13	94.1	10	1003.6	2	
	5500	14	53.8	15	1486.7	2	
	5500	15	92.1	10	1561.3	3	
	5500	16	65.4	11	1507.9	2	
	5500	17	88.7	19	1262.0	3	
	5500	18	57.3	7	1748.4	1	
	5500	19	67.4	7	1018.3	3	
	5500	20	95.6	17	1196.6	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5500	1	61.1	17	1706.8	2	1
	5500	2	87.4	13	1460.3	2	
	5500	3	83.5	17	1718.3	3	
	5500	4	55.4	15	1906.3	3	
	5500	5	64.7	17	1256.3	3	
	5500	6	75.5	19	1071.7	3	
	5500	7	79.7	11	1443.3	3	
	5500	8	91.9	15	1564.1	3	
	5500	9	98.5	11	1773.2	3	
	5500	10	92.4	9	1809.0	3	
	5500	11	63.6	10	1302.0	3	
	5500	12	58.5	16	1241.5	3	
	5500	13	54.5	13	1894.0	2	
	5500	14	69.2	9	1548.8	1	
	5500	15	54.6	13	1972.5	2	
	5500	16	81.2	16	1682.8	1	
	5500	17	96.5	12	1331.9	2	
	5500	18	58.1	12	1771.2	1	
	5500	19	96.7	17	1549.0	3	
16	5500	1	68.6	8	1952.5	1	1
	5500	2	95.3	18	1025.2	2	
	5500	3	97.9	20	1911.5	1	
	5500	4	71.4	10	1514.6	1	
	5500	5	70.6	19	1264.4	3	
	5500	6	63.5	10	1011.6	3	
	5500	7	79.8	17	1345.2	3	
	5500	8	52.6	15	1873.8	1	
	5500	9	63.3	19	1617.5	3	
	5500	10	79.2	16	1943.1	2	
	5500	11	53.0	7	1212.6	3	
	5500	12	55.0	11	1278.9	3	
	5500	13	60.7	8	1538.5	2	
	5500	14	59.6	13	1184.5	3	
	5500	15	91.7	12	1103.1	2	
	5500	16	56.8	6	1323.1	2	
	5500	17	78.1	20	1526.0	2	
	5500	18	53.8	12	1809.4	2	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5500	1	83.5	19	1417.1	2	1
	5500	2	58.7	10	1111.5	2	
	5500	3	90.3	11	1394.9	3	
	5500	4	75.7	15	1991.2	3	
	5500	5	53.7	8	1354.5	1	
	5500	6	75.2	13	1103.0	2	
	5500	7	61.2	9	1253.0	2	
	5500	8	71.0	13	1091.5	1	
	5500	9	94.3	11	1061.6	3	
	5500	10	56.1	11	1157.4	2	
	5500	11	91.7	10	1823.8	2	
	5500	12	61.4	14	1301.6	2	
	5500	13	98.9	18	1837.6	1	
	5500	14	94.5	19	1132.7	3	
	5500	15	76.3	18	1475.5	1	
	5500	16	50.7	17	1939.7	2	
	5500	17	66.3	20	1204.7	2	
18	5500	1	71.2	5	1274.7	2	1
	5500	2	65.3	12	1982.2	2	
	5500	3	81.2	19	1246.6	3	
	5500	4	83.1	20	1086.9	2	
	5500	5	51.8	15	1326.1	3	
	5500	6	92.9	17	1691.5	1	
	5500	7	65.5	8	1515.7	1	
	5500	8	50.3	18	1675.7	1	
	5500	9	57.9	8	1924.7	1	
	5500	10	90.5	11	1546.4	3	
	5500	11	54.4	17	1231.9	2	
	5500	12	98.4	14	1853.4	3	
	5500	13	56.4	9	1877.9	1	
	5500	14	85.0	17	1376.2	2	
	5500	15	61.1	17	1684.9	2	
5500	1	83.5	19	1417.1	2		

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5500	1	61.9	10	1470.3	2	1
	5500	2	67.6	11	1644.2	3	
	5500	3	68.5	10	1810.9	1	
	5500	4	54.2	17	1617.9	2	
	5500	5	96.4	17	1464.4	2	
	5500	6	57.6	9	1047.8	3	
	5500	7	62.6	13	1955.7	1	
	5500	8	87.3	6	1348.0	3	
	5500	9	78.1	13	1012.2	1	
	5500	10	54.7	20	1518.0	1	
	5500	11	85.7	13	1174.2	2	
	5500	12	75.2	10	1216.0	1	
	5500	13	73.3	18	1558.2	2	
	5500	14	73.1	12	1807.9	2	
20	5500	1	79.1	17	1495.6	3	1
	5500	2	57.0	9	1552.1	2	
	5500	3	80.6	11	1612.6	1	
	5500	4	55.7	13	1342.2	2	
	5500	5	69.4	16	1997.9	3	
	5500	6	96.7	13	1036.6	3	
	5500	7	56.5	8	1890.7	3	
	5500	8	92.0	10	1395.9	1	
	5500	9	62.3	17	1014.9	1	
	5500	10	55.7	17	1337.3	1	
21	5503.5	1	66.5	14	1645.4	2	1
	5503.5	2	55.1	14	1435.2	2	
	5503.5	3	55.0	15	1323.8	1	
	5505.5	4	96.1	9	1389.5	2	
	5501.5	5	93.6	19	1485.7	2	
	5505.5	6	83.9	10	1016.2	2	
	5506.5	7	98.9	7	1256.3	2	
	5506.5	8	53.5	7	1696.5	3	
	5505.5	9	68.0	11	1803.9	3	
	5503.5	10	83.3	15	1152.4	1	
	5501.5	11	57.3	20	1624.3	1	
	5504.5	12	72.6	13	1016.3	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5505.5	1	83.2	11	1441.7	1	1
	5507.5	2	57.4	6	1723.9	2	
	5505.5	3	79.8	10	1565.7	1	
	5502.5	4	88.3	18	1247.8	2	
	5505.5	5	50.6	11	1363.9	1	
	5507.5	6	62.8	5	1524.5	3	
	5504.5	7	85.3	12	1856.7	1	
	5502.5	8	54.8	17	1662.1	2	
23	5503.5	9	57.7	15	1205.5	3	1
	5504.5	1	95.8	13	1385.3	2	
	5505.5	2	95.4	9	1492.1	2	
	5503.5	3	97.2	16	1130.7	1	
	5502.5	4	63.1	17	1882.9	2	
	5507.5	5	88.6	6	1448.9	2	
	5502.5	6	87.5	17	1976.9	1	
	5505.5	7	68.6	11	1476.9	2	
	5502.5	8	90.7	18	1305.3	3	
	5504.5	9	59.0	12	1586.7	3	
	5507.5	10	77.0	6	1190.7	1	
	5502.5	11	58.6	18	1491.8	2	
	5505.5	12	58.7	11	1289.7	1	
	5504.5	13	64.1	12	1386.9	3	
	5506.5	14	74.5	8	1647.9	2	
5503.5	15	80.1	15	1474.5	2		
24	5503.5	1	65.1	16	1582.9	3	1
	5502.5	2	73.4	17	1919.6	2	
	5505.5	3	98.2	9	1345.3	1	
	5505.5	4	93.4	9	1075.2	3	
	5502.5	5	90.0	18	1029.5	3	
	5503.5	6	80.0	16	1635.7	2	
	5505.5	7	95.8	11	1028.4	1	
	5506.5	8	99.3	8	1958.8	3	
	5503.5	9	52.7	15	1129.4	2	
	5506.5	10	98.5	7	1515.5	3	
	5502.5	11	65.2	17	1865.8	1	
	5507.5	12	54.5	6	1209.6	1	
	5503.5	13	53.2	16	1834.1	1	
	5506.5	14	54.1	7	1373.1	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5506.5	1	60.9	7	1526.0	3	1
	5505.5	2	76.2	11	1644.4	3	
	5503.5	3	91.6	16	1191.8	3	
	5507.5	4	99.6	6	1444.2	2	
	5503.5	5	56.0	15	1596.1	1	
	5503.5	6	95.5	15	1148.6	2	
	5503.5	7	68.1	16	1402.6	1	
	5501.5	8	75.3	20	1282.7	1	
	5501.5	9	71.8	20	1920.8	3	
	5503.5	10	52.8	15	1835.0	1	
	5502.5	11	83.2	17	1368.1	2	
	5505.5	12	79.9	10	1163.7	3	
	5504.5	13	85.6	12	1720.6	3	
	5503.5	14	58.6	16	1511.8	2	
	5504.5	15	80.9	12	1885.9	1	
	5502.5	16	51.0	17	1754.6	3	
	5503.5	17	98.1	16	1646.9	3	
	5504.5	18	88.5	12	1312.6	2	
26	5502.5	1	87.7	17	1581.9	3	1
	5502.5	2	60.5	18	1008.2	1	
	5503.5	3	56.7	15	1687.2	3	
	5502.5	4	96.0	17	1511.9	2	
	5503.5	5	94.1	16	1568.0	3	
	5501.5	6	79.8	20	1242.8	2	
	5501.5	7	63.8	20	1136.9	3	
	5503.5	8	55.8	14	1456.0	1	
	5501.5	9	79.9	19	1505.4	1	
	5501.5	10	92.5	20	1570.5	2	
	5505.5	11	84.1	11	1719.6	3	
	5504.5	12	60.0	13	1597.5	1	
	5503.5	13	55.1	14	1782.0	1	
	5504.5	14	59.1	12	1625.8	1	
	5507.5	15	99.9	6	1310.4	3	
	5506.5	16	55.4	7	1775.5	3	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5505.5	1	86.7	9	1830.2	3	1
	5504.5	2	74.7	12	1954.9	3	
	5505.5	3	90.7	9	1023.9	2	
	5504.5	4	76.4	12	1972.4	1	
	5505.5	5	86.5	9	1908.0	2	
	5505.5	6	74.1	11	1570.6	2	
	5507.5	7	54.0	6	1940.7	2	
	5504.5	8	76.6	12	1336.4	2	
	5507.5	9	67.5	6	1239.5	2	
	5505.5	10	63.8	9	1431.9	3	
	5504.5	11	94.2	12	1645.0	3	
	5501.5	12	94.6	19	1395.5	3	
	5505.5	13	58.4	9	1713.0	3	
	5506.5	14	91.7	8	1229.1	3	
	5504.5	15	66.5	13	1476.9	2	
	5502.5	16	54.7	17	1790.4	3	
	5503.5	17	53.5	15	1177.6	2	
	5503.5	18	63.2	14	1278.1	1	
	5501.5	19	55.5	20	1182.5	1	
	5505.5	20	85.8	9	1122.8	2	
28	5505.5	1	92.3	9	1160.3	2	1
	5505.5	2	52.7	11	1323.1	1	
	5501.5	3	98.7	19	1220.1	1	
	5505.5	4	60.8	10	1947.0	1	
	5507.5	5	78.6	6	1265.1	1	
	5507.5	6	96.9	5	1956.7	1	
	5505.5	7	99.7	9	1541.6	2	
	5501.5	8	70.5	20	1002.9	3	
	5507.5	9	83.6	5	1435.4	3	
	5504.5	10	88.6	13	1614.8	3	
	5503.5	11	62.0	16	1925.2	1	
	5507.5	12	88.4	6	1012.0	1	
	5503.5	13	97.4	14	1321.8	2	
	5503.5	14	94.9	16	1650.4	2	
	5504.5	15	97.1	12	1535.3	2	
	5505.5	16	77.9	9	1963.5	1	
	5503.5	17	52.4	14	1584.4	1	
	5503.5	18	64.0	15	1056.3	3	
	5501.5	19	67.9	19	1725.2	1	
	5502.5	20	70.7	17	1683.6	1	

Test Mode		802.11ax HE20					
Frequency		5500 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5504.5	1	84.3	13	1728.9	1	1
	5503.5	2	74.2	16	1134.1	2	
	5506.5	3	51.3	7	1126.1	2	
	5504.5	4	68.6	12	1081.5	3	
	5502.5	5	55.9	17	1437.4	2	
	5502.5	6	81.0	18	1588.3	2	
	5503.5	7	97.9	14	1110.7	1	
	5504.5	8	57.5	12	1883.2	1	
	5503.5	9	53.3	14	1412.3	2	
	5505.5	10	98.2	9	1850.0	3	
	5505.5	11	90.6	9	1676.0	2	
	5505.5	12	73.3	10	1544.4	2	
	5503.5	13	74.4	14	1196.6	3	
	5506.5	14	64.5	8	1688.0	3	
	5504.5	15	67.3	13	1119.5	2	
	5501.5	16	84.9	19	1778.8	3	
	5505.5	17	96.4	10	1208.9	2	
30	5504.5	1	83.7	12	1484.9	1	1
	5505.5	2	97.4	9	1642.7	1	
	5504.5	3	60.4	12	1486.1	3	
	5503.5	4	91.5	14	1957.0	3	
	5506.5	5	63.4	7	1205.5	2	
	5503.5	6	66.2	15	1501.9	2	
	5501.5	7	98.8	20	1564.8	1	
	5504.5	8	62.8	12	1661.1	3	
	5502.5	9	73.0	17	1656.7	2	
	5503.5	10	80.9	16	1408.3	1	
	5502.5	11	97.3	18	1931.7	1	
	5507.5	12	69.6	5	1099.3	2	
	5505.5	13	72.7	9	1534.0	2	
	5506.5	14	94.6	8	1526.7	3	
Detection Percentage (%)							100.00

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	1	718	74	1393	1
2	5510	1	598	89	1672	1
3	5510	1	3066	18	326	1
4	5510	1	3066	18	326	0
5	5510	1	778	68	1285	1
6	5510	1	3066	18	326	1
7	5510	1	578	92	1730	1
8	5510	1	678	78	1475	1
9	5510	1	858	62	1166	1
10	5510	1	738	72	1355	1
11	5510	1	938	57	1066	1
12	5510	1	658	81	1520	1
13	5510	1	898	59	1114	1
14	5510	1	738	72	1355	1
15	5510	1	918	58	1089	1
16	5510	1	889	60	1125	1
17	5510	1	3052	18	328	1
18	5510	1	778	68	1285	1
19	5510	1	2308	23	433	1
20	5510	1	1050	51	952	1
21	5510	1	1217	44	822	1
22	5510	1	2981	18	335	1
23	5510	1	894	60	1119	0
24	5510	1	2816	19	355	1
25	5510	1	1260	42	794	1
26	5510	1	1674	32	597	1
27	5510	1	2863	19	349	1
28	5510	1	2399	22	417	1
29	5510	1	2207	24	453	1
30	5510	1	1232	43	812	1
Detection Percentage (%)						93.33

Test Mode	802.11ax HE40					
Frequency	5510 MHz					
Radar Signal	Type 2					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	4.50	203.50	26	4914	1
2	5510	1.50	169.90	25	5886	1
3	5510	1.30	177.00	28	5650	1
4	5510	1.90	190.90	23	5238	1
5	5510	1.80	222.50	29	4494	0
6	5510	5.00	222.70	24	4490	1
7	5510	5.00	203.70	26	4909	1
8	5510	4.90	193.10	25	5179	0
9	5510	1.30	192.00	27	5208	1
10	5510	4.90	191.40	25	5225	1
11	5510	2.30	177.40	24	5637	1
12	5510	4.90	226.40	24	4417	0
13	5510	2.60	227.60	27	4394	1
14	5510	1.70	180.00	29	5556	1
15	5510	2.10	165.20	27	6053	0
16	5510	1.90	183.00	28	5464	1
17	5510	1.70	209.70	28	4769	1
18	5510	1.60	203.60	26	4912	1
19	5510	1.50	203.20	24	4921	1
20	5510	2.30	186.70	28	5356	1
21	5510	4.60	170.50	26	5865	1
22	5510	2.10	204.40	23	4892	1
23	5510	2.40	212.80	24	4699	1
24	5510	4.60	227.50	24	4396	1
25	5510	1.50	164.60	27	6075	1
26	5510	2.10	195.60	28	5112	1
27	5510	1.80	186.80	25	5353	0
28	5510	1.70	190.40	25	5252	1
29	5510	1.00	177.60	25	5631	1
30	5510	1.80	217.00	28	4608	1
Detection Percentage (%)						83.33

Test Mode	802.11ax HE40					
Frequency	5510 MHz					
Radar Signal	Type 3					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	9.00	443.20	16	2256.32	1
2	5510	8.20	250.20	17	3996.80	0
3	5510	6.30	327.30	17	3055.30	1
4	5510	8.20	392.40	16	2548.42	1
5	5510	8.10	230.50	17	4338.39	1
6	5510	8.60	254.30	18	3932.36	0
7	5510	6.20	329.20	16	3037.67	1
8	5510	7.80	355.70	16	2811.36	0
9	5510	7.90	332.60	18	3006.61	1
10	5510	8.70	218.90	16	4568.30	1
11	5510	6.40	388.00	16	2577.32	1
12	5510	8.30	266.90	16	3746.72	1
13	5510	6.00	453.10	17	2207.02	1
14	5510	8.90	296.80	17	3369.27	0
15	5510	6.50	390.70	18	2559.51	1
16	5510	7.20	377.50	17	2649.01	1
17	5510	8.90	387.20	16	2582.64	1
18	5510	8.80	220.40	18	4537.21	1
19	5510	7.90	486.20	16	2056.77	1
20	5510	6.70	359.90	18	2778.55	1
21	5510	9.90	305.60	16	3272.25	1
22	5510	6.90	216.20	18	4625.35	1
23	5510	7.20	201.90	16	4952.95	0
24	5510	8.70	233.10	18	4290.00	1
25	5510	7.80	234.00	18	4273.50	0
26	5510	7.80	454.20	17	2201.67	1
27	5510	9.40	274.20	16	3646.97	1
28	5510	8.30	352.90	18	2833.66	0
29	5510	9.10	274.80	17	3639.01	1
30	5510	6.80	263.80	17	3790.75	1
Detection Percentage (%)						76.67

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	14.10	373.30	12	2679	1
2	5510	16.50	456.20	14	2192	1
3	5510	16.20	423.00	15	2364	0
4	5510	11.00	467.40	16	2139	1
5	5510	14.20	273.70	14	3654	1
6	5510	19.20	472.30	15	2117	1
7	5510	15.50	343.10	12	2915	1
8	5510	16.70	268.20	15	3729	1
9	5510	19.20	392.80	12	2546	1
10	5510	11.60	399.20	16	2505	0
11	5510	12.70	336.20	12	2974	1
12	5510	16.20	288.80	13	3463	1
13	5510	16.70	488.70	16	2046	0
14	5510	14.70	441.10	13	2267	1
15	5510	17.30	366.10	16	2731	1
16	5510	14.50	461.60	15	2166	1
17	5510	18.00	481.80	16	2076	1
18	5510	19.30	439.20	13	2277	1
19	5510	19.80	494.60	16	2022	1
20	5510	15.60	362.20	12	2761	0
21	5510	12.50	406.10	16	2462	1
22	5510	13.60	409.00	12	2445	1
23	5510	15.10	225.60	14	4433	1
24	5510	18.20	389.90	16	2565	1
25	5510	16.90	364.20	15	2746	1
26	5510	16.70	271.40	13	3685	0
27	5510	19.60	317.80	14	3147	1
28	5510	19.50	492.70	12	2030	1
29	5510	15.60	457.70	12	2185	1
30	5510	20.00	230.20	16	4344	0
Detection Percentage (%)						80.00

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5497	1	90.4	15	1585.5	3	1
	5497	2	61.6	16	1622.6	1	
	5497	3	89.6	15	1108.6	1	
	5494	4	98.7	7	1901.2	1	
	5496	5	81.6	12	1671.4	1	
	5495	6	91.2	9	1749.1	1	
	5496	7	84.3	13	1012.5	3	
	5495	8	53.0	10	1418.8	1	
	5496	9	83.3	12	1627.6	2	
	5497	10	89.8	16	1202.5	1	
	5495	11	71.6	10	1985.0	3	
2	5497	1	89.8	16	1167.3	1	1
	5497	2	94.9	16	1079.5	1	
	5494	3	63.2	8	1980.6	1	
	5494	4	60.9	8	1009.3	2	
	5498	5	83.6	18	1306.5	1	
	5493	6	61.6	6	1472.1	1	
	5497	7	67.6	15	1038.3	1	
	5494	8	83.7	7	1987.4	1	
	5498	9	95.2	17	1191.1	2	
	5493	10	65.4	6	1421.2	1	
	5495	11	95.3	11	1924.5	1	
	5494	12	66.1	7	1594.0	1	
3	5493	1	62.2	6	1464.9	3	1
	5499	2	70.5	19	1412.8	1	
	5496	3	80.5	12	1176.9	1	
	5498	4	74.4	18	1618.8	2	
	5495	5	93.1	9	1716.9	2	
	5499	6	64.5	19	1435.3	2	
	5498	7	86.9	18	1139.5	3	
	5497	8	74.4	15	1749.4	2	
	5494	9	74.2	7	1154.8	2	
	5494	10	76.9	7	1472.4	3	
	5497	11	63.2	14	1150.7	3	
	5493	12	78.0	6	1919.8	2	
	5498	13	51.6	17	1621.2	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5495	1	64.9	11	1462.3	2	1
	5495	2	62.3	9	1774.8	1	
	5498	3	89.2	17	1602.1	2	
	5493	4	51.1	6	1272.0	3	
	5493	5	94.0	6	1293.4	1	
	5497	6	71.5	16	1018.1	2	
	5494	7	55.4	8	1298.2	3	
	5497	8	85.0	14	1360.5	1	
5	5495	1	72.6	9	1153.1	1	1
	5494	2	94.1	8	1489.4	2	
	5496	3	81.4	12	1032.7	1	
	5496	4	65.3	12	1694.8	1	
	5496	5	88.1	12	1414.0	3	
	5499	6	91.5	20	1899.0	3	
	5495	7	87.1	9	1125.7	1	
	5498	8	59.1	17	1347.9	2	
	5494	9	63.6	7	1901.1	1	
	5497	10	87.1	16	1418.0	1	
	5495	11	54.2	11	1688.9	1	
	5499	12	69.9	20	1805.8	1	
	5497	13	83.8	14	1817.4	1	
	5494	14	72.8	8	1903.5	3	
	5497	15	74.6	16	1283.0	3	
6	5494	1	50.8	7	1369.2	2	1
	5494	2	51.8	7	1193.3	2	
	5497	3	95.7	14	1378.7	2	
	5498	4	63.1	17	1752.3	1	
	5495	5	64.3	11	1132.1	3	
	5496	6	89.2	12	1434.3	3	
	5495	7	66.4	9	1789.8	2	
	5494	8	86.7	7	1735.0	3	
	5496	9	54.5	12	1678.6	2	
	5494	10	67.7	8	1314.5	1	
	5497	11	91.6	14	1752.5	1	
	5494	12	58.7	7	1823.3	1	
	5498	13	84.4	17	1879.0	3	
	5499	14	57.1	19	1533.8	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5498	1	72.4	17	1238.7	1	1
	5498	2	53.7	18	1212.8	1	
	5495	3	84.7	10	1475.5	3	
	5499	4	93.0	20	1057.9	1	
	5493	5	70.8	6	1920.2	2	
	5494	6	91.9	7	1393.3	2	
	5499	7	93.2	19	1507.6	3	
	5498	8	53.5	17	1227.0	2	
	5495	9	53.6	11	1675.6	1	
	5494	10	52.0	7	1794.9	3	
	5496	11	87.5	12	1502.8	3	
	5494	12	76.4	8	1399.1	1	
	5494	13	84.0	8	1516.9	3	
	5495	14	50.2	9	1807.4	3	
	5497	15	90.8	15	1702.5	2	
	5497	16	51.9	14	1934.3	1	
	5495	17	78.8	11	1281.2	1	
8	5493	1	73.7	6	1963.8	3	1
	5499	2	75.8	20	1541.6	1	
	5499	3	91.9	19	1861.5	2	
	5497	4	89.8	14	1876.3	2	
	5497	5	53.7	14	1886.9	3	
	5495	6	86.0	11	1322.8	2	
	5494	7	82.4	8	1002.2	2	
	5493	8	58.3	6	1956.1	1	
	5496	9	68.8	12	1716.0	1	
	5498	10	94.0	18	1457.3	2	
	5495	11	59.7	9	1666.2	1	
	5495	12	81.3	11	1306.8	2	
	5494	13	54.2	8	1333.4	2	
	5497	14	96.9	16	1411.7	1	
	5497	15	62.2	15	1381.1	3	
	5493	16	97.3	6	1097.2	1	
	5495	17	76.0	10	1125.5	3	
5498	18	50.9	17	1051.3	1		

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5497	1	74.6	16	1438.1	1	0
	5497	2	89.4	14	1560.5	1	
	5494	3	50.1	7	1108.7	1	
	5497	4	88.7	15	1400.9	1	
	5494	5	95.2	7	1387.9	2	
	5495	6	97.7	11	1289.7	2	
	5497	7	88.9	15	1374.9	1	
	5498	8	84.7	17	1803.8	1	
	5498	9	69.1	17	1676.3	3	
	5497	10	90.5	15	1226.3	1	
	5493	11	94.5	6	1482.3	2	
	5496	12	61.4	13	1905.4	1	
	5494	13	82.7	8	1603.1	3	
	5497	14	83.4	16	1008.8	3	
	5497	15	94.9	15	1333.8	3	
	5497	16	62.0	14	1828.5	1	
	5495	17	96.5	9	1958.5	2	
	5493	18	77.6	6	1374.0	3	
	5499	19	62.1	19	1919.6	2	
10	5493	1	86.2	6	1519.9	2	1
	5497	2	96.5	16	1777.3	2	
	5495	3	59.2	9	1802.2	1	
	5495	4	99.4	9	1148.3	2	
	5497	5	54.7	14	1161.4	2	
	5494	6	58.2	8	1265.7	3	
	5495	7	68.9	11	1260.7	1	
	5497	8	71.3	15	1955.7	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5510	1	63.2	15	1974.6	3	1
	5510	2	69.1	7	1931.4	2	
	5510	3	91.9	12	1357.7	1	
	5510	4	88.4	10	1846.8	1	
	5510	5	76.9	16	1375.0	2	
	5510	6	84.6	9	1697.7	3	
	5510	7	72.6	19	1261.1	3	
	5510	8	54.3	16	1561.4	2	
	5510	9	59.9	8	1219.4	2	
	5510	10	54.4	15	1109.9	2	
	5510	11	95.2	17	1043.2	1	
	5510	12	59.2	8	1253.6	1	
	5510	13	83.8	13	1057.8	1	
	5510	14	76.5	12	2000.0	2	
	5510	15	62.4	6	1310.6	3	
	5510	16	88.9	11	1360.3	1	
12	5510	1	53.7	5	1530.6	1	1
	5510	2	55.4	9	1989.8	3	
	5510	3	51.9	18	1262.4	2	
	5510	4	81.6	12	1281.7	2	
	5510	5	63.5	15	1349.7	2	
	5510	6	60.6	18	1135.5	1	
	5510	7	67.9	16	1837.7	1	
	5510	8	90.2	17	1391.6	2	
	5510	9	77.2	14	1594.1	1	
	5510	10	76.6	11	1020.6	3	
	5510	11	67.1	12	1733.7	3	
	5510	12	81.7	10	1023.9	1	
	5510	13	76.4	19	1097.5	1	
	5510	14	80.9	13	1770.6	2	
	5510	15	86.8	11	1017.5	2	
	5510	16	52.1	7	1328.3	2	
	5510	17	79.6	17	1466.9	3	
	5510	18	72.5	15	1790.7	3	
	5510	19	63.5	14	1447.3	3	
	5510	20	91.4	8	1890.3	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5510	1	80.3	15	1658.0	3	1
	5510	2	80.5	7	1387.3	2	
	5510	3	97.8	14	1111.9	1	
	5510	4	66.5	17	1665.9	2	
	5510	5	65.4	5	1827.7	1	
	5510	6	83.7	11	1933.1	3	
	5510	7	61.1	17	1587.5	2	
	5510	8	69.0	14	1381.0	2	
	5510	9	84.7	15	1464.5	1	
	5510	10	68.5	17	1900.8	2	
14	5510	1	55.3	9	1451.8	1	1
	5510	2	69.9	20	1939.6	1	
	5510	3	61.0	13	1420.4	2	
	5510	4	97.1	14	1794.7	2	
	5510	5	87.2	6	1115.8	2	
	5510	6	77.2	11	1774.2	1	
	5510	7	94.6	15	1695.0	1	
	5510	8	64.6	5	1066.0	1	
	5510	9	53.2	18	1228.2	1	
	5510	10	54.1	17	1314.4	1	
	5510	11	86.2	15	1247.2	1	
	5510	12	66.6	9	1582.3	1	
	5510	13	76.4	8	1940.6	3	
	5510	14	88.6	16	1702.7	2	
	5510	15	92.3	20	1868.7	3	
	5510	16	55.1	10	1569.8	3	
	5510	17	97.0	10	1117.2	3	
	5510	18	98.5	19	1360.2	3	
	5510	19	64.4	20	1984.3	1	
	5510	20	95.8	11	1074.4	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5510	1	68.1	18	1153.3	1	1
	5510	2	68.5	8	1535.6	2	
	5510	3	92.9	17	1244.4	2	
	5510	4	61.3	10	1823.8	3	
	5510	5	92.1	9	1212.1	1	
	5510	6	59.6	14	1120.5	3	
	5510	7	82.5	16	1823.6	2	
	5510	8	79.5	15	1157.7	1	
	5510	9	52.0	8	1908.4	3	
	5510	10	88.3	11	1355.7	1	
	5510	11	55.7	8	1920.0	2	
	5510	12	69.4	15	1332.1	3	
	5510	13	92.2	6	1732.5	1	
	5510	14	65.6	12	1052.3	1	
	5510	15	57.9	6	1001.7	1	
	5510	16	69.7	11	1960.0	1	
	5510	17	95.1	8	1512.4	3	
	5510	18	53.3	8	1088.0	2	
	5510	19	79.3	17	1816.2	2	
16	5510	1	69.0	12	1497.5	1	1
	5510	2	50.7	16	1177.4	2	
	5510	3	66.1	9	1503.6	2	
	5510	4	53.5	6	1026.8	3	
	5510	5	57.1	13	1291.3	3	
	5510	6	59.7	18	1747.0	2	
	5510	7	71.6	10	1202.6	2	
	5510	8	87.9	16	1994.7	3	
	5510	9	78.3	20	1984.1	1	
	5510	10	93.0	14	1418.3	2	
	5510	11	92.8	13	1316.0	2	
	5510	12	79.4	14	1635.2	2	
	5510	13	51.8	14	1588.5	2	
	5510	14	76.0	19	1780.5	3	
	5510	15	54.3	15	1681.2	1	
	5510	16	70.3	15	1206.7	2	
	5510	17	72.7	16	1943.1	3	
	5510	18	77.7	12	1182.0	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5510	1	78.6	18	1660.3	2	1
	5510	2	73.7	9	1731.8	1	
	5510	3	74.9	9	1348.2	2	
	5510	4	77.0	13	1642.5	2	
	5510	5	93.9	9	1532.7	3	
	5510	6	83.4	5	1767.2	2	
	5510	7	78.0	5	1816.1	1	
	5510	8	72.6	13	1345.9	3	
	5510	9	89.2	11	1857.8	3	
	5510	10	51.6	10	1504.4	3	
	5510	11	81.9	6	1497.0	1	
	5510	12	85.3	18	1919.5	3	
	5510	13	77.0	8	1692.2	3	
	5510	14	62.7	10	1032.8	3	
	5510	15	69.7	19	1602.4	3	
	5510	16	80.7	18	1527.2	1	
	5510	17	88.2	18	1562.6	2	
18	5510	1	64.3	10	1862.8	1	1
	5510	2	96.0	14	1269.6	1	
	5510	3	75.5	5	1097.0	1	
	5510	4	53.3	10	1971.9	2	
	5510	5	73.7	16	1501.7	1	
	5510	6	53.4	18	1263.6	3	
	5510	7	88.3	20	1835.0	3	
	5510	8	86.0	18	1435.1	2	
	5510	9	68.4	6	1092.5	2	
	5510	10	82.8	10	1767.3	1	
	5510	11	51.7	14	1945.0	3	
	5510	12	96.9	16	1760.7	3	
	5510	13	84.6	18	1406.3	2	
	5510	14	98.3	13	1247.3	2	
	5510	15	85.5	5	1085.6	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5510	1	82.9	9	1443.4	2	1
	5510	2	85.7	14	1315.3	2	
	5510	3	56.6	13	1906.1	2	
	5510	4	89.8	10	1694.9	1	
	5510	5	85.0	13	1055.4	2	
	5510	6	57.6	9	1197.4	3	
	5510	7	91.1	9	1885.2	1	
	5510	8	71.9	7	1976.5	3	
	5510	9	97.4	19	1124.3	1	
	5510	10	80.9	12	1054.1	1	
	5510	11	96.3	11	1083.0	1	
	5510	12	88.9	7	1946.7	1	
	5510	13	62.9	10	1859.7	2	
	5510	14	50.8	6	1753.9	1	
20	5510	1	53.3	19	1315.0	3	1
	5510	2	91.0	9	1764.4	3	
	5510	3	70.0	12	1005.2	1	
	5510	4	78.5	14	1825.6	3	
	5510	5	69.3	13	1863.1	1	
	5510	6	59.5	11	1756.1	2	
	5510	7	73.5	19	1525.1	3	
	5510	8	54.8	19	1696.2	1	
	5510	9	80.4	16	1180.7	2	
	5510	10	95.4	14	1576.6	3	
21	5521	1	76.4	20	1393.9	1	1
	5522	2	59.7	18	1150.7	1	
	5521	3	96.1	19	1827.2	3	
	5523	4	94.5	16	1973.6	2	
	5525	5	80.1	10	1765.5	3	
	5521	6	77.9	19	1581.8	3	
	5523	7	86.7	16	1011.9	3	
	5523	8	68.7	14	1931.5	3	
	5521	9	86.9	19	1311.5	2	
	5525	10	62.0	10	1819.9	2	
	5523	11	82.2	14	1985.3	1	
	5521	12	91.9	19	1154.1	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5521	1	50.8	19	1271.3	2	1
	5521	2	90.3	19	1244.7	2	
	5522	3	77.5	17	1417.8	2	
	5526	4	90.5	7	1532.0	2	
	5525	5	65.8	11	1622.8	3	
	5522	6	71.8	17	1255.9	2	
	5526	7	51.3	8	1385.4	1	
	5527	8	62.2	6	1163.1	1	
23	5521	9	97.9	20	1994.7	1	1
	5526	1	62.4	7	1974.8	1	
	5523	2	93.5	15	1589.5	3	
	5521	3	58.9	20	1301.4	2	
	5525	4	51.6	10	1004.8	3	
	5524	5	72.9	12	1463.7	2	
	5523	6	74.2	14	1479.8	1	
	5525	7	76.4	9	1729.8	2	
	5523	8	89.0	14	1628.7	1	
	5522	9	70.0	17	1088.8	2	
	5525	10	90.6	11	1253.7	3	
	5524	11	85.5	12	1596.9	2	
	5521	12	83.3	19	1646.6	1	
	5522	13	76.5	18	1313.0	3	
	5521	14	83.3	19	1839.2	2	
5527	15	74.0	6	1619.5	1		
24	5523	1	94.8	15	1324.7	1	1
	5525	2	70.7	11	1635.0	3	
	5526	3	96.1	8	1791.0	2	
	5525	4	61.9	11	1959.6	2	
	5523	5	72.9	14	1812.5	2	
	5523	6	79.1	14	1551.4	3	
	5526	7	66.8	7	1128.7	1	
	5527	8	90.0	5	1545.8	1	
	5525	9	63.0	9	1557.5	3	
	5527	10	96.3	6	1955.0	1	
	5525	11	73.2	9	1492.3	3	
	5522	12	98.6	17	1811.8	3	
	5524	13	79.5	13	1592.5	2	
	5521	14	57.8	19	1294.8	2	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5524	1	75.9	13	1087.1	3	1
	5526	2	56.4	8	1099.5	1	
	5522	3	76.0	17	1081.6	2	
	5524	4	77.8	13	1200.8	2	
	5521	5	94.2	19	1475.1	2	
	5521	6	55.8	19	1368.2	1	
	5523	7	88.7	16	1706.3	1	
	5524	8	65.6	13	1577.6	3	
	5522	9	98.9	18	1804.7	2	
	5526	10	96.9	7	1613.4	3	
	5522	11	61.6	17	1310.9	2	
	5524	12	99.2	13	1883.1	3	
	5527	13	94.0	6	1937.9	1	
	5525	14	91.1	10	1534.4	2	
	5524	15	58.5	13	1342.7	1	
	5522	16	87.0	18	1648.8	1	
	5523	17	66.0	15	1357.9	1	
	5525	18	75.6	11	1521.2	1	
26	5527	1	75.7	5	1341.0	1	1
	5521	2	78.0	20	1953.0	2	
	5524	3	94.9	12	1348.4	1	
	5526	4	63.2	7	1086.2	2	
	5527	5	50.2	6	1936.9	2	
	5521	6	97.3	19	1494.1	2	
	5525	7	61.9	9	1121.5	1	
	5522	8	99.3	17	1562.4	1	
	5527	9	88.7	5	1847.5	3	
	5524	10	79.2	12	1521.3	2	
	5523	11	51.8	15	1487.8	2	
	5522	12	82.3	18	1877.2	1	
	5524	13	95.9	12	1931.1	2	
	5523	14	71.1	16	1035.7	1	
	5523	15	60.3	15	1345.5	1	
	5521	16	85.9	19	1619.0	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5524	1	85.9	12	1916.2	2	0
	5521	2	86.2	19	1627.1	1	
	5523	3	94.6	16	1140.4	2	
	5526	4	76.8	8	1297.0	1	
	5527	5	82.6	6	1268.3	1	
	5524	6	75.3	13	1317.8	1	
	5526	7	88.7	8	1765.1	2	
	5526	8	98.4	8	1871.2	2	
	5524	9	72.0	12	1845.9	3	
	5524	10	92.9	12	1371.7	3	
	5522	11	63.9	18	1191.0	1	
	5525	12	97.3	11	1250.8	3	
	5523	13	91.7	15	1394.4	3	
	5523	14	96.5	16	1428.2	3	
	5523	15	56.3	15	1238.4	3	
	5522	16	74.2	18	1449.7	3	
	5525	17	97.9	10	1294.7	3	
	5523	18	96.0	15	1695.1	3	
	5525	19	54.6	11	1492.2	1	
	5523	20	86.2	16	1599.2	1	
28	5524	1	79.9	13	1562.0	1	1
	5524	2	98.6	13	1810.4	2	
	5525	3	97.7	11	1418.3	1	
	5523	4	77.6	15	1110.2	3	
	5521	5	92.1	20	1450.2	3	
	5525	6	93.7	11	1658.8	3	
	5524	7	87.2	13	1017.4	3	
	5523	8	53.2	16	1360.2	1	
	5523	9	50.0	16	1549.8	2	
	5523	10	76.5	16	1862.0	3	
	5522	11	71.3	18	1768.2	2	
	5521	12	76.2	19	1083.7	1	
	5524	13	85.5	12	1882.5	1	
	5521	14	91.2	20	1086.2	1	
	5521	15	51.0	19	1313.0	3	
	5526	16	69.5	8	1410.9	1	
	5523	17	81.5	14	1865.4	2	
	5521	18	95.0	20	1045.2	3	
	5526	19	55.9	7	1981.5	1	
	5524	20	74.7	13	1926.2	3	

Test Mode		802.11ax HE40					
Frequency		5510 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5527	1	78.7	6	1414.7	3	1
	5526	2	67.2	8	1402.4	2	
	5526	3	99.3	7	1937.3	2	
	5527	4	96.3	5	1522.4	3	
	5524	5	92.4	13	1926.1	2	
	5524	6	95.1	13	1368.4	1	
	5521	7	55.1	19	1362.6	3	
	5526	8	72.4	7	1757.6	3	
	5524	9	70.8	12	1764.3	3	
	5524	10	84.5	12	1212.9	2	
	5524	11	94.5	13	1530.5	2	
	5523	12	64.6	15	1096.6	2	
	5525	13	58.1	10	1699.9	2	
	5521	14	70.0	20	1329.4	1	
	5526	15	94.3	7	1466.3	1	
	5525	16	63.0	11	1264.2	1	
	5523	17	67.5	15	1421.9	3	
30	5525	1	93.8	11	1811.3	1	1
	5522	2	63.1	18	1868.1	1	
	5522	3	87.0	17	1517.5	3	
	5527	4	77.8	6	1776.9	1	
	5527	5	89.1	5	1172.1	3	
	5527	6	77.8	6	1276.5	1	
	5521	7	56.0	19	1339.6	2	
	5521	8	87.7	19	1331.4	1	
	5526	9	69.1	8	1397.9	1	
	5522	10	75.3	18	1924.7	1	
	5524	11	96.6	13	1285.8	1	
	5527	12	91.7	6	1271.3	1	
	5524	13	83.1	12	1571.6	2	
	5525	14	71.3	9	1923.7	2	
							93.33

Test Mode		802.11ax HE40				
Frequency		5510 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	1	718	74	1393	1
2	5530	1	878	61	1139	1
3	5530	1	698	76	1433	1
4	5530	1	838	63	1193	0
5	5530	1	778	68	1285	1
6	5530	1	618	86	1618	1
7	5530	1	658	81	1520	1
8	5530	1	798	67	1253	1
9	5530	1	518	102	1931	1
10	5530	1	798	67	1253	1
11	5530	1	798	67	1253	1
12	5530	1	778	68	1285	1
13	5530	1	578	92	1730	1
14	5530	1	598	89	1672	1
15	5530	1	898	59	1114	1
16	5530	1	1679	32	596	1
17	5530	1	2674	20	374	1
18	5530	1	2344	23	427	1
19	5530	1	559	95	1789	0
20	5530	1	1080	49	926	1
21	5530	1	1762	30	568	1
22	5530	1	1180	45	847	1
23	5530	1	1561	34	641	1
24	5530	1	2172	25	460	1
25	5530	1	1708	31	585	1
26	5530	1	1067	50	937	1
27	5530	1	642	83	1558	1
28	5530	1	2098	26	477	1
29	5530	1	742	72	1348	0
30	5530	1	1664	32	601	1
Detection Percentage (%)						90.00

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 2					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	4.10	210.40	24	4753	1
2	5530	2.60	170.00	27	5882	1
3	5530	1.70	220.80	28	4529	1
4	5530	4.70	182.70	25	5473	0
5	5530	2.10	153.00	28	6536	1
6	5530	1.80	187.80	23	5325	1
7	5530	1.60	191.90	26	5211	1
8	5530	3.50	169.90	24	5886	1
9	5530	4.20	227.00	23	4405	1
10	5530	3.10	157.60	29	6345	0
11	5530	4.60	209.40	25	4776	1
12	5530	3.70	227.70	28	4392	1
13	5530	4.80	183.20	26	5459	1
14	5530	3.40	211.00	24	4739	1
15	5530	1.70	161.50	25	6192	1
16	5530	3.00	179.00	26	5587	1
17	5530	4.90	179.10	26	5583	1
18	5530	1.20	154.10	29	6489	1
19	5530	1.10	181.90	25	5498	1
20	5530	1.10	226.00	26	4425	1
21	5530	1.50	181.00	29	5525	1
22	5530	4.20	158.00	27	6329	1
23	5530	2.10	172.70	26	5790	1
24	5530	4.20	222.90	23	4486	1
25	5530	4.80	154.70	26	6464	0
26	5530	2.30	161.70	24	6184	1
27	5530	3.00	171.10	26	5845	1
28	5530	3.60	214.20	26	4669	1
29	5530	1.70	185.50	23	5391	1
30	5530	1.10	160.70	26	6223	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	9.70	386.80	16	2585.32	1
2	5530	8.70	488.10	16	2048.76	0
3	5530	8.00	374.30	17	2671.65	1
4	5530	6.50	492.50	16	2030.46	1
5	5530	7.80	456.60	18	2190.10	1
6	5530	7.60	410.00	16	2439.02	1
7	5530	6.40	416.70	18	2399.81	1
8	5530	8.80	304.30	18	3286.23	1
9	5530	6.50	314.30	17	3181.67	1
10	5530	7.80	455.30	16	2196.35	0
11	5530	6.40	368.50	18	2713.70	1
12	5530	6.20	365.20	17	2738.23	1
13	5530	6.50	253.60	18	3943.22	1
14	5530	6.10	451.50	18	2214.84	1
15	5530	7.90	360.80	18	2771.62	1
16	5530	8.10	313.10	17	3193.87	1
17	5530	9.90	213.70	18	4679.46	1
18	5530	7.00	213.70	16	4679.46	0
19	5530	8.30	385.70	17	2592.69	1
20	5530	7.80	466.80	17	2142.25	0
21	5530	8.90	374.70	16	2668.80	1
22	5530	6.30	257.20	16	3888.02	1
23	5530	6.90	243.30	16	4110.15	1
24	5530	6.10	357.80	16	2794.86	0
25	5530	7.80	207.50	16	4819.28	1
26	5530	6.10	227.80	17	4389.82	0
27	5530	7.90	215.30	18	4644.68	1
28	5530	6.40	228.60	18	4374.45	1
29	5530	9.70	398.70	16	2508.15	1
30	5530	7.70	348.30	18	2871.09	1
Detection Percentage (%)						80.00

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 4					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	17.60	354.70	12	2819	1
2	5530	12.50	272.10	16	3675	1
3	5530	13.50	432.40	14	2313	0
4	5530	13.50	394.40	14	2535	1
5	5530	14.70	447.90	15	2233	1
6	5530	19.00	215.50	13	4640	0
7	5530	11.70	494.70	14	2021	1
8	5530	14.70	395.70	15	2527	1
9	5530	15.80	265.30	13	3769	1
10	5530	13.30	265.40	13	3768	1
11	5530	13.40	258.60	14	3867	1
12	5530	12.60	426.20	16	2346	1
13	5530	14.60	251.60	15	3975	1
14	5530	17.10	433.10	15	2309	1
15	5530	11.20	403.40	16	2479	0
16	5530	19.50	245.80	14	4068	1
17	5530	19.80	310.80	12	3218	1
18	5530	18.00	443.30	15	2256	1
19	5530	14.70	432.70	14	2311	1
20	5530	18.70	462.90	15	2160	0
21	5530	17.10	230.10	13	4346	1
22	5530	14.80	400.80	13	2495	1
23	5530	13.70	299.00	13	3344	0
24	5530	12.70	390.60	13	2560	1
25	5530	12.10	292.50	12	3419	1
26	5530	11.30	277.70	16	3601	1
27	5530	13.80	261.60	13	3823	1
28	5530	17.40	336.80	14	2969	1
29	5530	15.20	210.40	12	4753	1
30	5530	11.30	458.60	14	2181	1
Detection Percentage (%)						83.33

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5497.5	1	67.3	16	1240.5	3	1
	5496.5	2	70.5	12	1961.9	1	
	5497.5	3	88.7	14	1747.2	2	
	5494.5	4	86.9	7	1973.1	1	
	5494.5	5	93.8	7	1956.5	2	
	5493.5	6	67.8	5	1554.1	2	
	5493.5	7	63.7	5	1821.4	3	
	5496.5	8	89.1	13	1215.2	3	
	5494.5	9	62.6	7	1404.6	3	
	5497.5	10	94.5	14	1829.7	2	
	5493.5	11	95.7	6	1813.6	2	
2	5494.5	1	60.4	7	1882.6	2	1
	5496.5	2	77.0	13	1694.2	2	
	5494.5	3	63.6	7	1534.7	2	
	5497.5	4	57.9	15	1380.3	2	
	5498.5	5	85.7	17	1652.2	2	
	5495.5	6	70.8	11	1942.9	2	
	5494.5	7	91.4	7	1151.8	3	
	5496.5	8	83.4	12	1531.2	2	
	5496.5	9	96.2	12	1409.3	1	
	5498.5	10	71.3	18	1780.7	2	
	5496.5	11	63.8	12	1896.5	1	
	5498.5	12	54.0	18	1299.8	2	
3	5497.5	1	68.0	15	1010.0	1	1
	5494.5	2	82.8	7	1076.7	2	
	5498.5	3	91.1	18	1863.3	3	
	5493.5	4	82.1	6	1980.2	3	
	5494.5	5	94.7	8	1034.2	2	
	5498.5	6	97.4	18	1522.7	1	
	5495.5	7	73.9	10	1513.1	2	
	5498.5	8	61.9	18	1130.5	3	
	5497.5	9	82.5	14	1438.0	2	
	5498.5	10	67.5	18	1814.1	1	
	5497.5	11	66.8	16	1604.5	1	
	5499.5	12	73.7	20	1618.7	2	
	5493.5	13	60.3	5	1276.2	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5497.5	1	99.7	16	1369.3	1	0
	5494.5	2	82.2	7	1851.2	3	
	5496.5	3	52.6	12	1020.6	1	
	5495.5	4	68.0	11	1388.5	2	
	5495.5	5	82.6	9	1067.9	1	
	5493.5	6	68.2	5	1668.7	2	
	5496.5	7	63.6	12	1644.5	1	
	5496.5	8	90.5	13	1794.8	1	
5	5493.5	9	63.7	6	1813.6	3	1
	5494.5	1	85.1	7	1375.1	1	
	5496.5	2	90.2	12	1705.8	2	
	5496.5	3	78.5	13	1776.6	1	
	5493.5	4	94.6	5	1110.0	3	
	5498.5	5	50.2	17	1296.2	2	
	5497.5	6	61.2	15	1237.2	3	
	5493.5	7	55.2	5	1949.4	1	
	5497.5	8	94.0	14	1919.5	1	
	5498.5	9	95.7	17	1167.1	2	
	5496.5	10	92.5	12	1560.5	3	
	5497.5	11	52.6	15	1201.4	1	
	5493.5	12	90.6	6	1639.9	2	
	5494.5	13	65.2	7	1908.7	3	
5498.5	14	72.6	18	1503.9	2		
5498.5	15	70.6	18	1537.0	1		
6	5493.5	1	89.7	6	1712.5	2	1
	5498.5	2	50.3	18	1310.1	1	
	5496.5	3	88.5	12	1800.8	2	
	5494.5	4	52.4	7	1228.7	2	
	5497.5	5	95.8	14	1158.6	1	
	5495.5	6	55.3	9	1101.7	3	
	5495.5	7	63.9	9	1590.4	1	
	5496.5	8	69.5	12	1885.2	1	
	5497.5	9	93.0	14	1258.3	2	
	5495.5	10	91.3	9	1533.6	2	
	5498.5	11	51.6	17	1738.2	2	
	5497.5	12	64.3	15	1839.5	1	
	5496.5	13	94.1	13	1707.5	1	
	5496.5	14	80.6	12	1652.9	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5498.5	1	97.7	17	1636.8	1	1
	5498.5	2	59.0	17	1498.5	3	
	5497.5	3	58.2	14	1141.7	3	
	5496.5	4	68.7	12	1055.9	1	
	5495.5	5	66.9	11	1714.2	1	
	5499.5	6	96.0	19	1944.9	2	
	5495.5	7	63.4	11	1232.7	2	
	5494.5	8	69.8	7	1016.4	3	
	5498.5	9	57.0	18	1169.5	3	
	5493.5	10	63.3	6	1177.2	3	
	5499.5	11	89.7	19	1401.1	2	
	5495.5	12	81.3	11	1491.5	3	
	5495.5	13	83.0	9	1106.4	1	
	5494.5	14	98.6	8	1773.6	3	
	5499.5	15	86.4	19	1436.1	1	
	5493.5	16	52.0	5	1926.4	3	
	5494.5	17	82.0	7	1764.9	1	
8	5495.5	1	67.3	11	1923.1	2	1
	5496.5	2	77.6	13	1571.6	3	
	5493.5	3	76.1	5	1484.6	3	
	5494.5	4	71.3	8	1571.6	3	
	5498.5	5	84.5	18	1994.9	1	
	5494.5	6	97.8	8	1957.6	1	
	5497.5	7	73.8	15	1557.9	3	
	5499.5	8	93.9	19	1686.6	1	
	5493.5	9	55.0	6	1022.9	1	
	5498.5	10	73.5	17	1189.0	2	
	5499.5	11	92.5	19	1613.6	2	
	5498.5	12	93.0	17	1474.9	3	
	5499.5	13	63.8	20	1468.2	2	
	5497.5	14	51.3	14	1427.5	3	
	5494.5	15	65.4	7	1399.1	2	
	5497.5	16	66.6	14	1299.5	3	
	5495.5	17	72.7	9	1384.3	3	
	5496.5	18	87.3	12	1141.2	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5493.5	1	54.8	6	1249.1	3	0
	5498.5	2	94.5	18	1754.5	1	
	5495.5	3	88.6	11	1533.9	2	
	5495.5	4	64.5	11	1163.9	2	
	5497.5	5	57.5	16	1650.8	3	
	5494.5	6	57.5	8	1696.3	1	
	5497.5	7	72.3	16	1278.8	1	
	5497.5	8	51.4	16	1961.1	1	
	5495.5	9	96.4	10	1621.2	3	
	5496.5	10	65.9	13	1282.8	1	
	5495.5	11	85.0	9	1731.3	2	
	5498.5	12	88.7	18	1341.6	2	
	5499.5	13	51.0	19	1095.9	3	
	5493.5	14	82.3	6	1086.3	1	
	5497.5	15	53.3	14	1123.5	2	
	5496.5	16	76.5	12	1863.2	2	
	5495.5	17	96.0	11	1076.3	3	
	5494.5	18	70.0	7	1644.9	2	
	5494.5	19	74.7	8	1542.9	2	
10	5496.5	1	73.6	13	1396.5	3	1
	5496.5	2	50.1	13	1362.6	1	
	5493.5	3	85.1	6	1628.0	2	
	5495.5	4	68.7	10	1980.3	1	
	5499.5	5	70.4	20	1557.2	2	
	5493.5	6	61.1	6	1678.8	3	
	5495.5	7	75.5	10	1811.2	3	
	5496.5	8	82.6	13	1223.4	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5530	1	72.7	15	1176.3	3	1
	5530	2	65.0	9	1361.3	3	
	5530	3	71.8	15	1253.5	3	
	5530	4	95.9	10	1273.9	1	
	5530	5	68.4	16	1578.6	1	
	5530	6	70.0	6	1415.0	1	
	5530	7	90.7	11	1605.8	2	
	5530	8	80.7	16	1384.4	2	
	5530	9	90.1	15	1507.3	3	
	5530	10	63.3	5	1220.7	2	
	5530	11	68.1	13	1331.6	3	
	5530	12	71.9	13	1410.2	2	
	5530	13	90.6	16	1015.6	1	
	5530	14	92.2	9	1052.0	1	
	5530	15	92.7	18	1495.2	2	
	5530	16	54.3	16	1009.9	1	
12	5530	1	83.5	17	1893.9	2	1
	5530	2	59.7	7	1876.5	3	
	5530	3	55.8	12	1309.4	1	
	5530	4	65.0	17	1866.8	1	
	5530	5	67.7	17	1309.0	3	
	5530	6	83.6	12	1742.2	1	
	5530	7	96.5	19	1891.7	1	
	5530	8	62.4	20	1549.7	1	
	5530	9	53.6	9	1187.3	3	
	5530	10	60.5	7	1734.3	2	
	5530	11	81.9	16	1961.5	3	
	5530	12	88.7	13	1024.4	3	
	5530	13	83.0	12	1003.6	2	
	5530	14	57.0	12	1508.7	1	
	5530	15	69.7	9	1314.0	1	
	5530	16	79.5	8	1228.4	1	
	5530	17	76.7	14	1248.9	2	
	5530	18	52.6	14	1300.2	1	
	5530	19	91.2	11	1444.9	3	
	5530	20	80.8	18	1032.8	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5530	1	85.3	6	1846.9	2	1
	5530	2	78.9	6	1792.8	2	
	5530	3	52.3	15	1176.0	3	
	5530	4	94.8	9	1317.9	1	
	5530	5	62.5	10	1215.9	3	
	5530	6	89.7	20	1129.1	2	
	5530	7	67.8	8	1998.5	1	
	5530	8	50.9	11	1356.6	3	
	5530	9	88.9	10	1490.2	3	
	5530	10	90.6	20	1226.1	2	
14	5530	1	84.6	18	1849.4	2	1
	5530	2	58.4	10	1497.9	1	
	5530	3	55.9	18	1790.0	2	
	5530	4	59.1	15	1990.7	2	
	5530	5	69.9	17	1784.9	3	
	5530	6	60.9	16	1616.3	3	
	5530	7	61.1	10	1857.7	1	
	5530	8	73.4	13	1374.3	1	
	5530	9	93.9	10	1480.9	1	
	5530	10	85.3	10	1233.6	2	
	5530	11	71.7	17	1059.6	2	
	5530	12	96.5	19	1723.6	1	
	5530	13	80.7	17	1937.6	2	
	5530	14	83.3	6	1705.5	2	
	5530	15	93.0	14	1949.0	1	
	5530	16	72.2	17	1027.9	2	
	5530	17	58.9	7	1468.3	2	
	5530	18	80.9	19	1681.5	1	
	5530	19	97.0	6	1003.7	3	
	5530	20	67.6	7	1894.2	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5530	1	54.1	5	1851.3	3	1
	5530	2	97.3	12	1737.5	2	
	5530	3	51.9	11	1414.4	1	
	5530	4	89.9	19	1061.0	3	
	5530	5	90.6	20	1606.0	2	
	5530	6	73.1	18	1736.4	2	
	5530	7	82.1	9	1761.9	2	
	5530	8	80.0	17	1056.0	3	
	5530	9	92.9	17	1430.2	1	
	5530	10	72.8	7	1231.2	2	
	5530	11	56.0	14	1510.3	3	
	5530	12	69.9	17	1929.2	2	
	5530	13	58.4	10	1816.2	1	
	5530	14	73.2	9	1000.8	3	
	5530	15	74.9	13	1665.2	2	
	5530	16	77.8	14	1512.5	2	
	5530	17	85.3	6	1440.3	1	
	5530	18	84.8	14	1534.8	1	
	5530	19	56.2	17	1249.3	1	
16	5530	1	72.7	14	1960.1	1	1
	5530	2	99.7	12	1493.5	1	
	5530	3	79.2	19	1873.7	2	
	5530	4	78.6	17	1388.7	3	
	5530	5	55.1	13	1917.0	2	
	5530	6	71.7	7	1032.9	3	
	5530	7	89.8	18	1227.9	3	
	5530	8	58.4	17	1984.1	2	
	5530	9	51.8	14	1472.3	3	
	5530	10	97.3	11	1819.8	3	
	5530	11	85.2	7	1393.8	2	
	5530	12	60.1	9	1995.1	2	
	5530	13	69.2	8	1454.8	3	
	5530	14	50.7	9	1107.2	1	
	5530	15	81.8	17	1029.8	3	
	5530	16	68.8	9	1379.2	2	
	5530	17	57.2	11	1583.9	3	
	5530	18	72.2	13	1261.5	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5530	1	53.8	7	1693.8	1	1
	5530	2	71.3	5	1445.2	3	
	5530	3	74.3	14	1538.3	2	
	5530	4	82.5	17	1067.6	3	
	5530	5	74.6	6	1736.6	2	
	5530	6	62.4	12	1693.1	3	
	5530	7	54.6	10	1878.6	3	
	5530	8	93.8	11	1667.3	2	
	5530	9	87.3	9	1996.4	2	
	5530	10	67.2	18	1513.3	3	
	5530	11	59.3	13	1127.4	2	
	5530	12	84.2	15	1777.1	2	
	5530	13	70.5	12	1749.4	2	
	5530	14	85.0	18	1740.4	2	
	5530	15	69.4	15	1377.5	2	
	5530	16	94.5	16	1109.4	3	
	5530	17	70.1	19	1676.4	3	
18	5530	1	99.1	7	1218.9	3	0
	5530	2	73.3	13	1494.4	1	
	5530	3	98.1	14	1594.0	2	
	5530	4	63.5	8	1498.3	1	
	5530	5	97.5	14	1474.5	1	
	5530	6	50.3	9	1469.2	1	
	5530	7	89.9	19	1062.3	3	
	5530	8	62.4	15	1605.2	1	
	5530	9	58.6	16	1117.8	3	
	5530	10	74.2	9	1533.4	1	
	5530	11	76.8	6	1635.0	3	
	5530	12	73.7	7	1596.1	2	
	5530	13	51.9	11	1680.2	3	
	5530	14	50.0	19	1470.7	3	
	5530	15	79.9	15	1801.5	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5530	1	55.5	14	1522.9	3	1
	5530	2	50.3	8	1447.9	2	
	5530	3	86.0	7	1833.7	2	
	5530	4	91.9	9	1535.3	1	
	5530	5	65.7	16	1209.4	2	
	5530	6	82.9	13	1451.4	2	
	5530	7	63.0	13	1862.2	3	
	5530	8	51.4	7	1360.3	3	
	5530	9	64.8	15	1476.0	1	
	5530	10	85.8	9	1849.1	2	
	5530	11	60.8	11	1685.0	1	
	5530	12	66.6	11	1191.8	3	
	5530	13	82.2	11	1310.6	3	
	5530	14	99.8	17	1559.5	1	
20	5530	1	93.2	17	1337.7	1	1
	5530	2	65.0	10	1597.1	2	
	5530	3	96.6	10	1162.4	1	
	5530	4	94.2	20	1222.6	2	
	5530	5	61.3	10	1131.4	1	
	5530	6	63.5	14	1339.5	3	
	5530	7	83.7	18	1352.2	3	
	5530	8	81.8	20	1467.3	2	
	5530	9	67.5	12	1000.4	3	
	5530	10	61.7	19	1224.8	3	
21	5562.5	1	70.2	16	1242.1	2	1
	5564.5	2	99.5	11	1606.8	2	
	5562.5	3	67.7	16	1238.8	3	
	5564.5	4	88.7	10	1106.4	1	
	5564.5	5	93.3	9	1973.6	2	
	5561.5	6	59.7	18	1236.5	1	
	5565.5	7	50.8	8	1431.5	3	
	5562.5	8	86.0	15	1139.1	3	
	5561.5	9	79.2	17	1065.0	1	
	5566.5	10	81.0	6	1974.0	3	
	5563.5	11	63.2	13	1160.6	2	
	5566.5	12	87.8	6	1118.8	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5562.5	1	85.9	16	1819.8	3	1
	5565.5	2	85.5	7	1024.9	1	
	5565.5	3	83.5	8	1966.1	1	
	5565.5	4	53.6	7	1554.1	1	
	5560.5	5	78.6	19	1936.2	2	
	5565.5	6	76.9	7	1276.3	3	
	5565.5	7	54.3	8	1664.3	2	
	5564.5	8	60.8	10	1672.2	2	
23	5560.5	9	94.1	19	1293.4	1	0
	5562.5	1	69.0	15	1896.6	3	
	5565.5	2	70.1	8	1178.5	2	
	5566.5	3	97.4	6	1615.9	2	
	5561.5	4	81.7	17	1650.8	3	
	5563.5	5	75.2	12	1259.4	2	
	5562.5	6	70.8	15	1144.2	3	
	5562.5	7	92.9	15	1678.7	1	
	5561.5	8	52.9	18	1486.3	2	
	5562.5	9	88.5	14	1989.8	1	
	5563.5	10	72.5	12	1771.8	2	
	5565.5	11	79.6	7	1427.8	1	
	5562.5	12	90.4	15	1101.9	2	
	5563.5	13	93.0	13	1814.3	2	
	5562.5	14	70.9	14	1375.0	1	
5562.5	15	66.3	14	1631.0	1		
24	5561.5	1	76.0	18	1360.9	3	1
	5561.5	2	81.6	18	1278.4	2	
	5566.5	3	75.4	6	1498.7	3	
	5561.5	4	68.5	18	1488.9	2	
	5564.5	5	67.2	10	1138.6	2	
	5564.5	6	77.3	9	1987.0	1	
	5560.5	7	85.6	19	1269.1	1	
	5564.5	8	70.8	9	1366.9	3	
	5563.5	9	61.3	12	1189.2	1	
	5561.5	10	83.4	18	1318.7	1	
	5564.5	11	80.3	9	1493.7	2	
	5560.5	12	75.4	19	1986.8	3	
	5561.5	13	79.4	18	1638.1	2	
	5563.5	14	73.5	12	1855.2	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5564.5	1	80.7	10	1509.3	1	1
	5566.5	2	73.3	6	1782.4	3	
	5564.5	3	98.3	10	1799.0	1	
	5565.5	4	94.6	8	1547.2	1	
	5561.5	5	68.4	18	1297.5	1	
	5562.5	6	77.4	16	1746.6	1	
	5566.5	7	60.7	5	1633.1	1	
	5562.5	8	85.2	15	1614.0	3	
	5560.5	9	95.0	19	1308.0	3	
	5560.5	10	51.9	19	1155.5	3	
	5563.5	11	87.8	13	1511.4	2	
	5562.5	12	82.6	15	1414.7	3	
	5562.5	13	99.5	15	1479.1	3	
	5562.5	14	60.0	15	1991.4	2	
	5564.5	15	58.4	11	1053.1	1	
	5560.5	16	59.1	19	1856.3	2	
	5562.5	17	54.5	16	1598.8	1	
	5563.5	18	89.5	13	1659.2	3	
26	5564.5	1	90.7	9	1357.8	2	1
	5562.5	2	77.7	15	1808.8	3	
	5566.5	3	90.5	5	1024.9	1	
	5564.5	4	59.0	10	1716.0	1	
	5565.5	5	61.6	7	1737.0	2	
	5566.5	6	96.3	5	1762.3	3	
	5560.5	7	73.4	19	1823.5	1	
	5566.5	8	69.5	6	1713.9	2	
	5561.5	9	84.2	18	1775.2	1	
	5566.5	10	98.9	6	1133.4	1	
	5566.5	11	82.7	6	1681.7	1	
	5564.5	12	77.7	11	1053.5	3	
	5560.5	13	84.7	19	1023.1	3	
	5564.5	14	61.4	9	1130.3	2	
	5564.5	15	78.0	9	1806.6	1	
	5562.5	16	54.9	16	1194.1	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5561.5	1	99.9	18	1875.2	3	1
	5565.5	2	95.2	8	1488.9	3	
	5562.5	3	55.2	16	1745.3	2	
	5562.5	4	80.0	14	1213.1	2	
	5565.5	5	61.3	7	1830.1	2	
	5560.5	6	85.6	20	1144.3	2	
	5561.5	7	73.3	17	1405.1	1	
	5562.5	8	54.4	14	1915.9	2	
	5560.5	9	62.5	19	1182.3	3	
	5563.5	10	50.6	13	1932.0	1	
	5564.5	11	81.5	10	1857.2	1	
	5566.5	12	65.3	6	1366.9	2	
	5563.5	13	73.4	12	1737.4	1	
	5565.5	14	51.3	8	1009.3	3	
	5563.5	15	52.9	13	1600.8	2	
	5560.5	16	79.3	19	1611.2	1	
	5561.5	17	84.7	18	1620.3	2	
	5565.5	18	81.2	7	1163.4	1	
	5566.5	19	59.2	5	1693.0	3	
	5565.5	20	78.9	8	1217.7	1	
28	5563.5	1	76.2	12	1093.3	3	1
	5561.5	2	55.4	18	1950.2	2	
	5564.5	3	87.6	11	1714.7	2	
	5566.5	4	64.2	6	1694.0	1	
	5560.5	5	54.4	19	1162.1	3	
	5563.5	6	64.3	13	1536.5	1	
	5564.5	7	85.9	10	1027.4	1	
	5562.5	8	80.3	15	1902.6	3	
	5562.5	9	88.5	14	1461.6	1	
	5562.5	10	61.9	15	1459.1	3	
	5562.5	11	71.9	16	1725.3	1	
	5562.5	12	85.2	16	1328.7	1	
	5564.5	13	94.2	11	1745.8	2	
	5561.5	14	87.8	18	1851.1	3	
	5561.5	15	62.7	17	1419.9	1	
	5565.5	16	66.2	7	1957.3	3	
	5562.5	17	52.8	15	1964.7	3	
	5564.5	18	78.7	11	1296.1	2	
	5566.5	19	86.3	6	1232.5	1	
	5565.5	20	92.0	8	1997.8	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5565.5	1	71.5	7	1237.4	2	1
	5563.5	2	66.6	13	1234.4	3	
	5562.5	3	67.4	16	1058.2	1	
	5565.5	4	78.7	7	1605.2	1	
	5560.5	5	73.8	20	1874.6	1	
	5560.5	6	76.1	19	1197.0	1	
	5562.5	7	75.3	15	1433.4	2	
	5566.5	8	65.8	5	1659.4	1	
	5562.5	9	63.0	16	1389.2	1	
	5562.5	10	90.6	16	1286.2	2	
	5562.5	11	53.8	15	1134.4	1	
	5561.5	12	54.2	18	1636.0	2	
	5565.5	13	72.5	7	1563.6	1	
	5565.5	14	62.5	7	1640.2	2	
	5563.5	15	97.1	12	1194.3	3	
	5561.5	16	89.6	17	1410.1	2	
	5565.5	17	53.8	7	1944.1	1	
30	5562.5	1	72.6	14	1260.8	2	1
	5563.5	2	96.6	12	1455.1	2	
	5564.5	3	62.7	10	1963.6	1	
	5564.5	4	66.4	9	1093.8	2	
	5564.5	5	67.3	10	1256.7	1	
	5562.5	6	62.0	16	1030.4	3	
	5565.5	7	60.9	7	1762.8	2	
	5562.5	8	79.0	15	1000.0	1	
	5560.5	9	53.9	19	1797.1	3	
	5564.5	10	68.2	10	1722.1	1	
	5565.5	11	61.2	8	1643.5	1	
	5560.5	12	76.0	19	1744.3	1	
	5565.5	13	60.0	8	1703.5	3	
	5564.5	14	69.1	11	1993.3	3	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Bridge mode

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5500	Type1	Table 5a	1	30	0	100.00%	≥60 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5510	Type1	Table 5a	1	30	0	100.00%	≥60 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5530	Type1	Table 5a	1	30	0	100.00%	≥60 %

Test Mode		802.11ax HE20				
Frequency		5500 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5500	1	858	62	1166	1
2	5500	1	838	63	1193	1
3	5500	1	658	81	1520	1
4	5500	1	918	58	1089	1
5	5500	1	758	70	1319	1
6	5500	1	878	61	1139	1
7	5500	1	838	63	1193	1
8	5500	1	658	81	1520	1
9	5500	1	878	61	1139	1
10	5500	1	778	68	1285	1
11	5500	1	638	83	1567	1
12	5500	1	538	99	1859	1
13	5500	1	558	95	1792	1
14	5500	1	798	67	1253	1
15	5500	1	698	76	1433	1
16	5500	1	794	67	1259	1
17	5500	1	2304	23	434	1
18	5500	1	2395	23	418	1
19	5500	1	1865	29	536	1
20	5500	1	1772	30	564	1
21	5500	1	720	74	1389	1
22	5500	1	1425	38	702	1
23	5500	1	2975	18	336	1
24	5500	1	3031	18	330	1
25	5500	1	727	73	1376	1
26	5500	1	695	76	1439	1
27	5500	1	1787	30	560	1
28	5500	1	2796	19	358	1
29	5500	1	2874	19	348	1
30	5500	1	673	79	1486	1
Detection Percentage (%)						100.00

Test Mode	802.11ax HE40					
Frequency	5510 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5510	1	778	68	1285	1
2	5510	1	758	70	1319	1
3	5510	1	618	86	1618	1
4	5510	1	598	89	1672	1
5	5510	1	3066	18	326	1
6	5510	1	778	68	1285	1
7	5510	1	698	76	1433	1
8	5510	1	778	68	1285	1
9	5510	1	618	86	1618	1
10	5510	1	758	70	1319	1
11	5510	1	718	74	1393	1
12	5510	1	518	102	1931	1
13	5510	1	678	78	1475	1
14	5510	1	818	65	1222	1
15	5510	1	598	89	1672	1
16	5510	1	2487	22	402	1
17	5510	1	1899	28	527	1
18	5510	1	1168	46	856	1
19	5510	1	2429	22	412	1
20	5510	1	1587	34	630	1
21	5510	1	1205	44	830	1
22	5510	1	1995	27	501	1
23	5510	1	1680	32	595	1
24	5510	1	2517	21	397	1
25	5510	1	1013	53	987	1
26	5510	1	2408	22	415	1
27	5510	1	2359	23	424	1
28	5510	1	2020	27	495	1
29	5510	1	813	65	1230	1
30	5510	1	2257	24	443	1
Detection Percentage (%)						100.00

Test Mode	802.11ax HE80					
Frequency	5530 MHz					
Radar Signal	Type 1					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5530	1	618	86	1618	1
2	5530	1	598	89	1672	1
3	5530	1	858	62	1166	1
4	5530	1	938	57	1066	1
5	5530	1	858	62	1166	1
6	5530	1	658	81	1520	1
7	5530	1	578	92	1730	1
8	5530	1	818	65	1222	1
9	5530	1	518	102	1931	1
10	5530	1	618	86	1618	1
11	5530	1	878	61	1139	1
12	5530	1	538	99	1859	1
13	5530	1	638	83	1567	1
14	5530	1	858	62	1166	1
15	5530	1	3066	18	326	1
16	5530	1	2815	19	355	1
17	5530	1	2389	23	419	1
18	5530	1	2920	19	342	1
19	5530	1	1215	44	823	1
20	5530	1	1954	28	512	1
21	5530	1	2421	22	413	1
22	5530	1	1693	32	591	1
23	5530	1	890	60	1124	1
24	5530	1	2942	18	340	1
25	5530	1	1555	34	643	1
26	5530	1	1293	41	773	1
27	5530	1	1172	46	853	1
28	5530	1	1516	35	660	1
29	5530	1	1066	50	938	1
30	5530	1	2588	21	386	1
Detection Percentage (%)						100.00

---END---