


## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>6</b>
A.2.1 Emissions within Restricted Frequency Bands.....	6
A.2.2 Emissions outside the frequency band.....	122
A.2.3 Emissions in Non-restricted Frequency Bands.....	144
<b>A.3 MAXIMUM POWER SPECTRAL DENSITY</b> .....	<b>145</b>
A.3.1 Power Spectral Density Result .....	145
A.3.2 Measurement Plots .....	150
<b>A.4 MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>168</b>
A.4.1 Conducted Output Power Result .....	168
A.4.2 Measurement Plots .....	198
<b>A.5 EMISSION/OCCUPIED BANDWIDTH</b> .....	<b>215</b>
A.5.1 Emission/Occupied Bandwidth Result .....	215
A.5.2 Measurement Plots .....	216
<b>A.6 UNDESIRABLE EMISSION LIMITS: SPURIOUS EMISSION (CONDUCTED)</b> .....	<b>230</b>
<b>A.7 IN-BAND EMISSION (CHANNEL MASK)</b> .....	<b>233</b>
<b>A.8 CONTENTION BASED PROTOCOL</b> .....	<b>251</b>
A.8.1 Contention-based Protocol.....	251
A.8.2 Measurement Plots .....	254

## A.1 CONDUCTED EMISSION

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

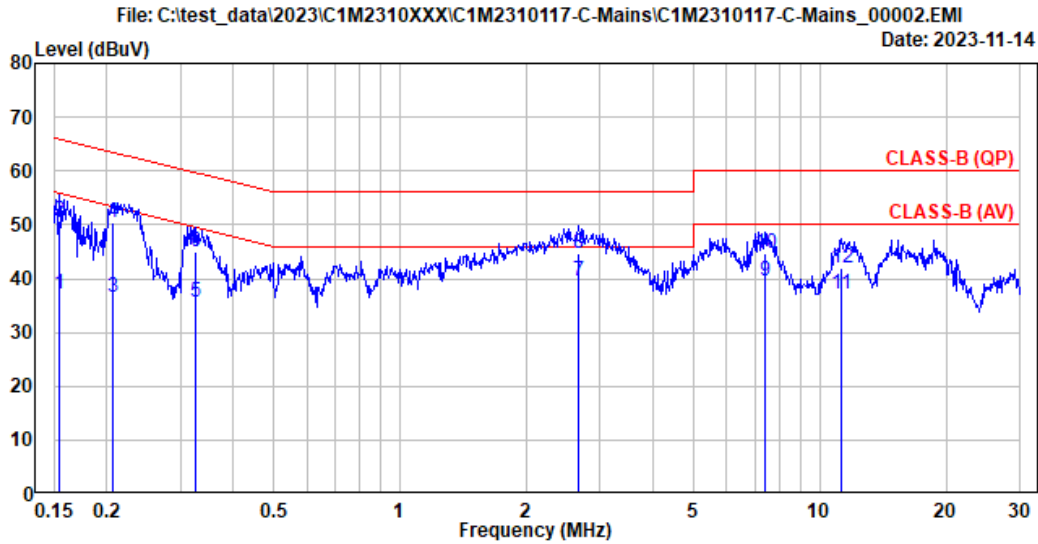


Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.154	10.30	0.03	9.85	16.83	37.01	55.79	18.78	Average
2	0.154	10.30	0.03	9.85	30.40	50.58	65.79	15.21	QP
3	0.207	10.29	0.03	9.85	16.43	36.60	53.31	16.71	Average
4	0.207	10.29	0.03	9.85	30.30	50.47	63.31	12.84	QP
5	0.325	10.28	0.03	9.85	15.61	35.77	49.58	13.81	Average
6	0.325	10.28	0.03	9.85	24.82	44.98	59.58	14.60	QP
7	2.661	10.34	0.07	9.86	19.42	39.69	46.00	6.31	Average
8	2.661	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
9	7.430	10.50	0.11	9.87	19.17	39.65	50.00	10.35	Average
10	7.430	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
11	11.238	10.64	0.15	9.90	16.38	37.07	50.00	12.93	Average
12	11.238	10.64	0.15	9.90	21.37	42.06	60.00	17.94	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #1(with INPOAQ ANT)		

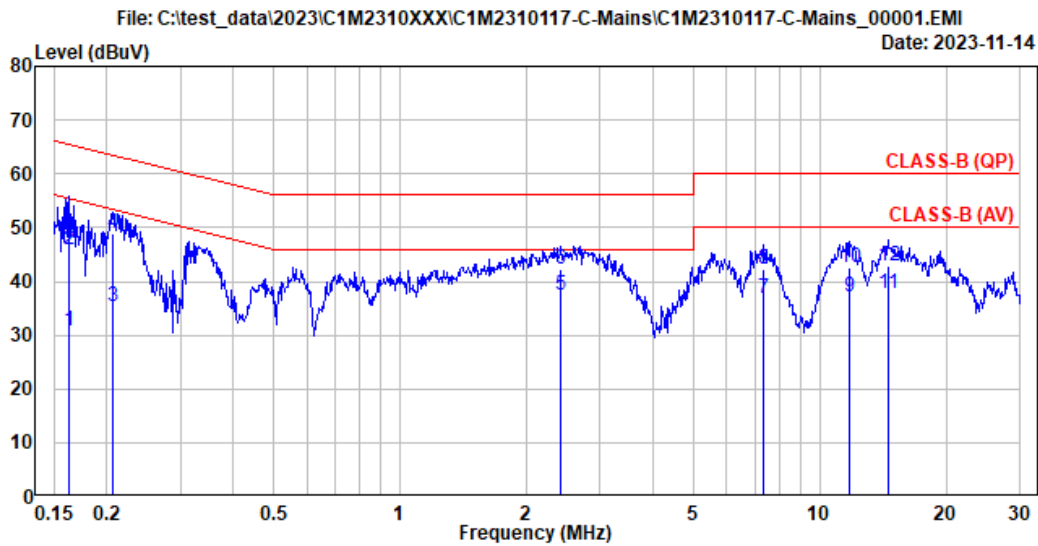


Site No.	: No.8 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z905P	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.162	10.29	0.03	9.85	10.52	30.69	55.34	24.65	Average
2	0.162	10.29	0.03	9.85	25.70	45.87	65.34	19.47	QP
3	0.207	10.28	0.03	9.85	15.27	35.43	53.31	17.88	Average
4	0.207	10.28	0.03	9.85	28.79	48.95	63.31	14.36	QP
5	2.421	10.31	0.07	9.86	17.07	37.31	46.00	8.69	Average
6	2.421	10.31	0.07	9.86	21.92	42.16	56.00	13.84	QP
7	7.320	10.42	0.11	9.87	16.34	36.74	50.00	13.26	Average
8	7.320	10.42	0.11	9.87	21.74	42.14	60.00	17.86	QP
9	11.812	10.52	0.15	9.90	16.63	37.20	50.00	12.80	Average
10	11.812	10.52	0.15	9.90	22.03	42.60	60.00	17.40	QP
11	14.563	10.60	0.17	9.91	17.08	37.76	50.00	12.24	Average
12	14.563	10.60	0.17	9.91	22.28	42.96	60.00	17.04	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

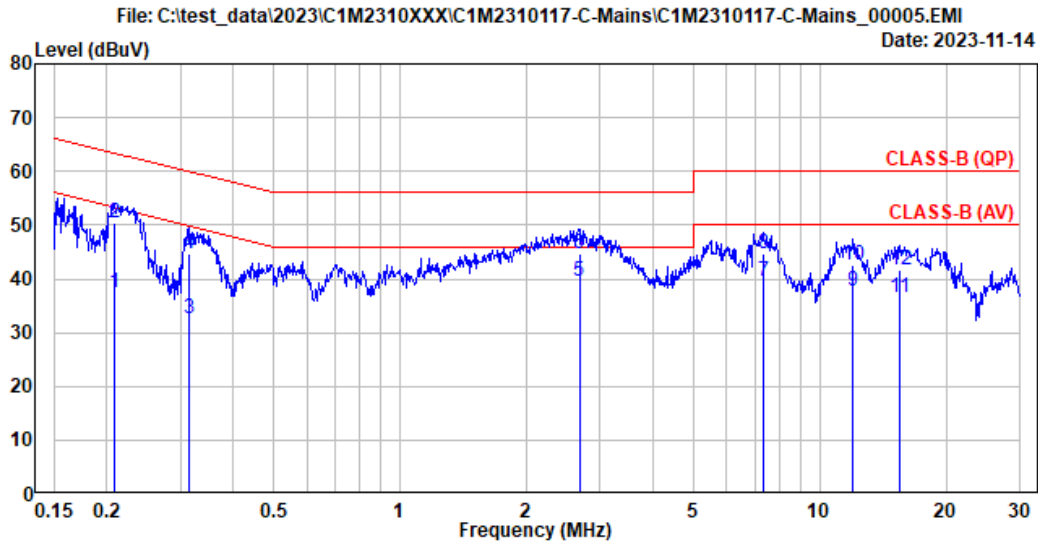

Site No.	: No.8 Shielded Room	Data No.	: 5
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Neutral
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.208	10.29	0.03	9.85	17.27	37.44	53.27	15.83	Average
2	0.208	10.29	0.03	9.85	30.37	50.54	63.27	12.73	QP
3	0.315	10.28	0.03	9.85	12.39	32.55	49.83	17.28	Average
4	0.315	10.28	0.03	9.85	24.40	44.56	59.83	15.27	QP
5	2.675	10.34	0.07	9.86	19.40	39.67	46.00	6.33	Average
6	2.675	10.34	0.07	9.86	24.49	44.76	56.00	11.24	QP
7	7.320	10.50	0.11	9.87	19.14	39.62	50.00	10.38	Average
8	7.320	10.50	0.11	9.87	24.31	44.79	60.00	15.21	QP
9	11.990	10.68	0.15	9.90	16.95	37.68	50.00	12.32	Average
10	11.990	10.68	0.15	9.90	21.87	42.60	60.00	17.40	QP
11	15.460	10.83	0.17	9.91	15.67	36.58	50.00	13.42	Average
12	15.460	10.83	0.17	9.91	20.85	41.76	60.00	18.24	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2023/11/14	Temp./Hum.	26°C/57%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Bruce Tseng
Test SKU	SKU #2(with LUXSHARE-ICT ANT)		

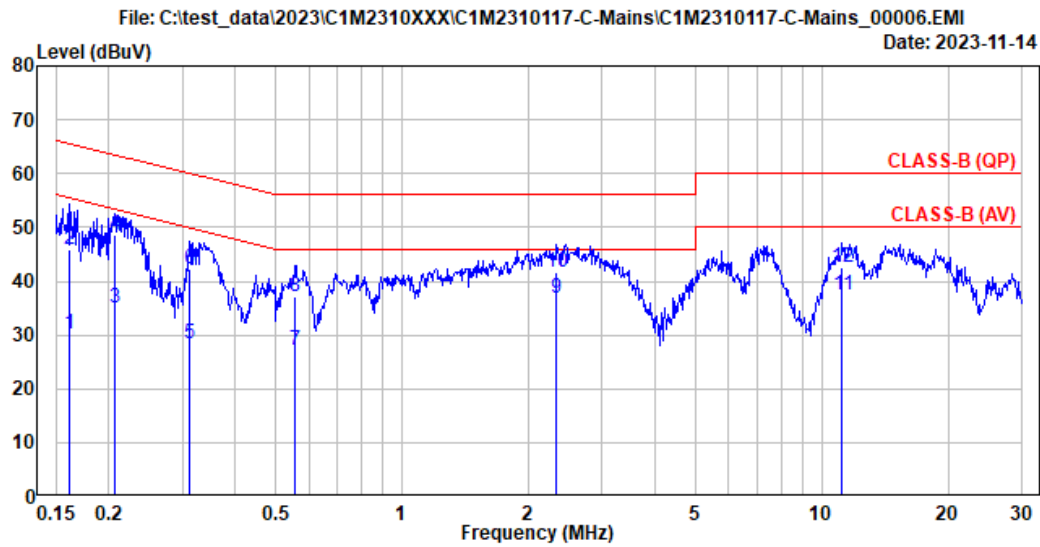

Site No.	: No.8 Shielded Room	Data No.	: 6
Instrument 1	: Receiver ESR(774)		
Instrument 2	: ENV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B (QP)	Phase	: Line
Environment	: 26°C/57%	Test Rating	: 120Vac/60Hz
EUT Model	: 16Z90SP	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.161	10.30	0.03	9.85	10.13	30.31	55.42	25.11	Average
2	0.161	10.30	0.03	9.85	25.84	46.02	65.42	19.40	QP
3	0.207	10.28	0.03	9.85	14.82	34.98	53.31	18.33	Average
4	0.207	10.28	0.03	9.85	28.46	48.62	63.31	14.69	QP
5	0.312	10.27	0.03	9.85	8.23	28.38	49.91	21.53	Average
6	0.312	10.27	0.03	9.85	22.08	42.23	59.91	17.68	QP
7	0.554	10.27	0.03	9.85	6.92	27.07	46.00	18.93	Average
8	0.554	10.27	0.03	9.85	16.83	36.98	56.00	19.02	QP
9	2.338	10.31	0.06	9.86	16.63	36.86	46.00	9.14	Average
10	2.338	10.31	0.06	9.86	21.33	41.56	56.00	14.44	QP
11	11.182	10.50	0.15	9.90	16.86	37.41	50.00	12.59	Average
12	11.182	10.50	0.15	9.90	21.89	42.44	60.00	17.56	QP

Remarks: 1. Emission Level(dBµV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBµV).

## A.2 RADIATED EMISSION

Test Date	2023/10/19 ~ 11/14	Temp./Hum.	23 ~ 25°C/52 ~69%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

### A.2.1 Emissions within Restricted Frequency Bands


#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

**Test SKU: SKU #1 (With INPAQ ANT)**


Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

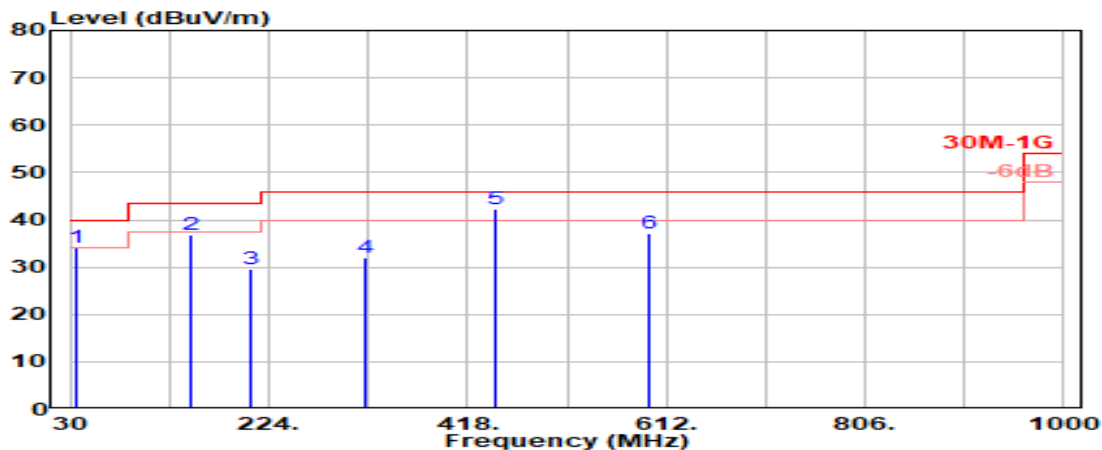

### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	26.51	37.45	34.03	40.00	5.97	Peak
148.825	16.64	2.86	26.02	43.43	36.91	43.50	6.59	Peak
207.025	15.72	3.47	25.80	36.26	29.66	43.50	13.84	Peak
317.767	19.44	4.59	25.83	33.67	31.88	46.00	14.12	Peak
445.483	22.32	5.94	26.82	40.72	42.15	46.00	3.85	Peak
594.217	24.27	6.74	27.40	33.40	37.01	46.00	8.99	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

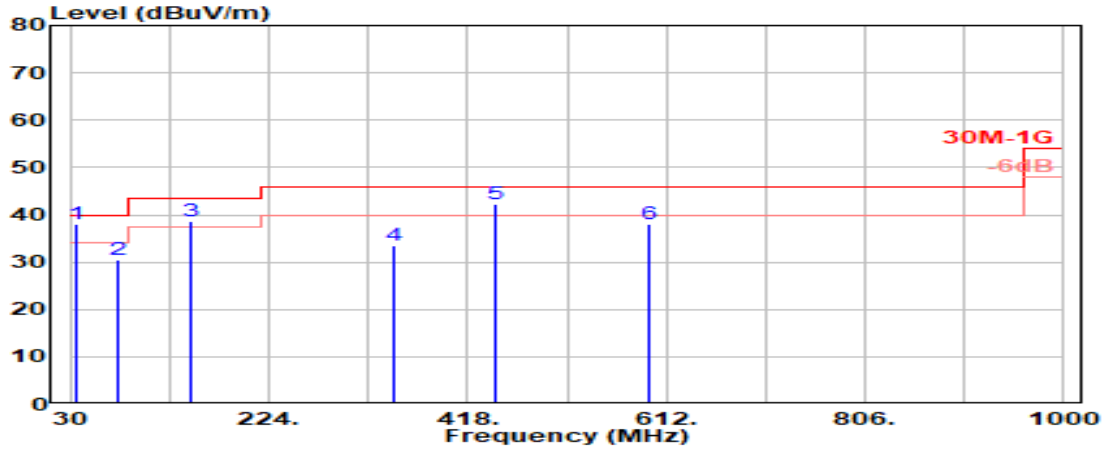


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	0.00	14.85	37.94	40.00	2.06	QP
77.692	12.82	2.01	26.38	42.00	30.45	40.00	9.55	Peak
148.825	16.64	2.86	26.02	45.29	38.77	43.50	4.73	Peak
345.250	20.22	4.92	26.08	34.44	33.50	46.00	12.50	Peak
445.483	22.32	5.94	26.82	40.72	42.15	46.00	3.85	Peak
594.217	24.27	6.74	27.40	34.54	38.16	46.00	7.84	Peak

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

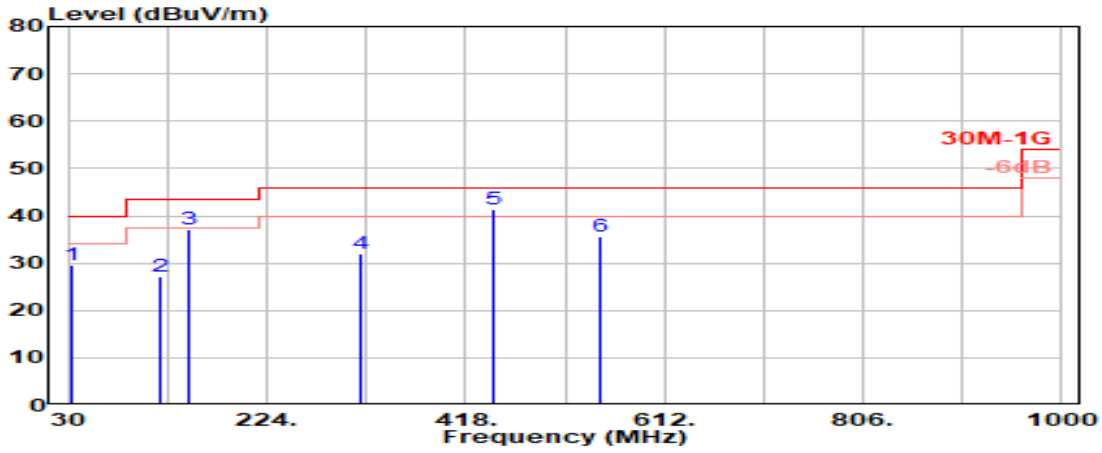


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.425	23.06	1.25	26.52	31.87	29.67	40.00	10.33	Peak
118.917	17.83	2.52	26.19	32.87	27.03	43.50	16.47	Peak
148.825	16.64	2.86	26.02	43.74	37.22	43.50	6.28	Peak
316.150	19.40	4.57	25.81	33.98	32.13	46.00	13.87	Peak
445.483	22.32	5.94	26.82	40.00	41.43	46.00	4.57	Peak
550.567	23.78	6.59	27.29	32.67	35.74	46.00	10.26	Peak



Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

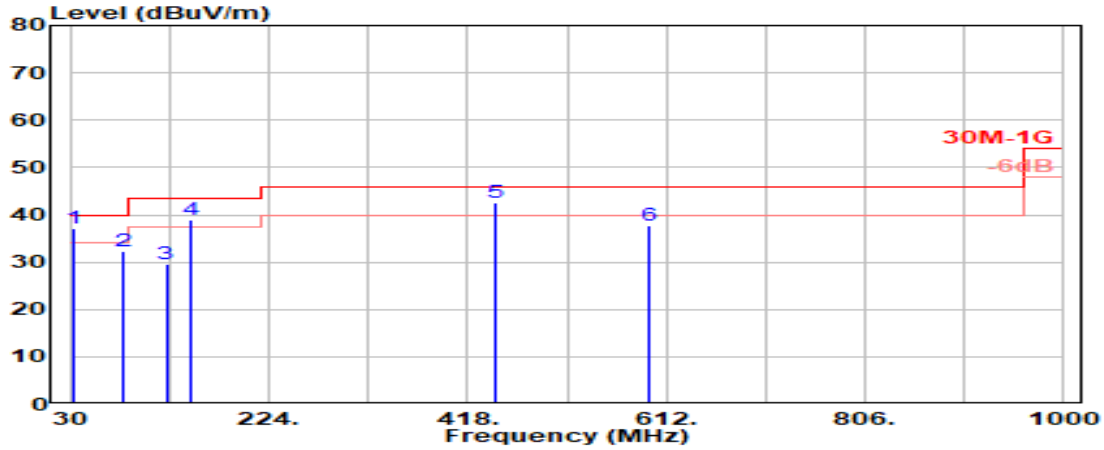


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.042	22.48	1.28	0.00	13.52	37.27	40.00	2.73	QP
80.925	13.17	2.05	26.36	43.33	32.19	40.00	7.81	Peak
123.767	17.73	2.58	26.16	35.48	29.63	43.50	13.87	Peak
148.825	16.64	2.86	26.02	45.45	38.93	43.50	4.57	Peak
445.483	22.32	5.94	26.82	41.01	42.44	46.00	3.56	Peak
594.217	24.27	6.74	27.40	34.02	37.64	46.00	8.36	Peak

**Spot Check with SKU #2 (with INAPQ ANT)**


Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

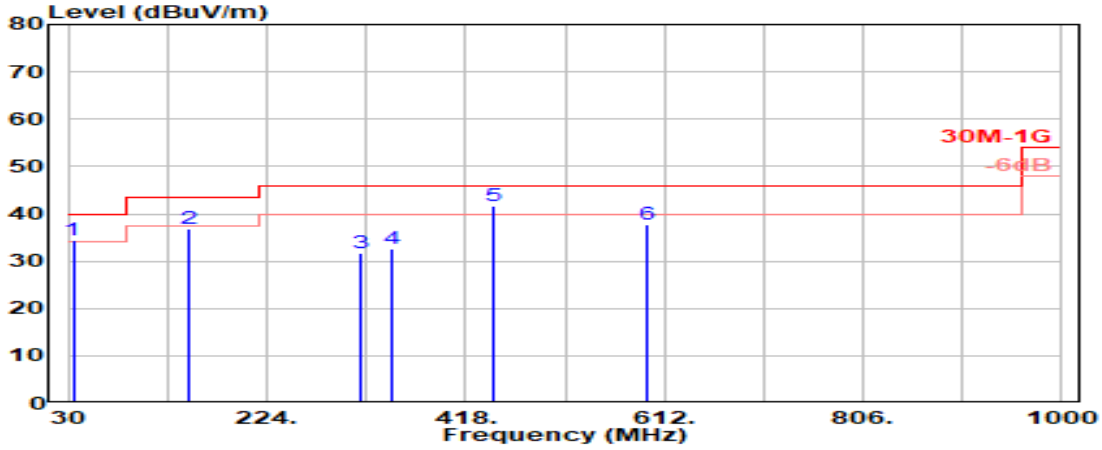

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	26.51	37.49	34.48	40.00	5.52	Peak
148.825	16.64	2.86	26.02	43.27	36.75	43.50	6.75	Peak
314.533	19.36	4.55	25.80	33.71	31.81	46.00	14.19	Peak
345.250	20.22	4.92	26.08	33.68	32.74	46.00	13.26	Peak
445.483	22.32	5.94	26.82	40.27	41.71	46.00	4.29	Peak
594.217	24.27	6.74	27.40	34.22	37.84	46.00	8.16	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

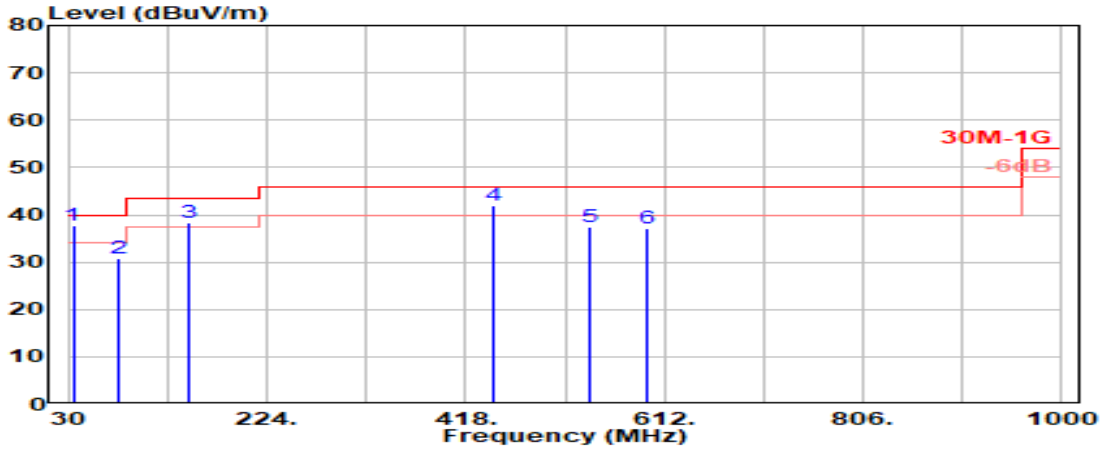


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.850	22.21	1.30	0.00	14.32	37.83	40.00	2.17	QP
80.117	13.03	2.04	26.37	42.00	30.70	40.00	9.30	Peak
148.825	16.64	2.86	26.02	44.98	38.45	43.50	5.05	Peak
445.483	22.32	5.94	26.82	40.50	41.94	46.00	4.06	Peak
540.058	23.63	6.55	27.27	34.52	37.44	46.00	8.56	Peak
594.217	24.27	6.74	27.40	33.59	37.21	46.00	8.79	Peak

**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**


Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6025MHz

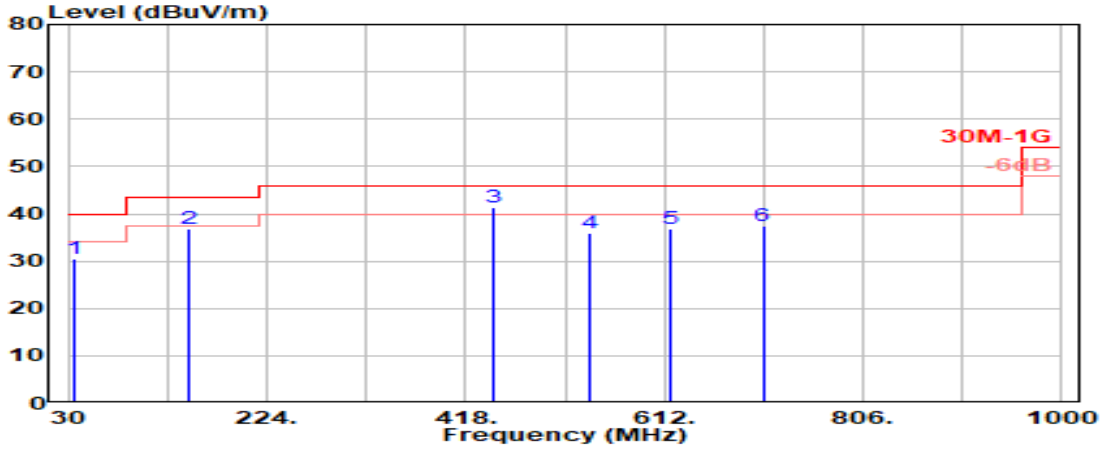

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	26.51	33.88	30.46	40.00	9.54	Peak
148.825	16.64	2.86	26.02	43.46	36.94	43.50	6.56	Peak
445.483	22.32	5.94	26.82	40.03	41.47	46.00	4.53	Peak
540.058	23.63	6.55	27.27	33.07	35.99	46.00	10.01	Peak
616.850	24.40	6.86	27.41	33.03	36.88	46.00	9.12	Peak
708.192	24.72	7.36	27.39	32.69	37.37	46.00	8.63	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6025MHz

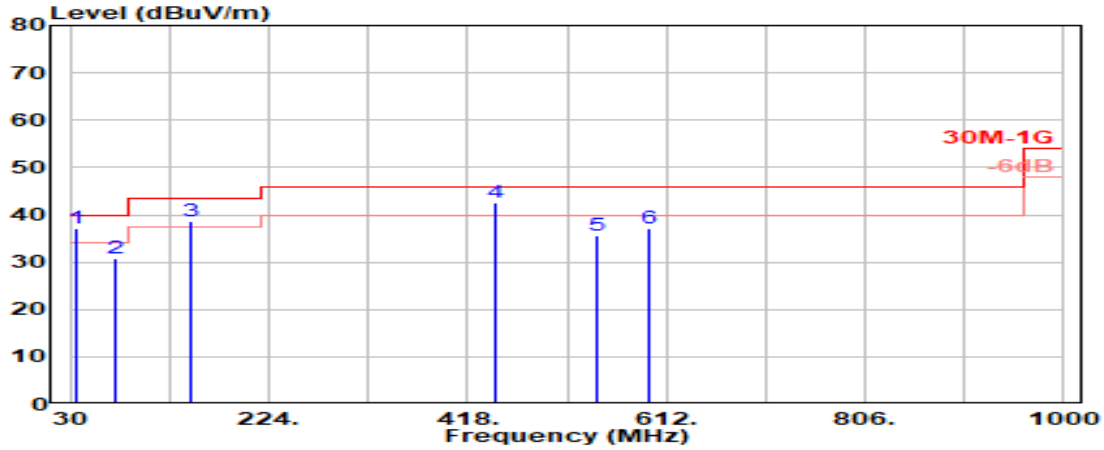


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
35.658	21.78	1.31	0.00	14.04	37.13	40.00	2.87	QP
75.267	12.63	1.97	26.38	42.65	30.87	40.00	9.13	Peak
148.825	16.64	2.86	26.02	45.10	38.58	43.50	4.92	Peak
445.483	22.32	5.94	26.82	41.07	42.50	46.00	3.50	Peak
544.908	23.70	6.57	27.28	32.63	35.62	46.00	10.38	Peak
594.217	24.27	6.74	27.40	33.65	37.27	46.00	8.73	Peak

A.2.1.3 Band Edge  
 ● OFDM Modulation


Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

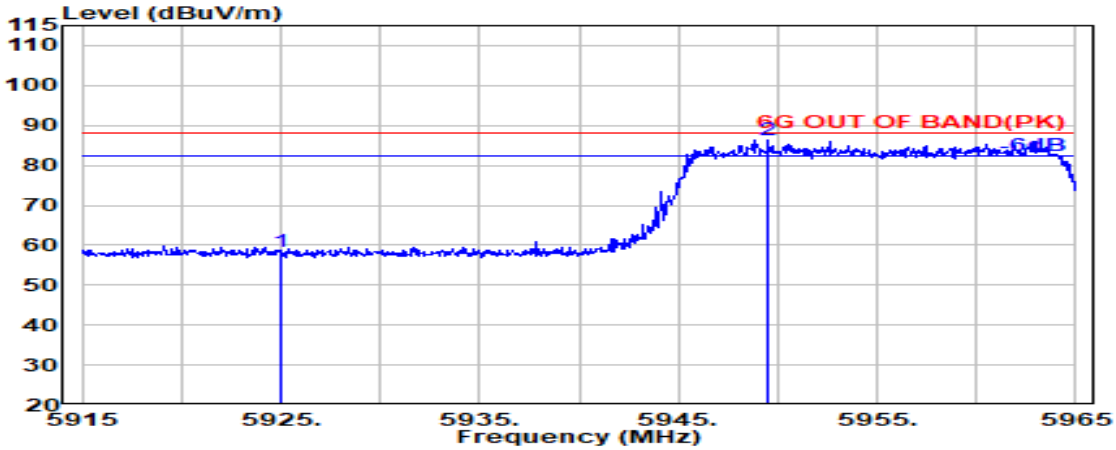

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.72	58.51	88.20	29.69	Peak
@ 5949.500	34.30	9.00	34.41	77.43	86.32	---	---	Peak

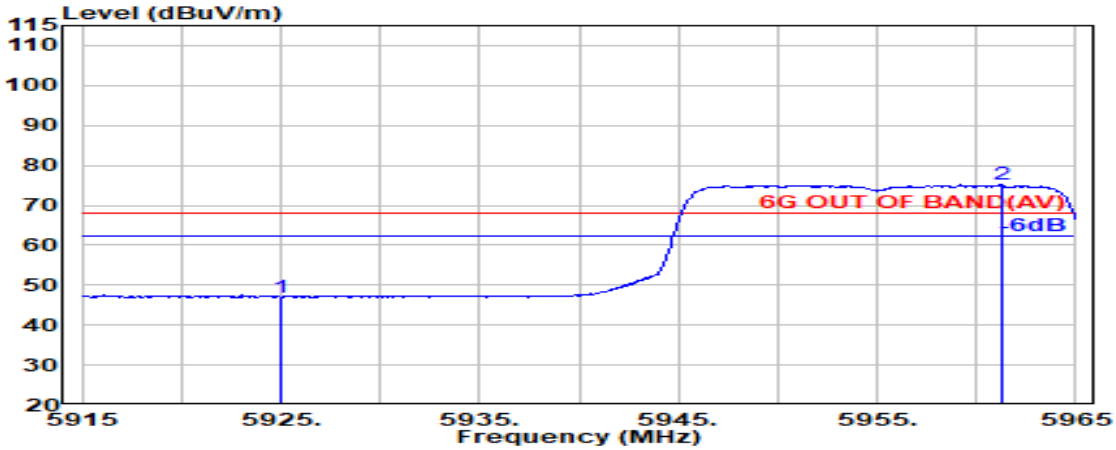


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.22	47.01	68.20	21.19	Average
@ 5961.250	34.28	9.01	34.41	66.20	75.08	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

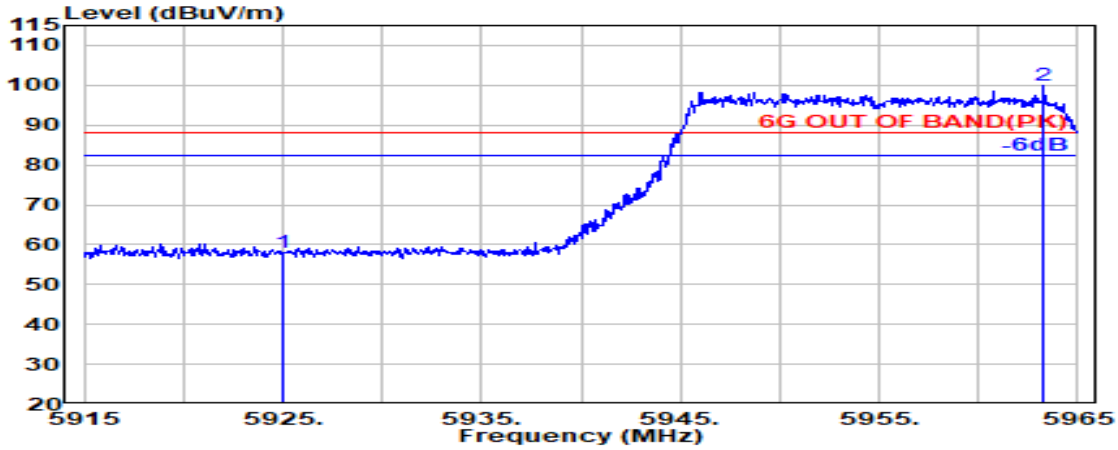

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.09	57.88	88.20	30.32	Peak
@ 5963.250	34.27	9.01	34.41	90.96	99.83	---	---	Peak

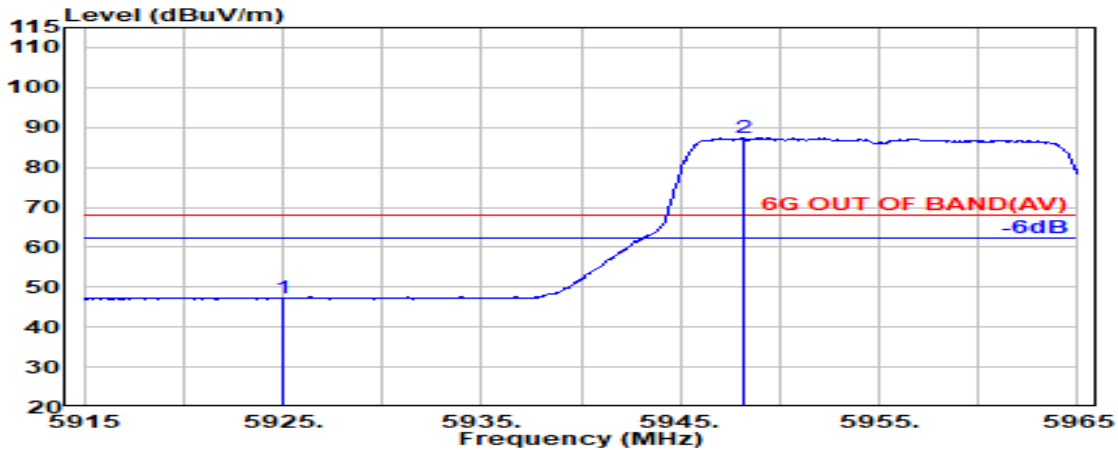


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.36	47.15	68.20	21.05	Average
@ 5948.150	34.29	9.00	34.41	78.53	87.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

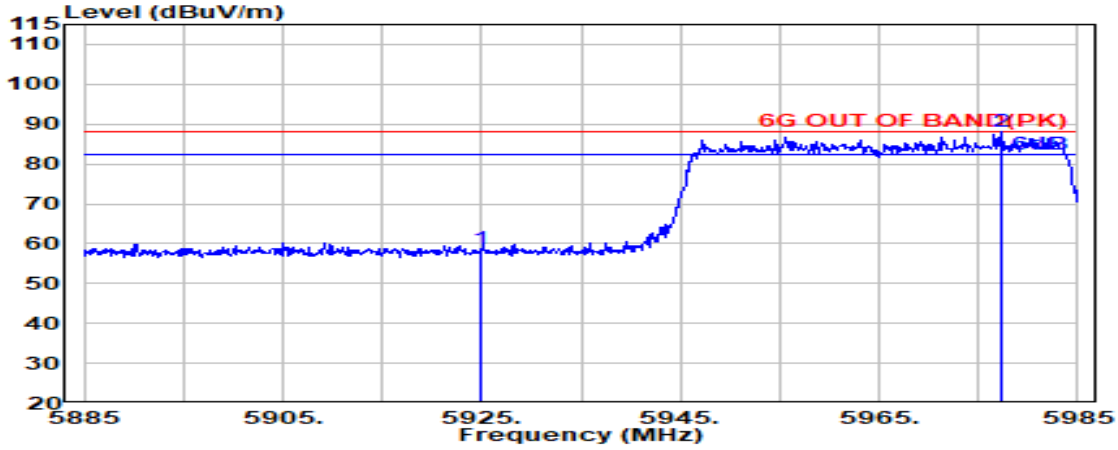

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.82	58.62	88.20	29.58	Peak
@ 5977.400	34.25	9.02	34.42	79.14	87.98	---	---	Peak

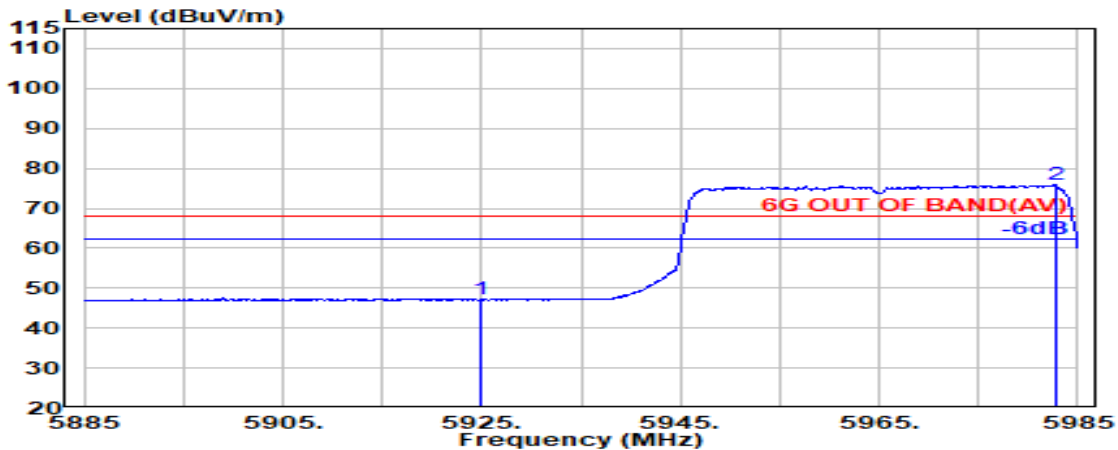


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.33	47.13	68.20	21.07	Average
@ 5982.700	34.23	9.02	34.42	67.02	75.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

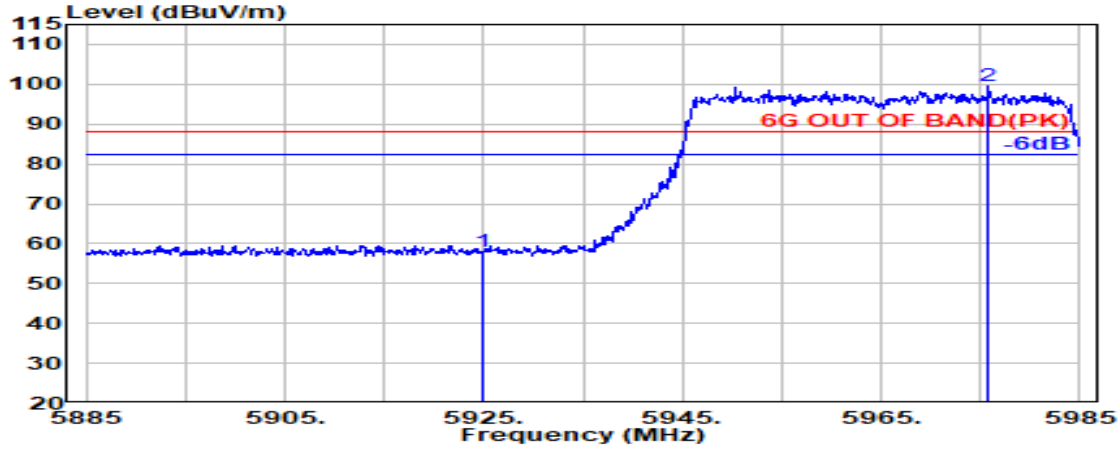

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.30	58.09	88.20	30.11	Peak
@ 5975.800	34.25	9.02	34.42	90.72	99.56	---	---	Peak

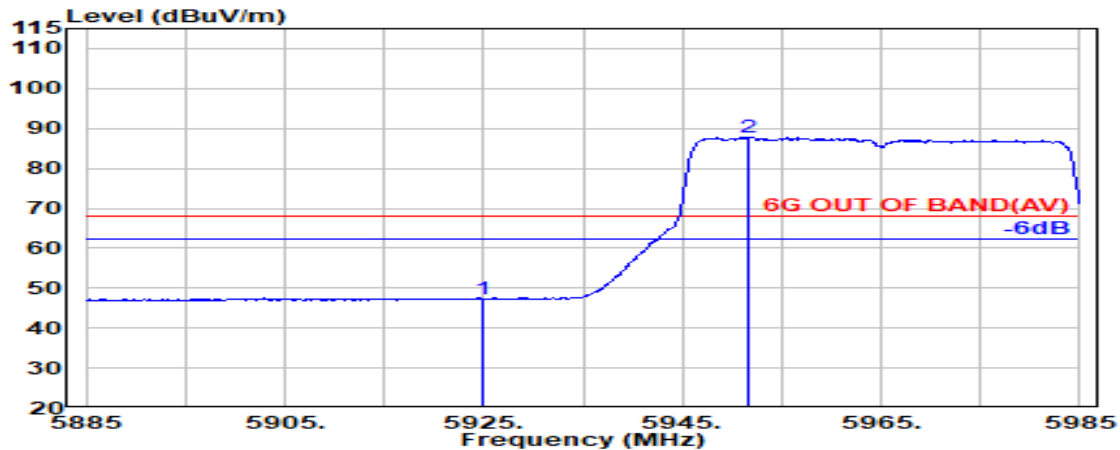


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.56	47.35	68.20	20.85	Average
@ 5951.700	34.30	9.00	34.41	78.93	87.82	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

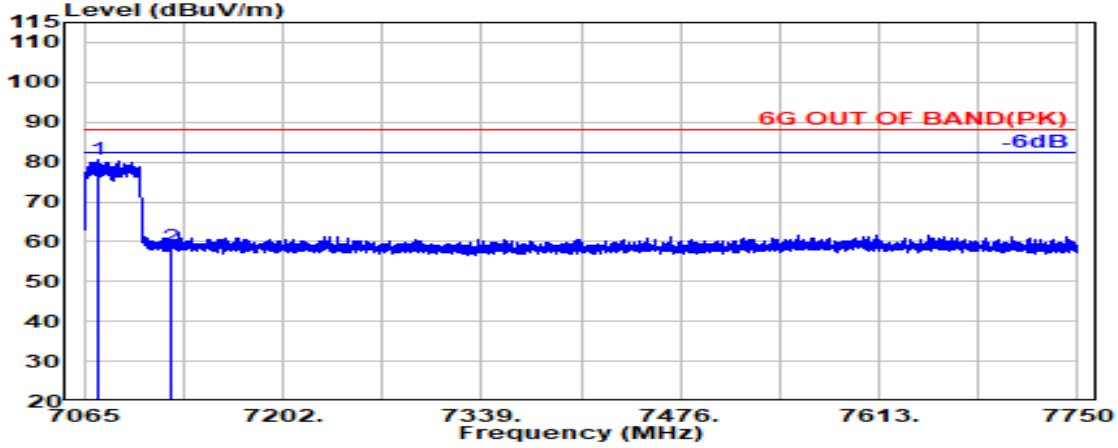

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7075.200	35.70	9.77	34.52	69.55	80.49	---	---	Peak
7125.000	35.90	9.80	34.55	47.47	58.62	88.20	29.58	Peak

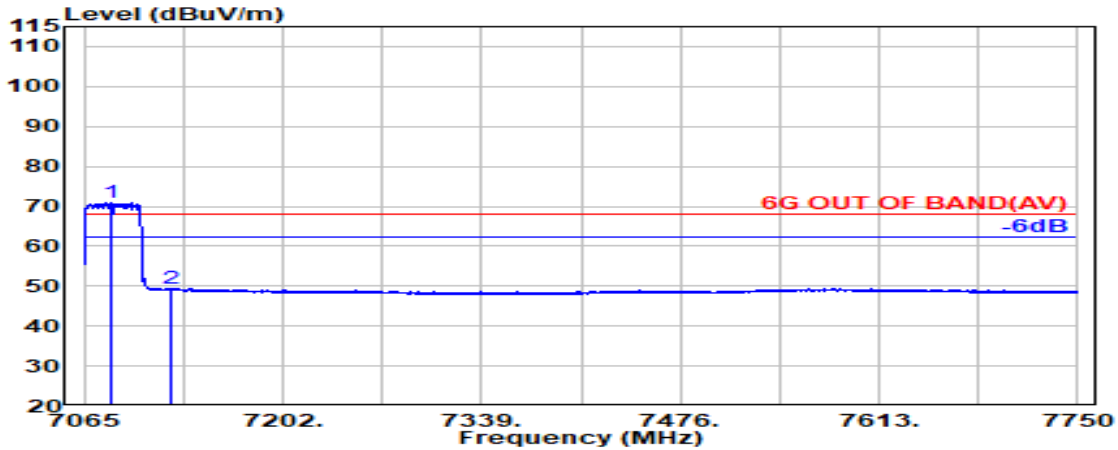


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7084.000	35.74	9.77	34.53	59.91	70.90	---	---	Average
7125.000	35.90	9.80	34.55	38.21	49.35	68.20	18.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

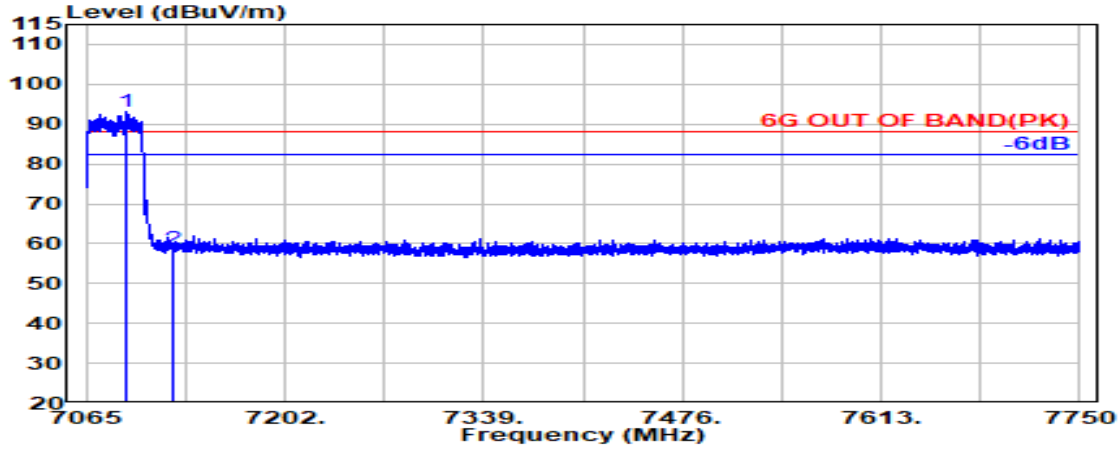

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7092.000	35.77	9.78	34.53	82.02	93.04	---	---	Peak
7125.000	35.90	9.80	34.55	47.66	58.81	88.20	29.39	Peak

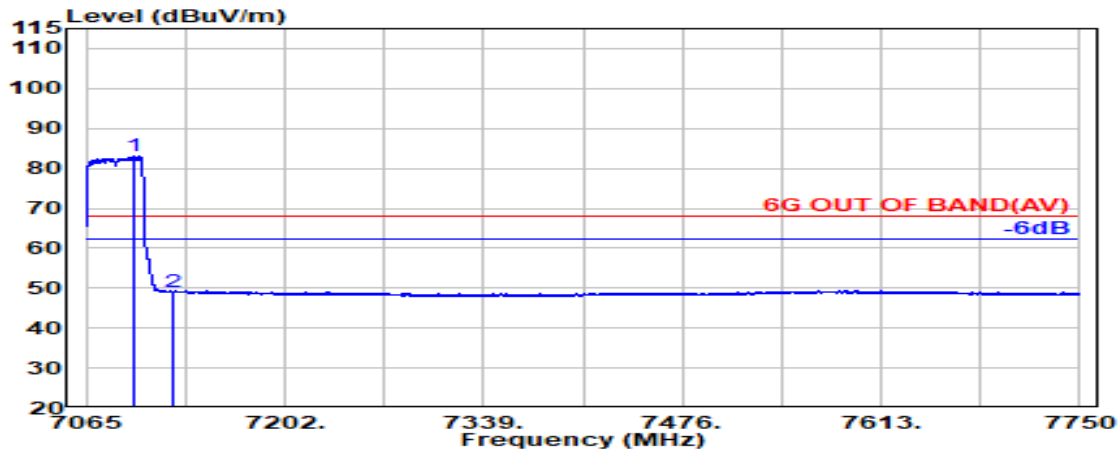


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.800	35.79	9.78	34.54	72.07	83.11	---	---	Average
7125.000	35.90	9.80	34.55	38.04	49.19	68.20	19.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

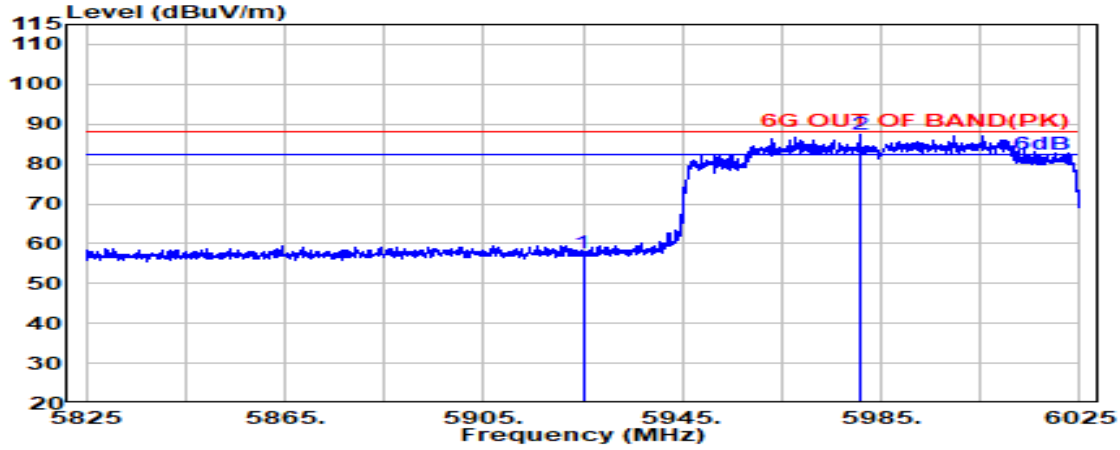

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	48.70	57.49	88.20	30.71	Peak
@ 5980.900	34.24	9.02	34.42	78.40	87.23	---	---	Peak

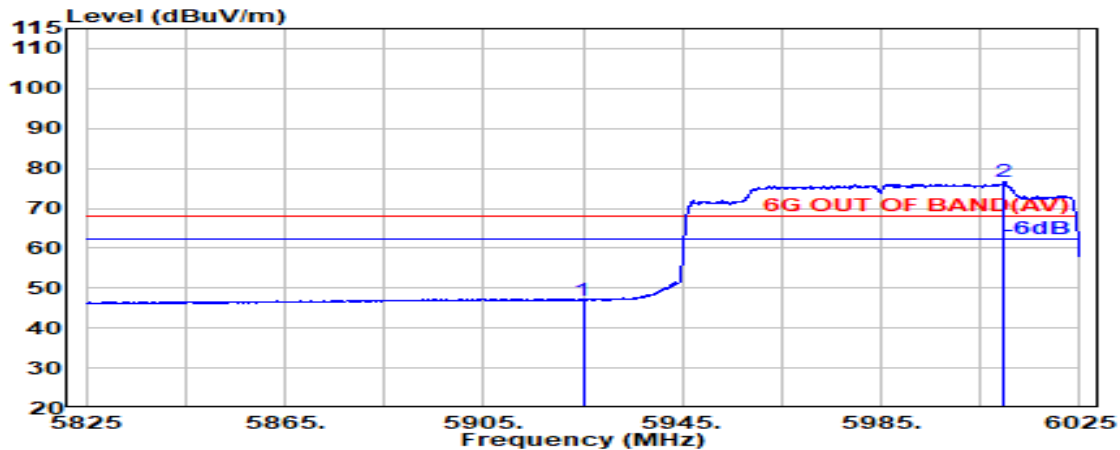


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.20	47.00	68.20	21.20	Average
@ 6009.800	34.20	9.04	34.42	67.67	76.48	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

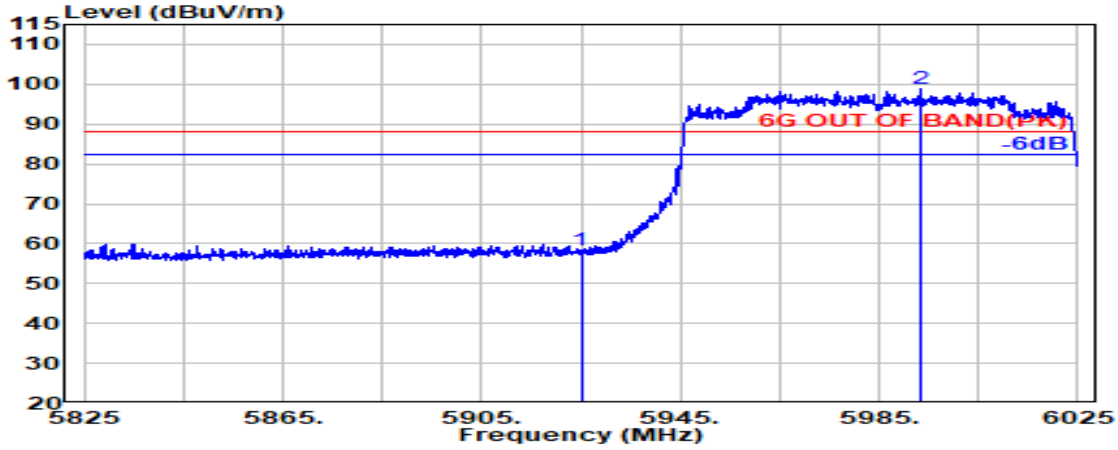

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.70	58.49	88.20	29.71	Peak
@ 5993.400	34.21	9.03	34.43	90.00	98.81	---	---	Peak

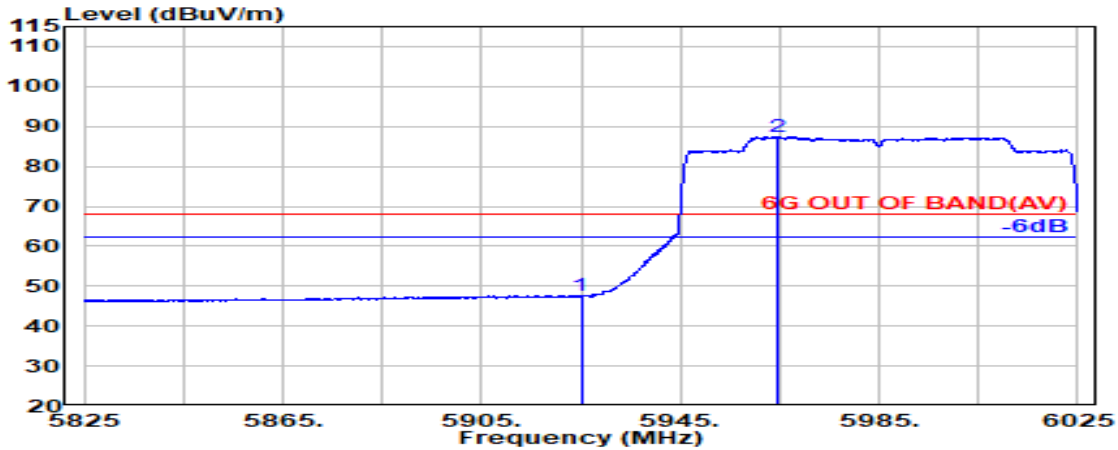


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.74	47.53	68.20	20.67	Average
@ 5964.400	34.27	9.01	34.41	78.65	87.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

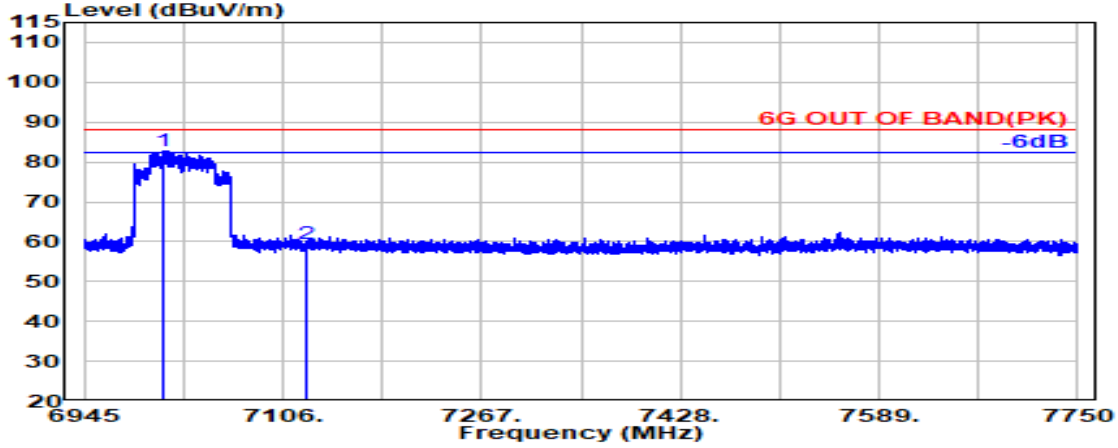

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7008.300	35.52	9.73	34.48	72.15	82.90	---	---	Peak
7125.000	35.90	9.80	34.55	48.46	59.61	88.20	28.59	Peak

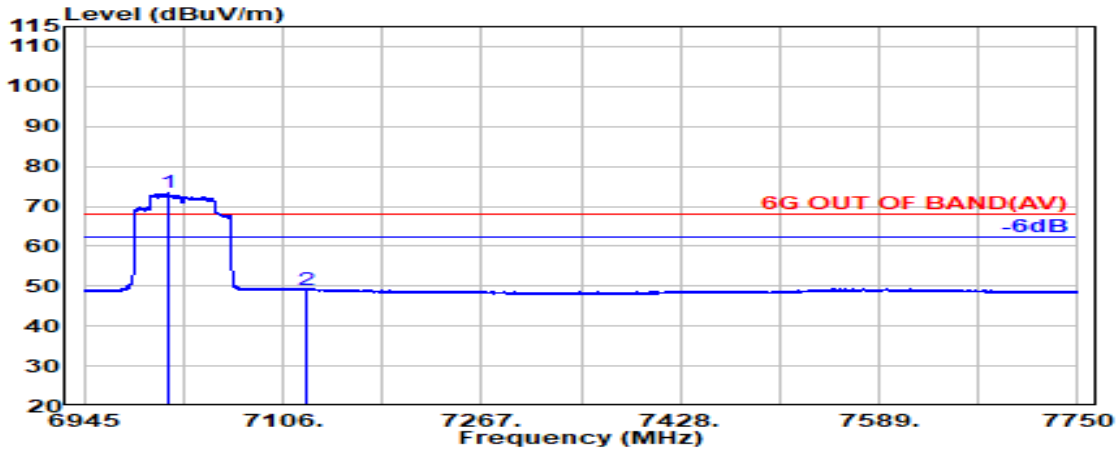


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7013.600	35.53	9.73	34.49	62.57	73.33	---	---	Average
7125.000	35.90	9.80	34.55	38.01	49.16	68.20	19.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

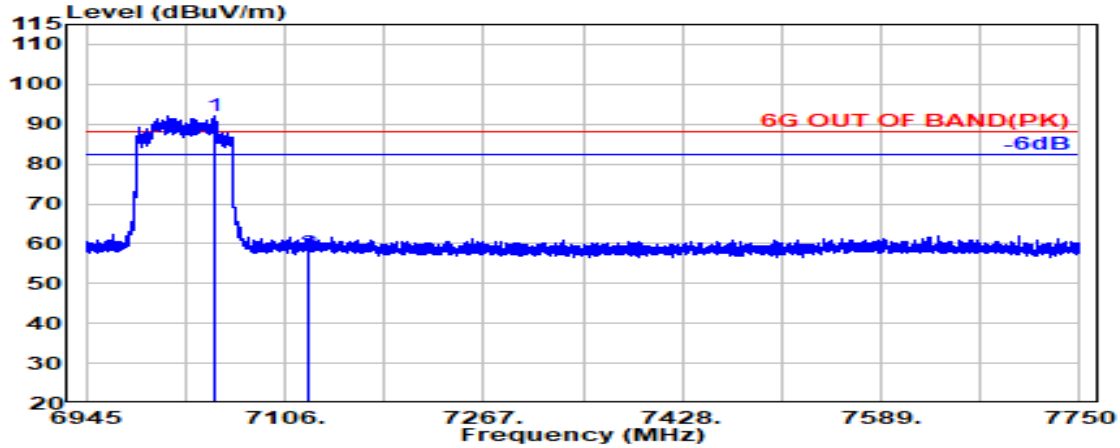

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7050.000	35.60	9.75	34.51	81.29	92.13	---	---	Peak
7125.000	35.90	9.80	34.55	46.59	57.74	88.20	30.46	Peak

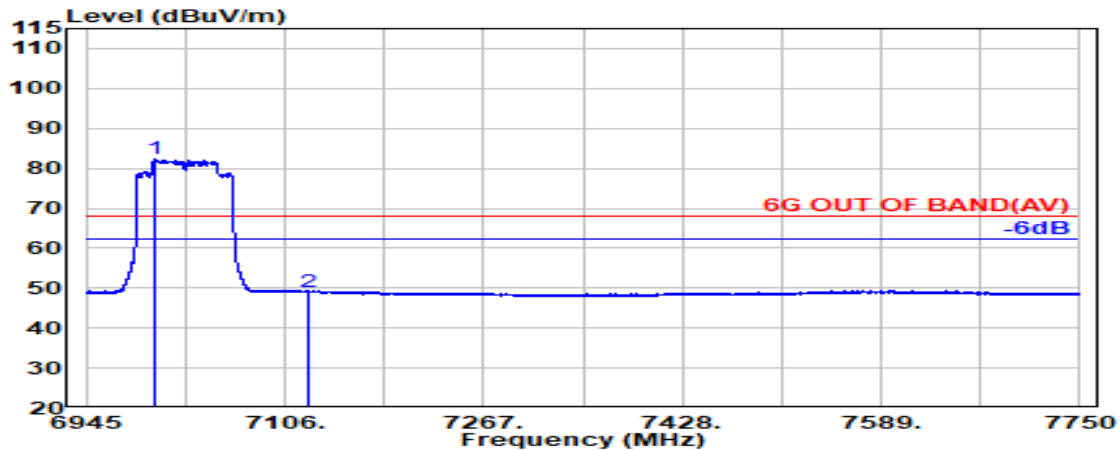


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7000.200	35.50	9.72	34.48	71.50	82.24	---	---	Average
7125.000	35.90	9.80	34.55	38.06	49.21	68.20	18.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

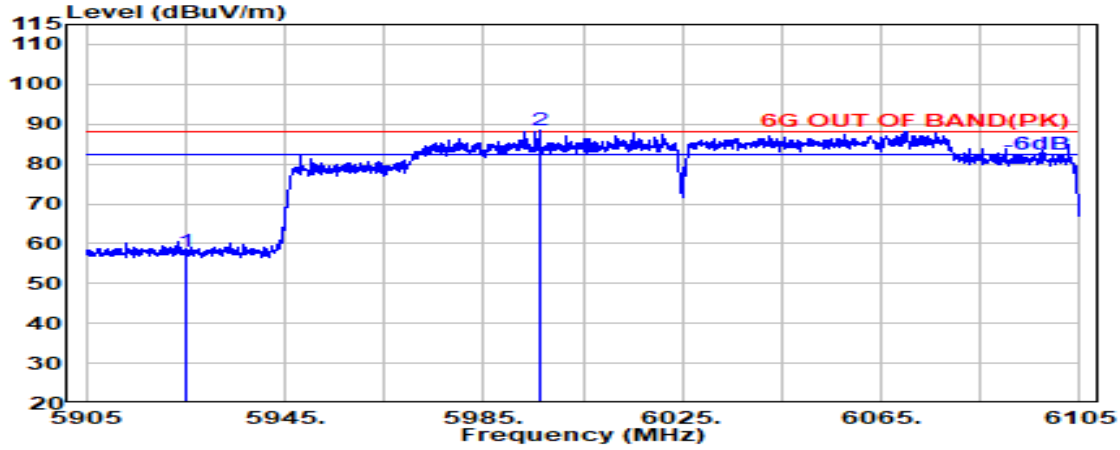

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.35	58.15	88.20	30.05	Peak
@ 5996.300	34.21	9.03	34.43	79.71	88.52	---	---	Peak

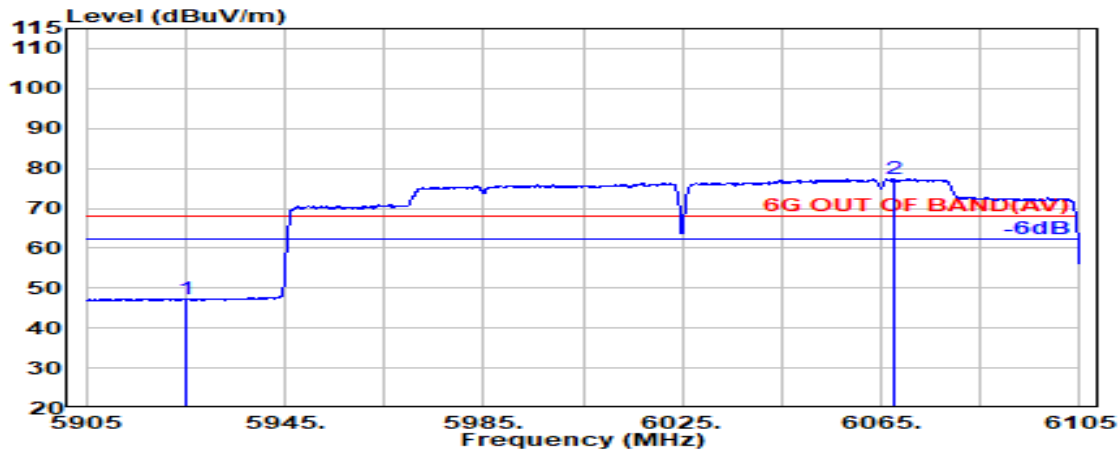


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.30	47.09	68.20	21.11	Average
@ 6067.700	34.24	9.08	34.38	68.35	77.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

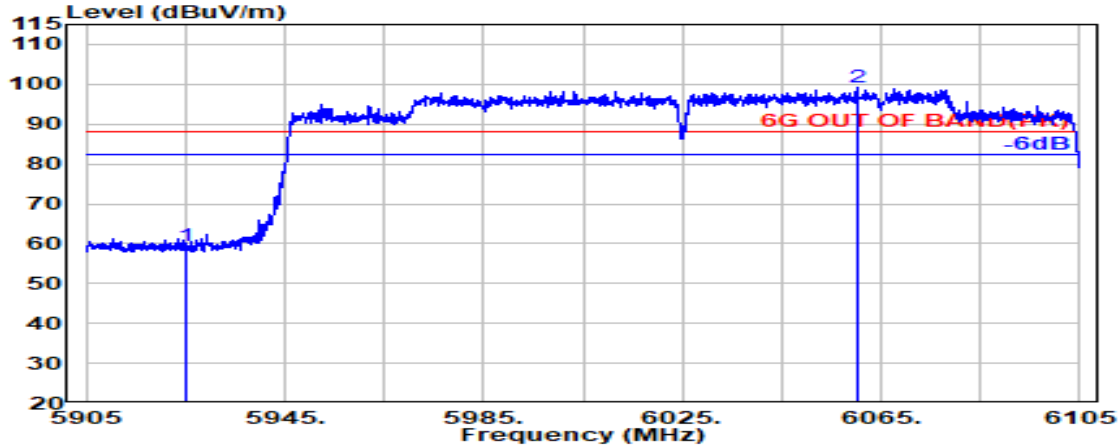

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	50.66	59.46	88.20	28.74	Peak
@ 6060.100	34.22	9.07	34.39	90.42	99.33	---	---	Peak

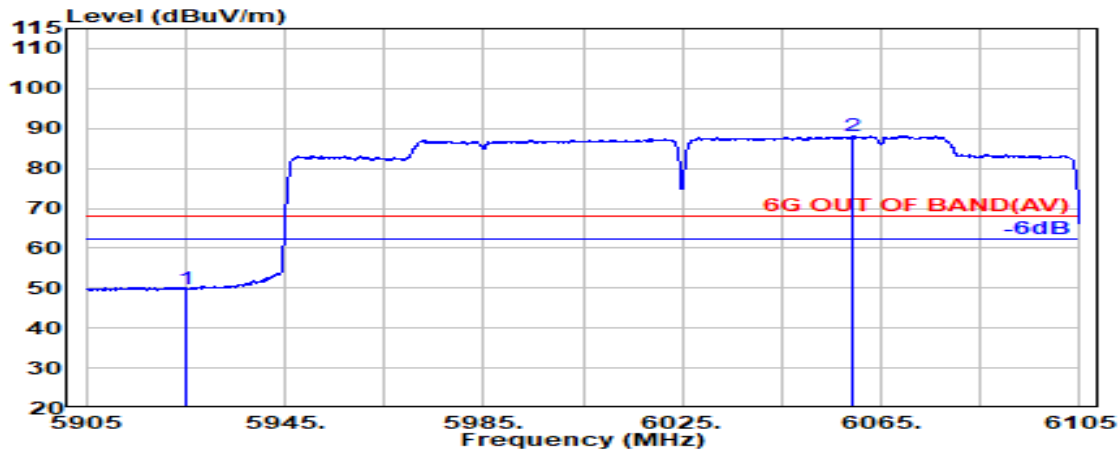


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.85	49.64	68.20	18.56	Average
@ 6059.400	34.22	9.07	34.39	79.23	88.13	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

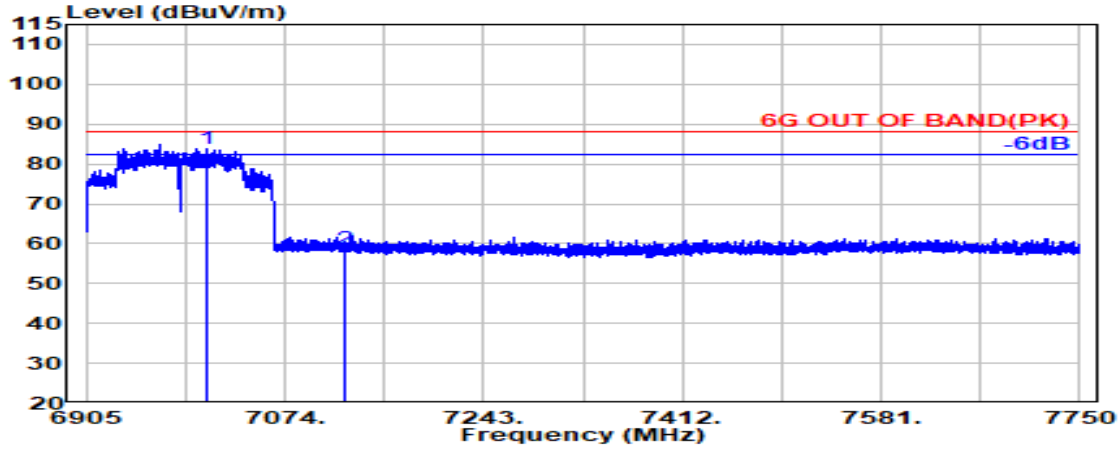

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7007.100	35.51	9.72	34.48	73.17	83.93	---	---	Peak
7125.000	35.90	9.80	34.55	47.44	58.59	88.20	29.61	Peak

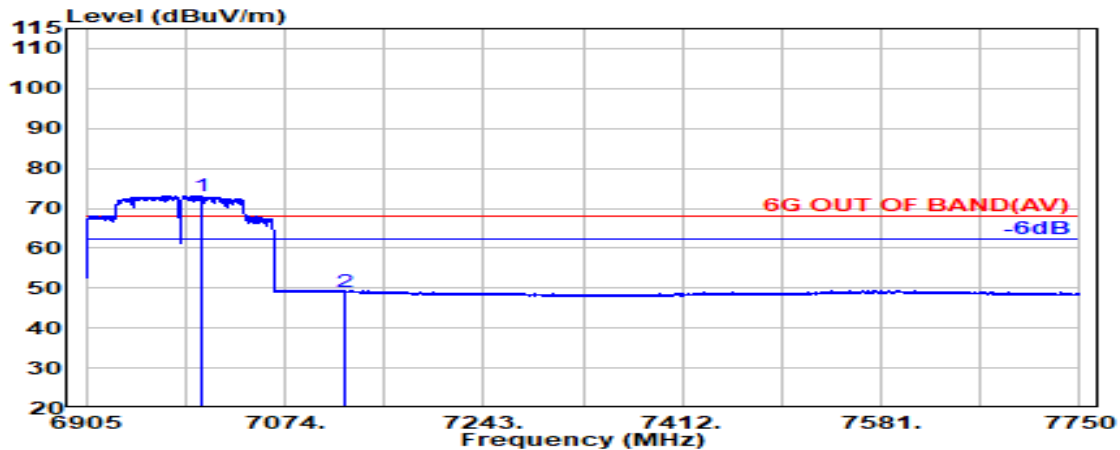


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7002.700	35.51	9.72	34.48	62.22	72.97	---	---	Average
7125.000	35.90	9.80	34.55	37.93	49.08	68.20	19.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

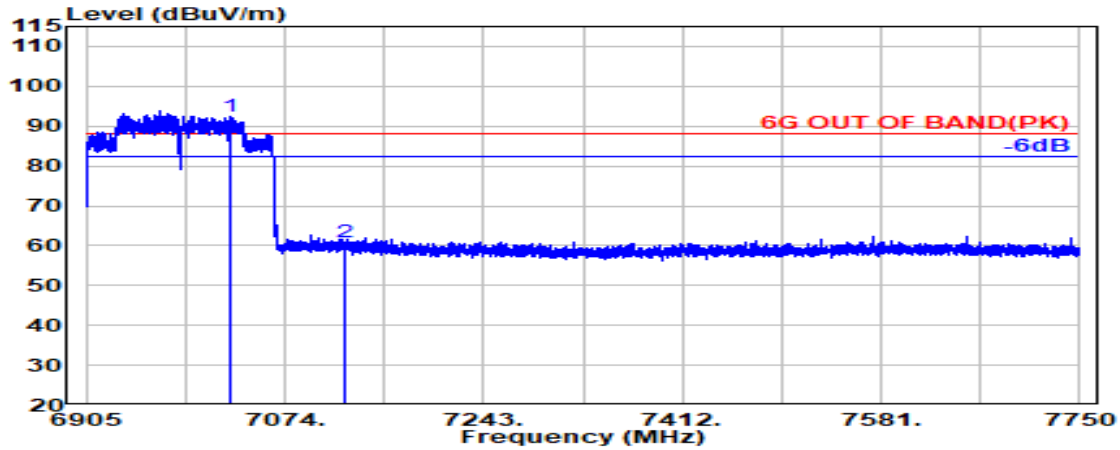

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7027.200	35.55	9.74	34.50	81.57	92.37	---	---	Peak
7125.000	35.90	9.80	34.55	49.89	61.04	88.20	27.16	Peak

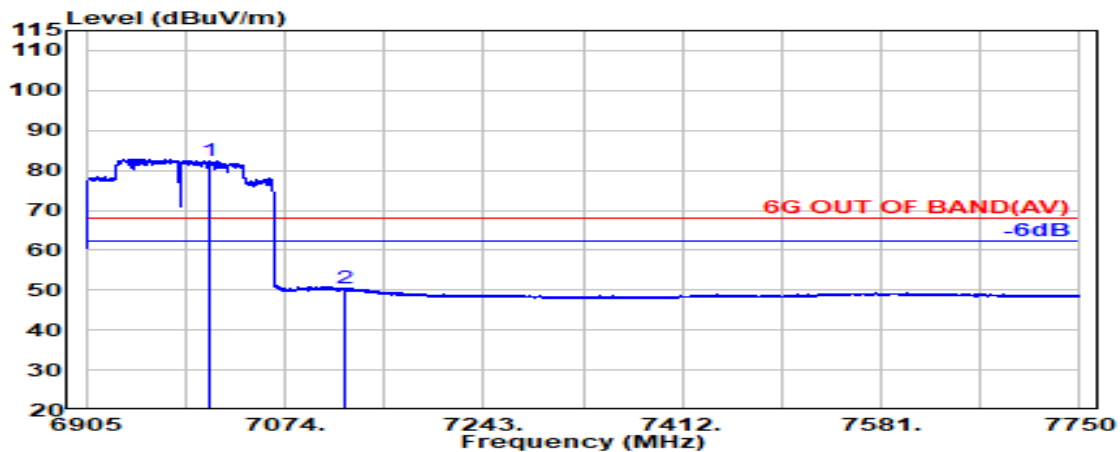


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7009.100	35.52	9.73	34.49	71.57	82.33	---	---	Average
7125.000	35.90	9.80	34.55	39.19	50.34	68.20	17.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

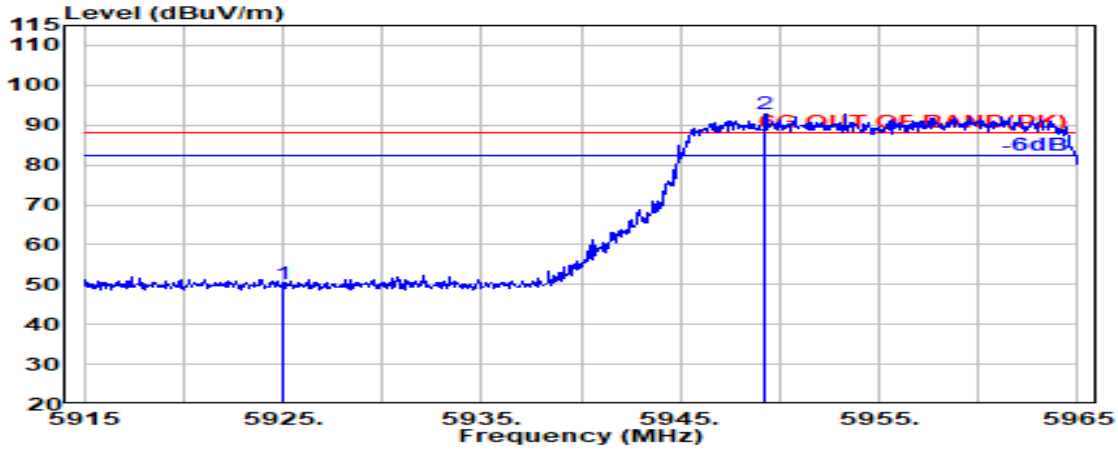

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	41.35	50.15	88.20	38.05	Peak
@ 5949.250	34.30	9.00	34.41	83.94	92.83	---	---	Peak

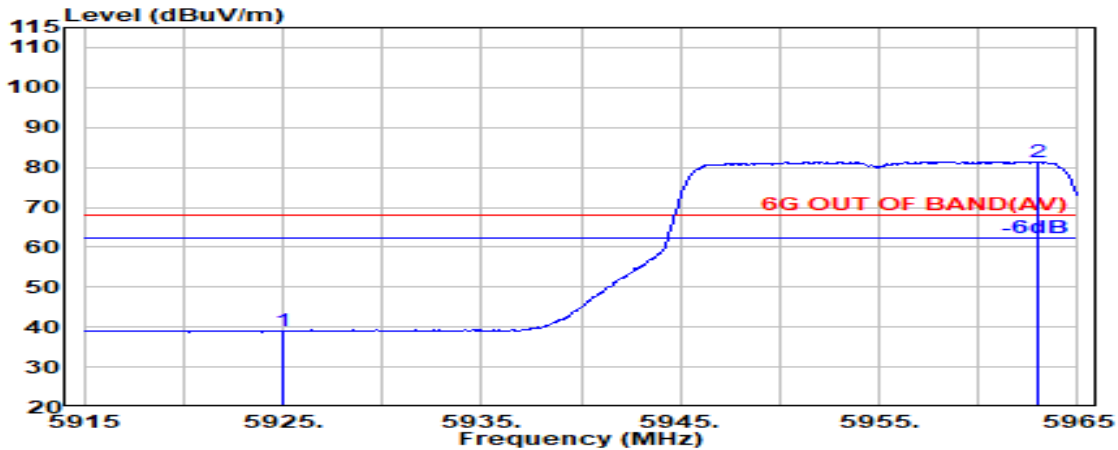


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.13	38.92	68.20	29.28	Average
@ 5962.950	34.27	9.01	34.41	72.58	81.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

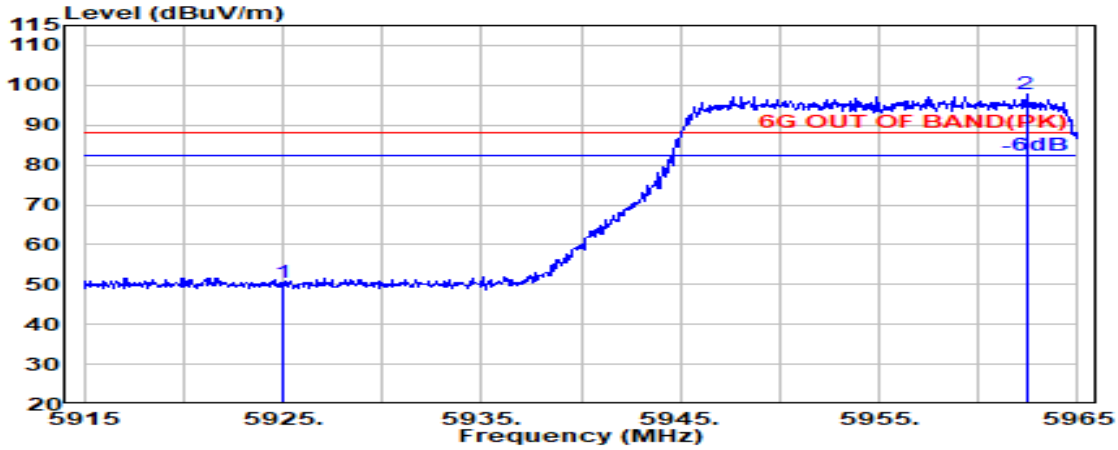

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	41.63	50.42	88.20	37.78	Peak
@ 5962.400	34.28	9.01	34.41	89.04	97.92	---	---	Peak

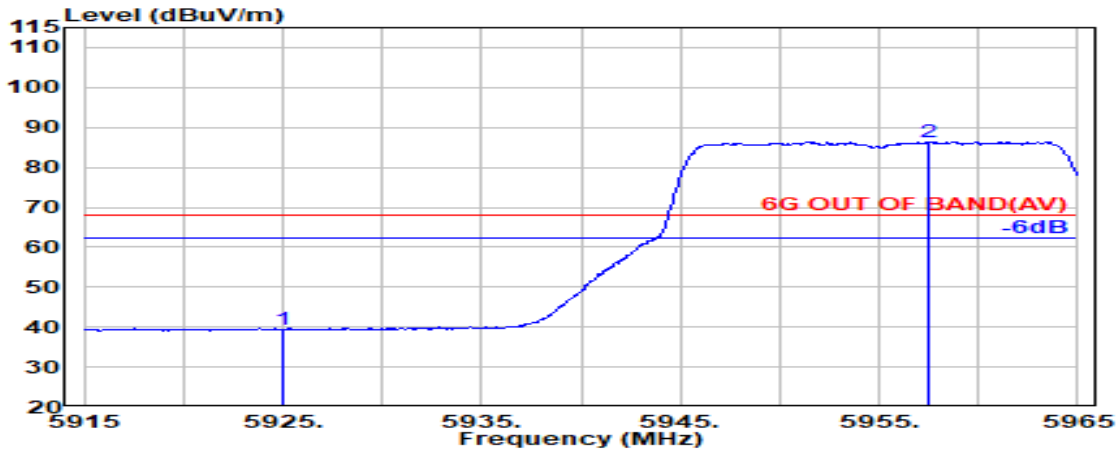


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.53	39.32	68.20	28.88	Average
@ 5957.450	34.29	9.01	34.41	77.49	86.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

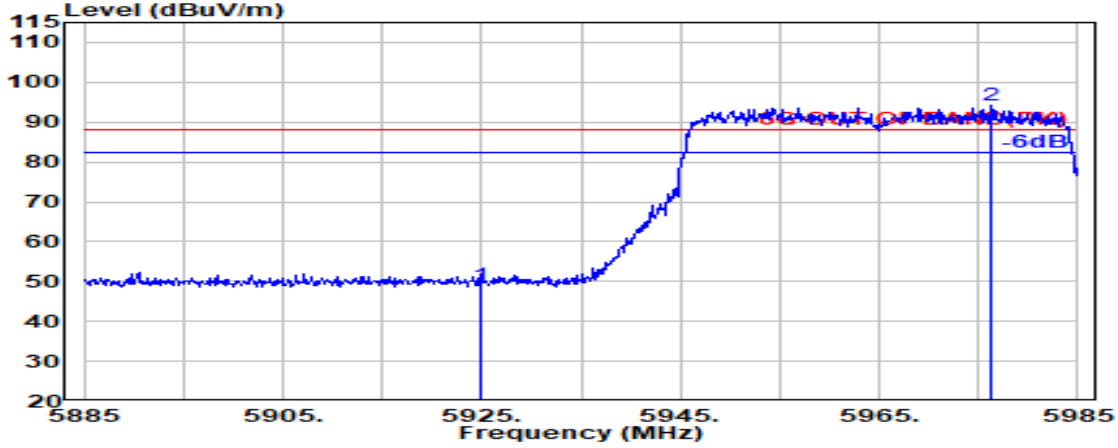

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.39	49.18	88.20	39.02	Peak
@ 5976.300	34.25	9.02	34.42	85.52	94.36	---	---	Peak

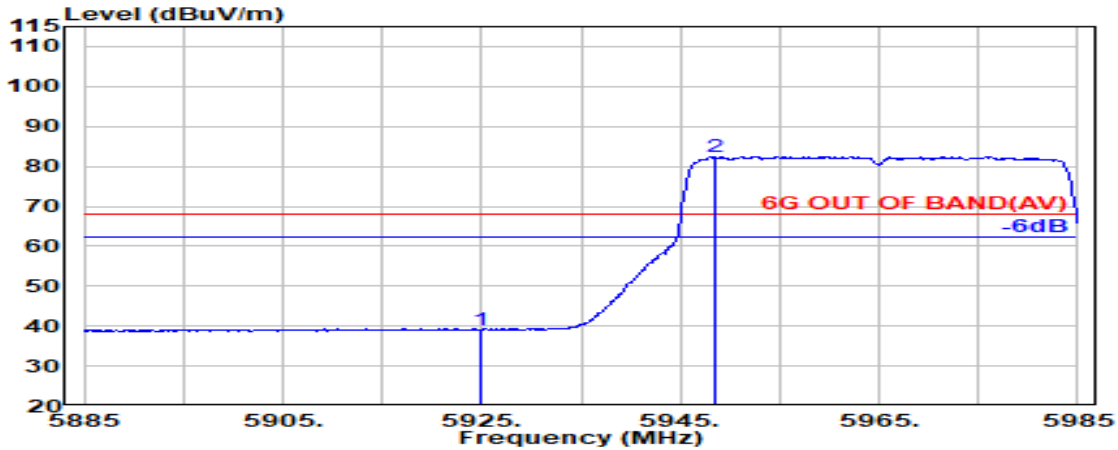


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.28	39.08	68.20	29.12	Average
@ 5948.500	34.29	9.00	34.41	73.61	82.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

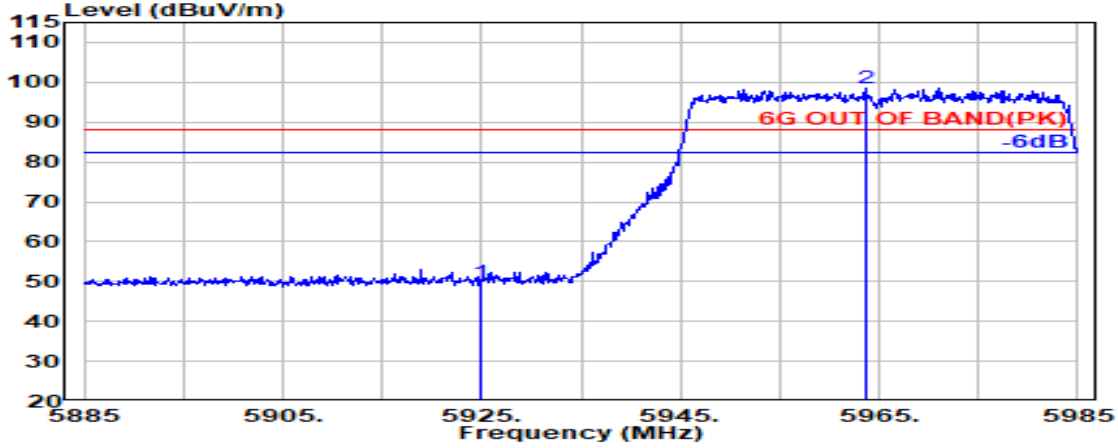

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.84	49.63	88.20	38.57	Peak
@ 5963.700	34.27	9.01	34.41	89.62	98.49	---	---	Peak

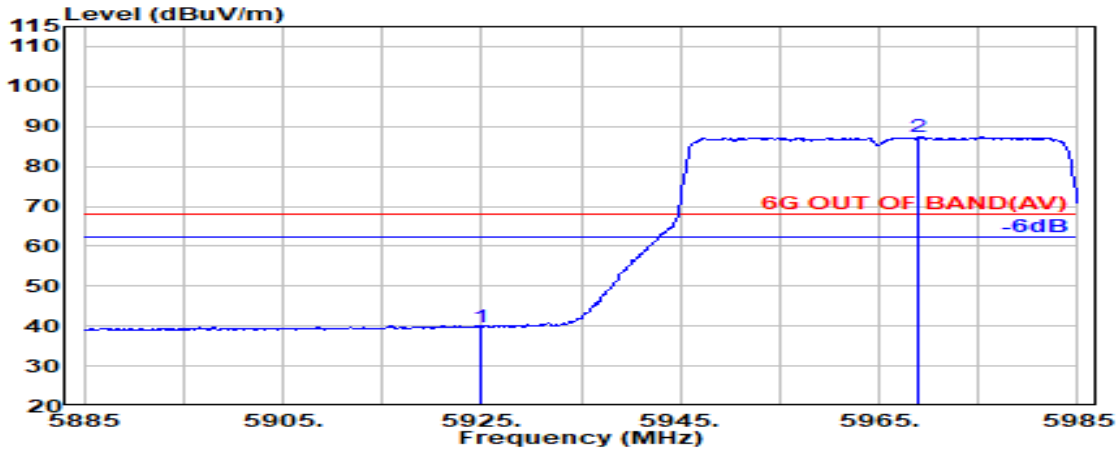


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.91	39.71	68.20	28.49	Average
@ 5969.000	34.26	9.01	34.42	78.56	87.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

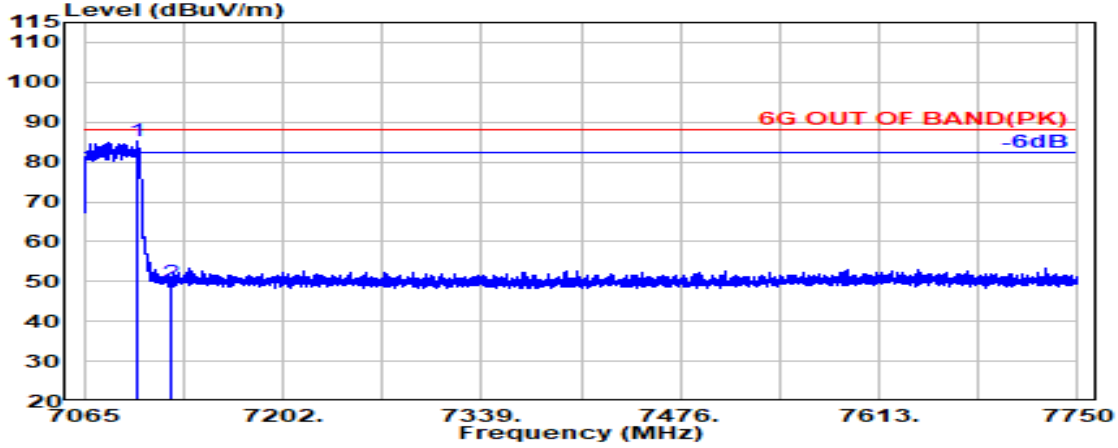

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.700	35.81	9.79	34.54	74.03	85.09	---	---	Peak
7125.000	35.90	9.80	34.55	38.65	49.80	88.20	38.40	Peak

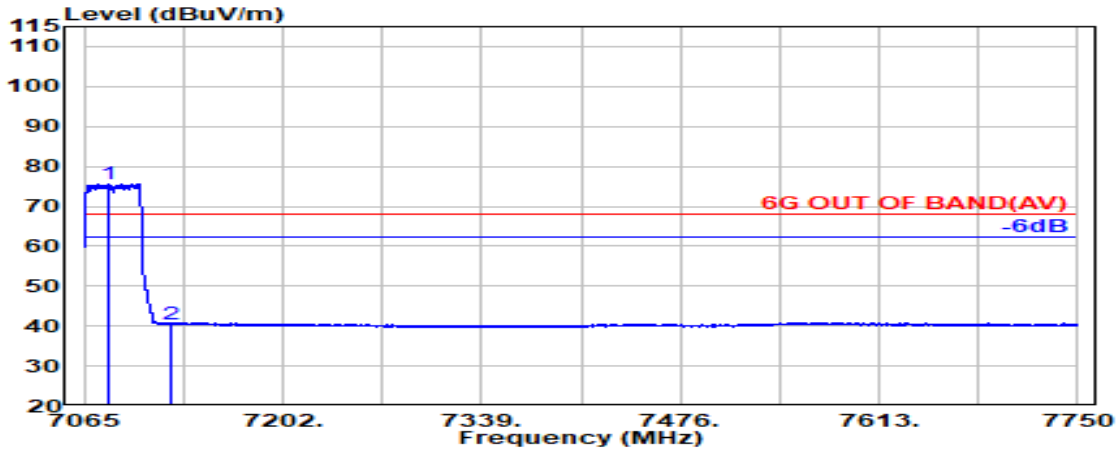


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7081.200	35.72	9.77	34.53	64.67	75.64	---	---	Average
7125.000	35.90	9.80	34.55	29.39	40.54	68.20	27.66	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

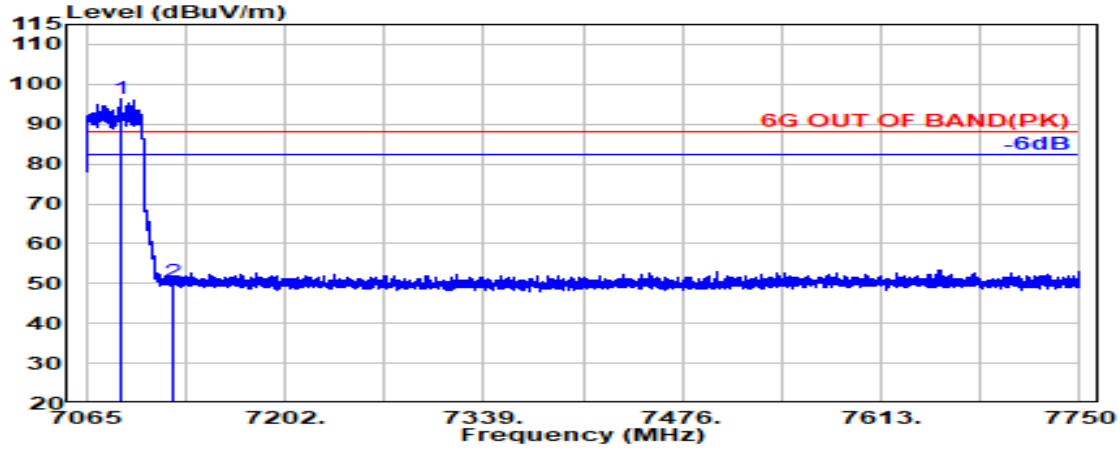

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7088.900	35.76	9.78	34.53	85.38	96.38	---	---	Peak
7125.000	35.90	9.80	34.55	39.43	50.58	88.20	37.62	Peak

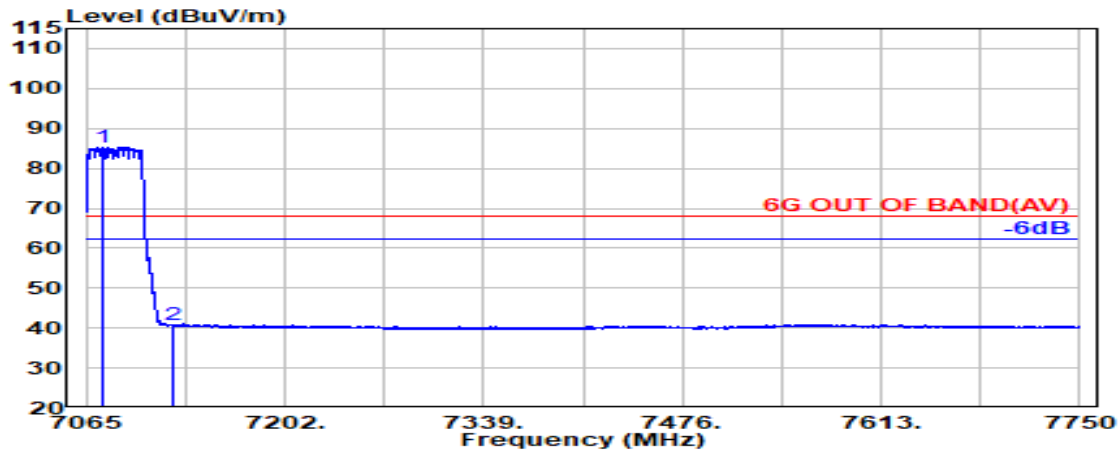


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7077.100	35.71	9.77	34.52	74.38	85.34	---	---	Average
7125.000	35.90	9.80	34.55	29.63	40.78	68.20	27.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

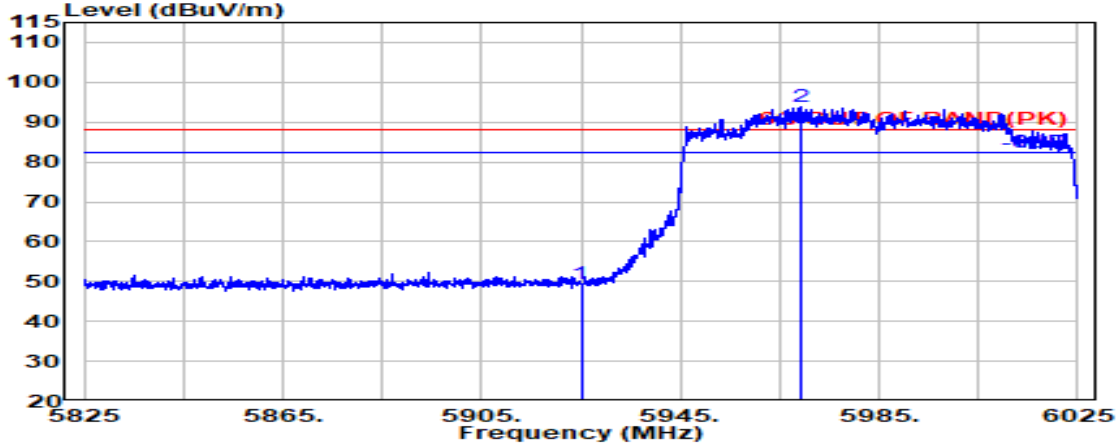

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.64	49.43	88.20	38.77	Peak
@ 5969.100	34.26	9.01	34.42	85.00	93.86	---	---	Peak

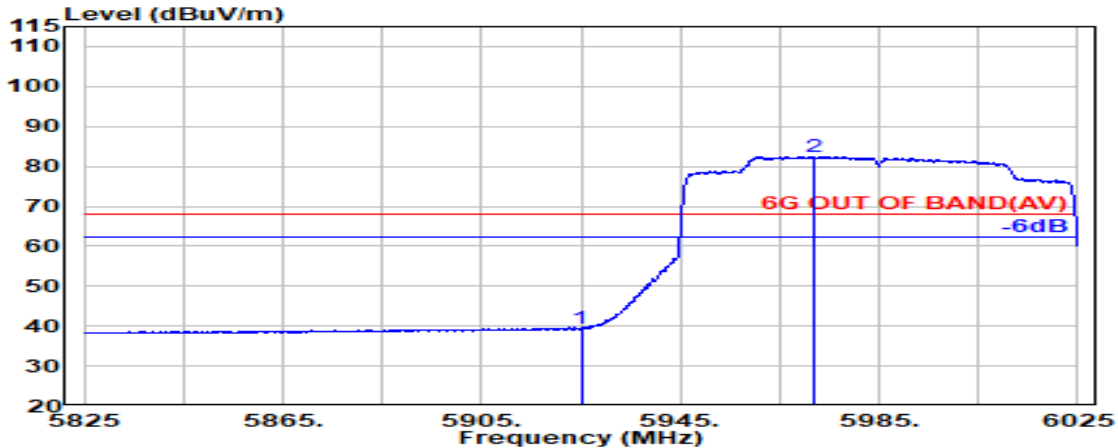


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.71	39.50	68.20	28.70	Average
@ 5971.900	34.26	9.02	34.42	73.60	82.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

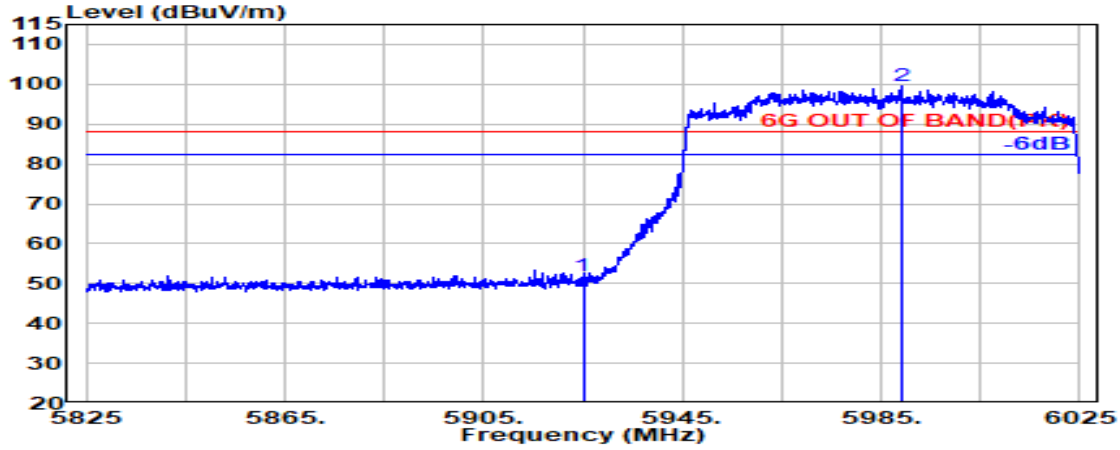

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	43.01	51.80	88.20	36.40	Peak
@ 5989.000	34.22	9.02	34.43	90.63	99.45	---	---	Peak

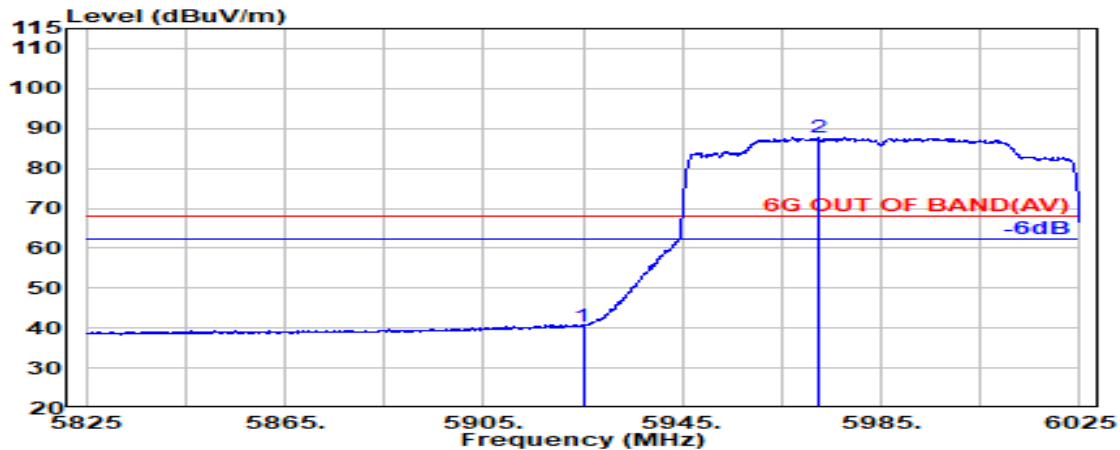


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	31.75	40.54	68.20	27.66	Average
@ 5972.500	34.25	9.02	34.42	78.82	87.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

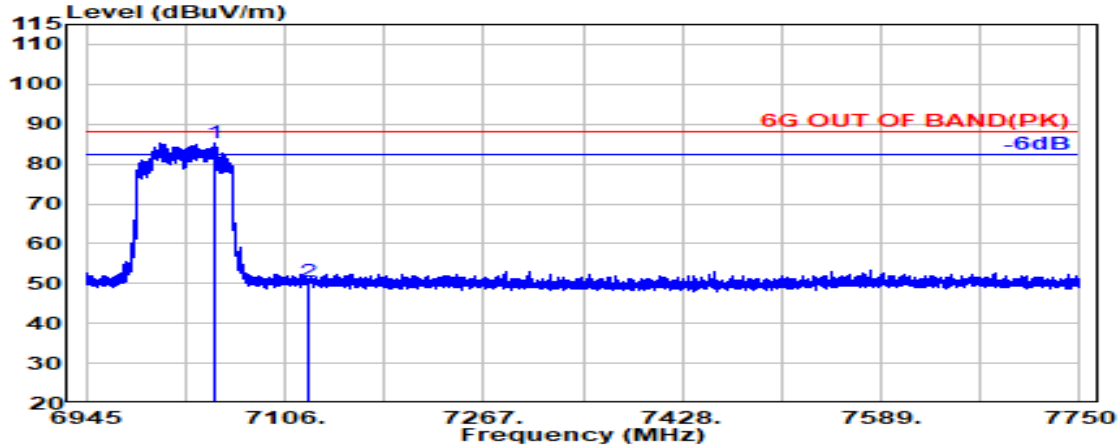

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.500	35.60	9.75	34.51	74.49	85.33	---	---	Peak
7125.000	35.90	9.80	34.55	39.40	50.55	88.20	37.65	Peak

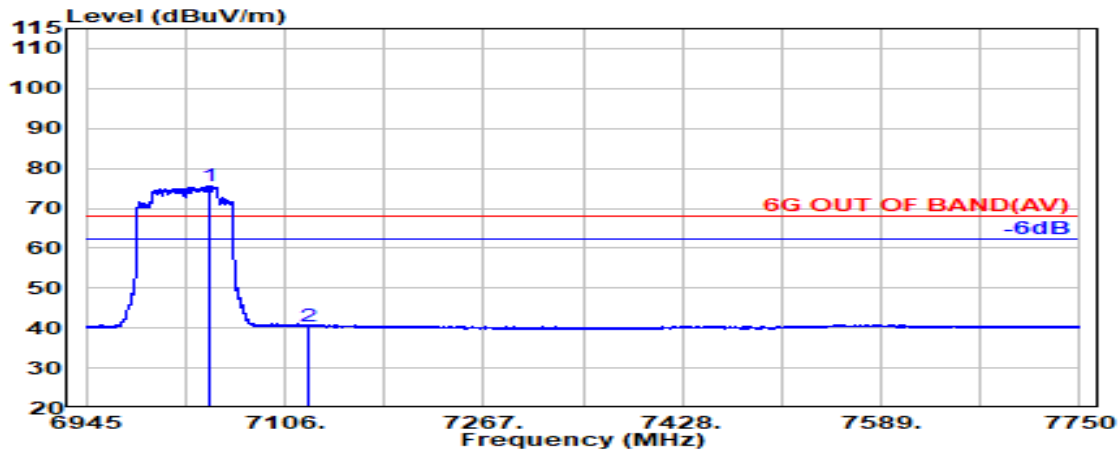


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7045.600	35.59	9.75	34.51	64.81	75.64	---	---	Average
7125.000	35.90	9.80	34.55	29.43	40.58	68.20	27.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

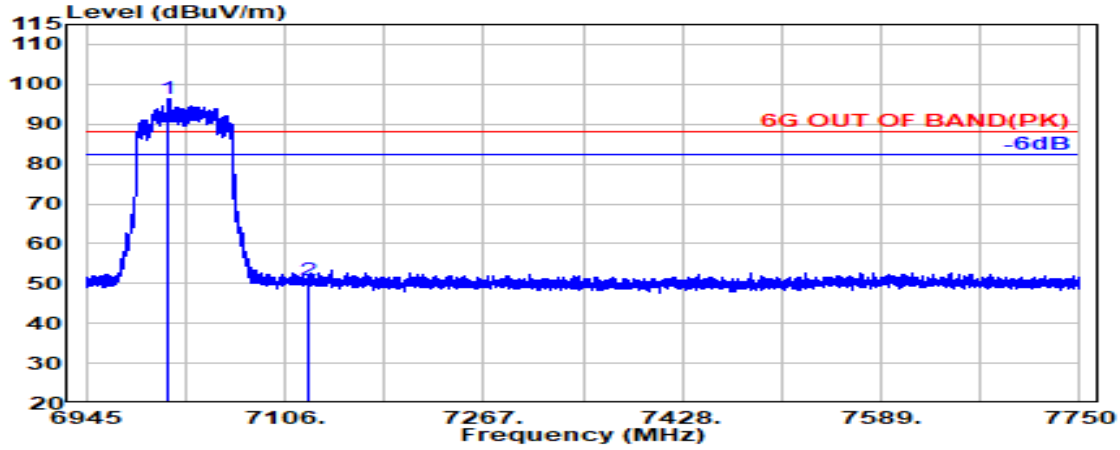

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7012.100	35.52	9.73	34.49	85.64	96.40	---	---	Peak
7125.000	35.90	9.80	34.55	39.66	50.81	88.20	37.39	Peak

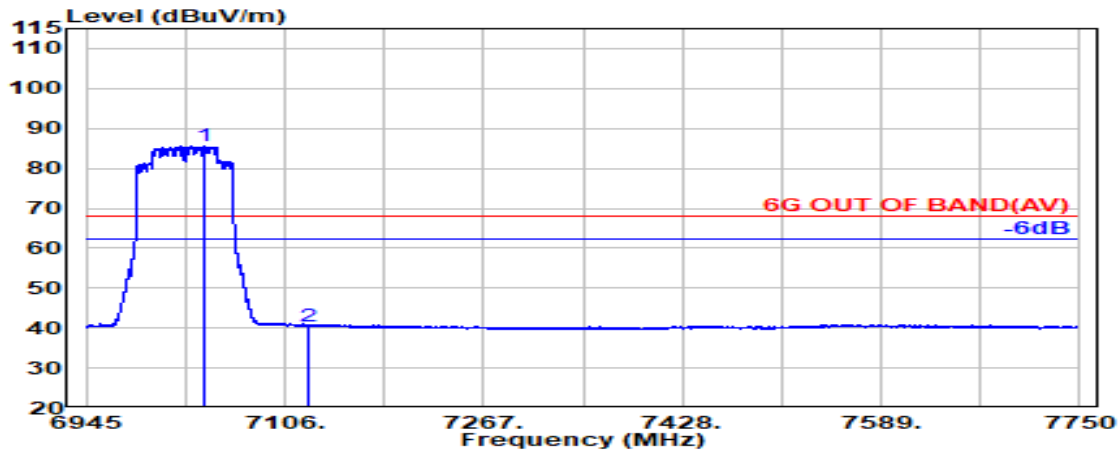


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7041.000	35.58	9.75	34.50	74.72	85.54	---	---	Average
7125.000	35.90	9.80	34.55	29.46	40.61	68.20	27.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

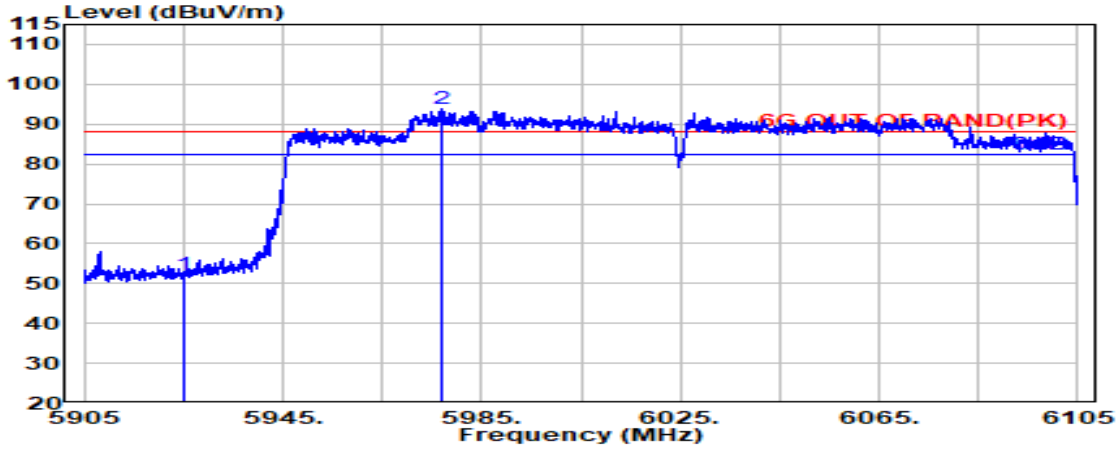

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	43.40	52.19	88.20	36.01	Peak
@ 5977.200	34.25	9.02	34.42	85.17	94.02	---	---	Peak

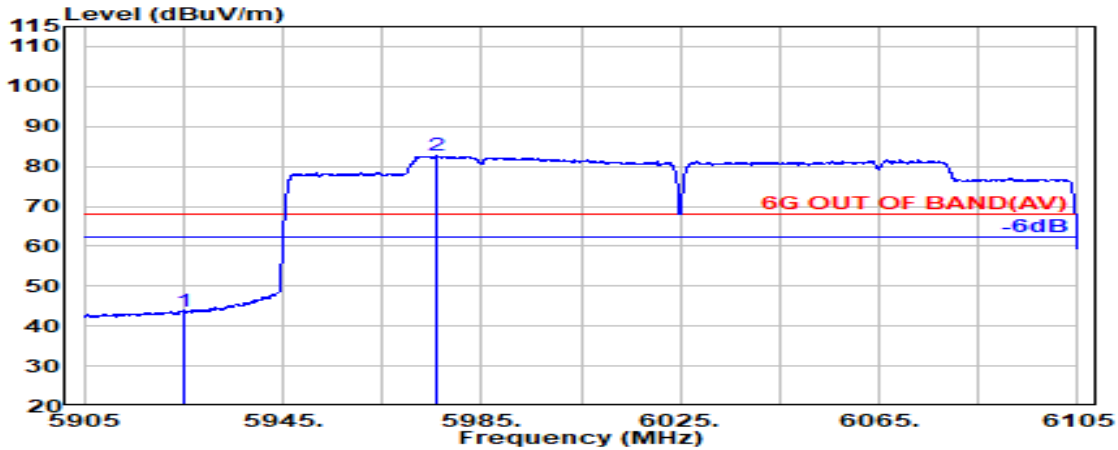


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	34.97	43.76	68.20	24.44	Average
@ 5975.700	34.25	9.02	34.42	73.76	82.60	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

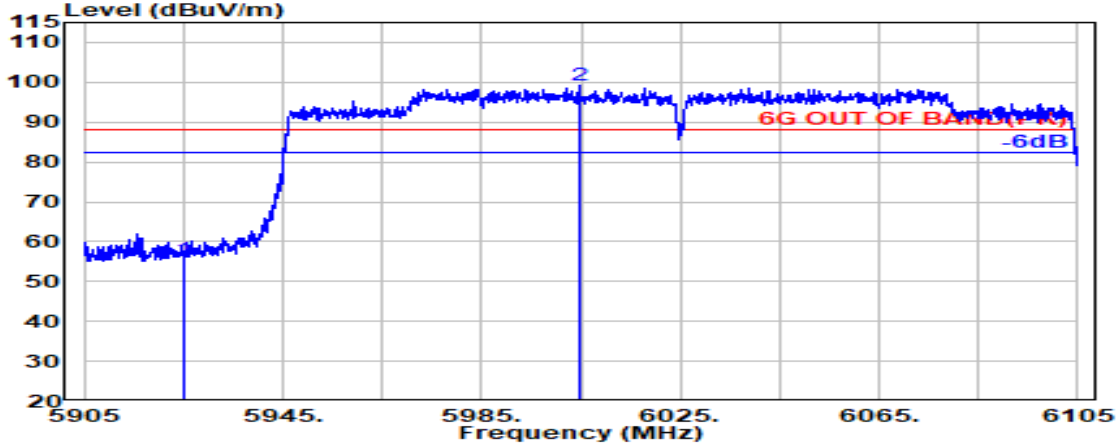

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	46.54	55.34	88.20	32.86	Peak
@ 6004.500	34.20	9.03	34.43	90.42	99.23	---	---	Peak

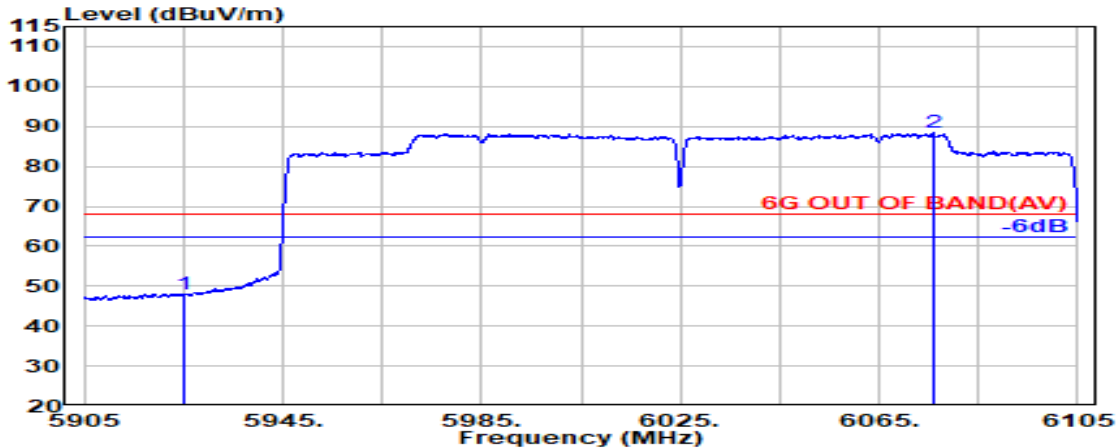


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	39.31	48.11	68.20	20.09	Average
@ 6075.900	34.25	9.09	34.38	79.53	88.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

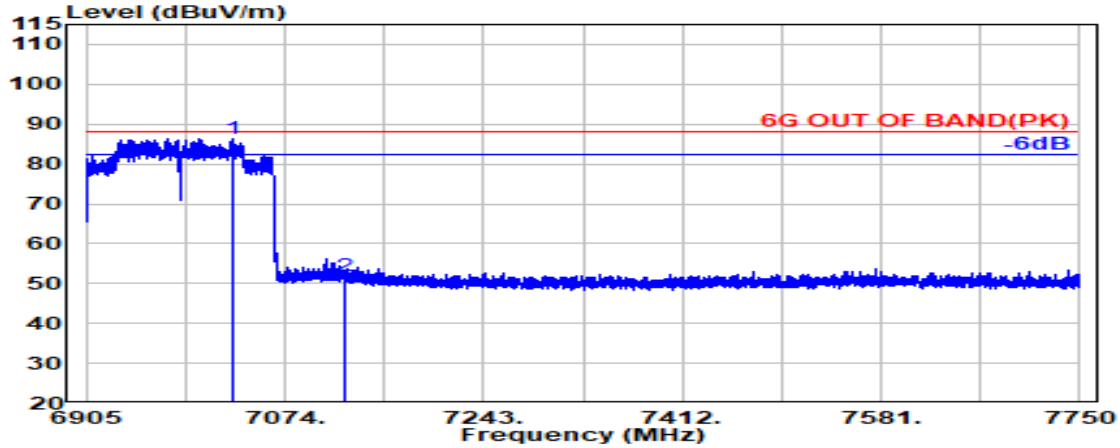

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7030.700	35.56	9.74	34.50	75.53	86.33	---	---	Peak
7125.000	35.90	9.80	34.55	40.87	52.02	88.20	36.18	Peak

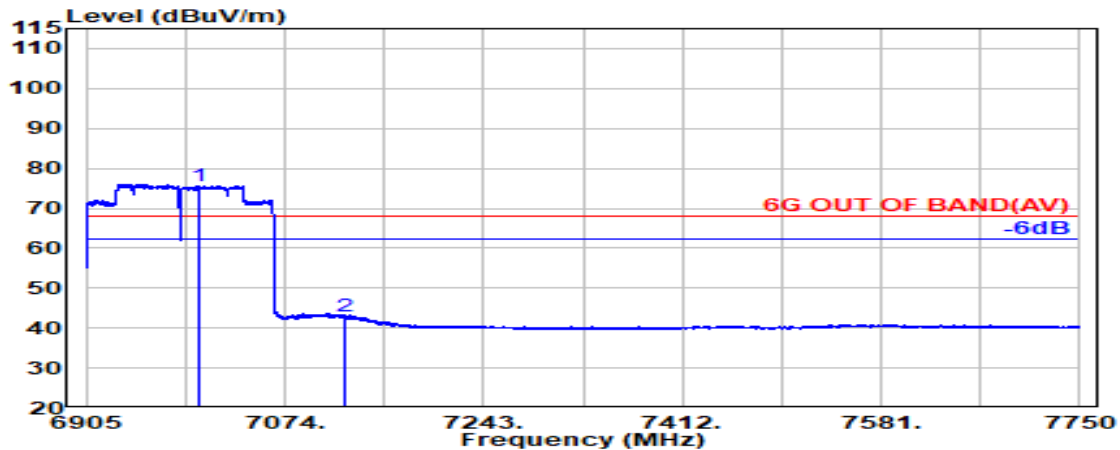


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 7000.100	35.50	9.72	34.48	64.91	75.65	---	---	Average
7125.000	35.90	9.80	34.55	31.69	42.83	68.20	25.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

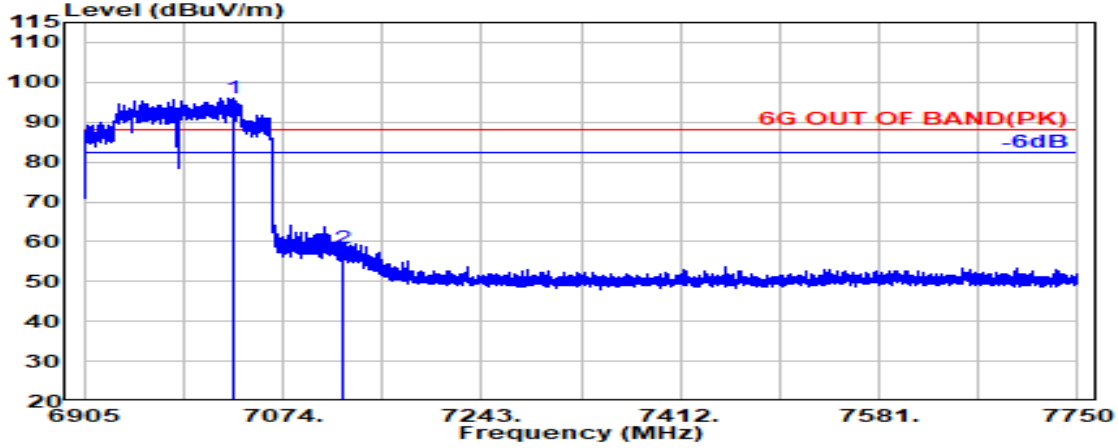

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7031.600	35.56	9.74	34.50	85.20	96.00	---	---	Peak
7125.000	35.90	9.80	34.55	47.19	58.34	88.20	29.86	Peak

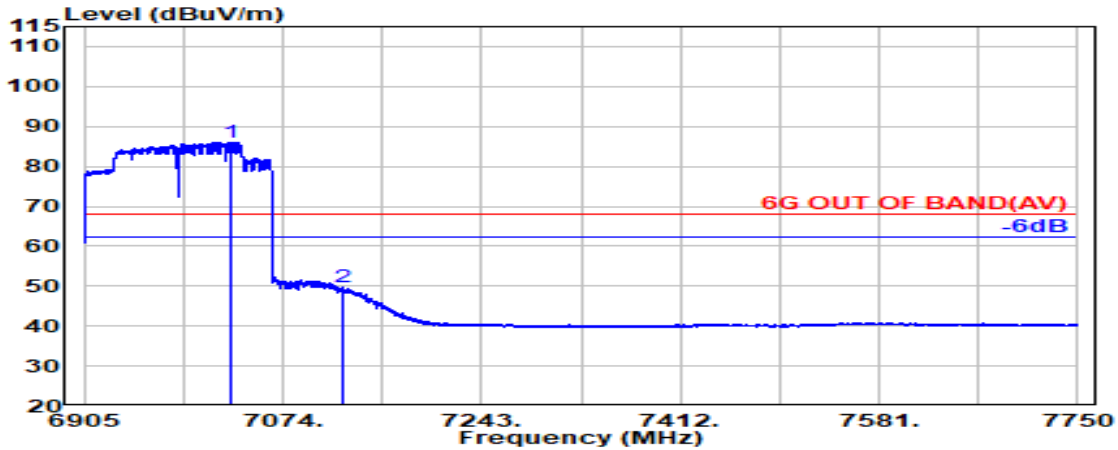

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7030.600	35.56	9.74	34.50	75.25	86.05	---	---	Average
7125.000	35.90	9.80	34.55	38.53	49.68	68.20	18.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

● OFDMA Modulation


Test SKU: SKU #1 (With INPAQ ANT)

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

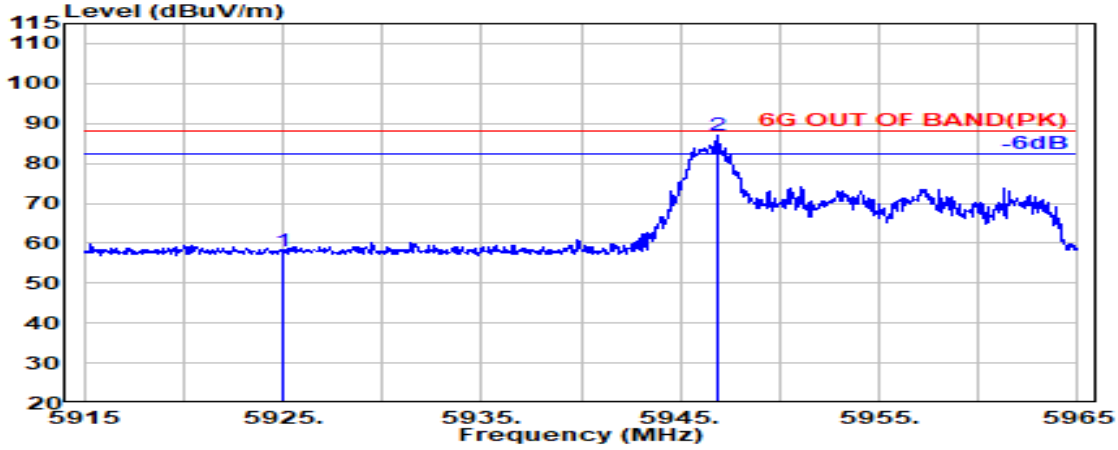

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.21	58.01	88.20	30.19	Peak
@ 5946.850	34.29	9.00	34.41	78.25	87.13	---	---	Peak

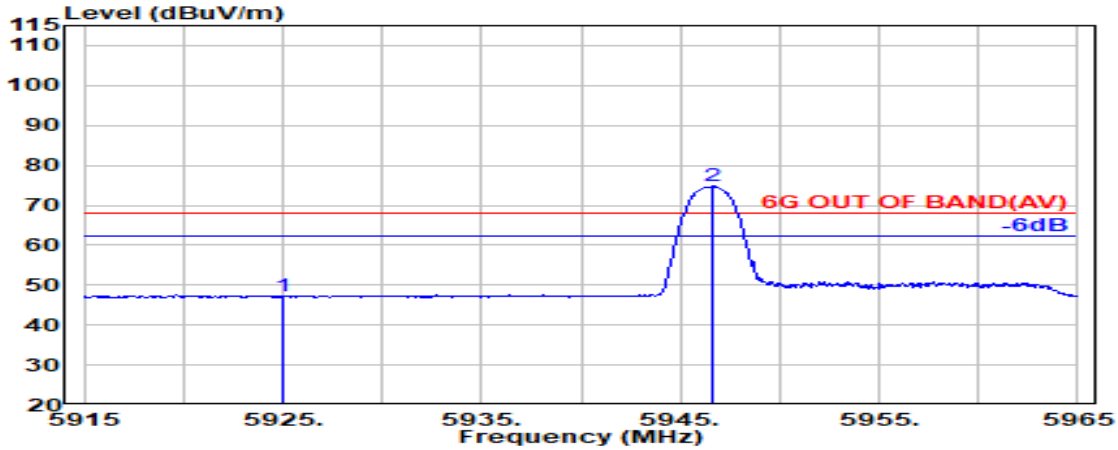


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.29	47.09	68.20	21.11	Average
@ 5946.650	34.29	9.00	34.41	65.88	74.76	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

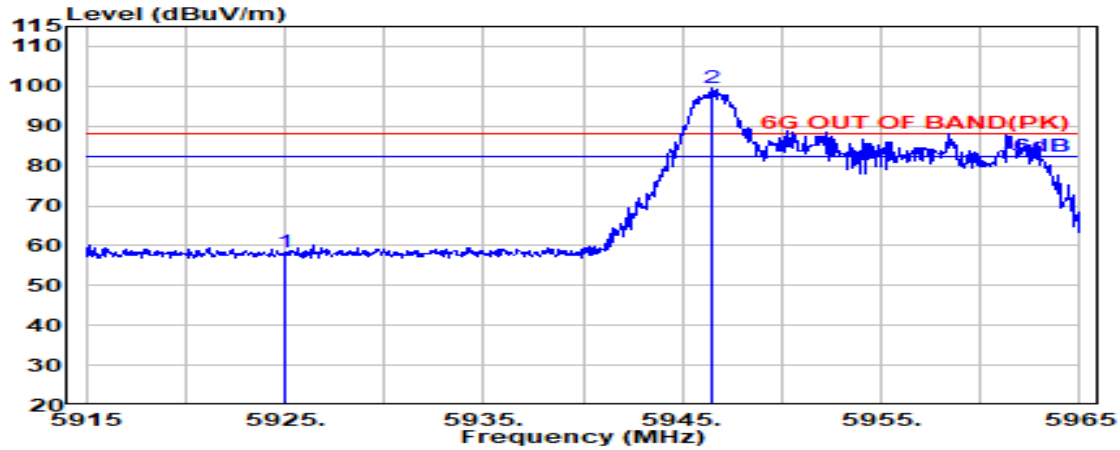

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.74	58.53	88.20	29.67	Peak
@ 5946.500	34.29	9.00	34.41	90.80	99.68	---	---	Peak

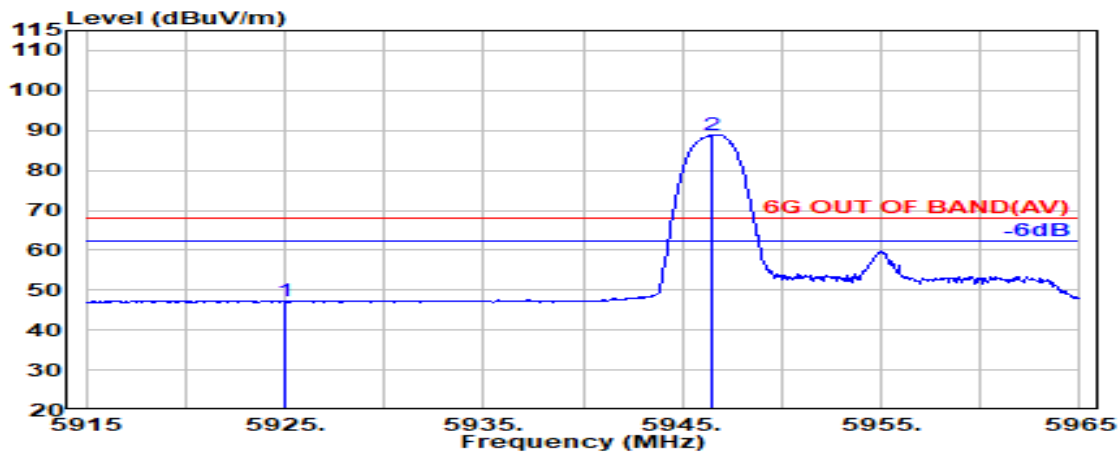


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.32	47.11	68.20	21.09	Average
@ 5946.500	34.29	9.00	34.41	80.11	88.99	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	17
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

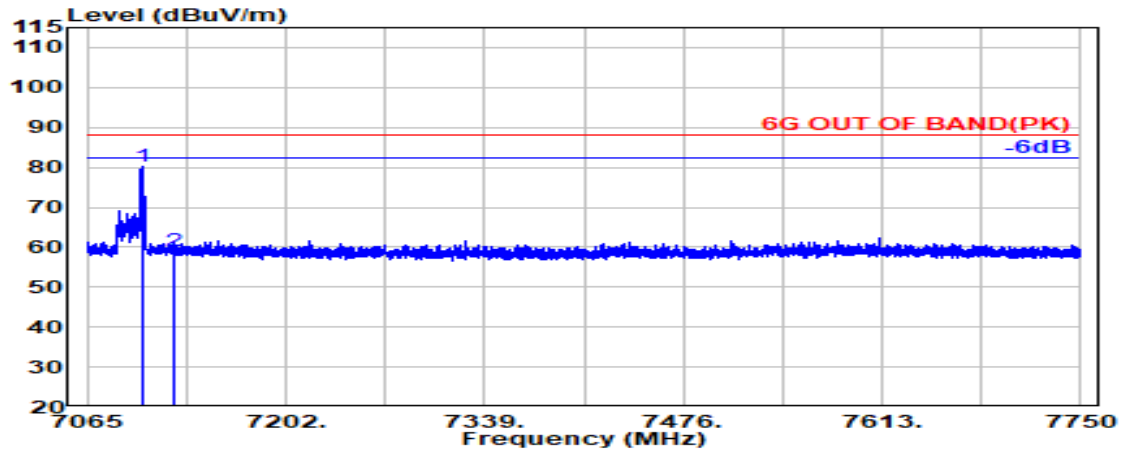

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7102.700	35.81	9.79	34.54	69.15	80.21	---	---	Peak
@ 7125.000	35.90	9.80	34.55	47.75	58.90	88.20	29.30	Peak

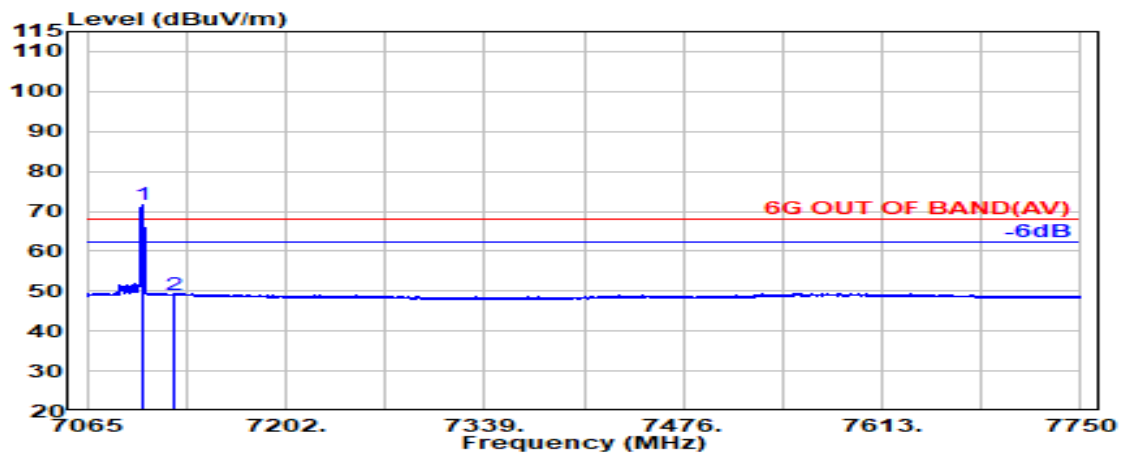


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7103.000	35.81	9.79	34.54	60.46	71.52	---	---	Average
@ 7125.000	35.90	9.80	34.55	37.82	48.97	68.20	19.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	17
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

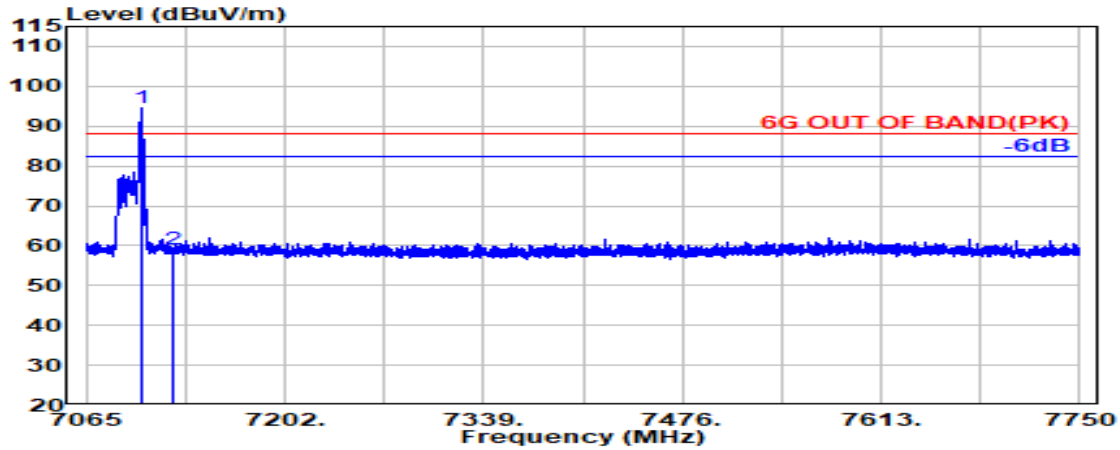

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7103.300	35.81	9.79	34.54	83.45	94.51	---	---	Peak
@ 7125.000	35.90	9.80	34.55	47.85	59.00	88.20	29.20	Peak

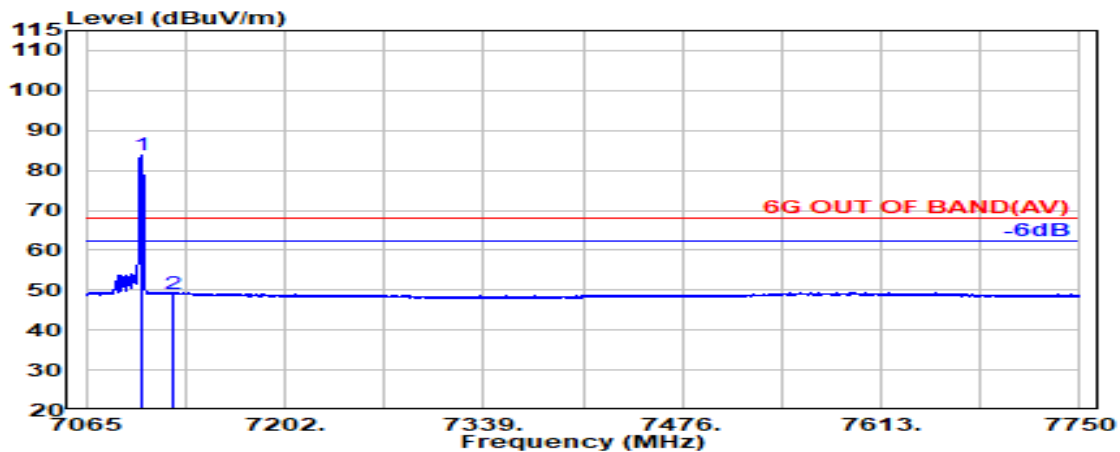


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7103.000	35.81	9.79	34.54	72.88	83.94	---	---	Average
@ 7125.000	35.90	9.80	34.55	38.02	49.17	68.20	19.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

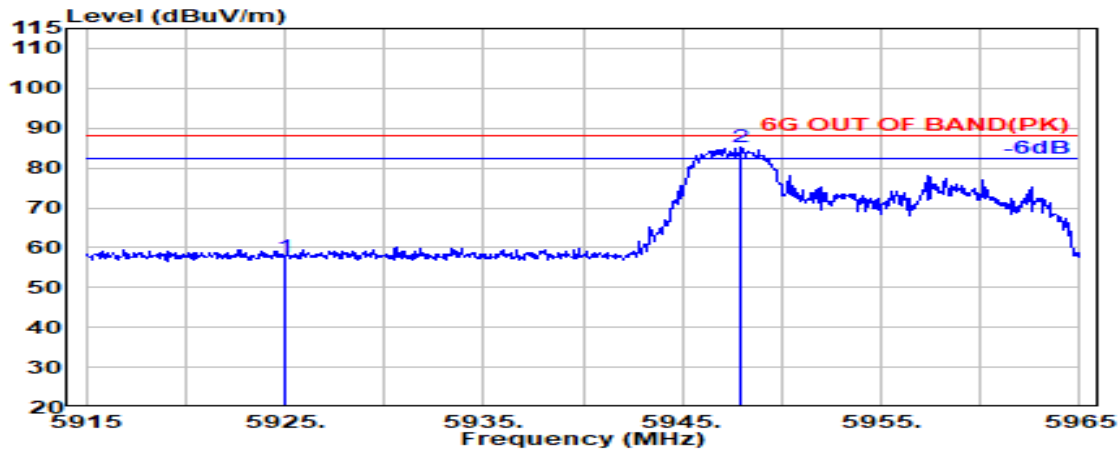

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.00	57.80	88.20	30.40	Peak
@ 5947.950	34.29	9.00	34.41	76.27	85.16	---	---	Peak

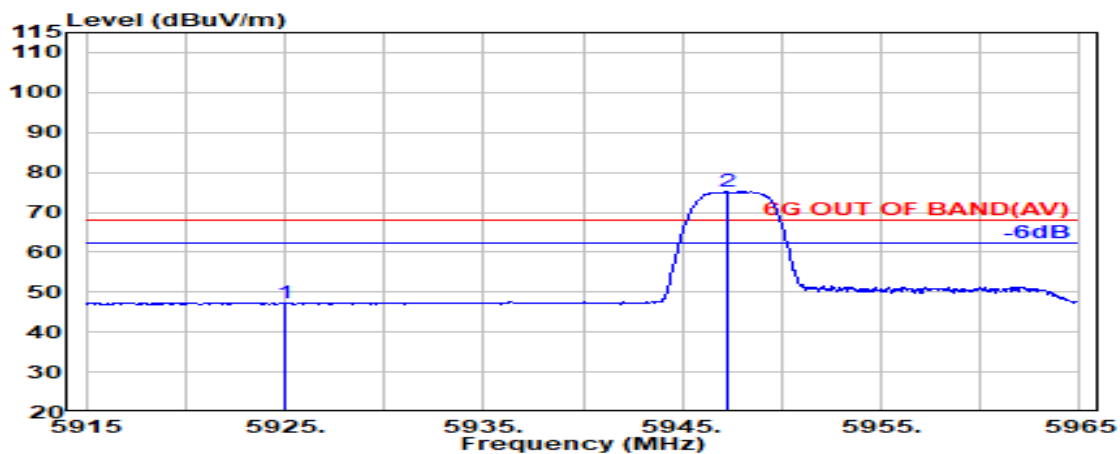


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.29	47.09	68.20	21.11	Average
@ 5947.250	34.29	9.00	34.41	66.31	75.19	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

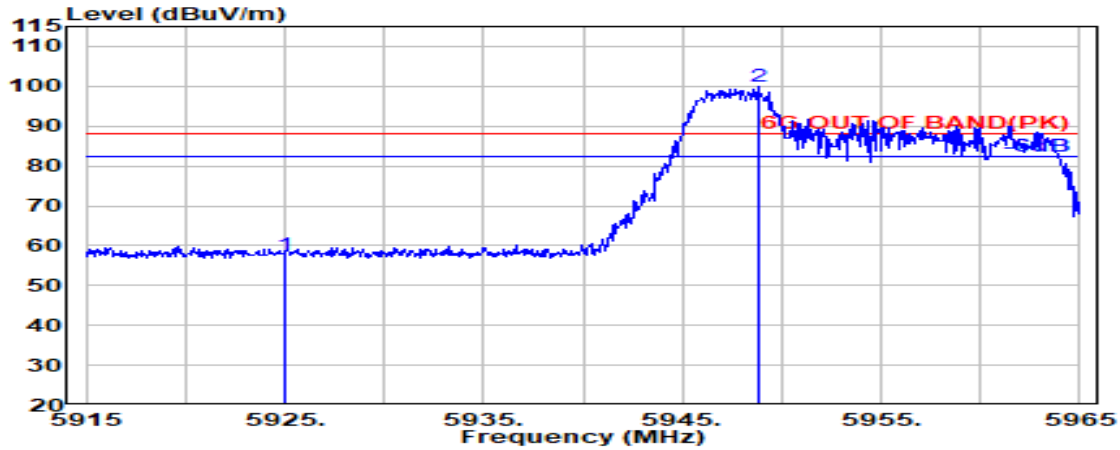

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	48.98	57.77	88.20	30.43	Peak
@ 5948.850	34.30	9.00	34.41	90.95	99.85	---	---	Peak

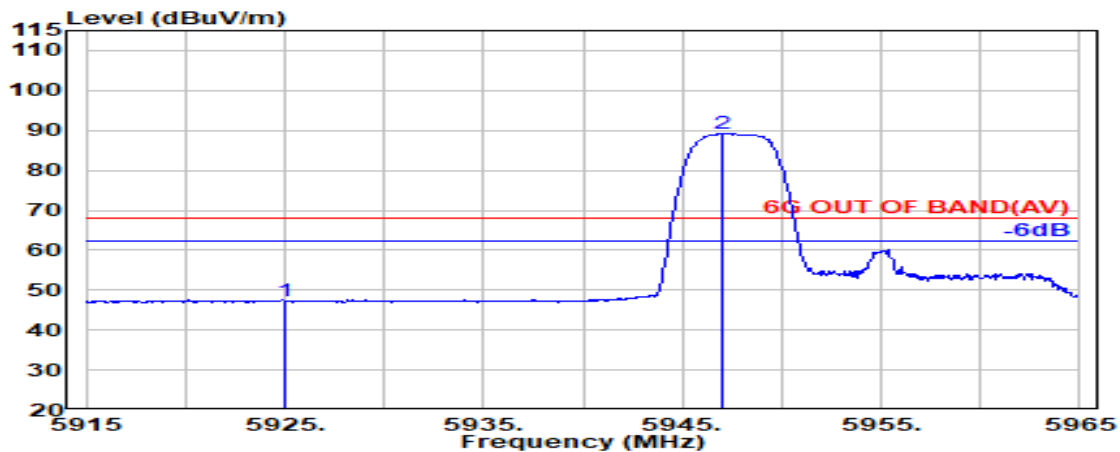


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.30	47.10	68.20	21.10	Average
@ 5947.050	34.29	9.00	34.41	80.39	89.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	44
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

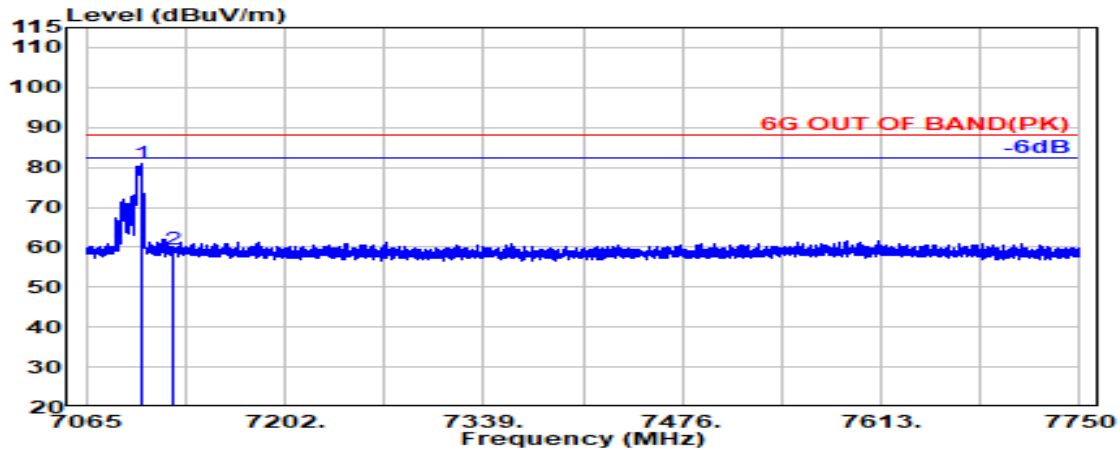

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.900	35.81	9.79	34.54	69.84	80.90	---	---	Peak
7125.000	35.90	9.80	34.55	48.13	59.28	88.20	28.92	Peak

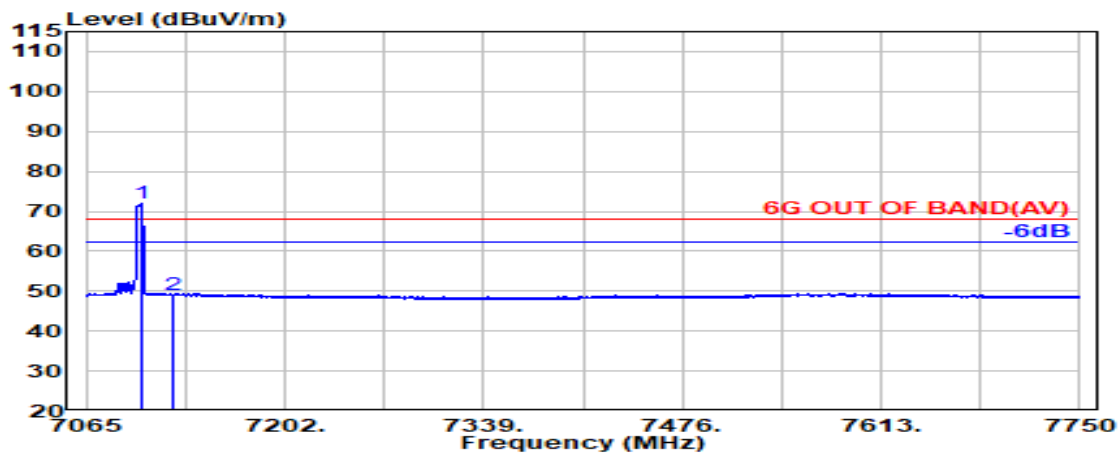


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.600	35.81	9.79	34.54	60.94	71.99	---	---	Average
7125.000	35.90	9.80	34.55	37.90	49.05	68.20	19.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	52T	RU Index	44
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

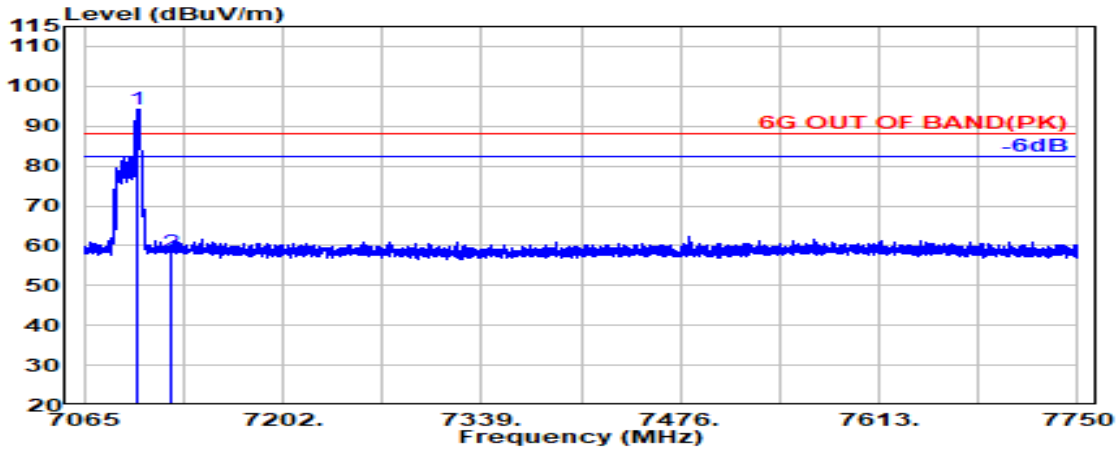

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7102.400	35.81	9.79	34.54	83.31	94.36	---	---	Peak
7125.000	35.90	9.80	34.55	47.35	58.50	88.20	29.70	Peak

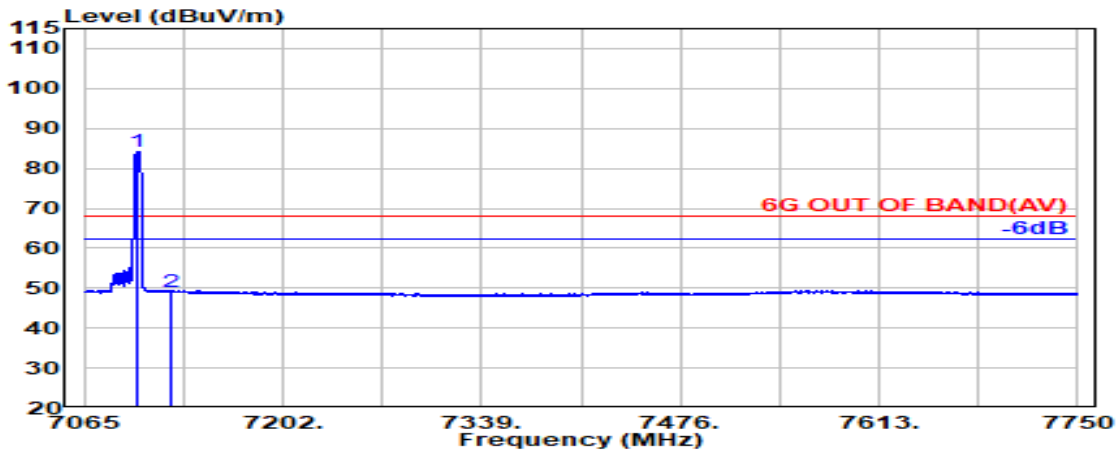


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.600	35.81	9.79	34.54	73.16	84.21	---	---	Average
7125.000	35.90	9.80	34.55	37.86	49.01	68.20	19.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

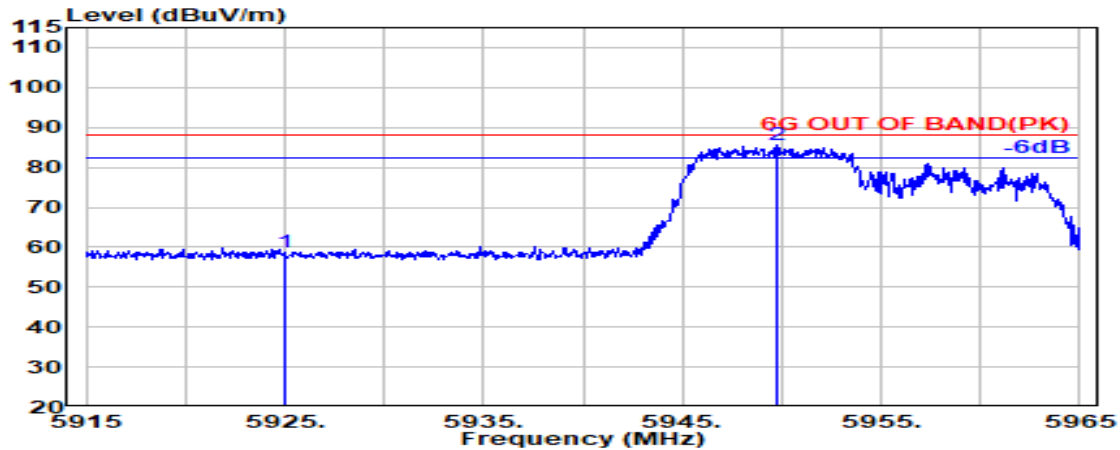

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.84	58.63	88.20	29.57	Peak
@ 5949.750	34.30	9.00	34.41	76.64	85.53	---	---	Peak

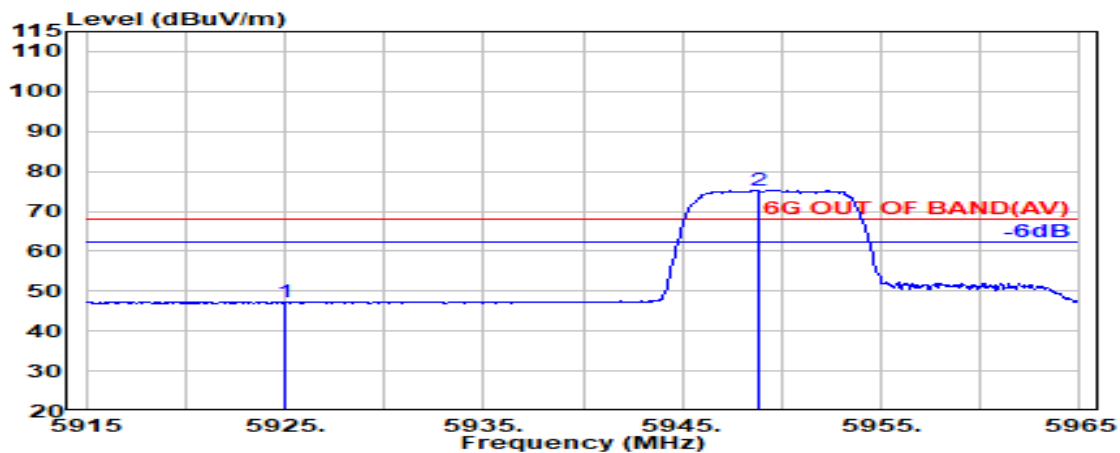


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.38	47.17	68.20	21.03	Average
@ 5948.850	34.30	9.00	34.41	66.40	75.29	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

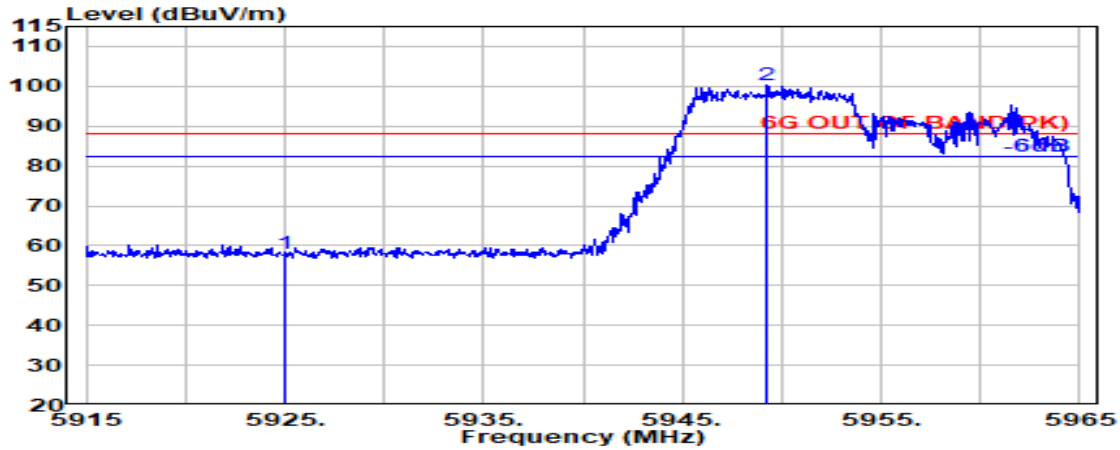

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.38	58.17	88.20	30.03	Peak
@ 5949.250	34.30	9.00	34.41	91.34	100.23	---	---	Peak

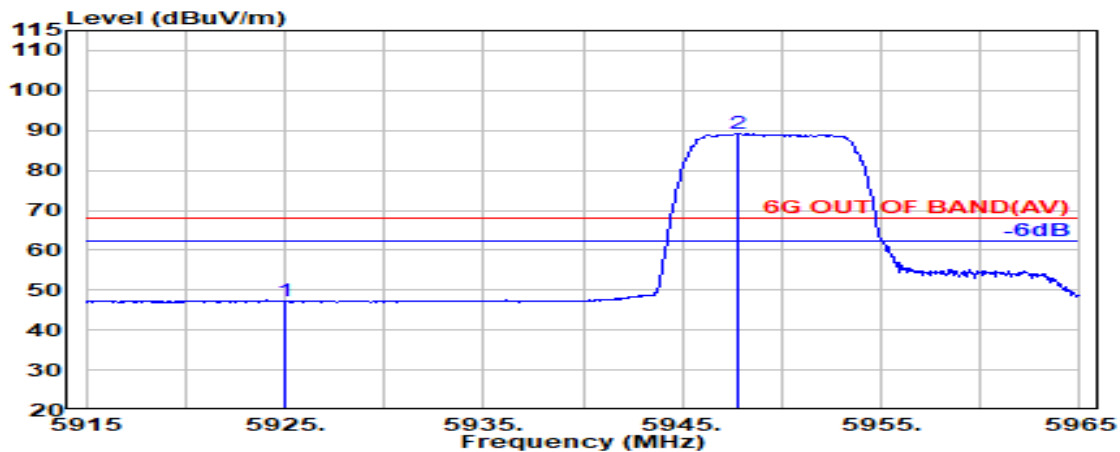


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.34	47.14	68.20	21.06	Average
@ 5947.800	34.29	9.00	34.41	80.39	89.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

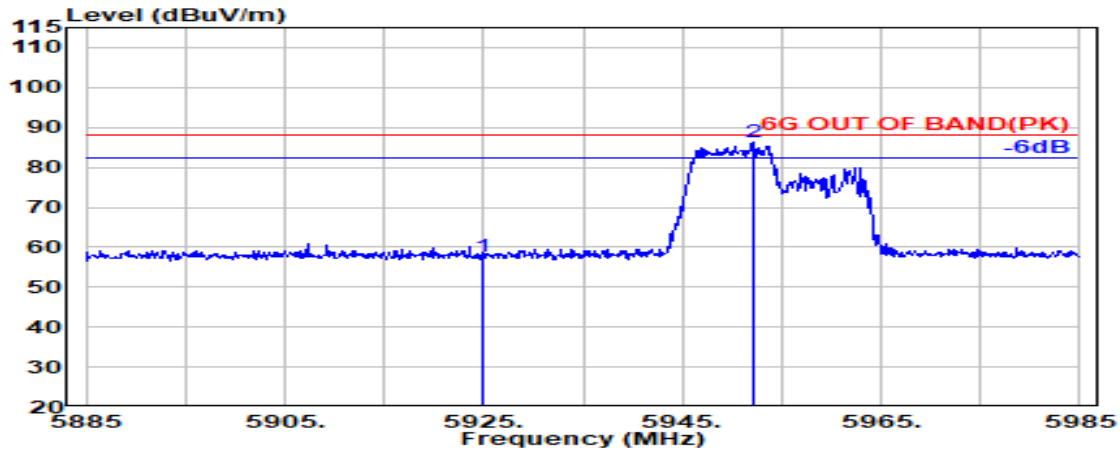

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5925.000	34.20	8.99	34.40	48.75	57.55	88.20	30.65	Peak
5952.200	34.30	9.00	34.41	77.42	86.31	---	---	Peak

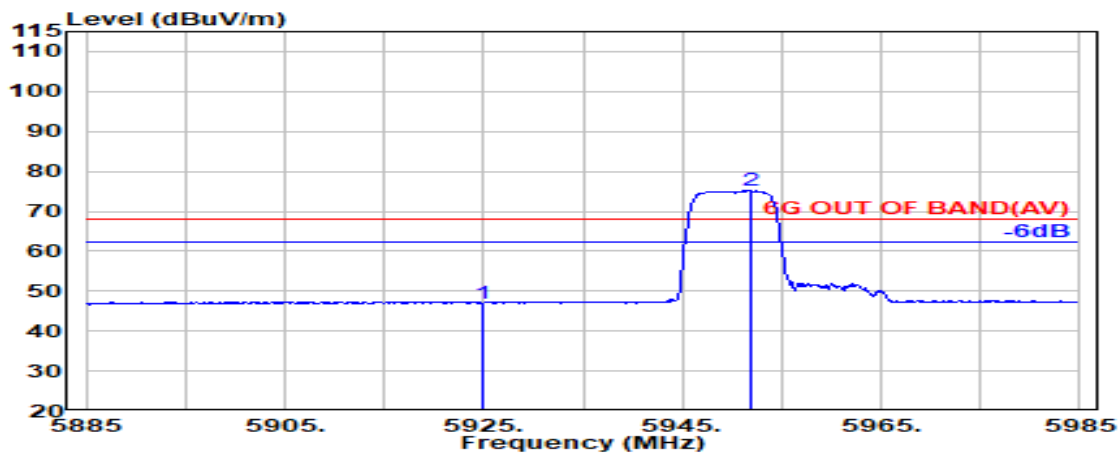


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5925.000	34.20	8.99	34.40	38.25	47.05	68.20	21.15	Average
5951.800	34.30	9.00	34.41	66.31	75.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

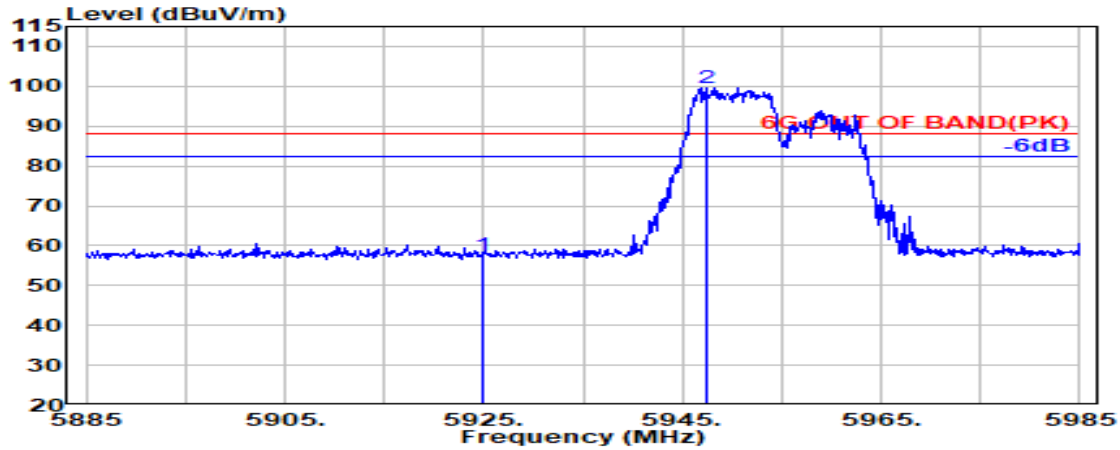

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5925.000	34.20	8.99	34.40	48.96	57.75	88.20	30.45	Peak
5947.400	34.29	9.00	34.41	90.81	99.69	---	---	Peak

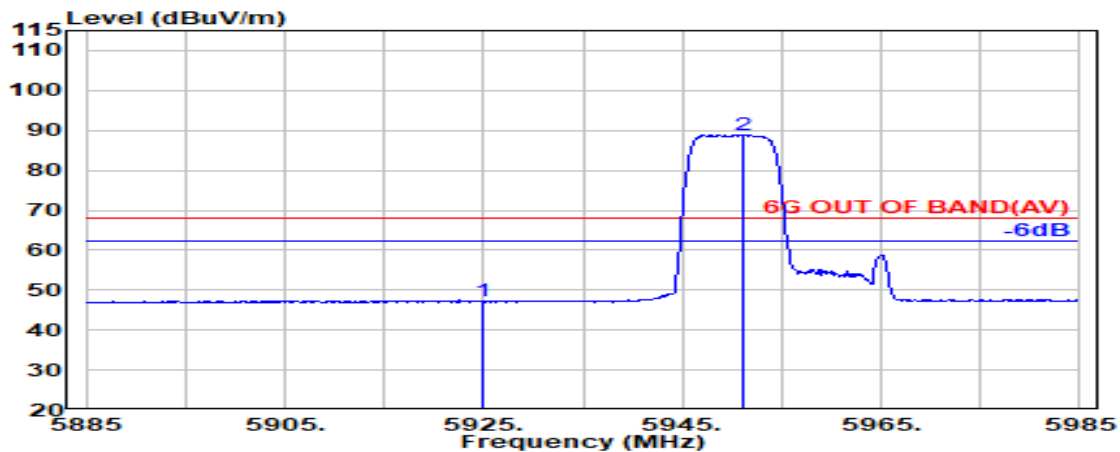


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5925.000	34.20	8.99	34.40	38.33	47.13	68.20	21.07	Average
5951.000	34.30	9.00	34.41	80.10	89.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	56
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

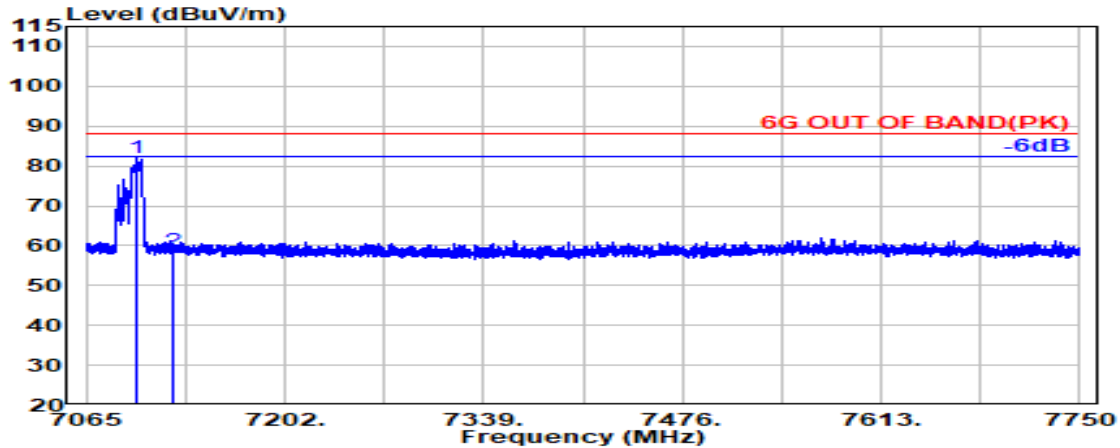

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7099.400	35.80	9.78	34.54	70.99	82.03	88.20	--	Peak
7125.000	35.90	9.80	34.55	47.59	58.74	88.20	29.46	Peak

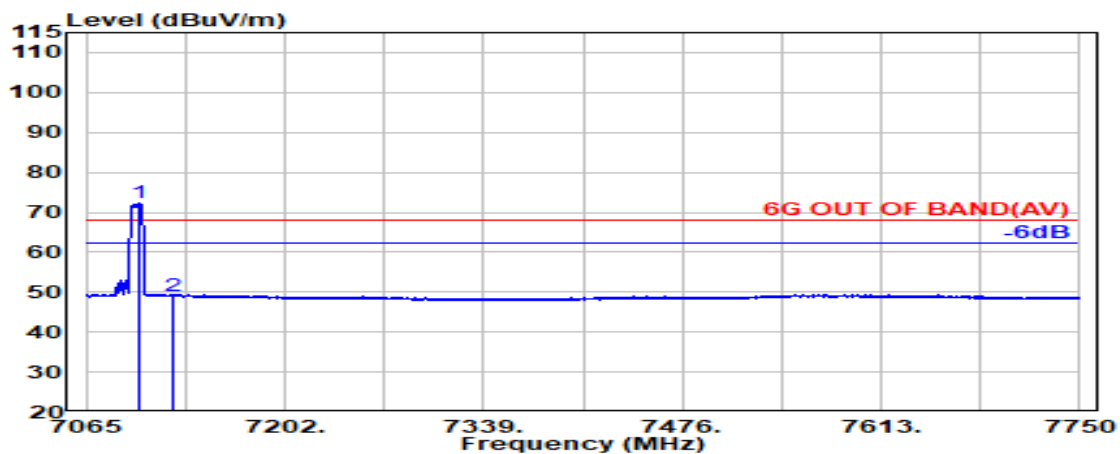


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7101.600	35.81	9.79	34.54	61.19	72.24	68.20	---	Average
7125.000	35.90	9.80	34.55	38.05	49.20	68.20	19.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	56
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

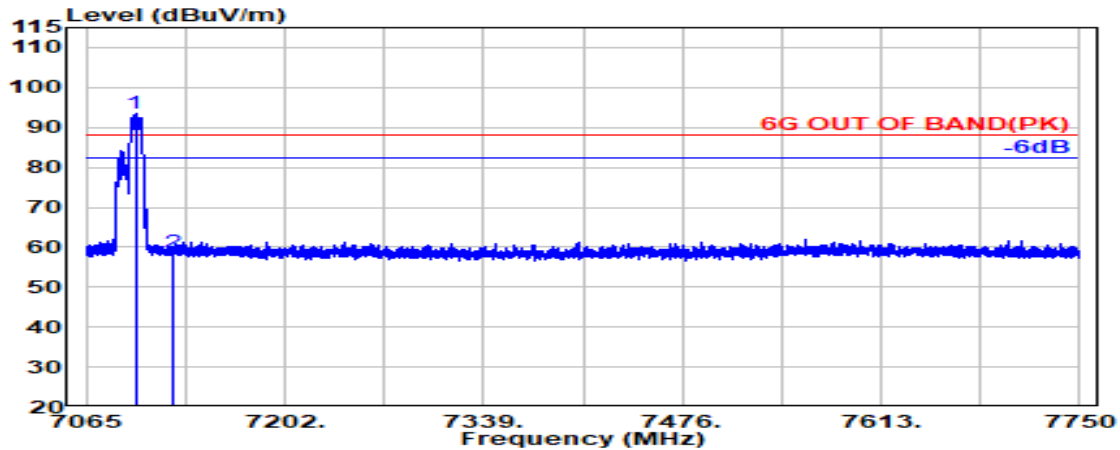

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7098.900	35.80	9.78	34.54	82.36	93.41	---	---	Peak
7125.000	35.90	9.80	34.55	47.62	58.77	88.20	29.43	Peak

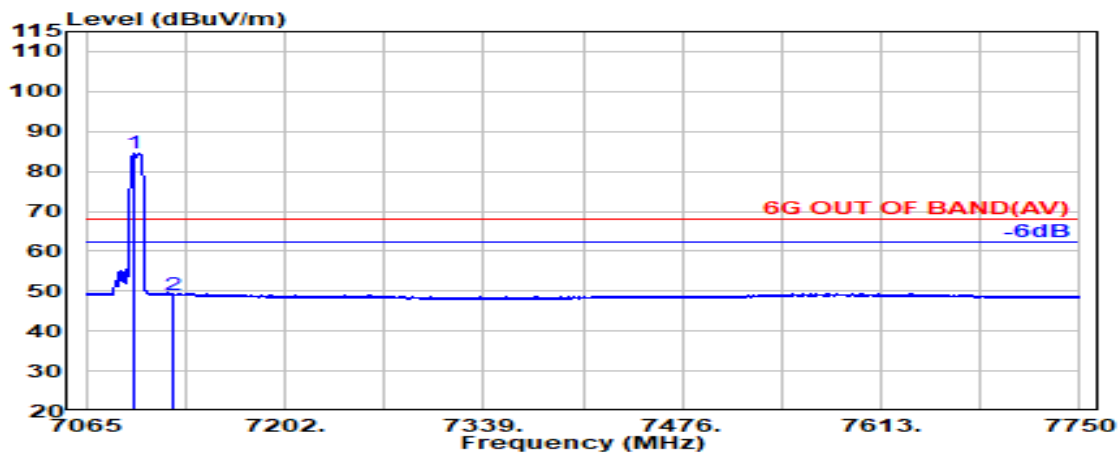


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7098.400	35.79	9.78	34.54	73.55	84.60	---	---	Average
7125.000	35.90	9.80	34.55	37.93	49.08	68.20	19.12	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

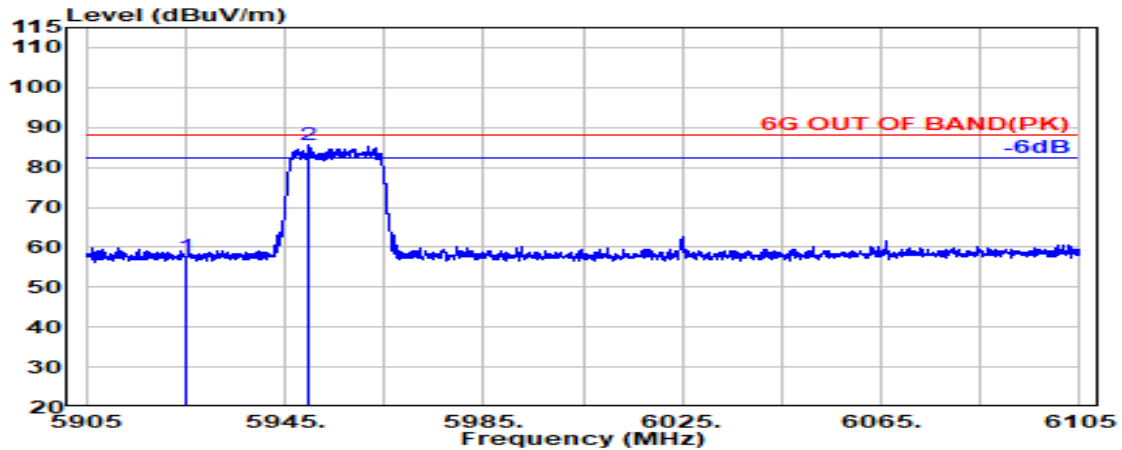

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	48.89	57.69	88.20	30.51	Peak
@ 5949.900	34.30	9.00	34.41	76.81	85.71	---	---	Peak

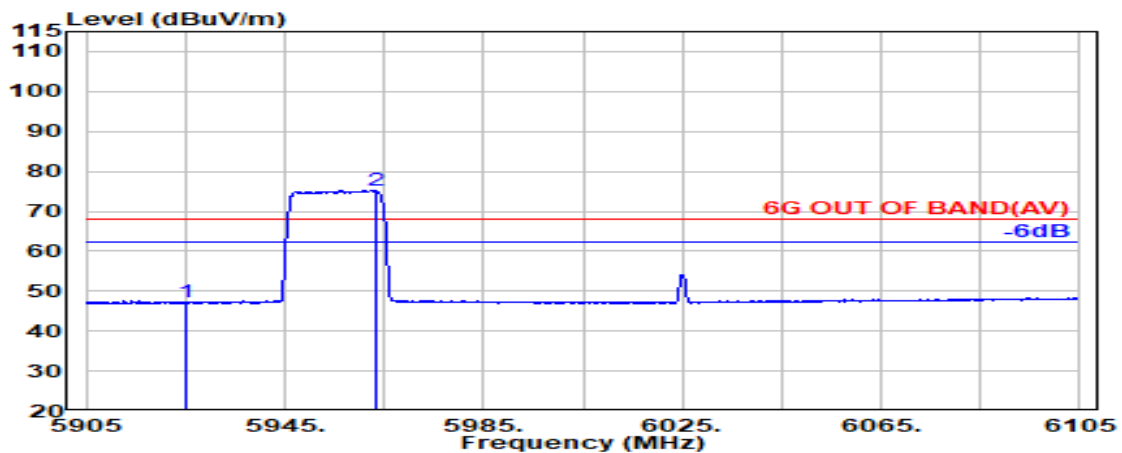


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.33	47.12	68.20	21.08	Average
@ 5963.300	34.27	9.01	34.41	66.48	75.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	242T	RU Index	61
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

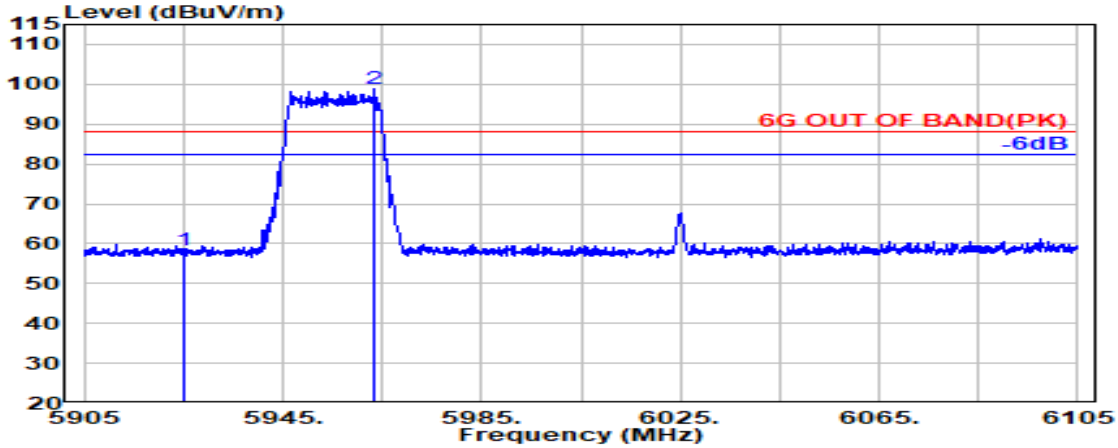

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.44	58.24	88.20	29.96	Peak
@ 5963.500	34.27	9.01	34.41	90.03	98.90	---	---	Peak

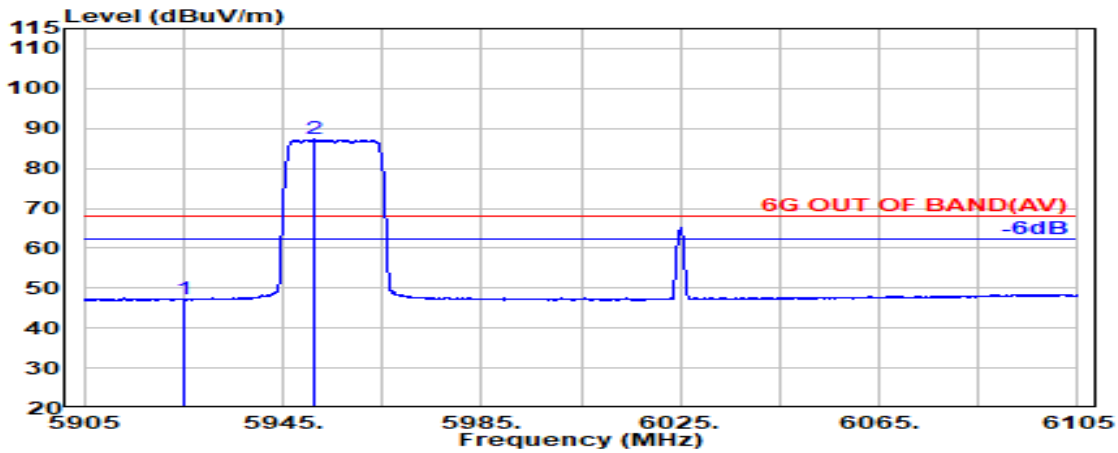


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.42	47.21	68.20	20.99	Average
@ 5951.400	34.30	9.00	34.41	78.41	87.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	62
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

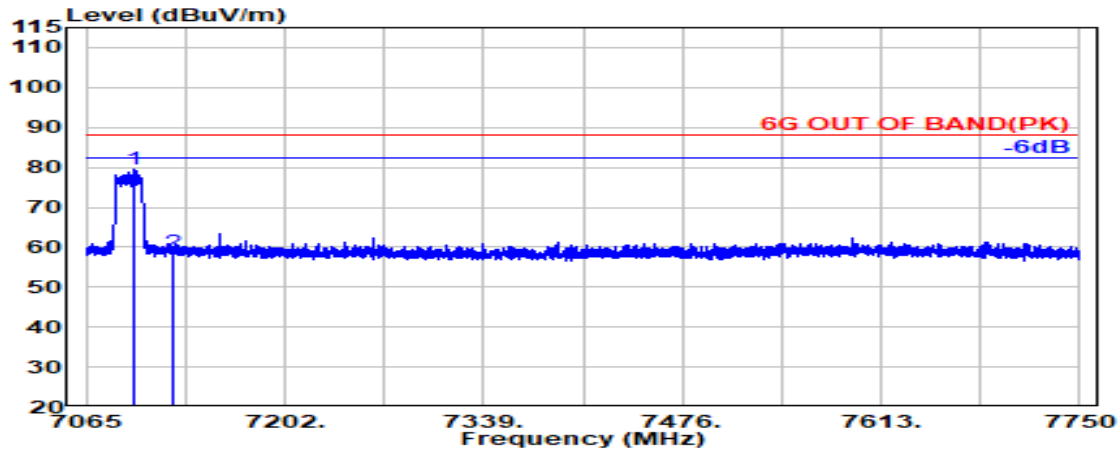

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7097.800	35.79	9.78	34.54	68.36	79.40	---	---	Peak
7125.000	35.90	9.80	34.55	47.65	58.80	88.20	29.40	Peak

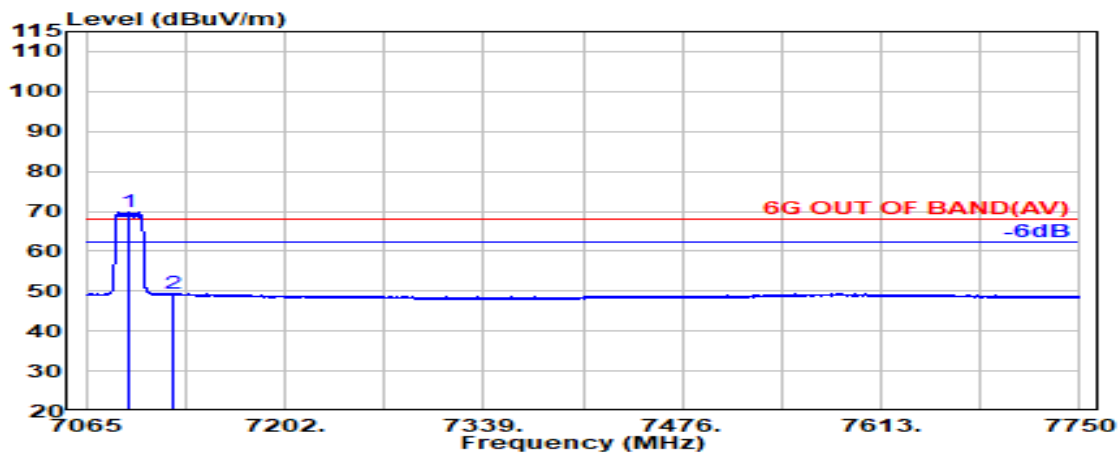


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7094.400	35.78	9.78	34.53	58.72	69.75	---	---	Average
7125.000	35.90	9.80	34.55	38.16	49.31	68.20	18.89	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	62
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

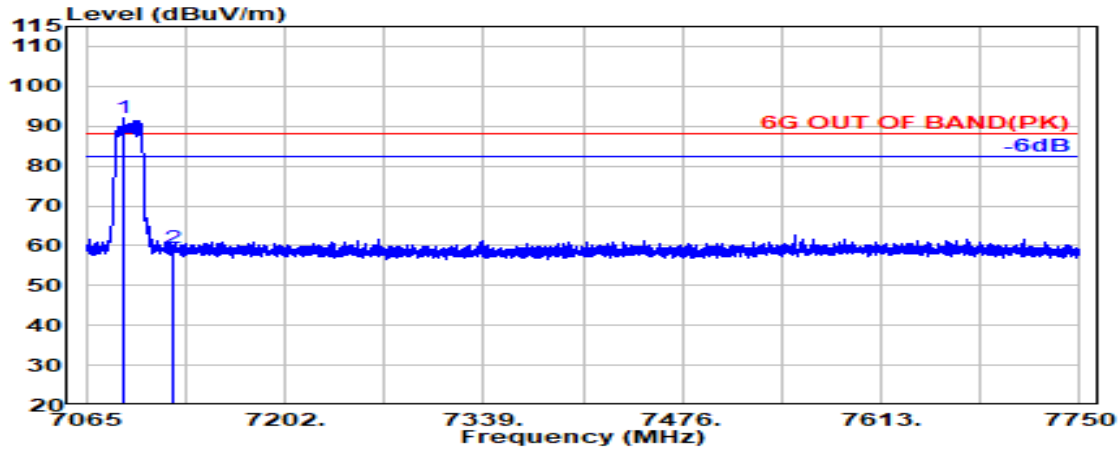

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7090.800	35.76	9.78	34.53	80.89	91.90	---	---	Peak
7125.000	35.90	9.80	34.55	48.32	59.47	88.20	28.73	Peak

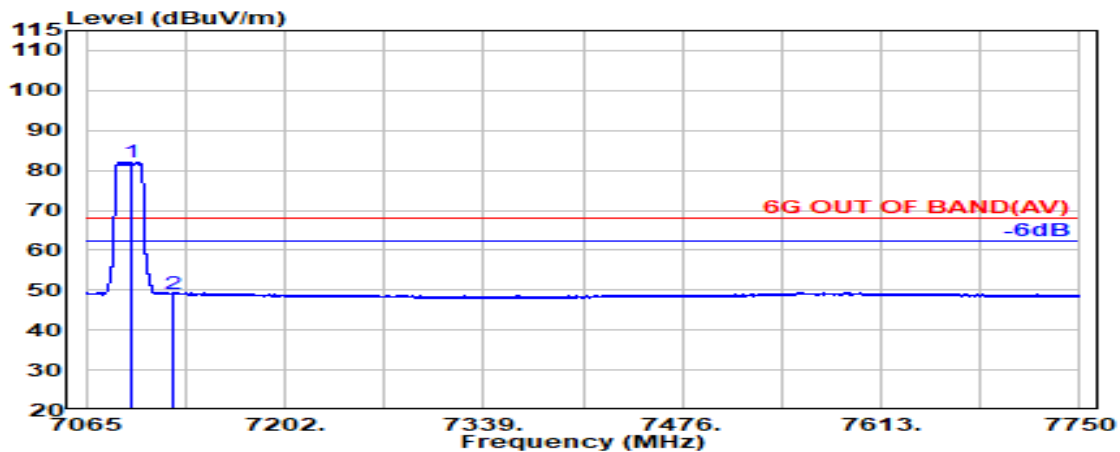


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7096.700	35.79	9.78	34.54	71.00	82.04	---	---	Average
7125.000	35.90	9.80	34.55	38.01	49.16	68.20	19.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

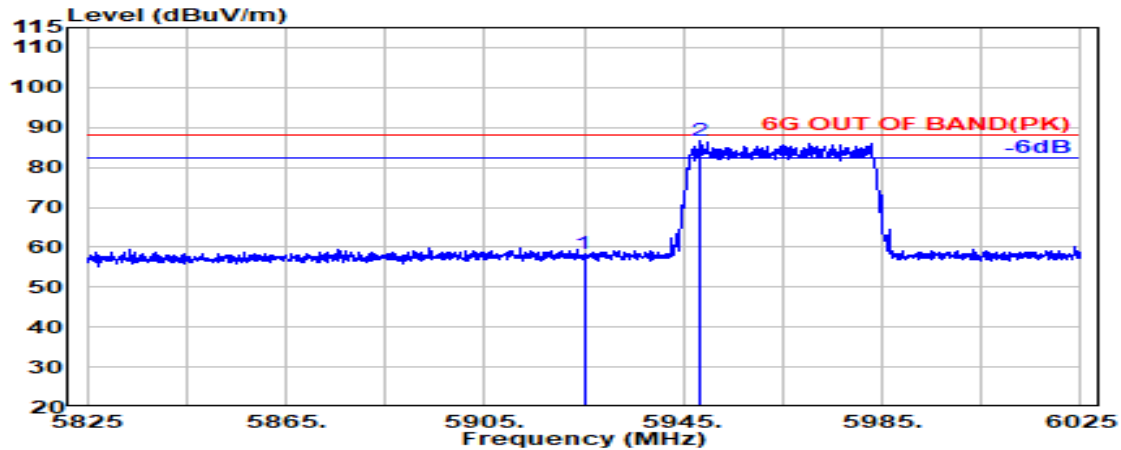

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.62	58.42	88.20	29.78	Peak
@ 5948.200	34.29	9.00	34.41	77.67	86.55	---	---	Peak

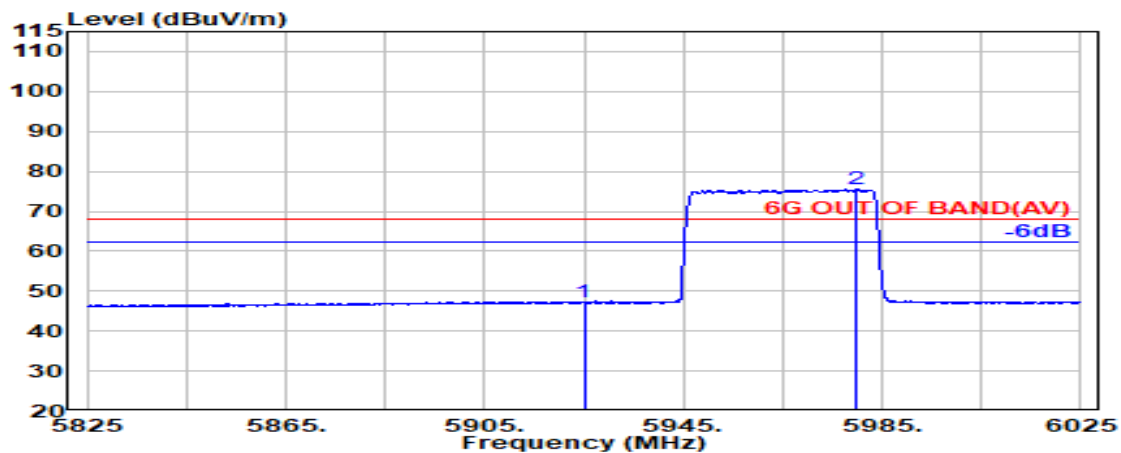


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.28	47.07	68.20	21.13	Average
@ 5979.900	34.24	9.02	34.42	66.69	75.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX5985MHz

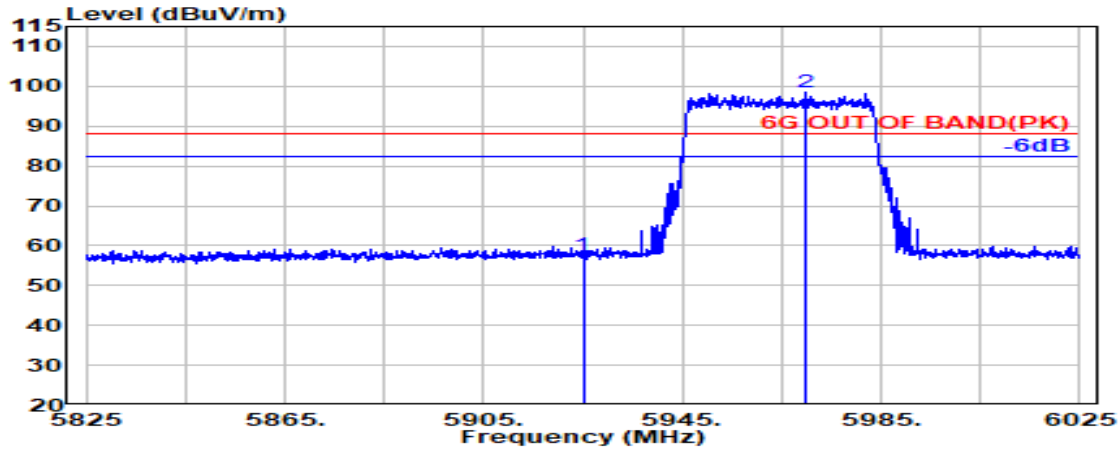

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	48.84	57.63	88.20	30.57	Peak
@ 5969.900	34.26	9.01	34.42	89.67	98.53	---	---	Peak

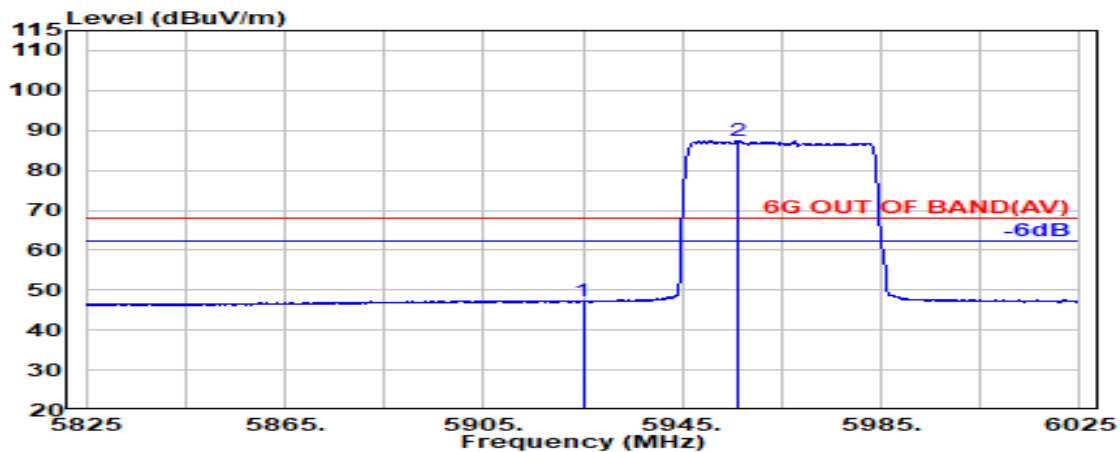


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.39	47.19	68.20	21.01	Average
@ 5956.000	34.29	9.01	34.41	78.46	87.34	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

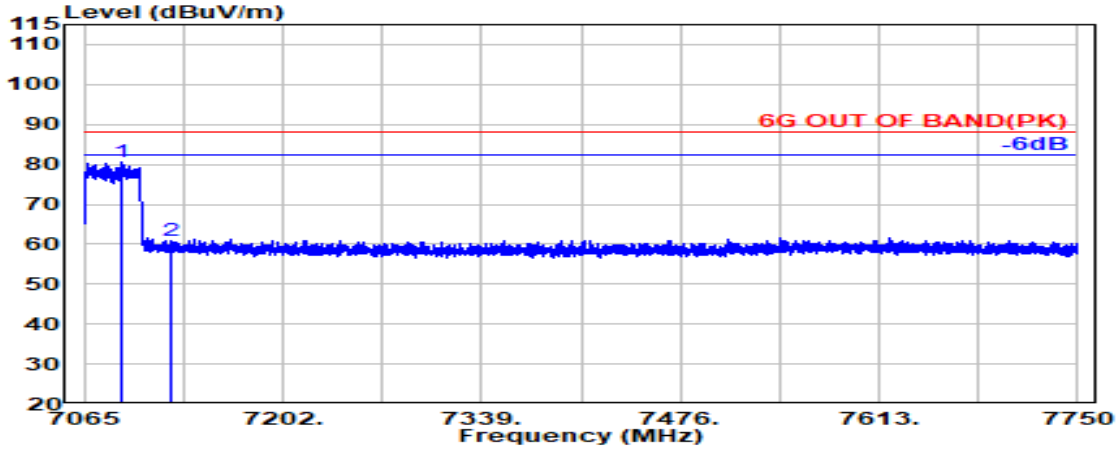

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7091.300	35.77	9.78	34.53	69.50	80.51	---	---	Peak
7125.000	35.90	9.80	34.55	49.75	60.90	88.20	27.30	Peak

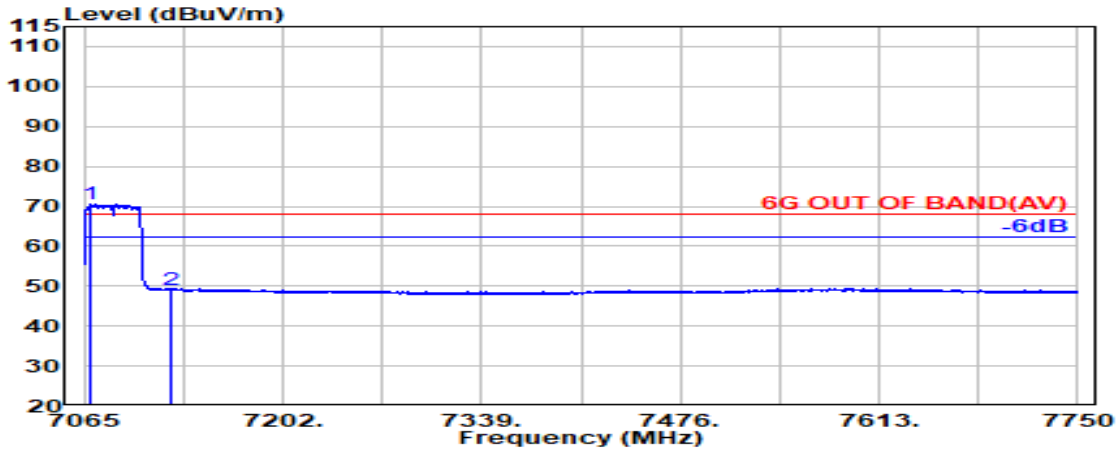


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7069.000	35.68	9.76	34.52	59.73	70.65	---	---	Average
7125.000	35.90	9.80	34.55	37.92	49.07	68.20	19.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

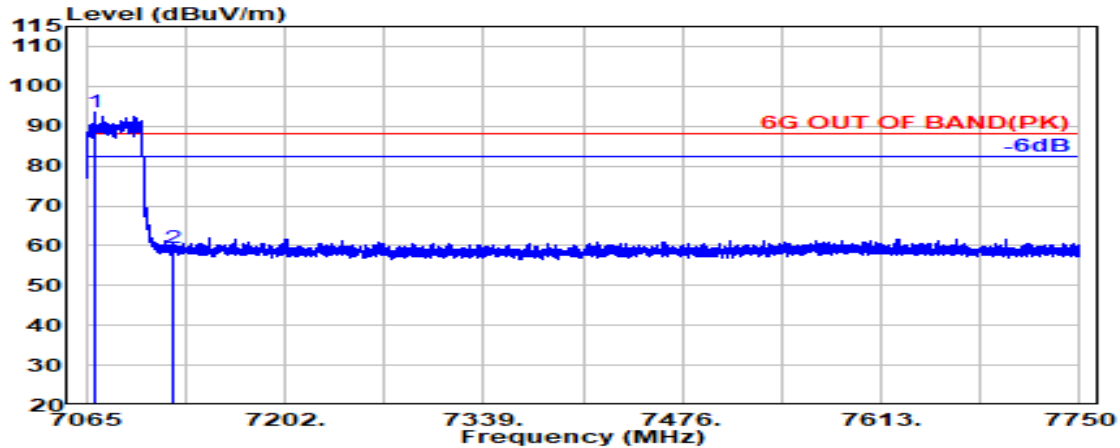

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7071.100	35.68	9.77	34.52	82.56	93.49	---	---	Peak
7125.000	35.90	9.80	34.55	48.13	59.28	88.20	28.92	Peak

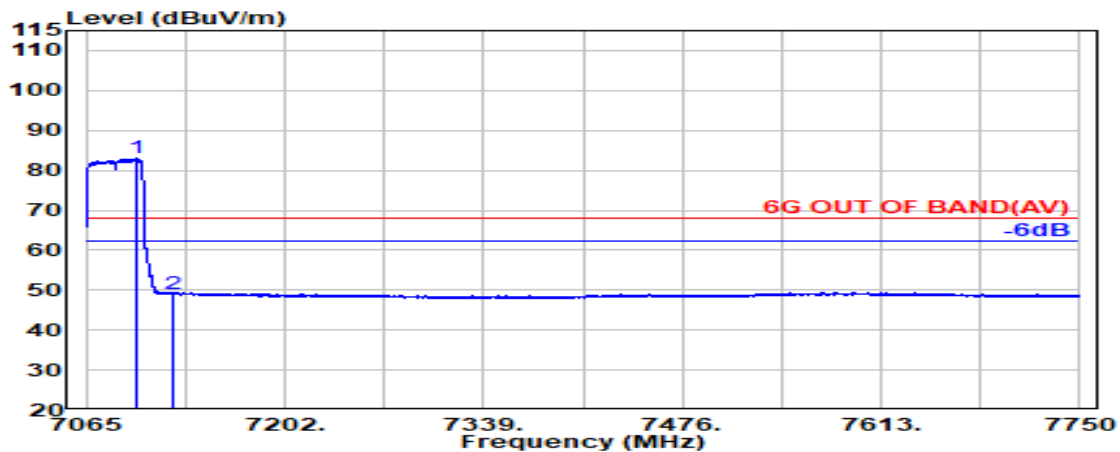


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7099.200	35.80	9.78	34.54	72.00	83.05	---	---	Average
7125.000	35.90	9.80	34.55	37.97	49.12	68.20	19.08	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

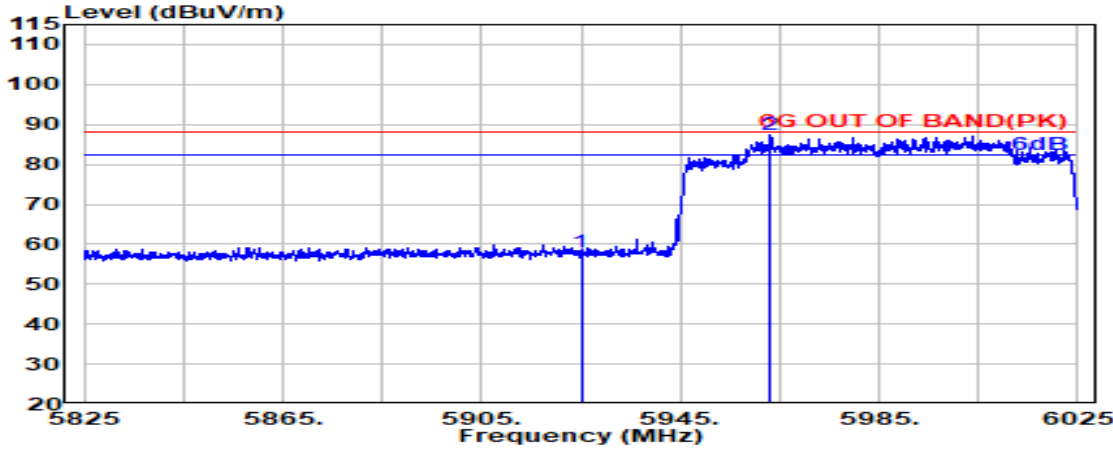

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.17	57.96	88.20	30.24	Peak
@ 5963.200	34.27	9.01	34.41	78.49	87.36	---	---	Peak

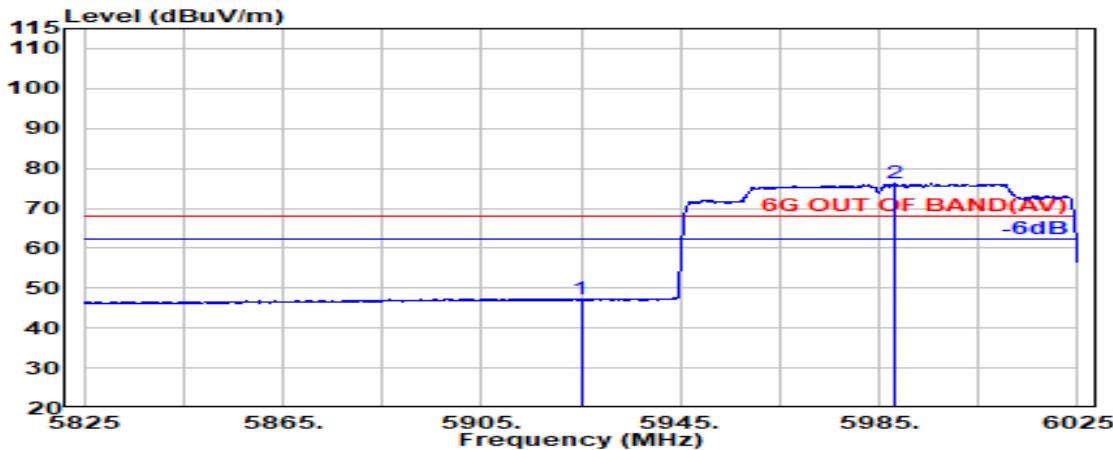


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.41	47.21	68.20	20.99	Average
@ 5988.000	34.22	9.02	34.42	67.43	76.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	996T	RU Index	67
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

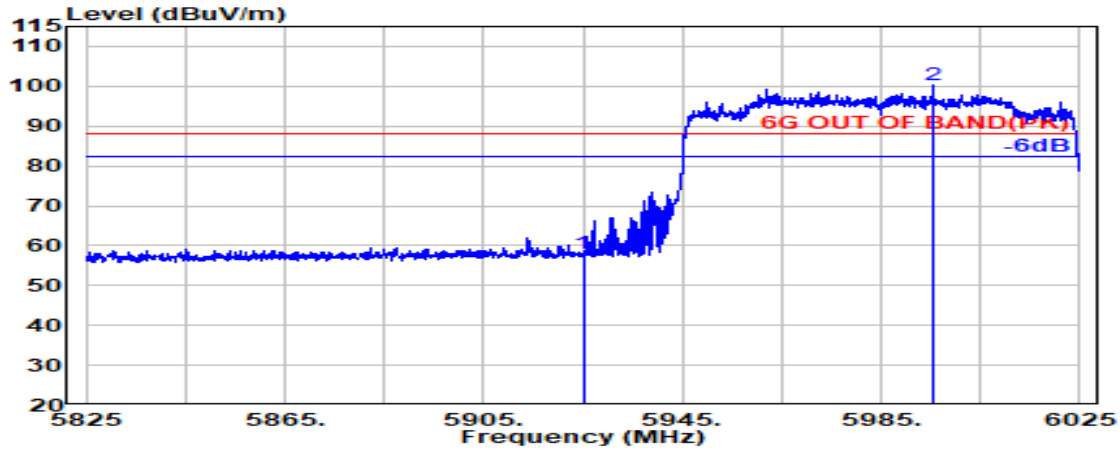

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	49.33	58.12	88.20	30.08	Peak
@ 5995.600	34.21	9.03	34.43	91.39	100.20	---	---	Peak

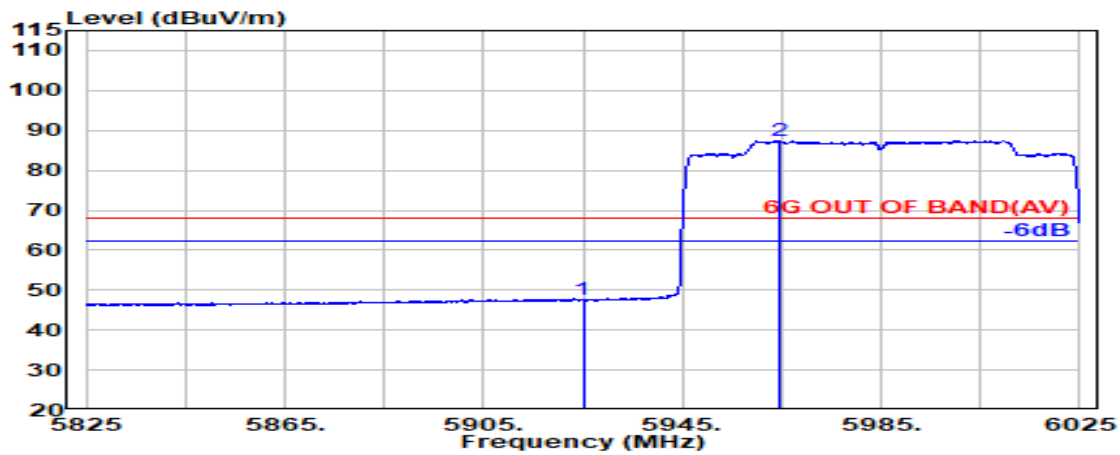


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	38.69	47.48	68.20	20.72	Average
@ 5964.700	34.27	9.01	34.41	78.62	87.49	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

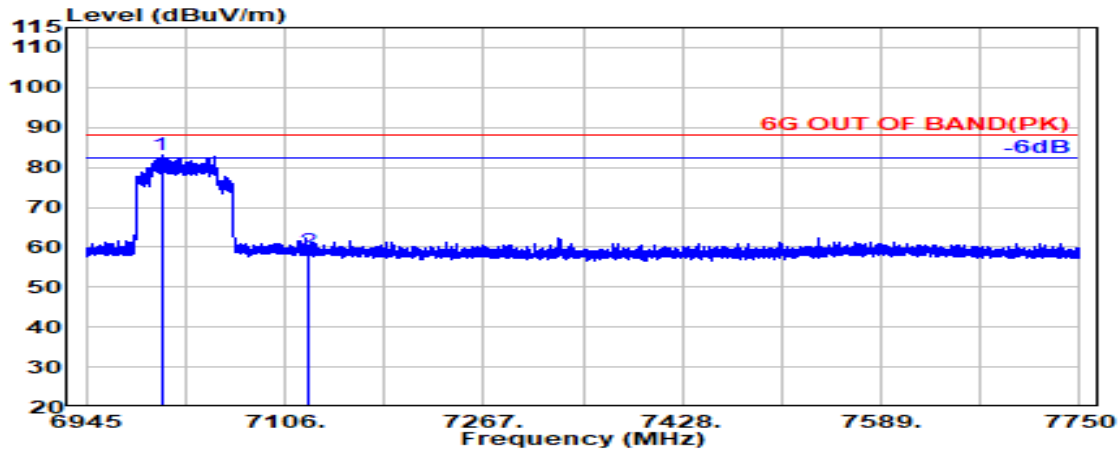

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7005.900	35.51	9.72	34.48	72.17	82.92	---	---	Peak
7125.000	35.90	9.80	34.55	47.92	59.07	88.20	29.13	Peak

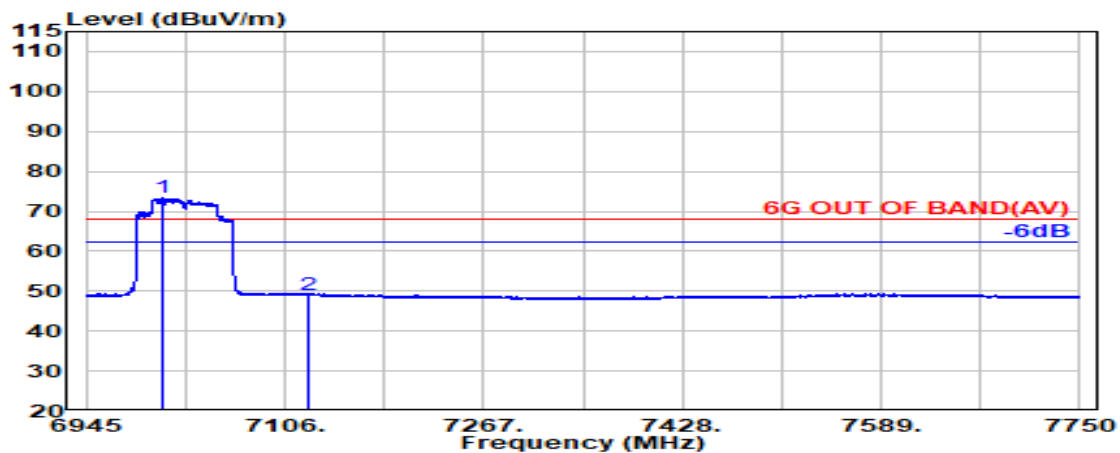


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7007.500	35.52	9.72	34.48	62.50	73.26	---	---	Average
7125.000	35.90	9.80	34.55	38.06	49.21	68.20	18.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

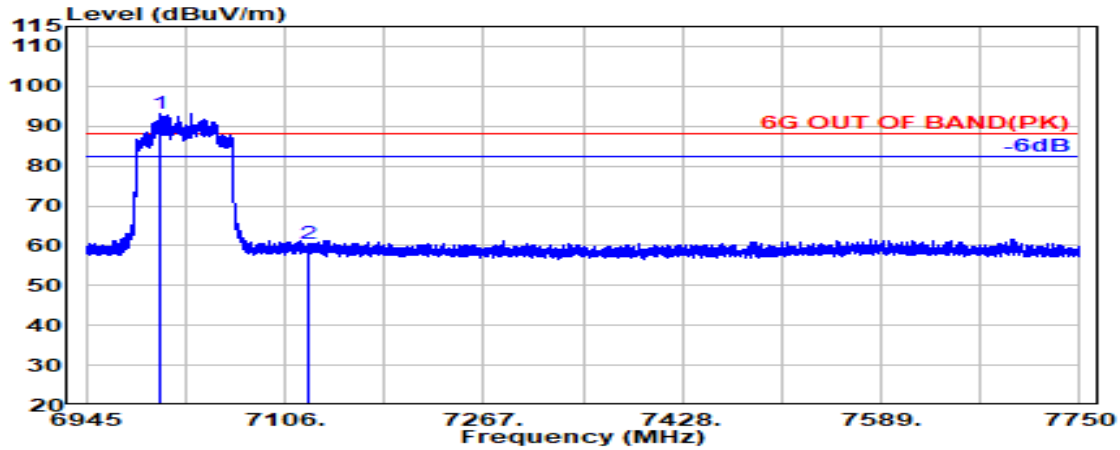

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7004.000	35.51	9.72	34.48	82.45	93.20	---	---	Peak
7125.000	35.90	9.80	34.55	49.42	60.57	88.20	27.63	Peak

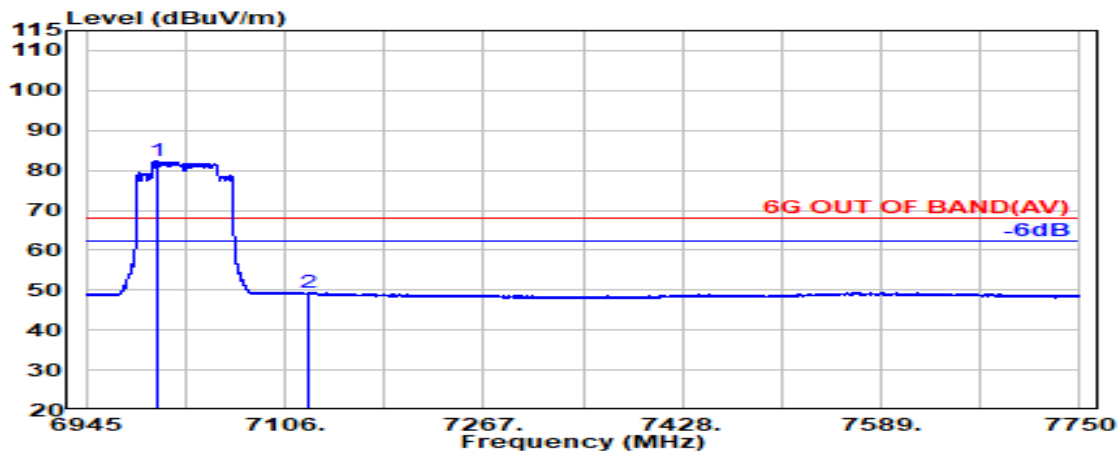


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7002.800	35.51	9.72	34.48	71.71	82.46	---	---	Average
7125.000	35.90	9.80	34.55	38.10	49.25	68.20	18.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

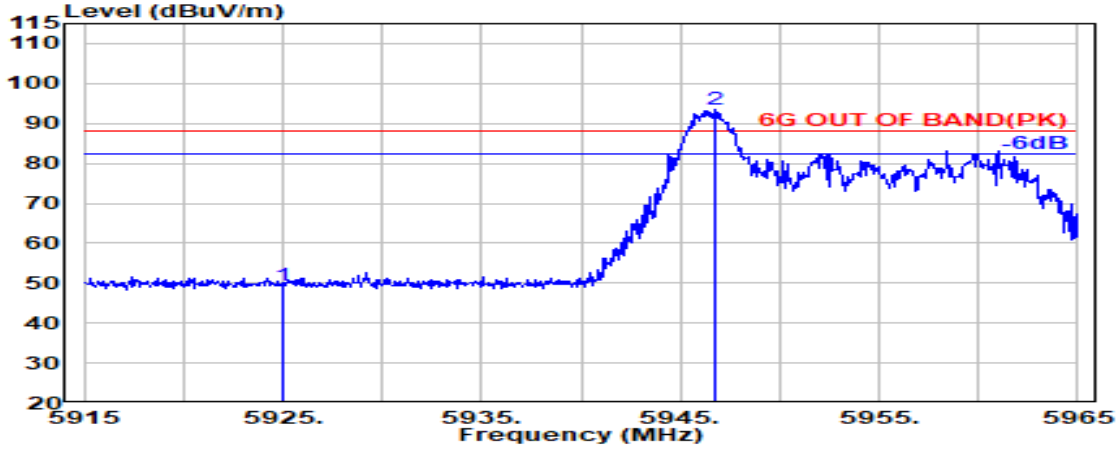

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.55	49.35	88.20	38.85	Peak
@ 5946.750	34.29	9.00	34.41	84.44	93.32	---	---	Peak

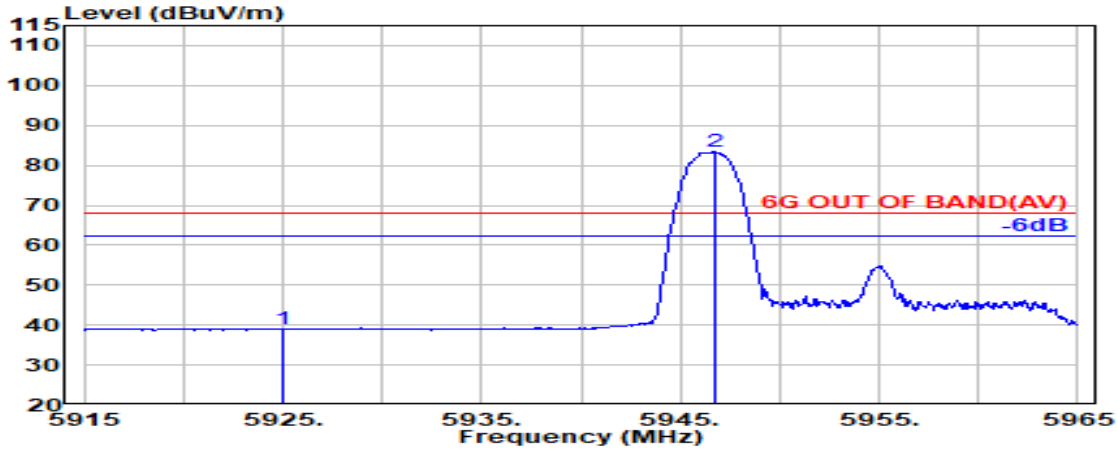


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.30	39.09	68.20	29.11	Average
@ 5946.800	34.29	9.00	34.41	74.44	83.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	0
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

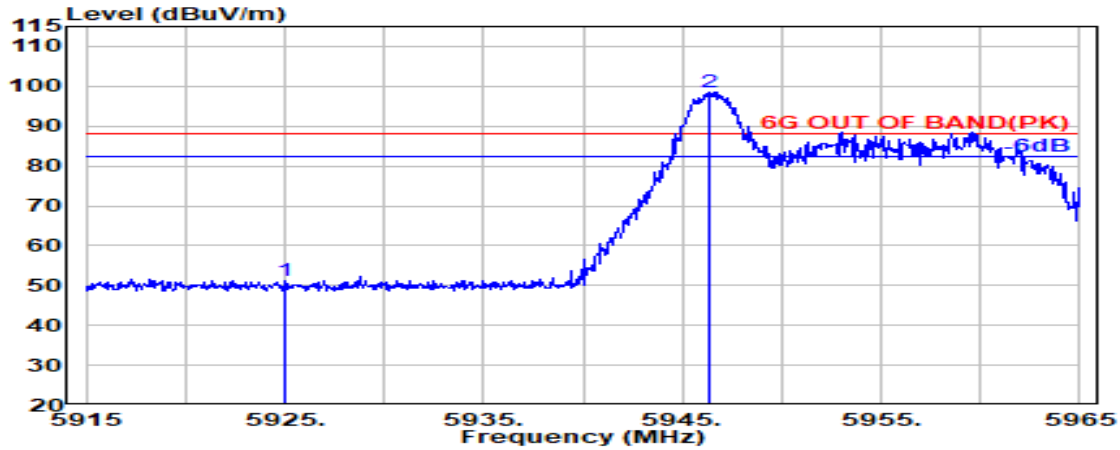

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	42.35	51.14	88.20	37.06	Peak
@ 5946.300	34.29	9.00	34.41	89.73	98.61	---	---	Peak

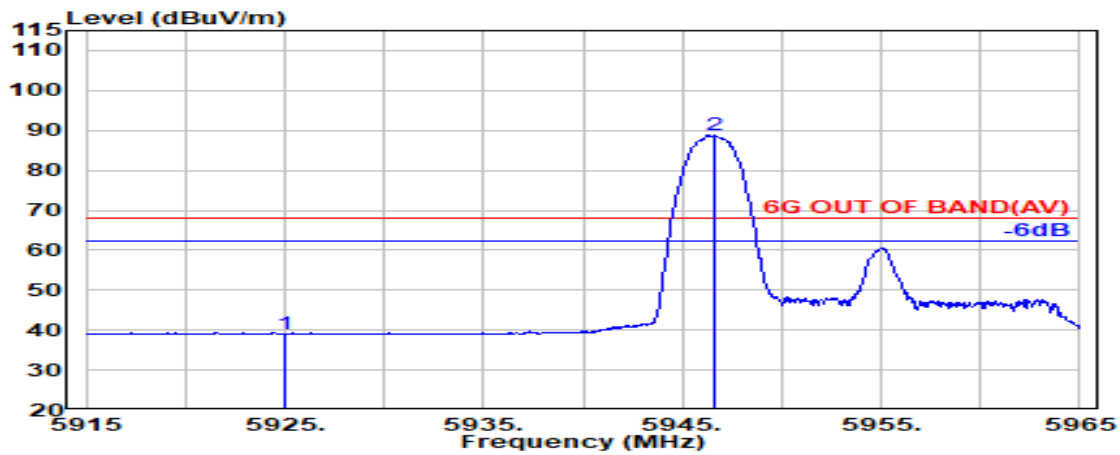


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.16	38.96	68.20	29.24	Average
@ 5946.650	34.29	9.00	34.41	79.89	88.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	36
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

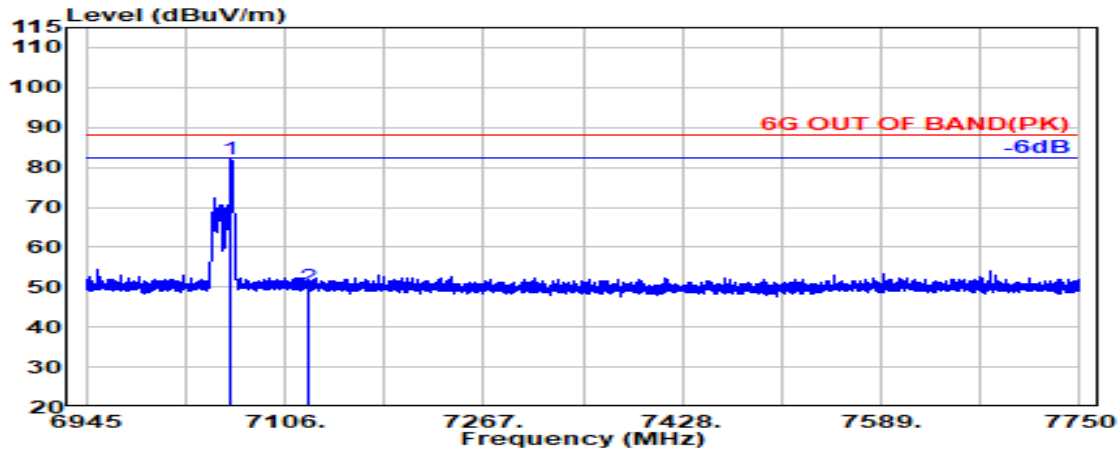

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7062.100	35.65	9.76	34.52	71.27	82.16	---	---	Peak
@ 7125.000	35.90	9.80	34.55	38.86	50.01	88.20	38.19	Peak

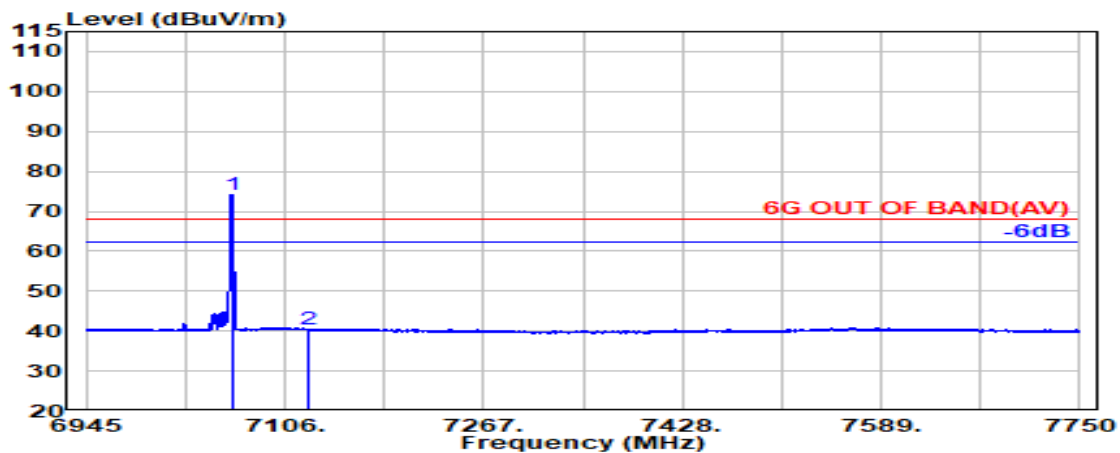


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.000	35.65	9.76	34.52	63.36	74.26	---	---	Average
@ 7125.000	35.90	9.80	34.55	29.28	40.43	68.20	27.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	26T	RU Index	36
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

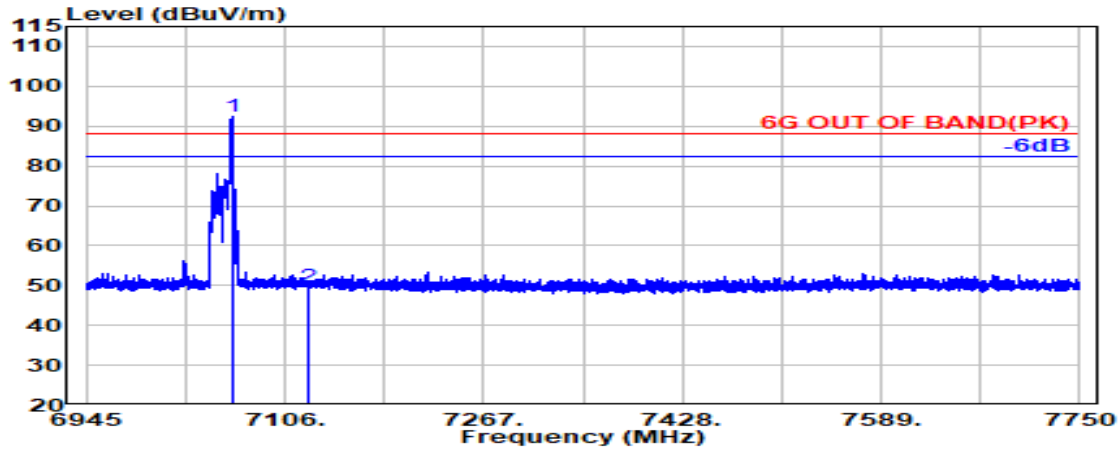

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.300	35.65	9.76	34.52	81.55	92.45	---	---	Peak
@ 7125.000	35.90	9.80	34.55	38.60	49.75	88.20	38.45	Peak

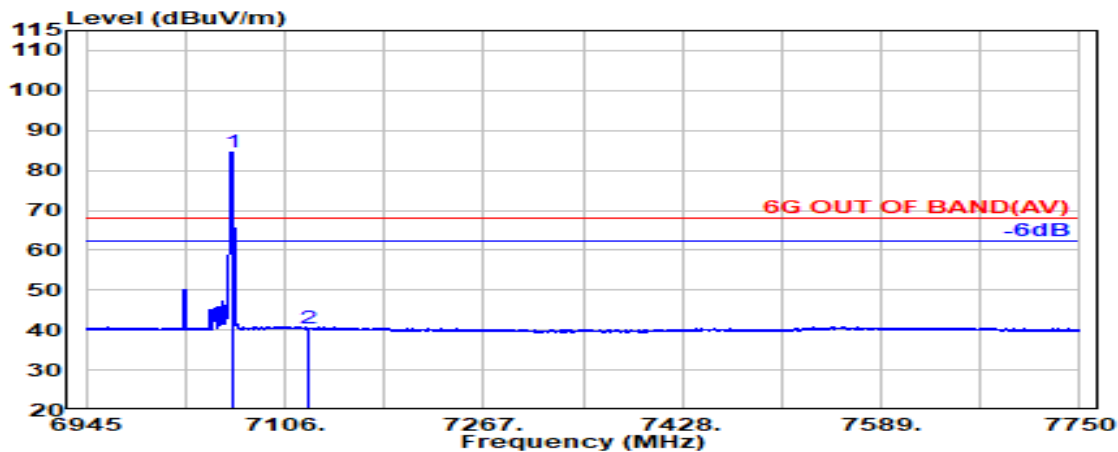


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
7063.200	35.65	9.76	34.52	73.64	84.53	---	---	Average
@ 7125.000	35.90	9.80	34.55	29.21	40.36	68.20	27.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

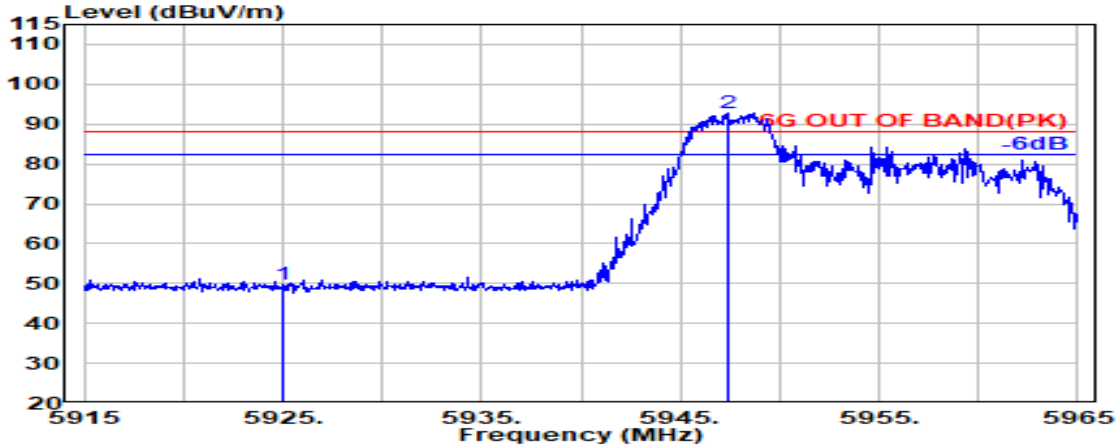

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	41.12	49.91	88.20	38.29	Peak
@ 5947.400	34.29	9.00	34.41	84.05	92.93	---	---	Peak

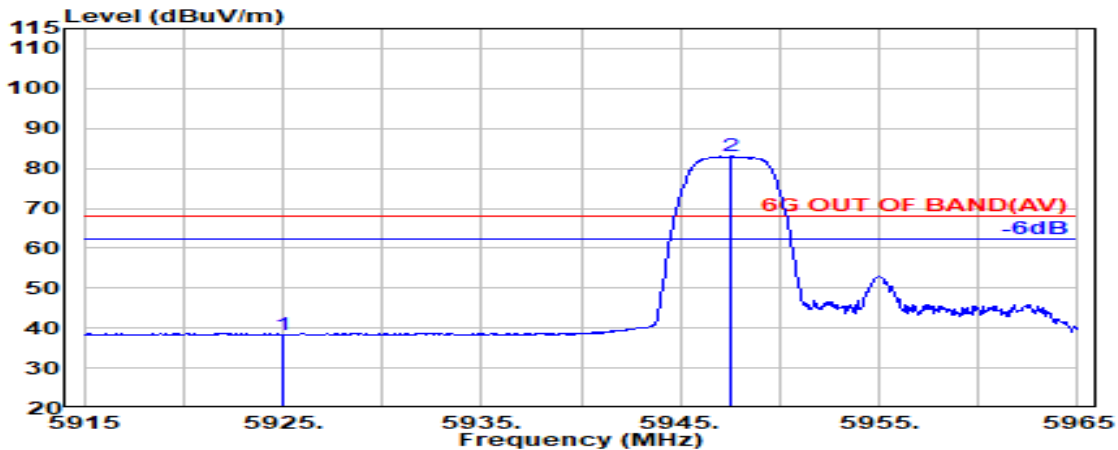


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	29.53	38.32	68.20	29.88	Average
@ 5947.550	34.29	9.00	34.41	74.10	82.99	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	52T	RU Index	37
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

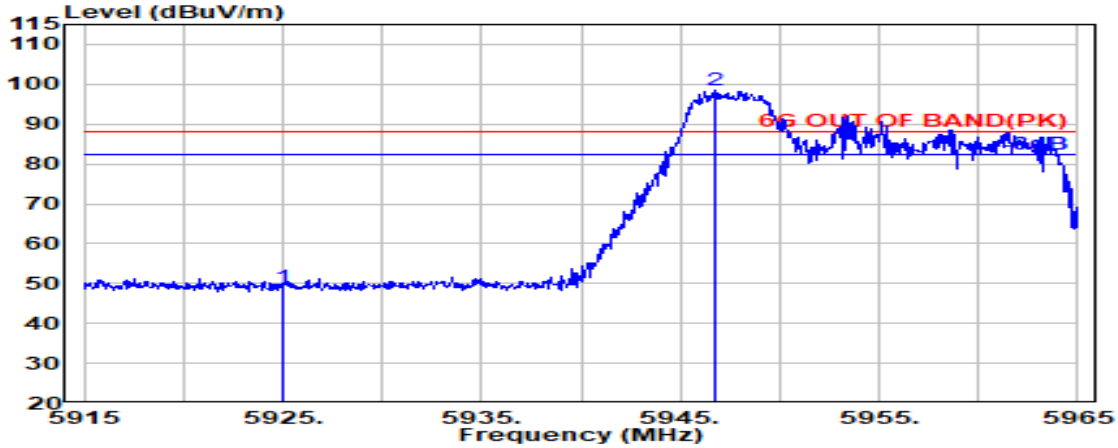

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.13	48.92	88.20	39.28	Peak
@ 5946.750	34.29	9.00	34.41	89.50	98.38	---	---	Peak

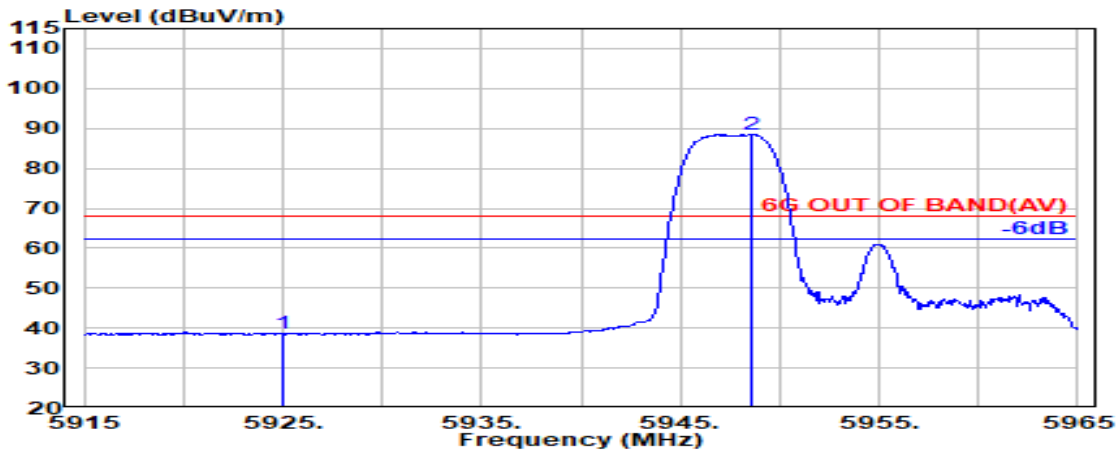


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	29.76	38.55	68.20	29.65	Average
@ 5948.600	34.29	9.00	34.41	79.70	88.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

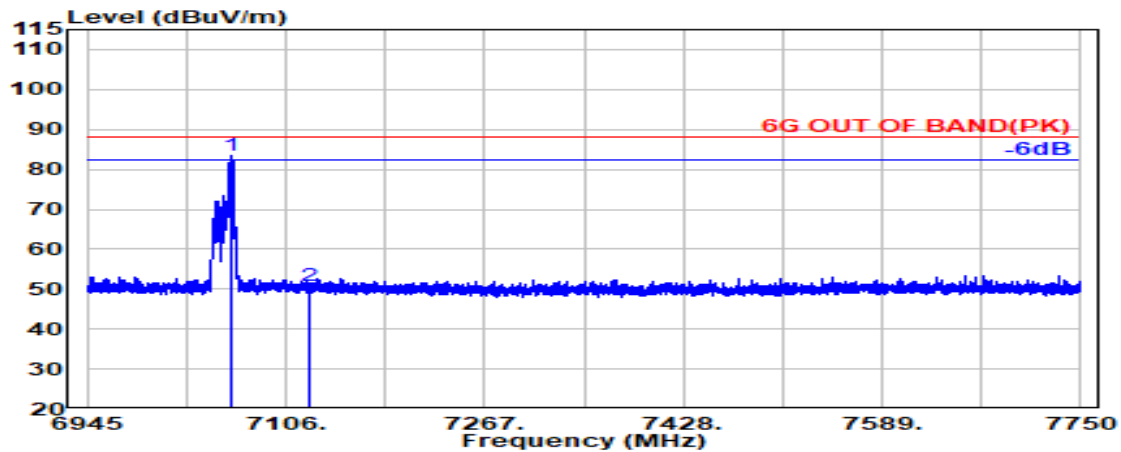

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7061.300	35.65	9.76	34.52	72.62	83.51	---	---	Peak
7125.000	35.90	9.80	34.55	39.52	50.67	88.20	37.53	Peak

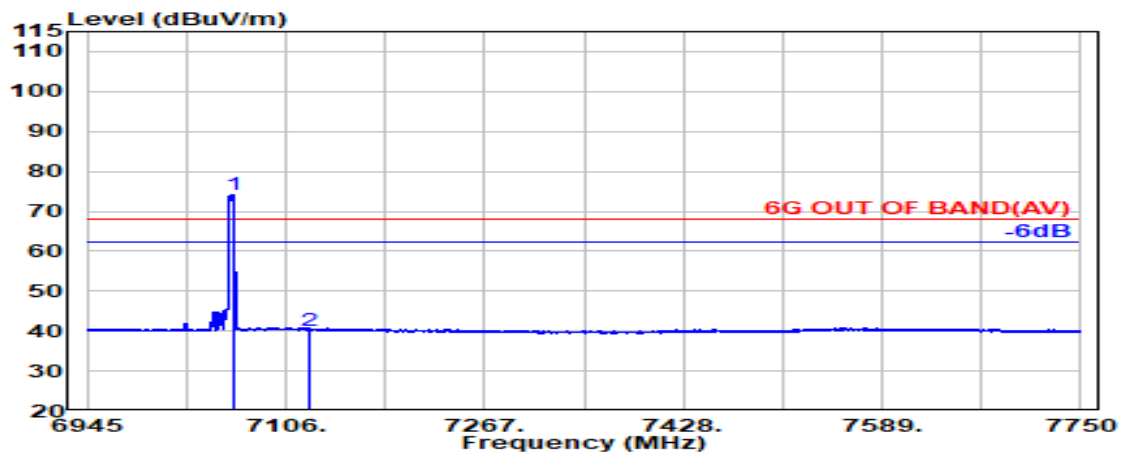


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.100	35.65	9.76	34.52	63.24	74.14	---	---	Average
7125.000	35.90	9.80	34.55	29.04	40.19	68.20	28.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	52T	RU Index	52
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

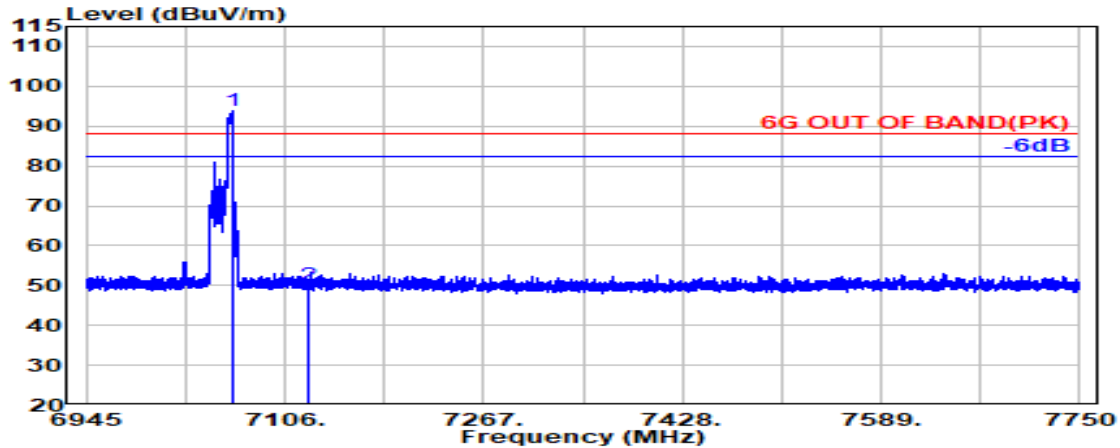

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.100	35.65	9.76	34.52	82.91	93.81	---	---	Peak
7125.000	35.90	9.80	34.55	38.92	50.07	88.20	38.13	Peak

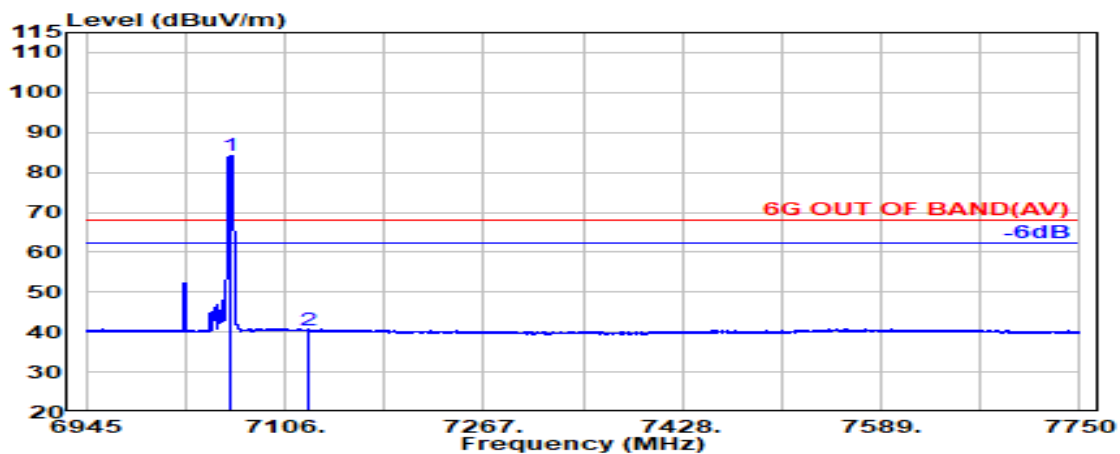


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.400	35.65	9.76	34.52	73.40	84.30	---	---	Average
7125.000	35.90	9.80	34.55	29.34	40.49	68.20	27.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

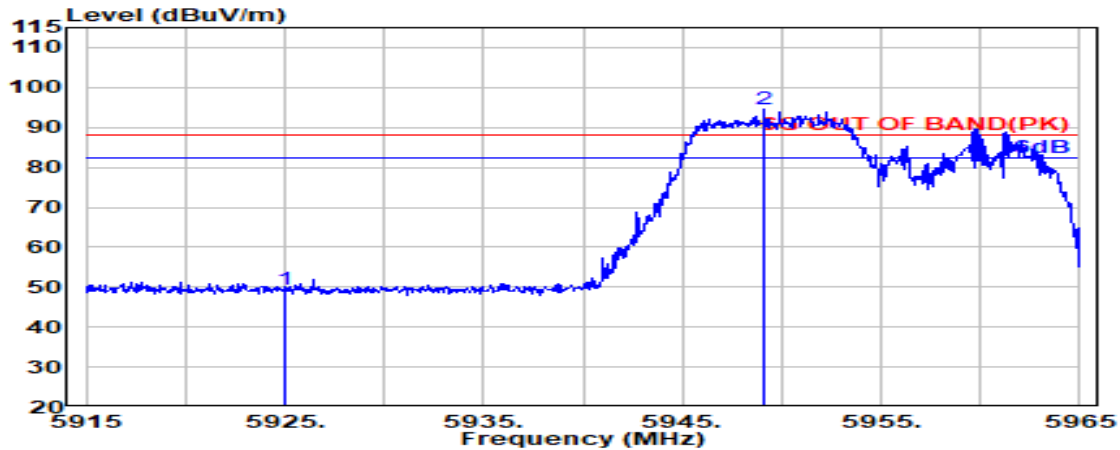

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.73	49.52	88.20	38.68	Peak
@ 5949.150	34.30	9.00	34.41	85.59	94.49	---	---	Peak

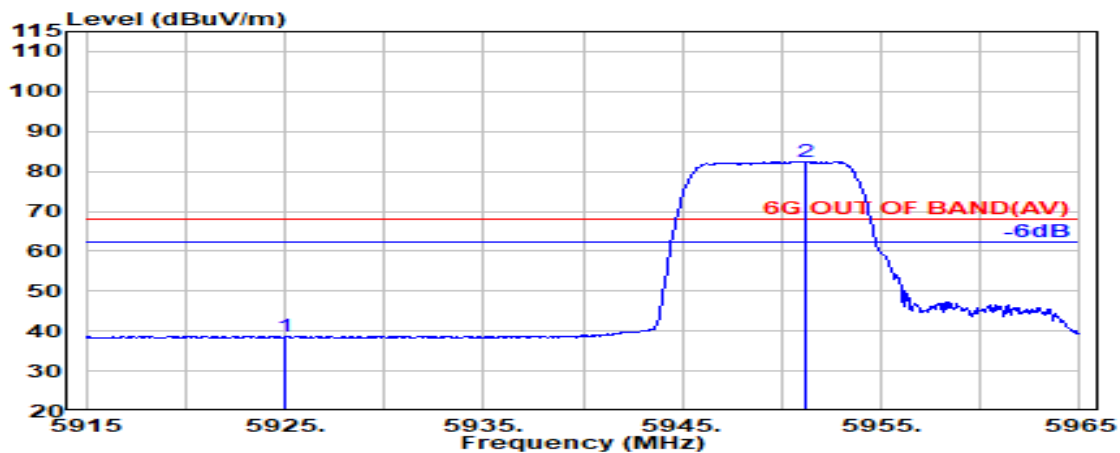


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	29.77	38.56	68.20	29.64	Average
@ 5951.150	34.30	9.00	34.41	73.62	82.51	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	53
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

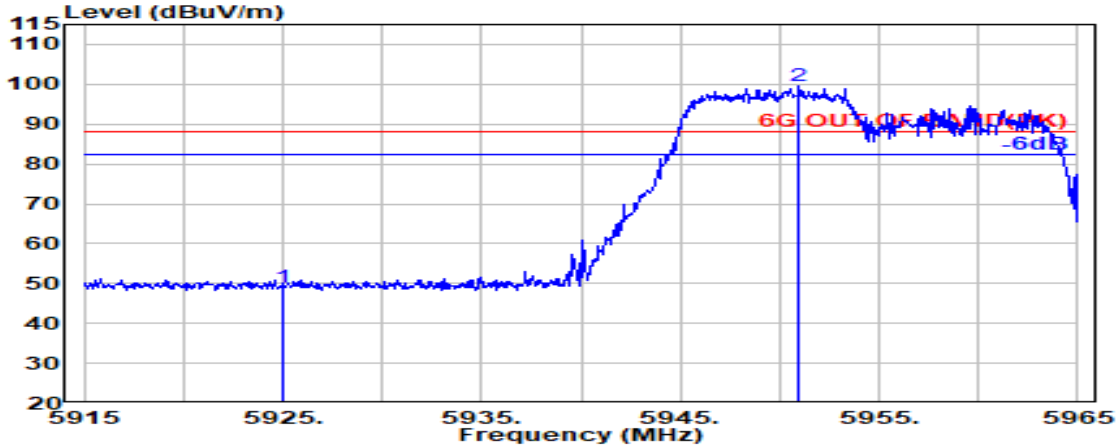

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.22	49.01	88.20	39.19	Peak
@ 5951.000	34.30	9.00	34.41	90.75	99.64	---	---	Peak

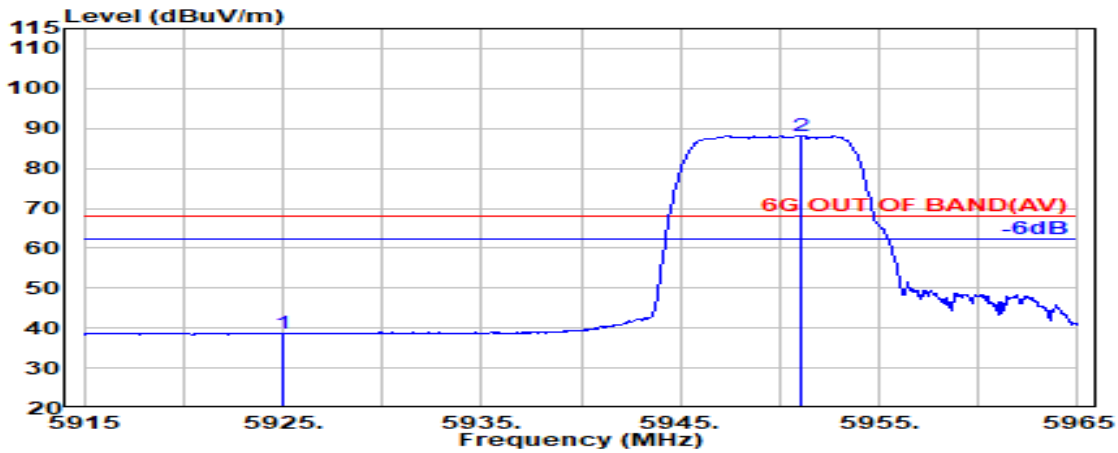


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	29.80	38.59	68.20	29.61	Average
@ 5951.050	34.30	9.00	34.41	79.35	88.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

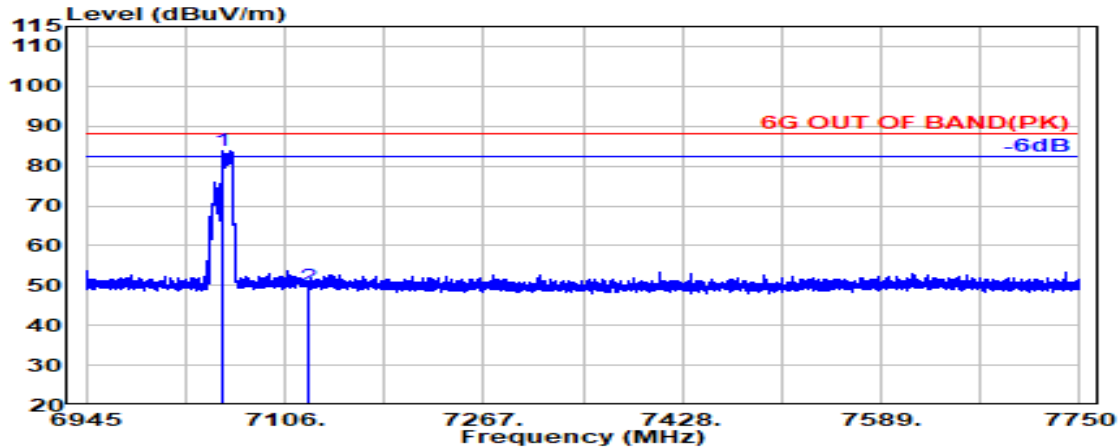

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7056.300	35.63	9.76	34.51	73.10	83.97	88.20	--	Peak
7125.000	35.90	9.80	34.55	38.75	49.89	88.20	38.31	Peak

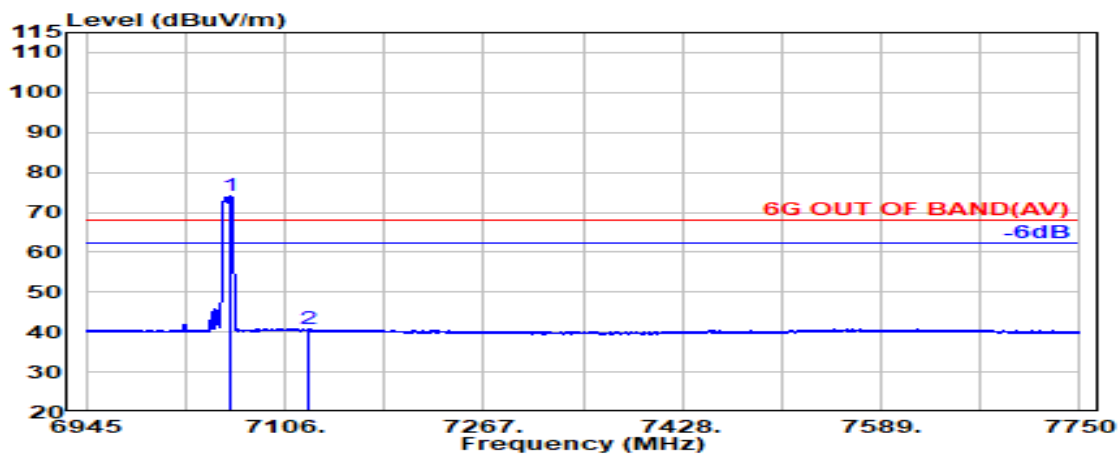


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.200	35.65	9.76	34.52	63.38	74.27	68.20	---	Average
7125.000	35.90	9.80	34.55	29.60	40.75	68.20	27.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Tones	106T	RU Index	60
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

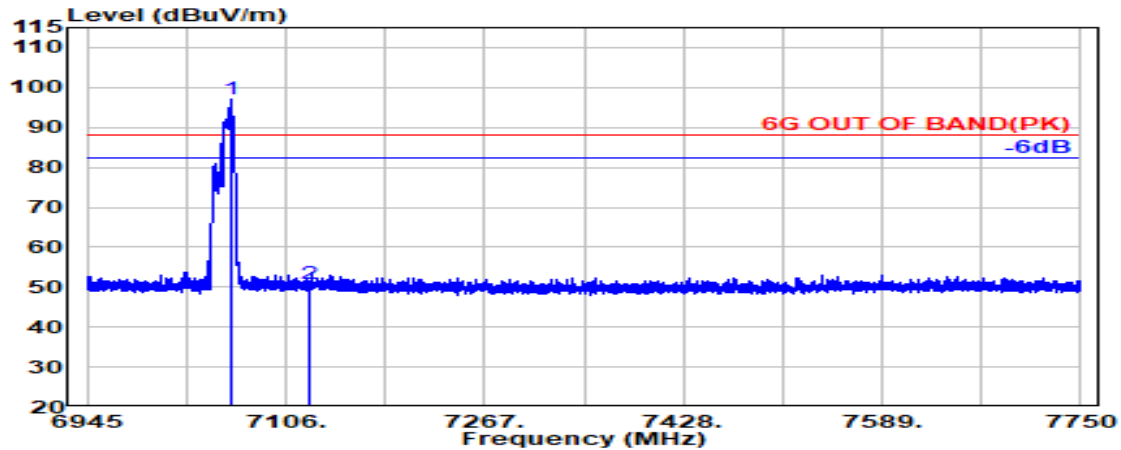

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.400	35.65	9.76	34.52	86.20	97.09	---	---	Peak
7125.000	35.90	9.80	34.55	39.77	50.92	88.20	37.28	Peak

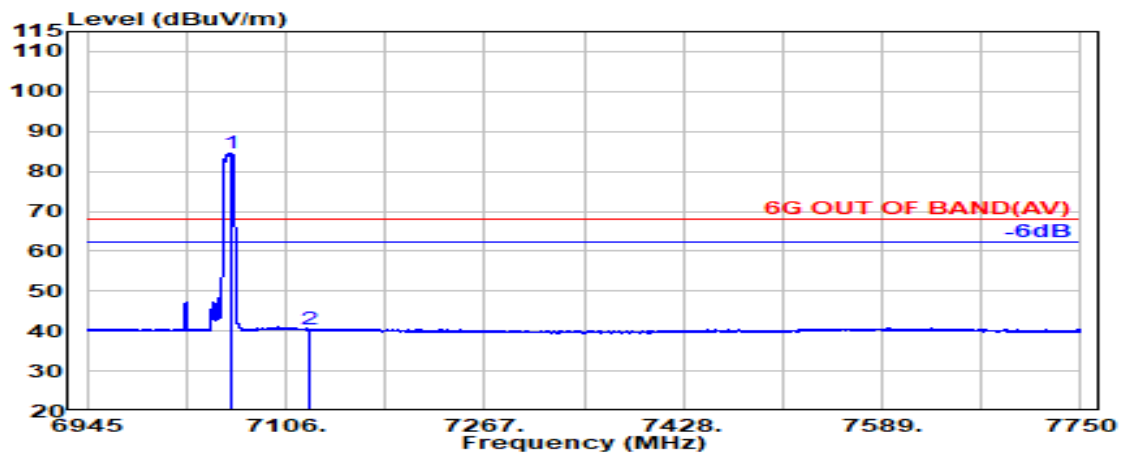


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7062.500	35.65	9.76	34.52	73.70	84.60	---	---	Average
7125.000	35.90	9.80	34.55	29.28	40.43	68.20	27.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

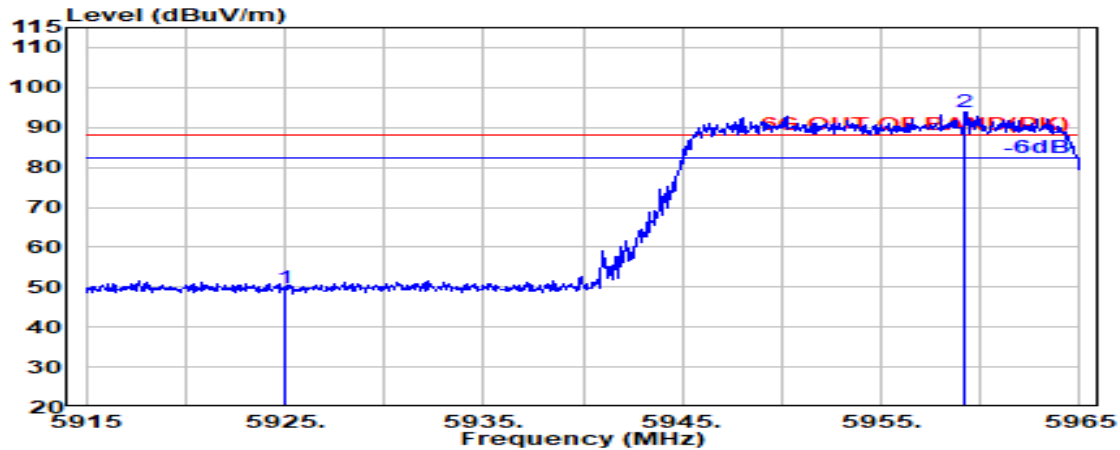

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	41.08	49.87	88.20	38.33	Peak
@ 5959.250	34.28	9.01	34.41	85.12	94.00	---	---	Peak

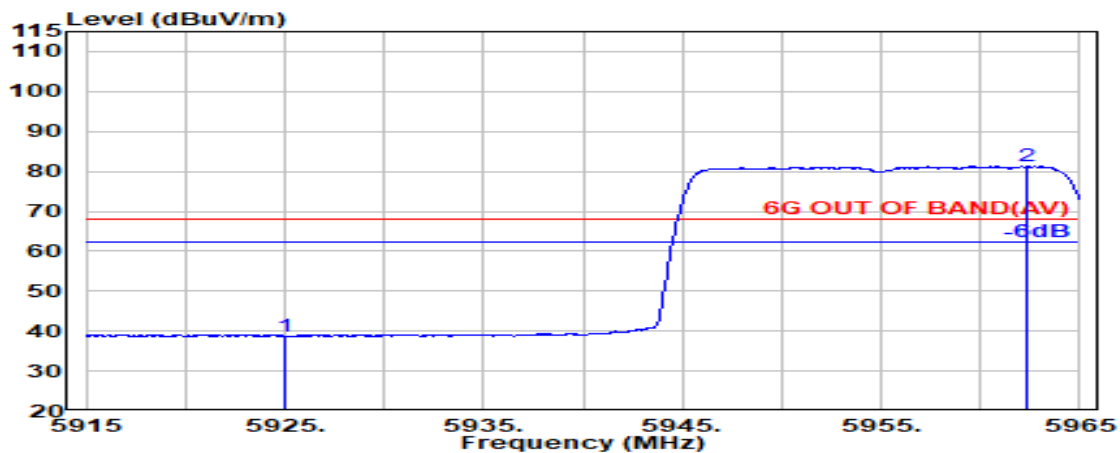


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	29.96	38.75	68.20	29.45	Average
@ 5962.350	34.28	9.01	34.41	72.40	81.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

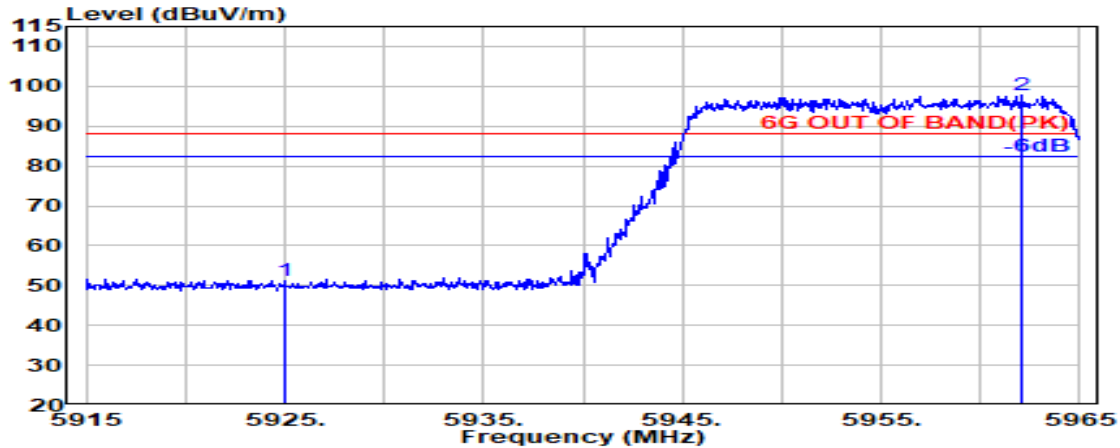

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	42.25	51.05	88.20	37.15	Peak
@ 5962.100	34.28	9.01	34.41	88.87	97.74	---	---	Peak

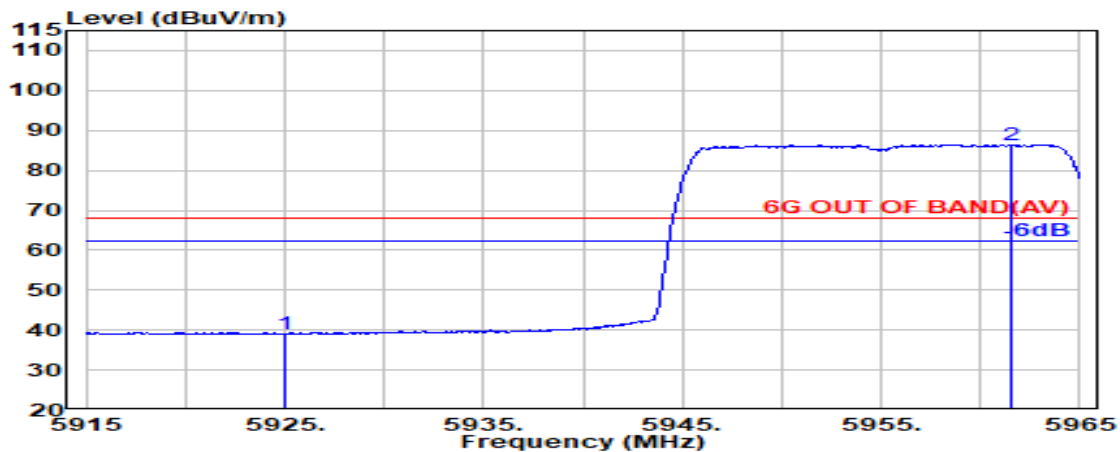


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.17	38.97	68.20	29.23	Average
@ 5961.500	34.28	9.01	34.41	77.56	86.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

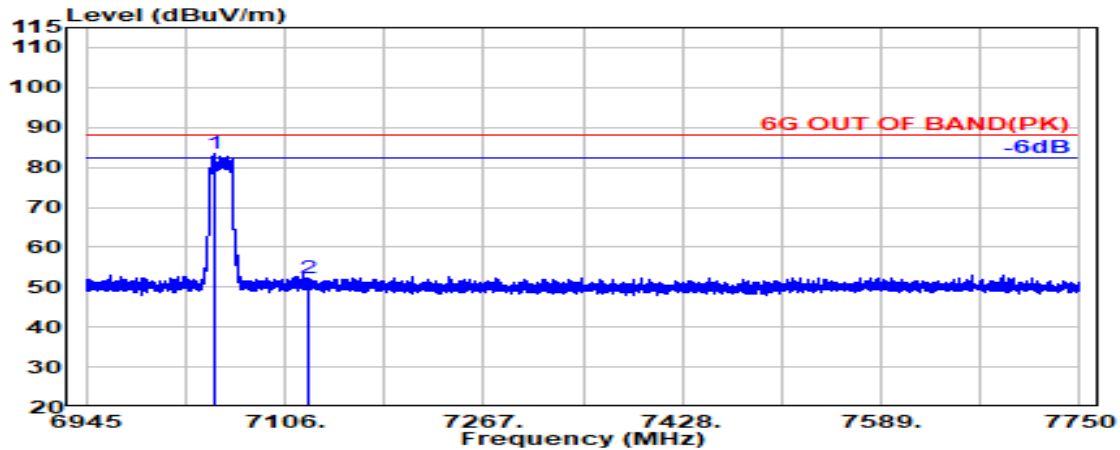

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.300	35.60	9.75	34.51	72.58	83.42	---	---	Peak
7125.000	35.90	9.80	34.55	40.99	52.14	88.20	36.06	Peak

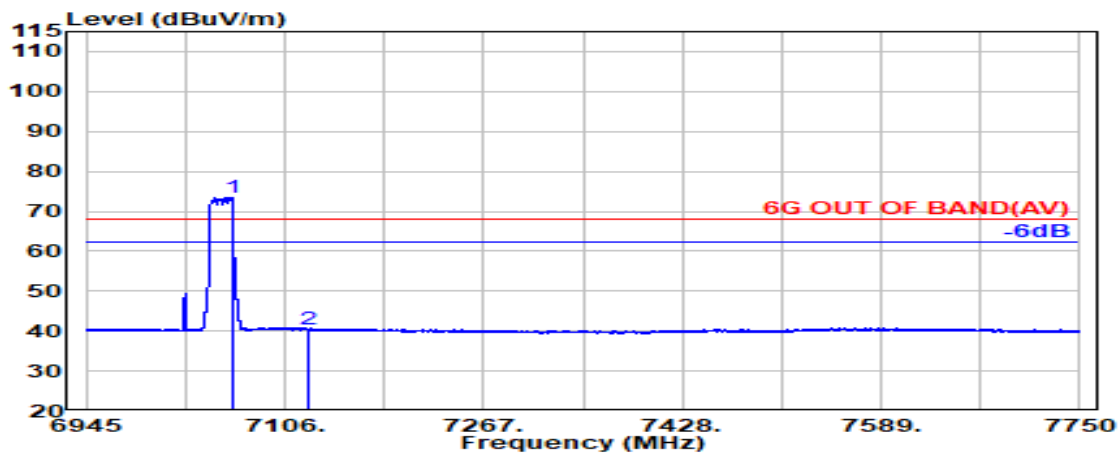


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7063.000	35.65	9.76	34.52	62.43	73.33	---	---	Average
7125.000	35.90	9.80	34.55	29.24	40.39	68.20	27.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	242T	RU Index	64
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

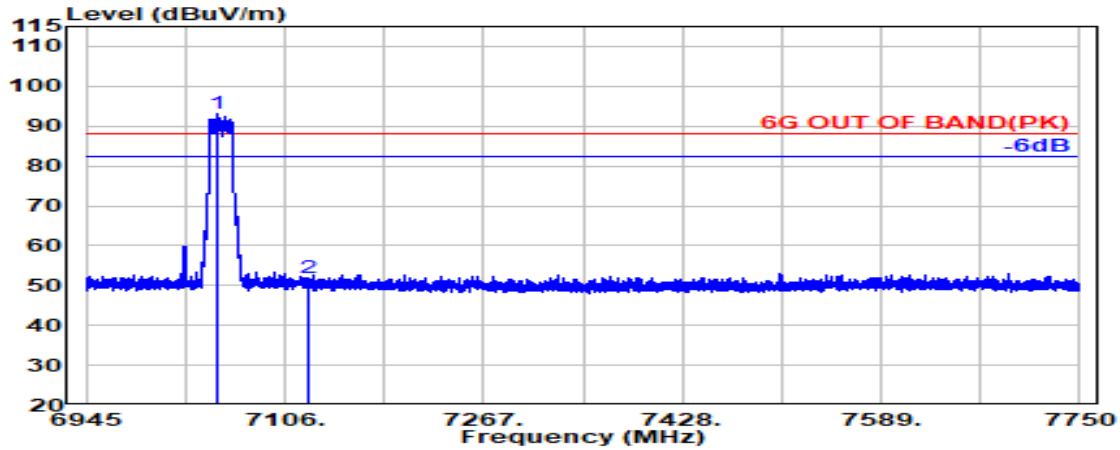

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7051.100	35.60	9.75	34.51	82.22	93.07	---	---	Peak
7125.000	35.90	9.80	34.55	40.71	51.86	88.20	36.34	Peak

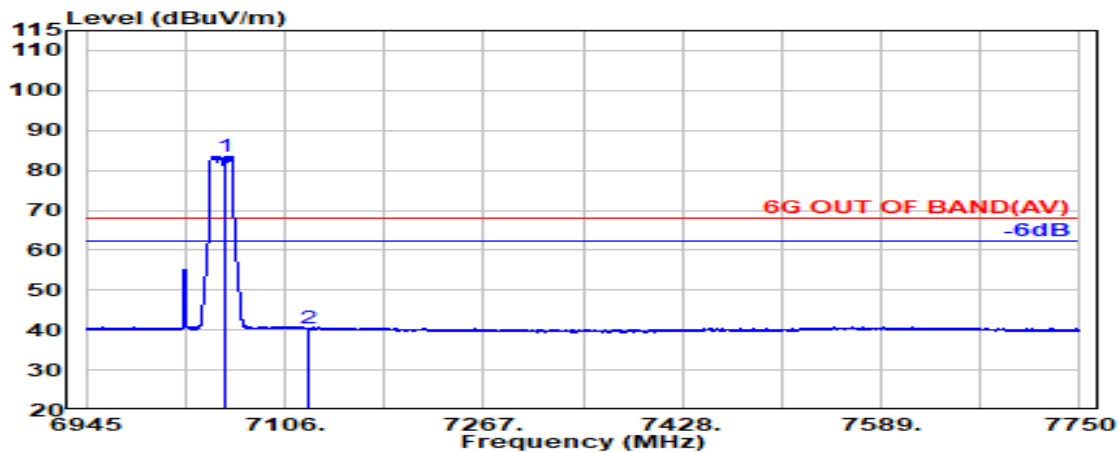


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7058.100	35.63	9.76	34.51	72.69	83.57	---	---	Average
7125.000	35.90	9.80	34.55	29.32	40.47	68.20	27.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

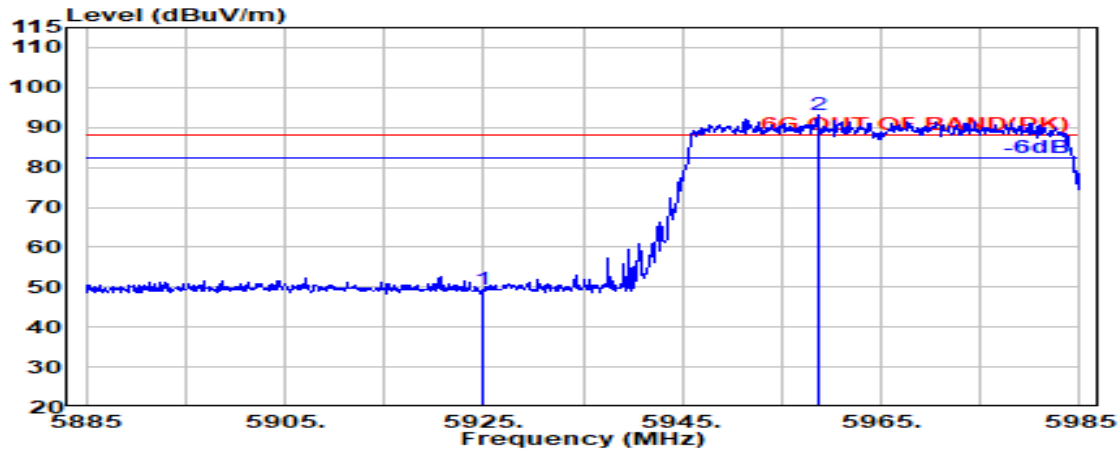

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.56	49.35	88.20	38.85	Peak
@ 5958.600	34.28	9.01	34.41	84.07	92.95	---	---	Peak

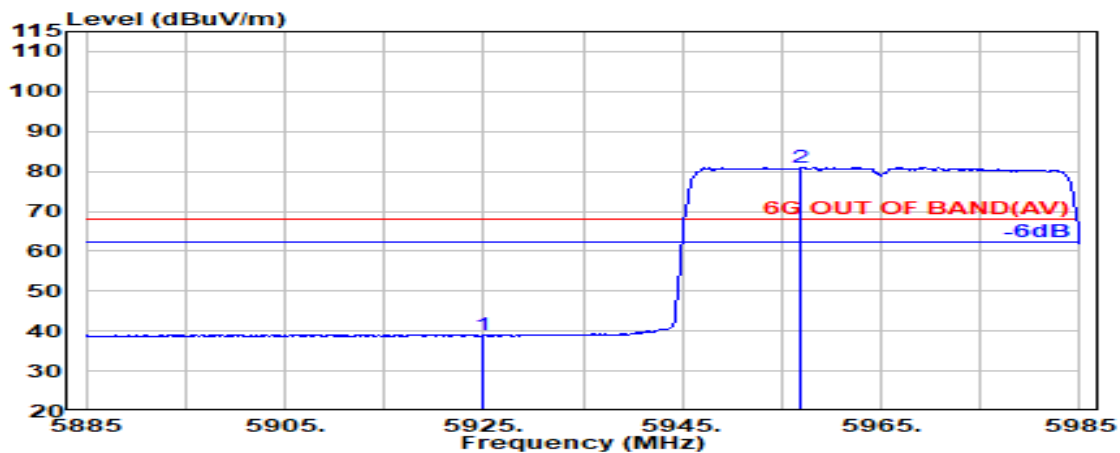


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.08	38.87	68.20	29.33	Average
@ 5957.000	34.29	9.01	34.41	72.03	80.92	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

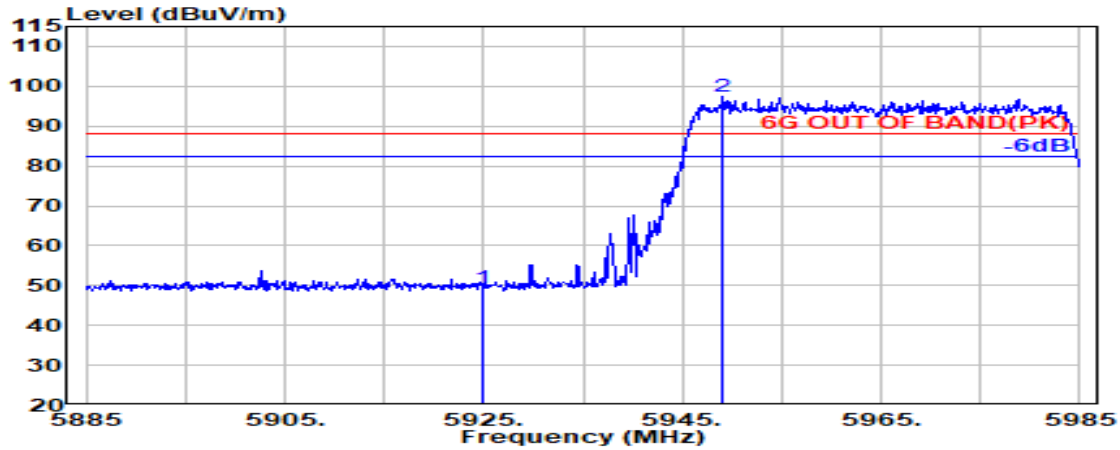

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.60	49.40	88.20	38.80	Peak
@ 5949.100	34.30	9.00	34.41	88.38	97.27	---	---	Peak

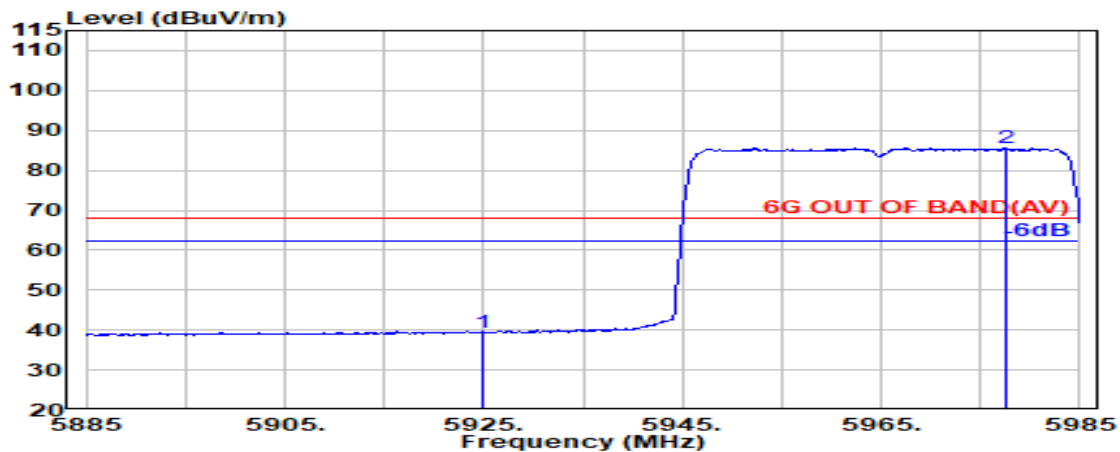


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.58	39.37	68.20	28.83	Average
@ 5977.500	34.24	9.02	34.42	76.69	85.54	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	S66
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

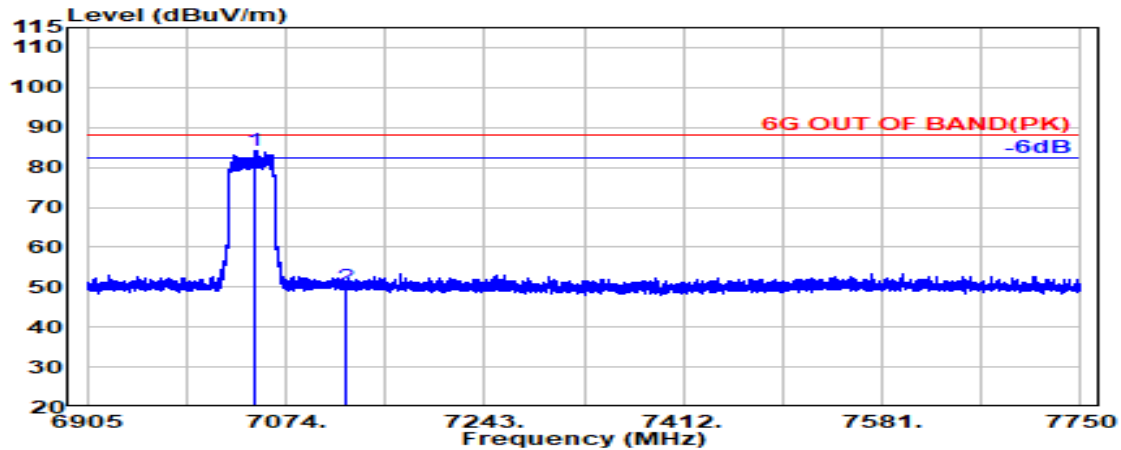

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7048.500	35.60	9.75	34.51	73.43	84.27	---	---	Peak
7125.000	35.90	9.80	34.55	38.96	50.11	88.20	38.09	Peak

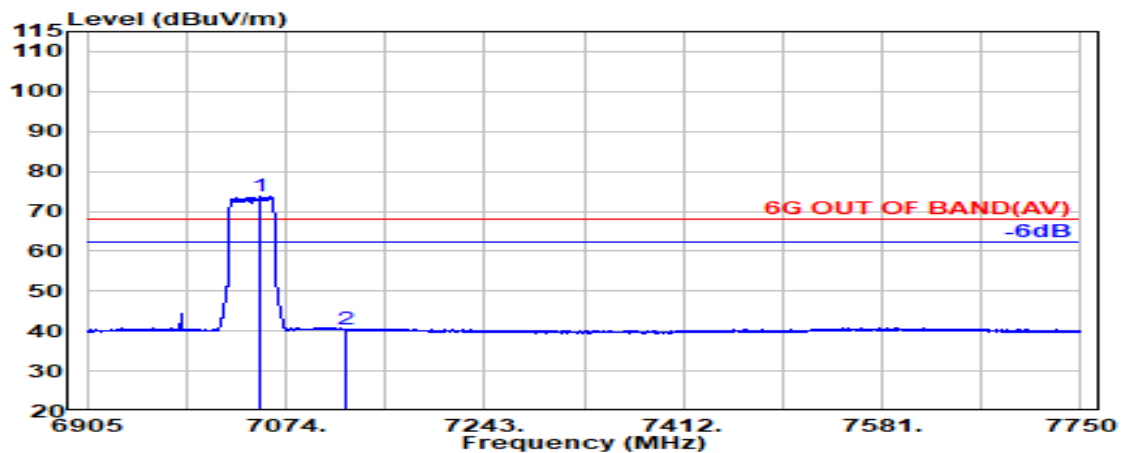


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7052.600	35.61	9.75	34.51	62.99	73.84	---	---	Average
7125.000	35.90	9.80	34.55	29.17	40.32	68.20	27.88	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	484T	RU Index	S66
Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

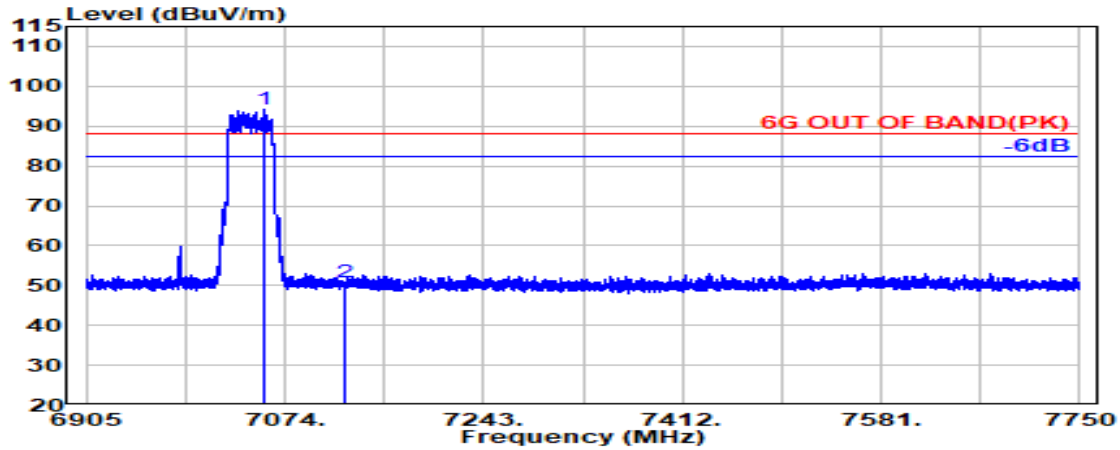

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7056.700	35.63	9.76	34.51	83.49	94.36	---	---	Peak
7125.000	35.90	9.80	34.55	39.72	50.87	88.20	37.33	Peak

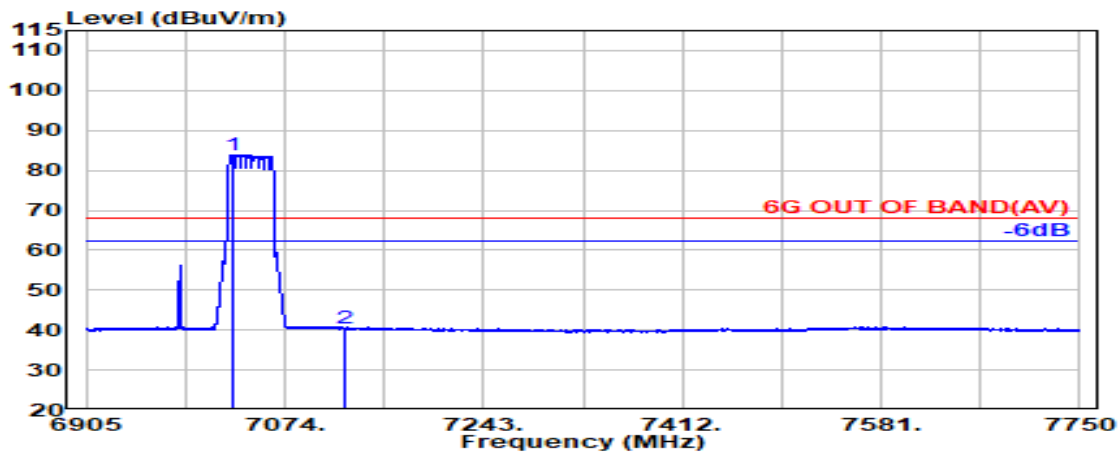


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7030.700	35.56	9.74	34.50	73.15	83.96	---	---	Average
7125.000	35.90	9.80	34.55	29.32	40.47	68.20	27.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

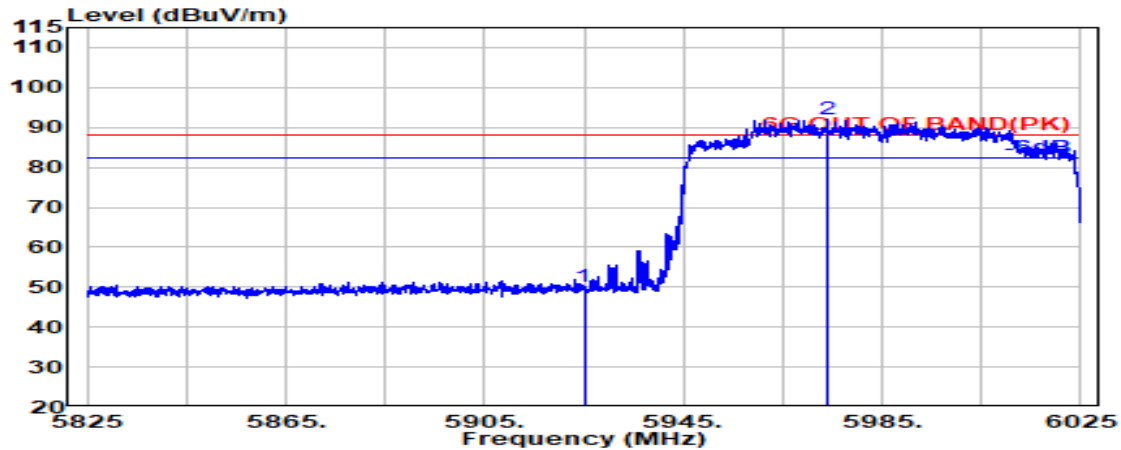

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	41.32	50.11	88.20	38.09	Peak
@ 5973.900	34.25	9.02	34.42	83.12	91.97	---	---	Peak

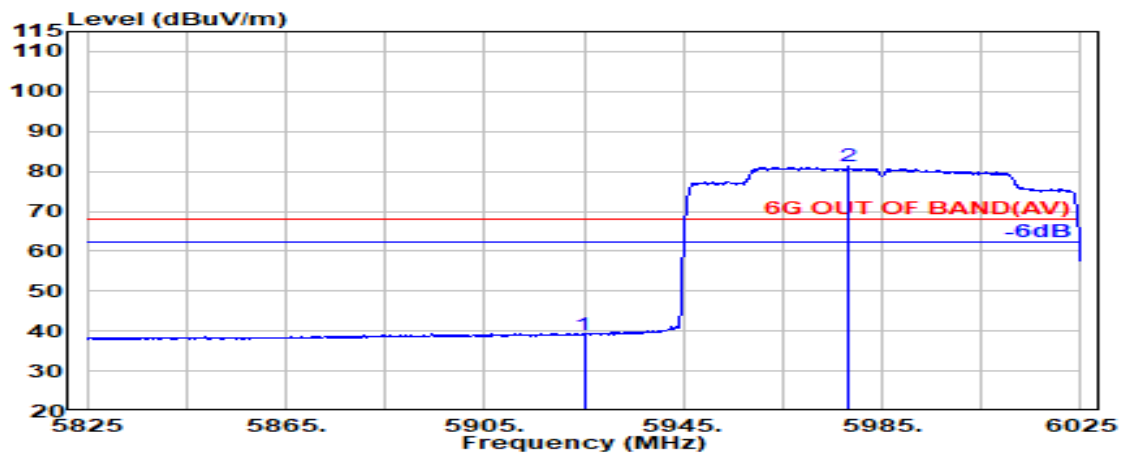


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	30.34	39.13	68.20	29.07	Average
@ 5978.200	34.24	9.02	34.42	72.29	81.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.




Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

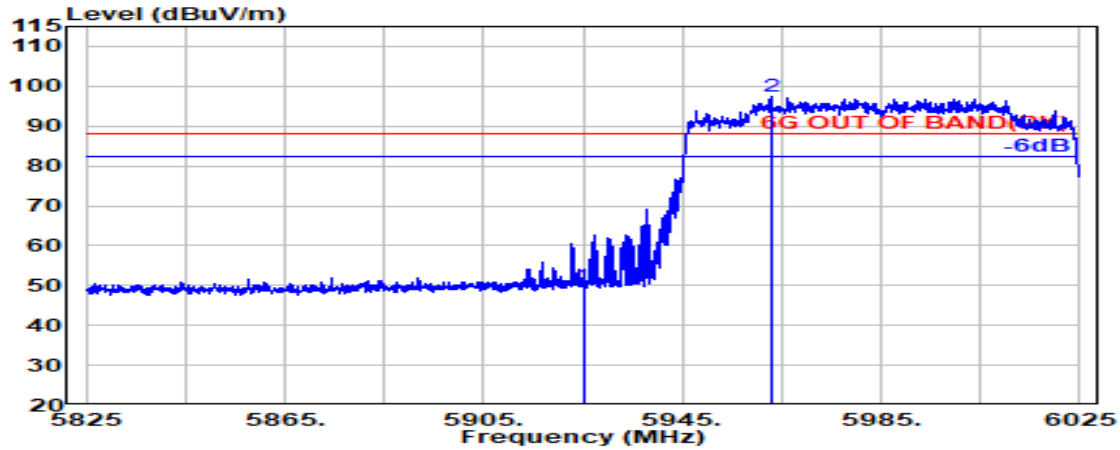

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	40.94	49.73	88.20	38.47	Peak
@ 5962.800	34.27	9.01	34.41	88.41	97.28	---	---	Peak

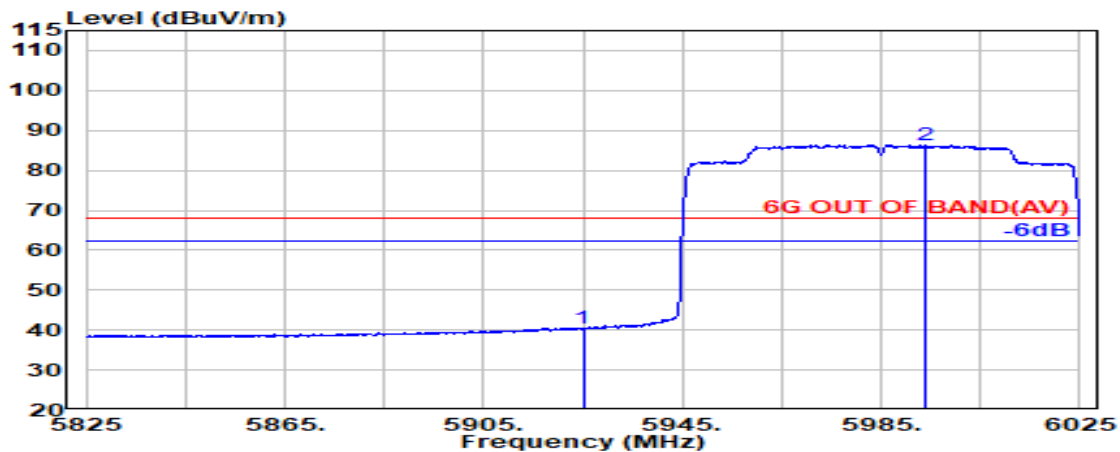


## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5925.000	34.20	8.99	34.40	31.50	40.30	68.20	27.90	Average
@ 5994.000	34.21	9.03	34.43	77.59	86.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

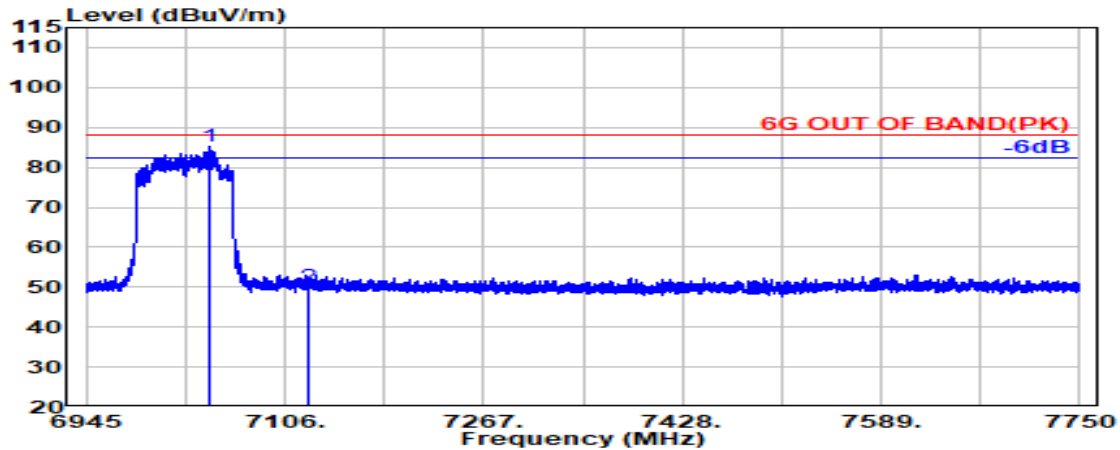

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7044.000	35.59	9.75	34.51	74.40	85.23	---	---	Peak
7125.000	35.90	9.80	34.55	39.04	50.19	88.20	38.01	Peak

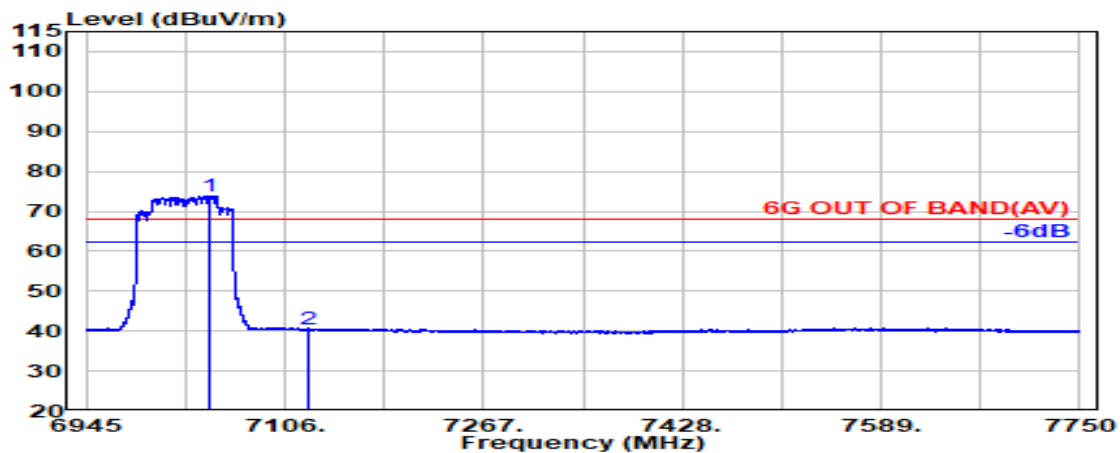


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7045.800	35.59	9.75	34.51	63.09	73.93	---	---	Average
7125.000	35.90	9.80	34.55	29.35	40.50	68.20	27.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 7025MHz

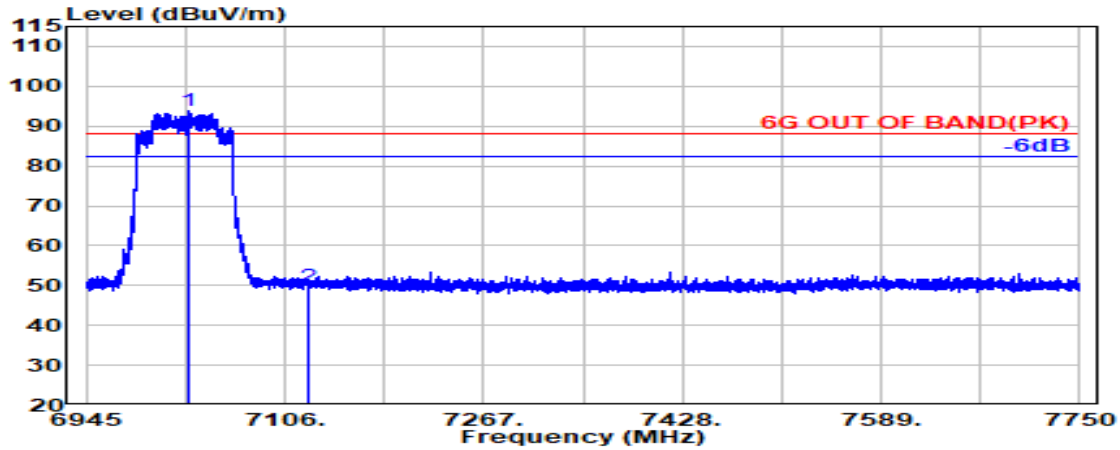

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7027.600	35.56	9.74	34.50	82.91	93.70	---	---	Peak
7125.000	35.90	9.80	34.55	38.69	49.84	88.20	38.36	Peak

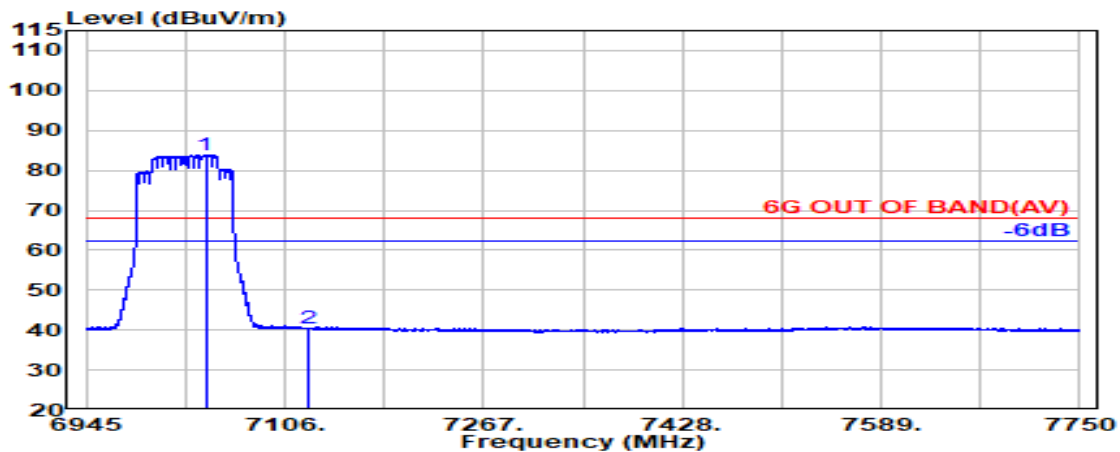

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 7041.800	35.58	9.75	34.50	73.05	83.88	---	---	Average
7125.000	35.90	9.80	34.55	29.31	40.46	68.20	27.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.1.4 Band Edge-Maker Delta  
 ● OFDM Modulation

**Test SKU: SKU #1 (With INPAQ ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20	Horizontal	75.34	61.60	13.74
	Vertical	89.74	71.88	17.86

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

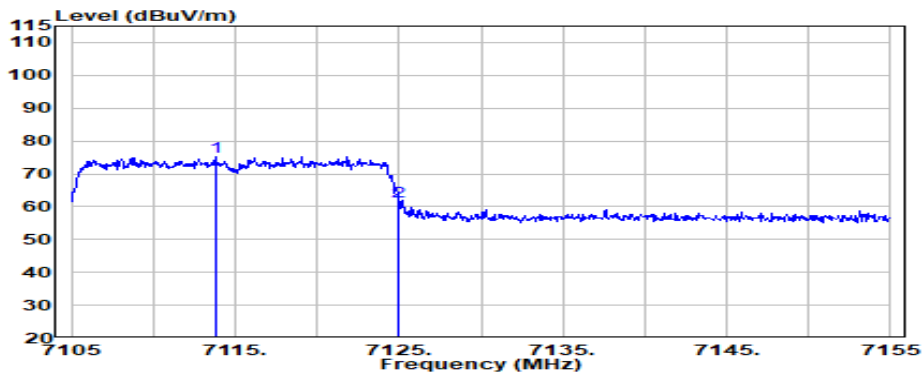

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7113.800	35.86	9.79	34.55	64.24	75.34	Peak
7125.000	35.90	9.80	34.55	50.45	61.60	Peak

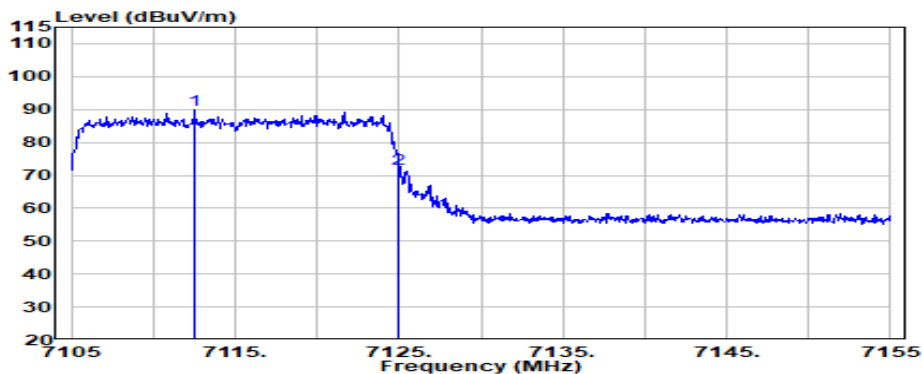


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7112.500	35.85	9.79	34.54	78.64	89.74	Peak
7125.000	35.90	9.80	34.55	60.73	71.88	Peak

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20	Horizontal	81.22	64.19	17.03
	Vertical	85.46	67.70	17.76

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

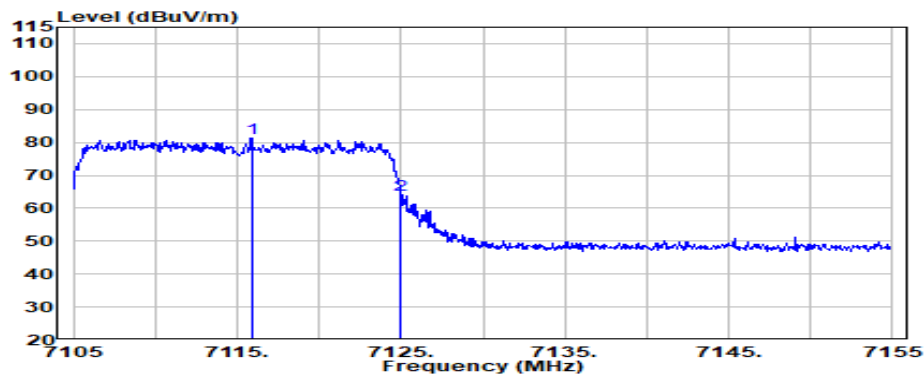

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7115.900	35.86	9.80	34.55	70.11	81.22	Peak
7125.000	35.90	9.80	34.55	53.05	64.19	Peak

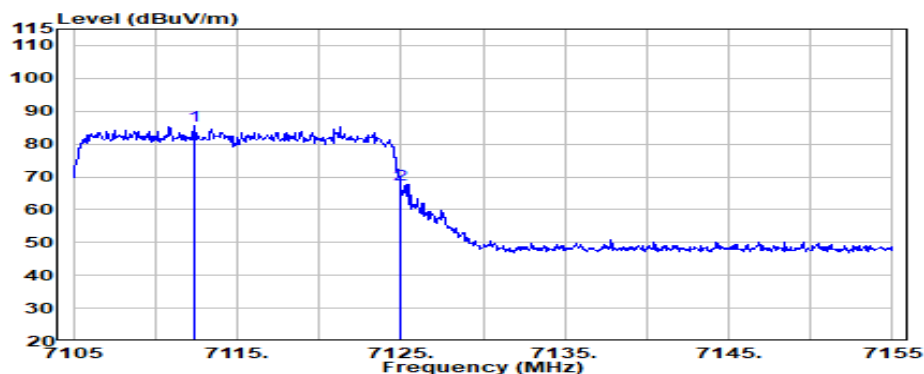

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7112.350	35.85	9.79	34.54	74.36	85.46	Peak
7125.000	35.90	9.80	34.55	56.55	67.70	Peak

● OFDMA Modulation

**Test SKU: SKU #1 (With INPAQ ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (26T, RU Index 8)	Horizontal	78.82	62.92	15.90
	Vertical	92.48	76.79	15.69

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

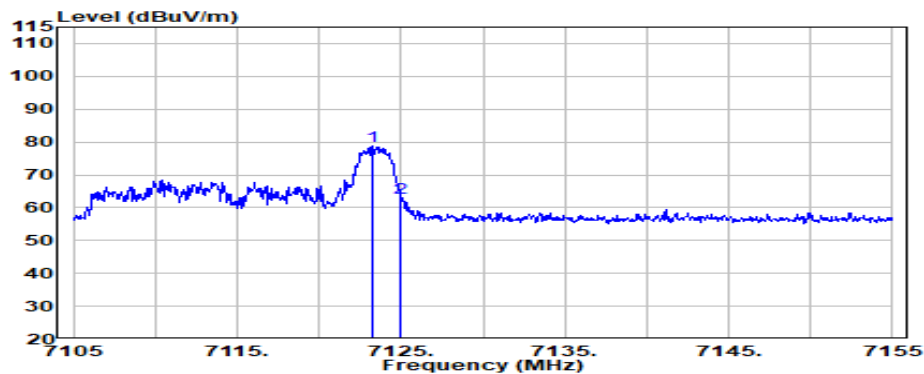

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Emission Detector
7123.200	35.89	9.80	34.55	67.68	78.82	Peak
7125.000	35.90	9.80	34.55	51.77	62.92	Peak

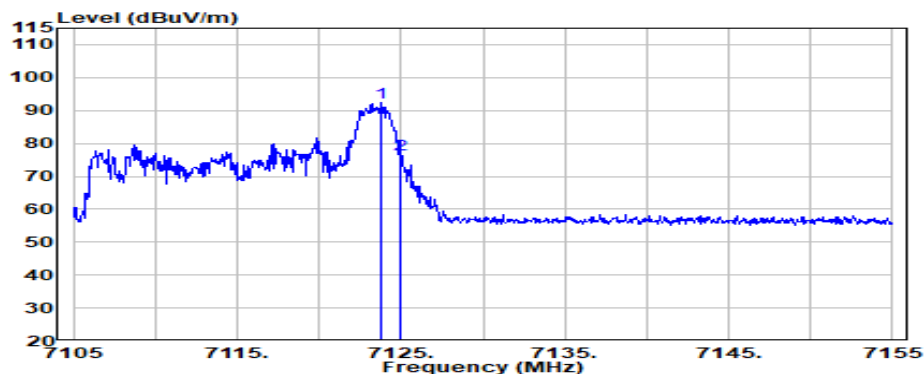


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Emission Detector
7123.800	35.90	9.80	34.55	81.34	92.48	Peak
7125.000	35.90	9.80	34.55	65.64	76.79	Peak


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dB $\mu$ V/m)	Band Edge Emission Level@7125MHz (dB $\mu$ V/m)	Marker-Delta (dB)
802.11ax-HE20 (52T, RU Index 40)	Horizontal	75.84	58.66	17.18
	Vertical	89.80	73.70	16.10

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

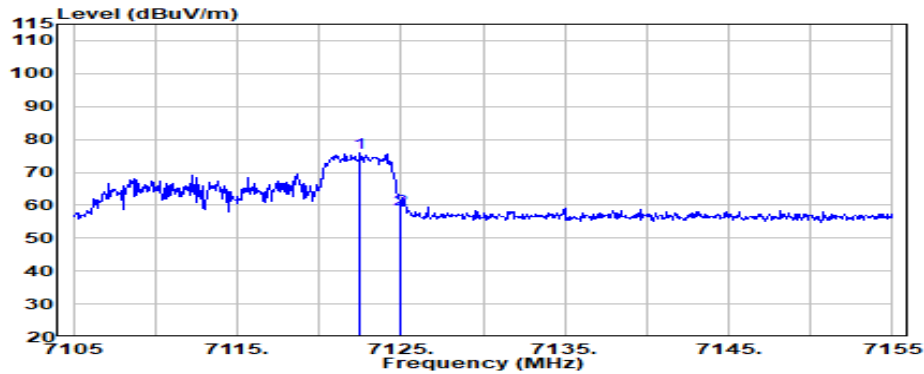

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Detector
7122.500	35.89	9.80	34.55	64.70	75.84	Peak
7125.000	35.90	9.80	34.55	47.51	58.66	Peak

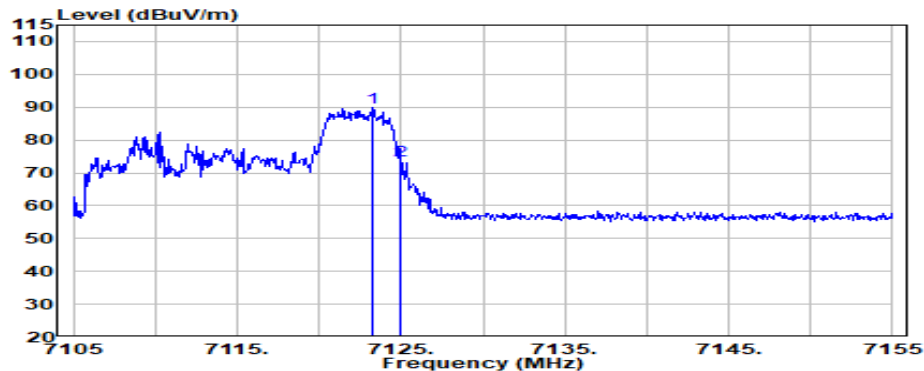


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Detector
7123.200	35.89	9.80	34.55	78.66	89.80	Peak
7125.000	35.90	9.80	34.55	62.55	73.70	Peak


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (106T, RU Index 54)	Horizontal	76.20	61.28	14.92
	Vertical	87.86	70.50	17.36

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

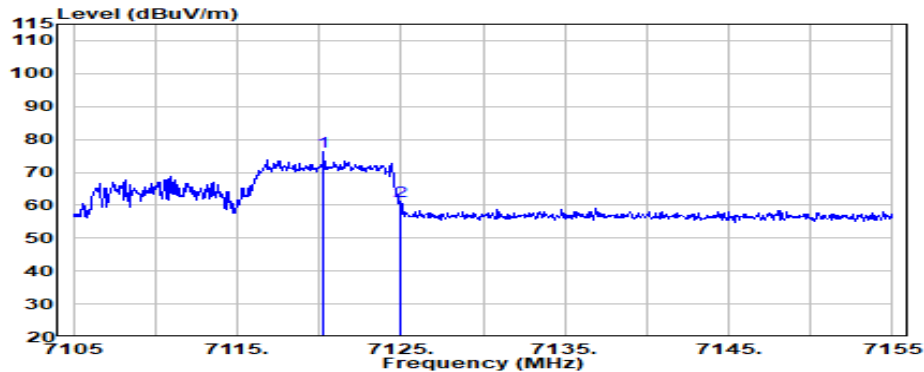

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7120.300	35.88	9.80	34.55	65.07	76.20	Peak
7125.000	35.90	9.80	34.55	50.13	61.28	Peak

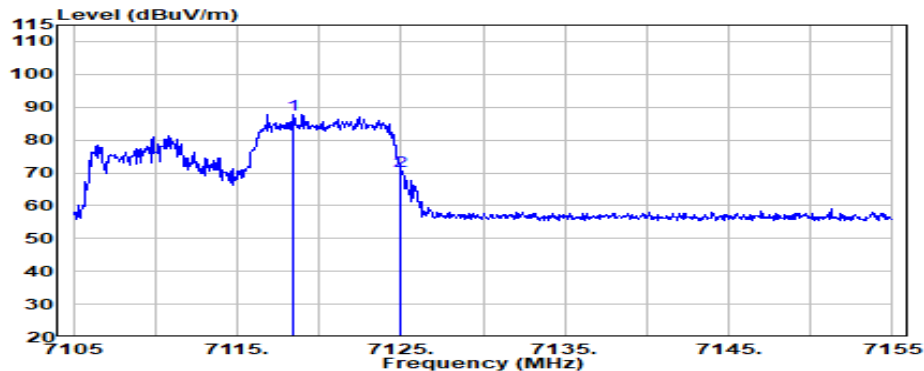

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7118.450	35.87	9.80	34.55	76.74	87.86	Peak
7125.000	35.90	9.80	34.55	59.35	70.50	Peak



**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (26T, RU Index 8)	Horizontal	85.07	69.58	15.49
	Vertical	89.65	72.29	17.36

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

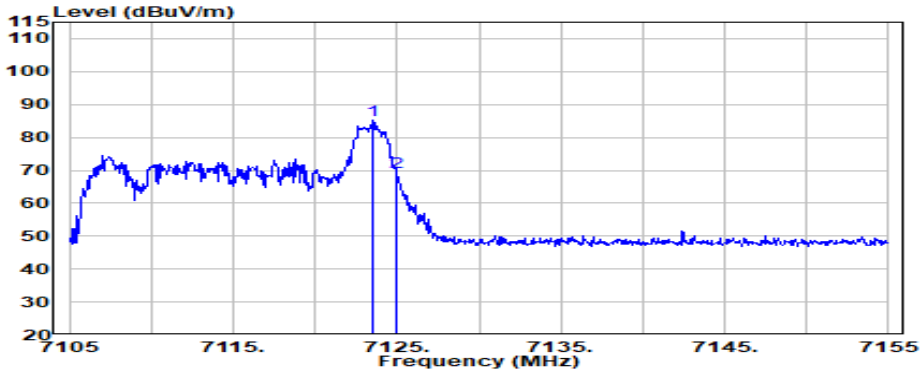

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.500	35.89	9.80	34.55	73.93	85.07	Peak
7125.000	35.90	9.80	34.55	58.43	69.58	Peak

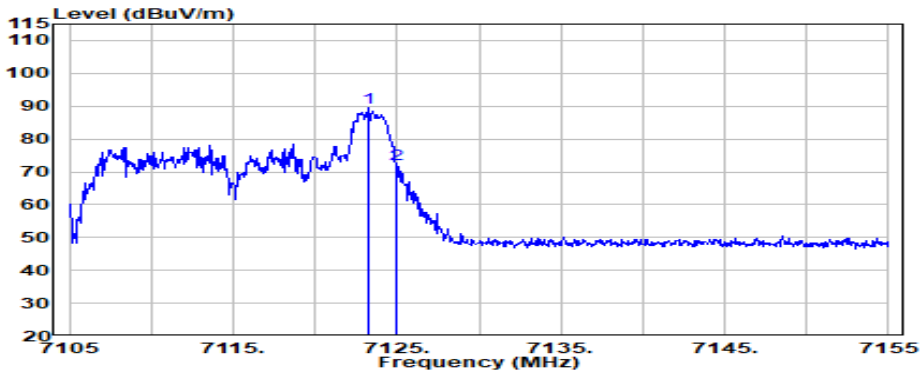


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.200	35.89	9.80	34.55	78.51	89.65	Peak
7125.000	35.90	9.80	34.55	61.14	72.29	Peak


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (52T, RU Index 40)	Horizontal	80.37	65.70	14.67
	Vertical	83.95	69.36	14.59

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

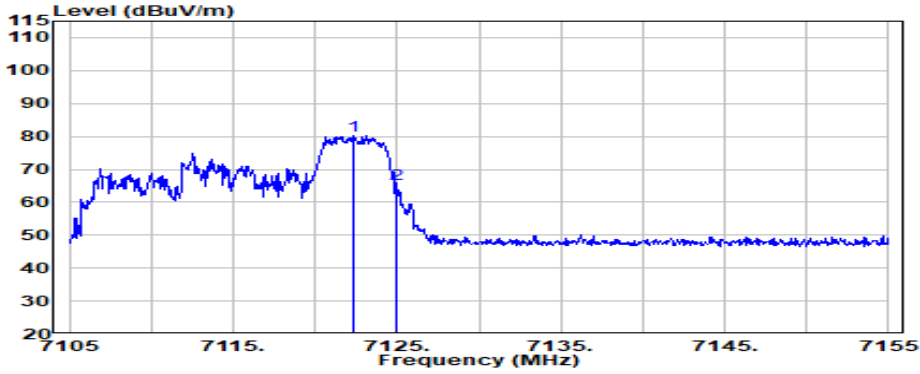

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.300	35.89	9.80	34.55	69.23	80.37	Peak
7125.000	35.90	9.80	34.55	54.55	65.70	Peak

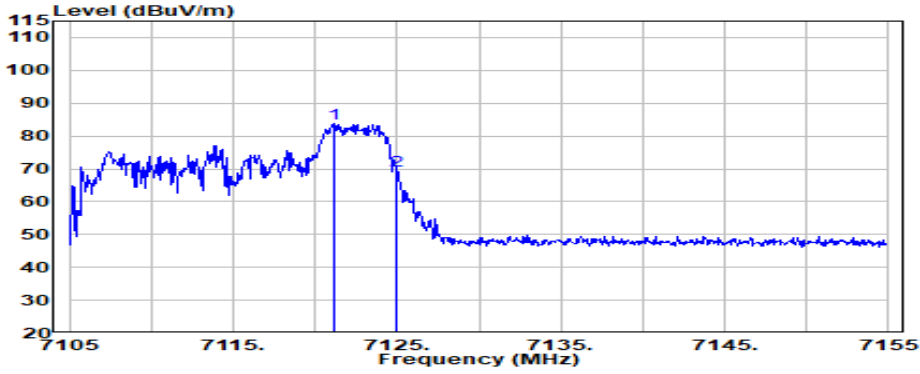


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.100	35.88	9.80	34.55	72.82	83.95	Peak
7125.000	35.90	9.80	34.55	58.21	69.36	Peak


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (106T, RU Index 54)	Horizontal	78.46	61.20	17.26
	Vertical	81.31	63.61	17.70

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

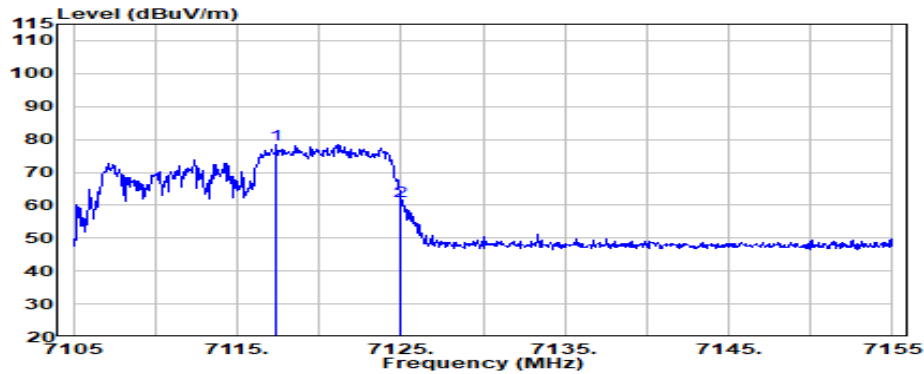

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7117.400	35.87	9.80	34.55	67.34	78.46	Peak
7125.000	35.90	9.80	34.55	50.05	61.20	Peak

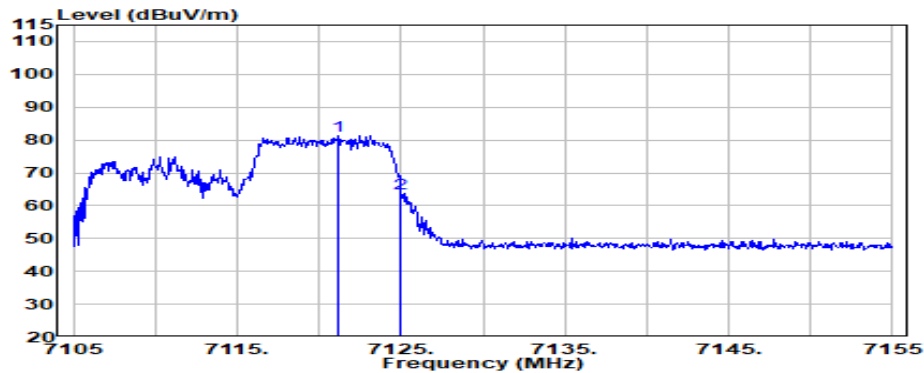


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.150	35.88	9.80	34.55	70.18	81.31	Peak
7125.000	35.90	9.80	34.55	52.46	63.61	Peak

**Spot Check with SKU #2 (with INAPQ ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (26T, RU Index 8)	Horizontal	80.67	66.79	13.88
	Vertical	92.94	77.14	15.80

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

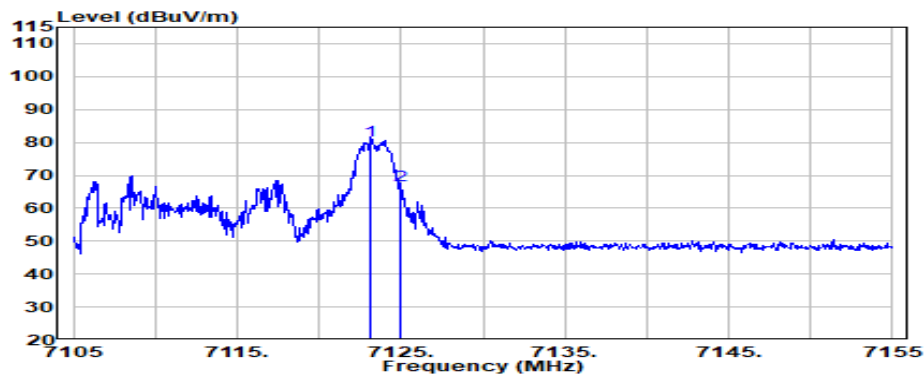

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.150	35.89	9.80	34.55	69.52	80.67	Peak
7125.000	35.90	9.80	34.55	55.64	66.79	Peak

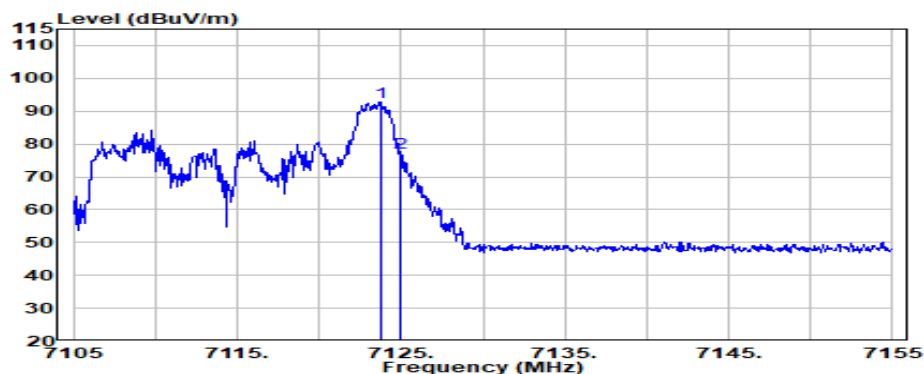


**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.750	35.90	9.80	34.55	81.80	92.94	Peak
7125.000	35.90	9.80	34.55	66.04	77.19	Peak

**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**


Mode	Antenna Polarization	Peak Fundamental Emission Level@7115MHz (dBμV/m)	Band Edge Emission Level@7125MHz (dBμV/m)	Marker-Delta (dB)
802.11ax-HE20 (52T, RU Index 40)	Horizontal	80.96	66.80	14.16
	Vertical	83.11	67.96	15.15

Note: marker -delta measured in accordance with KDB 789033 Section G3 (d)(i)

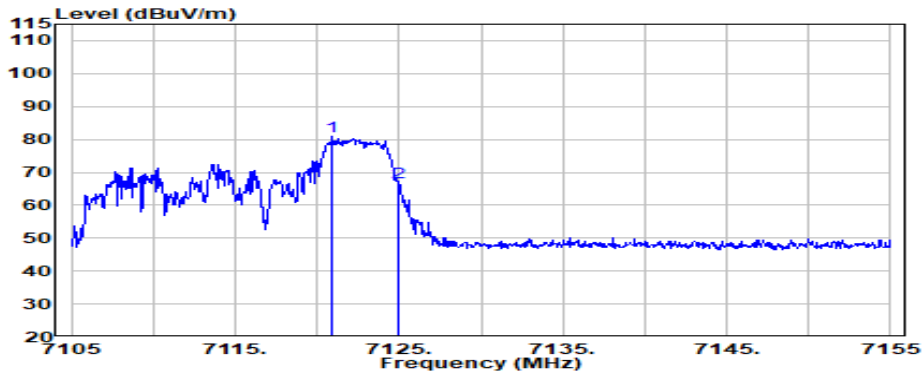

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7120.900	35.88	9.80	34.55	69.83	80.96	Peak
7125.000	35.90	9.80	34.55	55.66	66.80	Peak

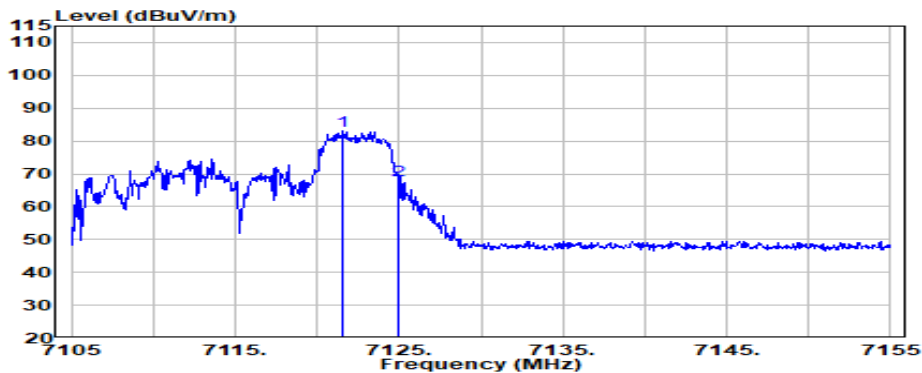

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.550	35.89	9.80	34.55	71.98	83.11	Peak
7125.000	35.90	9.80	34.55	56.81	67.96	Peak

**Band Edge-Maker Delta Test Result**


- OFDMA Modulation

Test SKU: SKU #1 (With INPAQ ANT)


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20	Antenna Polarization: Vertical					
	87.00	13.74	73.26	88.20	14.94	Peak
	76.43	13.74	62.69	68.20	5.51	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

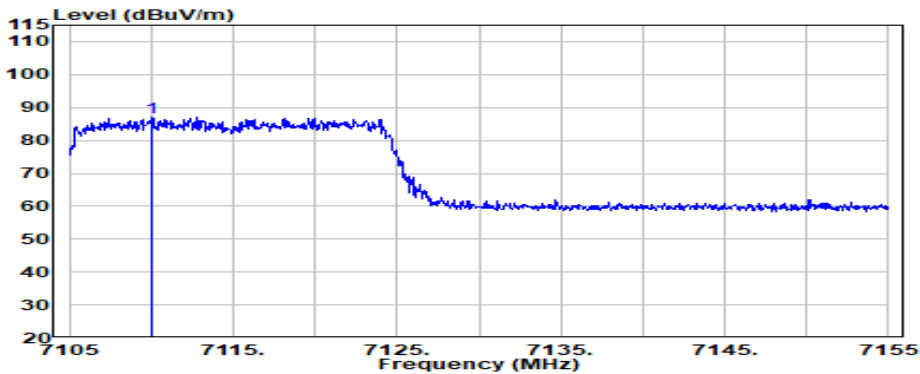

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7110.050	35.84	9.79	34.54	75.92	87.00	Peak

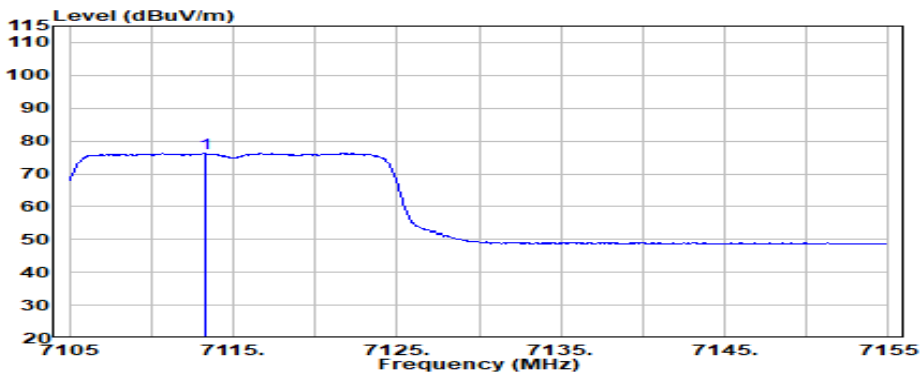


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7113.250	35.85	9.79	34.55	65.33	76.43	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20	Antenna Polarization: Vertical					
	90.62	17.86	72.76	88.20	15.44	Peak
	79.59	17.86	61.73	68.20	6.47	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

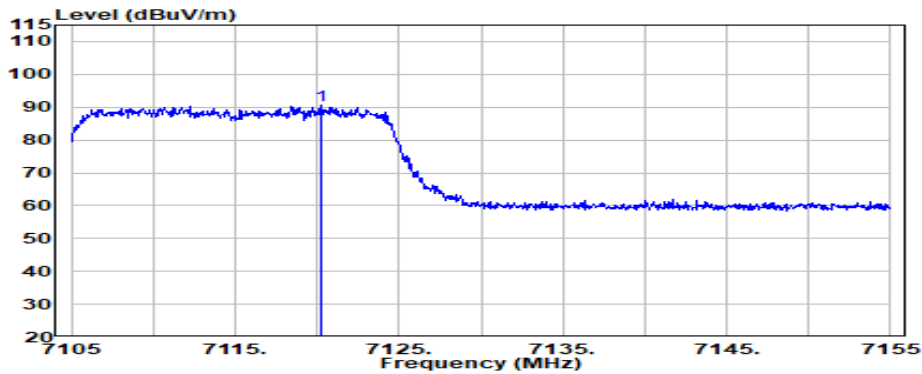

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7120.250	35.88	9.80	34.55	79.49	90.62	Peak

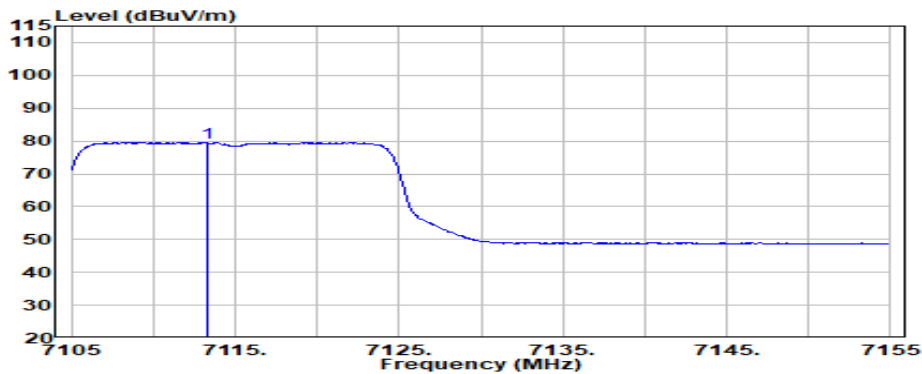


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7113.250	35.85	9.79	34.55	68.49	79.59	Average

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20	Antenna Polarization: Vertical					
	84.82	17.03	67.79	88.20	20.41	Peak
	73.92	17.03	56.89	68.20	11.31	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

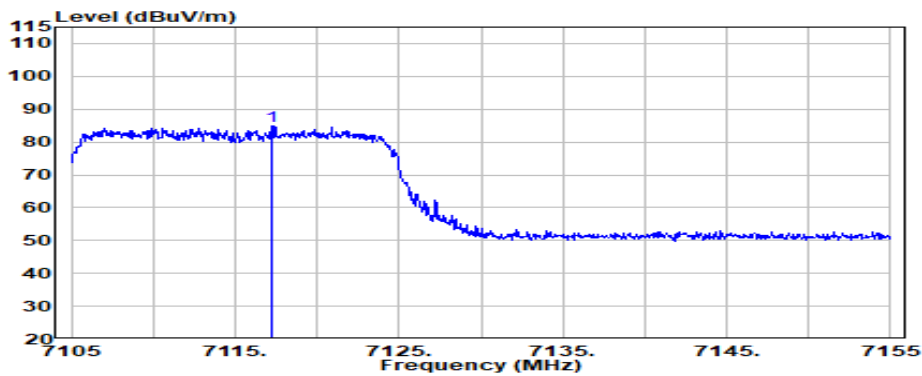

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7117.250	35.87	9.80	34.55	73.70	84.82	Peak

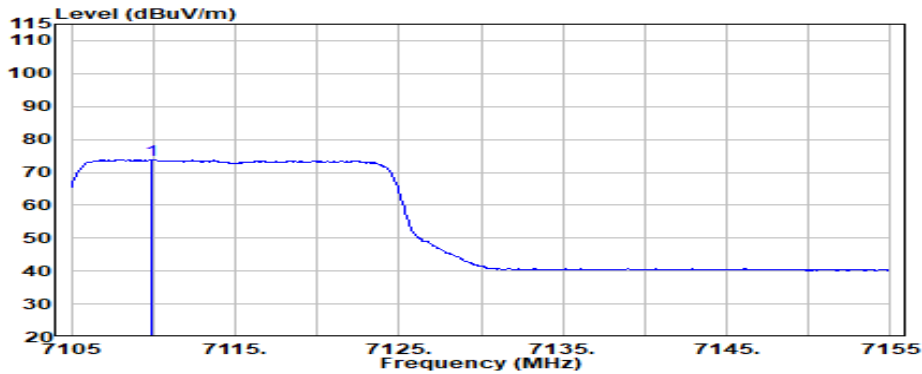


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7109.900	35.84	9.79	34.54	62.83	73.92	Average




Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20	Antenna Polarization: Vertical					
	93.52	17.76	75.76	88.20	12.44	Peak
	82.32	17.76	64.56	68.20	3.64	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

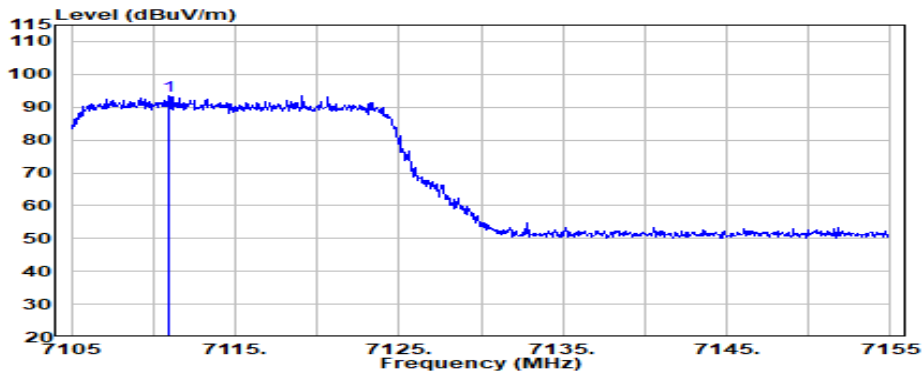

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7110.950	35.84	9.79	34.54	82.43	93.52	Peak

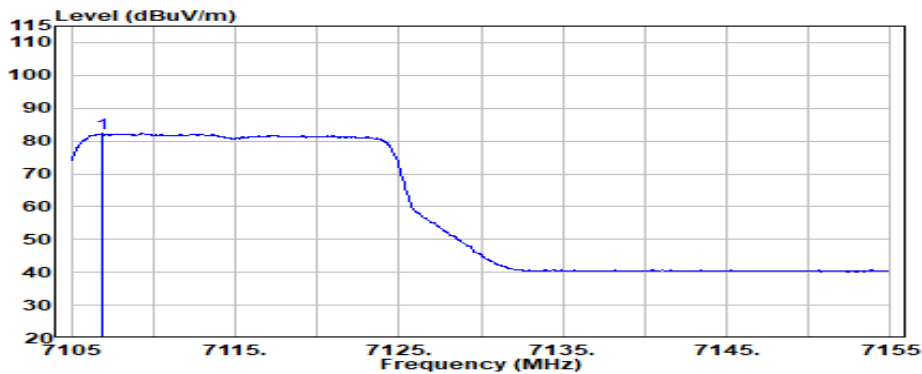

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7106.900	35.83	9.79	34.54	71.25	82.32	Average


● OFDMA Modulation

**Test SKU: SKU #1 (With INPAQ ANT)**


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	90.56	15.90	74.66	88.20	13.54	Peak
	80.16	15.90	64.26	68.20	3.94	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

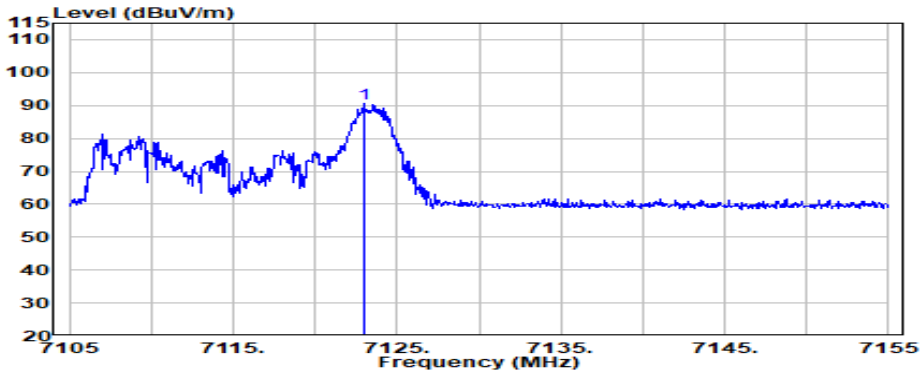

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.950	35.89	9.80	34.55	79.42	90.56	Peak

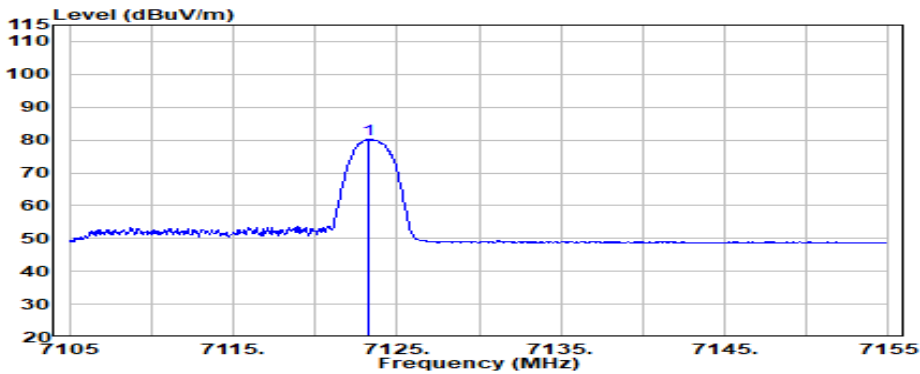


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.200	35.89	9.80	34.55	69.02	80.16	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	94.20	15.69	78.51	88.20	9.69	Peak
	82.68	15.69	66.99	68.20	1.21	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

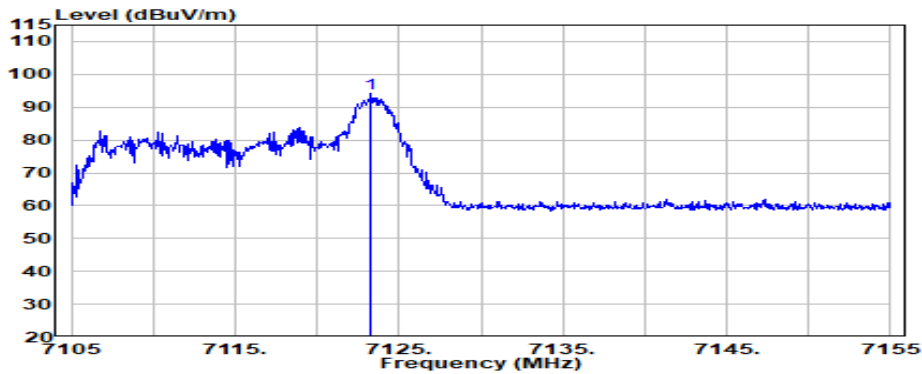

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.300	35.89	9.80	34.55	83.06	94.20	Peak

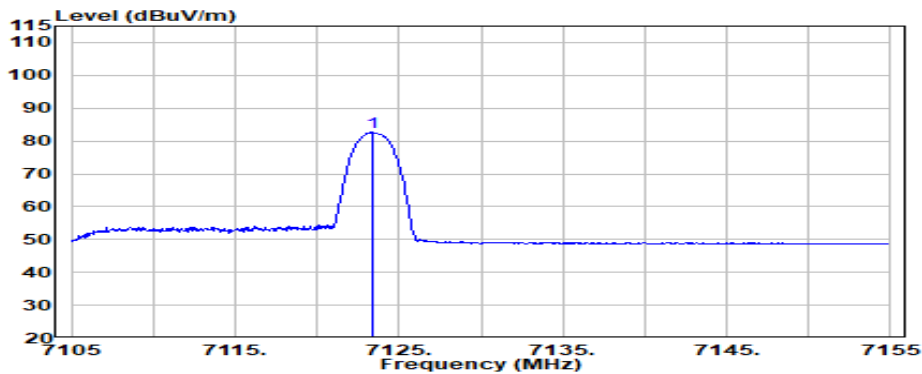


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.350	35.89	9.80	34.55	71.54	82.68	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	89.01	17.18	71.83	88.20	16.37	Peak
	77.43	17.18	60.25	68.20	7.95	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

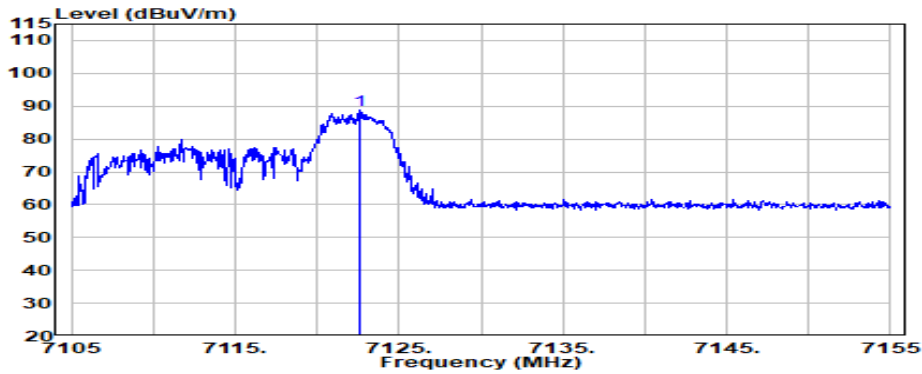

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.650	35.89	9.80	34.55	77.87	89.01	Peak

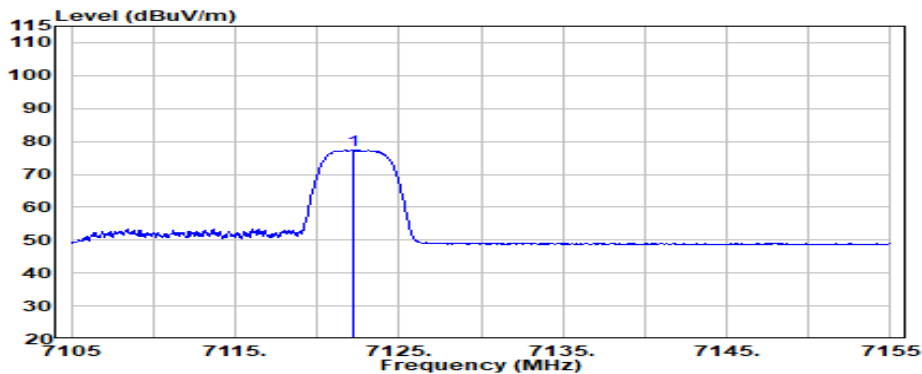


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.150	35.89	9.80	34.55	66.29	77.43	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	91.68	16.10	75.58	88.20	12.62	Peak
	80.86	16.10	64.76	68.20	3.44	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

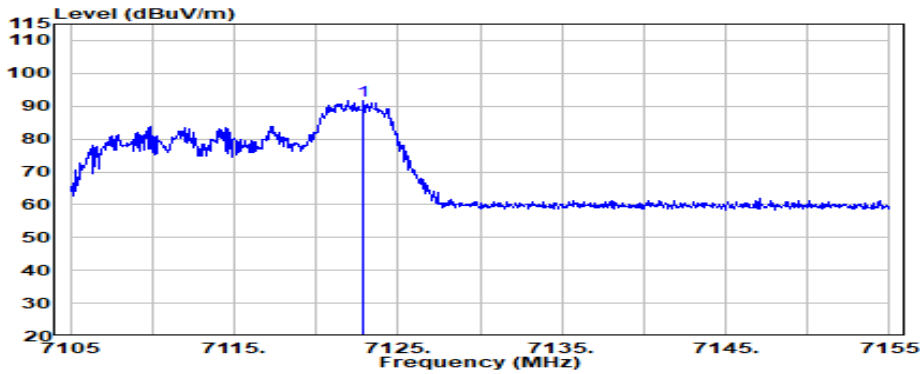

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.900	35.89	9.80	34.55	80.54	91.68	Peak

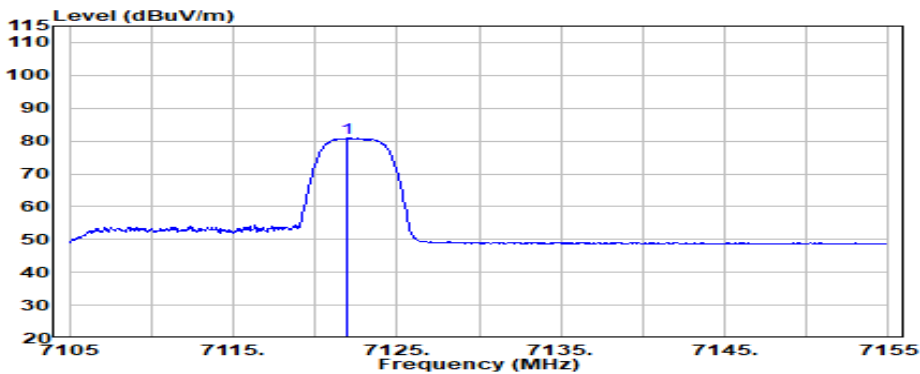


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.000	35.89	9.80	34.55	69.73	80.86	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (106T, RU Index 54)	Antenna Polarization: Vertical					
	85.83	14.92	70.91	88.20	17.29	Peak
	74.66	14.92	59.74	68.20	8.46	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

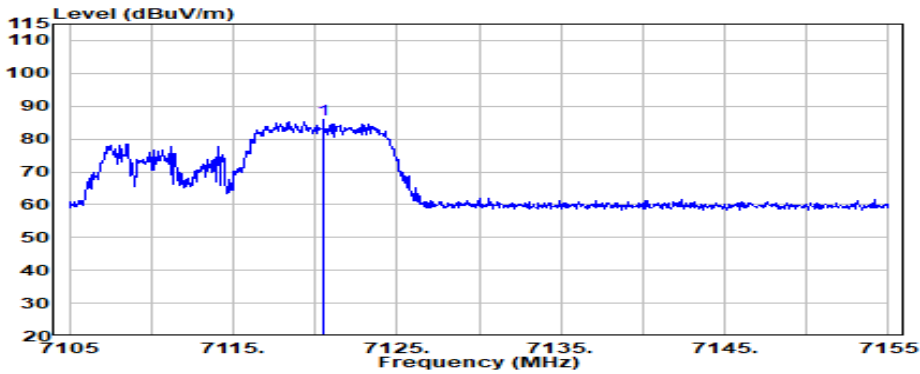

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7120.500	35.88	9.80	34.55	74.70	85.83	Peak

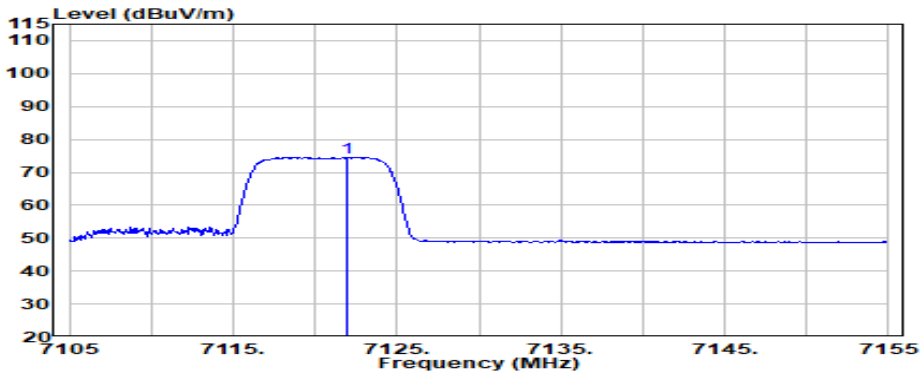


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.900	35.89	9.80	34.55	63.53	74.66	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (106T, RU Index 54)	Antenna Polarization: Vertical					
	88.67	17.36	71.31	88.20	16.89	Peak
	77.84	17.36	60.48	68.20	7.72	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

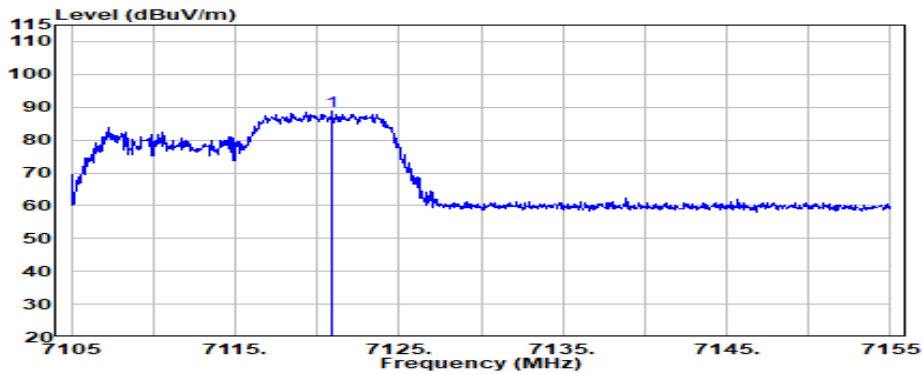

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7120.950	35.88	9.80	34.55	77.54	88.67	Peak

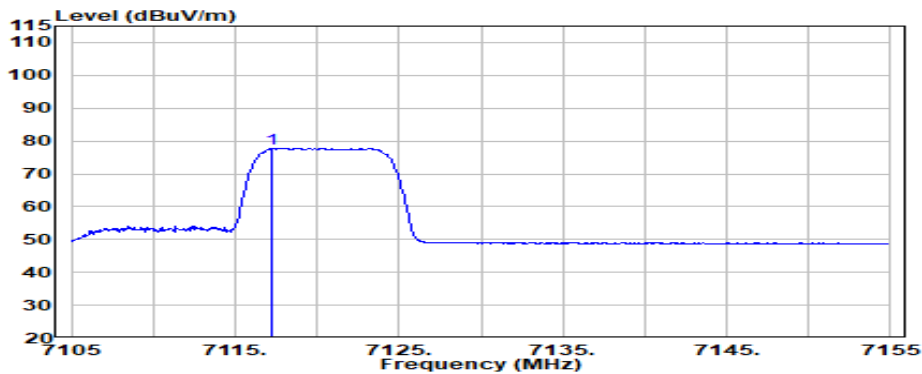


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7117.250	35.87	9.80	34.55	66.72	77.84	Average

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	87.97	15.49	72.48	88.20	15.72	Peak
	77.66	15.49	62.17	68.20	6.03	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

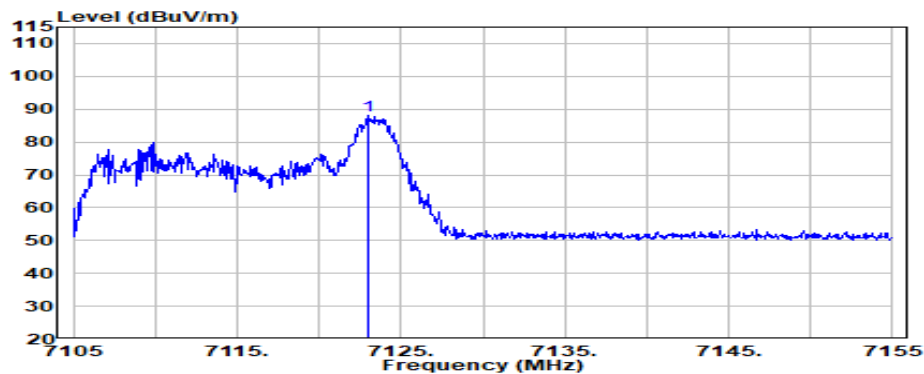

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.950	35.89	9.80	34.55	76.83	87.97	Peak

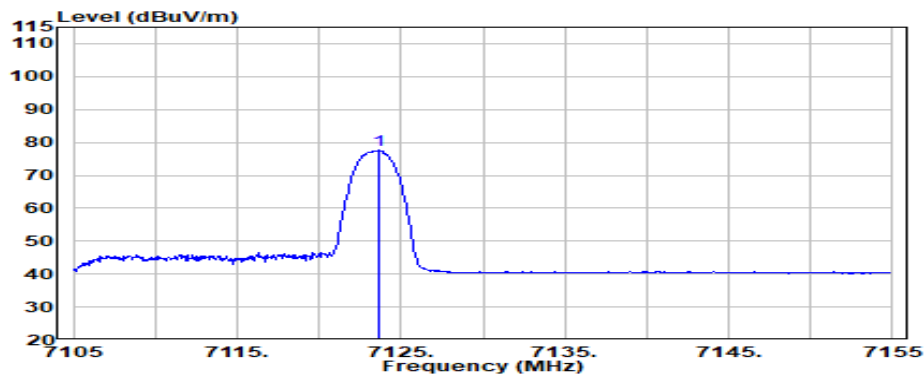


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.650	35.89	9.80	34.55	66.51	77.66	Average




Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	95.43	17.36	78.07	88.20	10.13	Peak
	84.68	17.36	67.32	68.20	0.88	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

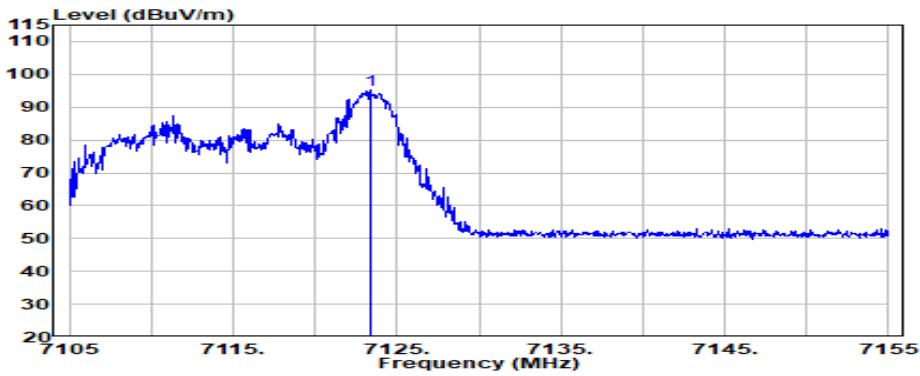

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.350	35.89	9.80	34.55	84.28	95.43	Peak

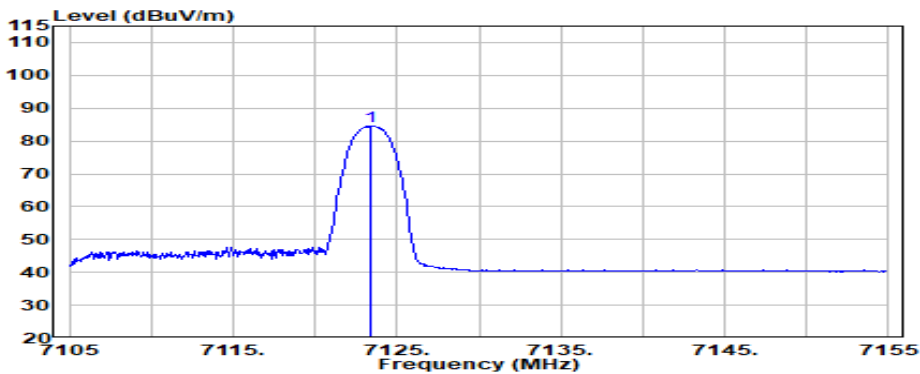


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.450	35.89	9.80	34.55	73.54	84.68	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	84.80	14.67	70.13	88.20	18.07	Peak
	73.93	14.67	59.26	68.20	8.94	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

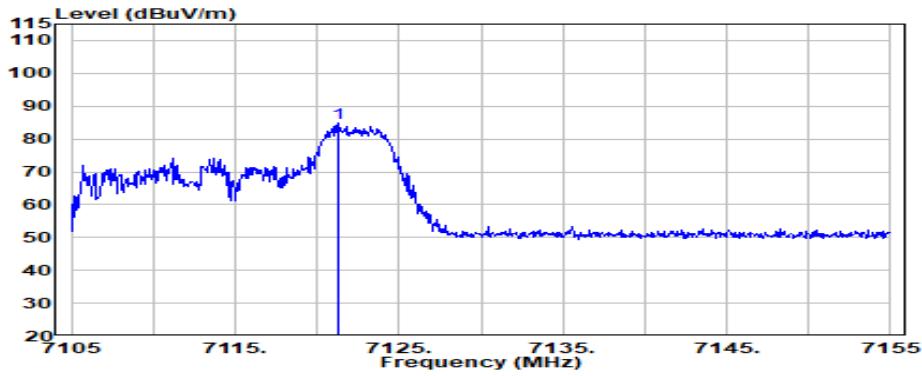

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.350	35.89	9.80	34.55	73.67	84.80	Peak

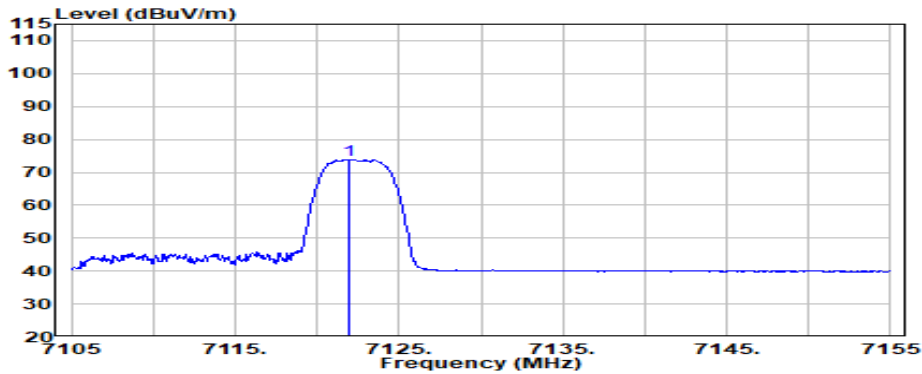


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.950	35.89	9.80	34.55	62.80	73.93	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	93.14	14.59	78.55	88.20	9.65	Peak
	81.16	14.59	66.57	68.20	1.63	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

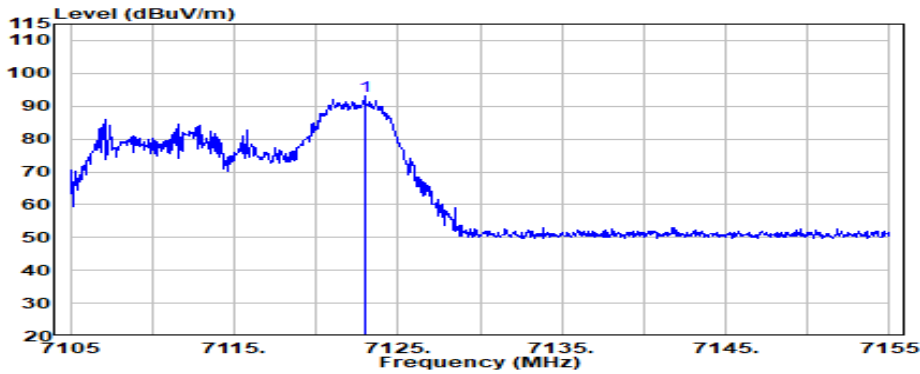

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.000	35.89	9.80	34.55	82.00	93.14	Peak

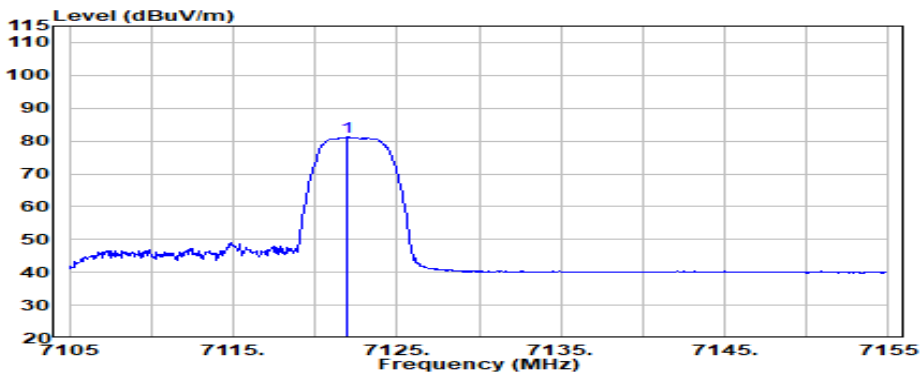


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7122.000	35.89	9.80	34.55	70.03	81.16	Average


Mode	Fundamental Emission Level@7115MHz (dB $\mu$ V/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
802.11ax-HE20 (106T, RU Index 54)	Antenna Polarization: Vertical					
	82.29	17.26	65.03	88.20	23.17	Peak
	70.99	17.26	53.73	68.20	14.47	Average

Note: Band Edge Emission Level (dB $\mu$ V/m) = Fundamental Emission Level (dB $\mu$ V/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

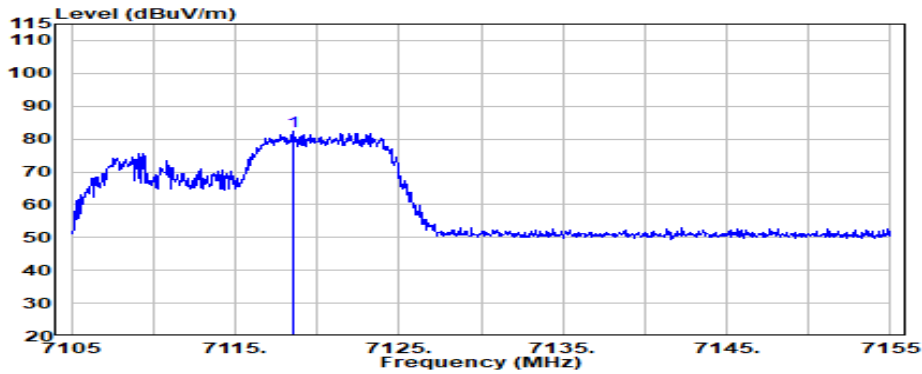

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Detector
7118.550	35.87	9.80	34.55	71.17	82.29	Peak

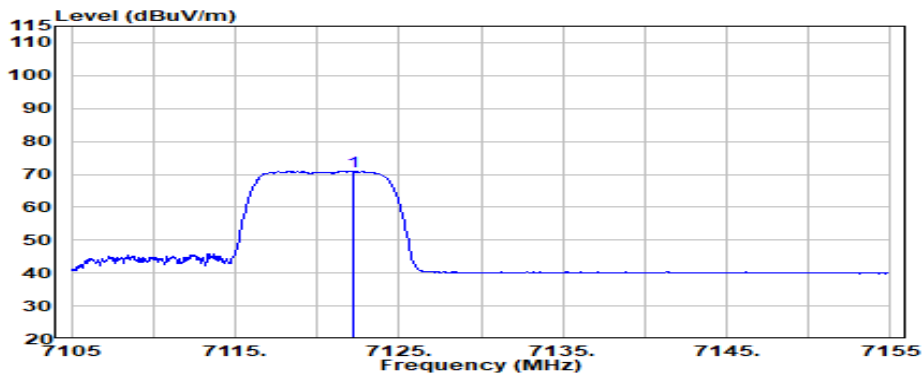


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Detector
7122.200	35.89	9.80	34.55	59.85	70.99	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (106T, RU Index 54)	Antenna Polarization: Vertical					
	89.90	17.70	72.20	88.20	16.00	Peak
	79.26	17.70	61.56	68.20	6.64	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

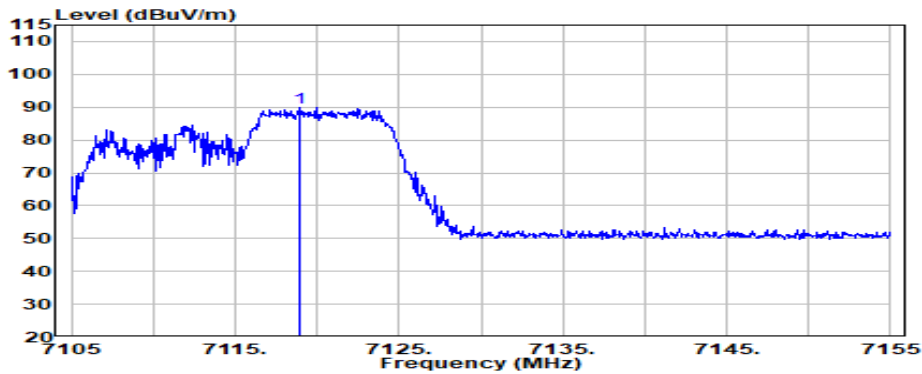

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7118.900	35.88	9.80	34.55	78.78	89.90	Peak

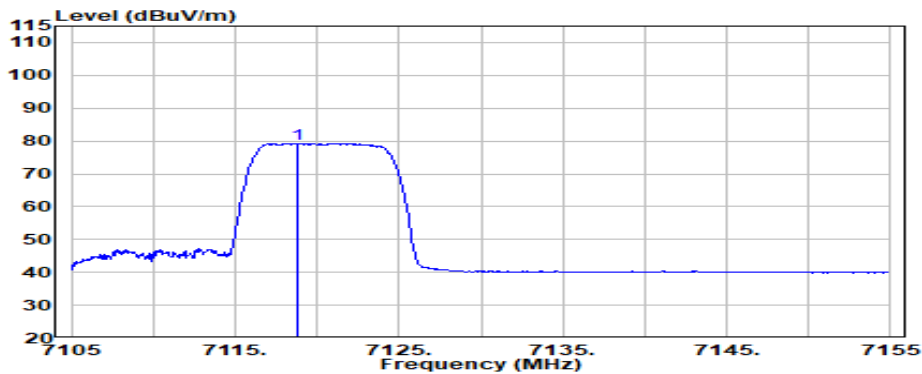


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7118.850	35.88	9.80	34.55	68.13	79.26	Average

**Spot Check with SKU #2 (with INAPQ ANT)**


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	91.34	13.88	77.46	88.20	10.74	Peak
	80.55	13.88	66.67	68.20	1.53	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

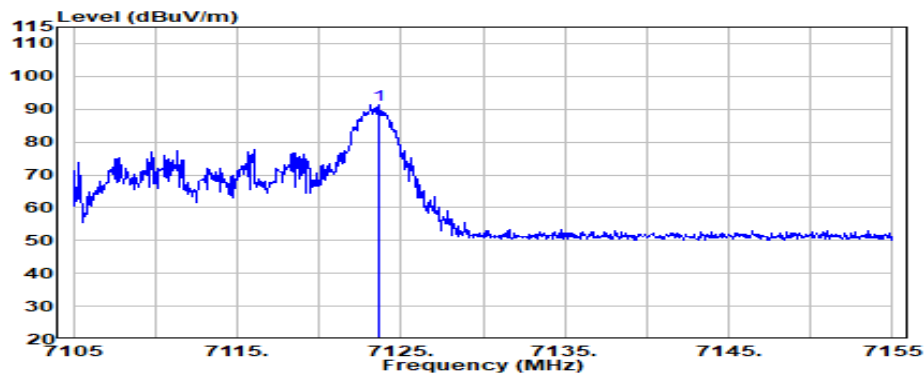

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.650	35.89	9.80	34.55	80.19	91.34	Peak

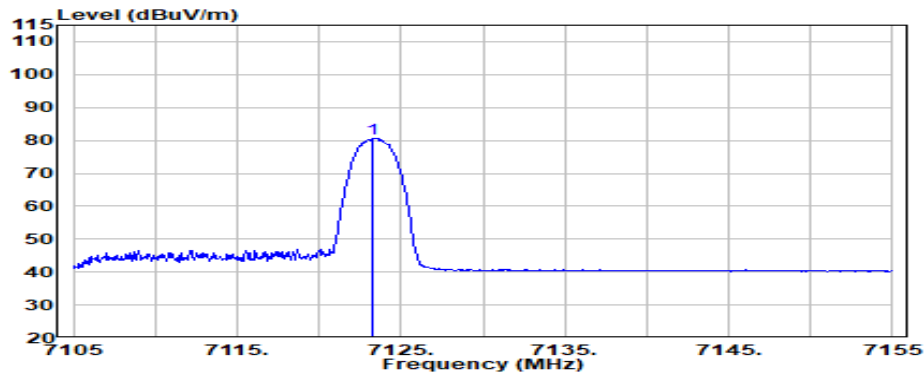


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.300	35.89	9.80	34.55	69.41	80.55	Average


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (26T, RU Index 8)	Antenna Polarization: Vertical					
	94.89	15.80	79.09	88.20	9.11	Peak
	80.72	15.80	64.92	68.20	3.28	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

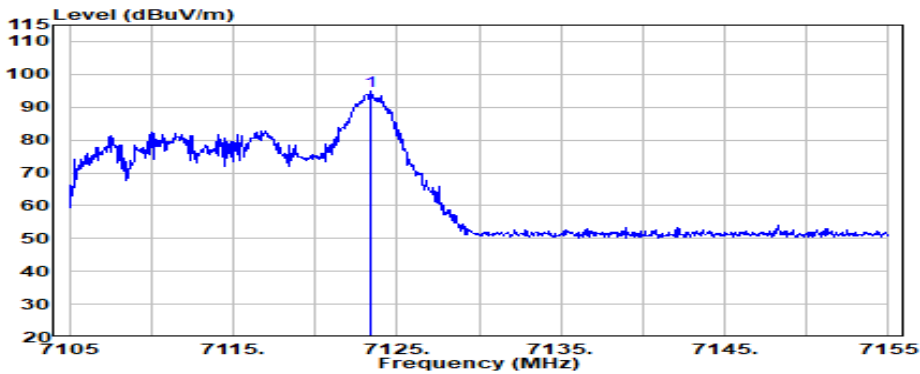

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.450	35.89	9.80	34.55	83.75	94.89	Peak

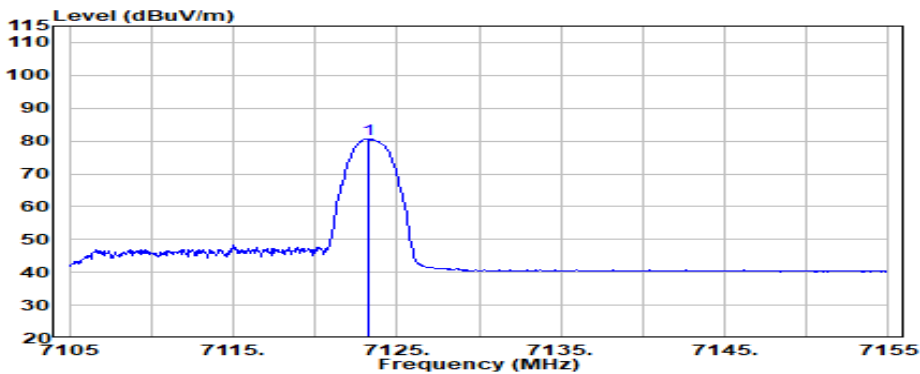


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.200	35.89	9.80	34.55	69.58	80.72	Average

**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**


Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	83.40	14.16	69.24	88.20	18.96	Peak
	72.98	14.16	58.82	68.20	9.38	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Horizontal Polarization

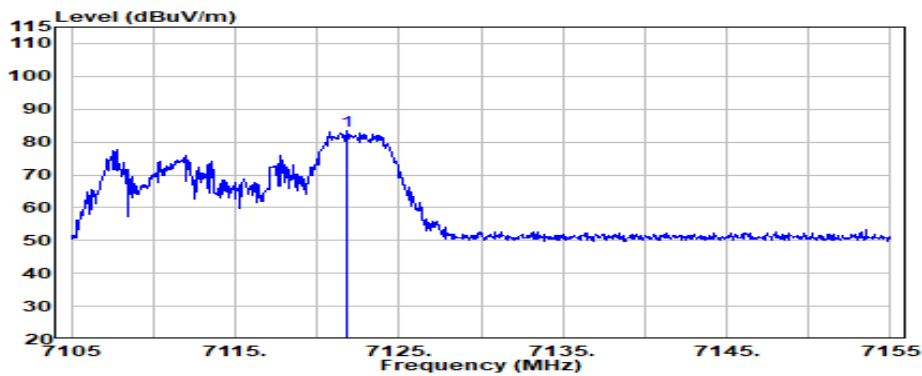

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.850	35.89	9.80	34.55	72.27	83.40	Peak

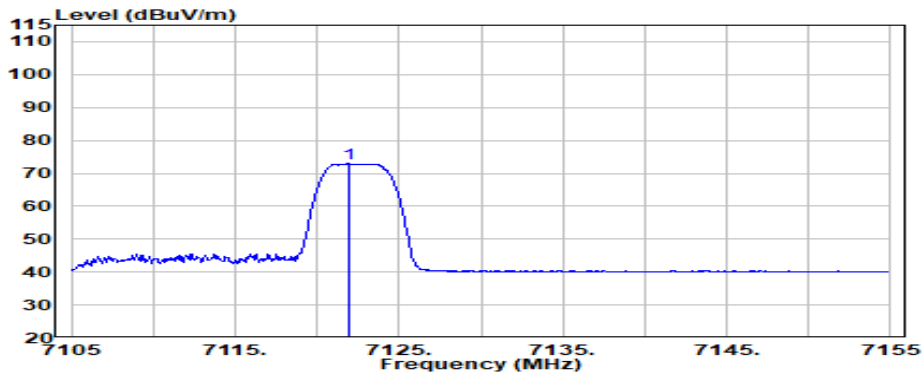


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.900	35.89	9.80	34.55	61.84	72.98	Average




Mode	Fundamental Emission Level@7115MHz (dBμV/m)	Marker-Delta (dB)	Band Edge Emission Level@7125MHz (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
802.11ax-HE20 (52T, RU Index 40)	Antenna Polarization: Vertical					
	91.72	15.15	76.57	88.20	11.63	Peak
	81.65	15.15	66.50	68.20	1.70	Average

Note: Band Edge Emission Level (dBμV/m) = Fundamental Emission Level (dBμV/m) - Marker-Delta (dB)

Antenna at Vertical Polarization

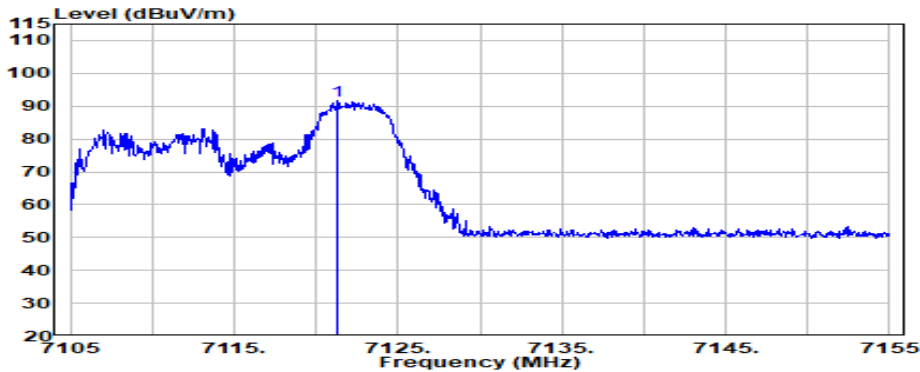

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7121.300	35.89	9.80	34.55	80.59	91.72	Peak

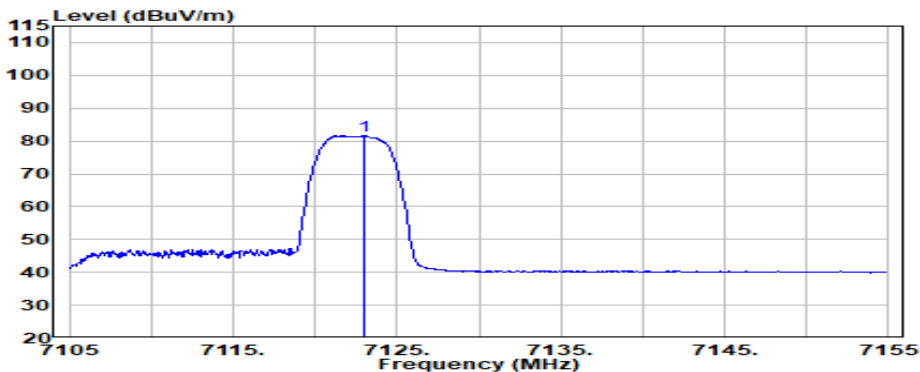

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Detector
7123.050	35.89	9.80	34.55	70.51	81.65	Average

### A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

- OFDM Modulation

#### Test SKU: SKU #1 (With INPAQ ANT)

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	33.29	51.72	54.00	2.28	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.53	50.96	54.00	3.04	Peak

Mode	802.11ax-HE20	U-NII Band	6
		Frequency	TX 6515MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.86	14.88	33.30	31.01	52.45	54.00	1.55	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13030.000	39.86	14.88	33.30	31.39	52.83	54.00	1.17	Peak

Mode	802.11ax-HE20	U-NII Band	7
		Frequency	TX 6535MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	30.41	51.99	54.00	2.01	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	30.65	52.23	54.00	1.77	Peak

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 6995MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
13990.000	41.66	15.33	32.94	27.68	51.73	54.00	2.27	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
13990.000	41.66	15.33	32.94	28.94	52.99	54.00	1.01	Peak

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.92	51.32	54.00	2.68	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.30	50.71	54.00	3.29	Peak

Mode	802.11ax-HE40	U-NII Band	6
		Frequency	TX 6485MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.71	14.84	33.37	31.41	52.59	54.00	1.41	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12970.000	39.71	14.84	33.37	31.79	52.97	54.00	1.03	Peak

Mode	802.11ax-HE40	U-NII Band	7
		Frequency	TX 6525MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.90	14.89	33.28	30.25	51.77	54.00	2.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.90	14.89	33.28	30.88	52.40	54.00	1.60	Peak

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7085MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	41.80	15.52	33.13	27.86	52.06	54.00	1.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14170.000	41.80	15.52	33.13	28.07	52.27	54.00	1.73	Peak

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 6385MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12770.000	39.10	14.65	33.71	32.75	52.78	54.00	1.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12770.000	39.10	14.65	33.71	32.21	52.25	54.00	1.75	Peak

Mode	802.11ax-HE80	U-NII Band	6
		Frequency	TX 6465MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.59	14.80	33.44	31.54	52.50	54.00	1.50	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.59	14.80	33.44	31.10	52.06	54.00	1.94	Peak

Mode	802.11ax-HE80	U-NII Band	7
		Frequency	TX 6705MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13410.000	40.80	15.06	33.00	30.10	52.96	54.00	1.04	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13410.000	40.80	15.06	33.00	28.85	51.71	54.00	2.29	Peak

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 6945MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	41.28	15.28	32.94	28.46	52.08	54.00	1.92	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	41.28	15.28	32.94	28.48	52.10	54.00	1.90	Peak

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6185MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12370.000	38.90	14.25	34.30	33.69	52.54	54.00	1.46	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12370.000	38.90	14.25	34.30	32.39	51.24	54.00	2.76	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.82	14.87	33.31	31.39	52.77	54.00	1.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.82	14.87	33.31	30.85	52.23	54.00	1.77	Peak



Mode	802.11ax-HE160	U-NII Band	7
		Frequency	TX 6665MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.73	15.03	33.06	29.99	52.69	54.00	1.31	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.73	15.03	33.06	29.42	52.12	54.00	1.88	Peak

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.58	15.32	32.94	28.67	52.63	54.00	1.37	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.58	15.32	32.94	28.39	52.34	54.00	1.66	Peak

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.00	50.42	54.00	3.58	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.41	50.84	54.00	3.16	Peak

Mode	802.11ax-HE20	U-NII Band	6
		Frequency	TX 6435MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12870.000	39.38	14.74	33.54	32.48	53.06	54.00	0.94	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12870.000	39.38	14.74	33.54	31.65	52.23	54.00	1.77	Peak

Mode	802.11ax-HE20	U-NII Band	7
		Frequency	TX 6535MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	31.23	52.81	54.00	1.19	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	31.83	53.40	54.00	0.60	Peak

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 6875MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.05	15.22	32.94	28.29	51.62	54.00	2.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13750.000	41.05	15.22	32.94	29.81	53.14	54.00	0.86	Peak

Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	33.37	51.77	54.00	2.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.68	51.09	54.00	2.91	Peak

Mode	802.11ax-HE40	U-NII Band	6
		Frequency	TX 6445MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.46	14.76	33.51	32.60	53.31	54.00	0.69	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12890.000	39.46	14.76	33.51	32.02	52.74	54.00	1.26	Peak

Mode	802.11ax-HE40	U-NII Band	7
		Frequency	TX 6525MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.90	14.89	33.28	31.69	53.21	54.00	0.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13050.000	39.90	14.89	33.28	30.70	52.22	54.00	1.78	Peak

Mode	802.11ax-HE40	U-NII Band	8
		Frequency	TX 7005MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	41.71	15.34	32.95	28.83	52.94	54.00	1.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
14010.000	41.71	15.34	32.95	28.05	52.15	54.00	1.85	Peak

Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	32.54	50.89	54.00	3.11	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	32.49	50.85	54.00	3.15	Peak

Mode	802.11ax-HE80	U-NII Band	6
		Frequency	TX 6465MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.59	14.80	33.44	31.67	52.62	54.00	1.38	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12930.000	39.59	14.80	33.44	31.78	52.74	54.00	1.26	Peak

Mode	802.11ax-HE80	U-NII Band	7
		Frequency	TX 6705MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13410.000	40.80	15.06	33.00	30.04	52.90	54.00	1.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13410.000	40.80	15.06	33.00	29.68	52.54	54.00	1.46	Peak

Mode	802.11ax-HE80	U-NII Band	8
		Frequency	TX 6945MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	41.28	15.28	32.94	29.03	52.65	54.00	1.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13890.000	41.28	15.28	32.94	27.92	51.55	54.00	2.45	Peak

Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	33.66	51.98	54.00	2.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	32.86	51.18	54.00	2.82	Peak

Mode	802.11ax-HE160	U-NII Band	6
		Frequency	TX 6505MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.82	14.87	33.31	30.81	52.19	54.00	1.81	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13010.000	39.82	14.87	33.31	31.57	52.96	54.00	1.04	Peak



Mode	802.11ax-HE160	U-NII Band	7
		Frequency	TX 6665MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.73	15.03	33.06	29.81	52.51	54.00	1.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13330.000	40.73	15.03	33.06	29.55	52.25	54.00	1.75	Peak

Mode	802.11ax-HE160	U-NII Band	8
		Frequency	TX 6985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.58	15.32	32.94	28.64	52.60	54.00	1.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13970.000	41.58	15.32	32.94	28.23	52.19	54.00	1.81	Peak

● OFDMA Modulation

**Test SKU: SKU #1 (With INPAQ ANT)**

Tones	26T	RU Index	18
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	34.00	52.36	54.00	1.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	33.43	51.78	54.00	2.22	Peak

Tones	52T	RU Index	39
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.47	50.89	54.00	3.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	33.73	52.15	54.00	1.85	Peak

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	33.54	51.94	54.00	2.06	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.86	51.26	54.00	2.74	Peak

Tones	242T	RU Index	62
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	33.77	52.09	54.00	1.91	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	33.98	52.30	54.00	1.70	Peak

Tones	484T	RU Index	S66
Mode	802.11ax-HE160	U-NII Band	5
		Frequency	TX 6025MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	33.84	52.16	54.00	1.84	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12050.000	39.00	13.92	34.60	33.06	51.38	54.00	2.62	Peak

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 6385MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12770.000	39.10	14.65	33.71	32.65	52.69	54.00	1.31	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
12770.000	39.10	14.65	33.71	32.67	52.71	54.00	1.29	Peak

**Test SKU: SKU #1 (With LUXSHARE-ICT ANT)**

Tones	26T	RU Index	4
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	33.75	52.18	54.00	1.82	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.93	51.35	54.00	2.65	Peak

Tones	52T	RU Index	39
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	33.09	51.52	54.00	2.48	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	34.42	52.85	54.00	1.15	Peak

Tones	106T	RU Index	53
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.18	50.58	54.00	3.42	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.31	50.72	54.00	3.28	Peak

Tones	242T	RU Index	61
Mode	802.11ax-HE20	U-NII Band	5
		Frequency	TX 5955MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	33.71	52.14	54.00	1.86	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11910.000	39.28	13.77	34.63	32.35	50.78	54.00	3.22	Peak

Tones	484T	RU Index	65
Mode	802.11ax-HE40	U-NII Band	5
		Frequency	TX 5965MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	32.85	51.25	54.00	2.75	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11930.000	39.24	13.79	34.63	33.29	51.69	54.00	2.31	Peak

Tones	996T	RU Index	67
Mode	802.11ax-HE80	U-NII Band	5
		Frequency	TX 5985MHz

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	33.84	52.20	54.00	1.80	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
11970.000	39.16	13.84	34.64	32.82	51.17	54.00	2.83	Peak

**Spot Check with SKU #2 (with INAPQ ANT)**

Mode	802.11ax-HE20	U-NII Band	8
		Frequency	TX 6995MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13990.000	41.66	15.33	32.94	28.29	52.33	54.00	1.67	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13990.000	41.66	15.33	32.94	28.39	52.44	54.00	1.56	Peak

**Spot Check with SKU #2 (with LUXSHARE-ICT ANT)**

Mode	802.11ax-HE20	U-NII Band	7
		Frequency	TX 6535MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	31.42	53.00	54.00	1.00	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
13070.000	39.94	14.90	33.26	30.80	52.38	54.00	1.62	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.