



Annex for BT

Test Report No.: CTL2403217071-WF

TABLE OF CONTENTS

1. Bandwidth.....	3
1.1 OBW.....	3
1.1.1 Test Result	3
1.1.2 Test Graph.....	4
1.2 20dB BW	9
1.2.1 Test Result	9
1.2.2 Test Graph.....	10
2. Maximum Conducted Output Power	15
2.1 Power	15
2.1.1 Test Result	15
2.1.2 Test Graph.....	16
3. Carrier Frequency Separation.....	21
3.1 Ant1	21
3.1.1 Test Result	21
3.1.2 Test Graph.....	22
4. Number of Hopping Frequencies	24
4.1 HoppNum	24
4.1.1 Test Result	24
4.1.2 Test Graph.....	25
5. Time of Occupancy (Dwell Time).....	27

FCCID: Q8W-T9-2

5.1 Ant1 27

 5.1.1 Test Result 27

 5.1.2 Test Graph..... 28

6. Unwanted Emissions In Non-restricted Frequency Bands..... 37

 6.1 Ref..... 37

 6.1.1 Test Result 37

 6.1.2 Test Graph..... 38

 6.2 CSE 43

 6.2.1 Test Result 43

 6.2.2 Test Graph..... 44

FCCID: Q8W-T9-2

1. Bandwidth


1.1 OBW

1.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.848	/	Pass
		2441	DH5	1	0.848	/	Pass
		2480	DH5	1	0.847	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.162	/	Pass
		2441	2DH5	1	1.161	/	Pass
		2480	2DH5	1	1.161	/	Pass
8DPSK	SISO	2402	3DH5	1	1.160	/	Pass
		2441	3DH5	1	1.158	/	Pass
		2480	3DH5	1	1.157	/	Pass

FCCID: Q8W-T9-2



1.1.2 Test Graph


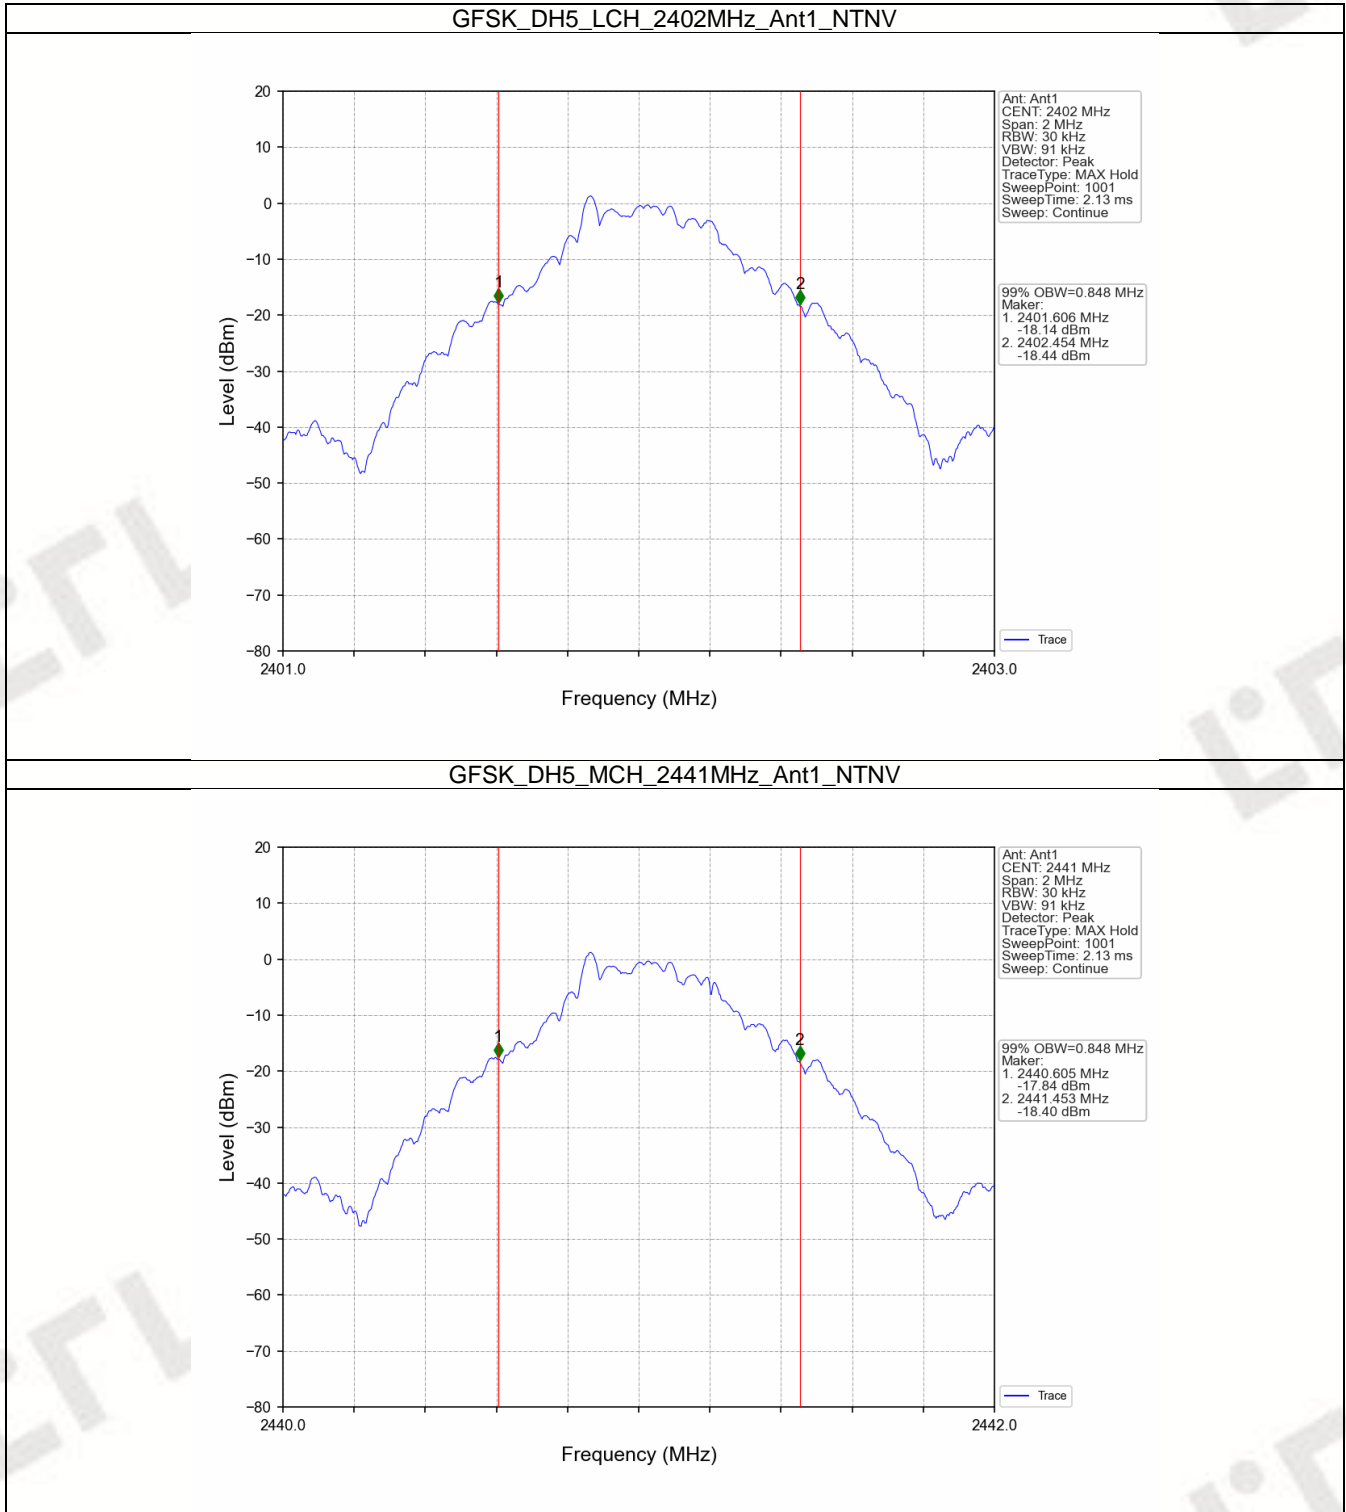


FCCID: Q8W-T9-2

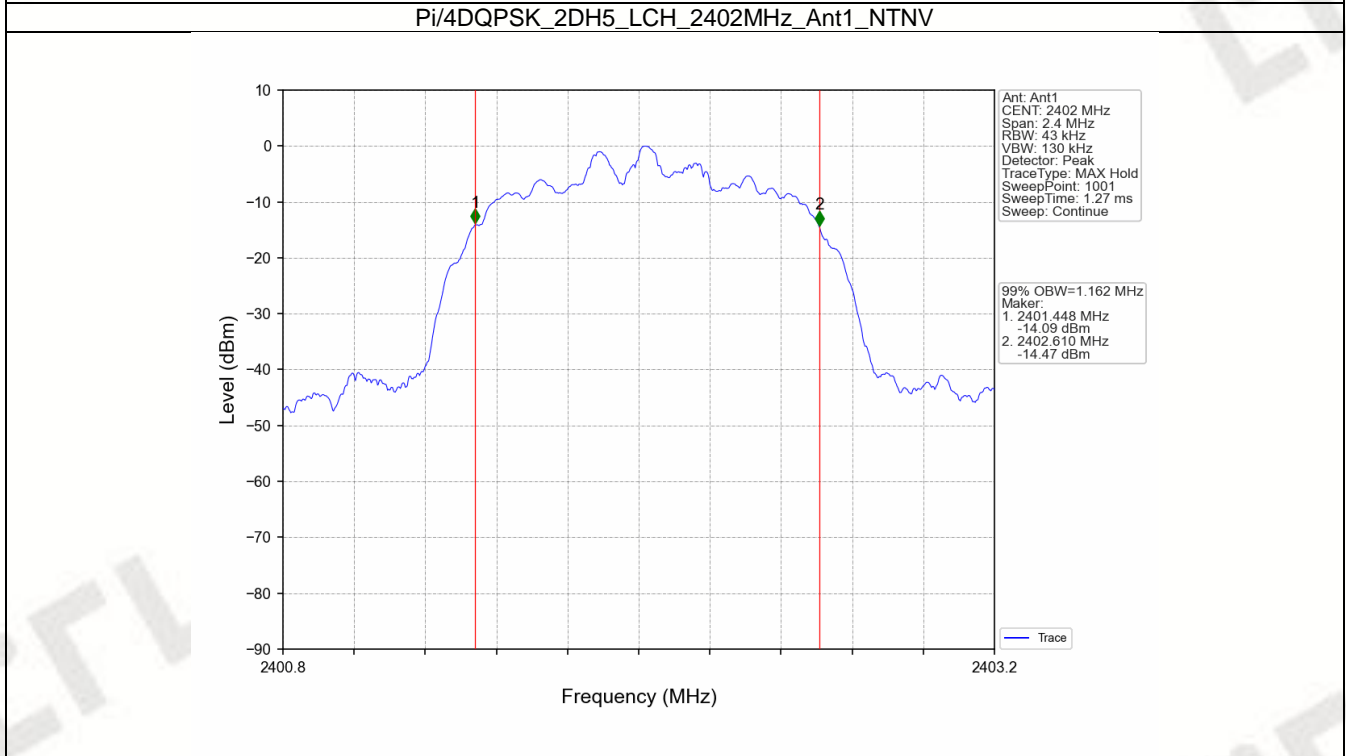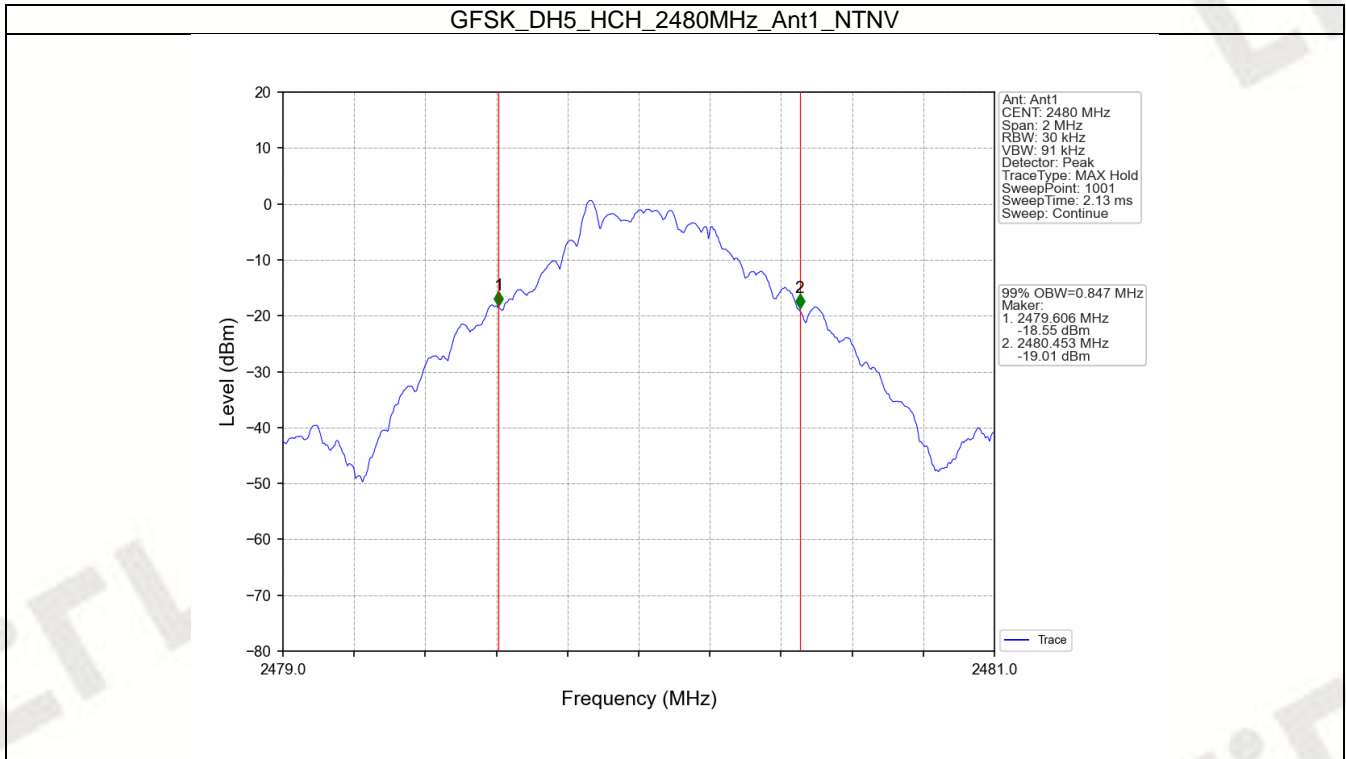


FCCID: Q8W-T9-2

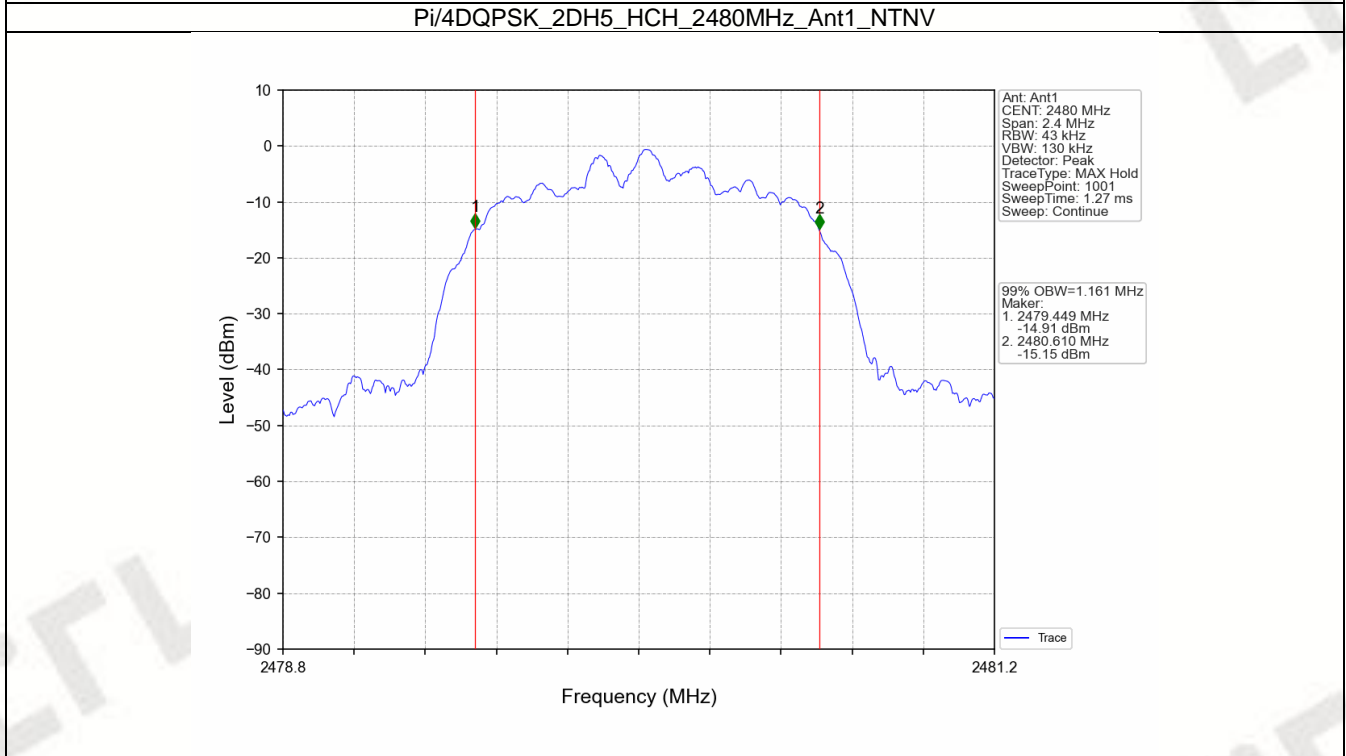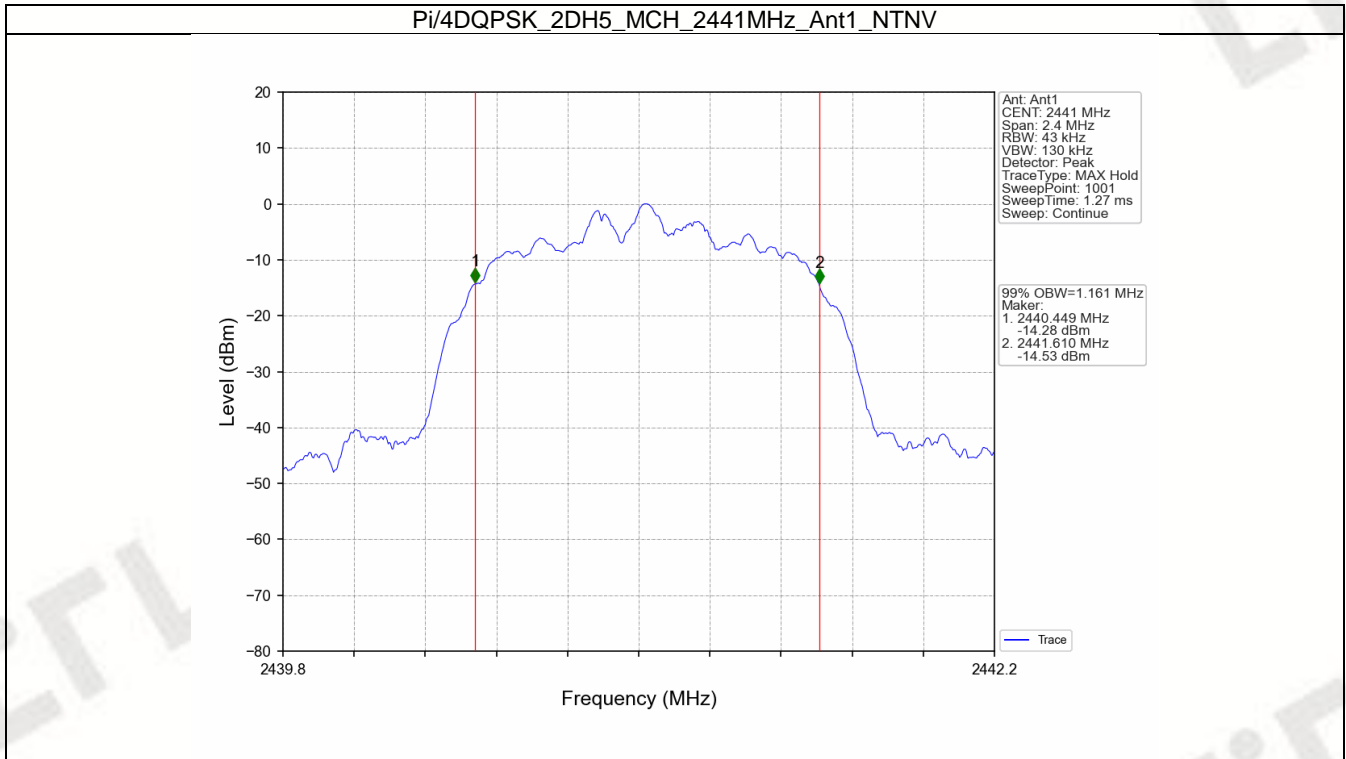

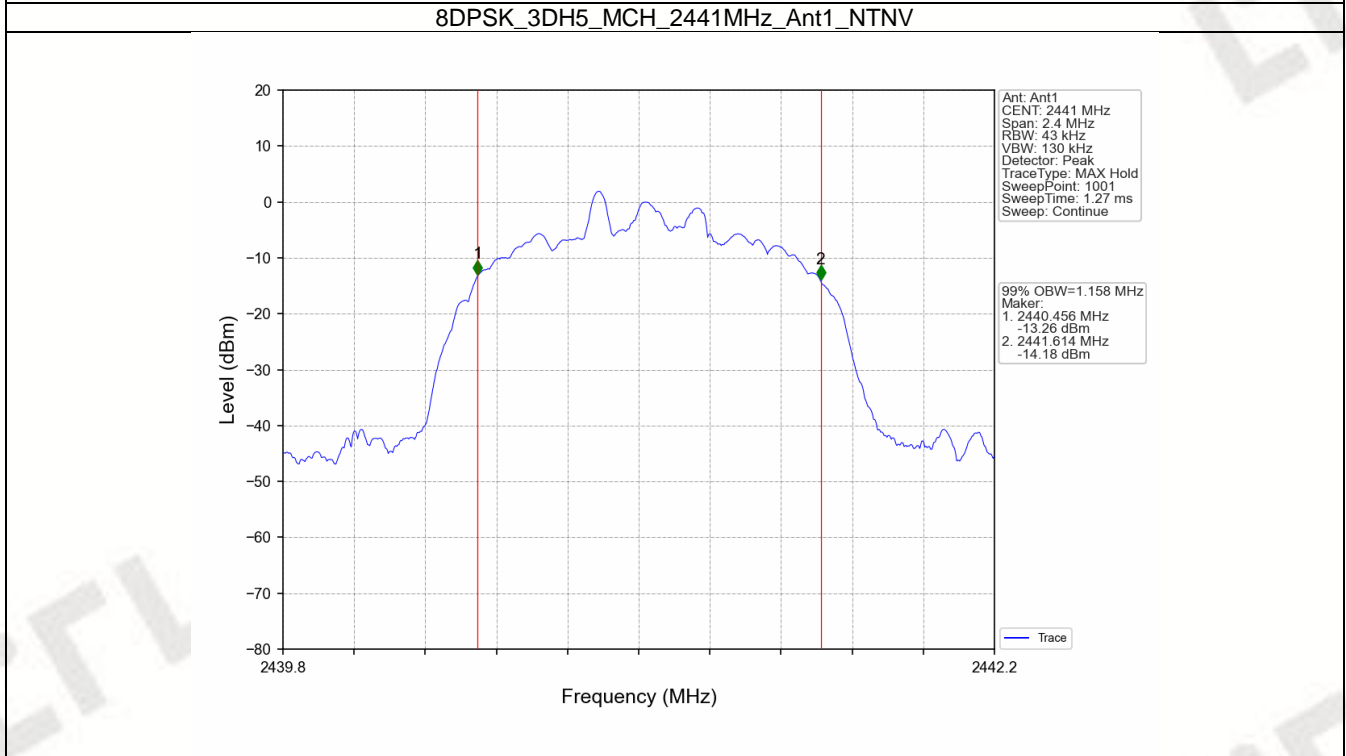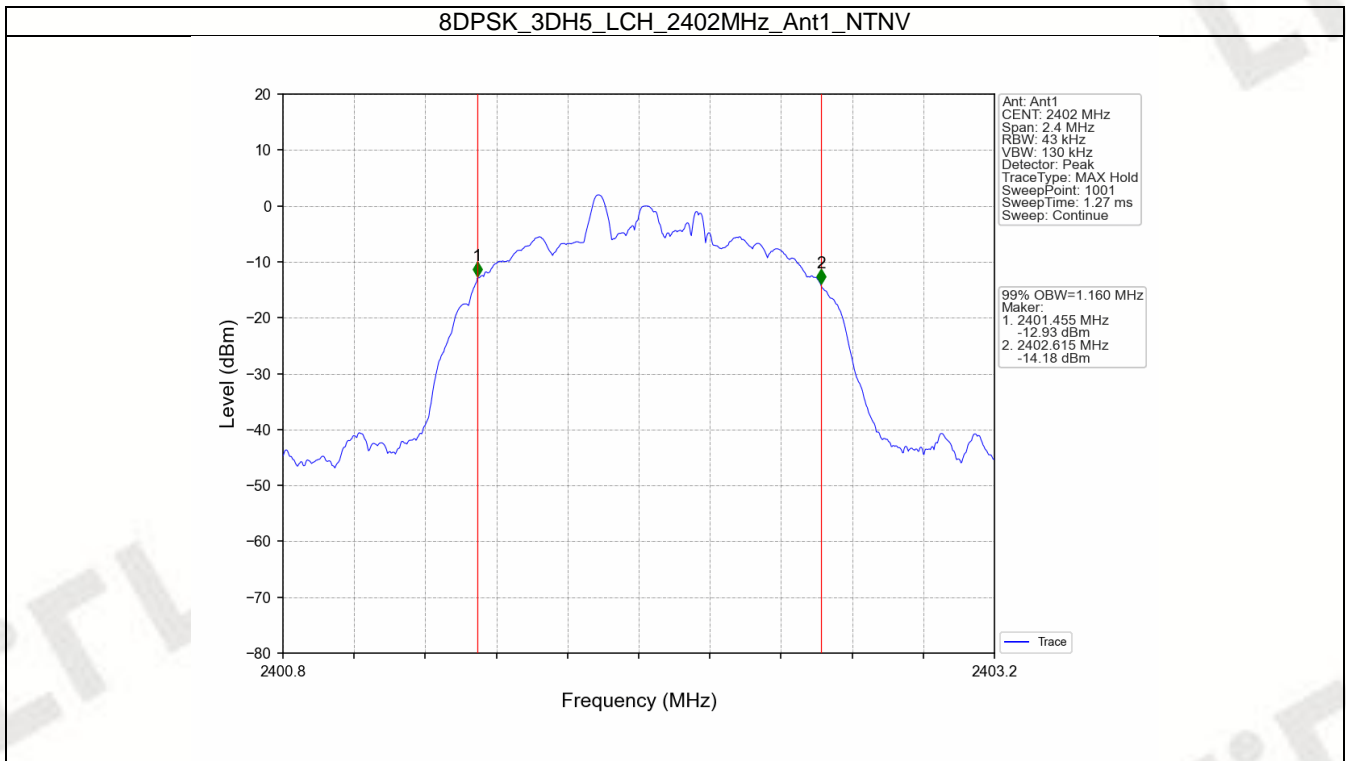

FCCID: Q8W-T9-2

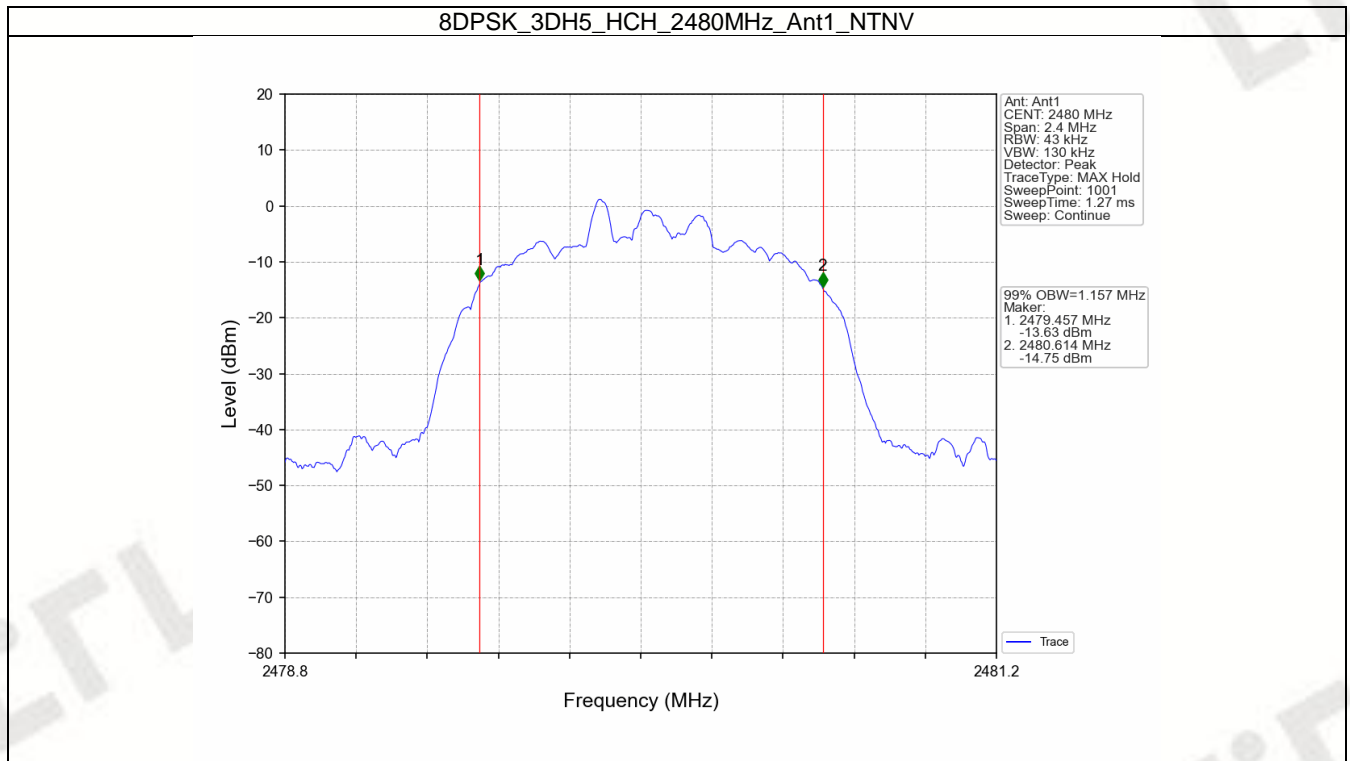


FCCID: Q8W-T9-2



1.2 20dB BW**1.2.1 Test Result**



Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.941	/	Pass
		2441	DH5	1	0.940	/	Pass
		2480	DH5	1	0.940	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.287	/	Pass
		2441	2DH5	1	1.289	/	Pass
		2480	2DH5	1	1.290	/	Pass
8DPSK	SISO	2402	3DH5	1	1.274	/	Pass
		2441	3DH5	1	1.276	/	Pass
		2480	3DH5	1	1.284	/	Pass

FCCID: Q8W-T9-2



1.2.2 Test Graph

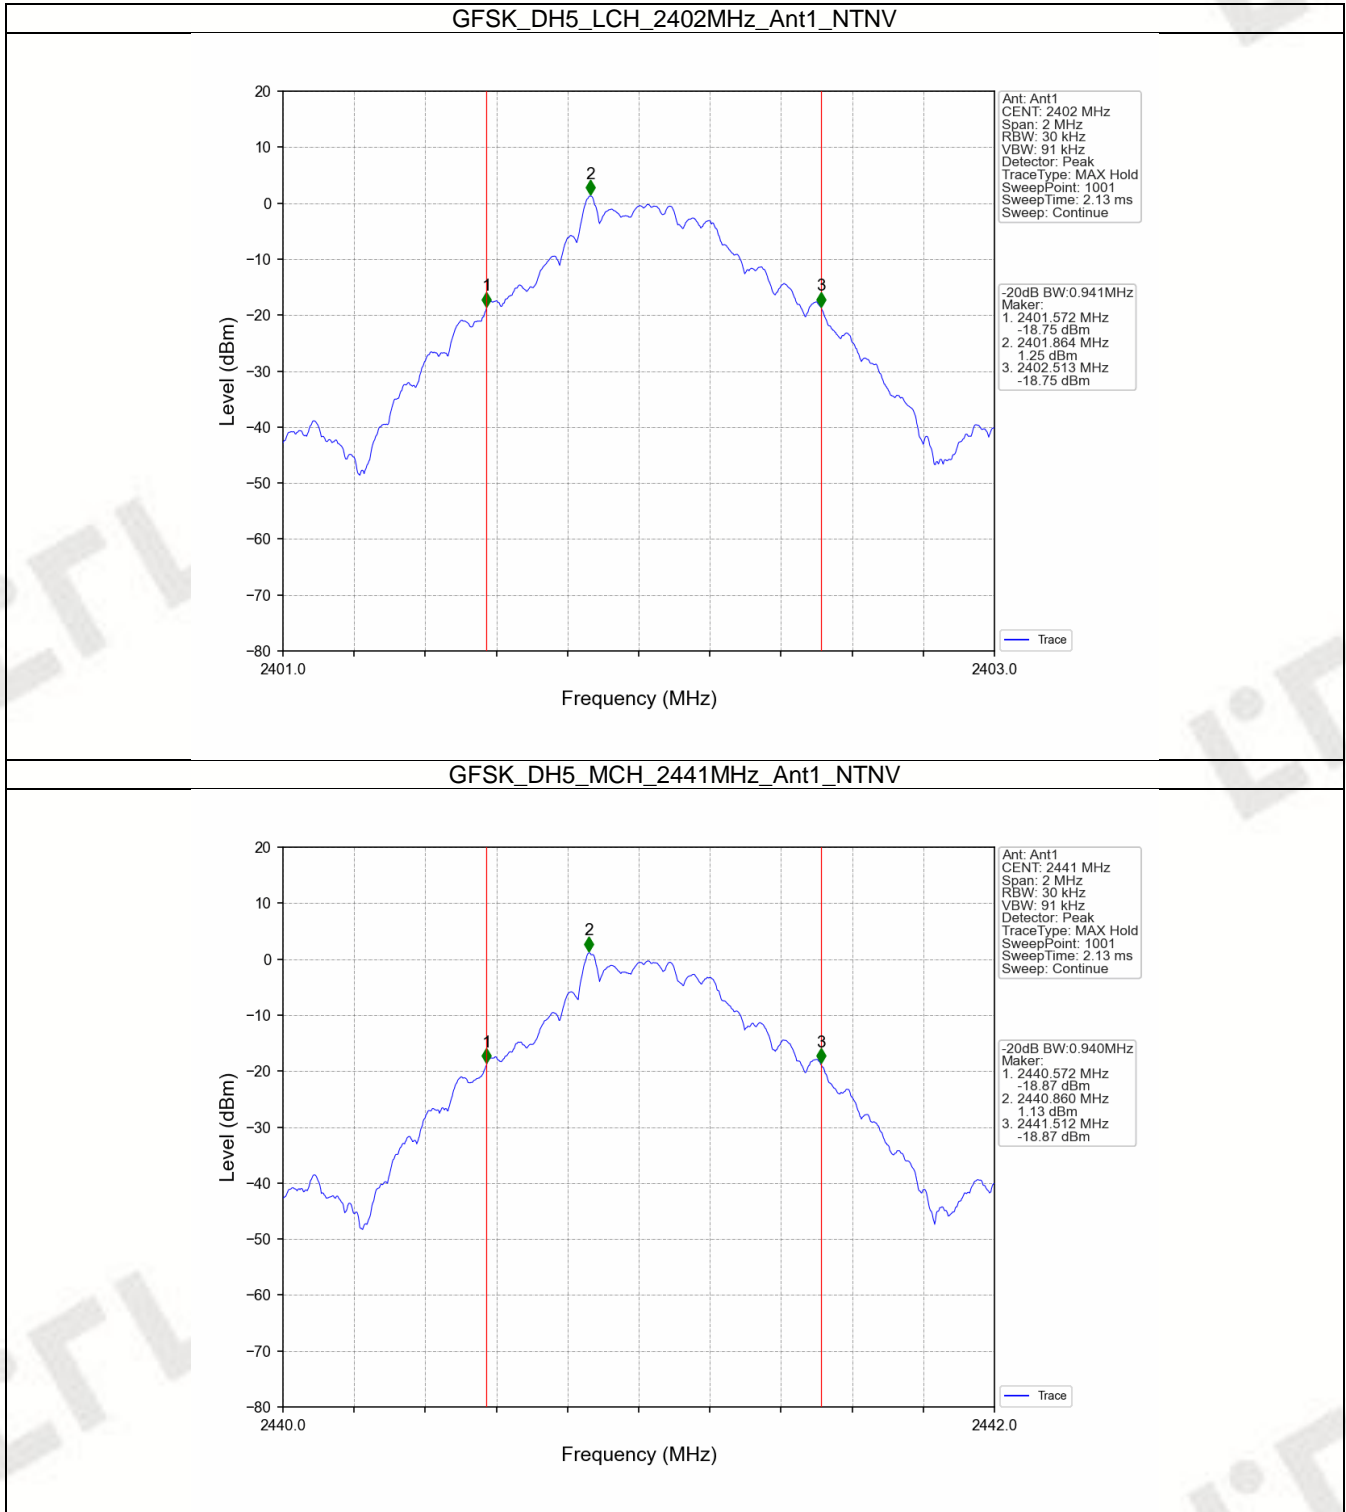

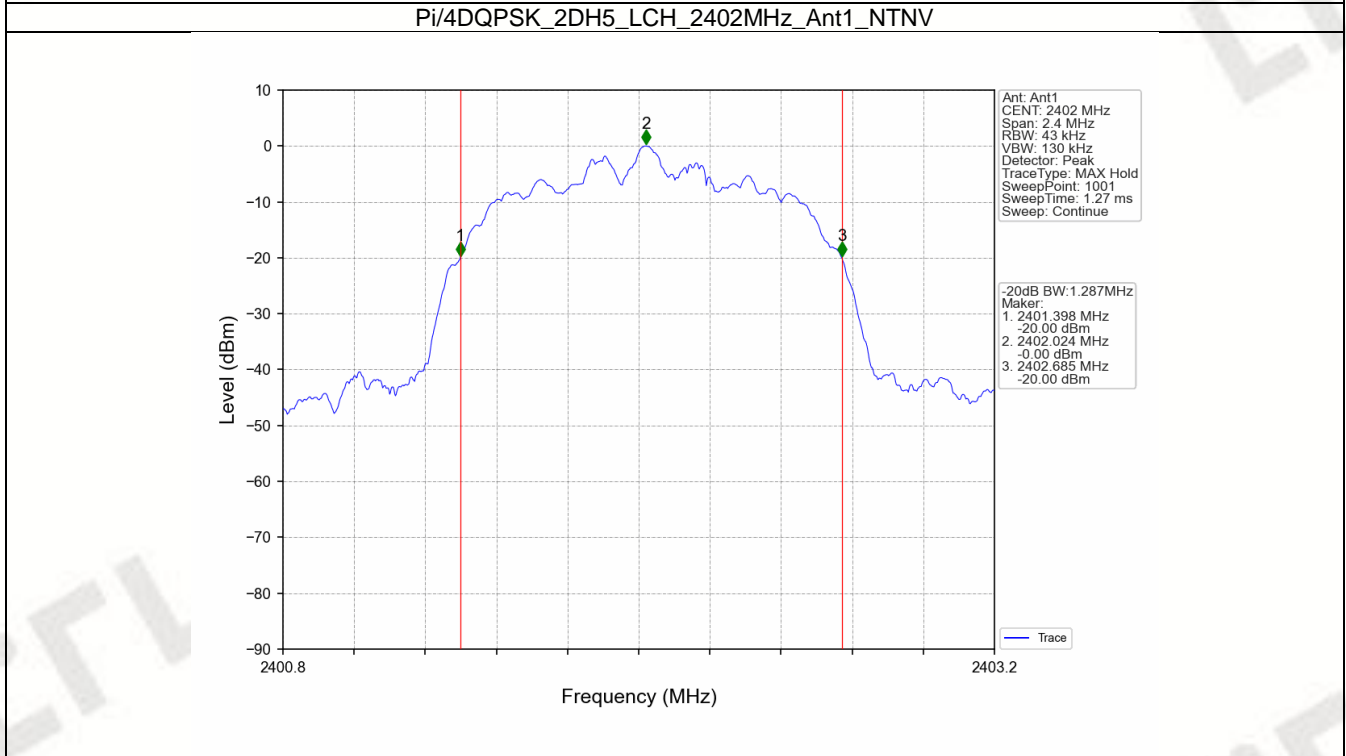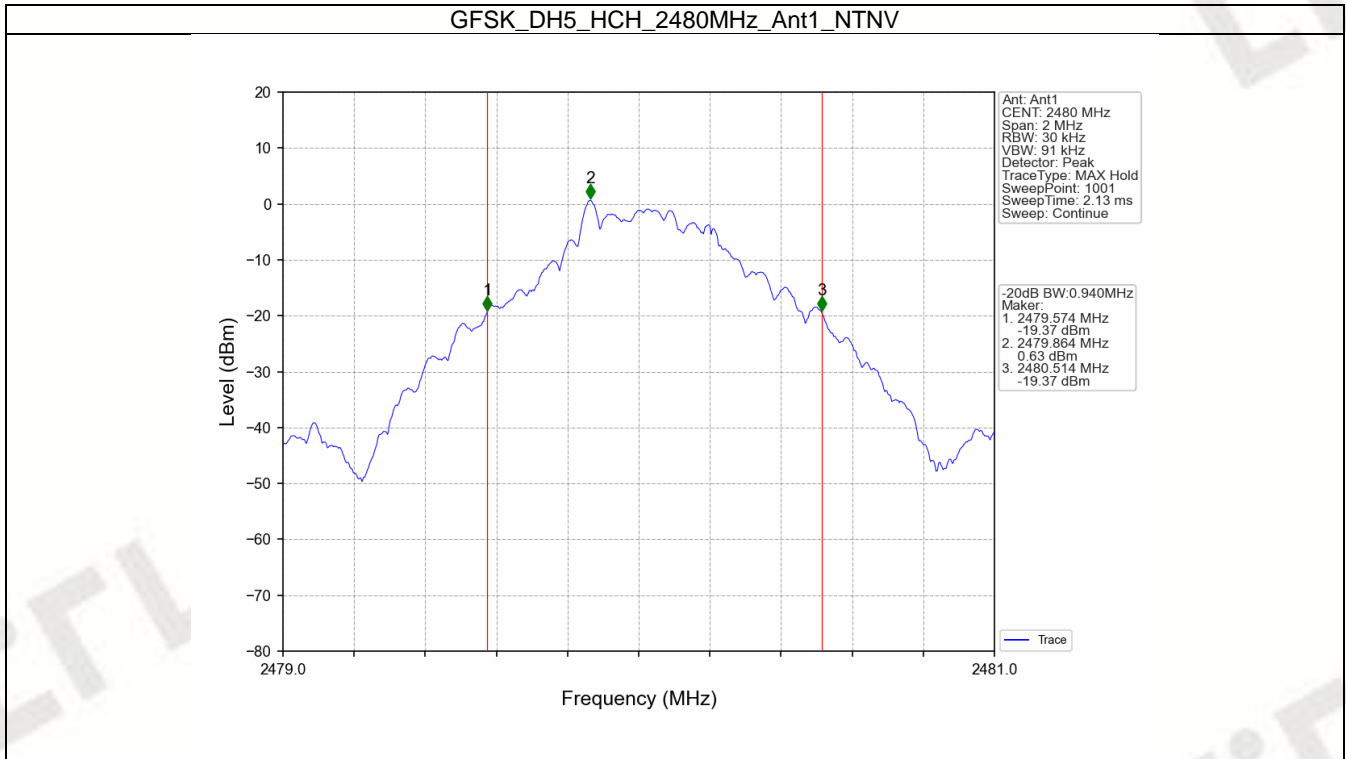


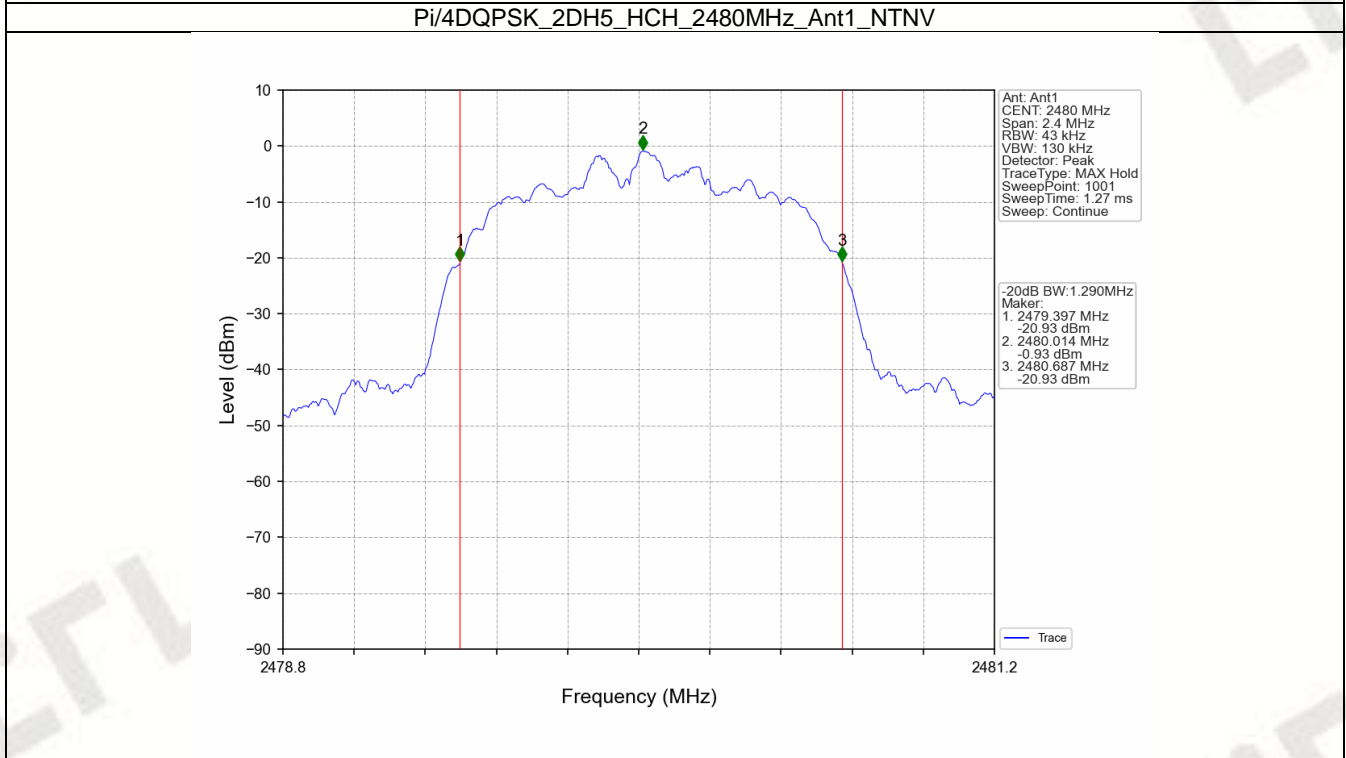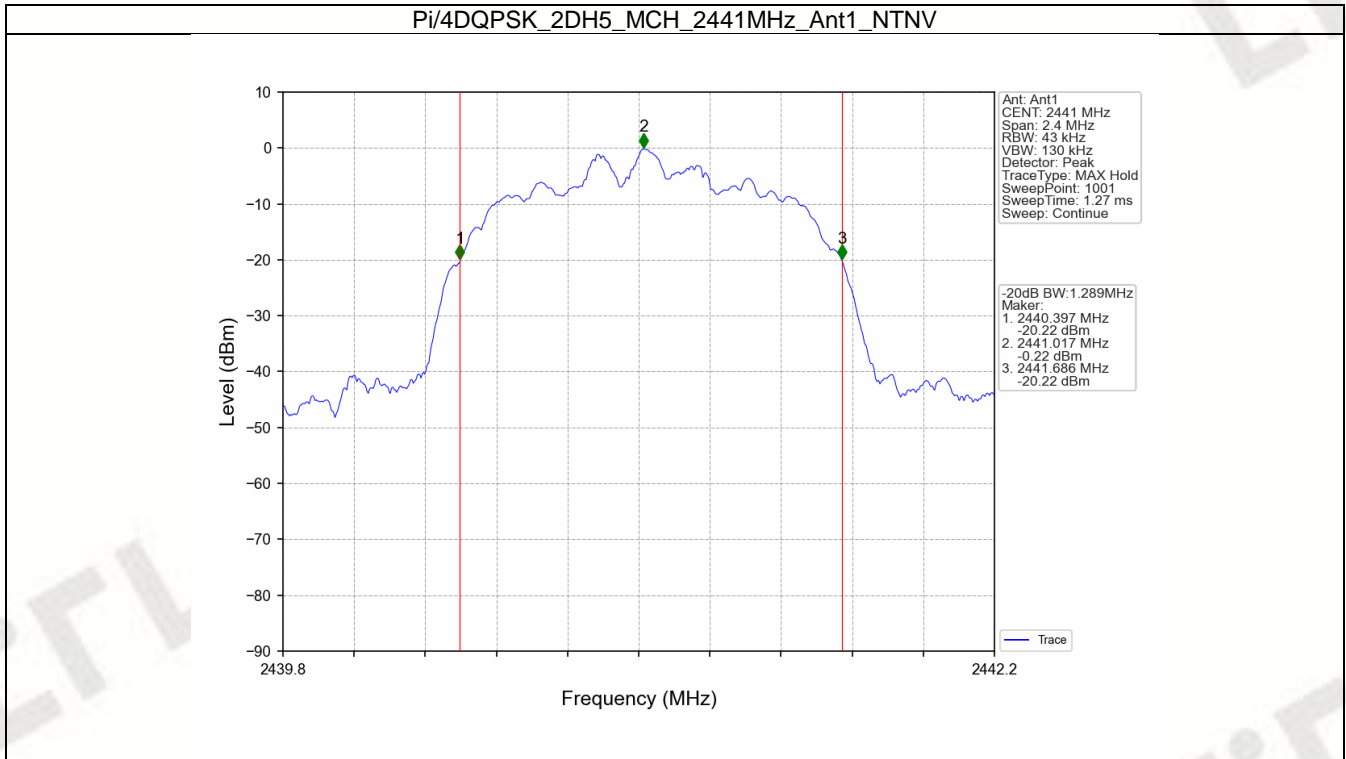

FCCID: Q8W-T9-2

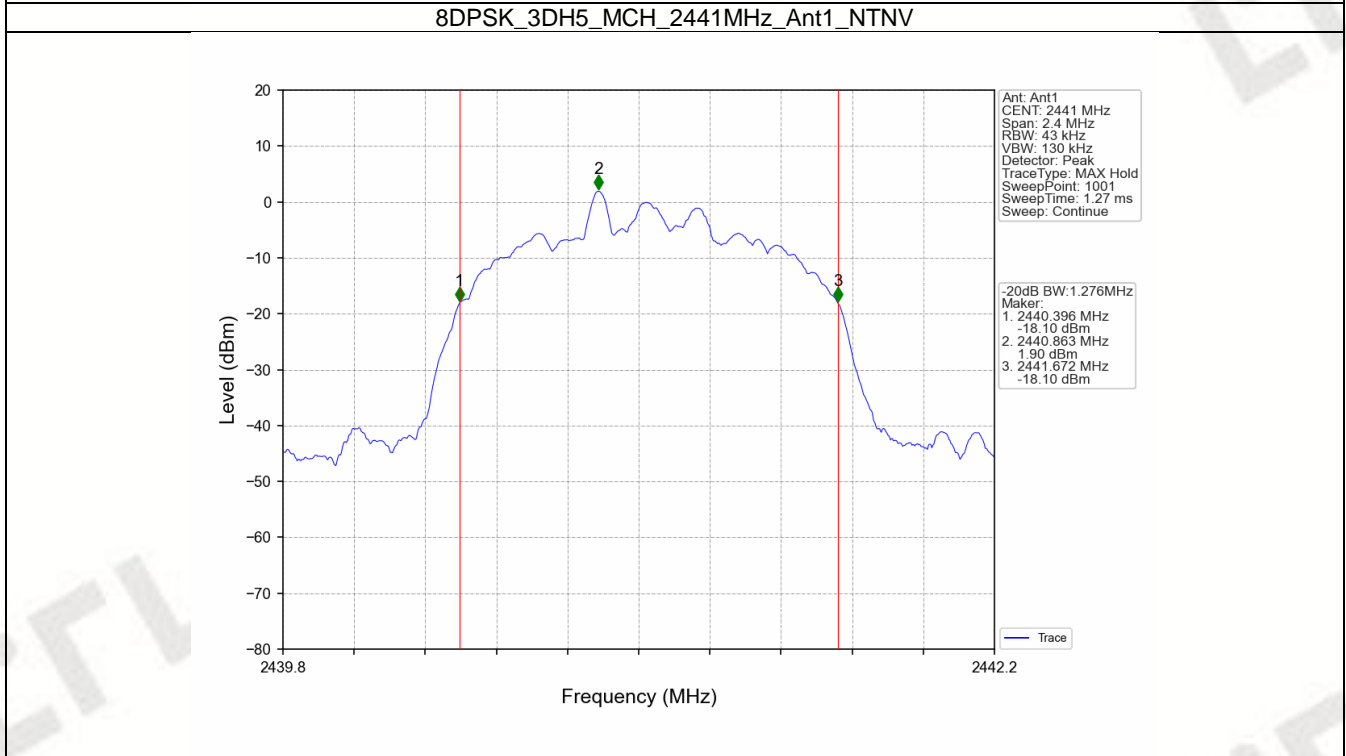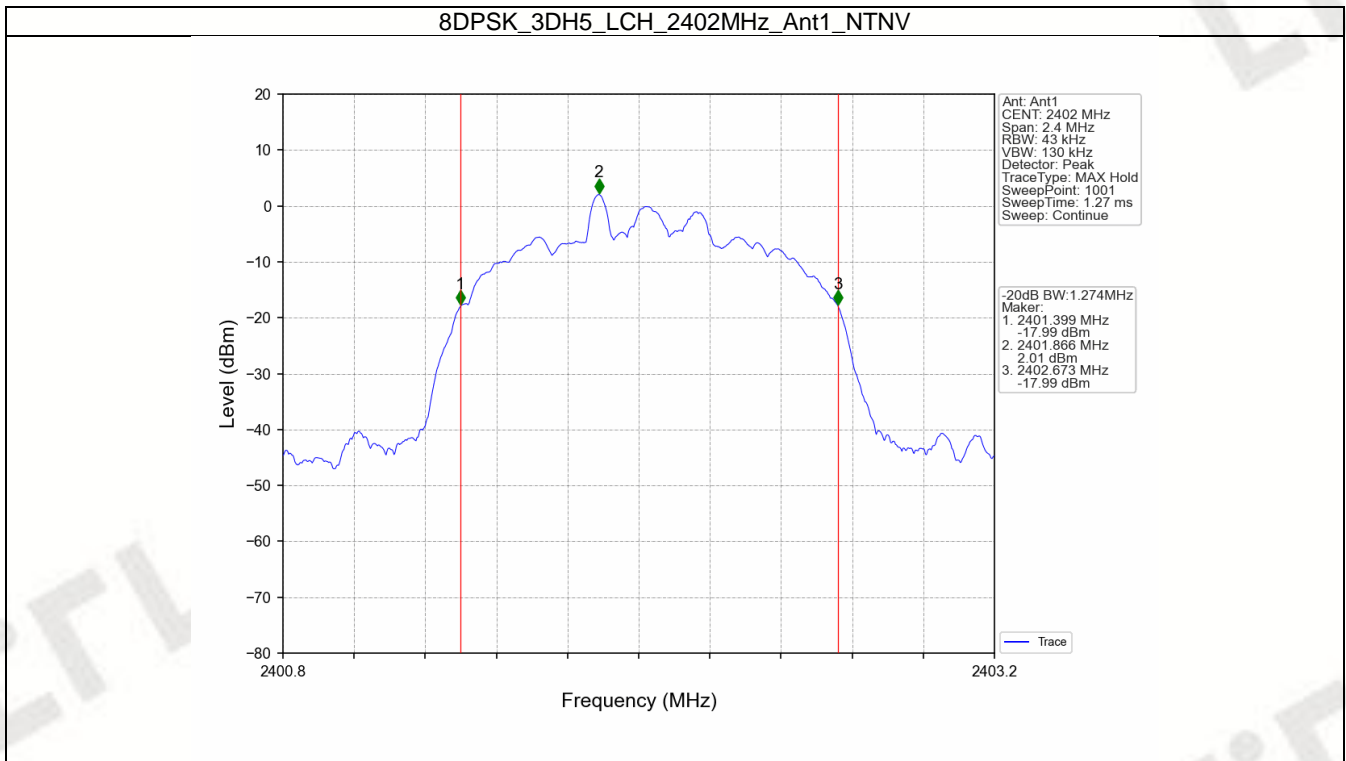

FCCID: Q8W-T9-2

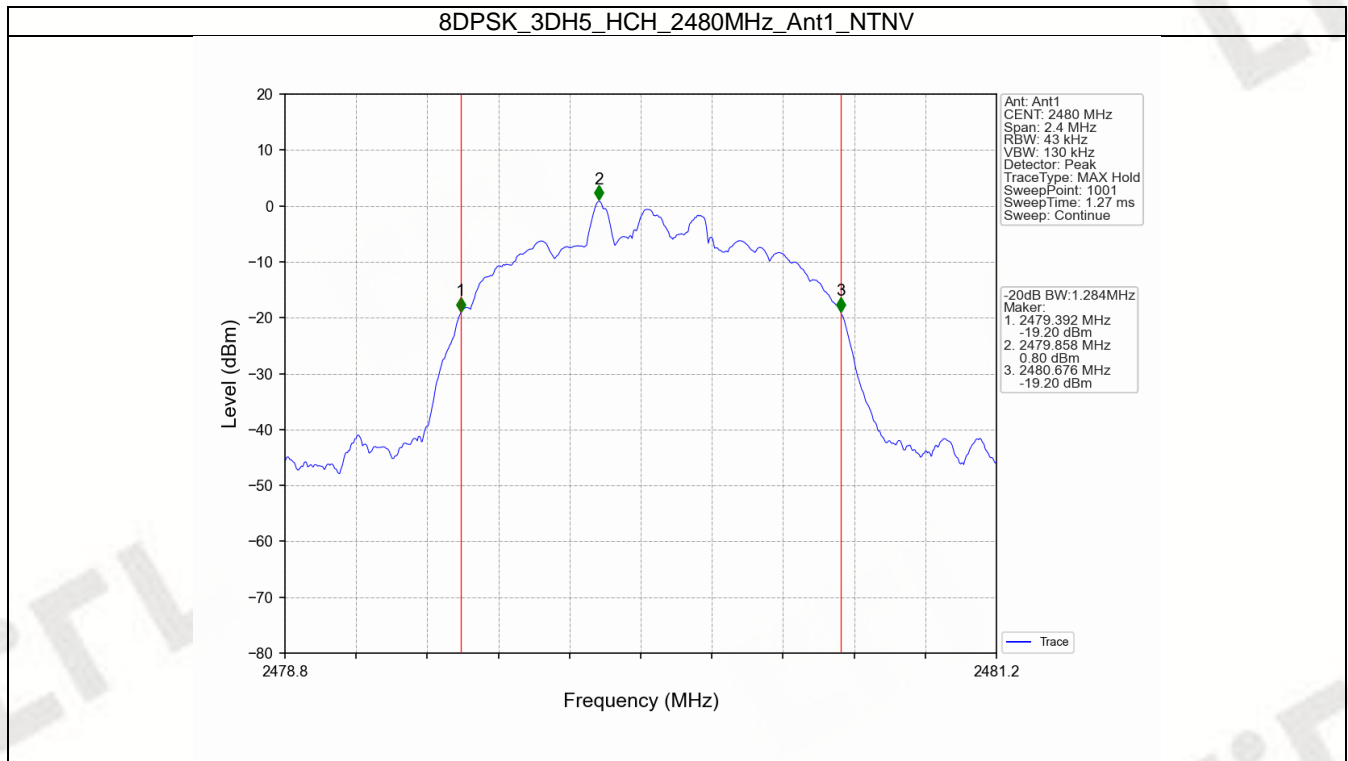

FCCID: Q8W-T9-2

2. Maximum Conducted Output Power

2.1 Power



2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	2.28	<=30	Pass
		2441	DH5	2.19	<=30	Pass
		2480	DH5	1.62	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	2.28	<=20.97	Pass
		2441	2DH5	2.20	<=20.97	Pass
		2480	2DH5	1.62	<=20.97	Pass
8DPSK	SISO	2402	3DH5	2.52	<=20.97	Pass
		2441	3DH5	2.43	<=20.97	Pass
		2480	3DH5	1.86	<=20.97	Pass



Note1: Antenna Gain: Ant1: 0.00dBi;



FCCID: Q8W-T9-2

2.1.2 Test Graph

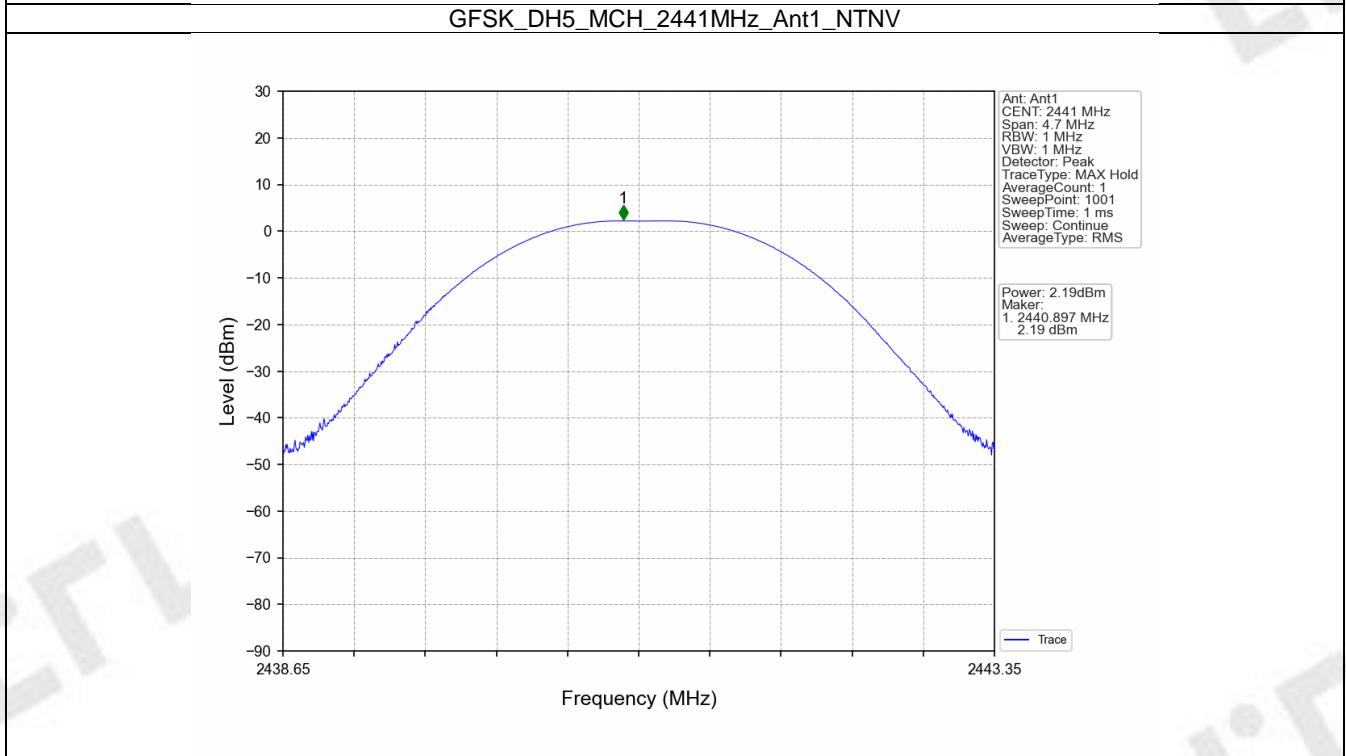
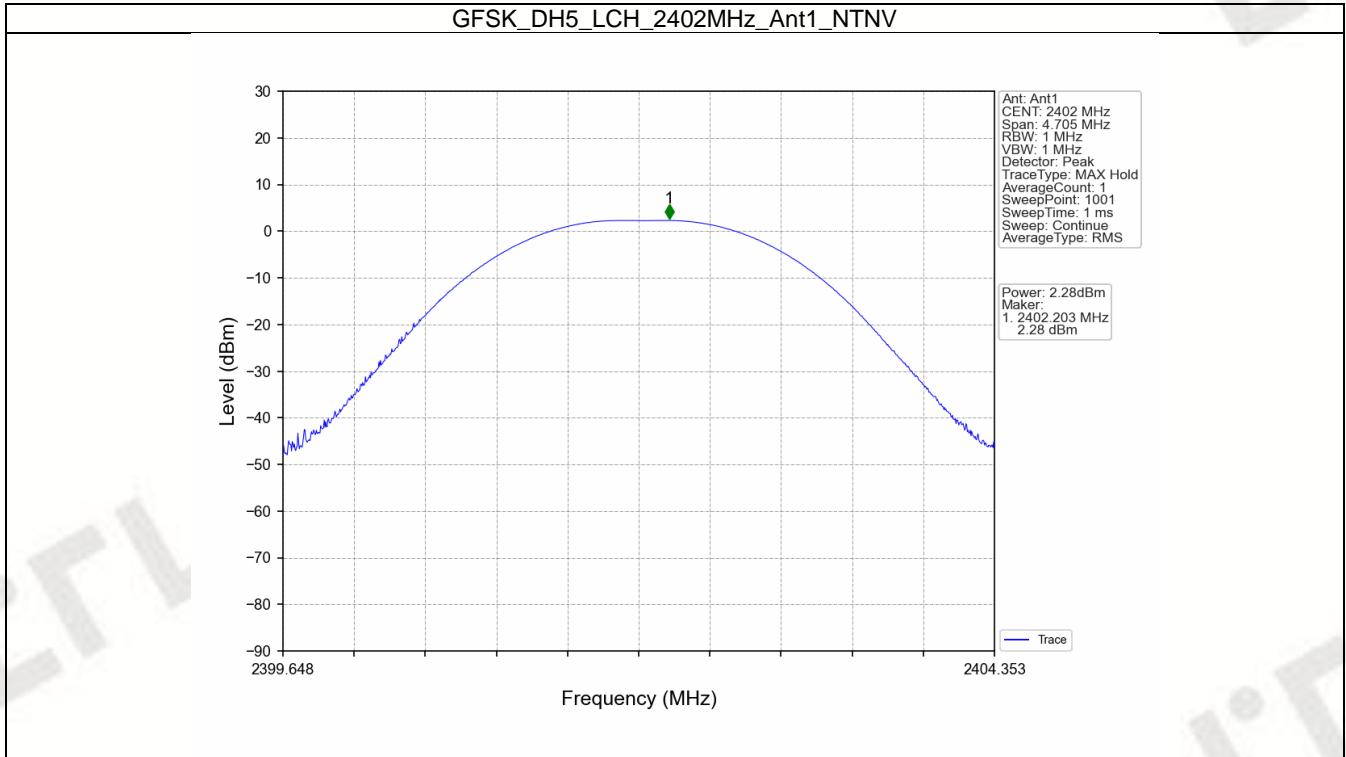


FCCID: Q8W-T9-2

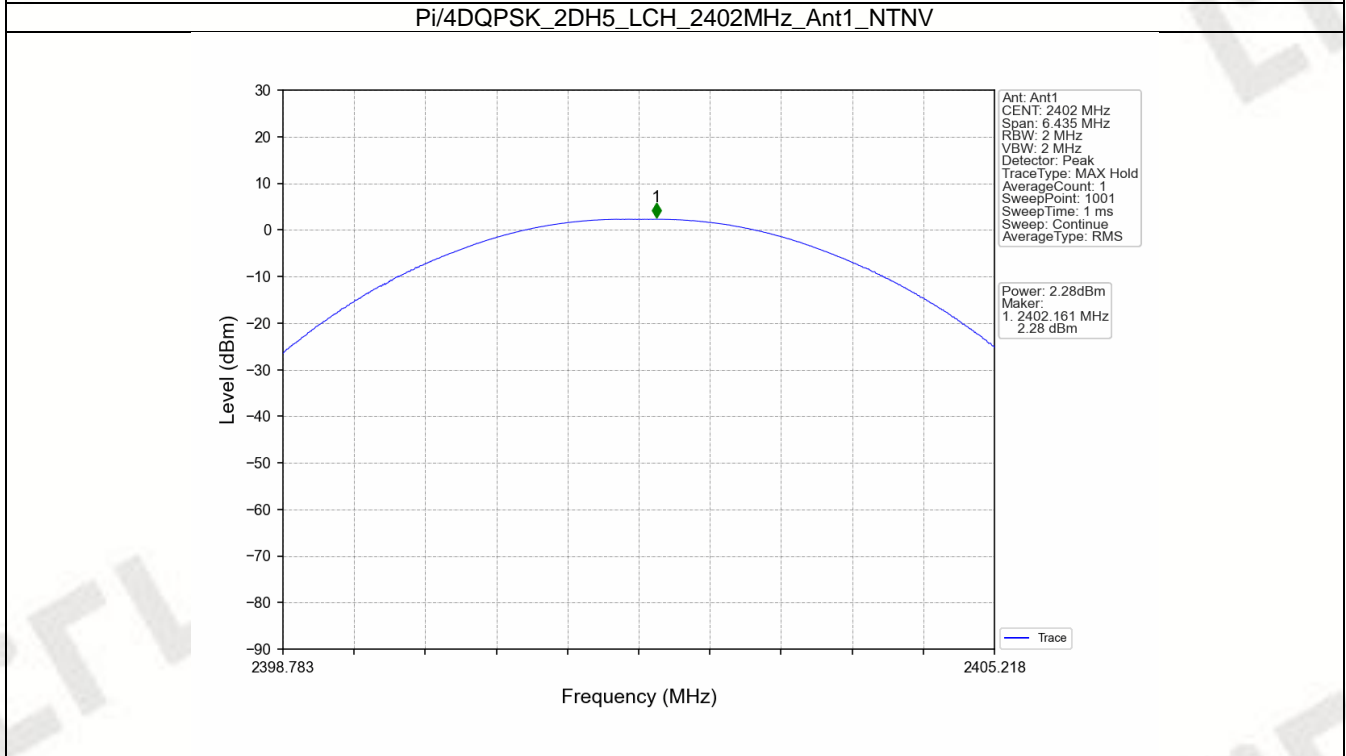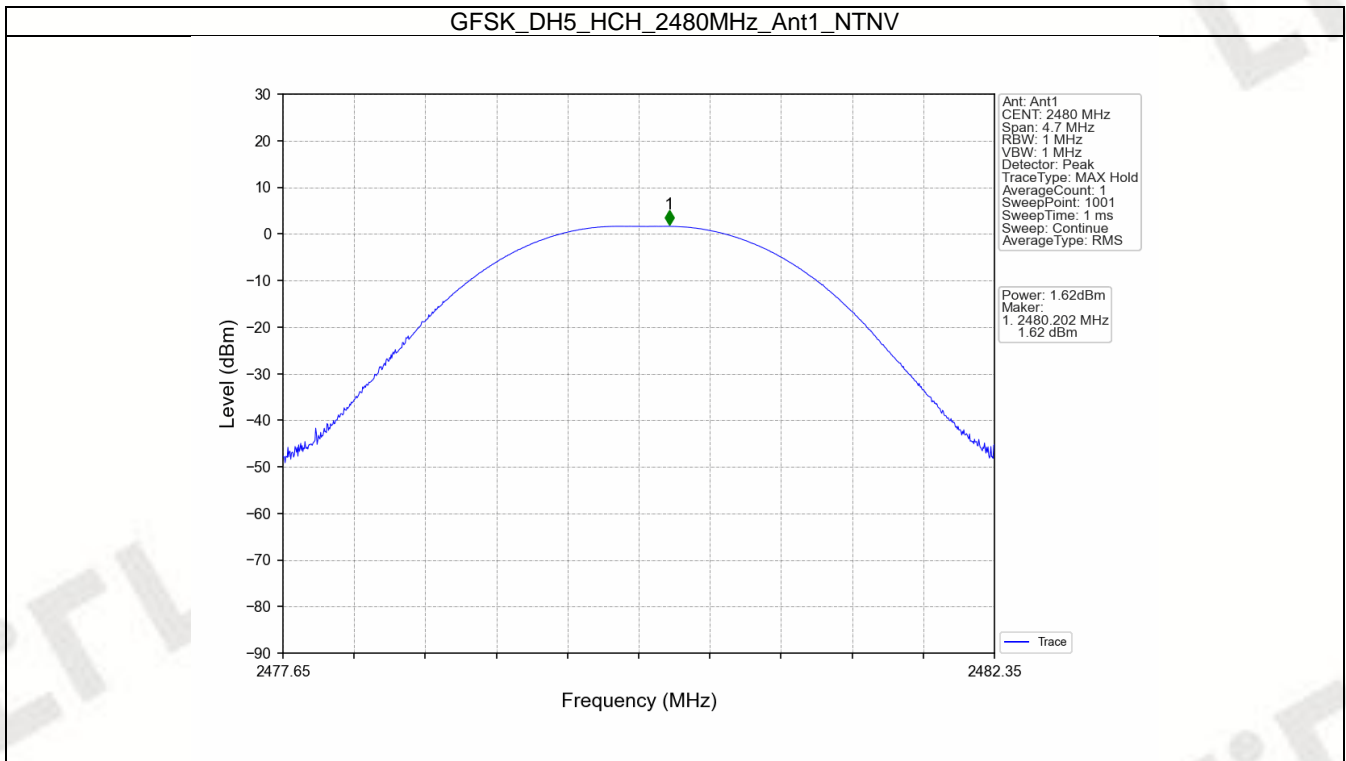


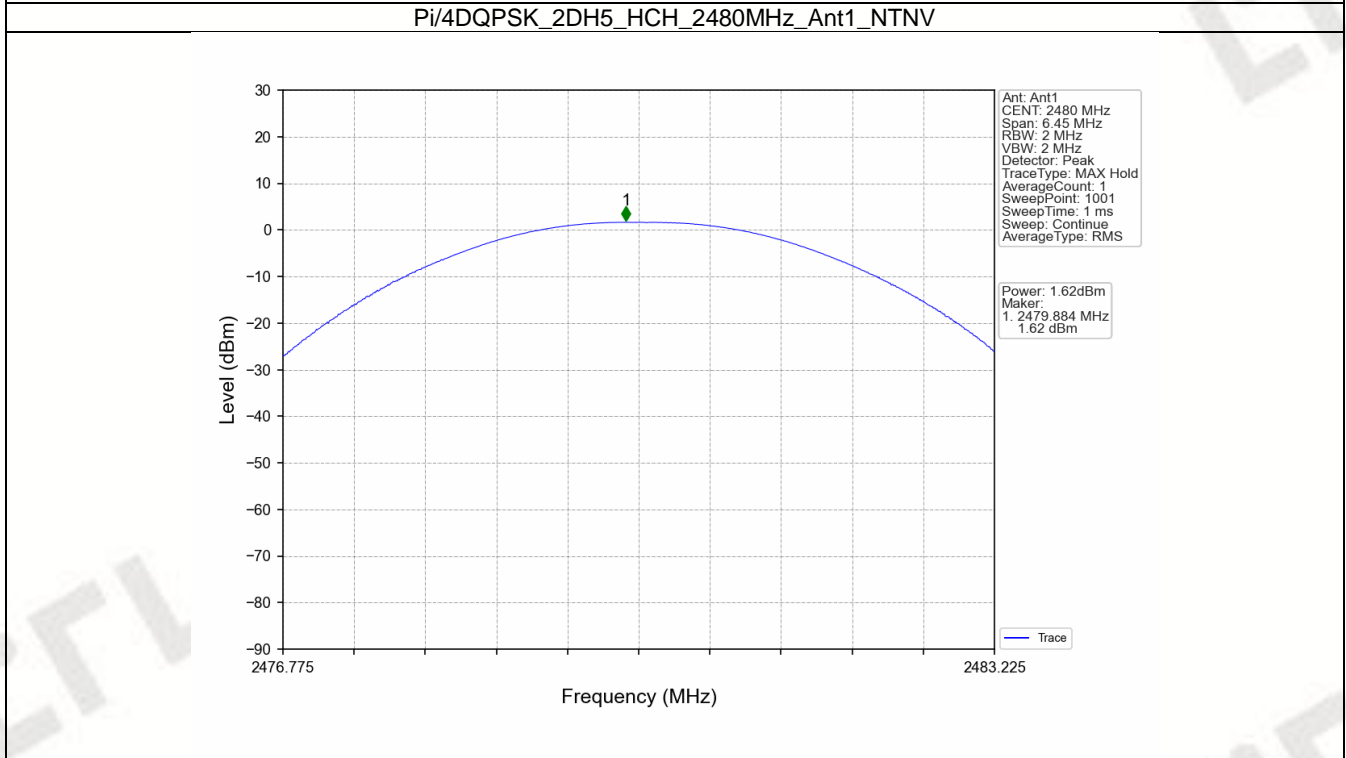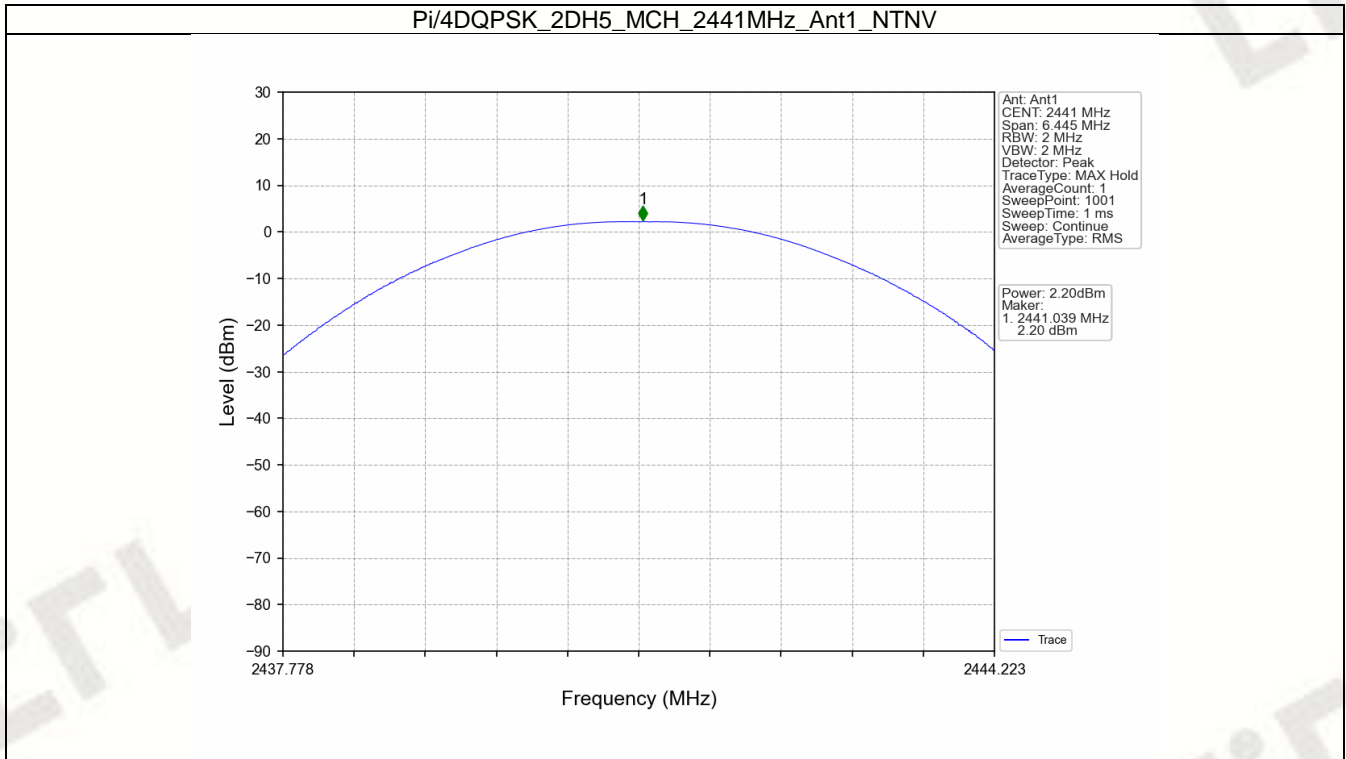

FCCID: Q8W-T9-2

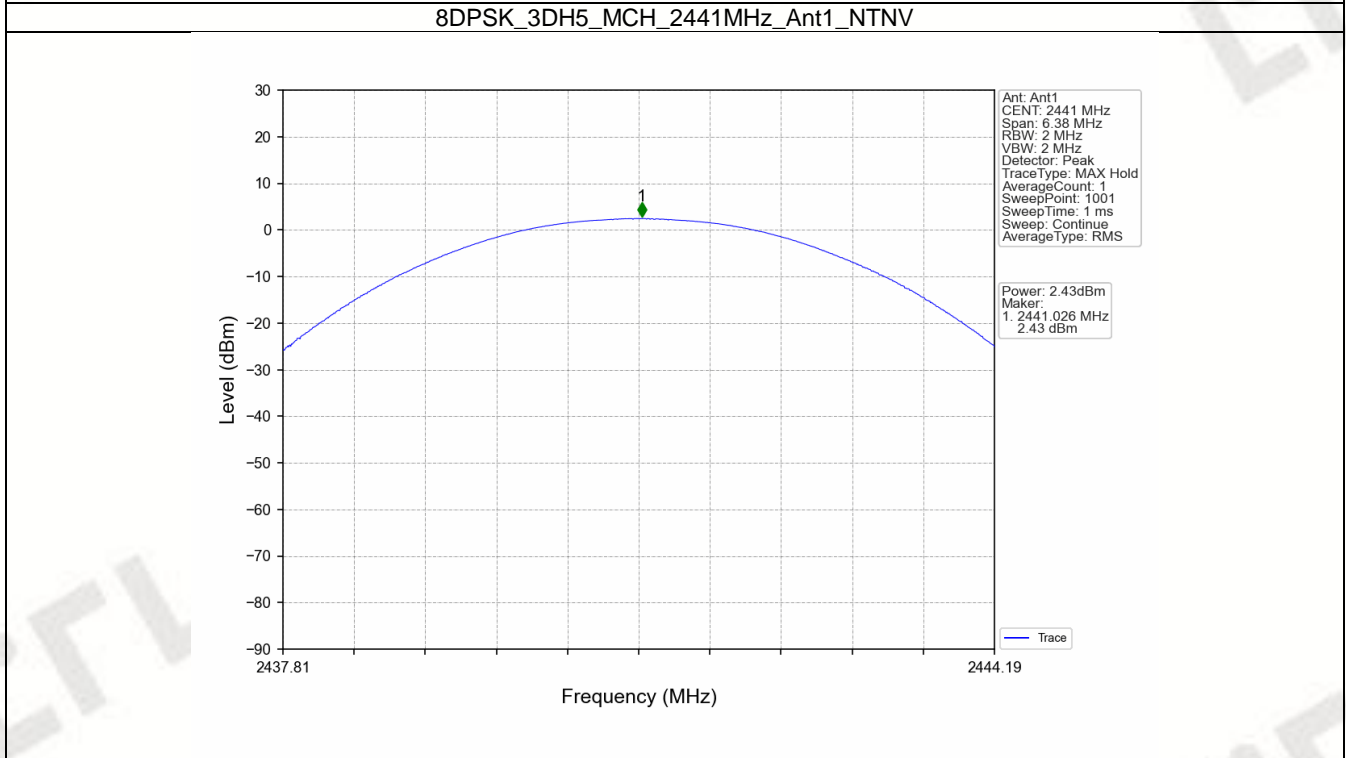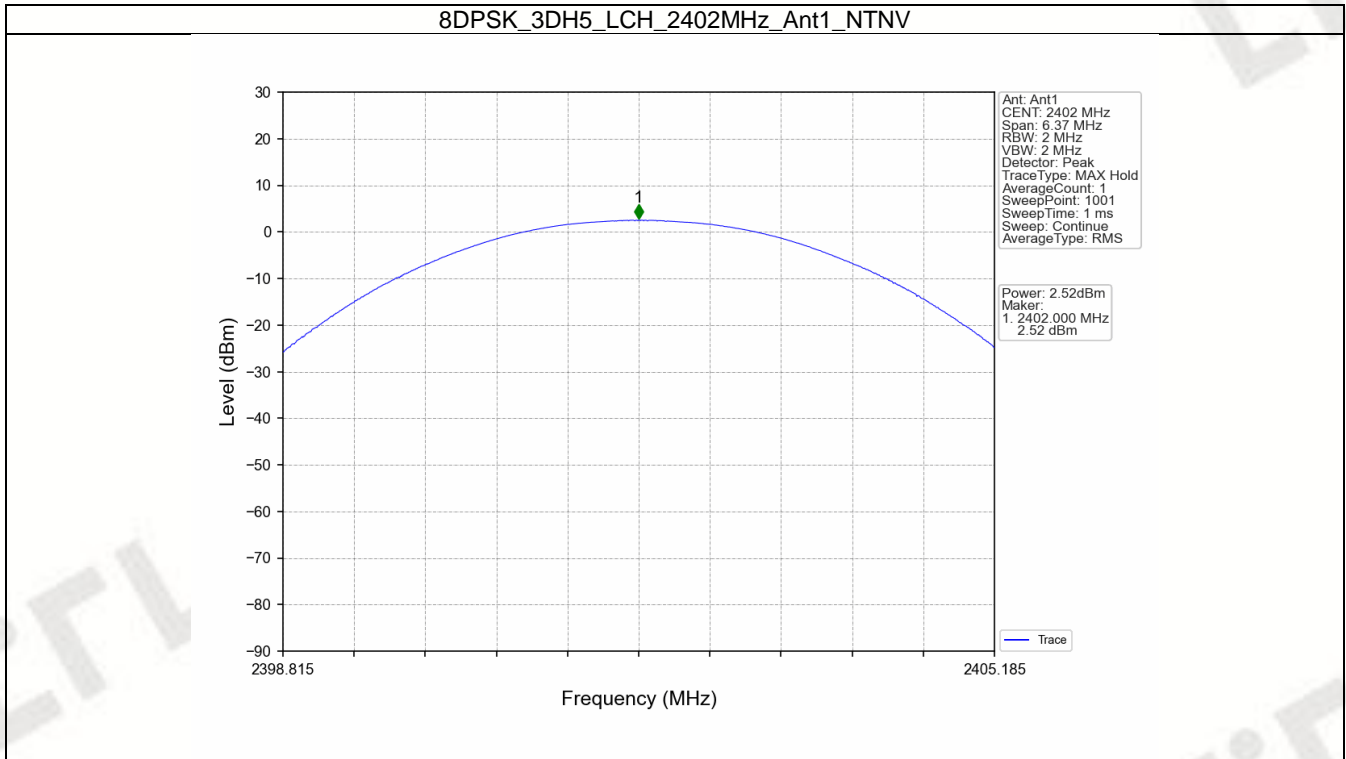

FCCID: Q8W-T9-2

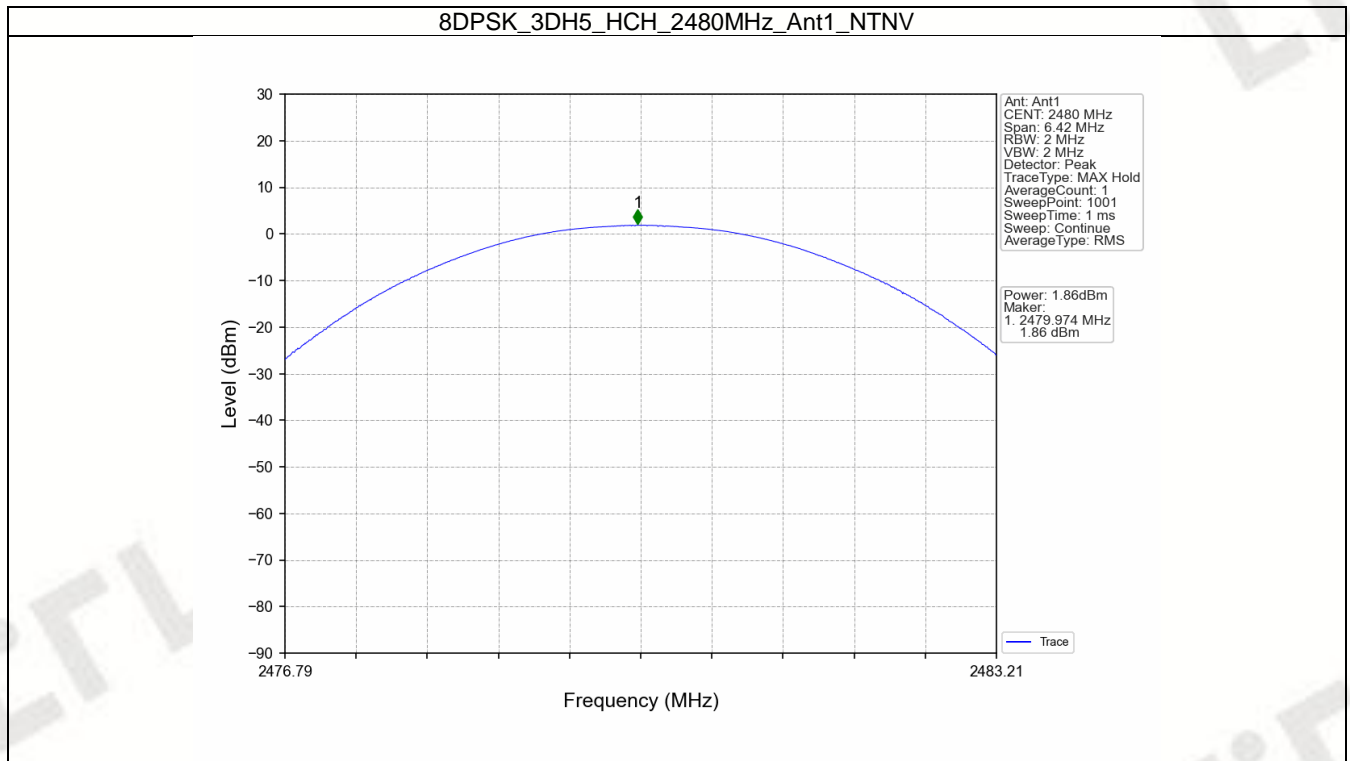

FCCID: Q8W-T9-2

3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	0.941	≥ 0.941	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.290	≥ 0.86	Pass
8DPSK	SISO	HOPP	3DH5	1.022	1.284	≥ 0.856	Pass

FCCID: Q8W-T9-2

3.1.2 Test Graph

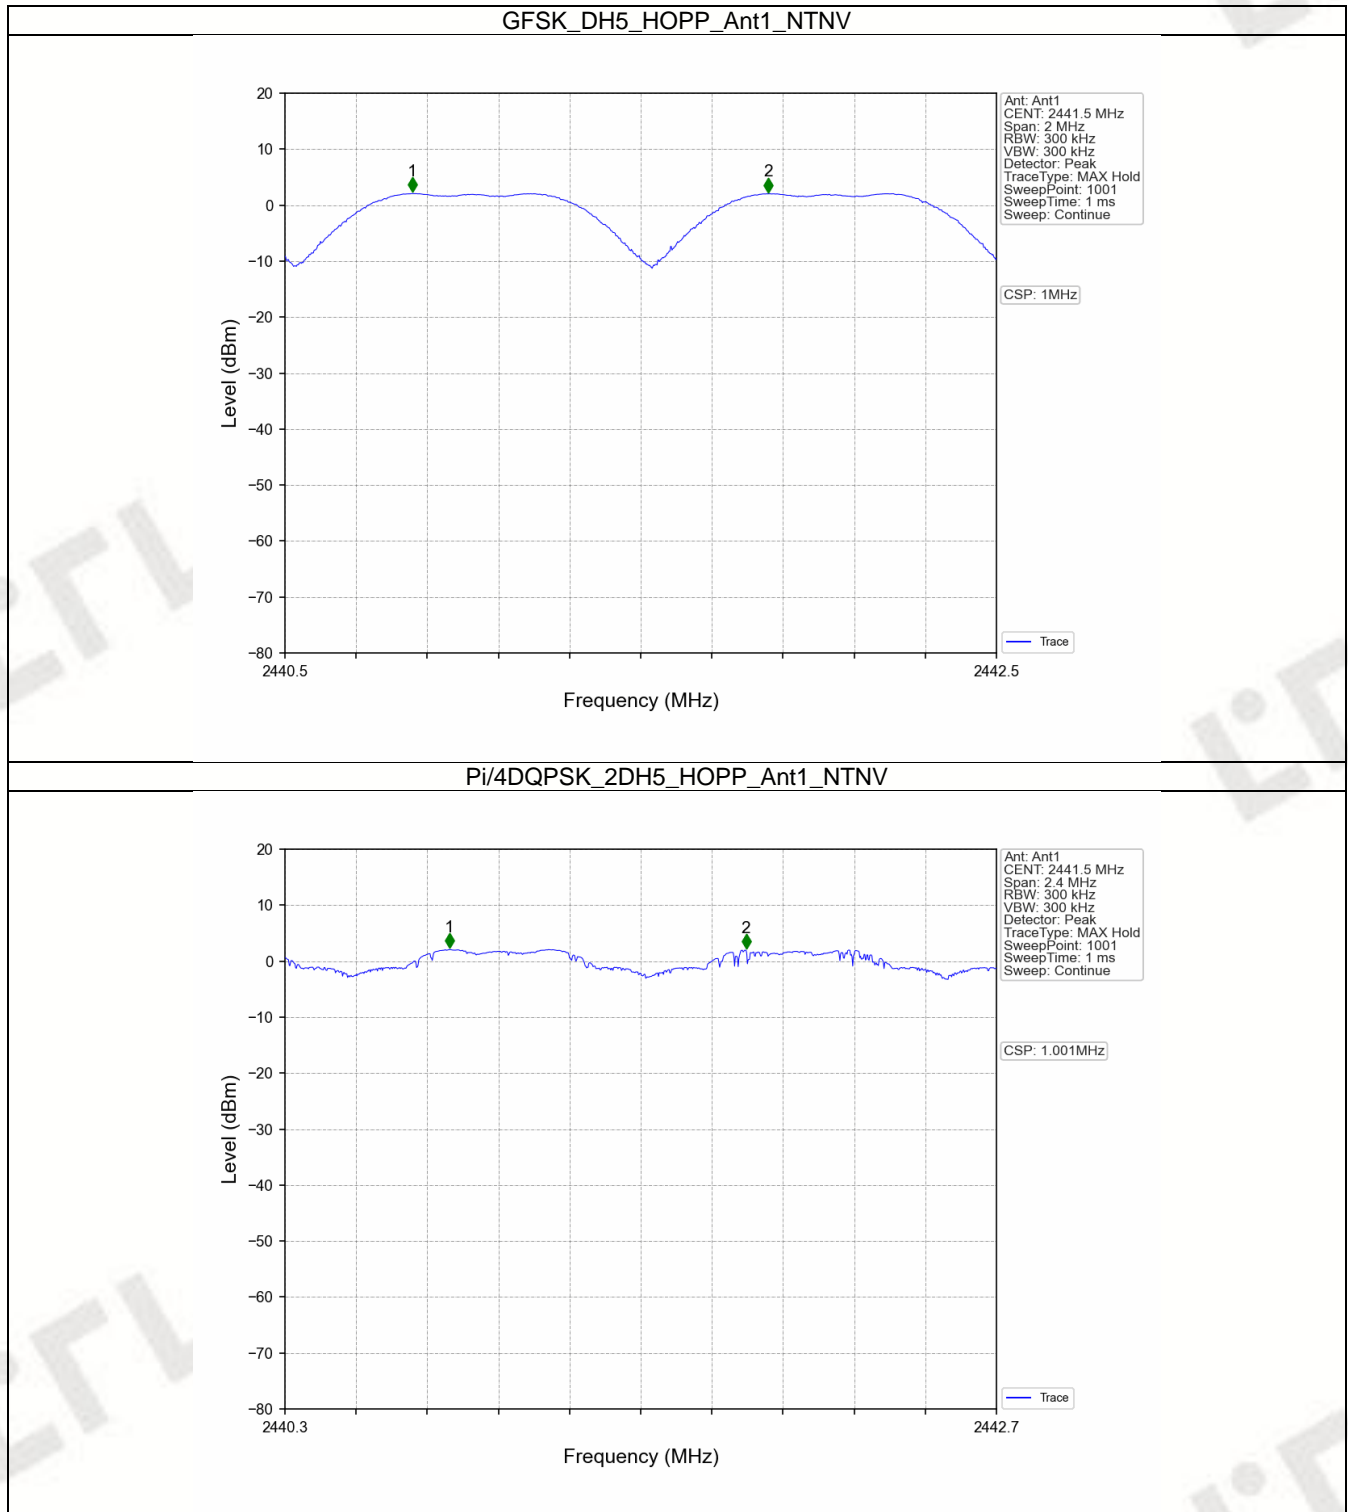

FCCID: Q8W-T9-2

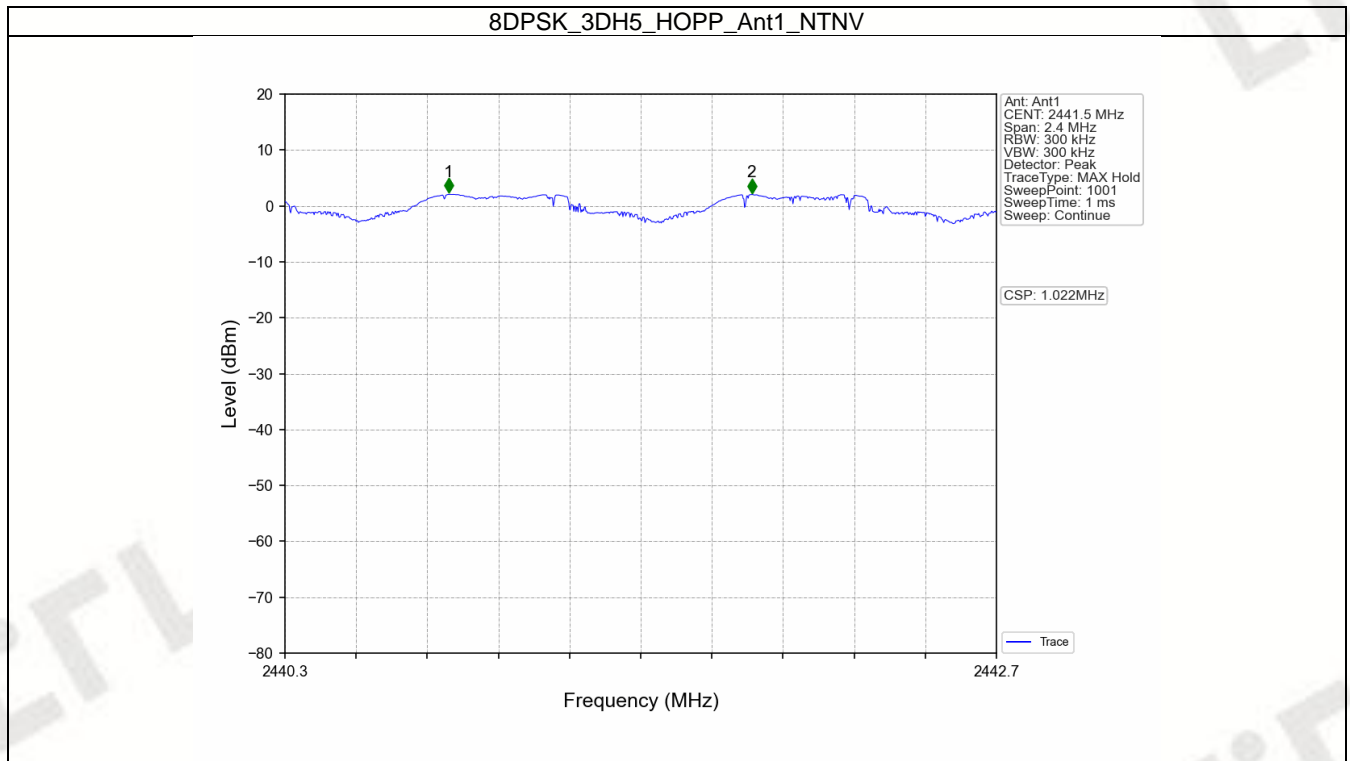

FCCID: Q8W-T9-2

4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

FCCID: Q8W-T9-2

4.1.2 Test Graph

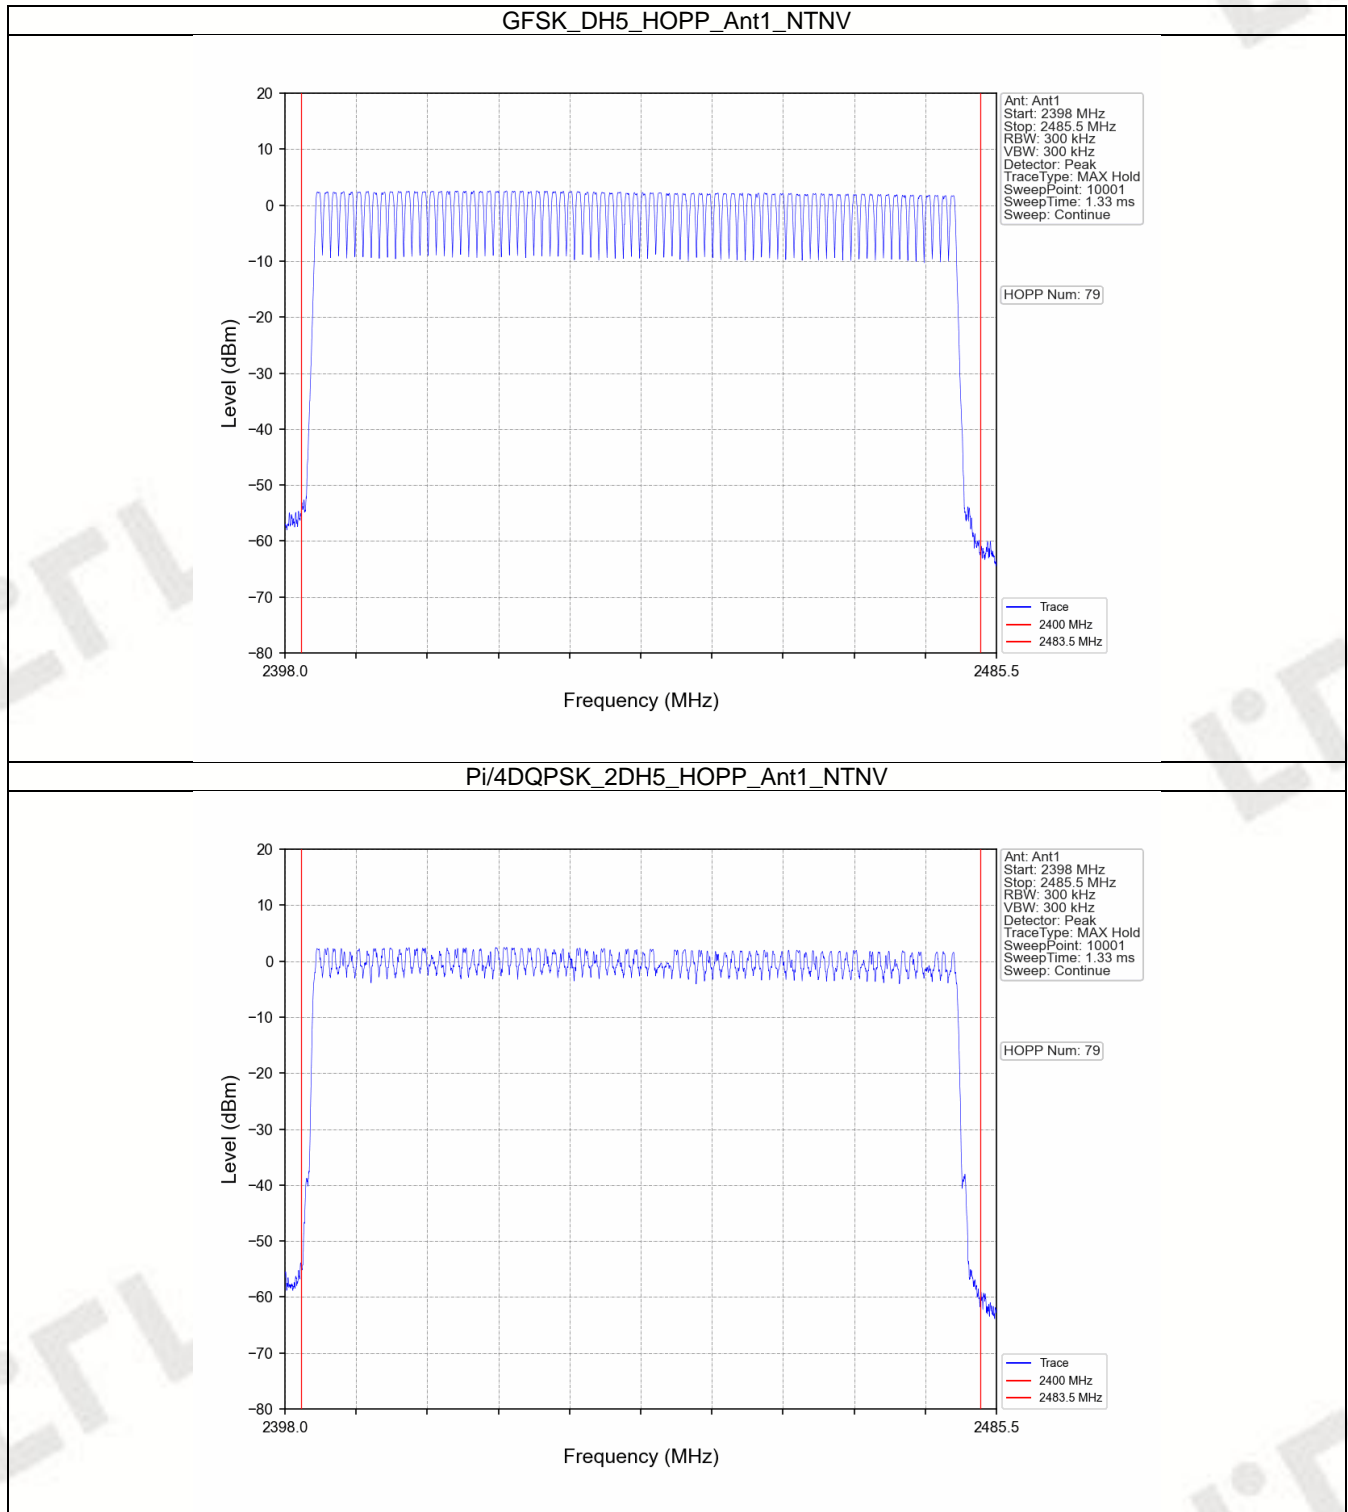

FCCID: Q8W-T9-2

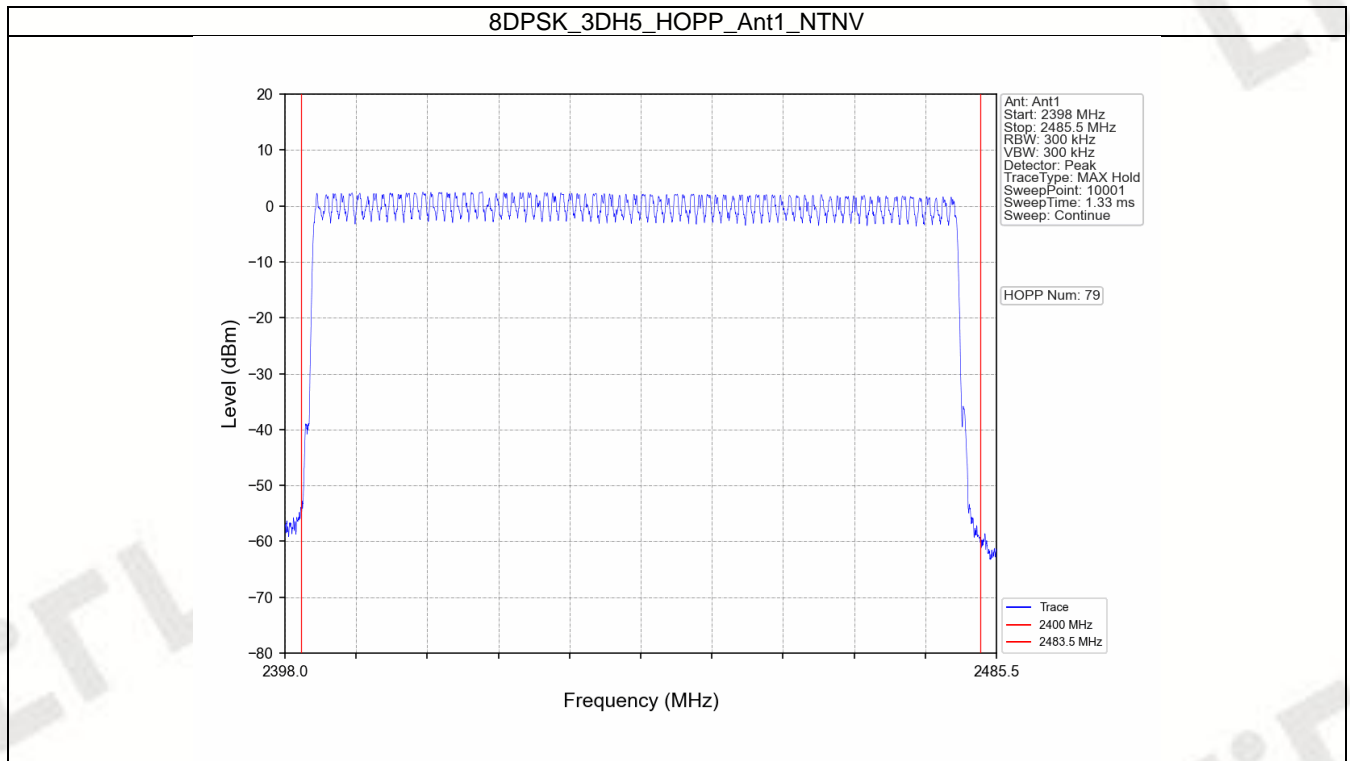

FCCID: Q8W-T9-2

5. Time of Occupancy (Dwell Time)


5.1 Ant1

5.1.1 Test Result



Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.374	31.600	226	84.524	<=400	Pass
			DH3	1.622	31.600	136	220.592	<=400	Pass
			DH5	2.872	31.600	94	269.968	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.380	31.600	246	93.480	<=400	Pass
			2DH3	1.634	31.600	134	218.956	<=400	Pass
			2DH5	2.882	31.600	94	270.908	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.380	31.600	230	87.400	<=400	Pass
			3DH3	1.630	31.600	138	224.940	<=400	Pass
			3DH5	2.882	31.600	96	276.672	<=400	Pass

FCCID: Q8W-T9-2



5.1.2 Test Graph


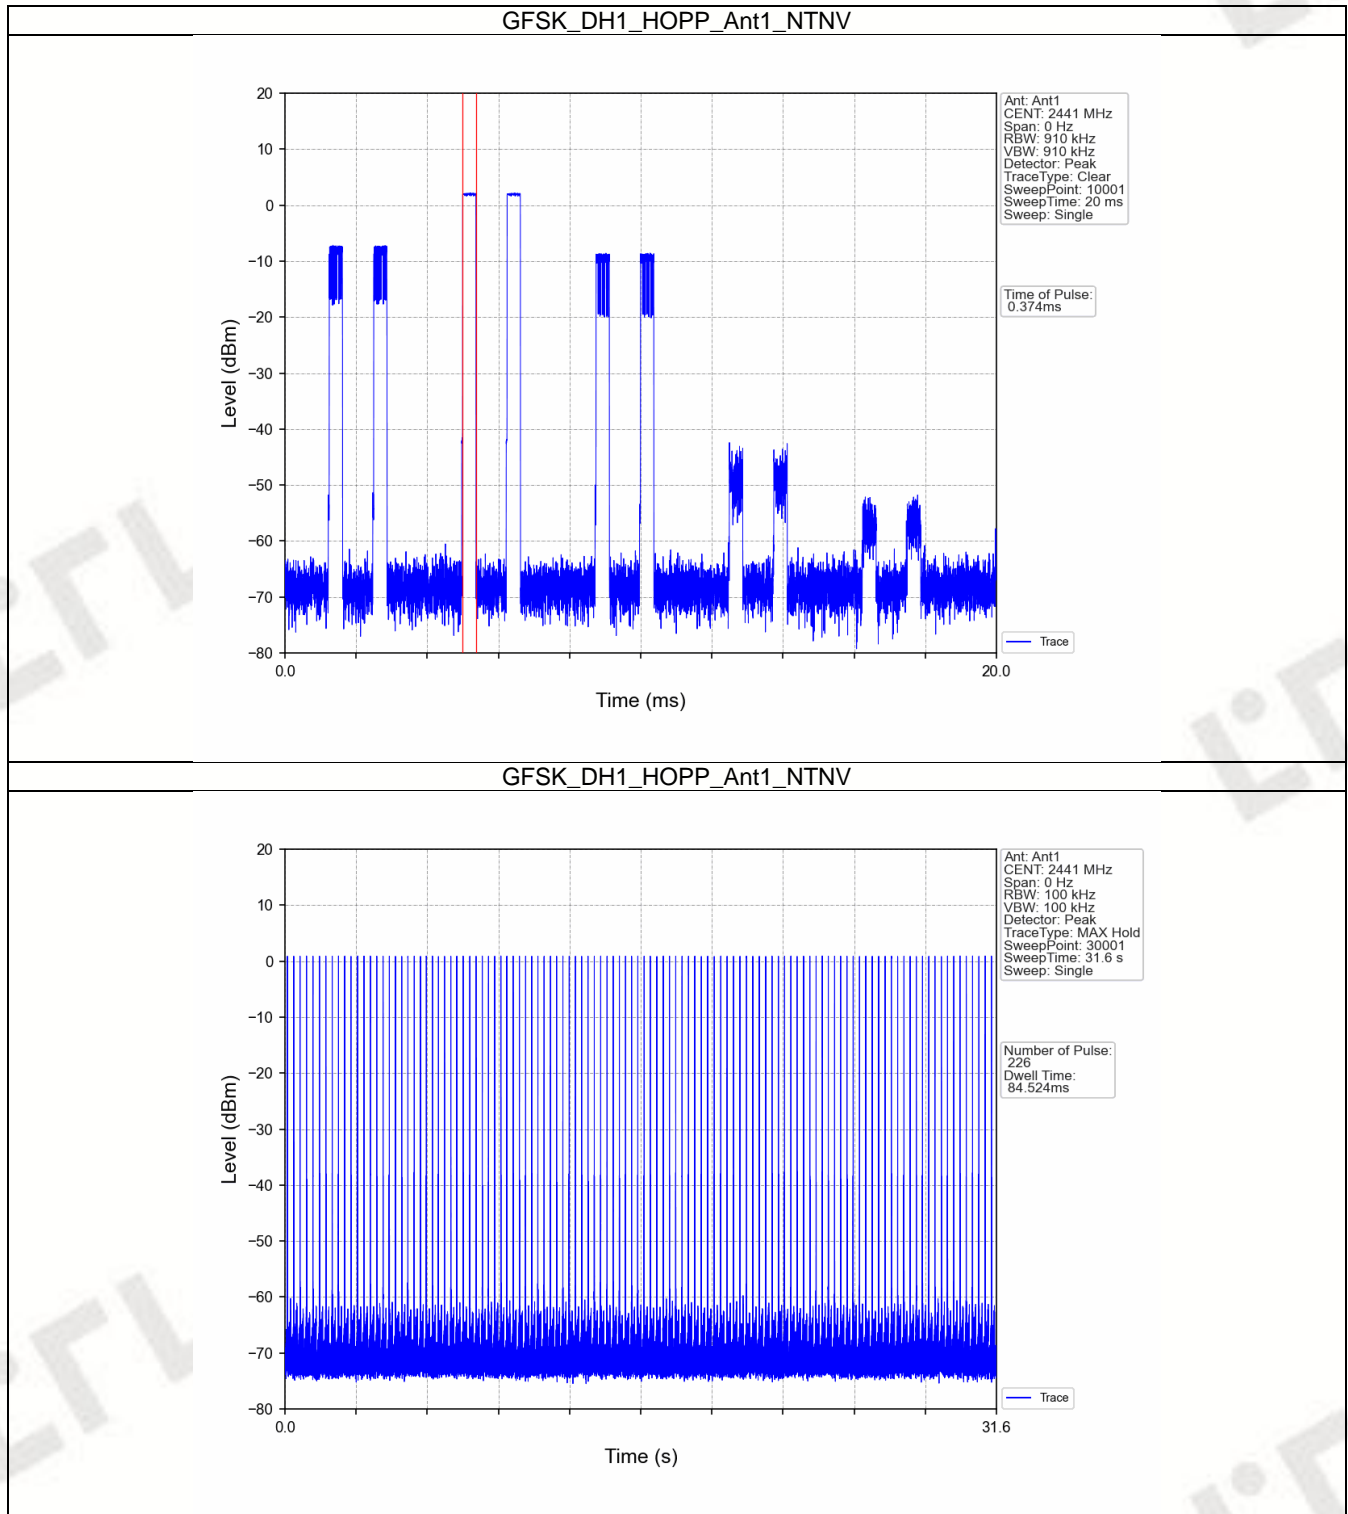




FCCID: Q8W-T9-2

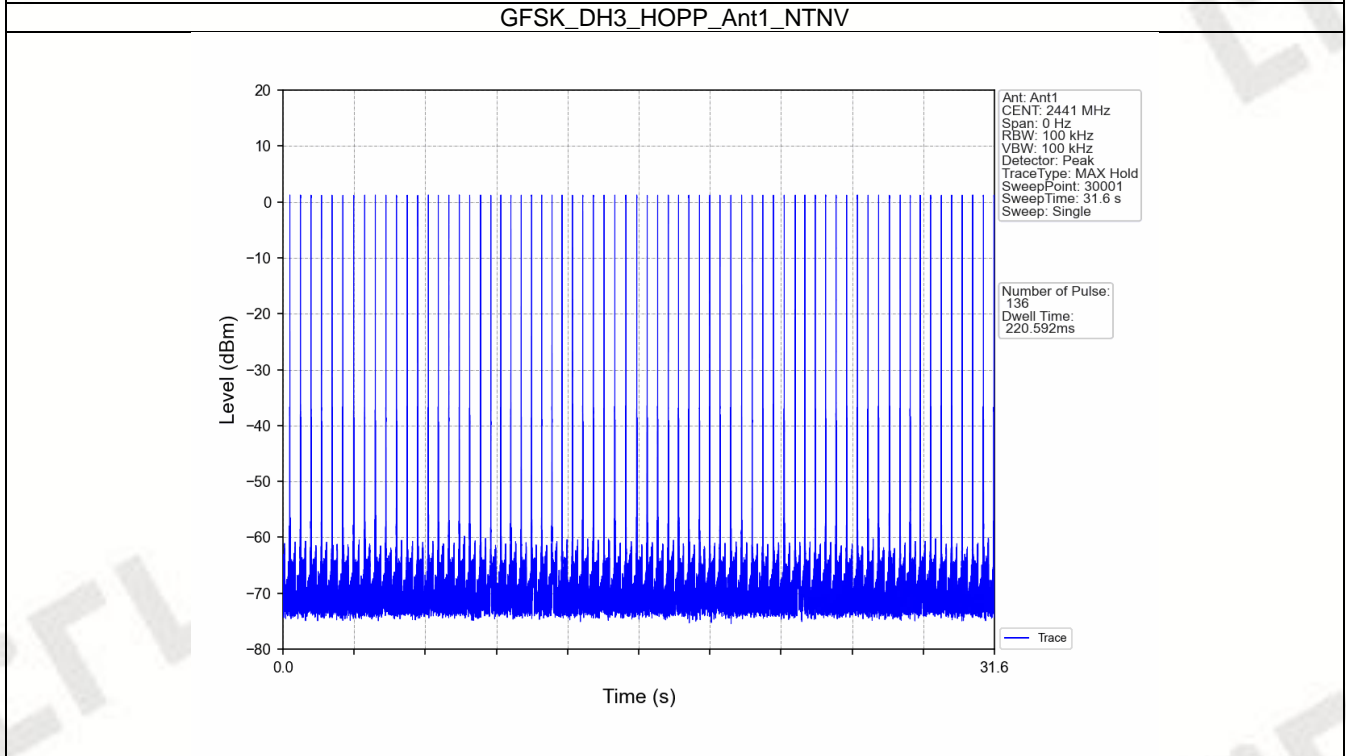
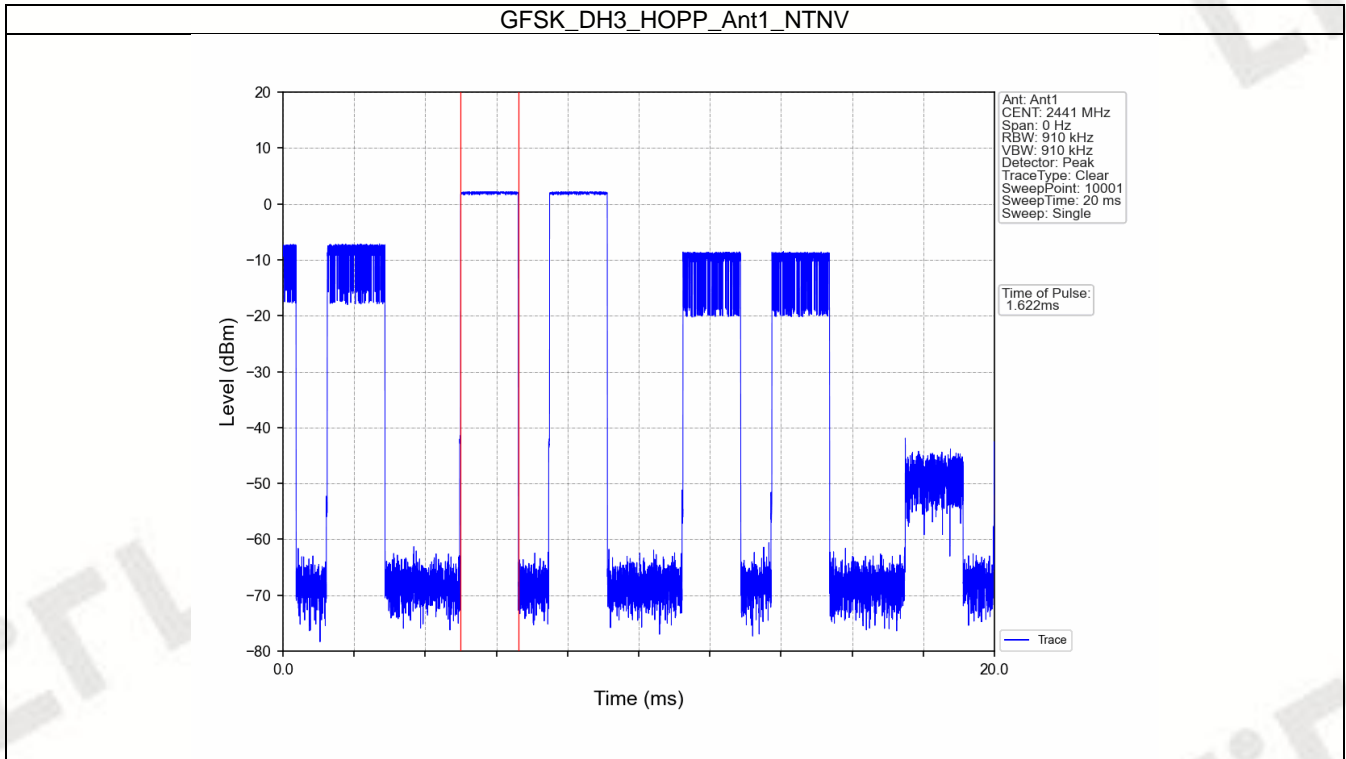




FCCID: Q8W-T9-2

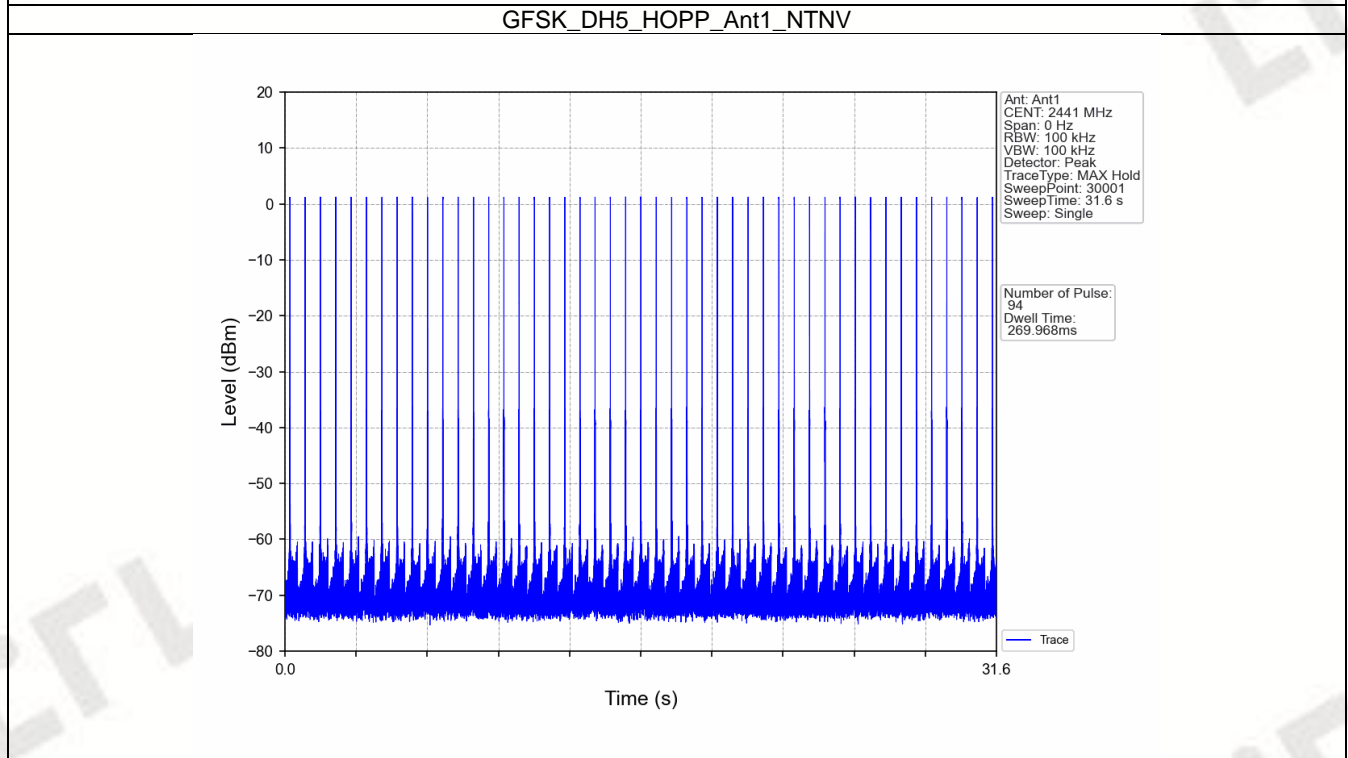
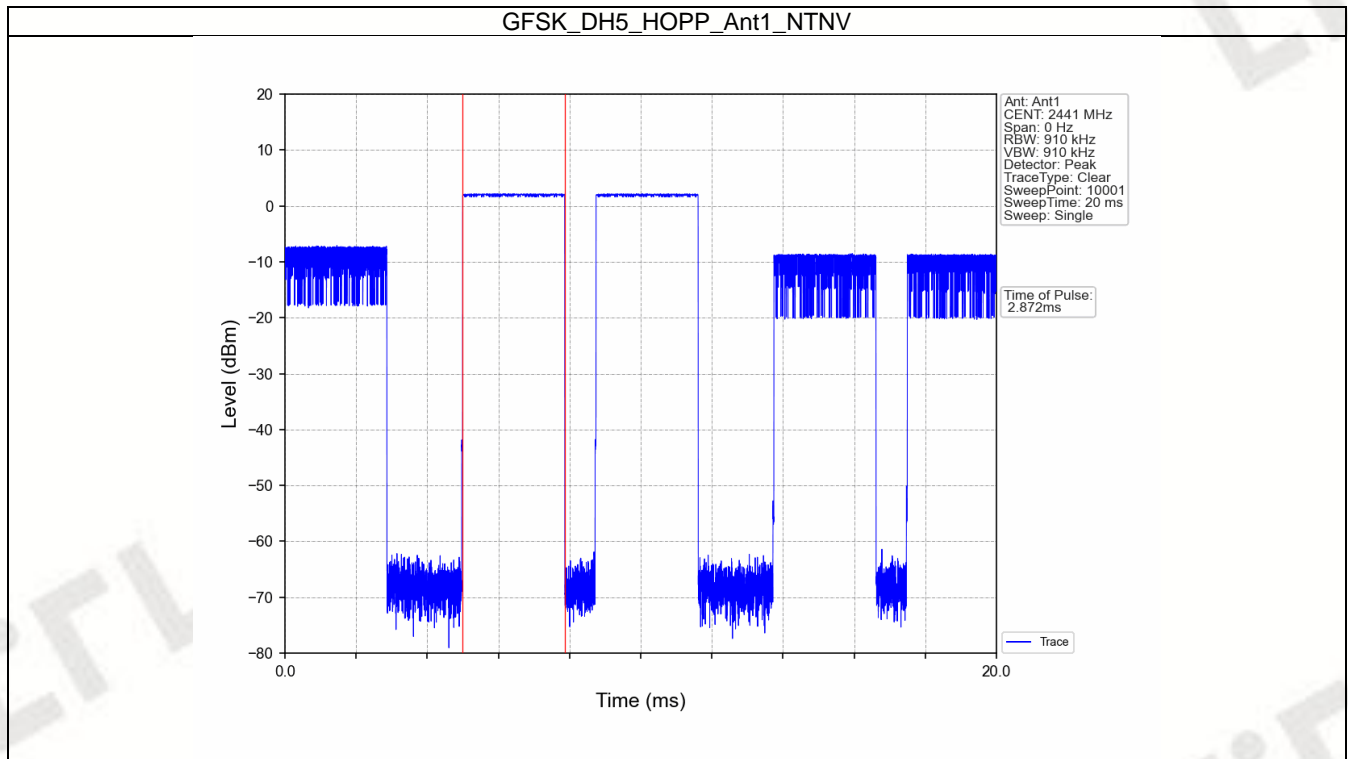


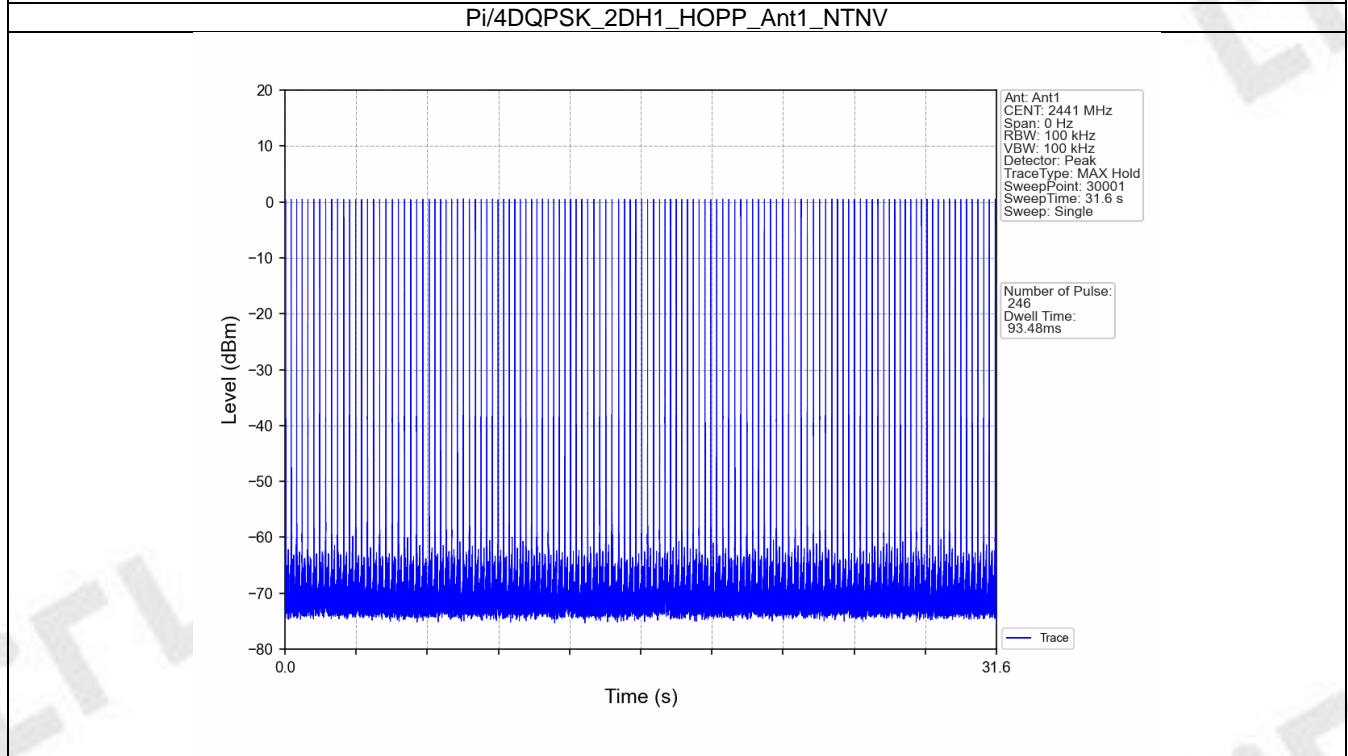
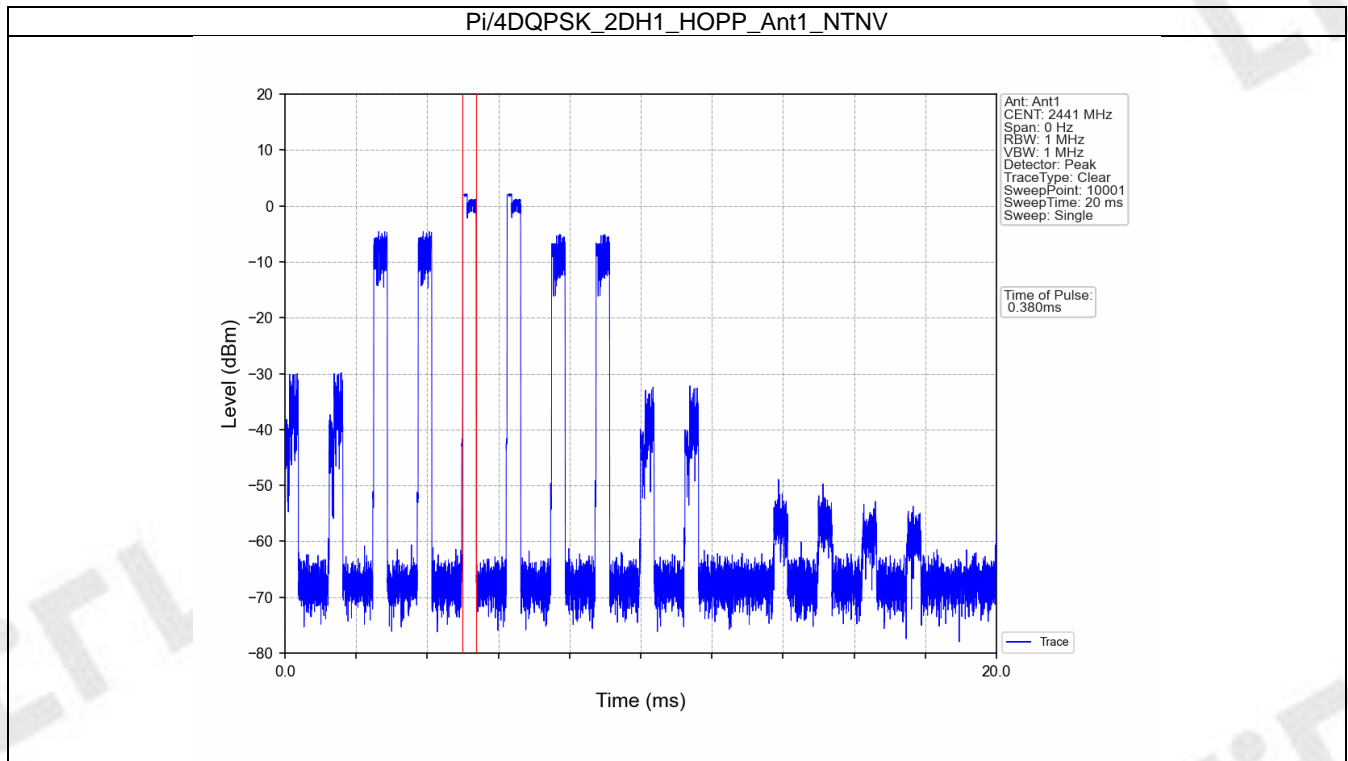


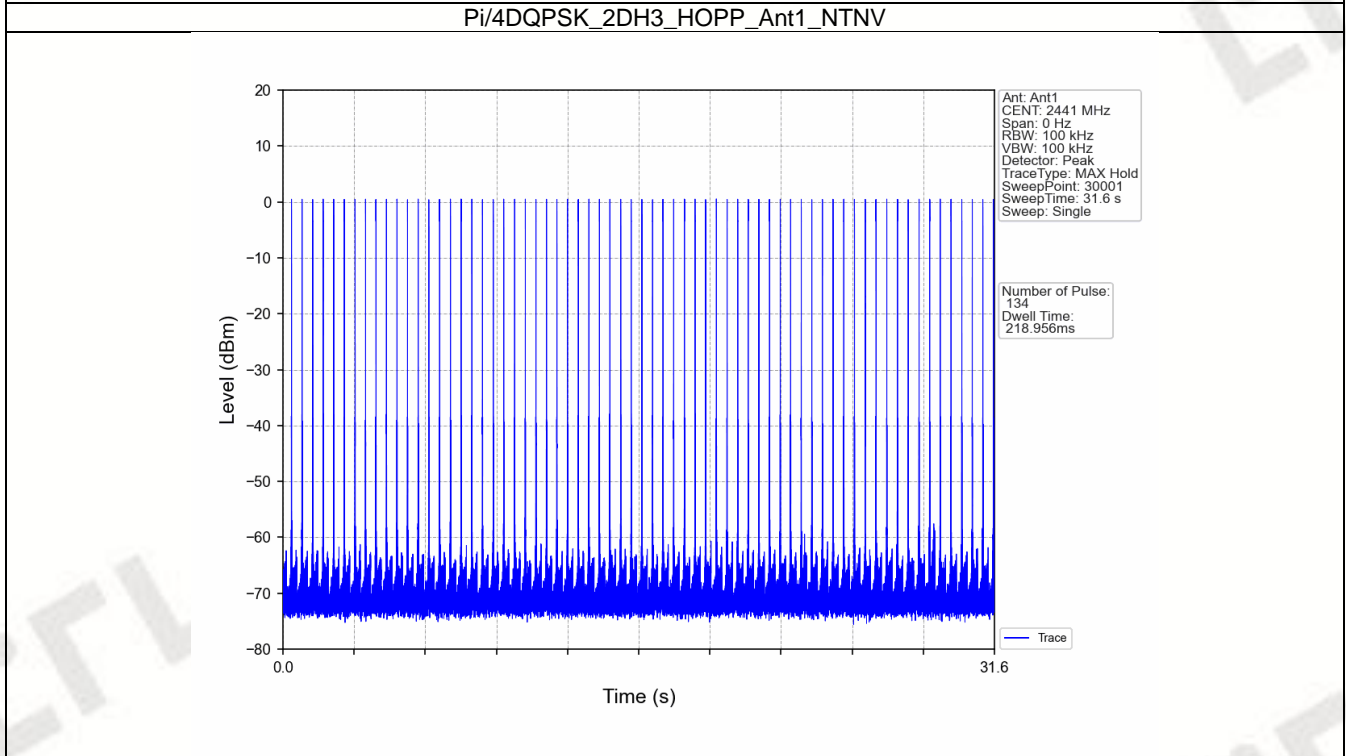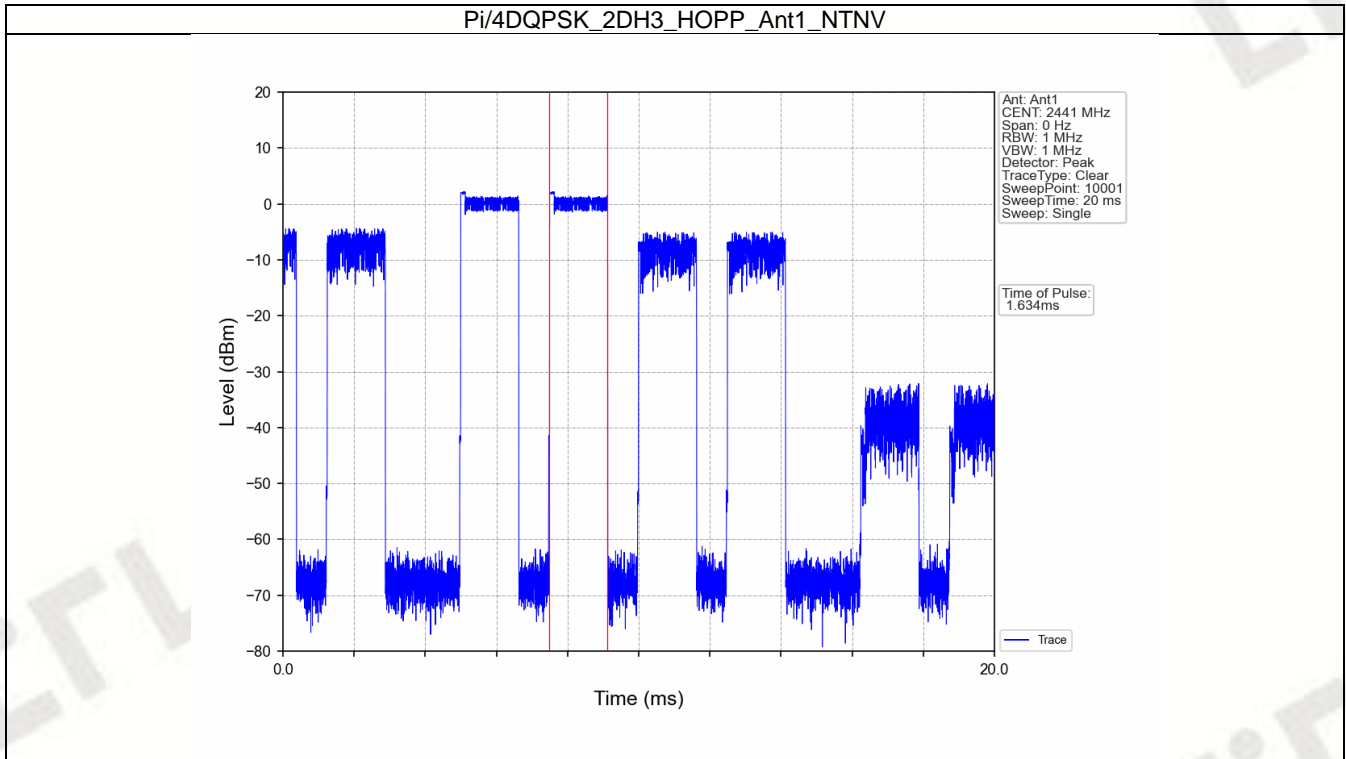

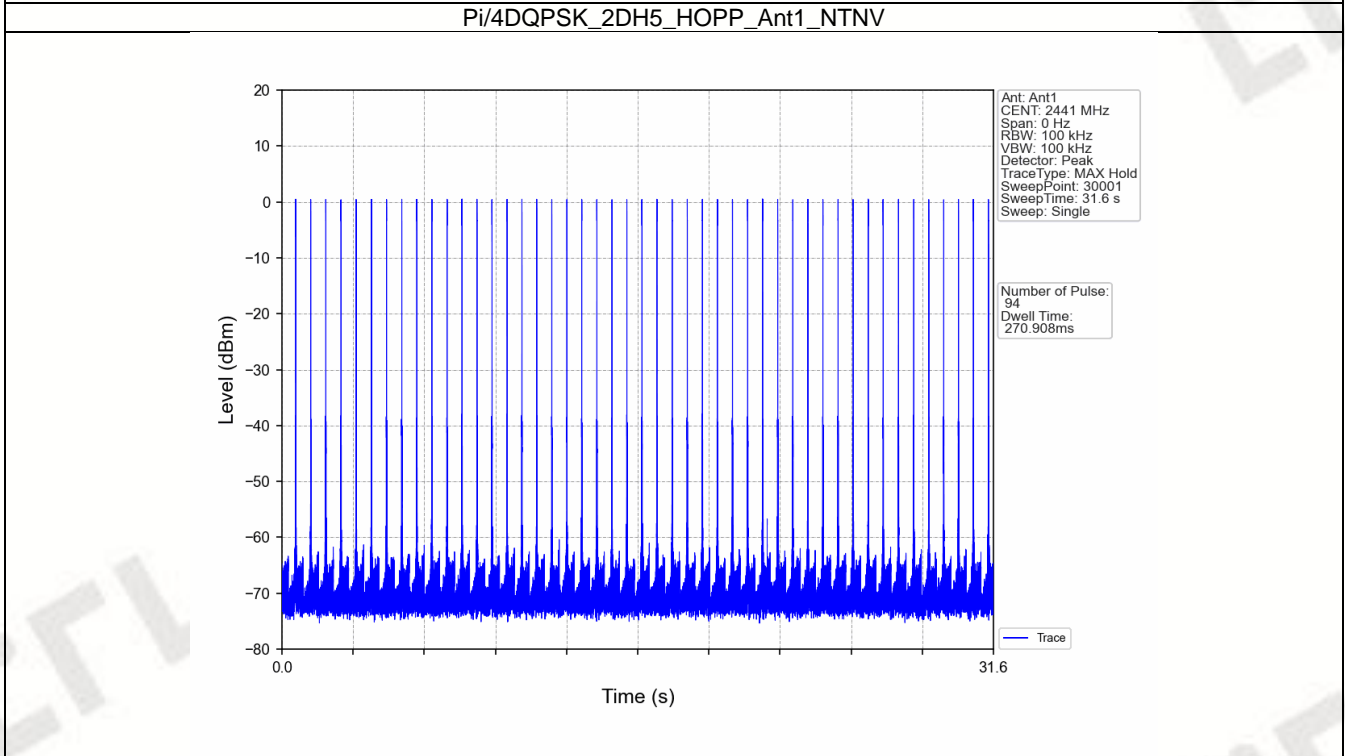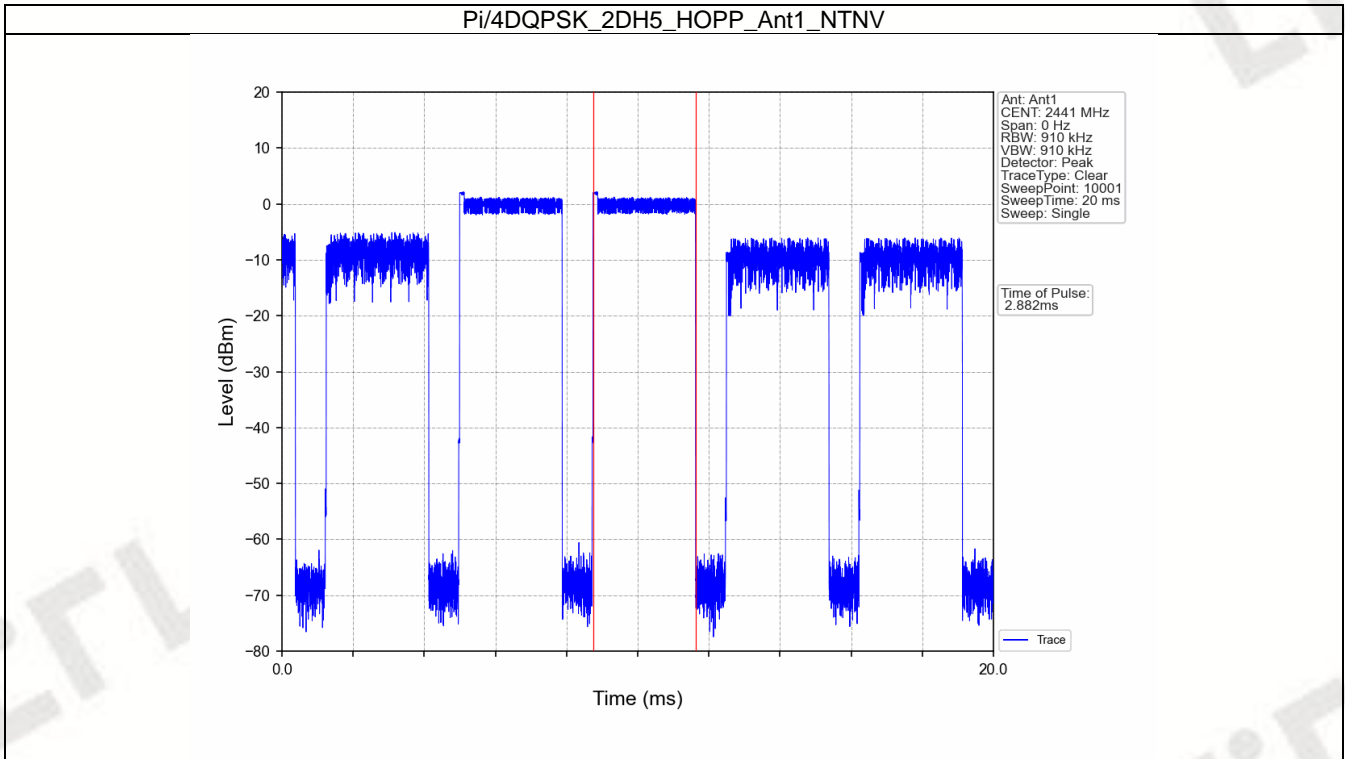

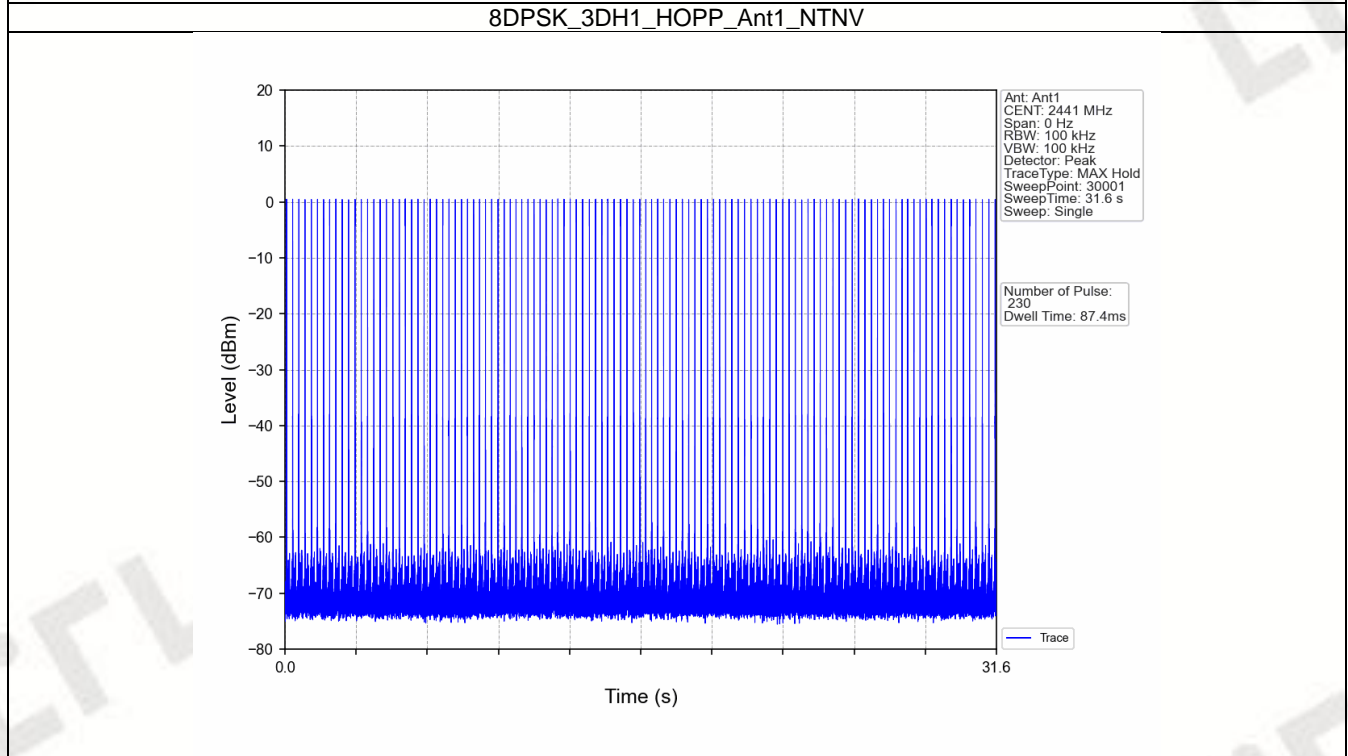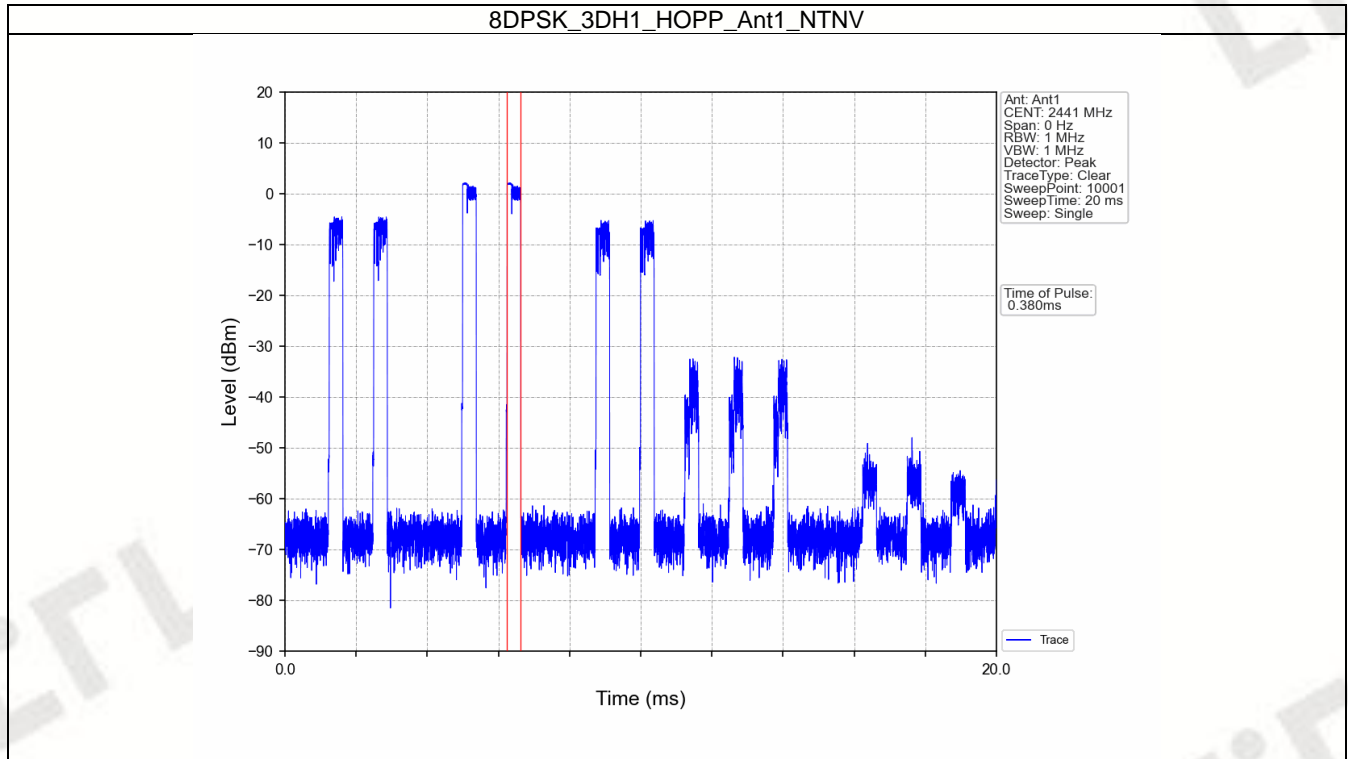

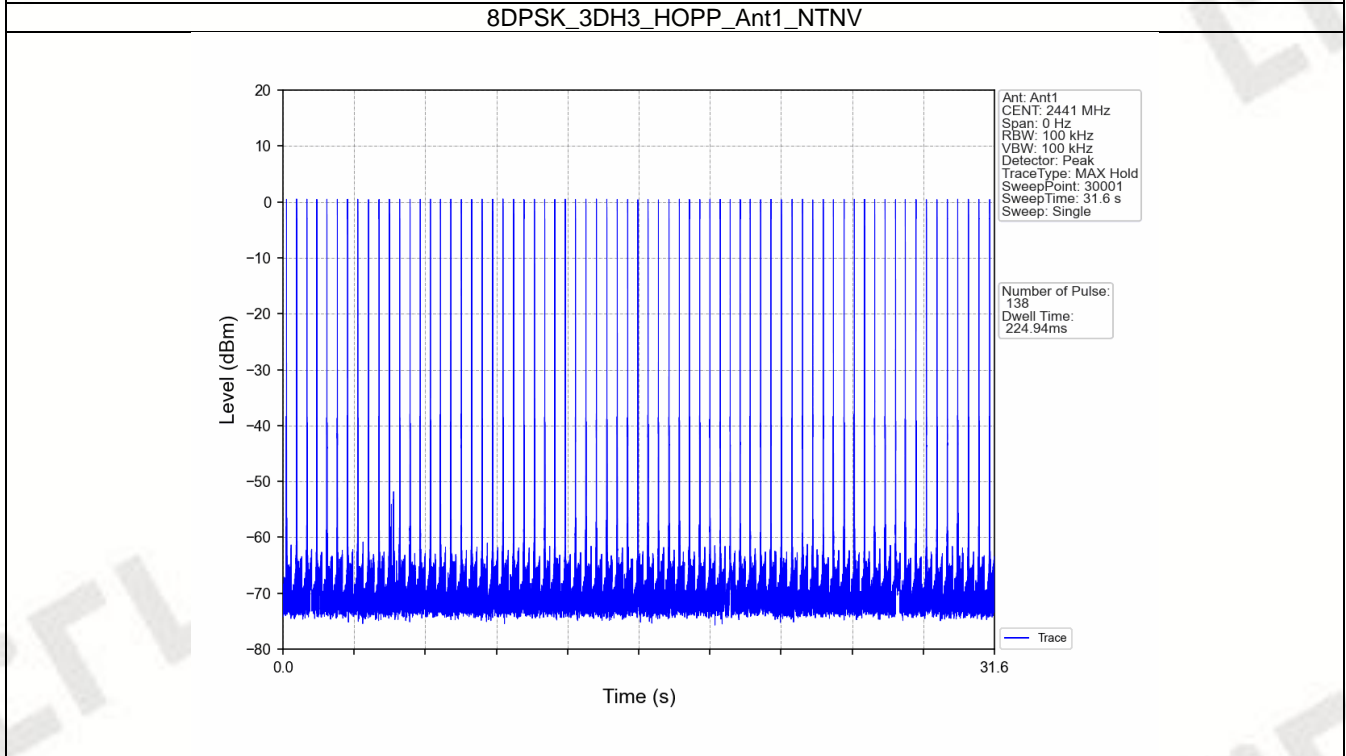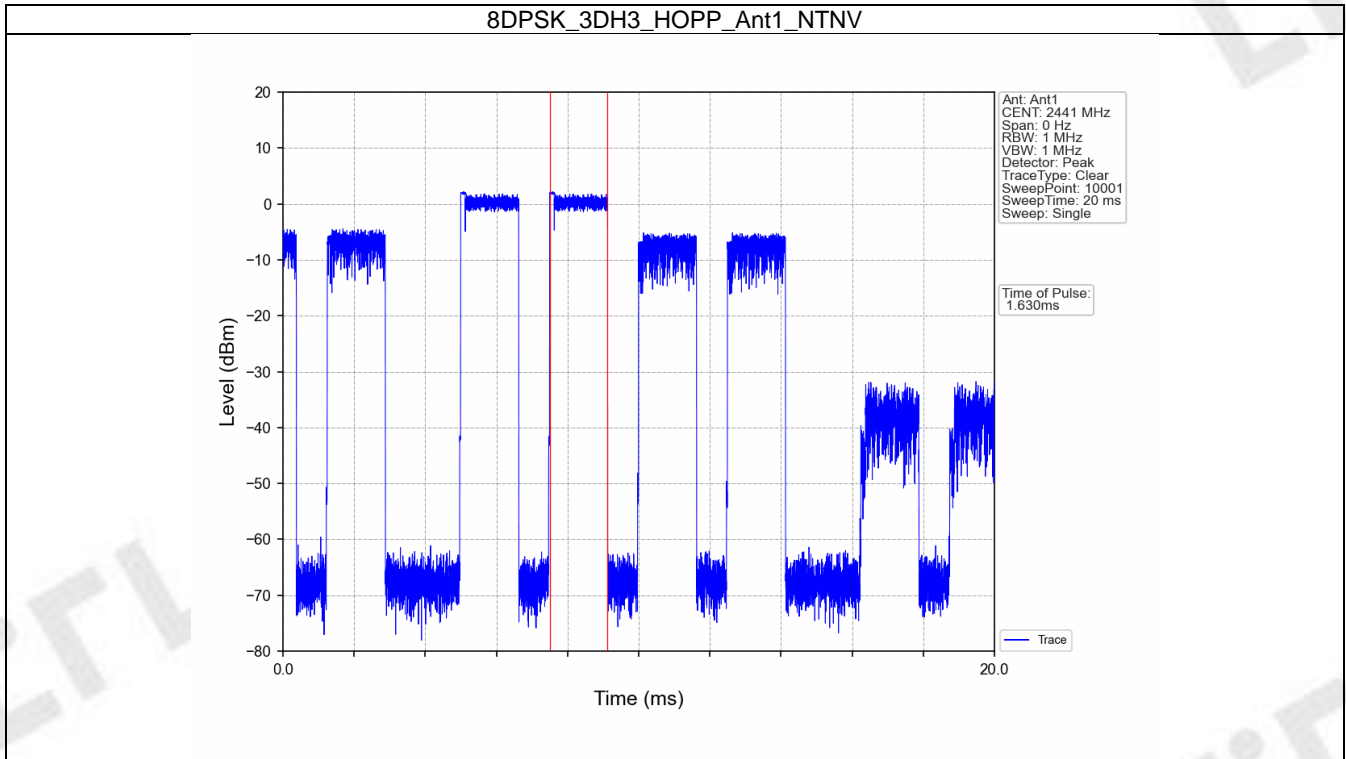

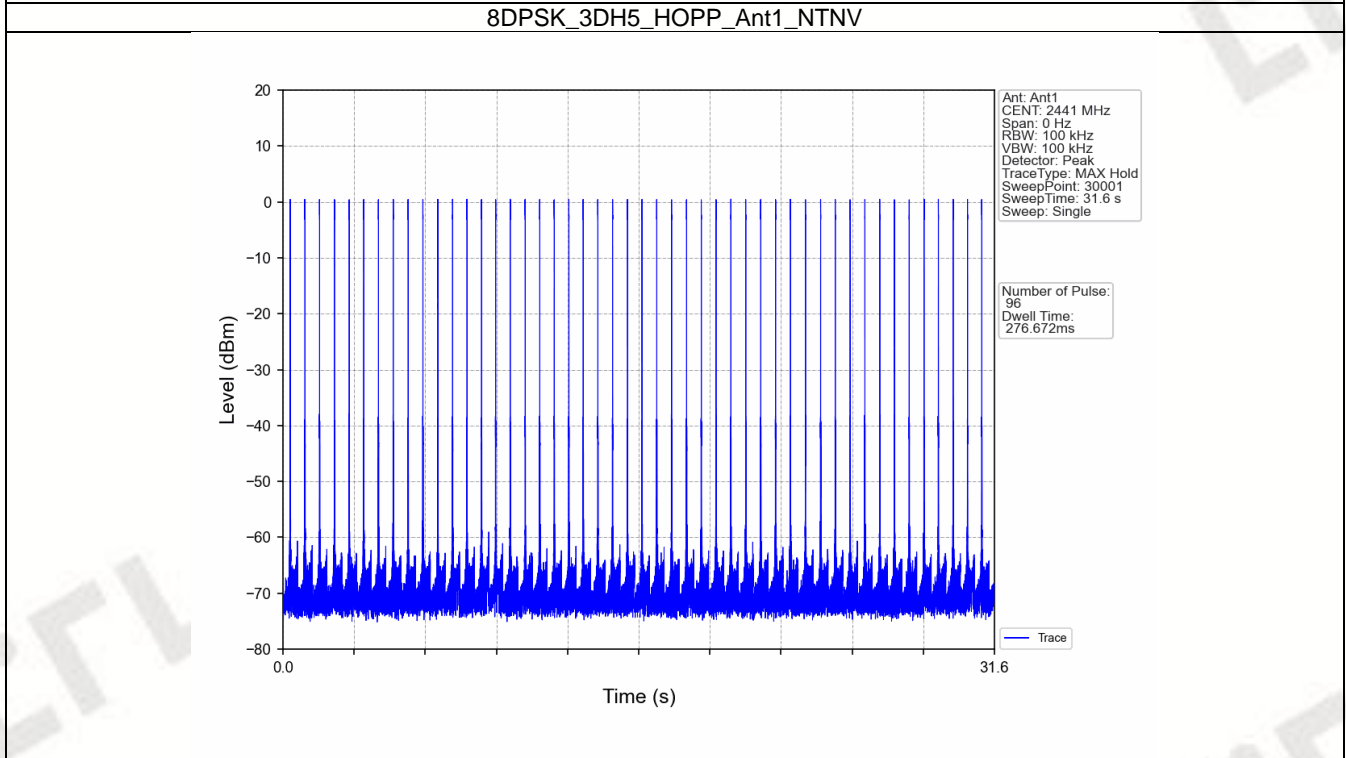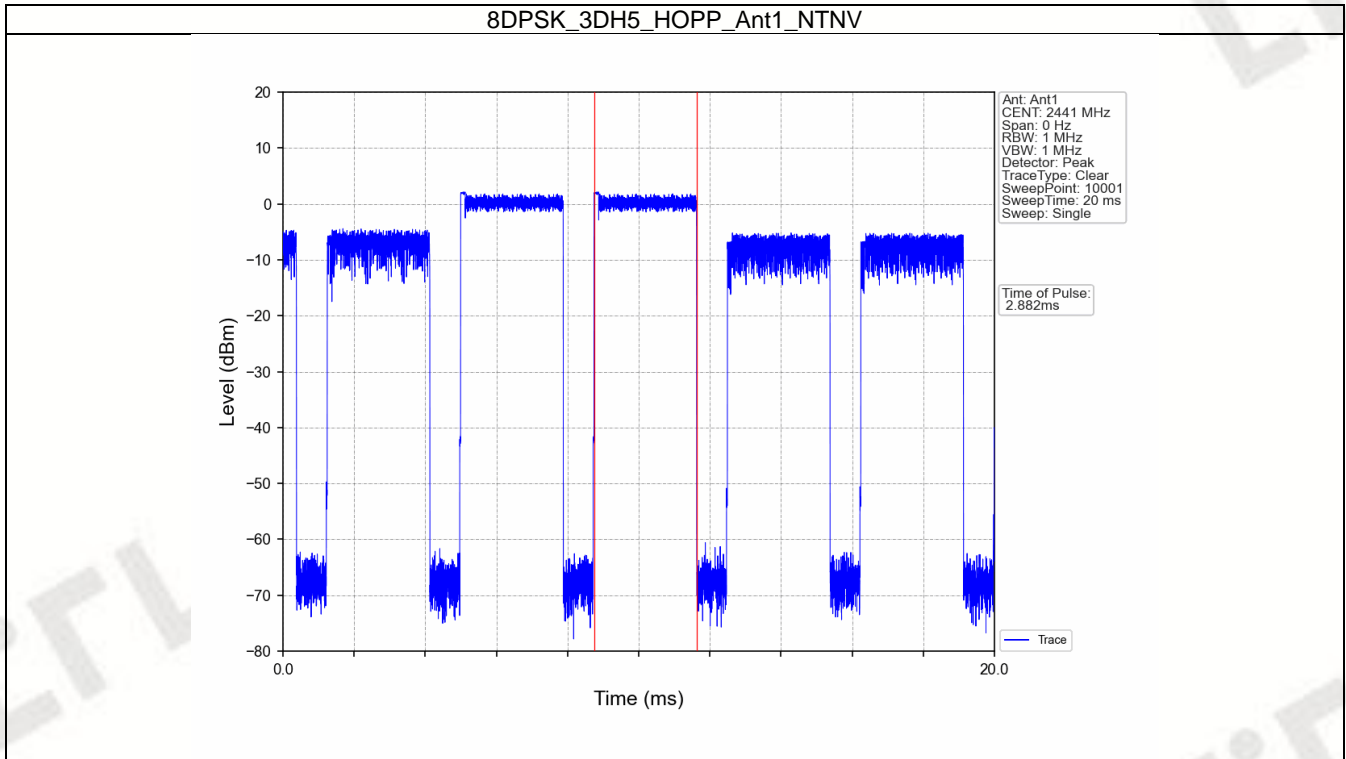

FCCID: Q8W-T9-2

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Ref


6.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	2.10
		2441	DH5	1	2.02
		2480	DH5	1	1.44
Pi/4DQPSK	SISO	2402	2DH5	1	1.93
		2441	2DH5	1	1.79
		2480	2DH5	1	1.27
8DPSK	SISO	2402	3DH5	1	2.11
		2441	3DH5	1	2.05
		2480	3DH5	1	1.36



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

FCCID: Q8W-T9-2



6.1.2 Test Graph

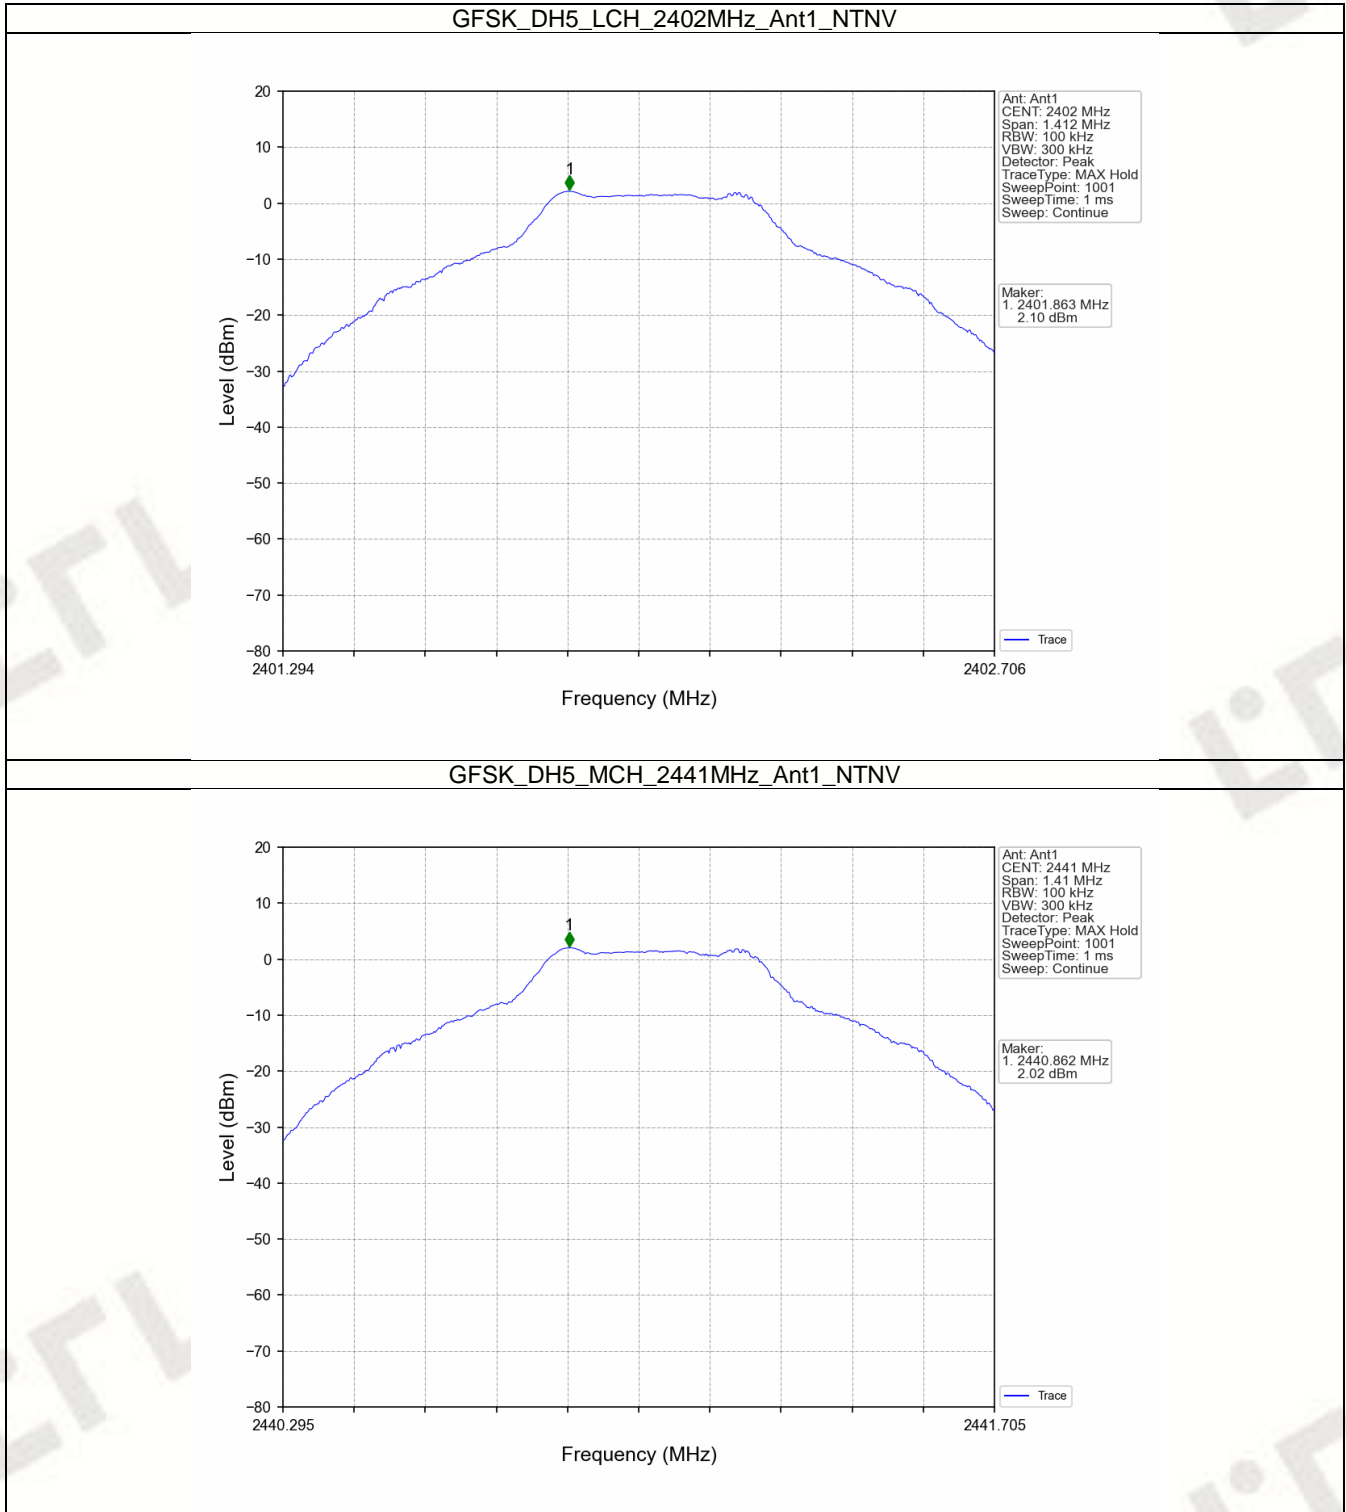



FCCID: Q8W-T9-2

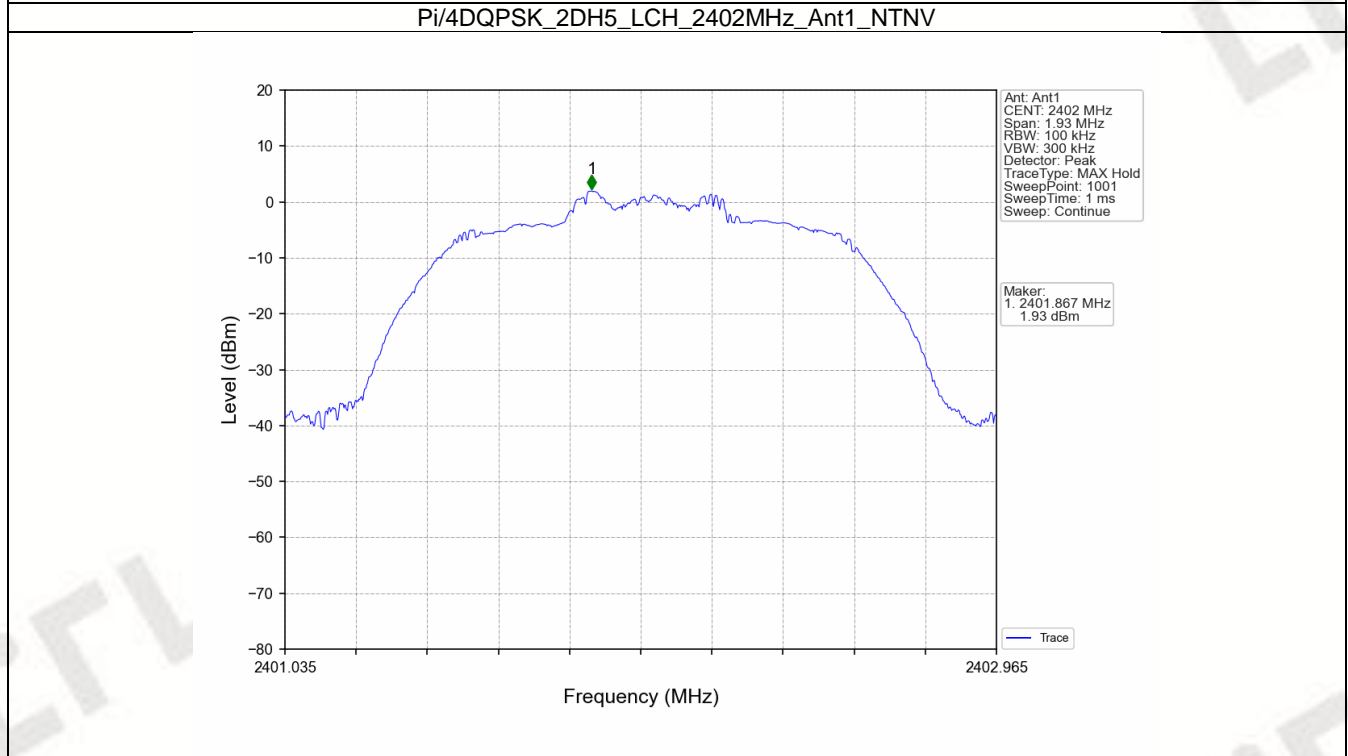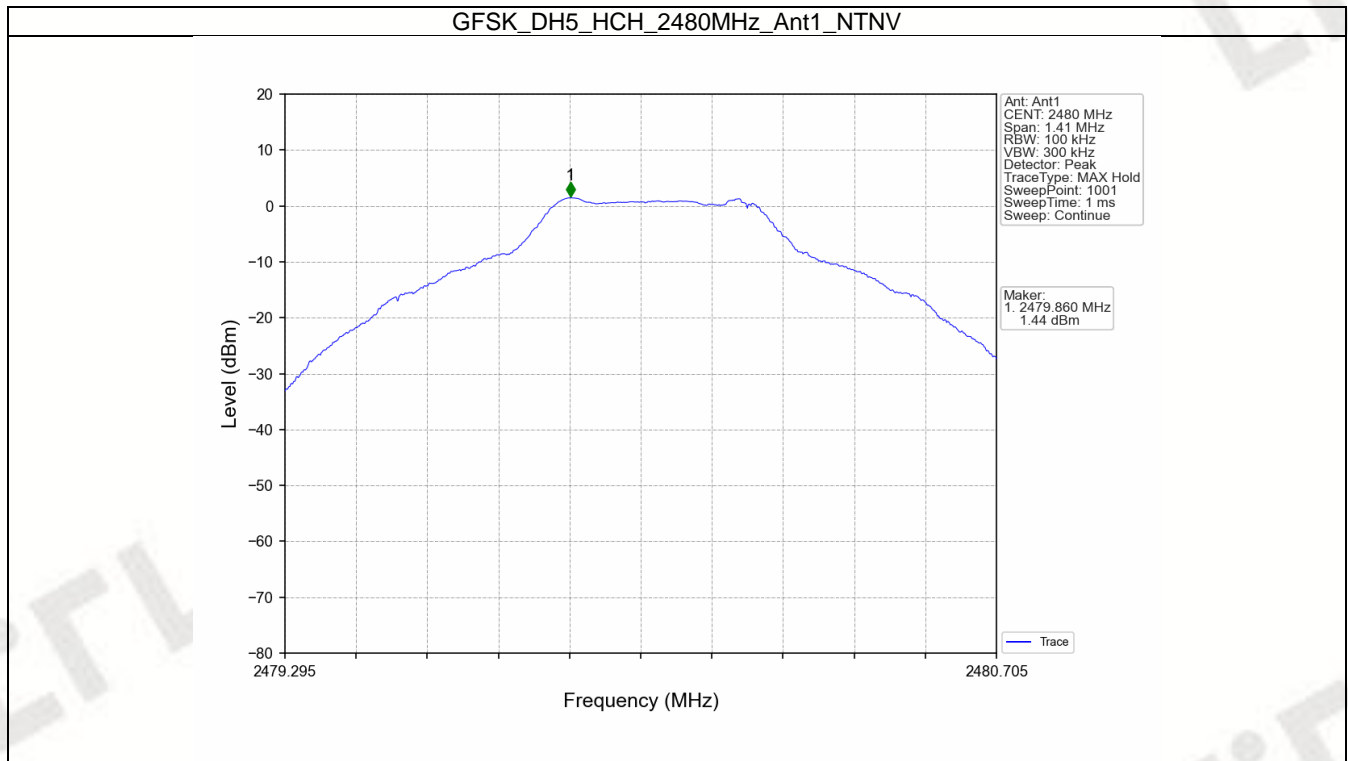


FCCID: Q8W-T9-2

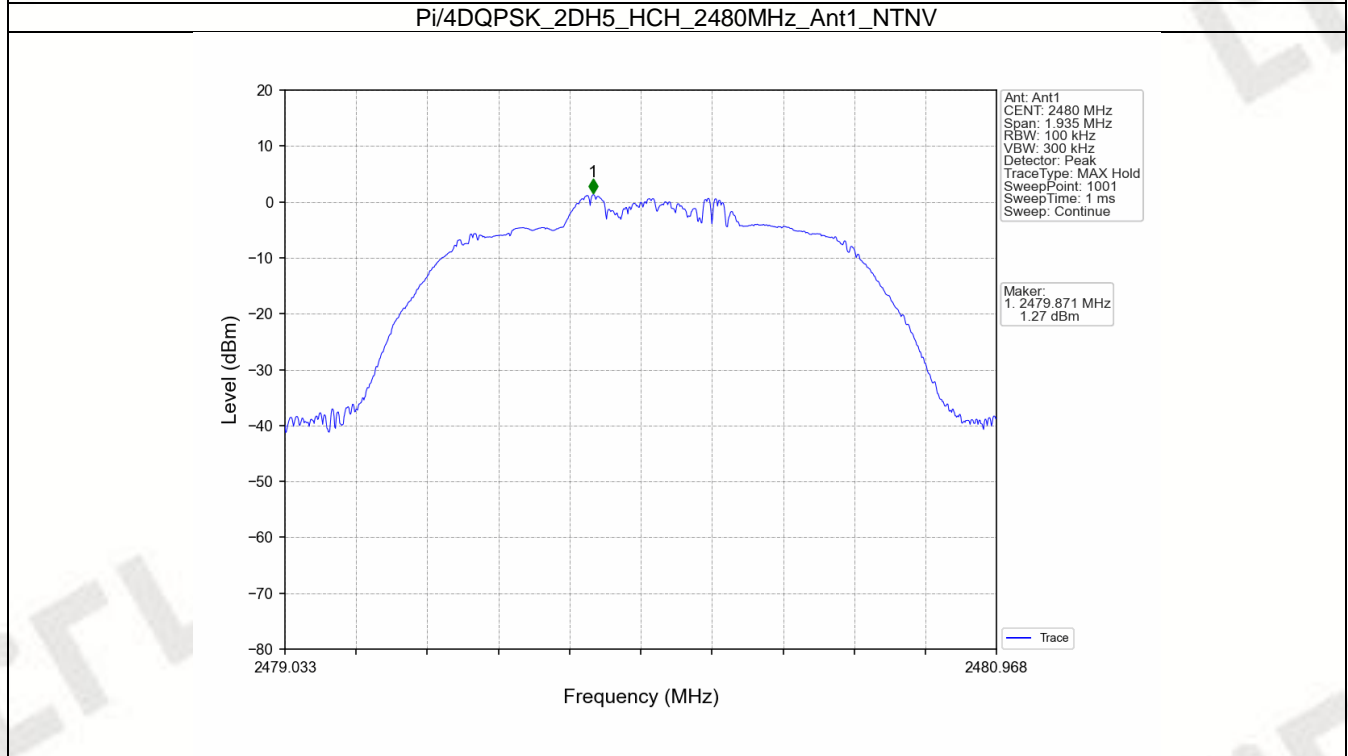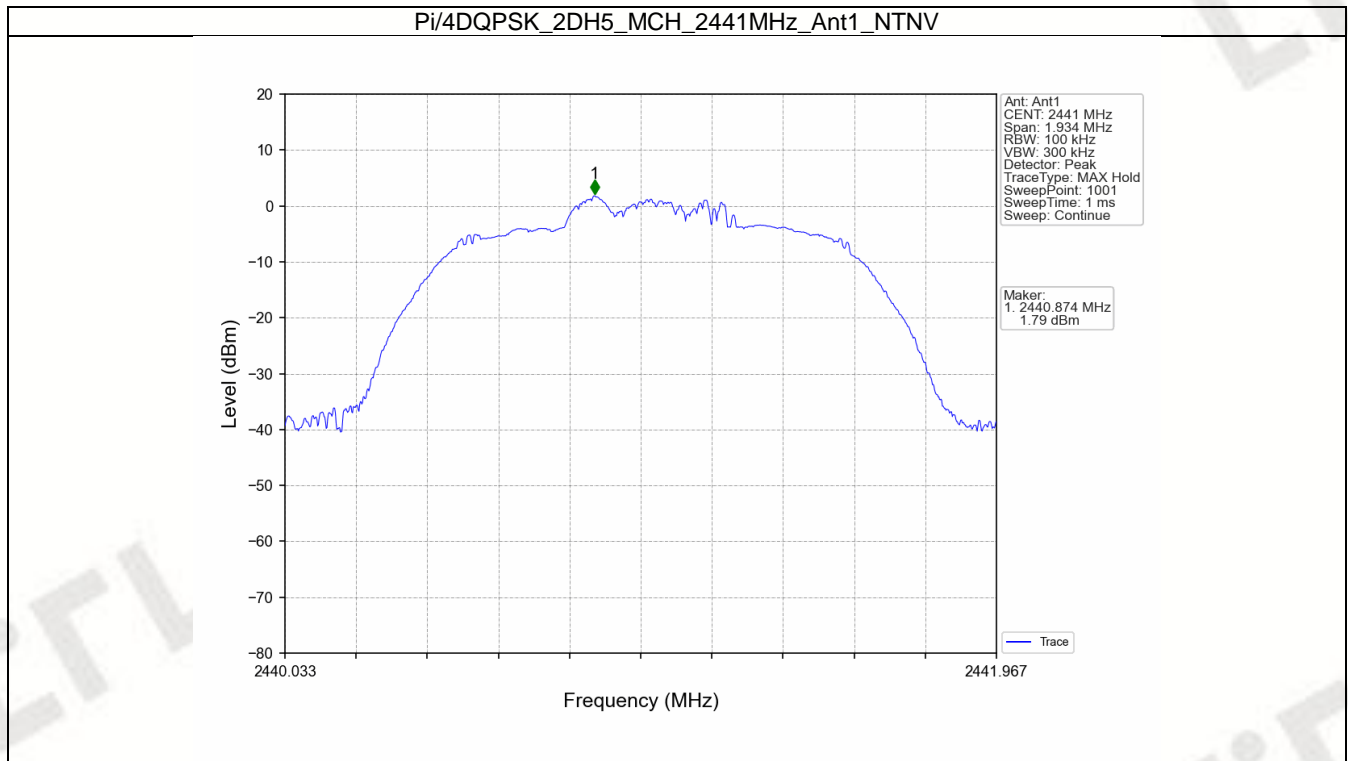

FCCID: Q8W-T9-2

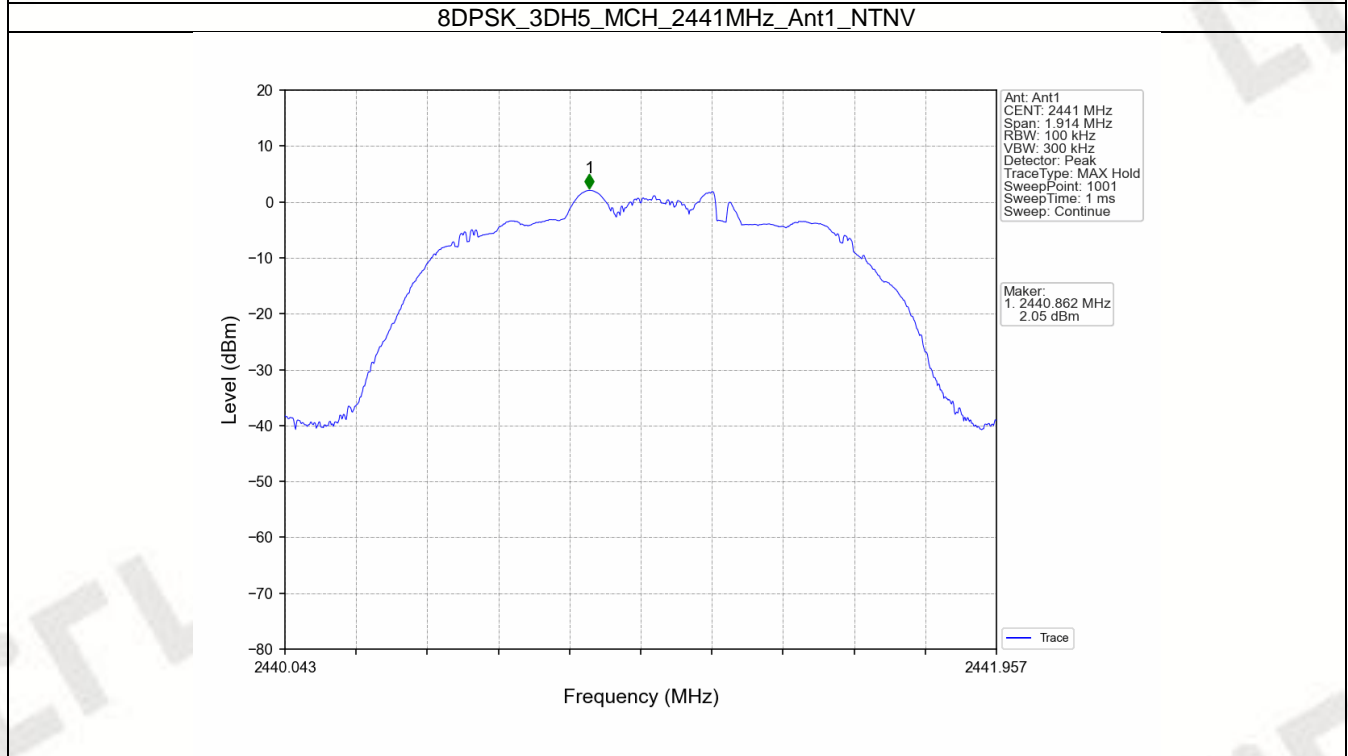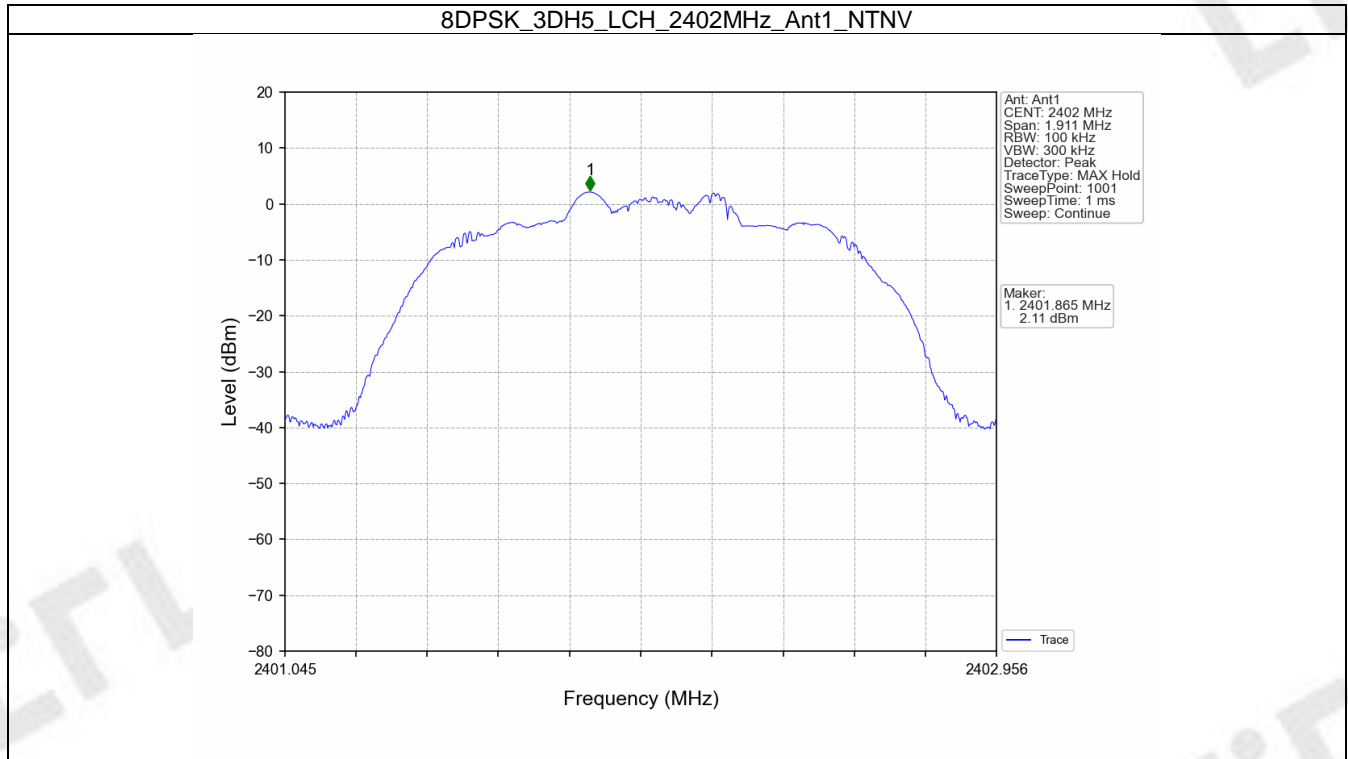

FCCID: Q8W-T9-2

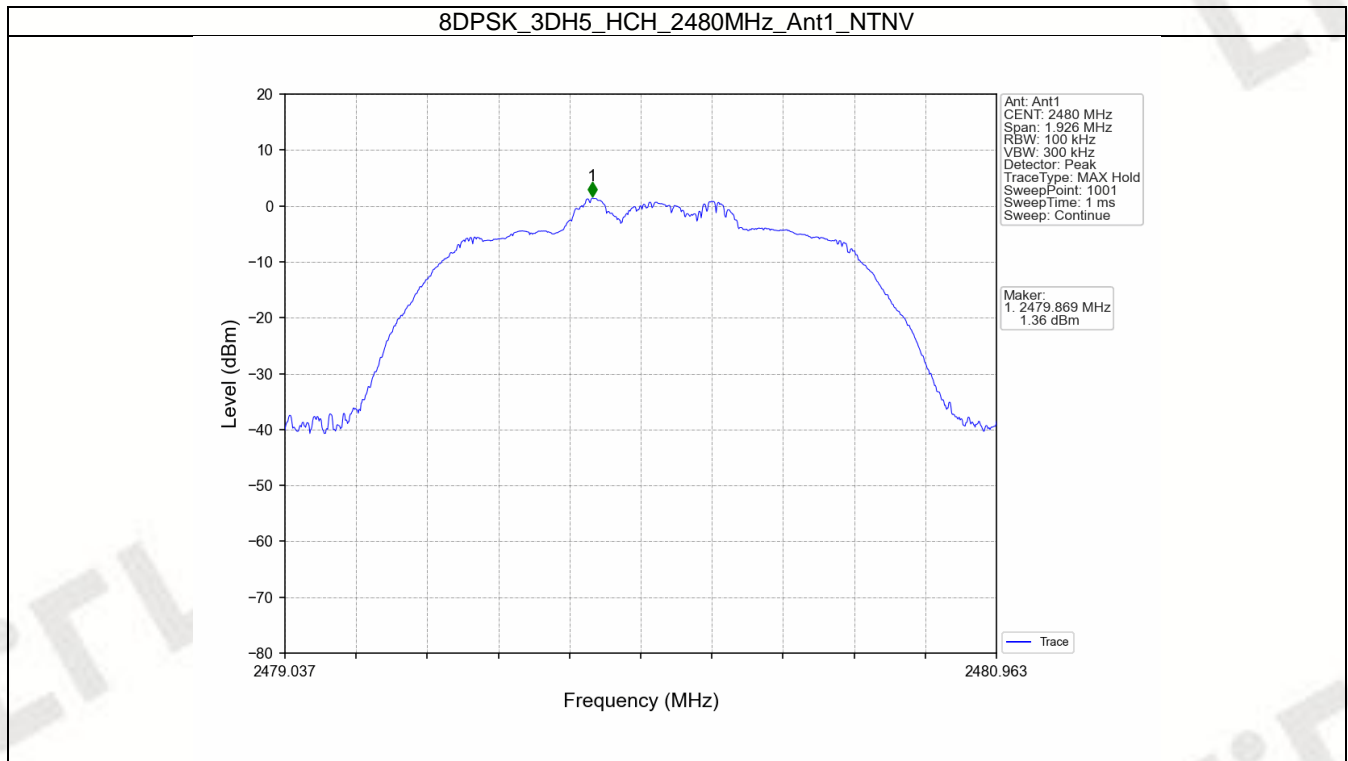

FCCID: Q8W-T9-2

6.2 CSE


6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	2.10	-17.90	Pass
		2441	DH5	1	2.10	-17.90	Pass
		2480	DH5	1	2.10	-17.90	Pass
		HOPP	DH5	1	2.10	-17.90	Pass
					2.10	-17.90	Pass
					2.10	-17.90	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.93	-18.07	Pass
		2441	2DH5	1	1.93	-18.07	Pass
		2480	2DH5	1	1.93	-18.07	Pass
		HOPP	2DH5	1	1.93	-18.07	Pass
					1.93	-18.07	Pass
					1.93	-18.07	Pass
8DPSK	SISO	2402	3DH5	1	2.11	-17.89	Pass
		2441	3DH5	1	2.11	-17.89	Pass
		2480	3DH5	1	2.11	-17.89	Pass
		HOPP	3DH5	1	2.11	-17.89	Pass
					2.11	-17.89	Pass
					2.11	-17.89	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.



FCCID: Q8W-T9-2



6.2.2 Test Graph


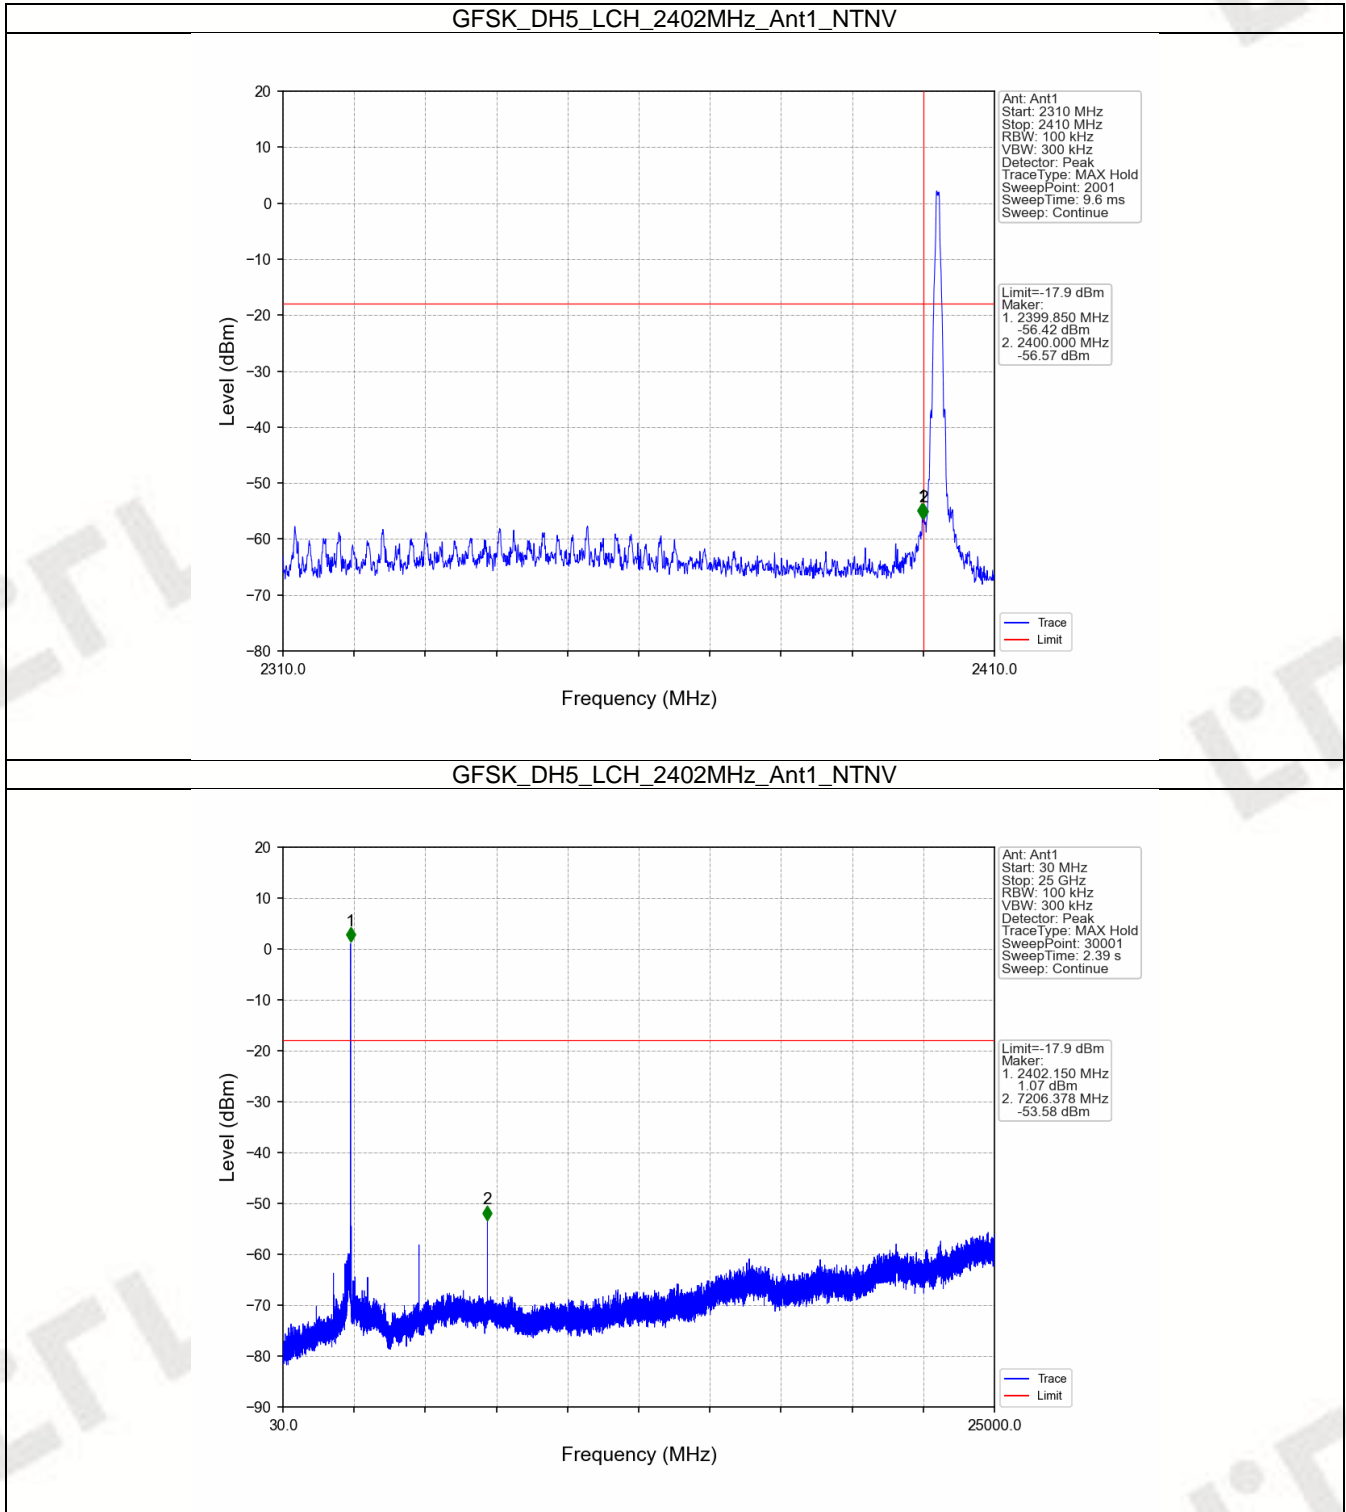




FCCID: Q8W-T9-2

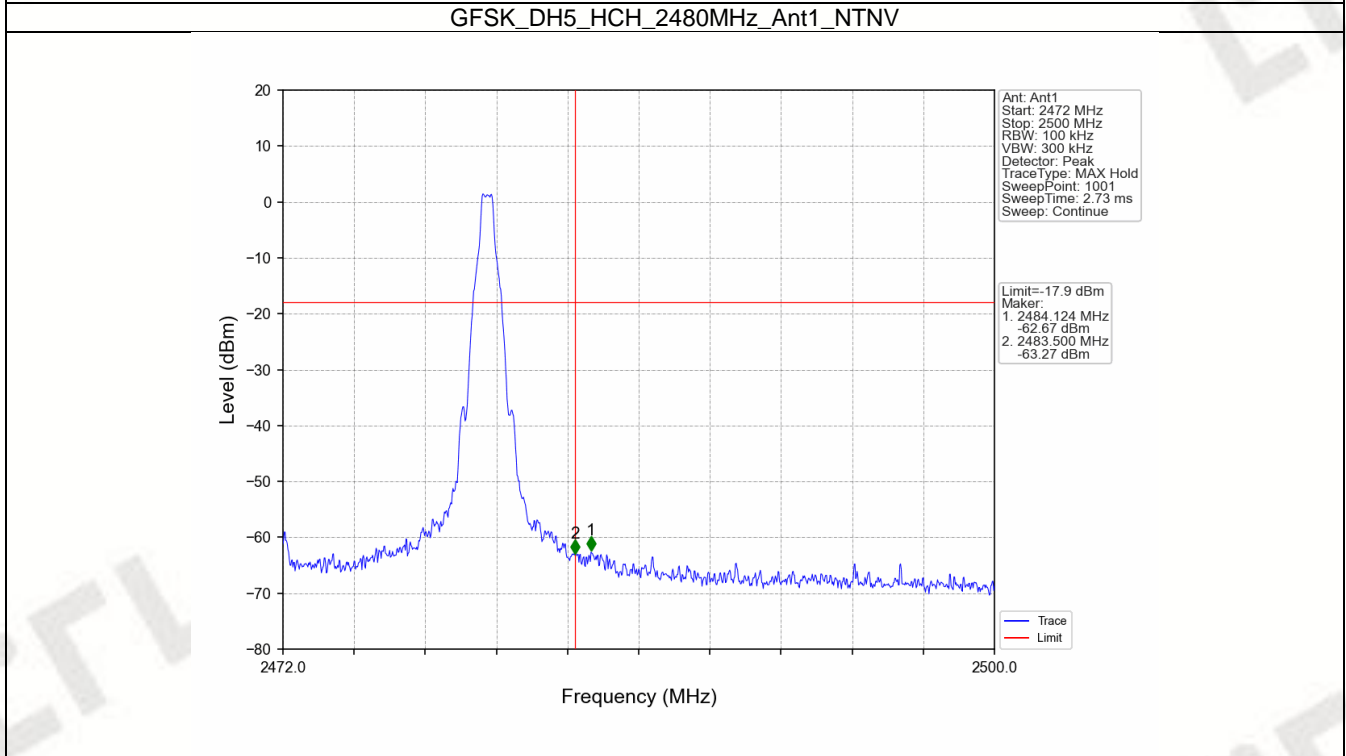
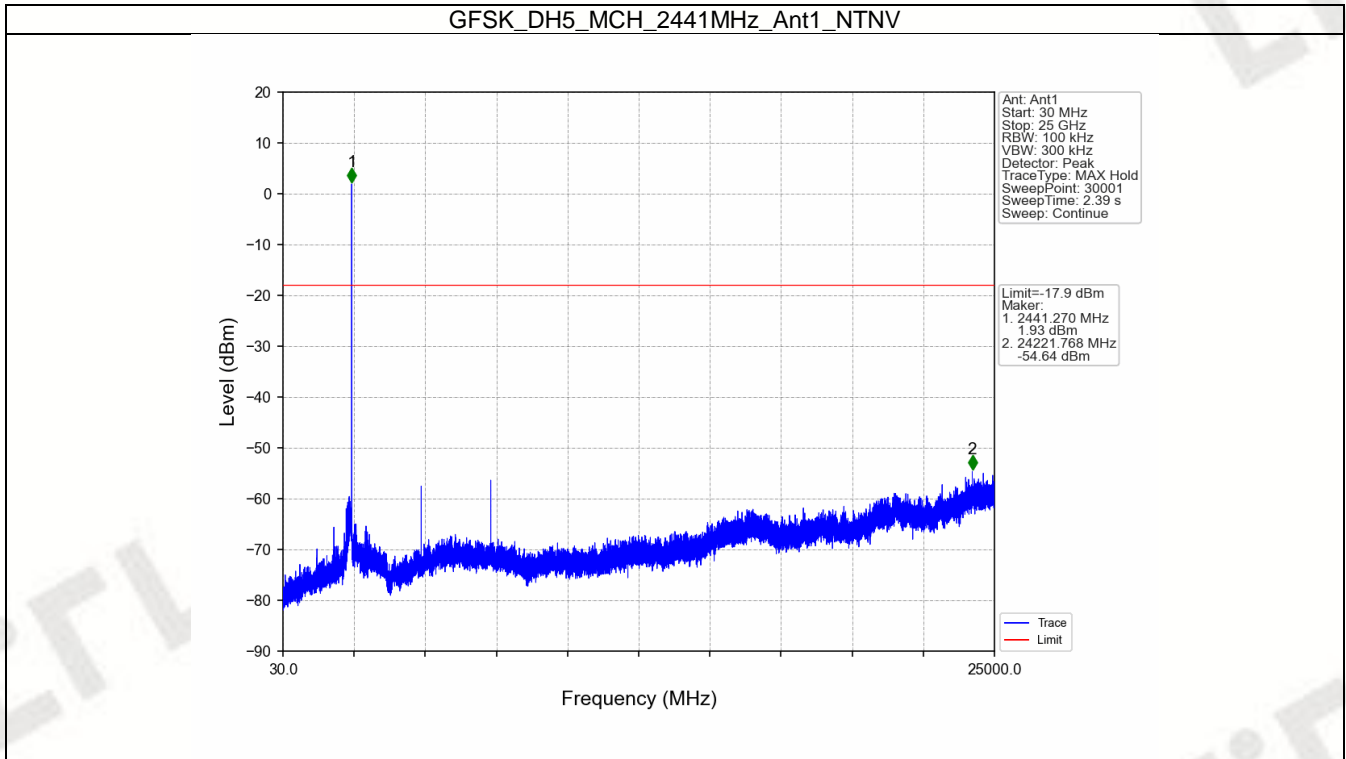


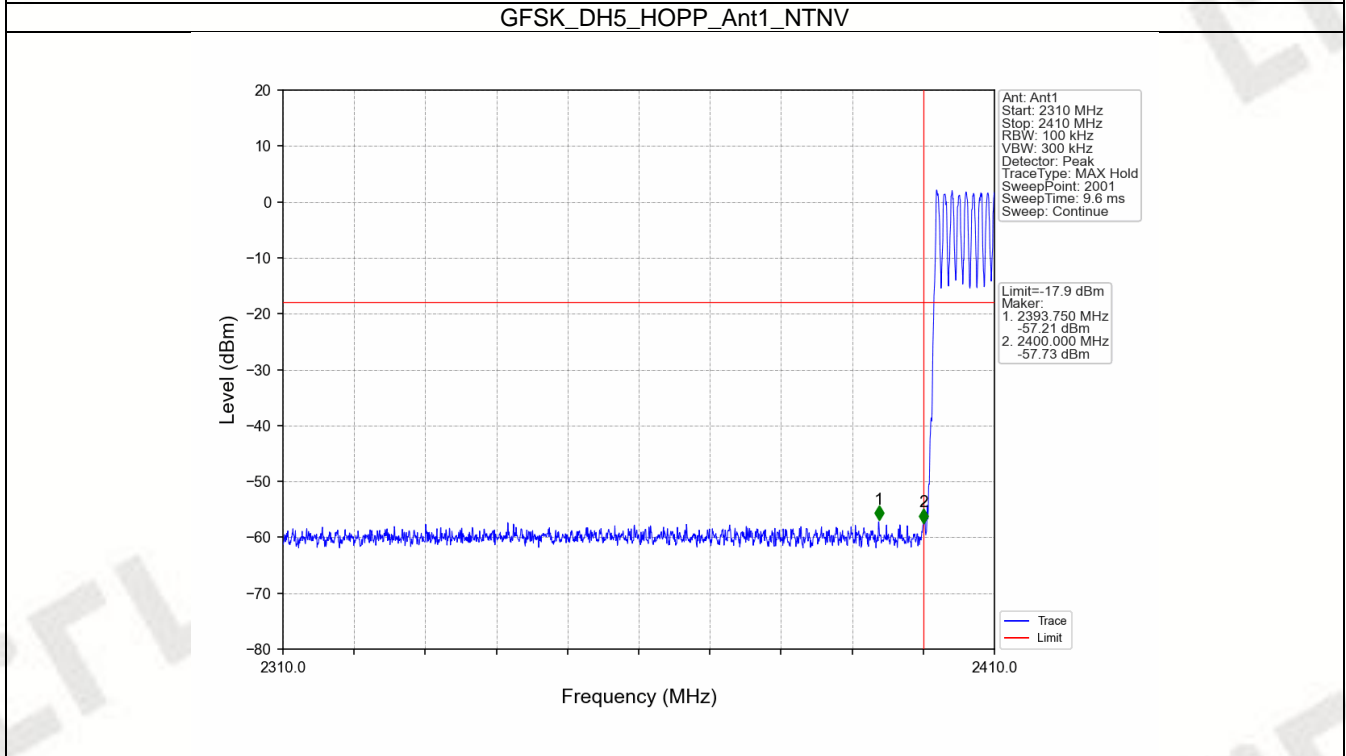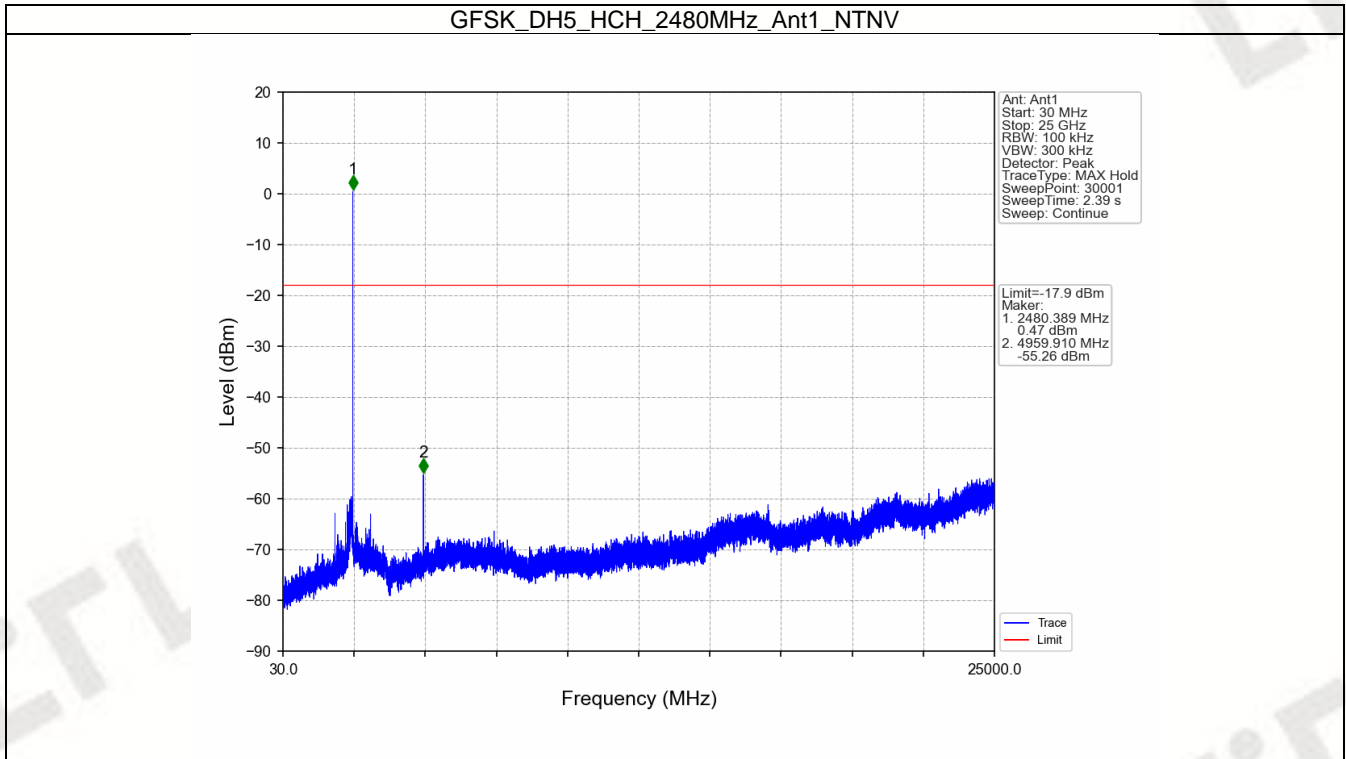

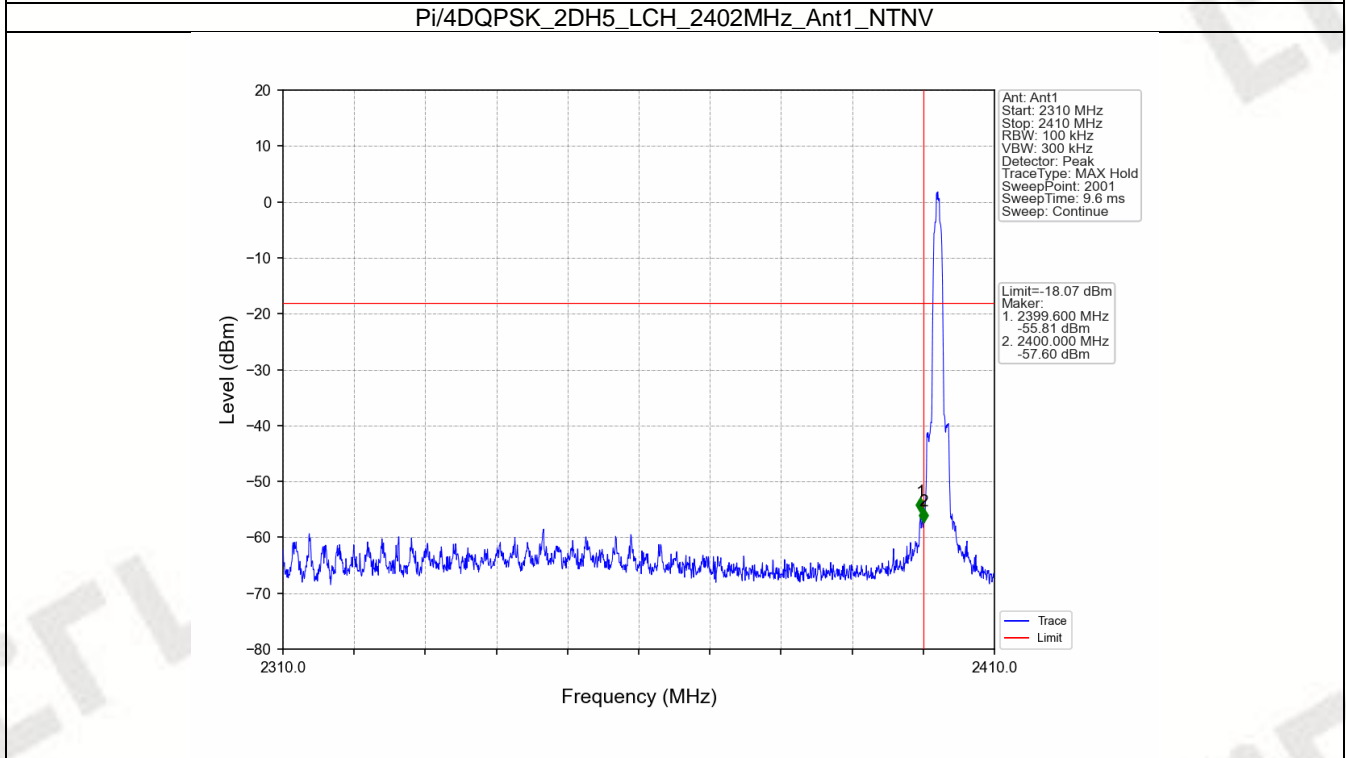
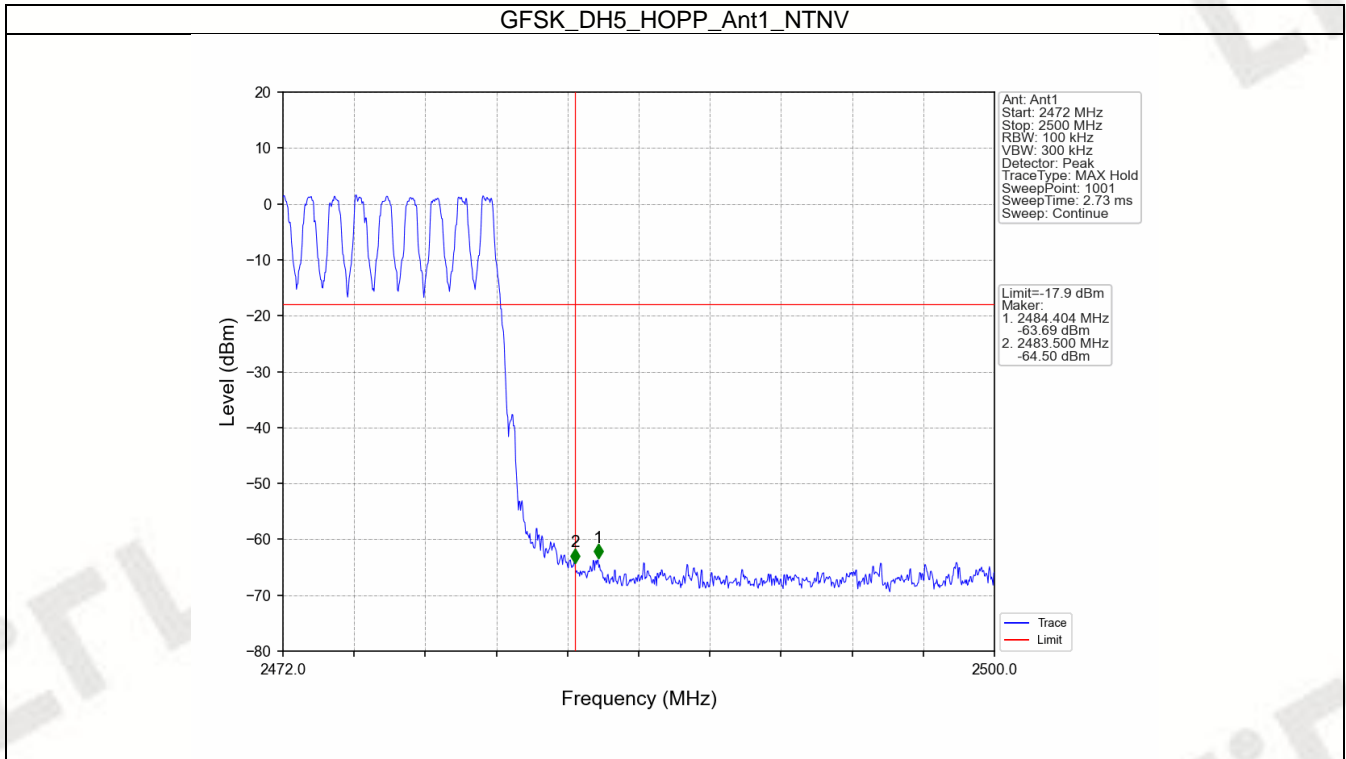


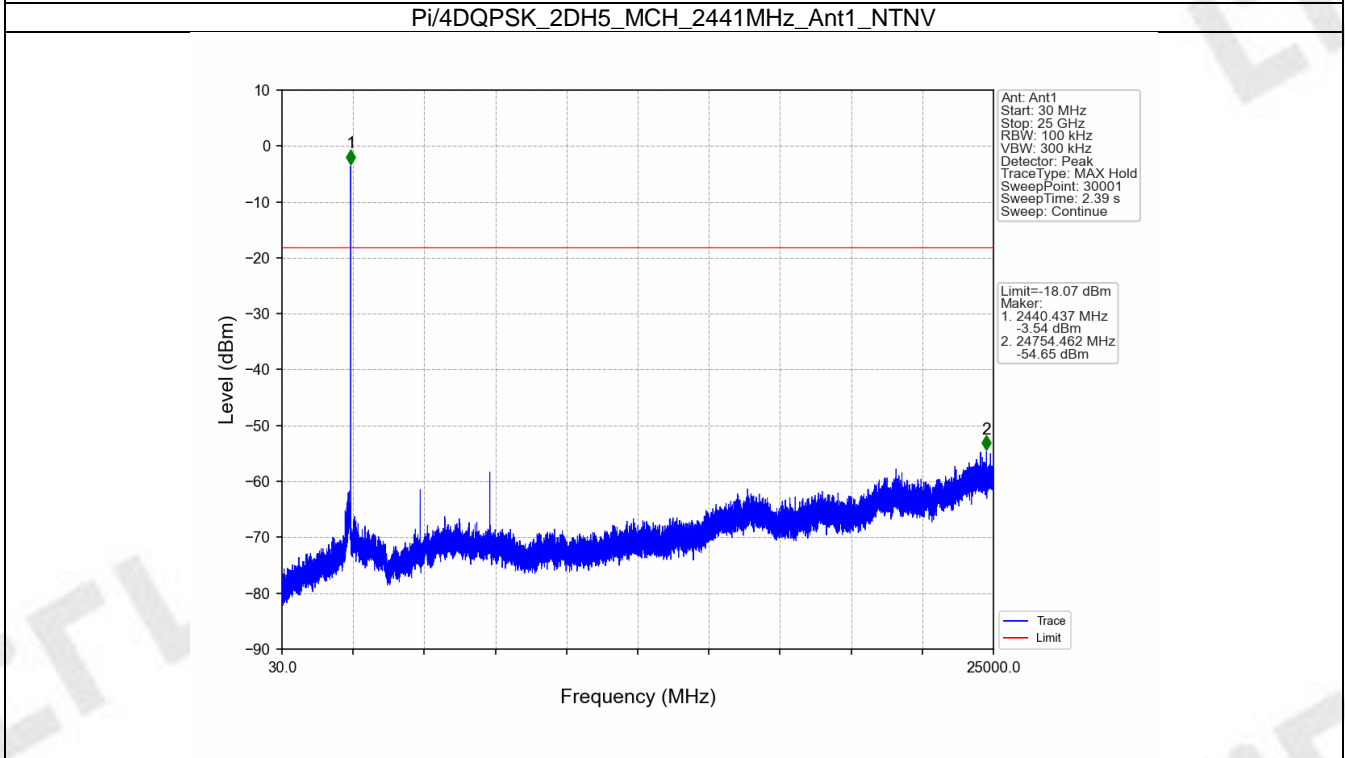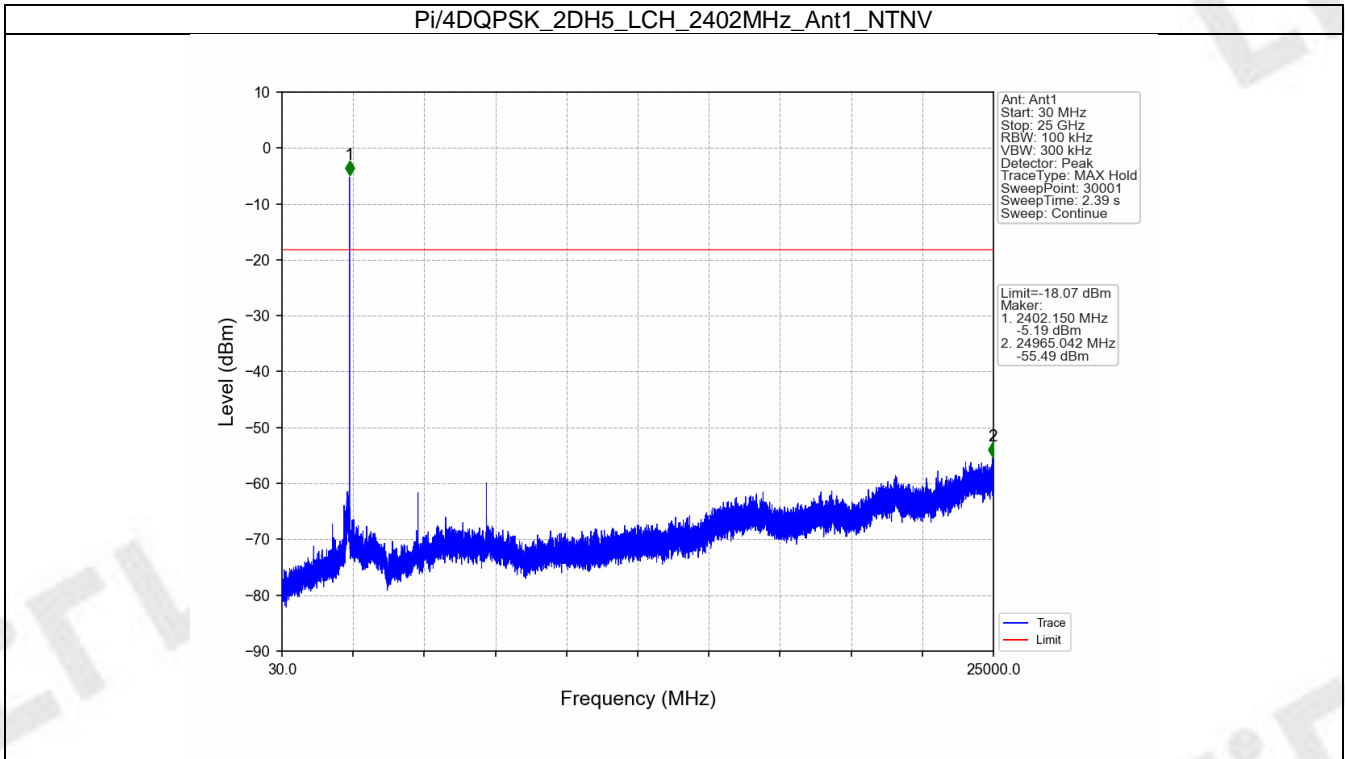

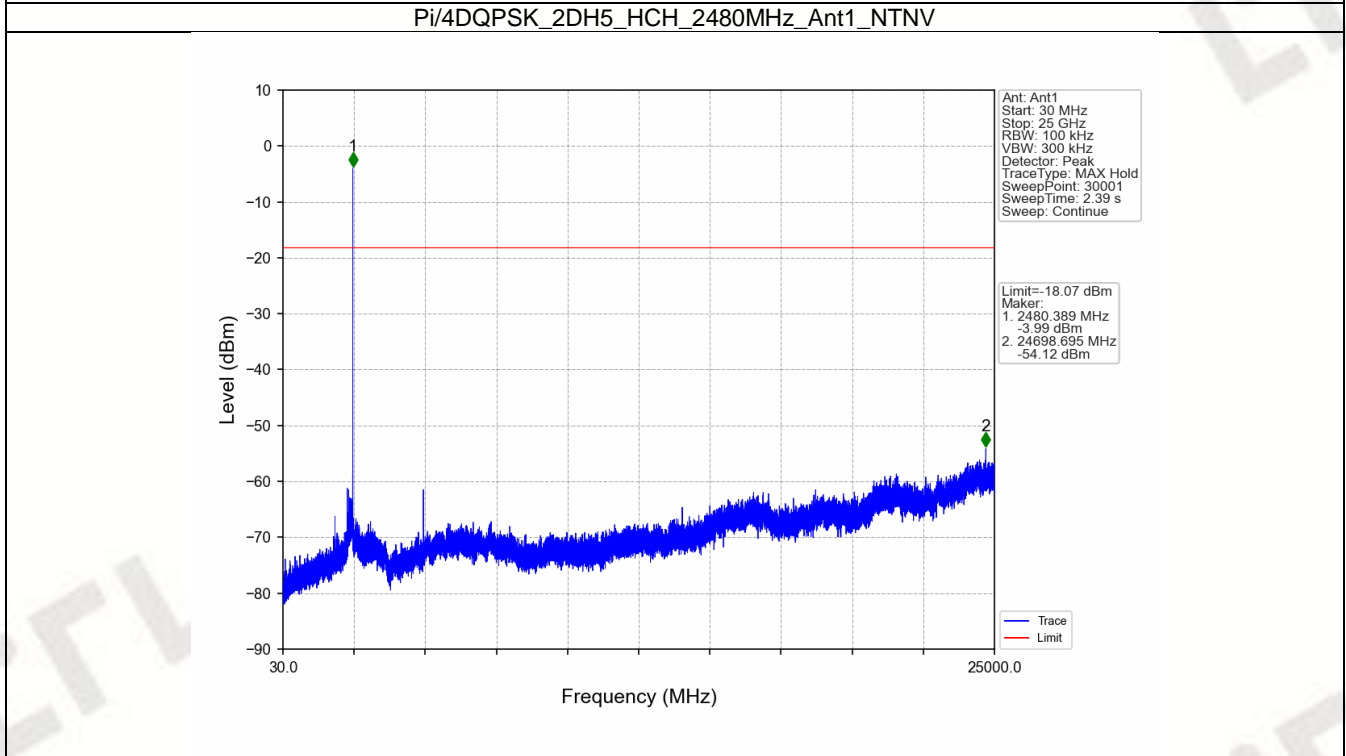
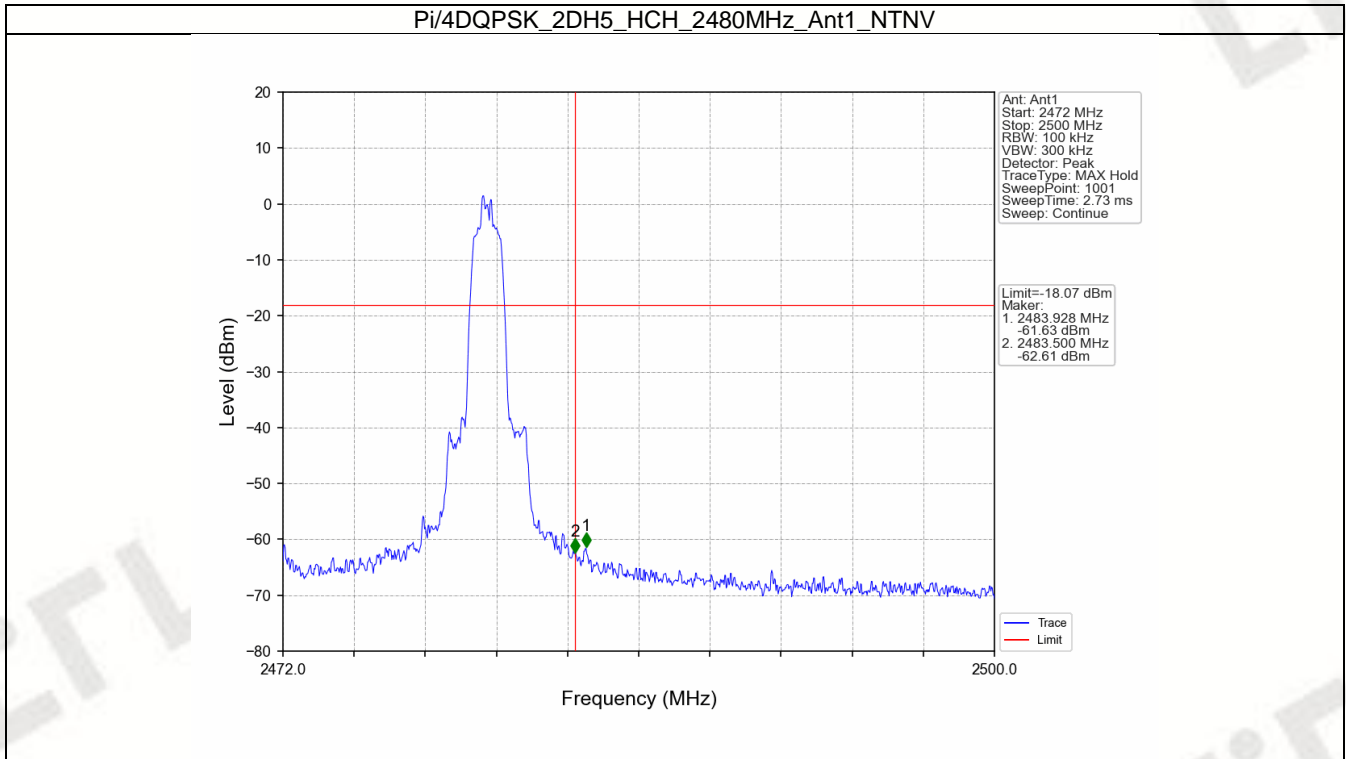


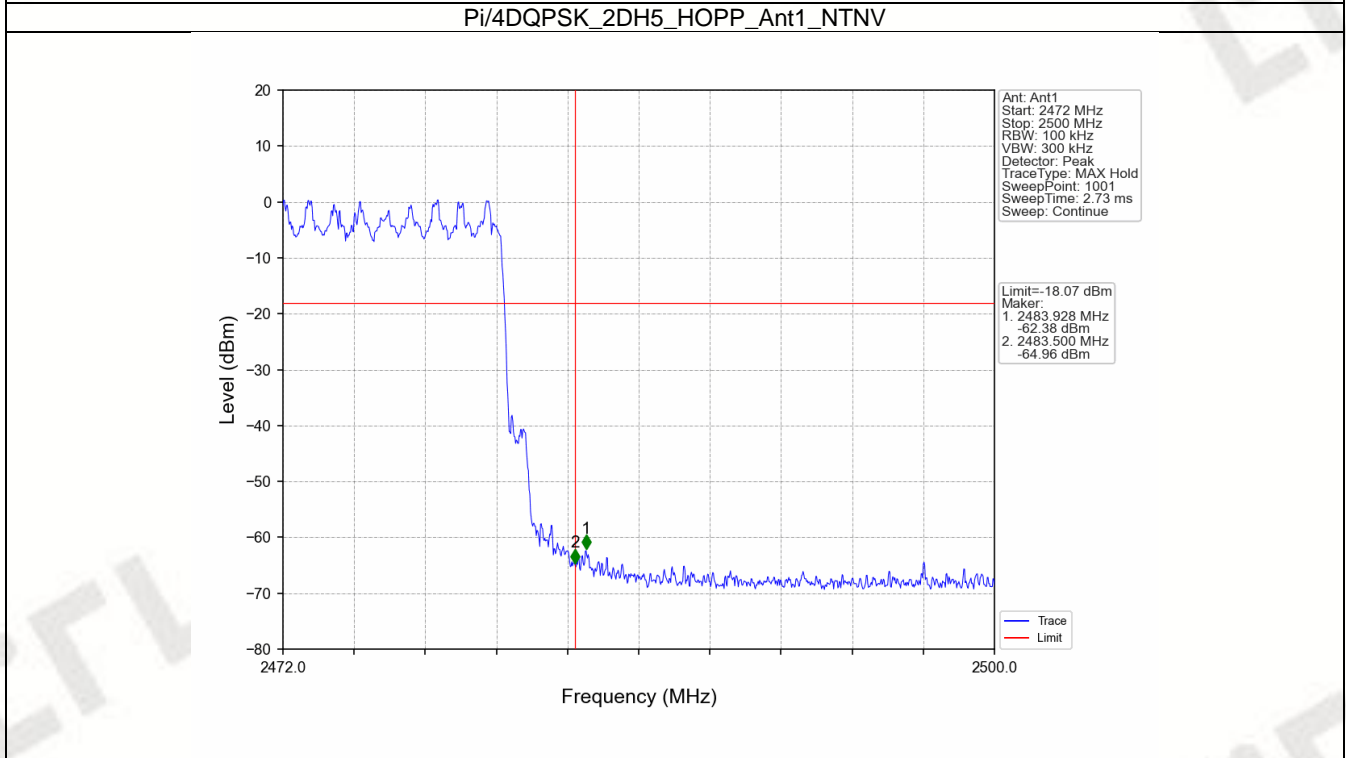
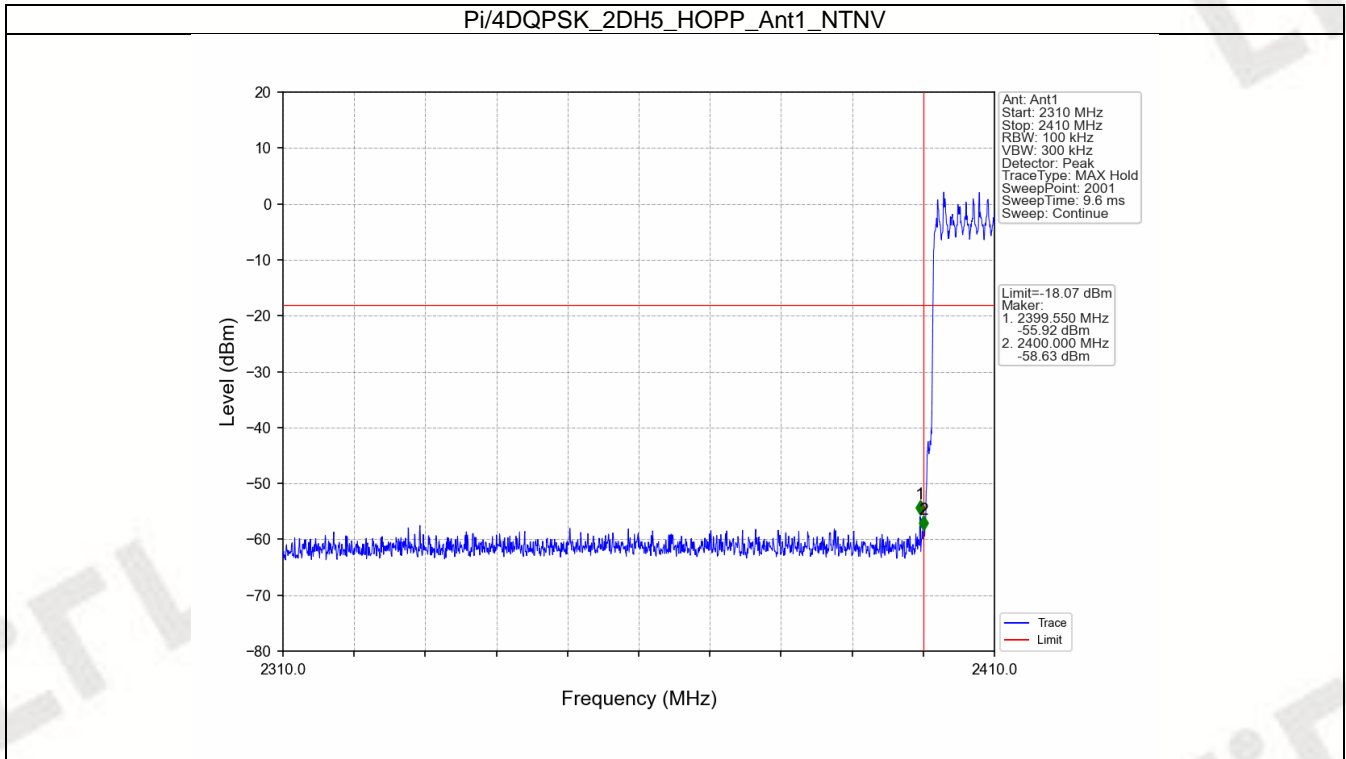


FCCID: Q8W-T9-2

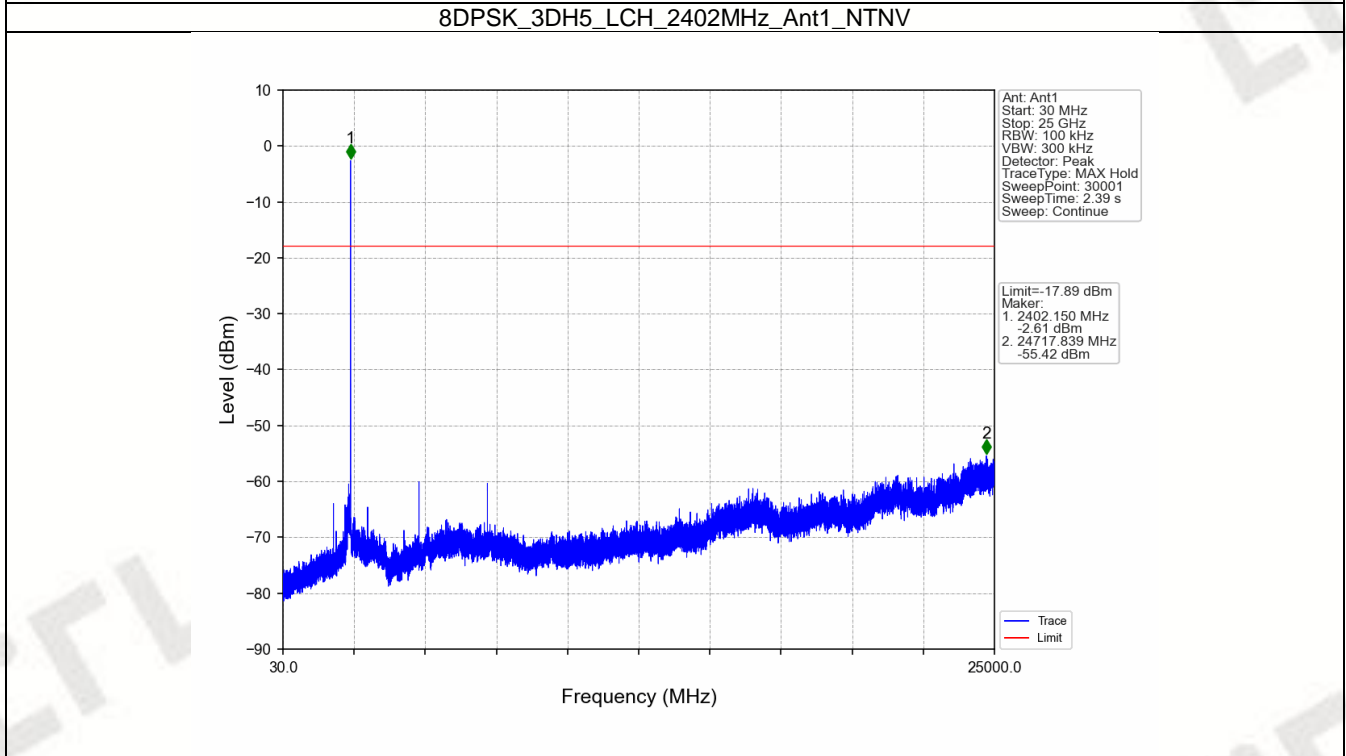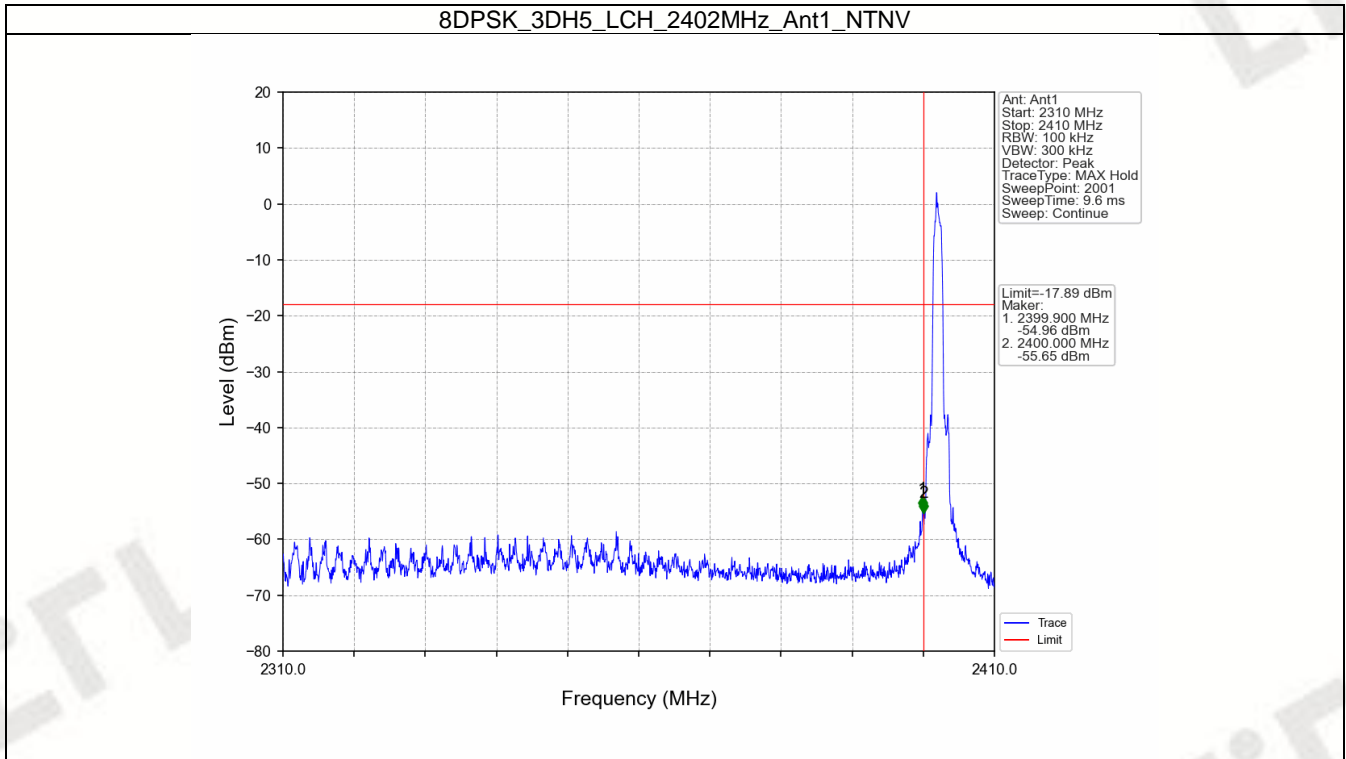

FCCID: Q8W-T9-2

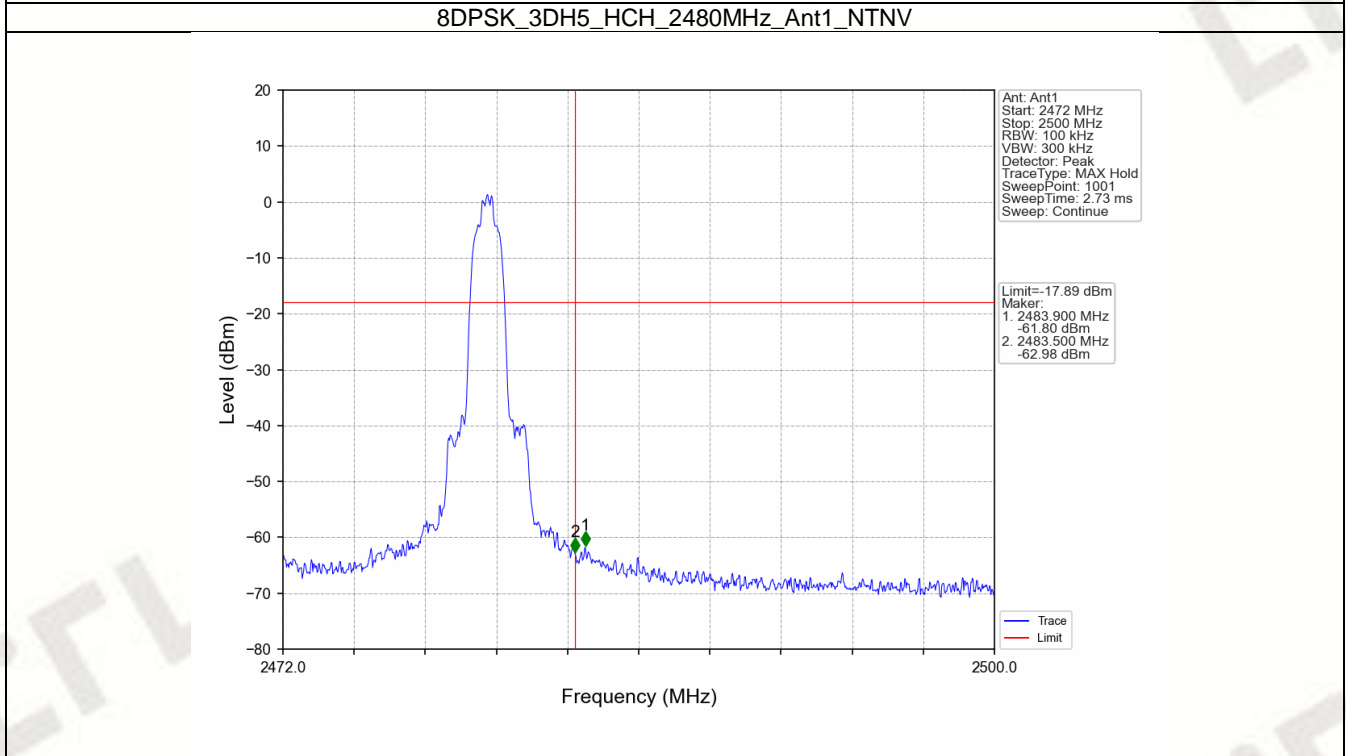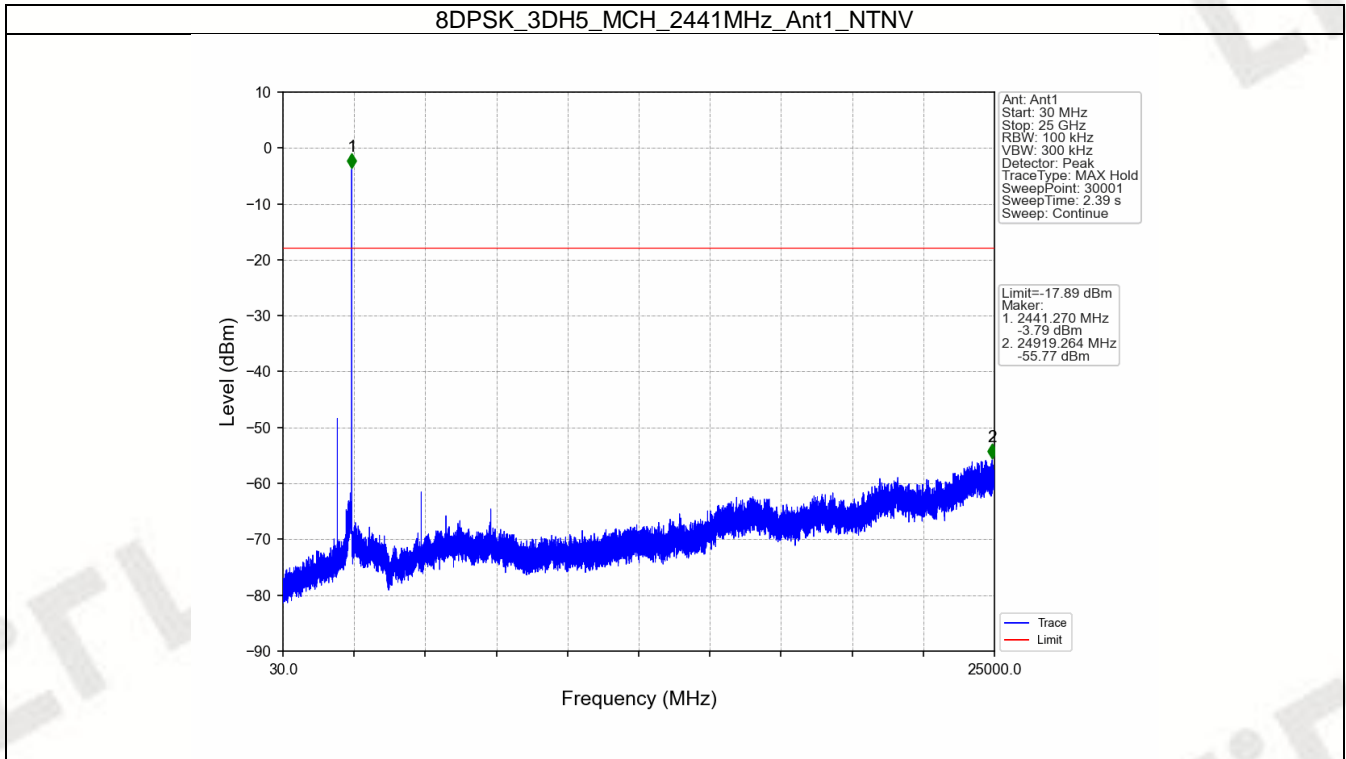

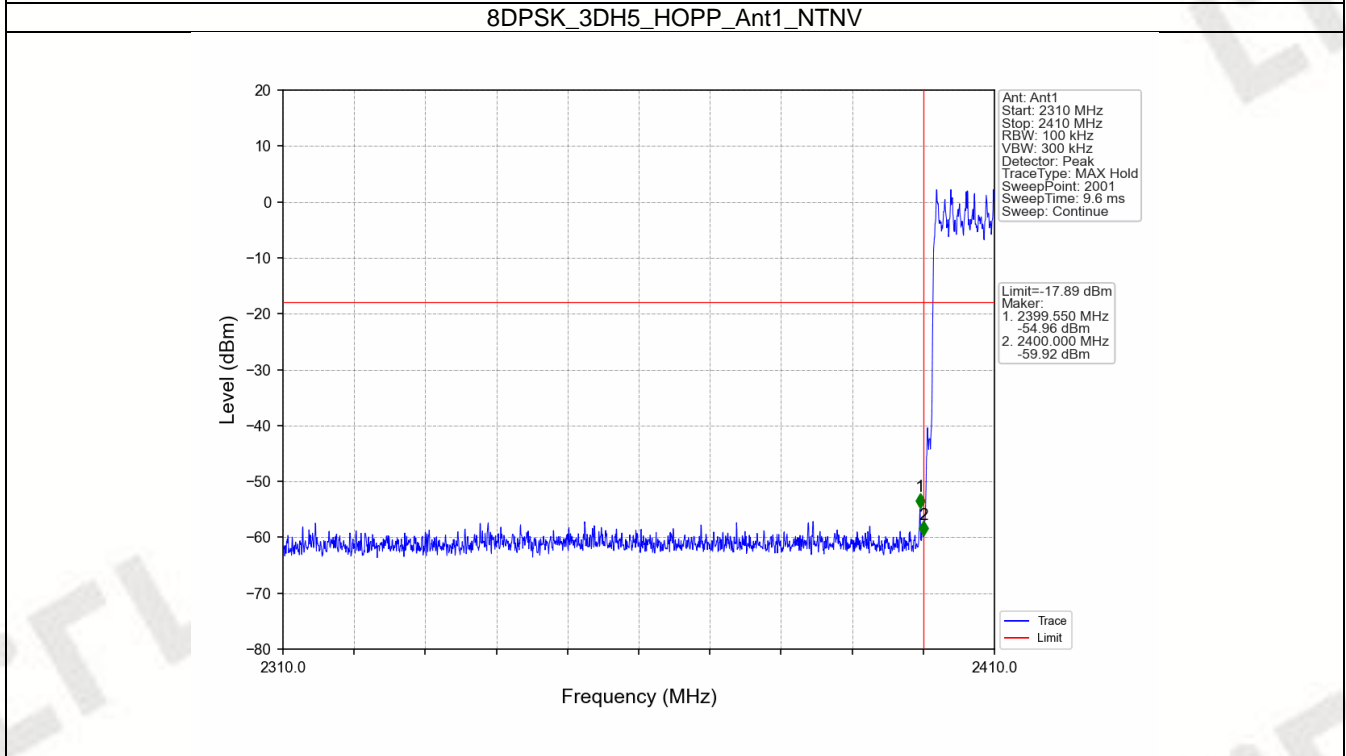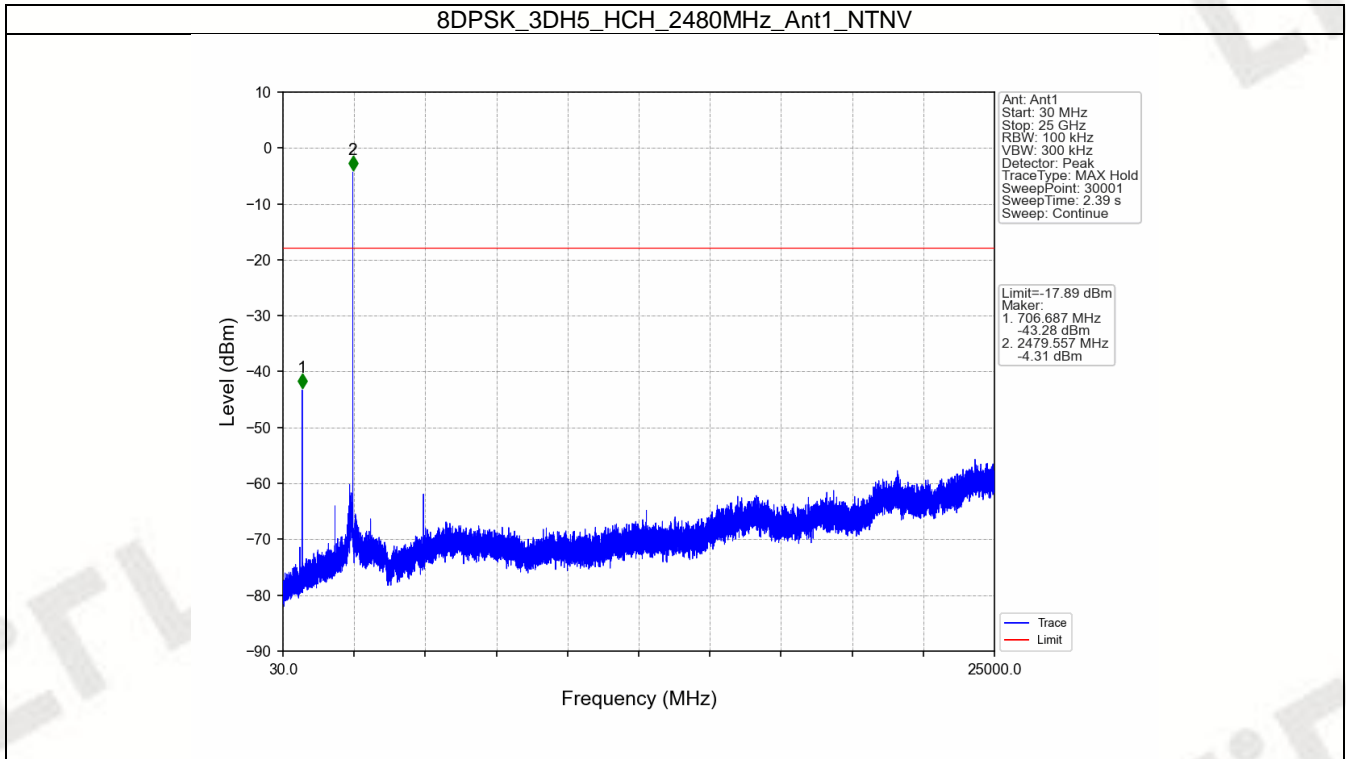

FCCID: Q8W-T9-2

