



# RF Test Report

For

**Applicant Name:** GSM GLOBE.COM INC  
Address: 10286 SW 22nd pl. Davie Florida United States 33324  
EUT Name: Mobile Phone  
Brand Name: Rayo Movil  
Model Number: Rayo Atlas

## Issued By

**Company Name:** BTF Testing Lab (Shenzhen) Co., Ltd.  
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,  
Tantou Community, Songgang Street, Bao'an District, Shenzhen,  
China

Report Number: BTF230526R00402  
Test Standards: 47 CFR Part 15.247

Test Conclusion: Pass  
FCC ID: 2AEJA-ATLAS  
Test Date: 2023-05-26 to 2023-06-08  
Date of Issue: 2023-06-09

Prepared By:

*Elma Yang*

Date:


elma.yang / Project Engineer  
2023-06-09

Approved By:

*Ryan CJ*

Date:

Ryan.CJ / EMC Manager  
2023-06-09



*Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.*



Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-06-09	Original

*Note: Once the revision has been made, then previous versions reports are invalid.*

## Table of Contents

<b>1</b>	<b>INTRODUCTION.....</b>	<b>5</b>
1.1	Identification of Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Announcement.....	5
<b>2</b>	<b>PRODUCT INFORMATION.....</b>	<b>6</b>
2.1	Application Information .....	6
2.2	Manufacturer Information.....	6
2.3	Factory Information .....	6
2.4	General Description of Equipment under Test (EUT) .....	6
2.5	Technical Information .....	6
<b>3</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
3.1	Test Standards .....	7
3.2	Uncertainty of Test.....	7
3.3	Summary of Test Result .....	7
<b>4</b>	<b>TEST CONFIGURATION .....</b>	<b>8</b>
4.1	Test Equipment List .....	8
4.2	Test Auxiliary Equipment.....	12
4.3	Test Modes .....	12
<b>5</b>	<b>EVALUATION RESULTS (EVALUATION) .....</b>	<b>13</b>
5.1	Antenna requirement .....	13
<b>6</b>	<b>RADIO SPECTRUM MATTER TEST RESULTS (RF).....</b>	<b>13</b>
6.1	<b>Conducted Emission at AC power line.....</b>	<b>13</b>
6.1.1	E.U.T. Operation: .....	13
6.1.2	Test Setup Diagram: .....	13
6.1.3	Test Data: .....	15
6.2	<b>Occupied Bandwidth.....</b>	<b>17</b>
6.2.1	E.U.T. Operation: .....	17
6.2.2	Test Setup Diagram: .....	17
6.2.3	Test Data: .....	17
6.3	<b>Maximum Conducted Output Power.....</b>	<b>18</b>
6.3.1	E.U.T. Operation: .....	18
6.3.2	Test Setup Diagram: .....	19
6.3.3	Test Data: .....	19
6.4	<b>Power Spectral Density .....</b>	<b>20</b>
6.4.1	E.U.T. Operation: .....	20
6.4.2	Test Setup Diagram: .....	20
6.4.3	Test Data: .....	20
6.5	<b>Emissions in non-restricted frequency bands .....</b>	<b>21</b>
6.5.1	E.U.T. Operation: .....	21
6.5.2	Test Setup Diagram: .....	22
6.5.3	Test Data: .....	22
6.6	<b>Band edge emissions (Radiated) .....</b>	<b>23</b>
6.6.1	E.U.T. Operation: .....	23
6.6.2	Test Data: .....	24
6.7	<b>Emissions in restricted frequency bands (below 1GHz) .....</b>	<b>26</b>
6.7.1	E.U.T. Operation: .....	26
6.7.2	Test Data: .....	27



6.8	Emissions in restricted frequency bands (above 1GHz) .....	29
6.8.1	E.U.T. Operation: .....	29
6.8.2	Test Data: .....	30
7	TEST SETUP PHOTOS .....	33
8	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	35
	APPENDIX.....	36

## 1 Introduction

### 1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

### 1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

### 1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 Product Information

### 2.1 Application Information

Company Name:	GSM GLOBE.COM INC
Address:	10286 SW 22nd pl. Davie Florida United States 33324

### 2.2 Manufacturer Information

Company Name:	GSM GLOBE.COM INC
Address:	10286 SW 22nd pl. Davie Florida United States 33324

### 2.3 Factory Information

Company Name:	ZTECH COMMUNICATION(SZ) CO LTD
Address:	FL 7 BLOCK D BAO'AN ZHIGU INNOVATION PARK YIN'TIAN ROAD NO.4 XI'XIANG STR' BAO'AN DISTRICT SZ CHINA

### 2.4 General Description of Equipment under Test (EUT)

EUT Name:	Mobile Phone
Test Model Number:	Rayo Atlas

### 2.5 Technical Information

Power Supply:	DC 4.45V from Battery
Power Adaptor:	Input:100-240V 50/60Hz 0.3A Output:5.0v 2.0A 10.0W
Operation Frequency:	2402MHz to 2480MHz
Number of Channels:	40
Modulation Type:	GFSK
Antenna Type:	PIFA ANT
Antenna Gain <sup>#</sup> :	1.09dBi

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

### 3 Summary of Test Results

#### 3.1 Test Standards

The tests were performed according to following standards:  
**47 CFR Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

#### 3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	±2.64dB
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

#### 3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

## 4 Test Configuration

### 4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum Conducted Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Power Spectral Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/



RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

**Emissions in non-restricted frequency bands**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

**Band edge emissions (Radiated)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMAMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23

POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preampilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

**Emissions in restricted frequency bands (below 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preampilifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preampilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

**Emissions in restricted frequency bands (above 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preampilifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23

POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMCC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

## 4.2 Test Auxiliary Equipment

The EUT was tested as an independent device.

## 4.3 Test Modes

No.	Test Modes	Description
TM1	TX mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation.

## 5 Evaluation Results (Evaluation)

### 5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

## 6 Radio Spectrum Matter Test Results (RF)


### 6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		

#### 6.1.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.1 °C
Humidity:	46.9 %
Atmospheric Pressure:	1010 mbar


#### 6.1.2 Test Setup Diagram:






6.1.3 Test Data:

TM1 / Line: Line / Band: 2.4G / BW: 1 / CH: M



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5820	33.67	10.66	44.33	56.00	-11.67	QP	P	
2	0.5865	15.98	10.66	26.64	46.00	-19.36	AVG	P	
3	1.1805	15.66	10.76	26.42	46.00	-19.58	AVG	P	
4 *	1.1849	33.93	10.76	44.69	56.00	-11.31	QP	P	
5	1.5270	15.63	10.73	26.36	46.00	-19.64	AVG	P	
6	1.5360	33.02	10.73	43.75	56.00	-12.25	QP	P	
7	1.8554	13.21	10.70	23.91	46.00	-22.09	AVG	P	
8	1.8645	30.92	10.70	41.62	56.00	-14.38	QP	P	
9	9.7080	18.00	10.93	28.93	50.00	-21.07	AVG	P	
10	9.9150	35.67	10.95	46.62	60.00	-13.38	QP	P	
11	11.0625	31.00	10.94	41.94	60.00	-18.06	QP	P	
12	11.0625	13.75	10.94	24.69	50.00	-25.31	AVG	P	

TM1 / Line: Neutral / Band: 2.4G / BW: 1 / CH: M



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5910	31.10	10.67	41.77	56.00	-14.23	QP	P	
2	0.5910	13.31	10.67	23.98	46.00	-22.02	AVG	P	
3 *	1.1400	32.74	10.77	43.51	56.00	-12.49	QP	P	
4	1.1490	16.14	10.77	26.91	46.00	-19.09	AVG	P	
5	1.6800	13.58	10.72	24.30	46.00	-21.70	AVG	P	
6	1.6845	31.68	10.72	42.40	56.00	-13.60	QP	P	
7	1.9724	9.74	10.69	20.43	46.00	-25.57	AVG	P	
8	2.0040	26.04	10.69	36.73	56.00	-19.27	QP	P	
9	9.5820	32.73	10.92	43.65	60.00	-16.35	QP	P	
10	9.5820	21.31	10.92	32.23	50.00	-17.77	AVG	P	
11	10.8285	27.92	10.93	38.85	60.00	-21.15	QP	P	
12	10.8285	16.63	10.93	27.56	50.00	-22.44	AVG	P	




## 6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<ul style="list-style-type: none"> <li>a) Set RBW = 100 kHz.</li> <li>b) Set the VBW <math>\geq</math> [3 × RBW].</li> <li>c) Detector = peak.</li> <li>d) Trace mode = max hold.</li> <li>e) Sweep = auto couple.</li> <li>f) Allow the trace to stabilize.</li> <li>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ul>

### 6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.6 °C
Humidity:	48 %
Atmospheric Pressure:	1010 mbar

### 6.2.2 Test Setup Diagram:



### 6.2.3 Test Data:

Please Refer to Appendix for Details.


### 6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

#### 6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.6 °C
Humidity:	48 %
Atmospheric Pressure:	1010 mbar

### 6.3.2 Test Setup Diagram:



### 6.3.3 Test Data:

Please Refer to Appendix for Details.


### 6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.6 °C
Humidity:	48 %
Atmospheric Pressure:	1010 mbar

#### 6.4.2 Test Setup Diagram:



#### 6.4.3 Test Data:

Please Refer to Appendix for Details.


### 6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

#### 6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.6 °C
Humidity:	48 %
Atmospheric Pressure:	1010 mbar

**6.5.2 Test Setup Diagram:**



**6.5.3 Test Data:**

Please Refer to Appendix for Details.

### 6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

#### 6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.2 °C
Humidity:	53.1 %
Atmospheric Pressure:	1010 mbar

**6.6.2 Test Data:**

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	67.98	-30.59	37.39	74.00	-36.61	peak	P
2 *	2390.000	71.24	-30.49	40.75	74.00	-33.25	peak	P
3	2400.000	68.17	-30.48	37.69	74.00	-36.31	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	69.48	-30.59	38.89	74.00	-35.11	peak	P
2	2390.000	70.24	-30.49	39.75	74.00	-34.25	peak	P
3 *	2400.000	73.67	-30.48	43.19	74.00	-30.81	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	73.22	-30.39	42.83	74.00	-31.17	peak	P
2	2500.000	69.71	-30.37	39.34	74.00	-34.66	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	70.72	-30.39	40.33	74.00	-33.67	peak	P
2	2500.000	66.71	-30.37	36.34	74.00	-37.66	peak	P



TM1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	68.76	-30.59	38.17	74.00	-35.83	peak	P
2 *	2390.000	70.96	-30.49	40.47	74.00	-33.53	peak	P
3	2400.000	67.79	-30.48	37.31	74.00	-36.69	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	67.76	-30.59	37.17	74.00	-36.83	peak	P
2	2390.000	69.46	-30.49	38.97	74.00	-35.03	peak	P
3 *	2400.000	74.29	-30.48	43.81	74.00	-30.19	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2483.500	70.13	-30.39	39.74	74.00	-34.26	peak	P
2 *	2500.000	70.44	-30.37	40.07	74.00	-33.93	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	69.63	-30.39	39.24	74.00	-34.76	peak	P
2	2500.000	67.44	-30.37	37.07	74.00	-36.93	peak	P

### 6.7 Emissions in restricted frequency bands (below 1GHz)


Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

#### 6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.2 °C
Humidity:	53.1 %
Atmospheric Pressure:	1010 mbar


**6.7.2 Test Data:**

Note: All the mode have been tested, and only the worst mode are in the report  
 TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	58.7155	38.01	-18.20	19.81	40.00	-20.19	QP	P
2	96.0986	49.62	-28.88	20.74	43.50	-22.76	QP	P
3 *	174.7301	62.11	-27.56	34.55	43.50	-8.95	QP	P
4	210.7860	60.70	-26.85	33.85	43.50	-9.65	QP	P
5	248.9881	58.78	-25.86	32.92	46.00	-13.08	QP	P
6	643.9894	49.68	-22.75	26.93	46.00	-19.07	QP	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	59.5448	48.43	-20.16	28.27	40.00	-11.73	QP	P
2	134.3235	62.06	-27.92	34.14	43.50	-9.36	QP	P
3	157.2829	63.20	-27.72	35.48	43.50	-8.02	QP	P
4 *	215.2678	62.68	-26.66	36.02	43.50	-7.48	QP	P
5	239.5670	57.83	-25.94	31.89	46.00	-14.11	QP	P
6	546.1393	50.17	-21.62	28.55	46.00	-17.45	QP	P

### 6.8 Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

#### 6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.2 °C
Humidity:	53.1 %
Atmospheric Pressure:	1010 mbar

**6.8.2 Test Data:**

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2996.588	65.85	-29.51	36.34	74.00	-37.66	peak	P
2	3780.514	68.41	-29.03	39.38	74.00	-34.62	peak	P
3	5018.426	69.72	-27.36	42.36	74.00	-31.64	peak	P
4	6197.299	72.08	-25.35	46.73	74.00	-27.27	peak	P
5 *	7536.756	73.61	-24.84	48.77	74.00	-25.23	peak	P
6	8660.900	73.76	-24.99	48.77	74.00	-25.23	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3643.203	63.37	-29.04	34.33	74.00	-39.67	peak	P
2	4592.305	67.57	-28.53	39.04	74.00	-34.96	peak	P
3	5871.227	66.01	-25.74	40.27	74.00	-33.73	peak	P
4	8033.891	69.58	-25.52	44.06	74.00	-29.94	peak	P
5	9861.086	69.36	-23.99	45.37	74.00	-28.63	peak	P
6 *	11596.997	71.30	-22.89	48.41	74.00	-25.59	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3323.271	60.64	-29.22	31.42	74.00	-42.58	peak	P
2	4102.750	64.81	-28.96	35.85	74.00	-38.15	peak	P
3	5746.982	70.55	-26.15	44.40	74.00	-29.60	peak	P
4	6835.279	70.05	-25.08	44.97	74.00	-29.03	peak	P
5	8541.570	73.69	-25.23	48.46	74.00	-25.54	peak	P
6 *	11384.444	73.35	-23.15	50.20	74.00	-23.80	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3454.509	62.12	-29.10	33.02	74.00	-40.98	peak	P
2	4384.765	64.77	-28.84	35.93	74.00	-38.07	peak	P
3	5631.874	66.60	-26.53	40.07	74.00	-33.93	peak	P
4	6623.290	70.63	-25.27	45.36	74.00	-28.64	peak	P
5	8534.167	72.10	-25.26	46.84	74.00	-27.16	peak	P
6 *	11617.127	74.10	-22.86	51.24	74.00	-22.76	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 1 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3727.349	62.94	-29.03	33.91	74.00	-40.09	peak	P
2	4522.492	66.02	-28.72	37.30	74.00	-36.70	peak	P
3	6371.667	66.58	-25.37	41.21	74.00	-32.79	peak	P
4	8010.704	68.36	-25.53	42.83	74.00	-31.17	peak	P
5	10420.786	73.37	-24.48	48.89	74.00	-25.11	peak	P
6 *	11410.798	72.25	-23.13	49.12	74.00	-24.88	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 1 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3302.206	63.35	-29.24	34.11	74.00	-39.89	peak	P
2	4234.065	65.59	-28.90	36.69	74.00	-37.31	peak	P
3	6073.172	67.92	-25.34	42.58	74.00	-31.42	peak	P
4	8419.016	69.97	-25.35	44.62	74.00	-29.38	peak	P
5	11282.893	73.60	-23.22	50.38	74.00	-23.62	peak	P
6 *	12824.163	72.47	-21.44	51.03	74.00	-22.97	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3100.553	63.25	-29.42	33.83	74.00	-40.17	peak	P
2	4164.880	66.36	-28.93	37.43	74.00	-36.57	peak	P
3	5444.604	68.01	-27.00	41.01	74.00	-32.99	peak	P
4	6890.821	69.29	-25.03	44.26	74.00	-29.74	peak	P
5	9470.021	68.81	-23.26	45.55	74.00	-28.45	peak	P
6 *	12995.808	69.36	-21.34	48.02	74.00	-25.98	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3154.793	62.74	-29.37	33.37	74.00	-40.63	peak	P
2	4475.677	66.31	-28.80	37.51	74.00	-36.49	peak	P
3	5471.422	68.36	-26.98	41.38	74.00	-32.62	peak	P
4	6746.950	69.71	-25.16	44.55	74.00	-29.45	peak	P
5	9197.561	70.03	-23.87	46.16	74.00	-27.84	peak	P
6 *	12824.163	69.97	-21.44	48.53	74.00	-25.47	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3510.879	62.10	-29.06	33.04	74.00	-40.96	peak	P
2	5046.062	65.93	-27.33	38.60	74.00	-35.40	peak	P
3	5765.283	66.67	-26.09	40.58	74.00	-33.42	peak	P
4	7571.690	66.45	-24.89	41.56	74.00	-32.44	peak	P
5	9795.749	66.54	-23.85	42.69	74.00	-31.31	peak	P
6 *	14618.166	70.59	-21.01	49.58	74.00	-24.42	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3048.127	62.02	-29.47	32.55	74.00	-41.45	peak	P
2	3856.668	65.18	-29.01	36.17	74.00	-37.83	peak	P
3	5323.229	66.94	-27.10	39.84	74.00	-34.16	peak	P
4	6835.279	68.55	-25.08	43.47	74.00	-30.53	peak	P
5	8701.046	71.20	-24.92	46.28	74.00	-27.72	peak	P
6 *	9500.178	70.01	-23.20	46.81	74.00	-27.19	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3082.681	64.82	-29.43	35.39	74.00	-38.61	peak	P
2	4063.803	66.80	-28.97	37.83	74.00	-36.17	peak	P
3	5666.163	66.99	-26.41	40.58	74.00	-33.42	peak	P
4	8385.017	67.16	-25.37	41.79	74.00	-32.21	peak	P
5	11101.737	71.21	-23.36	47.85	74.00	-26.15	peak	P
6 *	13207.871	71.13	-21.18	49.95	74.00	-24.05	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2970.716	61.32	-29.56	31.76	74.00	-42.24	peak	P
2	4164.880	62.86	-28.93	33.93	74.00	-40.07	peak	P
3	5552.673	65.00	-26.78	38.22	74.00	-35.78	peak	P
4	7296.681	68.01	-24.84	43.17	74.00	-30.83	peak	P
5	9470.021	68.31	-23.26	45.05	74.00	-28.95	peak	P
6 *	11282.893	70.60	-23.22	47.38	74.00	-26.62	peak	P



## 7 Test Setup Photos


Conducted Emission at AC power line



Occupied Bandwidth  
Maximum Conducted Output Power  
Power Spectral Density  
Emissions in non-restricted frequency bands



**Band edge emissions (Radiated)**  
**Emissions in restricted frequency bands (above 1GHz)**



**Emissions in restricted frequency bands (below 1GHz)**



## 8 EUT Constructional Details (EUT Photos)

Please refer to the report No.BTF230526R00401

# Appendix


## 1. Duty Cycle



### 1.1 Ant1

#### 1.1.1 Test Result


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.144	2.499	85.79	0.67	0.03
		2440	2.143	2.499	85.75	0.67	0.03
		2480	2.144	2.499	85.79	0.67	0.03
2M	SISO	2402	1.090	1.876	58.10	2.36	0.02
		2440	1.091	1.875	58.19	2.35	0.01
		2480	1.090	1.876	58.10	2.36	0.02

### 1.1.2 Test Graph

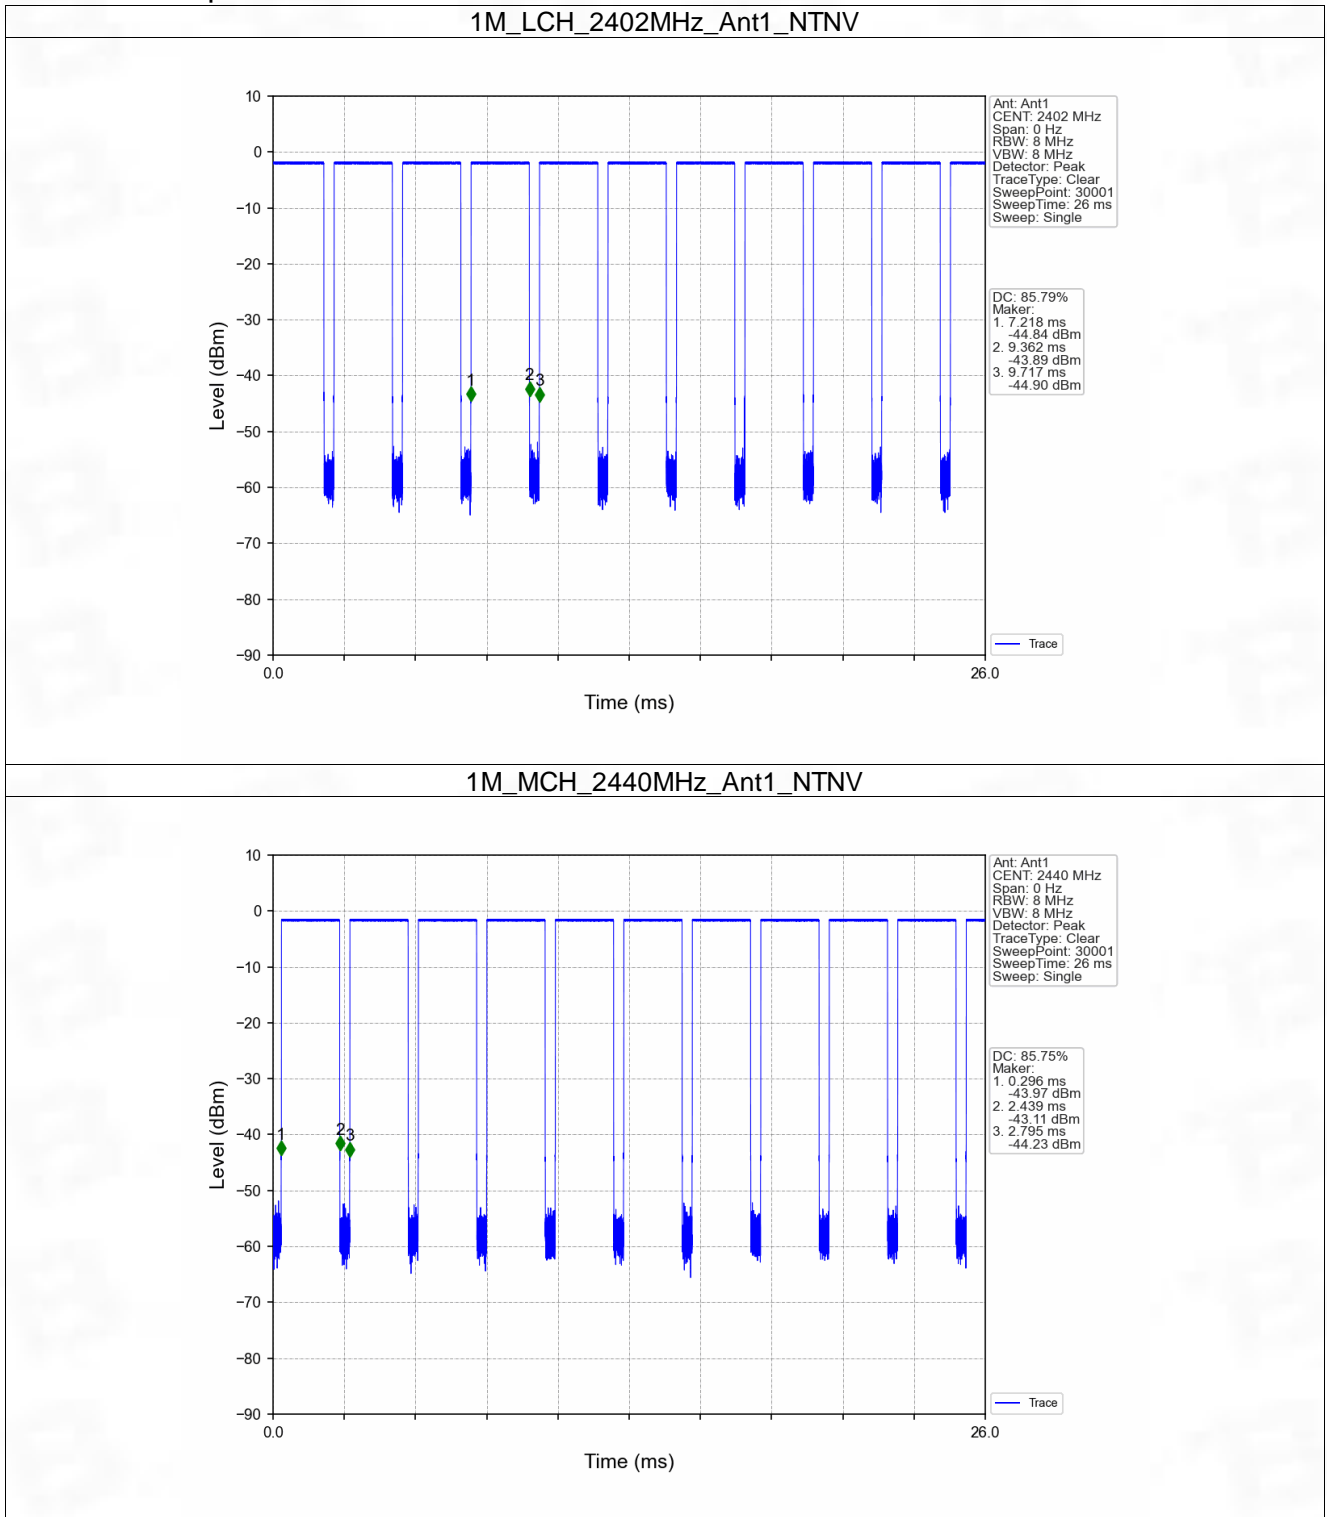




2M\_MCH\_2440MHz\_Ant1\_NTNV



2M\_HCH\_2480MHz\_Ant1\_NTNV






## 2. Bandwidth

### 2.1 OBW


#### 2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.033	Pass
		2440	1	1.031	Pass
		2480	1	1.031	Pass
2M	SISO	2402	1	2.062	Pass
		2440	1	2.063	Pass
		2480	1	2.062	Pass


### 2.1.2 Test Graph





1M\_HCH\_2480MHz\_Ant1\_NTNV



2M\_LCH\_2402MHz\_Ant1\_NTNV








## 2.2 6dB BW



## 2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.663	$\geq 0.5$	Pass
		2440	1	0.664	$\geq 0.5$	Pass
		2480	1	0.663	$\geq 0.5$	Pass
2M	SISO	2402	1	1.181	$\geq 0.5$	Pass
		2440	1	1.183	$\geq 0.5$	Pass
		2480	1	1.178	$\geq 0.5$	Pass

### 2.2.2 Test Graph









### 3. Maximum Conducted Output Power


#### 3.1 Power



##### 3.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-2.30	<=30	Pass
		2440	-1.88	<=30	Pass
		2480	-1.74	<=30	Pass
2M	SISO	2402	-2.19	<=30	Pass
		2440	-1.78	<=30	Pass
		2480	-1.64	<=30	Pass

Note1: Antenna Gain: Ant1: 1.09dBi;

### 3.1.2 Test Graph







## 4. Maximum Power Spectral Density


### 4.1 PSD



#### 4.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-18.02	<=8	Pass
		2440	-17.63	<=8	Pass
		2480	-17.67	<=8	Pass
2M	SISO	2402	-20.48	<=8	Pass
		2440	-20.74	<=8	Pass
		2480	-20.19	<=8	Pass

Note1: Antenna Gain: Ant1: 1.09dBi;

### 4.1.2 Test Graph









## 5. Unwanted Emissions In Non-restricted Frequency Bands


### 5.1 Ref



#### 5.1.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-2.10
		2440	1	-1.78
		2480	1	-1.80
2M	SISO	2402	1	-2.84
		2440	1	-2.56
		2480	1	-2.58

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

### 5.1.2 Test Graph









## 5.2 CSE

### 5.2.1 Test Result


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-1.78	-21.78	Pass
		2440	1	-1.78	-21.78	Pass
		2480	1	-1.78	-21.78	Pass
2M	SISO	2402	1	-2.56	-22.56	Pass
		2440	1	-2.56	-22.56	Pass
		2480	1	-2.56	-22.56	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


5.2.2 Test Graph




1M\_MCH\_2440MHz\_Ant1\_NTNV




1M\_HCH\_2480MHz\_Ant1\_NTNV



1M\_HCH\_2480MHz\_Ant1\_NTNV




2M\_LCH\_2402MHz\_Ant1\_NTNV








2M\_LCH\_2402MHz\_Ant1\_NTNV



2M\_MCH\_2440MHz\_Ant1\_NTNV





## 6. Form731

### 6.1 Form731

#### 6.1.1 Test Result

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0007	-1.64



Test Report Number: BTF230526R00402



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,  
Bao'an District, Shenzhen, China

[www.btf-lab.com](http://www.btf-lab.com)

**-- END OF REPORT --**