


Product Title
Font: Arial, Regular, 12pt
 Top-align with Top Label Margin
 Left-align with Left Label Margin

**Serial Number,
 Part Number,
 IMEI Number**
Heading Font: Arial Narrow, Bold, 6pt
Barcode Format: Code 128
Barcode Line Height: 2.5mm
Barcode Text Font: OCR-B 10 BT, Regular, 11pt /
 Arial, Regular, 9pt
 Left-align with Left Label Margin

Bluetooth MAC Address
Heading Font: Arial Narrow, Regular, 6pt
Paragraph Alignment: Justify
MAC Address Font: Arial, Regular, 8pt
 Left-align with Left Label Margin

**Product Version,
 Supplier Code,
 Date Of Manufacture**
Font: Arial, Regular, 8pt
Paragraph alignment: Left
 Left-align with Left Label Margin

MiX Telematics Logo
Width: 29.91mm
Height: 5.36mm
 Bottom-align with Bottom Label Margin
 Left-align with Left Label Margin

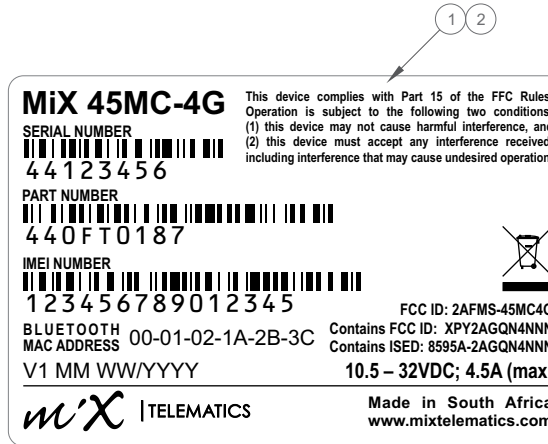

FCC Compliance Notice Text
Font: Arial Narrow, Bold, 5pt
Paragraph alignment: Justify
 Right-align with Right Label Margin
 Top-align with Top Label Margin

Wheelie Bin Logo
Width: 6.61mm
Height: 8.5mm
 Right-align with Right Label Margin
 Bottom-align 1.5mm above Certification Text

Certification Text
Font: Arial Narrow, Bold, 6pt
Paragraph alignment: Right
 Right-align with Right Label Margin
 Bottom-align with Bluetooth MAC Address Heading

Power Rating Text
Font: Arial Narrow, Bold, 8pt
 Right-align with Right Label Margin
 Bottom-align with Date of Manufacture Text


Line
Height: 0.5pt
Width: (Area between Left and Right Label Margins)

**Origin Text,
 MiX Telematics Website**
Font: Arial, Bold, 6pt
Paragraph alignment: Justify
 Right-align with Right Label Margin
 Centre vertically with MiX Telematics Logo

NOTES

- Use 2mm margin on all sides of label
- Do not scale logos. Use only logo artwork provided
- Serial number has format 44XXXXXX, where XXXXXX is a 6-digit number as in the artwork above
- Product Version has format V_n, where n=1,2,... (e.g. V1). Use the version number as indicated in the artwork above.
This is not to be confused with the Document Specification Version as in the title block below
- Supplier Code has format MM (e.g. AB). Use Supplier Code as specified by MiX Telematics
- Date of Manufacture Code has format WW/YYYY, where WW is the week number, and YYYY the year of manufacture (e.g. 32/2011)
- Apply label symmetrically to indentation on bottom surface of the OBC's housing.
 Orientate label so that bottom edge of label is closest to the OBC's connectors.

REF	DESCRIPTION	PART NUMBER
1	LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM	CON0153
2	RIBBON THER TRANS 110MMx70M NOTCHES B325	CON0154

	SPECIFICATION				REV	DATE	ECN	CHANGES
	DOCUMENT TITLE	MiX 45MC-4G: Housing Label			FT1-1	16 Jul 2018	N/A	Field Trial 1
	DOCUMENT NUMBER	440SL0187A			1A	13 Sep 2018	642	Field Trial 2
	SHEET	1 OF 1	SHEET SIZE	A4	1B	5 Nov 2018	656	Added Certification details; Removed "Field Trial Unit" text
	SCALE	1:1 Except where shown otherwise						
FORM	7.11.5-22	FORM REVISION	5					