

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1707-0123(1)
2. Customer
 - Name : SOLUM CO.,LTD.
 - Address : 150, Maeyeong-ro, Yeongtong-gu, Gyeonggi-do Suwon-si South Korea
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : ESL Graphic TAG / ST-GR2600N
FCC ID : 2AFWN-ST-GR2600N
5. Test Method Used : KDB 558074, ANSI C63.10-2013
Test Specification : FCC Part 15 Subpart C.247
6. Date of Test : 2017.03.09 ~ 2017.03.14
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Technical Manager
	Name : Sungeun Lee (Signature)	Name : Geunki Son (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 07 . 20 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1707-0123	Jul. 14, 2017	Initial issue
DRTFCC1707-0123(1)	Jul. 20, 2017	Update the Transmitter Power Spectral Density

Table of Contents

1. General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Declaration by the applicant / manufacturer	5
1.5 Test Conditions	5
1.6 Measurement Uncertainty	5
1.7 Test Equipment List	6
1.8 Summary of Test Results	7
2. Test Methodology	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 General Test Procedures	8
2.4 Description of Test Modes	8
2.5 Instrument Calibration	8
3. Test Result	9
3.1 Maximum Peak Conducted Output Power	9
3.1.1 Test Setup	9
3.1.2 Test Procedures	9
3.1.3 Test Results	9
3.2 6 dB Bandwidth Measurement	12
3.2.1 Test Setup	12
3.2.2 Test Procedures	12
3.2.3 Test Results	12
3.3 Maximum Power Spectral Density	15
3.3.1 Test Setup	15
3.3.2 Test Procedures	15
3.3.3 Test Results	15
3.4 Unwanted Emissions (Conducted)	18
3.4.1 Test Setup	18
3.4.2 Test Procedures	18
3.4.3 Test Results	19
3.5 Unwanted Emissions (Radiated)	27
3.5.1 Test Setup	28
3.5.2 Test Procedures	28
3.5.3 Test Results	29
3.6 Power line Conducted Emissions	30
3.6.1 Test Setup	30
3.6.2 Test Procedures	30
3.6.3 Test Results	30
3.7 Occupied Bandwidth	31
3.7.1 Test Setup	31
3.7.2 Test Procedures	31
3.7.3 Test Results	31
4. ANTENNA REQUIREMENTS	32
APPENDIX I	33
APPENDIX II	34
APPENDIX III	35

1. General Information

1.1 Testing Laboratory

DT&C Co., Ltd.		
Standard	Site number	Address
FCC	<input checked="" type="checkbox"/> 165783	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 804488	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 596748	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 678747	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
IC	<input type="checkbox"/> 5740A-3	42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935
	<input type="checkbox"/> 5740A-2	683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080
www.dtnc.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

1.2 Details of Applicant

Applicant : SOLUM CO.,LTD.
 Address : 150, Maeyeong-ro, Yeongtong-gu, Gyeonggi-do Suwon-si South Korea
 Contact person : Ki Dong Lee

1.3 Description of EUT

EUT	ESL Graphic TAG
Model Name	ST-GR2600N
Add Model Name	NA
Hardware version	11
Software version	21
Power Supply	DC 3.0 V
Frequency Range	2405 ~ 2480MHz (16 channels)
Max. RF Output Power	3.14 dBm
Modulation Technique	O-QPSK
Antenna Specification	Antenna Type: Internal Antenna Gain: -1.1 dBi(PK)

1.4 Declaration by the applicant / manufacturer

- N/A

1.5 Test Conditions

Ambient Condition	
▪ Temperature	+21 ~ 24 °C
▪ Relative Humidity	32 ~ 36 %

1.6 Measurement Uncertainty

Test items	Measurement uncertainty
Transmitter Output Power	1.0 dB (The confidence level is about 95 %, k = 2)
Conducted spurious emission	1.1 dB (The confidence level is about 95 %, k = 2)
AC conducted emission	2.4 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, k = 2)
Radiated spurious emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, k = 2)

1.7 Test Equipment List

Type	Manufacturer	Model	Cal. Date (yy/mm/dd)	Next Cal. Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent Technologies	N9020A	16/08/18	17/08/18	MY46471601
MXA Signal Analyzer	Agilent Technologies	N9020A	16/10/11	17/10/11	MY46471251
DC Power Supply	Agilent Technologies	66332A	17/01/11	18/01/11	US37473831
Thermohygrometer	BODYCOM	BJ5478	17/04/11	18/04/11	120612-1
Signal Generator	Rohde Schwarz	SMBV100A	17/01/04	18/01/04	255571
Signal Generator	Rohde Schwarz	SMF100A	16/06/23	17/06/23	102341
Multimeter	FLUKE	17B	16/04/21	17/04/21	26030065WS
Loop Antenna	Schwarzbeck	FMZB1513	16/04/22	18/04/22	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	16/05/13	18/05/13	3358
Horn Antenna	ETS-LINDGREN	3117	16/05/03	18/05/03	140394
Horn Antenna	A.H.Systems Inc.	SAS-574	15/04/30	17/04/30	154
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	16/09/09	17/09/09	3
High-pass filter	Wainwright	WHNX6-6320-8000-26500-40CC	16/09/13	17/09/13	1
PreAmplifier	Agilent Technologies	8449B	16/10/19	17/10/19	3008A02108
PreAmplifier	TSJ	MLA-010K01-B01-27	17/03/06	18/03/06	1844539
EMI Test Receiver	Rohde Schwarz	ESR7	16/02/25	17/02/25	101061

1.8 Summary of Test Results

FCC Part	RSS Std.	Parameter	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247 [5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247 [5.4]	Transmitter Output Power	< 1 Watt		C
15.247(d)	RSS-247 [5.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247 [5.2]	Transmitter Power Spectral Density	< 8 dBm/3 kHz		C
-	RSS-Gen [6.6]	Occupied Bandwidth (99 %)	RSS-Gen(6.6)		NA
15.247(d) 15.205 15.209	RSS-247 [5.5] RSS-Gen [8.9] RSS-Gen [8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	C
15.207	RSS-Gen [8.8]	AC Line Conducted Emissions	FCC 15.207 limits	AC Line Conducted	NA Note3
15.203	RSS-Gen [8.3]	Antenna Requirements	FCC 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: The supplying power of this device is batteries which are not rechargeable.

2. Test Methodology

Generally the tests were performed according to the KDB558074 D01 v03r05. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB 558074.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB 558074. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB 558074.

The EUT is placed on a non-conductive table, which is above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

2.4 Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting. The lowest, middle and highest channels were tested and reported.

Test Mode [TM]		Test Frequency [MHz]		
		Lowest channel	Middle channel	Highest channel
TM 1	ZIGBEE	2405	2440	2480
TM 2	-	-	-	-
TM 3	-	-	-	-
TM 4	-	-	-	-

2.5 Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

3. Test Result

3.1 Maximum Peak Conducted Output Power

▣ Test Requirements and limit, §15.247(b) & RSS-247 [5.4]

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

3.1.1 Test Setup

Refer to the APPENDIX I.

3.1.2 Test Procedures

Maximum Peak Conducted Output Power is measured using Measurement Procedure of **KDB558074**


1. Set the RBW \geq DTS bandwidth. **Actual RBW = 2 MHz**
2. Set VBW $\geq 3 \times$ RBW. **Actual VBW = 6 MHz**
3. Set span $\geq 3 \times$ RBW.
4. Sweep time = **auto couple**
5. Detector = **peak**
6. Trace mode = **max hold**
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

3.1.3 Test Results

Modulation	Tested Channel	Frame Average Output Power	Peak Output Power
		dBm	dBm
TM 1	Lowest	2.96	3.10
	Middle	2.24	2.43
	Highest	3.01	3.14


Peak Output Power

Test Channel : Lowest




Peak Output Power

Test Channel : Middle



Peak Output Power

Test Channel : Highest



3.2 6 dB Bandwidth Measurement

■ Test Requirements and limit, §15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

3.2.1 Test Setup

Refer to the APPENDIX I.

3.2.2 Test Procedures

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074**.

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

(RBW : 100 kHz / VBW : 300 kHz)


3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Results

Test Mode	Tested Channel	Test Results [MHz]
TM 1	Lowest	1.587
	Middle	1.627
	Highest	1.527


6 dB Bandwidth

Test Channel : Lowest




6 dB Bandwidth

Test Channel : Middle



6 dB Bandwidth

Test Channel : Highest



3.3 Maximum Power Spectral Density.

▣ Test requirements and limit, §15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

3.3.1 Test Setup

Refer to the APPENDIX I.

3.3.2 Test Procedures

Method PKPSD of KDB558074 is used.


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

3.3.3 Test Results

Test Mode	Tested Channel	PKPSD [dBm]	PKPSD [dBm]
TM 1	Lowest	0.06	-15.17
	Middle	-1.08	-16.31
	Highest	0.05	-15.18


Maximum PKPSD

Test Channel : Lowest




Maximum PKPSD

Test Channel : Middle



Maximum PKPSD

Test Channel : Highest



3.4 Unwanted Emissions (Conducted)

■ **Test requirements and limit, §15.247(d) & RSS-247 [5.5]**

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

3.4.1 Test Setup

Refer to the APPENDIX I.

3.4.2 Test Procedures

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level
LIMIT LINE = 20 dB below of the reference level.

- Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz.(Actual 1 MHz , See below note)**
3. Set the VBW $\geq 3 \times$ **RBW.(Actual 3 MHz, See below note)**
4. Detector = **peak**.
5. Ensure that the number of measurement points \geq span / RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.


Note : The conducted spurious emission was tested with below settings.

Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

3.4.3 Test Results


Reference (Test Channel : Lowest)




Low Band-edge




Conducted Spurious Emissions 1 (Test Channel : Lowest)




Conducted Spurious Emissions 2 (Test Channel : Lowest)

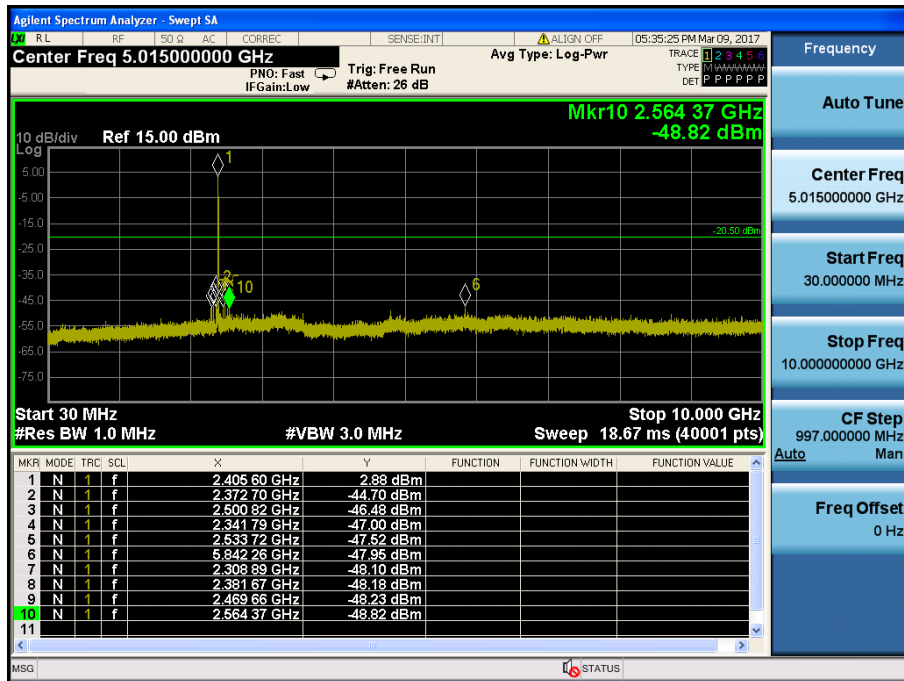


Conducted Spurious Emissions 3 (Test Channel : Lowest)




Reference (Test Channel : Middle)




Conducted Spurious Emissions 1 (Test Channel : Middle)

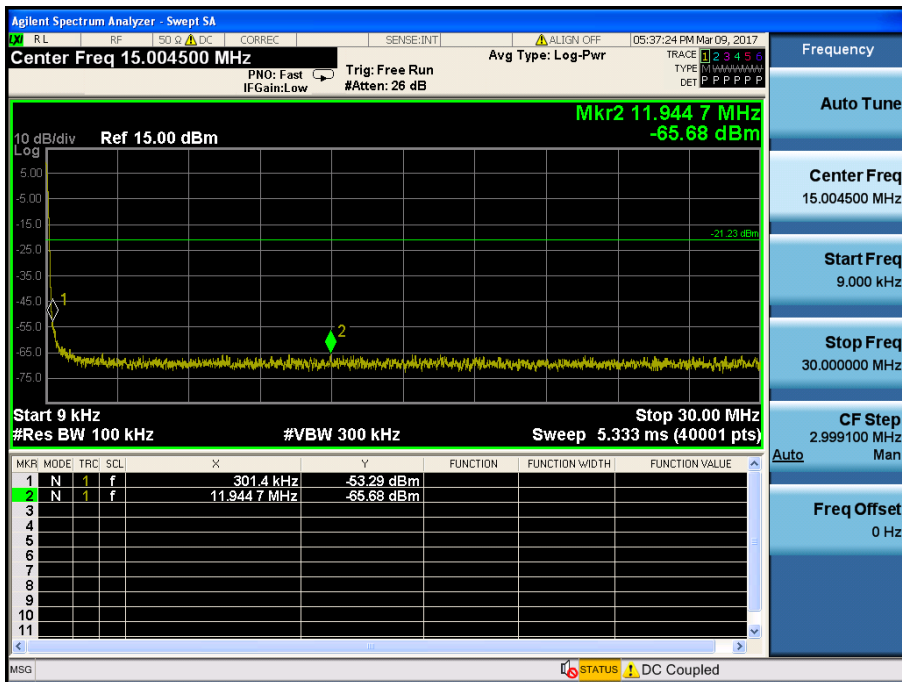

Conducted Spurious Emissions 2 (Test Channel : Middle)

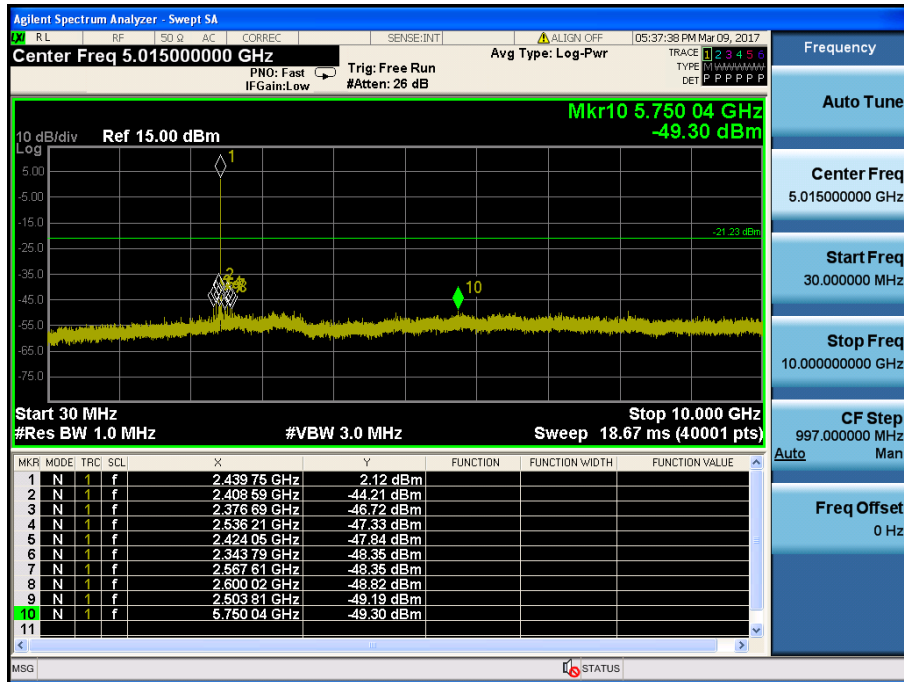


Conducted Spurious Emissions 3 (Test Channel : Middle)




Reference (Test Channel : Highest)




High Band-edge (Test Channel : Highest)




Conducted Spurious Emissions 1 (Test Channel : Highest)



Conducted Spurious Emissions 2 (Test Channel : Highest)

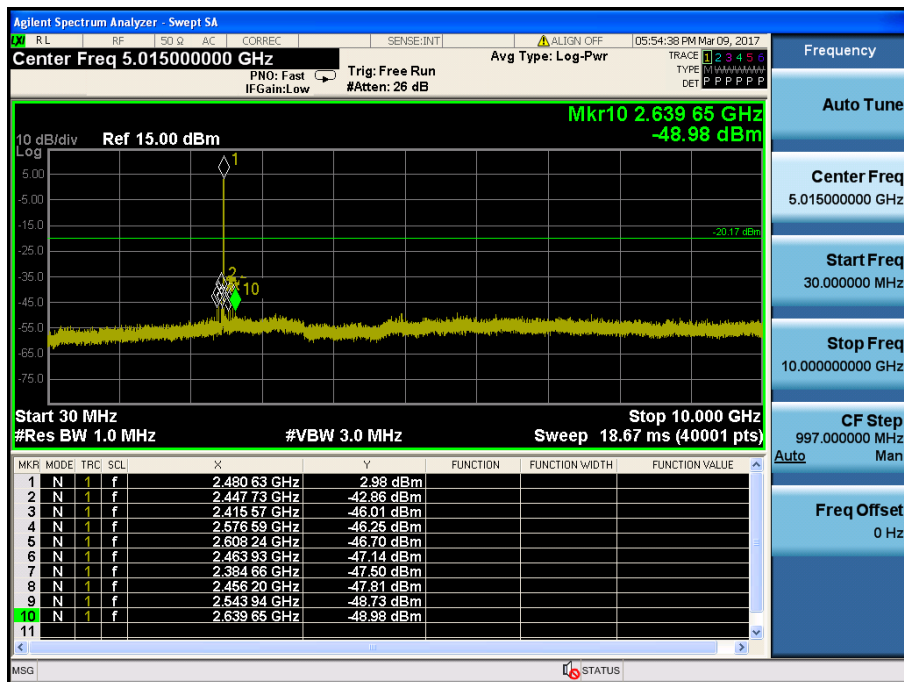

Conducted Spurious Emissions 3 (Test Channel : Highest)



3.5 Unwanted Emissions (Radiated)

▣ Test Requirements and limit,

§15.247(d), §15.205, §15.209 & RSS-247 [5.5], RSS-Gen [8.9], RSS-Gen [8.10]

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

- FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

- FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4400		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

- FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

3.5.1 Test Setup

Refer to the APPENDIX I.

3.5.2 Test Procedures

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 or 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note: Measurement Instrument Setting for Radiated Emission Measurements.

1. Frequency Range: \leq 1 GHz

RBW = 100 or 120 kHz, VBW = 3 x RBW, Detector = Peak or Quasi Peak

2. Frequency Range: $>$ 1 GHz

Peak Measurement

RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

Average Measurement

The result of Average measurement was calculated using PK result and duty reduction factor.

Note: Refer to appendix II for worst case duty cycle.

3.5.3 Test Results

Frequency Range : 9 kHz ~ 25 GHz

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2372.47	H	Y	PK	50.97	0.63	N/A	N/A	51.60	74.00	22.40
2372.47	H	Y	AV	50.97	0.63	-28.18	N/A	23.42	54.00	30.58
4809.00	H	Y	PK	51.37	7.62	N/A	N/A	58.99	74.00	15.01
4809.00	H	Y	AV	51.37	7.62	-28.18	N/A	30.81	54.00	23.19

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4878.86	V	Z	PK	48.37	7.39	N/A	N/A	55.76	74.00	18.24
4878.86	V	Z	AV	48.37	7.39	-28.18	N/A	27.58	54.00	26.42

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	D.C.F (dB)	Distance Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.65	V	Y	PK	52.48	1.10	N/A	N/A	53.58	74.00	20.42
2483.65	V	Y	AV	52.48	1.10	-28.18	N/A	25.40	54.00	28.60
4958.92	H	Y	PK	49.29	7.47	N/A	N/A	56.76	74.00	17.24
4958.92	H	Y	AV	49.29	7.47	-28.18	N/A	28.58	54.00	25.42

▪ Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3 m to 1 m. In this case, the distance factor(-9.54 dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

3. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + D.C.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Reduction Factor.

3.6 Power line Conducted Emissions

■ Test Requirements and limit, §15.207 & RSS-Gen [8.8]

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

3.6.1 Test Setup

NA

3.6.2 Test Procedures

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a 6.5 m \times 3.5 m \times 3.5 m (L \times W \times H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) \times 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

3.6.3 Test Results

NA

3.7 Occupied Bandwidth

■ Test Requirements, RSS-Gen [6.6]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 % emission bandwidth, as calculated or measured.

3.7.1 Test Setup

NA

3.7.2 Test Procedures

The 99 % power bandwidth was measured with a calibrated spectrum analyzer.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3 × RBW.

Spectrum analyzer plots are included on the following pages.

3.7.3 Test Results

NA

4. ANTENNA REQUIREMENTS

■ **According to FCC 47 CFR §15.203**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”


The antenna is attached on the main PCB using the special spring tension.

Therefore this E.U.T Complies with the requirement of §15.203

APPENDIX I


Test set up diagrams

▪ **Radiated Measurement**



For measurement below 30MHz, the proper calibration between the chamber and OATS has been done per KDB 937606.

▪ **Conducted Measurement**



Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.20	15	5.36
1	1.14	20	6.45
2.405 & 2.440 & 2.480	1.70	25	6.24
5	2.66	-	-
10	4.16	-	-

Note 1: The path loss from EUT to Spectrum analyzer was measured and used for test.
 Path loss (S/A's correction factor) = Cable A (Attenuator, Applied only when it was used externally)

APPENDIX II

Duty cycle plots

▪ Test Procedure


Duty Cycle was measured using section 6.0 b) of KDB558074 :

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value. Set VBW ≥ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if T ≤ 16.7 microseconds.)

Duty Cycle

Test Channel : Middle

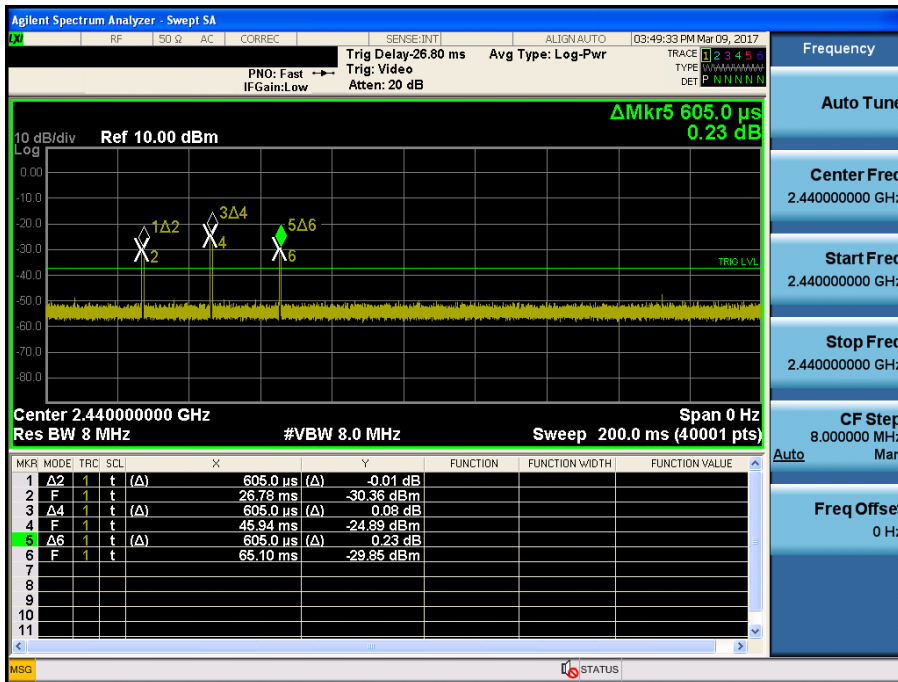

Note : Measure Duty Cycle = T / 100 ms (T = sum of the individual on-time in 100 ms)
 = (0.605ms + 0.605ms + 0.605ms) / 100 ms = 1.82%

Declared Max Transmit on time(per 100ms) = 3.9ms

Duty cycle reduction factor = 20 x log (3.9ms/100ms) = -28.18dB


(Worst case duty cycle has been provided by the manufacturer’s technical documentation.)

APPENDIX III

Unwanted Emissions (Radiated) Test Plot


Lowest & Y & Hor

Detector Mode : PK



Highest & Y & Ver

Detector Mode : PK



Lowest & Y & Hor

Detector Mode : PK

