

---

# FCC Test Report

---

Report No.: AGC00594170601FE07

**FCC ID** : 2A13K-CS22SA  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Rugged Mobile Phone  
**BRAND NAME** : Cyrus  
**MODEL NAME** : CS22SA  
**CLIENT** : Cyrus Technology GmbH  
**DATE OF ISSUE** : July 10, 2017  
**STANDARD(S)** : FCC Part 22 Rules  
: FCC Part 24 Rules  
: FCC Part 27 Rules  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



**REPORT REVISE RECORD**

<b>Report Version</b>	<b>Revise Time</b>	<b>Issued Date</b>	<b>Valid Version</b>	<b>Notes</b>
V1.0	/	July 10, 2017	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1 Product Description .....	6
2.2 Related Submittal(s) / Grant (s) .....	7
2.3 Test Methodology .....	7
2.4 Test Facility .....	7
2.5 Measurement Instruments .....	7
2.6 Special Accessories .....	9
2.7 Equipment Modifications .....	9
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
3.1 EUT CONFIGURATION .....	10
3.2 EUT EXERCISE .....	10
3.3 GENERAL TECHNICAL REQUIREMENTS .....	10
3.4 CONFIGURATION OF EUT SYSTEM .....	11
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>5. DESCRIPTION OF TEST MODES .....</b>	<b>13</b>
<b>6. OUTPUT POWER .....</b>	<b>16</b>
6.1 Conducted Output Power .....	16
6.2 RADIATED OUTPUT POWER .....	40
6.3. Peak-to-Average Ratio .....	50
<b>7. SPURIOUS EMISSION.....</b>	<b>79</b>
7.1 CONDUCTED SPURIOUS EMISSION.....	79
7.2 Radiated Spurious Emission.....	81
7.2.1. MEASUREMENT PROCEDURE .....	81
7.2.2. TEST SETUP .....	82

<b>8. FREQUENCY STABILITY .....</b>	<b>89</b>
<b>8.1 MEASUREMENT METHOD .....</b>	<b>89</b>
<b>8.2 PROVISIONS APPLICABLE.....</b>	<b>89</b>
<b>8.3 MEASUREMENT RESULT (WORST).....</b>	<b>90</b>
<b>9. OCCUPIED BANDWIDTH.....</b>	<b>93</b>
<b>9.1 MEASUREMENT METHOD .....</b>	<b>93</b>
<b>9.2 PROVISIONS APPLICABLE.....</b>	<b>93</b>
<b>9.3 MEASUREMENT RESULT.....</b>	<b>93</b>
<b>10. EMISSION BANDWIDTH .....</b>	<b>100</b>
<b>10.1 MEASUREMENT METHOD.....</b>	<b>100</b>
<b>10.2 PROVISIONS APPLICABLE .....</b>	<b>100</b>
<b>10.3 MEASUREMENT RESULT.....</b>	<b>100</b>
<b>11. BAND EDGE .....</b>	<b>107</b>
<b>11.1 MEASUREMENT METHOD .....</b>	<b>107</b>
<b>11.2 PROVISIONS APPLICABLE.....</b>	<b>107</b>
<b>11.3 MEASUREMENT RESULT.....</b>	<b>107</b>
<b>APPENDIX A.....</b>	<b>108</b>
<b>TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....</b>	<b>108</b>
<b>APPENDIX B.....</b>	<b>123</b>
<b>TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) .....</b>	<b>123</b>
<b>EMISSION BANDWIDTH (-26DBC).....</b>	<b>123</b>
<b>APPENDIX C.....</b>	<b>146</b>
<b>TEST PLOTS FOR BAND EDGES .....</b>	<b>146</b>
<b>CONDUCTED EMISSION .....</b>	<b>162</b>

## 1. VERIFICATION OF COMPLIANCE

<b>Applicant</b>	Cyrus Technology GmbH
<b>Address</b>	Hergelsbendenstraße 49 D-52080 Aachen Germany
<b>Manufacturer</b>	Shenzhen Xin Kingbrand Enterprises Co., Ltd
<b>Address</b>	KingBrand Industrial Zone, Nanpu Road, Shang Liao Lin Pikeng, Shajing Town, Baoan District, Shenzhen City, Guangdong Province, China
<b>Product Designation</b>	Rugged Mobile Phone
<b>Brand Name</b>	Cyrus
<b>Test Model</b>	CS22SA
<b>Date of test</b>	June 23, 2017~July 10, 2017
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal

### We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA- 603-D-2010. The sample tested as described in this report is in compliance with the FCC Rules Part22, Part24 and Part27.

The test results of this report relate only to the tested sample identified in this report.

Tested By

*Donjon Huang*

Donjon Huang(Huang  
dongyang)

July 10, 2017

Reviewed By

*Bart Xie*

Bart Xie(Xie Xiaobin)

July 10, 2017

Approved By

*Solger Zhang*

Solger Zhang(Zhang Hongyi)  
Authorized Officer

July 10, 2017

## 2. GENERAL INFORMATION

### 2.1 Product Description

A major technical description of EUT is described as following:

Radio System Type:	LTE	
Hardware version:	FQ5_02	
Software version:	smartphone_A7N_20170607_V0.01	
Frequency Bands:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input checked="" type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 12 <input checked="" type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 26 <input type="checkbox"/> TDD Band 41 (U.S. Bands) <input type="checkbox"/> FDD Band 1 <input type="checkbox"/> FDD Band 3 <input type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 8 <input type="checkbox"/> FDD Band 20 <input type="checkbox"/> TDD Band 33 <input type="checkbox"/> TDD Band 34 <input type="checkbox"/> TDD Band 38 <input checked="" type="checkbox"/> FDD Band 40 <input type="checkbox"/> FDD Band 42 <input type="checkbox"/> FDD Band 43 (Non-U.S. Bands)	
Frequency Range	LTE Band 2	Transmission (TX): 1850 to 1909.9 MHz Receiving (RX): 1930 to 1989.9 MHz
	LTE Band 4	Transmission (TX): 1710 to 1754.9 MHz Receiving (RX): 2110 to 2154.9 MHz
	LTE Band 5	Transmission (TX): 824 to 848.9 MHz Receiving (RX): 869 to 893.9 MHz
	LTE Band 7	Transmission (TX): 2500 to 2569.9 MHz Receiving (RX): 2620 to 2689.9 MHz
	LTE Band 17	Transmission (TX): 704 to 715.9 MHz Receiving (RX): 734 ~ 745.9 MHz
	Supported Channel Bandwidth	LTE Band 2
LTE Band 4		<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
LTE Band 5		<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz
LTE Band 7		<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
LTE Band 17		<input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz
Antenna:	PIFA Antenna	
Type of Modulation	QPSK/16QAM	
Antenna gain:	-0.5dBi(LTE band 2), -0.7dBi(LTE band 4), -1.0dBi(LTE band 5), -0.3dBi(LTE band 7), -1.0dBi(LTE band 17)	
Diversity Antenna Gain	-0.7dBi(LTE band 2), -0.9dBi(LTE band 4), -1.3dBi(LTE band 5), -0.5dBi(LTE band 7), -1.3dBi(LTE band 17),	

Power Supply:	DC 3.8V by battery
Battery parameter:	DC3.8V/3000mAh
Dual Card:	WCDMA/GSM/LTE Card Slot GSM Card Slot
Power Class	3
Voltage range	DC3.4 V to 4.35V (Normal: DC3.8 V)
Temperature range	-10°C to +50°C
*** Note: The High Voltage DC4.35V and Low Voltage DC3.4V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage.	

## 2.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AI3K-CS22SA**, filing to comply with the FCC Part22, Part24 Part27 requirements

## 2.3 Test Methodology

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D-2010, and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

KDB 971168 D01 Power Meas License Digital Systems v02r02

## 2.4 Test Facility

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents of ANSI/TIA-603-D-2010.

## 2.5 Measurement Instruments

Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 3, 2016	July 2, 2017
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 2, 2017	July 1, 2018
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9168	D69250	Mar 1, 2016	Feb 28, 2018
Trilog Broadband Antenna(substituted antenna) (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 3, 2016	July 2, 2018

Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 3, 2016	July 2, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96221	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 2, 2017	July 1, 2018
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 2, 2017	June 1, 2018
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 5, 2016	June 4, 2018
Spectrum analyzer	Agilent	E4407B	MY46185649	June 2, 2017	June 1, 2018
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 10, 2016	July 9, 2018
Horn Antenna(substituted antenna) (1G-18GHz)	ETS LINDGREN	3117	00034609	Mar 1, 2016	Feb 28, 2018
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 3, 2016	July 2, 2017
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 2, 2017	July 1, 2018
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 6, 2016	July 5, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515H	96220	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 2, 2017	July 1, 2018
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 5, 2016	June 4, 2018
Artificial Mains Network	Narda	L2-16B	000WX31025	July 7, 2016	July 6, 2017
Artificial Mains Network	Narda	L2-16B	000WX31025	July 2, 2017	July 1, 2018
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 7, 2016	July 6, 2017
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96222	July 3, 2016	July 2, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 2, 2017	July 1, 2018
Shielded Room	CHENGYU	843	PTS-002	June 5, 2016	June 4, 2017
Shielded Room	CHENGYU	843	PTS-002	July 2, 2017	July 1, 2018
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 24,2016	July 23, 2017
COMMUNICATION TESTER	AGILENT	8960	GB46490550	July 2, 2017	July 1, 2018
RF attenuator	N/A	RFA20db	68	N/A	N/A
Signal Generator	AGILENT	N5182A	MY50140530	Oct 16,2015	Oct 15,2016



Signal Generator(substituted equipment)	AGILENT	E8257D	MY45141029	Oct 16,2015	Oct 15,2016
---	---------	--------	------------	-------------	-------------

**2.6 Special Accessories**

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

**2.7 Equipment Modifications**

Not available for this EUT intended for grant.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/27.50(d)/ 27.50(c)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	27.50(d)
3	Spurious Emission	Conducted spurious emission	2.1051 / 27.53(h)/ 27.53(g)
		Radiated spurious emission	
4	Frequency Stability		2.1055/27.54
5	Occupied Bandwidth		2.1049 (h)(i)
6	Emission Bandwidth		2.1049/27.53(h)/ 27.53(g)
7	Band Edge		27.53(h)/ 27.53(g)

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.

### 3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Rugged Mobile Phone	CS22SA	FCC ID: 2AI3K-CS22SA	EUT
2	Adapter	RKL-0510	DC 5.0V/2A	Accessory
3	Battery	V28S	DC3.8V/ 3000mAh	Accessory
4	USB Cable	N/A	N/A	Accessory
5	Earphone	N/A	N/A	Accessory

*\*\*\*Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.*

#### 4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/27.50(d)/ 27.50(c)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	27.50(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051 / 27.53(h)/ 27.53(g)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/27.54	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		2.1049/27.53(h)/ 27.53(g)	Pass
7	Band Edge		27.53(h)/ 27.53(g)	Pass

## 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMW 500) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both LTE frequency band.

**\*\*\*Note:** LTE band 2, LTE band 4, LTE band 5 and LTE band 17 mode have been tested during the test. The worst condition was recorded in the test report if no other modes test data.

Test Mode	Test Modes Description
LTE	LTE system, QPSK modulation
LTE	LTE system, 16QAM modulation

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX (1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX (3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX (5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX (10M)	Channel 18650	Channel 18900	Channel 19150
		1855.0 MHz	1880 MHz	1905.0 MHz
	TX (15M)	Channel 18675	Channel 18900	Channel 19125
		1857.5 MHz	1880 MHz	1902.5 MHz
	TX (20M)	Channel 18700	Channel 18900	Channel 19100
		1860.0 MHz	1880 MHz	1900.0 MHz
	RX (1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX (3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX (5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX (10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz
RX (15M)	Channel 675	Channel 900	Channel 1125	
	1937.5 MHz	1960 MHz	1982.5 MHz	
RX (20M)	Channel 700	Channel 900	Channel 1100	
	1940 MHz	1960 MHz	1980 MHz	

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX (1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX (3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX (5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX (10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX (15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX (20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX (1.4M)	Channel 1957	Channel 2175	Channel 2393
		2110.7 MHz	2132.5 MHz	2154.3 MHz
	RX (3M)	Channel 1965	Channel 2175	Channel 2385
		2111.5 MHz	2132.5 MHz	2153.5 MHz
	RX (5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5 MHz	2152.5 MHz
	RX (10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5 MHz	2150 MHz
RX (15M)	Channel 2025	Channel 2175	Channel 2325	
	2117.5 MHz	2132.5 MHz	2147.5 MHz	
RX (20M)	Channel 2050	Channel 2175	Channel 2300	
	2120 MHz	2132.5 MHz	2145 MHz	

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 5	TX (1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	TX (3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	TX (5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	TX (10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX (1.4M)	Channel 2404	Channel 2525	Channel 2463
		869.4 MHz	881.5 MHz	893.3 MHz
RX (3M)	Channel 2415	Channel 2525	Channel 2635	

		870.5 MHz	881.5 MHz	892.5 MHz
	RX (5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX (5M)	Channel 20775	Channel 21100	Channel 21425
		2502.5 MHz	2535 MHz	2567.5 MHz
	TX (10M)	Channel 20800	Channel 21100	Channel 21400
		2505 MHz	2535 MHz	2565 MHz
	TX (15M)	Channel 20825	Channel 21100	Channel 21375
		2507.5 MHz	2535 MHz	2562.5 MHz
	TX (20M)	Channel 20850	Channel 21100	Channel 21350
		2510 MHz	2535 MHz	2560 MHz
	RX (5M)	Channel 2775	Channel 3100	Channel 3425
		2622.5 MHz	2655 MHz	2687.5 MHz
	RX (10M)	Channel 2800	Channel 3100	Channel 3400
		2625 MHz	2655 MHz	2685 MHz
	RX (15M)	Channel 2825	Channel 3100	Channel 3375
		2627.5 MHz	2655 MHz	2682.5 MHz
	RX (20M)	Channel 2850	Channel 3100	Channel 3350
		2630 MHz	2655 MHz	2680 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 17	TX (5M)	Channel 23755	Channel 23790	Channel 23825
		706.5 MHz	710 MHz	713.5 MHz
	TX (10M)	Channel 23780	Channel 23790	Channel 23800
		709 MHz	710 MHz	711 MHz
	RX (5M)	Channel 5755	Channel 5790	Channel 5825
		736.5 MHz	740 MHz	743.5 MHz
	RX (10M)	Channel 5780	Channel 5790	Channel 5800
		739 MHz	740 MHz	743.5 MHz

## 6. OUTPUT POWER

### 6.1 Conducted Output Power

#### 6.1.1 Procedures: (According with KDB 971168)

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes (LTE Band 4) at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The instrument must have an available measurement/resolution bandwidth that is equal to or exceeds the OBW. If this capability is available, then the following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW. c)
- Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- 1) Use the peak marker function to determine the peak amplitude level.

#### 6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits		
Mode	Average Power	Tolerance(dB)
LTE	23 dBm (0.2W)	$\pm 2.7$

#### LTE Band 2

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	18700	1860.0	QPSK	1	0	0	21.84
				1	49	0	22.89
				1	99	0	21.09
				50	0	1	22.44
				50	25	1	21.58
				50	49	1	22.14
				100	0	1	22.20
			16QAM	1	0	1	21.41
				1	49	1	22.80
				1	99	1	21.43
				50	0	2	20.99



	18900	1880.0	QPSK	50	25	2	21.79
				50	49	2	20.85
				100	0	2	21.83
				1	0	0	21.61
				1	49	0	22.40
			1	99	0	20.88	
			50	0	1	21.50	
			50	25	1	22.34	
			50	49	1	21.95	
			100	0	1	21.91	
	16QAM	1	0	1	21.48		
		1	49	1	22.18		
		1	99	1	22.26		
		50	0	2	21.58		
		50	25	2	21.65		
	19100	1900.0	QPSK	50	49	2	22.54
				100	0	2	22.19
				1	0	0	22.38
				1	49	0	22.01
				1	99	0	21.77
50			0	1	21.57		
50			25	1	21.62		
50			49	1	21.90		
100			0	1	22.96		
16QAM			1	0	1	20.81	
	1	49	1	22.14			
	1	99	1	21.64			
	50	0	2	22.37			
	50	25	2	22.07			
50	49	2	21.41				
100	0	2	21.90				

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	18675	1857.5	QPSK	1	0	0	21.25
				1	37	0	21.40
				1	74	0	22.48
				36	0	1	21.42
				36	16	1	22.25
				36	35	1	22.45
				75	0	1	21.41
			16QAM	1	0	1	20.80
				1	37	1	21.89
				1	74	1	22.10
				36	0	2	21.30
				36	16	2	22.08
				36	35	2	20.91
				75	0	2	22.87

18900	1880.0	QPSK	1	0	0	21.45
			1	37	0	21.69
			1	74	0	22.14
			36	0	1	22.05
			36	16	1	21.70
			36	35	1	21.91
			75	0	1	21.89
		16QAM	1	0	1	21.10
			1	37	1	22.34
			1	74	1	21.87
			36	0	2	21.45
			36	16	2	22.32
			36	35	2	21.11
			75	0	2	21.30
19125	1902.5	QPSK	1	0	0	21.27
			1	37	0	20.95
			1	74	0	21.19
			36	0	1	21.52
			36	16	1	21.21
			36	35	1	21.60
			75	0	1	20.92
		16QAM	1	0	1	22.64
			1	37	1	21.68
			1	74	1	22.11
			36	0	2	22.26
			36	16	2	21.57
			36	35	2	21.03
			75	0	2	21.63

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	18650	1855.0	QPSK	1	0	0	22.14
				1	24	0	20.72
				1	49	0	21.73
				25	0	1	21.38
				25	12	1	21.66
				25	25	1	22.09
				50	0	1	21.41
			16QAM	1	0	1	21.53
				1	24	1	22.16
				1	49	1	20.96
				25	0	2	21.78
				25	12	2	22.71
				25	25	2	20.87
				50	0	2	20.88
	18900	1880.0	QPSK	1	0	0	22.73
				1	24	0	21.26
				1	49	0	22.74
25				0	1	21.82	
25				12	1	22.80	

			16QAM	25	25	1	20.99
				50	0	1	22.22
				1	0	1	22.86
				1	24	1	21.58
				1	49	1	22.15
				25	0	2	21.19
				25	12	2	21.90
				25	25	2	21.40
				50	0	2	21.02
				1	0	0	22.23
	1	24	0	21.20			
	1	49	0	22.38			
	25	0	1	21.31			
	25	12	1	21.17			
	25	25	1	22.34			
	50	0	1	20.86			
	1	0	1	21.69			
	1	24	1	21.37			
	1	49	1	21.92			
	25	0	2	22.37			
25	12	2	21.19				
25	25	2	21.48				
50	0	2	22.34				

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	18625	1852.5	QPSK	1	0	0	21.58
				1	12	0	22.02
				1	24	0	20.97
				12	0	1	21.56
				12	6	1	21.38
				12	11	1	21.42
				25	0	1	21.09
			16QAM	1	0	1	21.09
				1	12	1	21.23
				1	24	1	22.46
				12	0	2	21.66
				12	6	2	21.79
				12	11	2	22.13
				25	0	2	21.46
	18900	1880.0	QPSK	1	0	0	21.43
				1	12	0	20.96
				1	24	0	21.22
				12	0	1	21.99
				12	6	1	21.62
				12	11	1	20.94
25	0	1	22.42				

			16QAM	1	0	1	21.87
				1	12	1	21.47
				1	24	1	21.01
				12	0	2	21.72
				12	6	2	21.44
				12	11	2	21.30
				25	0	2	22.43
	19175	1907.5	QPSK	1	0	0	20.92
				1	12	0	22.30
				1	24	0	22.05
				12	0	1	21.09
				12	6	1	22.16
				12	11	1	21.54
				25	0	1	22.24
16QAM	1	0	1	21.18			
	1	12	1	21.49			
	1	24	1	21.43			
	12	0	2	21.67			
	12	6	2	21.06			
	12	11	2	21.05			
	25	0	2	21.27			

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	18615	1851.5	QPSK	1	0	0	22.04
				1	7	0	22.12
				1	14	0	22.48
				8	0	1	21.09
				8	4	1	20.80
				8	7	1	20.91
				15	0	1	22.33
			16QAM	1	0	1	22.24
				1	7	1	22.38
				1	14	1	22.18
				8	0	2	21.63
				8	4	2	22.85
				8	7	2	22.15
				15	0	2	22.66
18900	1880.0	QPSK	1	0	0	23.05	
			1	7	0	22.51	
			1	14	0	21.13	
			8	0	1	21.81	
			8	4	1	22.01	
			8	7	1	21.03	

			16QAM	15	0	1	21.68
				1	0	1	21.84
				1	7	1	22.30
				1	14	1	22.04
				8	0	2	21.23
				8	4	2	22.38
				8	7	2	21.71
				15	0	2	21.53
	19185	1908.5	QPSK	1	0	0	22.32
				1	7	0	22.91
				1	14	0	21.20
				8	0	1	21.25
				8	4	1	21.80
				8	7	1	22.04
				15	0	1	22.12
				16QAM	1	0	1
	1	7	1		21.09		
	1	14	1		20.80		
8	0	2	20.91				
8	4	2	22.33				
8	7	2	22.24				
15	0	2	22.38				

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	18607	1850.7	QPSK	1	0	0	22.02
				1	3	0	22.16
				1	5	0	22.10
				3	0	0	21.45
				3	2	0	21.23
				3	3	0	21.60
				6	0	1	21.72
			16QAM	1	0	1	21.94
				1	2	1	22.30
				1	5	1	22.57
				3	0	1	22.09
				3	1	1	21.94
				3	2	1	22.16
				6	0	2	22.32
	18900	1880.0	QPSK	1	0	0	21.63
				1	2	0	21.34
				1	5	0	21.75
				3	0	0	22.04
3				1	0	22.02	

				3	2	0	21.81	
				6	0	1	21.83	
			16QAM	1	0	1	22.52	
				1	2	1	21.44	
				1	5	1	21.51	
				3	0	1	22.56	
				3	1	1	21.47	
				3	2	1	21.20	
				6	0	2	22.07	
					1	0	0	21.45
					1	2	0	21.57
			QPSK	1	5	0	21.52	
				3	0	0	22.44	
				3	1	0	21.41	
				3	2	0	22.48	
				6	0	1	22.04	
					1	0	1	22.19
			16QAM	1	2	1	21.43	
				1	5	1	21.20	
				3	0	1	21.59	
				3	1	1	21.76	
				3	2	1	22.04	
				6	0	2	22.02	
19193	1909.3							

**LTE Band 4**

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	20050	1720.0	QPSK	1	0	0	20.92
				1	49	0	21.27
				1	99	0	21.98
				50	0	1	20.99
				50	25	1	21.73
				50	49	1	22.06
				100	0	1	22.06
			16QAM	1	0	1	21.06
				1	49	1	22.38
				1	99	1	22.13
				50	0	2	21.29
				50	25	2	22.35
				50	49	2	22.26
				100	0	2	22.01
	20175	1732.5	QPSK	1	0	0	22.86
				1	49	0	21.35
				1	99	0	21.85
				50	0	1	22.23
				50	25	1	21.97
				50	49	1	22.53
				100	0	1	21.60
			16QAM	1	0	1	21.61
				1	49	1	22.04
				1	99	1	22.23
				50	0	2	21.27
				50	25	2	22.13
				50	49	2	21.61
				100	0	2	21.59
	20300	1745.0	QPSK	1	0	0	21.16
				1	49	0	21.28
1				99	0	21.47	
50				0	1	21.12	
50				25	1	21.14	
50				49	1	21.03	
100				0	1	21.41	
16QAM			1	0	1	21.97	
			1	49	1	20.99	
			1	99	1	21.88	
			50	0	2	22.12	
			50	25	2	22.01	
			50	49	2	21.13	
			100	0	2	21.03	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	20025	1717.5	QPSK	1	0	0	22.10
				1	37	0	21.42
				1	74	0	21.55
				36	0	1	21.21
				36	16	1	21.55
				36	35	1	21.35
				75	0	1	22.03
			16QAM	1	0	1	22.34
				1	37	1	21.86
				1	74	1	22.86
				36	0	2	21.31
				36	16	2	21.57
				36	35	2	21.59
				75	0	2	22.14
	20175	1732.5	QPSK	1	0	0	22.74
				1	37	0	22.77
				1	74	0	20.85
				36	0	1	22.93
				36	16	1	22.30
				36	35	1	21.46
				75	0	1	21.52
			16QAM	1	0	1	21.76
				1	37	1	22.18
				1	74	1	22.68
				36	0	2	21.90
				36	16	2	21.34
				36	35	2	22.27
				75	0	2	21.88
	20325	1747.5	QPSK	1	0	0	22.16
				1	37	0	20.80
1				74	0	21.63	
36				0	1	22.02	
36				16	1	21.34	
36				35	1	22.01	
75				0	1	21.44	
16QAM			1	0	1	21.81	
			1	37	1	21.15	
			1	74	1	21.42	
			36	0	2	21.42	
			36	16	2	22.15	
			36	35	2	22.33	
			75	0	2	22.04	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20000	1715.0	QPSK	1	0	0	21.67
				1	24	0	22.42
				1	49	0	22.73
				25	0	1	22.31
				25	12	1	21.38
				25	25	1	22.27
				50	0	1	21.98
			16QAM	1	0	1	21.65
				1	24	1	20.90
				1	49	1	21.97
				25	0	2	21.13
				25	12	2	21.87
				25	25	2	21.54
				50	0	2	22.13
	20175	1732.5	QPSK	1	0	0	22.93
				1	24	0	22.14
				1	49	0	22.02
				25	0	1	21.04
				25	12	1	21.13
				25	25	1	21.73
				50	0	1	21.43
			16QAM	1	0	1	21.25
				1	24	1	21.60
				1	49	1	22.67
				25	0	2	21.82
				25	12	2	21.30
				25	25	2	21.88
				50	0	2	21.98
	20350	1750.0	QPSK	1	0	0	22.05
				1	24	0	21.41
1				49	0	22.15	
25				0	1	21.44	
25				12	1	21.62	
25				25	1	21.21	
50				0	1	22.54	
16QAM			1	0	1	22.01	
			1	24	1	22.11	
			1	49	1	21.39	
			25	0	2	22.22	
			25	12	2	22.02	
			25	25	2	21.48	
			50	0	2	21.07	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	19975	1712.5	QPSK	1	0	0	21.64
				1	12	0	21.42
				1	24	0	22.22
				12	0	1	20.90
				12	6	1	21.40
				12	11	1	22.08
				25	0	1	20.98
			16QAM	1	0	1	20.97
				1	12	1	21.74
				1	24	1	22.13
				12	0	2	22.75
				12	6	2	21.98
				12	11	2	21.69
				25	0	2	21.51
	20175	1732.5	QPSK	1	0	0	22.50
				1	12	0	22.09
				1	24	0	21.54
				12	0	1	21.59
				12	6	1	21.64
				12	11	1	21.07
				25	0	1	21.09
			16QAM	1	0	1	21.40
				1	12	1	21.70
				1	24	1	21.95
				12	0	2	21.05
				12	6	2	22.39
				12	11	2	21.48
				25	0	2	21.40
	20375	1752.5	QPSK	1	0	0	21.88
				1	12	0	21.17
				1	24	0	20.86
				12	0	1	21.90
				12	6	1	21.30
				12	11	1	21.86
				25	0	1	21.63
			16QAM	1	0	1	22.16
1				12	1	21.66	
1				24	1	21.38	
12				0	2	22.30	
12				6	2	20.93	
12				11	2	21.02	
25				0	2	21.86	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	19965	1711.5	QPSK	1	0	0	21.98
				1	7	0	22.22
				1	14	0	22.23
				8	0	1	20.87
				8	4	1	22.22
				8	7	1	21.26
				15	0	1	20.88
			16QAM	1	0	1	22.50
				1	7	1	22.03
				1	14	1	22.04
				8	0	2	21.01
				8	4	2	21.77
				8	7	2	21.31
				15	0	2	21.20
	20175	1732.5	QPSK	1	0	0	22.34
				1	7	0	21.25
				1	14	0	22.14
				8	0	1	21.02
				8	4	1	22.57
				8	7	1	22.53
				15	0	1	21.78
			16QAM	1	0	1	22.08
				1	7	1	21.30
				1	14	1	21.22
				8	0	2	21.59
				8	4	2	21.48
				8	7	2	22.13
				15	0	2	21.19
	20385	1753.5	QPSK	1	0	0	21.52
				1	7	0	21.41
1				14	0	21.76	
8				0	1	20.74	
8				4	1	22.55	
8				7	1	21.28	
15				0	1	20.81	
16QAM			1	0	1	21.51	
			1	7	1	21.24	
			1	14	1	22.01	
			8	0	2	21.87	
			8	4	2	21.69	
			8	7	2	21.63	
			15	0	2	22.15	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	19957	1710.7	QPSK	1	0	0	21.89
				1	2	0	21.75
				1	5	0	22.12
				3	0	0	21.45
				3	1	0	21.63
				3	2	0	22.14
			16QAM	6	0	1	22.59
				1	0	1	22.61
				1	2	1	21.51
				1	5	1	21.70
				3	0	1	22.05
				3	1	1	21.32
	20175	1732.5	QPSK	3	2	1	20.91
				6	0	2	21.97
				1	0	0	21.57
				1	2	0	22.68
				1	5	0	21.06
				3	0	0	22.23
			16QAM	3	1	0	23.01
				3	2	0	21.77
				6	0	1	21.61
				1	0	1	22.07
				1	2	1	21.78
				1	5	1	22.22
	20393	1754.3	QPSK	3	0	1	22.00
				3	1	1	21.30
				3	2	1	21.46
				6	0	2	21.44
				1	0	0	21.51
				1	2	0	22.17
16QAM			1	5	0	21.58	
			3	0	0	21.56	
			3	1	0	21.49	
			3	2	0	21.84	
			6	0	1	22.02	
			1	0	1	22.06	
1	2	1	21.23				
1	5	1	21.82				
3	0	1	22.39				
3	1	1	22.29				
3	2	1	22.87				
6	0	2	21.84				

**LTE Band 5**

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20450	829	QPSK	1	0	0	22.34
				1	24	0	21.31
				1	49	0	22.16
				25	0	1	21.45
				25	12	1	21.99
				25	25	1	22.76
				50	0	1	21.54
			16QAM	1	0	1	21.12
				1	24	1	21.28
				1	49	1	20.86
				25	0	2	21.74
				25	12	2	22.72
				25	25	2	20.80
				50	0	2	21.95
	20525	836.5	QPSK	1	0	0	22.52
				1	24	0	21.25
				1	49	0	21.13
				25	0	1	22.70
				25	12	1	21.52
				25	25	1	21.85
				50	0	1	21.39
			16QAM	1	0	1	22.47
				1	24	1	22.01
				1	49	1	22.34
				25	0	2	21.51
				25	12	2	22.17
				25	25	2	21.21
				50	0	2	21.31
	20600	844	QPSK	1	0	0	22.04
				1	24	0	21.02
1				49	0	22.32	
25				0	1	20.91	
25				12	1	22.61	
25				25	1	21.54	
50				0	1	21.55	
16QAM			1	0	1	22.20	
			1	24	1	21.39	
			1	49	1	22.25	
			25	0	2	22.00	
			25	12	2	21.36	
			25	25	2	21.14	
			50	0	2	21.54	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	20425	826.5	QPSK	1	0	0	22.82
				1	12	0	22.60
				1	24	0	21.75
				12	0	1	22.20
				12	6	1	20.95
				12	11	1	22.82
				25	0	1	22.69
			16QAM	1	0	1	22.69
				1	12	1	21.52
				1	24	1	21.91
				12	0	2	22.57
				12	6	2	22.42
				12	11	2	20.89
				25	0	2	21.36
	20525	836.5	QPSK	1	0	0	21.75
				1	12	0	21.85
				1	24	0	21.42
				12	0	1	22.24
				12	6	1	22.11
				12	11	1	20.97
				25	0	1	21.41
			16QAM	1	0	1	22.41
				1	12	1	21.63
				1	24	1	21.74
				12	0	2	22.02
				12	6	2	21.83
				12	11	2	22.47
				25	0	2	20.96
	20625	846.5	QPSK	1	0	0	21.44
				1	12	0	21.71
				1	24	0	21.43
				12	0	1	21.49
				12	6	1	22.37
				12	11	1	22.00
				25	0	1	22.75
			16QAM	1	0	1	21.71
1				12	1	21.96	
1				24	1	21.05	
12				0	2	22.05	
12				6	2	22.55	
12				11	2	22.66	
25				0	2	22.00	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	20415	825.5	QPSK	1	0	0	22.86
				1	7	0	21.77
				1	14	0	21.40
				8	0	1	21.10
				8	4	1	21.94
				8	7	1	21.76
				15	0	1	21.29
			16QAM	1	0	1	22.10
				1	7	1	21.41
				1	14	1	21.76
				8	0	2	21.58
				8	4	2	22.44
				8	7	2	21.27
				15	0	2	22.57
	20525	836.5	QPSK	1	0	0	21.18
				1	7	0	21.75
				1	14	0	21.80
				8	0	1	22.13
				8	4	1	21.51
				8	7	1	22.08
				15	0	1	21.26
			16QAM	1	0	1	21.71
				1	7	1	21.61
				1	14	1	21.88
				8	0	2	21.15
				8	4	2	22.33
				8	7	2	20.83
				15	0	2	21.21
	20635	847.5	QPSK	1	0	0	21.57
				1	7	0	21.79
1				14	0	21.66	
8				0	1	22.64	
8				4	1	21.78	
8				7	1	22.77	
15				0	1	22.01	
16QAM			1	0	1	21.55	
			1	7	1	20.87	
			1	14	1	21.80	
			8	0	2	22.02	
			8	4	2	21.43	
			8	7	2	22.07	
			15	0	2	21.39	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	20407	824.7	QPSK	1	0	0	21.76
				1	2	0	21.62
				1	5	0	21.47
				3	0	0	21.05
				3	1	0	22.32
				3	2	0	21.70
				6	0	1	22.18
			16QAM	1	0	1	21.95
				1	2	1	22.27
				1	5	1	22.72
				3	0	1	22.89
				3	1	1	21.46
				3	2	1	21.47
				6	0	2	22.02
	20525	836.5	QPSK	1	0	0	21.48
				1	2	0	22.23
				1	5	0	20.94
				3	0	0	21.79
				3	1	0	22.21
				3	2	0	21.55
				6	0	1	21.96
			16QAM	1	0	1	22.46
				1	2	1	21.83
				1	5	1	22.51
				3	0	1	21.49
				3	1	1	21.72
				3	2	1	22.03
				6	0	2	22.05
	20643	848.3	QPSK	1	0	0	22.34
				1	2	0	21.48
1				5	0	22.49	
3				0	0	22.19	
3				1	0	21.62	
3				2	0	21.27	
6				0	1	21.77	
16QAM			1	0	1	21.67	
			1	2	1	20.85	
			1	5	1	22.17	
			3	0	1	21.89	
			3	1	1	22.19	
			3	2	1	21.92	
			6	0	2	22.39	



**LTE Band 7**

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	20850	2510	QPSK	1	0	0	21.74
				1	49	0	21.82
				1	99	0	21.88
				50	0	1	21.93
				50	25	1	21.73
				50	49	1	22.61
			16QAM	100	0	1	22.06
				1	0	1	22.27
				1	49	1	21.99
				1	99	1	21.65
				50	0	2	22.30
				50	25	2	21.65
	21100	2535	QPSK	50	49	2	22.44
				100	0	2	21.33
				1	0	0	21.86
				1	49	0	22.21
				1	99	0	22.25
				50	0	1	21.66
			16QAM	50	25	1	22.73
				50	49	1	22.25
				100	0	1	21.44
				1	0	1	22.22
				1	49	1	22.61
				1	99	1	21.97
	21350	2560	QPSK	50	0	2	22.02
				50	25	2	22.31
				50	49	2	21.55
				100	0	2	21.96
				1	0	0	22.12
				1	49	0	22.45
16QAM			1	99	0	22.23	
			50	0	1	22.29	
			50	25	1	21.64	
			50	49	1	21.74	
			100	0	1	21.82	
			1	0	1	21.88	
			1	49	1	21.93	
			1	99	1	21.73	
			50	0	2	22.61	
			50	25	2	22.06	
			50	49	2	22.27	
			100	0	2	21.99	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	20825	2507.5	QPSK	1	0	0	21.88
				1	37	0	22.45
				1	74	0	21.58
				36	0	1	22.41
				36	16	1	21.89
				36	35	1	22.08
				75	0	1	22.21
			16QAM	1	0	1	22.32
				1	37	1	22.02
				1	74	1	21.49
				36	0	2	21.52
				36	16	2	21.92
				36	35	2	22.28
				75	0	2	22.37
	21100	2535	QPSK	1	0	0	22.51
				1	37	0	21.73
				1	74	0	22.13
				36	0	1	22.62
				36	16	1	22.00
				36	35	1	22.13
				75	0	1	22.06
			16QAM	1	0	1	21.97
				1	37	1	21.67
				1	74	1	22.06
				36	0	2	21.86
				36	16	2	22.32
				36	35	2	22.48
				75	0	2	21.61
	21375	2562.5	QPSK	1	0	0	21.72
				1	37	0	22.31
1				74	0	22.09	
36				0	1	21.65	
36				16	1	22.25	
36				35	1	21.88	
75				0	1	22.45	
16QAM			1	0	1	21.58	
			1	37	1	22.41	
			1	74	1	21.89	
			36	0	2	22.08	
			36	16	2	22.21	
			36	35	2	22.32	
			75	0	2	22.02	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20800	2505	QPSK	1	0	0	22.40
				1	24	0	22.15
				1	49	0	22.31
				25	0	1	21.84
				25	12	1	22.42
				25	25	1	21.52
			16QAM	50	0	1	22.31
				1	0	1	22.06
				1	24	1	21.78
				1	49	1	21.41
				25	0	2	22.49
				25	12	2	21.87
	21100	2535	QPSK	25	25	2	22.10
				50	0	2	21.36
				1	0	0	22.70
				1	24	0	22.00
				1	49	0	21.74
				25	0	1	22.08
			16QAM	25	12	1	22.00
				25	25	1	22.31
				50	0	1	22.24
1				0	1	21.69	
1				24	1	21.83	
1				49	1	21.95	
21400	2565	QPSK	25	0	2	21.76	
			25	12	2	21.95	
			25	25	2	22.00	
			50	0	2	21.99	
			1	0	0	21.62	
			1	24	0	21.84	
			1	49	0	21.87	
		16QAM	25	0	1	22.20	
			25	12	1	21.64	
			25	25	1	22.40	
			50	0	1	22.15	
			1	0	1	22.31	
			1	24	1	21.84	
			1	49	1	22.42	
			25	0	2	21.52	
25	12	2	22.31				
25	25	2	22.06				
50	0	2	21.78				

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	20775	2502.5	QPSK	1	0	0	21.75
				1	12	0	21.88
				1	24	0	22.22
				12	0	1	21.87
				12	6	1	21.39
				12	13	1	21.32
				25	0	1	22.34
			16QAM	1	0	1	22.11
				1	12	1	22.02
				1	24	1	22.24
				12	0	2	21.88
				12	6	2	21.42
				12	13	2	22.31
				25	0	2	22.08
	21100	2535	QPSK	1	0	0	21.81
				1	12	0	21.99
				1	24	0	21.48
				12	0	1	21.67
				12	6	1	22.39
				12	13	1	22.30
				25	0	1	22.28
			16QAM	1	0	1	21.61
				1	12	1	22.48
				1	24	1	21.71
				12	0	2	22.07
				12	6	2	21.24
				12	13	2	21.55
				25	0	2	21.84
	21425	2567.5	QPSK	1	0	0	21.73
				1	12	0	21.92
1				24	0	22.11	
12				0	1	22.19	
12				6	1	22.30	
12				13	1	21.75	
25				0	1	21.88	
16QAM			1	0	1	22.22	
			1	12	1	21.87	
			1	24	1	21.39	
			12	0	2	21.32	
			12	6	2	22.34	
			12	13	2	22.11	
			25	0	2	22.02	

**LTE Band 17**

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	23780	709	QPSK	1	0	0	21.87
				1	24	0	21.84
				1	49	0	21.99
				25	0	1	21.54
				25	12	1	21.72
				25	25	1	22.11
				50	0	1	22.89
			16QAM	1	0	1	21.69
				1	24	1	22.61
				1	49	1	21.52
				25	0	2	22.03
				25	12	2	21.14
				25	25	2	21.60
				50	0	2	22.72
	23790	710	QPSK	1	0	0	22.76
				1	24	0	22.26
				1	49	0	21.71
				25	0	1	21.39
				25	12	1	22.42
				25	25	1	22.28
				50	0	1	21.91
			16QAM	1	0	1	21.99
				1	24	1	21.60
				1	49	1	22.18
				25	0	2	21.75
				25	12	2	22.44
				25	25	2	21.54
				50	0	2	21.77
	23800	711	QPSK	1	0	0	22.22
				1	24	0	21.23
1				49	0	22.04	
25				0	1	21.73	
25				12	1	20.85	
25				25	1	21.87	
50				0	1	21.84	
16QAM			1	0	1	21.25	
			1	24	1	21.54	
			1	49	1	21.34	
			25	0	2	22.11	
			25	12	2	21.24	
			25	25	2	21.65	
			50	0	2	22.74	

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	23755	706.5	QPSK	1	0	0	21.66
				1	12	0	21.61
				1	24	0	21.18
				12	0	1	22.57
				12	6	1	21.49
				12	11	1	22.82
				25	0	1	22.29
			16QAM	1	0	1	22.32
				1	12	1	22.64
				1	24	1	22.08
				12	0	2	21.88
				12	6	2	21.76
				12	11	2	21.26
				25	0	2	22.03
	23790	710	QPSK	1	0	0	21.12
				1	12	0	21.39
				1	24	0	22.50
				12	0	1	22.56
				12	6	1	22.39
				12	11	1	21.24
				25	0	1	21.63
			16QAM	1	0	1	22.42
				1	12	1	22.02
				1	24	1	22.62
				12	0	2	21.23
				12	6	2	21.23
				12	11	2	22.28
				25	0	2	21.64
	23825	713.5	QPSK	1	0	0	22.18
				1	12	0	22.25
1				24	0	22.26	
12				0	1	21.45	
12				6	1	21.91	
12				11	1	21.40	
25				0	1	21.60	
16QAM			1	0	1	21.15	
			1	12	1	22.57	
			1	24	1	21.44	
			12	0	2	21.96	
			12	6	2	22.57	
			12	11	2	22.15	
			25	0	2	22.61	

According to 3GPP 36.521 sub-clause 6.2.3.3, the maximum output power is allowed to be reduced by following the table.

**Table 6.2.3.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (For PRACH, PUCCH and SRS transmission, the allowed MPR is according to that specified for PUSCH QPSK modulation for the corresponding transmission bandwidth.).

When PRACH, PUCCH are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

For each subframe, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) within the slot, the maximum MPR over the two slots is then applied for the entire subframe.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5.3 apply. The normative reference for this requirement is TS 36.101 clause 6.2.3.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

## 6.2 RADIATED OUTPUT POWER

### 6.2.1 MEASUREMENT METHOD


The measurements procedures specified in ANSI/TIA-603-D-2010 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 27.50(d)(4). The "reference path loss" from Step 1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{dBi}$ .

#### Test Setup


NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### Step 1: Pre-test

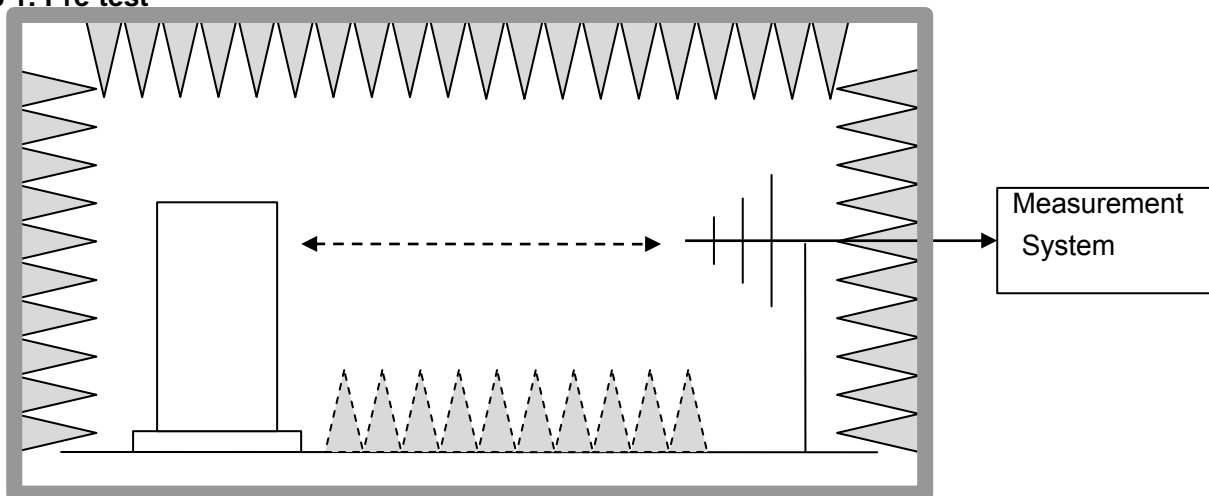



**Step 2: Substitution method to verify the maximum ERP**

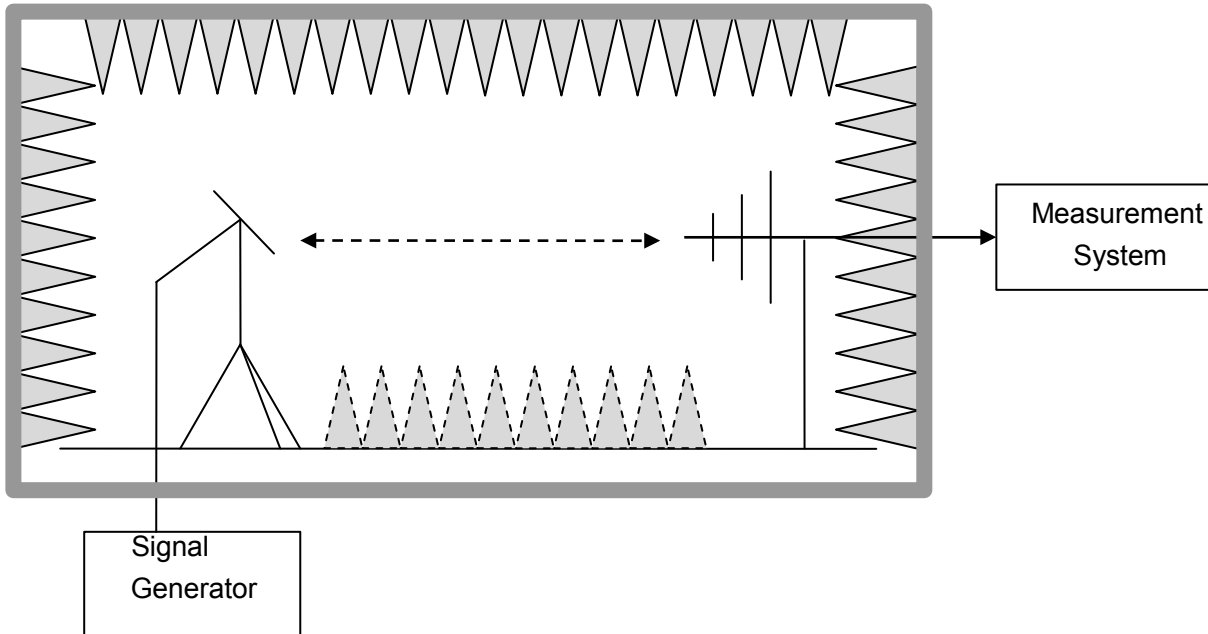

**6.2.2 PROVISIONS APPLICABLE**

This is the test for the maximum radiated power from the EUT. Rule Part 27.50(d) specifies, “Mobile/portable stations are limited to 1 watts e.i.r.p.

Rule Part 27.50(c)(10) specifies “Portable stations (hand-held devices) are limited to 3 watts ERP”.

Mode	Nominal Peak Power
LTE Band 2	$\leq 30$ dBm (1W)
LTE Band 4	$\leq 30$ dBm (1W)
LTE Band 5	$\leq 34.77$ dBm (3W)
LTE Band 7	$\leq 30$ dBm (1W)
LTE Band 17	$\leq 34.77$ dBm (3W)

6.2.3 MEASUREMENT RESULT

EIRP for LTE Band2

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1850.7	1.4	QPSK	1/0	12.73	V	7.95	0.79	19.82	30
1880.0	1.4	QPSK	1/0	12.69	V	7.95	0.79	19.74	30
1909.3	1.4	QPSK	1/0	12.65	V	7.95	0.79	19.79	30
1850.7	1.4	QPSK	1/0	11.13	H	7.95	0.79	18.15	30
1880.0	1.4	QPSK	1/0	10.90	H	7.95	0.79	17.88	30
1909.3	1.4	QPSK	1/0	13.50	H	7.95	0.79	20.69	30
1850.7	1.4	16-QAM	1/5	13.81	V	7.95	0.79	20.55	30
1880.0	1.4	16-QAM	1/0	10.75	V	7.95	0.79	17.96	30
1909.3	1.4	16-QAM	1/0	10.64	V	7.95	0.79	17.89	30
1850.7	1.4	16-QAM	1/5	12.26	H	7.95	0.79	19.24	30
1880.0	1.4	16-QAM	1/0	12.06	H	7.95	0.79	19.31	30
1909.3	1.4	16-QAM	1/0	11.24	H	7.95	0.79	18.31	30
1851.5	3	QPSK	1/0	10.96	V	7.95	0.79	18.40	30
1880.0	3	QPSK	1/0	13.14	V	7.95	0.79	20.11	30
1908.5	3	QPSK	1/0	12.90	V	7.95	0.79	20.33	30
1851.5	3	QPSK	1/0	12.13	H	7.95	0.79	19.36	30
1880.0	3	QPSK	1/0	10.88	H	7.95	0.79	18.03	30
1908.5	3	QPSK	1/0	11.53	H	7.95	0.79	18.77	30
1851.5	3	16-QAM	1/0	12.23	V	7.95	0.79	19.24	30
1880.0	3	16-QAM	1/0	11.76	V	7.95	0.79	18.77	30
1908.5	3	16-QAM	1/0	11.10	V	7.95	0.79	17.94	30
1851.5	3	16-QAM	1/0	10.98	H	7.95	0.79	18.35	30
1880.0	3	16-QAM	1/0	11.79	H	7.95	0.79	19.03	30
1908.5	3	16-QAM	1/0	11.83	H	7.95	0.79	18.78	30
1852.5	5	QPSK	1/0	12.13	V	7.95	0.79	19.29	30
1880.0	5	QPSK	1/0	13.33	V	7.95	0.79	20.49	30
1907.5	5	QPSK	1/24	12.34	V	7.95	0.79	19.50	30
1852.5	5	QPSK	1/0	12.26	H	7.95	0.79	19.42	30
1880.0	5	QPSK	1/0	12.14	H	7.95	0.79	19.30	30
1907.5	5	QPSK	1/24	11.78	H	7.95	0.79	18.94	30
1852.5	5	16-QAM	1/0	12.90	V	7.95	0.79	20.06	30
1880.0	5	16-QAM	1/0	13.70	V	7.95	0.79	20.86	30
1907.5	5	16-QAM	1/24	11.91	V	7.95	0.79	19.07	30
1852.5	5	16-QAM	1/0	11.62	H	7.95	0.79	18.78	30
1880.0	5	16-QAM	1/0	13.54	H	7.95	0.79	20.70	30

1907.5	5	16-QAM	1/24	12.20	H	7.95	0.79	19.36	30
1855	10	QPSK	1/0	11.60	V	7.95	0.79	18.76	30
1880	10	QPSK	1/49	11.88	V	7.95	0.79	19.04	30
1905	10	QPSK	1/0	12.69	V	7.95	0.79	19.85	30
1855	10	QPSK	1/0	12.27	H	7.95	0.79	19.43	30
1880	10	QPSK	1/49	12.59	H	7.95	0.79	19.75	30
1905	10	QPSK	1/0	12.65	H	7.95	0.79	19.81	30
1855	10	16-QAM	1/0	12.86	V	7.95	0.79	20.02	30
1880	10	16-QAM	1/49	14.44	V	7.95	0.79	21.60	30
1905	10	16-QAM	1/0	13.18	V	7.95	0.79	20.34	30
1855	10	16-QAM	1/0	13.73	H	7.95	0.79	20.89	30
1880	10	16-QAM	1/49	12.16	H	7.95	0.79	19.32	30
1905	10	16-QAM	1/0	13.25	H	7.95	0.79	20.41	30
1857.5	15	QPSK	1/0	12.94	V	7.95	0.79	20.10	30
1880	15	QPSK	1/74	13.12	V	7.95	0.79	20.28	30
1902.5	15	QPSK	1/0	13.62	V	7.95	0.79	20.78	30
1857.5	15	QPSK	1/0	13.29	H	7.95	0.79	20.45	30
1880	15	QPSK	1/74	12.27	H	7.95	0.79	19.43	30
1902.5	15	QPSK	1/0	11.96	H	7.95	0.79	19.12	30
1857.5	15	16-QAM	1/0	12.66	V	7.95	0.79	19.82	30
1880	15	16-QAM	1/74	13.72	V	7.95	0.79	20.88	30
1902.5	15	16-QAM	1/0	11.79	V	7.95	0.79	18.95	30
1857.5	15	16-QAM	1/0	11.21	H	7.95	0.79	18.37	30
1880	15	16-QAM	1/74	12.38	H	7.95	0.79	19.54	30
1902.5	15	16-QAM	1/0	12.11	H	7.95	0.79	19.27	30
1860	20	QPSK	1/99	12.15	V	7.95	0.79	19.31	30
1880	20	QPSK	1/99	12.92	V	7.95	0.79	20.08	30
1900	20	QPSK	1/0	13.77	V	7.95	0.79	20.93	30
1860	20	QPSK	1/99	12.27	H	7.95	0.79	19.43	30
1880	20	QPSK	1/99	12.62	H	7.95	0.79	19.78	30
1900	20	QPSK	1/0	12.47	H	7.95	0.79	19.63	30
1860	20	16-QAM	1/99	11.89	V	7.95	0.79	19.05	30
1880	20	16-QAM	1/99	14.45	V	7.95	0.79	21.61	30
1900	20	16-QAM	1/0	12.31	V	7.95	0.79	19.47	30
1860	20	16-QAM	1/99	13.84	H	7.95	0.79	21.00	30
1880	20	16-QAM	1/99	12.23	H	7.95	0.79	19.39	30
1900	20	16-QAM	1/0	11.70	H	7.95	0.79	18.86	30

## EIRP for LTE Band4

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1710.7	1.4	QPSK	1/0	13.77	V	7.95	0.79	20.93	30
1732.5	1.4	QPSK	1/0	13.65	V	7.95	0.79	20.81	30
1754.3	1.4	QPSK	1/0	13.81	V	7.95	0.79	20.97	30
1710.7	1.4	QPSK	1/0	13.49	H	7.95	0.79	20.65	30
1732.5	1.4	QPSK	1/0	12.41	H	7.95	0.79	19.57	30
1754.3	1.4	QPSK	1/0	11.49	H	7.95	0.79	18.65	30
1710.7	1.4	16-QAM	1/5	13.04	V	7.95	0.79	20.20	30
1732.5	1.4	16-QAM	1/0	13.35	V	7.95	0.79	20.51	30
1754.3	1.4	16-QAM	1/0	12.12	V	7.95	0.79	19.28	30
1710.7	1.4	16-QAM	1/5	11.61	H	7.95	0.79	18.77	30
1732.5	1.4	16-QAM	1/0	12.79	H	7.95	0.79	19.95	30
1754.3	1.4	16-QAM	1/0	12.58	H	7.95	0.79	19.74	30
1711.5	3	QPSK	1/0	12.52	V	7.95	0.79	19.68	30
1732.5	3	QPSK	1/0	12.87	V	7.95	0.79	20.03	30
1753.5	3	QPSK	1/0	14.47	V	7.95	0.79	21.63	30
1711.5	3	QPSK	1/0	12.50	H	7.95	0.79	19.66	30
1732.5	3	QPSK	1/0	12.70	H	7.95	0.79	19.86	30
1753.5	3	QPSK	1/0	11.71	H	7.95	0.79	18.87	30
1711.5	3	16-QAM	1/0	13.12	V	7.95	0.79	20.28	30
1732.5	3	16-QAM	1/0	13.43	V	7.95	0.79	20.59	30
1753.5	3	16-QAM	1/0	14.03	V	7.95	0.79	21.19	30
1711.5	3	16-QAM	1/0	13.18	H	7.95	0.79	20.34	30
1732.5	3	16-QAM	1/0	14.00	H	7.95	0.79	21.16	30
1753.5	3	16-QAM	1/0	13.48	H	7.95	0.79	20.64	30
1712.5	5	QPSK	1/0	12.24	V	7.95	0.79	19.40	30
1732.5	5	QPSK	1/0	13.64	V	7.95	0.79	20.80	30
1752.5	5	QPSK	1/24	11.15	V	7.95	0.79	18.31	30
1712.5	5	QPSK	1/0	12.68	H	7.95	0.79	19.84	30
1732.5	5	QPSK	1/0	11.84	H	7.95	0.79	19.00	30
1752.5	5	QPSK	1/24	12.92	H	7.95	0.79	20.08	30
1712.5	5	16-QAM	1/0	13.36	V	7.95	0.79	20.52	30
1732.5	5	16-QAM	1/0	11.50	V	7.95	0.79	18.66	30
1752.5	5	16-QAM	1/24	12.02	V	7.95	0.79	19.18	30
1712.5	5	16-QAM	1/0	11.44	H	7.95	0.79	18.60	30
1732.5	5	16-QAM	1/0	11.16	H	7.95	0.79	18.32	30
1752.5	5	16-QAM	1/24	12.27	H	7.95	0.79	19.43	30

1715	10	QPSK	1/0	13.47	V	7.95	0.79	20.63	30
1732.5	10	QPSK	1/49	11.69	V	7.95	0.79	18.85	30
1750	10	QPSK	1/0	11.84	V	7.95	0.79	19.00	30
1715	10	QPSK	1/0	13.28	H	7.95	0.79	20.44	30
1732.5	10	QPSK	1/49	13.13	H	7.95	0.79	20.29	30
1750	10	QPSK	1/0	12.06	H	7.95	0.79	19.22	30
1715	10	16-QAM	1/0	13.71	V	7.95	0.79	20.87	30
1732.5	10	16-QAM	1/49	12.90	V	7.95	0.79	20.06	30
1750	10	16-QAM	1/0	11.97	V	7.95	0.79	19.13	30
1715	10	16-QAM	1/0	13.15	H	7.95	0.79	20.31	30
1732.5	10	16-QAM	1/49	13.95	H	7.95	0.79	21.11	30
1750	10	16-QAM	1/0	13.09	H	7.95	0.79	20.25	30
1717.5	15	QPSK	1/0	11.62	V	7.95	0.79	18.78	30
1732.5	15	QPSK	1/74	12.58	V	7.95	0.79	19.74	30
1747.5	15	QPSK	1/0	11.32	V	7.95	0.79	18.48	30
1717.5	15	QPSK	1/0	12.39	H	7.95	0.79	19.55	30
1732.5	15	QPSK	1/74	12.25	H	7.95	0.79	19.41	30
1747.5	15	QPSK	1/0	12.50	H	7.95	0.79	19.66	30
1717.5	15	16-QAM	1/0	13.86	V	7.95	0.79	21.02	30
1732.5	15	16-QAM	1/74	11.06	V	7.95	0.79	18.22	30
1747.5	15	16-QAM	1/0	12.14	V	7.95	0.79	19.30	30
1717.5	15	16-QAM	1/0	10.79	H	7.95	0.79	17.95	30
1732.5	15	16-QAM	1/74	13.29	H	7.95	0.79	20.45	30
1747.5	15	16-QAM	1/0	11.57	H	7.95	0.79	18.73	30
1720	20	QPSK	1/99	12.38	V	7.95	0.79	19.54	30
1732.5	20	QPSK	1/99	13.29	V	7.95	0.79	20.45	30
1745	20	QPSK	1/0	13.55	V	7.95	0.79	20.71	30
1720	20	QPSK	1/99	11.69	H	7.95	0.79	18.85	30
1732.5	20	QPSK	1/99	12.76	H	7.95	0.79	19.92	30
1745	20	QPSK	1/0	12.82	H	7.95	0.79	19.98	30
1720	20	16-QAM	1/99	11.42	V	7.95	0.79	18.58	30
1732.5	20	16-QAM	1/99	12.19	V	7.95	0.79	19.35	30
1745	20	16-QAM	1/0	11.24	V	7.95	0.79	18.40	30
1720	20	16-QAM	1/99	12.96	H	7.95	0.79	20.12	30
1732.5	20	16-QAM	1/99	11.88	H	7.95	0.79	19.04	30
1745	20	16-QAM	1/0	12.57	H	7.95	0.79	19.73	30

**EIRP for LTE Band5**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
824.7	1.4	QPSK	1/0	13.63	V	6.7	0.49	19.84	34.77
836.5	1.4	QPSK	1/0	13.30	V	6.7	0.49	19.51	34.77
848.3	1.4	QPSK	1/0	14.19	V	6.7	0.49	20.40	34.77
824.7	1.4	QPSK	1/0	13.54	H	6.7	0.49	19.75	34.77
836.5	1.4	QPSK	1/0	13.36	H	6.7	0.49	19.57	34.77
848.3	1.4	QPSK	1/0	12.15	H	6.7	0.49	18.36	34.77
824.7	1.4	16-QAM	1/0	12.95	V	6.7	0.49	19.16	34.77
836.5	1.4	16-QAM	1/0	14.54	V	6.7	0.49	20.75	34.77
848.3	1.4	16-QAM	1/0	12.77	V	6.7	0.49	18.98	34.77
824.7	1.4	16-QAM	1/0	10.77	H	6.7	0.49	16.98	34.77
836.5	1.4	16-QAM	1/0	12.69	H	6.7	0.49	18.90	34.77
848.3	1.4	16-QAM	1/0	12.68	H	6.7	0.49	18.89	34.77
825.5	3	QPSK	1/0	12.35	V	6.7	0.49	18.56	34.77
836.5	3	QPSK	1/0	12.85	V	6.7	0.49	19.06	34.77
847.5	3	QPSK	1/0	13.03	V	6.7	0.49	19.24	34.77
825.5	3	QPSK	1/0	11.76	H	6.7	0.49	17.97	34.77
836.5	3	QPSK	1/0	13.78	H	6.7	0.49	19.99	34.77
847.5	3	QPSK	1/0	11.99	H	6.7	0.49	18.20	34.77
825.5	3	16-QAM	1/0	11.44	V	6.7	0.49	17.65	34.77
836.5	3	16-QAM	1/0	14.67	V	6.7	0.49	20.88	34.77
847.5	3	16-QAM	1/0	13.25	V	6.7	0.49	19.46	34.77
825.5	3	16-QAM	1/0	13.36	H	6.7	0.49	19.57	34.77
836.5	3	16-QAM	1/0	11.72	H	6.7	0.49	17.93	34.77
847.5	3	16-QAM	1/0	12.87	H	6.7	0.49	19.08	34.77
826.5	5	QPSK	1/0	13.29	V	6.7	0.49	19.50	34.77
836.5	5	QPSK	1/0	13.65	V	6.7	0.49	19.86	34.77
846.5	5	QPSK	1/0	14.19	V	6.7	0.49	20.40	34.77
826.5	5	QPSK	1/0	13.21	H	6.7	0.49	19.42	34.77
836.5	5	QPSK	1/0	13.29	H	6.7	0.49	19.50	34.77
846.5	5	QPSK	1/0	13.36	H	6.7	0.49	19.57	34.77
826.5	5	16-QAM	1/0	13.32	V	6.7	0.49	19.53	34.77
836.5	5	16-QAM	1/0	13.45	V	6.7	0.49	19.66	34.77
846.5	5	16-QAM	1/0	11.89	V	6.7	0.49	18.10	34.77
826.5	5	16-QAM	1/0	11.98	H	6.7	0.49	18.19	34.77
836.5	5	16-QAM	1/0	14.05	H	6.7	0.49	20.26	34.77
846.5	5	16-QAM	1/0	12.93	H	6.7	0.49	19.14	34.77

829	10	QPSK	1/0	11.98	V	6.7	0.49	18.19	34.77
836.5	10	QPSK	1/0	11.85	V	6.7	0.49	18.06	34.77
844	10	QPSK	1/0	13.90	V	6.7	0.49	20.11	34.77
829	10	QPSK	1/0	11.50	H	6.7	0.49	17.71	34.77
836.5	10	QPSK	1/0	12.67	H	6.7	0.49	18.88	34.77
844	10	QPSK	1/0	11.79	H	6.7	0.49	18.00	34.77
829	10	16-QAM	1/0	12.29	V	6.7	0.49	18.50	34.77
836.5	10	16-QAM	1/0	14.36	V	6.7	0.49	20.57	34.77
844	10	16-QAM	1/0	12.98	V	6.7	0.49	19.19	34.77
829	10	16-QAM	1/0	13.09	H	6.7	0.49	19.30	34.77
836.5	10	16-QAM	1/0	12.00	H	6.7	0.49	18.21	34.77
844	10	16-QAM	1/0	11.75	H	6.7	0.49	17.96	34.77

**EIRP for LTE Band7**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
2502.5	5	QPSK	1/0	12.31	V	8.23	1.12	19.42	30
2535	5	QPSK	1/0	10.58	V	8.23	1.12	17.69	30
2567.5	5	QPSK	1/24	12.05	V	8.23	1.12	19.16	30
2502.5	5	QPSK	1/0	13.55	H	8.23	1.12	20.66	30
2535	5	QPSK	1/0	11.06	H	8.23	1.12	18.17	30
2567.5	5	QPSK	1/24	9.44	H	8.23	1.12	16.55	30
2502.5	5	16-QAM	1/0	11.66	V	8.23	1.12	18.77	30
2535	5	16-QAM	1/0	12.38	V	8.23	1.12	19.49	30
2567.5	5	16-QAM	1/24	12.47	V	8.23	1.12	19.58	30
2502.5	5	16-QAM	1/0	11.05	H	8.23	1.12	18.16	30
2535	5	16-QAM	1/0	10.92	H	8.23	1.12	18.03	30
2567.5	5	16-QAM	1/24	10.17	H	8.23	1.12	17.28	30
2505	10	QPSK	1/0	13.30	V	8.23	1.12	20.41	30
2535	10	QPSK	1/49	12.84	V	8.23	1.12	19.95	30
2565	10	QPSK	1/0	12.88	V	8.23	1.12	19.99	30
2505	10	QPSK	1/0	10.01	H	8.23	1.12	17.12	30
2535	10	QPSK	1/49	11.16	H	8.23	1.12	18.27	30
2565	10	QPSK	1/0	10.40	H	8.23	1.12	17.51	30
2505	10	16-QAM	1/0	10.84	V	8.23	1.12	17.95	30
2535	10	16-QAM	1/49	11.05	V	8.23	1.12	18.16	30
2565	10	16-QAM	1/0	11.54	V	8.23	1.12	18.65	30
2505	10	16-QAM	1/0	10.72	H	8.23	1.12	17.83	30
2535	10	16-QAM	1/49	12.52	H	8.23	1.12	19.63	30

2565	10	16-QAM	1/0	9.99	H	8.23	1.12	17.10	30
2507.5	15	QPSK	1/0	10.77	V	8.23	1.12	17.88	30
2535	15	QPSK	1/74	12.13	V	8.23	1.12	19.24	30
2562.5	15	QPSK	1/0	10.78	V	8.23	1.12	17.89	30
2507.5	15	QPSK	1/0	11.89	H	8.23	1.12	19.00	30
2535	15	QPSK	1/74	12.28	H	8.23	1.12	19.39	30
2562.5	15	QPSK	1/0	12.47	H	8.23	1.12	19.58	30
2507.5	15	16-QAM	1/0	10.73	V	8.23	1.12	17.84	30
2535	15	16-QAM	1/74	10.64	V	8.23	1.12	17.75	30
2562.5	15	16-QAM	1/0	11.58	V	8.23	1.12	18.69	30
2507.5	15	16-QAM	1/0	12.11	H	8.23	1.12	19.22	30
2535	15	16-QAM	1/74	11.56	H	8.23	1.12	18.67	30
2562.5	15	16-QAM	1/0	11.86	H	8.23	1.12	18.97	30
2510	20	QPSK	1/99	12.30	V	8.23	1.12	19.41	30
2535	20	QPSK	1/99	11.54	V	8.23	1.12	18.65	30
2560	20	QPSK	1/0	11.33	V	8.23	1.12	18.44	30
2510	20	QPSK	1/99	12.60	H	8.23	1.12	19.71	30
2535	20	QPSK	1/99	11.90	H	8.23	1.12	19.01	30
2560	20	QPSK	1/0	10.52	H	8.23	1.12	17.63	30
2510	20	16-QAM	1/99	11.42	V	8.23	1.12	18.53	30
2535	20	16-QAM	1/99	12.42	V	8.23	1.12	19.53	30
2560	20	16-QAM	1/0	11.68	V	8.23	1.12	18.79	30
2510	20	16-QAM	1/99	12.79	H	8.23	1.12	19.90	30
2535	20	16-QAM	1/99	10.14	H	8.23	1.12	17.25	30
2560	20	16-QAM	1/0	10.46	H	8.23	1.12	17.57	30

## ERP for LTE Band17

Frequency	Channel BW	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
706.5	5	QPSK	1/0	10.98	H	6.7	0.49	17.19	34.77
710	5	QPSK	1/0	14.14	H	6.7	0.49	20.35	34.77
713.5	5	QPSK	1/0	14.03	H	6.7	0.49	20.24	34.77
706.5	5	QPSK	1/0	12.37	V	6.7	0.49	18.58	34.77
710	5	QPSK	1/0	10.07	V	6.7	0.49	16.28	34.77
713.5	5	QPSK	1/0	11.84	V	6.7	0.49	18.05	34.77
706.5	5	16-QAM	1/0	11.38	H	6.7	0.49	17.59	34.77
710	5	16-QAM	1/0	13.30	H	6.7	0.49	19.51	34.77
713.5	5	16-QAM	1/0	12.43	H	6.7	0.49	18.64	34.77
706.5	5	16-QAM	1/0	11.58	V	6.7	0.49	17.79	34.77



710	5	16-QAM	1/0	12.48	V	6.7	0.49	18.69	34.77
713.5	5	16-QAM	1/0	13.15	V	6.7	0.49	19.36	34.77

Frequency	Channel BW	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
709	10	QPSK	1/0	12.89	H	6.7	0.49	19.10	34.77
710	10	QPSK	1/0	12.72	H	6.7	0.49	18.93	34.77
711	10	QPSK	1/0	11.43	H	6.7	0.49	17.64	34.77
709	10	QPSK	1/0	13.89	V	6.7	0.49	20.10	34.77
710	10	QPSK	1/0	12.05	V	6.7	0.49	18.26	34.77
711	10	QPSK	1/0	11.27	V	6.7	0.49	17.48	34.77
709	10	16-QAM	1/0	13.94	H	6.7	0.49	20.15	34.77
710	10	16-QAM	1/0	13.80	H	6.7	0.49	20.01	34.77
711	10	16-QAM	1/0	14.19	H	6.7	0.49	20.40	34.77
709	10	16-QAM	1/0	11.71	V	6.7	0.49	17.92	34.77
710	10	16-QAM	1/0	12.56	V	6.7	0.49	18.77	34.77
711	10	16-QAM	1/0	14.34	V	6.7	0.49	20.55	34.77

Note: Above is the worst mode data.

### 6.3. Peak-to-Average Ratio

#### 6.3.1 MEASUREMENT METHOD

FCC: 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 v02r01 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

#### 6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 6.3.3 MEASUREMENT RESULT

#### LTE Band 2 Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.83	<13	PASS
		1	3	3.15	<13	PASS
		1	5	2.64	<13	PASS
		3	0	4.11	<13	PASS
		3	2	3.40	<13	PASS
		3	3	3.75	<13	PASS
		6	0	4.92	<13	PASS

	MCH	1	0	2.88	<13	PASS
		1	3	2.59	<13	PASS
		1	5	2.42	<13	PASS
		3	0	3.38	<13	PASS
		3	2	3.87	<13	PASS
		3	3	4.01	<13	PASS
		6	0	4.40	<13	PASS
	HCH	1	0	3.88	<13	PASS
		1	3	3.00	<13	PASS
		1	5	3.07	<13	PASS
		3	0	2.39	<13	PASS
		3	2	3.09	<13	PASS
		3	3	3.92	<13	PASS
		6	0	3.46	<13	PASS
16QAM	LCH	1	0	2.47	<13	PASS
		1	3	3.08	<13	PASS
		1	5	2.25	<13	PASS
		3	0	3.54	<13	PASS
		3	2	3.31	<13	PASS
		3	3	4.03	<13	PASS
		6	0	4.39	<13	PASS
	MCH	1	0	2.41	<13	PASS
		1	3	2.15	<13	PASS
		1	5	3.00	<13	PASS
		3	0	3.97	<13	PASS
		3	2	4.11	<13	PASS
		3	3	4.20	<13	PASS
		6	0	4.35	<13	PASS
	HCH	1	0	2.70	<13	PASS
		1	3	2.17	<13	PASS
		1	5	2.81	<13	PASS
		3	0	3.46	<13	PASS
		3	2	4.38	<13	PASS
		3	3	4.92	<13	PASS
		6	0	4.35	<13	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			

QPSK	LCH	1	0	2.21	<13	PASS
		1	7	3.54	<13	PASS
		1	14	3.71	<13	PASS
		8	0	2.91	<13	PASS
		8	4	4.87	<13	PASS
		8	7	3.95	<13	PASS
		15	0	4.59	<13	PASS
	MCH	1	0	2.93	<13	PASS
		1	7	3.22	<13	PASS
		1	14	2.53	<13	PASS
		8	0	2.45	<13	PASS
		8	4	4.67	<13	PASS
		8	7	4.62	<13	PASS
		15	0	4.48	<13	PASS
	HCH	1	0	2.32	<13	PASS
		1	7	2.60	<13	PASS
		1	14	2.15	<13	PASS
		8	0	2.38	<13	PASS
		8	4	3.25	<13	PASS
		8	7	4.94	<13	PASS
		15	0	4.69	<13	PASS
16QAM	LCH	1	0	2.59	<13	PASS
		1	7	3.54	<13	PASS
		1	14	3.42	<13	PASS
		8	0	2.65	<13	PASS
		8	4	3.32	<13	PASS
		8	7	4.51	<13	PASS
		15	0	4.66	<13	PASS
	MCH	1	0	1.88	<13	PASS
		1	7	2.89	<13	PASS
		1	14	4.13	<13	PASS
		8	0	3.15	<13	PASS
		8	4	3.90	<13	PASS
		8	7	3.87	<13	PASS
		15	0	3.83	<13	PASS
	HCH	1	0	3.03	<13	PASS
		1	7	3.40	<13	PASS
		1	14	4.24	<13	PASS
		8	0	3.81	<13	PASS
		8	4	4.48	<13	PASS

		8	7	4.34	<13	PASS
		15	0	4.58	<13	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.15	<13	PASS
		1	12	2.35	<13	PASS
		1	24	3.01	<13	PASS
		12	0	2.53	<13	PASS
		12	6	2.96	<13	PASS
		12	13	3.92	<13	PASS
		25	0	4.46	<13	PASS
	MCH	1	0	2.05	<13	PASS
		1	12	2.54	<13	PASS
		1	24	2.62	<13	PASS
		12	0	3.03	<13	PASS
		12	6	3.62	<13	PASS
		12	13	3.37	<13	PASS
		25	0	4.79	<13	PASS
	HCH	1	0	3.00	<13	PASS
		1	12	2.71	<13	PASS
		1	24	2.70	<13	PASS
		12	0	3.09	<13	PASS
		12	6	3.70	<13	PASS
		12	13	3.95	<13	PASS
		25	0	4.20	<13	PASS
16QAM	LCH	1	0	2.20	<13	PASS
		1	12	3.24	<13	PASS
		1	24	2.85	<13	PASS
		12	0	3.01	<13	PASS
		12	6	3.34	<13	PASS
		12	13	4.63	<13	PASS
		25	0	4.87	<13	PASS
	MCH	1	0	2.72	<13	PASS
		1	12	3.23	<13	PASS
		1	24	2.26	<13	PASS
		12	0	2.80	<13	PASS
		12	6	4.42	<13	PASS
		12	13	3.47	<13	PASS

		25	0	4.57	<13	PASS
	HCH	1	0	3.01	<13	PASS
		1	12	2.32	<13	PASS
		1	24	2.20	<13	PASS
		12	0	2.72	<13	PASS
		12	6	3.92	<13	PASS
		12	13	4.11	<13	PASS
		25	0	3.86	<13	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.15	<13	PASS
		1	24	3.15	<13	PASS
		1	49	3.96	<13	PASS
		25	0	3.57	<13	PASS
		25	12	3.51	<13	PASS
		25	25	4.77	<13	PASS
		50	0	4.53	<13	PASS
	MCH	1	0	2.54	<13	PASS
		1	24	2.00	<13	PASS
		1	49	2.91	<13	PASS
		25	0	2.72	<13	PASS
		25	12	3.52	<13	PASS
		25	25	3.99	<13	PASS
		50	0	3.48	<13	PASS
	HCH	1	0	2.56	<13	PASS
		1	24	2.33	<13	PASS
		1	49	3.59	<13	PASS
		25	0	4.45	<13	PASS
		25	12	4.65	<13	PASS
		25	25	4.74	<13	PASS
		50	0	4.65	<13	PASS
16QAM	LCH	1	0	2.51	<13	PASS
		1	24	3.13	<13	PASS
		1	49	3.53	<13	PASS
		25	0	4.31	<13	PASS
		25	12	4.53	<13	PASS
		25	25	4.53	<13	PASS

	MCH	50	0	4.49	<13	PASS
		1	0	2.62	<13	PASS
		1	24	2.33	<13	PASS
		1	49	2.76	<13	PASS
		25	0	2.92	<13	PASS
		25	12	3.80	<13	PASS
		25	25	4.55	<13	PASS
		50	0	4.66	<13	PASS
	HCH	1	0	2.04	<13	PASS
		1	24	3.10	<13	PASS
		1	49	3.60	<13	PASS
		25	0	3.25	<13	PASS
		25	12	3.56	<13	PASS
		25	25	4.32	<13	PASS
		50	0	4.67	<13	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.17	<13	PASS
		1	37	3.34	<13	PASS
		1	74	3.09	<13	PASS
		37	0	3.62	<13	PASS
		37	18	2.61	<13	PASS
		37	38	4.21	<13	PASS
		75	0	3.95	<13	PASS
	MCH	1	0	1.89	<13	PASS
		1	37	2.76	<13	PASS
		1	74	3.20	<13	PASS
		37	0	2.51	<13	PASS
		37	18	3.90	<13	PASS
		37	38	3.71	<13	PASS
		75	0	4.30	<13	PASS
	HCH	1	0	3.13	<13	PASS
		1	37	2.30	<13	PASS
		1	74	2.75	<13	PASS
		37	0	3.38	<13	PASS
		37	18	3.11	<13	PASS
		37	38	4.26	<13	PASS

		75	0	4.10	<13	PASS
16QAM	LCH	1	0	2.17	<13	PASS
		1	37	3.34	<13	PASS
		1	74	3.09	<13	PASS
		37	0	3.62	<13	PASS
		37	18	2.61	<13	PASS
		37	38	4.21	<13	PASS
		75	0	3.95	<13	PASS
	MCH	1	0	2.89	<13	PASS
		1	37	2.76	<13	PASS
		1	74	3.20	<13	PASS
		37	0	2.51	<13	PASS
		37	18	3.90	<13	PASS
		37	38	3.71	<13	PASS
		75	0	4.30	<13	PASS
	HCH	1	0	3.13	<13	PASS
		1	37	2.30	<13	PASS
		1	74	2.75	<13	PASS
		37	0	3.38	<13	PASS
		37	18	4.11	<13	PASS
		37	38	4.26	<13	PASS
		75	0	4.10	<13	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.73	<13	PASS
		1	49	2.93	<13	PASS
		1	99	2.80	<13	PASS
		50	0	3.12	<13	PASS
		50	25	3.73	<13	PASS
		50	50	4.35	<13	PASS
		100	0	4.99	<13	PASS
	MCH	1	0	2.94	<13	PASS
		1	49	3.20	<13	PASS
		1	99	3.57	<13	PASS
		50	0	3.67	<13	PASS
		50	25	4.30	<13	PASS
		50	50	4.20	<13	PASS



		100	0	4.16	<13	PASS
	HCH	1	0	3.03	<13	PASS
		1	49	3.23	<13	PASS
		1	99	3.27	<13	PASS
		50	0	2.99	<13	PASS
		50	25	3.51	<13	PASS
		50	50	4.23	<13	PASS
		100	0	4.34	<13	PASS
16QAM		LCH	1	0	2.75	<13
	1		49	3.06	<13	PASS
	1		99	3.09	<13	PASS
	50		0	3.34	<13	PASS
	50		25	3.98	<13	PASS
	50		50	4.09	<13	PASS
	100		0	4.34	<13	PASS
	MCH		1	0	2.46	<13
		1	49	3.11	<13	PASS
		1	99	3.39	<13	PASS
		50	0	3.79	<13	PASS
		50	25	4.56	<13	PASS
		50	50	3.71	<13	PASS
		100	0	4.14	<13	PASS
		HCH	1	0	2.69	<13
	1		49	2.92	<13	PASS
	1		99	3.17	<13	PASS
	50		0	3.71	<13	PASS
	50		25	4.51	<13	PASS
	50		50	4.66	<13	PASS
	100		0	4.13	<13	PASS

**LTE Band 4**  
**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.92	<13	PASS
		1	3	3.11	<13	PASS
		1	5	3.58	<13	PASS
		3	0	3.41	<13	PASS
		3	2	3.88	<13	PASS
		3	3	4.14	<13	PASS
		6	0	4.26	<13	PASS
	MCH	1	0	2.55	<13	PASS
		1	3	2.94	<13	PASS
		1	5	3.50	<13	PASS
		3	0	4.01	<13	PASS
		3	2	4.78	<13	PASS
		3	3	4.61	<13	PASS
		6	0	4.32	<13	PASS
	HCH	1	0	3.33	<13	PASS
		1	3	2.92	<13	PASS
		1	5	3.41	<13	PASS
		3	0	2.94	<13	PASS
		3	2	3.73	<13	PASS
		3	3	4.72	<13	PASS
		6	0	4.46	<13	PASS
16QAM	LCH	1	0	2.87	<13	PASS
		1	3	3.87	<13	PASS
		1	5	3.07	<13	PASS
		3	0	3.56	<13	PASS
		3	2	4.42	<13	PASS
		3	3	4.25	<13	PASS
		6	0	4.82	<13	PASS
	MCH	1	0	2.35	<13	PASS
		1	3	3.99	<13	PASS
		1	5	3.48	<13	PASS
		3	0	4.16	<13	PASS
		3	2	4.61	<13	PASS
		3	3	3.70	<13	PASS
		6	0	4.09	<13	PASS

	HCH	1	0	3.40	<13	PASS
		1	3	3.51	<13	PASS
		1	5	4.45	<13	PASS
		3	0	3.74	<13	PASS
		3	2	4.38	<13	PASS
		3	3	4.50	<13	PASS
		6	0	4.41	<13	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.40	<13	PASS
		1	7	2.25	<13	PASS
		1	14	2.93	<13	PASS
		8	0	3.43	<13	PASS
		8	4	3.09	<13	PASS
		8	7	4.65	<13	PASS
		15	0	4.55	<13	PASS
	MCH	1	0	2.74	<13	PASS
		1	7	2.86	<13	PASS
		1	14	2.69	<13	PASS
		8	0	3.48	<13	PASS
		8	4	4.22	<13	PASS
		8	7	3.88	<13	PASS
		15	0	4.36	<13	PASS
	HCH	1	0	2.62	<13	PASS
		1	7	3.63	<13	PASS
		1	14	2.65	<13	PASS
		8	0	3.10	<13	PASS
		8	4	4.05	<13	PASS
		8	7	3.23	<13	PASS
		15	0	4.53	<13	PASS
16QAM	LCH	1	0	2.37	<13	PASS
		1	7	3.21	<13	PASS
		1	14	2.56	<13	PASS
		8	0	4.53	<13	PASS
		8	4	4.12	<13	PASS

		8	7	4.33	<13	PASS
		15	0	5.01	<13	PASS
	MCH	1	0	2.68	<13	PASS
		1	7	3.81	<13	PASS
		1	14	3.73	<13	PASS
		8	0	3.94	<13	PASS
		8	4	3.65	<13	PASS
		8	7	3.98	<13	PASS
		15	0	3.94	<13	PASS
	HCH	1	0	2.94	<13	PASS
		1	7	3.15	<13	PASS
		1	14	3.18	<13	PASS
		8	0	4.28	<13	PASS
		8	4	4.73	<13	PASS
		8	7	4.96	<13	PASS
15		0	5.32	<13	PASS	

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.82	<13	PASS
		1	12	3.37	<13	PASS
		1	24	2.25	<13	PASS
		12	0	2.84	<13	PASS
		12	6	3.21	<13	PASS
		12	13	4.81	<13	PASS
		25	0	4.62	<13	PASS
	MCH	1	0	3.00	<13	PASS
		1	12	3.21	<13	PASS
		1	24	3.53	<13	PASS
		12	0	4.02	<13	PASS
		12	6	3.95	<13	PASS
		12	13	4.97	<13	PASS
		25	0	4.96	<13	PASS
	HCH	1	0	3.43	<13	PASS
		1	12	3.00	<13	PASS
		1	24	4.55	<13	PASS
		12	0	4.16	<13	PASS

		12	6	4.65	<13	PASS
		12	13	5.40	<13	PASS
		25	0	4.82	<13	PASS
16QAM	LCH	1	0	2.88	<13	PASS
		1	12	2.39	<13	PASS
		1	24	3.39	<13	PASS
		12	0	3.91	<13	PASS
		12	6	4.48	<13	PASS
		12	13	4.35	<13	PASS
		25	0	5.39	<13	PASS
	MCH	1	0	3.82	<13	PASS
		1	12	3.17	<13	PASS
		1	24	4.14	<13	PASS
		12	0	3.90	<13	PASS
		12	6	4.23	<13	PASS
		12	13	5.75	<13	PASS
		25	0	5.94	<13	PASS
	HCH	1	0	3.18	<13	PASS
		1	12	4.80	<13	PASS
		1	24	3.64	<13	PASS
		12	0	3.98	<13	PASS
		12	6	4.20	<13	PASS
		12	13	4.95	<13	PASS
		25	0	5.00	<13	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.01	<13	PASS
		1	24	3.16	<13	PASS
		1	49	3.03	<13	PASS
		25	0	3.89	<13	PASS
		25	12	4.36	<13	PASS
		25	25	4.20	<13	PASS
		50	0	4.34	<13	PASS
	MCH	1	0	3.64	<13	PASS
		1	24	3.33	<13	PASS
		1	49	3.37	<13	PASS

		25	0	3.79	<13	PASS	
		25	12	5.90	<13	PASS	
		25	25	4.56	<13	PASS	
		50	0	5.27	<13	PASS	
	HCH	1	0	3.92	<13	PASS	
		1	24	3.29	<13	PASS	
		1	49	3.94	<13	PASS	
		25	0	4.12	<13	PASS	
		25	12	4.48	<13	PASS	
		25	25	5.04	<13	PASS	
		50	0	5.01	<13	PASS	
	16QAM	LCH	1	0	3.26	<13	PASS
			1	24	4.31	<13	PASS
1			49	3.75	<13	PASS	
25			0	4.43	<13	PASS	
25			12	5.64	<13	PASS	
25			25	5.76	<13	PASS	
50			0	5.52	<13	PASS	
MCH		1	0	3.07	<13	PASS	
		1	24	4.75	<13	PASS	
		1	49	3.40	<13	PASS	
		25	0	5.32	<13	PASS	
		25	12	4.52	<13	PASS	
		25	25	5.30	<13	PASS	
		50	0	5.77	<13	PASS	
HCH		1	0	3.91	<13	PASS	
		1	24	3.63	<13	PASS	
		1	49	4.12	<13	PASS	
		25	0	5.04	<13	PASS	
		25	12	5.32	<13	PASS	
		25	25	5.58	<13	PASS	
		50	0	5.60	<13	PASS	

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.47	<13	PASS
		1	37	3.22	<13	PASS
		1	74	3.32	<13	PASS

		37	0	4.27	<13	PASS
		37	18	3.34	<13	PASS
		37	38	4.57	<13	PASS
		75	0	4.95	<13	PASS
	MCH	1	0	3.37	<13	PASS
		1	37	3.76	<13	PASS
		1	74	3.94	<13	PASS
		37	0	4.57	<13	PASS
		37	18	4.47	<13	PASS
		37	38	3.91	<13	PASS
		75	0	4.91	<13	PASS
	HCH	1	0	3.70	<13	PASS
		1	37	3.04	<13	PASS
		1	74	3.96	<13	PASS
37		0	3.92	<13	PASS	
37		18	3.84	<13	PASS	
37		38	5.94	<13	PASS	
75		0	5.50	<13	PASS	
16QAM	LCH	1	0	3.90	<13	PASS
		1	37	3.30	<13	PASS
		1	74	4.03	<13	PASS
		37	0	4.24	<13	PASS
		37	18	3.99	<13	PASS
		37	38	5.47	<13	PASS
		75	0	5.96	<13	PASS
	MCH	1	0	3.43	<13	PASS
		1	37	3.05	<13	PASS
		1	74	3.78	<13	PASS
		37	0	5.10	<13	PASS
		37	18	4.77	<13	PASS
		37	38	5.71	<13	PASS
		75	0	5.05	<13	PASS
	HCH	1	0	3.78	<13	PASS
		1	37	4.12	<13	PASS
		1	74	3.74	<13	PASS
		37	0	3.94	<13	PASS
		37	18	5.33	<13	PASS
		37	38	4.77	<13	PASS
		75	0	5.81	<13	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.04	<13	PASS
		1	49	3.58	<13	PASS
		1	99	3.91	<13	PASS
		50	0	4.70	<13	PASS
		50	25	5.27	<13	PASS
		50	50	5.18	<13	PASS
		100	0	5.38	<13	PASS
	MCH	1	0	3.53	<13	PASS
		1	49	4.55	<13	PASS
		1	99	3.58	<13	PASS
		50	0	4.96	<13	PASS
		50	25	4.62	<13	PASS
		50	50	3.98	<13	PASS
		100	0	5.32	<13	PASS
	HCH	1	0	3.01	<13	PASS
		1	49	3.17	<13	PASS
		1	99	3.18	<13	PASS
		50	0	4.88	<13	PASS
		50	25	5.72	<13	PASS
		50	50	4.82	<13	PASS
		100	0	4.89	<13	PASS
16QAM	LCH	1	0	3.93	<13	PASS
		1	49	4.67	<13	PASS
		1	99	3.21	<13	PASS
		50	0	4.47	<13	PASS
		50	25	4.67	<13	PASS
		50	50	4.56	<13	PASS
		100	0	5.39	<13	PASS
	MCH	1	0	3.30	<13	PASS
		1	49	3.09	<13	PASS
		1	99	4.70	<13	PASS
		50	0	3.85	<13	PASS
		50	25	4.48	<13	PASS
		50	50	4.79	<13	PASS
		100	0	5.84	<13	PASS



	HCH	1	0	4.06	<13	PASS
		1	49	3.40	<13	PASS
		1	99	3.93	<13	PASS
		50	0	4.30	<13	PASS
		50	25	4.30	<13	PASS
		50	50	5.89	<13	PASS
		100	0	6.43	<13	PASS

**LTE Band 5**  
**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.66	<13	PASS
		1	3	2.95	<13	PASS
		1	5	2.86	<13	PASS
		3	0	3.57	<13	PASS
		3	2	3.90	<13	PASS
		3	3	4.10	<13	PASS
		6	0	4.97	<13	PASS
	MCH	1	0	2.87	<13	PASS
		1	3	2.84	<13	PASS
		1	5	3.07	<13	PASS
		3	0	4.19	<13	PASS
		3	2	3.85	<13	PASS
		3	3	4.54	<13	PASS
		6	0	4.09	<13	PASS
	HCH	1	0	3.06	<13	PASS
		1	3	3.78	<13	PASS
		1	5	3.92	<13	PASS
		3	0	3.80	<13	PASS
		3	2	4.07	<13	PASS
		3	3	4.48	<13	PASS
		6	0	3.33	<13	PASS
16QAM	LCH	1	0	2.53	<13	PASS
		1	3	2.81	<13	PASS
		1	5	2.80	<13	PASS
		3	0	3.28	<13	PASS
		3	2	4.40	<13	PASS
		3	3	4.69	<13	PASS
		6	0	5.21	<13	PASS
	MCH	1	0	2.44	<13	PASS
		1	3	2.16	<13	PASS
		1	5	2.80	<13	PASS
		3	0	4.26	<13	PASS
		3	2	3.54	<13	PASS
		3	3	3.95	<13	PASS
		6	0	4.53	<13	PASS

	HCH	1	0	3.57	<13	PASS
		1	3	3.66	<13	PASS
		1	5	2.45	<13	PASS
		3	0	3.82	<13	PASS
		3	2	4.29	<13	PASS
		3	3	3.57	<13	PASS
		6	0	4.24	<13	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.39	<13	PASS
		1	7	2.94	<13	PASS
		1	14	2.75	<13	PASS
		8	0	2.78	<13	PASS
		8	4	3.87	<13	PASS
		8	7	4.67	<13	PASS
		15	0	4.90	<13	PASS
	MCH	1	0	2.96	<13	PASS
		1	7	2.62	<13	PASS
		1	14	2.79	<13	PASS
		8	0	2.82	<13	PASS
		8	4	3.37	<13	PASS
		8	7	3.49	<13	PASS
		15	0	4.49	<13	PASS
	HCH	1	0	3.07	<13	PASS
		1	7	2.61	<13	PASS
		1	14	3.63	<13	PASS
		8	0	2.28	<13	PASS
		8	4	4.06	<13	PASS
		8	7	3.96	<13	PASS
		15	0	4.03	<13	PASS
16QAM	LCH	1	0	2.21	<13	PASS
		1	7	2.41	<13	PASS
		1	14	2.60	<13	PASS
		8	0	3.76	<13	PASS
		8	4	3.80	<13	PASS
		8	7	4.14	<13	PASS
		15	0	4.17	<13	PASS

	MCH	1	0	2.70	<13	PASS
		1	7	2.96	<13	PASS
		1	14	2.27	<13	PASS
		8	0	4.25	<13	PASS
		8	4	3.99	<13	PASS
		8	7	3.49	<13	PASS
		15	0	3.91	<13	PASS
	HCH	1	0	3.01	<13	PASS
		1	7	2.35	<13	PASS
		1	14	3.07	<13	PASS
		8	0	3.09	<13	PASS
		8	4	4.08	<13	PASS
		8	7	4.67	<13	PASS
		15	0	4.26	<13	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.57	<13	PASS
		1	12	2.21	<13	PASS
		1	24	3.39	<13	PASS
		12	0	3.47	<13	PASS
		12	6	3.76	<13	PASS
		12	13	3.97	<13	PASS
		25	0	4.08	<13	PASS
	MCH	1	0	2.97	<13	PASS
		1	12	2.44	<13	PASS
		1	24	2.48	<13	PASS
		12	0	3.76	<13	PASS
		12	6	3.91	<13	PASS
		12	13	4.42	<13	PASS
		25	0	4.06	<13	PASS
	HCH	1	0	3.38	<13	PASS
		1	12	2.62	<13	PASS
		1	24	3.10	<13	PASS
		12	0	2.93	<13	PASS
		12	6	3.40	<13	PASS
		12	13	4.28	<13	PASS
		25	0	4.05	<13	PASS

16QAM	LCH	1	0	2.80	<13	PASS
		1	12	3.62	<13	PASS
		1	24	2.78	<13	PASS
		12	0	3.01	<13	PASS
		12	6	3.52	<13	PASS
		12	13	4.69	<13	PASS
		25	0	4.70	<13	PASS
	MCH	1	0	2.90	<13	PASS
		1	12	2.73	<13	PASS
		1	24	3.31	<13	PASS
		12	0	3.09	<13	PASS
		12	6	4.62	<13	PASS
		12	13	4.59	<13	PASS
		25	0	5.01	<13	PASS
	HCH	1	0	2.52	<13	PASS
		1	12	2.40	<13	PASS
		1	24	3.45	<13	PASS
		12	0	3.24	<13	PASS
		12	6	4.05	<13	PASS
		12	13	4.00	<13	PASS
		25	0	4.35	<13	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.00	<13	PASS
		1	24	3.94	<13	PASS
		1	49	2.92	<13	PASS
		25	0	3.71	<13	PASS
		25	12	2.71	<13	PASS
		25	25	4.63	<13	PASS
		50	0	4.91	<13	PASS
	MCH	1	0	3.25	<13	PASS
		1	24	2.96	<13	PASS
		1	49	3.44	<13	PASS
		25	0	4.12	<13	PASS
		25	12	4.56	<13	PASS
		25	25	3.15	<13	PASS
		50	0	4.26	<13	PASS

	HCH	1	0	3.54	<13	PASS
		1	24	3.06	<13	PASS
		1	49	3.05	<13	PASS
		25	0	3.59	<13	PASS
		25	12	4.24	<13	PASS
		25	25	4.98	<13	PASS
		50	0	3.76	<13	PASS
16QAM	LCH	1	0	2.36	<13	PASS
		1	24	2.32	<13	PASS
		1	49	3.40	<13	PASS
		25	0	3.10	<13	PASS
		25	12	3.47	<13	PASS
		25	25	3.98	<13	PASS
		50	0	4.21	<13	PASS
	MCH	1	0	2.94	<13	PASS
		1	24	2.79	<13	PASS
		1	49	2.42	<13	PASS
		25	0	3.75	<13	PASS
		25	12	3.80	<13	PASS
		25	25	3.81	<13	PASS
		50	0	4.14	<13	PASS
	HCH	1	0	2.83	<13	PASS
		1	24	2.24	<13	PASS
		1	49	2.83	<13	PASS
		25	0	3.20	<13	PASS
		25	12	4.24	<13	PASS
		25	25	4.17	<13	PASS
		50	0	4.59	<13	PASS

**LTE Band 7**  
**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.90	<13	PASS
		1	12	2.16	<13	PASS
		1	24	2.50	<13	PASS
		12	0	3.34	<13	PASS
		12	6	3.30	<13	PASS
		12	13	3.38	<13	PASS
		25	0	4.51	<13	PASS
	MCH	1	0	2.48	<13	PASS
		1	12	2.40	<13	PASS
		1	24	2.82	<13	PASS
		12	0	4.09	<13	PASS
		12	6	3.95	<13	PASS
		12	13	4.23	<13	PASS
		25	0	4.15	<13	PASS
	HCH	1	0	3.00	<13	PASS
		1	12	3.35	<13	PASS
		1	24	3.25	<13	PASS
		12	0	4.42	<13	PASS
		12	6	4.26	<13	PASS
		12	13	3.48	<13	PASS
		25	0	4.44	<13	PASS
16QAM	LCH	1	0	2.76	<13	PASS
		1	12	2.88	<13	PASS
		1	24	3.78	<13	PASS
		12	0	4.37	<13	PASS
		12	6	3.97	<13	PASS
		12	13	3.67	<13	PASS
		25	0	4.20	<13	PASS
	MCH	1	0	2.43	<13	PASS
		1	12	2.70	<13	PASS
		1	24	3.84	<13	PASS
		12	0	3.74	<13	PASS
		12	6	4.86	<13	PASS
		12	13	4.03	<13	PASS
		25	0	4.16	<13	PASS

	HCH	1	0	2.82	<13	PASS
		1	12	3.56	<13	PASS
		1	24	3.19	<13	PASS
		12	0	3.60	<13	PASS
		12	6	3.22	<13	PASS
		12	13	4.49	<13	PASS
		25	0	4.33	<13	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.08	<13	PASS
		1	24	2.50	<13	PASS
		1	49	3.20	<13	PASS
		25	0	2.95	<13	PASS
		25	12	3.38	<13	PASS
		25	25	3.70	<13	PASS
		50	0	4.43	<13	PASS
	MCH	1	0	2.09	<13	PASS
		1	24	2.64	<13	PASS
		1	49	3.00	<13	PASS
		25	0	3.54	<13	PASS
		25	12	4.13	<13	PASS
		25	25	4.06	<13	PASS
		50	0	4.69	<13	PASS
	HCH	1	0	2.87	<13	PASS
		1	24	2.01	<13	PASS
		1	49	3.12	<13	PASS
		25	0	3.56	<13	PASS
		25	12	3.16	<13	PASS
		25	25	4.33	<13	PASS
		50	0	3.97	<13	PASS
16QAM	LCH	1	0	3.19	<13	PASS
		1	24	3.25	<13	PASS
		1	49	3.33	<13	PASS
		25	0	4.16	<13	PASS
		25	12	4.87	<13	PASS
		25	25	3.77	<13	PASS
		50	0	4.11	<13	PASS



	MCH	1	0	2.38	<13	PASS
		1	24	3.77	<13	PASS
		1	49	3.74	<13	PASS
		25	0	4.05	<13	PASS
		25	12	3.97	<13	PASS
		25	25	3.90	<13	PASS
		50	0	3.64	<13	PASS
	HCH	1	0	3.55	<13	PASS
		1	24	2.59	<13	PASS
		1	49	3.49	<13	PASS
		25	0	4.60	<13	PASS
		25	12	4.47	<13	PASS
		25	25	4.21	<13	PASS
		50	0	3.80	<13	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.12	<13	PASS
		1	37	2.98	<13	PASS
		1	74	3.39	<13	PASS
		37	0	4.15	<13	PASS
		37	18	3.62	<13	PASS
		37	38	3.62	<13	PASS
		75	0	4.36	<13	PASS
	MCH	1	0	2.65	<13	PASS
		1	37	2.53	<13	PASS
		1	74	3.10	<13	PASS
		37	0	3.42	<13	PASS
		37	18	3.98	<13	PASS
		37	38	4.47	<13	PASS
		75	0	4.02	<13	PASS
	HCH	1	0	2.96	<13	PASS
		1	37	3.98	<13	PASS
		1	74	4.46	<13	PASS
		37	0	3.38	<13	PASS
		37	18	4.36	<13	PASS
		37	38	3.67	<13	PASS
		75	0	3.90	<13	PASS

16QAM	LCH	1	0	2.68	<13	PASS
		1	37	2.79	<13	PASS
		1	74	3.37	<13	PASS
		37	0	2.78	<13	PASS
		37	18	4.27	<13	PASS
		37	38	4.08	<13	PASS
		75	0	3.88	<13	PASS
	MCH	1	0	2.87	<13	PASS
		1	37	3.51	<13	PASS
		1	74	2.35	<13	PASS
		37	0	3.55	<13	PASS
		37	18	4.12	<13	PASS
		37	38	4.56	<13	PASS
		75	0	3.85	<13	PASS
	HCH	1	0	3.04	<13	PASS
		1	37	2.54	<13	PASS
		1	74	2.90	<13	PASS
		37	0	3.57	<13	PASS
		37	18	3.52	<13	PASS
		37	38	4.29	<13	PASS
		75	0	4.86	<13	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.31	<13	PASS
		1	49	3.15	<13	PASS
		1	99	3.96	<13	PASS
		50	0	4.03	<13	PASS
		50	25	3.34	<13	PASS
		50	50	4.88	<13	PASS
		100	0	3.12	<13	PASS
	MCH	1	0	2.79	<13	PASS
		1	49	2.65	<13	PASS
		1	99	3.02	<13	PASS
		50	0	3.56	<13	PASS
		50	25	4.54	<13	PASS
		50	50	4.10	<13	PASS
		100	0	3.35	<13	PASS

	HCH	1	0	2.91	<13	PASS
		1	49	2.86	<13	PASS
		1	99	3.07	<13	PASS
		50	0	4.58	<13	PASS
		50	25	3.75	<13	PASS
		50	50	3.95	<13	PASS
		100	0	4.53	<13	PASS
16QAM	LCH	1	0	2.63	<13	PASS
		1	49	3.31	<13	PASS
		1	99	2.54	<13	PASS
		50	0	2.83	<13	PASS
		50	25	3.54	<13	PASS
		50	50	4.28	<13	PASS
		100	0	4.95	<13	PASS
	MCH	1	0	2.70	<13	PASS
		1	49	2.04	<13	PASS
		1	99	3.52	<13	PASS
		50	0	2.86	<13	PASS
		50	25	3.83	<13	PASS
		50	50	4.55	<13	PASS
		100	0	3.82	<13	PASS
	HCH	1	0	2.80	<13	PASS
		1	49	3.32	<13	PASS
		1	99	2.64	<13	PASS
		50	0	3.50	<13	PASS
		50	25	3.47	<13	PASS
		50	50	3.98	<13	PASS
		100	0	4.51	<13	PASS

**LTE Band 17**  
**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.16	<13	PASS
		1	12	2.63	<13	PASS
		1	24	2.66	<13	PASS
		12	0	4.50	<13	PASS
		12	6	3.41	<13	PASS
		12	13	3.84	<13	PASS
		25	0	4.50	<13	PASS
	MCH	1	0	2.52	<13	PASS
		1	12	2.55	<13	PASS
		1	24	3.90	<13	PASS
		12	0	2.45	<13	PASS
		12	6	3.75	<13	PASS
		12	13	3.35	<13	PASS
		25	0	4.28	<13	PASS
	HCH	1	0	2.61	<13	PASS
		1	12	2.56	<13	PASS
		1	24	3.64	<13	PASS
		12	0	2.90	<13	PASS
		12	6	3.90	<13	PASS
		12	13	4.22	<13	PASS
		25	0	4.24	<13	PASS
16QAM	LCH	1	0	2.40	<13	PASS
		1	12	3.57	<13	PASS
		1	24	2.97	<13	PASS
		12	0	3.39	<13	PASS
		12	6	4.57	<13	PASS
		12	13	4.43	<13	PASS
		25	0	4.82	<13	PASS
	MCH	1	0	3.35	<13	PASS
		1	12	3.30	<13	PASS
		1	24	2.88	<13	PASS
		12	0	4.85	<13	PASS
		12	6	4.45	<13	PASS
		12	13	4.47	<13	PASS

		25	0	4.20	<13	PASS
	HCH	1	0	3.79	<13	PASS
		1	12	3.10	<13	PASS
		1	24	3.32	<13	PASS
		12	0	3.14	<13	PASS
		12	6	4.03	<13	PASS
		12	13	4.18	<13	PASS
		25	0	5.08	<13	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.40	<13	PASS
		1	24	4.57	<13	PASS
		1	49	3.97	<13	PASS
		25	0	3.39	<13	PASS
		25	12	4.57	<13	PASS
		25	25	5.43	<13	PASS
		50	0	4.82	<13	PASS
	MCH	1	0	3.35	<13	PASS
		1	24	4.30	<13	PASS
		1	49	3.88	<13	PASS
		25	0	4.85	<13	PASS
		25	12	4.45	<13	PASS
		25	25	5.47	<13	PASS
		50	0	5.20	<13	PASS
	HCH	1	0	3.79	<13	PASS
		1	24	3.10	<13	PASS
		1	49	4.32	<13	PASS
		25	0	4.14	<13	PASS
		25	12	4.03	<13	PASS
		25	25	4.18	<13	PASS
		50	0	5.08	<13	PASS
16QAM	LCH	1	0	3.07	<13	PASS
		1	24	3.95	<13	PASS
		1	49	2.67	<13	PASS
		25	0	3.51	<13	PASS
		25	12	4.14	<13	PASS
		25	25	4.61	<13	PASS

		50	0	4.18	<13	PASS
	MCH	1	0	3.40	<13	PASS
		1	24	2.75	<13	PASS
		1	49	4.32	<13	PASS
		25	0	4.16	<13	PASS
		25	12	4.81	<13	PASS
		25	25	4.80	<13	PASS
		50	0	5.74	<13	PASS
		HCH	1	0	3.82	<13
	1		24	2.48	<13	PASS
	1		49	2.82	<13	PASS
	25		0	3.89	<13	PASS
	25		12	4.47	<13	PASS
	25		25	4.65	<13	PASS
	50		0	4.76	<13	PASS

## 7. SPURIOUS EMISSION

### 7.1 CONDUCTED SPURIOUS EMISSION

#### 7.1.1 MEASUREMENT METHOD

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.**

Test Procedure Used


KDB 971168 v02r01 – Section 6.0

#### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least  $10 \times$  the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

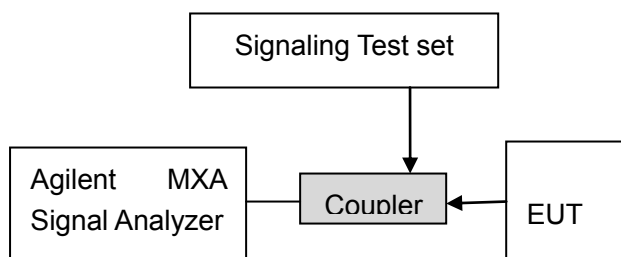

#### Test Instrument & Measurement Setup

shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### **Test Note**

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

### **7.1.2 MEASUREMENT RESULT**

**PLEASE REFER TO:** APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

**Note:** 1. No emission found in standby or receive mode, no recording in this report.




## 7.2 Radiated Spurious Emission

### 7.2.1. MEASUREMENT PROCEDURE


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

### 7.2.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

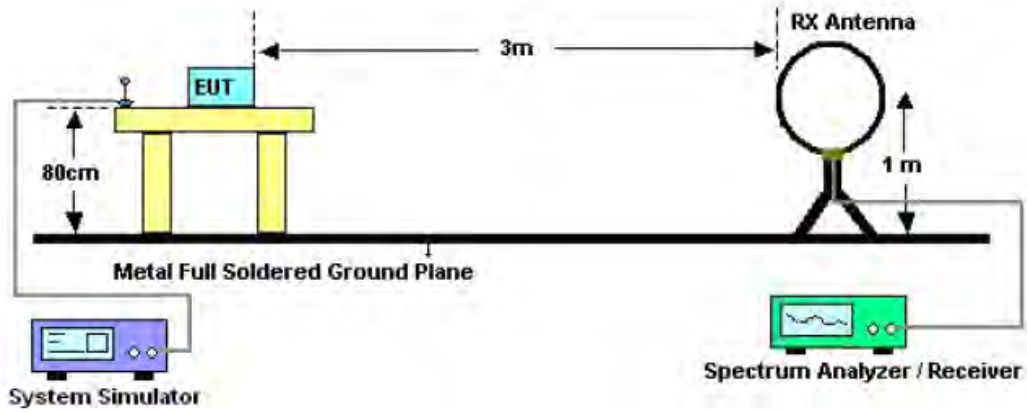

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

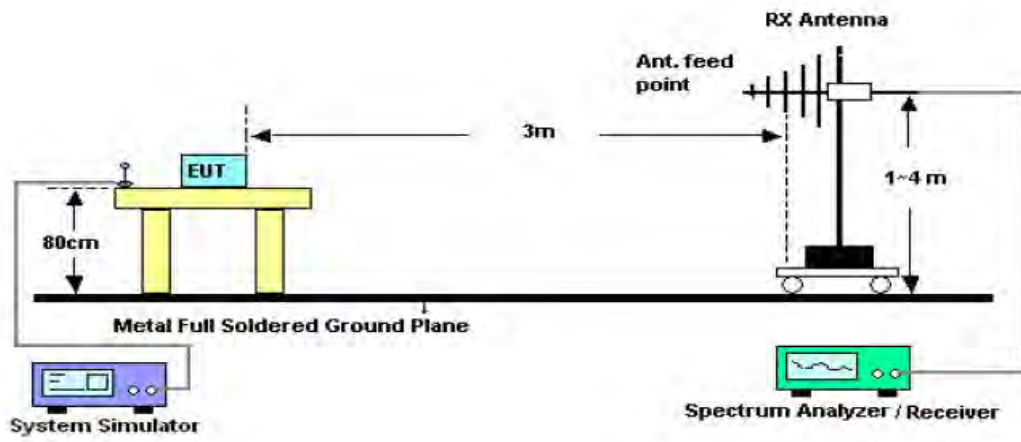

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

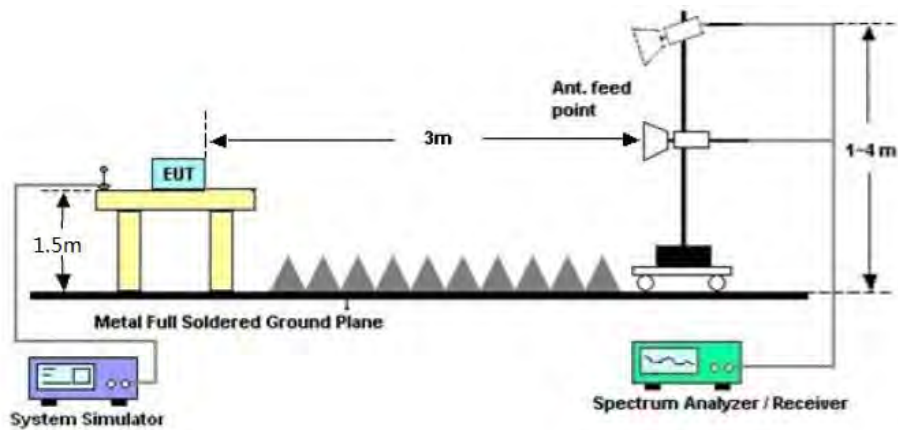

### 7.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** Only record the worst condition of each test mode:

**7.2.3 MEASUREMENT RESULT**

**LTE Band 2  
Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3720	-44.58	V	10.06	2.52	-37.04	-13	-24.04
3720	-45.42	H	10.06	2.52	-37.88	-13	-24.88
257.2	-50.47	V	6.7	0.24	-44.01	-13	-31.01
640.2	-46.74	H	6.5	0.39	-40.63	-13	-27.63

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-45.15	V	10.06	2.52	-37.61	-13	-24.61
3760	-45.07	H	10.06	2.52	-37.53	-13	-24.53
256.9	-54.58	V	6.7	0.24	-48.12	-13	-35.12
639.8	-47.06	H	6.5	0.39	-40.95	-13	-27.95

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3800	-46.81	V	10.06	2.52	-39.27	-13	-26.27
3800	-47.69	H	10.06	2.52	-40.15	-13	-27.15
254.6	-54.05	V	6.7	0.24	-47.59	-13	-34.59
639.4	-46.97	H	6.5	0.39	-40.86	-13	-27.86

**LTE Band 4  
Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3440	-46.90	V	10.06	2.52	-39.36	-13	-26.36
3440	-45.24	H	10.06	2.52	-37.70	-13	-24.70
257.4	-53.53	V	6.7	0.24	-47.07	-13	-34.07
640.2	-50.35	H	6.5	0.39	-44.24	-13	-31.24

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3465	-46.84	V	10.06	2.52	-39.30	-13	-26.30
3465	-46.16	H	10.06	2.52	-38.62	-13	-25.62
256.9	-53.38	V	6.7	0.24	-46.92	-13	-33.92
639.8	-48.28	H	6.5	0.39	-42.17	-13	-29.17

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3490	-47.03	V	10.06	2.52	-39.49	-13	-26.49
3490	-44.05	H	10.06	2.52	-36.51	-13	-23.51
254.6	-51.55	V	6.7	0.24	-45.09	-13	-32.09
639.4	-46.88	H	6.5	0.39	-40.77	-13	-27.77

**LTE Band 5  
Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1658	-47.86	V	10.72	1.65	-38.79	-13	-25.79
1658	-42.72	H	10.72	1.65	-33.65	-13	-20.65
255.2	-51.81	V	6.7	0.24	-45.35	-13	-32.35
641.1	-47.92	H	6.5	0.39	-41.81	-13	-28.81

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673	-47.56	V	10.72	1.65	-38.49	-13	-25.49
1673	-46.88	H	10.72	1.65	-37.81	-13	-24.81
254.5	-55.15	V	6.7	0.24	-48.69	-13	-35.69
640.2	-50.35	H	6.5	0.39	-44.24	-13	-31.24

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1688	-45.91	V	10.72	1.65	-36.84	-13	-23.84
1688	-45.57	H	10.72	1.65	-36.50	-13	-23.50
254.2	-52.67	V	6.7	0.24	-46.21	-13	-33.21
640.8	-50.48	H	6.5	0.39	-44.37	-13	-31.37

**LTE Band 7  
Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5020	-45.66	V	9.32	3.29	-39.63	-13	-26.63
5020	-47.17	H	9.32	3.29	-41.14	-13	-28.14
257.1	-51.93	V	6.7	0.24	-45.47	-13	-32.47
640.4	-48.75	H	6.5	0.39	-42.64	-13	-29.64

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5070	-47.16	V	9.32	3.29	-41.13	-13	-28.13
5070	-46.48	H	9.32	3.29	-40.45	-13	-27.45
257.3	-57.05	V	6.7	0.24	-50.59	-13	-37.59
640.5	-49.14	H	6.5	0.39	-43.03	-13	-30.03

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
5120	-49.01	V	9.32	3.29	-42.98	-13	-29.98
5120	-48.79	H	9.32	3.29	-42.76	-13	-29.76
256.3	-54.72	V	6.7	0.24	-48.26	-13	-35.26
641.2	-47.91	H	6.5	0.39	-41.80	-13	-28.80

**LTE Band 17  
Low channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1418	-47.40	V	10.72	1.65	-38.33	-13	-25.33
1418	-45.01	H	10.72	1.65	-35.94	-13	-22.94
253.8	-52.64	V	6.7	0.24	-46.18	-13	-33.18
640.5	-52.66	H	6.5	0.39	-46.55	-13	-33.55

**Middle channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1420	-46.04	V	10.72	1.65	-36.97	-13	-23.97
1420	-46.36	H	10.72	1.65	-37.29	-13	-24.29
253.8	-52.49	V	6.7	0.24	-46.03	-13	-33.03
639.7	-48.95	H	6.5	0.39	-42.84	-13	-29.84

**High channel**

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1422	-49.57	V	10.72	1.65	-40.50	-13	-27.50
1422	-45.71	H	10.72	1.65	-36.64	-13	-23.64
254.5	-50.58	V	6.7	0.24	-44.12	-13	-31.12
639.4	-48.69	H	6.5	0.39	-42.58	-13	-29.58

- Note:** 1. EUT Field Strength (dBm) = Reading (Signal generator) + Antenna Gain (substitution antenna) - Cable loss (From Signal Generator to substitution antenna).  
2. Below 30MHZ no Spurious found.



## 8. FREQUENCY STABILITY

### 8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.  
 , With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 5 , Subject the EUT to overnight soak at +50°C.
- 6 , With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 8.2 PROVISIONS APPLICABLE

#### 8.2.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

**8.2.2 For equipment powered by primary supply voltage**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**8.3 MEASUREMENT RESULT (WORST)**

**LTE Band 2**

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	10.13	0.005387	±2.5
0		-17.19	-0.009146	±2.5
10		-4.63	-0.002465	±2.5
20		2.57	0.001370	±2.5
30		31.79	0.016655	±2.5
40		46.29	0.024255	±2.5
50		9.90	0.005187	±2.5
55		42.66	0.022352	±2.5
25	4.2	26.41	0.014046	±2.5
	3.5	49.02	0.026076	±2.5

**LTE Band 4**

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-27.67	-0.015969	±2.5
0		-29.15	-0.016828	±2.5
10		-37.89	-0.021873	±2.5
20		-23.79	-0.013731	±2.5
30		11.82	0.006820	±2.5
40		-40.15	-0.023177	±2.5
50		-52.20	-0.030130	±2.5
55		-13.49	-0.007786	±2.5

- 25	4.2	-2.75	-0.001585	±2.5
	3.5	-33.13	-0.019123	±2.5

**LTE Band 5**

Middle Channel, fo = 836.5 MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-2.09	-0.002497	±2.5
0		0.01	0.000017	±2.5
10		-1.10	-0.001317	±2.5
20		1.06	0.001265	±2.5
30		1.83	0.002189	±2.5
40		1.85	0.002206	±2.5
50		7.31	0.008739	±2.5
55		-4.05	-0.004840	±2.5
- 25	4.2	-6.91	-0.008260	±2.5
	3.5	-0.31	-0.000376	±2.5

**LTE Band 7**

Middle Channel, fo = 2535 MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	3.28	0.001292	±2.5
0		3.22	0.001270	±2.5
10		-2.79	-0.001100	±2.5
20		-2.73	-0.001078	±2.5
30		4.69	0.001851	±2.5
40		-3.26	-0.001287	±2.5
50		4.85	0.001913	±2.5
55		4.85	0.001913	±2.5
25	4.2	-2.09	-0.000824	±2.5
	3.5	4.68	0.001845	±2.5

LTE Band 17

Middle Channel, fo = 710 MHz				
Temperature (°C)	Power Supplied	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	3.63	0.005118	±2.5
0		0.07	0.000101	±2.5
10		2.69	0.003788	±2.5
20		-2.13	-0.003002	±2.5
30		-1.75	-0.002458	±2.5
40		-6.11	-0.008603	±2.5
50		0.46	0.000645	±2.5
55		4.75	0.006689	±2.5
25	4.2	7.17	0.010094	±2.5
	3.5	0.77	0.001088	±2.5

Note: The EUT doesn't work below -10°C

## 9. OCCUPIED BANDWIDTH

### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 9.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### LTE Band 2

#### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0794	PASS
	MCH	6	0	1.0783	PASS
	HCH	6	0	1.0950	PASS
16QAM	LCH	6	0	1.0821	PASS
	MCH	6	0	1.0817	PASS
	HCH	6	0	1.0905	PASS

#### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6858	PASS
	MCH	15	0	2.6877	PASS
	HCH	15	0	2.6879	PASS
16QAM	LCH	15	0	2.6859	PASS
	MCH	15	0	2.6856	PASS
	HCH	15	0	2.6882	PASS

#### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		

QPSK	LCH	25	0	4.4846	PASS
	MCH	25	0	4.4797	PASS
	HCH	25	0	4.4833	PASS
16QAM	LCH	25	0	4.4823	PASS
	MCH	25	0	4.4797	PASS
	HCH	25	0	4.4916	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9399	PASS
	MCH	50	0	8.9438	PASS
	HCH	50	0	8.9504	PASS
16QAM	LCH	50	0	8.9294	PASS
	MCH	50	0	8.9384	PASS
	HCH	50	0	8.9602	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.397	PASS
	MCH	75	0	13.416	PASS
	HCH	75	0	13.466	PASS
16QAM	LCH	75	0	13.383	PASS
	MCH	75	0	13.427	PASS
	HCH	75	0	13.452	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.822	PASS
	MCH	100	0	17.902	PASS
	HCH	100	0	17.907	PASS
16QAM	LCH	100	0	17.822	PASS
	MCH	100	0	17.909	PASS
	HCH	100	0	17.909	PASS

**LTE Band 4**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0794	PASS
	MCH	6	0	1.0762	PASS
	HCH	6	0	1.0780	PASS
16QAM	LCH	6	0	1.0813	PASS
	MCH	6	0	1.0788	PASS
	HCH	6	0	1.0761	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6845	PASS
	MCH	15	0	2.6863	PASS
	HCH	15	0	2.6837	PASS
16QAM	LCH	15	0	2.6805	PASS
	MCH	15	0	2.6843	PASS
	HCH	15	0	2.6816	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4845	PASS
	MCH	25	0	4.4859	PASS
	HCH	25	0	4.4799	PASS
16QAM	LCH	25	0	4.4816	PASS
	MCH	25	0	4.4768	PASS
	HCH	25	0	4.4855	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9503	PASS

	MCH	50	0	8.9238	PASS
	HCH	50	0	8.9355	PASS
16QAM	LCH	50	0	8.9419	PASS
	MCH	50	0	8.9114	PASS
	HCH	50	0	8.9452	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.418	PASS
	MCH	75	0	13.369	PASS
	HCH	75	0	13.440	PASS
16QAM	LCH	75	0	13.414	PASS
	MCH	75	0	13.382	PASS
	HCH	75	0	13.436	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.890	PASS
	MCH	100	0	17.808	PASS
	HCH	100	0	17.925	PASS
16QAM	LCH	100	0	17.893	PASS
	MCH	100	0	17.810	PASS
	HCH	100	0	17.896	PASS

**LTE Band 5**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0785	PASS
	MCH	6	0	1.0793	PASS
	HCH	6	0	1.0779	PASS
16QAM	LCH	6	0	1.0825	PASS
	MCH	6	0	1.0803	PASS
	HCH	6	0	1.0780	PASS



**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6874	PASS
	MCH	15	0	2.6851	PASS
	HCH	15	0	2.6850	PASS
16QAM	LCH	15	0	2.6837	PASS
	MCH	15	0	2.6852	PASS
	HCH	15	0	2.6891	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4884	PASS
	MCH	25	0	4.4848	PASS
	HCH	25	0	4.4799	PASS
16QAM	LCH	25	0	4.4805	PASS
	MCH	25	0	4.4904	PASS
	HCH	25	0	4.4859	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9502	PASS
	MCH	50	0	8.9528	PASS
	HCH	50	0	8.9393	PASS
16QAM	LCH	50	0	8.9477	PASS
	MCH	50	0	8.9606	PASS
	HCH	50	0	8.9459	PASS

**LTE Band 7**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4863	PASS
	MCH	25	0	4.4783	PASS

	HCH	25	0	4.4882	PASS
16QAM	LCH	25	0	4.4801	PASS
	MCH	25	0	4.4891	PASS
	HCH	25	0	4.4850	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9235	PASS
	MCH	50	0	8.9478	PASS
	HCH	50	0	8.9320	PASS
16QAM	LCH	50	0	8.9325	PASS
	MCH	50	0	8.9394	PASS
	HCH	50	0	8.9347	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.414	PASS
	MCH	75	0	13.416	PASS
	HCH	75	0	13.406	PASS
16QAM	LCH	75	0	13.397	PASS
	MCH	75	0	13.411	PASS
	HCH	75	0	13.404	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.866	PASS
	MCH	100	0	17.867	PASS
	HCH	100	0	17.874	PASS
16QAM	LCH	100	0	17.848	PASS
	MCH	100	0	17.870	PASS
	HCH	100	0	17.878	PASS

**LTE Band 17**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4853	PASS
	MCH	25	0	4.4747	PASS
	HCH	25	0	4.4831	PASS
16QAM	LCH	25	0	4.4867	PASS
	MCH	25	0	4.4827	PASS
	HCH	25	0	4.4856	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9361	PASS
	MCH	50	0	8.9408	PASS
	HCH	50	0	8.9284	PASS
16QAM	LCH	50	0	8.9444	PASS
	MCH	50	0	8.9316	PASS
	HCH	50	0	8.9458	PASS

Note: Please refers to Appendix B for compliance test plots for Occupied Bandwidth (99%)

## 10. EMISSION BANDWIDTH

### 10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 10.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### LTE Band 2

#### Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.236	PASS
	MCH	6	0	1.279	PASS
	HCH	6	0	1.548	PASS
16QAM	LCH	6	0	1.250	PASS
	MCH	6	0	1.294	PASS
	HCH	6	0	1.583	PASS

#### Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.885	PASS
	MCH	15	0	2.903	PASS
	HCH	15	0	2.987	PASS
16QAM	LCH	15	0	2.895	PASS
	MCH	15	0	2.893	PASS
	HCH	15	0	3.015	PASS

#### Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		

QPSK	LCH	25	0	4.838	PASS
	MCH	25	0	4.838	PASS
	HCH	25	0	4.858	PASS
16QAM	LCH	25	0	4.817	PASS
	MCH	25	0	4.875	PASS
	HCH	25	0	4.823	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.590	PASS
	MCH	50	0	9.472	PASS
	HCH	50	0	9.637	PASS
16QAM	LCH	50	0	9.499	PASS
	MCH	50	0	9.471	PASS
	HCH	50	0	9.490	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.19	PASS
	MCH	75	0	14.21	PASS
	HCH	75	0	14.59	PASS
16QAM	LCH	75	0	14.04	PASS
	MCH	75	0	14.12	PASS
	HCH	75	0	14.18	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.56	PASS
	MCH	100	0	18.61	PASS
	HCH	100	0	18.71	PASS
16QAM	LCH	100	0	18.59	PASS
	MCH	100	0	18.66	PASS
	HCH	100	0	18.66	PASS

**LTE Band 4**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.237	PASS
	MCH	6	0	1.230	PASS
	HCH	6	0	1.225	PASS
16QAM	LCH	6	0	1.219	PASS
	MCH	6	0	1.224	PASS
	HCH	6	0	1.223	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.886	PASS
	MCH	15	0	2.879	PASS
	HCH	15	0	2.864	PASS
16QAM	LCH	15	0	2.874	PASS
	MCH	15	0	2.857	PASS
	HCH	15	0	2.886	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.798	PASS
	MCH	25	0	4.756	PASS
	HCH	25	0	4.895	PASS
16QAM	LCH	25	0	4.835	PASS
	MCH	25	0	4.822	PASS
	HCH	25	0	4.791	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.502	PASS
	MCH	50	0	9.483	PASS

	HCH	50	0	9.461	PASS
16QAM	LCH	50	0	9.462	PASS
	MCH	50	0	9.466	PASS
	HCH	50	0	9.530	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.09	PASS
	MCH	75	0	14.10	PASS
	HCH	75	0	14.12	PASS
16QAM	LCH	75	0	14.04	PASS
	MCH	75	0	14.00	PASS
	HCH	75	0	14.03	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.57	PASS
	MCH	100	0	18.59	PASS
	HCH	100	0	18.71	PASS
16QAM	LCH	100	0	18.57	PASS
	MCH	100	0	18.54	PASS
	HCH	100	0	18.64	PASS

**LTE Band 5**

**Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.281	PASS
	MCH	6	0	1.236	PASS
	HCH	6	0	1.214	PASS
16QAM	LCH	6	0	1.231	PASS
	MCH	6	0	1.248	PASS
	HCH	6	0	1.228	PASS

**Channel Bandwidth: 3 MHz**

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.858	PASS
	MCH	15	0	2.895	PASS
	HCH	15	0	2.890	PASS
16QAM	LCH	15	0	2.876	PASS
	MCH	15	0	2.896	PASS
	HCH	15	0	2.886	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.828	PASS
	MCH	25	0	4.867	PASS
	HCH	25	0	4.827	PASS
16QAM	LCH	25	0	4.846	PASS
	MCH	25	0	4.803	PASS
	HCH	25	0	4.868	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.478	PASS
	MCH	50	0	9.636	PASS
	HCH	50	0	9.630	PASS
16QAM	LCH	50	0	9.464	PASS
	MCH	50	0	9.593	PASS
	HCH	50	0	9.452	PASS

**LTE Band 7**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		



QPSK	LCH	25	0	4.798	PASS
	MCH	25	0	4.813	PASS
	HCH	25	0	4.856	PASS
16QAM	LCH	25	0	4.841	PASS
	MCH	25	0	4.820	PASS
	HCH	25	0	4.842	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.430	PASS
	MCH	50	0	9.437	PASS
	HCH	50	0	9.425	PASS
16QAM	LCH	50	0	9.477	PASS
	MCH	50	0	9.536	PASS
	HCH	50	0	9.437	PASS

**Channel Bandwidth: 15 MHz**

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.10	PASS
	MCH	75	0	14.14	PASS
	HCH	75	0	14.10	PASS
16QAM	LCH	75	0	14.09	PASS
	MCH	75	0	14.03	PASS
	HCH	75	0	14.17	PASS

**Channel Bandwidth: 20 MHz**

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.62	PASS
	MCH	100	0	18.63	PASS
	HCH	100	0	18.67	PASS
16QAM	LCH	100	0	18.58	PASS
	MCH	100	0	18.68	PASS
	HCH	100	0	18.70	PASS

**LTE Band 17**

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.824	PASS
	MCH	25	0	4.808	PASS
	HCH	25	0	4.828	PASS
16QAM	LCH	25	0	4.840	PASS
	MCH	25	0	4.830	PASS
	HCH	25	0	4.809	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.504	PASS
	MCH	50	0	9.475	PASS
	HCH	50	0	9.465	PASS
16QAM	LCH	50	0	9.482	PASS
	MCH	50	0	9.478	PASS
	HCH	50	0	9.440	PASS

Note: Please refers to Appendix B for compliance test plots for emission bandwidth (-26dBc)

## **11. BAND EDGE**

### **11.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **11.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of §2.1051 §24.238(a) §27.53(e) §27.53(g)  
KDB 971168 v02r01 – Section 6.0


### **11.3 MEASUREMENT RESULT**


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequency. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.


Please refers to Appendix III for compliance test plots for band edge

## APPENDIX A


### TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION LTE BAND 2

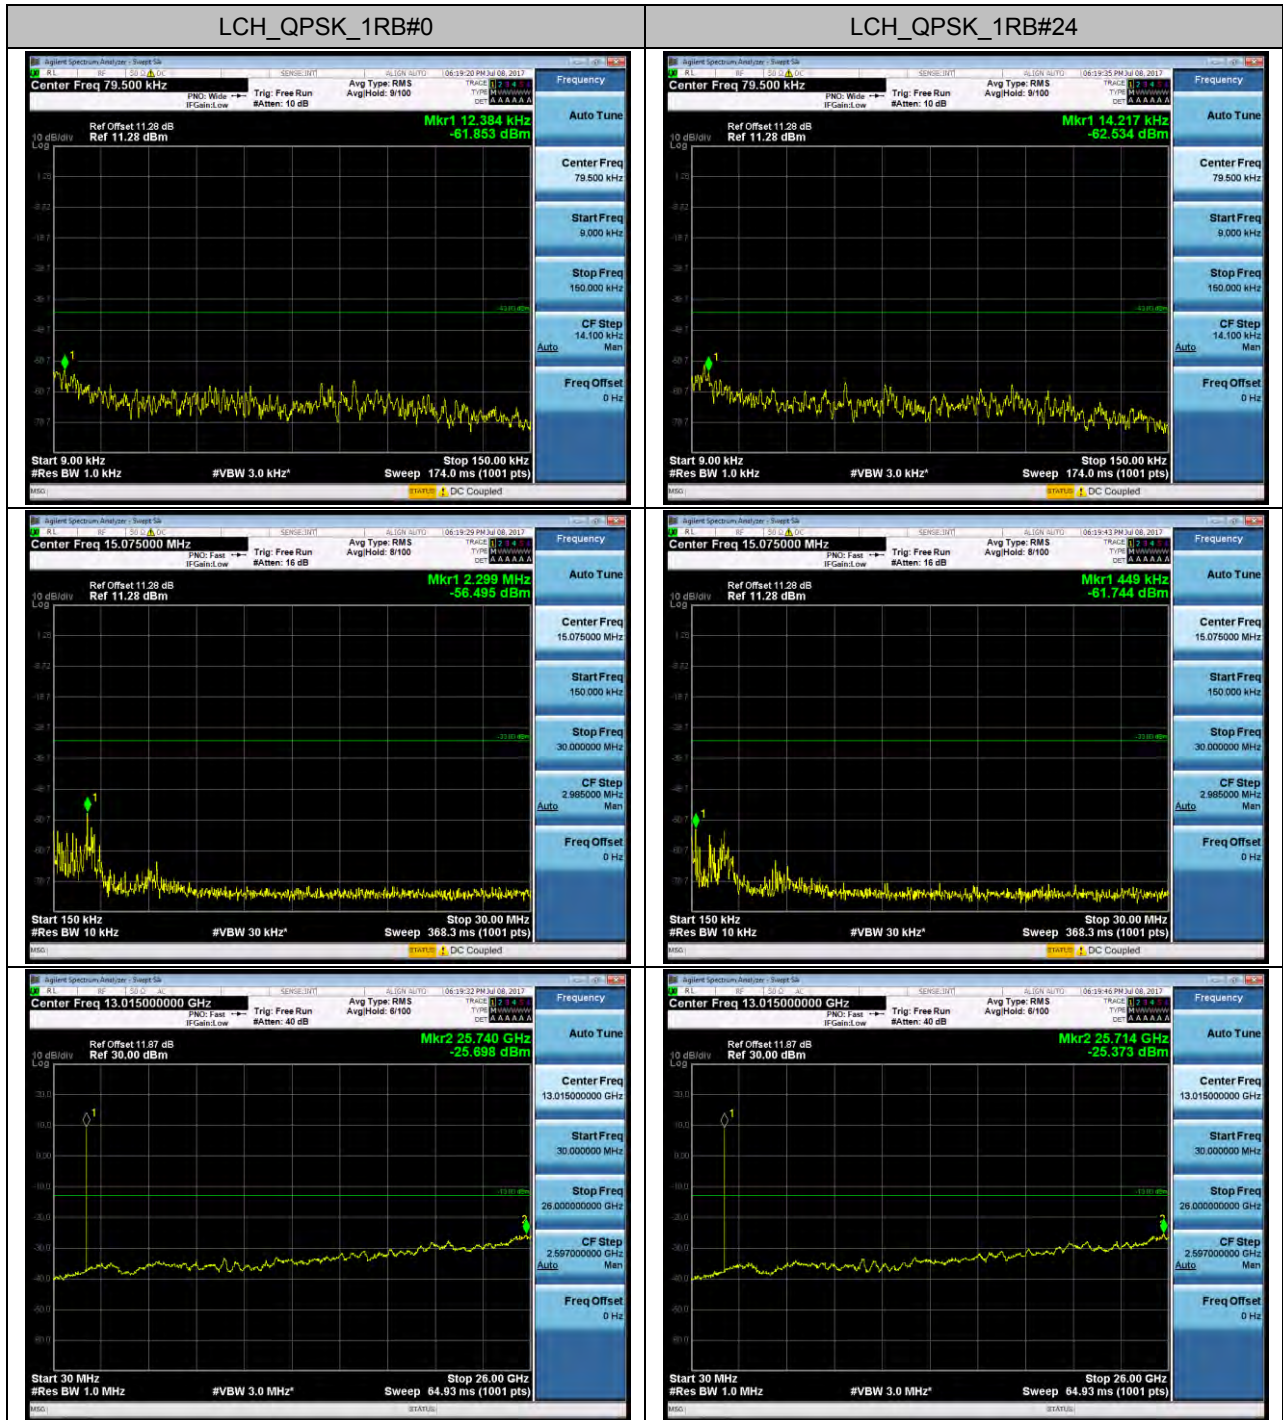


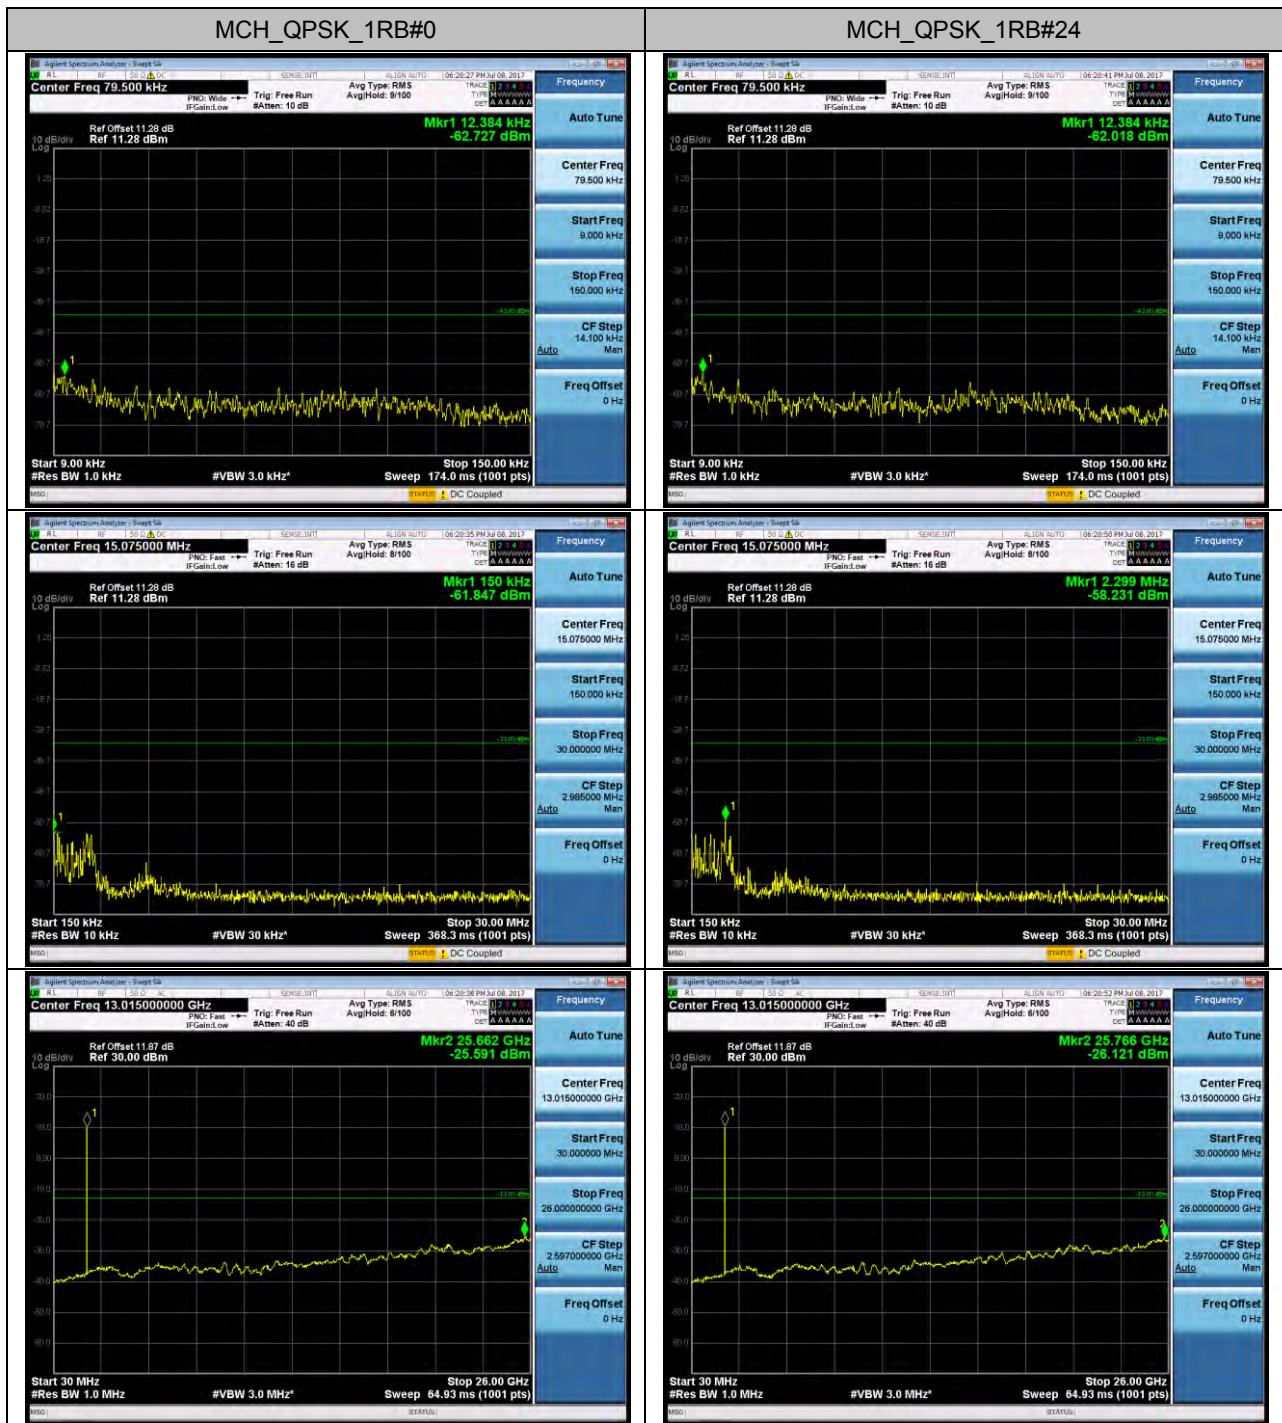

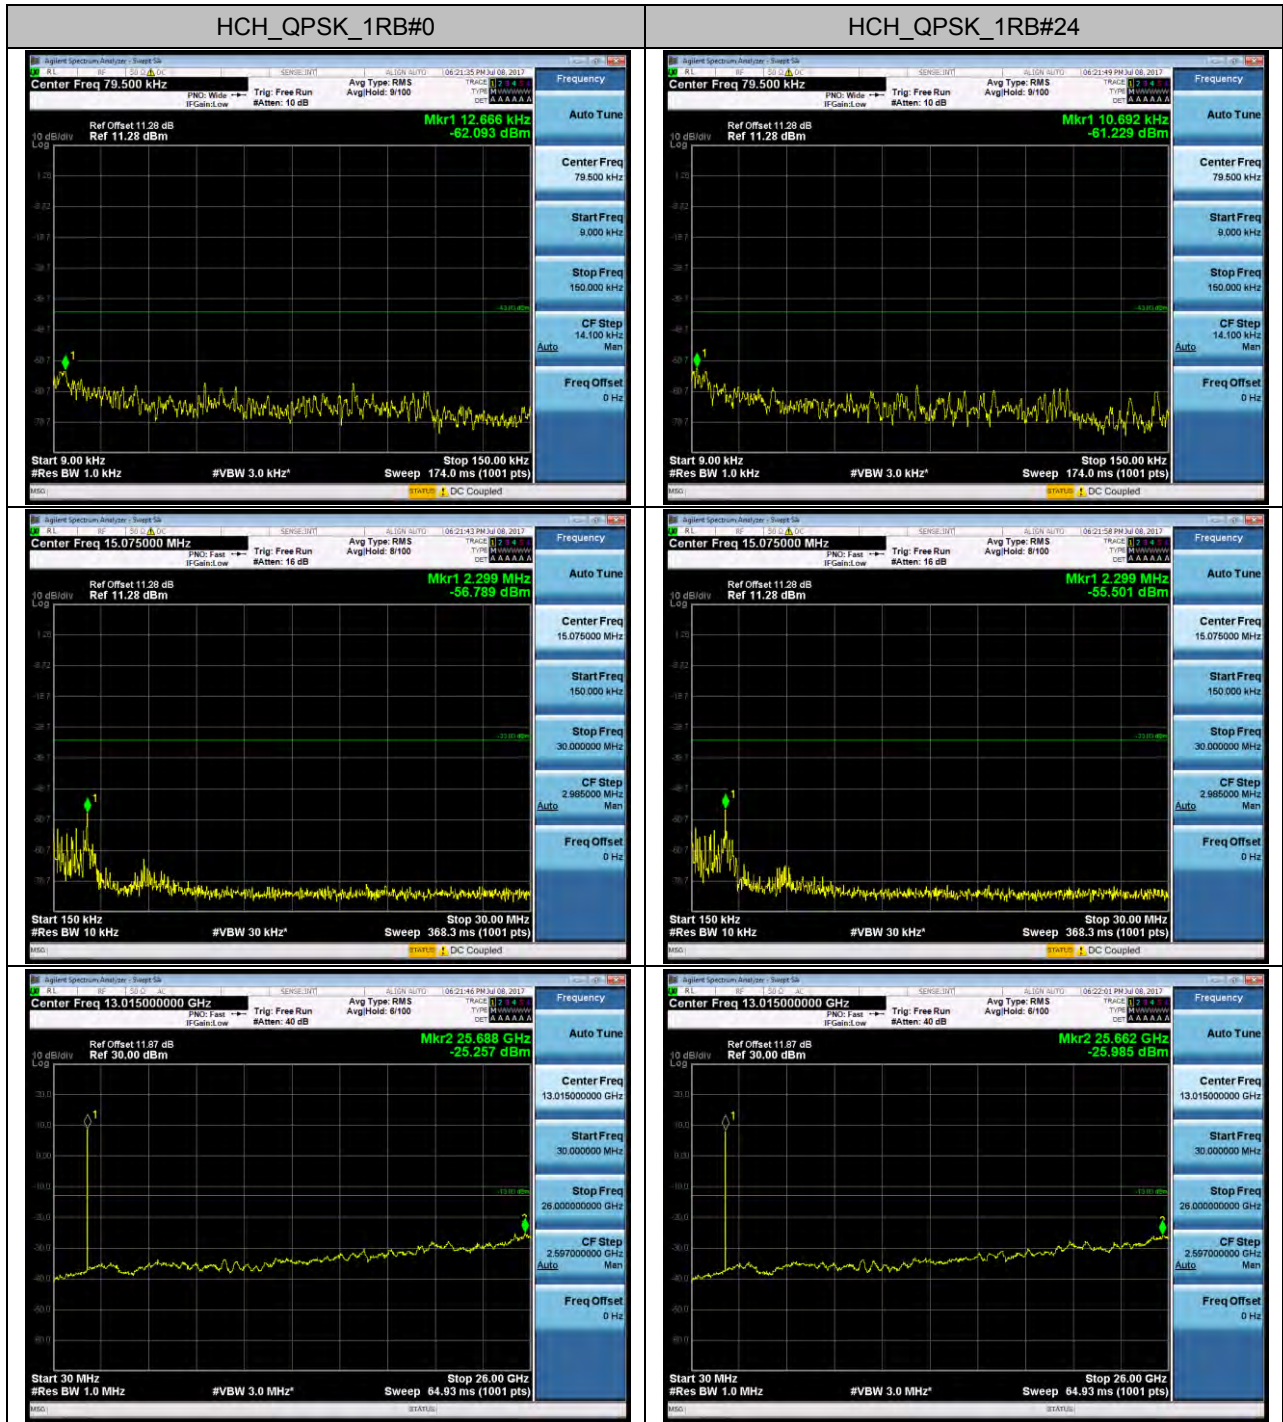


LTE BAND 4

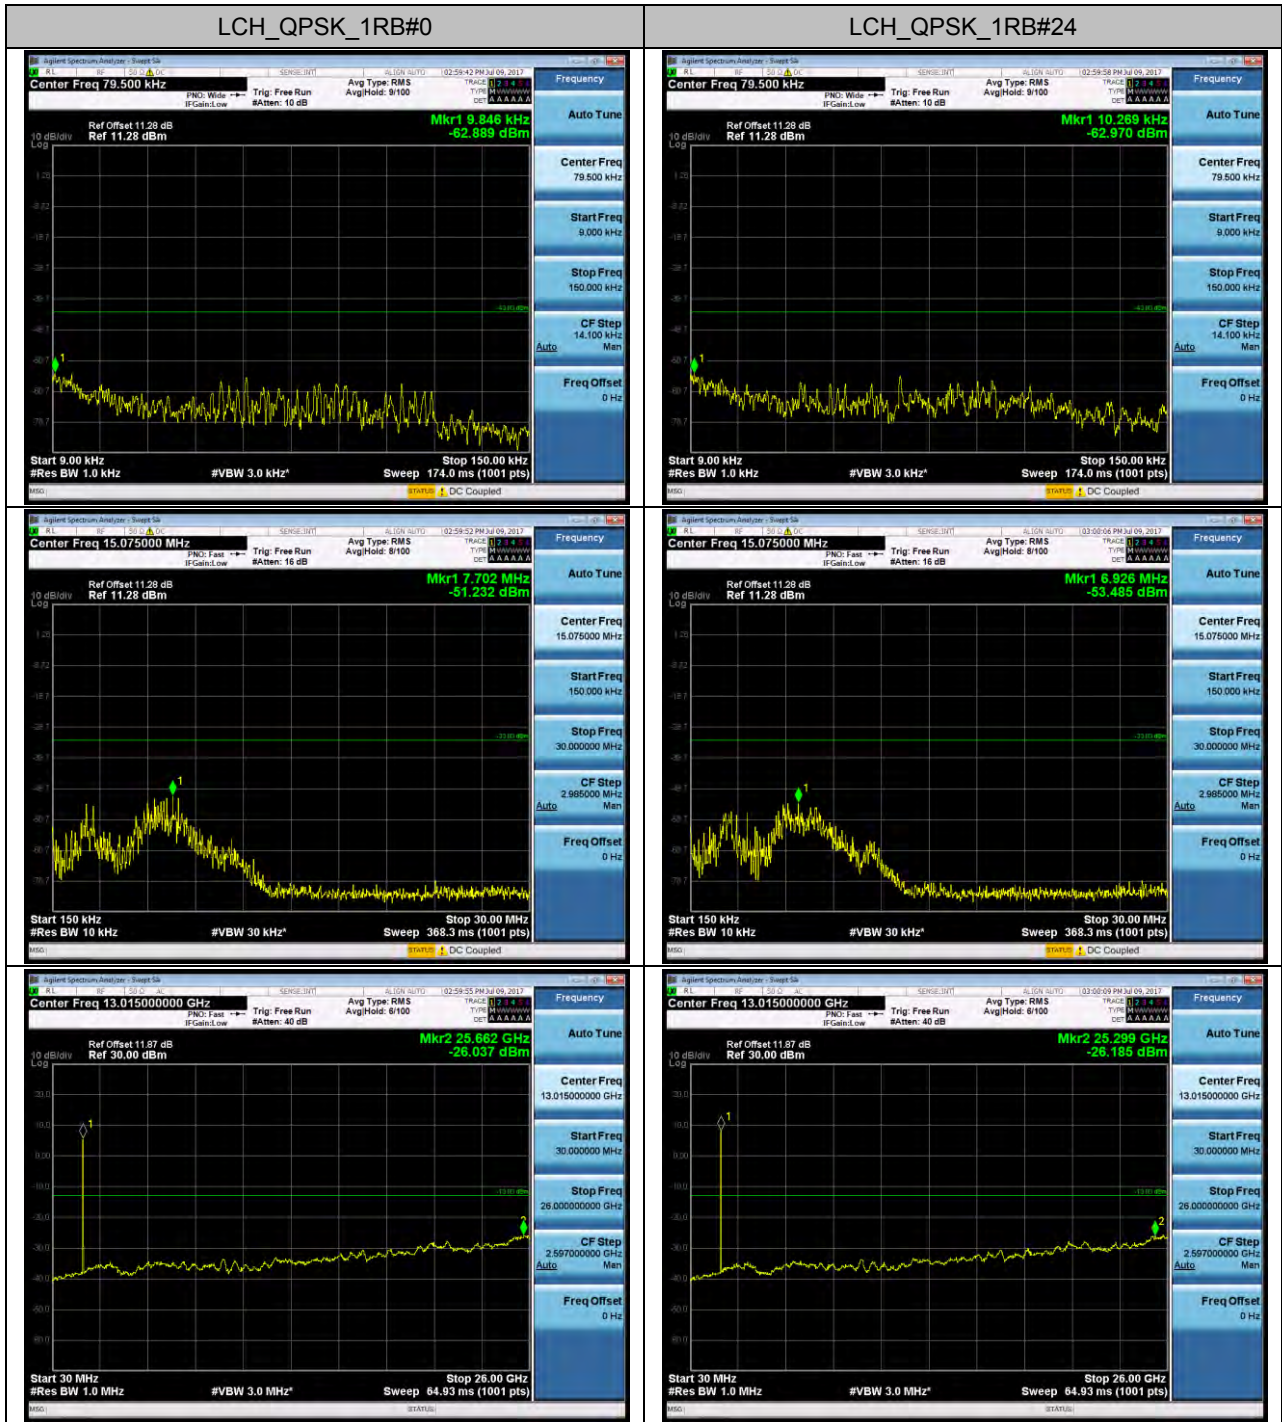


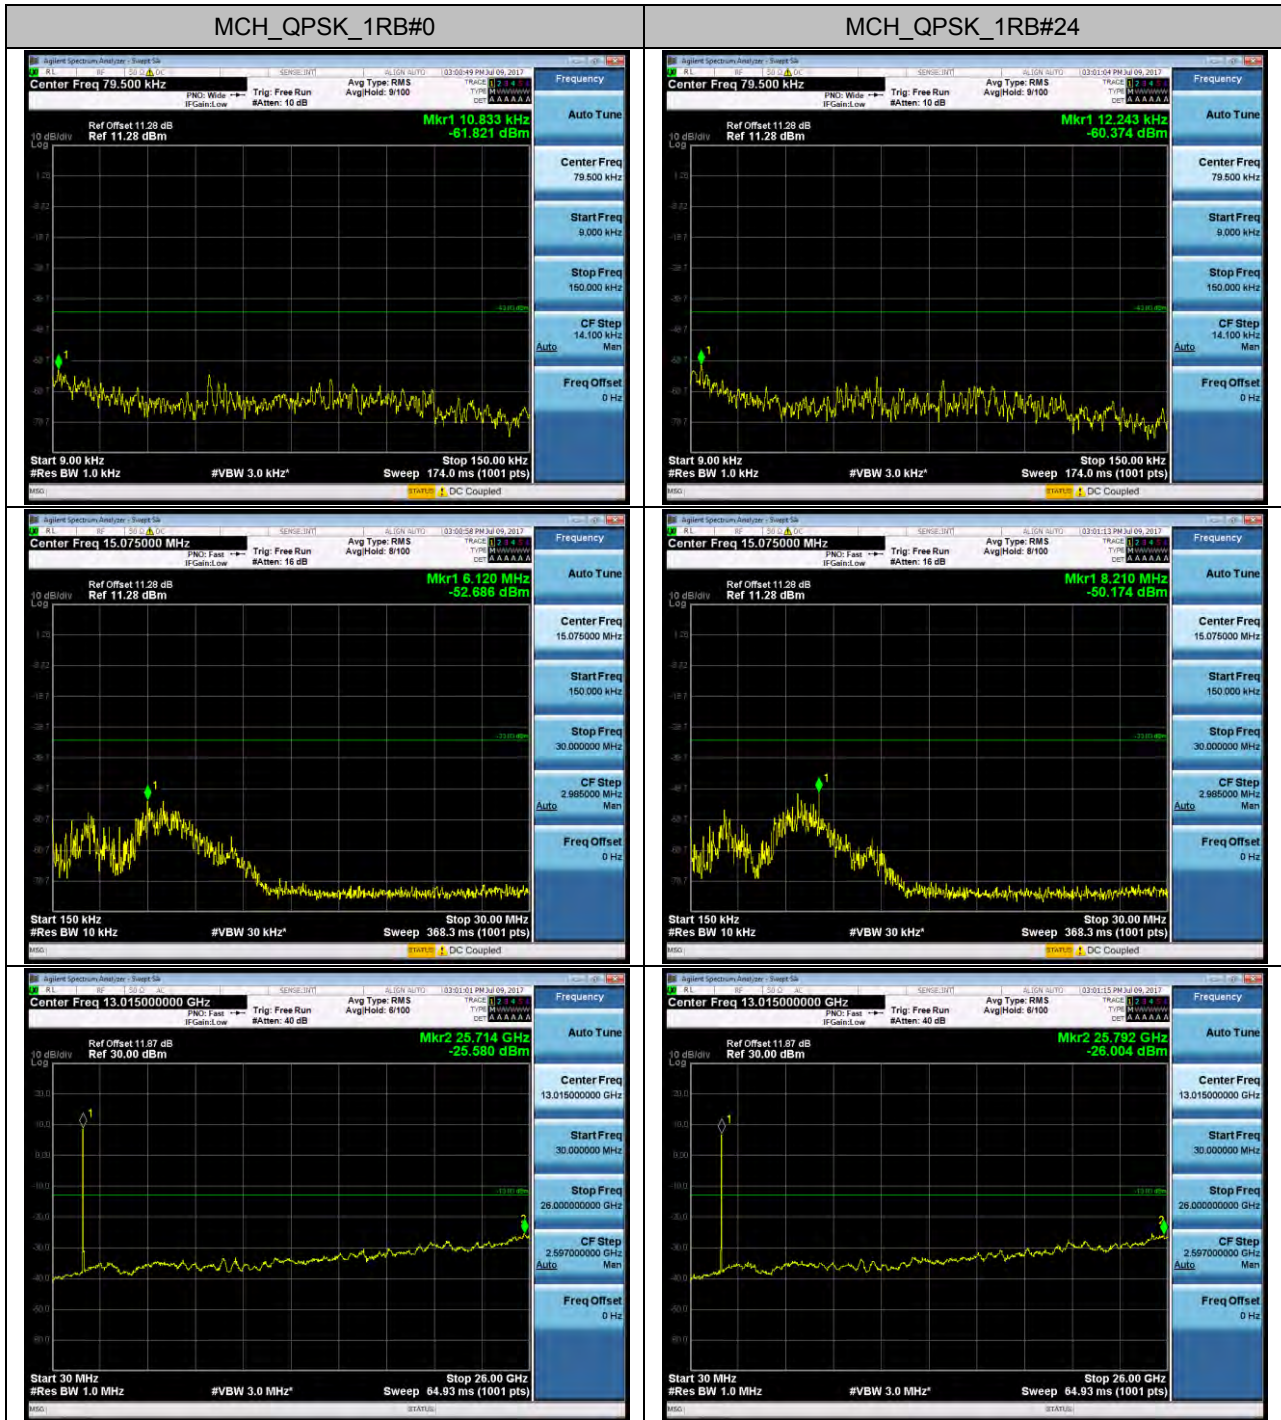





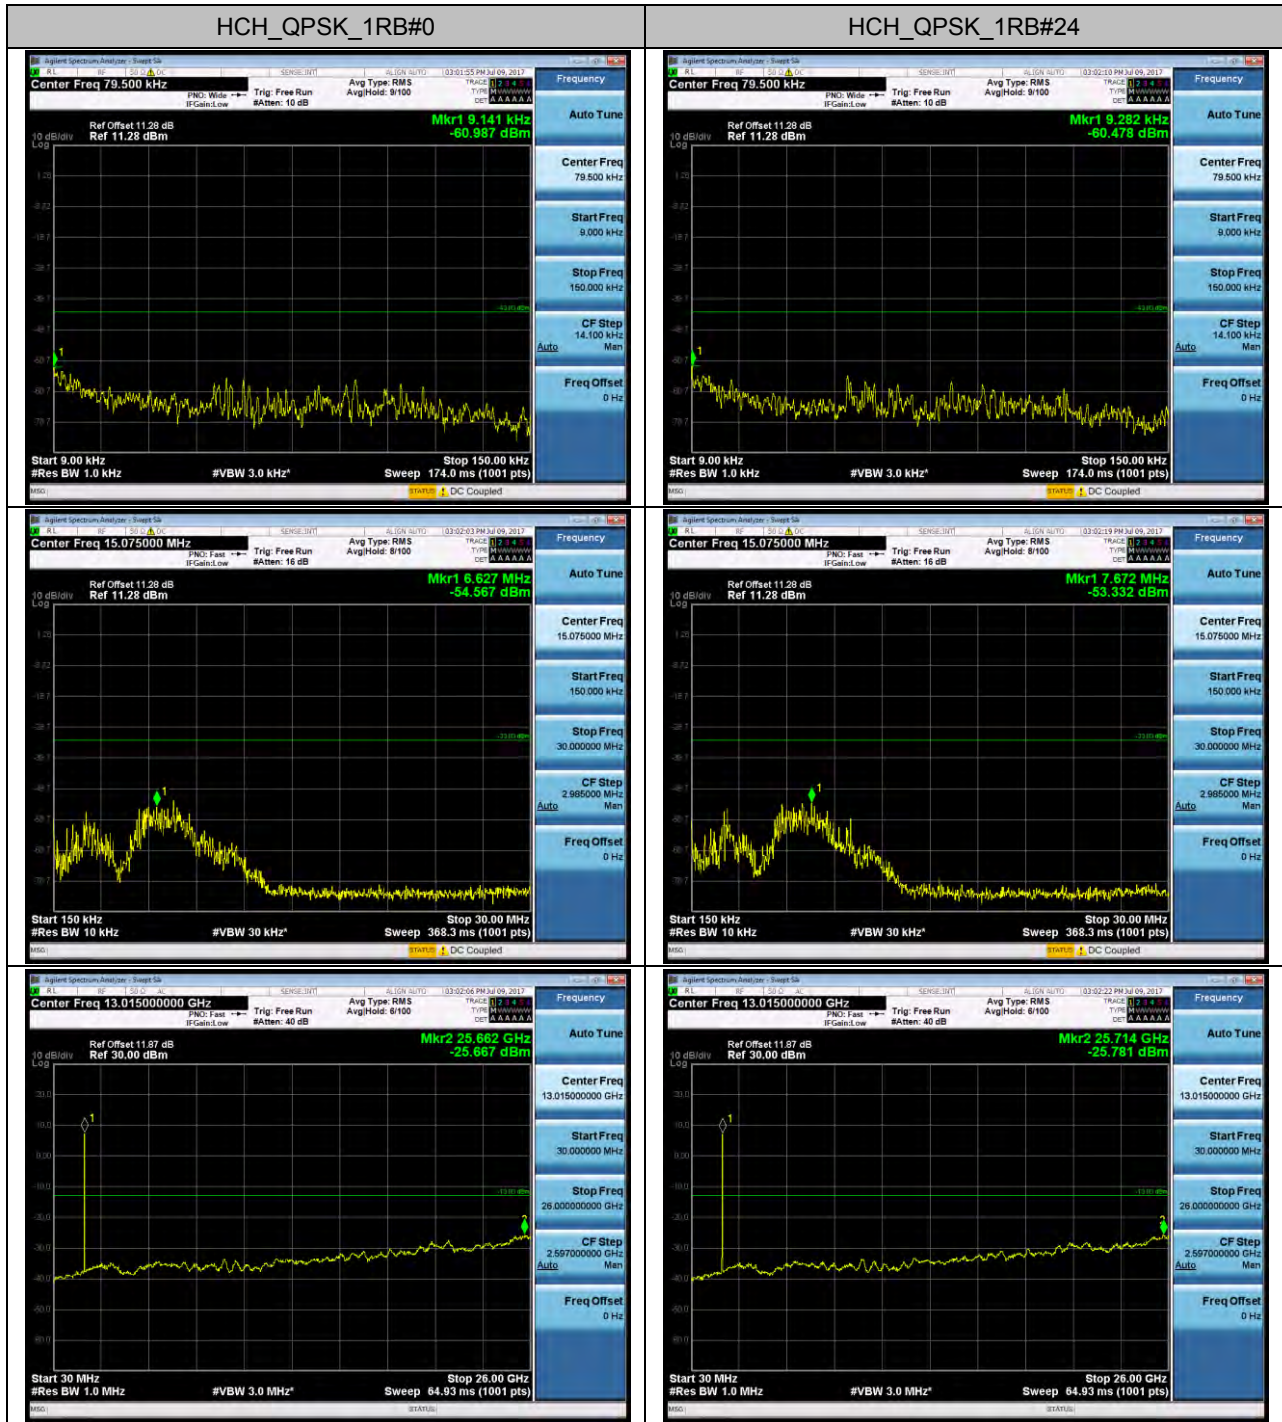


LTE BAND 5

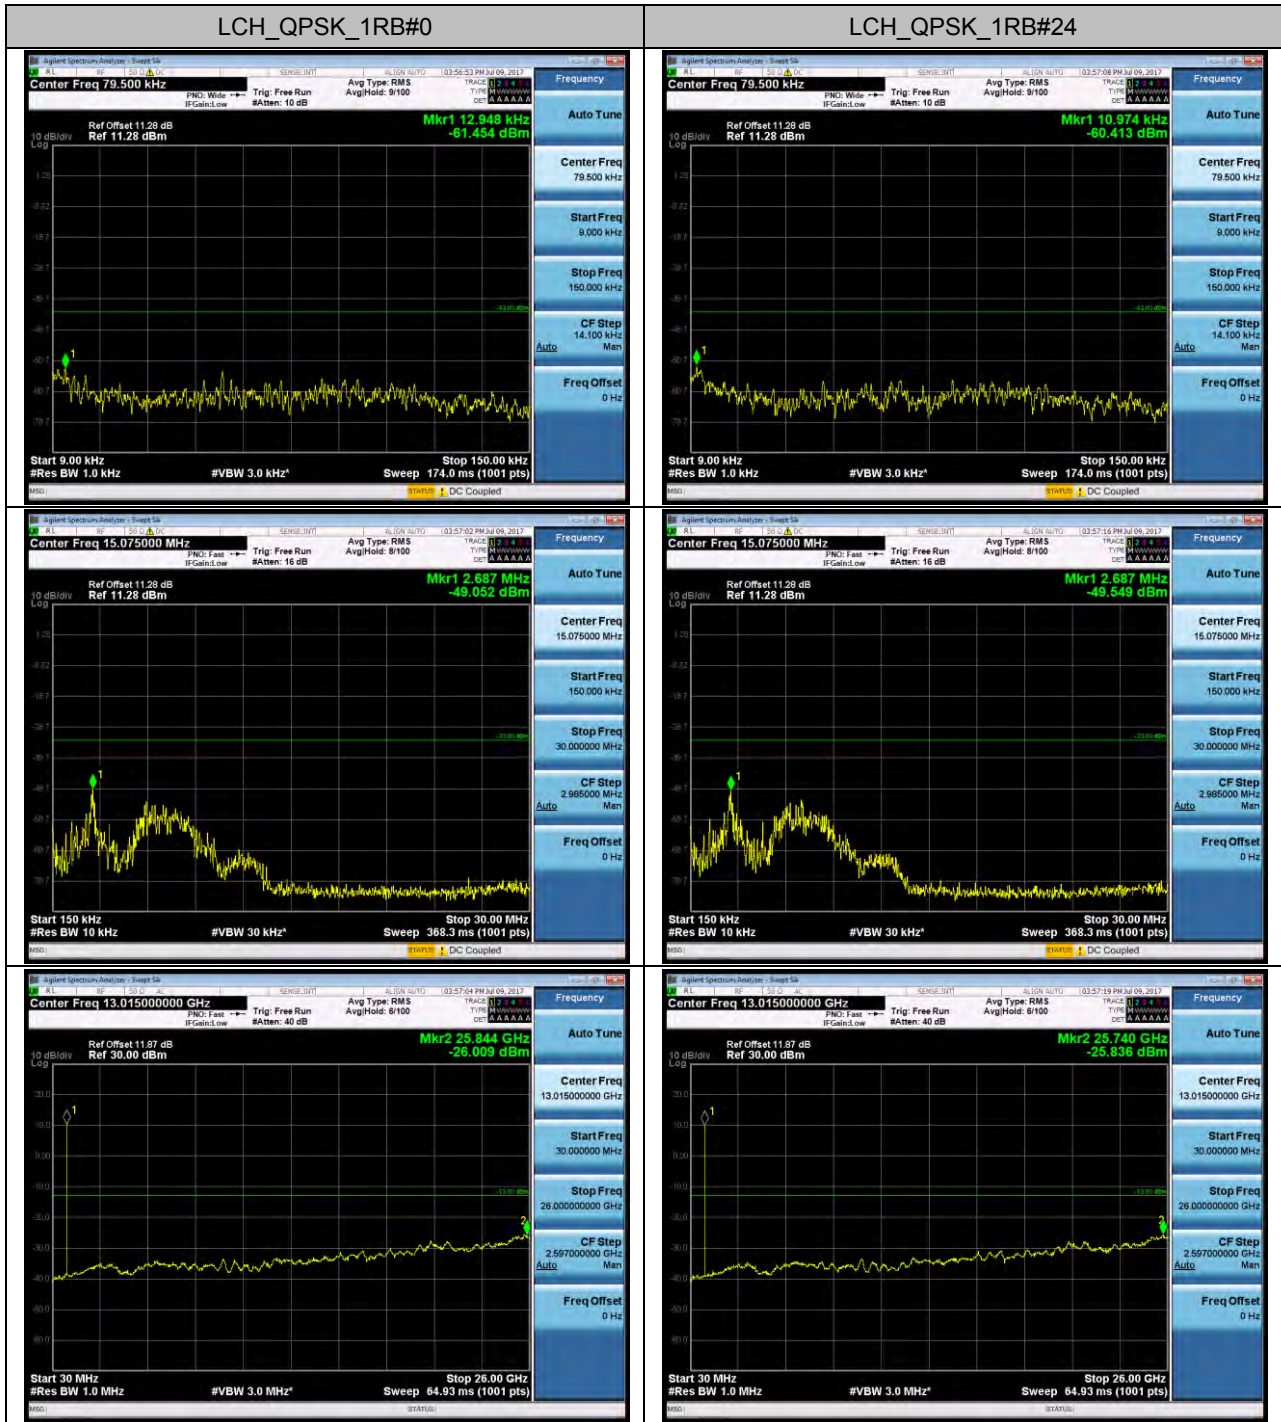


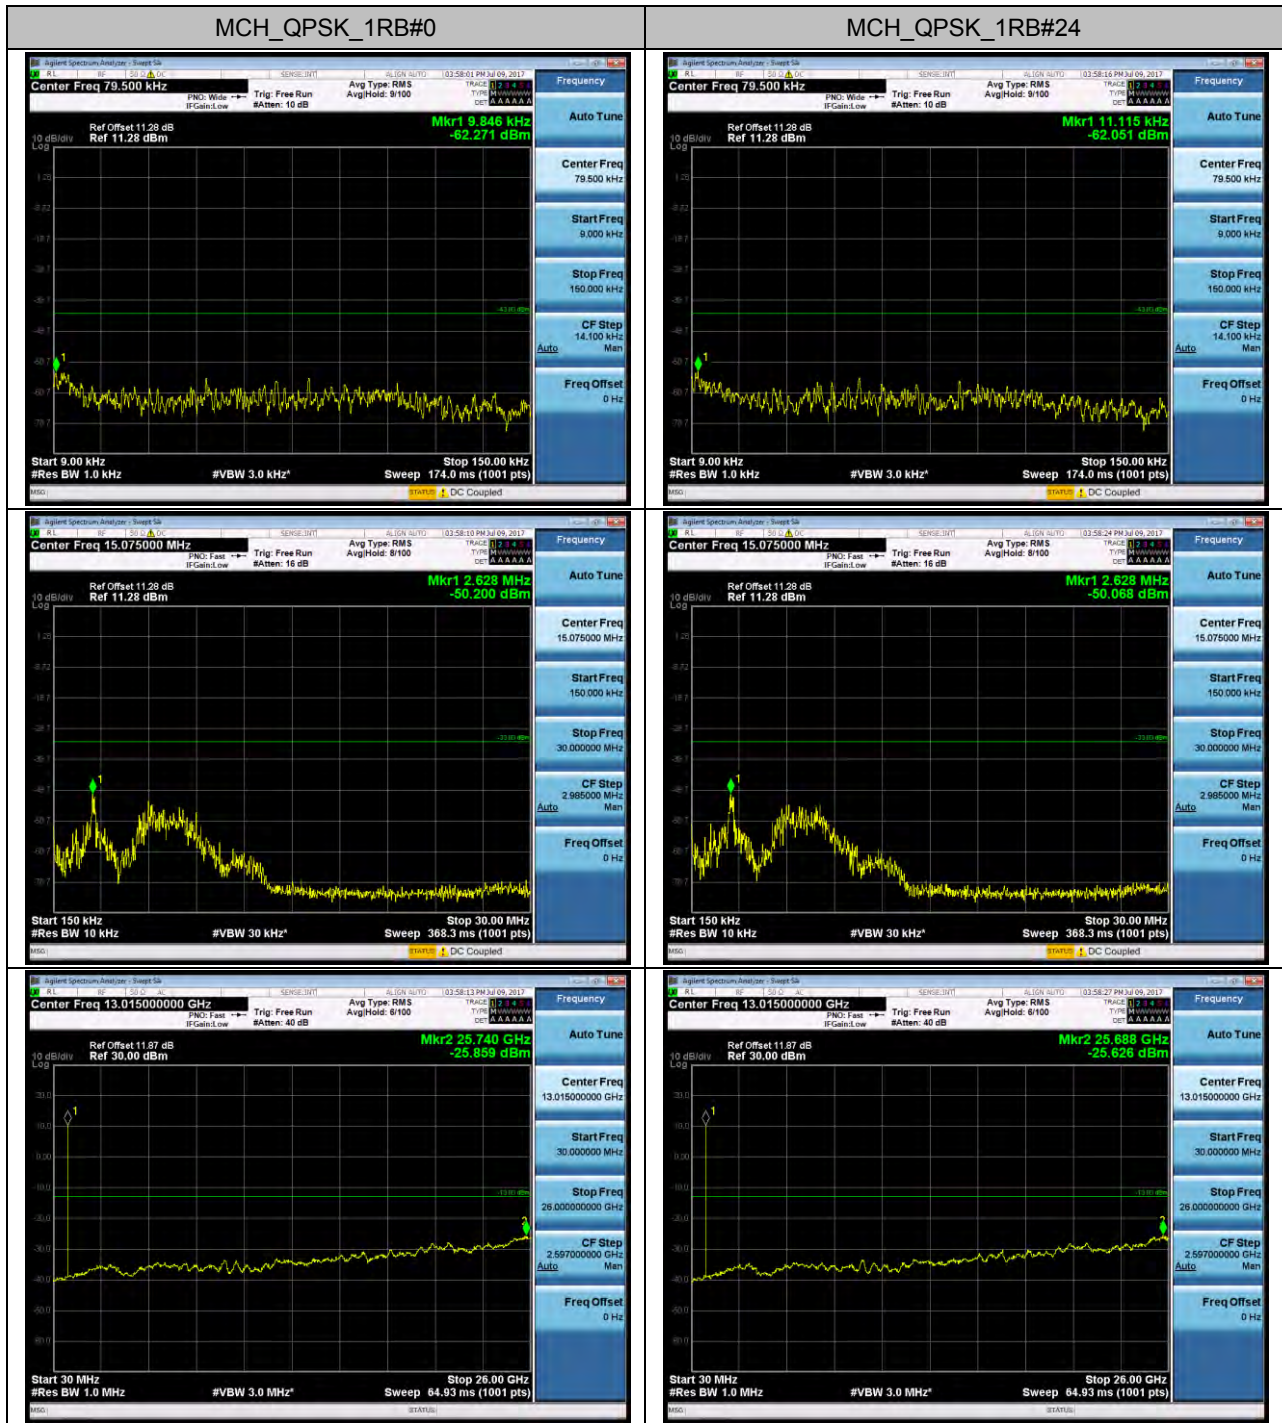


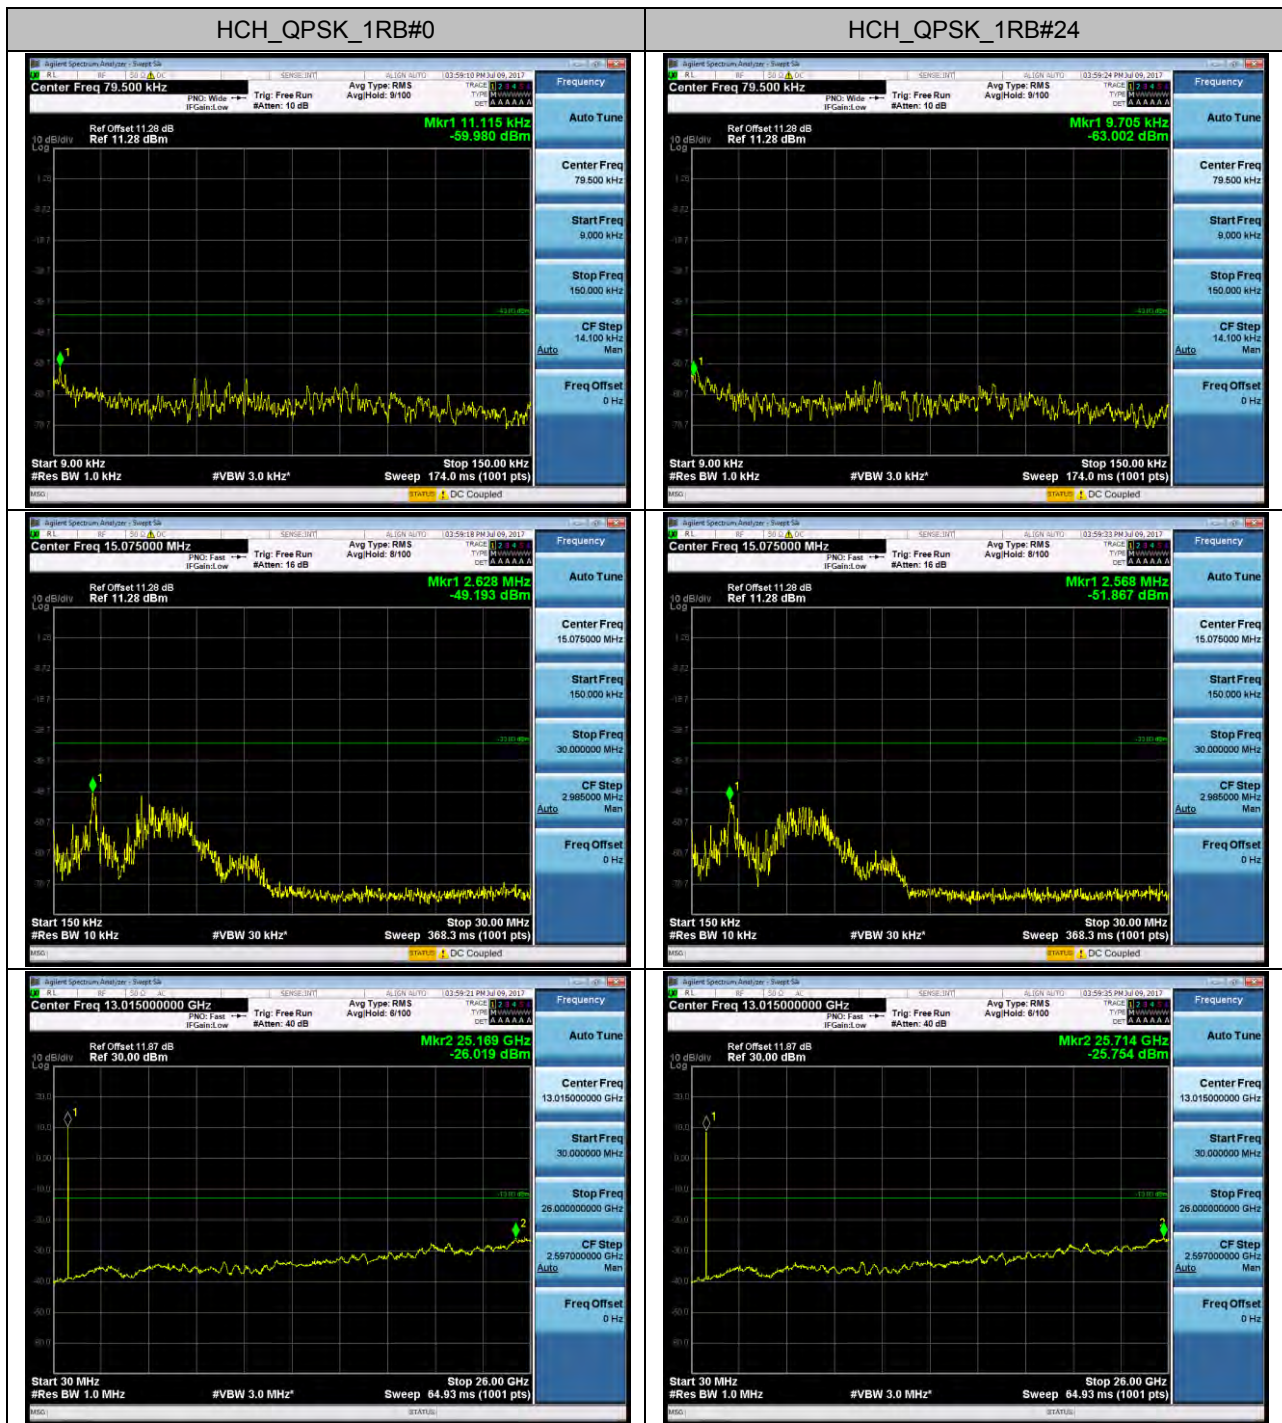


LTE BAND 7

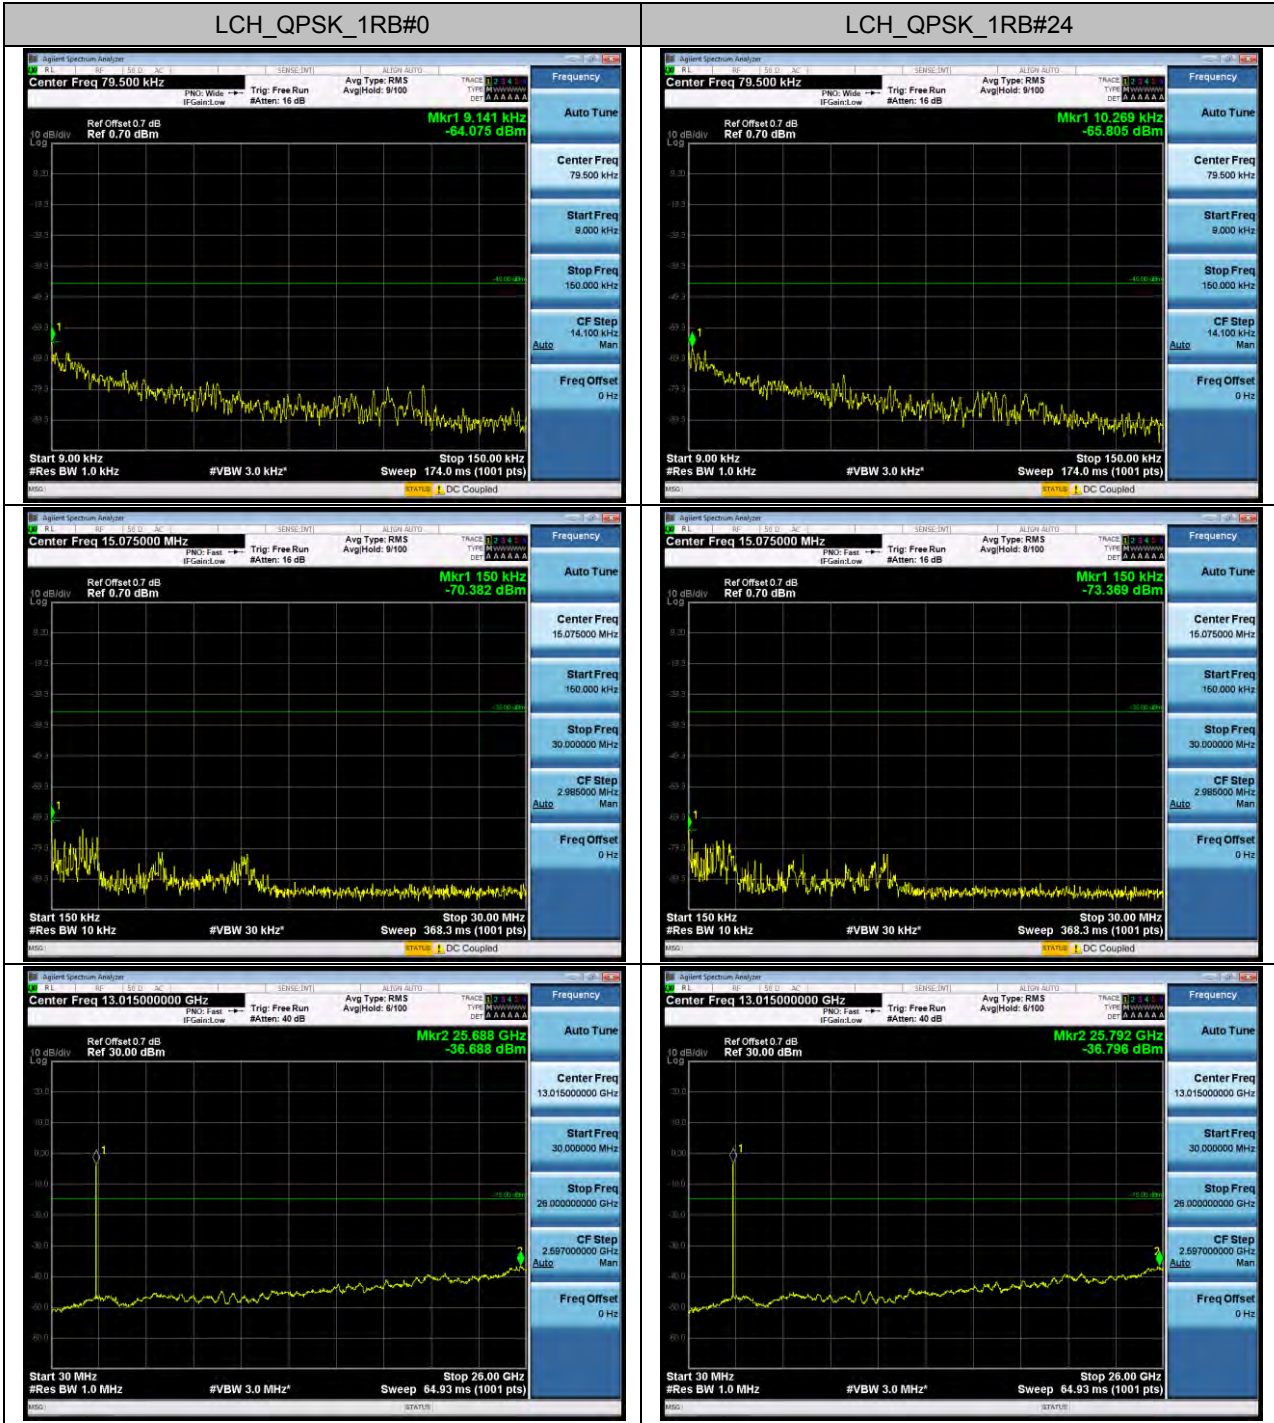

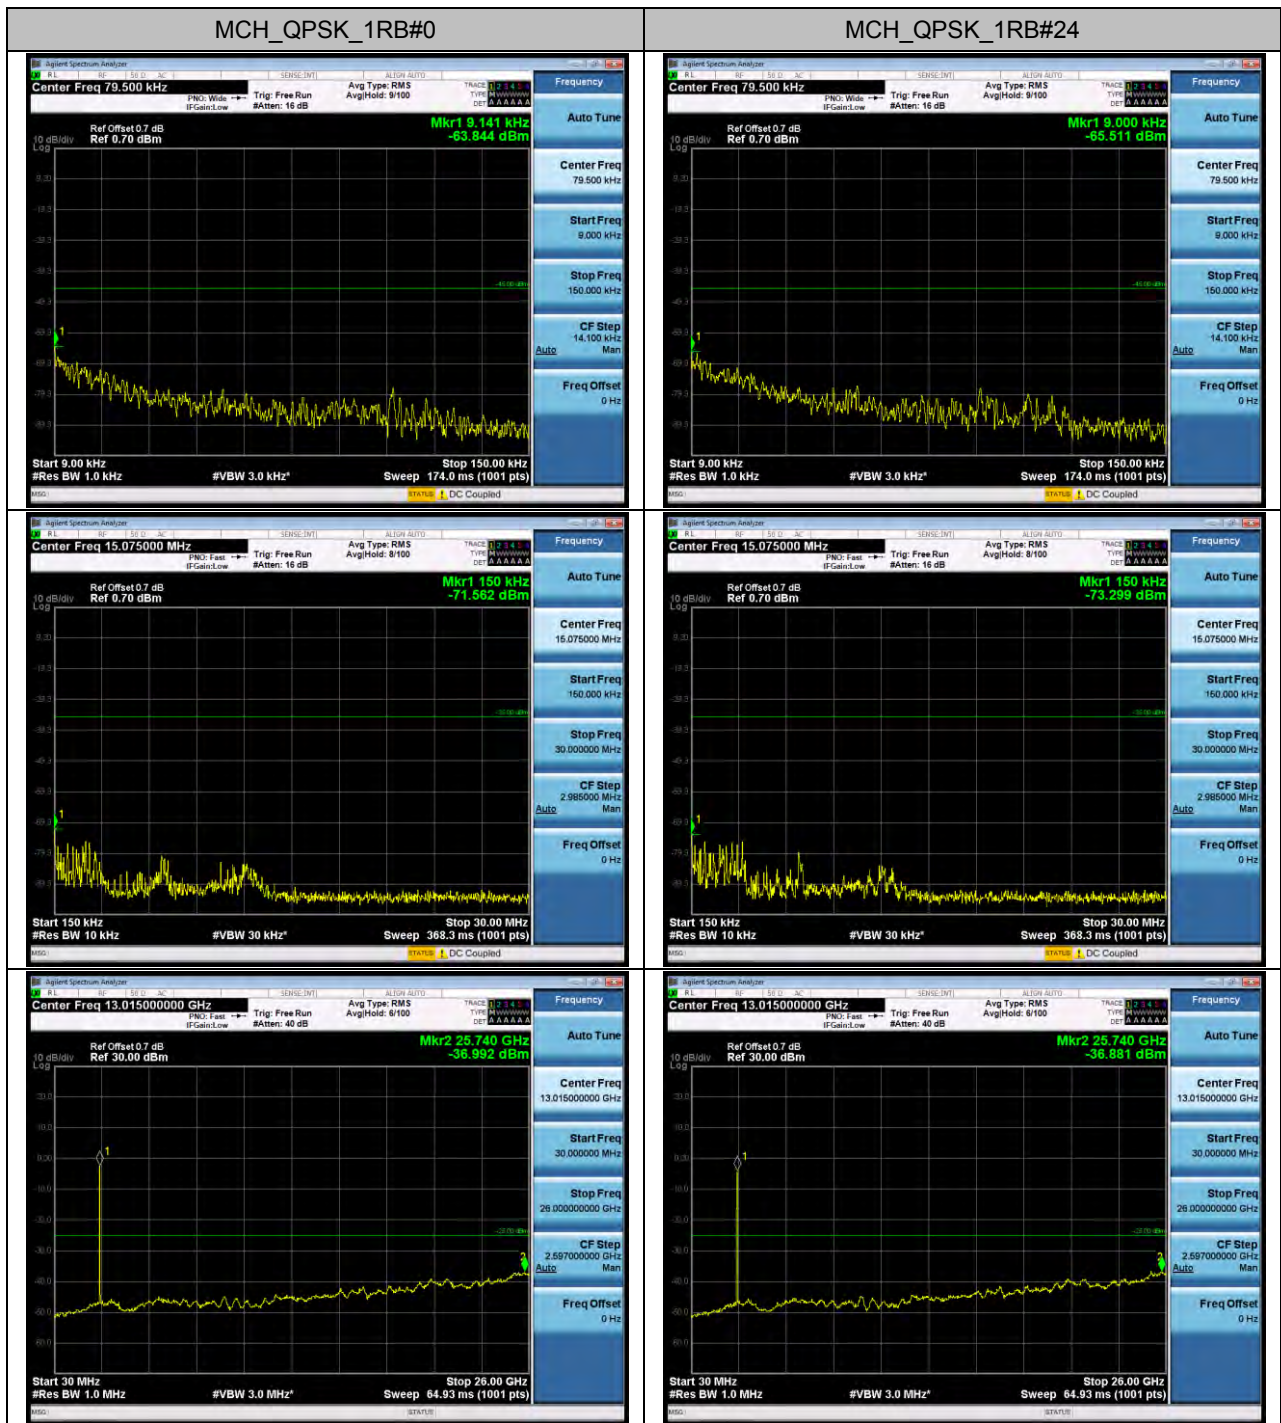


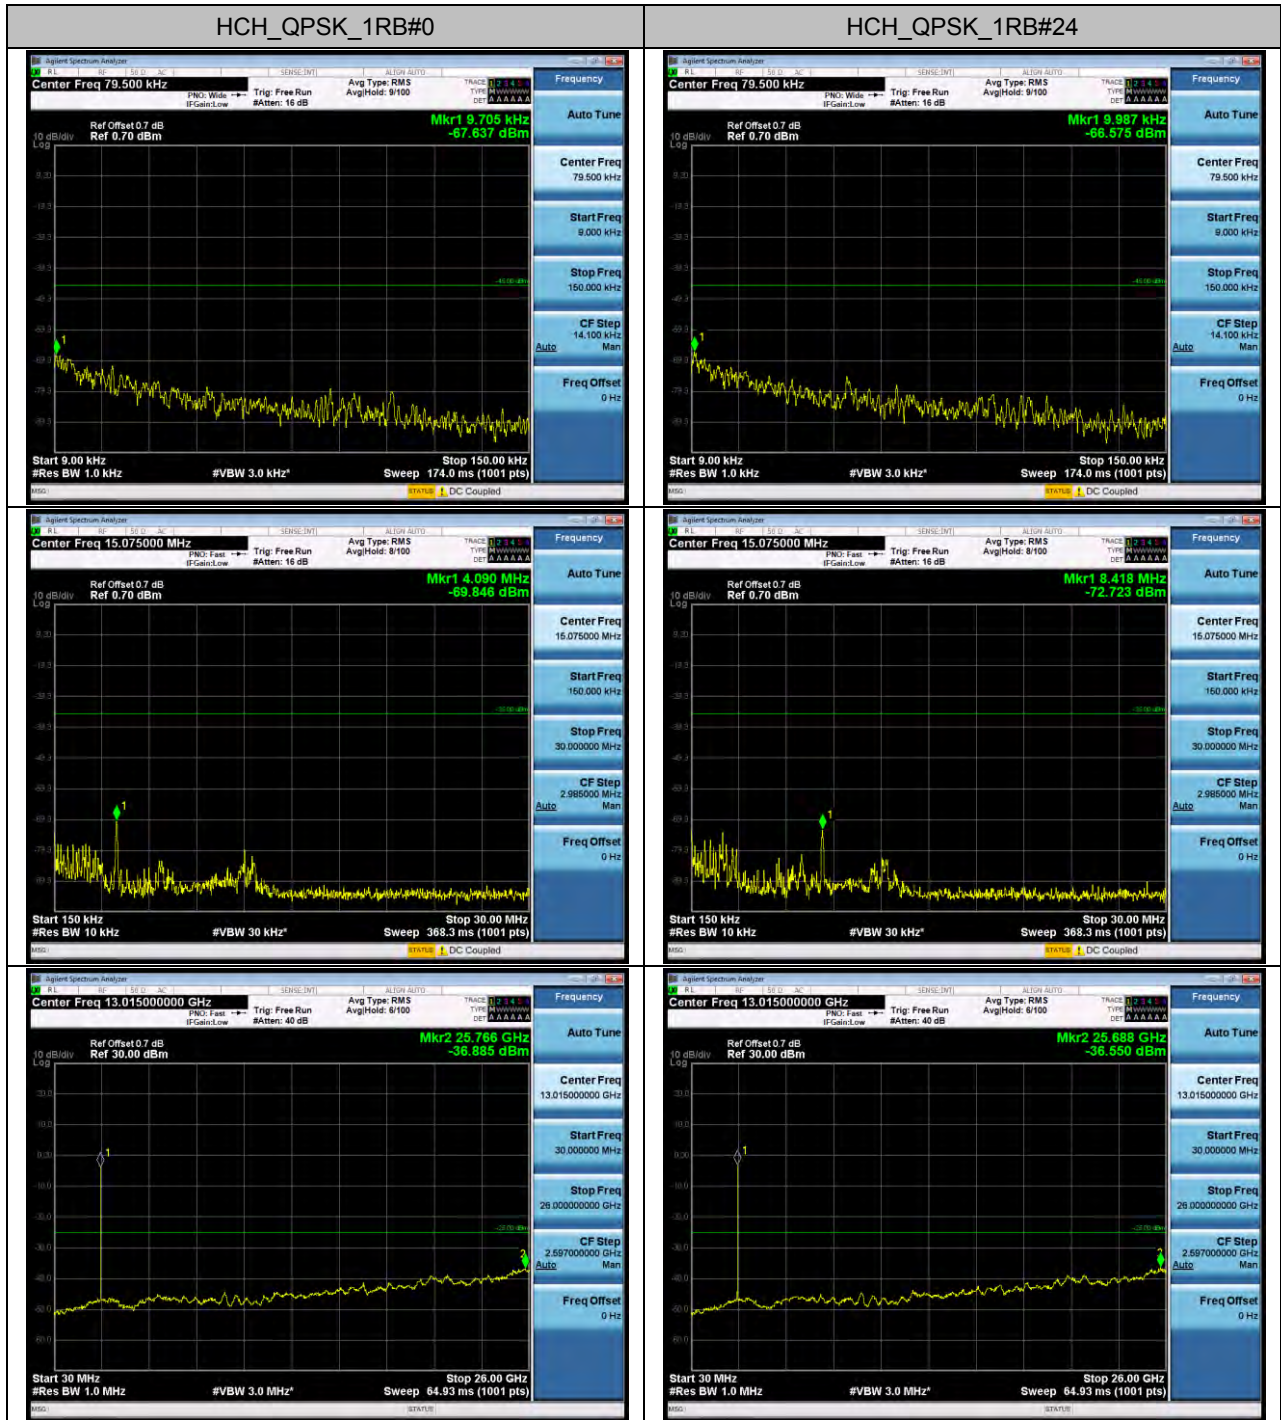


### LTE BAND 17

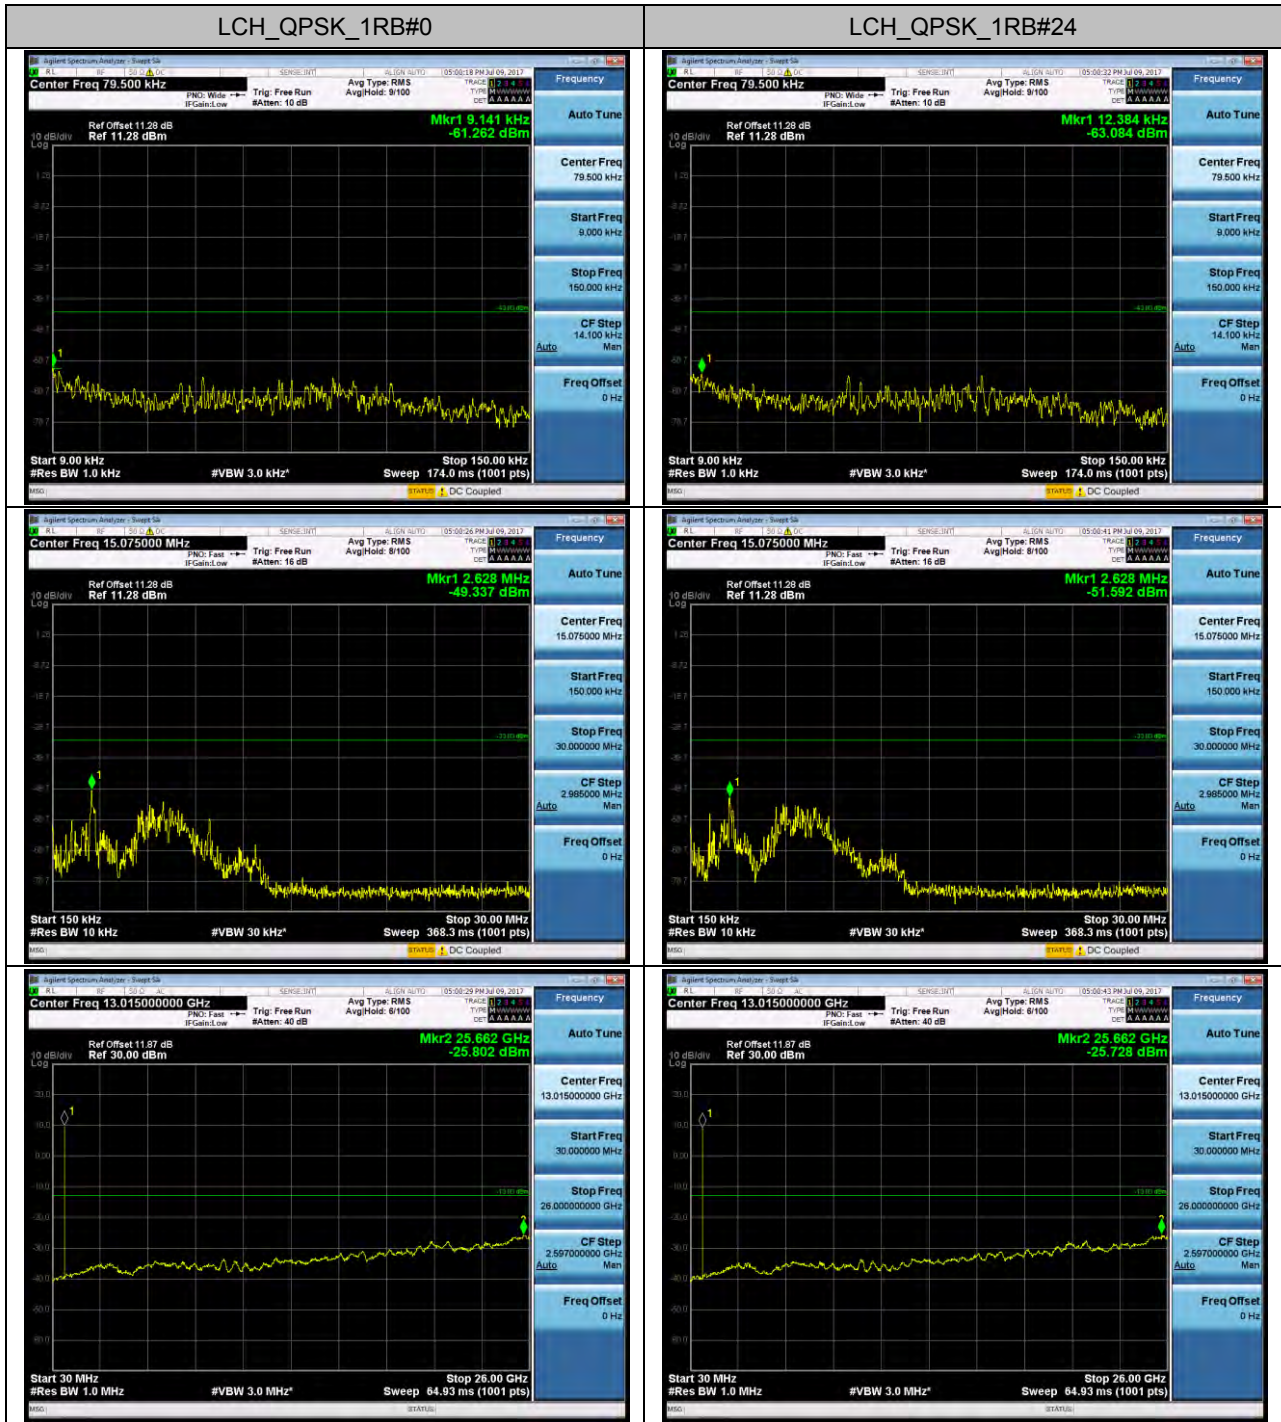




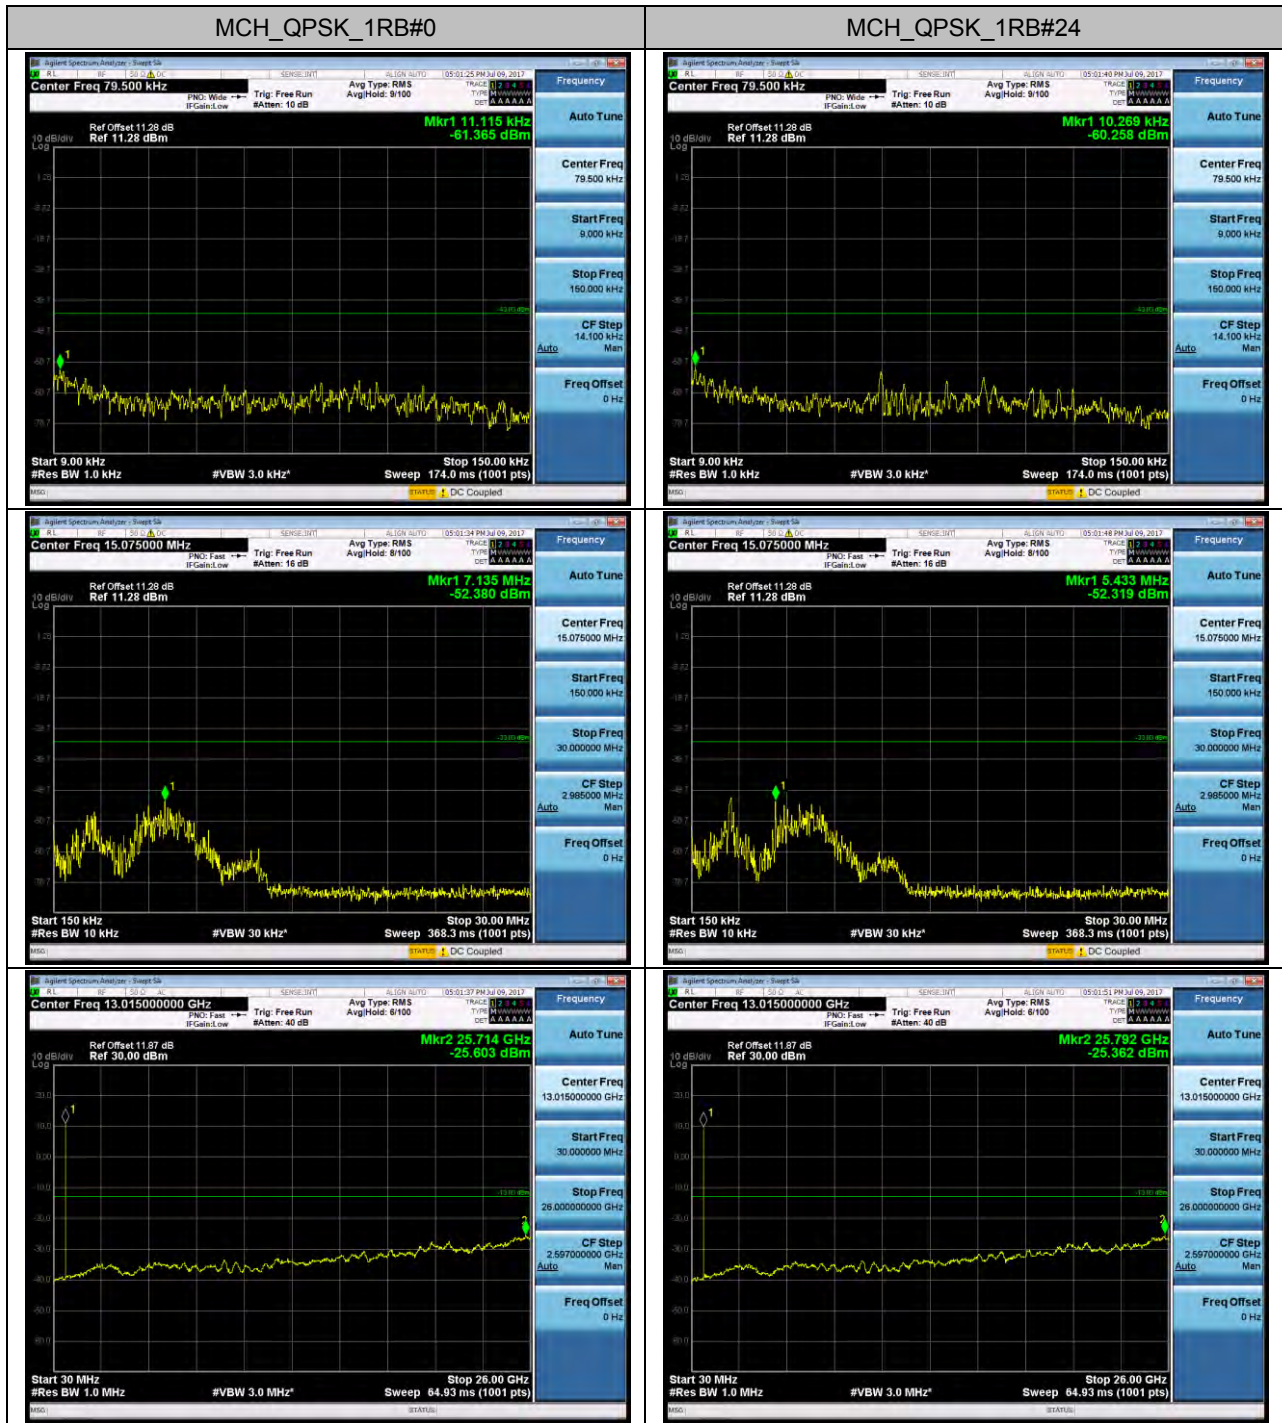


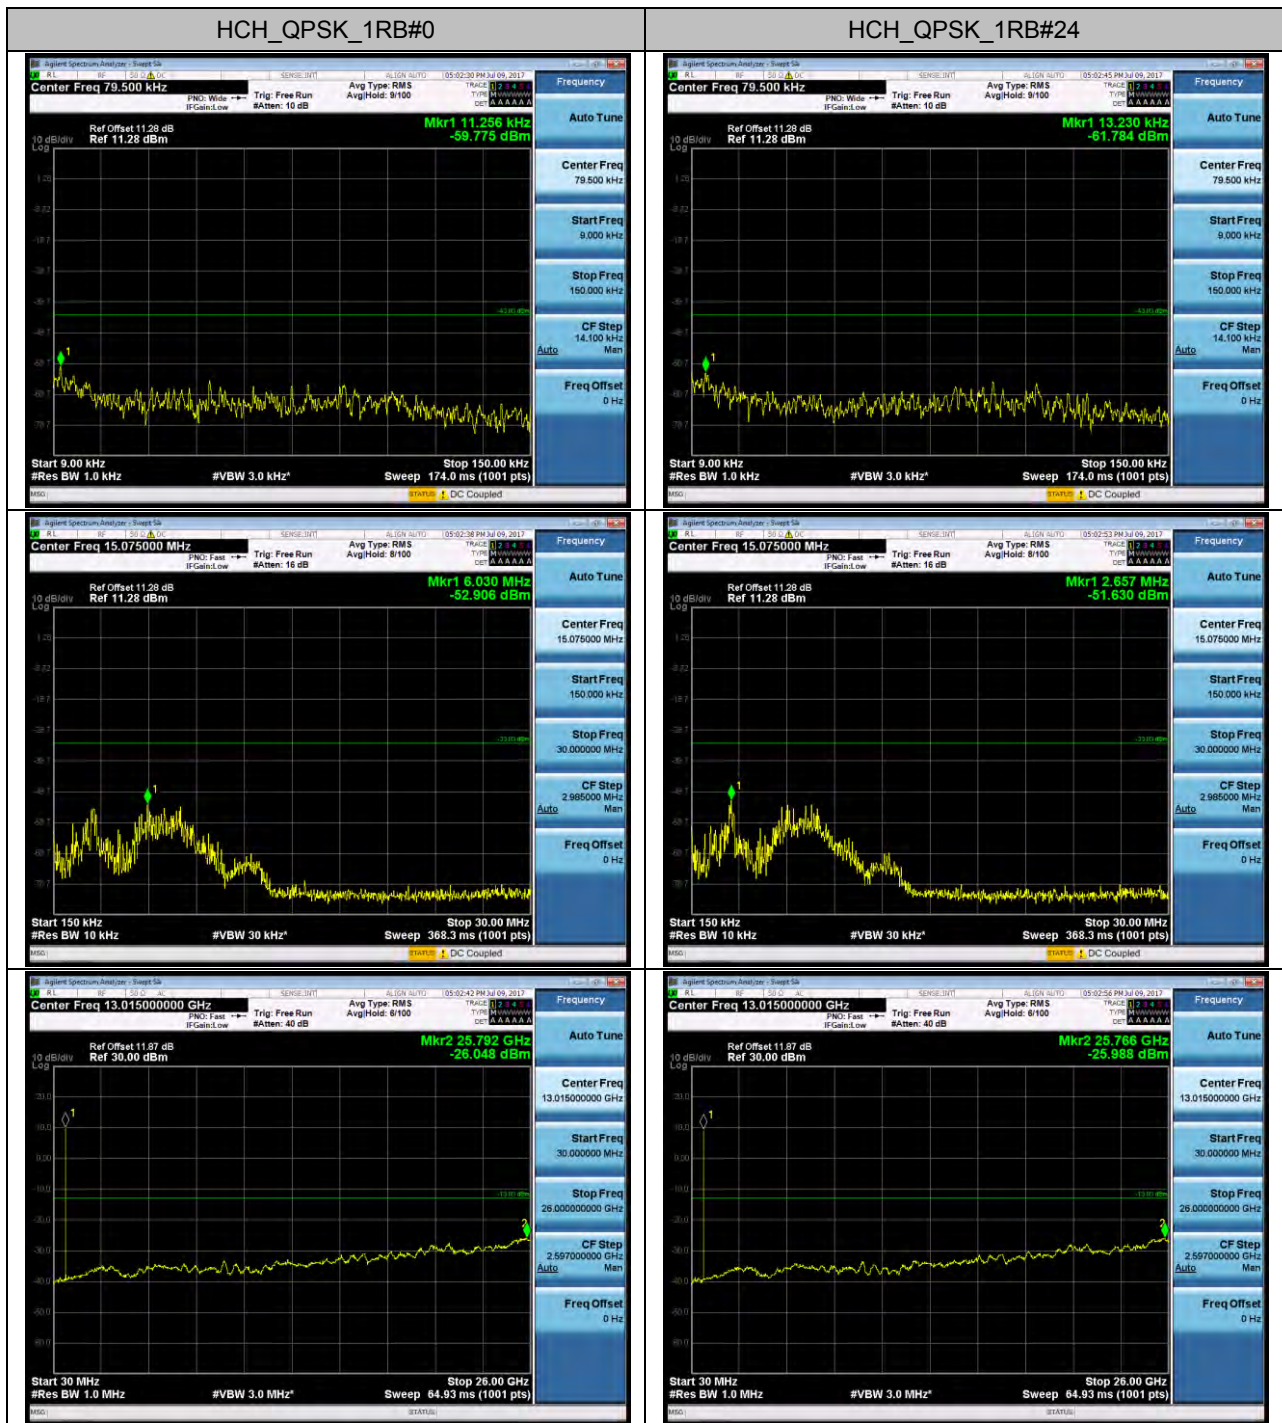


# APPENDIX B



## TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) EMISSION BANDWIDTH (-26dBC)


### LTE Band 2 Channel Bandwidth: 1.4 MHz

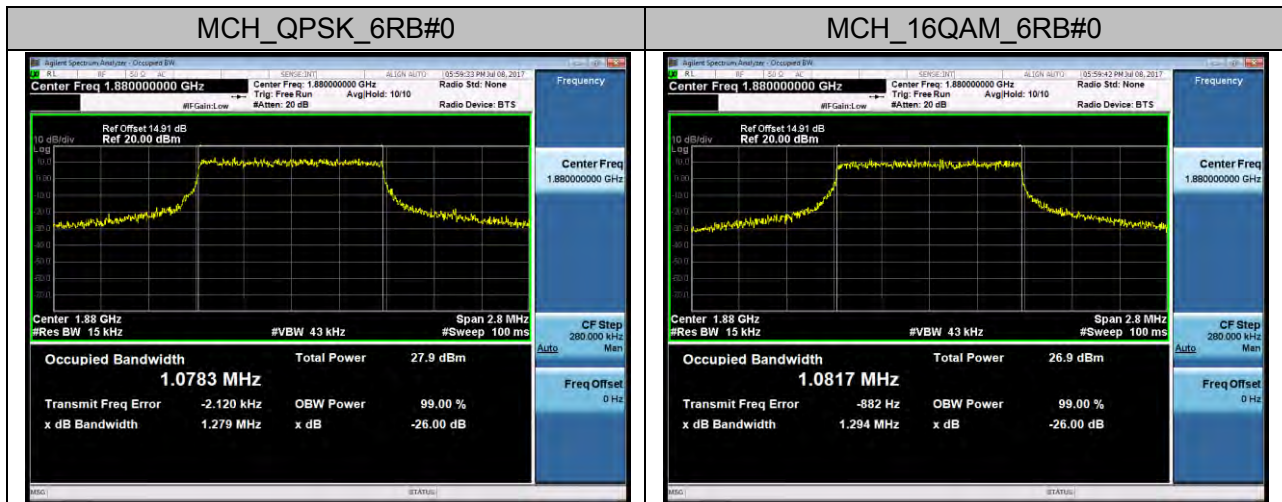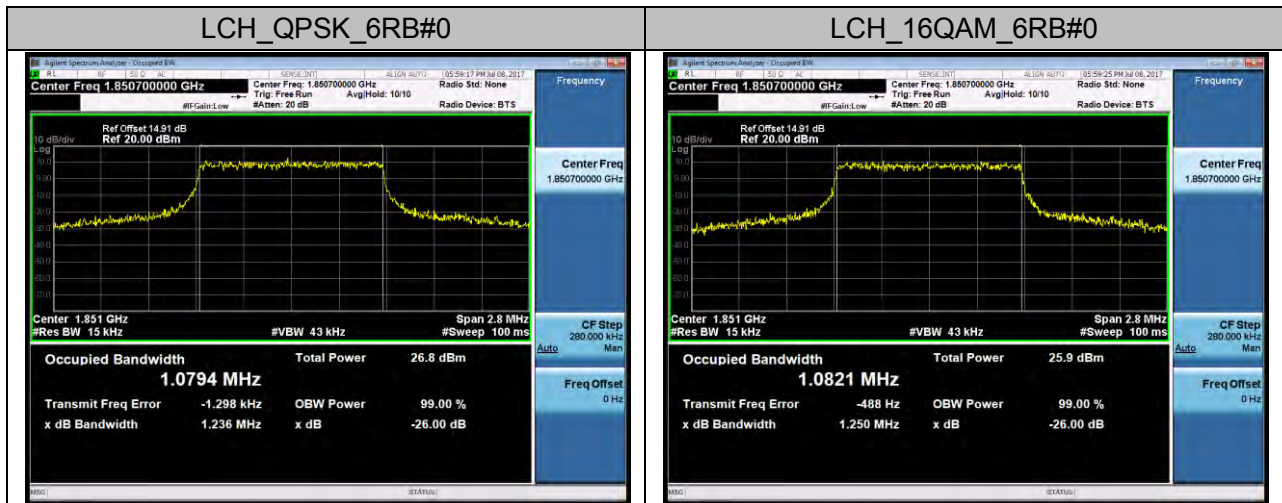


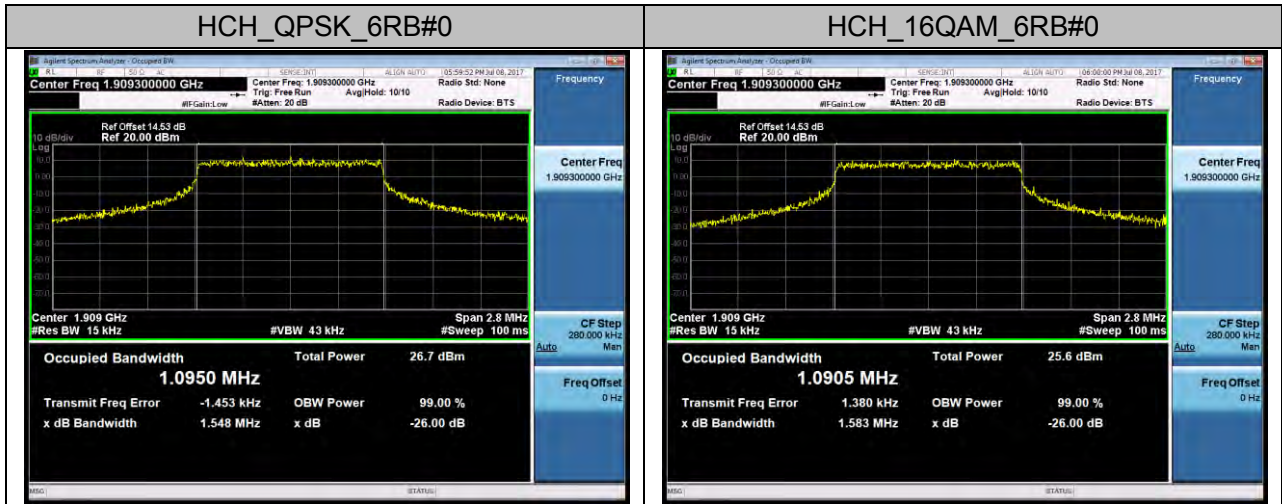



### Channel Bandwidth: 3 MHz

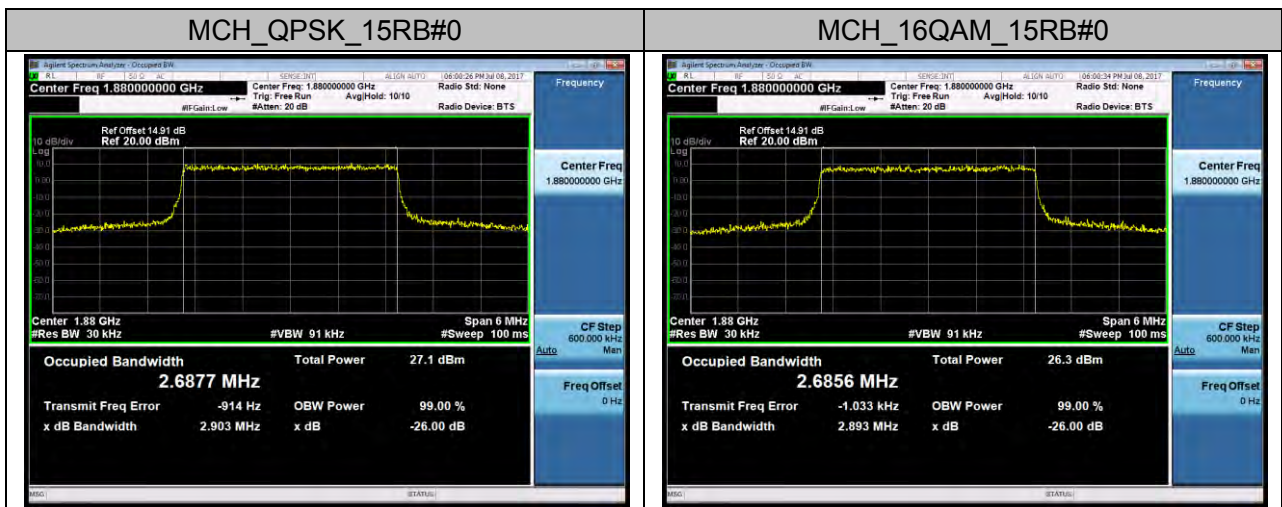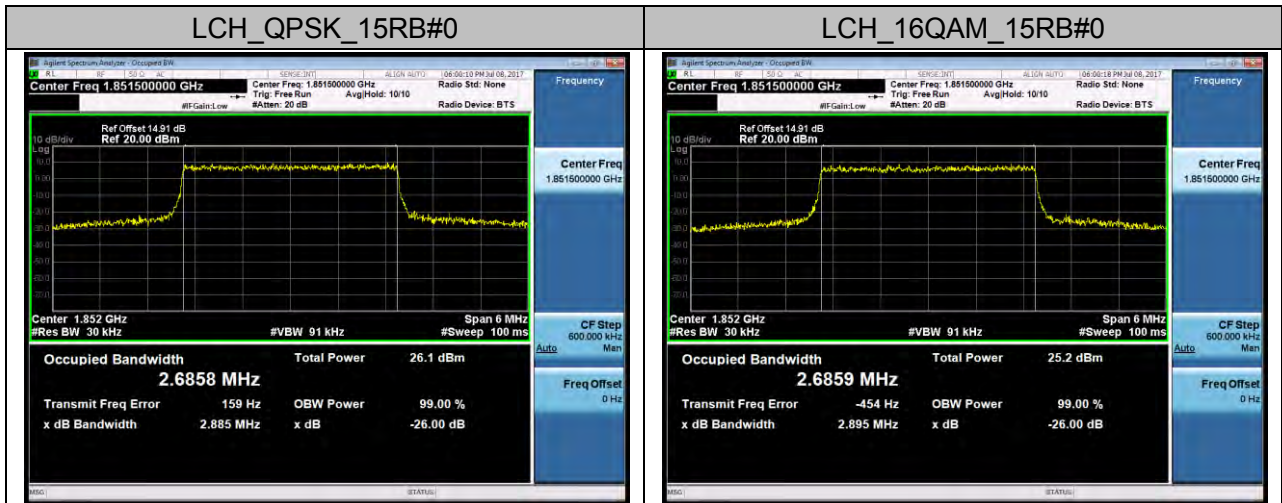


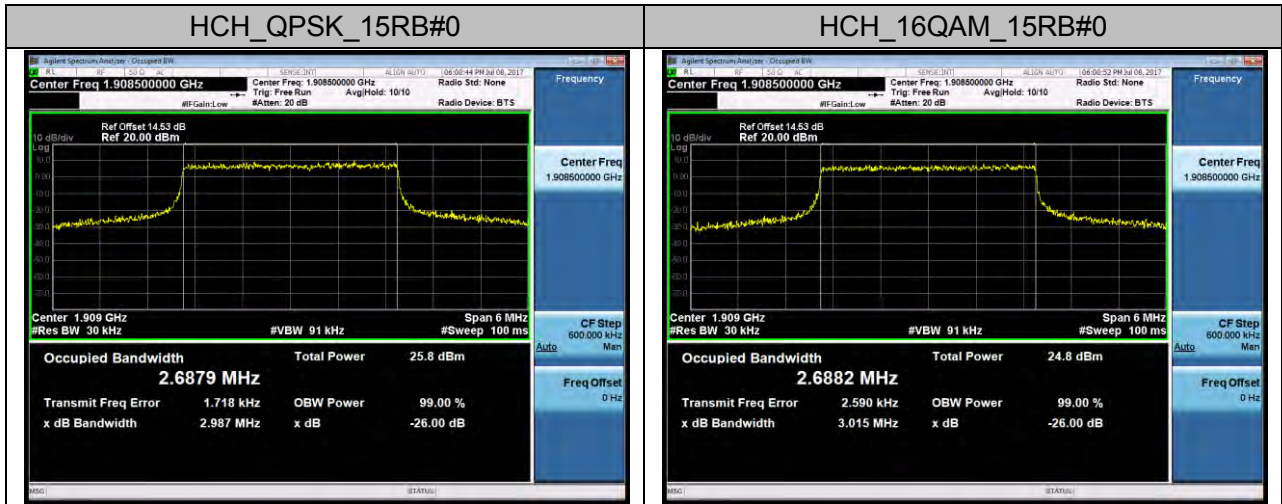



### Channel Bandwidth: 5 MHz

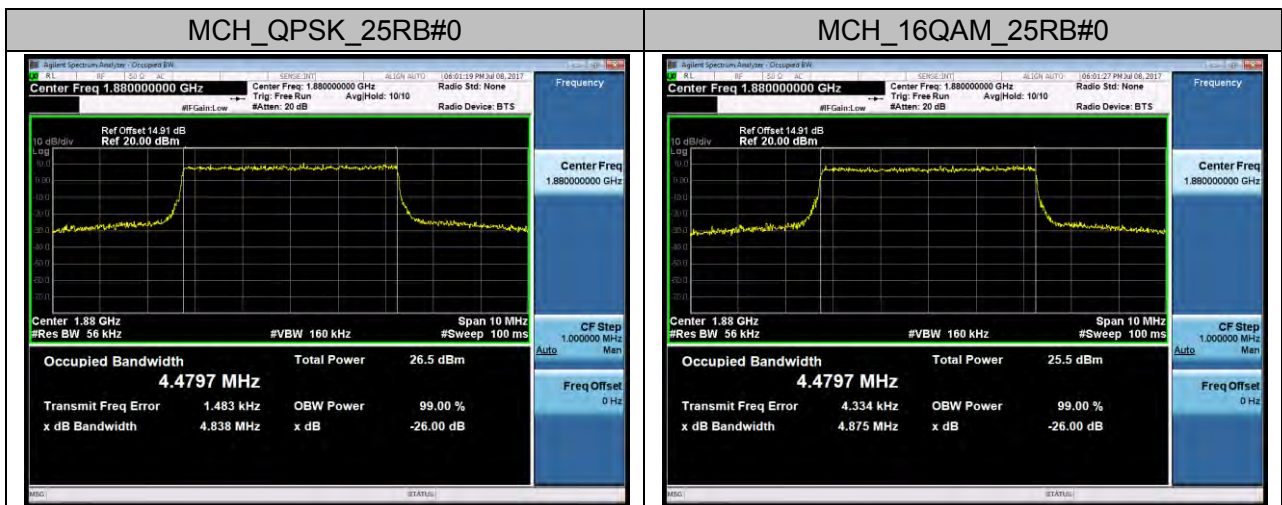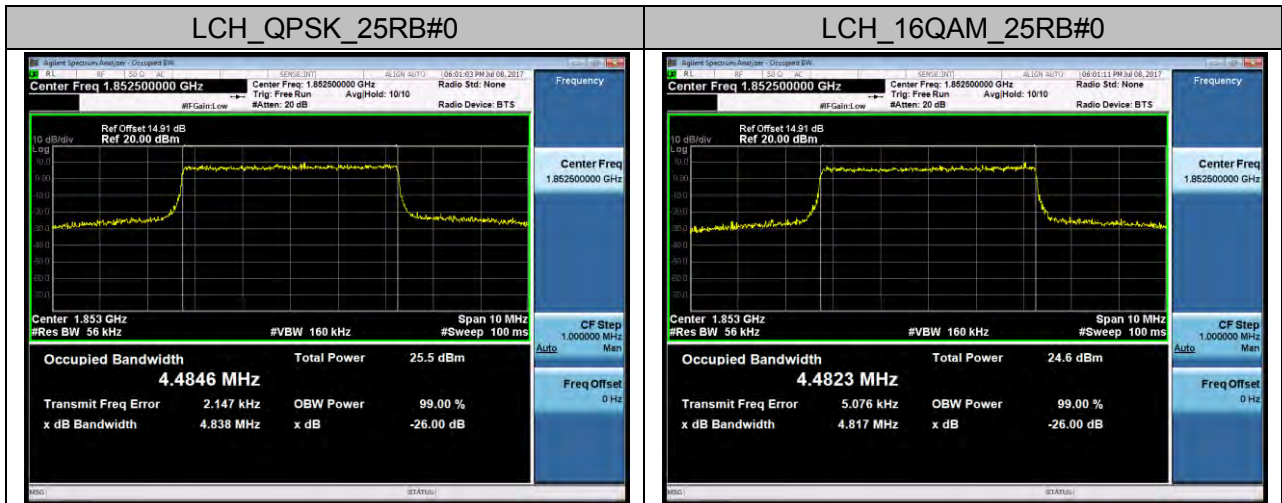


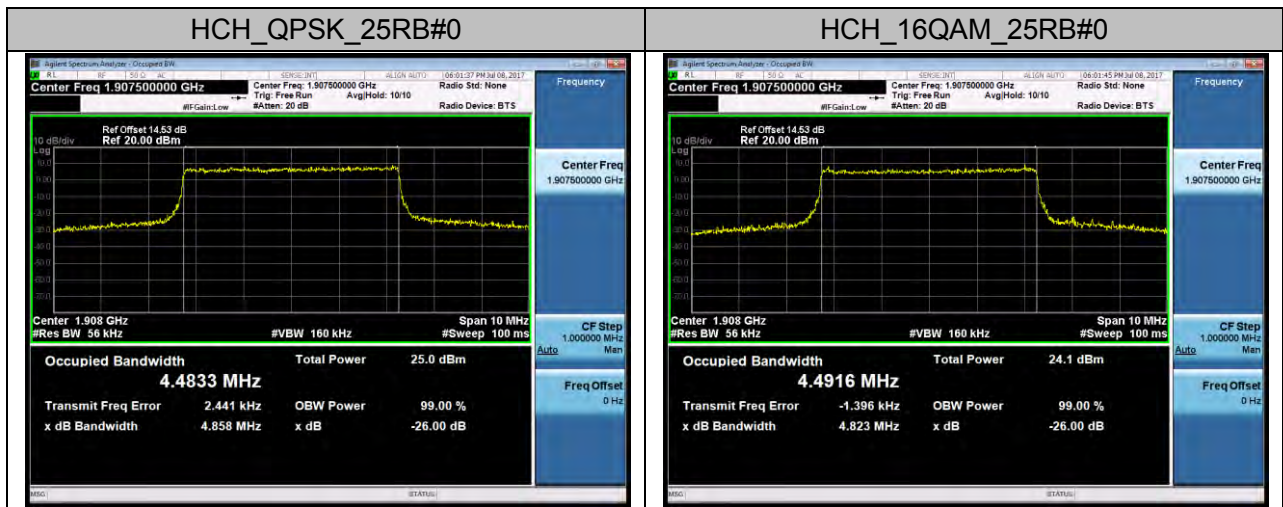



### Channel Bandwidth: 10 MHz

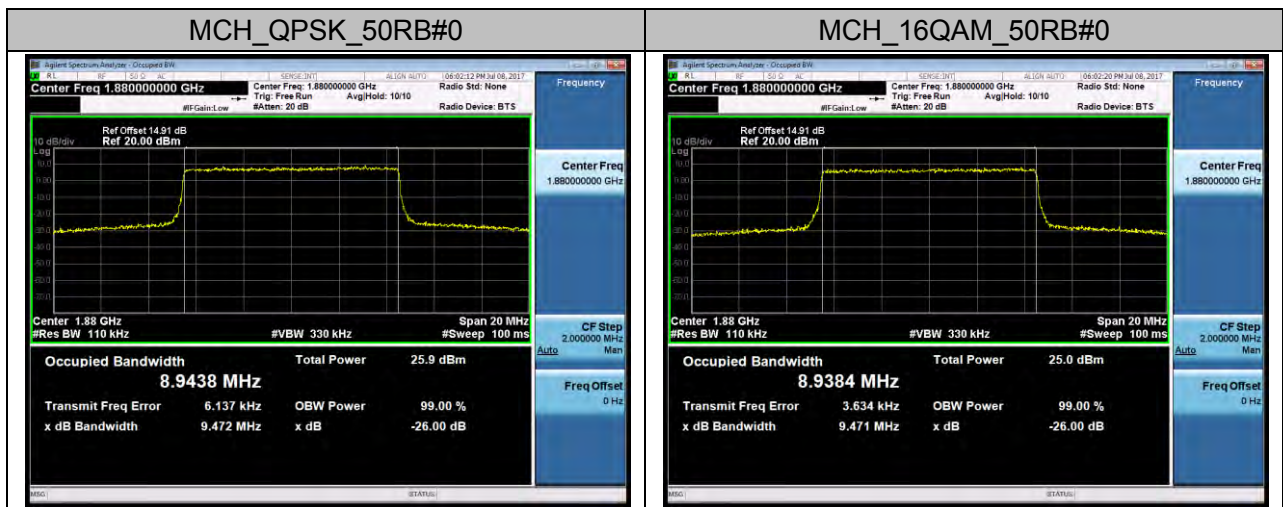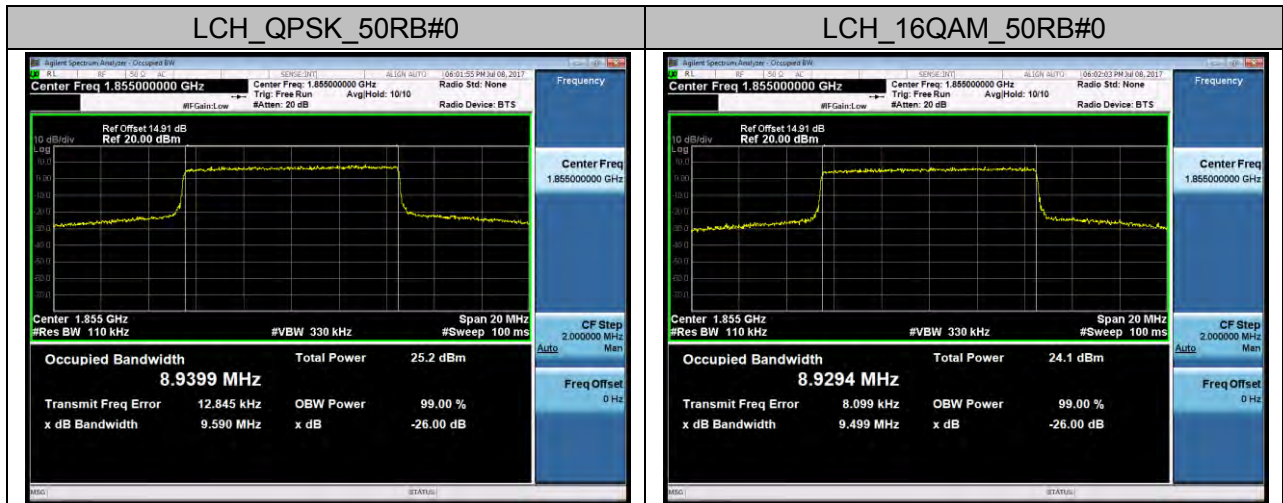


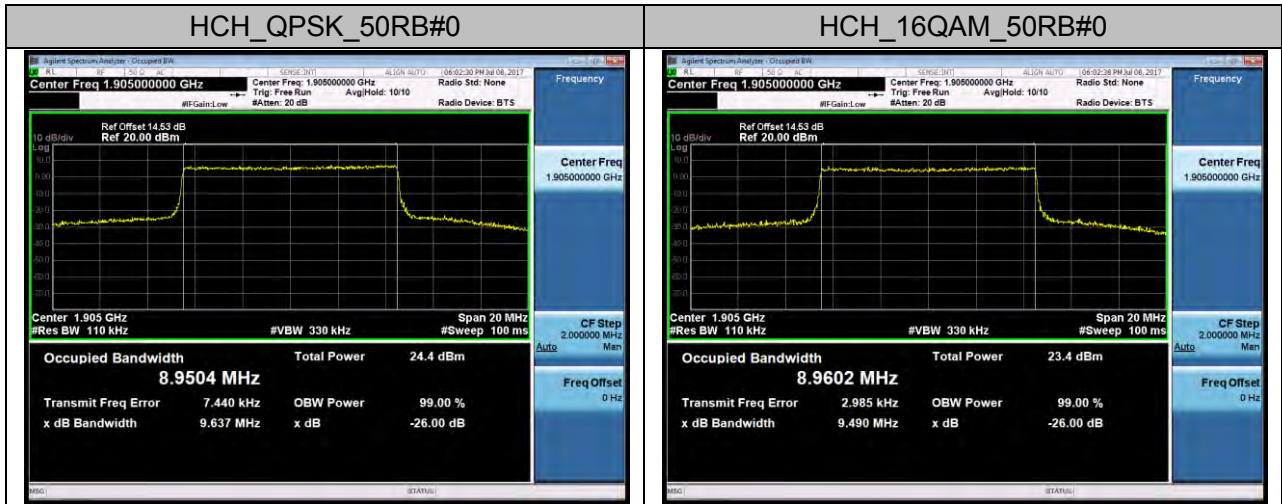


## Channel Bandwidth: 15 MHz

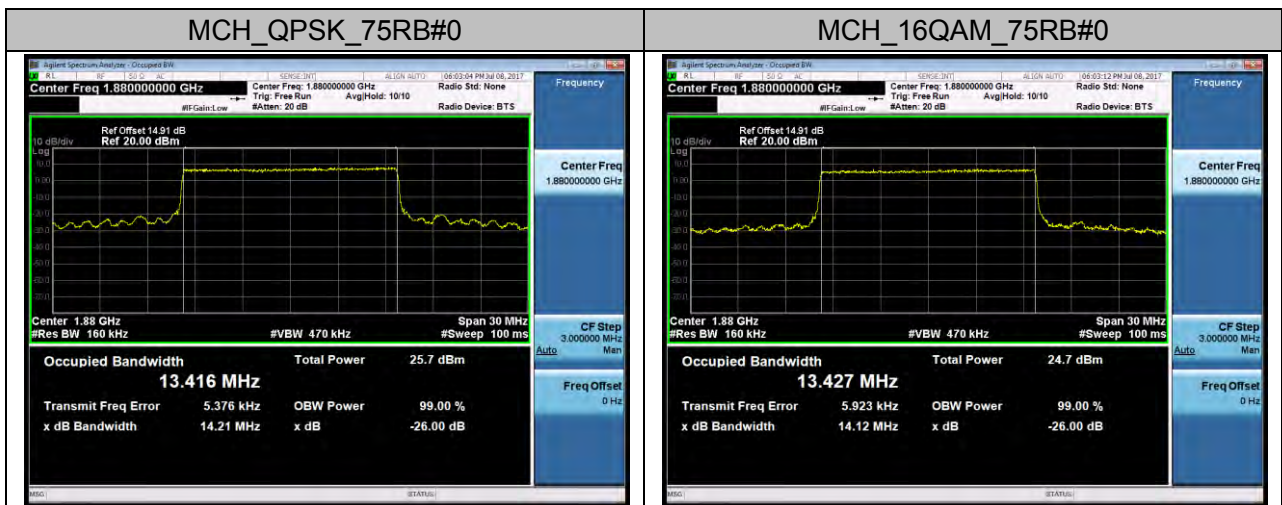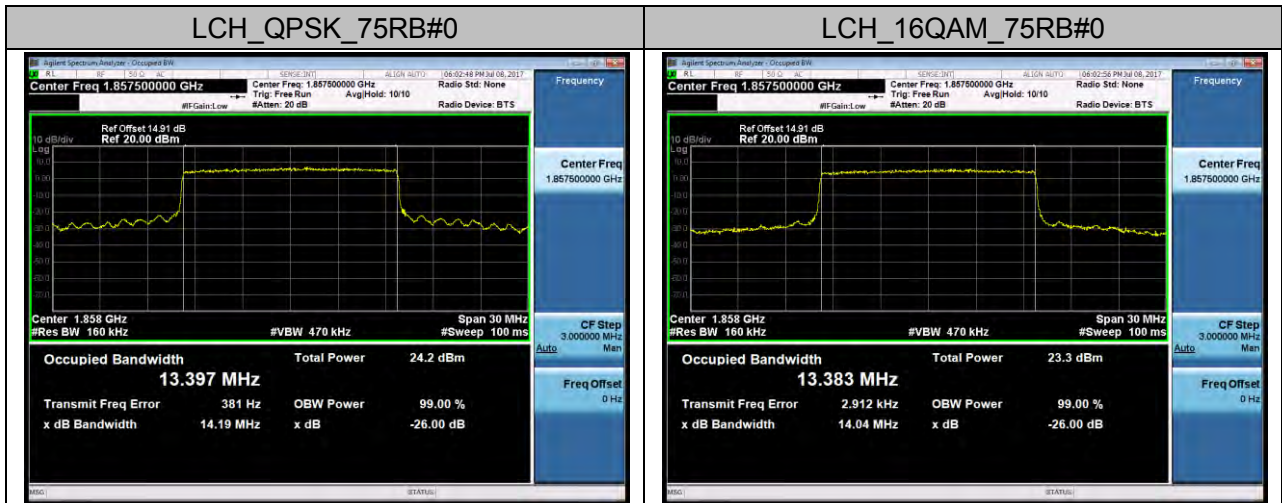


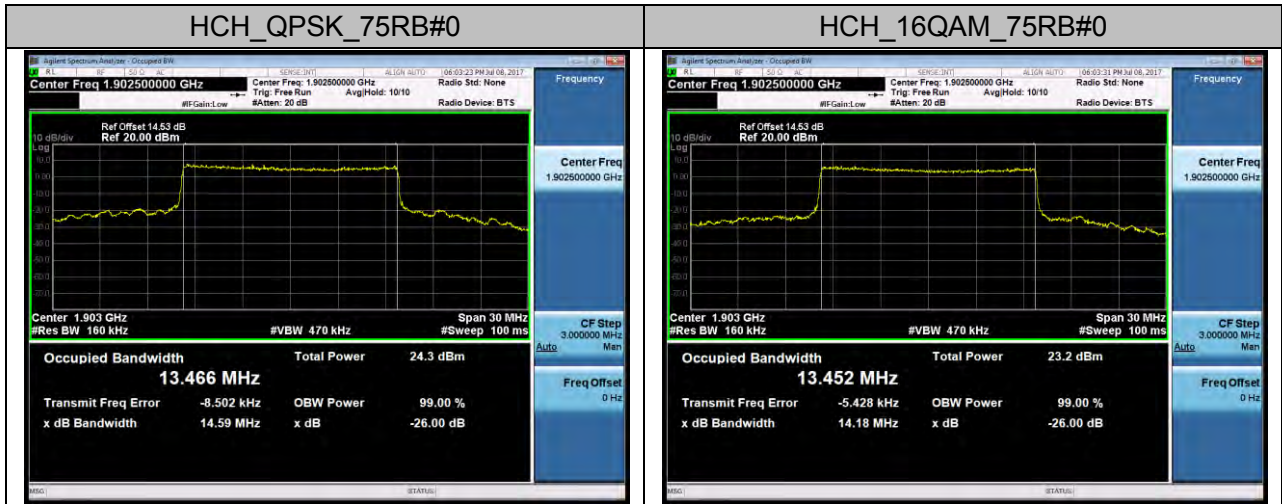



**Channel Bandwidth: 20 MHz**

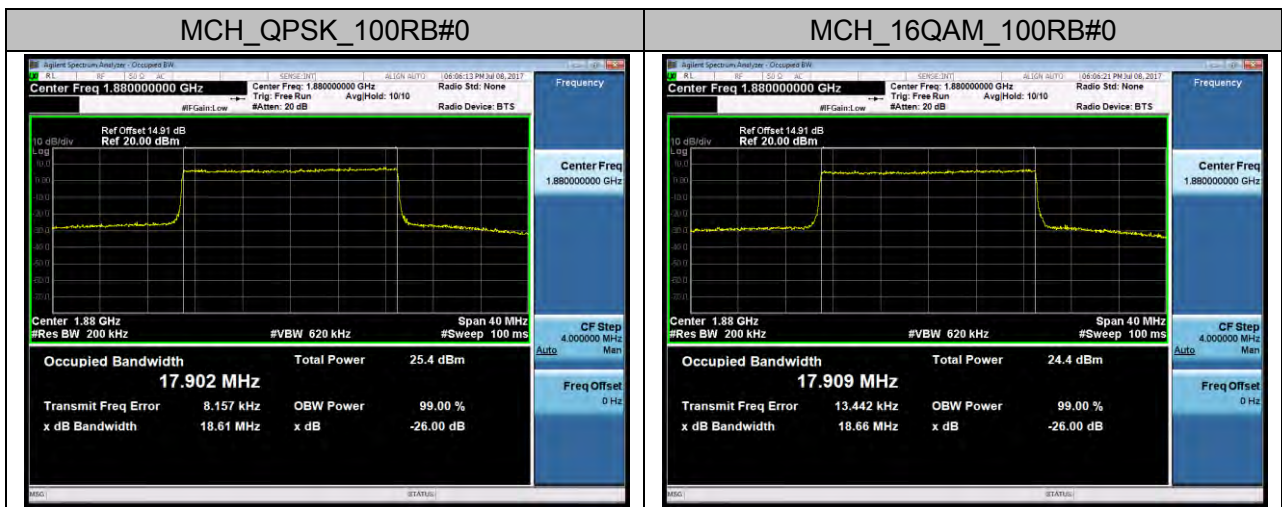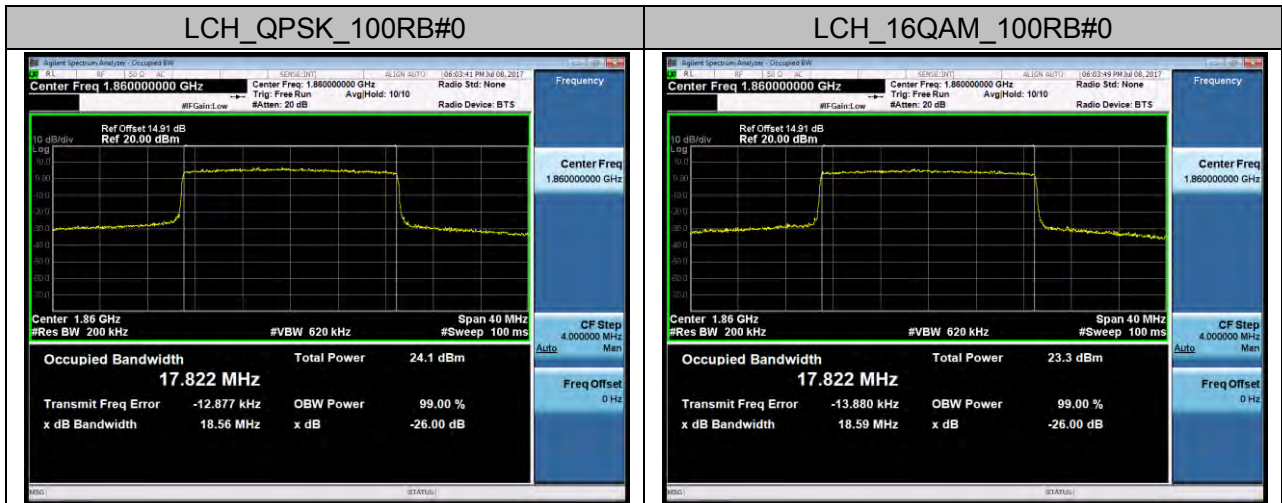




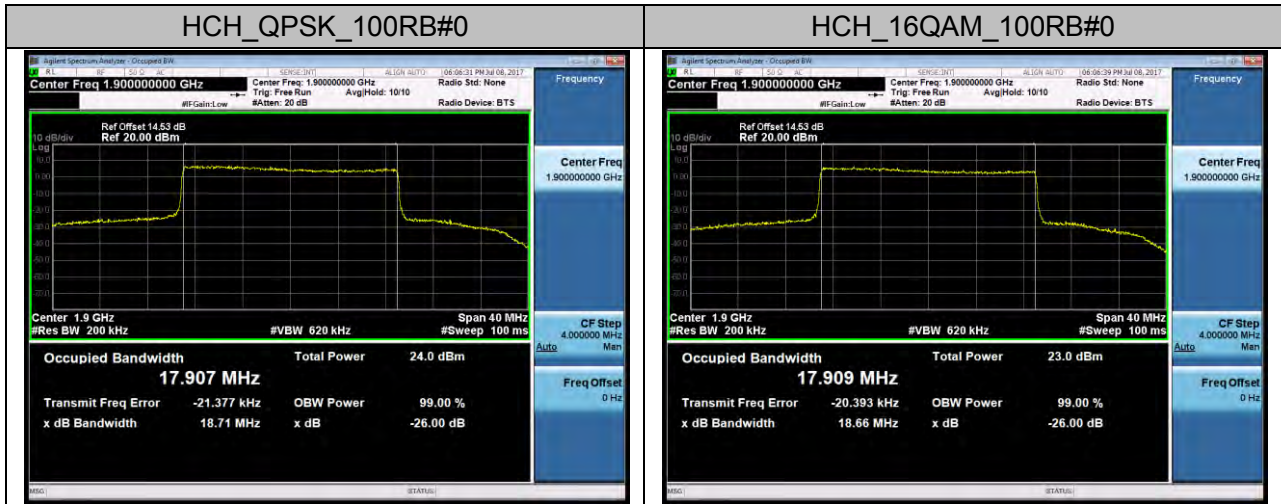

**LTE Band 4**  
**Channel Bandwidth: 1.4 MHz**

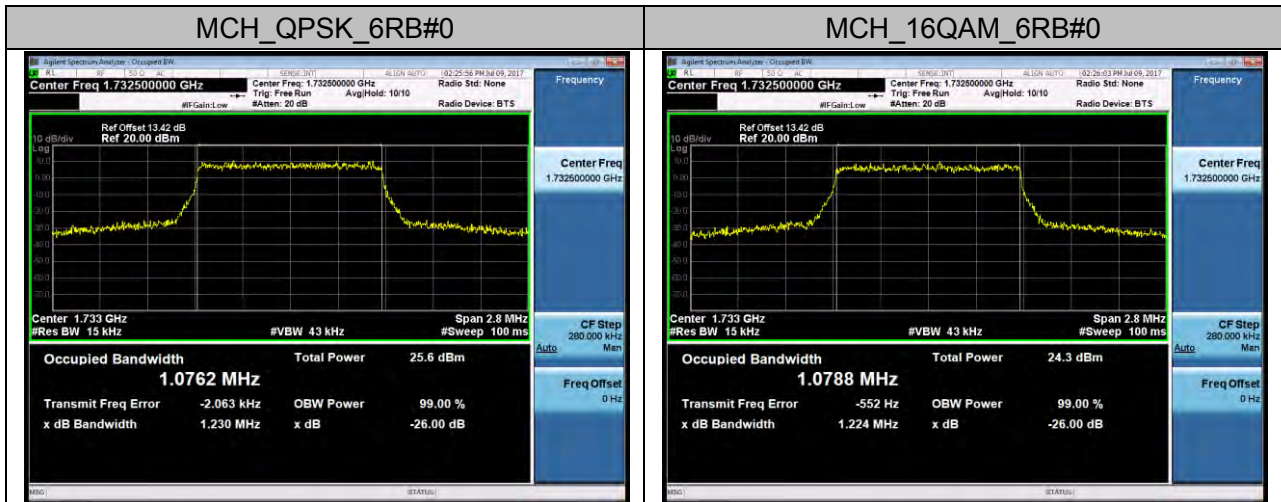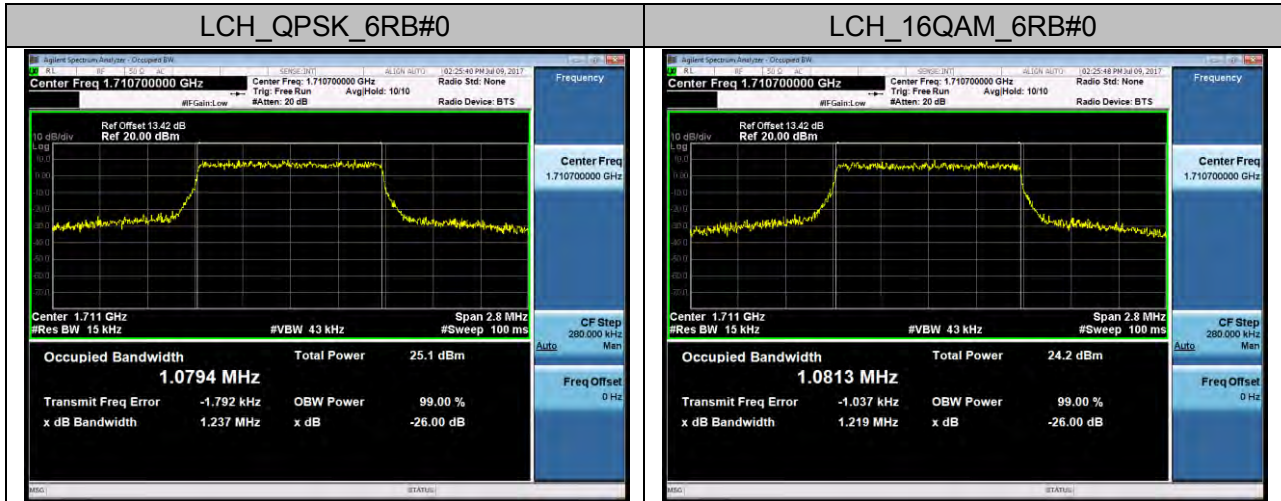

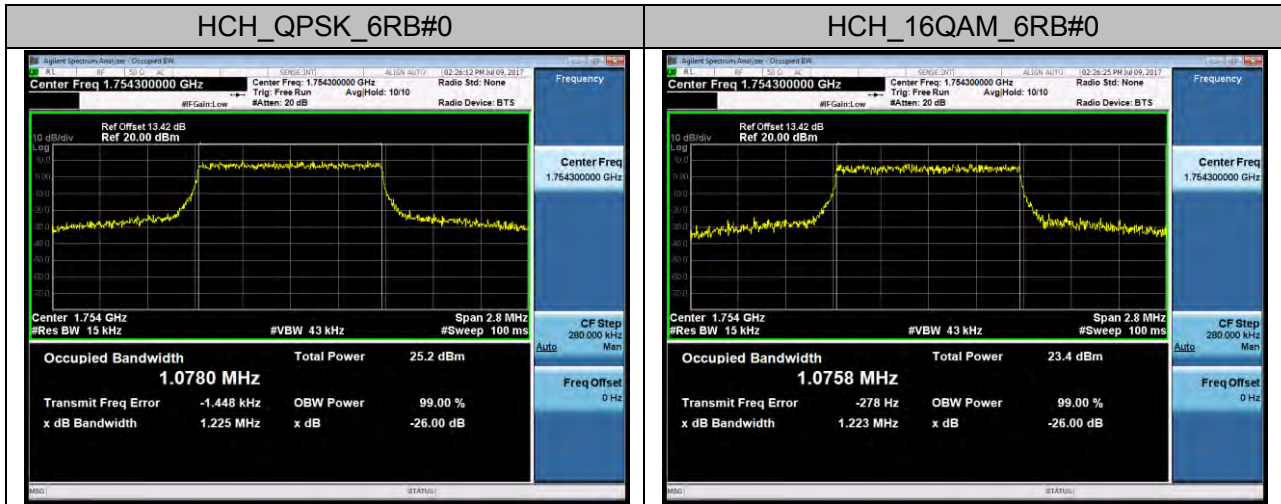

### Channel Bandwidth: 3 MHz

