

FCC Test Report

Report No.: AGC02724180503FE03

FCC ID : 2ALCFXO-9452

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bond Outdoor Waterproof TWS Speakers

BRAND NAME : N/A

MODEL NAME : XO-9452

CLIENT: Dongguan Xing Yue Electronic Co., Ltd

DATE OF ISSUE : Jun. 08, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

AGC 3

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spowed this jest eport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a transfer o

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 63

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	pliance / ® ##	Jun. 08, 2018	Valid	Initial release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5 5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS	8 8
6. TEST FACILITY	10
7. TEST METHOD	11
8. TEST EQUIPMENT LIST	11
9. RADIATED EMISSION	12
9.1. TEST LIMIT 9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP 9.4. TEST RESULT	12
10. BAND EDGE EMISSION	37
10.1. MEASUREMENT PROCEDURE 10.2 TEST SETUP 10.3 RADIATED TEST RESULT	37 38
11. 20DB BANDWIDTH	42
11.1. MEASUREMENT PROCEDURE	42
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	48 48
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	51
APPENDIX B. PHOTOGRAPHS OF FUT	54



Page 4 of 63

1. VERIFICATION OF CONFORMITY

Applicant	Dongguan Xing Yue Electronic Co., Ltd
Address	#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Manufacturer	Dongguan Xing Yue Electronic Co., Ltd
Address	#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Product Designation	Bond Outdoor Waterproof TWS Speakers
Brand Name	N/A
Test Model	XO-9452
Date of test	May 29, 2018 to Jun. 04, 2018
Deviation	None
Condition of Test Sample	Normal San
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By	Jorden Wang	
To The Till	Jonhen Wang(Wang Yonghuan)	Jun. 04, 2018
Reviewed By	and change	
	Cool Cheng(Cheng Mengguo)	Jun. 08, 2018
Approved By	Forverst cen	
	Forrest Lei(Lei Yonggang) Authorized Officer	Jun. 08, 2018



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

	VII.
Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	0.41dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, □8DPSK BLE □GFSK
Number of channels	79
Hardware Version	V1.2
Software Version	V1.2
Antenna Designation	PCB Antenna
Antenna Gain	4dBi
Power Supply	DC 3.7V by battery
NI-4-	

- Both USB port only be used for charging and can't be used to transfer data with PC.
- The EUT comprises left and right speaker, both are the same and have been tested. Only the test data of left speaker recorded in this report.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Channel Number	Frequency	
The Table Companies	0 0	2402MHz	
	1	2403MHz	
		T. Barbara	
	38	2440 MHz	
2400~2483.5MHz	39	2441 MHz	
	40	2442 MHz	
	· 电型 · 电型 · 电型	- CO - CO	
	77	2479 MHz	
	78	2480 MHz	



Page 6 of 63

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.


- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES


NO.		TEST MODE DESCRIPTION
	1 水炭	Low channel GFSK
8	2	Middle channel GFSK
G	3	High channel GFSK
	4	Low channel π /4-DQPSK
Wil Juliance	5	Middle channel π /4-DQPSK
obal Com	6	High channel π /4-DQPSK
100	7	BT Link with charging
	8	BT Link

Note:

- All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





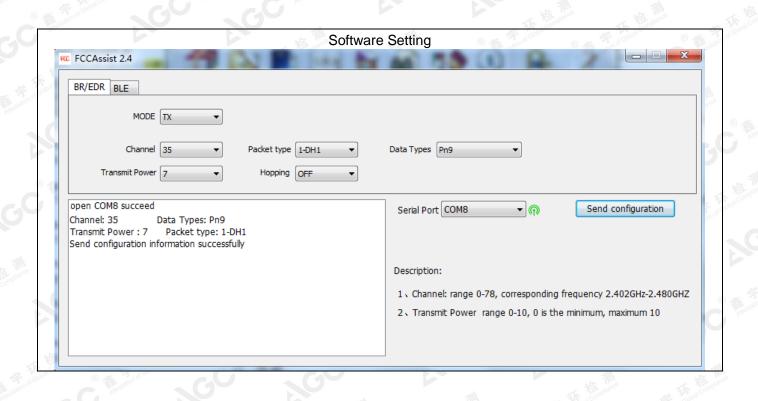

The results shown the streport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type of the company of the report will be confirmed at a type of the company of the report will be confirmed at a type of the company of the report will be confirmed at a type of the company of the com




Page 8 of 63

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, and testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark	
1	Bond Outdoor Waterproof TWS Speakers	Xing Yue	XO-9452	EUT	
2	Battery	CJ	503035	Accessory	
3	PC	APPLE	A1465	A.E	
4	Control box	GZUT	N/A	A.E	
5	Adapter	IPRO	NTR-S01	A.E	
6	USB Cable	N/A	1m unshielded	A.E	
7	USB Cable	N/A	0.3m unshielded	Accessory	
8	AUX IN Cable	N/A	0.5m unshielded	Accessory	
9	Mobile phone	Huawei	P9	A.E	



Page 9 of 63

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant



Page 10 of 63

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012			
NVLAP Lab Code	600153-0			
Designation Number	CN5028			
Test Firm Registration Number	682566			
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0			



Page 11 of 63

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B	-1111	Mar. 01, 2018	Feb. 28, 2019
Filter (2.4-2.483GHz)	Micro-tronics	087	The total complaints (S. W.	Jun.20, 2017	Jun.19, 2018

The results shows if this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the sample (s) are retained for 30 days only. The document is issued by (CC, this document cannot be reported except in full with our prior written permission.



Page 12 of 63

9. RADIATED EMISSION

9.1. TEST LIMIT

Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)	2			
0.490 ~ 1.705	30	24000/F(kHz)	吃那			
1.705 ~ 30	30	30 (1)	E Solution of Global			
30 ~ 88	3	100	40.0			
88 ~ 216	3 - 6	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3 The factor of the second	Other:74.0 dB(μV)/m (Average)	(Peak) 54.0 dB(μV)/m			

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 63

9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 63

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP






9.3. TEST SETUP

RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHz

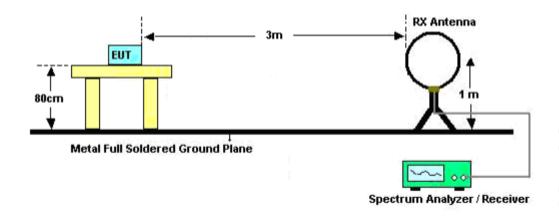


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

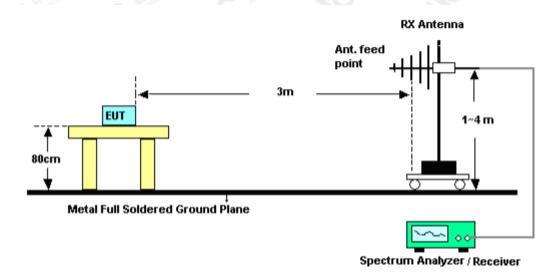



Page 16 of 63

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

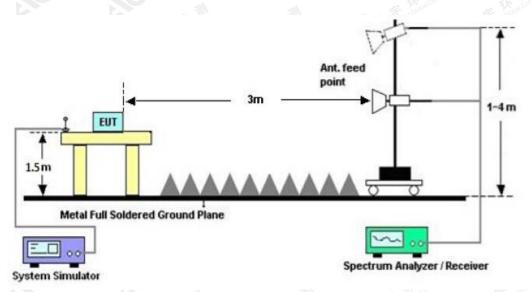



Page 17 of 63

9.4. TEST RESULT


(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

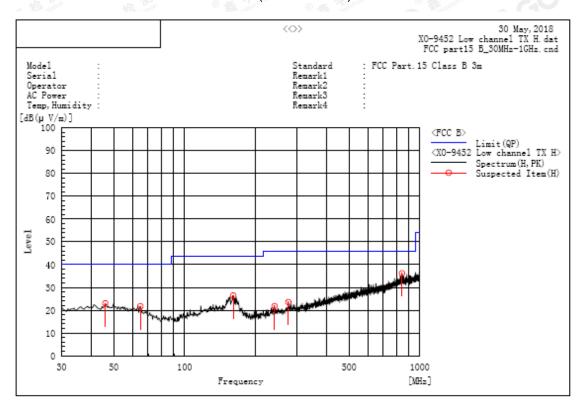

A. Suspected List:

0,0	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
	46.005	H	5.7	17.3	23.0	40.0	17.0	Pass	100.0	287.9
	64.920	Н	6.2	15.6	21.8	40.0	18.2	Pass	100.0	287.9
	160.950	Н	9.9	16.6	26.5	43.5	17.0	Pass	100.0	74.4
)	241.460	Н	5.6	16.2	21.8	46.0	24.2	Pass	200.0	91.7
	276.380	Н	5.9	17.6	23.5	46.0	22.5	Pass	100.0	181.5
3	840.435	Н	6.8	29.4	36.2	46.0	9.8	Pass	100.0	110.1

RESULT: PASS


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

IGC 8



Page 18 of 63

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

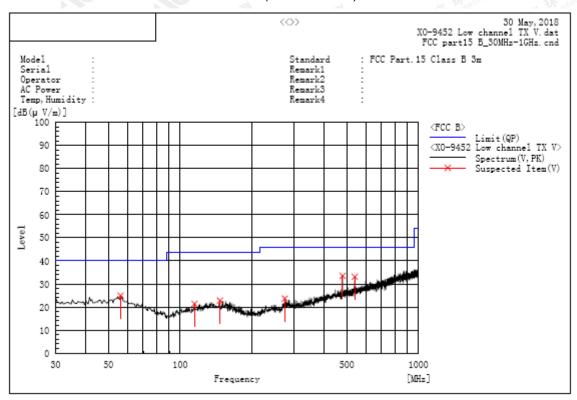


A. Suspected List:

	Frequency MHz	Polarization	Polarization Reading dB (uV) Fact dB (1/n		Level dB(uV/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
	56.190	v	8.3	16.6	24.9	40.0	15.1	Pass	200.0	288.6
Г	114.875	V	6.4	15.0	21.4	43.5	22.1	Pass	200.0	180.1
	146.885	v	6.2	16.6	22.8	43.5	20.7	Pass	100.0	92.4
í	274.925	V	6.3	17.4	23.7	46.0	22.3	Pass	200.0	180.1
311	480.080	V	10.9	22.6	33.5	46.0	12.5	Pass	100.0	21.0
	540.220	V	9.5	23.7	33.2	46.0	12.8	Pass	100.0	56.0

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.






RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

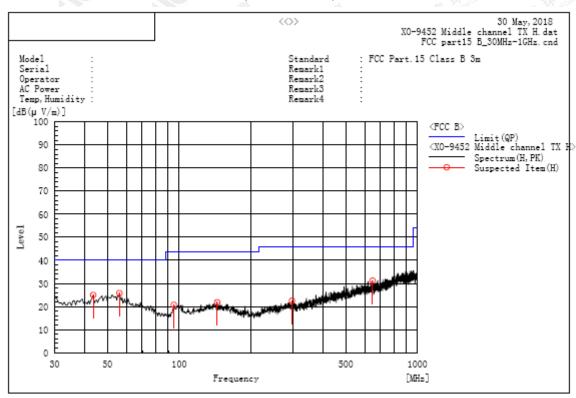

A. Suspected List:


Frequency MHz	Polarization	Polarization Reading dB(uV)		Level dB(uV/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
43.580	Н	7.6	17.4	25.0	40.0	15.0	Pass	100.0	92.5
56.190	Н	9.2	16.6	25.8	40.0	14.2	Pass	100.0	92.5
94.990	Н	8.1	12.7	20.8	43.5	22.7	Pass	100.0	92.5
144.460	Н	5.2	16.6	21.8	43.5	21.7	Pass	100.0	92.5
297.720	Н	5.1	17.4	22.5	46.0	23.5	Pass	100.0	92.5
648.375	Н	5.6	25.6	31.2	46.0	14.8	Pass	100.0	92.5

RESULT: PASS





RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL -VERTICAL

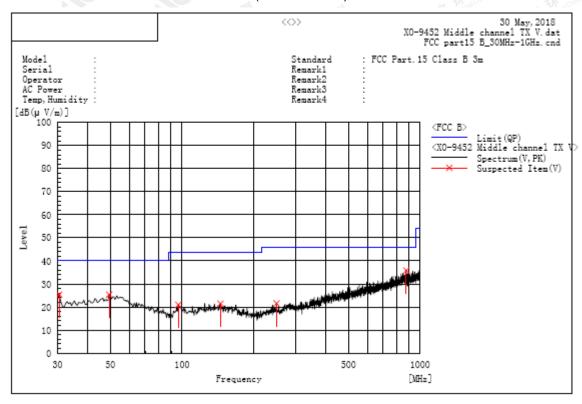


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
30.485	V	9.9	15.5	25.4	40.0	14.6	Pass	100.0	93.2
49.400	V	8.3	17.1	25.4	40.0	14.6	Pass	100.0	93.2
96.445	V	8.1	12.9	21.0	43.5	22.5	Pass	100.0	57.5
144.945	V	4.9	16.6	21.5	43.5	22.0	Pass	100.0	93.2
249.220	V	5.5	16.1	21.6	46.0	24.4	Pass	100.0	93.2
874.870	V	5.9	29.9	35.8	46.0	10.2	Pass	100.0	93.2

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

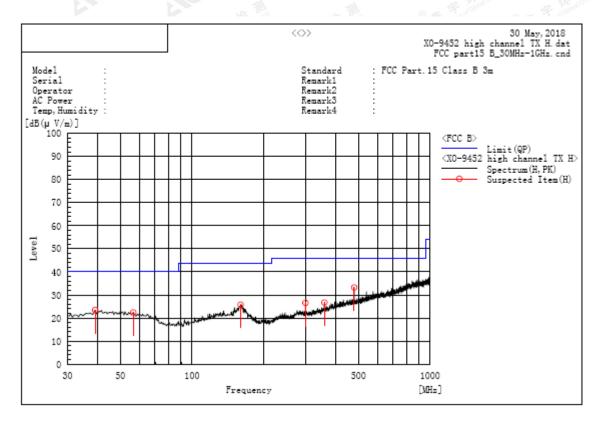

A. Suspected List:


	Frequency MHz			Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
	39.215	Н	6.1	17.4	23.5	40.0	16.5	Pass	100.0	300.7
	56.675	Н	5.8	16.6	22.4	40.0	17.6	Pass	200.0	171.4
	159.980	Н	9.2	16.6	25.8	43.5	17.7	Pass	100.0	345.6
1	299.660	Н	9.2	17.4	26.6	46.0	19.4	Pass	100.0	350.7
	359.800	Н	7.4	19.3	26.7	46.0	19.3	Pass	100.0	321.6
	480.080	Н	10.7	22.6	33.3	46.0	12.7	Pass	200.0	85.5

RESULT: PASS



Page 22 of 63

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

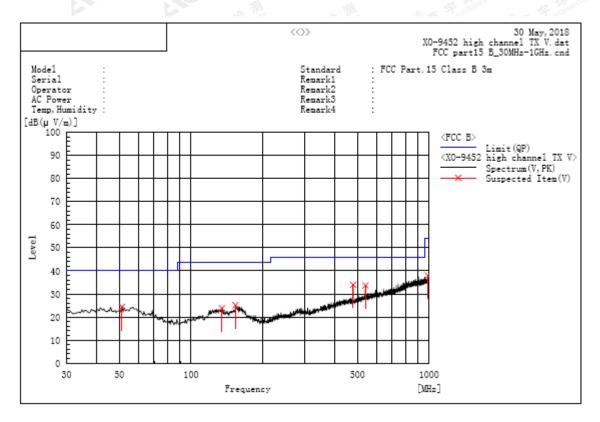

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Marqin dB	Pass/Fail	Height cm	Angle deg
51.340	V	7.3	17.0	24.3	40.0	15.7	Pass	200.0	86.4
134.760	V	7.3	16.5	23.8	43.5	19.7	Pass	100.0	242.0
153.675	V	8.5	16.6	25.1	43.5	18.4	Pass	100.0	242.0
480.080	V	11.4	22.6	34.0	46.0	12.0	Pass	200.0	186.2
540.220	V	10.0	23.7	33.7	46.0	12.3	Pass	100.0	66.6
987.875	v	7.0	31.0	38.0	54.0	16.0	Pass	100.0	346.8

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 23 of 63

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

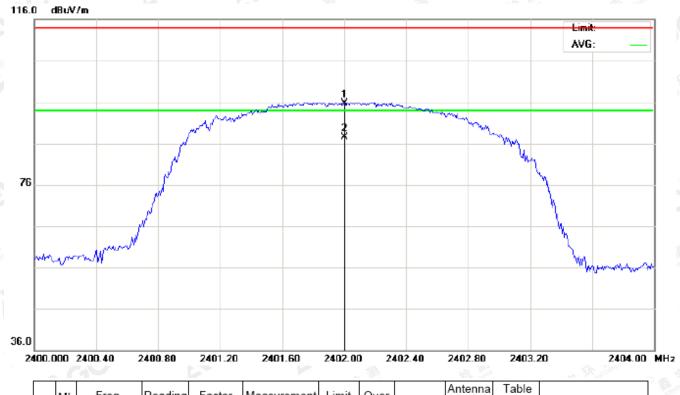


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2402.000	85.29	10.32	95.61	114.00	-18.39	peak			
	2	*	2402.000	77.24	10.32	87.56	94.00	-6.44	AVG	100	137	
_									\$45.00 CO		III Ollo	(K) 200 1 AV

RESULT: PASS



Page 24 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

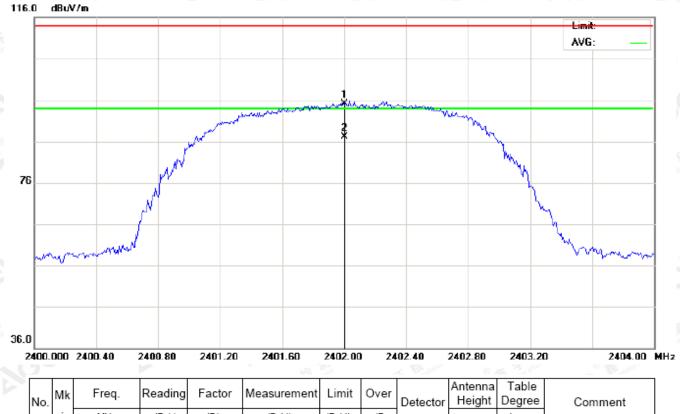

N	. MI	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
3	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	84.79	10.32	95.11	114.00	-18.89	peak			
2	*	2402.000	76.82	10.32	87.14	94.00	-6.86	AVG	100	263	


RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 25 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

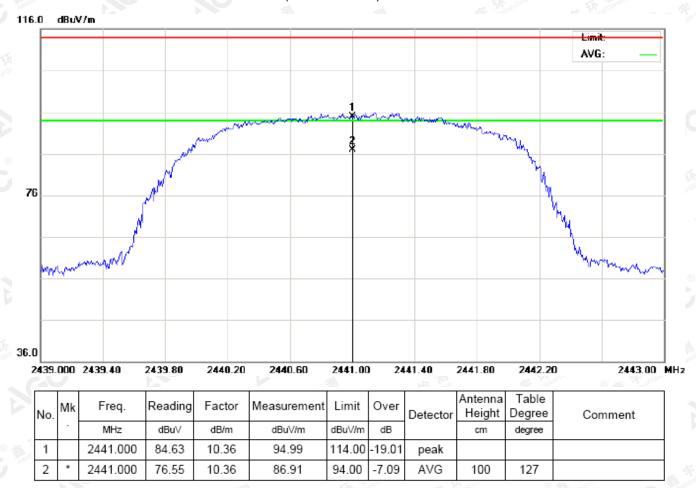


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 26 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

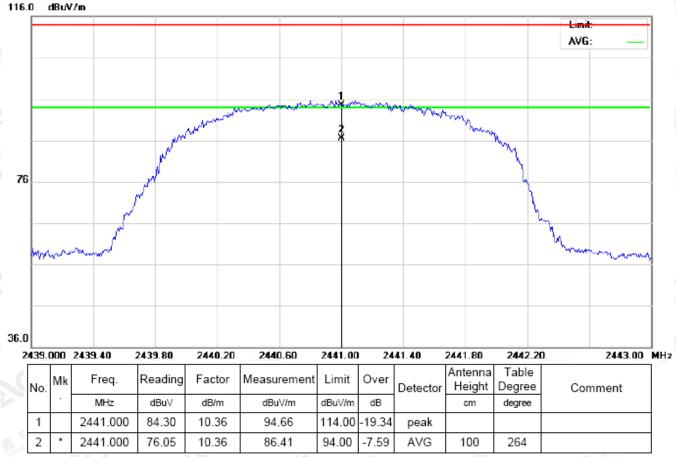


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 27 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

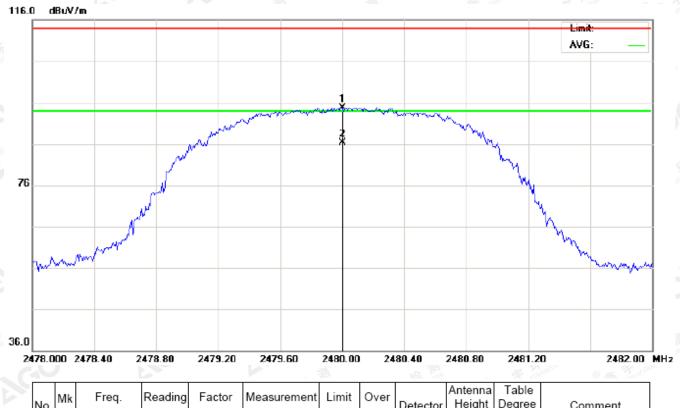

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	84.08	10.41	94.49	114.00	-19.51	peak			
2	*	2480.000	75.92	10.41	86.33	94.00	-7.67	AVG	100	136	


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 28 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

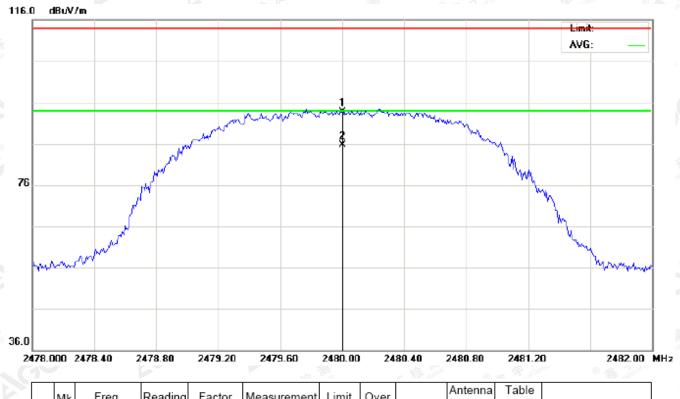

N	o.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
ji -	1		2480.000	83.25	10.41	93.66	114.00	-20.34	peak			
	2	*	2480.000	75.33	10.41	85.74	94.00	-8.26	AVG	100		

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 29 of 63

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna Polarization	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)		
2402	85.29	10.32	95.61	114	-18.39	Horizontal	
2402	84.79	10.32	95.11	114	-18.89	Vertical	
2441	84.63	10.36	94.99	114	-19.01	Horizontal	
2441	84.30	10.36	94.66	114	-19.34	Vertical	
2480	84.08	10.41	94.49	114	-19.51	Horizontal	
2480	83.25	10.41	93.66	114	-20.34	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	77.24	10.32	87.56	94	-6.44	Horizontal	
2402	76.82	10.32	87.14	94	-6.86	Vertical	
2441	76.55	10.36	86.91	94	-7.09	Horizontal	
2441	76.05	10.36	86.41	94	-7.59	Vertical	
2480	75.92	10.41	86.33	94	-7.67	Horizontal	
2480	75.33	10.41	85.74	94	-8.26	Vertical	



Page 30 of 63

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	84.80	10.32	95.12	114	-18.88	Horizontal	
2402	84.33	10.32	94.65	114	-19.35	Vertical	
2441	84.10	10.36	94.46	114	-19.54	Horizontal	
2441	83.55	10.36	93.91	114	-20.09	Vertical	
2480	83.32	10.41	93.73	114	-20.27	Horizontal	
2480	82.96	10.41	93.37	114	-20.63	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	76.81	10.32	87.13	94	-6.87	Horizontal	
2402	76.42	10.32	86.74	94	-7.26	Vertical	
2441	76.03	10.36	86.39	94	-7.61	Horizontal	
2441	75.66	10.36	86.02	94	-7.98	Vertical	
2480	75.24	10.41	85.65	94	-8.35	Horizontal	
2480	74.81	10.41	85.22	94	-8.78	Vertical	




Page 31 of 63

(Worst modulation: GFSK)

For Harmonics

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

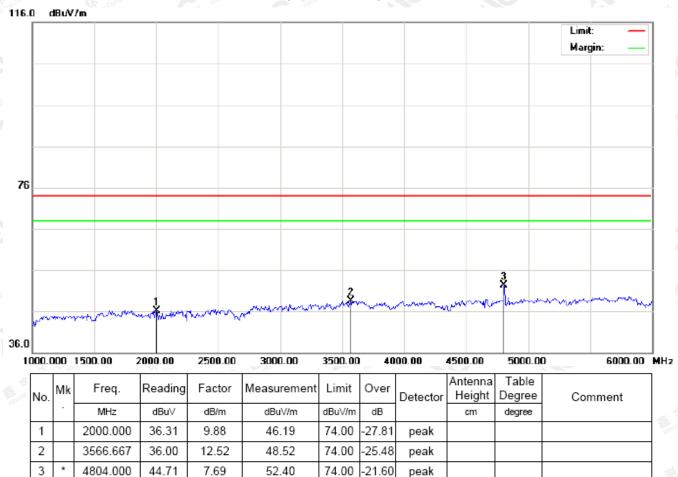


RESULT: PASS



Page 32 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

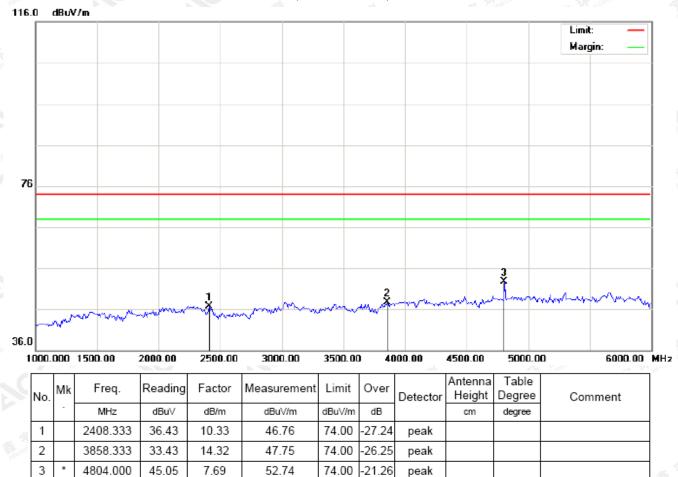


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 33 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

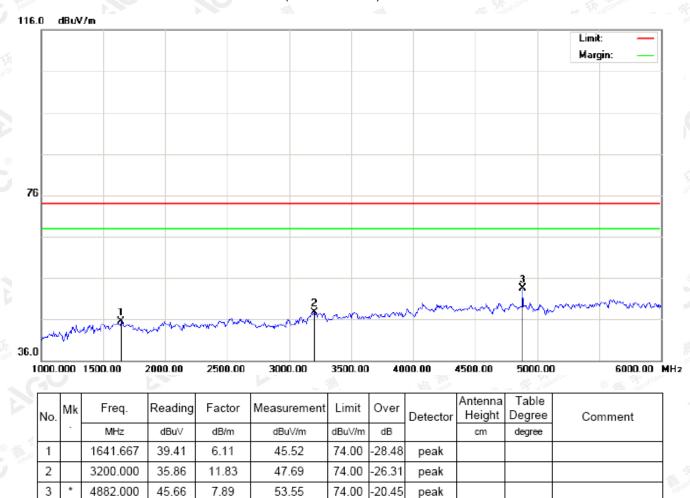


RESULT: PASS

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



Page 34 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

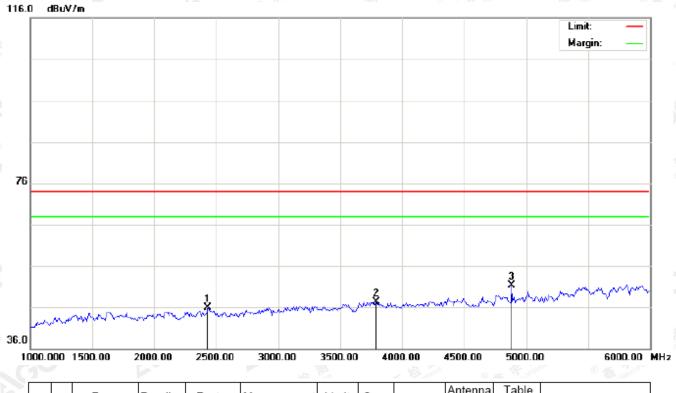

	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
3		-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
stal	1		2433.333	35.55	10.36	45.91	74.00	-28.09	peak			
	2		3791.667	33.46	13.91	47.37	74.00	-26.63	peak			
	3	*	4882.000	43.39	7.89	51.28	74.00	-22.72	peak			


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 35 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

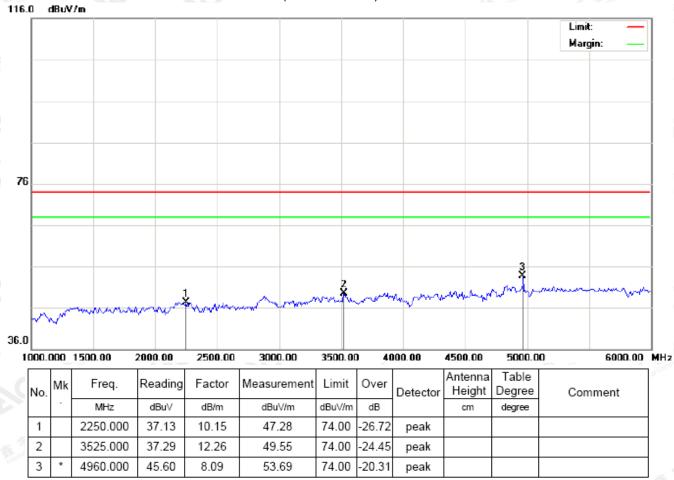


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 36 of 63

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

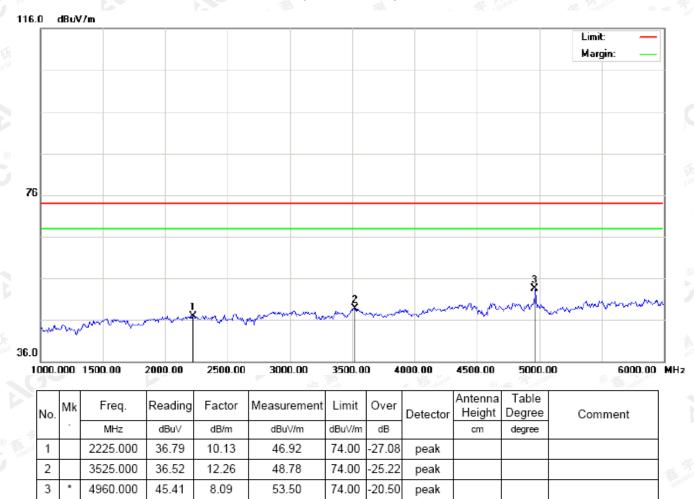

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 37 of 63

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

	Start frequency(MHz)				Stop frequency(MHz)			
	2200	Kimplence	The Committee	® A station of G	2405	100		
(S) ### (1)	2478	3lobal C	Autostation of Glob	-,0 "	2500			

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

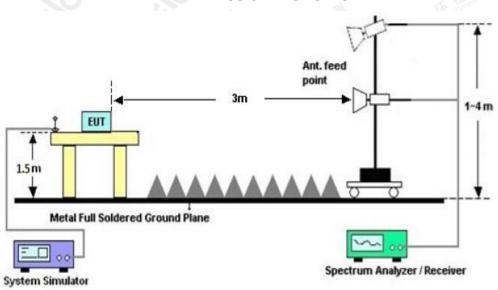

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 38 of 63

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

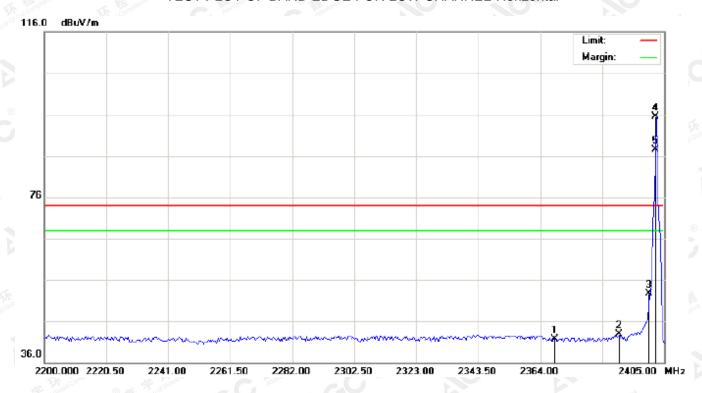

3	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2368.783	31.45	10.29	41.74	74.00	-32.26	peak			
	2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
	3		2400.000	42.47	10.32	52.79	74.00	-21.21	peak			
	4	*	2402.000	84.62	10.32	94.94	74.00	20.94	peak			
	5	Х	2402.000	77.26	10.32	87.58	74.00	13.58	AVG	100	139	

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 63

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




					20/21 AU' JPL V							
	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
<u> </u>		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
,ii	1		2361.950	31.59	10.28	41.87	74.00	-32.13	peak			
	2		2390.000	31.21	10.31	41.52	74.00	-32.48	peak			
	3		2400.000	36.06	10.32	46.38	74.00	-27.62	peak			
	4	*	2402.000	84.29	10.32	94.61	74.00	20.61	peak			
	5	Х	2402.000	76.77	10.32	87.09	74.00	13.09	AVG	100	254	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 40 of 63

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

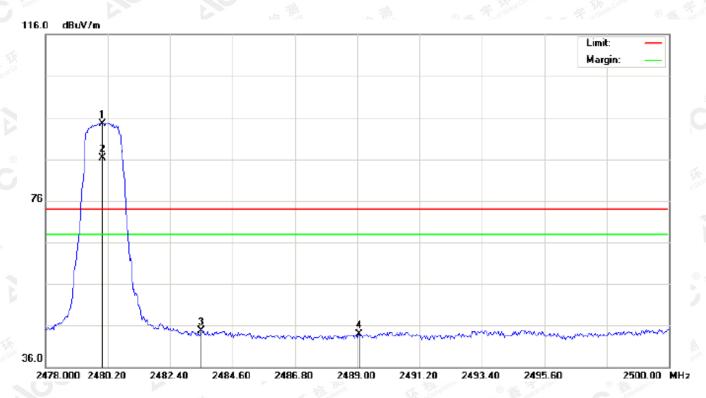


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	84.05	10.41	94.46	74.00	20.46	peak			
2	Х	2480.000	75.90	10.41	86.31	74.00	12.31	AVG	100	135	
3		2483.500	34.19	10.41	44.60	74.00	-29.40	peak			
4		2489.073	33.43	10.42	43.85	74.00	-30.15	peak			

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 41 of 63

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

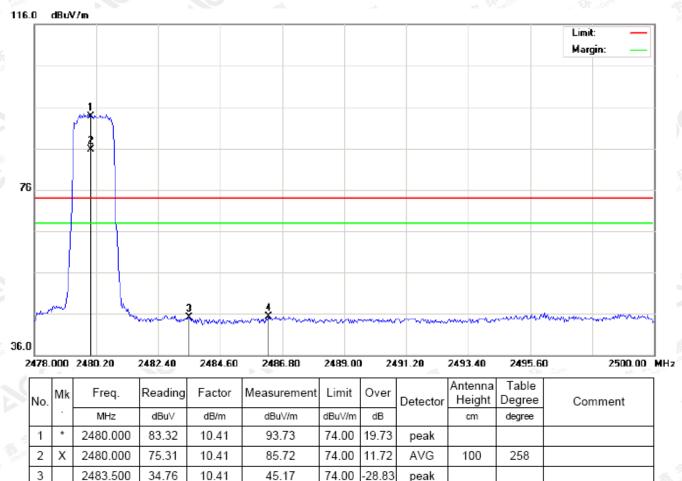

RESULT: PASS

2486.323

3

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

45.17

45.35

34.76

34.94

10.41

10.41

The "Factor" value can be calculated automatically by software of measurement system.

74.00

74.00

-28.83

-28.65

peak

peak

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cent.com.




Page 42 of 63

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

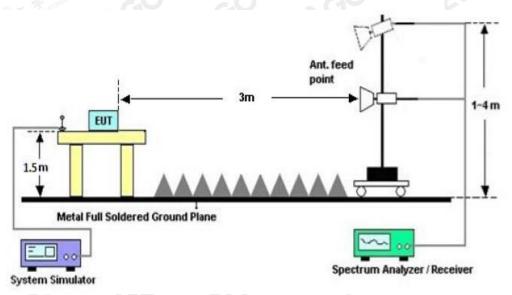


11.3. LIMITS AND MEASUREMENT RESULTS

		4.DE 1.70										
BLUET	BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT											
	Measurement Result											
Applicable Limits		5 11										
		99%OBW (MHz)	-20dB BW(MHz)	Result								
The State of the Company	Low Channel	0.906	1.070	PASS								
N/A	Middle Channel	0.905	1.068	PASS								
100	High Channel	0.908	1.072	PASS								


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

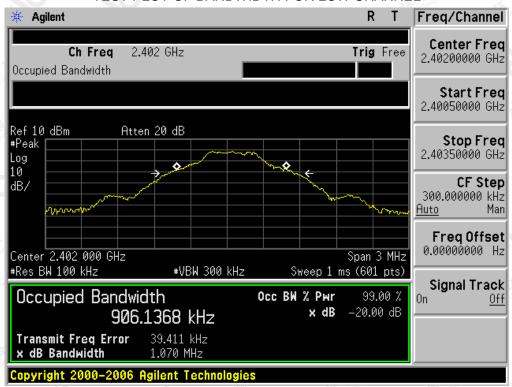

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

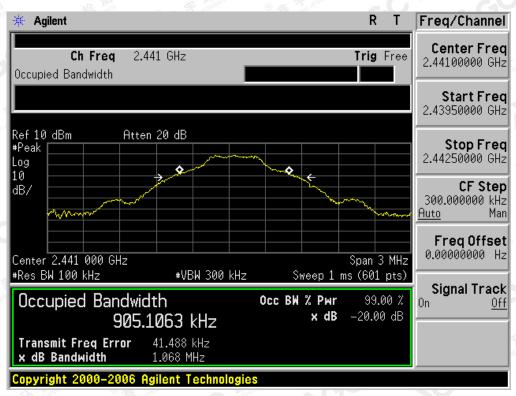


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




Page 44 of 63

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

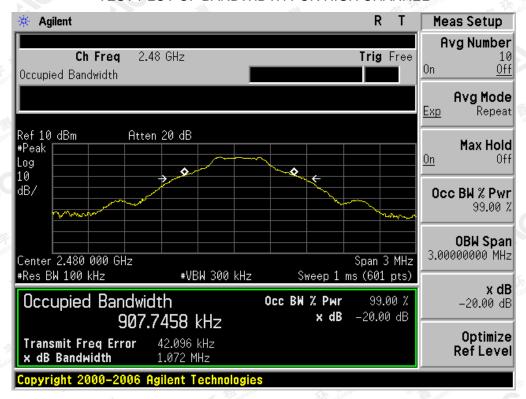


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





No.			- 10 mg	20, 'Co., 'S							
BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT											
	Measurement Result										
Applicable Limits		Result									
TO THE	Low Channel	1.208	1.370	PASS							
N/A	Middle Channel	1.213	1.382	PASS							
	High Channel	1.210	1.365	PASS							


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

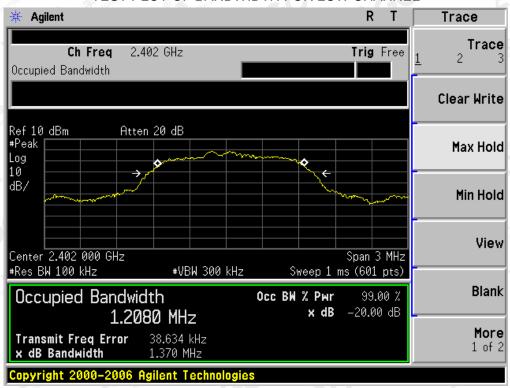


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

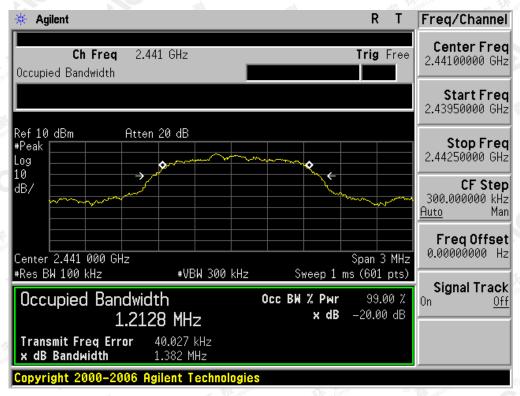

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

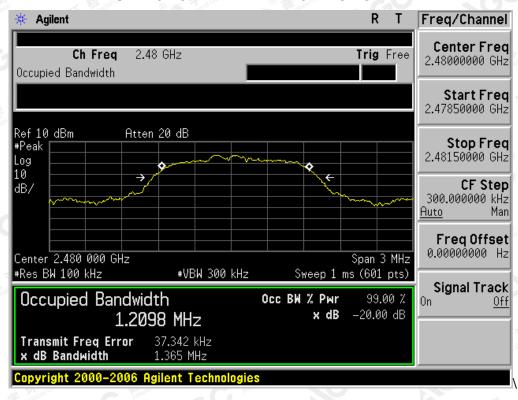

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 47 of 63

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46/						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

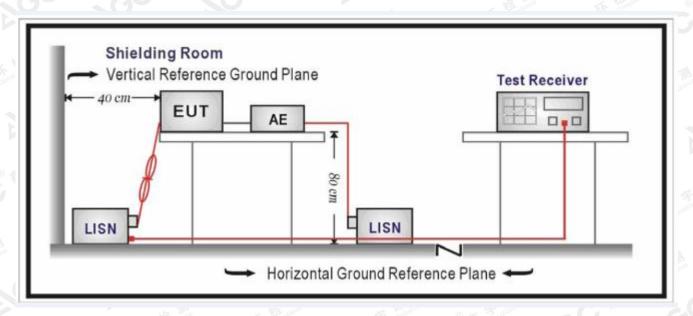

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 48 of 63

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

Line Conducted Emission Test Line 1-L

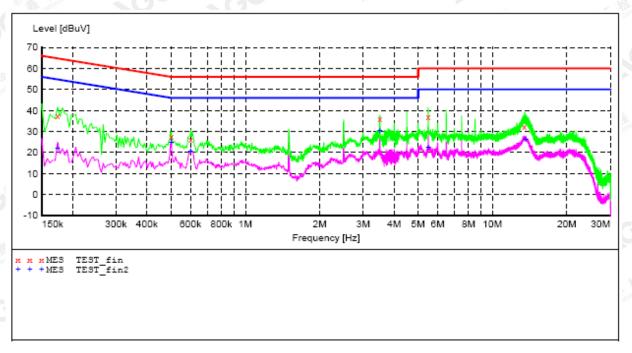

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.174000 0.502000 0.602000 3.502000 5.498000 13.462000	37.60 27.60 26.20 36.20 36.90 32.50	10.0 10.1 10.1 10.0 10.3 9.5	65 56 56 56 60	27.2 28.4 29.8 19.8 23.1 27.5	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO


MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.174000 0.502000 0.602000 3.502000 5.498000 13.602000	21.90 24.70 20.70 30.60 22.70 26.40	10.0 10.1 10.1 10.0 10.3 9.5	55 46 46 46 50 50	25.3	AV AV AV AV AV	L1 L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.



Line Conducted Emission Test Line 2-N

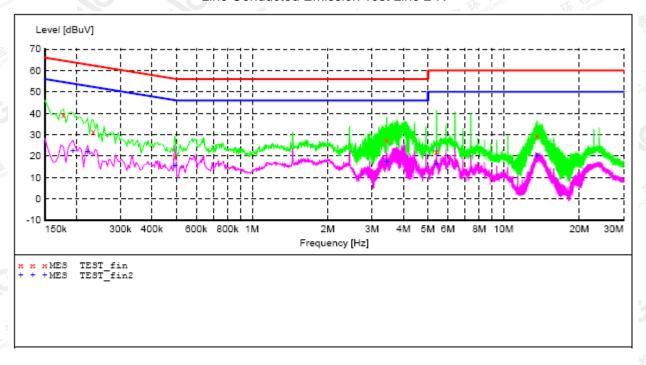


MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.178000 0.234000	39.20 31.20	10.0	65 62	25.4 31.1	QP QP	N N	FLO FLO
0.494000	19.90	10.1	56	36.2	QP	N	FLO
3.430000	27.50	10.0	56	28.5	QP	N	FLO
5.410000	22.20	10.3	60	37.8	QP	N	FLO
13.574000	29.30	9.5	60	30.7	QP	N	FLO

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.194000	22.60	10.1	54	31.3		N	FLO
0.222000	22.10	10.1	53	30.6		N	FLO
0.494000	15.50	10.1	46	30.6		N	FLO
3.430000	17.30	10.0	46	28.7	AV	N	FLO
5.410000	16.30	10.3	50	33.7	AV	N	FLO
13.574000	20.00	9.5	50	30.0	AV	N	FLO

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.










The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.



Page 53 of 63



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.





APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true. It www.agc. gett.com.



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true. It www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



BACK VIEW OF EUT




LEFT VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





RIGHT VIEW OF EUT




LEFTVIEW OF EUT (PORT)



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



OPEN VIEW OF EUT

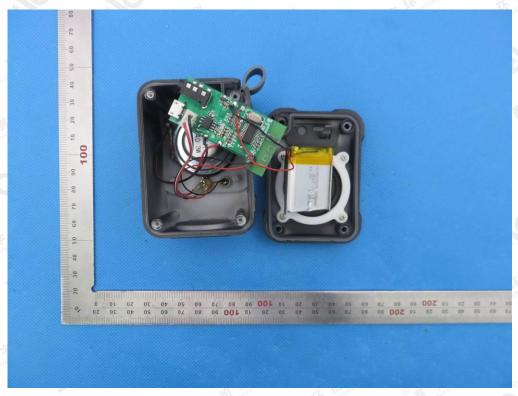

VIEW OF BATTERY




The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China




INTERNAL VIEW OF EUT-1

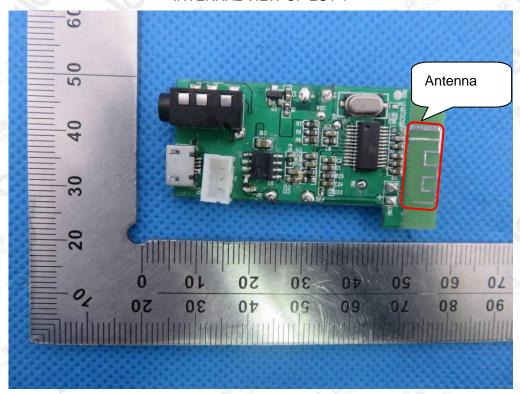

INTERNAL VIEW OF EUT-2

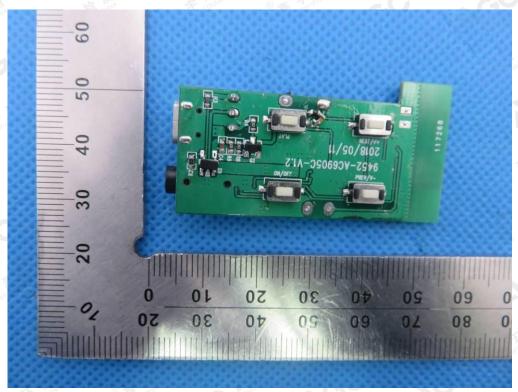

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





INTERNAL VIEW OF EUT-3




RUGHTVIEW OF EUT (PORT)



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



OPEN VIEW OF EUT

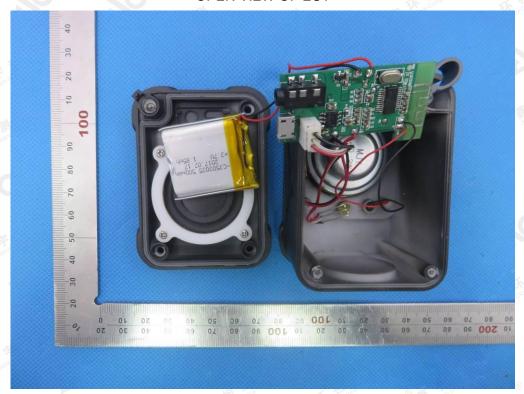

VIEW OF BATTERY




The results spowd this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China




INTERNAL VIEW OF EUT-1

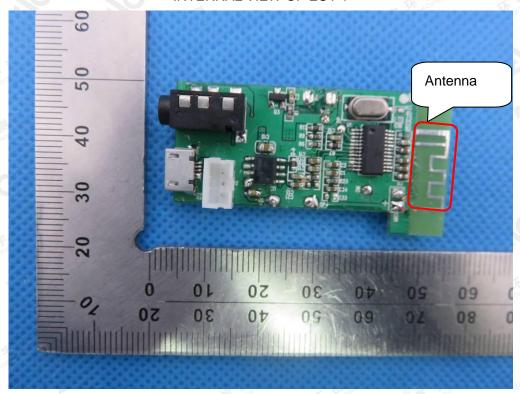

INTERNAL VIEW OF EUT-2

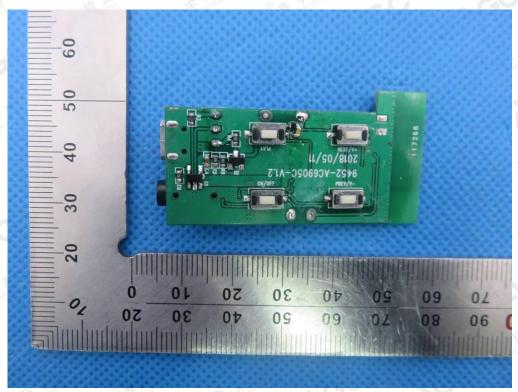

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





INTERNAL VIEW OF EUT-3



VIEW OF ADAPTER (AE)



The adapter was supplied by AGC

----END OF REPORT----

The results spowfor this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com 🕜 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China