



## FCC- TEST REPORT

Report Number : **68.910.18.0030.02** Date of Issue: 10 January 2019

Model : **X500, X500i, X500w, X500r, X500Pro, D5, D51, D52, D5s, D5Pro, Robvacuum8, X-503, X500, X520, X530, X550, X560**

Product Type : Robotic Vacuum Cleaner

Applicant : Shenzhen Hua Xin Information Technology Co., Ltd.

Address : Section A 10/F, Block 1, No.7 Industrial Park, Yulu Community,  
Yutang, Guangming New District, 518132 ShenZhen,  
PEOPLE'S REPUBLIC OF CHINA

Production Facility : Shenzhen Hua Xin Information Technology Co., Ltd.

Address : Section A 10/F, Block 1, No.7 Industrial Park, Yulu Community,  
Yutang, Guangming New District, 518132 ShenZhen,  
PEOPLE'S REPUBLIC OF CHINA

Test Result : **n Positive      o Negative**

Total pages including Appendices : 51

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.*

*TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.*

*This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.*



# 1 Table of Contents

- 1 Table of Contents.....2
- 2 Details about the Test Laboratory .....3
- 3 Description of the Equipment under Test.....4
- 4 Summary of Test Standards .....5
- 5 Summary of Test Results .....6
- 6 General Remarks.....7
- 7 Test Setups .....9
- 8 Systems test configuration .....10
- 9 Technical Requirement .....11
  - 9.1 Conducted Emission .....11
  - 9.2 Conducted peak output power.....15
  - 9.3 6dB and 99% bandwidth.....17
  - 9.4 Power spectral density .....23
  - 9.5 Spurious RF conducted emissions.....29
  - 9.6 Band edge .....39
  - 9.7 Spurious radiated emissions for transmitter .....43
- 10 Test Equipment List.....50
- 11 System Measurement Uncertainty .....51



## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12&13, Zhiheng Wisdomland Business Park,  
Nantou Checkpoint Road 2, Nanshan District,  
Shenzhen City, 518052,  
P. R. China

FCC Registration Number: 514049

Telephone: 86 755 8828 6998  
Fax: 86 755 8828 5299

### 3 Description of the Equipment under Test

#### Description of the Equipment Under Test

Product:	Robotic Vacuum Cleaner
Model no.:	X500, X500i, X500w, X500r, X500Pro, D5, D51, D52, D5s, D5Pro, Robvacuum8, X-503, X500, X520, X530, X550, X560
FCC ID:	2AMYQ-20180700500
Options and accessories:	NIL
Rated Input:	100-240VAC, 50/60Hz (for Adapter); 19VDC (for Cleaner)
RF Transmission Frequency:	2412-2462MHz
No. of Operated Channel:	11
Modulation:	CCK, DQPSK, DBPSK for 802.11b QPSK,BPSK for 802.11g/n
Duty Cycle:	100%
Antenna Type:	Integral Antenna
Antenna Gain:	2dBi
Description of the EUT:	Tested with external approved adaptor GSCU0600S019V12E: Input: 100-240V AC, 50/60Hz, 0.5A Max, Output: 19V DC, 0.6A; Or tested with external approved adaptor YJS015D-1900600U: Input: 120V AC, 60Hz, 0.5A, Output: 19V DC, 0.6A



## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2018 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 v05 DTS Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Result	Test Site
§15.207	Conducted emission AC power port	---	N/A	--
§15.247(b)(1)	Conducted peak output power	13	Pass	Site 1
§15.247(e)	Power spectral density*	20	Pass	Site 1
§15.247(a)(2)	6dB bandwidth	14	Pass	Site 1
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	14	Pass	Site 1
§15.247(a)(1)	Carrier frequency separation	--	N/A	--
§15.247(a)(1)(iii)	Number of hopping frequencies	--	N/A	--
§15.247(a)(1)(iii)	Dwell Time	--	N/A	--
§15.247(d)	Spurious RF conducted emissions	26	Pass	Site 1
§15.247(d)	Band edge	32	Pass	Site 1
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter	36	Pass	Site 1
§15.203	Antenna requirement	See note 1	Pass	--

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a permanently integral antenna, which gain is 2dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.




## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AMYQ--20180700500, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C rules.

This report is based on report 68.910.18.0030.01 for following changes,  
 -The control PCB and appearance were added, see model difference for detail.  
 -Alternative component was added as below:

Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Mark(s) of conformity
Battery package	Yiyang Corun Battery Co., Ltd	INR18650 M26-4S1P	14,4V; 2500mAh	TÜV Rheinland
- Battery cell	LG CHEM., LTD	INR18650 M26	3,6V; 2500mAh	UL
Motor for wheel driver	Standard Motor	RP365-ST/14175	12VDC; Class 105	Test appliance

Trade mark	Model No.	Control PCB			Apperance			
		Without	A	B	1#	2#	3#	4#
TESVOR	X500; X500i; X500w; X500r; X500Pro	√			√			
	X500; X520; X530; X550; X560					√		
	Robvacuum8						√	
ZIGLINT	D5; D51; D52; D5s; D5Pro		√					√
 ORFELD	X-503			√				√

So the previous test data are still valid. Selected retest item of Spurious radiated emissions (30-1000MHz) was applied on D5 and X-503 with the alternative component for verify the difference, the others are deemed to fulfill relevant EMC requirement without further testing.

The EUT has multiple work modes, the worst test results are listed in the report.



**SUMMARY:**

All tests according to the regulations cited on page 5 were

n - Performed

o - **Not** Performed

The Equipment under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date:                      July 01, 2018                      November 11, 2018

Testing Start Date:                              July 01, 2018                              November 11, 2018

Testing End Date:                                August 06, 2018                                January 09, 2019

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:

Tested by:



\_\_\_\_\_  
Laurent Yuan  
EMC Project Manager

\_\_\_\_\_  
Dawi Xu  
EMC Project Engineer


\_\_\_\_\_  
Tree Zhan  
EMC Test Engineer




## 7 Test Setups

### 7.1 Radiated test setups


Below 1GHz

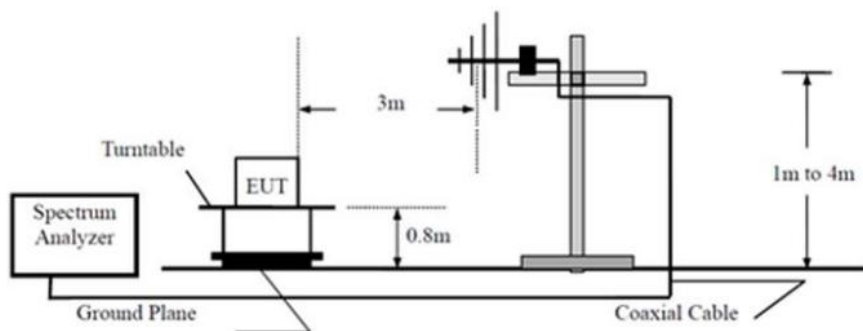


Above 1GHz

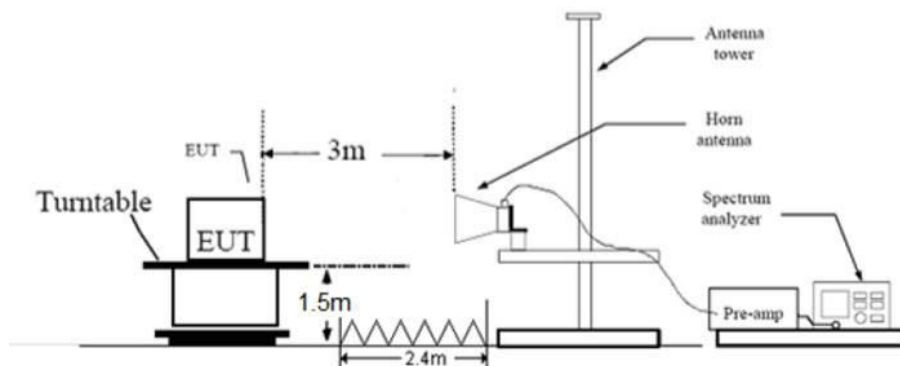

### 7.2 Conducted RF test setups



### 7.3 AC Power Line Conducted Emission test setups

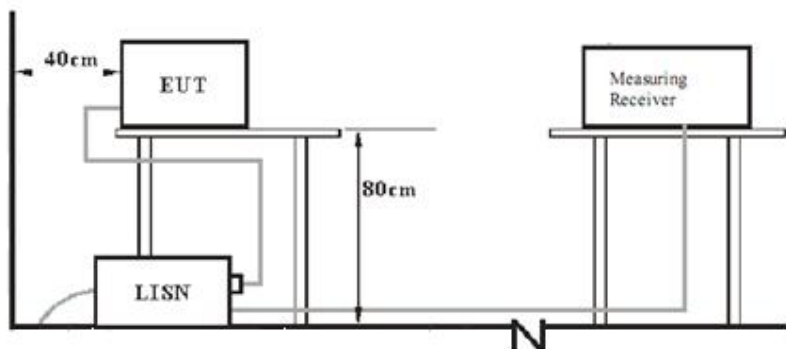



## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
---	---	---	---

Test software: RF test tool

The system was configured to channel 1, 6 and 11 for the test.


## 9 Technical Requirement

### 9.1 Conducted Emission

#### Conducted Emission Test 150kHz – 30MHz

M/N: X500(with adapter: GSCU0600S019V12E)  
 Op Cond.: Charging  
 Test Spec.: Power Line, Live  
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

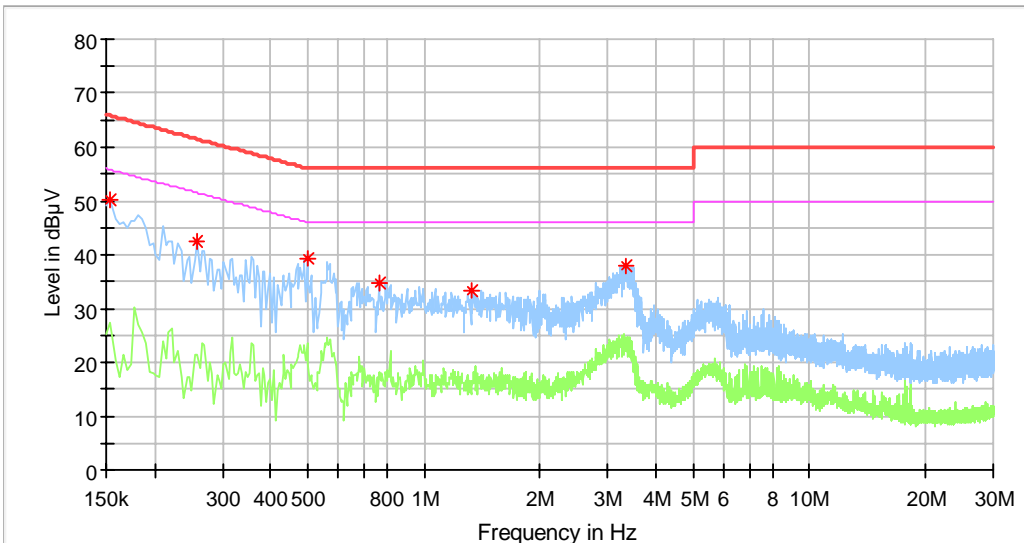


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	50.00	---	65.78	15.78	L1	10.2
0.258000	42.63	---	61.50	18.86	L1	10.2
0.498000	39.40	---	56.03	16.63	L1	10.2
0.766000	34.73	---	56.00	21.27	L1	10.2
1.330000	33.18	---	56.00	22.82	L1	10.2
3.358000	38.00	---	56.00	18.00	L1	10.3

**Conducted Emission Test 150kHz – 30MHz**

M/N: X500(with adapter: GSCU0600S019V12E)  
 Op Cond.: Charging  
 Test Spec.: Power Line, Neutral  
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

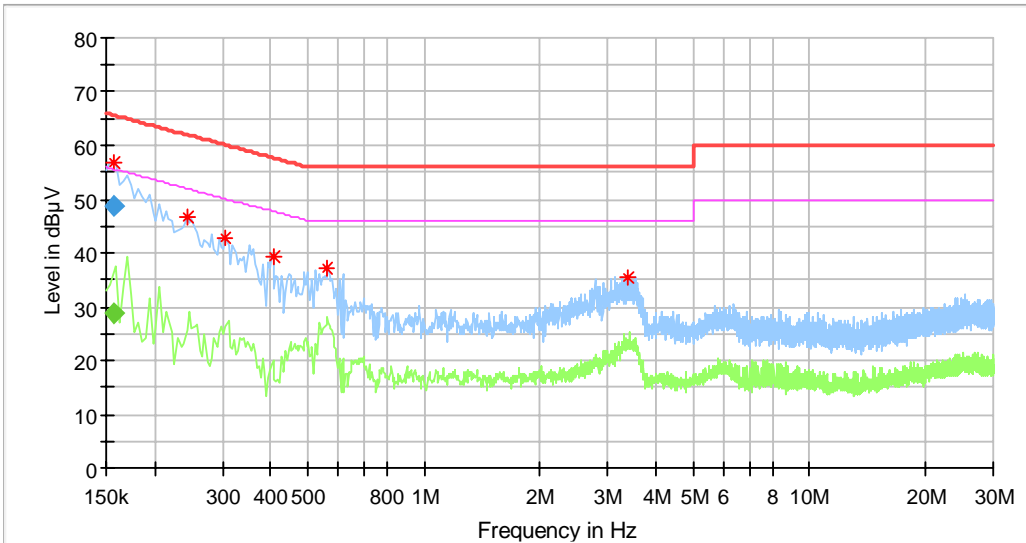


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.157500	---	28.93	55.59	26.66	N	10.3
0.157500	48.70	---	65.59	16.89	N	10.3

**Conducted Emission Test 150kHz – 30MHz**

M/N: X500(with adapter: YJS015D-1900600U)  
 Op Cond.: Charging  
 Test Spec.: Power Line, Live  
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

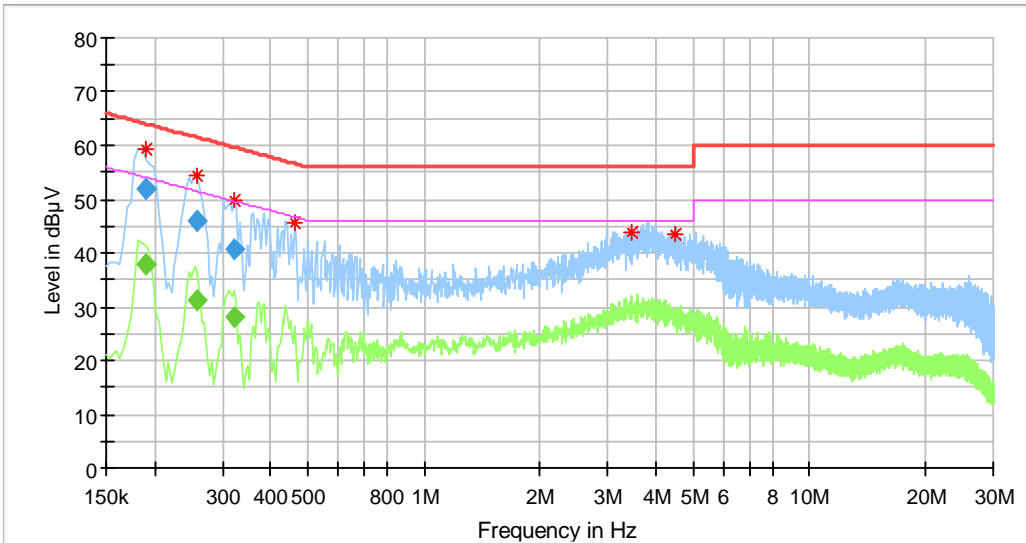


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.189500	---	37.80	54.06	16.26	L1	10.2
0.189500	51.91	---	64.06	12.15	L1	10.2
0.257500	---	31.27	51.51	20.24	L1	10.2
0.257500	46.02	---	61.51	15.49	L1	10.2
0.321500	---	28.13	49.67	21.54	L1	10.2
0.321500	40.68	---	59.67	18.99	L1	10.2

**Conducted Emission Test 150kHz – 30MHz**

M/N: X500(with adapter: YJS015D-1900600U)  
 Op Cond.: Charging  
 Test Spec.: Power Line, Neutral  
 Comment: AC 120V/60Hz

Temperature (°C): 22.5 Relative Humidity (%): 46.7 Atmospheric Pressure(mbar) : 1012

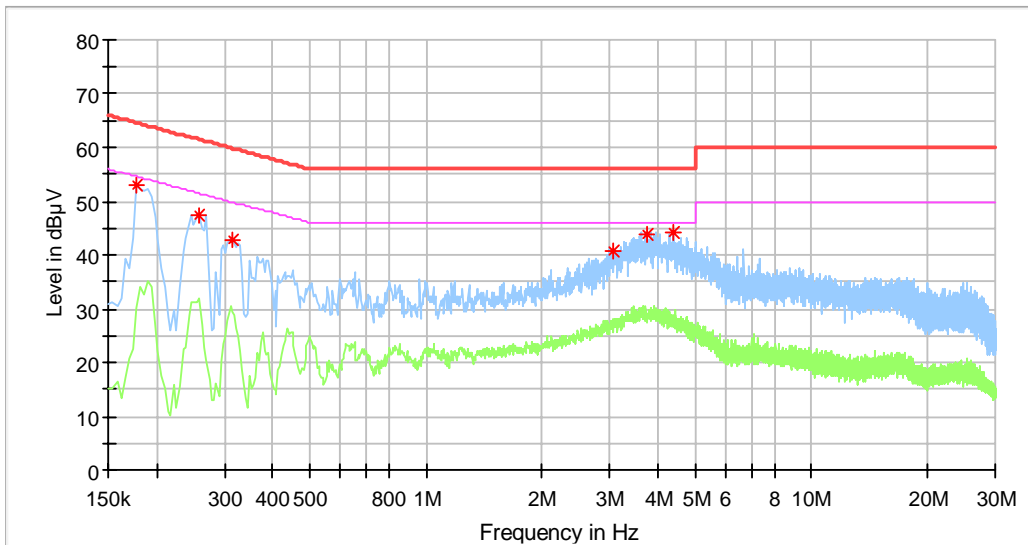

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.178000	53.10	---	64.58	11.48	N	10.3
0.258000	47.31	---	61.50	14.19	N	10.3
0.314000	42.95	---	59.86	16.91	N	10.3
3.046000	40.66	---	56.00	15.34	N	10.5
3.730000	43.88	---	56.00	12.12	N	10.5
4.374000	44.37	---	56.00	11.63	N	10.5



## 9.2

### 9.2 Conducted peak output power

#### Test Method

1. Connect the power meter to the EUT
  - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
  - b) At all times the EUT is transmitting at its maximum power control level.
  - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding  $10\log(1/x)$ , where x is the duty cycle to the measurement result.

#### Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b

Frequency MHz	Conducted Peak Output Power dBm	Result
Top channel 2412MHz	13.7	Pass
Middle channel 2437MHz	13.7	Pass
Bottom channel 2462MHz	12.9	Pass

802.11g

Frequency MHz	Conducted Peak Output Power dBm	Result
Top channel 2412MHz	16.1	Pass
Middle channel 2437MHz	16.4	Pass
Bottom channel 2462MHz	14.8	Pass



802.11nHT20

Frequency <b>MHz</b>	Conducted Peak Output Power <b>dBm</b>	Result
Top channel 2412MHz	16.0	Pass
Middle channel 2437MHz	16.2	Pass
Bottom channel 2462MHz	14.6	Pass



### 9.3 6dB and 99% bandwidth

#### Test Method

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit

Limit [kHz]

$\geq$ 500

#### Test result

##### 802.11b

Frequency MHz	6dB bandwidth KHz	99 bandwidth KHz	Result
Bottom channel 2412MHz	8120	11948	Pass
Middle channel 2437MHz	9120	11948	Pass
Top channel 2462MHz	9080	11788	Pass


##### 802.11g

Frequency MHz	6dB bandwidth KHz	99 bandwidth KHz	Result
Bottom channel 2412MHz	15920	16863	Pass
Middle channel 2437MHz	15920	16943	Pass
Top channel 2462MHz	16120	16703	Pass


##### 802.11nHT20

Frequency MHz	6dB bandwidth KHz	99 bandwidth KHz	Result
Bottom channel 2412MHz	15800	17702	Pass
Middle channel 2437MHz	15800	17782	Pass
Top channel 2462MHz	15800	17582	Pass


802.11b

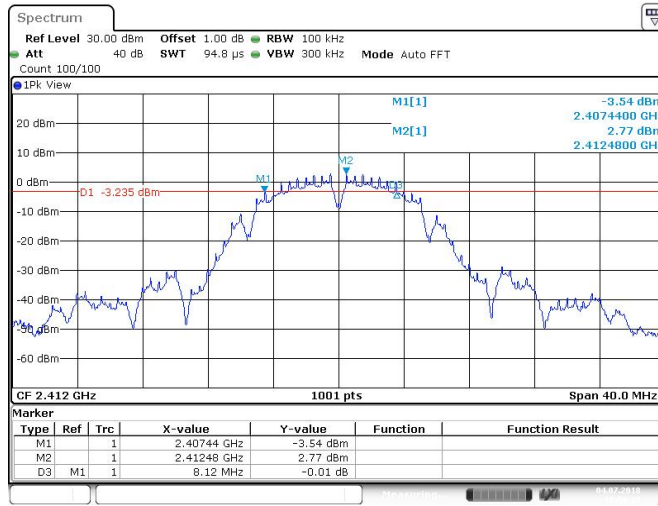

2412MHz

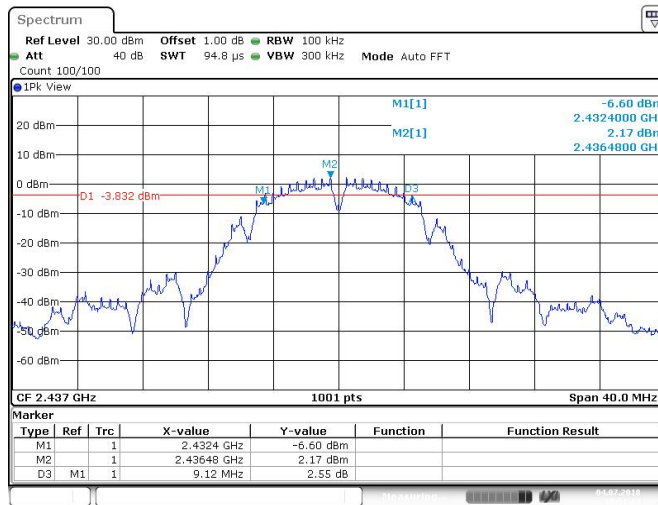


2437MHz

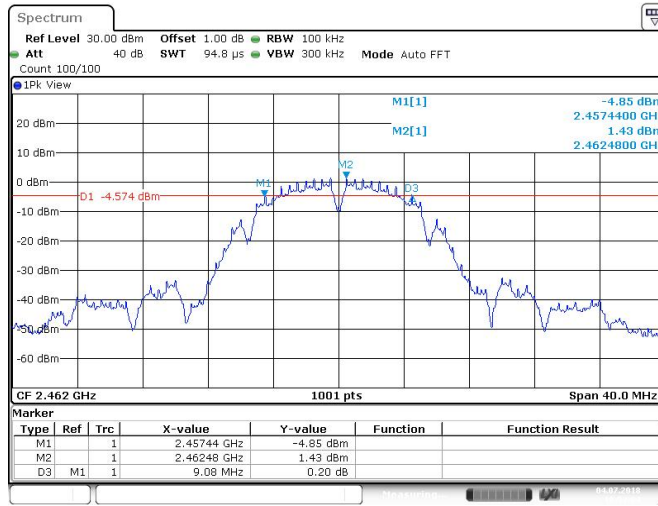

Date: 4.JUL.2018 10:53:05


2462MHz

802.11g

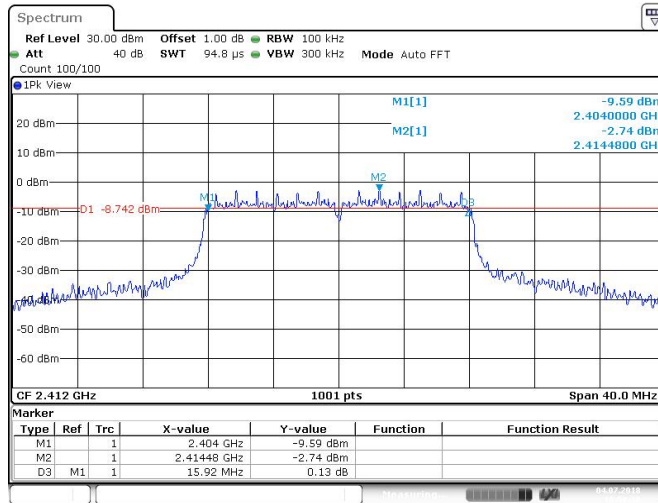


Date: 4.JUL.2018 10:58:30

2412MHz

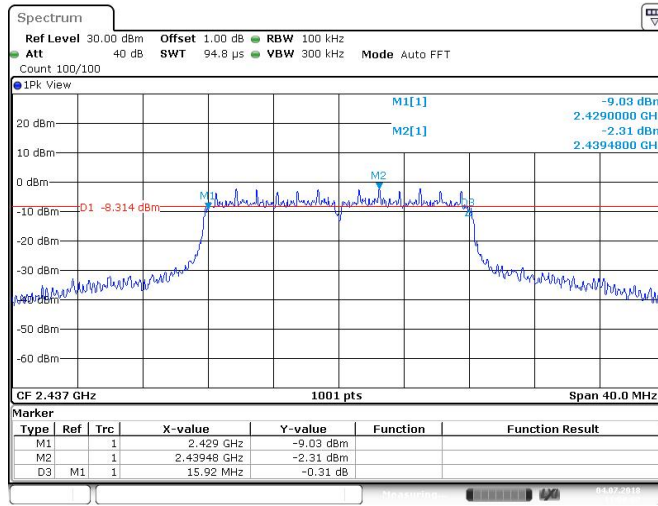

Date: 4 JUL 2018 11:00:02


2437MHz

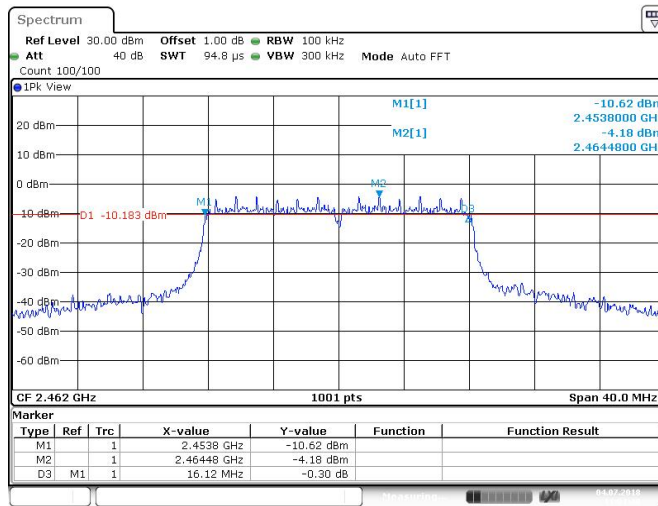


Date: 4 JUL 2018 11:01:48

2462MHz


802.11nHT20

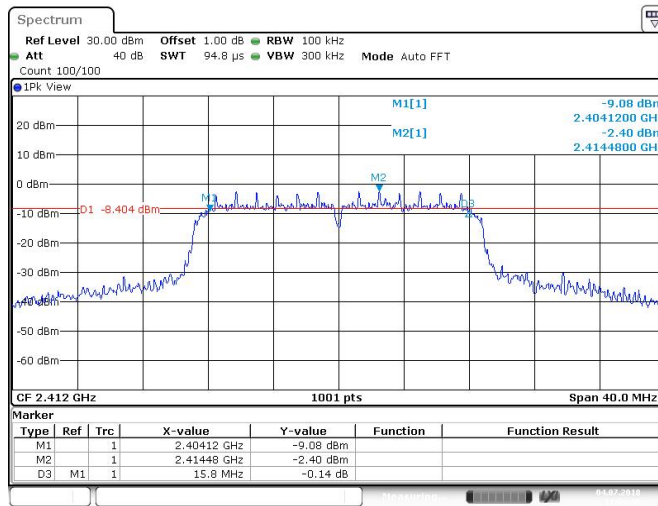

2412MHz

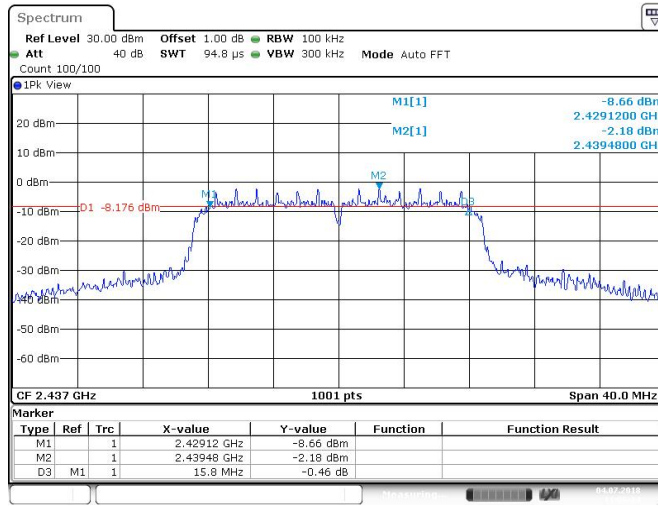

2437MHz

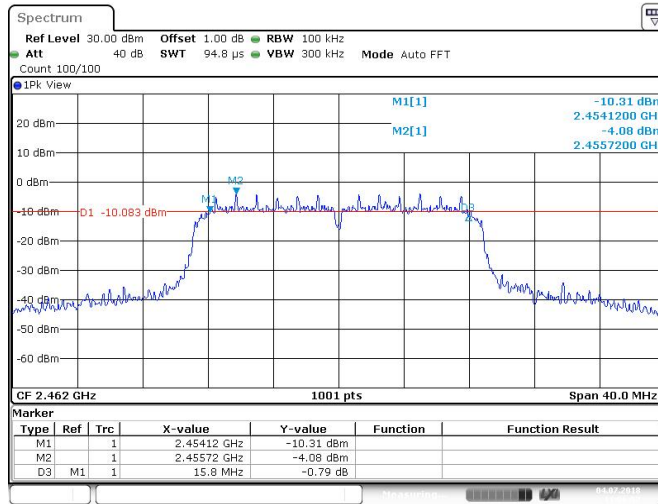

Date: 4 JUL 2018 11:06:57

2462MHz

## 9.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

### Limit

Limit [dBm]

≤8

### Test result

#### 802.11b

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-11.8	Pass
Middle channel 2437MHz	-12.3	Pass
Bottom channel 2462MHz	-13.18	Pass


#### 802.11g

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-17.94	Pass
Middle channel 2437MHz	-17.61	Pass
Bottom channel 2462MHz	-18.97	Pass

#### 802.11nHT20

Frequency MHz	Power spectral density dBm	Result
Top channel 2412MHz	-17.94	Pass
Middle channel 2437MHz	-17.61	Pass
Bottom channel 2462MHz	-19.48	Pass

802.11b

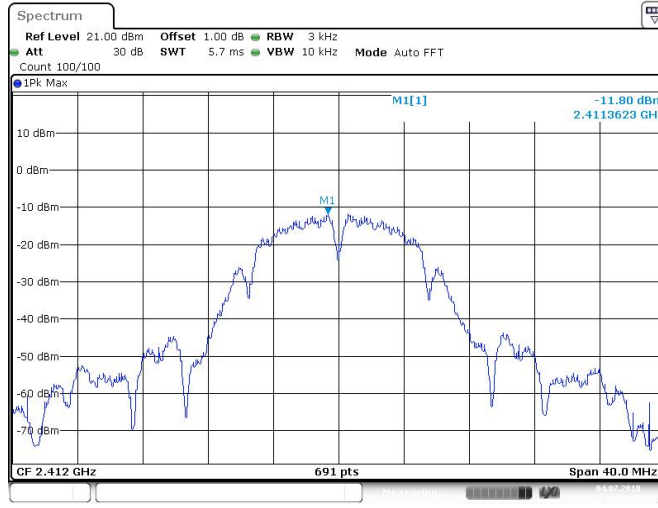

Date: 4 JUL 2018 10:50:35


2412MHz



Date: 4 JUL 2018 10:52:07

2437MHz




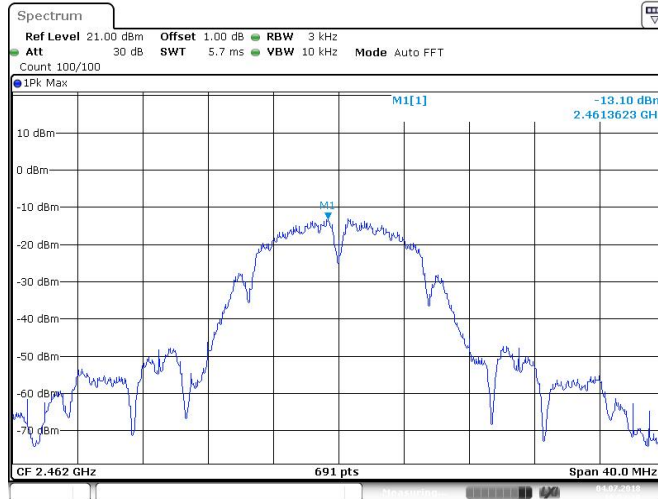

Date: 4 JUL 2018 10:53:28


2462MHz

802.11g

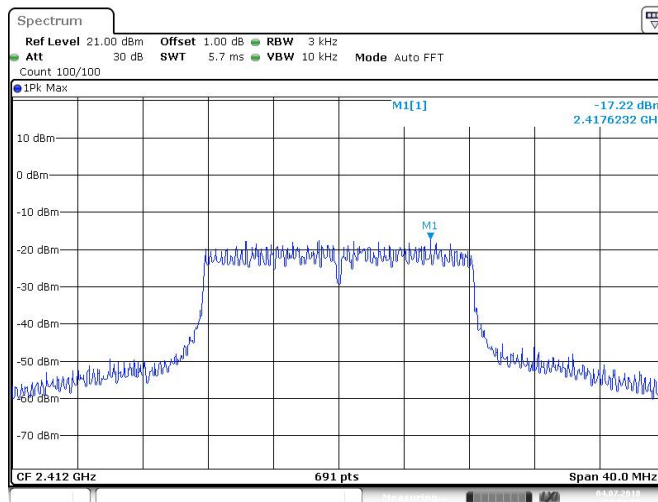


Date: 4 JUL 2018 10:58:53

2412MHz

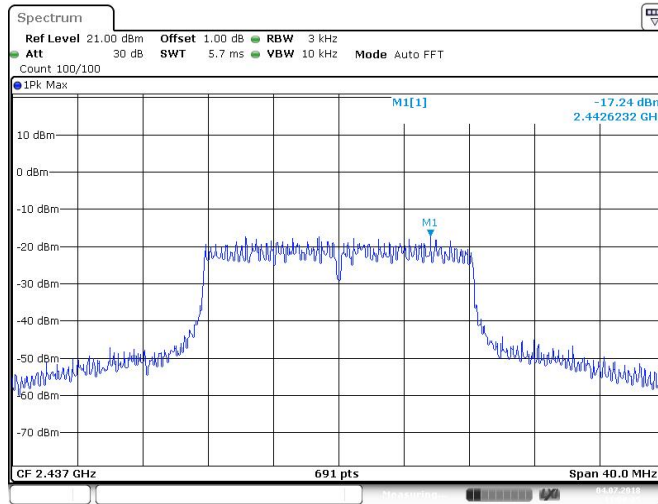

Date: 4.JUL.2018 11:00:25

2437MHz

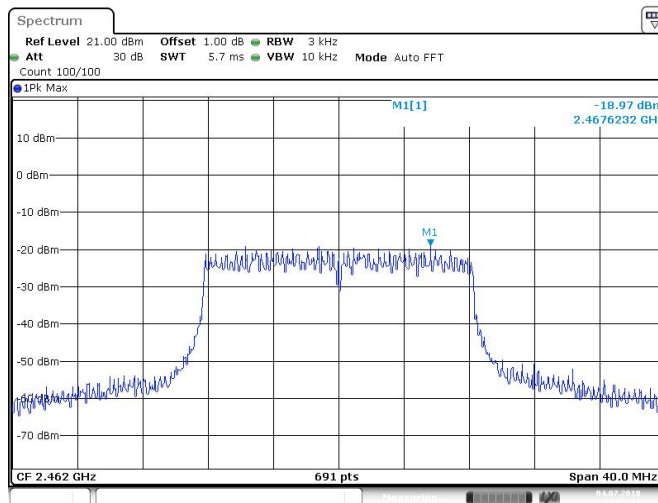


Date: 4.JUL.2018 11:02:11


2462MHz




802.11nHT20

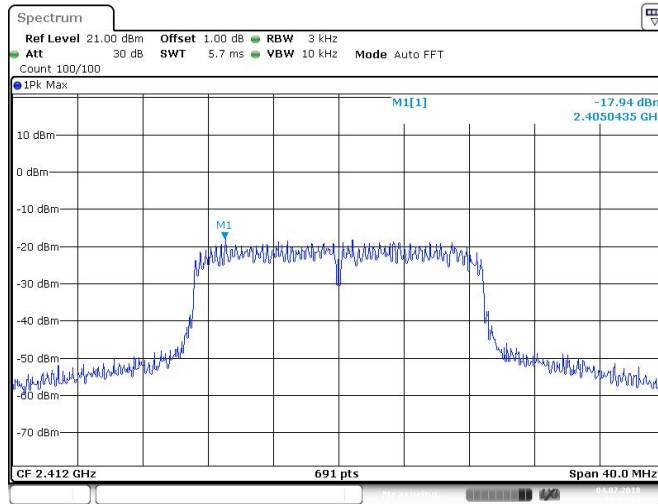

2412MHz

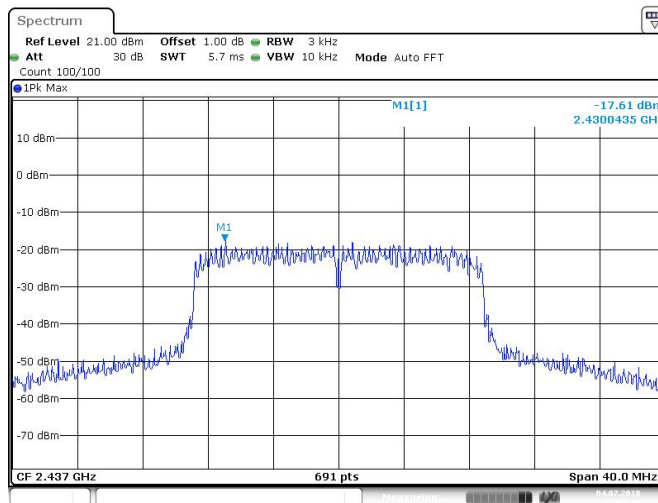

2437MHz

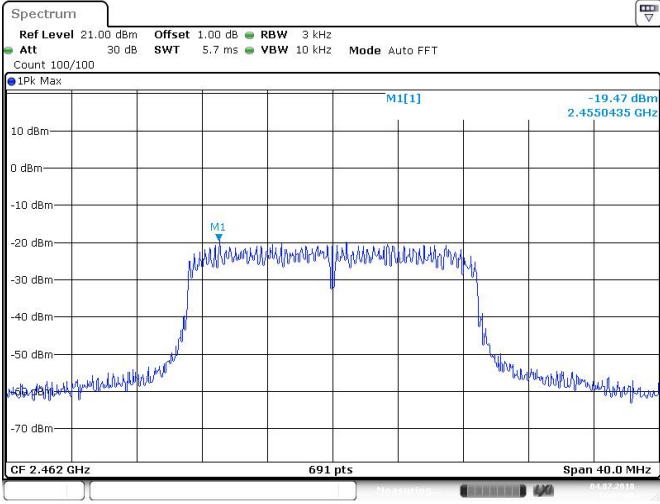

2462MHz



## 9.5 Spurious RF conducted emissions

### Test Method


1. Establish a reference level by using the following procedure:
  - a. Set RBW=100 kHz. VBW≥3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
  - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
  - a. Set the center frequency and span to encompass frequency range to be measured.
  - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

### Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

## Spurious RF conducted emissions

802.11b

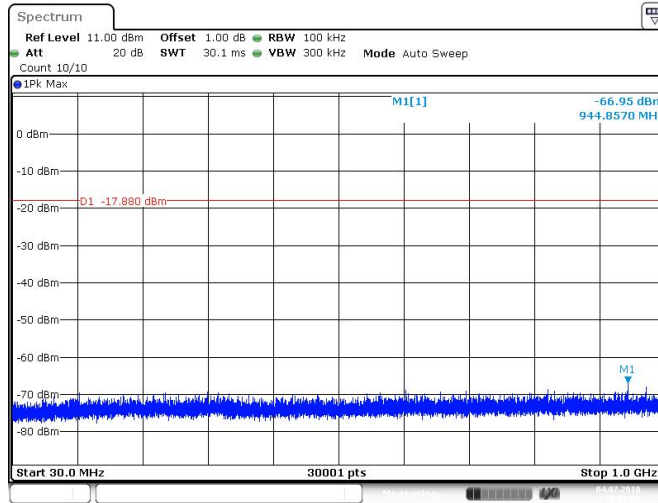


Date: 4 JUL 2018 10:51:00

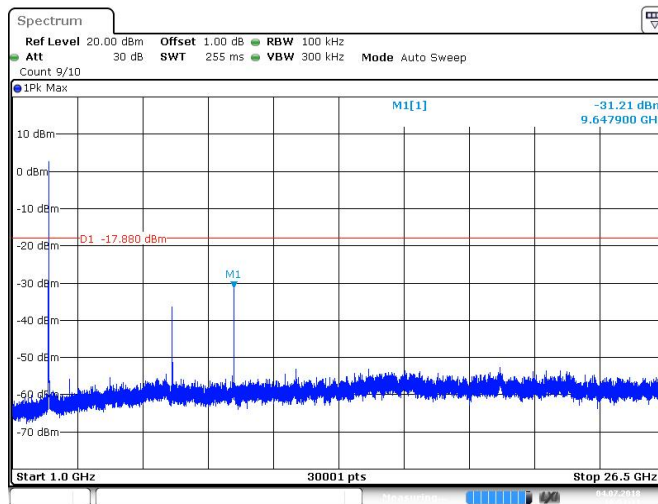


Date: 4 JUL 2018 10:51:11

2412MHz

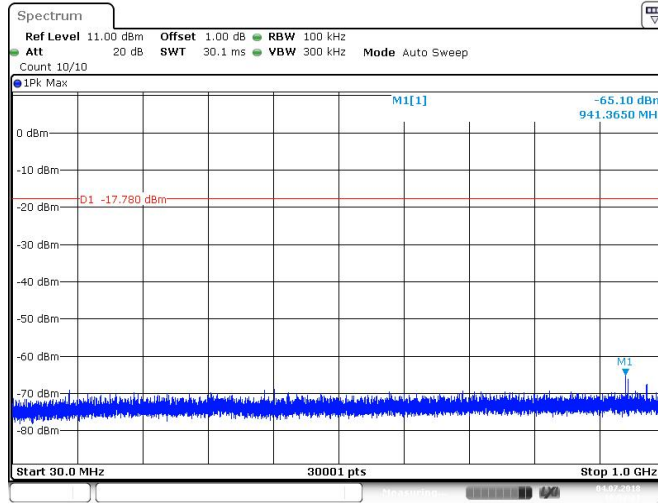


Date: 4 JUL 2018 10:52:21

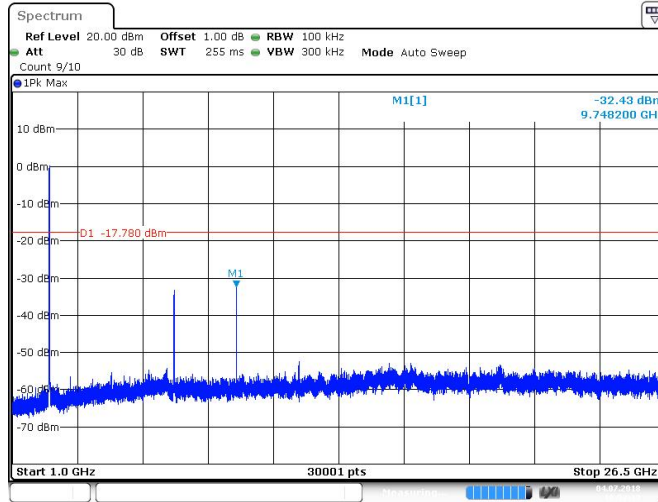


Date: 4 JUL 2018 10:52:33

2437MHz

### Spurious RF conducted emissions

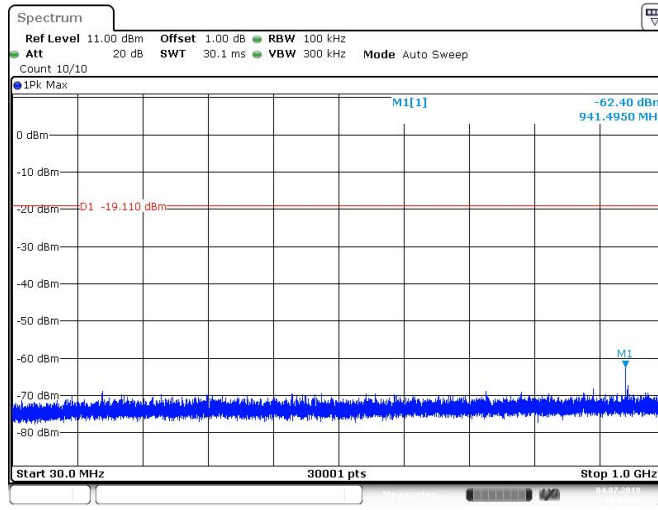

Date: 4 JUL 2018 10:53:52


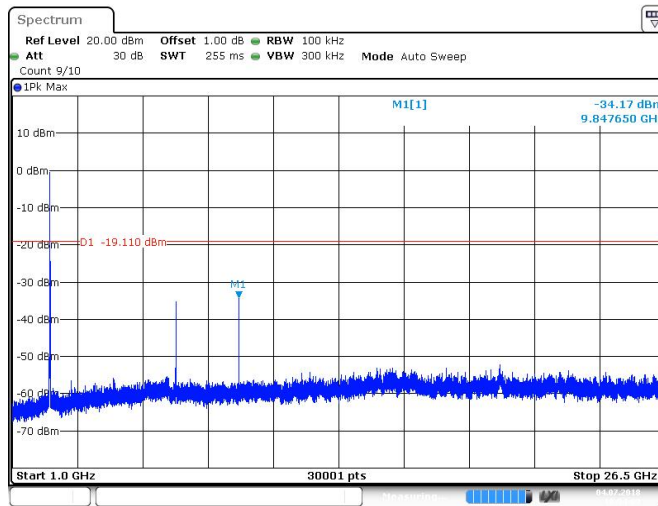


Date: 4 JUL 2018 10:54:04

2462MHz




802.11g

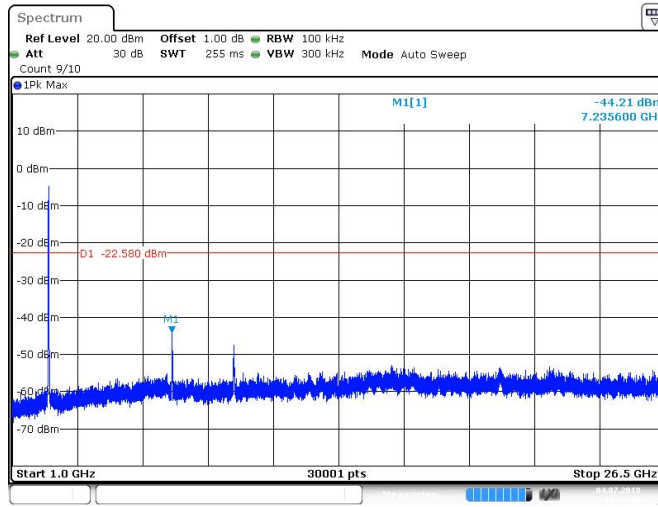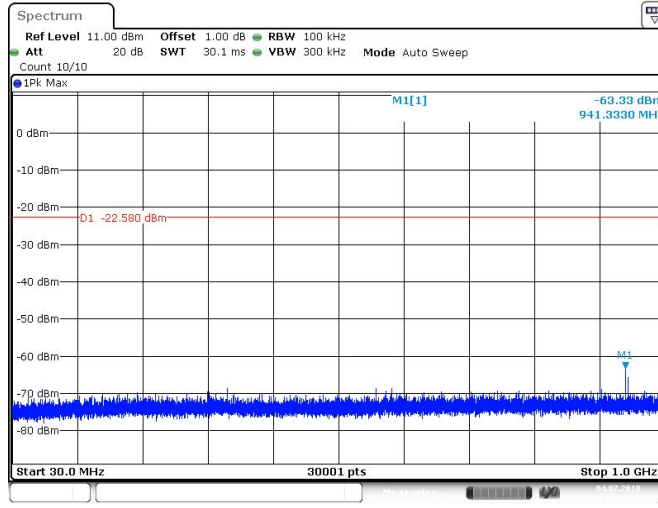


2412MHz

### Spurious RF conducted emissions

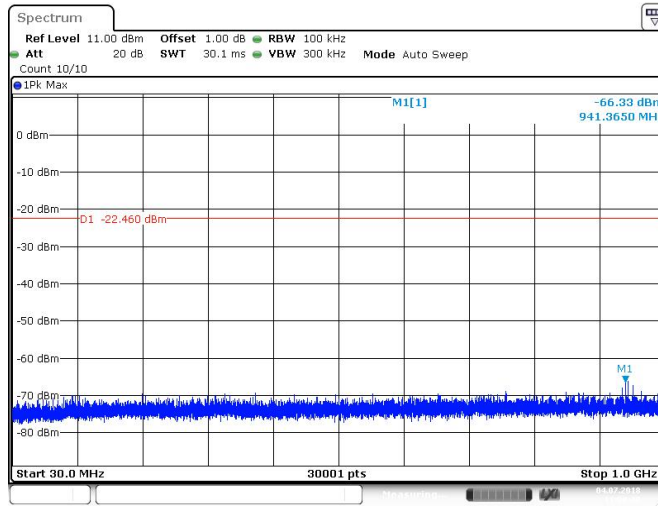


Date: 4 JUL 2018 11:00:40

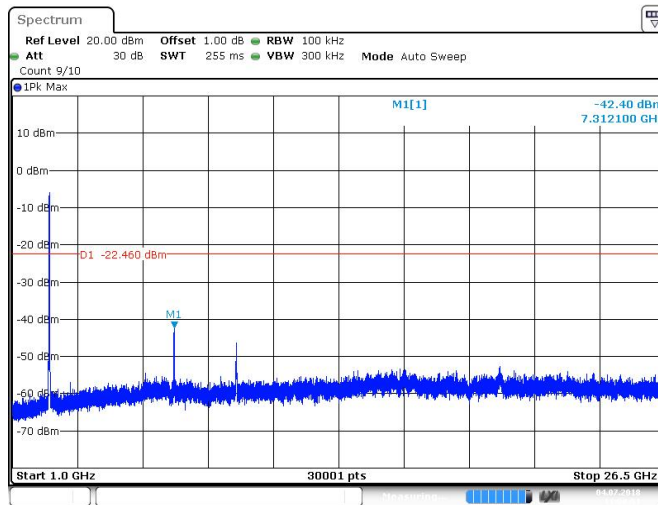


Date: 4 JUL 2018 11:00:51

2437MHz

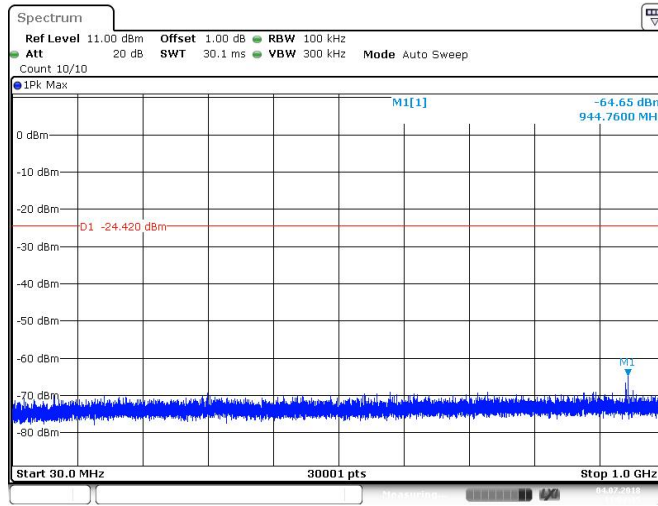

Date: 4 JUL 2018 11:02:36

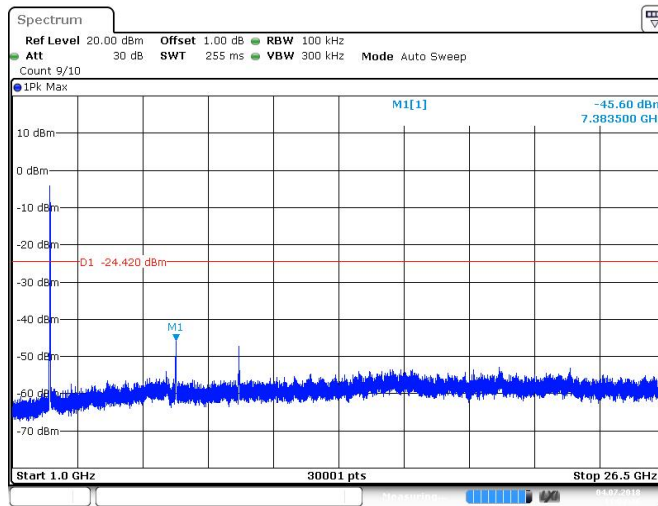


Date: 4 JUL 2018 11:02:47


2462MHz

## Spurious RF conducted emissions

802.11nHT20

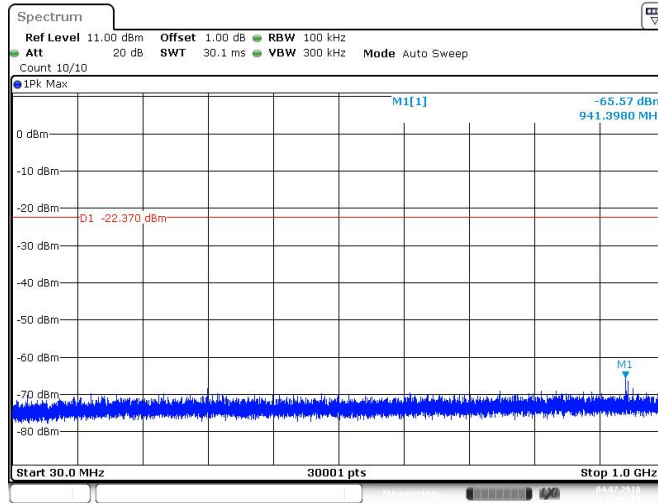


Date: 4 JUL 2018 11:04:24

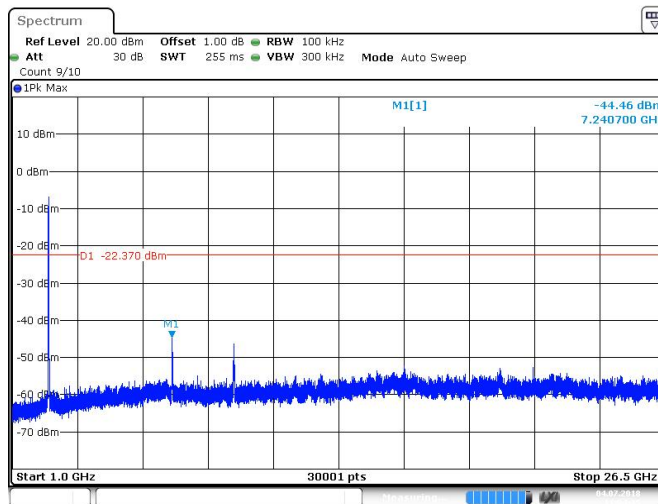


Date: 4 JUL 2018 11:04:36

2412MHz

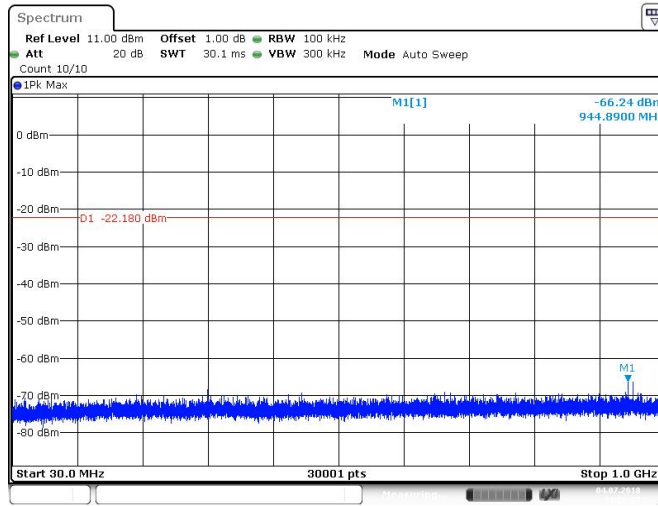


Date: 4 JUL 2018 11:06:02

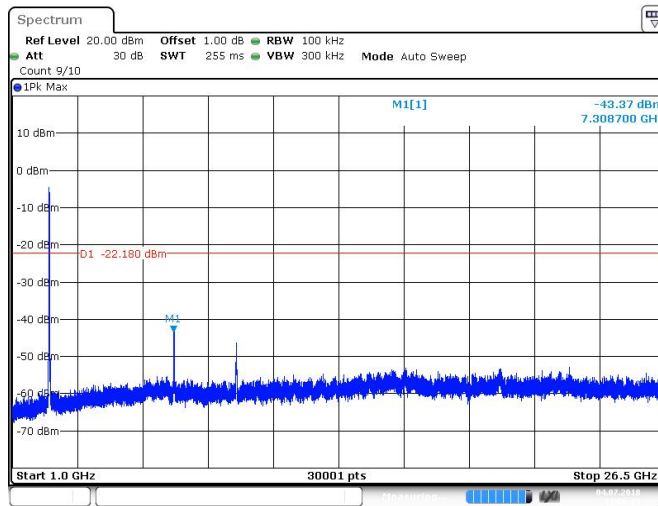


Date: 4 JUL 2018 11:06:14

2437MHz

### Spurious RF conducted emissions

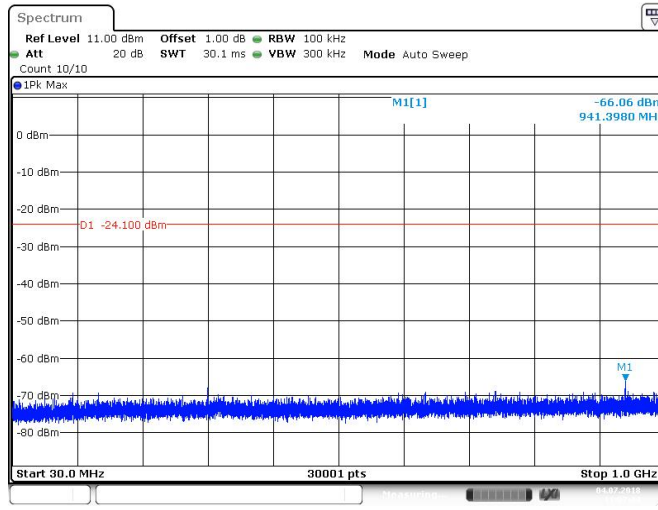

Date: 4 JUL 2018 11:07:44

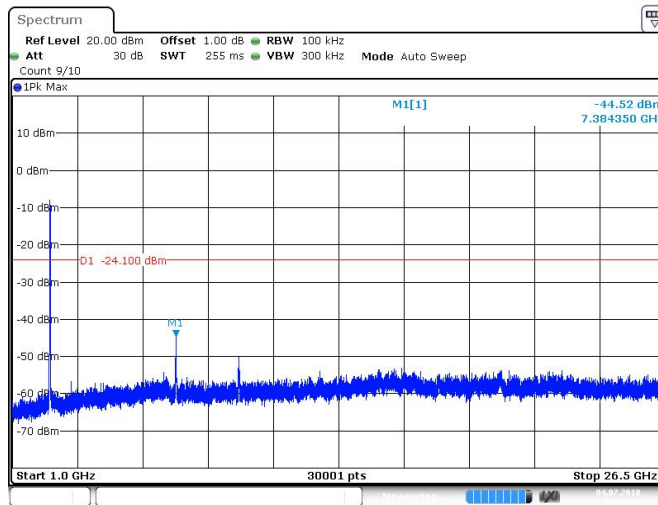

Date: 4 JUL 2018 11:07:56

2462MHz

## 9.6 Band edge

### Test Method


- 1 Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

### Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


### Test result

802.11b

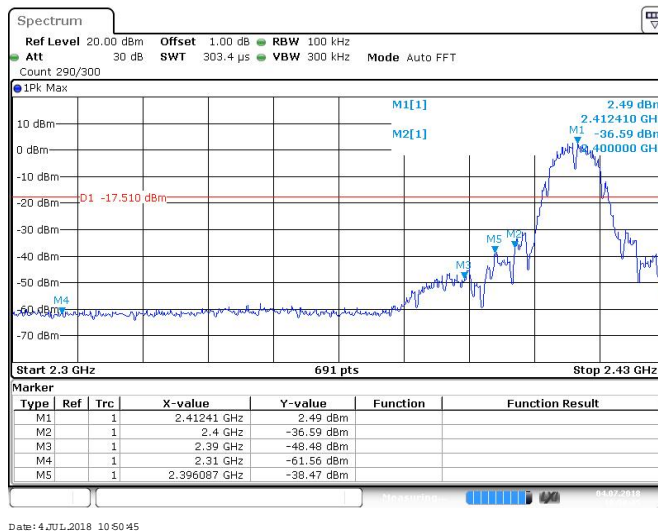


2412MHz

## Band edge

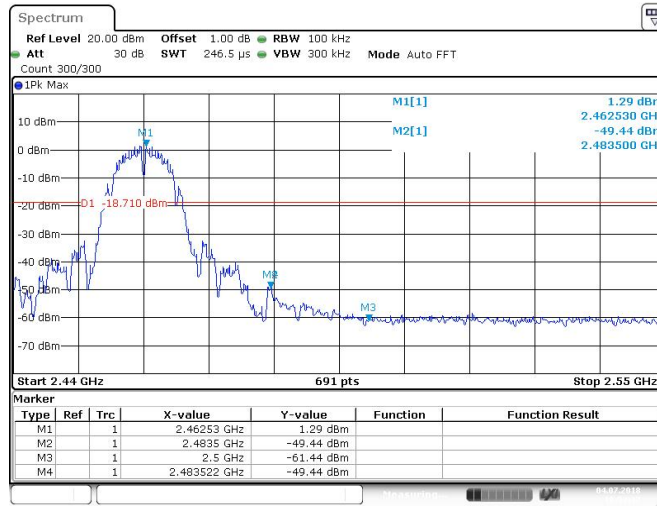

2462MHz


802.11g

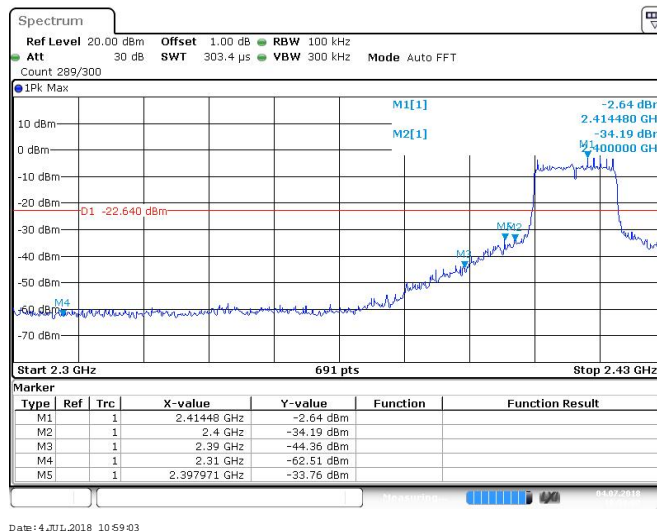

2412MHz



## Band edge

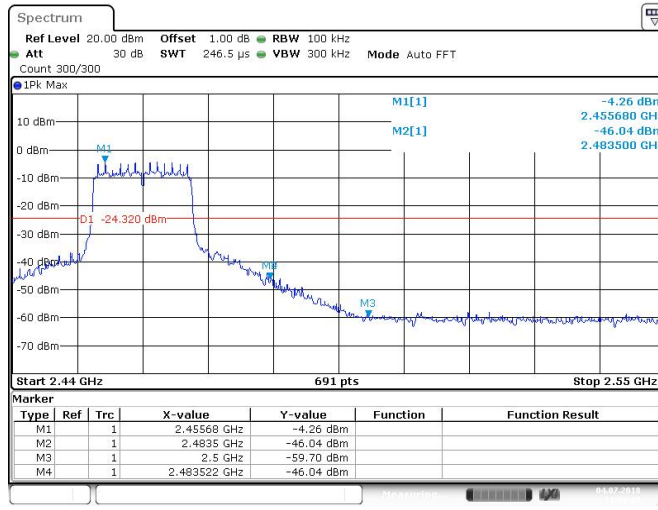

2462MHz


802.11nHT20



2412MHz



## Band edge

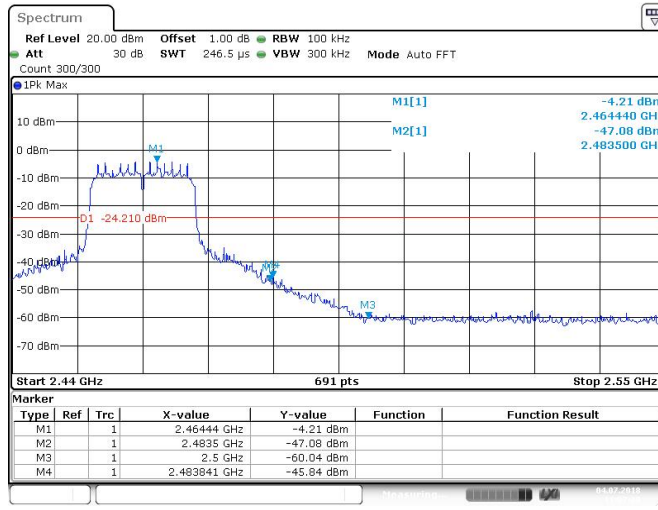

## 9.7 Spurious radiated emissions for transmitter

### Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

#### For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW  $\geq$  RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 KHz, VBW  $\geq$  RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

### Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK



**Spurious radiated emissions for transmitter**

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

**Transmitting spurious emission test result as below:**

802.11b

2412MHz (30MHz – 1GHz)(for X500)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
360.01	38.83	Horizontal	46.0	QP	Pass	-24.7
320.13*	32.79	Vertical	46.0	QP	Pass	-26.3

2412MHz (30MHz – 1GHz)(for D5)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
400.01*	42.63	Horizontal	46.0	QP	Pass	-24.7
877.78	37.08	Vertical	46.0	QP	Pass	-26.3

2412MHz (30MHz – 1GHz)(for X-503)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
207.03*	38.15	Horizontal	46.0	QP	Pass	-24.7
876.54	37.17	Vertical	46.0	QP	Pass	-26.3

2412MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
2384.00*	43.29	Horizontal	74.00	PK	Pass	-6.1
17784.27*	51.23	Vertical	74.00	PK	Pass	23.1

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss



2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
2437.62*	42.83	Horizontal	74.00	PK	Pass	-5.9
4873.69*	41.98	Vertical	74.00	PK	Pass	2.6

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result	Corr. (dB)
2460.5*	45.75	Horizontal	74.00	PK	Pass	-5.7
9847.96*	44.14	Vertical	74.00	PK	Pass	9.3

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

802.11g  
2412MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
		Horizontal		QP	Pass
		Vertical		QP	Pass

2412MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
2377.87*	42.92	Horizontal	74.00	PK	Pass	-6.1
7730.93*	50.71	Vertical	74.00	PK	Pass	22.9

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
2438.93 *	36.12	Horizontal	74.00	PK	Pass	-5.8
17758.59*	51.01	Vertical	74.00	PK	Pass	23.0

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss



2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
2640.00*	37.14	Horizontal	74.00	PK	Pass	-4.7
17600.15*	50.52	Vertical	74.00	PK	Pass	22.4

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

802.11nHT20

2412MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2412MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
2381.30*	39.19	Horizontal	74.00	PK	Pass	-6.1
17739.84*	50.54	Vertical	74.00	PK	Pass	23.0

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss





2437MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2437MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
2443.25*	37.37	Horizontal	74.00	PK	Pass	-5.8
17897.81*	50.67	Vertical	74.00	PK	Pass	23.0

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

2462MHz (30MHz – 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result
--	--	Horizontal	--	QP	Pass
--	--	Vertical	--	QP	Pass

2462MHz (Above 1GHz)

Frequency MHz	Emission Level dBuV/m	Polarization	Limit dBµV/m	Detector	Result	Corr. (dB)
1007.93*	45.42	Horizontal	74.00	PK	Pass	-14.1
179.70.46*	46.86	Vertical	74.00	PK	Pass	22.9

Remark:

- (1) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- (2) “\*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
- (4) Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

## 10 Test Equipment List

### List of Test Instruments

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2019-7-6
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2019-7-6
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2019-7-6
Horn Antenna	Rohde & Schwarz	HF907	102294	2019-7-6
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2019-7-6
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2019-7-6
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2019-7-6
Horn Antenna	Rohde & Schwarz	HF907	102294	2019-7-6
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2019-7-6
LISN	Rohde & Schwarz	ENV4200	100249	2019-7-6
LISN	Rohde & Schwarz	ENV216	100326	2019-7-6
ISN	Rohde & Schwarz	ENY81	100177	2019-7-6
ISN	Rohde & Schwarz	ENY81-CA6	101664	2019-7-6
High Voltage Probe	Rohde & Schwarz	TK9420(VT94 20)	9420-58	2019-7-6
RF Current Probe	Rohde & Schwarz	EZ-17	100816	2019-7-6

#### C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- Power spectral density\*
- Spurious RF conducted emissions
- Band edge



## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.98dB; Vertical: 5.06dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.95dB; Vertical: 4.94dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.14dB; Vertical: 5.12dB;
Uncertainty for Conducted RF test with TS 8997	Power level test involved: 2.06dB Frequency test involved: $1.16 \times 10^{-7}$