

# **FCC Test Report**

Report No.: AGC06662200201FE05

FCC ID : 2ANTCZR08DP

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Wireless NVR

BRAND NAME : N/A

ZR08DP, PQ08W, SQ08W, NQ08W, RQ08W, PQ04W, SQ04W,

NQ04W, RQ04W, ZR08DS, ZR08DN, ZR08DR, ZR08DL,

89000T, 89001T, 89023T, 89025T, 99000T, 99001T,

99023T, 99025T

**APPLICANT** : Ansjer Electronics Co., Ltd

**DATE OF ISSUE** : Apr. 10, 2020

STANDARD(S)

**MODEL NAME** 

TEST PROCEDURE(S) : FCC Part 15.247

REPORT VERSION : V1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

## **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Page 2 of 98

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Apr. 10, 2020	Valid	Initial Release






## **TABLE OF CONTENTS**


1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. IEEE 802.11N MODULATION SCHEME	
2.4. RELATED SUBMITTAL(S) / GRANT (S)	7
2.5. TEST METHODOLOGY	7
2.6. SPECIAL ACCESSORIES	
2.7. EQUIPMENT MODIFICATIONS	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	
8. 6 DB BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	24
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	24
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	43







10.1 MEASUREMENT PROCEDURE	43
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	43
10.3 MEASUREMENT EQUIPMENT USED	43
10.4 LIMITS AND MEASUREMENT RESULT	43
11. RADIATED EMISSION	57
11.1. MEASUREMENT PROCEDURE	57
11.2. TEST SETUP	58
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	59
12. BAND EDGE EMISSION	65
12.1. MEASUREMENT PROCEDURE	65
12.2. TEST SET-UP	65
12.3. TEST RESULT	66
13. FCC LINE CONDUCTED EMISSION TEST	
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST	82
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	82
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	83
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	83
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	84
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	86
ADDENDIV D. DUOTOCDADUS OF SUT	G <sup>O</sup>





## 1. VERIFICATION OF CONFORMITY

Applicant	Ansjer Electronics Co., Ltd
Address	301# , 1st Building, No.21 Yongtian Road, Xiangzhou 519000, Zhuhai, Guangdong, China
Manufacturer	Ansjer Electronics Co., Ltd
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China
Factory	Ansjer Electronics Co., Ltd
Address	No.5 WanLi Road, SanXiang, ZhongShan 528463, Guangdong, China
Product Designation	Wireless NVR
Brand Name	N/A
Test Model	ZR08DP
Series Model	PQ08W, SQ08W, NQ08W, RQ08W, PQ04W, SQ04W, NQ04W, RQ04W, ZR08DS, ZR08DN, ZR08DR, ZR08DL, 89000T, 89001T, 89023T, 89025T, 99000T, 99001T, 99023T, 99025T
Model Difference	All the same except for the model name
Date of test	Feb. 26, 2020 to Apr. 06, 2020
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

## We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Imim Hurang	
	Donjon Huang Project Engineer	Apr. 06, 2020
Reviewed By	Max Zhang	
30 20	Max Zhang Reviewer	Apr. 10, 2020
Approved By	Formerles	
PCC 7	Forrest Lei Authorized Officer	Apr. 10, 2020



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 6 of 98

## 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless NVR". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz~2.462GHz			
Output Power	IEEE 802.11b: 13.70dBm; IEEE 802.11g:12.12dBm; IEEE 802.11n(20): 14.90dBm; IEEE 802.11n(40): 14.95dBm			
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)			
Number of channels	11			
Hardware Version	V01.1Q00.02.T			
Software Version	V1.6.4			
Antenna Designation	2(802.11b/g/n20/n40 all used two antennas,but 802.11b/g support SISO and 802.11n20/n40 support MIMO)			
Number of transmit chain	2			
Antenna Gain	5dBi			
Power Supply	DC 12V by adapter			

## TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
CC C	<sub>®</sub> 1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
30 20	4	2427 MHZ
	5	2432 MHZ
2400~2483.5MHZ	6	2437 MHZ
-C	7	2442 MHZ
	8	2447 MHZ
- 0	9	2452 MHZ
20	10	2457 MHZ
	11	2462 MHZ



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com Service Hotline:400 089 2118



Page 7 of 98

## 2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCI	BPS	NDI	BPS	rate(I	ata Mbps) nsGl
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1 💿	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	_ 1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation  Number of spatial streams		
NSS			
R	Code rate		
NBPSC	Number of coded bits per single carrier		
NCBPS	Number of coded bits per symbol		
NDBPS	Number of data bits per symbol		
GI	Guard interval		

## 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANTCZR08DP** filing to comply with the FCC Part 15 requirements.

## 2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.


## 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,





## 3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB





Page 9 of 98

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating

## Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

## Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. The test software is the SecureCRTPortable\_V7.0.0 which can set the EUT into the individual test modes.




Page 10 of 98

## 5. SYSTEM TEST CONFIGURATION

## **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



## **EQUIPMENT USED IN EUT SYSTEM**

ltem	Equipment	Model No.	ID or Specification	Remark
1	Wireless NVR	ZR08DP	2ANTCZR08DP	EUT
2	TV displayer	S22E200B	N/A	AE
3	Adapter	VZ-0122000U	DC12V/2000mA	AE
4	Mouse	M315	N/A	AE
5	USB disk	U16	N/A	AE

## **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 11 of 98

## 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd			
Location	-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, uhai Street, Bao'an District, Shenzhen, Guangdong, China			
Designation Number	CN1259			
FCC Test Firm Registration Number	975832			
A2LA Cert. No.	5054.02			
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA			

## TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 10, 2019	Jun. 09, 2020
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
Test software	R&S	ES-K1(Ver.V1. 7.1)	N/A	N/A	N/A

## **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Feb. 25, 2020	Feb. 24, 2021
Attenuator	ZHINAN	E-002	N/A	Aug. 26, 2019	Aug. 25, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 09, 2019	Sep. 08, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	FARA	EZ_EMC (Ver.RA-03A)	N/A	N/A	N/A



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 12 of 98

## 7. OUTPUT POWER


## 7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) AVERAGE POWER SETUP







Page 13 of 98

## 7.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	OUTPUT POWER	,G		©	
TEST MODE	802.11b with data rate 1		.0	CO.	

Frequency (GHz)	Average Power Chain 1 (dBm)	Average Power Chain 2 (dBm)	Average Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	13.70	13.52	N/A	30	Pass
2.437	13.47	12.98	N/A	30	Pass
2.462	13.41	12.96	N/A	30	Pass

TEST ITEM	OUTPUT POWER	700	-C
TEST MODE	802.11g with data rate 6		DO. 100

Frequency (GHz)	Average Power Chain 1 (dBm)	Average Power Chain 2 (dBm)	Average Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.06	12.12	N/A	30	Pass
2.437	11.88	11.65	N/A	30	Pass
2.462	11.51	11.47	N/A	30	Pass

TEST ITEM	OUTPUT POWER		10	< G(
TEST MODE	802.11n 20 with data rate 6.5	a.C	8	

Frequency (GHz)	Average Power Chain 1 (dBm)	Average Power Chain 2 (dBm)	Average Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	12.15	11.62	14.90	30	Pass
2.437	11.67	11.53	14.61	30	Pass
2.462	11.64	11.48	14.57	30	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 14 of 98

TEST ITEM	OUTPUT POWER
TEST MODE	802.11n 40 with data rate 13.5

Frequency (GHz)	Average Power Chain 1 (dBm)	Average Power Chain 2 (dBm)	Average Power Total (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	12.41	11.42	14.95	30	Pass
2.437	11.89	11.36	14.64	30	Pass
2.452	11.20	11.19	14.21	30	Pass



Page 15 of 98


## 8. 6 DB BANDWIDTH

## **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

## 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

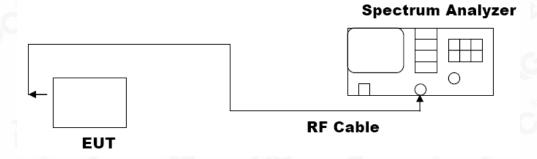





## 8.3. LIMITS AND MEASUREMENT RESULTS

TEST ITEM	6DB BANDWIDTH	
TEST MODE	802.11b with data rate 11	

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Applicable Limits		
	Test Data	a (MHz)	Criteria
>500KHZ	Low Channel	9.01	PASS
	Middle Channel	8.09	PASS
	High Channel	9.04	PASS

TEST ITEM	6DB BANDWIDTH	0		10
TEST MODE	802.11g with data rate 54	100	c.C	8

LIMITS AND MEASUREMENT RESULT			
A P I I . I ! . ! ! .	Applicable Limits		
Applicable Limits	Test Data (MHz)		Criteria
	Low Channel	16.38	PASS
>500KHZ	Middle Channel	16.40	PASS
0	High Channel	16.36	PASS


TEST ITEM	6DB BANDWIDTH		100	~ GC
TEST MODE	802.11n 20 with data rate 65	-6	@	

LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Applicable Limits			
	Test Dat	a (MHz)	Criteria	
8	Low Channel	17.56	PASS	
>500KHZ	Middle Channel	17.59	PASS	
	High Channel	17.57	PASS	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,





TEST ITEM	6DB BANDWIDTH
TEST MODE	802.11n 40 with data rate 135

LIMITS AND MEASUREMENT RESULT			
Applicable Limits		Applicable Limits	
	Test Dat	a (MHz)	Criteria
	Low Channel	36.29	PASS
>500KHZ	Middle Channel	36.33	PASS
	High Channel	36.31	PASS



## 802.11b TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



**802.11g TEST RESULT**TEST PLOT OF BANDWIDTH FOR LOW CHANNEL






Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

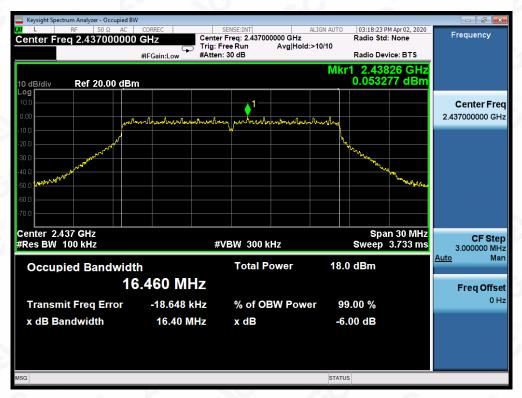

## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

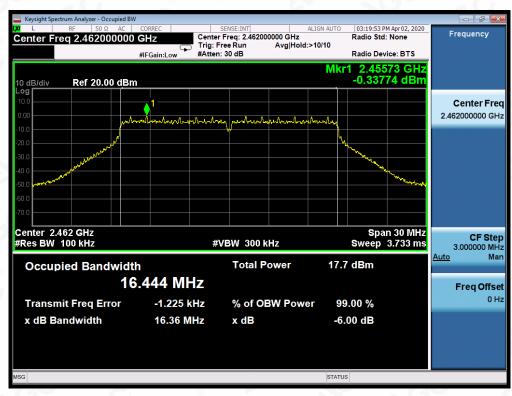




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# 802.11n (20) TEST RESULT TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

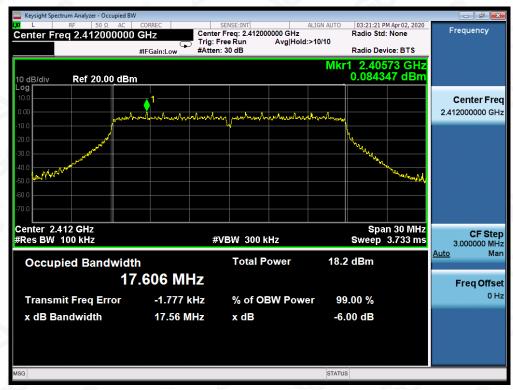

## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL






Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118





## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

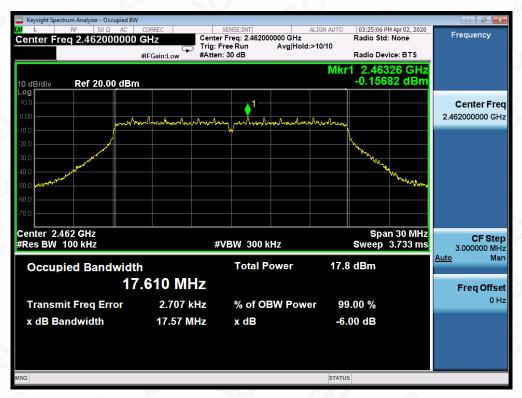

802.11n (40) TEST RESULT
TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



## TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

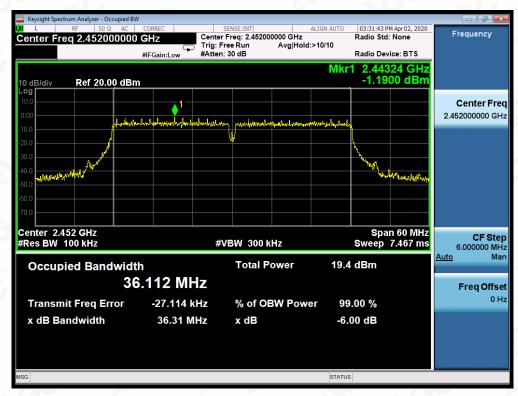



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Page 24 of 98

## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

## 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.


#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT			
A	Measurement Result		
Applicable Limits	Test Data	Criteria	
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -30dBc than the limit Specified on the BOTTOM Channel	PASS	
power that is produce by the intentional radiator shall be at least 30 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.  In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -30dBc than the limit Specified on the TOP Channel	PASS	







## TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11b FOR MODULATION IN LOW CHANNEL

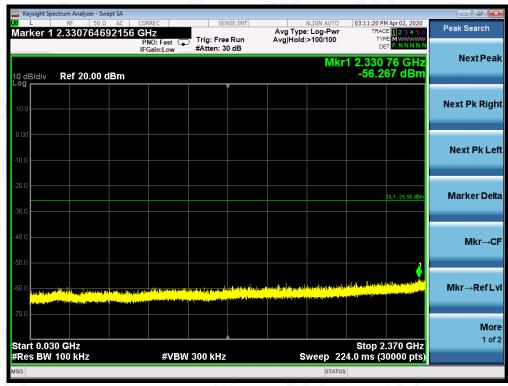



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118






TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN MIDDLE CHANNEL

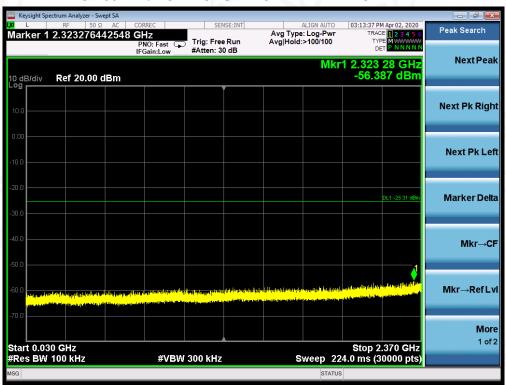




Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



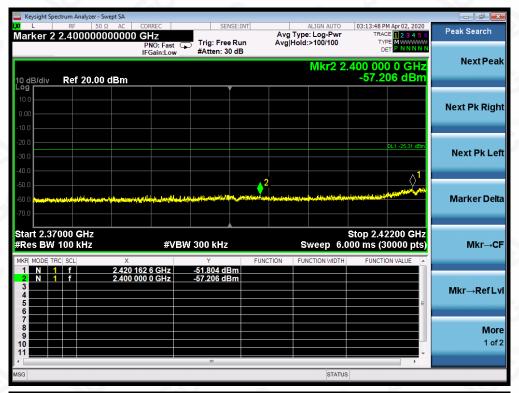

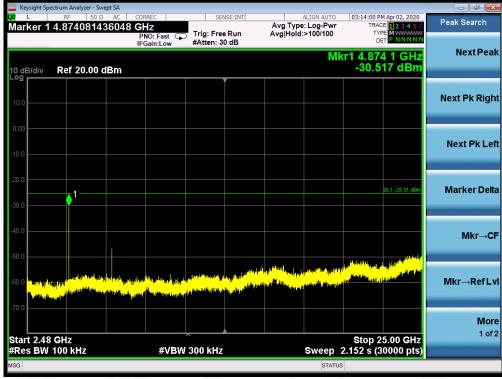





Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118



## TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11b FOR MODULATION IN HIGH CHANNEL

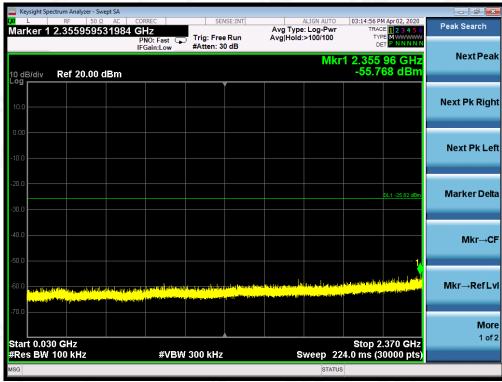

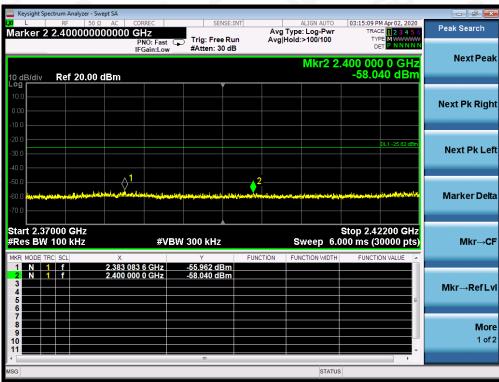



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118





TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11g FOR MODULATION IN LOW CHANNEL

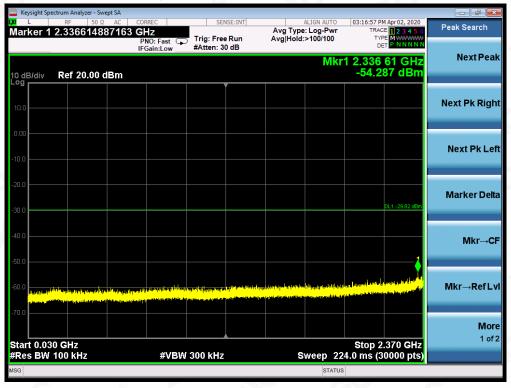




Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China






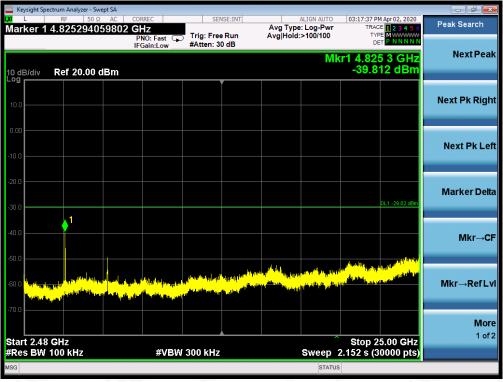

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118





# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11g FOR MODULATION IN MIDDLE CHANNEL



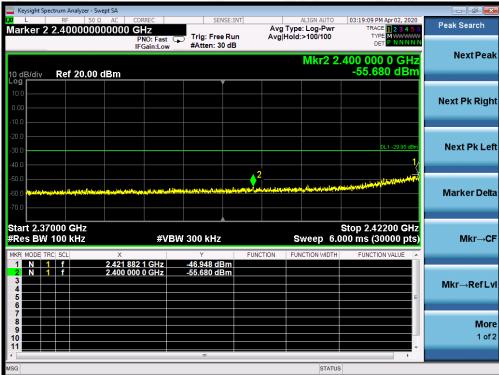




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE
OF 802.11g FOR MODULATION IN HIGH CHANNEL

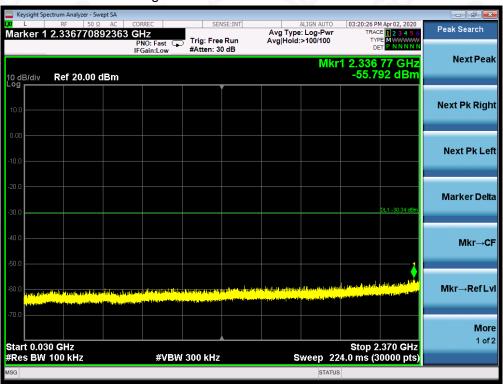



Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China









Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118





## TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF 802.11n20 FOR MODULATION IN LOW CHANNEL

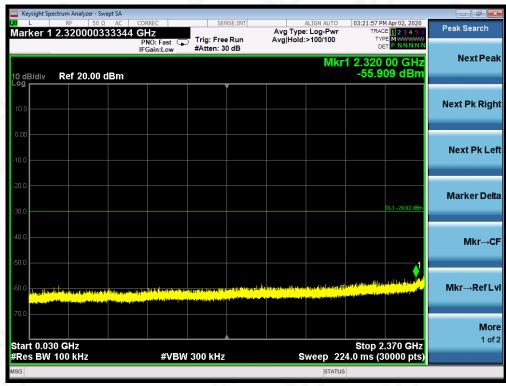





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118






TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN MIDDLE CHANNEL






Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



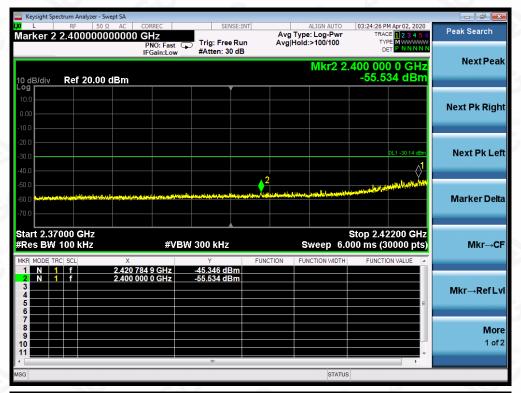


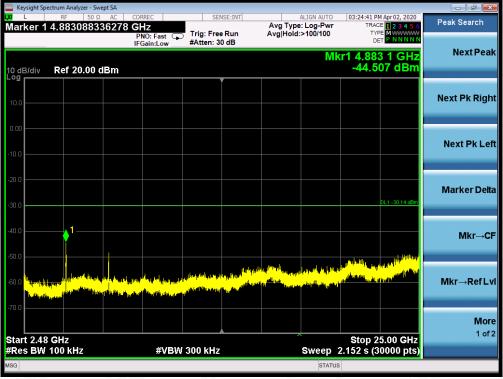


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n20 FOR MODULATION IN HIGH CHANNEL

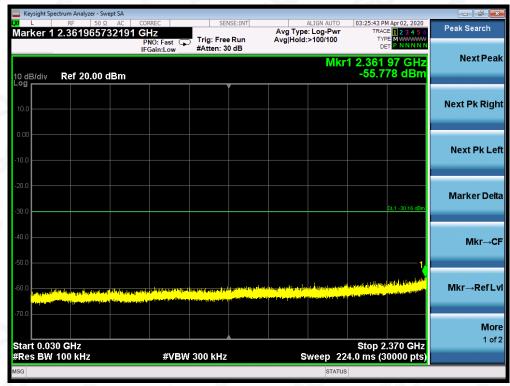

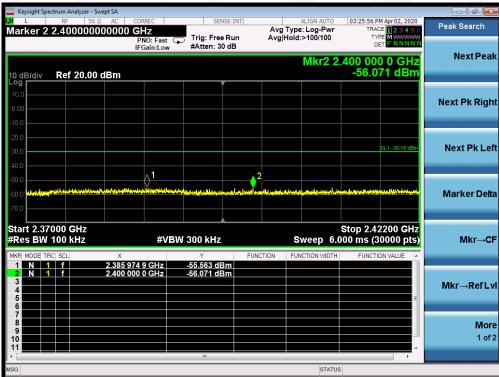




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE
OF 802.11n40 FOR MODULATION IN LOW CHANNEL

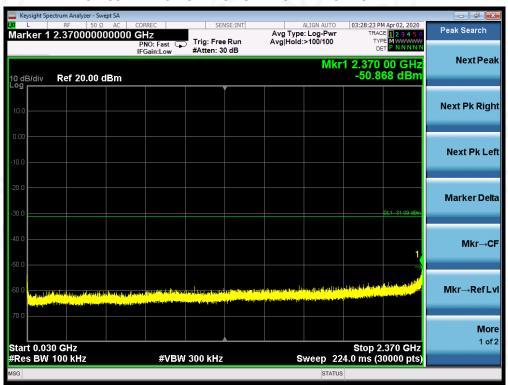



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China








Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n40 FOR MODULATION IN MIDDLE CHANNEL

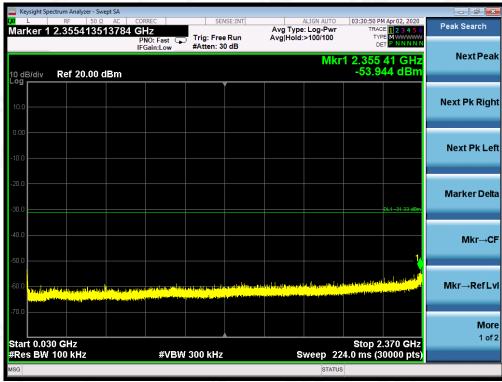





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





TEST PLOT OF OUT OF BAND EMISSIONS THE WORST CASE OF 802.11n40 FOR MODULATION IN HIGH CHANNEL






Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



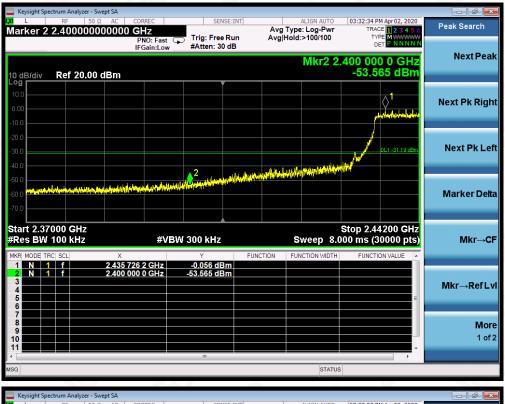



Note: Two transmit chains had been tested, the chain 1 was the worst case and record in the test report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC06662200201FE05

Page 43 of 98

## 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 10.3 was used in this testing.

## 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

## **10.3 MEASUREMENT EQUIPMENT USED**

Refer To Section 6.

#### **10.4 LIMITS AND MEASUREMENT RESULT**

TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11b with data rate 1

Channel No.	Power density Chain 1 (dBm/20kHz)	Power density Chain 2 (dBm/20kHz)	Power density Total (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	0.633	0.303	N/A	8	Pass
Middle Channel	0.645	1.048	N/A	8	Pass
High Channel	-0.877	-0.440	N/A	8	Pass

TEST ITEM	POWER SPECTRAL DENSITY	10	C
TEST MODE	802.11g with data rate 6	8	

Channel No.	Power density Chain 1 (dBm/20kHz)	Power density Chain 2 (dBm/20kHz)	Power density Total (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	-4.819	-5.226	N/A	8	Pass
Middle Channel	-5.306	-5.083	N/A	8	Pass
High Channel	-5.671	-5.621	N/A	8	Pass



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11n 20 with data rate 6.5

Channel No.	Power density Chain 1 (dBm/20kHz)	Power density Chain 2 (dBm/20kHz)	Power density Total (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	-5.213	-5.450	-2.320	8	Pass
Middle Channel	-5.670	-5.444	-2.545	8	Pass
High Channel	-5.529	-5.804	-2.654	8	Pass

TEST ITEM	POWER SPECTRAL DENSITY
TEST MODE	802.11n 40 with data rate 13.5

Channel No.	Power density Chain 1 (dBm/20kHz)	Power density Chain 2 (dBm/20kHz)	Power density Total (dBm/20kHz)	Limit (dBm/3kHz)	Result
Low Channel	-6.054	-6.004	-3.019	8	Pass
Middle Channel	-5.890	-5.920	-2.895	8	Pass
High Channel	-6.407	-6.244	-3.314	8	Pass



# 802.11b TEST RESULT(Chain 1) TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL



#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL



802.11b TEST RESULT(Chain 2)
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL






Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# 802.11g TEST RESULT(Chain 1) TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

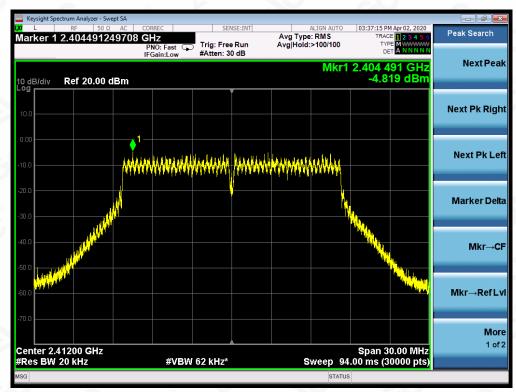

## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

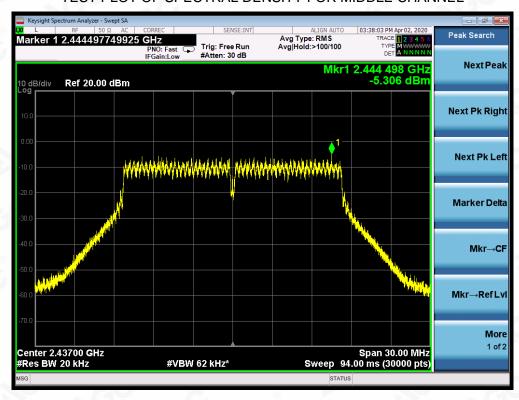




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

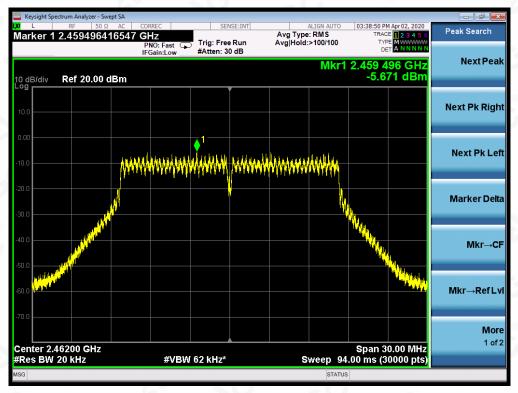

802.11g TEST RESULT(Chain 2)
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

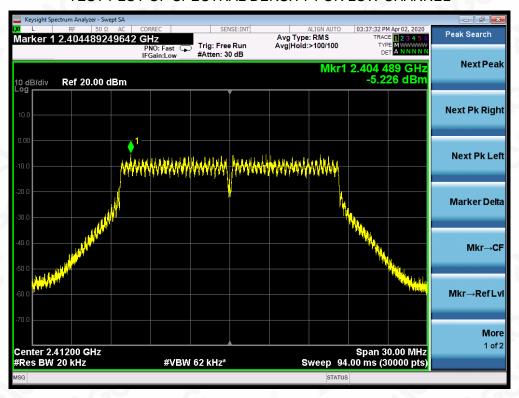




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

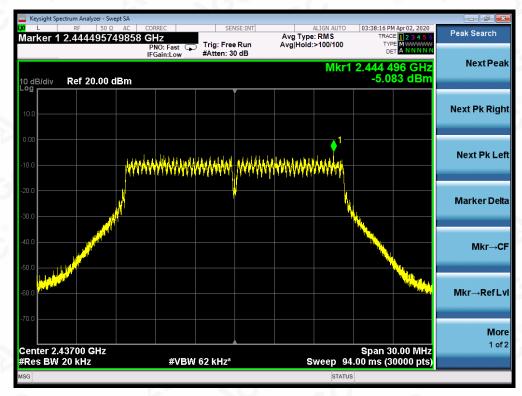

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

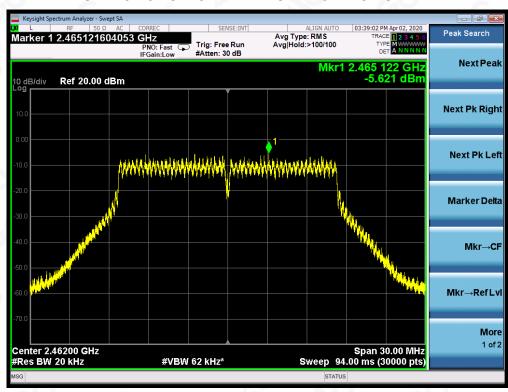




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# 802.11n 20 TEST RESULT(Chain 1) TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

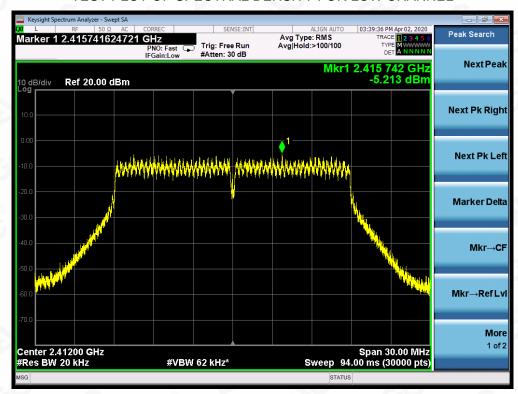

## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

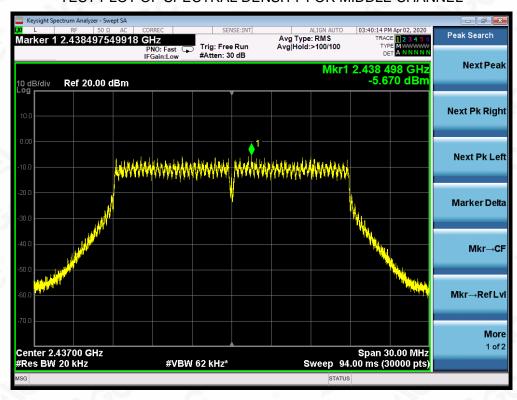




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

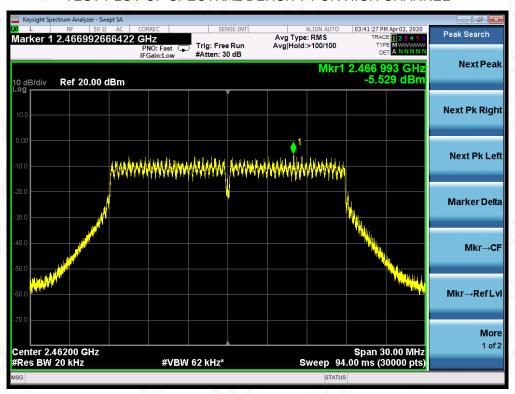

802.11n 20 TEST RESULT(Chain 2)
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

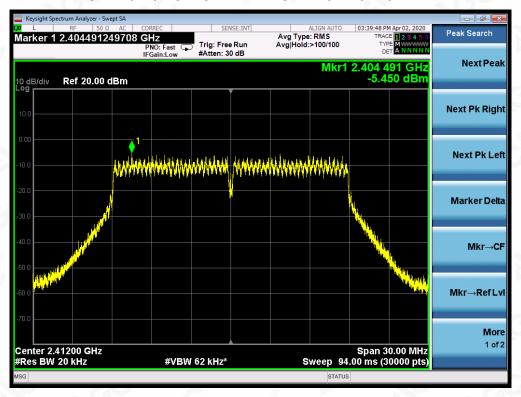




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

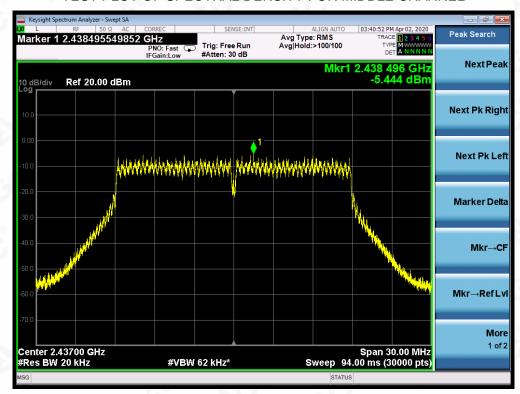

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

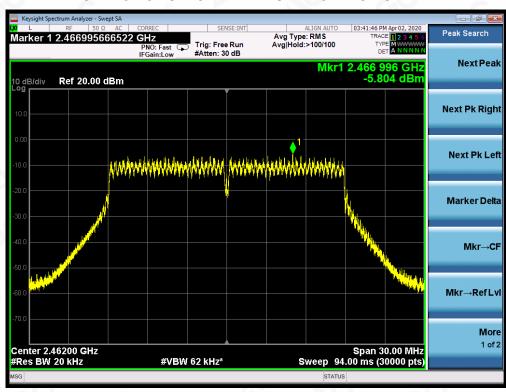




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



# 802.11n 40 TEST RESULT(Chain 1) TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

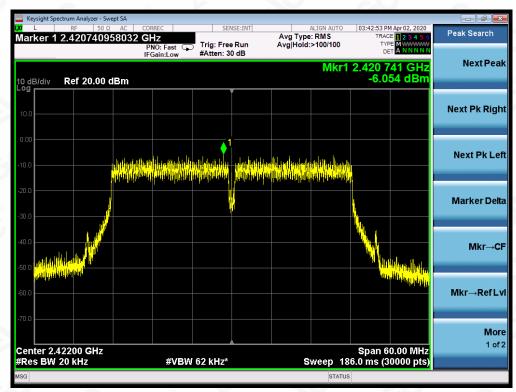

## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

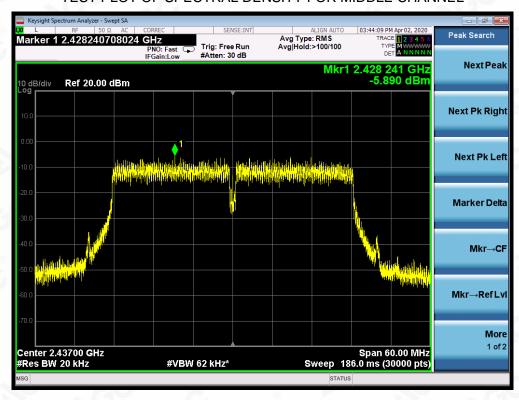




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

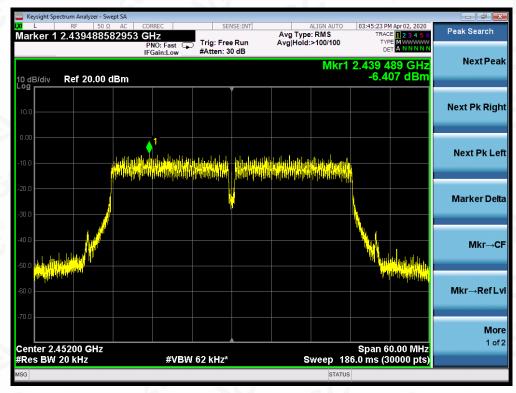

802.11n 40 TEST RESULT(Chain 2)
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

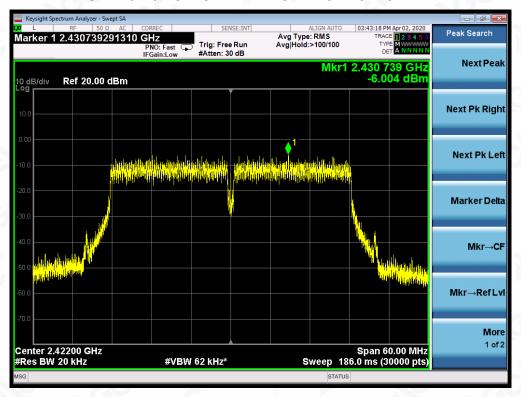




Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



## TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

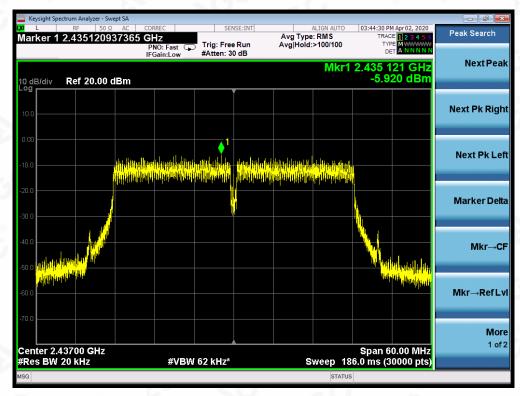

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

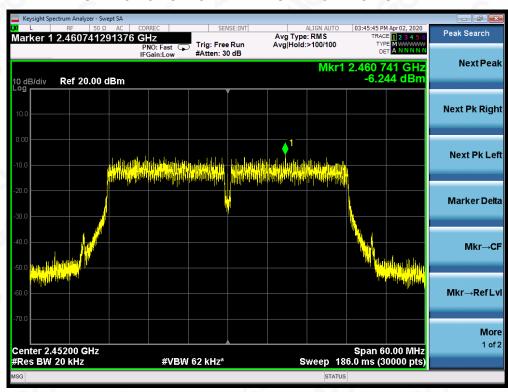



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC06662200201FE05

Page 57 of 98

#### 11. RADIATED EMISSION

#### 11.1. MEASUREMENT PROCEDURE


- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.






#### 11.2. TEST SETUP


## Radiated Emission Test-Setup Frequency Below 30MHz

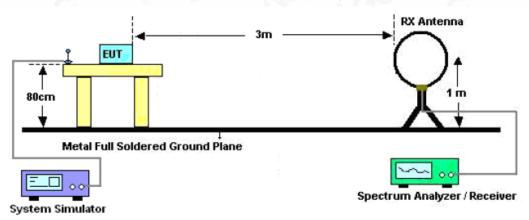

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

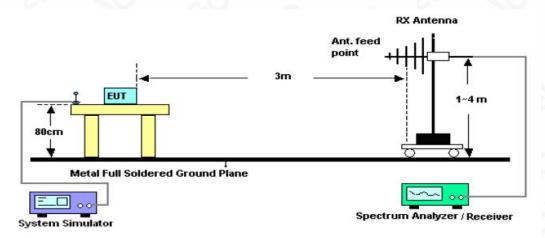

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

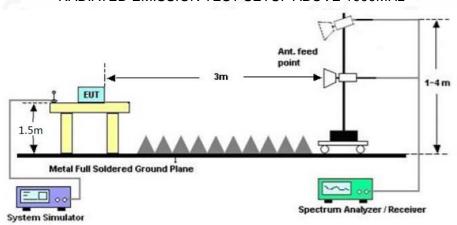



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC06662200201FE05

Page 59 of 98

## 11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.


## 11.4. TEST RESULT

#### **RADIATED EMISSION BELOW 30MHZ**

No emission found between lowest internal used/generated frequencies to 30MHz.




Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118





**RADIATED EMISSION BELOW 1GHZ** 

EUT	Wireless NVR	Model Name	ZR08DP
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

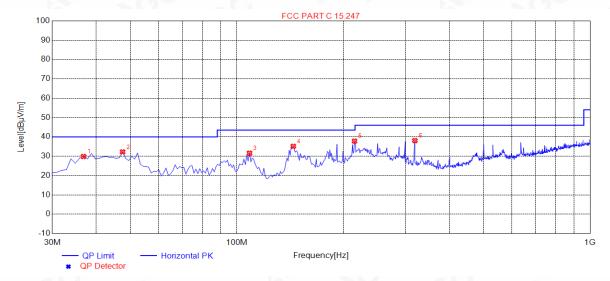


NO.	Fre q.	Level	Factor	Limit	Margin	Height	Angle	Polarity
NO.	[MHz]	[dBuV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polatity
1	36.7900	29.85	14.16	40.00	10.15	150	224	Horizontal
2	47.4600	32.23	14.74	40.00	7.77	150	215	Horizontal
3	108.5700	31.59	12.27	43.50	11.91	150	217	Horizontal
4	144.4600	35.13	14.88	43.50	8.37	150	168	Horizontal
5	215.2700	37.82	12.98	43.50	5.68	150	336	Horizontal
6	319.0600	38.11	16.65	46.00	7.89	150	316	Horizontal

**RESULT: PASS** 




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, 





EUT	Wireless NVR	Model Name	ZR08DP
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

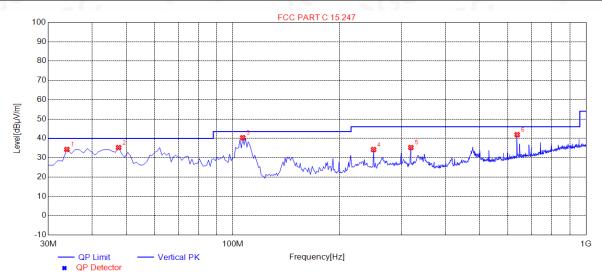

	4								
1	NO.	Fre q.	Level	Factor	Limit	Margin	Height	Angle	Polarity
١	NO.	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dB]	[cm]	[°]	Folality
	1	33.8800	34.27	13.53	40.00	5.73	150	291	Vertical
	2	47.4600	35.24	14.74	40.00	4.76	150	2	Vertical
4	3	106.6300	40.36	12.07	43.50	3.14	150	349	Vertical
	4	250.1900	34.21	14.69	46.00	11.79	150	19	Vertical
	5	319.0600	35.28	16.65	46.00	10.72	150	39	Vertical
	6	638.1900	41.90	24.93	46.00	4.10	150	178	Vertical

## **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118