



Test Report No.: W7L-P23030025RF06



FCC TEST REPORT (PART 27)



Applicant:	Thundercomm Technology Co., Ltd
Address:	No. 107, Middle Datagu Road, Xiantao Street, Yubei District, Chongqing, China, 401122

Manufacturer or Supplier:	Thundercomm Technology Co., Ltd
Address:	No. 107, Middle Datagu Road, Xiantao Street, Yubei District, Chongqing, China, 401122
Product:	TurboX CM2290-NA
Brand Name:	TURBOX
Model Name:	TurboX CM2290-NA
FCC ID:	2AOHHCM2290NA
Date of tests:	Apr. 07, 2023 ~ Apr. 26, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27 ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Apr. 26, 2023	 Date: Apr. 26, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	7
1.2 TEST SITE AND INSTRUMENTS	8
2 GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 CONFIGURATION OF SYSTEM UNDER TEST	13
2.3 DESCRIPTION OF SUPPORT UNITS	14
2.4 TEST ITEM AND TEST CONFIGURATION	14
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	21
3 TEST TYPES AND RESULTS	22
3.1 OUTPUT POWER MEASUREMENT	22
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	22
3.1.2 TEST PROCEDURES	22
3.1.3 TEST SETUP	23
3.1.4 TEST RESULTS	24
3.2 FREQUENCY STABILITY MEASUREMENT	55
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	55
3.2.2 TEST PROCEDURE	55
3.2.3 TEST SETUP	55
3.2.4 TEST RESULTS	56
3.3 OCCUPIED BANDWIDTH MEASUREMENT	57
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	57
3.3.2 TEST SETUP	57
3.3.3 TEST PROCEDURES	57
3.3.4 TEST RESULTS	58
3.4 BAND EDGE MEASUREMENT	59
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	59
3.4.2 TEST SETUP	60
3.4.3 TEST PROCEDURES	61
3.4.4 TEST RESULTS	62
3.5 CONDUCTED SPURIOUS EMISSIONS	63
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	63
3.5.2 TEST PROCEDURE	63
3.5.3 TEST SETUP	63
3.5.4 TEST RESULTS	64
3.6 RADIATED EMISSION MEASUREMENT	65
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	65
3.6.2 TEST PROCEDURES	65
3.6.3 DEVIATION FROM TEST STANDARD	65
3.6.4 TEST SETUP	66
3.6.5 TEST RESULTS	68
3.7 PEAK TO AVERAGE RATIO	114
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	114
3.7.2 TEST SETUP	114
3.7.3 TEST PROCEDURES	114
3.7.4 TEST RESULTS	115
4 INFORMATION ON THE TESTING LABORATORIES	116



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..117

6 APPENDIX118

LTE BAND7118

LTE BAND12 (INCLUDING B17)..... 170

LTE BAND13 222

LTE BAND 71 249



Test Report No.: W7L-P23030025RF06

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23030025RF06	Original release	Apr. 26, 2023

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
§2.1046	Conducted Output Power	Compliance	A
§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 17) (Band 71)	Compliance	A
§27.50(h)(2)	Equivalent Isotropically Radiated Power (Band 7)	Compliance	A
§2.1055 §27.54	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6)	Conducted Band Edge Measurements (Band 7) (Band 12) (Band 13) (Band 17) (Band 71)	Compliance	A
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6)	Conducted Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17) (Band 71)	Compliance	A
§2.1053 §27.53(c)(2)(4) §27.53(f) §27.53(g) §27.53(m)(4)(6)	Radiated Spurious Emissions (Band 7) (Band 12) (Band 13) (Band 17) (Band 71)	Compliance	A
NA	Peak to average ratio	Compliance	A



Test Report No.: W7L-P23030025RF06

***Test Lab Information Reference**

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park,
Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01

The FCC Site Registration No. : 525120; Designation No. : CN1171;

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Test Report No.: W7L-P23030025RF06

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 17,23	Feb. 16,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.14,22	May.13,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,22	Sep.02,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,23	Mar. 04,24
Horn Antenna	ETS-LINDGREN	3117	00168692	Mar. 05,23	Mar. 04,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40- K-SG/QMS-003 61	15433	Sep.04, 22	Sep.03, 23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 12,22	May. 11,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 12,22	May. 11,23
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.12,22	May.11,23
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 12,22	Aug. 11,23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	TurboX CM2290-NA	
BRAND NAME	TURBOX	
MODEL NAME	TurboX CM2290-NA	
NOMINAL VOLTAGE	EUT 4.0V	
MODULATION TECHNOLOGY	LTE	QPSK, 16QAM, 64QAM
FREQUENCY RANGE	LTE Band 7 Channel Bandwidth: 5MHz	2502.5MHz ~ 2567.5MHz
	LTE Band 7 Channel Bandwidth: 10MHz	2505MHz ~ 2565MHz
	LTE Band 7 Channel Bandwidth: 15MHz	2507.5MHz ~ 2562.5MHz
	LTE Band 7 Channel Bandwidth: 20MHz	2510MHz ~ 2560MHz
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709MHz ~ 711 MHz
	LTE Band 71 Channel Bandwidth: 5MHz	665.5MHz ~ 695.5MHz
	LTE Band 71 Channel Bandwidth: 10MHz	668MHz ~ 693MHz
	LTE Band 71 Channel Bandwidth: 15MHz	670.5MHz ~ 690.5MHz
LTE Band 71 Channel Bandwidth: 20MHz	673MHz ~ 688MHz	



Test Report No.: W7L-P23030025RF06

MAX. EIRP POWER	LTE Band 7 Channel Bandwidth: 5MHz	609.54mW
	LTE Band 7 Channel Bandwidth: 10MHz	606.74mW
	LTE Band 7 Channel Bandwidth: 15MHz	608.14mW
	LTE Band 7 Channel Bandwidth: 20MHz	612.35mW
	LTE Band 12 Channel Bandwidth: 1.4MHz	236.59mW
	LTE Band 12 Channel Bandwidth: 3MHz	236.59mW
	LTE Band 12 Channel Bandwidth: 5MHz	236.59mW
	LTE Band 12 Channel Bandwidth: 10MHz	237.68mW
	LTE Band 13 Channel Bandwidth: 5MHz	234.42mW
	LTE Band 13 Channel Bandwidth: 10MHz	236.59mW
	LTE Band 17 Channel Bandwidth: 5MHz	239.33mW
	LTE Band 17 Channel Bandwidth: 10MHz	240.44mW
	LTE Band 71 Channel Bandwidth: 5MHz	220.8mW
	LTE Band 71 Channel Bandwidth: 10MHz	220.8mW
	LTE Band 71 Channel Bandwidth: 15MHz	223.87mW
	LTE Band 71 Channel Bandwidth: 20MHz	224.91mW
EMISSION DESIGNATOR	LTE Band 7 Channel Bandwidth: 5MHz	QPSK: 4M49G7D
		16QAM: 4M50W7D
		64QAM: 4M49W7D
	LTE Band 7 Channel Bandwidth: 10MHz	QPSK: 8M97G7D
		16QAM: 8M96W7D
		64QAM: 8M95W7D
	LTE Band 7 Channel Bandwidth: 15MHz	QPSK: 13M5G7D
		16QAM: 13M4W7D
		64QAM: 13M4W7D

EMISSION DESIGNATOR	LTE Band 7 Channel Bandwidth: 20MHz	QPSK: 17M9G7D
		16QAM: 17M9W7D
		64QAM: 17M9W7D
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M10W7D
		64QAM: 1M09W7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 2M70G7D
		16QAM: 2M70W7D
		64QAM: 2M70W7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 4M49G7D
		16QAM: 4M49W7D
		64QAM: 4M50W7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 8M97G7D
		16QAM: 8M96W7D
		64QAM: 8M96W7D
	LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 4M50G7D
		16QAM: 4M51W7D
		64QAM: 4M50W7D
	LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 8M94G7D
		16QAM: 8M94W7D
		64QAM: 8M93W7D
	LTE Band 71 Channel Bandwidth: 5MHz	QPSK: 4M49G7D
		16QAM: 4M50W7D
		64QAM: 4M49W7D
LTE Band 71 Channel Bandwidth: 10MHz	QPSK: 8M98G7D	
	16QAM: 8M98W7D	
	64QAM: 8M98W7D	
LTE Band 71 Channel Bandwidth: 15MHz	QPSK: 13M4G7D	
	16QAM: 13M4W7D	
	64QAM: 13M4W7D	
LTE Band 71	QPSK: 17M9G7D	



BUREAU
VERITAS

Test Report No.: W7L-P23030025RF06

	Channel Bandwidth: 20MHz	16QAM: 17M9W7D
		64QAM: 17M9W7D
ANTENNA TYPE	Flex Antenna with 4.8dBi gain for LTE7 Flex Antenna with 2.5dBi gain for LTE12 Flex Antenna with 2.5dBi gain for LTE13 Flex Antenna with 2.5dBi gain for LTE17/ LTE71	
HW VERSION	V06	
SW VERSION	FlatBuild_Turbox-CM2290_cm2290_la1.0.1.v.userdebug.20230301.1952	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-25-75 °C	
EXTREME VOLTAGE	3.4V - 4.35V	


NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

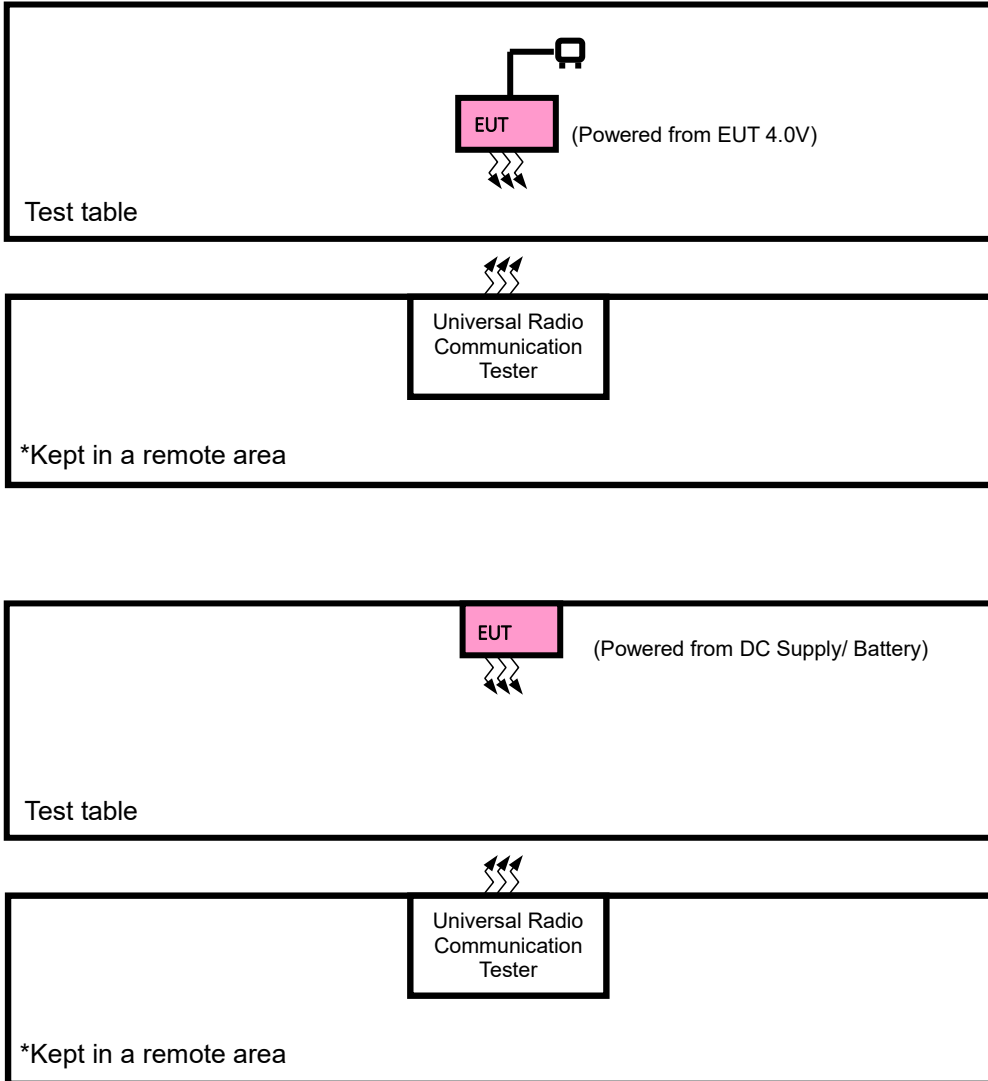



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + adapter with LTE link
B	EUT + DC source with LTE link

LTE BAND 7 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDT H	MODULATION	MODE		
A	EIRP	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0RB Offset		
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	20850 to 21350	20850, 21100, 21350	20MHz	QPSK	100 RB / 0 RB Offset		
A	OCCUPIED BANDWIDTH	20775 to 21425	20775, 21100, 21425	5MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset		
		20825 to 21375	20825, 21100, 21375	15MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset		
		20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset		
A	PEAK TO AVERAGE RATIO	20850 to 21350	20850, 21100, 21350	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
A	BAND EDGE	20775 to 21425	20775	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			21425	5MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20800 to 21400	20800	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			21400	10MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20825 to 21375	20825	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			21375	15MHz	QPSK, 16QAM, 64QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20850 to 21350	20850	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			21350	20MHz	QPSK, 16QAM, 64QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		A	CONDCUDED EMISSION	20775 to 21425	20775, 21100, 21425	5MHz	QPSK	1 RB / 0 RB Offset
				20800 to 21400	20800, 21100, 21400	10MHz	QPSK	1 RB / 0RB Offset
				20825 to 21375	20825, 21100, 21375	15MHz	QPSK	1 RB / 0 RB Offset
				20850 to 21350	20850, 21100, 21350	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	20775 to 21425	21100	5MHz	QPSK	1 RB / 0 RB Offset		
		20800 to 21400	20800, 21100, 21400	10MHz	QPSK	1 RB / 0 RB Offset		
		20825 to 21375	21100	15MHz	QPSK	1 RB / 0 RB Offset		
		20850 to 21350	21100	20MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	50 RB / 0 RB Offset		
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset		
A	PEAK TO AVERAGE RATIO	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			23173	1.4MHz	QPSK, 16QAM, 64QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
			23025 to 23165	23025	3MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset	
				23165	3MHz	QPSK, 16QAM, 64QAM	1 RB / 14 RB Offset 15 RB / 0 RB Offset	
		23035 to 23155	23035	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			23155	5MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		23060 to 23130	23060	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			23130	10MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		A	CONDCUDED EMISSION	23017 to 23173	23017, 23095 ,23173	1.4MHz	QPSK	1 RB / 0 RB Offset
				23025 to 23165	23025, 23095 ,23165	3MHz	QPSK	1 RB / 0 RB Offset
				23035 to 23155	23035, 23095 ,23155	5MHz	QPSK	1 RB / 0 RB Offset
				23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23017, 23095 ,23173	1.4MHz	QPSK	1 RB / 0 RB Offset		
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset		
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23030025RF06

LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 20175, 23255	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23230	23230	10MHz	QPSK,	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23205 to 23255	23205, 20175, 23255	5MHz	QPSK,16QAM,64QAM	25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM,64QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23230	23230	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
A	BAND EDGE	23205 to 23255	23205	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23255	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset
						50 RB / 0 RB Offset
A	CONDCUDED EMISSION	23205 to 23255	23205, 20175, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205, 20175, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23030025RF06

LTE BAND 17 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 17 are covered by LTE Band 12, Because it is a subset of LTE Band 12 with the same output power and supported bandwidths, So the conducted test data and RSE test data please refer to LTE Band 12

LTE BAND 71

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	133147 to 133447	133147, 133247, 133447	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		133172 to 133422	133172, 133272, 133422	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	133222 to 133372	133222, 133372	20MHz	QPSK	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	133147 to 133447	133147, 133247, 133447	5MHz	QPSK,16QAM,64QAM	25 RB / 0 RB Offset
		133172 to 133422	133172, 133272, 133422	10MHz	QPSK,16QAM,64QAM	50 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM,64QAM	75 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM,64QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	133222 to 133372	133222, 133322, 133372	20MHz	QPSK, 16QAM,64QAM	1 RB / 99 RB Offset 100 RB / 0 RB Offset
A	BAND EDGE	133147 to 133447	133147	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			133447	5MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		133172 to 133422	133172	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			133422	10MHz	QPSK,16QAM, 64QAM	1 RB / 49 RB Offset 50 RB / 0 RB Offset
		133197 to 133397	133197	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
			133397	15MHz	QPSK,16QAM, 64QAM	1 RB / 74 RB Offset 75 RB / 0 RB Offset
		133222 to 133372	133222	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset
			133372	20MHz	QPSK,16QAM, 64QAM	1 RB / 99 RB Offset



BUREAU
VERITAS

Test Report No.: W7L-P23030025RF06

						100 RB / 0 RB Offset
A	CONDCUDEDED EMISSION	133147 to 133447	133147, 133247, 133447	5MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		133172 to 133422	133172, 133272, 133422	10MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	133147 to 133447	133322	5MHz	QPSK	1 RB / 0 RB Offset
		133172 to 133422	133172, 133272, 133422	10MHz	QPSK	1 RB / 0 RB Offset
		133197 to 133397	133297	15MHz	QPSK	1 RB / 0 RB Offset
		133222 to 133372	133322	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23030025RF06

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	EUT 4.0V	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.4/4.0/4.35V By DC Source	James Fu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	EUT 4.0V	James Fu
BAND EDGE	23deg. C, 70%RH	EUT 4.0V	James Fu
CONDCUDED EMISSION	23deg. C, 70%RH	EUT 4.0V	James Fu
RADIATED EMISSION	23deg. C, 70%RH	EUT 4.0V	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	EUT 4.0V	James Fu



Test Report No.: W7L-P23030025RF06

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: W7L-P23030025RF06

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:

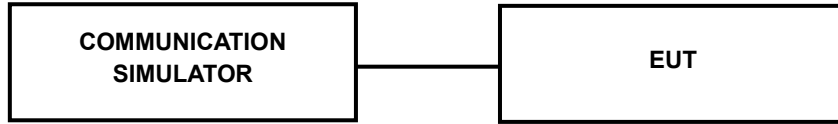

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 7

Band/BW	Modulation	RB Size	RB Offset	Low CH 20775	Mid CH 21100	High CH 21425
				Frequency 2502.5 MHz	Frequency 2535 MHz	Frequency 2567.5 MHz
7/5	QPSK	1	0	22.86	22.87	22.76
		1	12	22.90	22.99	22.92
		1	24	23.03	23.02	23.05
		12	0	22.04	22.06	22.00
		12	6	22.02	22.05	22.09
		12	13	22.00	22.03	22.02
		25	0	22.16	22.17	22.17
	16QAM	1	0	21.66	21.65	21.65
		1	12	21.84	21.95	21.85
		1	24	21.58	21.60	21.62
		12	0	21.08	21.05	21.04
		12	6	20.96	20.99	21.03
		12	13	21.02	21.10	20.95
		25	0	21.08	21.15	21.11
	64QAM	1	0	21.28	21.25	21.21
		1	12	21.64	21.69	21.65
		1	24	21.26	21.26	21.24
		12	0	20.25	20.31	20.19
		12	6	19.98	20.07	20.03
		12	13	20.12	20.15	20.04
		25	0	20.25	20.26	20.27

Band/BW	Modulation	RB Size	RB Offset	Low CH 20800	Mid CH 21100	High CH 21400
				Frequency 2505 MHz	Frequency 2535 MHz	Frequency 2565 MHz
7/ 10	QPSK	1	0	22.84	22.84	22.79
		1	24	22.96	22.92	22.96
		1	49	22.99	23.03	23.01
		25	0	22.08	22.00	22.04
		25	12	22.01	22.06	22.06
		25	25	22.05	21.99	22.05
		50	0	22.16	22.18	22.14
	16QAM	1	0	21.68	21.63	21.71
		1	24	21.89	21.95	21.83
		1	49	21.60	21.57	21.58
		25	0	21.13	21.06	21.07
		25	12	21.01	20.96	21.04
		25	25	21.02	21.08	20.96
		50	0	21.14	21.08	21.12
	64QAM	1	0	21.24	21.26	21.24
		1	24	21.69	21.64	21.65
		1	49	21.28	21.24	21.27
		25	0	20.25	20.25	20.20
		25	12	20.05	20.06	19.97
		25	25	20.11	20.12	20.06
		50	0	20.30	20.22	20.28

Band/BW	Modulation	RB Size	RB Offset	Low CH 20825	Mid CH 21100	High CH 21375
				Frequency 2507.5 MHz	Frequency 2535 MHz	Frequency 2562.5 MHz
7/ 15	QPSK	1	0	22.89	22.90	22.73
		1	37	22.91	22.92	22.91
		1	74	23.04	23.01	23.04
		36	0	22.08	22.01	22.00
		36	19	22.03	22.02	22.09
		36	39	22.06	21.97	22.06
		75	0	22.10	22.21	22.14
	16QAM	1	0	21.72	21.63	21.72
		1	37	21.82	21.93	21.86
		1	74	21.62	21.59	21.62
		36	0	21.12	21.05	21.04
		36	19	20.97	20.96	21.03
		36	39	21.09	21.10	20.93
		75	0	21.11	21.08	21.07
	64QAM	1	0	21.31	21.24	21.27
		1	37	21.70	21.63	21.62
		1	74	21.24	21.23	21.30
		36	0	20.30	20.31	20.14
		36	19	19.99	20.00	19.99
		36	39	20.14	20.19	20.08
		75	0	20.29	20.20	20.29



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 20850	Mid CH 21100	High CH 21350
				Frequency 2510 MHz	Frequency 2535 MHz	Frequency 2560 MHz
7/ 20	QPSK	1	0	22.90	22.92	22.81
		1	50	22.98	23.00	22.97
		1	99	23.07	23.07	23.06
		50	0	22.10	22.08	22.05
		50	25	22.09	22.10	22.11
		50	50	22.08	22.05	22.07
		100	0	22.18	22.25	22.19
	16QAM	1	0	21.74	21.71	21.73
		1	50	21.90	21.97	21.91
		1	99	21.65	21.65	21.64
		50	0	21.14	21.12	21.09
		50	25	21.03	21.04	21.05
		50	50	21.10	21.12	21.01
		100	0	21.16	21.16	21.13
	64QAM	1	0	21.32	21.30	21.29
		1	50	21.72	21.70	21.67
		1	99	21.30	21.31	21.32
		50	0	20.31	20.33	20.22
		50	25	20.06	20.08	20.05
		50	50	20.16	20.20	20.12
		100	0	20.31	20.28	20.30



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	22.69	22.85	22.91
		1	2	23.19	23.24	23.39
		1	5	22.69	22.75	22.89
		3	0	22.44	22.55	22.66
		3	1	22.37	22.57	22.52
		3	3	22.29	22.39	22.50
		6	0	21.84	21.97	22.03
	16QAM	1	0	21.33	21.47	21.57
		1	2	21.54	21.68	21.76
		1	5	20.61	20.66	20.84
		3	0	21.43	21.58	21.61
		3	1	21.44	21.69	21.66
		3	3	21.29	21.44	21.56
		6	0	20.82	20.99	21.03
	64QAM	1	0	20.90	21.08	21.19
		1	2	21.50	21.76	21.74
		1	5	20.90	21.05	21.15
		3	0	20.59	20.74	20.74
		3	1	20.49	20.74	20.74
		3	3	20.43	20.53	20.62
		6	0	19.83	20.00	20.04



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	22.71	22.87	22.90
		1	7	23.15	23.25	23.39
		1	14	22.65	22.75	22.89
		8	0	21.93	22.08	22.16
		8	3	21.80	22.07	22.04
		8	7	21.76	21.96	22.04
		15	0	21.81	21.98	21.97
	16QAM	1	0	21.30	21.53	21.60
		1	7	21.51	21.71	21.74
		1	14	20.64	20.66	20.84
		8	0	20.89	21.09	21.11
		8	3	20.99	21.14	21.19
		8	7	20.81	20.92	21.02
		15	0	20.82	20.93	21.06
	64QAM	1	0	20.96	21.11	21.13
		1	7	21.53	21.70	21.73
		1	14	20.91	21.07	21.15
		8	0	20.12	20.28	20.25
		8	3	20.03	20.18	20.29
		8	7	19.90	20.07	20.08
		15	0	19.85	19.97	20.08



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	22.72	22.82	22.91
		1	12	23.20	23.22	23.39
		1	24	22.66	22.74	22.93
		12	0	21.96	22.08	22.13
		12	6	21.80	22.08	22.05
		12	13	21.80	21.92	22.05
		25	0	21.79	22.01	22.00
	16QAM	1	0	21.31	21.49	21.60
		1	12	21.48	21.74	21.73
		1	24	20.64	20.66	20.83
		12	0	20.89	21.07	21.08
		12	6	20.96	21.18	21.15
		12	13	20.76	20.94	21.05
		25	0	20.82	20.94	21.03
	64QAM	1	0	20.90	21.08	21.19
		1	12	21.50	21.76	21.73
		1	24	20.84	21.12	21.15
		12	0	20.13	20.25	20.24
		12	6	19.97	20.25	20.28
		12	13	19.94	20.06	20.05
		25	0	19.81	20.03	20.06

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	22.77	22.89	22.96
		1	24	23.22	23.30	23.41
		1	49	22.71	22.82	22.94
		25	0	22.00	22.13	22.18
		25	12	21.88	22.09	22.10
		25	25	21.84	21.97	22.06
		50	0	21.85	22.03	22.05
	16QAM	1	0	21.38	21.54	21.62
		1	24	21.56	21.76	21.78
		1	49	20.66	20.74	20.85
		25	0	20.97	21.13	21.16
		25	12	21.02	21.20	21.21
		25	25	20.83	20.99	21.07
		50	0	20.88	21.01	21.08
	64QAM	1	0	20.97	21.13	21.21
		1	24	21.58	21.78	21.79
		1	49	20.92	21.13	21.17
		25	0	20.17	20.30	20.32
		25	12	20.05	20.26	20.30
		25	25	19.98	20.11	20.13
		50	0	19.87	20.05	20.09



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	23.05	23.09	23.08
		1	12	23.19	23.13	23.20
		1	24	23.31	23.35	23.34
		12	0	22.33	22.30	22.34
		12	6	22.25	22.20	22.22
		12	13	22.32	22.30	22.36
		25	0	22.36	22.35	22.29
	16QAM	1	0	21.90	21.89	21.91
		1	12	21.71	21.68	21.72
		1	24	21.74	21.69	21.71
		12	0	21.08	21.06	21.12
		12	6	21.25	21.19	21.26
		12	13	21.24	21.28	21.27
		25	0	21.26	21.20	21.27
	64QAM	1	0	21.26	21.30	21.29
		1	12	21.51	21.48	21.52
		1	24	21.51	21.46	21.48
		12	0	20.16	20.14	20.20
		12	6	20.38	20.37	20.31
		12	13	20.11	20.08	20.10
		25	0	20.20	20.15	20.19

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	23.13	/
		1	24	/	23.21	/
		1	49	/	23.39	/
		25	0	/	22.36	/
		25	12	/	22.27	/
		25	25	/	22.38	/
		50	0	/	22.37	/
	16QAM	1	0	/	21.97	/
		1	24	/	21.74	/
		1	49	/	21.76	/
		25	0	/	21.14	/
		25	12	/	21.27	/
		25	25	/	21.32	/
		50	0	/	21.28	/
	64QAM	1	0	/	21.34	/
		1	24	/	21.54	/
		1	49	/	21.53	/
		25	0	/	20.22	/
		25	12	/	20.39	/
		25	25	/	20.16	/
		50	0	/	20.21	/



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

LTE Band 17

Band/BW	Modulation	RB Size	RB Offset	Low CH 23755	Mid CH 23790	High CH 23825
				Frequency 706.5 MHz	Frequency 710 MHz	Frequency 713.5 MHz
17/ 5	QPSK	1	0	23.01	22.97	22.91
		1	12	23.38	23.44	23.24
		1	24	22.99	23.01	22.93
		12	0	22.00	22.10	21.90
		12	6	22.19	22.05	22.03
		12	13	21.98	22.00	21.82
		25	0	22.02	22.08	21.86
	16QAM	1	0	21.63	21.65	21.57
		1	12	21.47	21.43	21.33
		1	24	21.43	21.45	21.37
		12	0	20.89	20.99	20.77
		12	6	21.08	21.20	21.04
		12	13	21.17	21.13	20.93
		25	0	21.02	21.14	20.98
	64QAM	1	0	21.45	21.41	21.21
		1	12	21.69	21.75	21.59
		1	24	21.19	21.15	21.05
		12	0	20.20	20.22	20.14
		12	6	20.22	20.32	20.10
		12	13	20.20	20.22	20.04
		25	0	20.06	20.02	19.82

Band/BW	Modulation	RB Size	RB Offset	Low CH 23780	Mid CH 23790	High CH 23800
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz
17/ 10	QPSK	1	0	23.05	23.02	22.92
		1	24	23.44	23.46	23.29
		1	49	23.06	23.06	22.95
		25	0	22.08	22.12	21.95
		25	12	22.21	22.13	22.05
		25	25	22.06	22.06	21.90
		50	0	22.08	22.10	21.92
	16QAM	1	0	21.70	21.70	21.59
		1	24	21.53	21.50	21.38
		1	49	21.50	21.50	21.39
		25	0	20.97	21.01	20.83
		25	12	21.16	21.21	21.06
		25	25	21.21	21.18	21.01
		50	0	21.10	21.15	21.00
	64QAM	1	0	21.49	21.46	21.29
		1	24	21.75	21.77	21.62
		1	49	21.25	21.22	21.10
		25	0	20.27	20.27	20.16
		25	12	20.30	20.34	20.16
		25	25	20.28	20.28	20.12
		50	0	20.10	20.07	19.90



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

LTE Band 71

Band/BW	Modulation	RB Size	RB Offset	Low CH 133147	Mid CH 133247	High CH 133447
				Frequency 665.5MHz	Frequency 675.5MHz	Frequency 695.5MHz
71/5	QPSK	1	0	22.75	22.91	22.84
		1	12	22.99	23.09	22.99
		1	24	22.78	22.93	22.92
		12	0	22.11	22.24	22.12
		12	6	22.38	22.64	22.42
		12	13	22.03	22.18	22.12
		25	0	21.87	22.12	21.95
	16QAM	1	0	21.93	22.06	22.03
		1	12	22.20	22.47	22.30
		1	24	21.86	21.94	21.91
		12	0	21.10	21.25	21.07
		12	6	21.01	21.25	21.07
		12	13	20.89	21.03	20.95
		25	0	20.72	20.86	20.81
	64QAM	1	0	20.73	20.91	20.75
		1	12	21.03	21.25	21.10
		1	24	20.75	21.00	20.83
		12	0	19.96	20.06	19.97
		12	6	19.79	20.02	19.90
		12	13	19.75	19.93	19.72
		25	0	19.73	19.97	19.82



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 133172	Mid CH 133272	High CH 133172
				Frequency 668MHz	Frequency 678MHz	Frequency 693MHz
71/ 10	QPSK	1	0	22.72	22.94	22.84
		1	24	22.99	23.09	23.00
		1	49	22.75	22.97	22.88
		25	0	22.12	22.23	22.15
		25	12	22.44	22.58	22.42
		25	25	22.01	22.15	22.11
		50	0	21.92	22.12	21.92
	16QAM	1	0	21.93	22.03	21.99
		1	24	22.25	22.43	22.33
		1	49	21.86	21.95	21.88
		25	0	21.12	21.23	21.13
		25	12	21.05	21.19	21.12
		25	25	20.88	21.04	20.92
		50	0	20.76	20.85	20.85
	64QAM	1	0	20.72	20.92	20.72
		1	24	21.08	21.21	21.14
		1	49	20.81	20.94	20.80
		25	0	19.94	20.03	20.03
		25	12	19.86	20.01	19.84
		25	25	19.74	19.90	19.74
		50	0	19.78	19.93	19.83



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 133197	Mid CH 133297	High CH 133397
				Frequency 670.5MHz	Frequency 680.5MHz	Frequency 690.5MHz
71/ 15	QPSK	1	0	22.74	22.93	22.88
		1	37	23.00	23.15	22.96
		1	74	22.75	22.94	22.91
		36	0	22.14	22.25	22.14
		36	19	22.43	22.64	22.41
		36	39	22.03	22.18	22.11
		75	0	21.87	22.12	21.97
	16QAM	1	0	21.98	22.03	22.04
		1	37	22.20	22.45	22.30
		1	74	21.85	21.96	21.91
		36	0	21.17	21.26	21.07
		36	19	21.01	21.24	21.09
		36	39	20.94	21.01	20.92
		75	0	20.72	20.85	20.84
	64QAM	1	0	20.79	20.94	20.69
		1	37	21.04	21.19	21.10
		1	74	20.81	21.00	20.81
		36	0	19.98	20.03	20.04
		36	19	19.80	19.95	19.86
		36	39	19.76	19.97	19.74
		75	0	19.73	19.96	19.81



Test Report No.: W7L-P23030025RF06

Band/BW	Modulation	RB Size	RB Offset	Low CH 133222	Mid CH 133322	High CH 133372
				Frequency 673MHz	Frequency 683MHz	Frequency 688MHz
71/ 20	QPSK	1	0	22.80	22.98	22.89
		1	50	23.01	23.17	23.01
		1	99	22.83	23.01	22.93
		50	0	22.15	22.29	22.17
		50	25	22.46	22.65	22.47
		50	50	22.07	22.23	22.13
		100	0	21.93	22.14	22.00
	16QAM	1	0	22.00	22.11	22.05
		1	50	22.28	22.49	22.35
		1	99	21.88	22.02	21.93
		50	0	21.18	21.31	21.15
		50	25	21.07	21.27	21.13
		50	50	20.96	21.08	20.97
		100	0	20.78	20.93	20.86
	64QAM	1	0	20.80	20.96	20.77
		1	50	21.11	21.27	21.16
		1	99	20.83	21.01	20.85
		50	0	20.00	20.11	20.05
		50	25	19.87	20.03	19.92
		50	50	19.79	19.98	19.80
		100	0	19.79	19.99	19.85



**BUREAU
VERITAS**

Test Report No.: W7L-P23030025RF06

EIRP

LTE BAND 7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	23.03	4.8	27.83	606.74	2
21100	2535.0	23.02	4.8	27.82	605.34	2
21425	2567.5	23.05	4.8	27.85	609.54	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	21.84	4.8	26.64	461.32	2
21100	2535.0	21.95	4.8	26.75	473.15	2
21425	2567.5	21.85	4.8	26.65	462.38	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20775	2502.5	21.64	4.8	26.44	440.55	2
21100	2535	21.69	4.8	26.49	445.66	2
21425	2567.5	21.65	4.8	26.45	441.57	2



Test Report No.: W7L-P23030025RF06

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505.0	22.99	4.8	27.79	601.17	2
21100	2535.0	23.03	4.8	27.83	606.74	2
21400	2565.0	23.01	4.8	27.81	603.95	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505.0	21.89	4.8	26.69	466.66	2
21100	2535.0	21.95	4.8	26.75	473.15	2
21400	2565.0	21.83	4.8	26.63	460.26	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20800	2505	21.69	4.8	26.49	445.66	2
21100	2535	21.64	4.8	26.44	440.55	2
21400	2565	21.65	4.8	26.45	441.57	2



Test Report No.: W7L-P23030025RF06

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	23.04	4.8	27.84	608.14	2
21100	2535.0	23.01	4.8	27.81	603.95	2
21375	2562.5	23.04	4.8	27.84	608.14	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	21.82	4.8	26.62	459.2	2
21100	2535.0	21.93	4.8	26.73	470.98	2
21375	2562.5	21.86	4.8	26.66	463.45	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20825	2507.5	21.7	4.8	26.5	446.68	2
21100	2535	21.63	4.8	26.43	439.54	2
21375	2562.5	21.62	4.8	26.42	438.53	2