



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

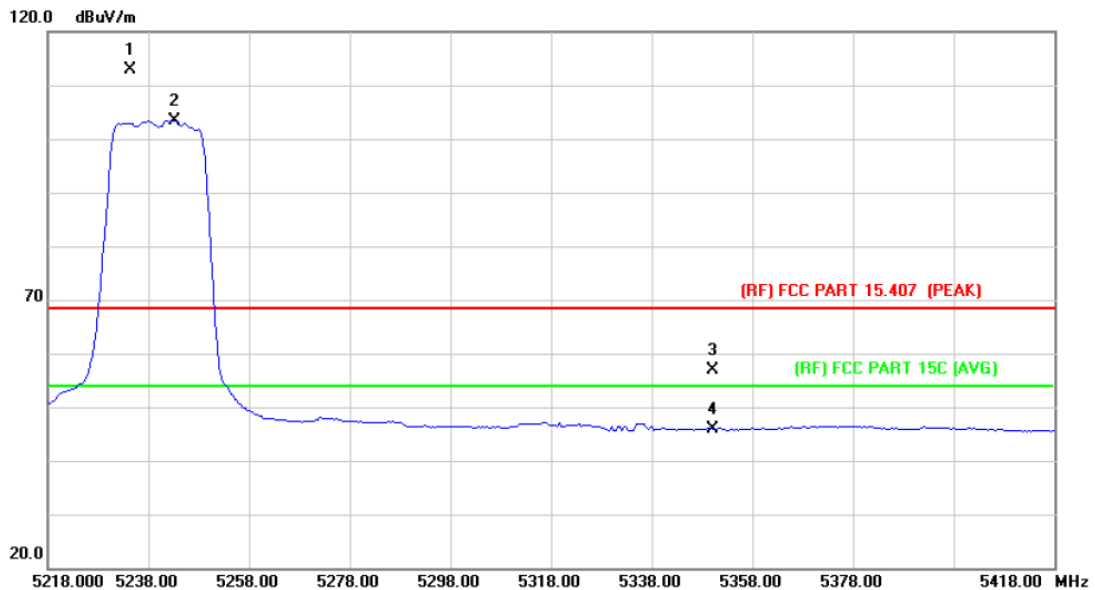

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | X   | 5234.500 | 96.15         | 16.70          | 112.85      | Fundamental Frequency |        | peak     |
| 2   | *   | 5243.200 | 86.70         | 16.72          | 103.42      | Fundamental Frequency |        | AVG      |
| 3   |     | 5350.000 | 39.96         | 16.83          | 56.79       | 68.30                 | -11.51 | peak     |
| 4   |     | 5350.000 | 29.08         | 16.83          | 45.91       | 54.00                 | -8.09  | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

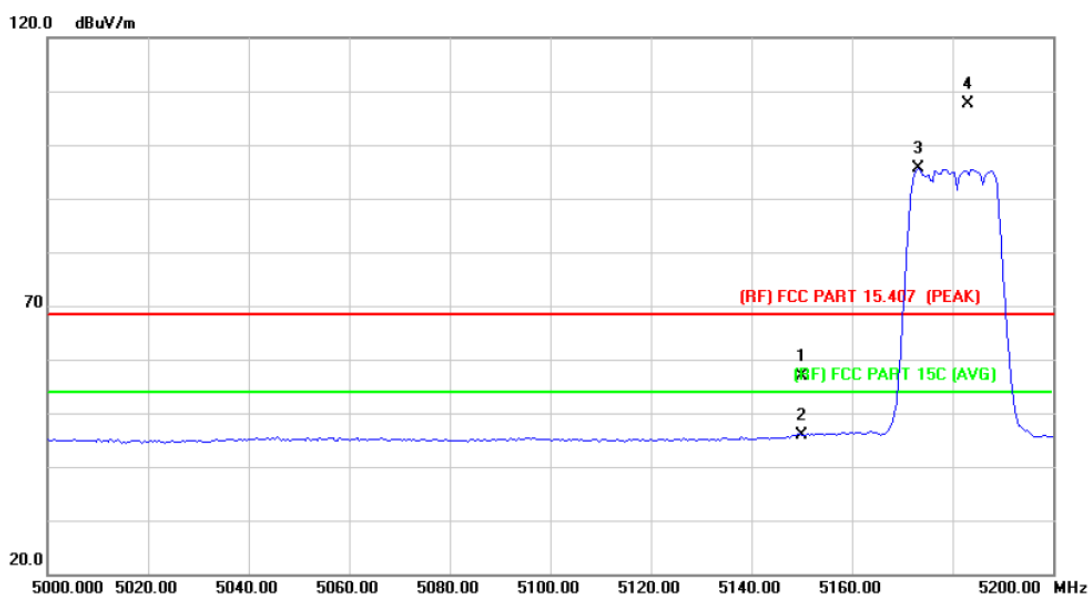

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                      | Over        |
|-----|-----|----------|---------------|----------------|-------------|----------------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                     | dB Detector |
| 1   |     | 5150.000 | 40.21         | 16.61          | 56.82       | 68.30                      | -11.48 peak |
| 2   |     | 5150.000 | 29.22         | 16.61          | 45.83       | 54.00                      | -8.17 AVG   |
| 3   | *   | 5173.200 | 79.02         | 16.63          | 95.65       | Fundamental Frequency AVG  |             |
| 4   | X   | 5183.200 | 91.01         | 16.65          | 107.66      | Fundamental Frequency peak |             |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

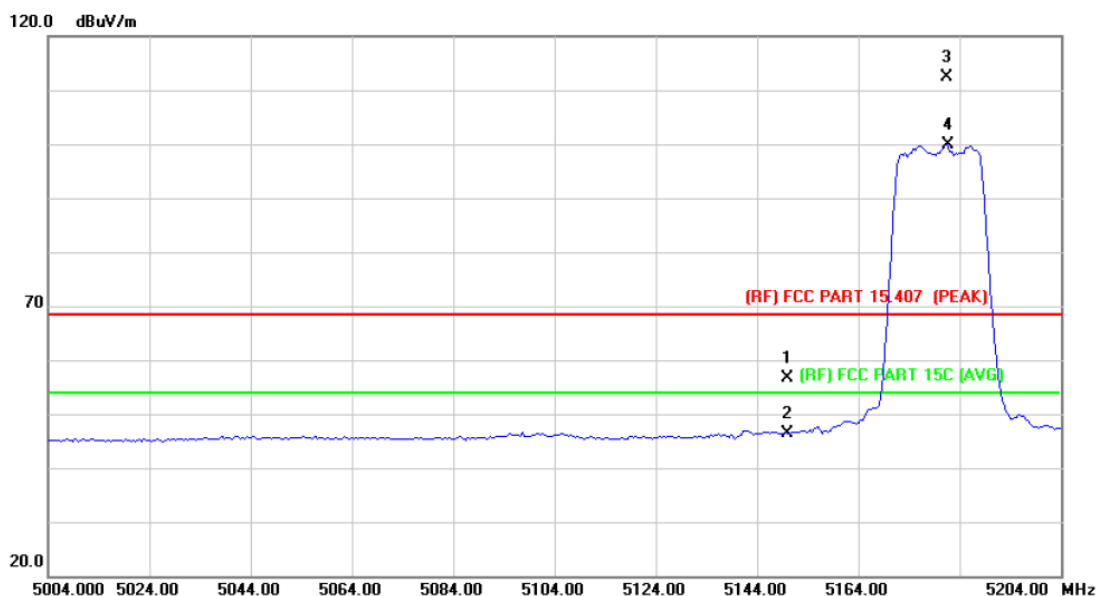

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   |     | 5150.000 | 40.13         | 16.61          | 56.74       | 68.30                 | -11.56 | peak     |
| 2   |     | 5150.000 | 29.72         | 16.61          | 46.33       | 54.00                 | -7.67  | AVG      |
| 3   | X   | 5181.347 | 95.71         | 16.64          | 112.35      | Fundamental Frequency |        | peak     |
| 4   | *   | 5181.674 | 83.20         | 16.64          | 99.84       | Fundamental Frequency |        | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

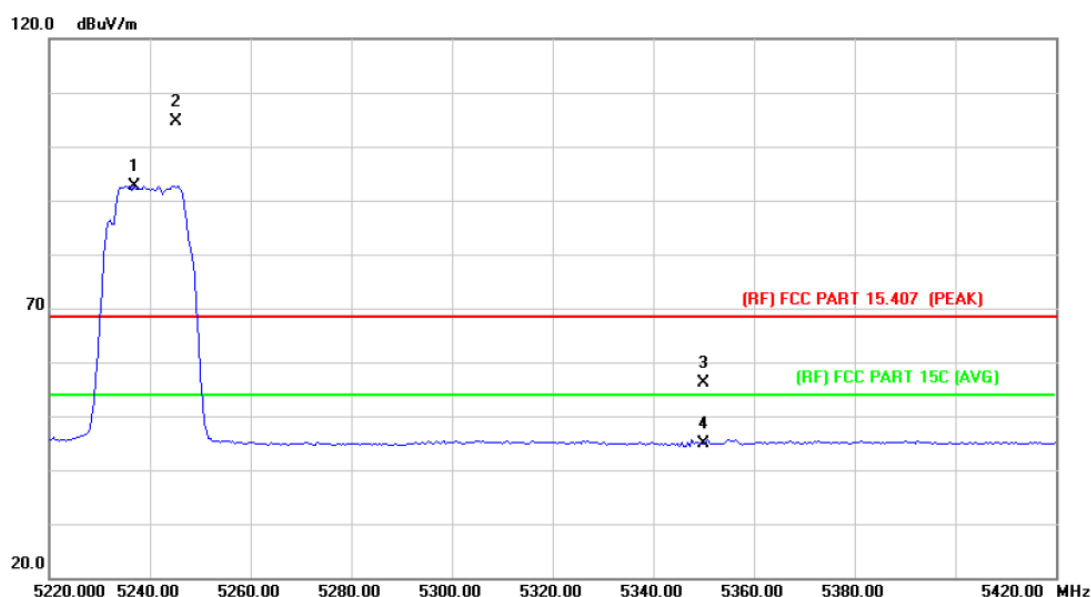

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 5236.800     | 76.00                    | 16.70                     | 92.70                      | Fundamental Frequency |            | AVG      |
| 2   | X   | 5245.200     | 87.84                    | 16.71                     | 104.55                     | Fundamental Frequency |            | peak     |
| 3   |     | 5350.000     | 39.25                    | 16.83                     | 56.08                      | 68.30                 | -12.22     | peak     |
| 4   |     | 5350.000     | 28.01                    | 16.83                     | 44.84                      | 54.00                 | -9.16      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

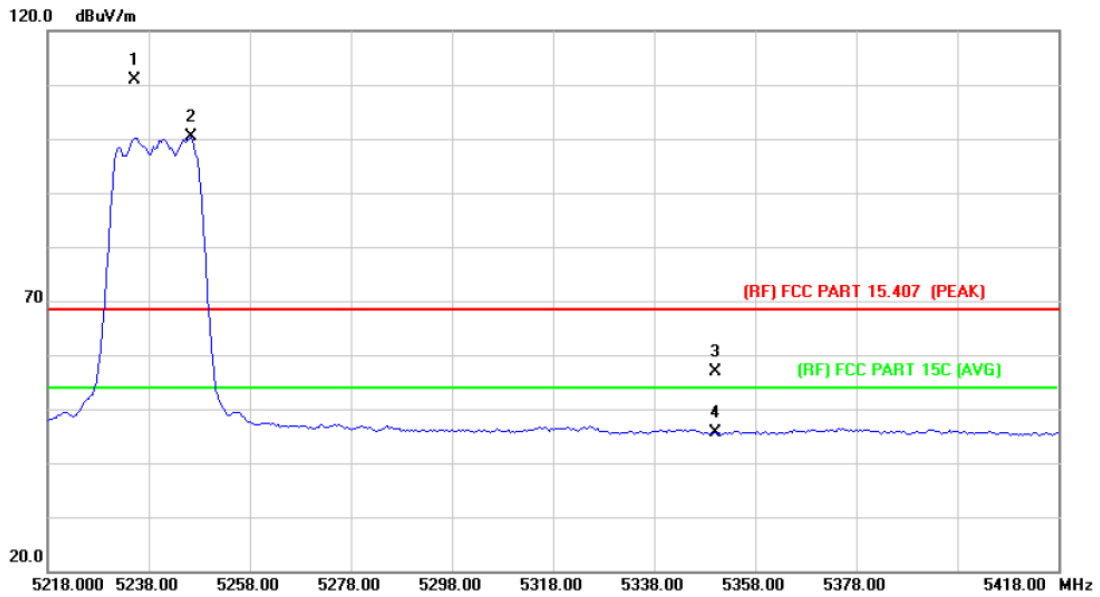

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | X   | 5235.200 | 94.15         | 16.70          | 110.85      | Fundamental Frequency |        | peak     |
| 2   | *   | 5246.400 | 83.74         | 16.71          | 100.45      | Fundamental Frequency |        | AVG      |
| 3   |     | 5350.000 | 40.02         | 16.83          | 56.85       | 68.30                 | -11.45 | peak     |
| 4   |     | 5350.000 | 28.71         | 16.83          | 45.54       | 54.00                 | -8.46  | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

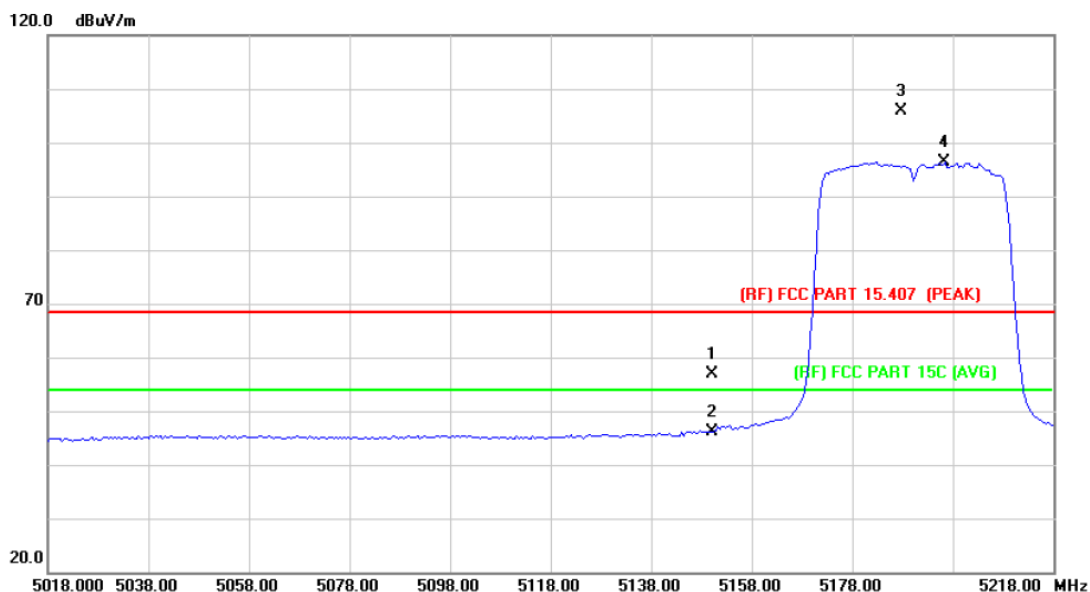

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   |     | 5150.000 | 40.26         | 16.61          | 56.87       | 68.30                 | -11.43 | peak     |
| 2   |     | 5150.000 | 29.47         | 16.61          | 46.08       | 54.00                 | -7.92  | AVG      |
| 3   | X   | 5187.650 | 89.21         | 16.65          | 105.86      | Fundamental Frequency |        | peak     |
| 4   | *   | 5196.400 | 79.68         | 16.65          | 96.33       | Fundamental Frequency |        | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

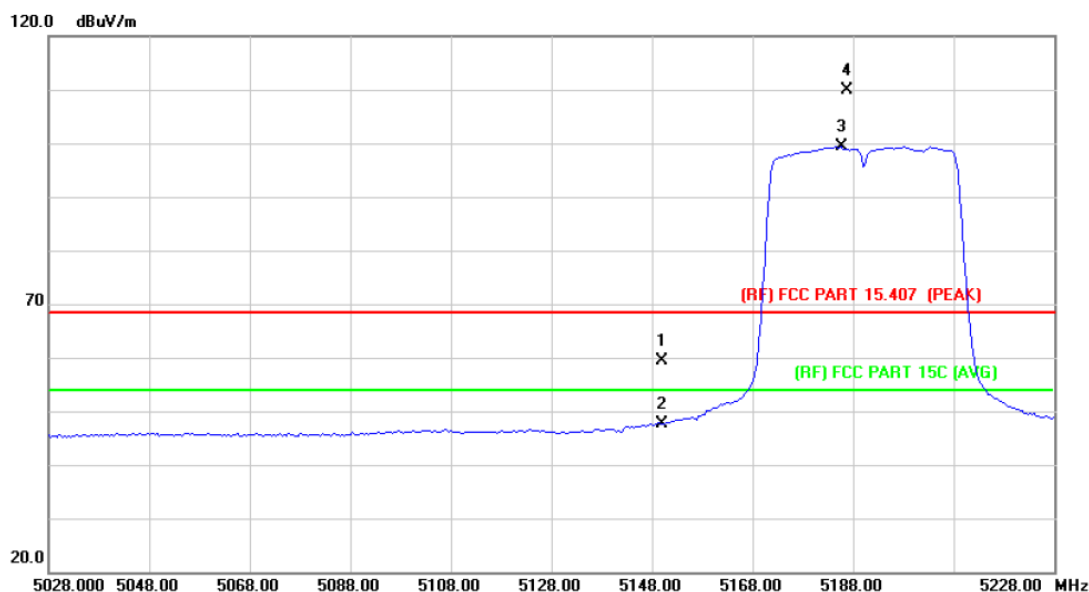

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over        |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB Detector |
| 1   |     | 5150.000 | 42.73         | 16.61          | 59.34       | 68.30                 | -8.96 peak  |
| 2   |     | 5150.000 | 31.08         | 16.61          | 47.69       | 54.00                 | -6.31 AVG   |
| 3   | *   | 5185.600 | 82.62         | 16.65          | 99.27       | Fundamental Frequency |             |
| 4   | X   | 5186.670 | 93.20         | 16.65          | 109.85      | Fundamental Frequency |             |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

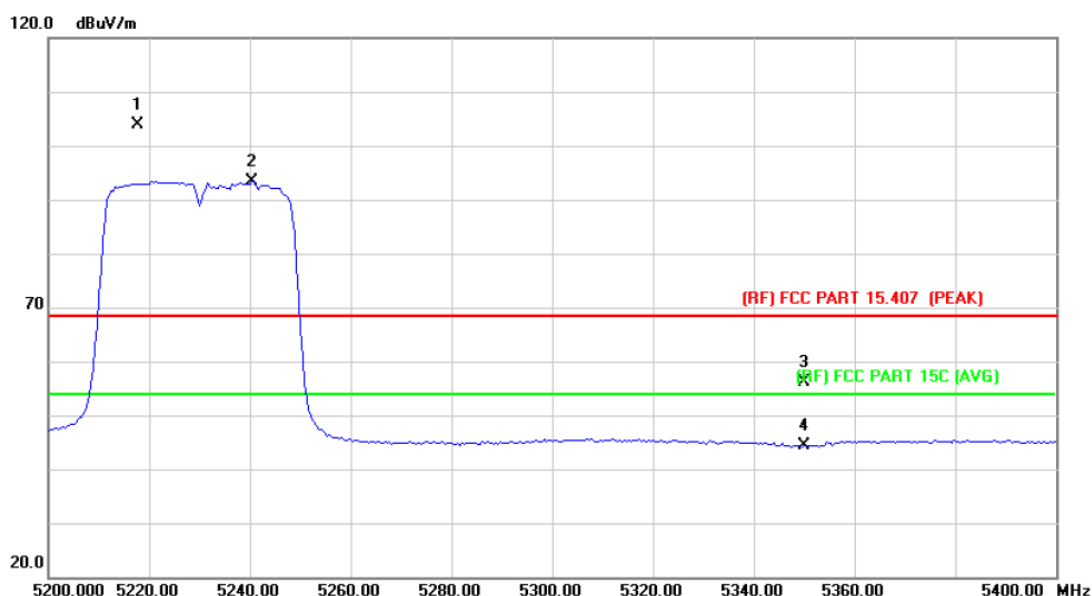

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 5217.600     | 87.20                    | 16.68                     | 103.88                     | Fundamental Frequency |            | peak     |
| 2   | *   | 5240.400     | 76.67                    | 16.72                     | 93.39                      | Fundamental Frequency |            | AVG      |
| 3   |     | 5350.000     | 39.39                    | 16.83                     | 56.22                      | 68.30                 | -12.08     | peak     |
| 4   |     | 5350.000     | 27.55                    | 16.83                     | 44.38                      | 54.00                 | -9.62      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

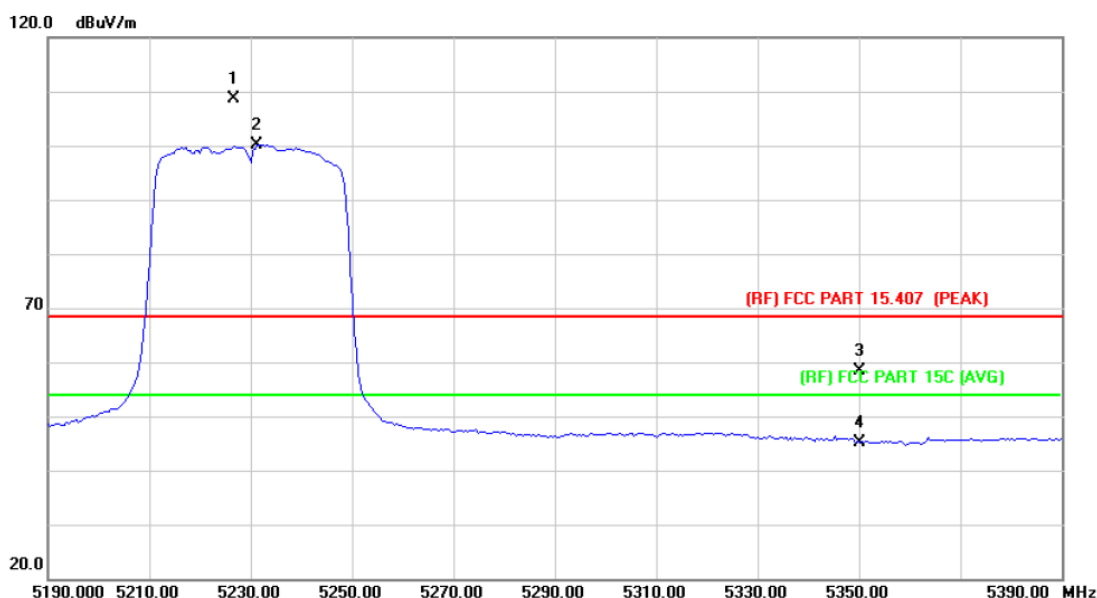

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 5226.540     | 91.99                    | 16.70                     | 108.69                     | Fundamental Frequency |            | peak     |
| 2   | *   | 5231.200     | 83.38                    | 16.70                     | 100.08                     | Fundamental Frequency |            | AVG      |
| 3   |     | 5350.000     | 41.53                    | 16.83                     | 58.36                      | 68.30                 | -9.94      | peak     |
| 4   |     | 5350.000     | 28.34                    | 16.83                     | 45.17                      | 54.00                 | -8.83      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

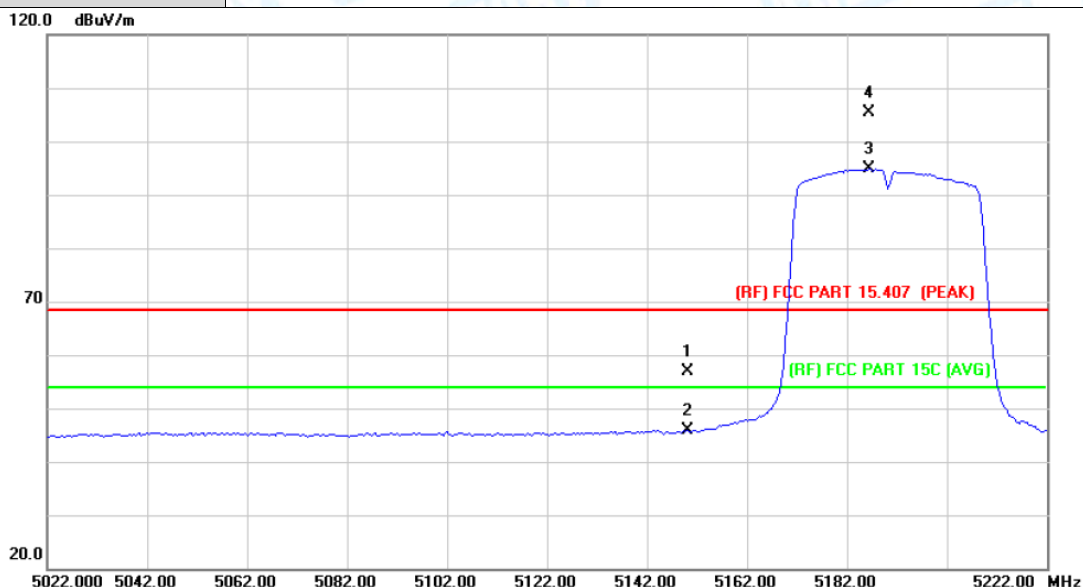

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over        |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB Detector |
| 1   |     | 5150.000 | 40.28         | 16.61          | 56.89       | 68.30                 | -11.41 peak |
| 2   |     | 5150.000 | 29.24         | 16.61          | 45.85       | 54.00                 | -8.15 AVG   |
| 3   | *   | 5186.400 | 78.19         | 16.65          | 94.84       | Fundamental Frequency |             |
| 4   | X   | 5186.530 | 88.72         | 16.65          | 105.37      | Fundamental Frequency |             |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

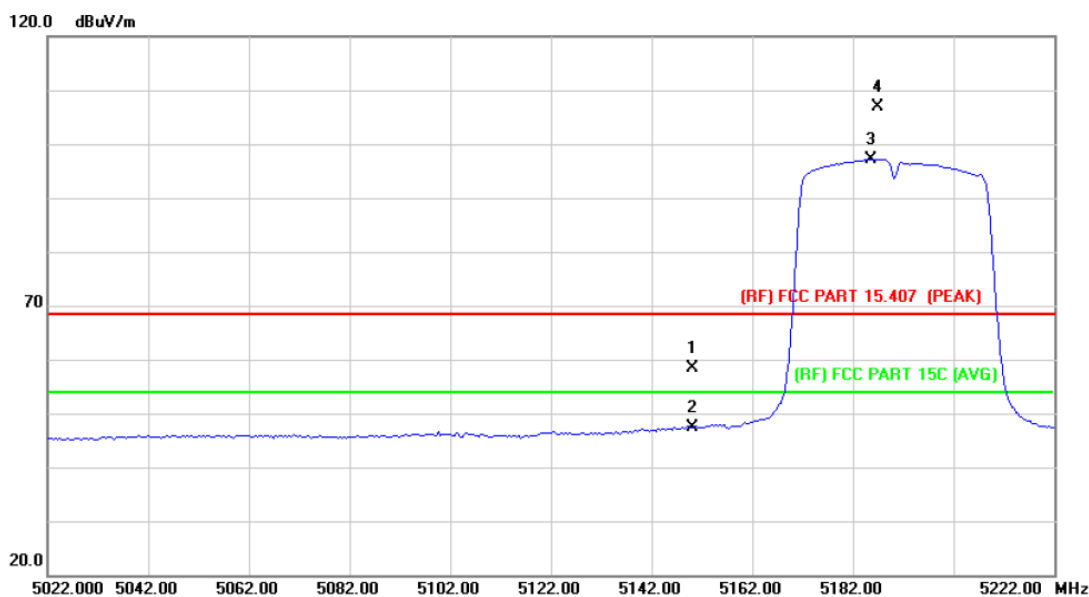

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                      | Over        |
|-----|-----|----------|---------------|----------------|-------------|----------------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                     | dB Detector |
| 1   |     | 5150.000 | 41.73         | 16.61          | 58.34       | 68.30                      | -9.96 peak  |
| 2   |     | 5150.000 | 30.87         | 16.61          | 47.48       | 54.00                      | -6.52 AVG   |
| 3   | *   | 5185.600 | 80.57         | 16.65          | 97.22       | Fundamental Frequency AVG  |             |
| 4   | X   | 5186.970 | 90.23         | 16.65          | 106.88      | Fundamental Frequency peak |             |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

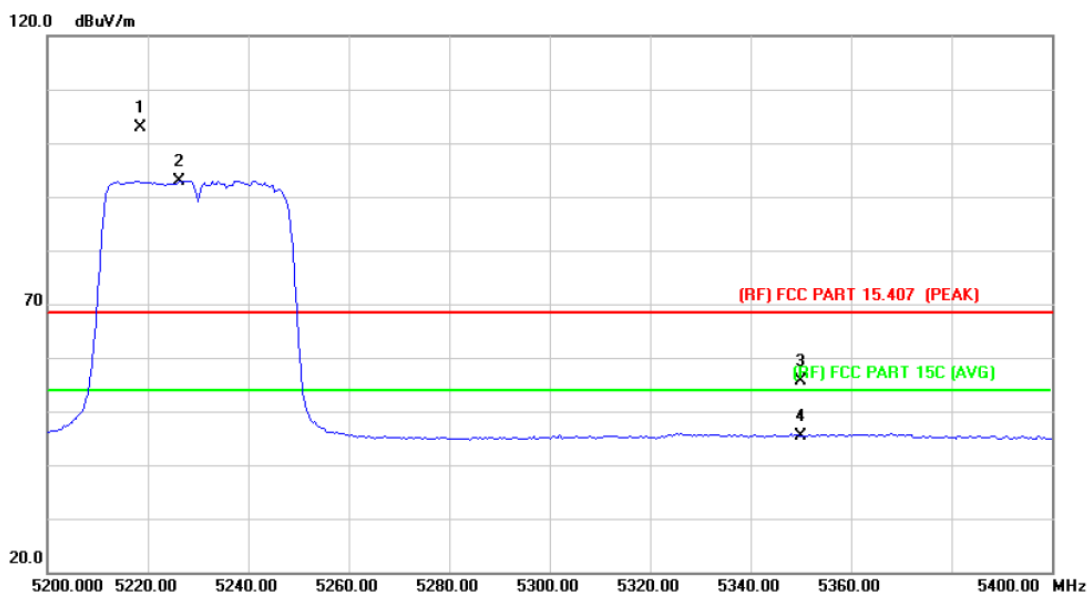

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 5218.640     | 86.27                    | 16.69                     | 102.96                     | Fundamental Frequency |            | peak     |
| 2   | *   | 5226.400     | 76.26                    | 16.70                     | 92.96                      | Fundamental Frequency |            | AVG      |
| 3   |     | 5350.000     | 38.85                    | 16.83                     | 55.68                      | 68.30                 | -12.62     | peak     |
| 4   |     | 5350.000     | 28.46                    | 16.83                     | 45.29                      | 54.00                 | -8.71      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

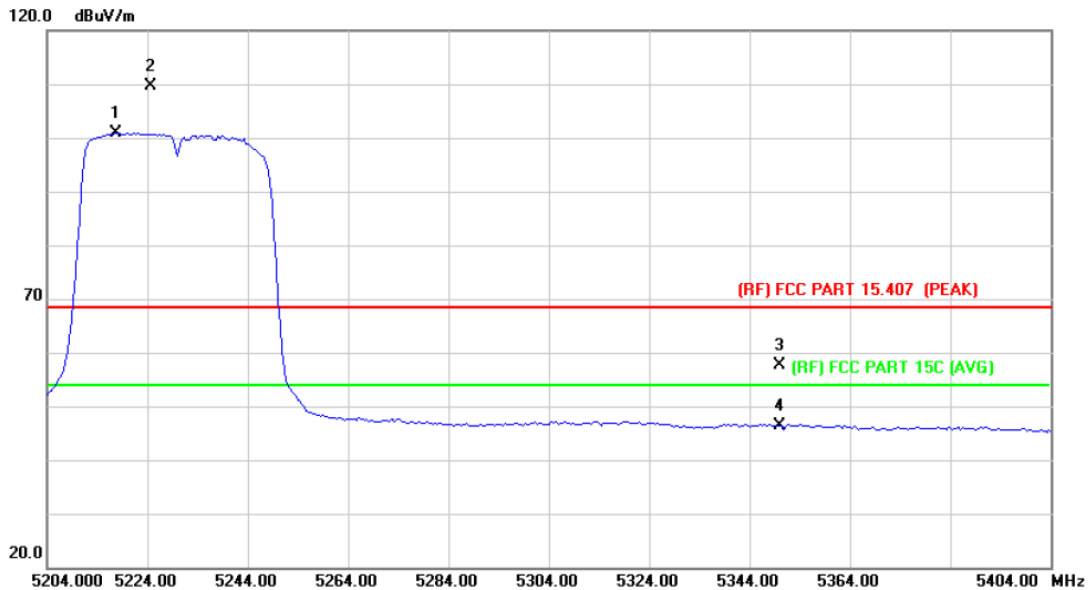

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | *   | 5217.600 | 84.15         | 16.68          | 100.83      | Fundamental Frequency |        | AVG      |
| 2   | X   | 5224.620 | 93.00         | 16.69          | 109.69      | Fundamental Frequency |        | peak     |
| 3   |     | 5350.000 | 40.72         | 16.83          | 57.55       | 68.30                 | -10.75 | peak     |
| 4   |     | 5350.000 | 29.63         | 16.83          | 46.46       | 54.00                 | -7.54  | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

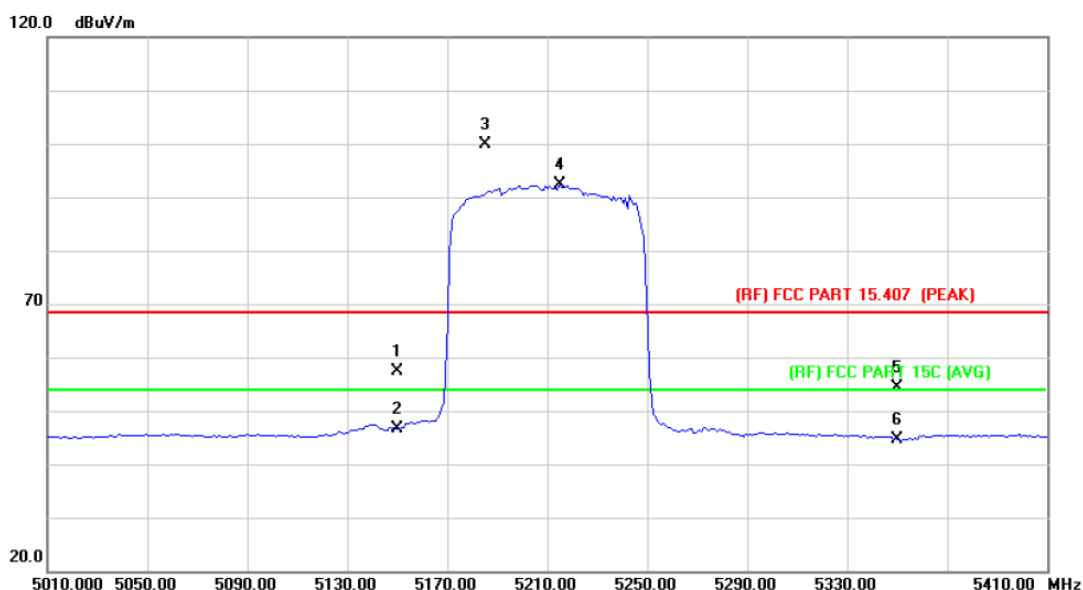

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 5150.000     | 40.74                    | 16.61                     | 57.35                      | 68.30                 | -10.95     | peak     |
| 2   |     | 5150.000     | 29.96                    | 16.61                     | 46.57                      | 54.00                 | -7.43      | AVG      |
| 3   | X   | 5185.200     | 83.24                    | 16.65                     | 99.89                      | Fundamental Frequency |            | peak     |
| 4   | *   | 5214.800     | 75.65                    | 16.68                     | 92.33                      | Fundamental Frequency |            | AVG      |
| 5   |     | 5350.000     | 37.53                    | 16.83                     | 54.36                      | 68.30                 | -13.94     | peak     |
| 6   |     | 5350.000     | 27.72                    | 16.83                     | 44.55                      | 54.00                 | -9.45      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

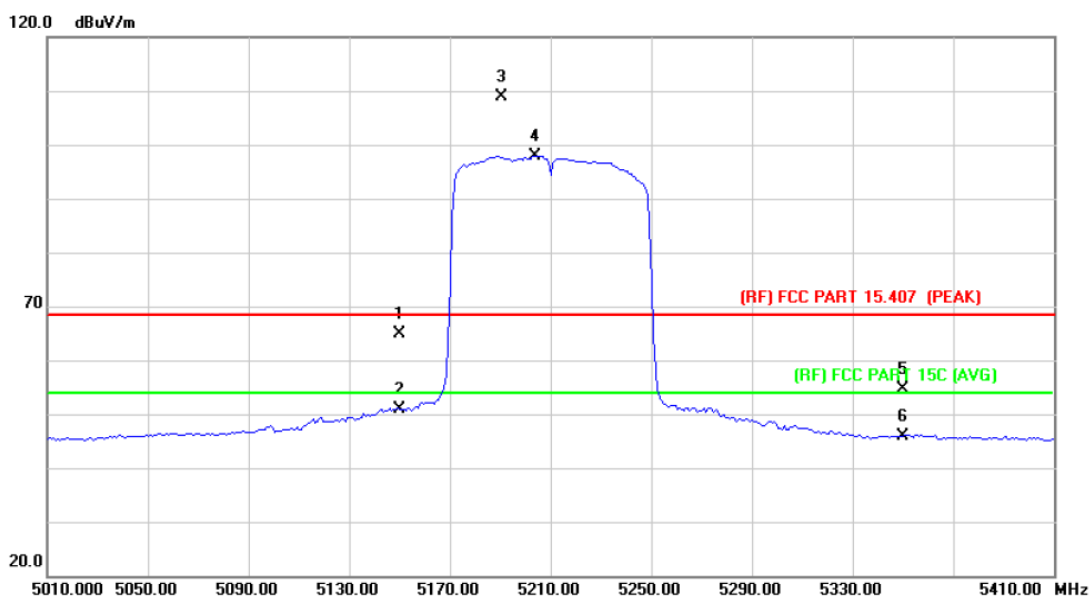

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 5150.000     | 48.26                    | 16.61                     | 64.87                      | 68.30                 | -3.43      | peak     |
| 2   |     | 5150.000     | 34.17                    | 16.61                     | 50.78                      | 54.00                 | -3.22      | AVG      |
| 3   | X   | 5190.500     | 92.14                    | 16.66                     | 108.80                     | Fundamental Frequency |            | peak     |
| 4   | *   | 5203.600     | 81.32                    | 16.67                     | 97.99                      | Fundamental Frequency |            | AVG      |
| 5   |     | 5350.000     | 37.85                    | 16.83                     | 54.68                      | 68.30                 | -13.62     | peak     |
| 6   |     | 5350.000     | 28.97                    | 16.83                     | 45.80                      | 54.00                 | -8.20      | AVG      |

Emission Level= Read Level+ Correct Factor


|               |                                              |                    |     |
|---------------|----------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                 |                    |     |
| Ant. Pol.     | Horizontal                                   |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       |                                              |                    |     |

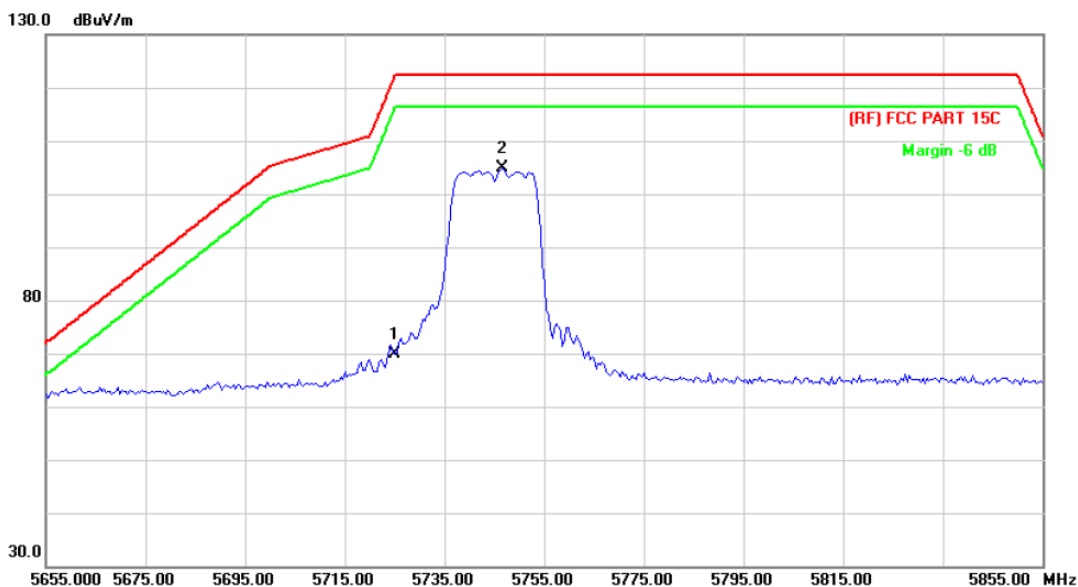

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 52.07                    | 17.82                     | 69.89                      | 122.30          | -52.41     | peak     |
| 2   | *   | 5746.600     | 86.92                    | 17.90                     | 104.82                     | 122.30          | -17.48     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                              |                    |     |
|---------------|----------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                 |                    |     |
| Ant. Pol.     | Vertical                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       |                                              |                    |     |

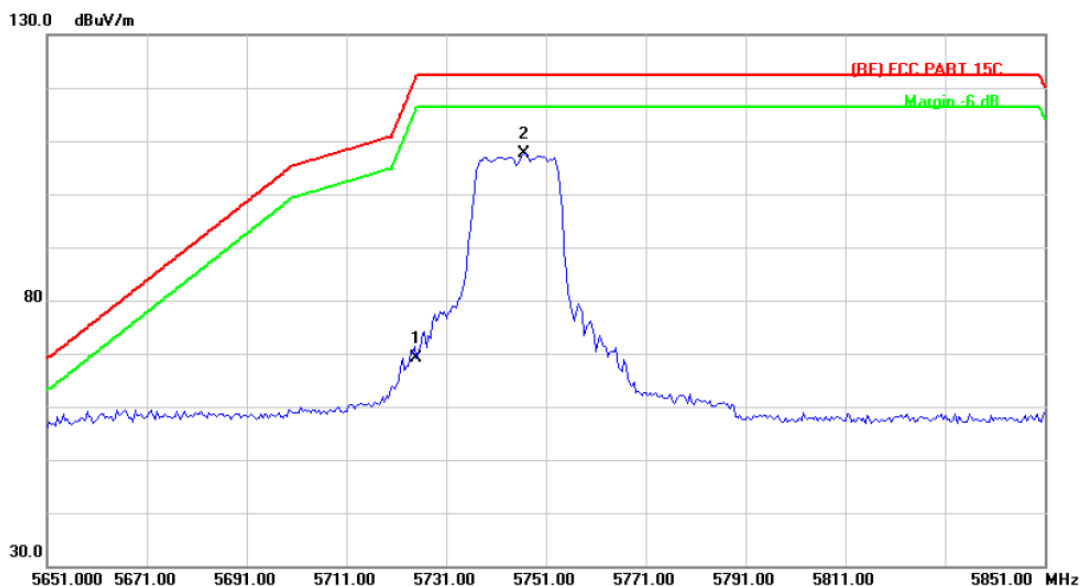

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 5725.000 | 51.35         | 17.82          | 69.17       | 122.30 | -53.13 | peak     |
| 2   | *   | 5746.600 | 89.67         | 17.90          | 107.57      | 122.30 | -14.73 | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                              |                    |     |
|---------------|----------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                 |                    |     |
| Ant. Pol.     | Horizontal                                   |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       |                                              |                    |     |

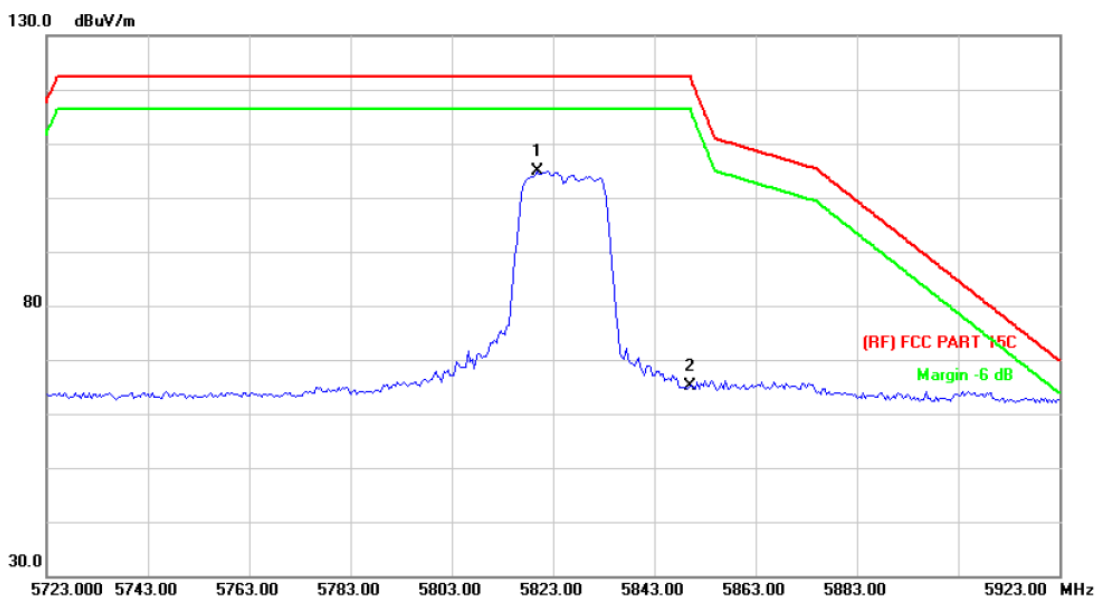

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5819.800     | 86.71                    | 18.17                     | 104.88                     | 122.30          | -17.42     | peak     |
| 2   |     | 5850.000     | 46.97                    | 18.28                     | 65.25                      | 122.30          | -57.05     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                              |                    |     |
|---------------|----------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                 |                    |     |
| Ant. Pol.     | Vertical                                     |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       |                                              |                    |     |

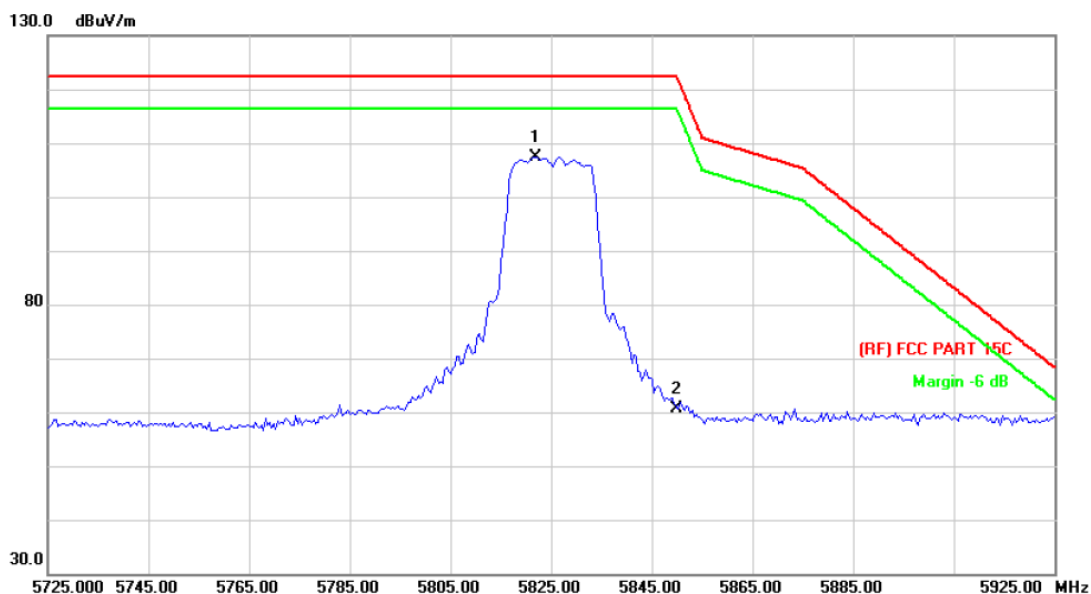

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5821.800     | 89.12                    | 18.17                     | 107.29                     | 122.30          | -15.01     | peak     |
| 2   |     | 5850.000     | 42.29                    | 18.28                     | 60.57                      | 122.30          | -61.73     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

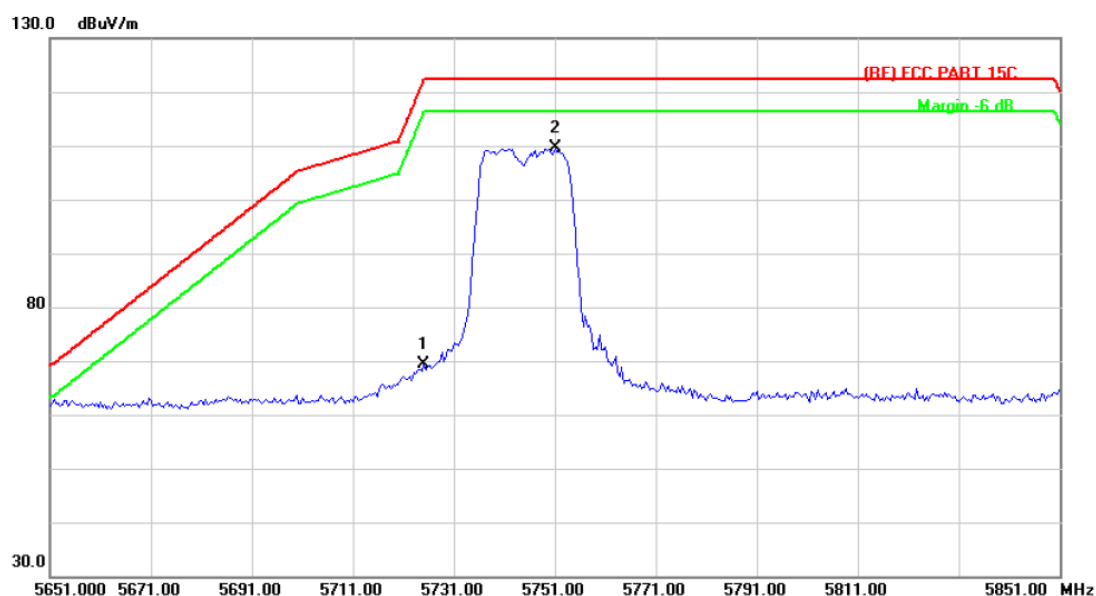

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 54.13                    | 17.82                     | 71.95                      | 122.30          | -50.35     | peak     |
| 2   | *   | 5747.000     | 93.80                    | 17.90                     | 111.70                     | 122.30          | -10.60     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

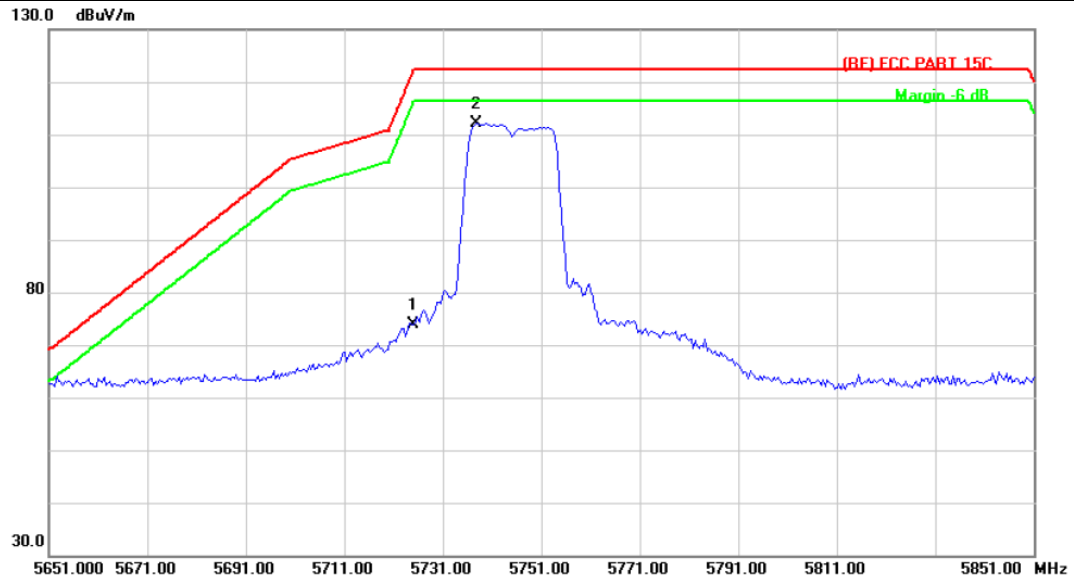

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 55.99                    | 17.82                     | 73.81                      | 122.30          | -48.49     | peak     |
| 2   | *   | 5737.800     | 94.31                    | 17.87                     | 112.18                     | 122.30          | -10.12     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

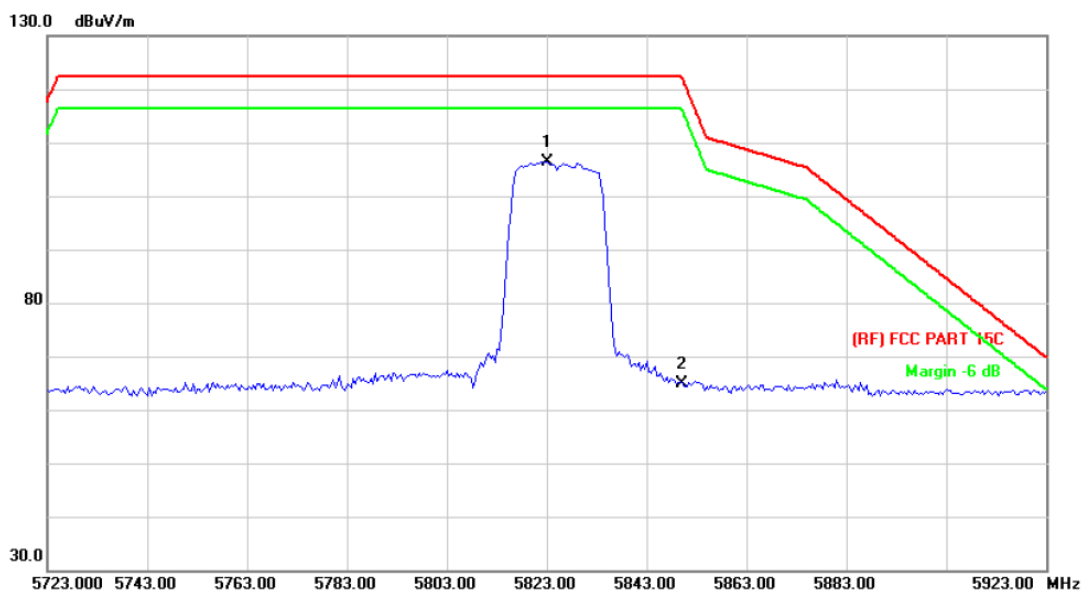

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5823.000     | 89.22                    | 18.17                     | 107.39                     | 122.30          | -14.91     | peak     |
| 2   |     | 5850.000     | 49.56                    | 18.28                     | 67.84                      | 122.30          | -54.46     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

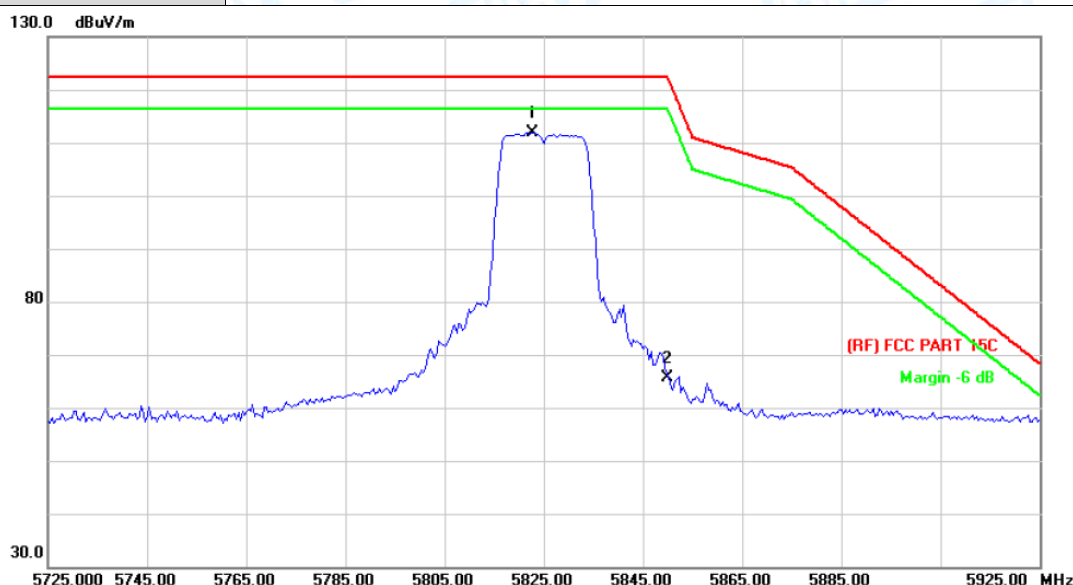

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5822.600     | 93.69                    | 18.17                     | 111.86                     | 122.30          | -10.44     | peak     |
| 2   |     | 5850.000     | 47.27                    | 18.28                     | 65.55                      | 122.30          | -56.75     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

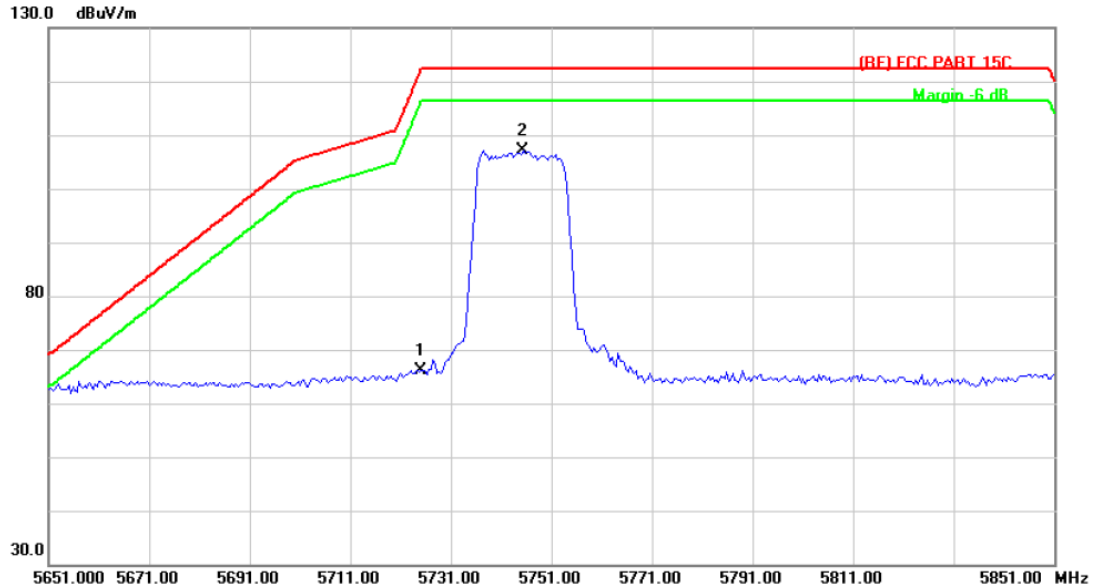

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 48.27                    | 17.82                     | 66.09                      | 122.30          | -56.21     | peak     |
| 2   | *   | 5745.400     | 89.26                    | 17.90                     | 107.16                     | 122.30          | -15.14     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

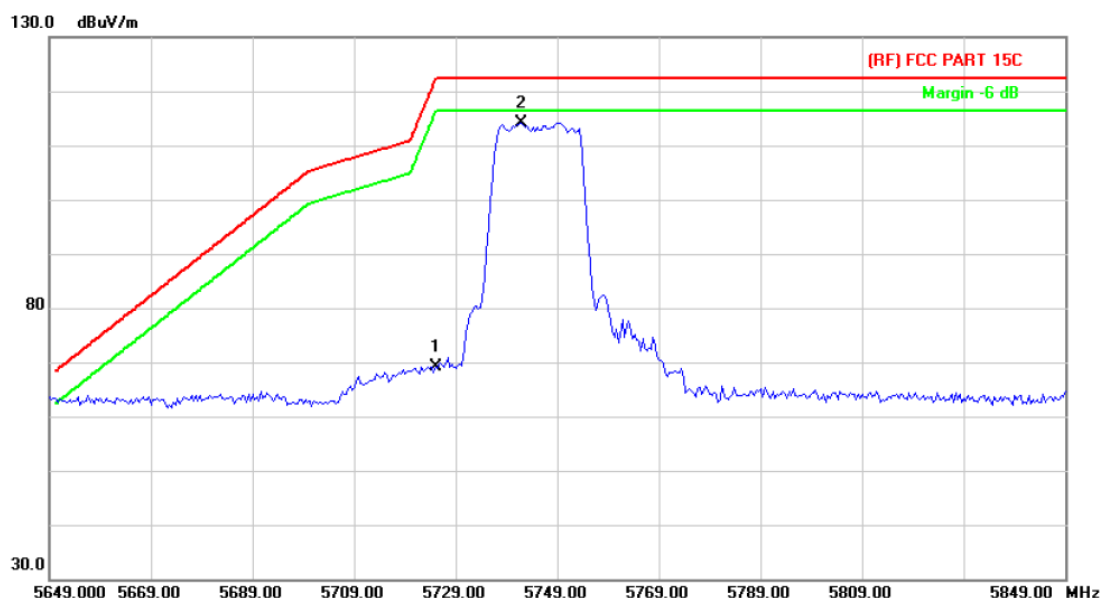

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 51.32                    | 17.82                     | 69.14                      | 122.30          | -53.16     | peak     |
| 2   | *   | 5741.800     | 96.35                    | 17.89                     | 114.24                     | 122.30          | -8.06      | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

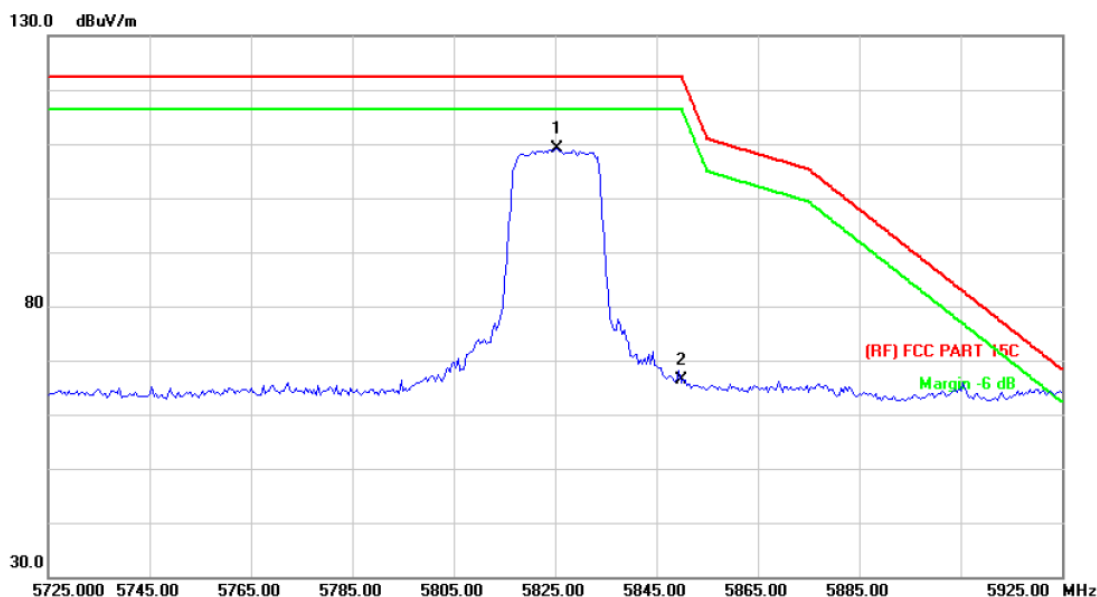

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5825.400     | 91.01                    | 18.19                     | 109.20                     | 122.30          | -13.10     | peak     |
| 2   |     | 5850.000     | 48.16                    | 18.28                     | 66.44                      | 122.30          | -55.86     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

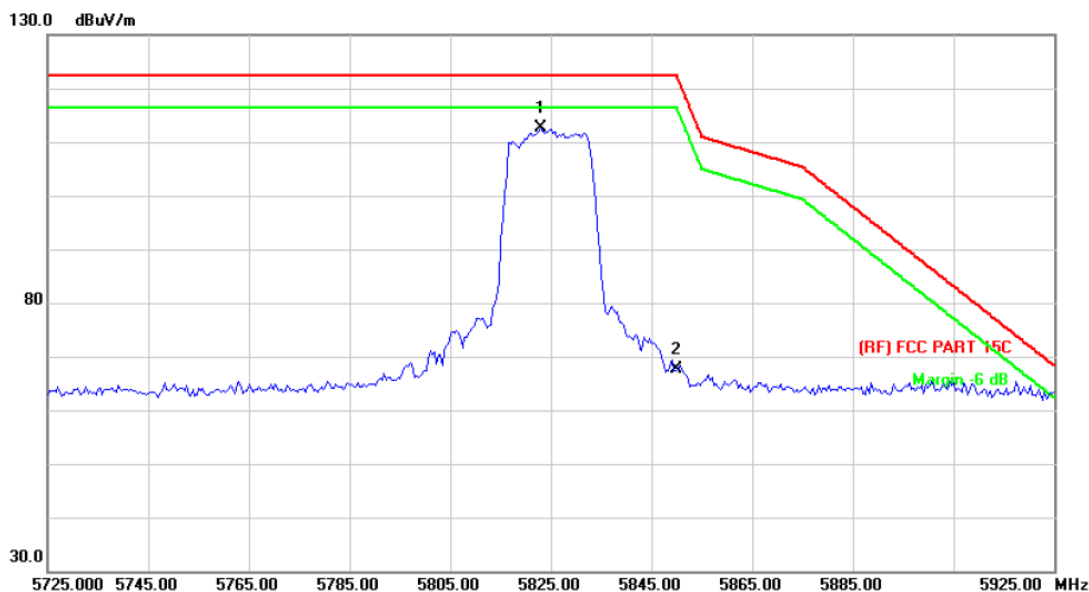

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 5823.000 | 94.34         | 18.17          | 112.51      | 122.30 | -9.79  | peak     |
| 2   |     | 5850.000 | 49.42         | 18.28          | 67.70       | 122.30 | -54.60 | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

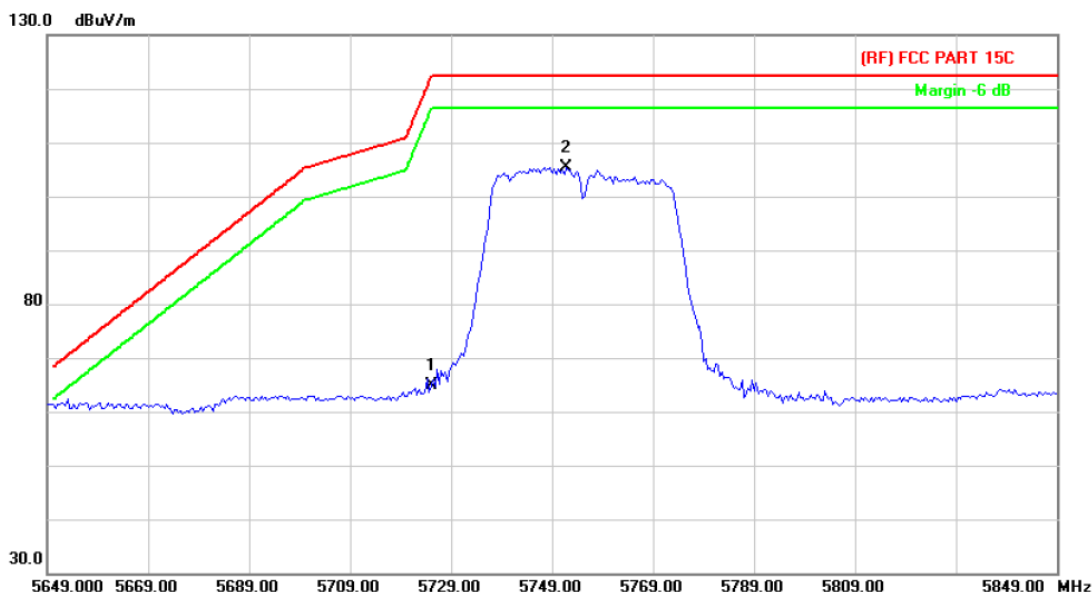

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 47.13                    | 17.82                     | 64.95                      | 122.30          | -57.35     | peak     |
| 2   | *   | 5751.800     | 87.49                    | 17.91                     | 105.40                     | 122.30          | -16.90     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

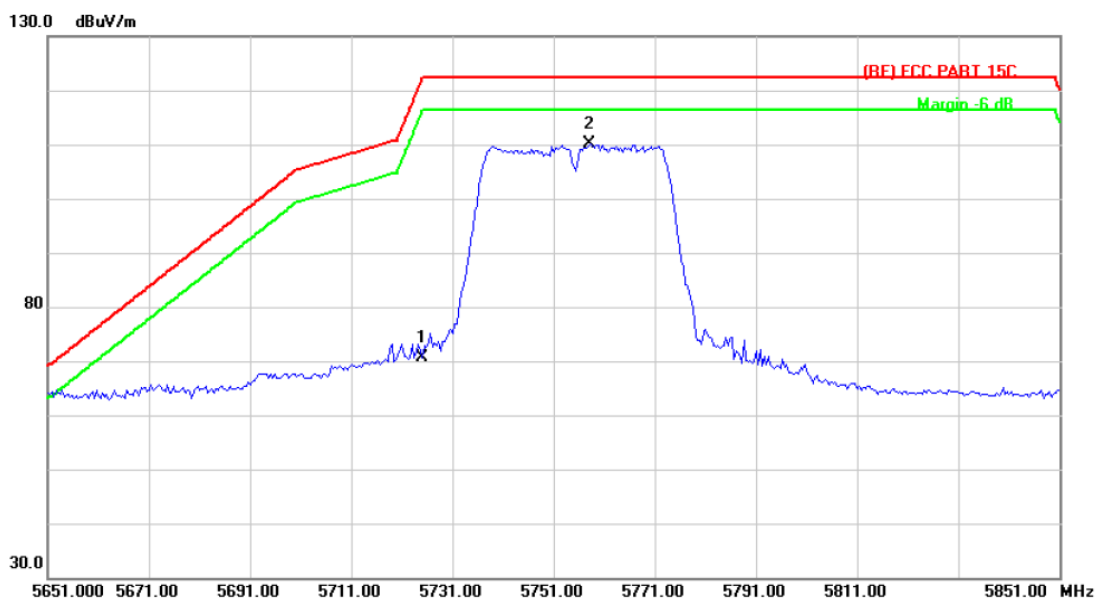

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 52.92                    | 17.82                     | 70.74                      | 122.30          | -51.56     | peak     |
| 2   | *   | 5758.200     | 92.25                    | 17.93                     | 110.18                     | 122.30          | -12.12     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Horizontal                                             |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

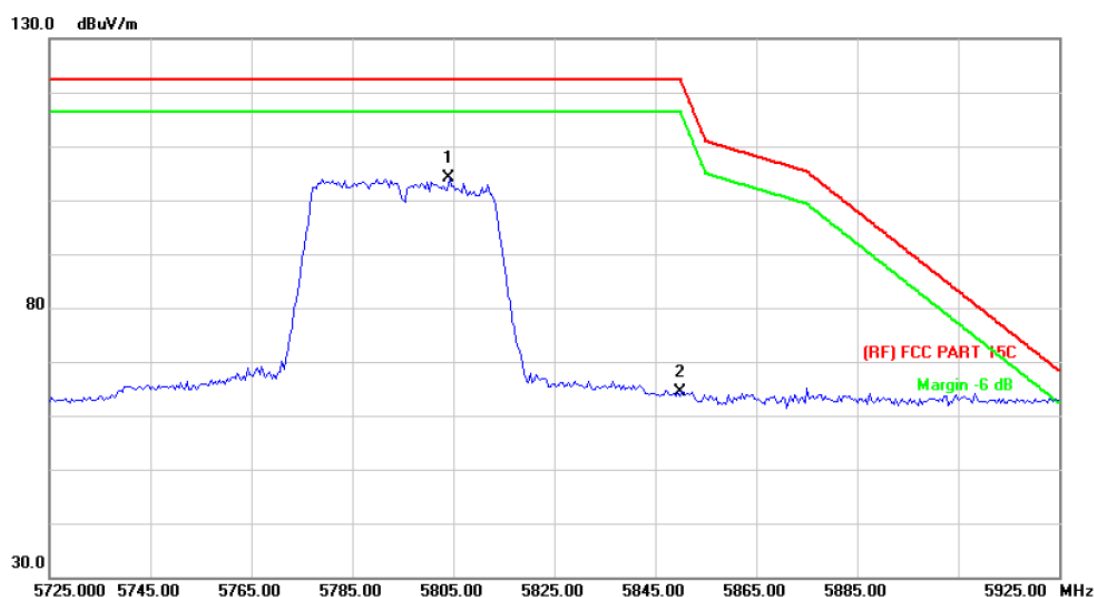

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5804.200     | 85.96                    | 18.11                     | 104.07                     | 122.30          | -18.23     | peak     |
| 2   |     | 5850.000     | 45.98                    | 18.28                     | 64.26                      | 122.30          | -58.04     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Ant. Pol.     | Vertical                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                        |                    |     |

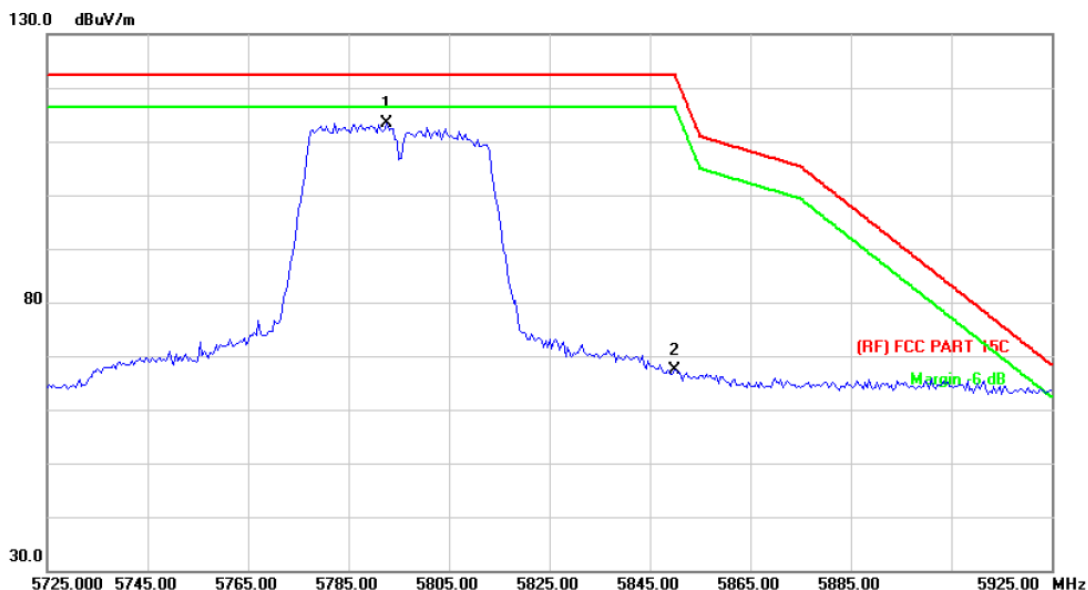

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 5792.600 | 95.20         | 18.07          | 113.27       | 122.30 | -9.03  | peak     |
| 2   |     | 5850.000 | 49.00         | 18.28          | 67.28        | 122.30 | -55.02 | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

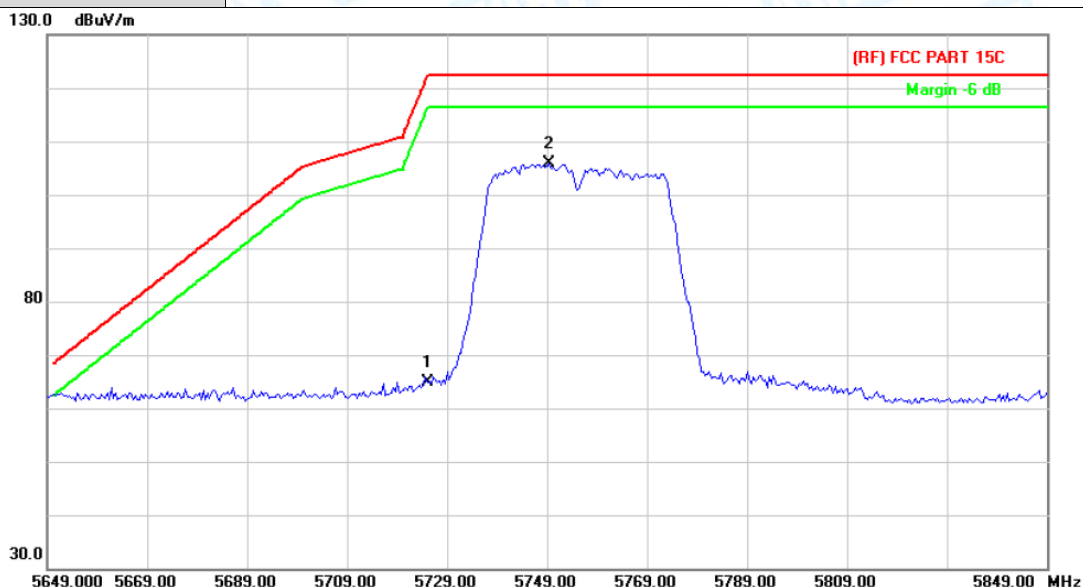

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 46.95                    | 17.82                     | 64.77                      | 122.30          | -57.53     | peak     |
| 2   | *   | 5749.400     | 87.93                    | 17.91                     | 105.84                     | 122.30          | -16.46     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

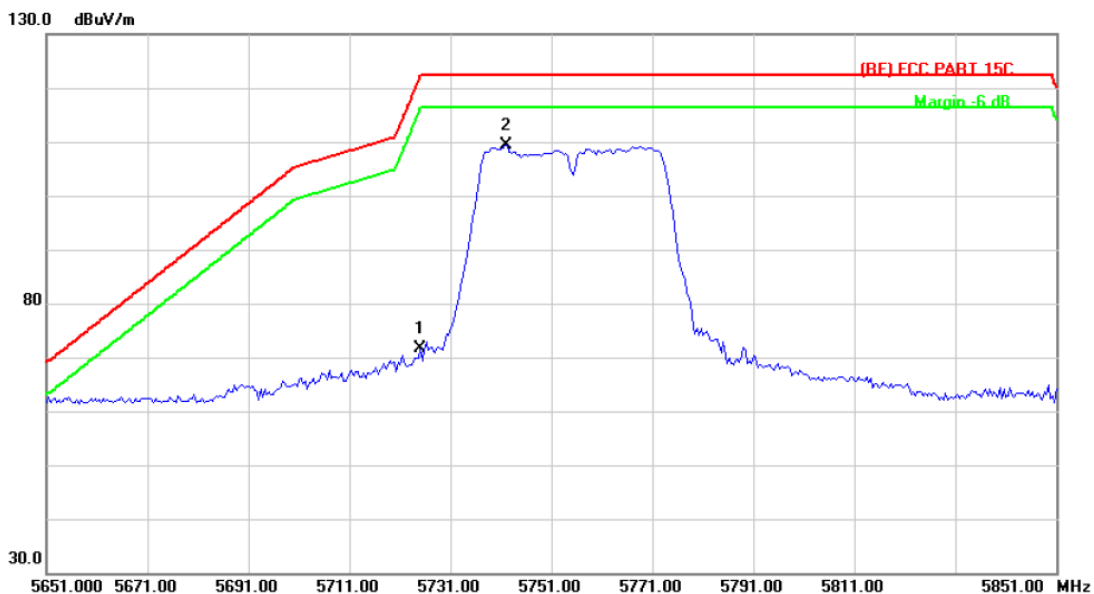

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 5725.000     | 53.78                    | 17.82                     | 71.60                      | 122.30          | -50.70     | peak     |
| 2   | *   | 5742.200     | 91.44                    | 17.89                     | 109.33                     | 122.30          | -12.97     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

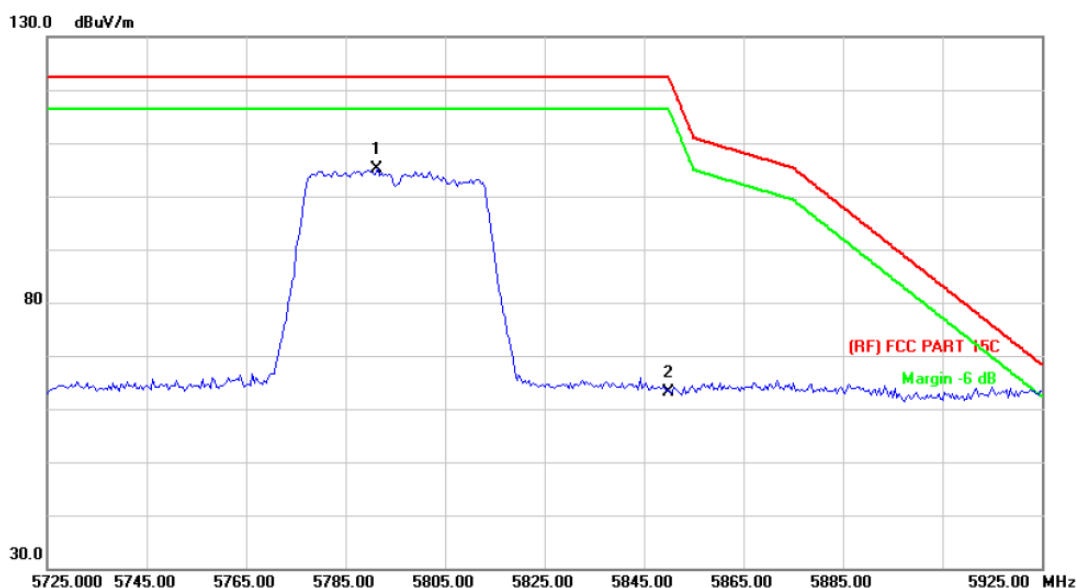

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5791.400     | 86.98                    | 18.07                     | 105.05                     | 122.30          | -17.25     | peak     |
| 2   |     | 5850.000     | 44.83                    | 18.28                     | 63.11                      | 122.30          | -59.19     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

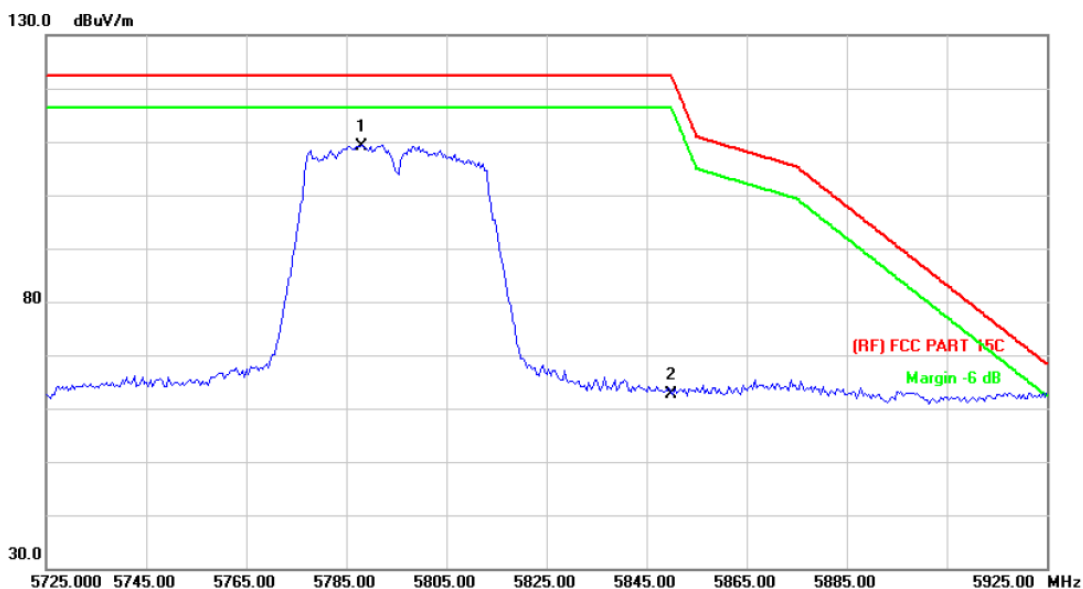

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 5788.200     | 91.19                    | 18.06                     | 109.25                     | 122.30          | -13.05     | peak     |
| 2   |     | 5850.000     | 44.39                    | 18.28                     | 62.67                      | 122.30          | -59.63     | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Horizontal                                               |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

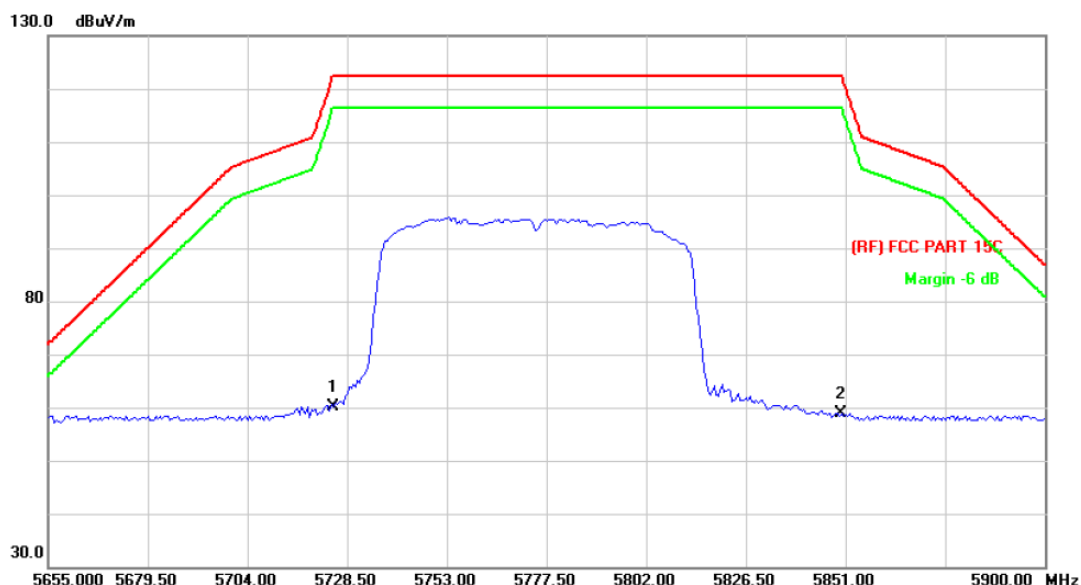

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 5725.000 | 44.80         | 15.32          | 60.12       | 122.30 | -62.18 | peak     |
| 2   |     | 5850.000 | 43.10         | 15.74          | 58.84       | 122.30 | -63.46 | peak     |

Emission Level= Read Level+ Correct Factor


|               |                                                          |                    |     |
|---------------|----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                    | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                             |                    |     |
| Ant. Pol.     | Vertical                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) Antenna 0+1+2 |                    |     |
| Remark:       |                                                          |                    |     |

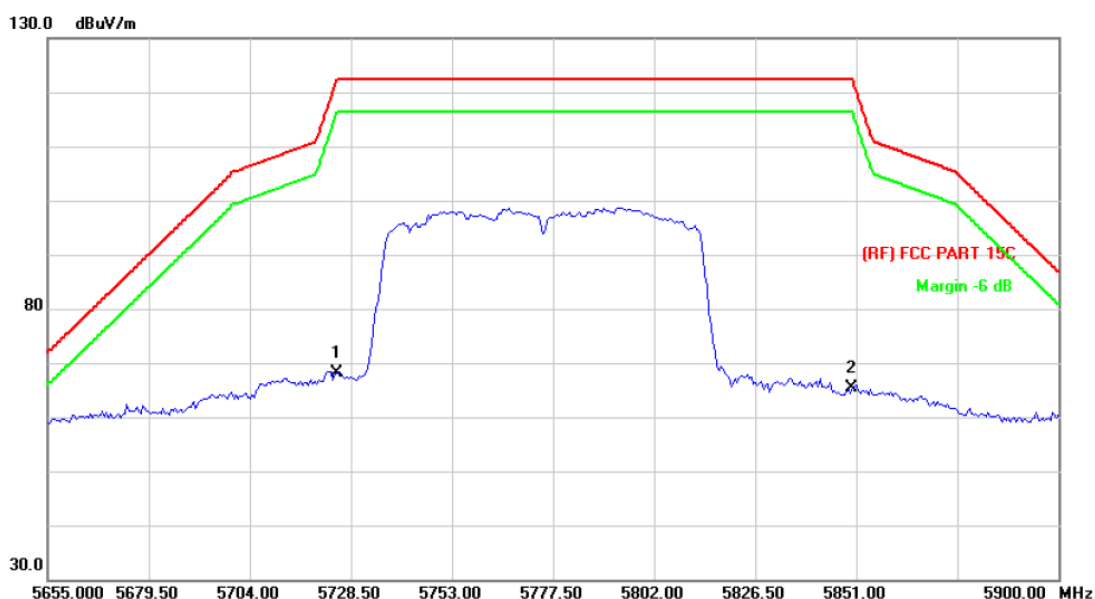



| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 5725.000 | 52.75         | 15.32          | 68.07       | 122.30 | -54.23 | peak     |
| 2   |     | 5850.000 | 49.67         | 15.74          | 65.41       | 122.30 | -56.89 | peak     |

Emission Level= Read Level+ Correct Factor



(2) Conducted Test

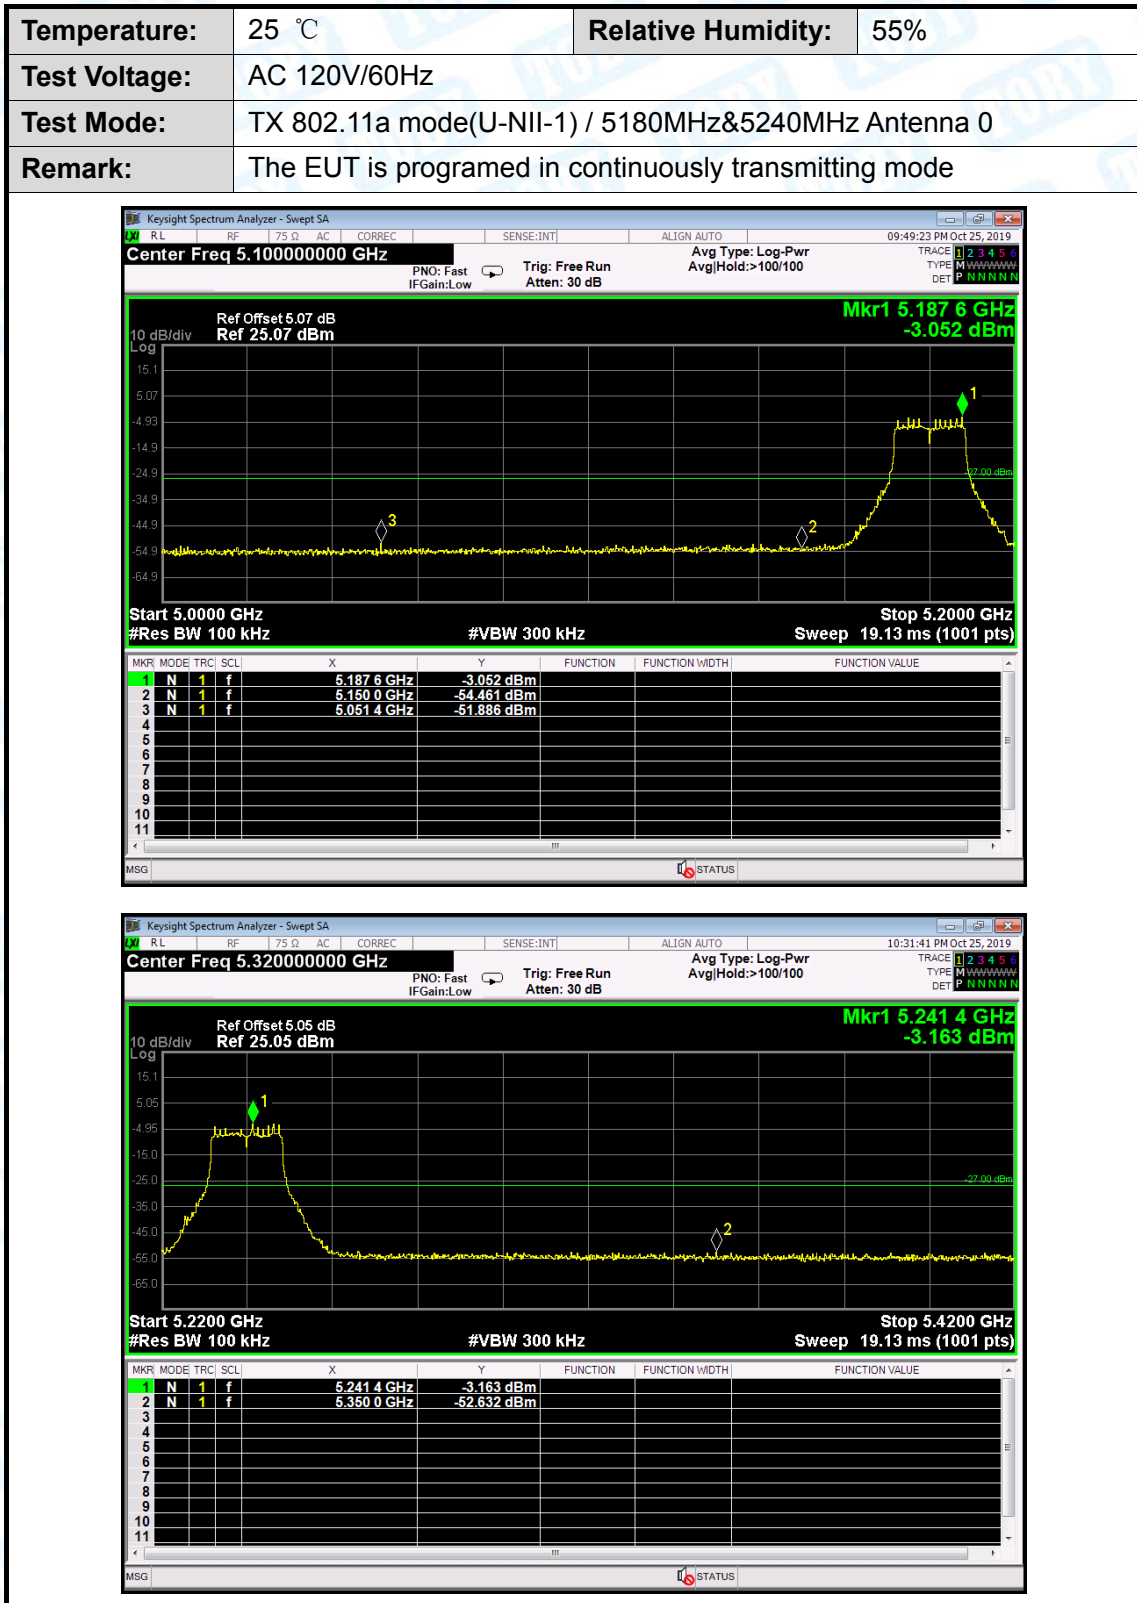



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11a mode(U-NII-1) / 5180MHz&5240MHz Antenna 1   |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

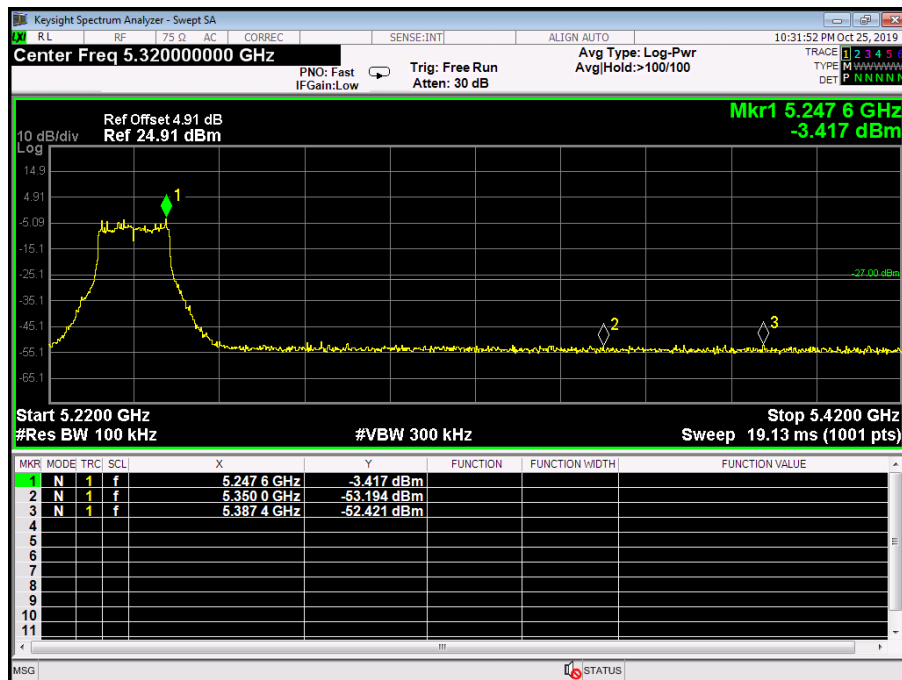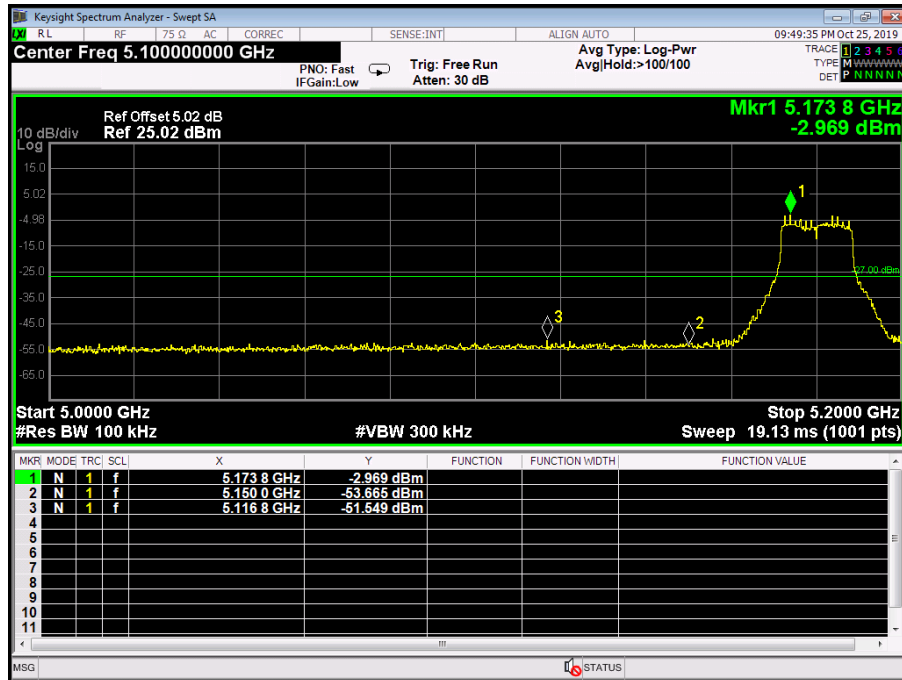



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11a mode(U-NII-1) / 5180MHz&5240MHz Antenna 2   |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

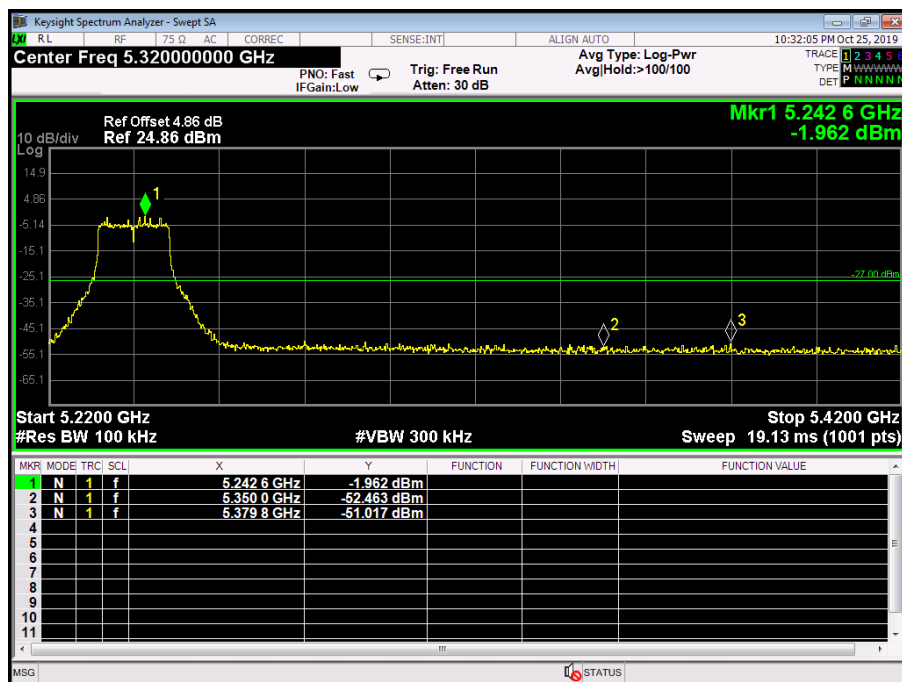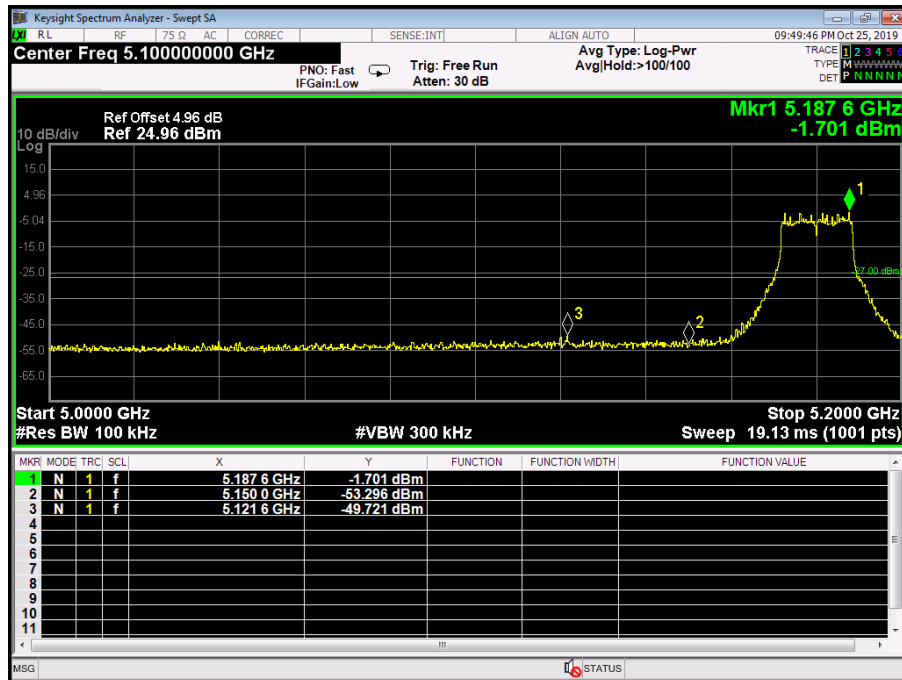



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

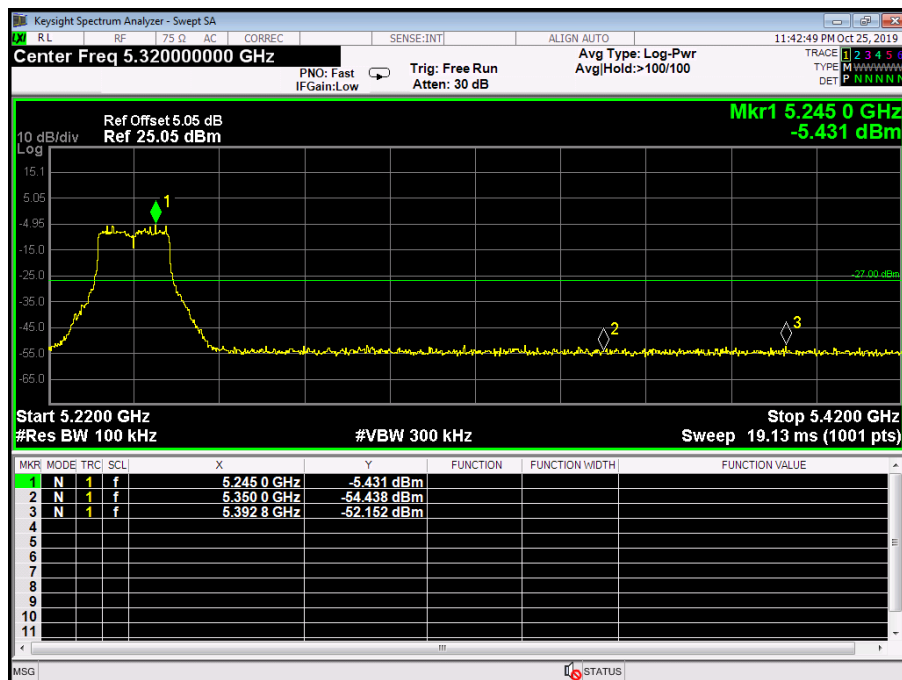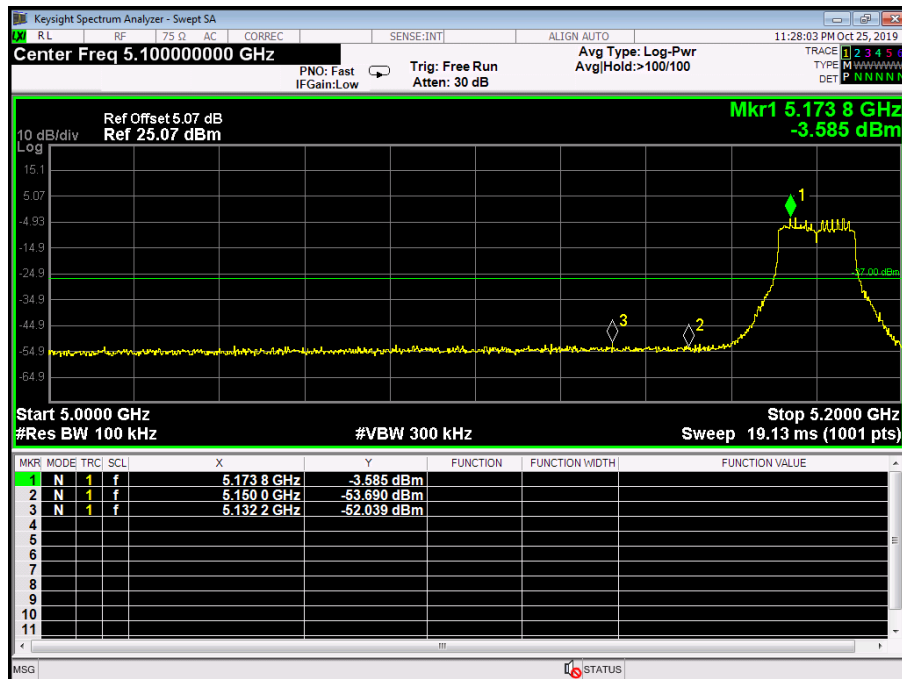



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

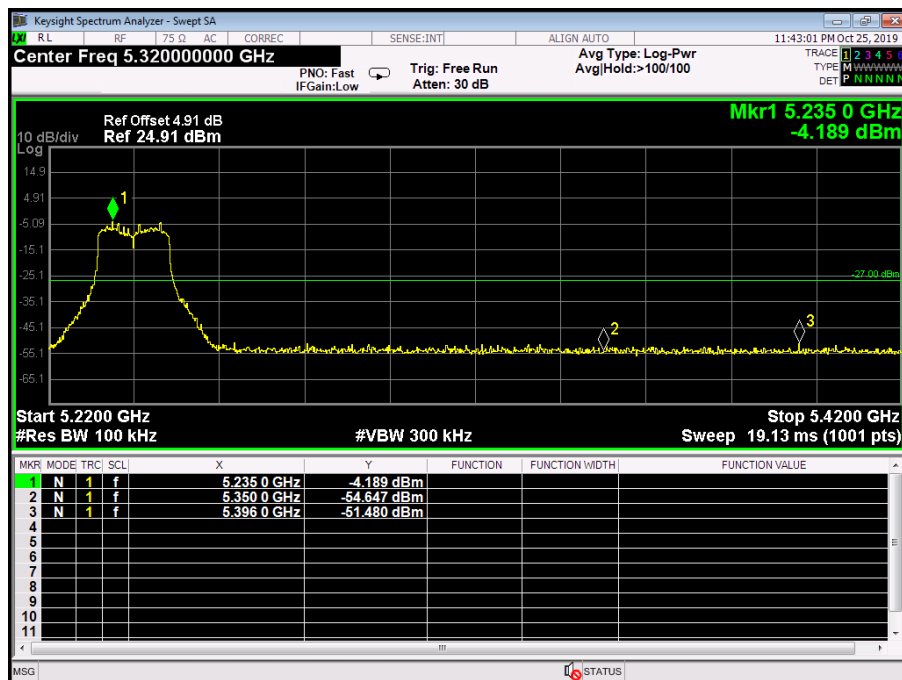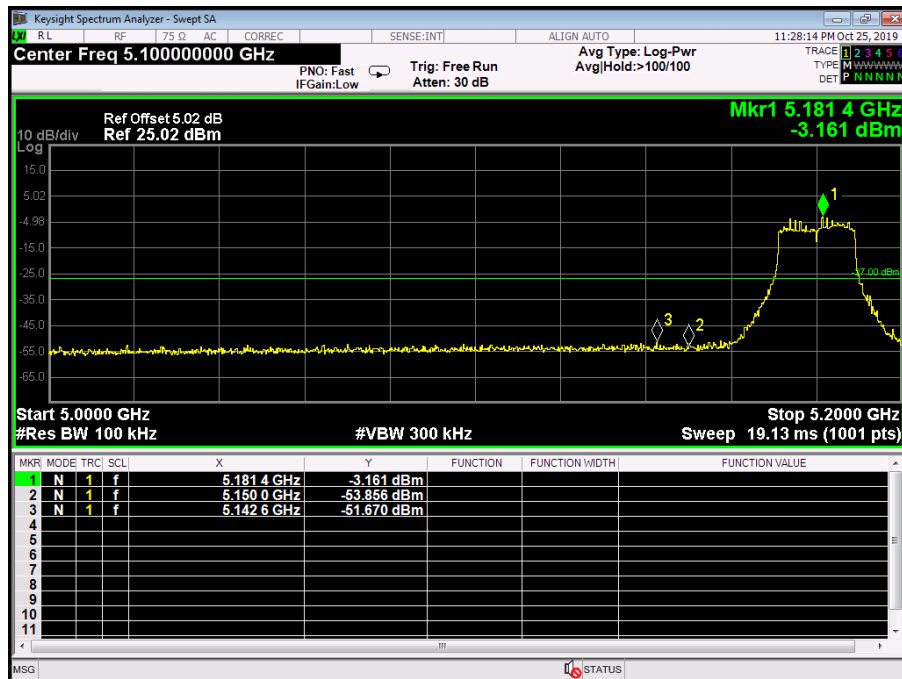



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

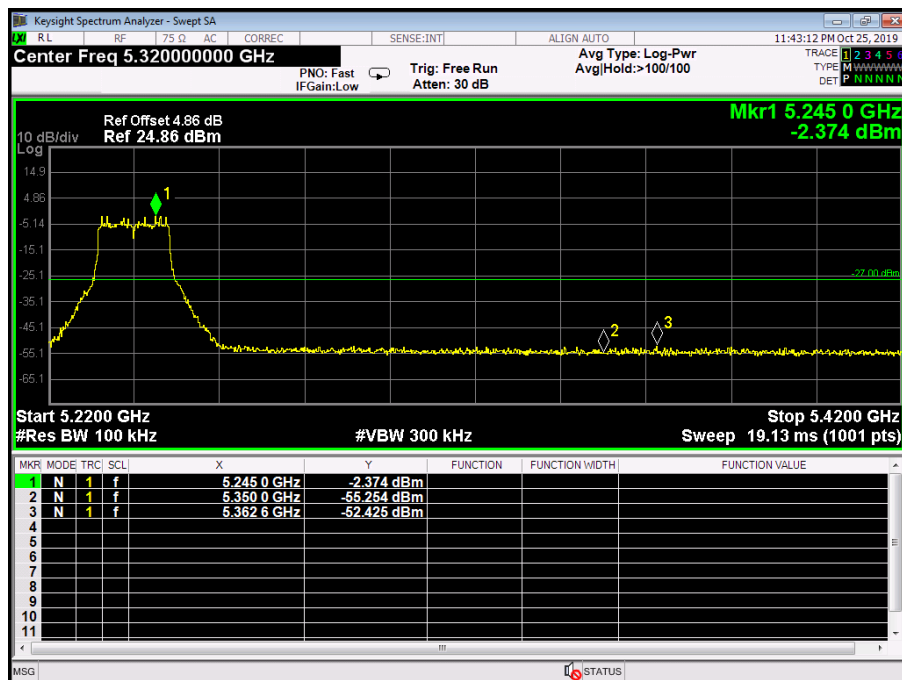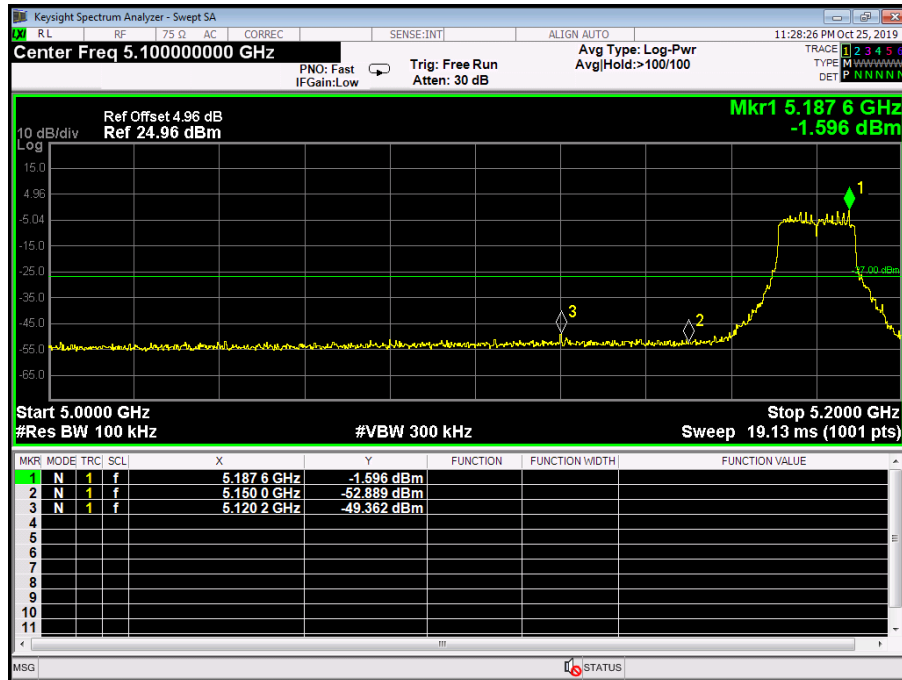



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

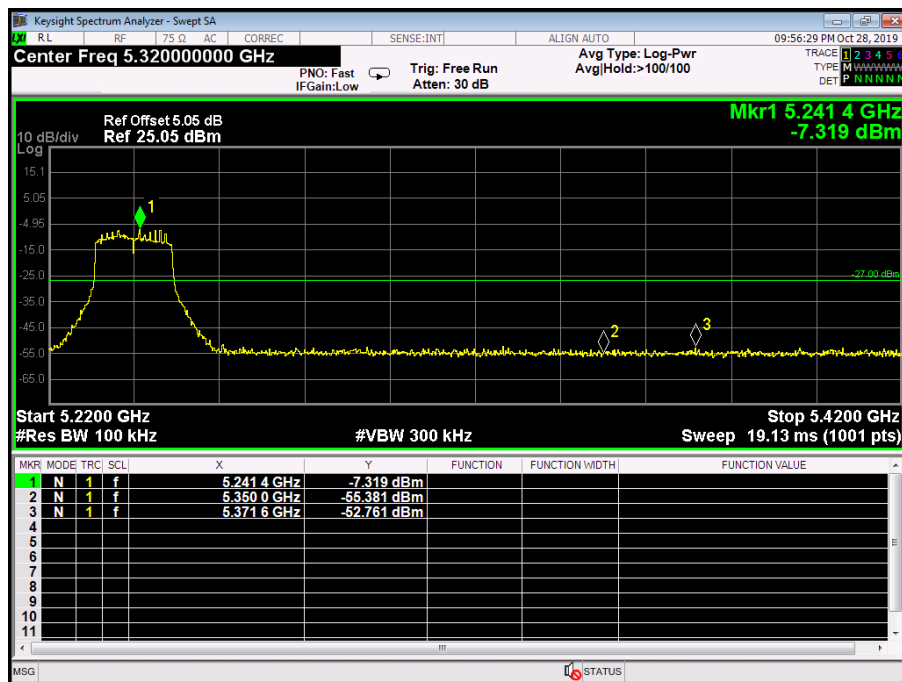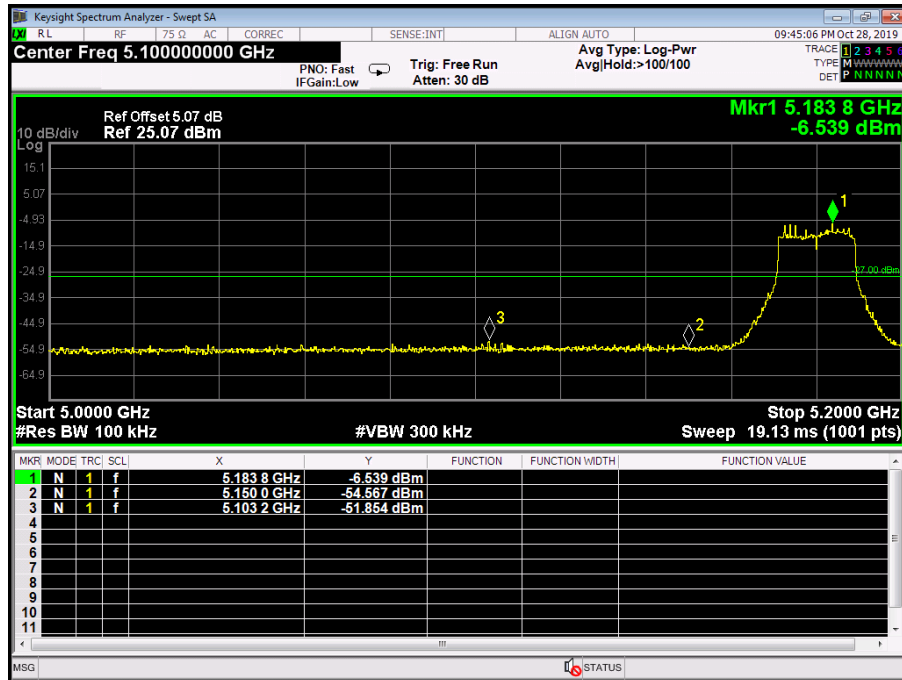



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

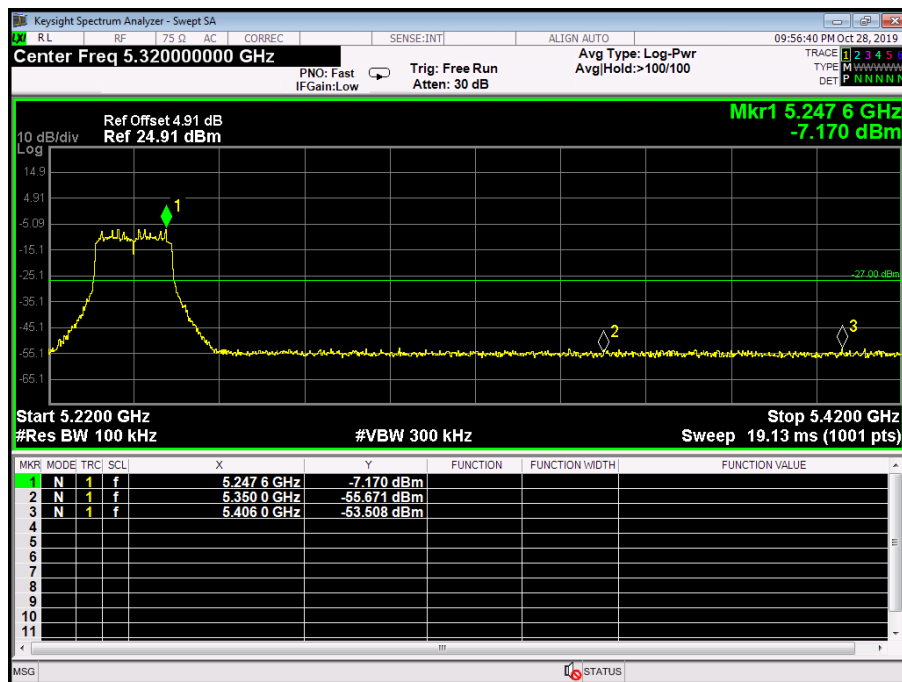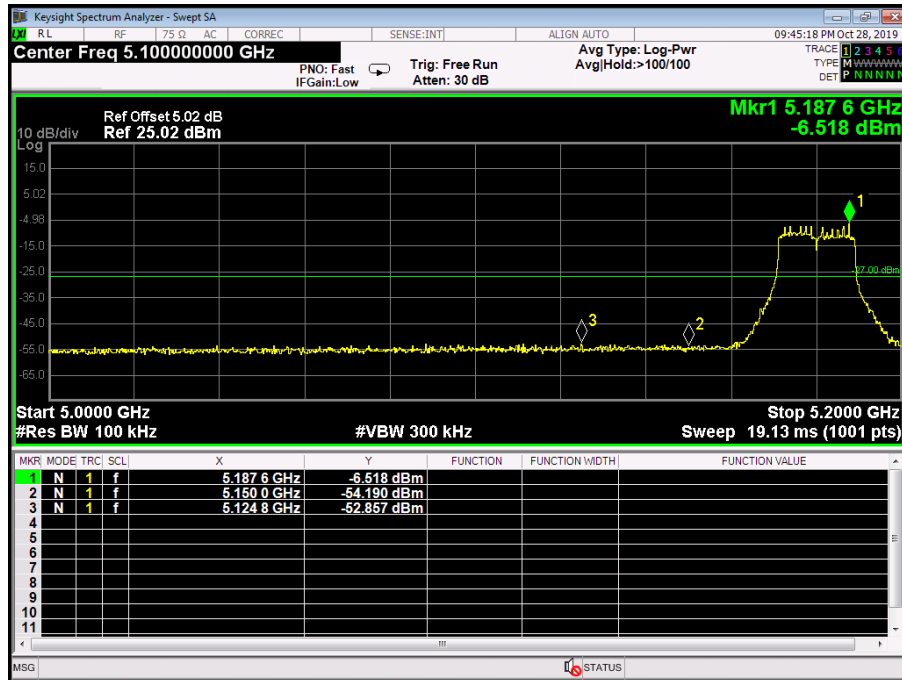



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

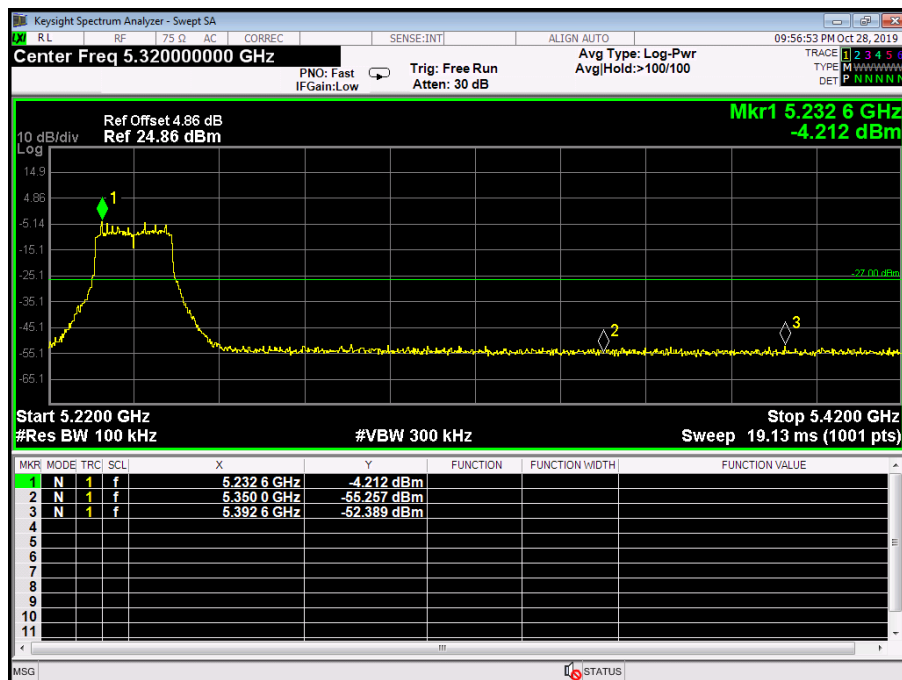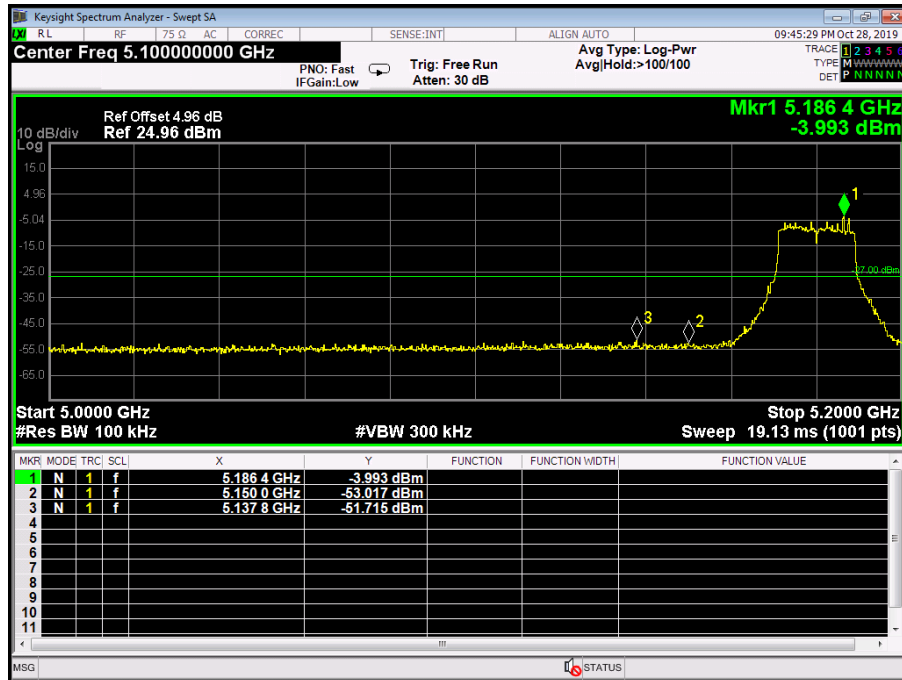



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

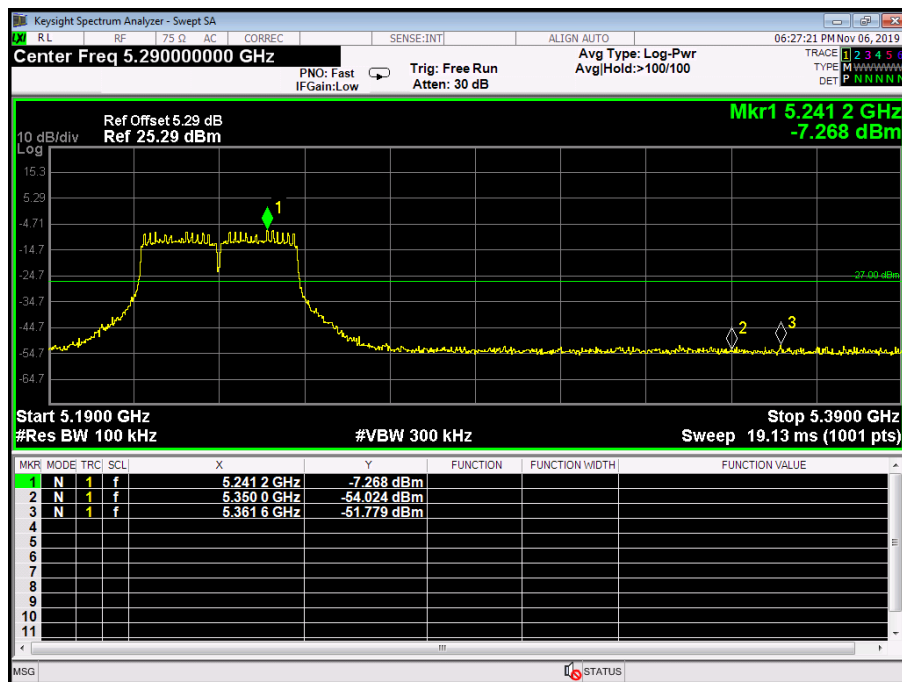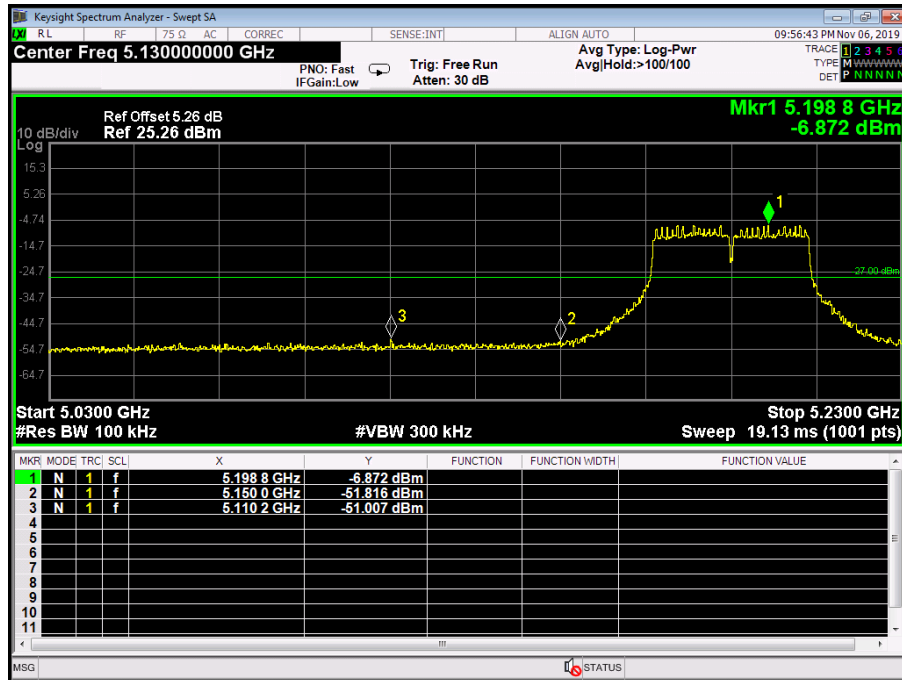



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

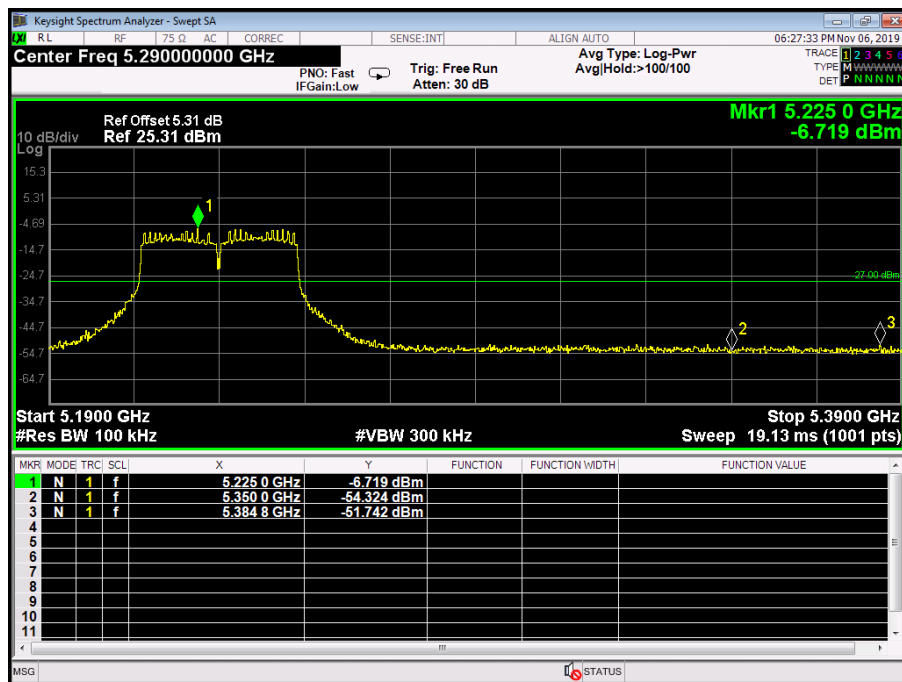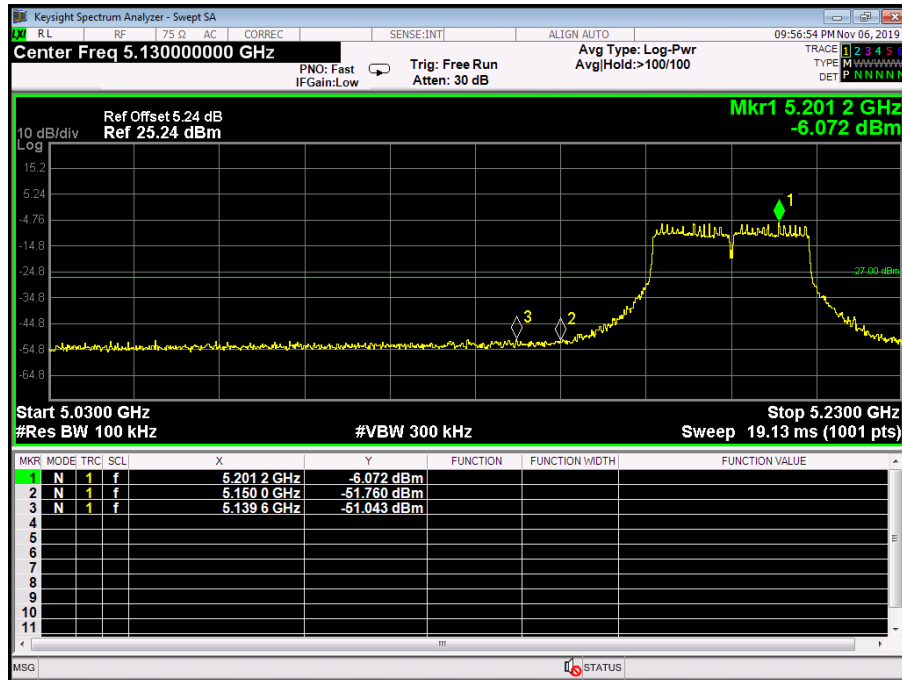



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

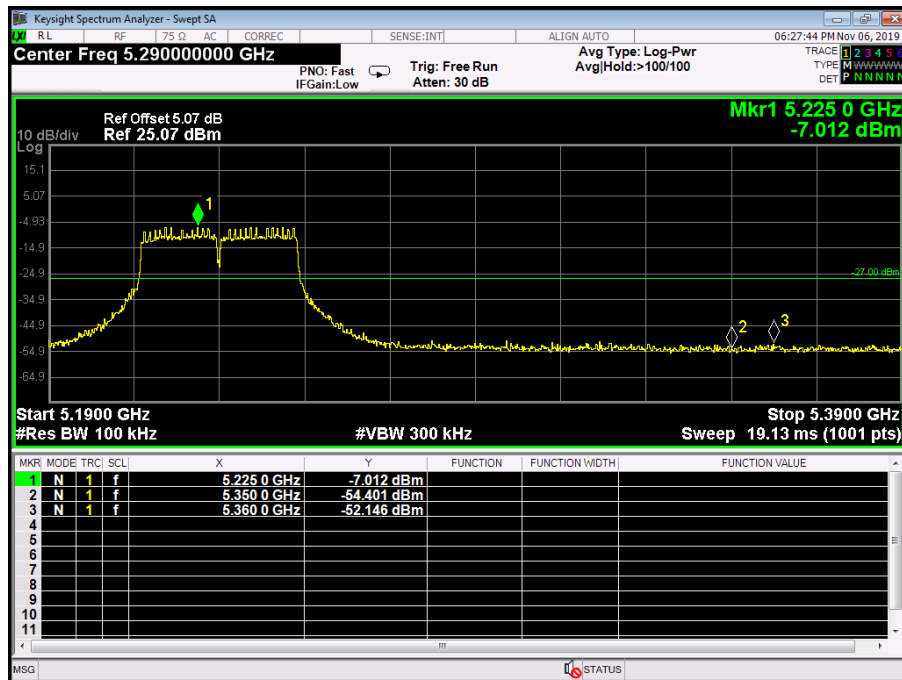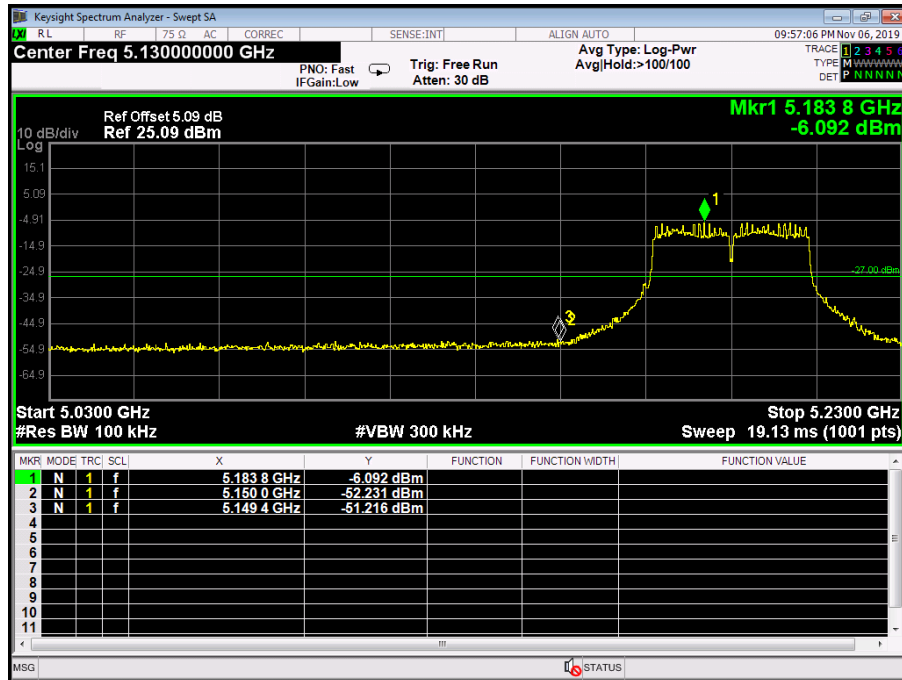



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

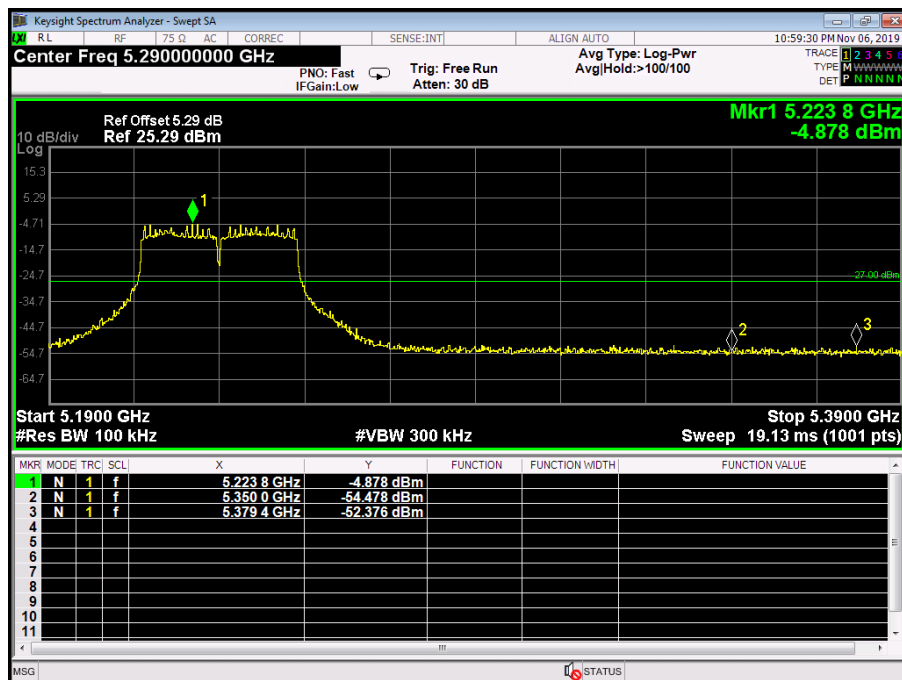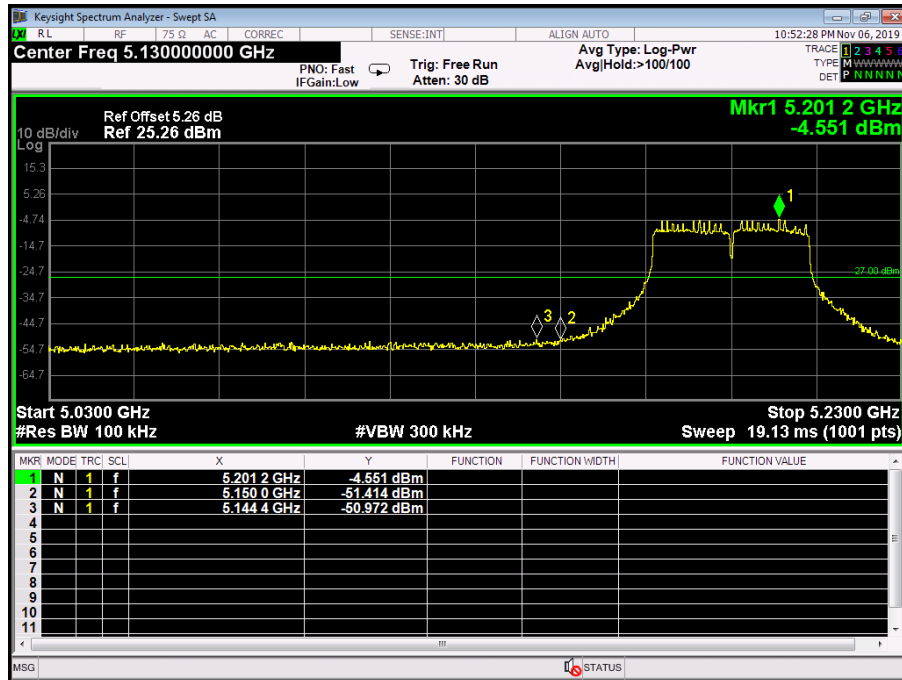



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

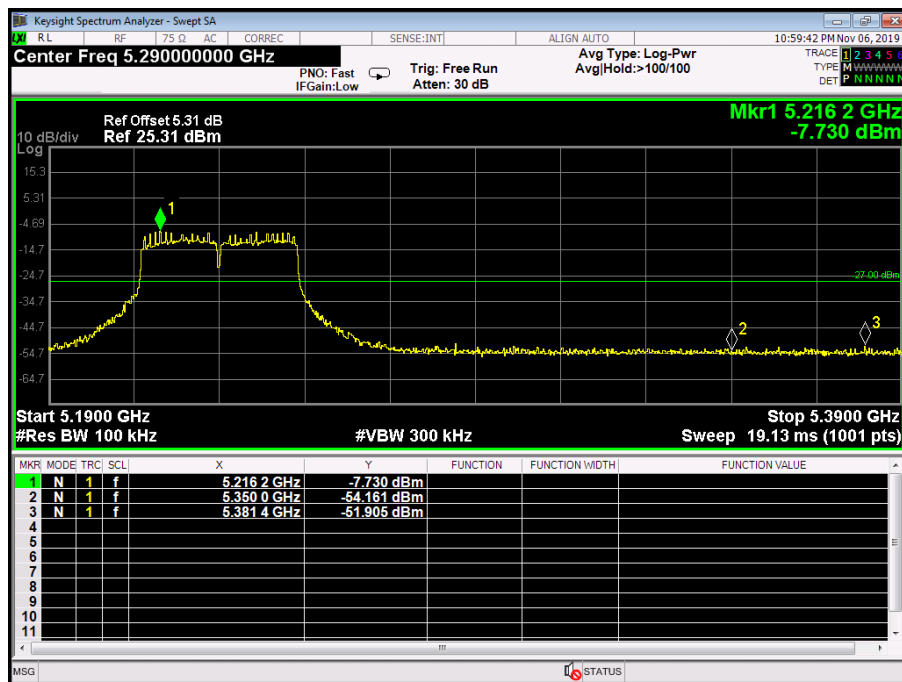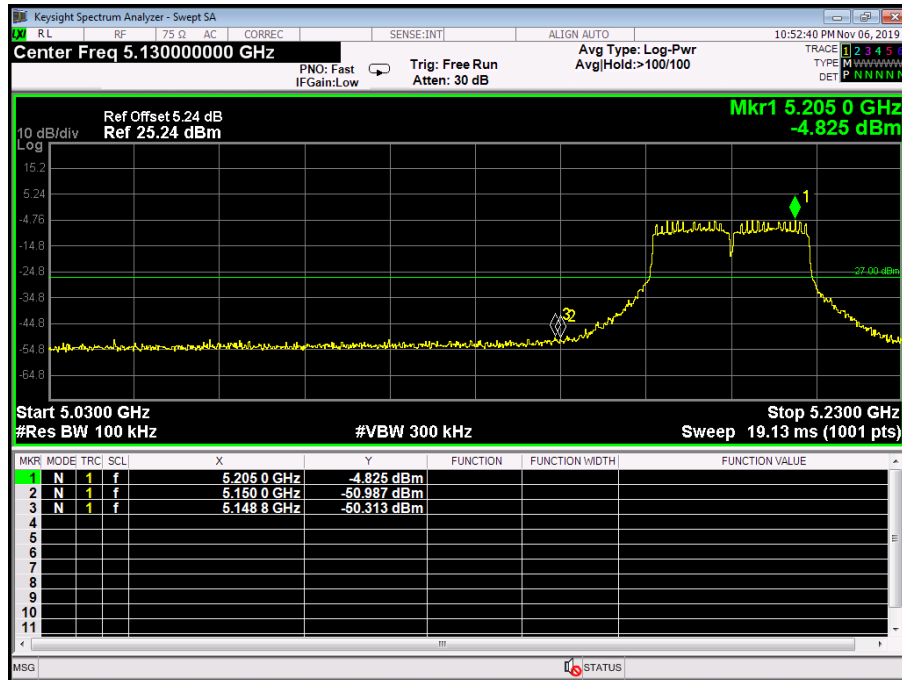



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

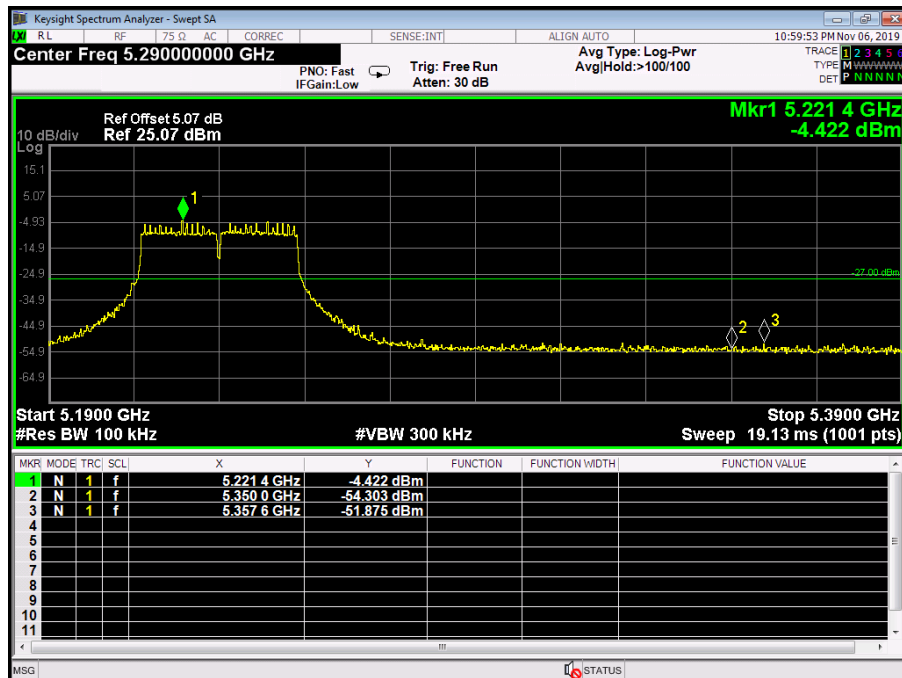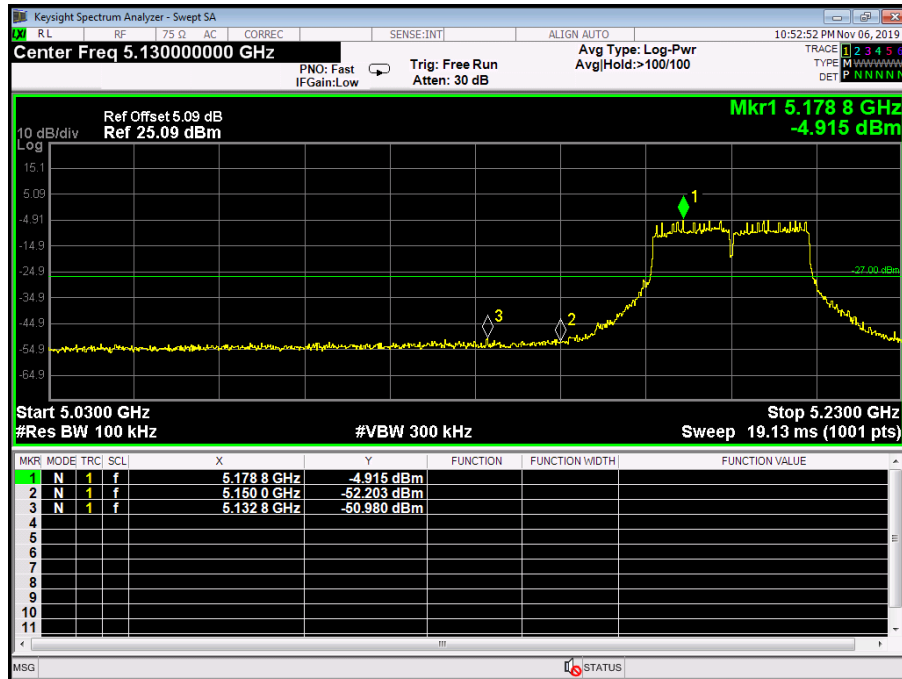



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11ac(80) mode(U-NII-1) 5210MHz Antenna 0        |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

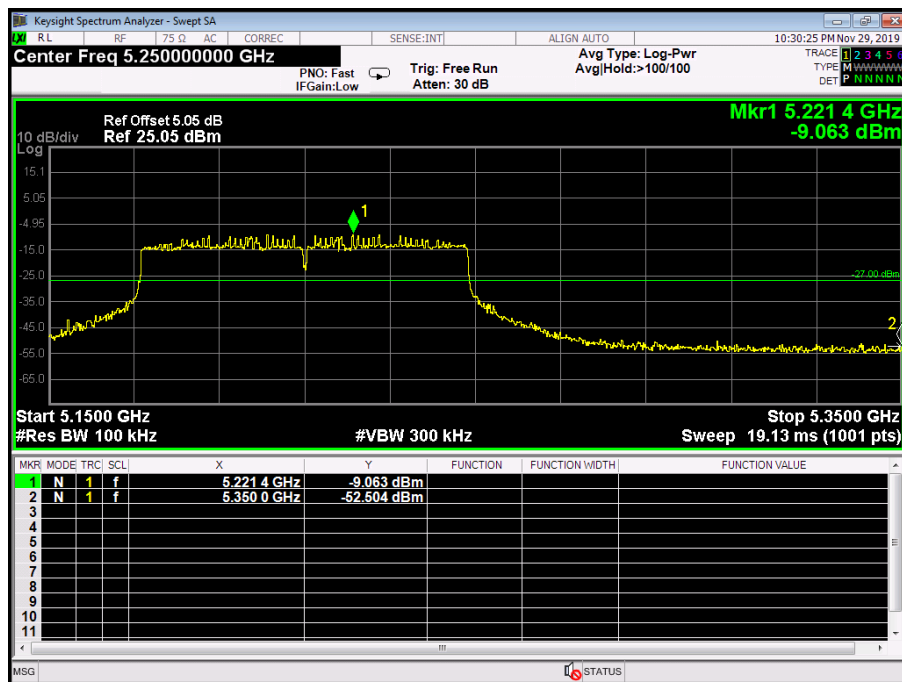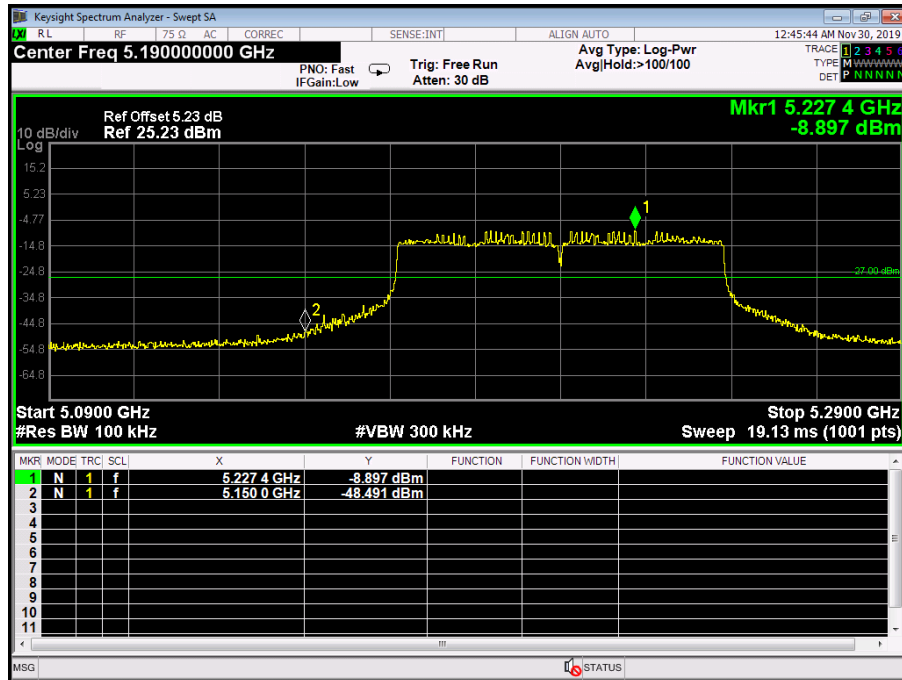



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11ac(80) mode(U-NII-1) 5210MHz Antenna 1        |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

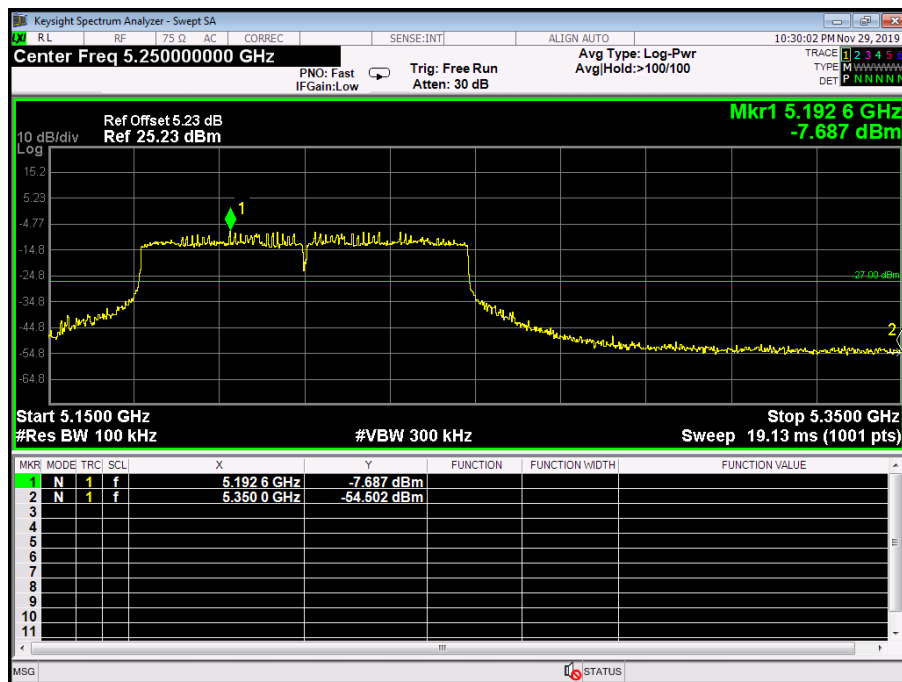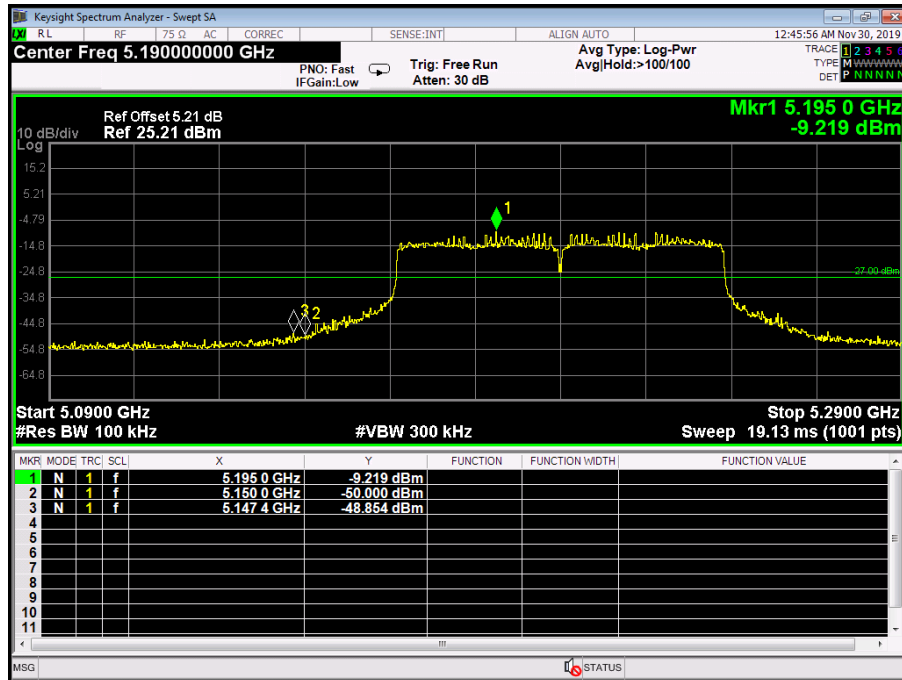



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11ac(80) mode(U-NII-1) / 5210MHz Antenna 2      |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

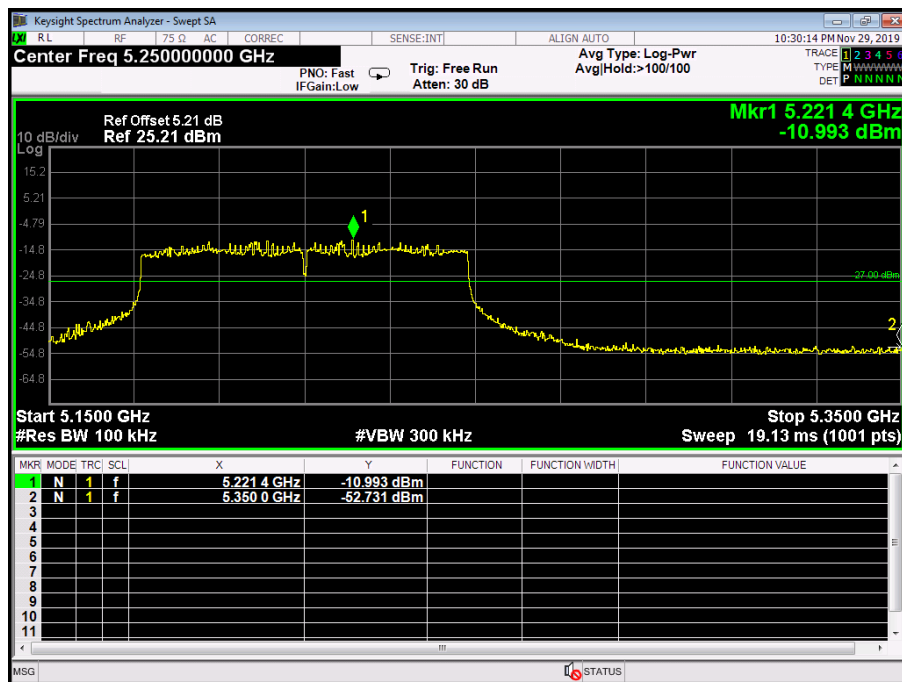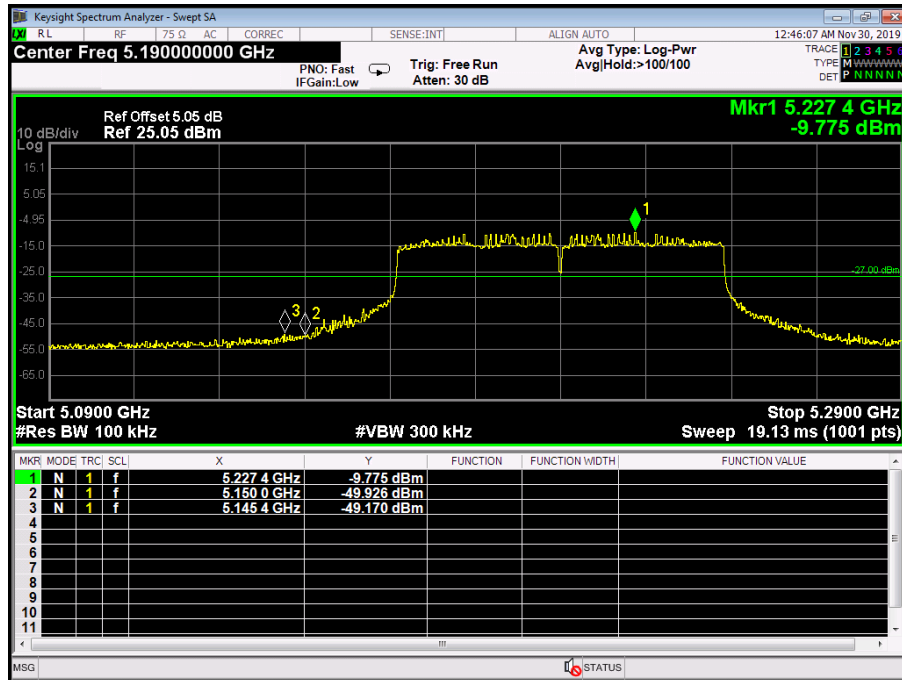



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 0   |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

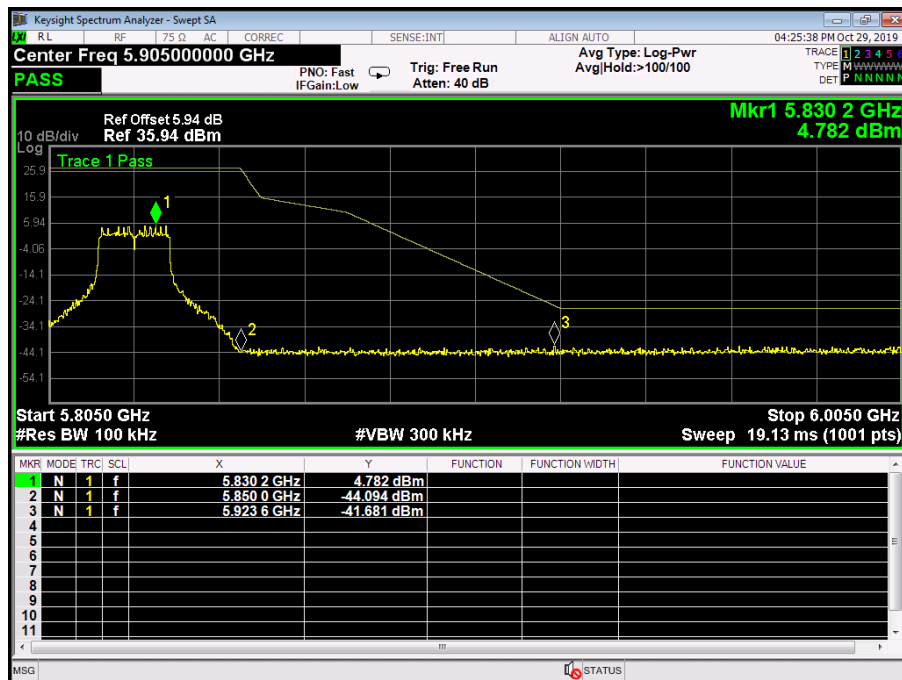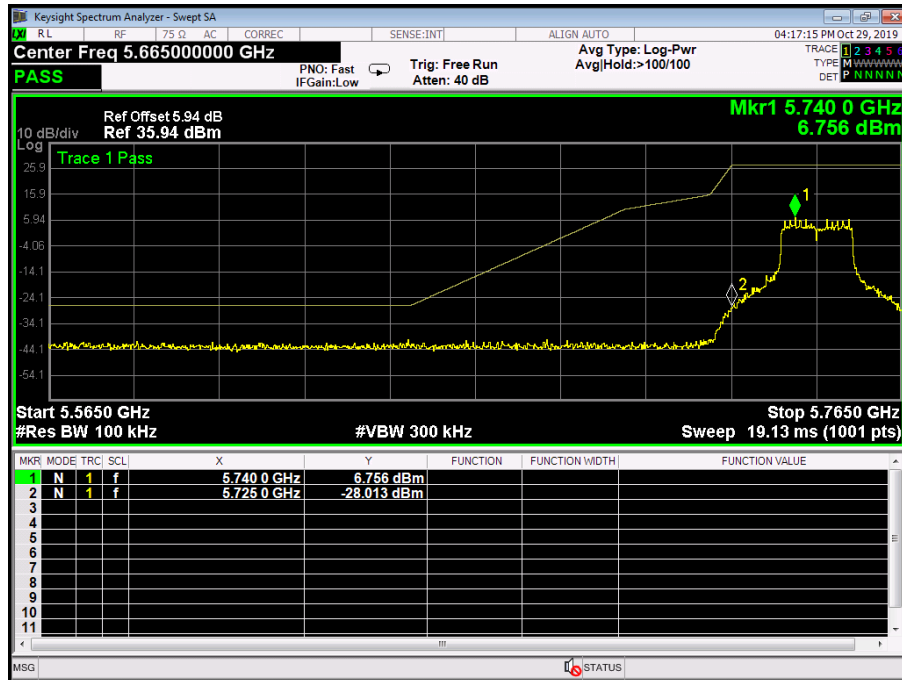



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 1   |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

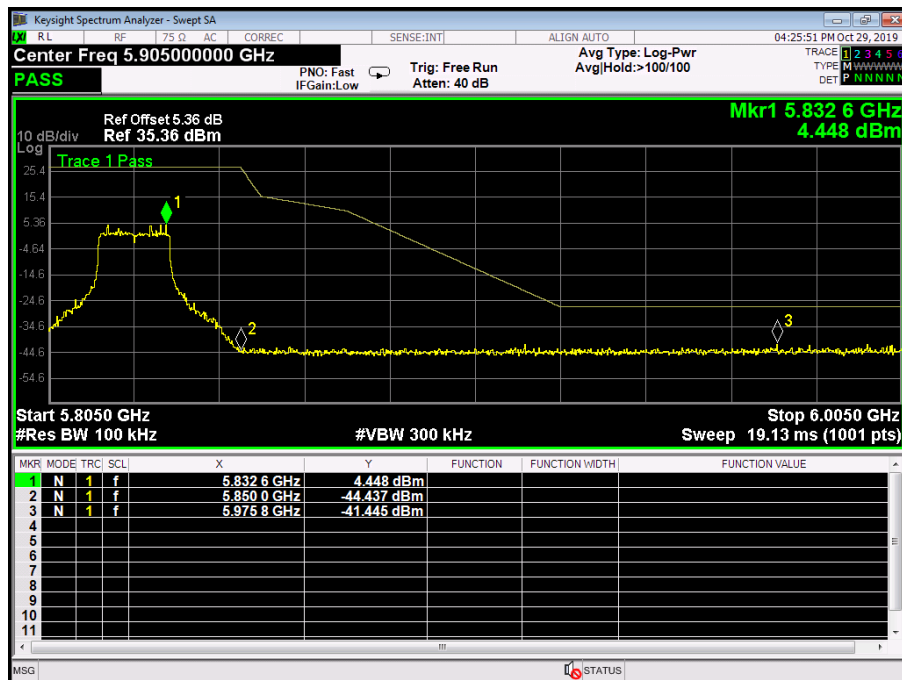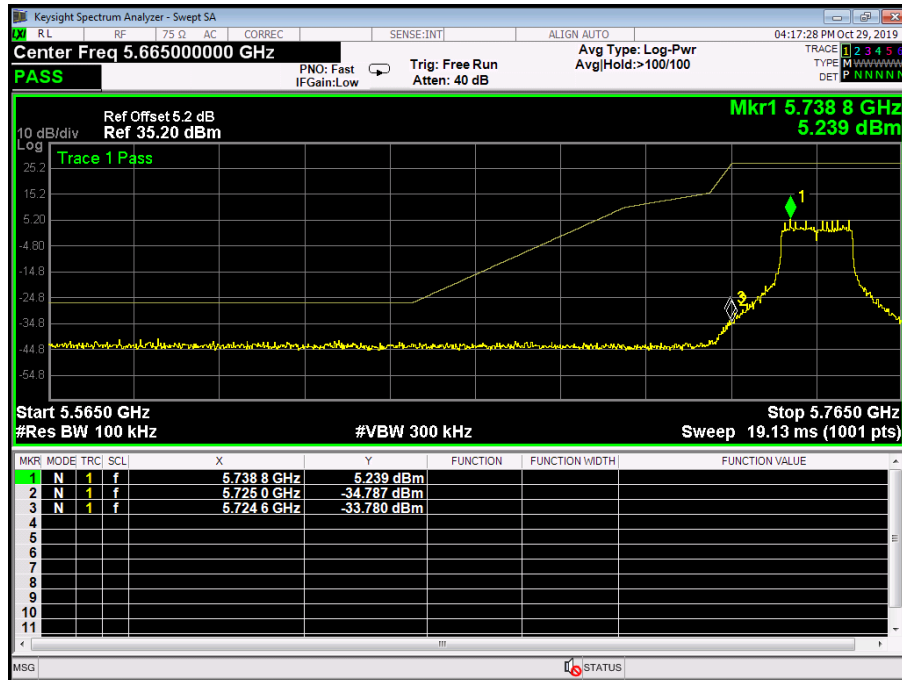



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 2   |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

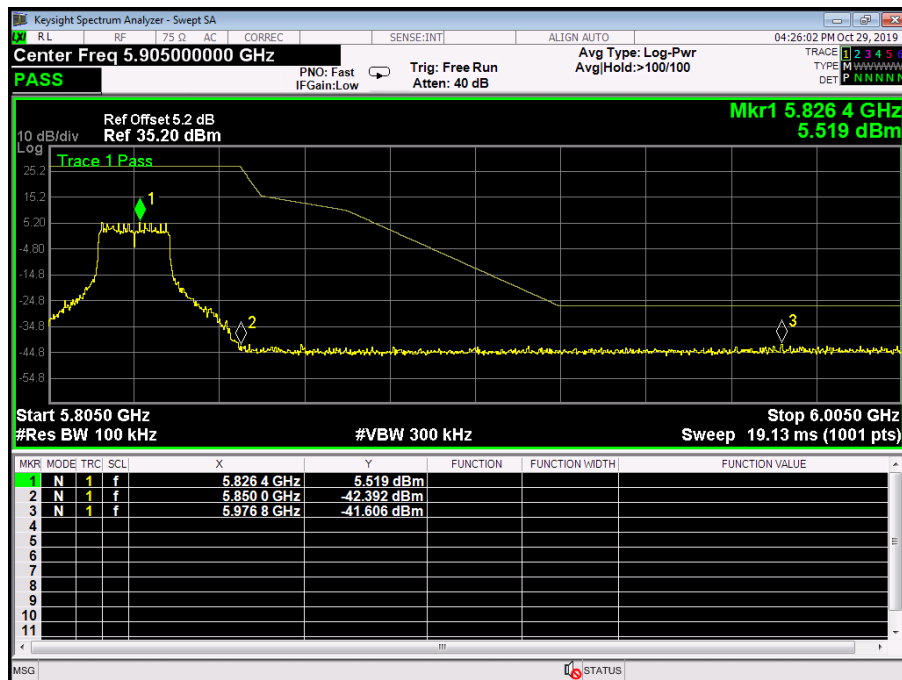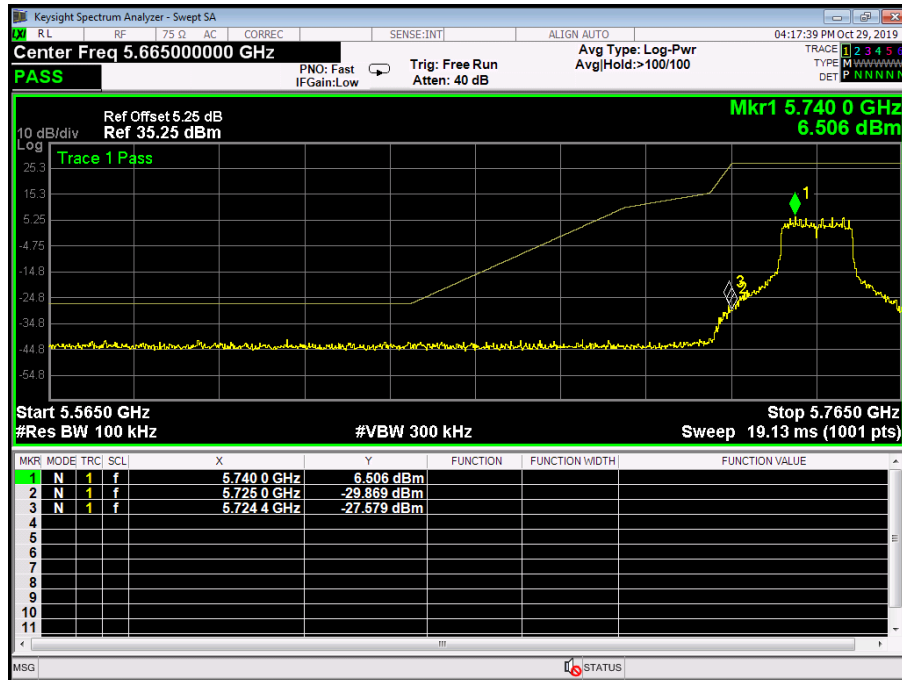



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

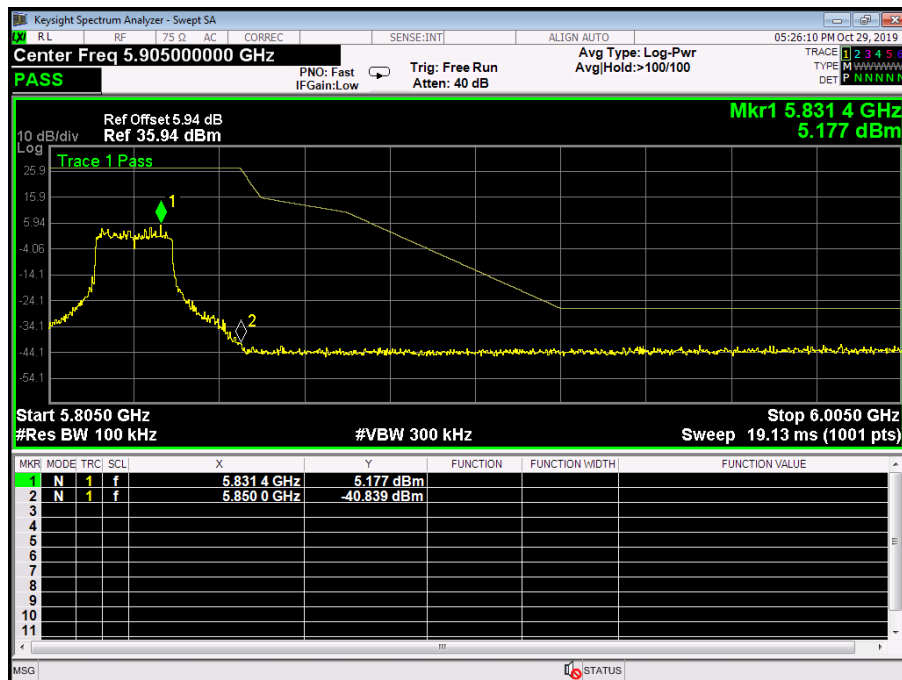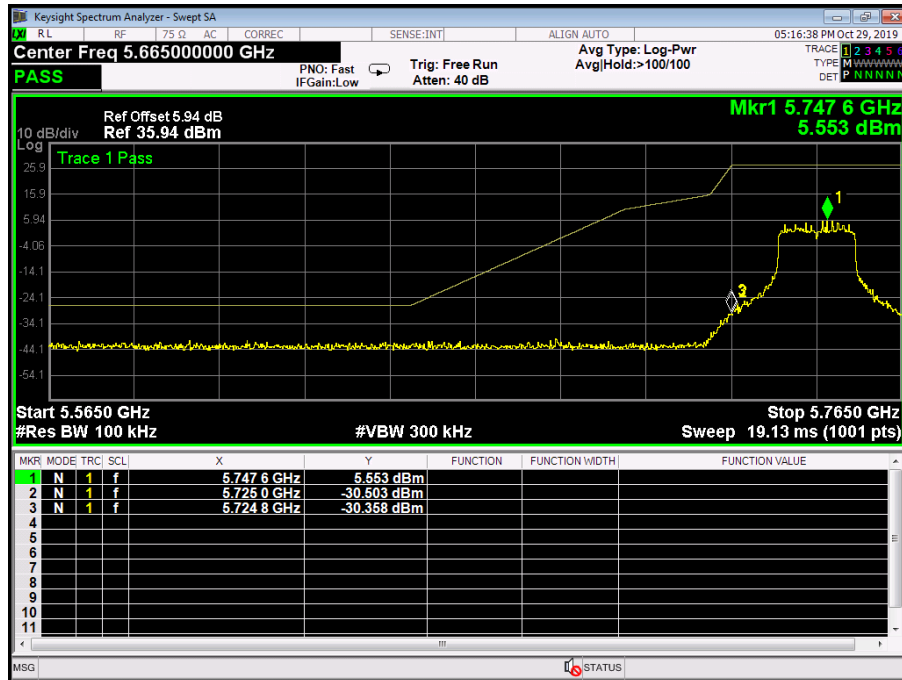



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

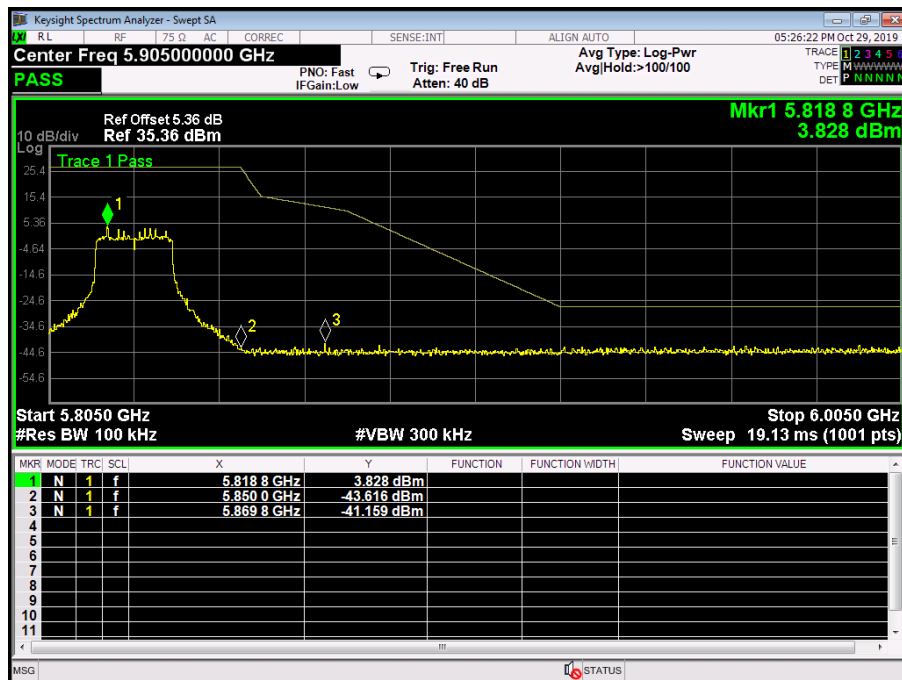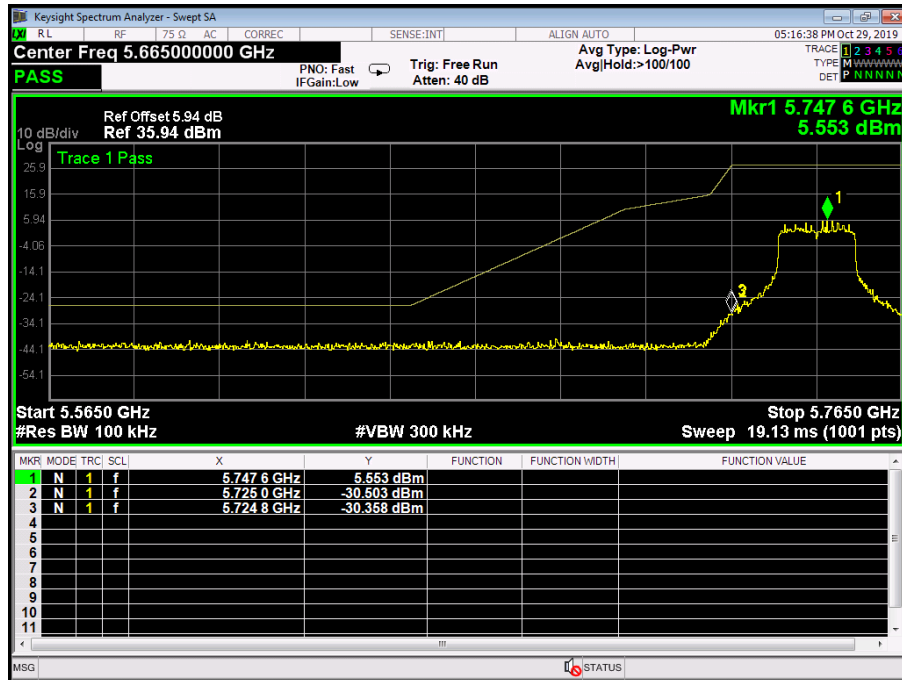



|               |                                                            |                    |     |
|---------------|------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                      | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode     |                    |     |

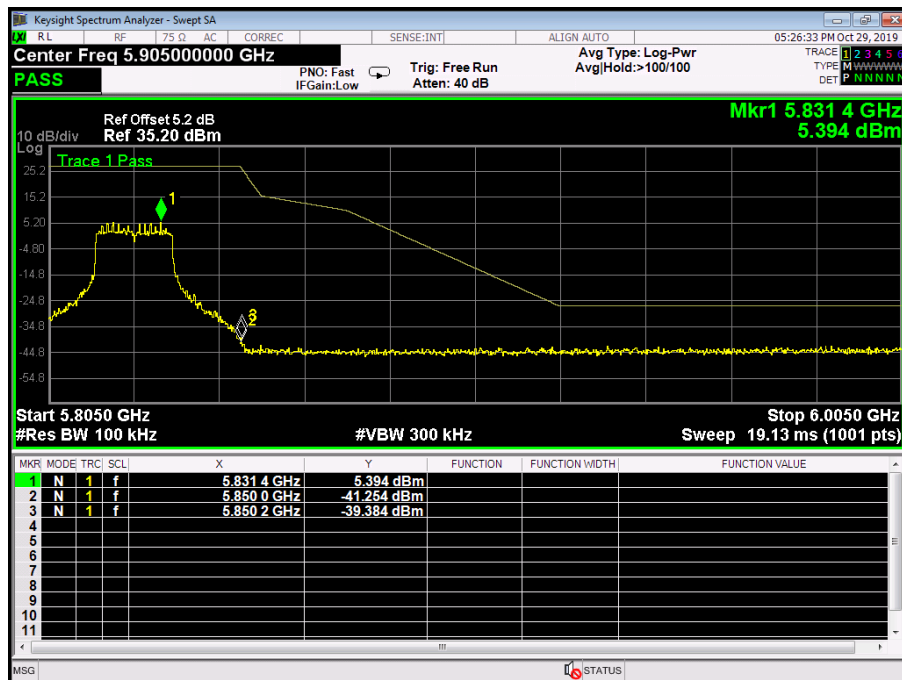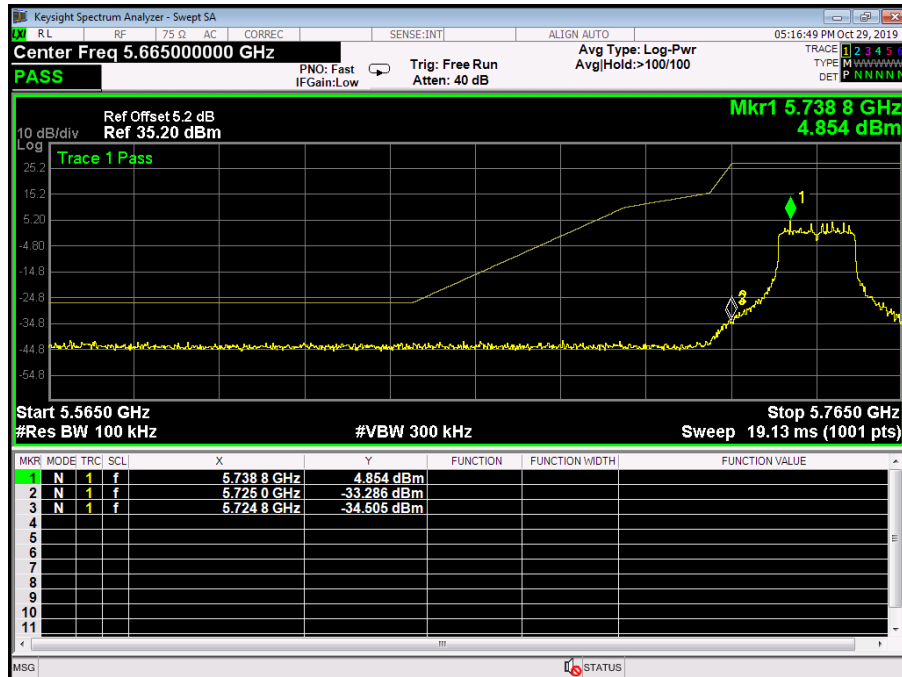



|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

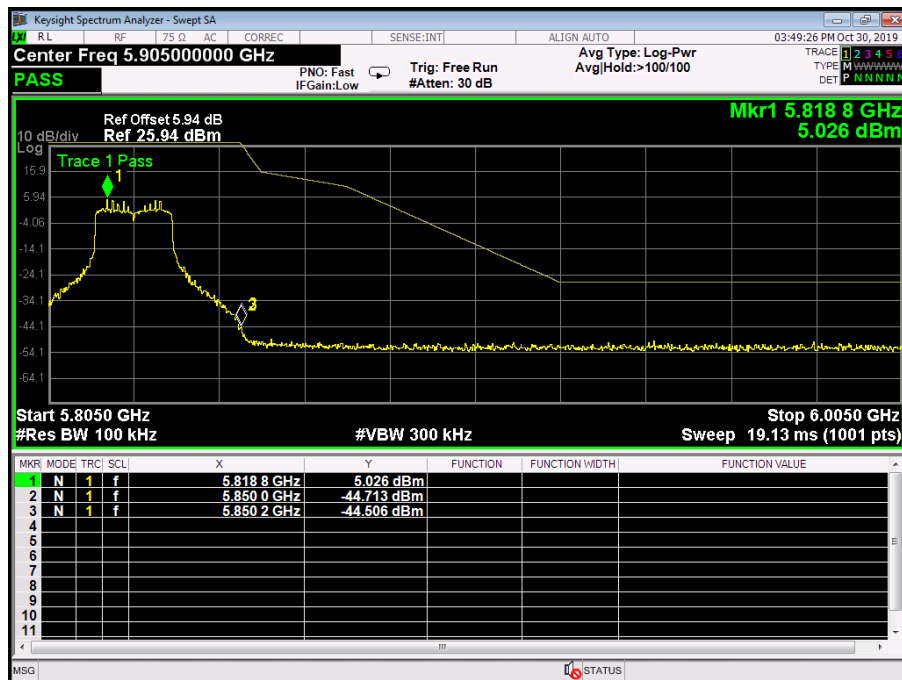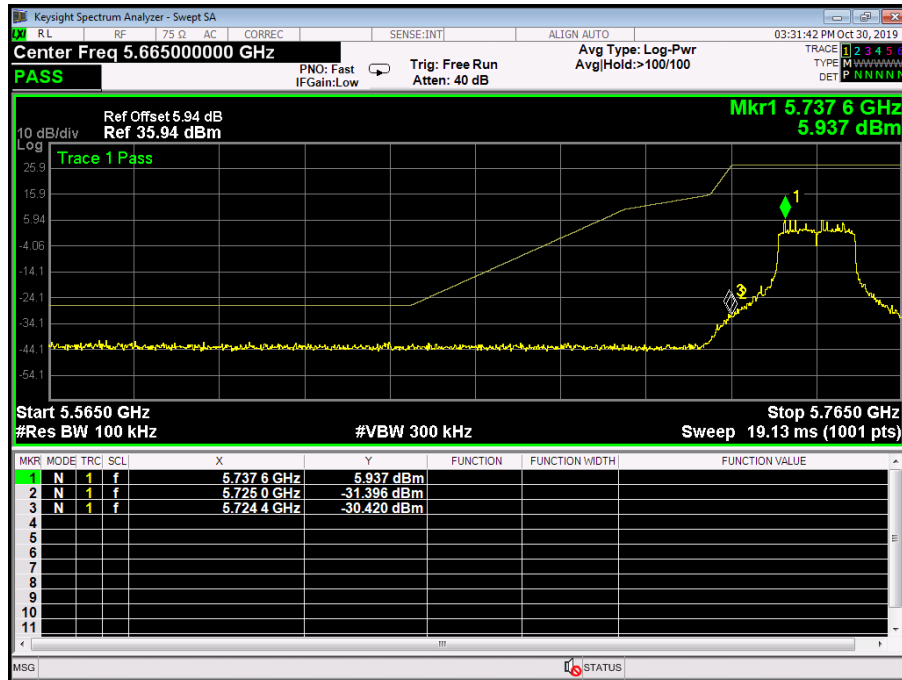


|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

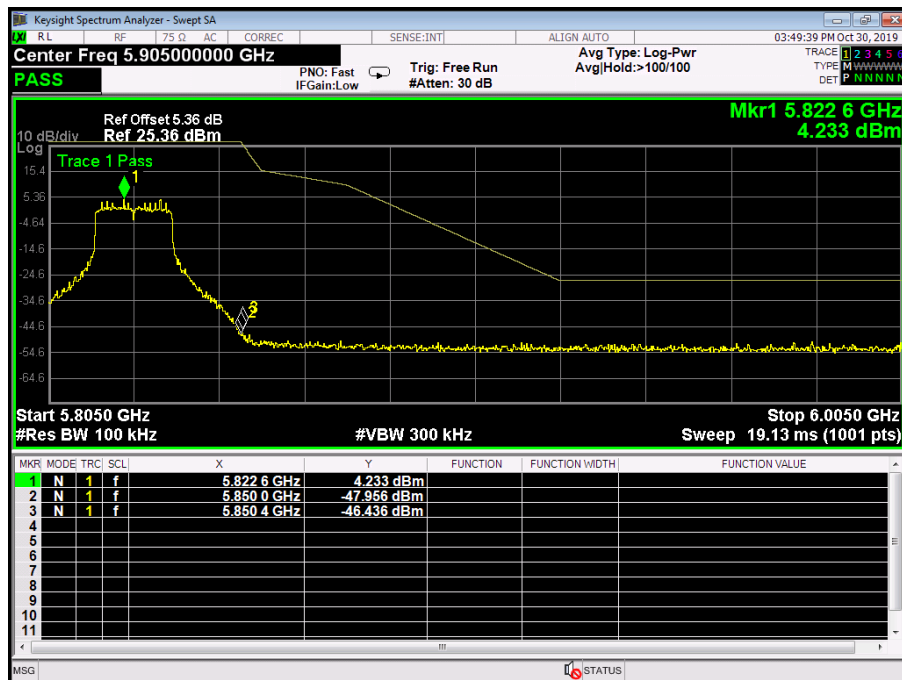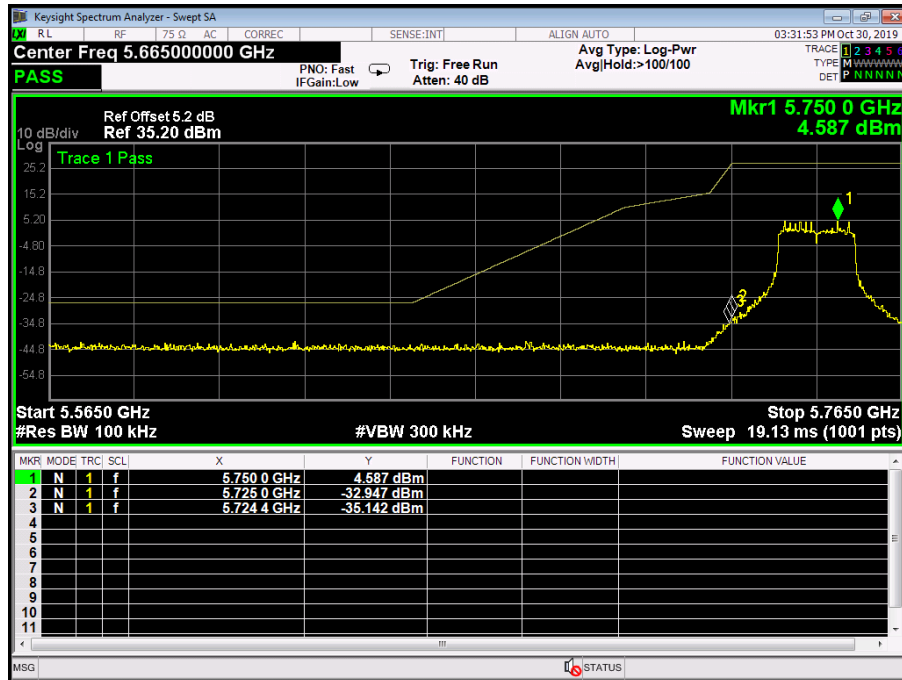


|               |                                                              |                    |     |
|---------------|--------------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                        | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode       |                    |     |

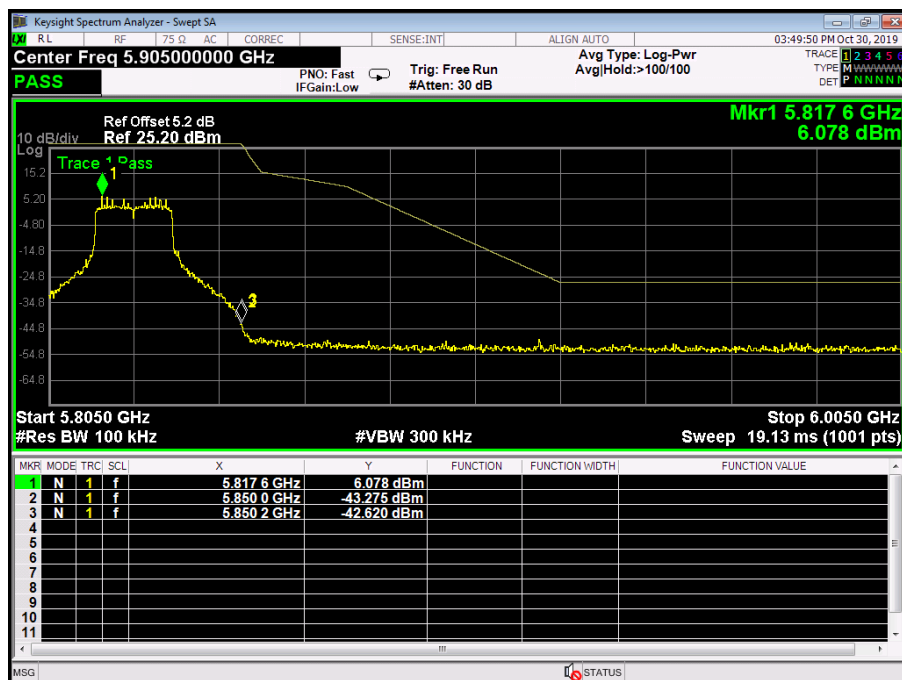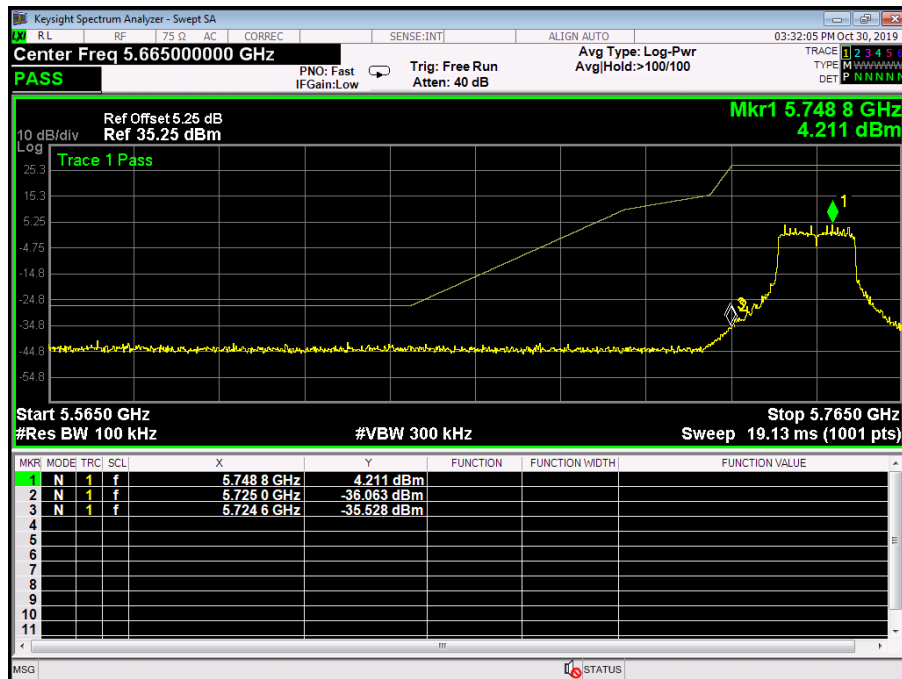


|               |                                                         |                    |     |
|---------------|---------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                            |                    |     |
| Test Mode:    | TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |     |

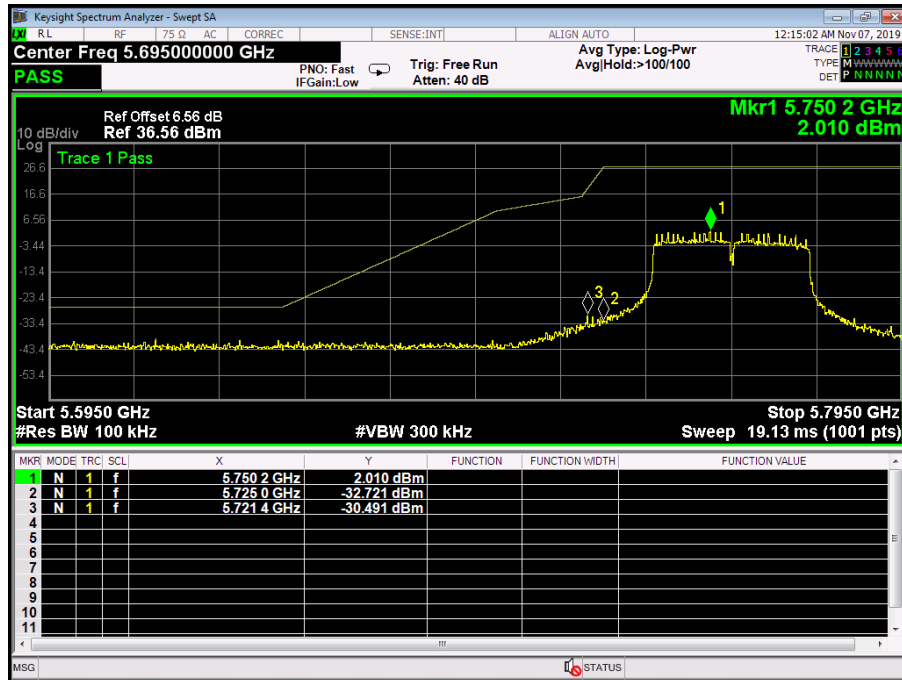


|               |                                                         |                    |     |
|---------------|---------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                            |                    |     |
| Test Mode:    | TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |     |

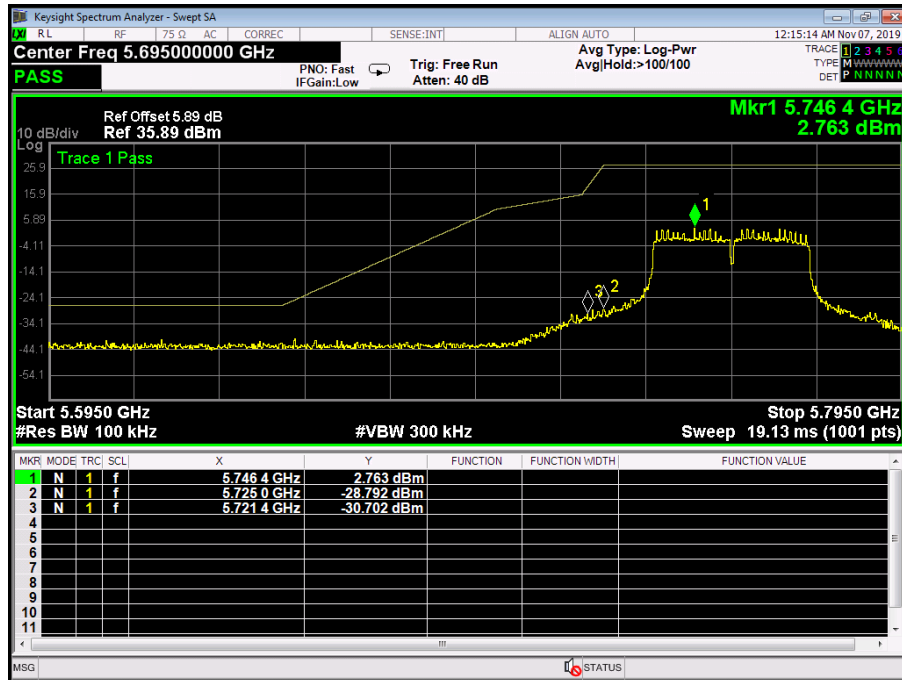


|               |                                                         |                    |     |
|---------------|---------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                            |                    |     |
| Test Mode:    | TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |     |

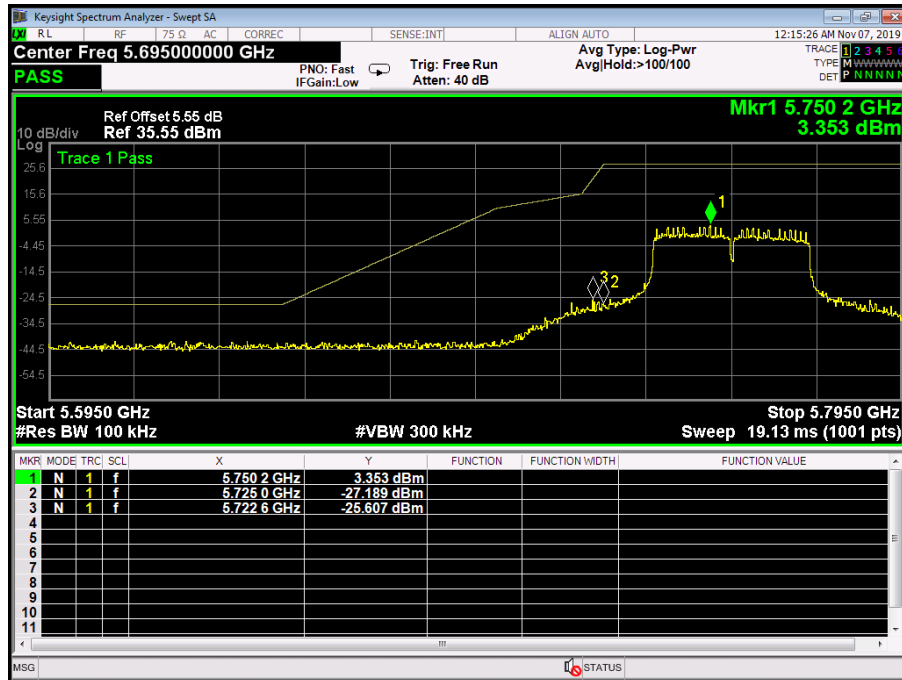


|               |                                                           |                    |     |
|---------------|-----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                     | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                              |                    |     |
| Test Mode:    | TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 0 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode    |                    |     |

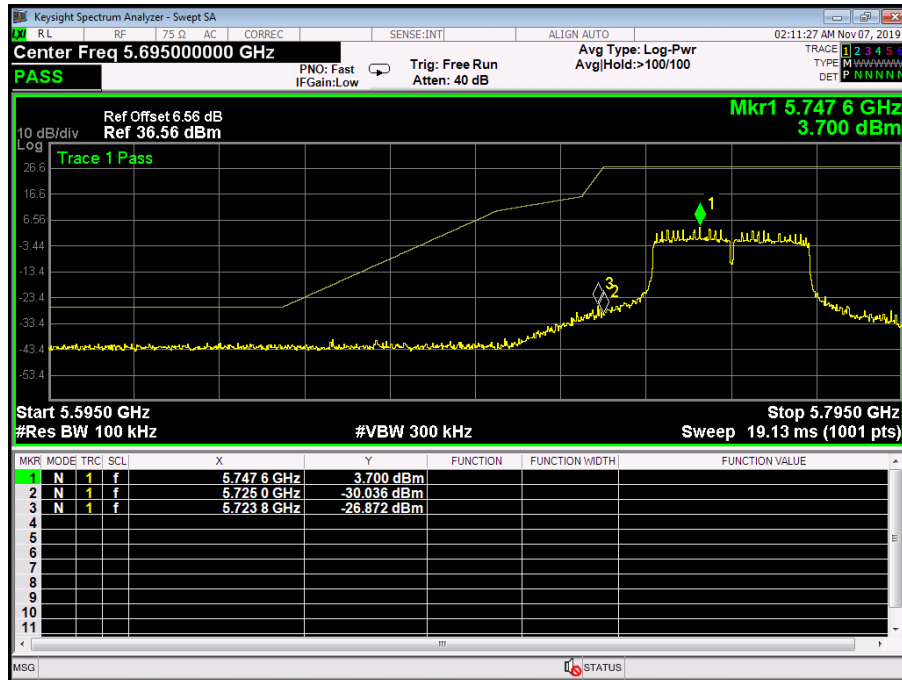



|               |                                                           |                    |     |
|---------------|-----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                     | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                              |                    |     |
| Test Mode:    | TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 1 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode    |                    |     |

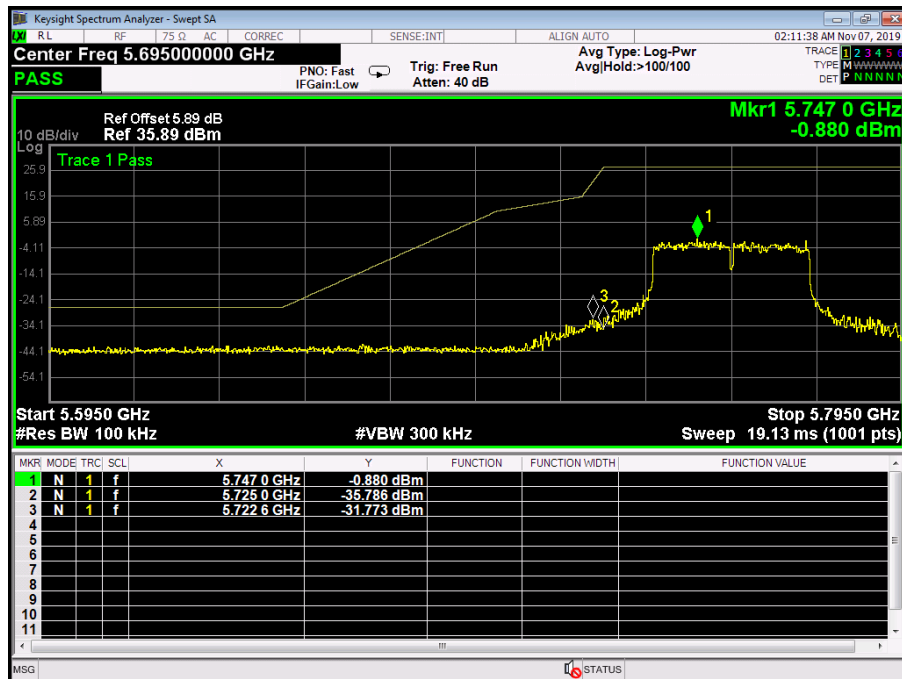



|               |                                                           |                    |     |
|---------------|-----------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                     | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                              |                    |     |
| Test Mode:    | TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 2 |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode    |                    |     |

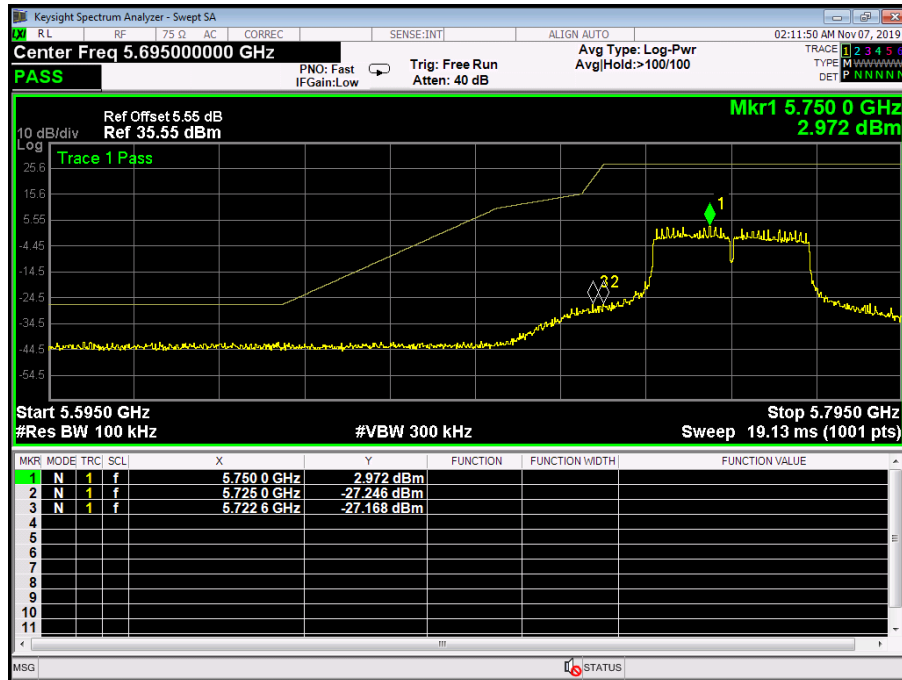



|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 0      |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

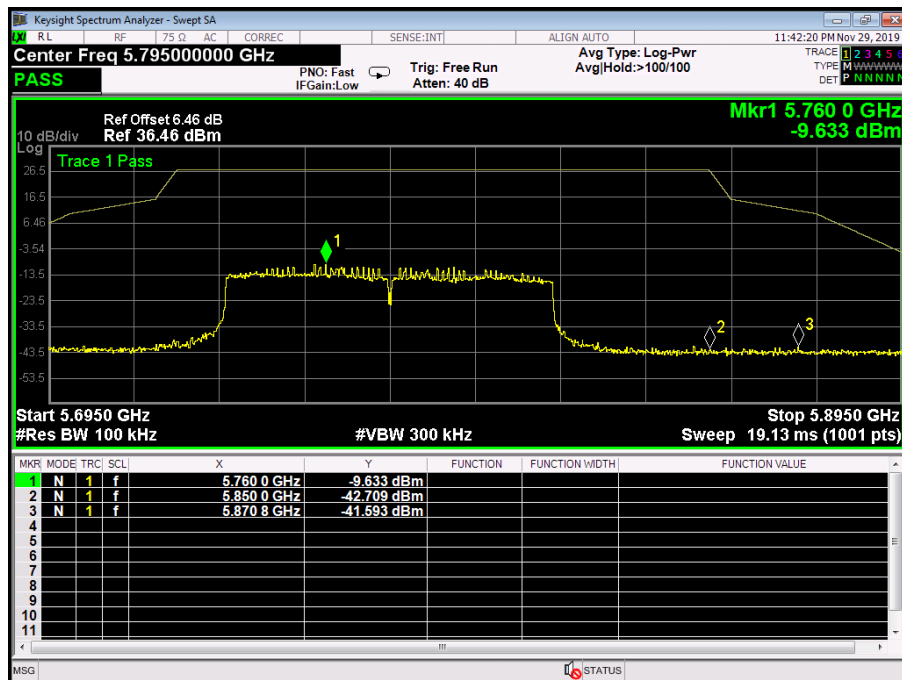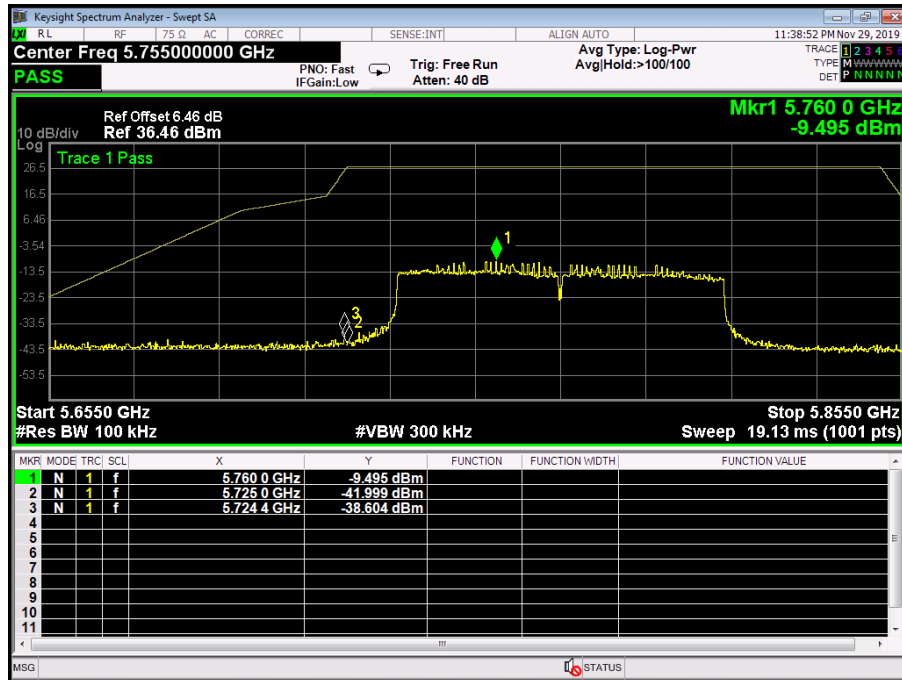


|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 1      |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

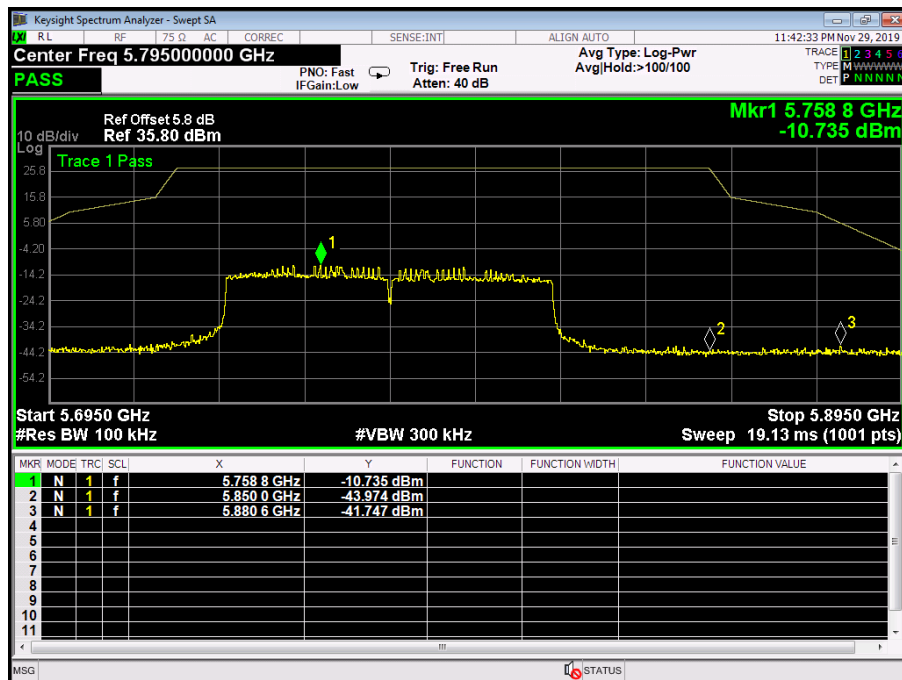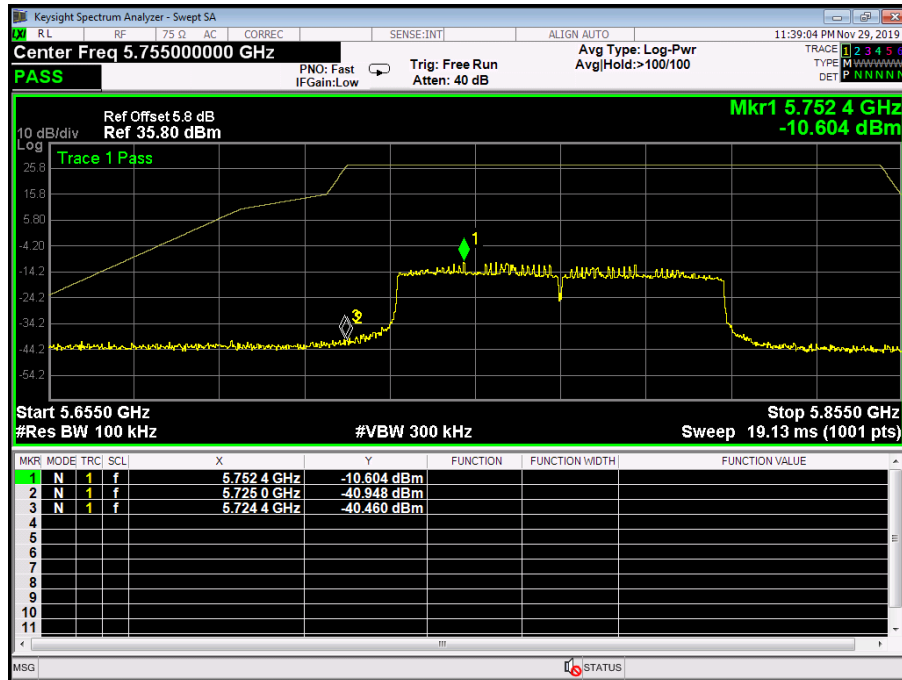

|               |                                                        |                    |     |
|---------------|--------------------------------------------------------|--------------------|-----|
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55% |
| Test Voltage: | AC 120V/60Hz                                           |                    |     |
| Test Mode:    | TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 2      |                    |     |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |     |

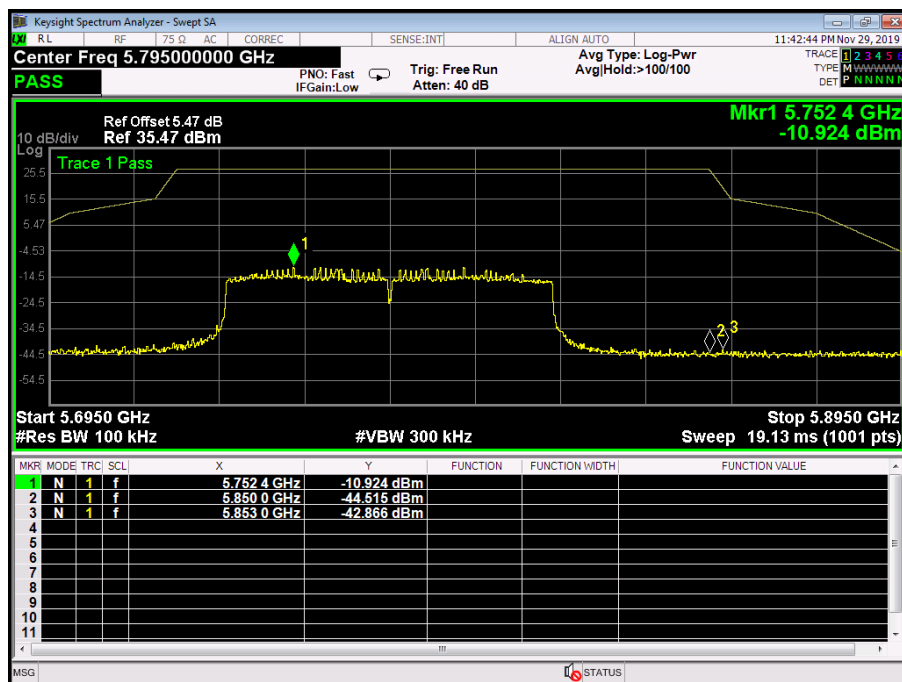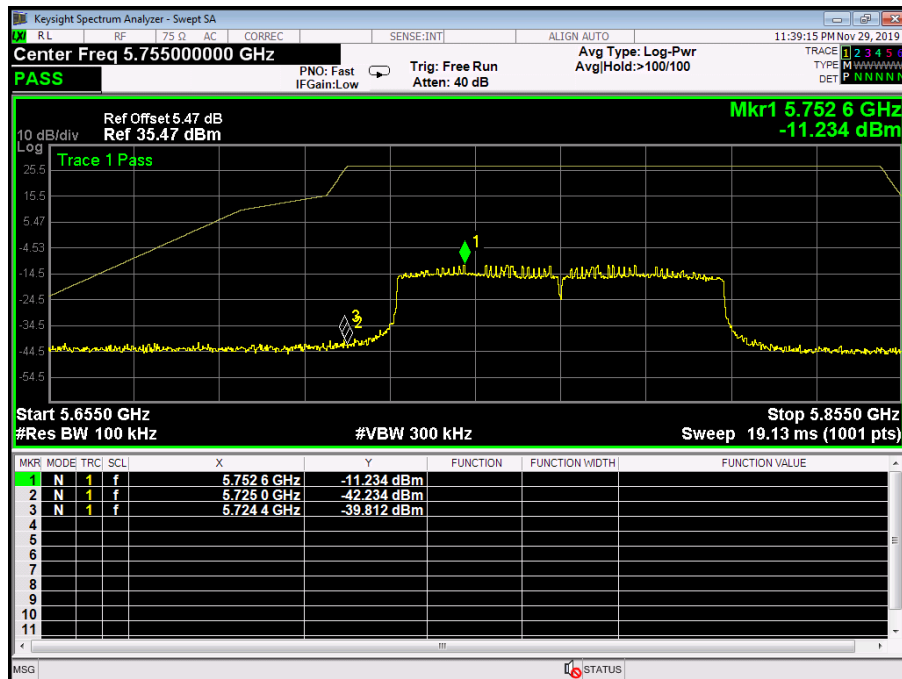


## Attachment D--Bandwidth Test Data
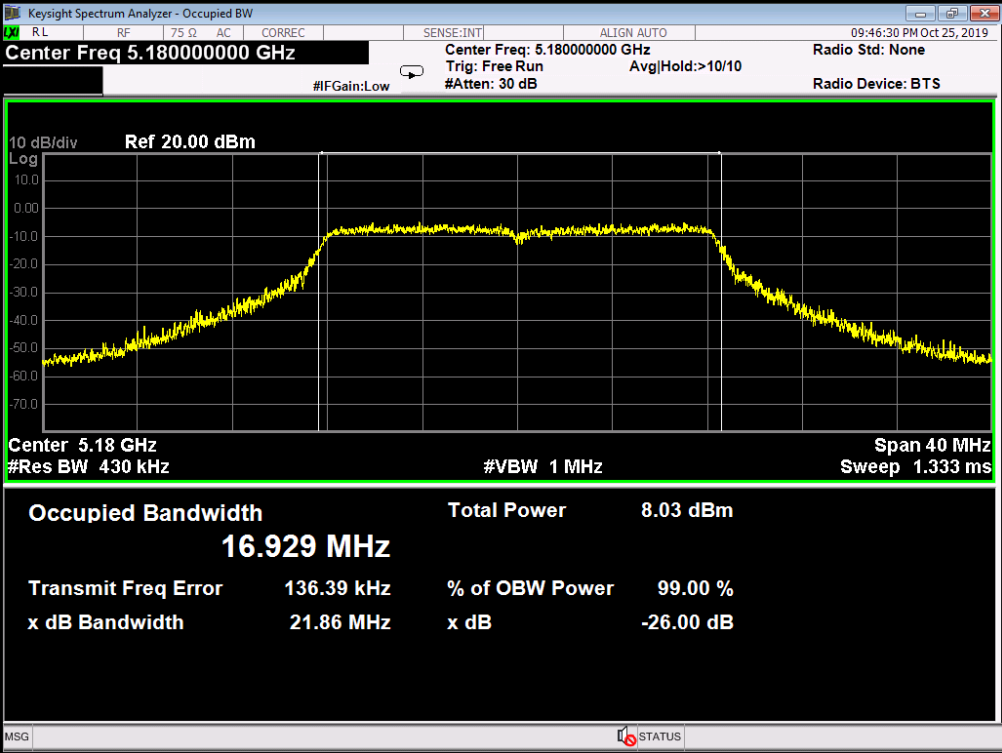
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 25 °C                               | Relative Humidity:   | 55%                 |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|----------------------|---------------------|---------------------------|--|--------------------|----------|-------------------|--|--|--|---------------------|------------|----------------|---------|----------------|-----------|------|-----------|
| Test Voltage:                                                                                                                                                                                                                                                                                                                                                                                                                                                    | AC 120V/60Hz                        |                      |                     |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| Test Mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                       | TX 802.11a Mode (U-NII-1) Antenna 0 |                      |                     |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| Channel                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Frequency (MHz)                     | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| 36                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5180                                | 21.56                | 16.929              |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| 40                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5200                                | 22.67                | 16.960              |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| 48                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 5240                                | 22.35                | 16.942              |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| 802.11a Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                     |                      |                     |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| 5180 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |                      |                     |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
|  <table> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td><td><b>Total Power</b></td><td>8.03 dBm</td></tr> <tr> <td colspan="2"><b>16.929 MHz</b></td><td></td><td></td></tr> <tr> <td>Transmit Freq Error</td><td>136.39 kHz</td><td>% of OBW Power</td><td>99.00 %</td></tr> <tr> <td>x dB Bandwidth</td><td>21.86 MHz</td><td>x dB</td><td>-26.00 dB</td></tr> </table> |                                     |                      |                     | <b>Occupied Bandwidth</b> |  | <b>Total Power</b> | 8.03 dBm | <b>16.929 MHz</b> |  |  |  | Transmit Freq Error | 136.39 kHz | % of OBW Power | 99.00 % | x dB Bandwidth | 21.86 MHz | x dB | -26.00 dB |
| <b>Occupied Bandwidth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                     | <b>Total Power</b>   | 8.03 dBm            |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| <b>16.929 MHz</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                     |                      |                     |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| Transmit Freq Error                                                                                                                                                                                                                                                                                                                                                                                                                                              | 136.39 kHz                          | % of OBW Power       | 99.00 %             |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |
| x dB Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 21.86 MHz                           | x dB                 | -26.00 dB           |                           |  |                    |          |                   |  |  |  |                     |            |                |         |                |           |      |           |

## 802.11a Mode

5200 MHz

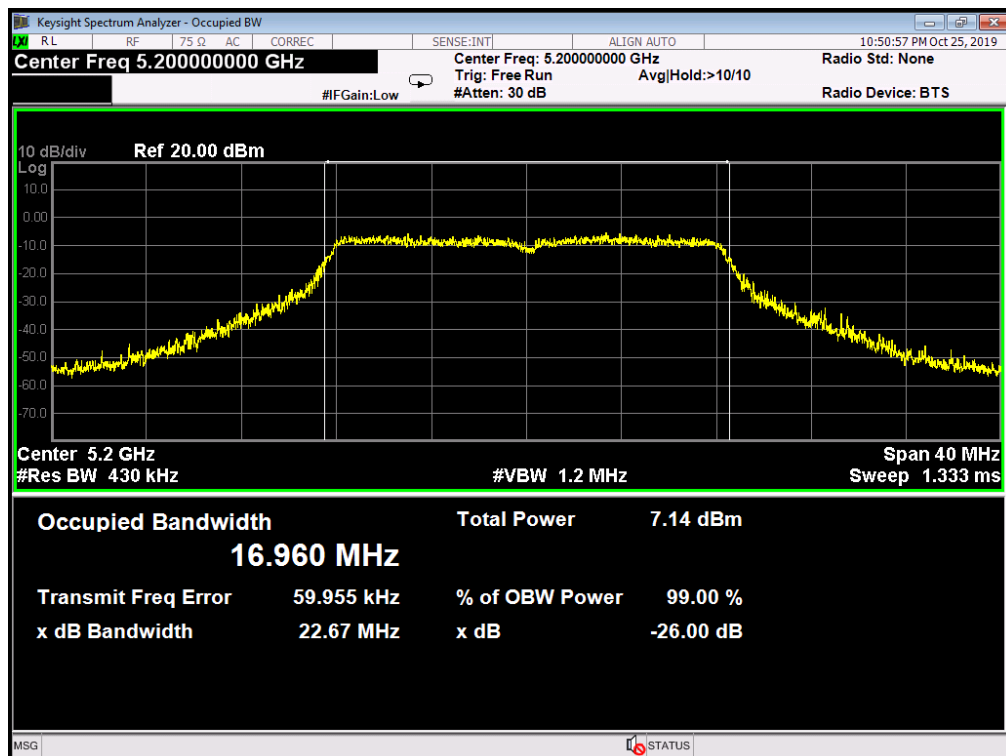

## 802.11a Mode

5240 MHz

