

User Manual

V21.01



Model: DGSNKS43BK, DGSNKS43WH, DGTCHKSK43

Product Name:

43-Inch Digital Touchscreen Kiosk – Black

43-Inch Digital Touchscreen Kiosk - White

Description: 43" Android Touch Screen Next Gen Digital Kiosk

Scan QR code to visit the product page:



Operating Instructions for Digital Signage

Note: Before using the product, please read the instructions carefully! Do not attempt to disassemble this product. If the product does not work properly, please call our Customer Service Department at 1-844-221-3393.

Features	3
Safety Warnings and Precautions	3
Assembly and Connection	5
Packing List	5
Interfaces	6
Steps for Unpacking	6
If installed as a wall-mounted product	7
Cable trough installation mode	9
Remote Control	10
Description of Basic Operation	11
Power on/Standby	11
About Launch Desktop	11
Description of Wallpaper Switch	11
File Manager	11
Local Settings	12
Status of Menu bar	13
DiViEx APP Introduction	14
System requirements	14
How to upload media files	14
Setting	15
Edit picture	16
Music	17
Factory Reset	17
Screen Rotate	18
Choose System Language	19
Technical Specifications	20
Troubleshooting	22
Cleaning and Maintenance	24
Names and Contents of Toxic and Hazardous Substances or Elements in the Product	25

Contents

Features

- 1. Embedded with Android 7.1 smart operating system and unique UI design, bringing you a more convenient operation and better visual experience.
- 2. Support USB mouse and keyboard, realizing easy manipulation like a computer. Using a mouse for set up is recommended.
- 3. Built-in Wi-Fi module, high capacity memory and high capacity cache, making it smoother to watch 1080P HD movies and play big games.
- 4. High-quality LCD screen as the display, no flicker, low radiation, greatly reducing eye fatigue, eye protection, high brightness, high contrast, and wide viewing angle; ultra-fast response time greatly reduces ghosting of fast moving images.
- 5. Progressive image processing and industry-leading motion compensation technology improve the flickering and blurring in the edges of motion picture.
- 6. Dynamic contrast technology can significantly improve the clarity and contrast of various screens.
- 7. Multi-channel USB interfaces, supporting HD media streaming.

Safety Warnings and Precautions

Thank you for purchasing the high-performance multi-functional LED backlight Digital Signage from Displays2Go. We have considered the factors to ensure personal safety in product design and have tested rigorously at the factory. However, improper installation and use may result in electric shock and fire. In order to safely use, maximize performance of the unit and extend the life of the product, please read and follow all instructions carefully before using the product.

Keep the instructions for future reference.

We strongly recommend using a surge protector, or a power strip with internal circuit breaker to prevent damages to the digital signage.

Symbol Legends:

- ⚠ Warning: May cause personal injury or death
- **⊘** The operation is prohibited
- ▲ Caution: May cause damage or property loss

If any of the following occurs:

- Power outage or instable voltage.
- Abnormal sound or smell from the unit.
- AC power cord is damaged.
- Digital Signage is damaged due to drop, knock or impact.
- Any liquid or foreign matters fall into the enclosure.



Turn off the Digital Signage immediately, pull out the plug from the power outlet, and ask the authorized personnel for maintenance timely.

S If coal gas or other flammable gas leaks, do not pull out the plug of the LCD Digital Signage or other electrical appliances; instead, turn off the gas valve immediately, and open the doors and windows quickly.

- ● Do not use power supply other than AC 110V, 60Hz.
 - Cut off the power supply before connecting or disconnecting any cables.
 - Do not place the Digital Signage on any instable positions, or else it may be damaged or cause fire.
 - Do not place the Digital Signage in the positions such as:
 - 1. The environment subject to direct strong sunlight, moisture, extreme temperature or too much dust;
 - 2. The environment with flammable or explosive materials;
 - 3. The environment with flammable or corrosive gases;
 - Do not use damaged or inappropriate power outlets, and ensure that the plugs and outlets contact properly.
 - Do not let dust or metal deposits adhere to the plugs and outlets.
 - Do not damage the power cords:
 - 1. Do not modify the power cords;
 - 2. Do not place heavy objects on the power cords;
 - 3. Keep the power cords away from heat source;
 - 4. Do not pull the cord to remove the plug.
 - Do not connect too many plugs to one outlet in parallel, or else it may cause fire due to excessive power consumption.
 - Do not approach the Digital Signage with open flame (e.g. a lighted candle), or else it may cause electric shock or fire.
 - Do not put any sharp objects, metal or liquid into the vents or let them touch the signal terminals to avoid short circuit, product damage, and electric shock.
 - The openings in the enclosure are designed for ventilation and cooling, to ensure long time reliable running of components inside the enclosure and prevent overheating. Do not block the openings when place the unit.

🛞 Do not touch the plugs with wet fingers, or else it will cause electric shock.

Do not use the Digital Signage in stormy weather, especially when there is lightning; instead, please disconnect the power and antenna plugs to avoid lightning strike.

O not disassemble the Digital Signage without permission, or else it may cause electric shock or fire. Please ask qualified technician for repair.

- Do not let children climb onto the Digital Signage.
- Keep the small parts away from children to prevent them from swallowing.
- If the Digital Signage won't be used for a long time, please turn it off and pull out the power plug.
- To adjust the position of the Digital Signage, please disconnect all power cords and move slowly to avoid tip over.
- Do not scratch or knock the LCD with hard object, or twist and squeeze the LCD.
- Do not turn on the unit immediately when it is moved from a place with low temperature to high temperature, or else it will cause condensation and malfunction.
- Before cleaning the Digital Signage, please pull out the power plug; wipe with soft cloth; do not use industrial chemicals; prevent foreign matters from entering the machine. Improper cleaning (such as cleaning solution, water) may damage the product, erase the printed information, and even cause damage of the components if fluid flows in, resulting in machine failure.
- If the unit displays the same screen for a long time or the moving picture has fixed text or icon, it will leave ghosting on the screen and won't disappear when the unit is turned off; it is normal and isn't covered by the warranty.
- The power of the Digital Signage can be cut off by pulling out the plug.
- If the LCD screen ruptures and the liquid splashes on the skin, please rinse for 15 minutes with clean water immediately, and consult your doctor.
- To carry the Digital Signage with hands, please grab and hold the edges; do not apply pressure on the panel.
- Use the Digital Signage properly: Use in proper lighting conditions; insufficient lighting or long time watching will impair your eyesight.
- Unplug device to disconnect from power.
- Insert the plug into the outlet properly, or else it may cause sparks and fire.
- The technical specifications printed herein and on the packaging are subject to change without prior notice. The Manual may be slightly different from actual operation, and the latter is applicable.

Assembly and Connection


Packing List

Name	Quantity	Name	Quantity
Digital Signage	1	Operation Manual	1
Remote Control	1	Cleaning Kit	1
Hardware Kit	1	Towel	
Wrench (6mm)		Glove	
M8*80 Screws (4)		Cable Management Unit	1
		Touch Pens	2

Note: ADDITIONAL TOOLS REQUIRED FOR ASSEMBLY OF WALL-MOUNTED UNIT. TWO PEOPLE REQUIRED.

Contact Displays2Go if you have questions about the operation, debugging and connection of the unit; if the unit doesn't work normally, please cut off the power immediately and consult the dealer. The unit is class-A product, which may cause radio interference in living environment. In this case, please take feasible measures, and use power plug as the disconnection device.

Interfaces

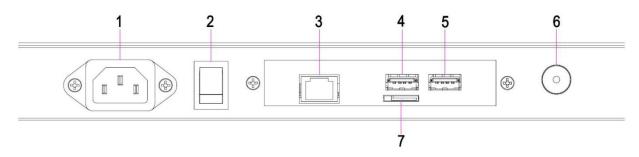


1.Power port; 2.On/Off button; 3.RJ45 interface(Ethernet); 4. USB interface; 5.USB interface; 6.WiFi interface; 7.TF card;

Note: Please pull out the power plug before installing or disassembling the unit!

Steps for Unpacking

- 1. Open the top cover as shown in Fig. 2;
- 2. Carefully lift out the unit as shown in Fig. 3.







(Fig. 2)




(Fig. 3)


If installing as a wall-mounted product

1. Use the 6mm hex wrench in the accessory bag to remove the 8 socket head cap screws connecting the base bracket and the screen(Fig.1);


2. Carefully lift out the unit as shown in Fig. 2 (avoid scratching);

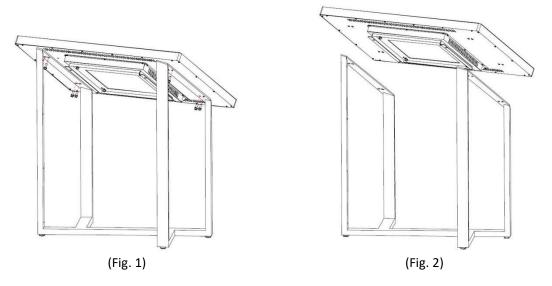

3. Continue to use a 6mm hex wrench to loosen 4 socket head cap screws, and then lift the wall-mounted bracket to align with the screw holes;

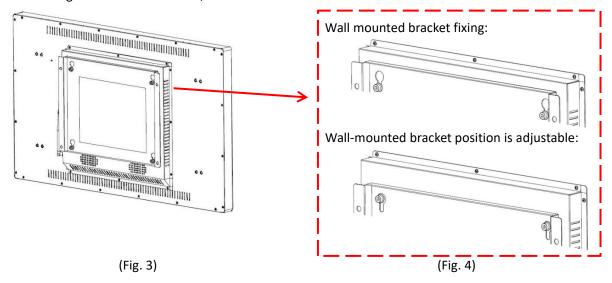


4. Remove the wall hanging bracket, as shown in Figure 5;




5. Fix the wall-hanging bracket on a load-bearing wall, and determine where unit should be hung. Then, drill 4 holes at the identified position with a 10mm drill bit, as shown in Figure 6;

Note: When the wall hanging support is locked, the raised edge should face outward.

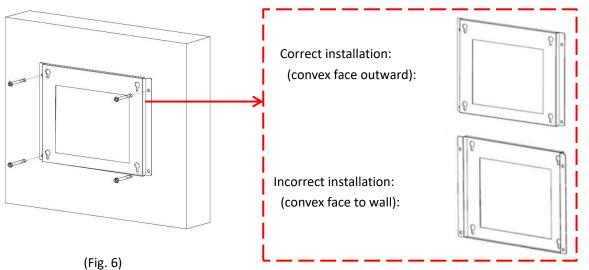


6. Fix the wall hanging bracket on the wall with M8 expansion screw, as shown in Figure 7;

7. Two people lift the machine, hang the machine on the wall hanging bracket, carefully move the machine, and confirm that all the screws on the machine have been hung on the wall hanging bracket (Fig.8);

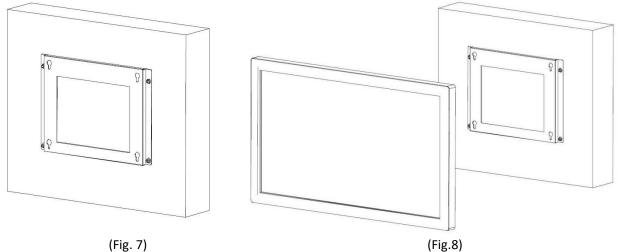



8. After the machine is installed, gently shake the machine to confirm whether the machine has been fixed (Fig.9);







Cable Management Installation Mode


1. Take out the cord management channel and tear off the surface coating of the bottom adhesive on the back. Refer to Figure 1.

2. Paste the channel on one of the leg of the table, leaving 25mm space from the top and bottom to let cord come through, as shown in Figure 2.

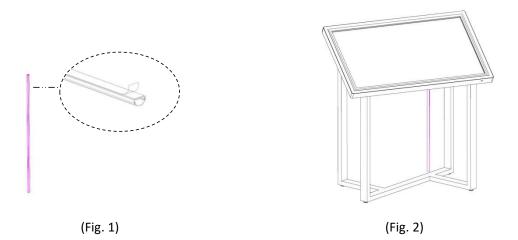

- 3. Figure 3 is the reference diagram after the channel has been placed.
- 4. How to use it
- 4-1. Open the channel from the side.
- 4-2. Put the power cord/Ethernet cord in the channel
- 4-3. Close the channel.









Installing batteries for the remote control:

Remove the battery cover and insert two AAA batteries (1.5V). Ensure that the battery polarity matches the "+"/"-" marks in the battery compartment of the remote control.

Precautions for using the remote control:

- Aim the remote control at the receiver window. Do not place any object between the remote control and the receiver window to avoid interference with the normal operation.
- Keep the remote control away from violent vibration. In addition, do not set or place the remote control in direct sunlight, or else the remote control may be deformed by heat.
- The remote control may be invalid when the receiver window of the unit is in direct sunlight or strong lighting; in this case, please adjust the angle of the lighting or the unit or approach the receiver window to use it.
- The distance of remote control will be shortened if the battery voltage is insufficient; in this case, please replace with new batteries; if the remote control won't be used for a long time or the batteries are run out, please take out the batteries to avoid corrosion due to battery leakage, which will damage the remote control.
- Do not use batteries of different types or mix new batteries with old ones. Always replace the batteries in pairs.
- Do not put the batteries in fire, or charge or disassemble them, or charge, short circuit, disassemble, heat or burn used batteries. Please dispose of waste batteries in accordance with local environmental regulations. Do not expose the batteries in overheated environments such as sunlight and fire.

Description of remote control buttons:



Button	Function
С U	Power switch
Ð	To show the Source menu
段	Mute
⊿-	Turn up the volume
_ +	Turn down the volume
ОК	Confirm selection
	To move the cursor up
▼	To move the cursor down
<	To move the cursor left
•	To move the cursor right
≡ ▲	Switching options
	Home button
	Go back to the parent menu
MENU	To show the main menu
SETUP	To set up OSD menu

Note: Press the SETUP button in the main interface to call out the OSD menu. After exiting the playback mode by pressing the STOP button, the playback will start according to the schedule next time. Remark: The real appearance of the remote control may be different from the picture, please refer to the actual product.

Description of Basic Operation

Power on/Standby

Insert the power plug into the outlet. If the Digital Signage has the switch button "I", turn it on; if you press the switch button "O", the Digital Signage enters standby state.

In power on state, enter "System Assistant" and press the " し" button on the remote control, and the Digital Signage enters standby state.

About Launch Desktop

Description of Desktop Icons

lcon	Function				
	Main applications				
Þ	Back				
0	Home page				
	Background applications				
D	Sound -				
	Sound +				Fay Store
		0	C		9

Description of Wallpaper Switch


We suggest using a mouse to change the wallpaper.

Connect a mouse with the digital panel through USB port, then follow the steps below:

- 1. click "Setting"
- 2. At the setting menu, click "Display"
- 3. At the Display setting menu, click "Gallery", or "Wallpaper"
- 4. Then select an image you would like to set up as background.
- 5. Confirm the selection by clicking "Set wallpaper".

File Manager

- 1. Click the Main Apps button "()" in the Home page to enter the "APPS" menu interface (Fig. 2);
- 2. Click the "Explorer" icon in the "APPS" menu interface (Fig. 2) and enter "Explorer" menu (Fig. 3);
- 3. Click options in the "Explorer" menu to read the files from different devices.

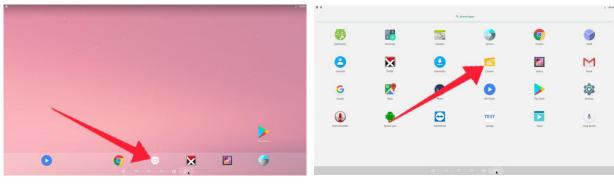



plorer							
A Home	El Level Up	Es Matti	Editor	NewFolder	EB Back	BS Ned	
Internal Me	mory						
⊜ USB							

Fig. 3

Local Settings

- 1. Click the Main Apps button "()" in the Home page to enter the "APPS" menu interface (Fig. 1)
- 2. Click the "Settings" icon in the "APPS" menu interface (Fig. 2) and enter "Wi-Fi" menu (Fig. 3);
- 3. Click options in the "Wi-Fi" menu and set up different options.

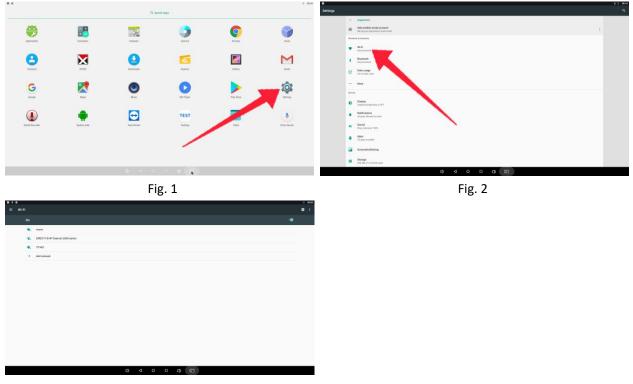



Fig. 3

lcon	Function	• E +		
	WIFI switch	Settings		
*	Bluetooth		^	Suggestions
0	Data usage			Add another email account Set up your personal or work email
0	Display		Wirele	ss & networks
	Notifications		•	Wi-Fi Disabled
	Sound		*	Bluetooth
۲	Apps		0	Data usage
	Screenshot Setting		0	0 B of data used
	Storage			More
	Battery		Device	
	Memory		•	Display Adaptive brightness is OFF
-	Users			Notifications
9	Location		•	All apps allowed to send
6	Security		•	Sound Ring volume at 71%
	Accounts		ĕ	Apps 25 apps installed
G	Google			
	Languages & input		\$	ScreenshotSetting
0	Backup & reset			Storage 4.43 GB of 16 GB used
0	Date & time			

Description of Settings Interface (shown on the right)

Status of Menu Bar

- 1. Click the "setting" (Fig. 1);
- 2. Click the "Display" (Fig. 2);
- 3. In "Display navigation", click " \checkmark " in the option box to hide the menu bar (Fig. 3);
- 4. The display interface of the hidden menu bar is shown in Figure 4.

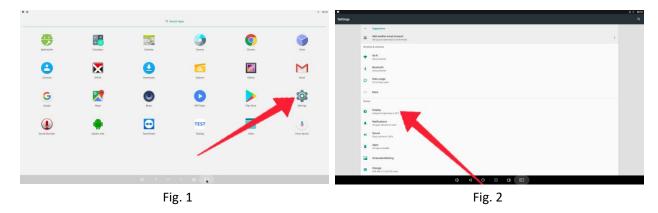

ay	t ≥ ens ≕ Display	
Brightness level	Brighteen level	
Malpaper	walpager	
50ep tere	5kep New Y	
Eczen sever	Ecrem saver	
Fort size Drivel	Fort Size Influet	
Directory State	Dates and Index	
When device is solated solated the scenario of the access.	When device is trained framework and the access	
Ceit	Cost	
Display navigatori	C Display mangation	
HOM	HOM	
0, 4 0 D 0, (D)		
• • • • • • • • • • • • • • • • • • •	Fig. 4	

DiViEx APP Introduction

System requirements:

Step 1: Before using this application, make sure your machine meets or exceeds the following system requirements:

СРИ	RK3288
ROM	16GB
Operating system	Android 7.1

How to upload media files :

Step 2: Make new directory named "MediaFolder" in root directory in U disk.

•	Name	Dete modified	Туре
	MediaFolder	2020/3/13 16:46	File folder

Open "MediaFolder", create 3 subfolders, and change their names to "Images", "Videos", "Music". Copy the media file to be displayed, image to "Images", video to "Videos", Music to "Music"

(F:) > MediaFolder >		
Name	Dete modified	Туре
Images	2020/3/13 16:48	File folder
Music	2020/3/13 16:51	File folder
Videos	2020/3/13 16:51	File folder

Format requirement:

Image	JPG/JPEG/BMP/PNG
Video	MPEG1/MPEG2/MPEG4/ MKV
Music	MP3

	5 a		Q Sea	irch Apps		2 08.04
	Advinstaller	+ Calculator	Calendar	Camera	Dirone	Clock
	Contects		Downloads	Explorer	Galiery	Gmeil
DiviEx	Google	Sec Maps	Co Marce	MX Player	Play Stare	Settings
	Gaund Recorder	System alde	Teamblewer	TEST	Video	Voice Search
			D 4 0	= 0 🙀		

Step 3: Plug in the USB drive into the device and click the DiViEx App to open it.

Step 4: When the screen shows "Copy finished" after "Usb Disk:",

Choose picture display mode Augu Conse Con	Usb Disk:	Copy finished	Ans line Ansatrop Ansatr		Usb Disk: Cogrission
PLAY PLAY		-	Aspi Aspi Induced plan aparlan Induced plan aparlan Induced plan aparlan Induced plan Induced	PLAY	
PLAY O Setting Edit Image: Music	PL	AY	(a) Setting	Edit	🕫 Music

Setting:

Step 1: Select the time you would like each picture to be on the screen for by dragging the bar to the desired time. Select how you would like the images to display. Select the desired transition effect between pictures.

Auto Boot

If enable, application will auto boot when android system boot

• Auto Play

If enable, application will show all resource including images videos

- Choose Picture display mode "Adapt", "Center", "Reshaped by the original size", "Set Image center adaptation display"
- Set Picture switch mode

During the image conversion process, there are 10 animations: "Normal","Depth", "Zoom"," CubeIn", "ForegroundToBackground", "Flip3D", "FilpHorizontal", "RotateDown", "Accordion, Stack".

Auto Boot 🕒		
Image display time (Incode)		
Choose picture display mode		
Reshaped by the original ze		
O Set Image center adaptation to any		
	PLAY	
() Setting	🖾 Edit	🕖 Music
		<u> </u>

Edit picture:

This function show all pictures, you can edit all pictures, and remove it.

• Edit picture

There are four corners and four border to crop the picture, you can drag it

• Filter

Set different filter for the picture, we support the following filter: AUTO_FIX, BLACK_WHITE, BRIGHTNESS, CONTRAST, CROSS_PROCESS, DOCUMENTARY, DUE_TONE, FILL_LIGHT, FISH_EYE, FLIP_HORIZONTAL, FILP_VERTICAL, GRAIN, GRAY_SCALE, LOMISH, NEGATIVE, PSTERIZE, ROTATE, SATURATE, SEPIA, SHARPEN, TEMPERATURE, TINT, VIGNETTE.

• Rese

Restore the original image


Download "

It will create a new picture when you click download button



Image deletion

Click " To delete unwanted pictures

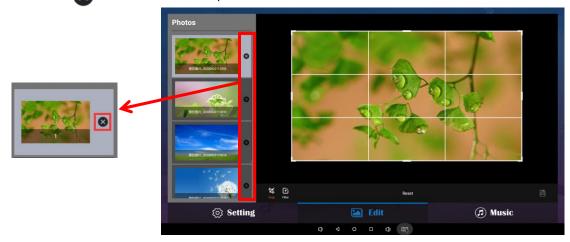


Music:

List all music files int Playlist library

• Add music to playing list music from Playlist library, you can click right arrow, music title will show the number of playlist music.

Playlist library	_	Playing list music	
	\odot		
▶ Gee.mp3	•		
	•		

• To remove background music from the playlist, click the left arrow in the playlist



Factory Reset:

- 1. Get into Settings, then click "Backup & reset" (Fig. 1)
- 2. Click "Factory data reset" (Fig. 2)
- 3. Choose "Erase SD card", then click "RESET DEVICE" to get the unit to Factory Reset (Fig. 3)




Screen Rotate:

- 1. Click the Main Apps button "(in the Home page to enter the "APPS" menu interface (Fig. 1)
- 2. Click "System aide" into Fig. 2
- 3. Choose the degree you would like to Rotate screen, then click "Confirm", after the restart, the screen will be rotated (Fig. 3)











Choose System Language:

- 1. Get into Settings, then click "Language & input" (Fig. 1)
- 2. Click "Languages", then click "Add a language" (Fig. 3)
- 3. You can add the required system language (Fig. 4)
- 4. Drag the system language you just added up to the front(Fig. 5)





≣

Technical Specifications

	ITEM	SPECIFICATION		
	LCD size	43"		
	Light source	LED backlight		
	Resolution	1920*1080 (pixels)		
	Brightness (typ.)/(min)	400cd/m ² (typ.)		
	Contrast (typ.)	1200:1 (typ.)		
Panel	Response (ms)	10ms (typ.)		
	Pixel pitch	0.16 (H) mm * 0.49 (V) mm		
	Refresh rate	60Hz		
	Viewing angle	178° (H)/178° (V)		
	Color saturation	72%		
	Viewable area	940.9(H) mm * 529.3(V) mm		
	Chromaticness	16.7M		
Deverse	Voltage	100V~240V, 50-60Hz		
Power supply	Power Consumption	≤95W		
	Operating temperature (°C)	0~40°C		
	Storage temperature (°C)	-10~60°C		
Environment	Storage humidity	10~60% RH Non-condensing		
	Operating humidity	20~80% RH Non-condensing		
	Maximum operating time (hrs/day)	18 hours		
	Operating system	Android 7.1		
	Processor	RK3288, quad-core		
	RAM	2G		
Functions	ROM	16G		
	Decoding resolution	1080P UHD compatible		
	Playback mode	Support loop, inter-cut, timer, shim, etc.		
	Touch support	IR Touch		

	Supported Video Files	AVI, MPEG4, WMV, MKV, FLV, MP4, MOV		
	Supported Photo Files	JPG, JPEG, BMP, PNG, GIF		
	Audio output, supported files	Left and right audio channel, MP3		
Functions	RTC (real-time clock)	Yes		
	Schedule power on/off	Yes		
	System update	USB compatible		
	App installation	Support download and installation		
	TF	1		
I/O interfaces	Ethernet (RJ45)	1		
	HDMI	N/A		
	VGA	N/A		
	Headset	N/A		
	USB	2		
	SIM	N/A		
	Net weight	48kg		
Structure	Gross weight	65kg		
	Unit dimensions (W*D*H)	1041*560*1140.86mm		
	Package dimensions (W*D*H)	≈1160*680*1260mm		
	Shell material	Aluminum profile/sheet metal		
	Shell color	Black		
Language	OSD	English/Simplified Chinese		

	Troubleshooting the Digital Signs – DGSNKS43BK						
Issue	Probable Cause	Solutions					
• No picture or sound	 Unit not plugged into wall outlet Power cord not properly connected to the terminal on the back of the unit. Unit not powered on Wall outlet not working 	 Check that the unit is plugged into wall outlet. Confirm that the power cord is connected to the terminal on the back of the unit. Turn the on/off toggle switch located on the back of the unit, lower center, to the "on" position. Unplug unit, wait 20 seconds, plug unit back into outlet and try again. Make sure that outlet is working by plugging in a different electrical device. If all of the above have been checked and the issue is not resolved, contact a customer service representative. 					
 No sound (but picture is working) 	 Volume not adjusted on the remote control. Content/Video does not have sound. Content format is not compatible. Speakers do not work. 	 Adjust volume using the remote control Confirm content is one of the following compatible formats: AVI, MPEG4, WMV, MKV, flv, MP3, MP4, MOV. If unit is connected to Wi-Fi, go to YouTube and play video that has sound Unplug unit, wait 20 seconds, plug unit back into outlet and try again. Try playing the content on a different device (smart phone, computer or tablet) If all of the above have been checked and the issue is not resolved, contact a customer service representative. 					
 No picture (but sound is working) 	 Content file damaged. Content format is not compatible. Screen damaged or defective. 	 Confirm content is one of the following compatible formats: AVI, MPEG4, WMV, MKV, flv, MP3, MP4, MOV. Try playing the content on a different device (smart phone, computer or tablet) Unplug unit, wait 20 seconds, plug unit back into outlet and try again. If all of the above have been checked and the issue is not resolved, contact a customer service representative. 					
 Remote control not working 	 Batteries not inserted properly. Batteries are dead. Standing too close or too far from the unit. 	 Check that battery is inserted properly with positive and negative orientation. Insert new batteries. Stand within 1 foot of the front of the unit and point the remote directly at the sensor (green dot) If all of the above have been checked and the issue is not resolved, contact a customer service representative. 					

 No Wi-Fi signal 	 Wi-Fi is not turned on in product settings. Wi-Fi is not connected to a network Low or no signal from the router Antenna is missing or not pointed upward. Damaged PC board 	 Check that Wi-Fi is turned on in settings Click the settings icon from the Android home screen. Click "Wi-Fi". Click the on/off icon in the upper right hand corner to turn on Wi-Fi. Click the on/off icon in the upper left hand side. Then select your Wi-Fi network Confirm that the antenna is in place and pointed upward. Check that other devices are receiving the signal. If other devices are not receiving the Wi-Fi signal, please contact your internet service provider. Unplug or reset the router and wait for 20 seconds. Restart the router and check. If all of the above have been checked and the issue is not resolved, contact a customer service representative.
 Parts missing or Damaged 	 Parts missed during manufacturing. (No charge for replacements) Parts lost or damaged by the customer. (There is charge for replacements) 	 Contact a customer service representative.
 Having problems with installing software or getting content to play 	 Did you purchase the DisplayIt!Xpress software from Displays2go? Did the customer purchase or downloaded another 3rd party software onto the product? 	 If you purchased DisplayIt!Xpress software from Displays2go or from Best Wave directly, please contact Best Wave at support@bestwave. com or (480)368-8900 ext. 2 If you purchased or downloaded another 3rd party software onto the product, please contact the 3rd party software company's customer support for assistance.
 Cannot upload content 	 Content format is not compatible. Content files are too large. Port being used is defective App being used to play content is defective. Android board is defective. 	 Confirm content is one of the following compatible formats: AVI, MPEG4, WMV, MKV, flv, MP3, MP4, MOV. Confirm file size is less than available space. If all of the above have been checked and the issue is not resolved, contact a customer service representative.
 Issues using pre-installed apps 	 Mistake in storing content to NAND Flash (shown on pg. 11) App is defective 	SlideShow App steps Explorer > Select USB > Select Multi > highlight files > Editor > Select Copy > Home > NAND > MediaFolder >

> Android board is defective.	Images> Editor > Paste
	 Open SlideShow app and select
	desired trasitions, slide time and
	looping > Play
	MX Player steps > Follow same steps as
	SlideShow App > MediaFolder > Video >
	Editor > Paste.
	 Open MX Player and select video to
	play.
	• Loop video: While the video is
	playing, click on the video and there
	should be 3 dots in the top right
	corner. Click on the 3 dots > play >
	check desired Loop option
	If all of the above have been checked and
	the issue is not resolved, contact a customer
	service representative.

Cleaning and Maintenance

- 1. Avoid strong vibration or impact on the product.
- 2. Keep the product dry to avoid possible damage by moisture.
- 3. Don't place the product under direct sunlight which may shorten the service life of the screen.
- 4. Clean screen and product by using a glass cleaner.
- 5. If the product will not be used for a long time, pull out the power cord to prevent the internal short circuit or other potential dangers.

Names and Contents of Toxic and Hazardous Substances or Elements in the Product

Davit source	Toxic and hazardous substances or elements					
Part name	Pb	Hg	Cd	Cr ⁶⁺	PBB	PBDE
Display		0	0	0	0	0
Shell	0	0	0	0	×	×
Circuit board assembly *		0	0	0	0	0
Wires	0	0	0	0	0	0
Metal parts	0	0	0	0	0	0
Packaging materials*	0	0	0	0	0	0
Remote control		0	0	0	0	0
Speaker		0	0	0	0	0
Accessories*	0	0	0	0	0	0

* : Circuit board assembly includes PCB and the electronic elements thereof;

Packaging materials include packaging box, styrofoam, etc.;

Other accessories include instruction manual.

O : the content of the toxic and hazardous substances or elements in the part is lower than the limit specified in GB/T 26572-2011 standard.

 \times : the content of the toxic and hazardous substances or elements in the part is higher than the limit specified in GB/T 26572-2011 standard.

The table shows that the machine contains harmful substances inside. The data is provided by material suppliers and verified by the company according to the material type. Some materials contain harmful substances that can't be replaced in present technology. We are dedicated to improving this.

The EFUP of the product is ten years. The pollution control label is shown on the right.

The EFUP is valid only when the user operates in the normal conditions specified in the manual herein.

Waste Electrical and Electronic Products Recycling and Disposal Regulations

To protect the earth, if you do not need this product or its service life expires, please abide by your local *Waste Electrical and Electronic Products Recycling and Disposal Regulations* or send it to qualified local manufacture for recycling.

This Manual is for reference only and is subject to change without prior notice.

FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated

with minimum distance 20cm between the radiator & your body.