



Profile: 2360091R	Page No.: 188
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) with Ant1+Ant2	

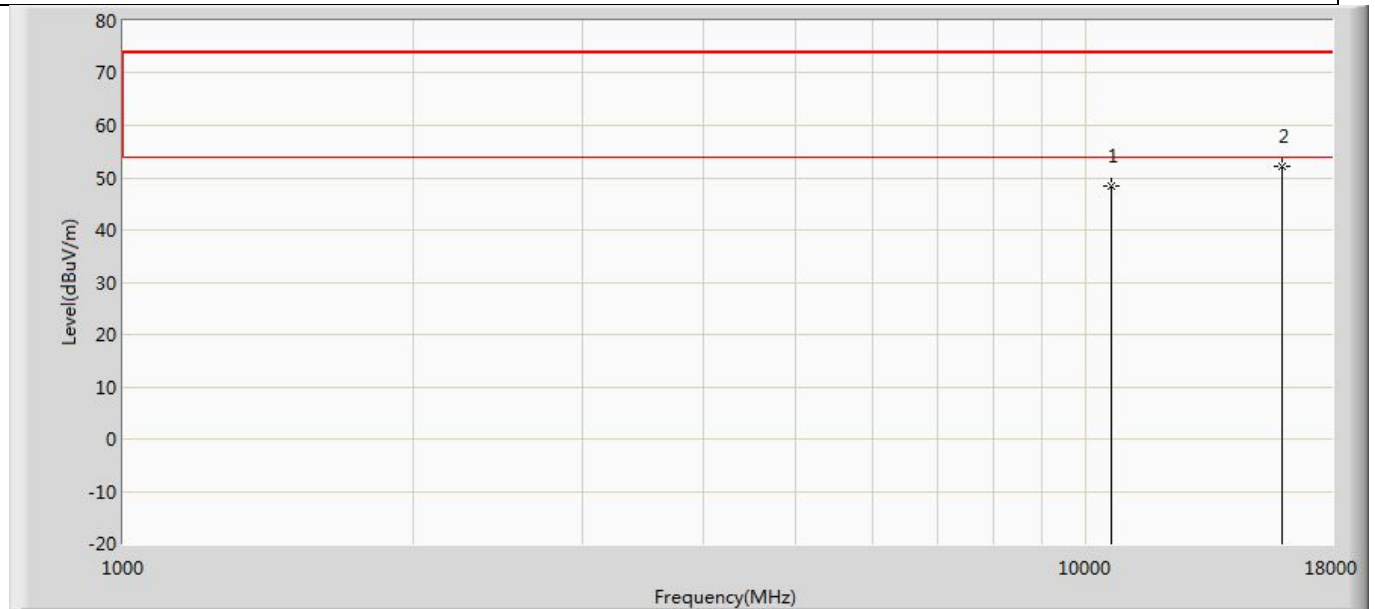


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	48.300	51.619	-25.700	74.000	-3.319	PK
2	*	15960.000	52.073	51.007	-21.927	74.000	1.066	PK

Profile: 2360091R	Page No.: 189
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) with Ant1+Ant2	

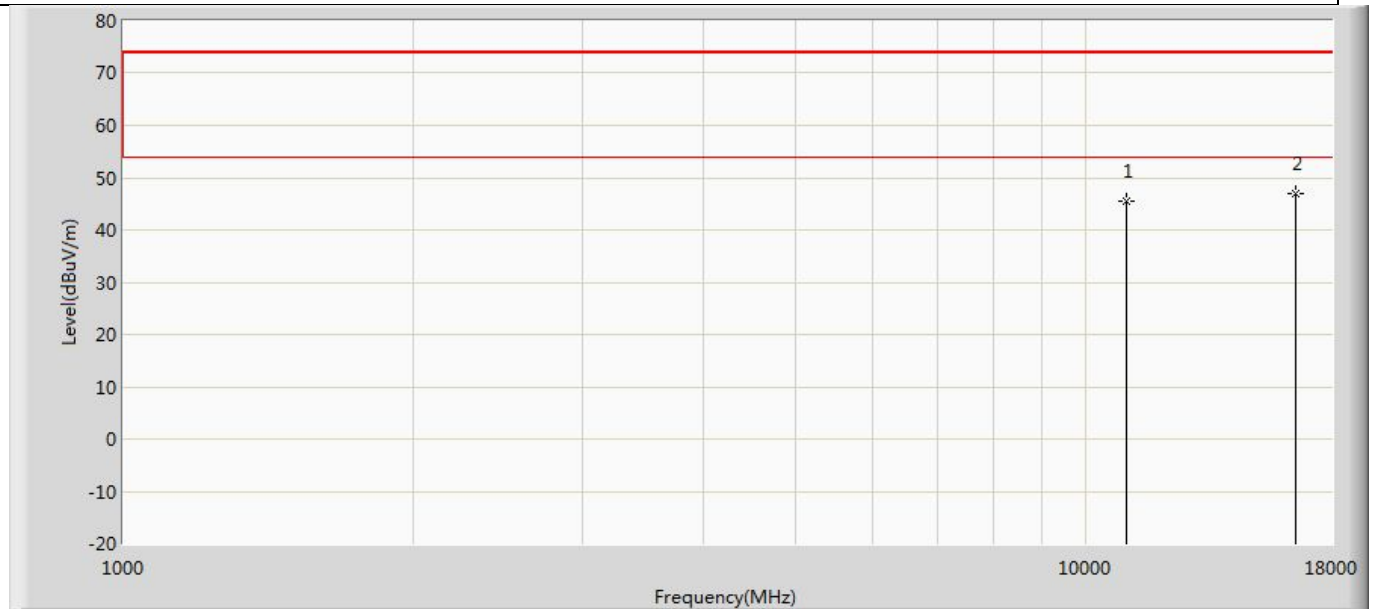


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	45.393	51.722	-28.607	74.000	-6.329	PK
2	*	16500.000	47.002	49.174	-26.998	74.000	-2.172	PK

Profile: 2360091R	Page No.: 190
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) with Ant1+Ant2	

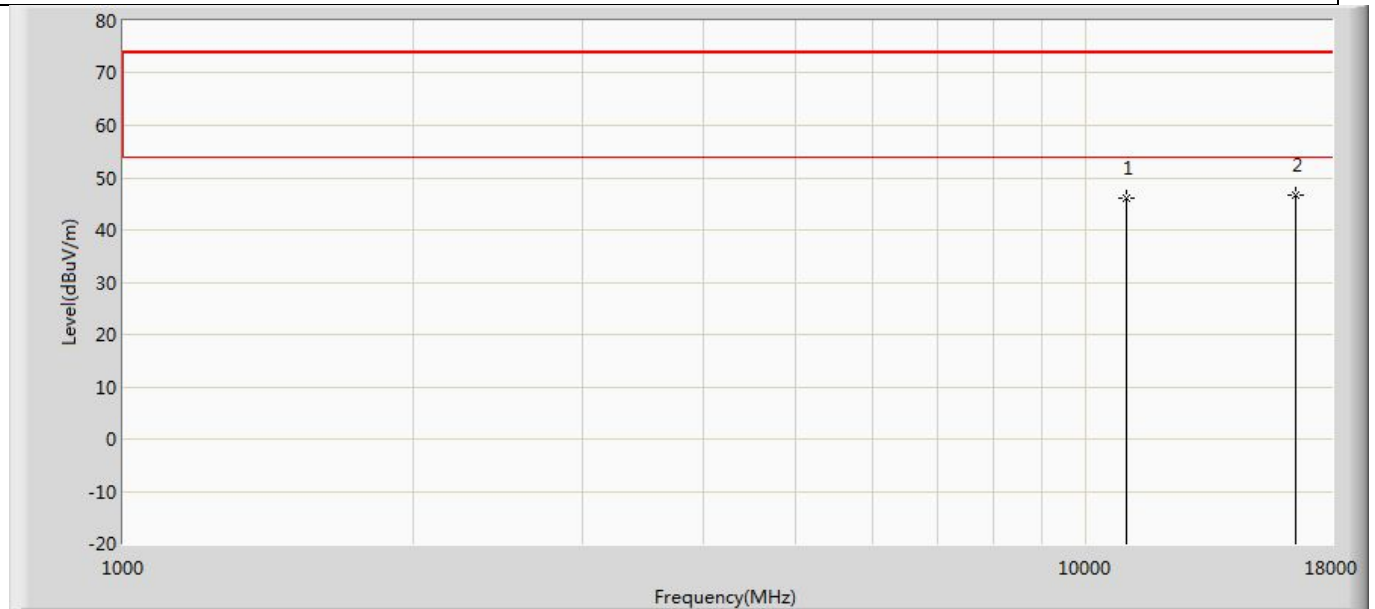


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	46.005	52.334	-27.995	74.000	-6.329	PK
2	*	16500.000	46.565	48.737	-27.435	74.000	-2.172	PK

Profile: 2360091R	Page No.: 191
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5580MHz by 802.11ac(20MHz) with Ant1+Ant2	

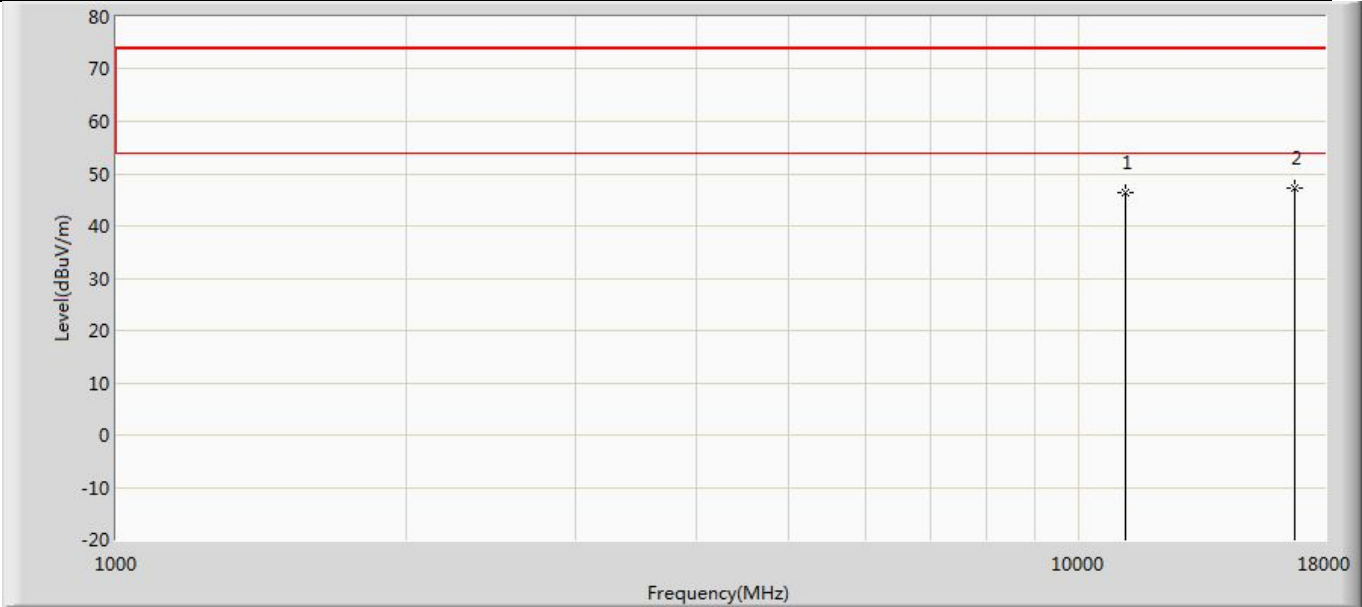


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.491	51.939	-27.509	74.000	-5.447	PK
2	*	16740.000	47.169	49.785	-26.831	74.000	-2.616	PK

Profile: 2360091R	Page No.: 192
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5580MHz by 802.11ac(20MHz) with Ant1+Ant2	

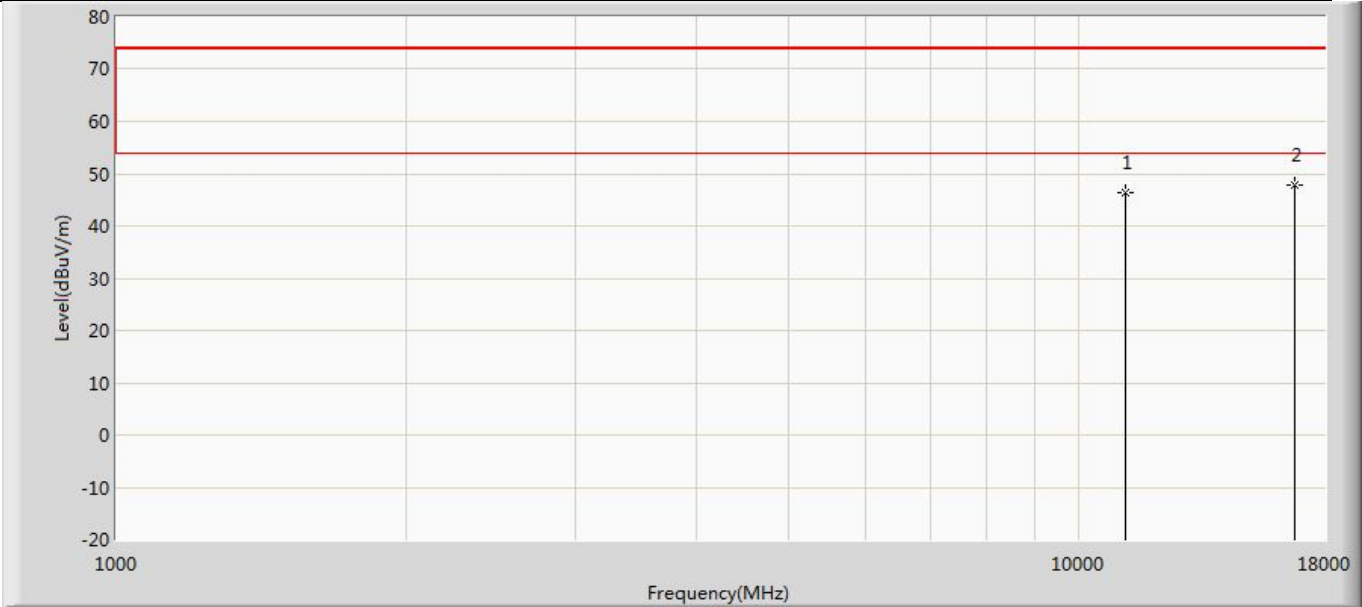


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.379	51.827	-27.621	74.000	-5.447	PK
2	*	16740.000	47.943	50.559	-26.057	74.000	-2.616	PK

Profile: 2360091R	Page No.: 193
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5700MHz by 802.11ac(20MHz) with Ant1+Ant2	

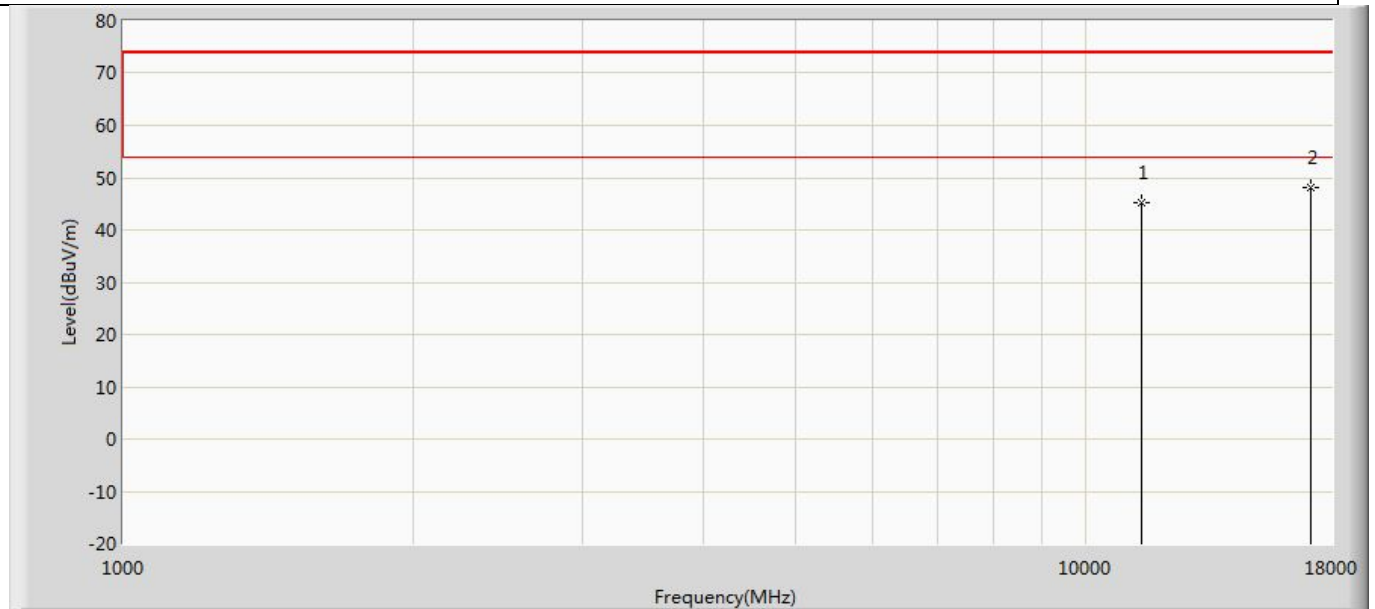


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.158	50.071	-28.842	74.000	-4.914	PK
2	*	17100.000	48.053	49.997	-25.947	74.000	-1.944	PK

Profile: 2360091R	Page No.: 194
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5700MHz by 802.11ac(20MHz) with Ant1+Ant2	

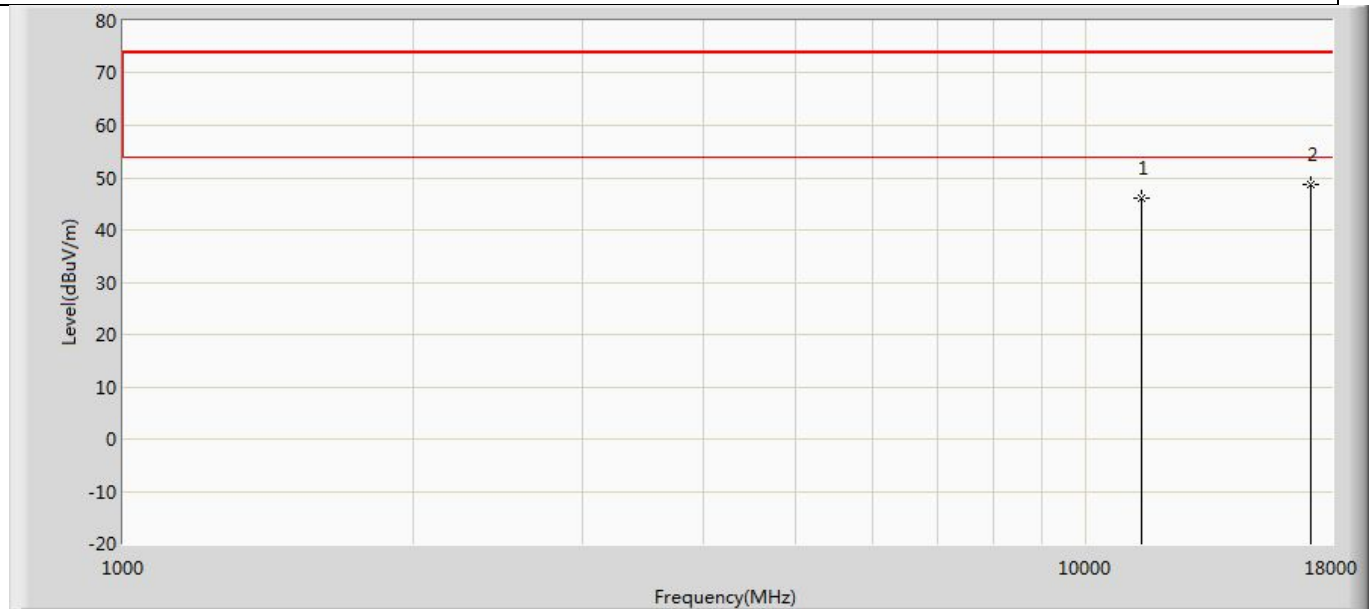


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.140	51.053	-27.860	74.000	-4.914	PK
2	*	17100.000	48.724	50.668	-25.276	74.000	-1.944	PK

Profile: 2360091R	Page No.: 57
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5745MHz by 802.11ac(20MHz) with Ant1+Ant2	

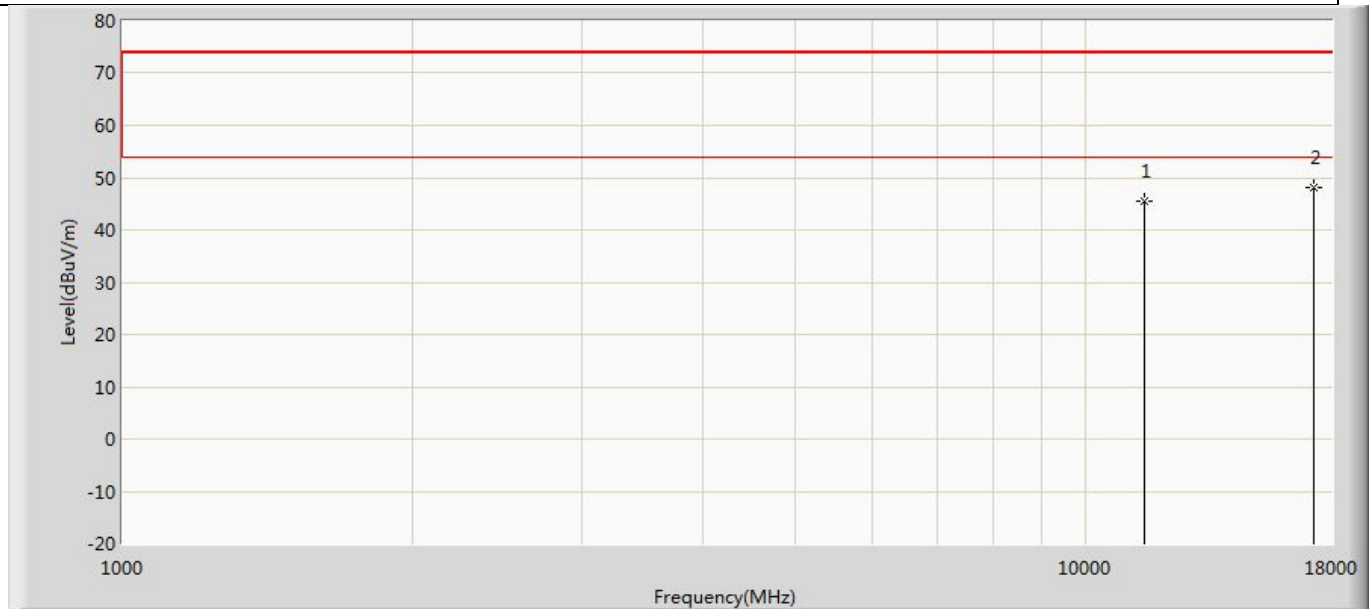


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	45.555	50.745	-28.445	74.000	-5.190	PK
2	*	17235.000	48.067	50.072	-25.933	74.000	-2.005	PK

Profile: 2360091R	Page No.: 58
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5745MHz by 802.11ac(20MHz) with Ant1+Ant2	

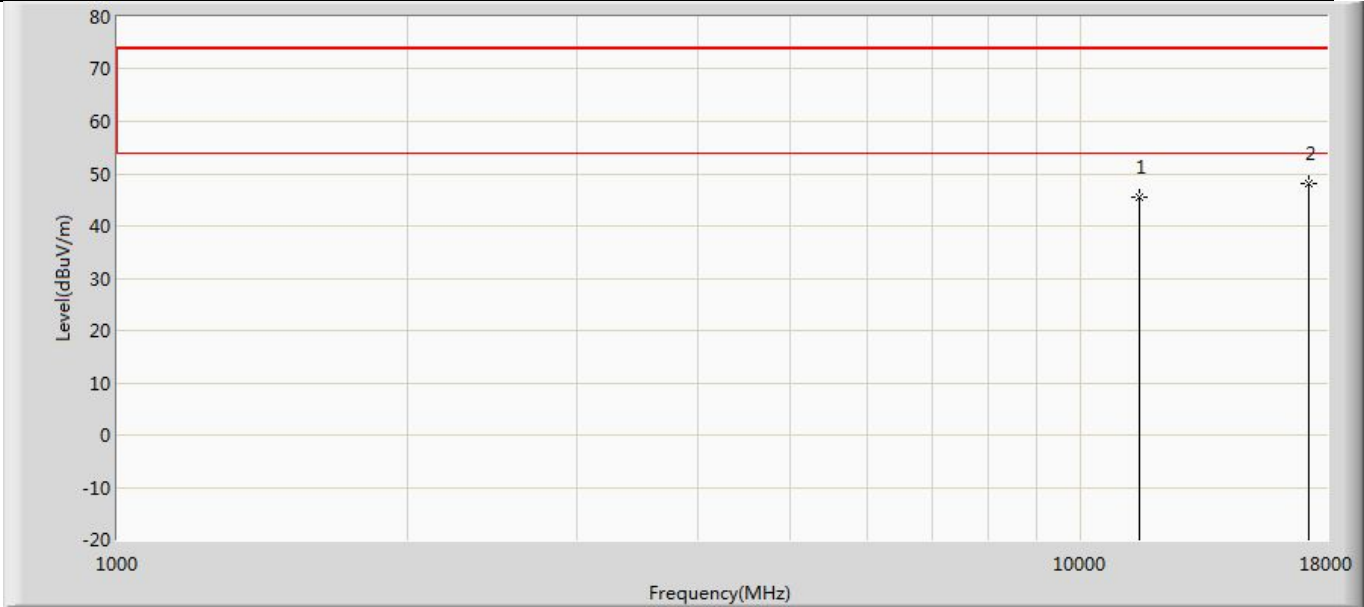


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	45.400	50.590	-28.600	74.000	-5.190	PK
2	*	17235.000	48.082	50.087	-25.918	74.000	-2.005	PK

Profile: 2360091R	Page No.: 59
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5785MHz by 802.11ac(20MHz) with Ant1+Ant2	

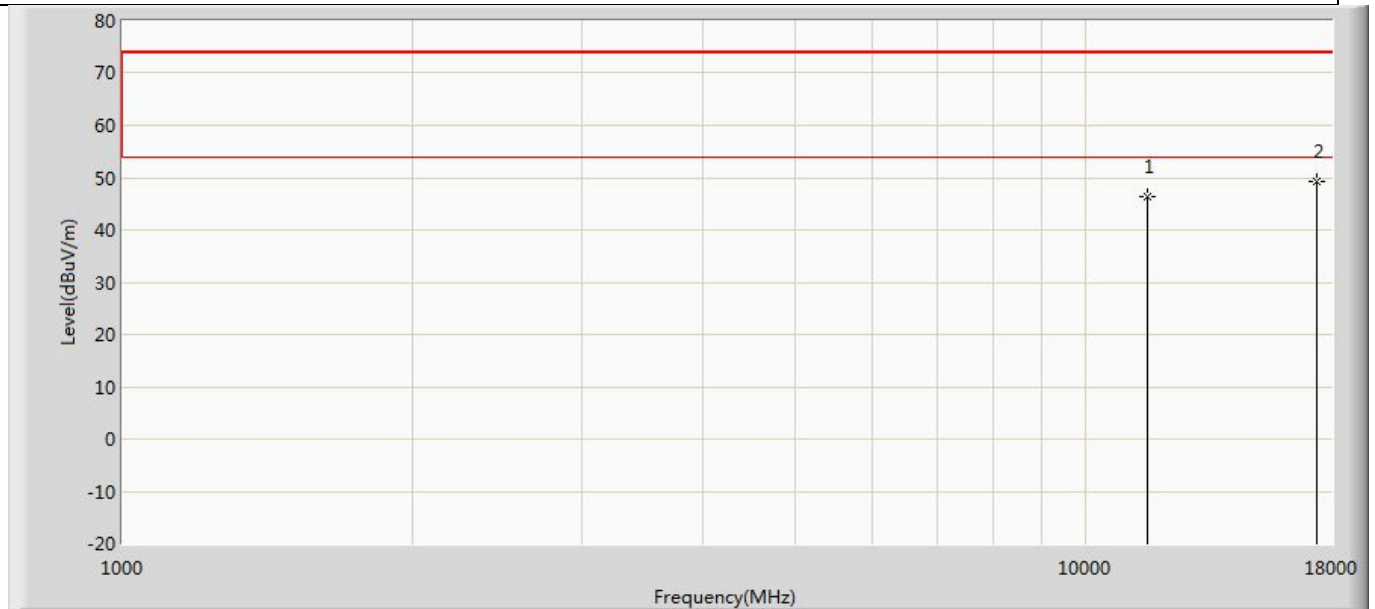


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.329	50.758	-27.671	74.000	-4.429	PK
2	*	17355.000	49.156	50.891	-24.844	74.000	-1.735	PK

Profile: 2360091R	Page No.: 60
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5785MHz by 802.11ac(20MHz) with Ant1+Ant2	

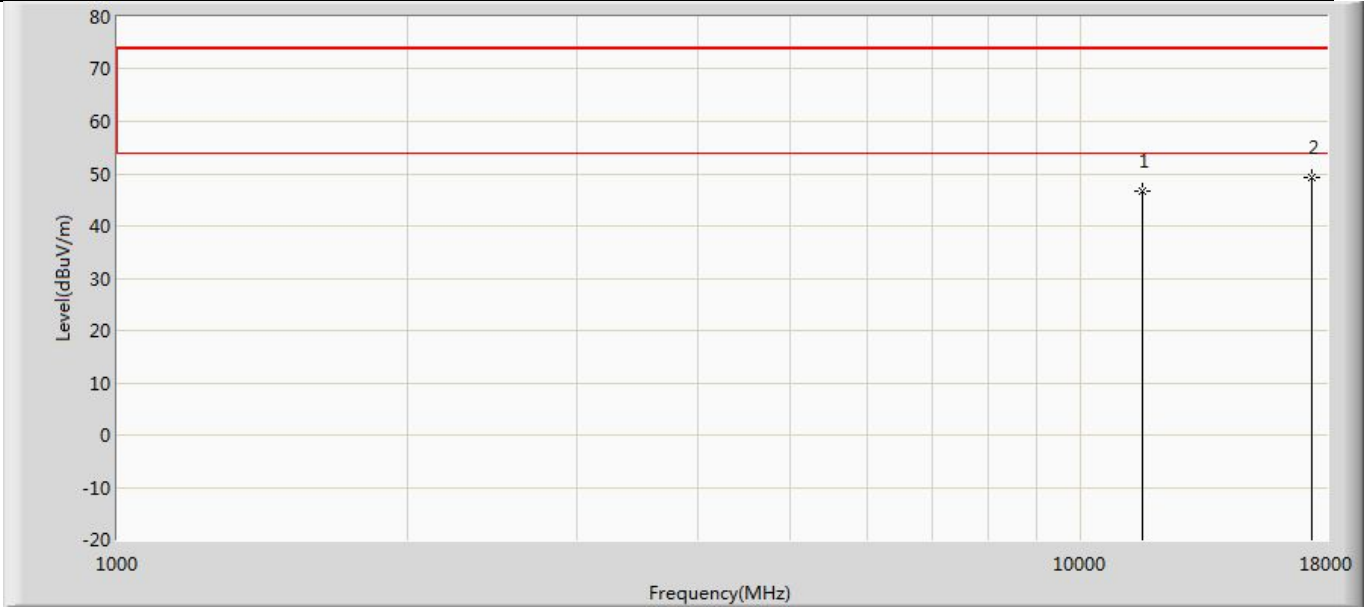


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.762	51.191	-27.238	74.000	-4.429	PK
2	*	17355.000	49.310	51.045	-24.690	74.000	-1.735	PK

Profile: 2360091R	Page No.: 61
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5825MHz by 802.11ac(20MHz) with Ant1+Ant2	

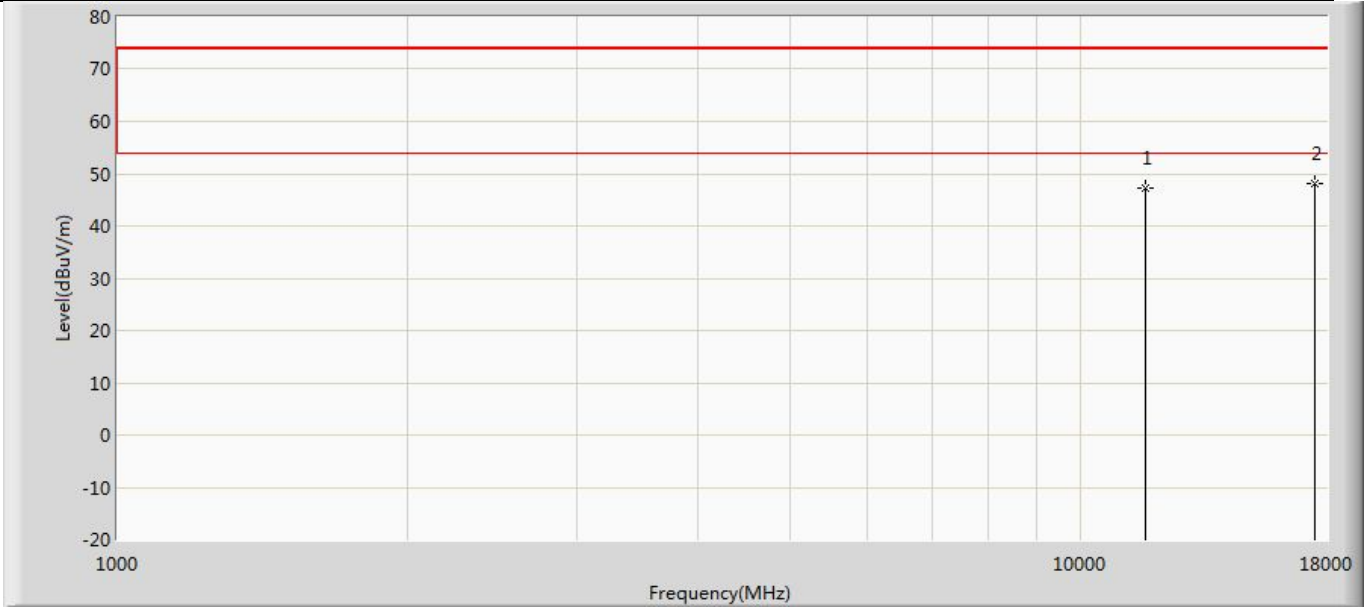


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	47.267	51.615	-26.733	74.000	-4.348	PK
2	*	17475.000	48.127	50.534	-25.873	74.000	-2.407	PK

Profile: 2360091R	Page No.: 62
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5825MHz by 802.11ac(20MHz) with Ant1+Ant2	

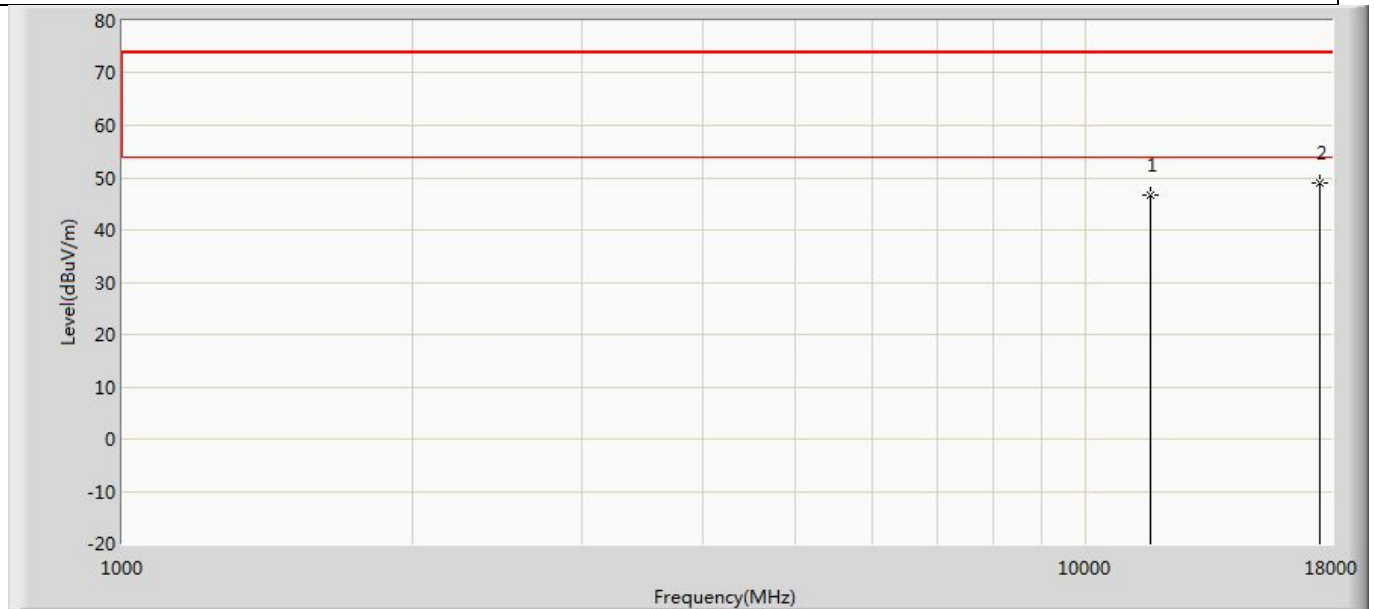


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.677	51.025	-27.323	74.000	-4.348	PK
2	*	17475.000	49.069	51.476	-24.931	74.000	-2.407	PK

Profile: 2360091R	Page No.: 195
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with Ant1+Ant2	

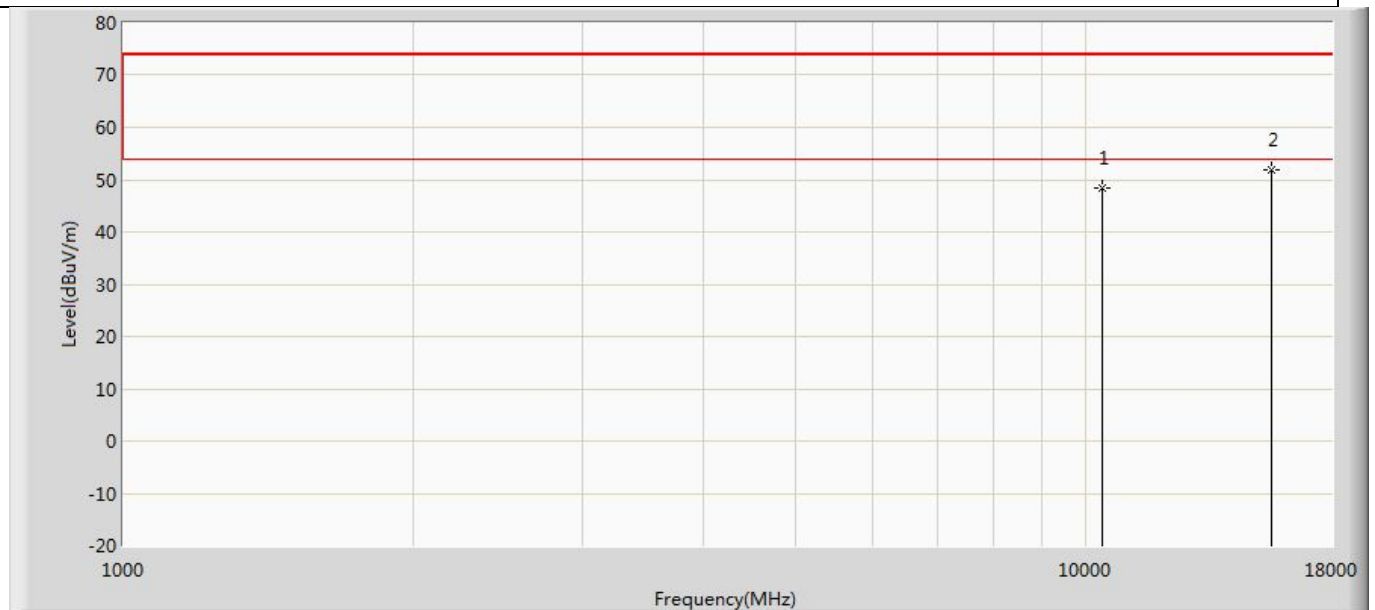


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	48.400	51.602	-25.600	74.000	-3.202	PK
2	*	15570.000	51.956	51.456	-22.044	74.000	0.501	PK

Profile: 2360091R	Page No.: 196
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with Ant1+Ant2	

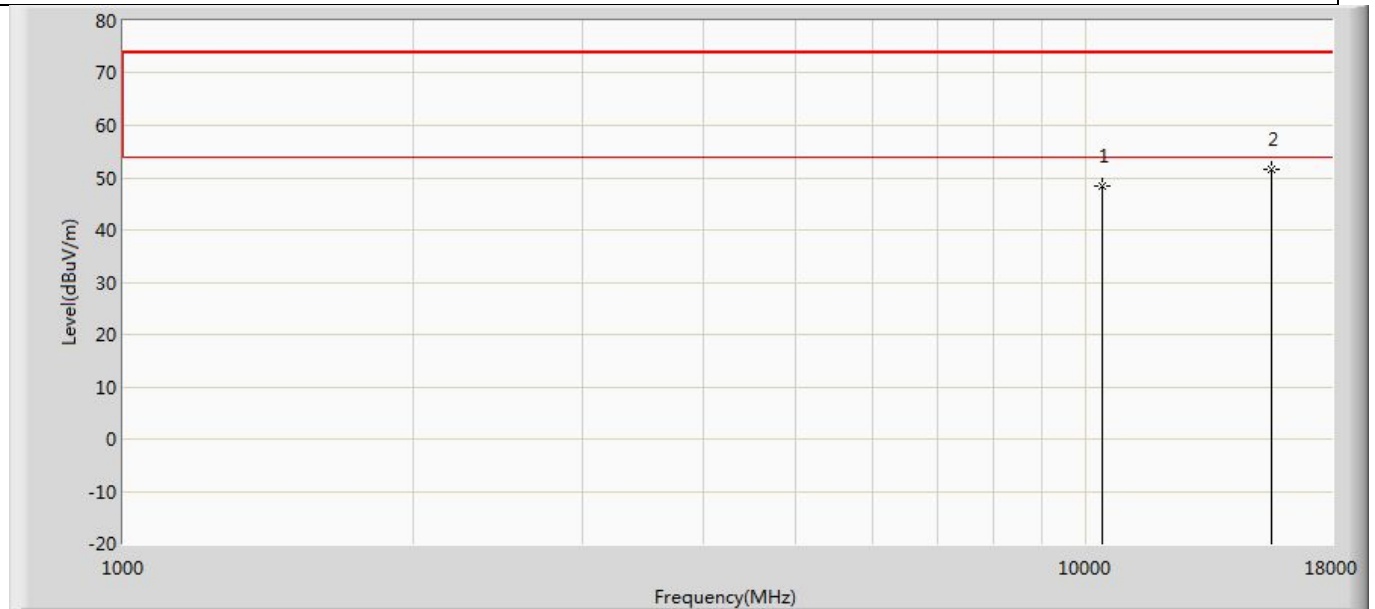


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	48.491	51.693	-25.509	74.000	-3.202	PK
2	*	15570.000	51.532	51.032	-22.468	74.000	0.501	PK

Profile: 2360091R	Page No.: 197
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5230MHz by 802.11ac(40MHz) with Ant1+Ant2	

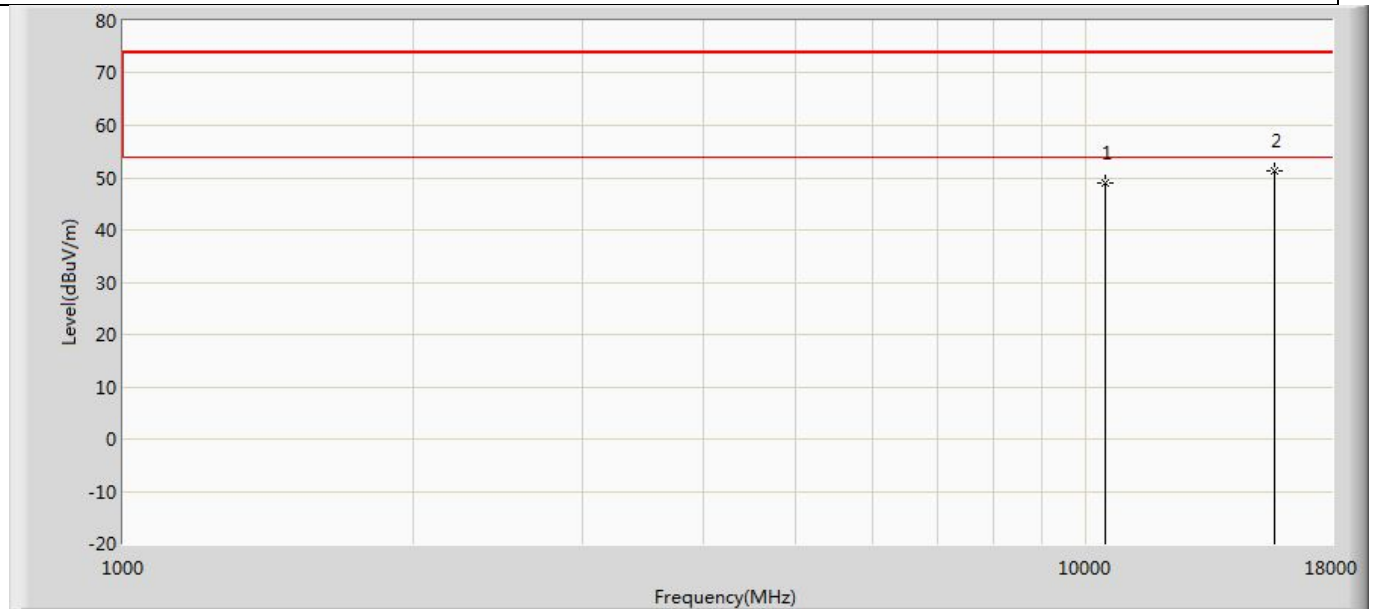


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	49.071	52.401	-24.929	74.000	-3.331	PK
2	*	15690.000	51.337	50.905	-22.663	74.000	0.431	PK

Profile: 2360091R	Page No.: 198
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5230MHz by 802.11ac(40MHz) with Ant1+Ant2	

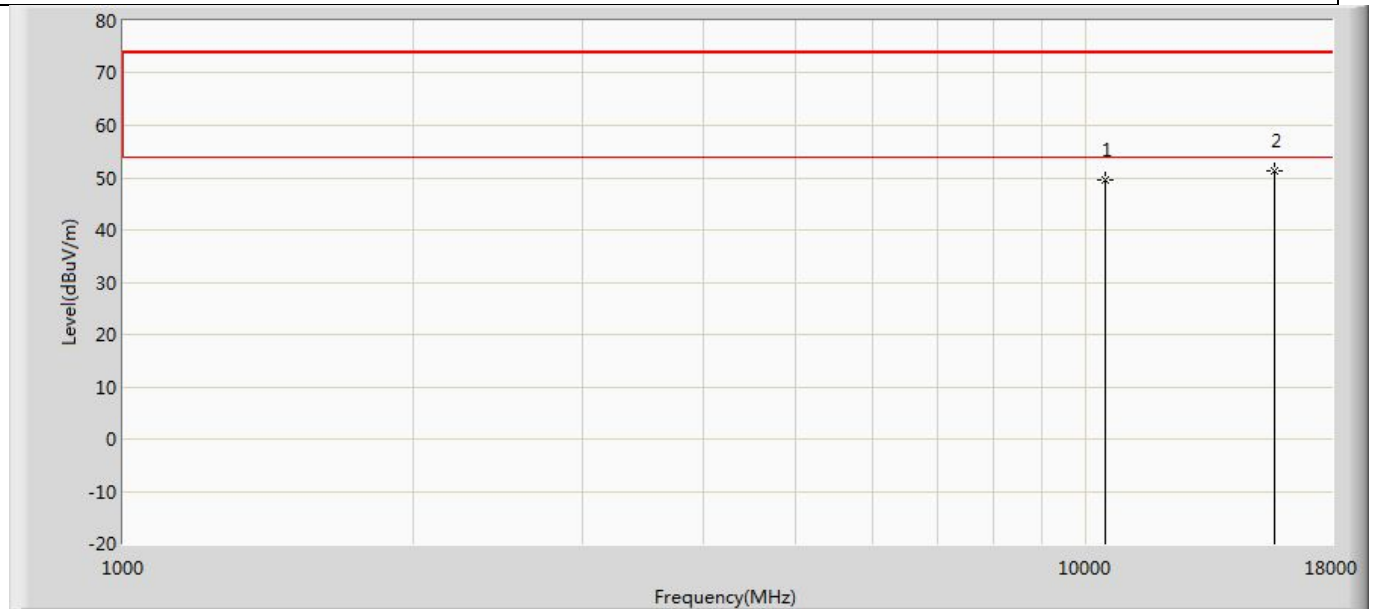


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	49.519	52.849	-24.481	74.000	-3.331	PK
2	*	15690.000	51.402	50.970	-22.598	74.000	0.431	PK

Profile: 2360091R	Page No.: 199
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5270MHz by 802.11ac(40MHz) with Ant1+Ant2	

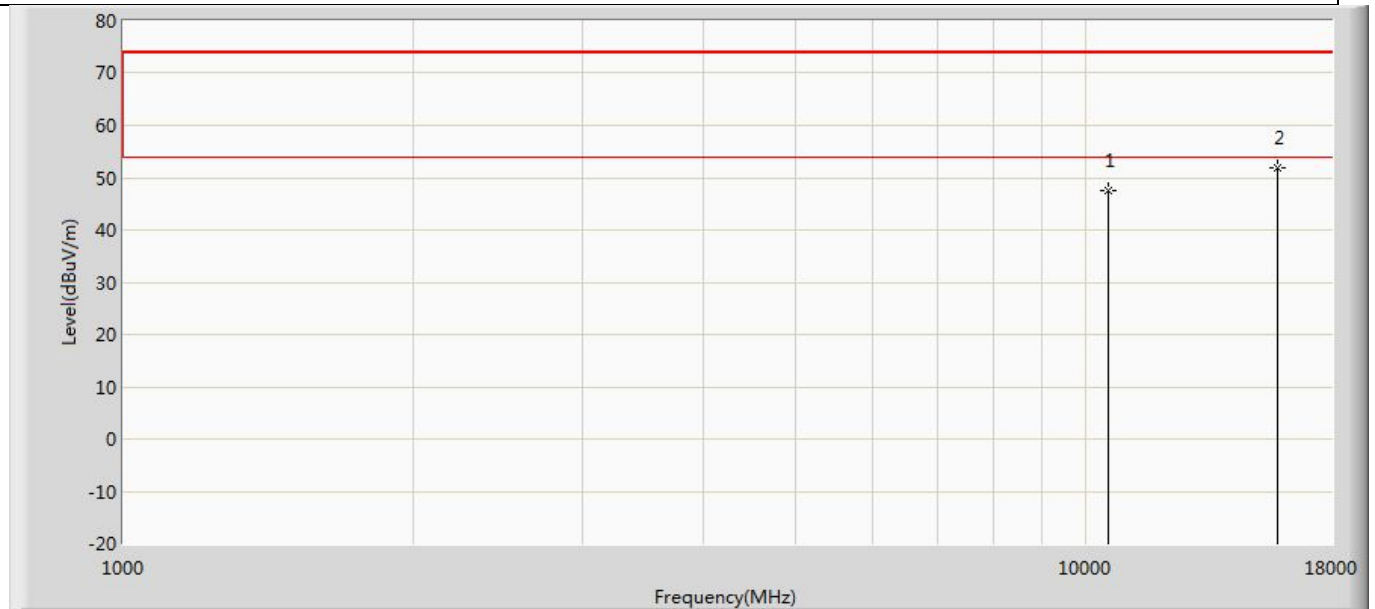


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	47.618	50.804	-26.382	74.000	-3.185	PK
2	*	15810.000	51.860	50.737	-22.140	74.000	1.123	PK

Profile: 2360091R	Page No.: 200
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5270MHz by 802.11ac(40MHz) with Ant1+Ant2	

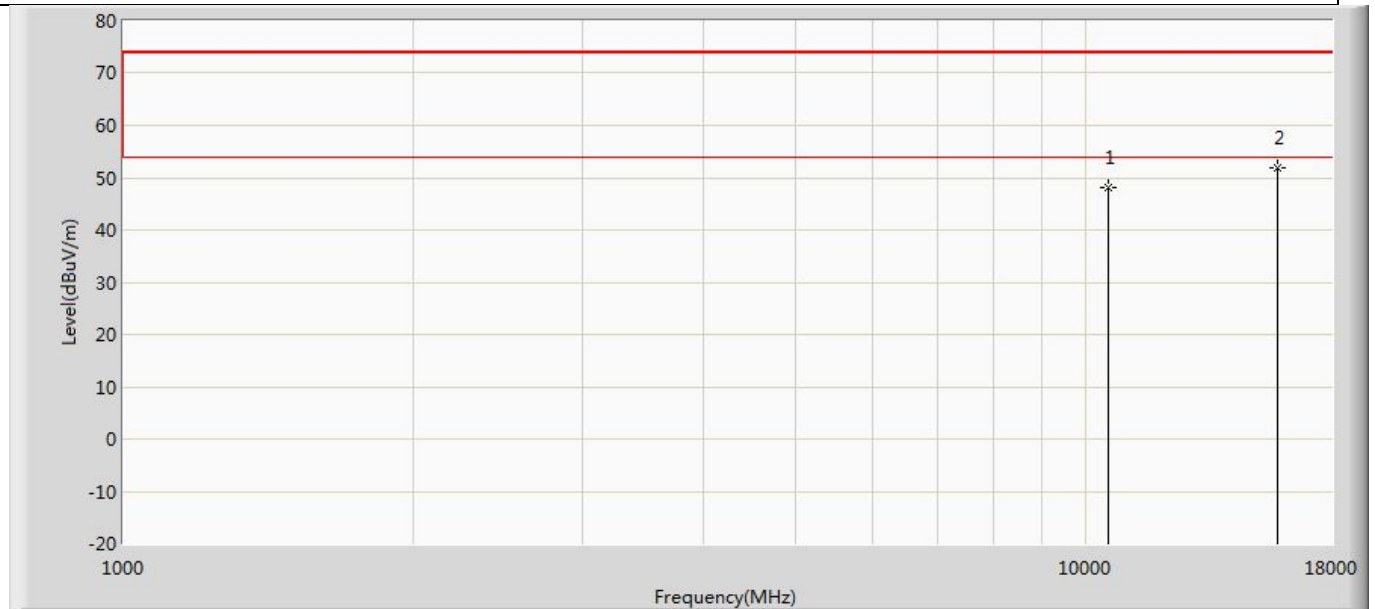


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	47.999	51.185	-26.001	74.000	-3.185	PK
2	*	15810.000	51.903	50.780	-22.097	74.000	1.123	PK

Profile: 2360091R	Page No.: 201
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with Ant1+Ant2	

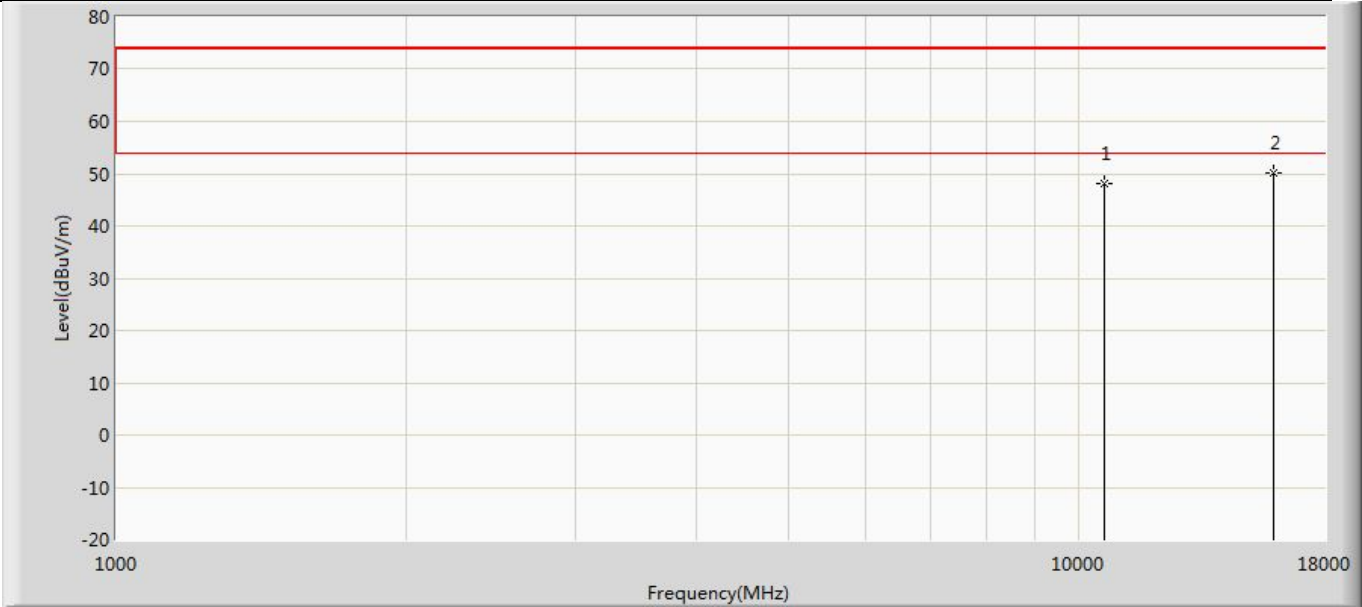


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	48.231	51.407	-25.769	74.000	-3.176	PK
2	*	15930.000	50.092	48.944	-23.908	74.000	1.148	PK

Profile: 2360091R	Page No.: 202
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with Ant1+Ant2	

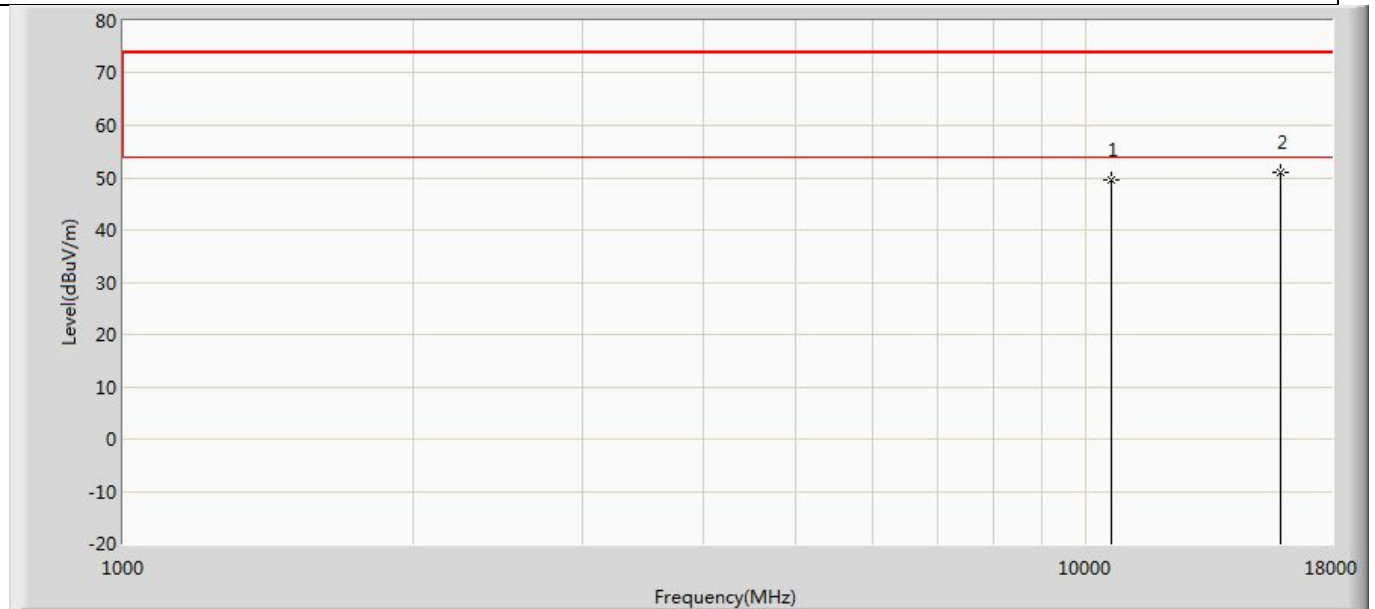


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	49.466	52.642	-24.534	74.000	-3.176	PK
2	*	15930.000	51.025	49.877	-22.975	74.000	1.148	PK

Profile: 2360091R	Page No.: 203
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with Ant1+Ant2	

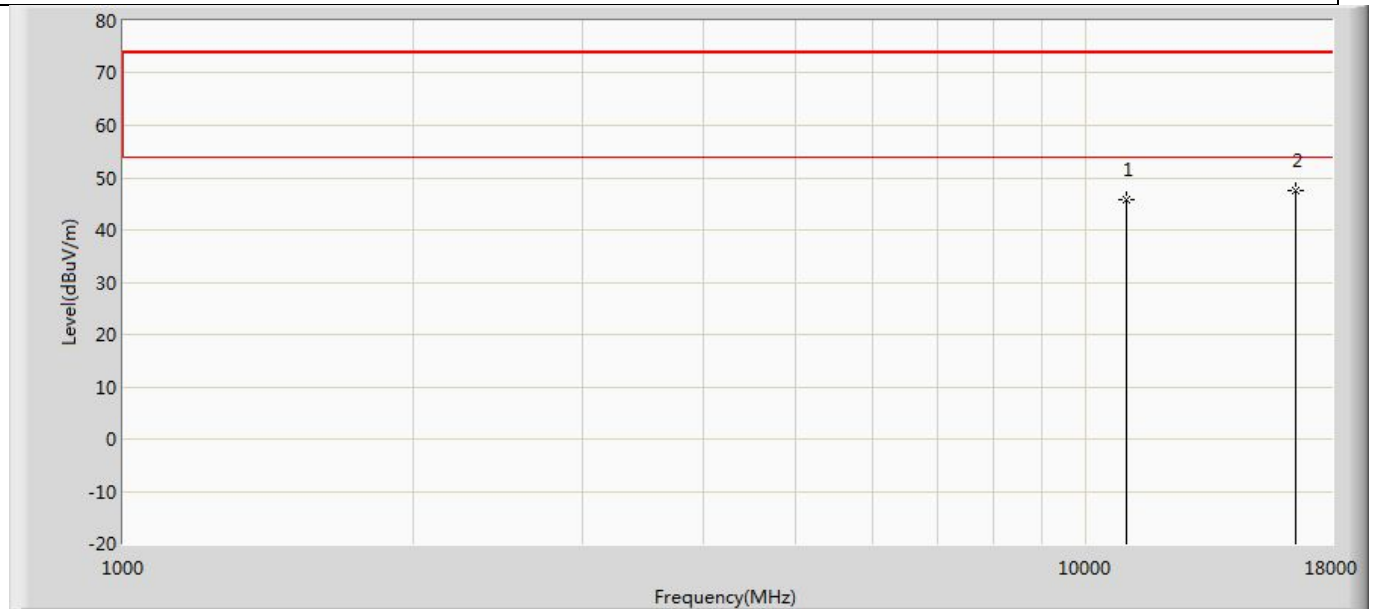


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	45.918	51.750	-28.082	74.000	-5.832	PK
2	*	16530.000	47.668	50.588	-26.332	74.000	-2.920	PK

Profile: 2360091R	Page No.: 204
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with Ant1+Ant2	

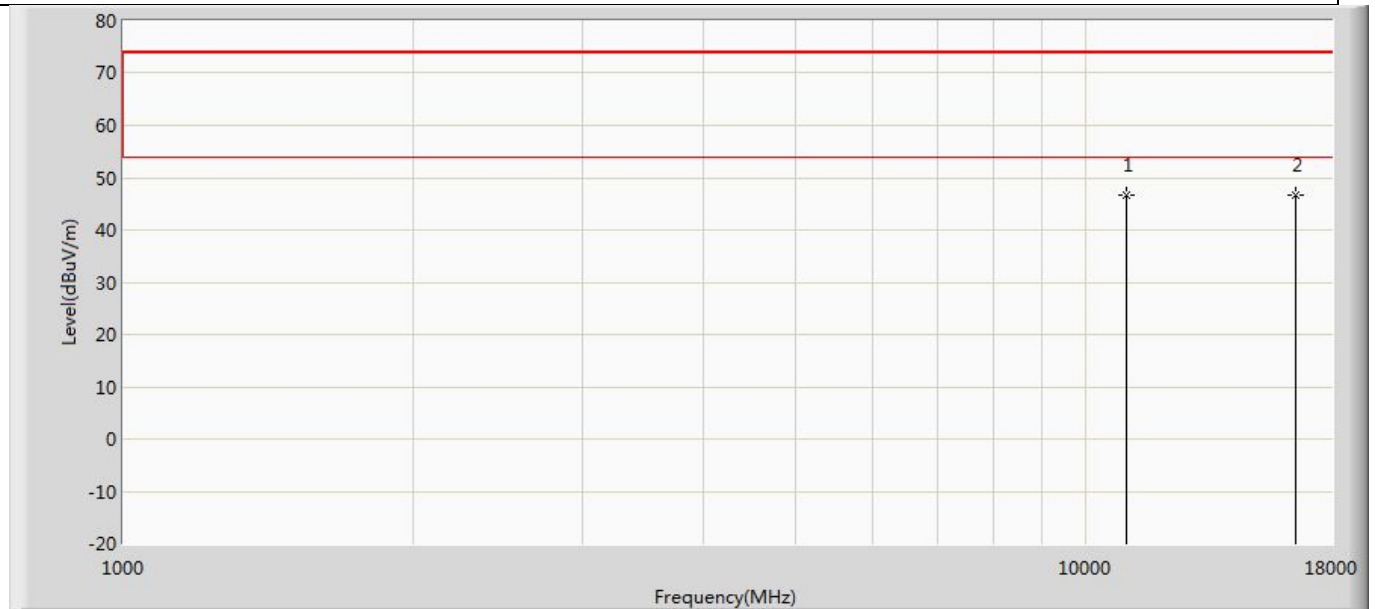


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	46.561	52.393	-27.439	74.000	-5.832	PK
2	*	16530.000	46.611	49.531	-27.389	74.000	-2.920	PK

Profile: 2360091R	Page No.: 205
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5590MHz by 802.11ac(40MHz) with Ant1+Ant2	

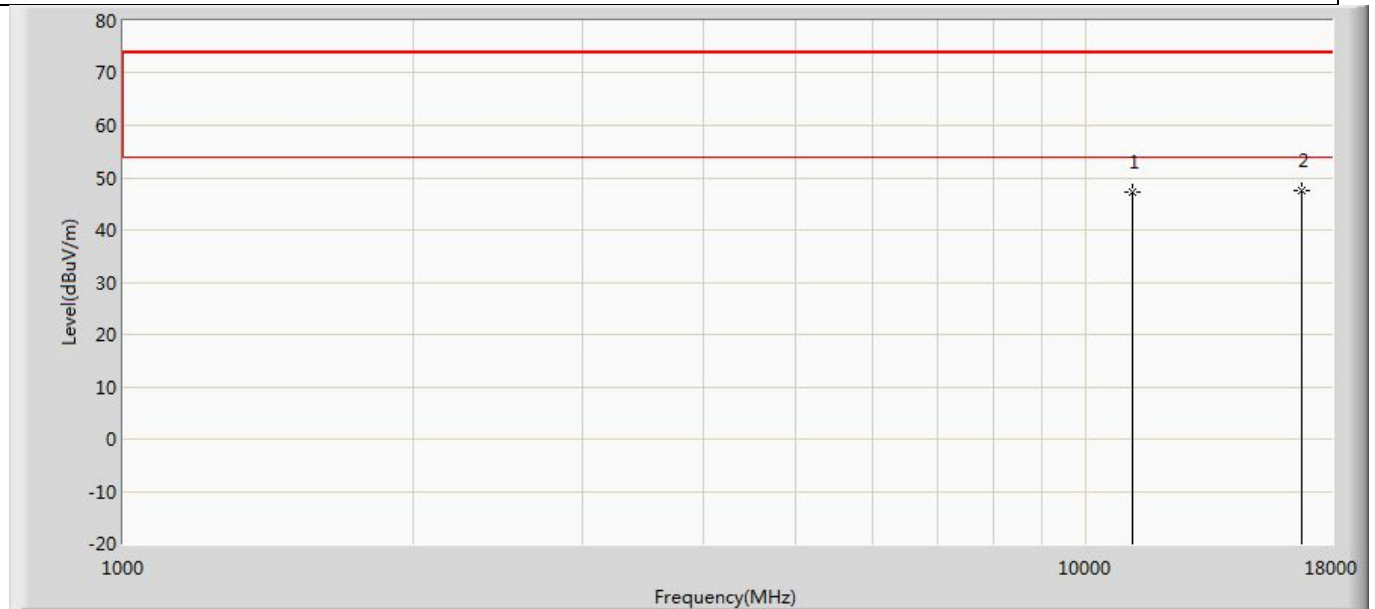


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	47.269	52.381	-26.731	74.000	-5.111	PK
2	*	16770.000	47.477	49.860	-26.523	74.000	-2.383	PK

Profile: 2360091R	Page No.: 206
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5590MHz by 802.11ac(40MHz) with Ant1+Ant2	

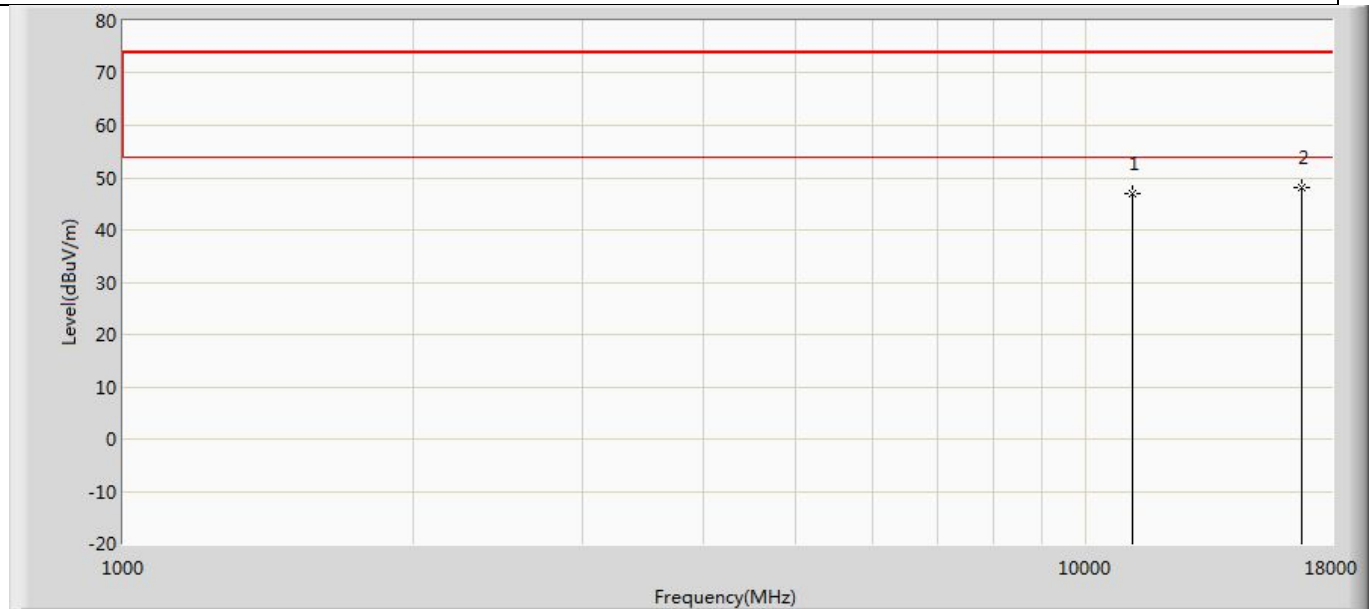


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	47.013	52.125	-26.987	74.000	-5.111	PK
2	*	16770.000	48.204	50.587	-25.796	74.000	-2.383	PK

Profile: 2360091R	Page No.: 207
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5670MHz by 802.11ac(40MHz) with Ant1+Ant2	

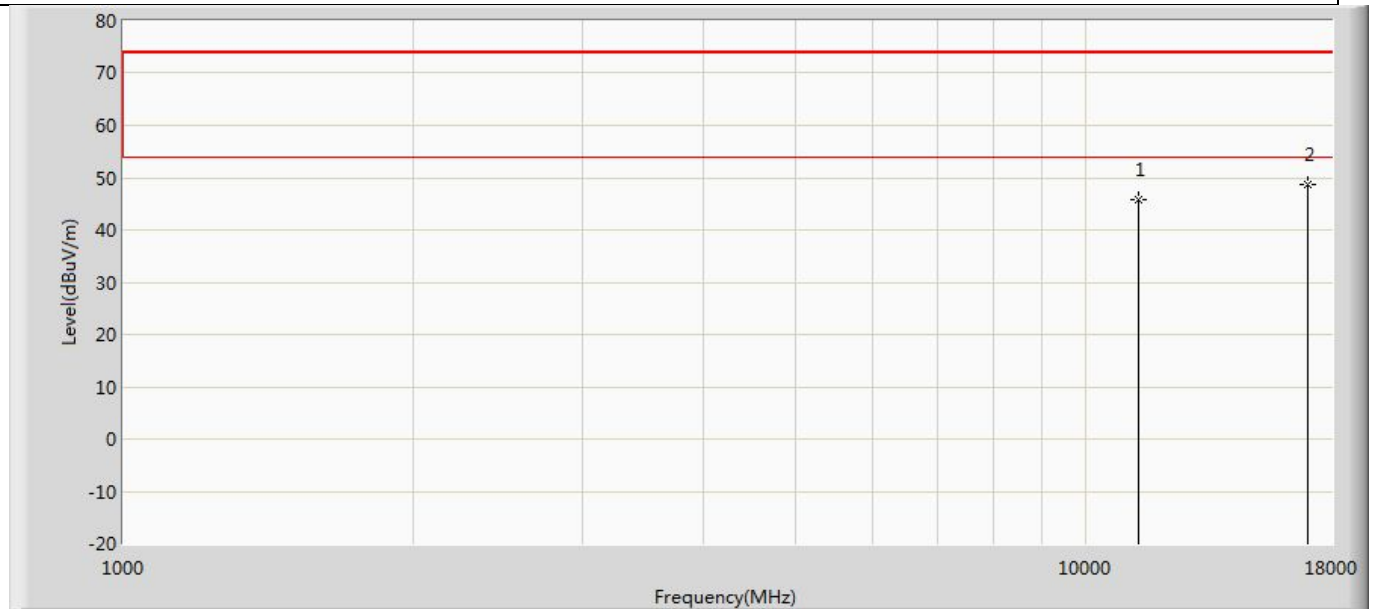


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.878	51.245	-28.122	74.000	-5.366	PK
2	*	17010.000	48.833	51.637	-25.167	74.000	-2.803	PK

Profile: 2360091R	Page No.: 208
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5670MHz by 802.11ac(40MHz) with Ant1+Ant2	

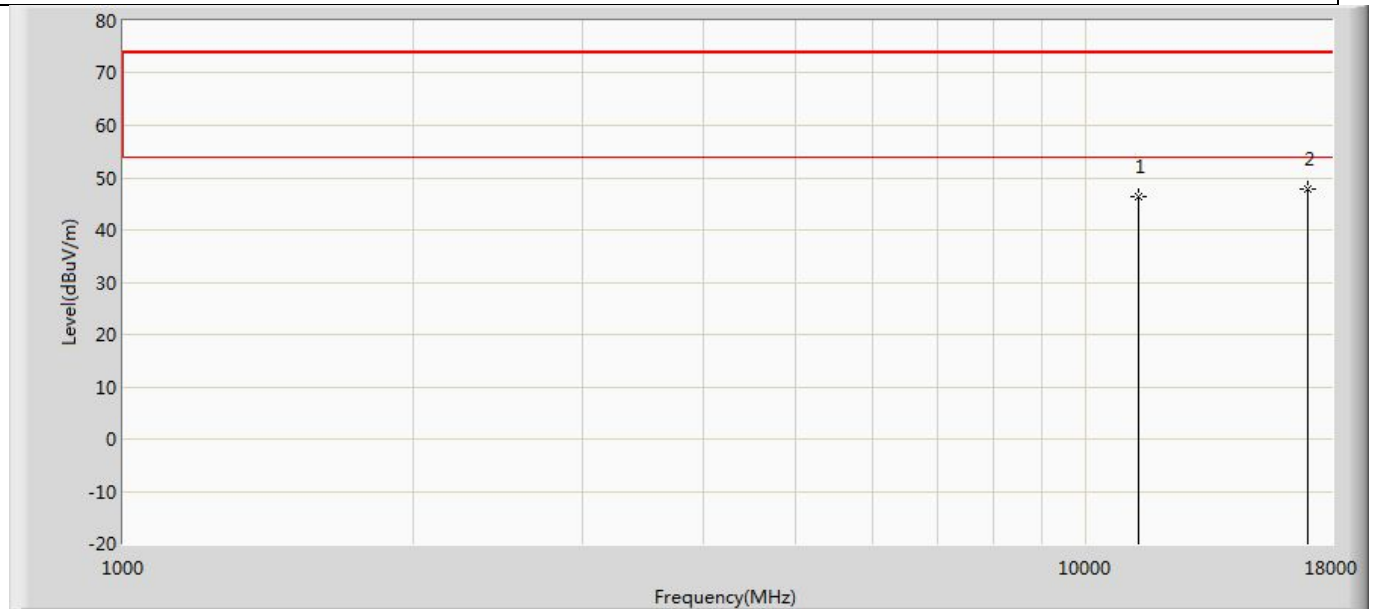


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	46.463	51.830	-27.537	74.000	-5.366	PK
2	*	17010.000	47.929	50.733	-26.071	74.000	-2.803	PK

Profile: 2360091R	Page No.: 63
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5755MHz by 802.11ac(40MHz) with Ant1+Ant2	

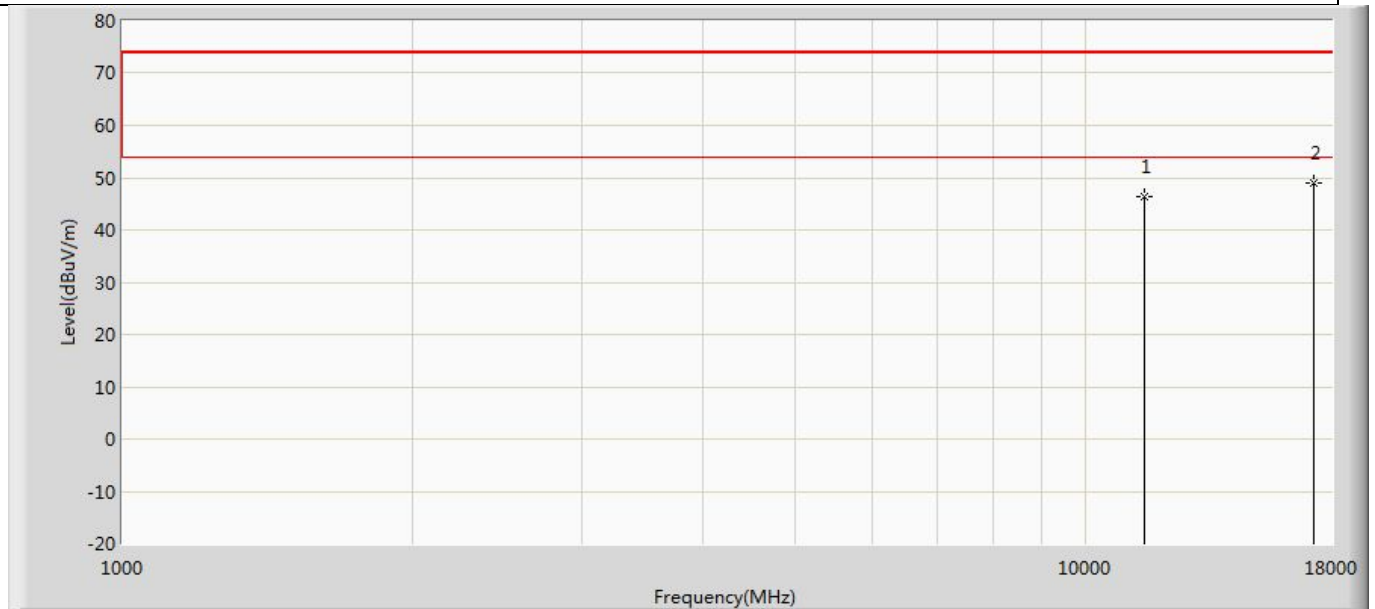


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	46.292	51.560	-27.708	74.000	-5.268	PK
2	*	17265.000	49.075	51.499	-24.925	74.000	-2.424	PK

Profile: 2360091R	Page No.: 64
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5755MHz by 802.11ac(40MHz) with Ant1+Ant2	

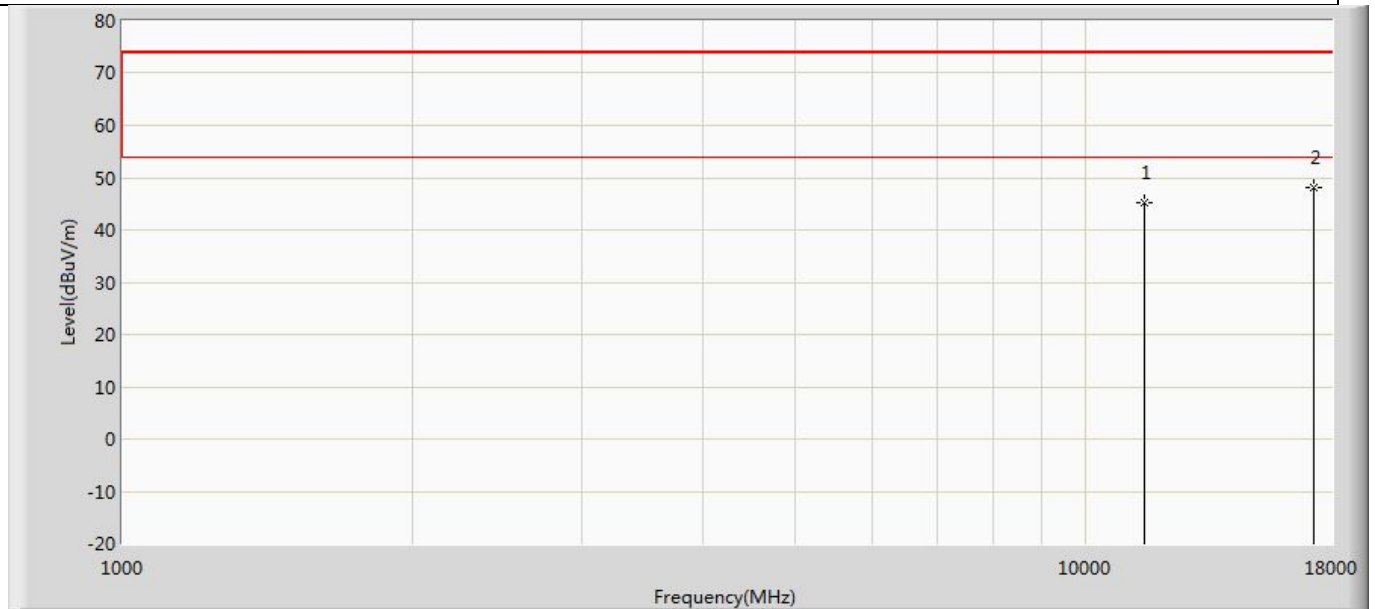


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	45.099	50.367	-28.901	74.000	-5.268	PK
2	*	17265.000	48.230	50.654	-25.770	74.000	-2.424	PK

Profile: 2360091R	Page No.: 65
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5795MHz by 802.11ac(40MHz) with Ant1+Ant2	

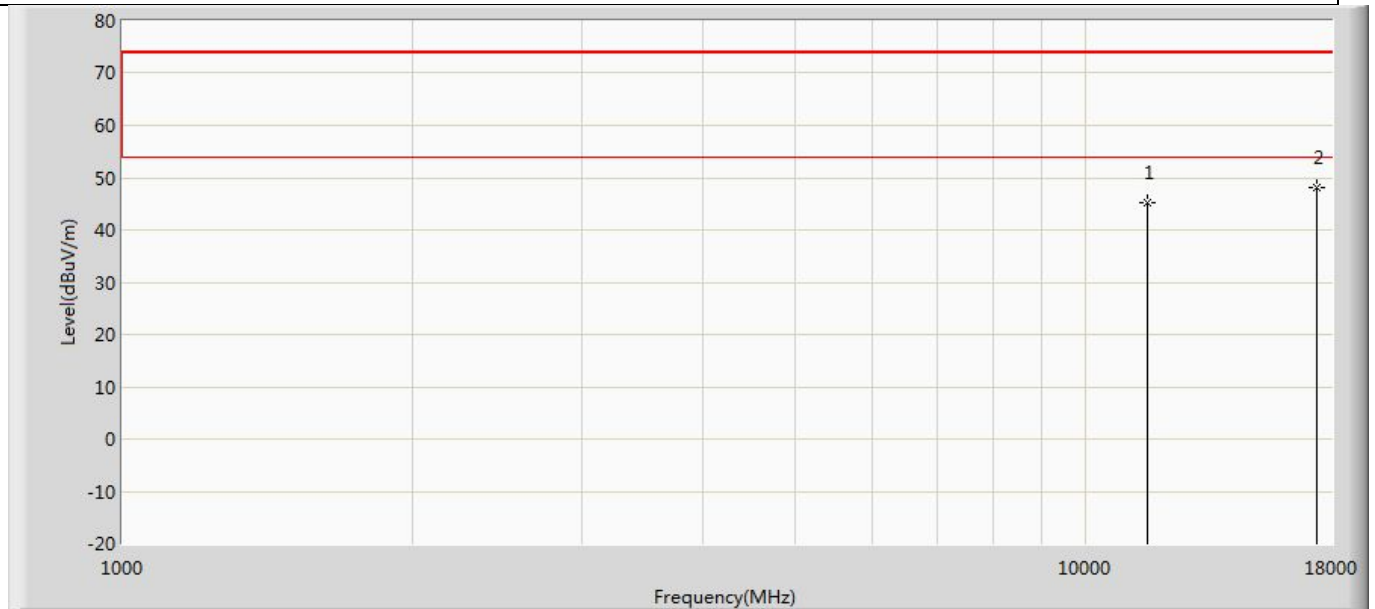


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	45.272	50.426	-28.728	74.000	-5.154	PK
2	*	17385.000	48.217	50.452	-25.783	74.000	-2.236	PK

Profile: 2360091R	Page No.: 66
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5795MHz by 802.11ac(40MHz) with Ant1+Ant2	

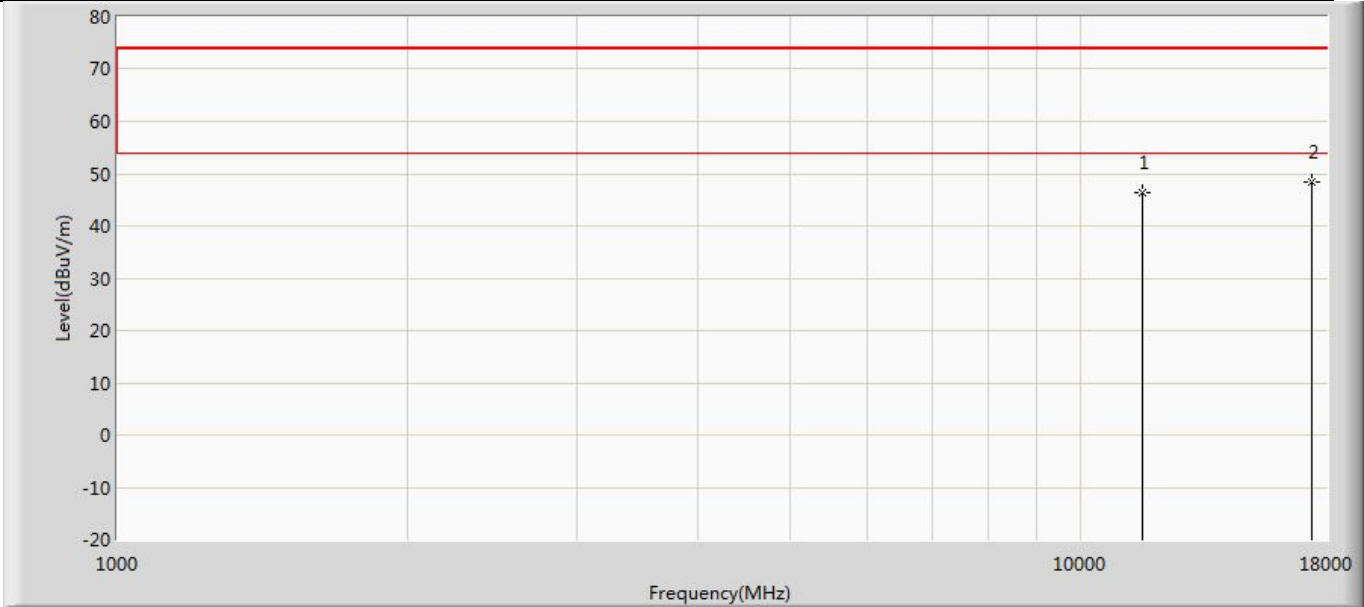


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	46.451	51.605	-27.549	74.000	-5.154	PK
2	*	17385.000	48.446	50.681	-25.554	74.000	-2.236	PK

Profile: 2360091R	Page No.: 209
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with Ant1+Ant2	

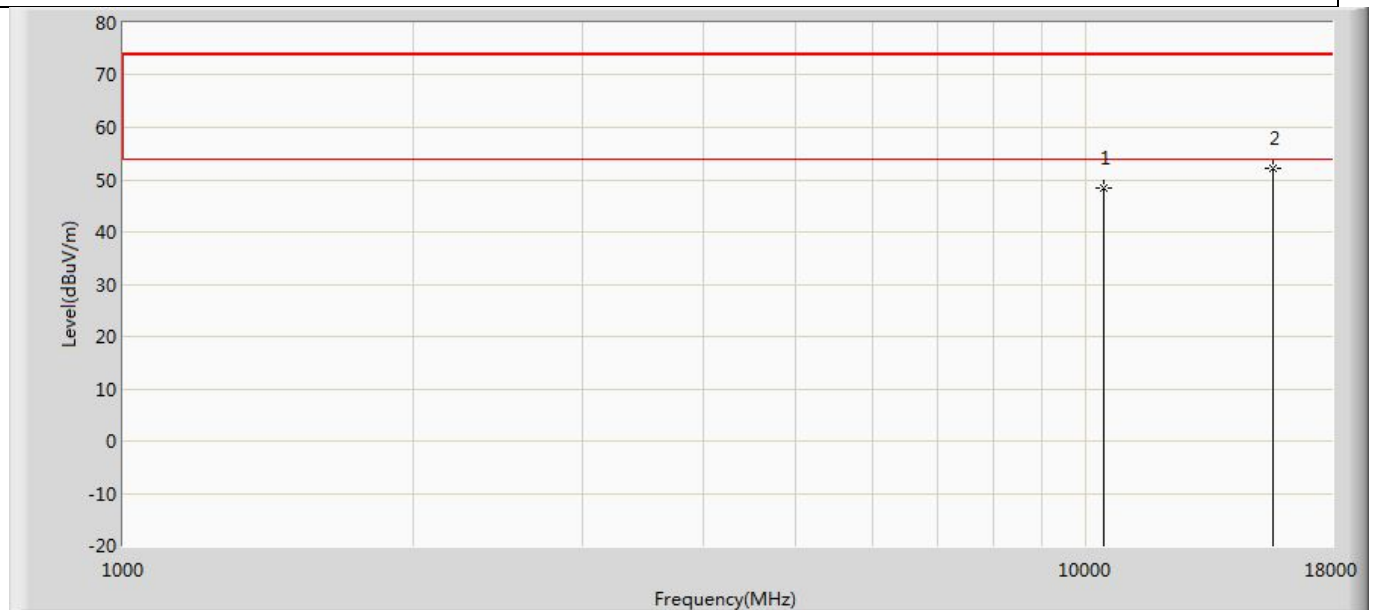


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	48.414	51.409	-25.586	74.000	-2.995	PK
2	*	15630.000	52.192	50.755	-21.808	74.000	1.437	PK

Profile: 2360091R	Page No.: 210
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with Ant1+Ant2	

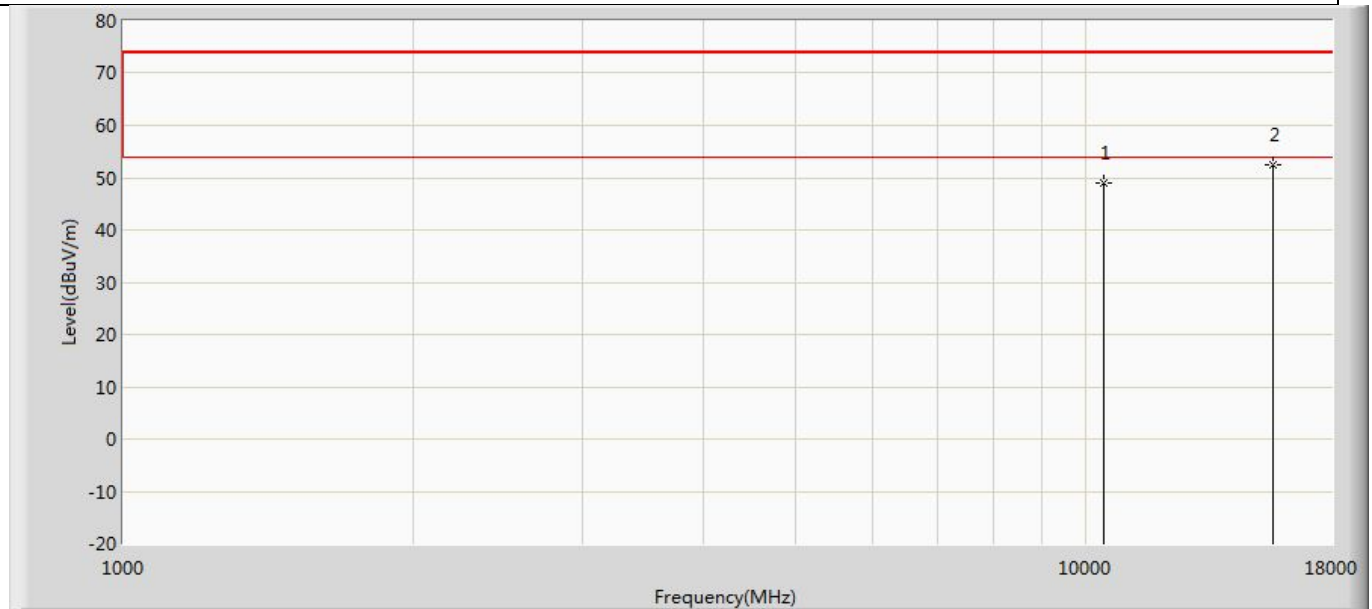


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	48.848	51.843	-25.152	74.000	-2.995	PK
2	*	15630.000	52.364	50.927	-21.636	74.000	1.437	PK

Profile: 2360091R	Page No.: 211
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with Ant1+Ant2	

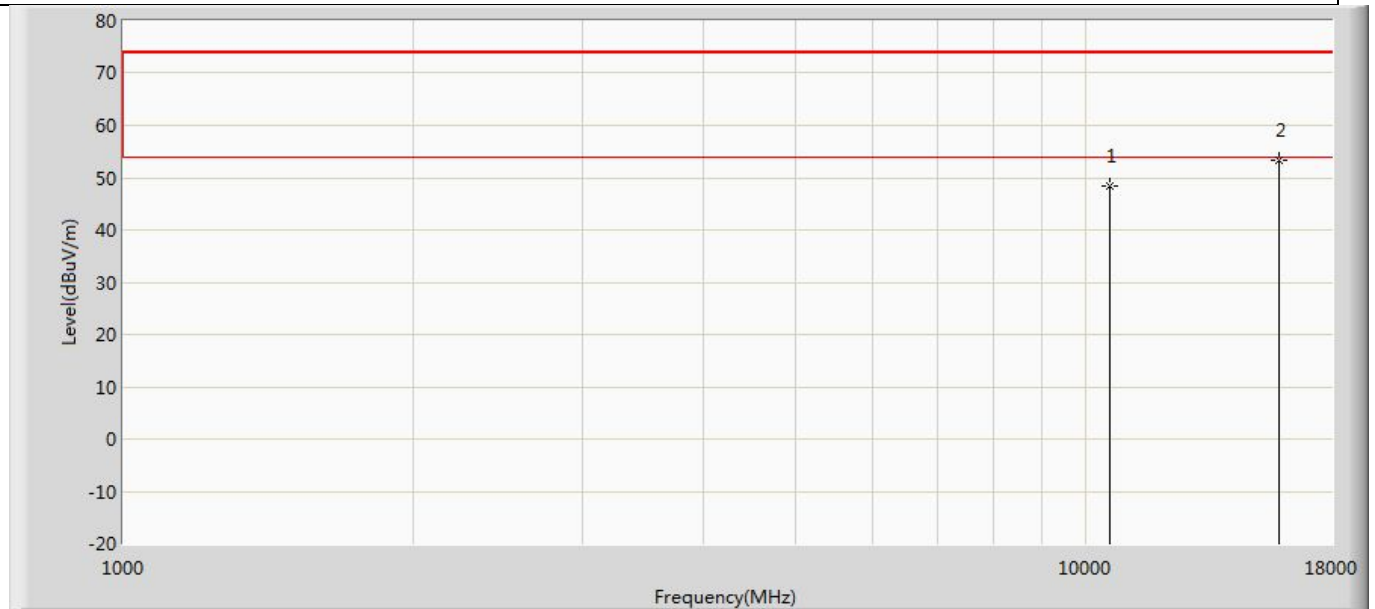


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	48.421	51.403	-25.579	74.000	-2.982	PK
2	*	15870.000	53.398	51.536	-20.602	74.000	1.862	PK

Profile: 2360091R	Page No.: 212
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with Ant1+Ant2	

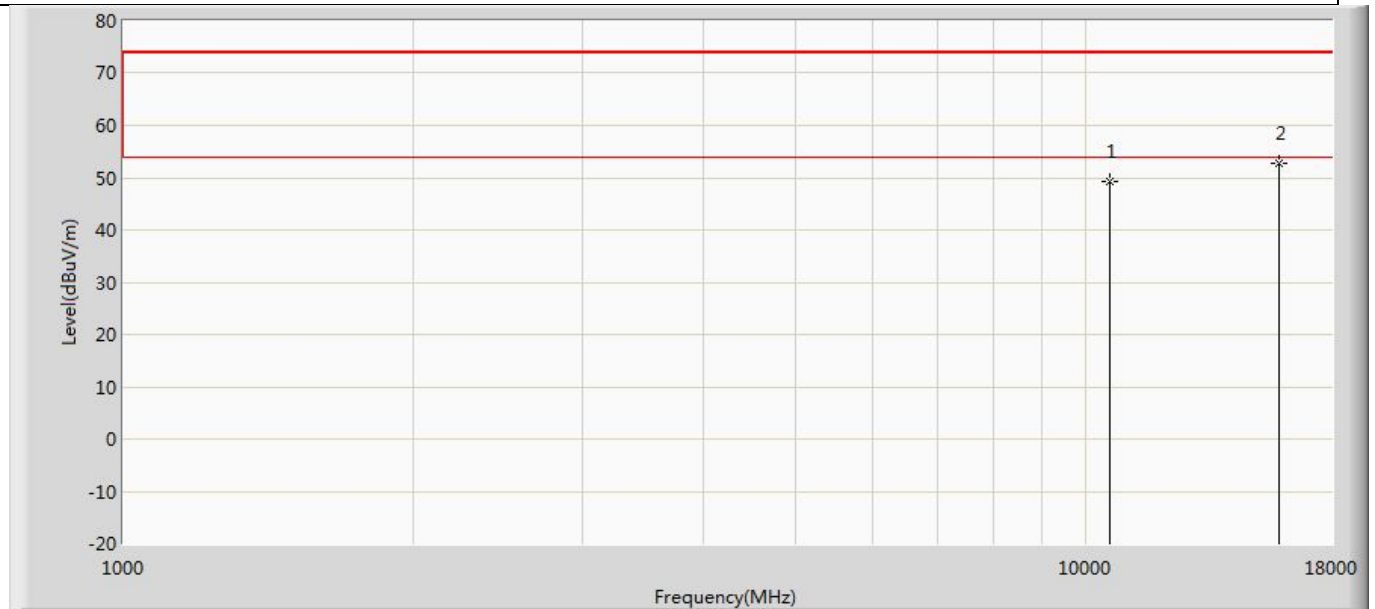


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	49.192	52.174	-24.808	74.000	-2.982	PK
2	*	15870.000	52.850	50.988	-21.150	74.000	1.862	PK

Profile: 2360091R	Page No.: 213
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with Ant1+Ant2	

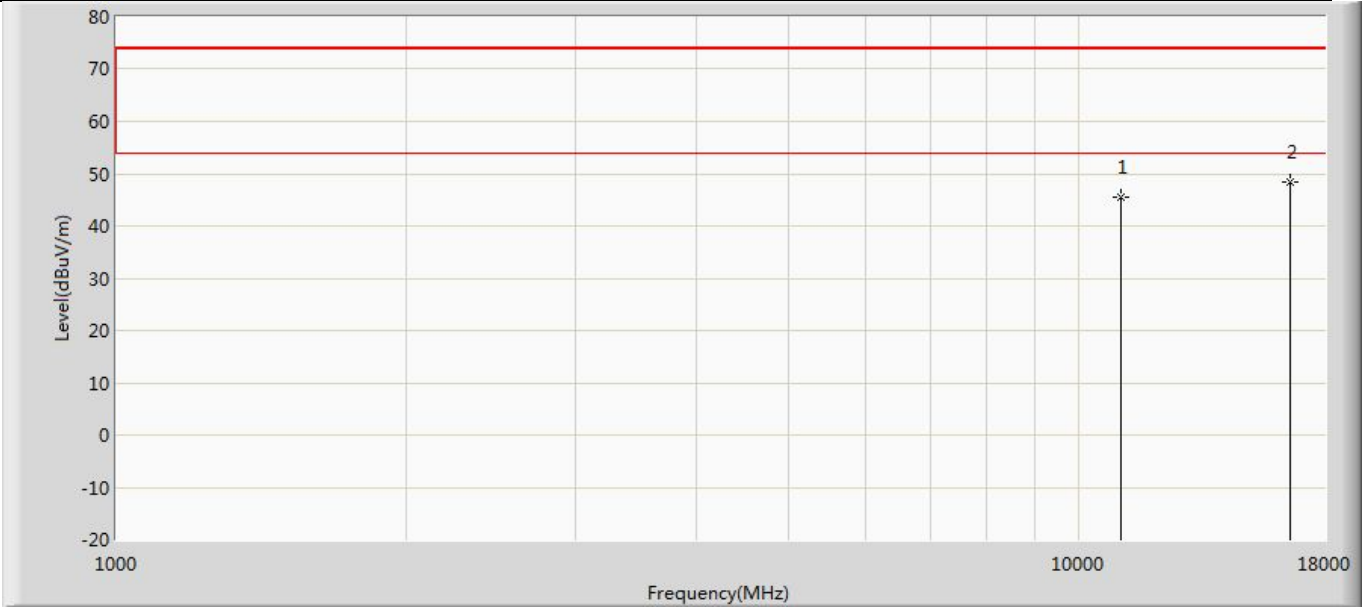


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	45.424	50.957	-28.576	74.000	-5.534	PK
2	*	16590.000	48.468	50.705	-25.532	74.000	-2.237	PK

Profile: 2360091R	Page No.: 214
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with Ant1+Ant2	

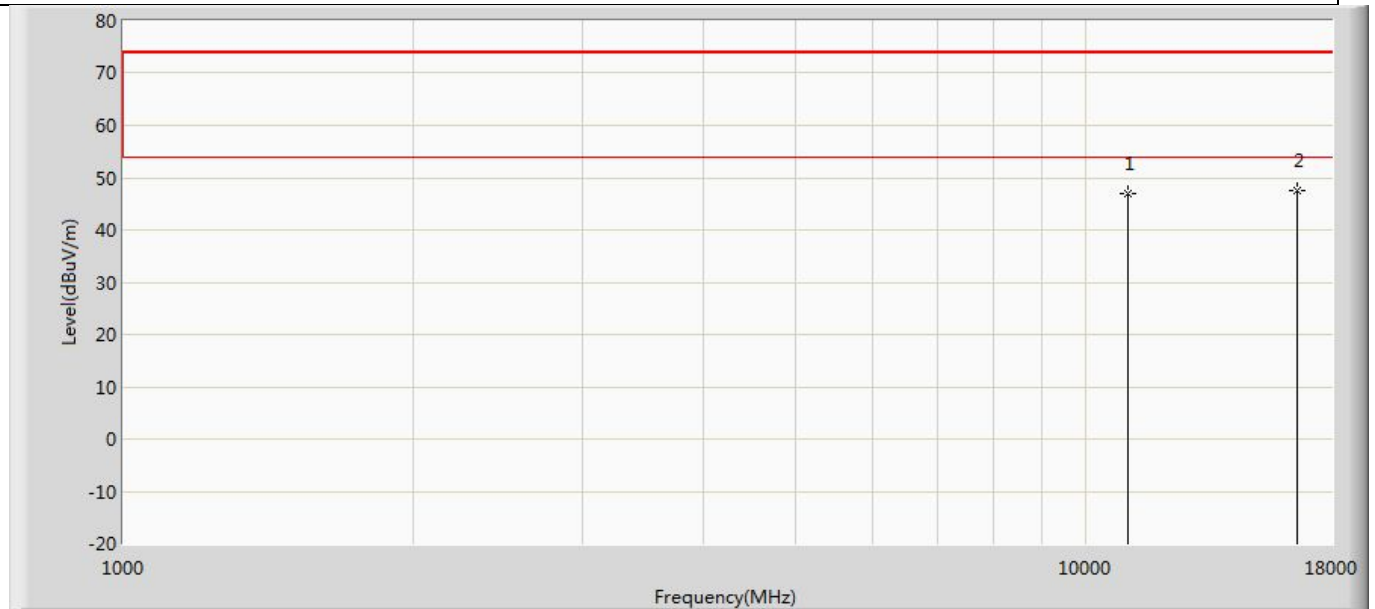


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	46.973	52.506	-27.027	74.000	-5.534	PK
2	*	16590.000	47.571	49.808	-26.429	74.000	-2.237	PK

Profile: 2360091R	Page No.: 67
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) with Ant1+Ant2	

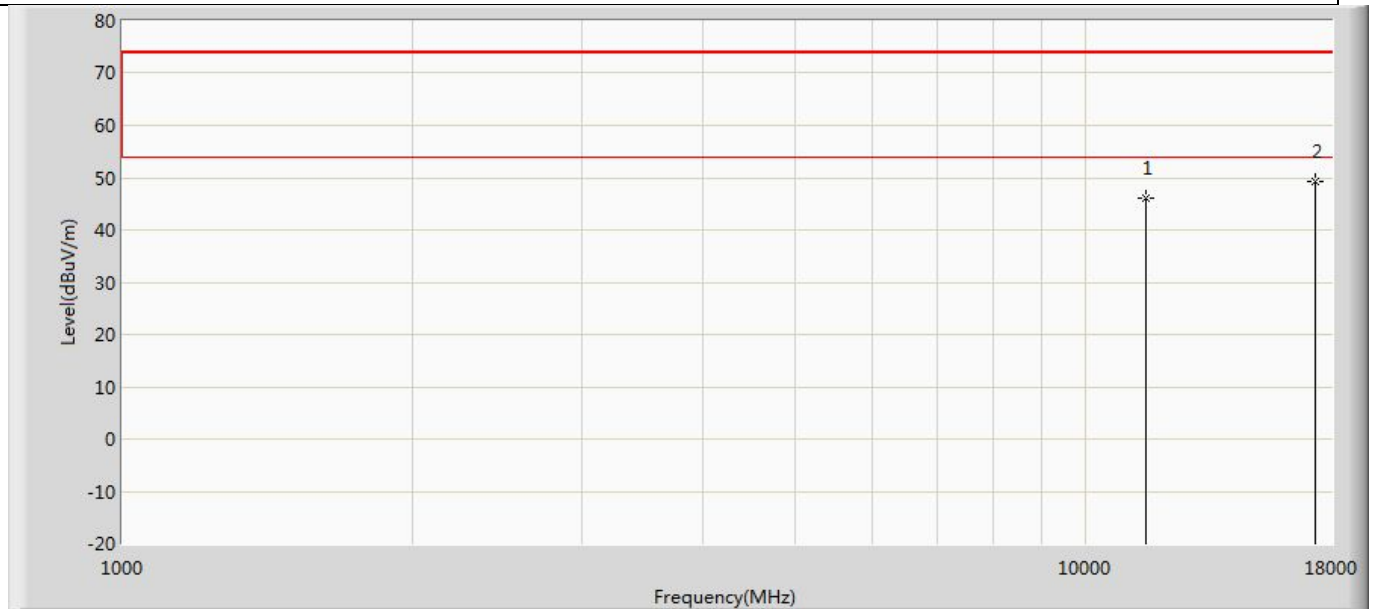


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	45.972	50.660	-28.028	74.000	-4.688	PK
2	*	17325.000	49.352	51.889	-24.648	74.000	-2.538	PK

Profile: 2360091R	Page No.: 68
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5775MHz by 802.11ac(80MHz) with Ant1+Ant2	

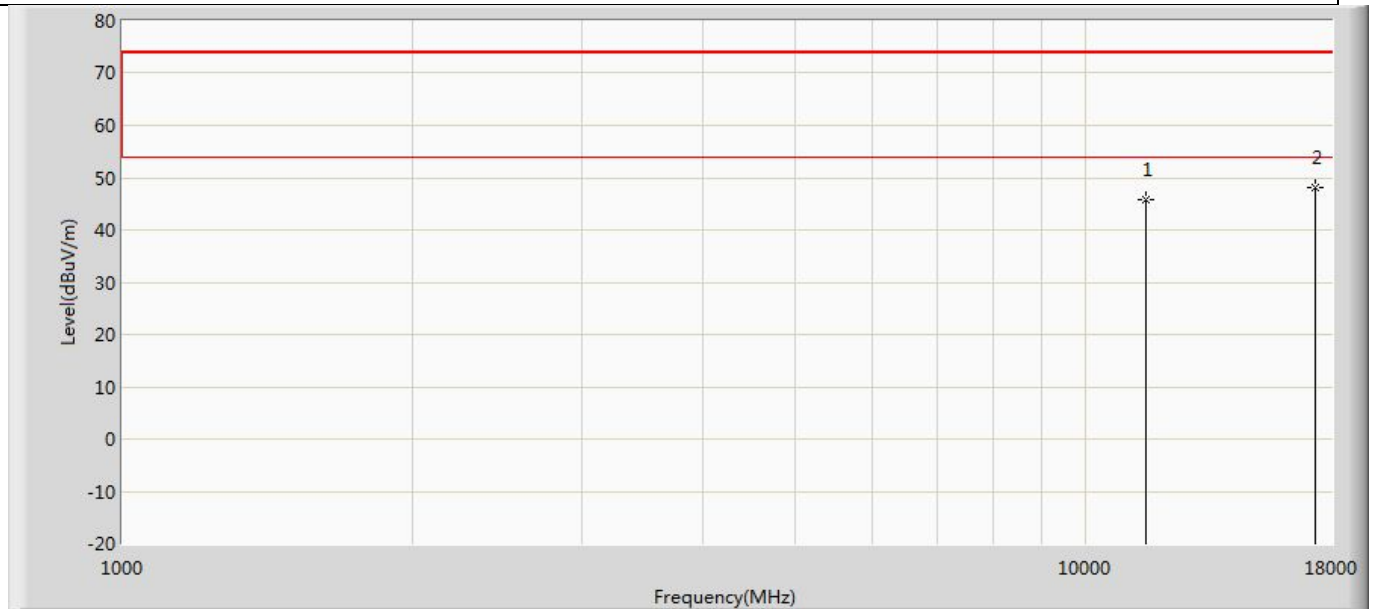


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	45.873	50.561	-28.127	74.000	-4.688	PK
2	*	17325.000	48.231	50.768	-25.769	74.000	-2.538	PK

Profile: 2360091R	Page No.: 215
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with Ant1+Ant2	

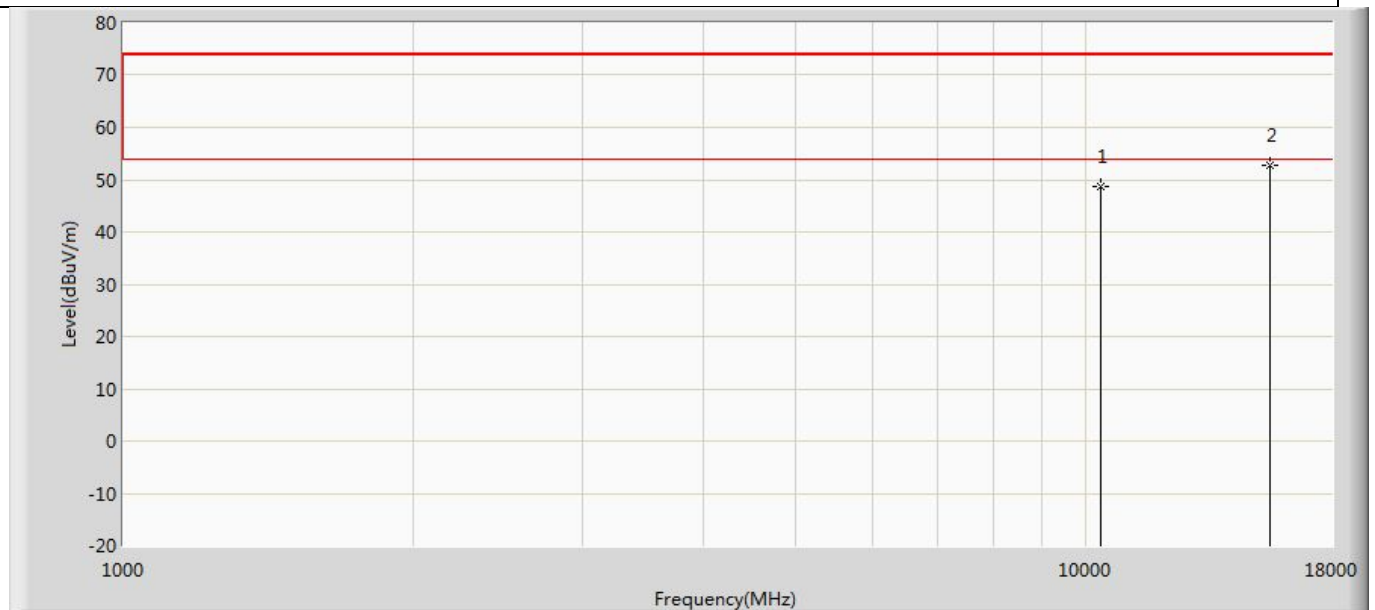


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.600	51.998	-25.400	74.000	-3.399	PK
2	*	15540.000	52.659	51.433	-21.341	74.000	1.226	PK

Profile: 2360091R	Page No.: 216
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with Ant1+Ant2	

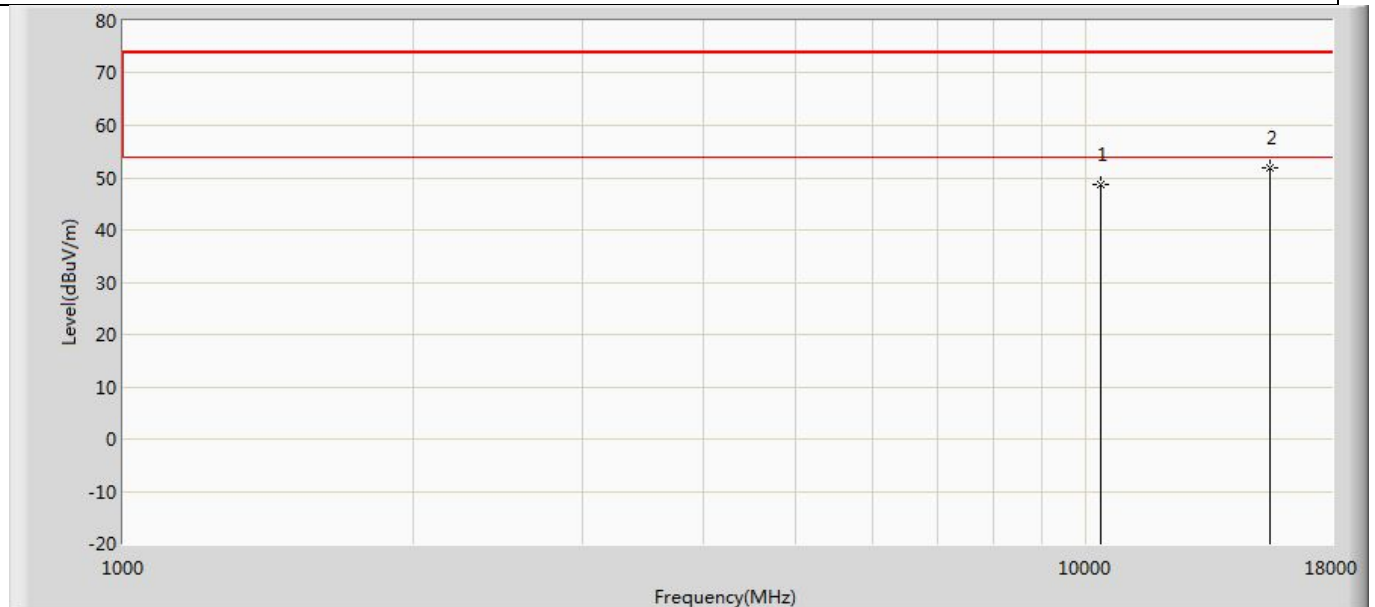


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.660	52.058	-25.340	74.000	-3.399	PK
2	*	15540.000	51.789	50.563	-22.211	74.000	1.226	PK

Profile: 2360091R	Page No.: 217
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) with Ant1+Ant2	

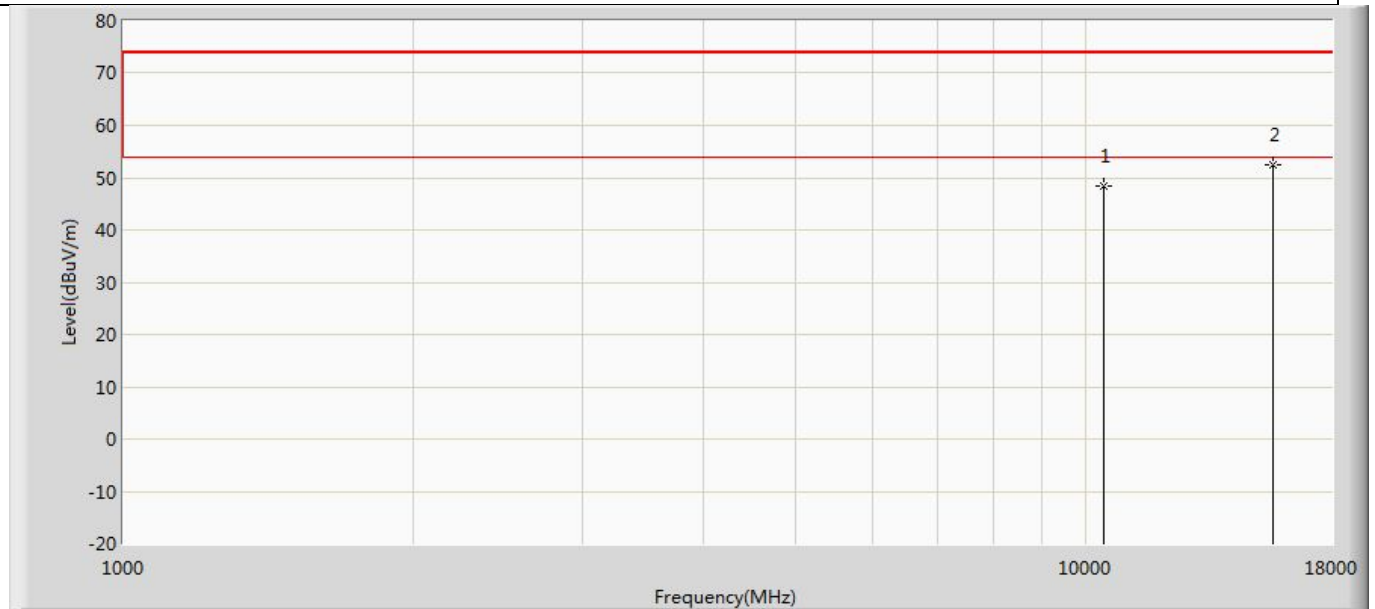


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.384	51.673	-25.616	74.000	-3.288	PK
2	*	15660.000	52.350	51.158	-21.650	74.000	1.192	PK

Profile: 2360091R	Page No.: 218
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5220MHz by 802.11ax(20MHz) with Ant1+Ant2	

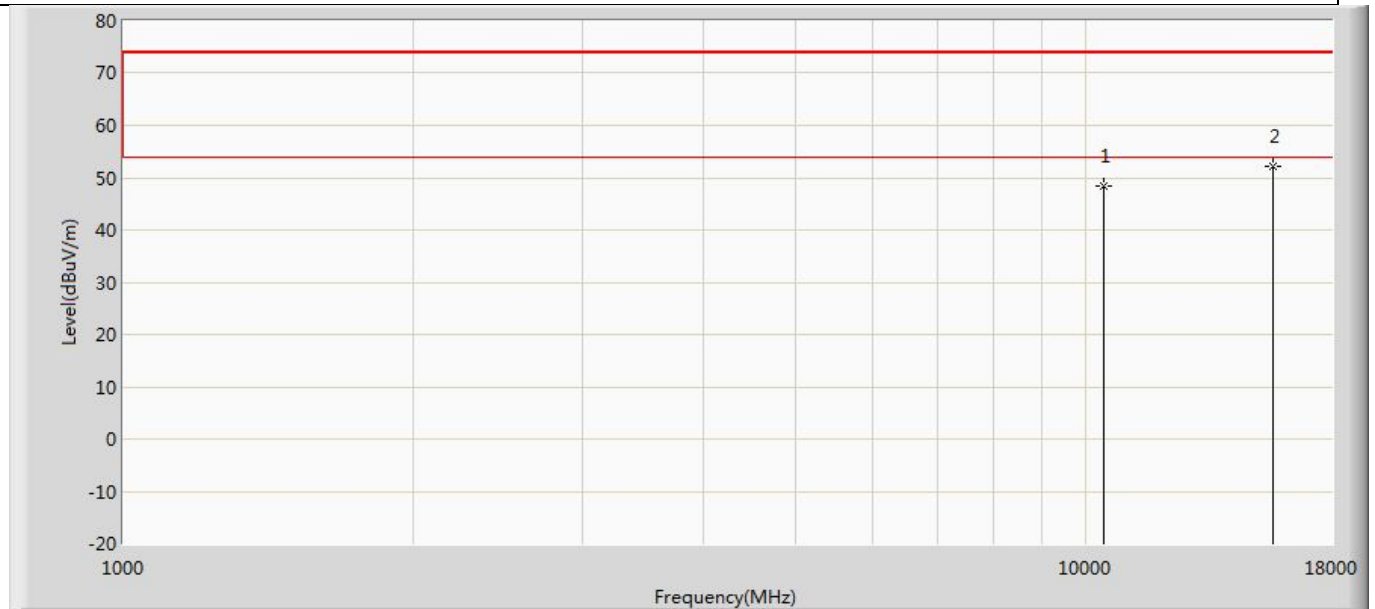


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.462	51.751	-25.538	74.000	-3.288	PK
2	*	15660.000	52.260	51.068	-21.740	74.000	1.192	PK

Profile: 2360091R	Page No.: 219
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) with Ant1+Ant2	

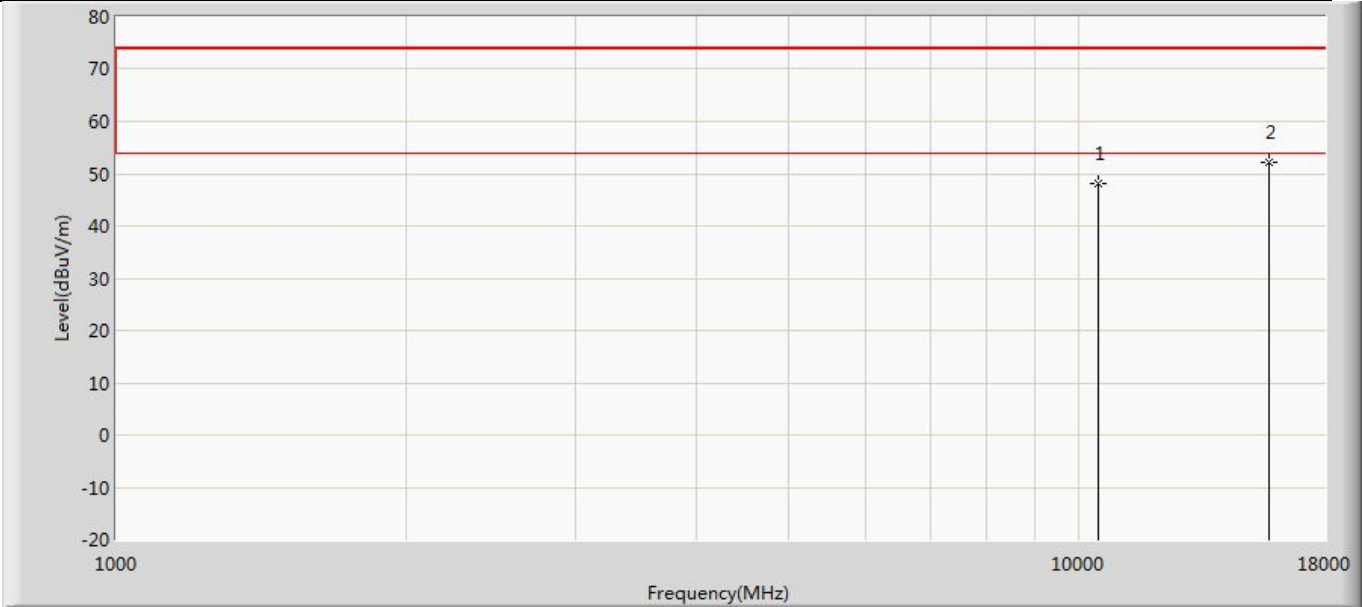


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.118	51.383	-25.882	74.000	-3.265	PK
2	*	15720.000	52.313	50.662	-21.687	74.000	1.651	PK

Profile: 2360091R	Page No.: 220
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5240MHz by 802.11ax(20MHz) with Ant1+Ant2	

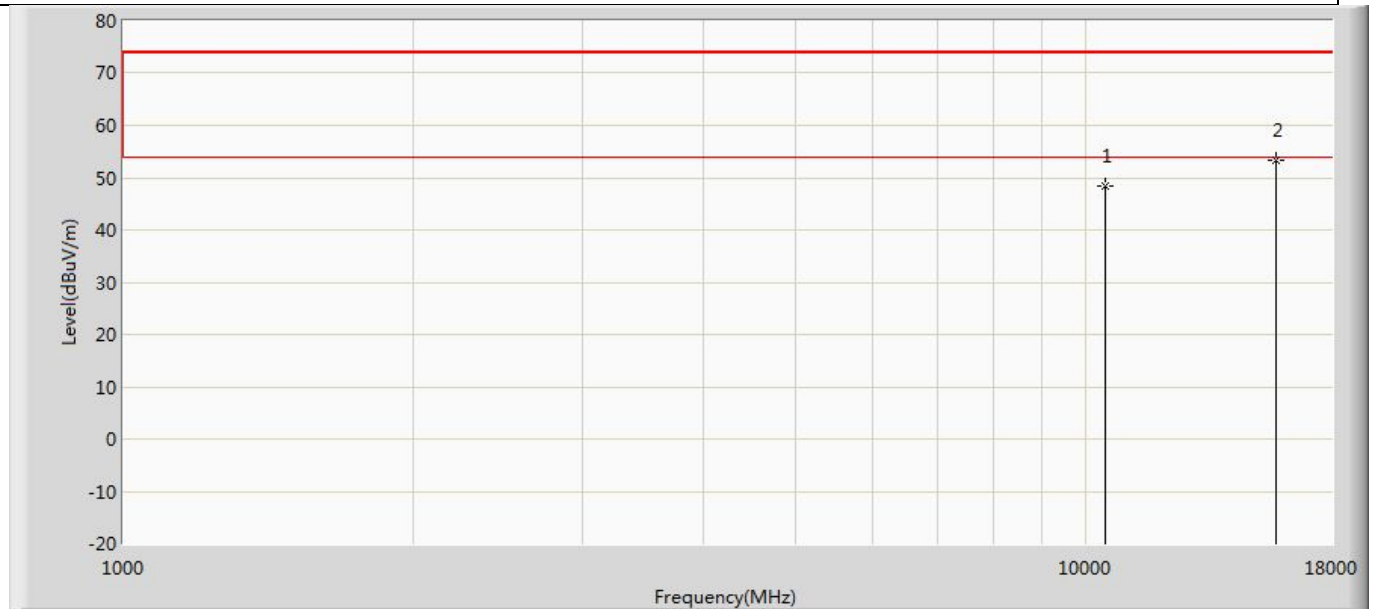


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.487	51.752	-25.513	74.000	-3.265	PK
2	*	15720.000	53.206	51.555	-20.794	74.000	1.651	PK

Profile: 2360091R	Page No.: 221
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) with Ant1+Ant2	

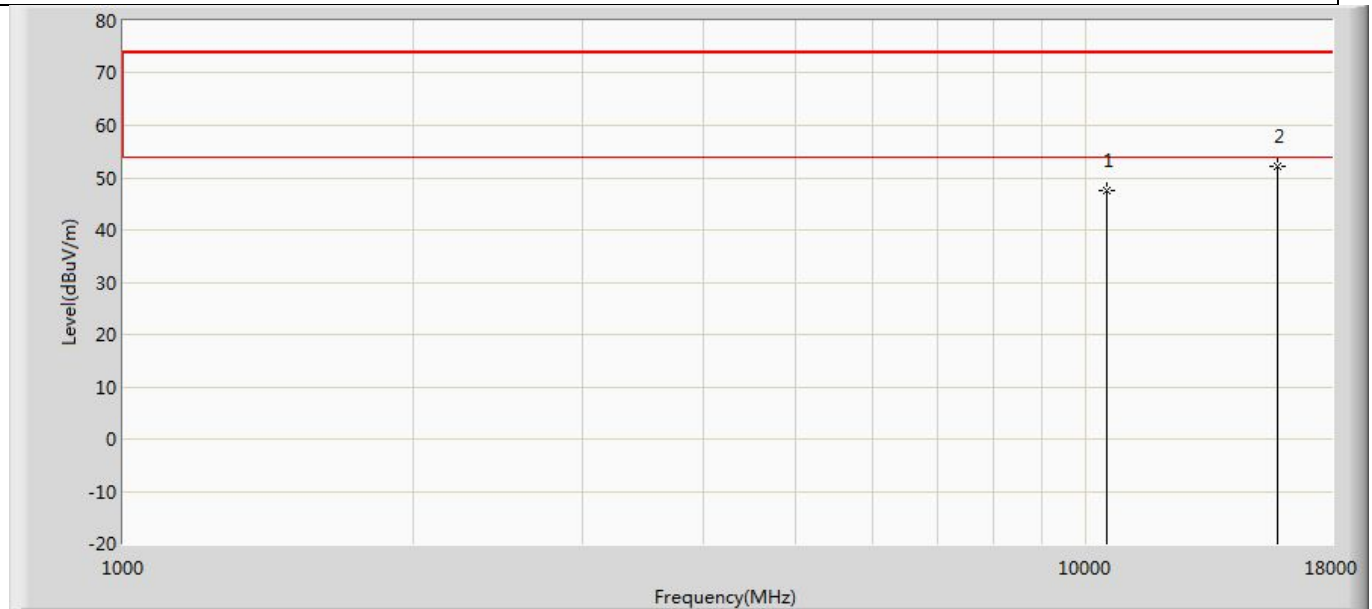


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.645	50.863	-26.355	74.000	-3.218	PK
2	*	15780.000	52.192	50.853	-21.808	74.000	1.339	PK

Profile: 2360091R	Page No.: 222
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5260MHz by 802.11ax(20MHz) with Ant1+Ant2	

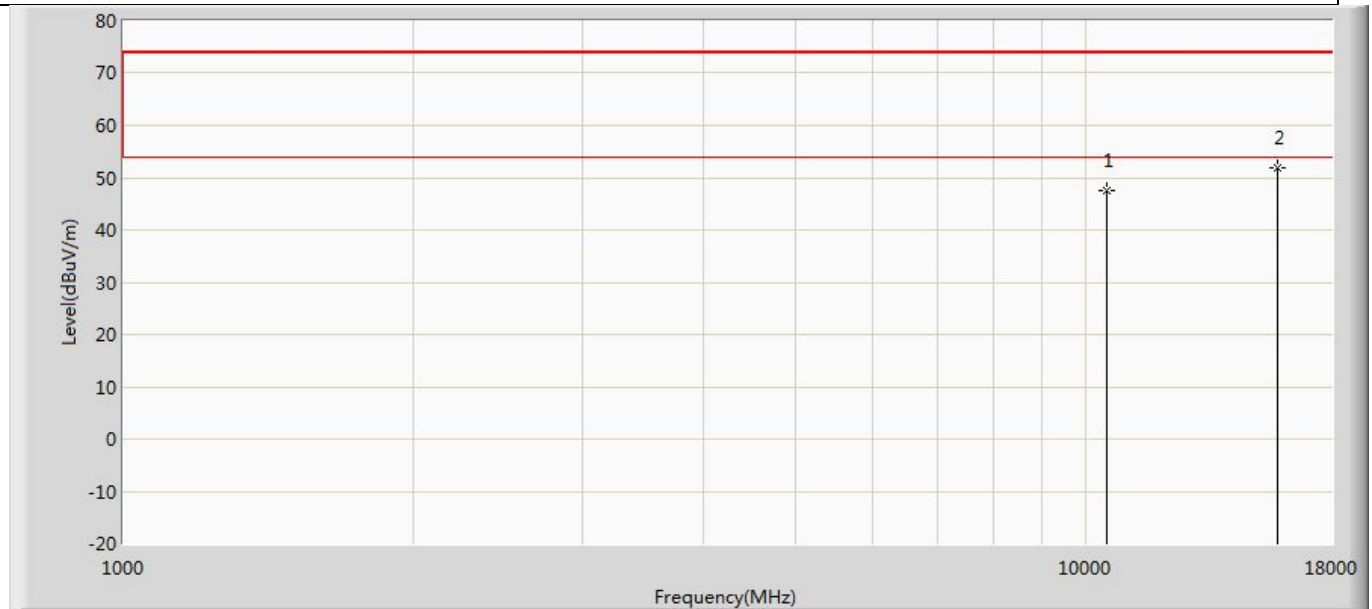


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.485	50.703	-26.515	74.000	-3.218	PK
2	*	15780.000	52.025	50.686	-21.975	74.000	1.339	PK

Profile: 2360091R	Page No.: 223
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) with Ant1+Ant2	

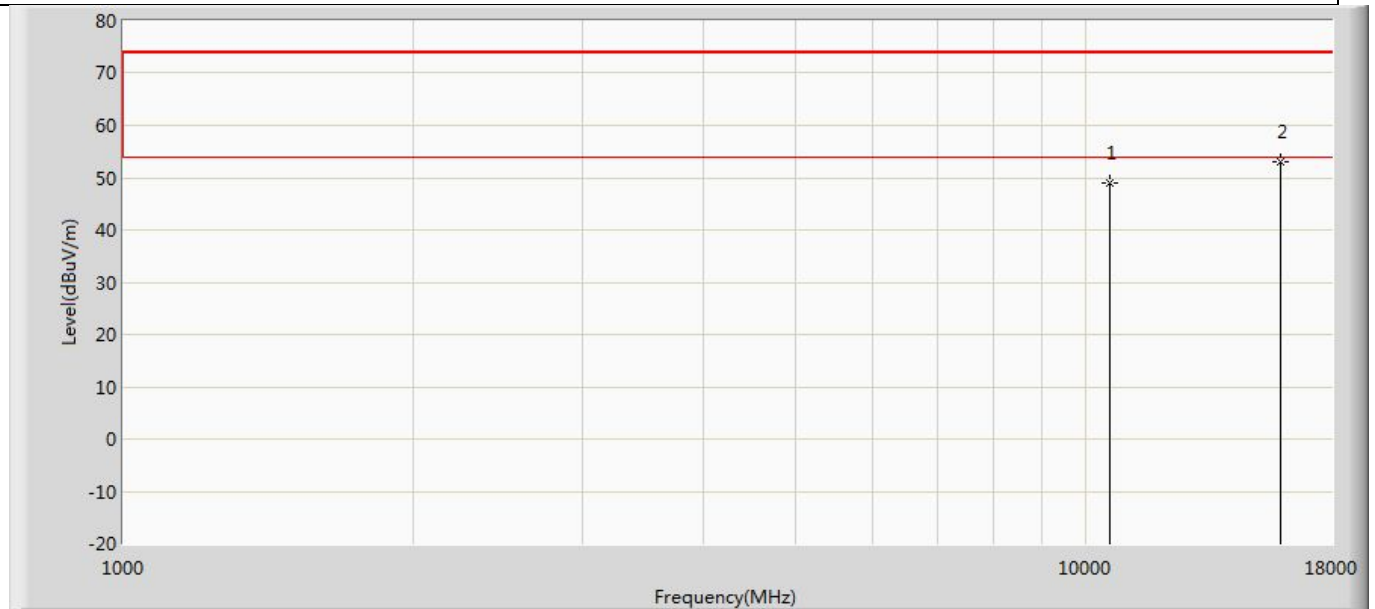


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	49.033	51.698	-24.967	74.000	-2.665	PK
2	*	15900.000	53.068	51.019	-20.932	74.000	2.049	PK

Profile: 2360091R	Page No.: 224
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5300MHz by 802.11ax(20MHz) with Ant1+Ant2	

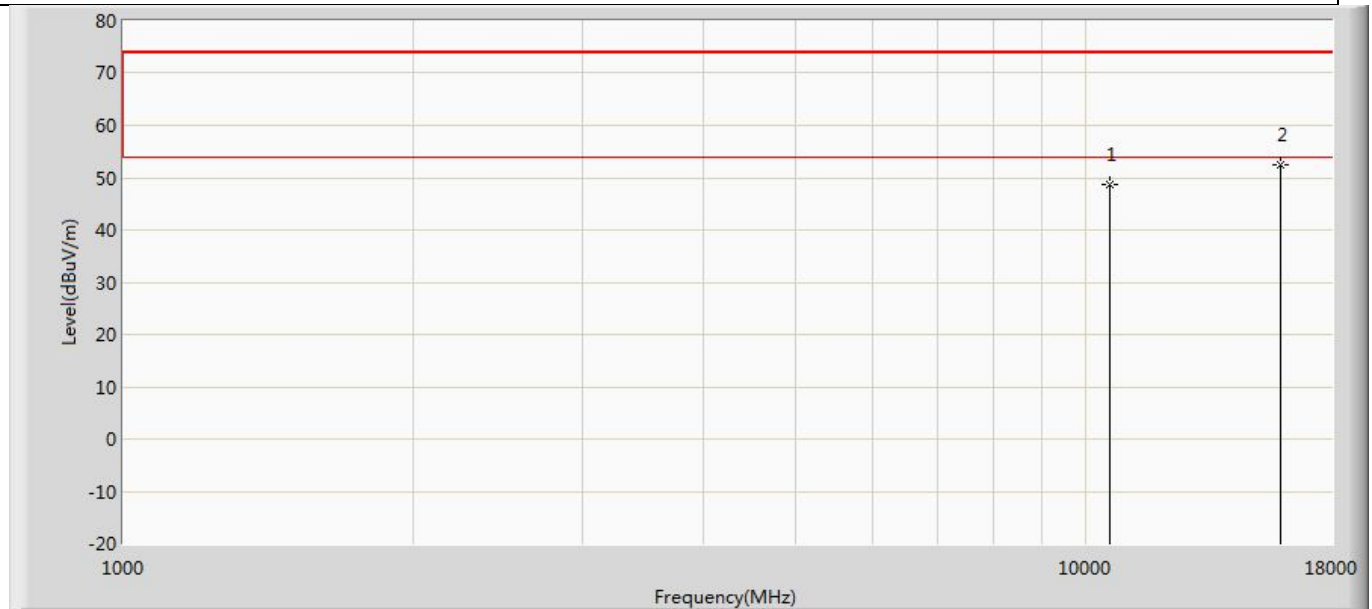


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	48.742	51.407	-25.258	74.000	-2.665	PK
2	*	15900.000	52.425	50.376	-21.575	74.000	2.049	PK

Profile: 2360091R	Page No.: 225
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with Ant1+Ant2	

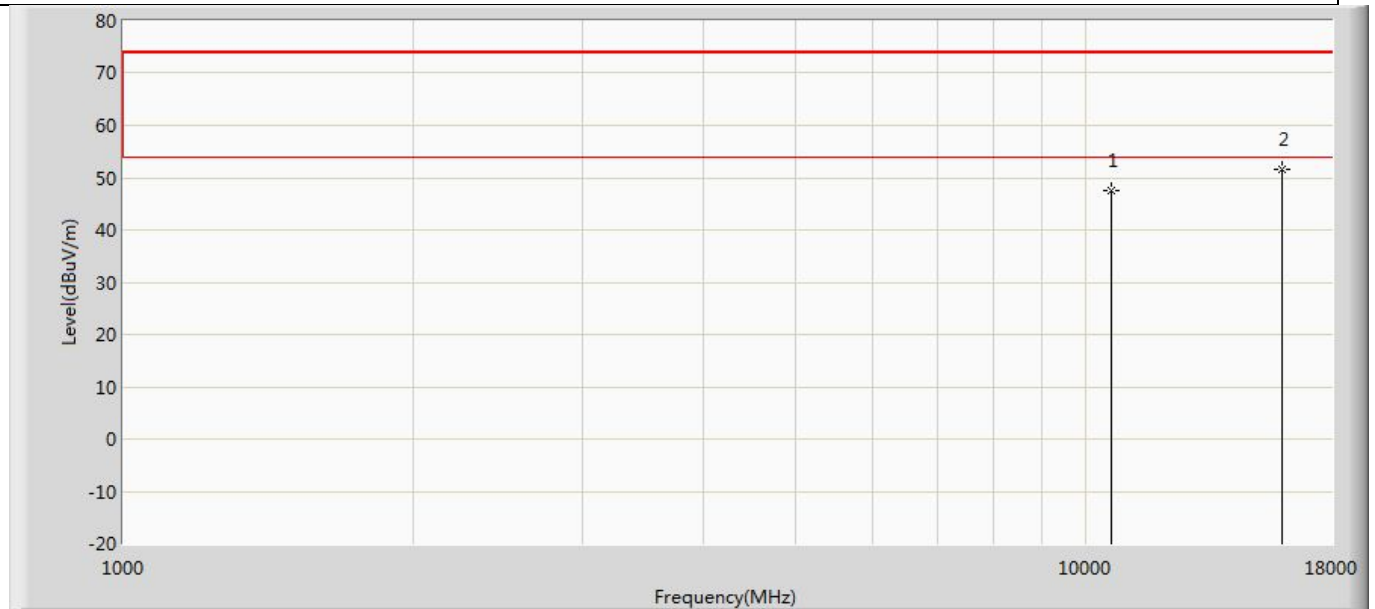


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	47.529	50.848	-26.471	74.000	-3.319	PK
2	*	15960.000	51.712	50.646	-22.288	74.000	1.066	PK

Profile: 2360091R	Page No.: 226
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with Ant1+Ant2	

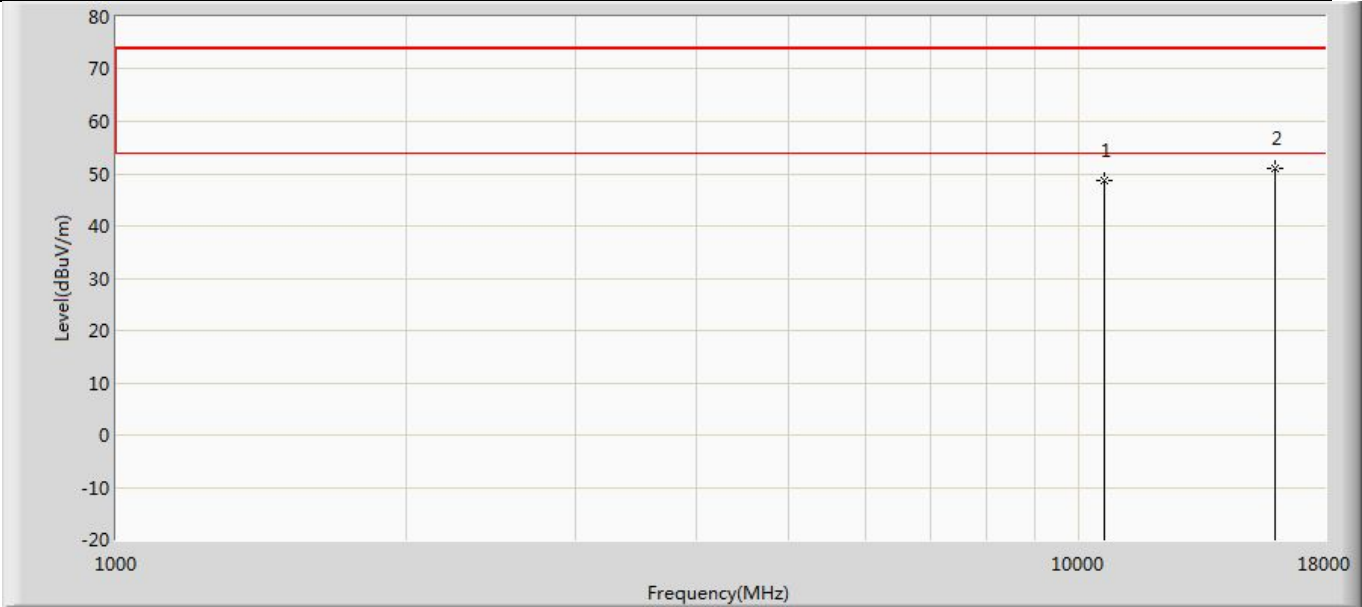


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	48.693	52.012	-25.307	74.000	-3.319	PK
2	*	15960.000	50.969	49.903	-23.031	74.000	1.066	PK

Profile: 2360091R	Page No.: 227
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with Ant1+Ant2	

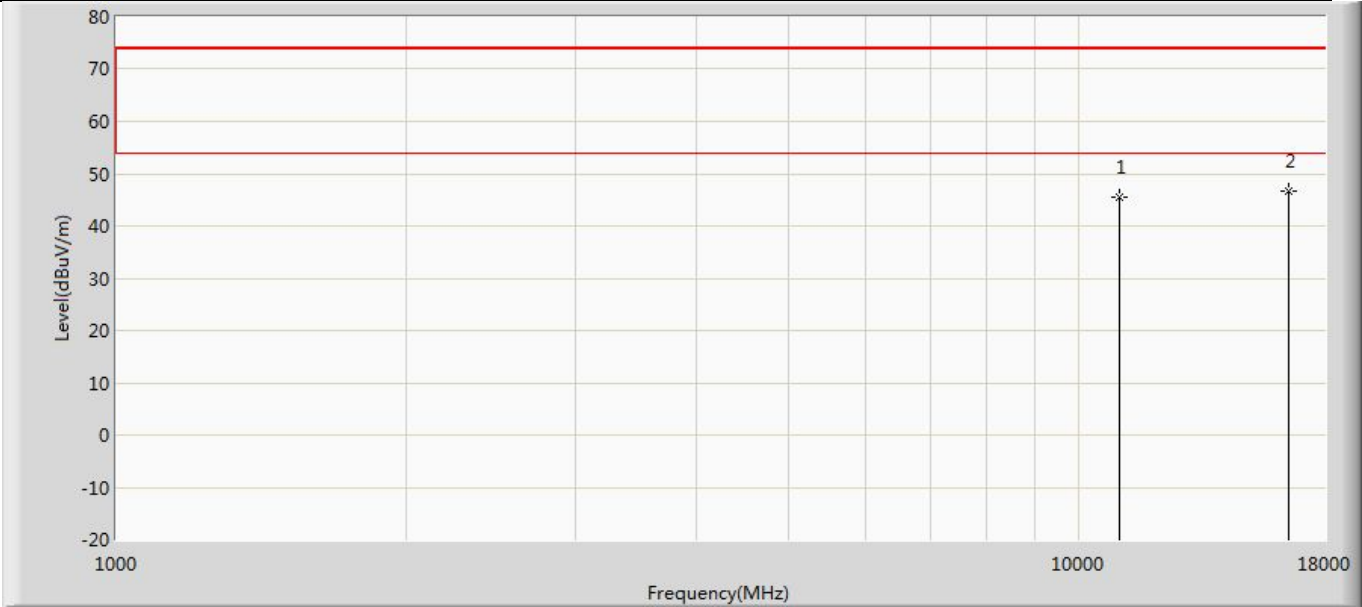


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	45.520	51.849	-28.480	74.000	-6.329	PK
2	*	16500.000	46.810	48.982	-27.190	74.000	-2.172	PK

Profile: 2360091R	Page No.: 228
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with Ant1+Ant2	

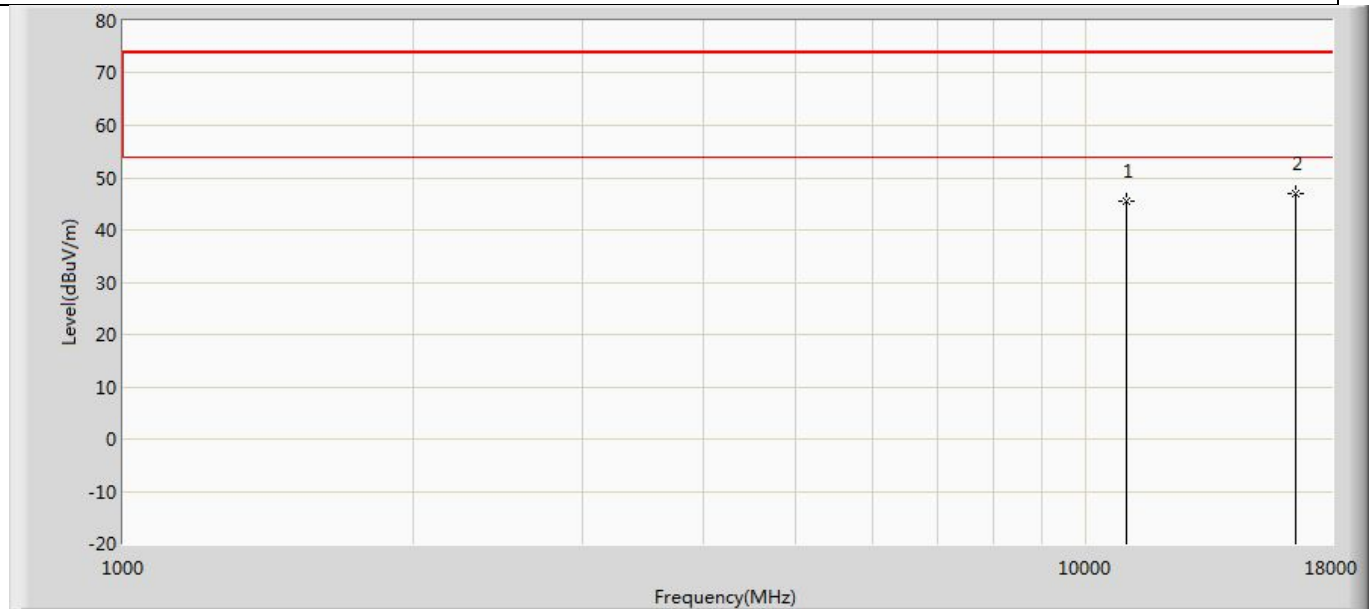


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	45.506	51.835	-28.494	74.000	-6.329	PK
2	*	16500.000	47.047	49.219	-26.953	74.000	-2.172	PK

Profile: 2360091R	Page No.: 229
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5580MHz by 802.11ax(20MHz) with Ant1+Ant2	

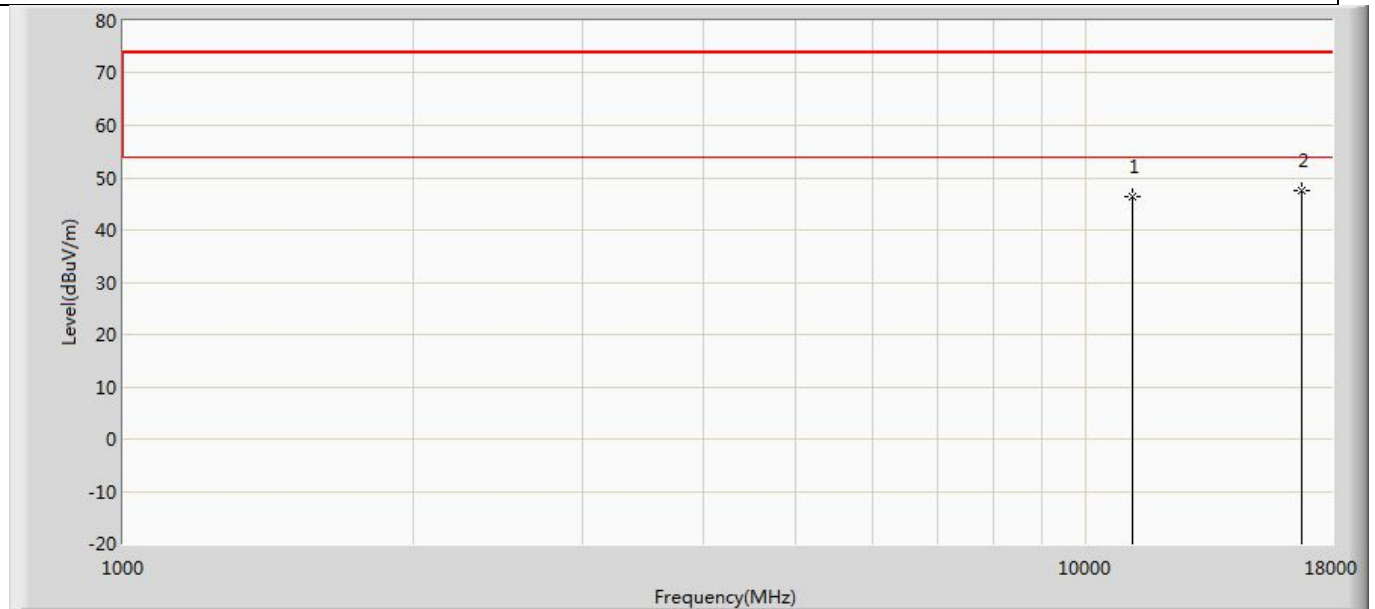


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.345	51.793	-27.655	74.000	-5.447	PK
2	*	16740.000	47.547	50.163	-26.453	74.000	-2.616	PK

Profile: 2360091R	Page No.: 230
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5580MHz by 802.11ax(20MHz) with Ant1+Ant2	

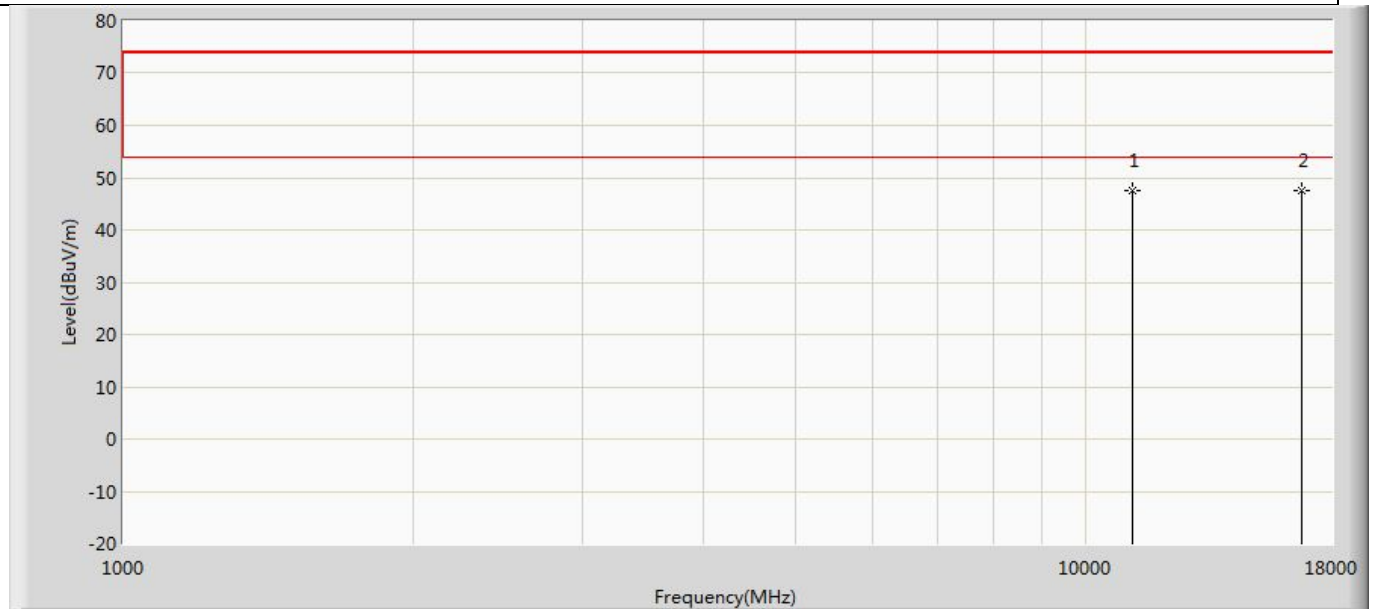


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	47.407	52.855	-26.593	74.000	-5.447	PK
2	*	16740.000	47.559	50.175	-26.441	74.000	-2.616	PK

Profile: 2360091R	Page No.: 231
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5700MHz by 802.11ax(20MHz) with Ant1+Ant2	

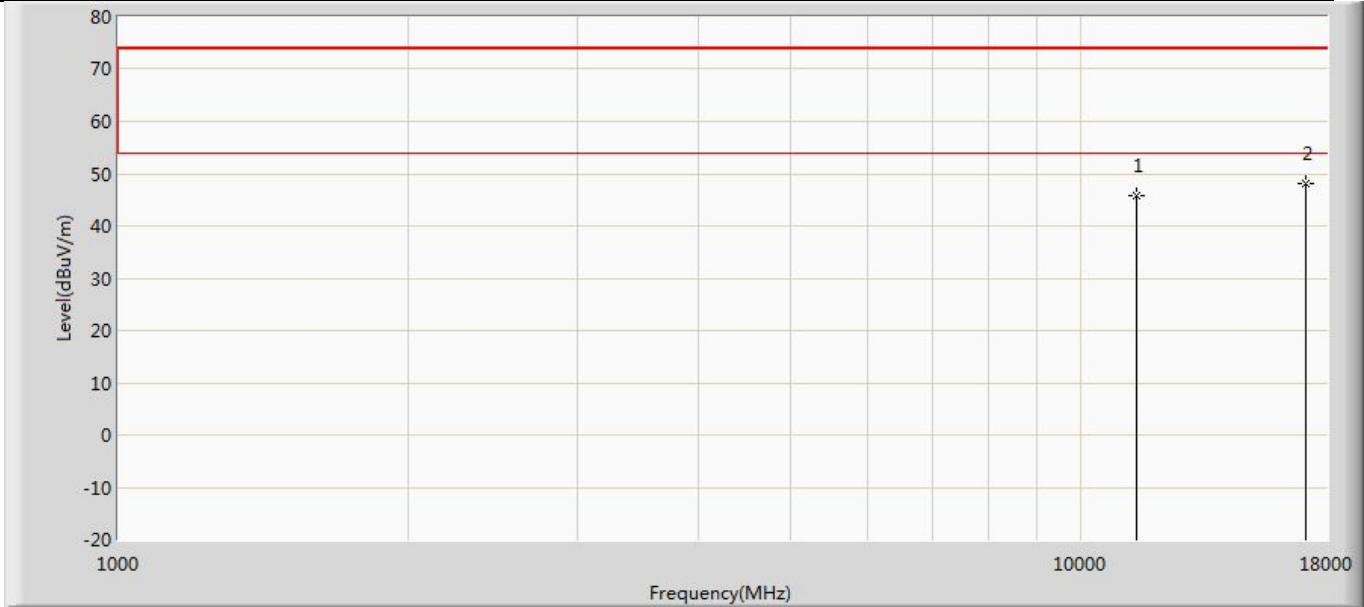


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.908	50.821	-28.092	74.000	-4.914	PK
2	*	17100.000	48.124	50.068	-25.876	74.000	-1.944	PK

Profile: 2360091R	Page No.: 232
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5700MHz by 802.11ax(20MHz) with Ant1+Ant2	

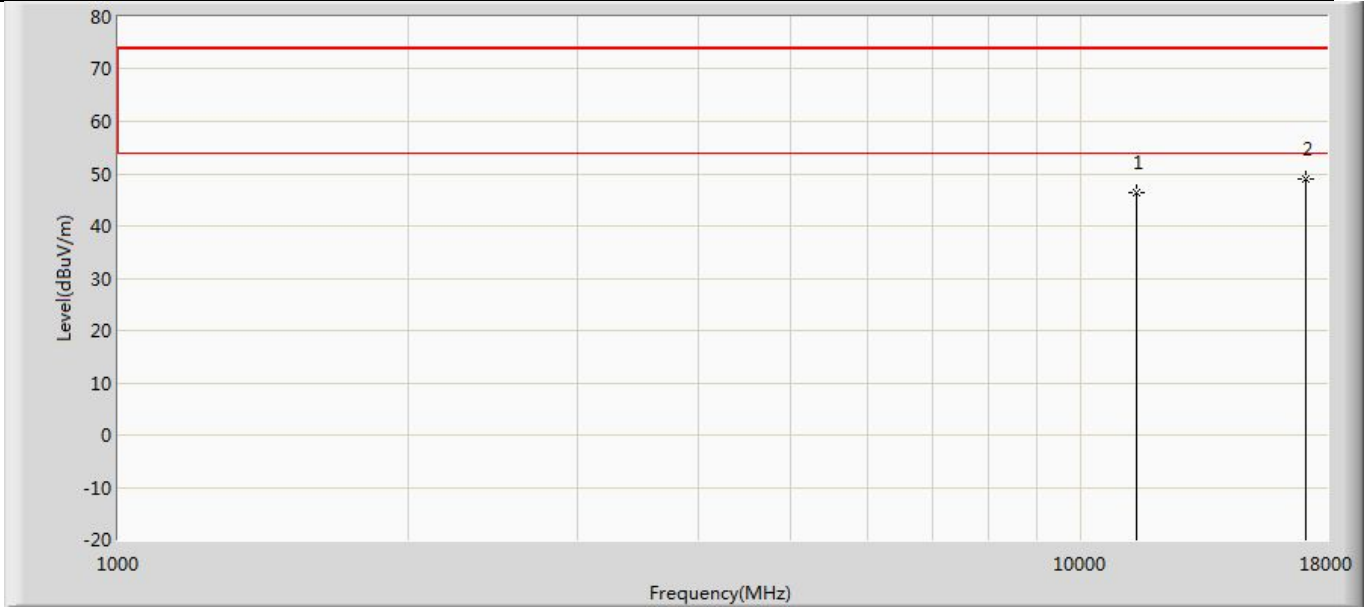


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	46.310	51.223	-27.690	74.000	-4.914	PK
2	*	17100.000	48.995	50.939	-25.005	74.000	-1.944	PK

Profile: 2360091R	Page No.: 69
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) with Ant1+Ant2	

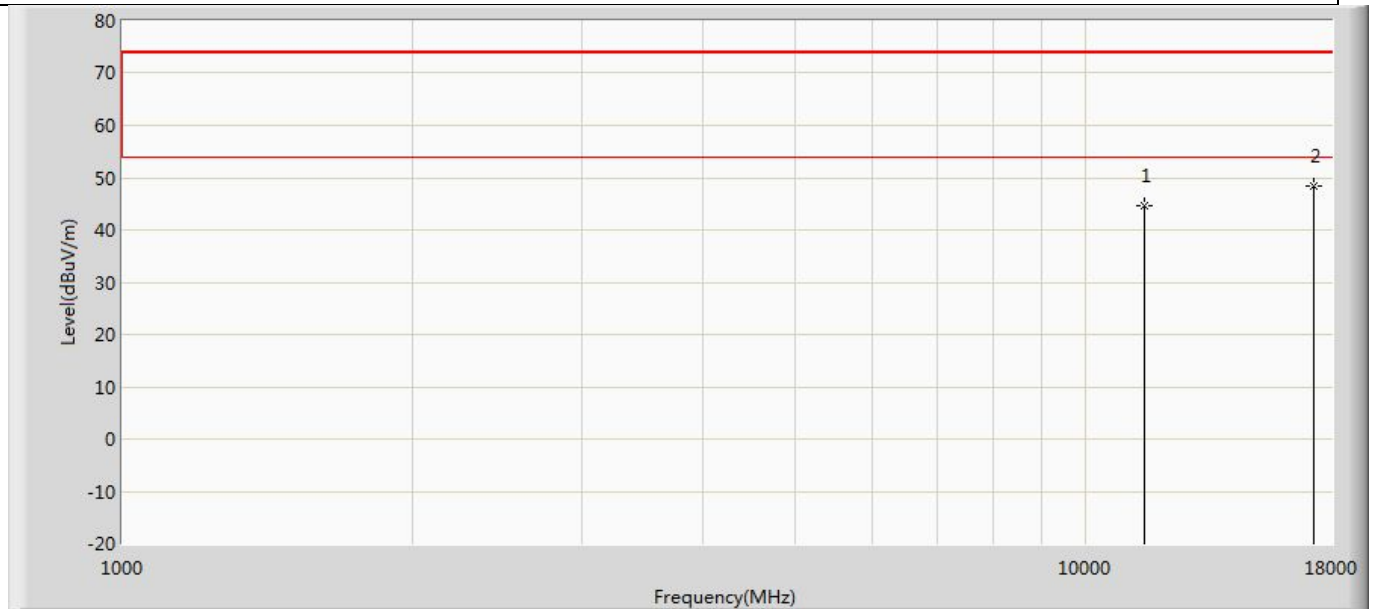


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	44.742	49.932	-29.258	74.000	-5.190	PK
2	*	17235.000	48.502	50.507	-25.498	74.000	-2.005	PK

Profile: 2360091R	Page No.: 70
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5745MHz by 802.11ax(20MHz) with Ant1+Ant2	

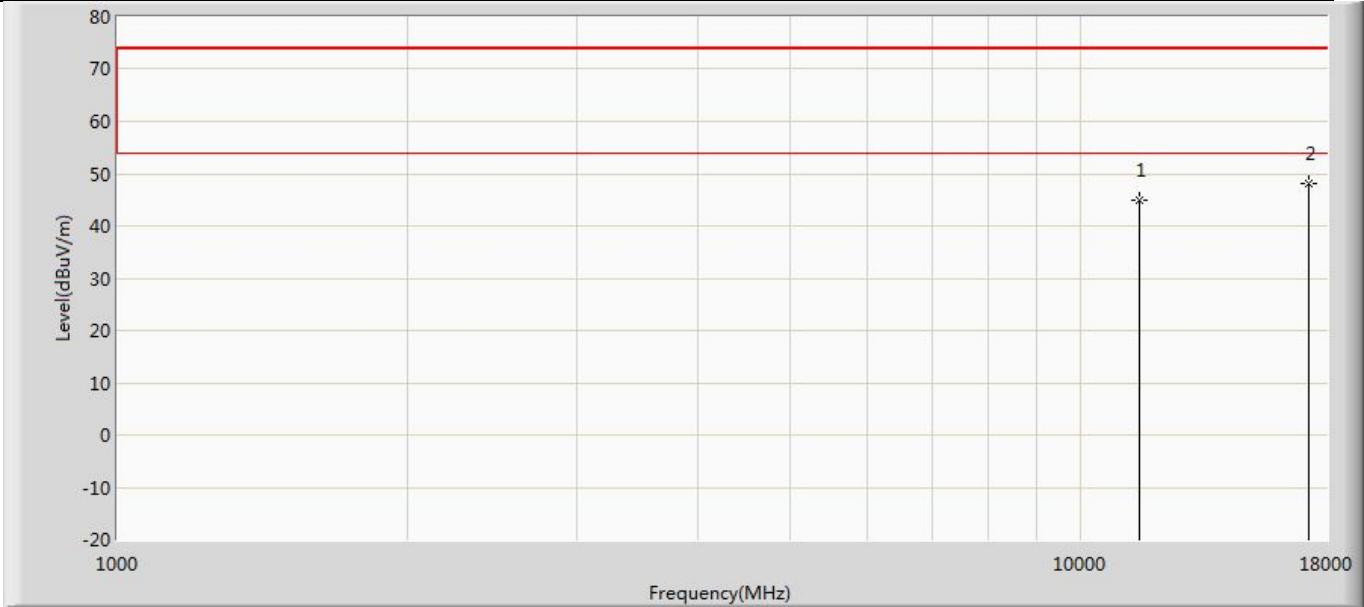


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	44.859	50.049	-29.141	74.000	-5.190	PK
2	*	17235.000	48.187	50.192	-25.813	74.000	-2.005	PK

Profile: 2360091R	Page No.: 71
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) with Ant1+Ant2	

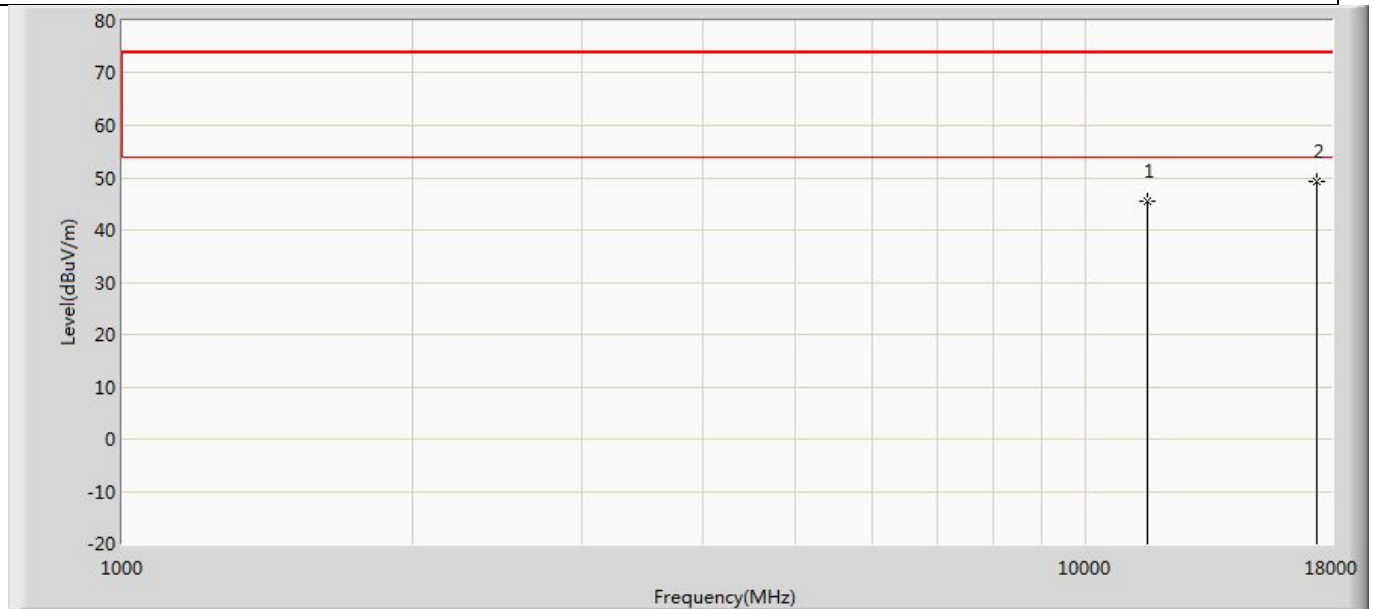


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	45.573	50.002	-28.427	74.000	-4.429	PK
2	*	17355.000	49.291	51.026	-24.709	74.000	-1.735	PK

Profile: 2360091R	Page No.: 72
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5785MHz by 802.11ax(20MHz) with Ant1+Ant2	

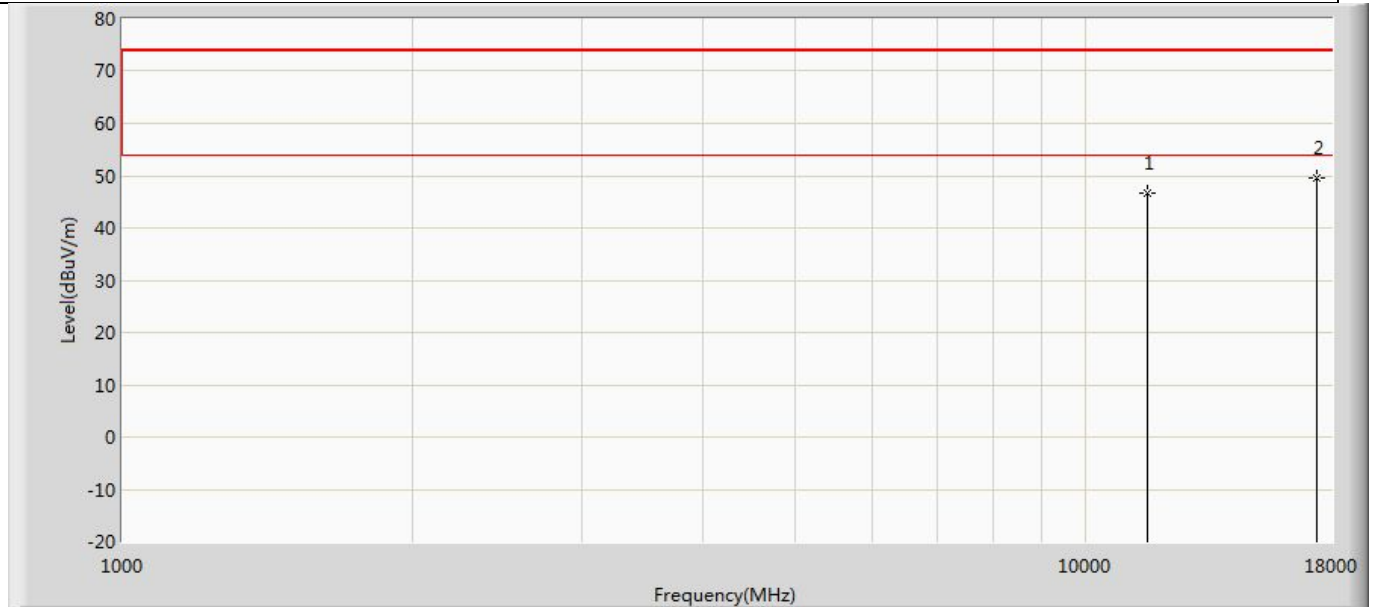


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.552	50.981	-27.448	74.000	-4.429	PK
2	*	17355.000	49.610	51.345	-24.390	74.000	-1.735	PK

Profile: 2360091R	Page No.: 73
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) with Ant1+Ant2	

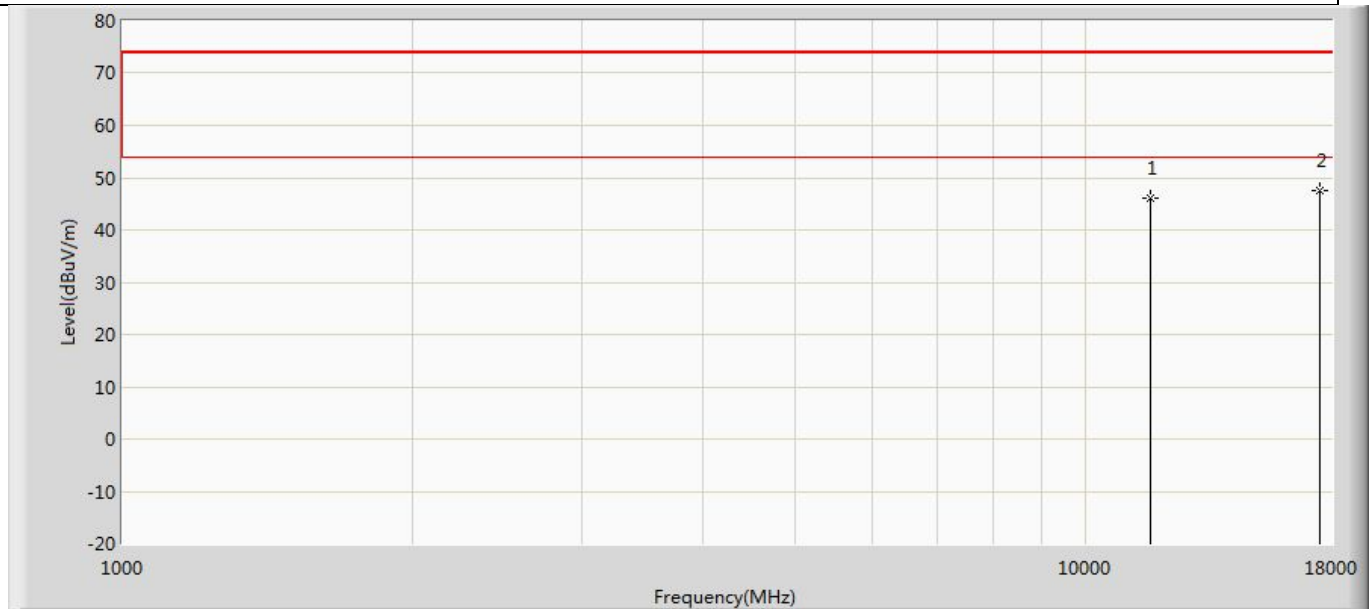


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.199	50.547	-27.801	74.000	-4.348	PK
2	*	17475.000	47.599	50.006	-26.401	74.000	-2.407	PK

Profile: 2360091R	Page No.: 74
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5825MHz by 802.11ax(20MHz) with Ant1+Ant2	

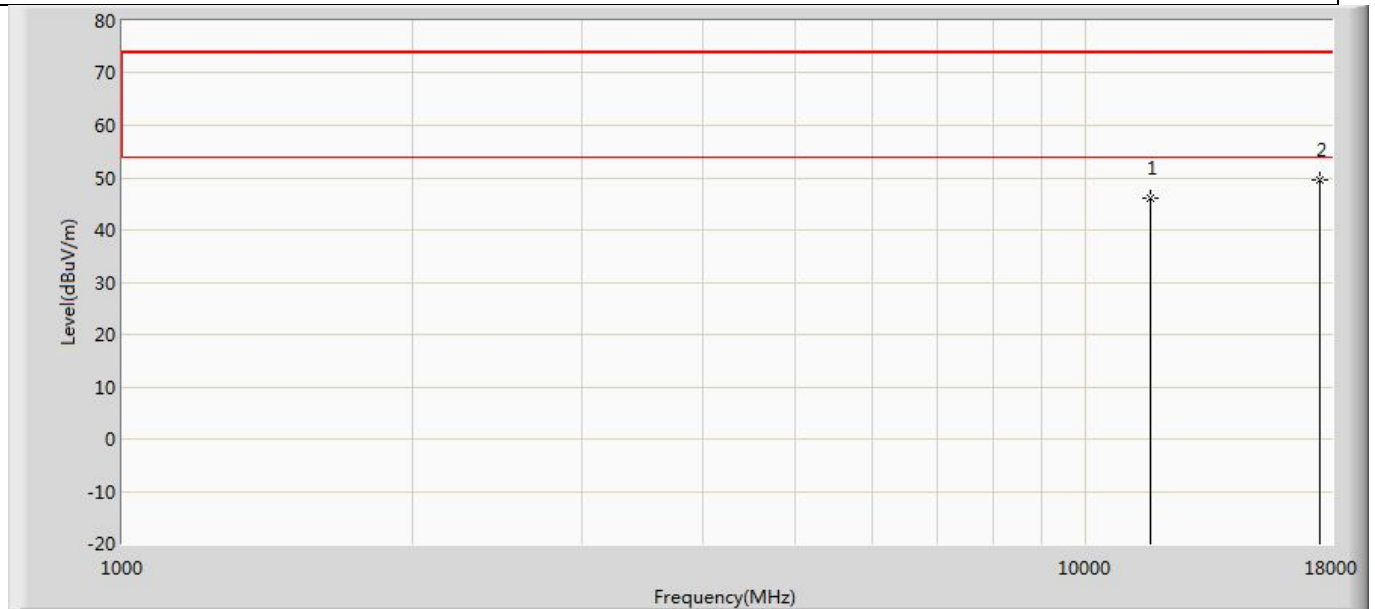


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.025	50.373	-27.975	74.000	-4.348	PK
2	*	17475.000	49.439	51.846	-24.561	74.000	-2.407	PK

Profile: 2360091R	Page No.: 233
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with Ant1+Ant2	

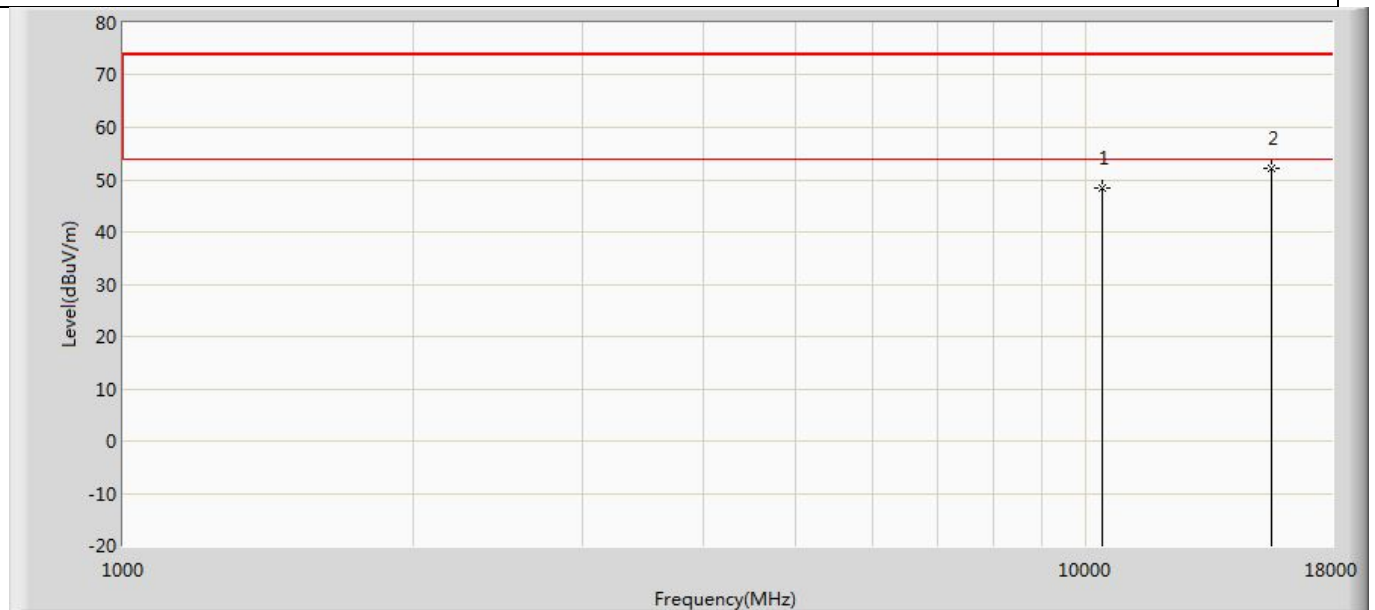


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	48.445	51.647	-25.555	74.000	-3.202	PK
2	*	15570.000	52.057	51.557	-21.943	74.000	0.501	PK

Profile: 2360091R	Page No.: 234
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with Ant1+Ant2	

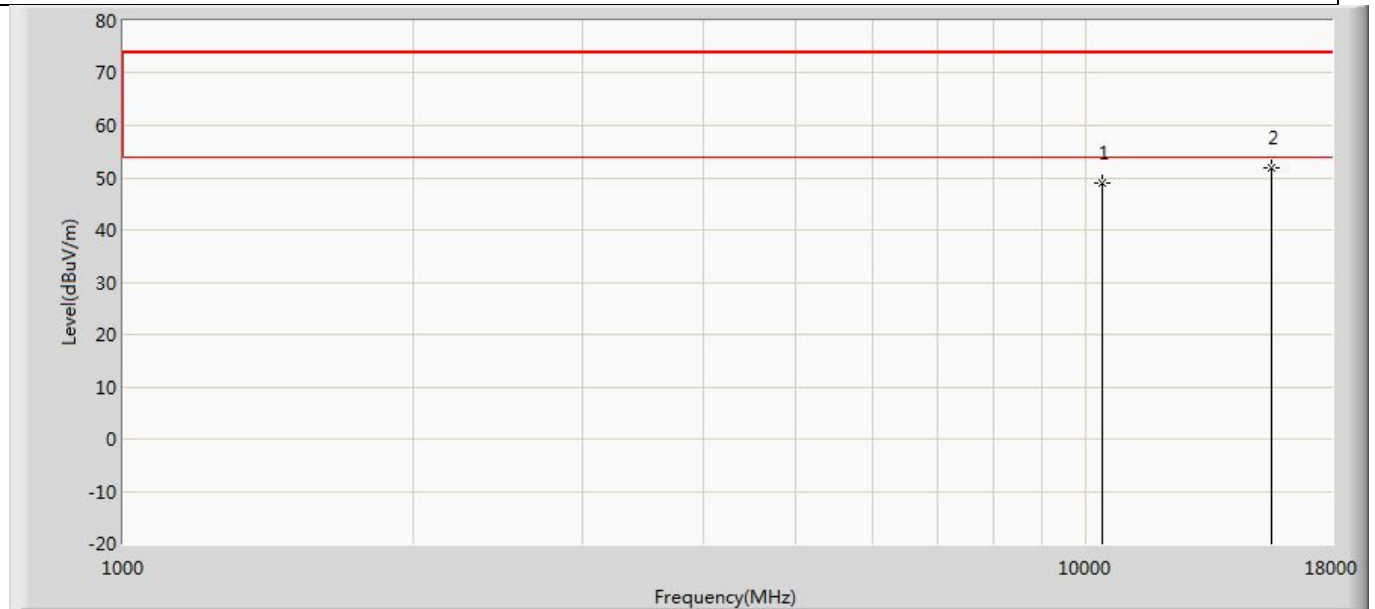


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	49.011	52.213	-24.989	74.000	-3.202	PK
2	*	15570.000	51.760	51.260	-22.240	74.000	0.501	PK

Profile: 2360091R	Page No.: 235
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5230MHz by 802.11ax(40MHz) with Ant1+Ant2	

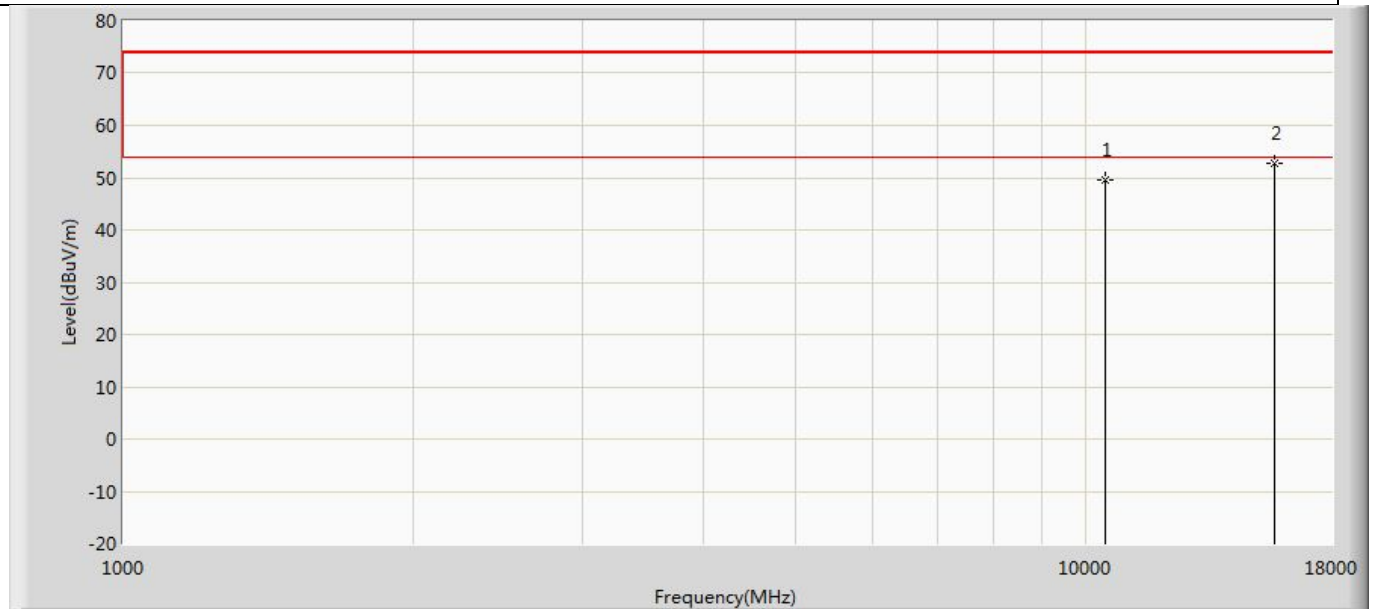


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	49.645	52.975	-24.355	74.000	-3.331	PK
2	*	15690.000	52.816	52.384	-21.184	74.000	0.431	PK

Profile: 2360091R	Page No.: 236
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5230MHz by 802.11ax(40MHz) with Ant1+Ant2	

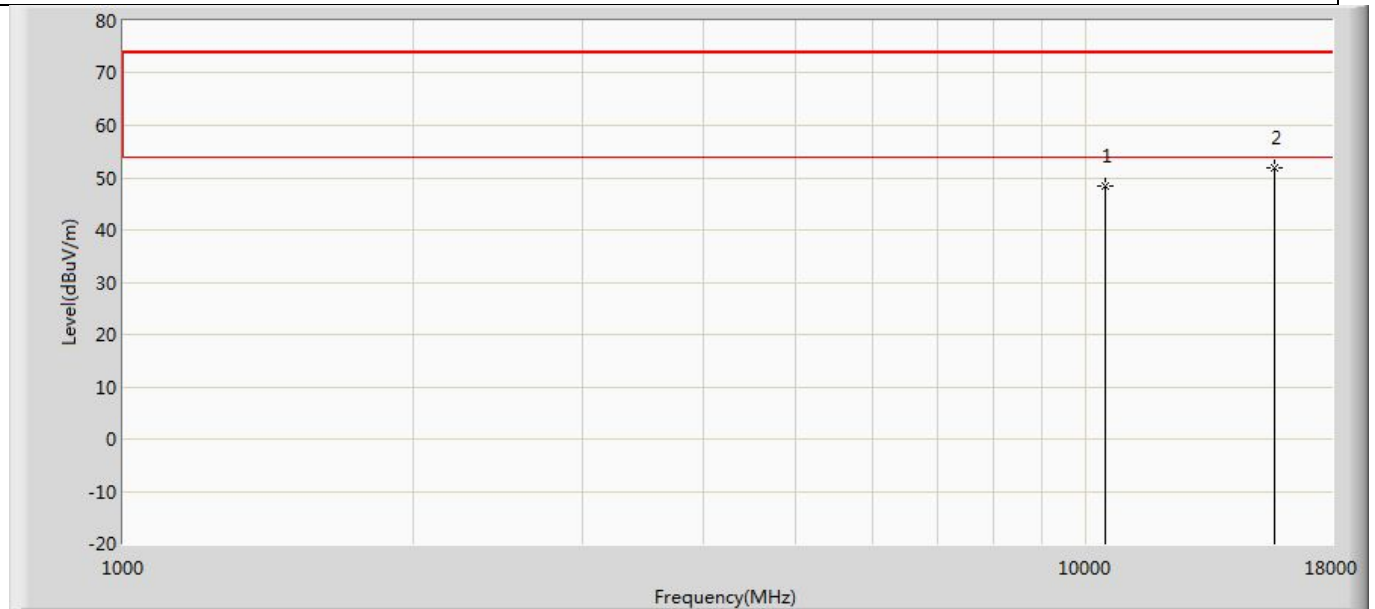


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	48.435	51.765	-25.565	74.000	-3.331	PK
2	*	15690.000	51.786	51.354	-22.214	74.000	0.431	PK

Profile: 2360091R	Page No.: 237
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5270MHz by 802.11ax(40MHz) with Ant1+Ant2	

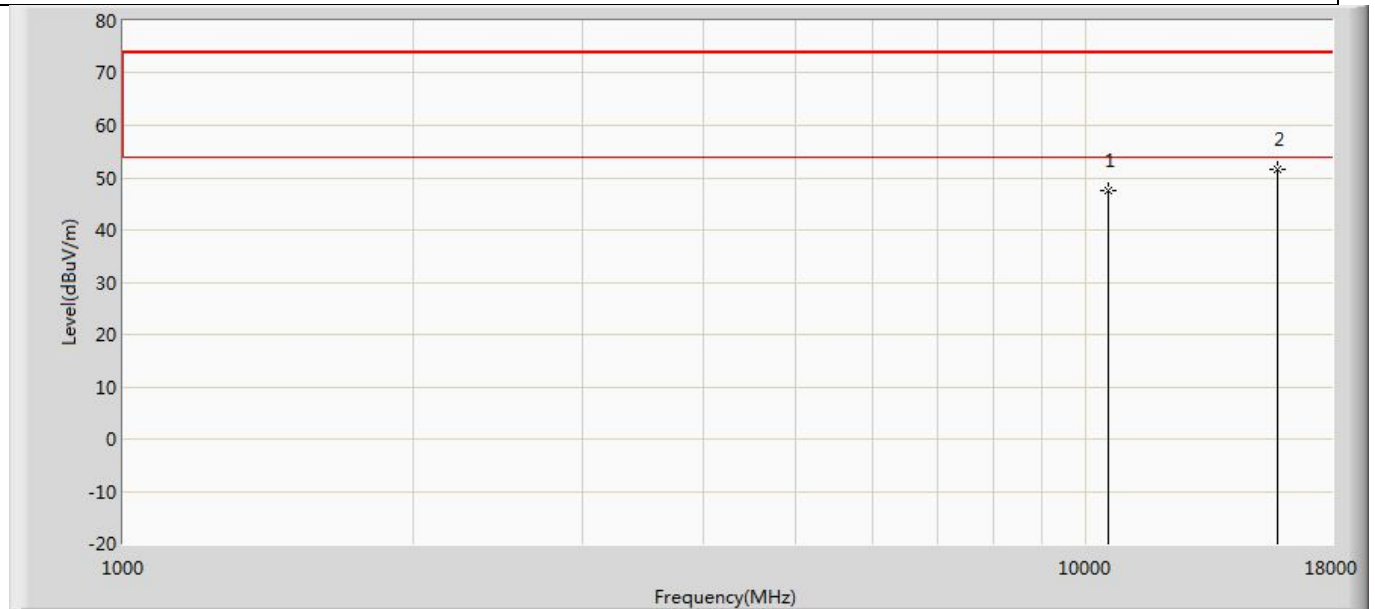


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	47.498	50.684	-26.502	74.000	-3.185	PK
2	*	15810.000	51.694	50.571	-22.306	74.000	1.123	PK

Profile: 2360091R	Page No.: 238
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5270MHz by 802.11ax(40MHz) with Ant1+Ant2	

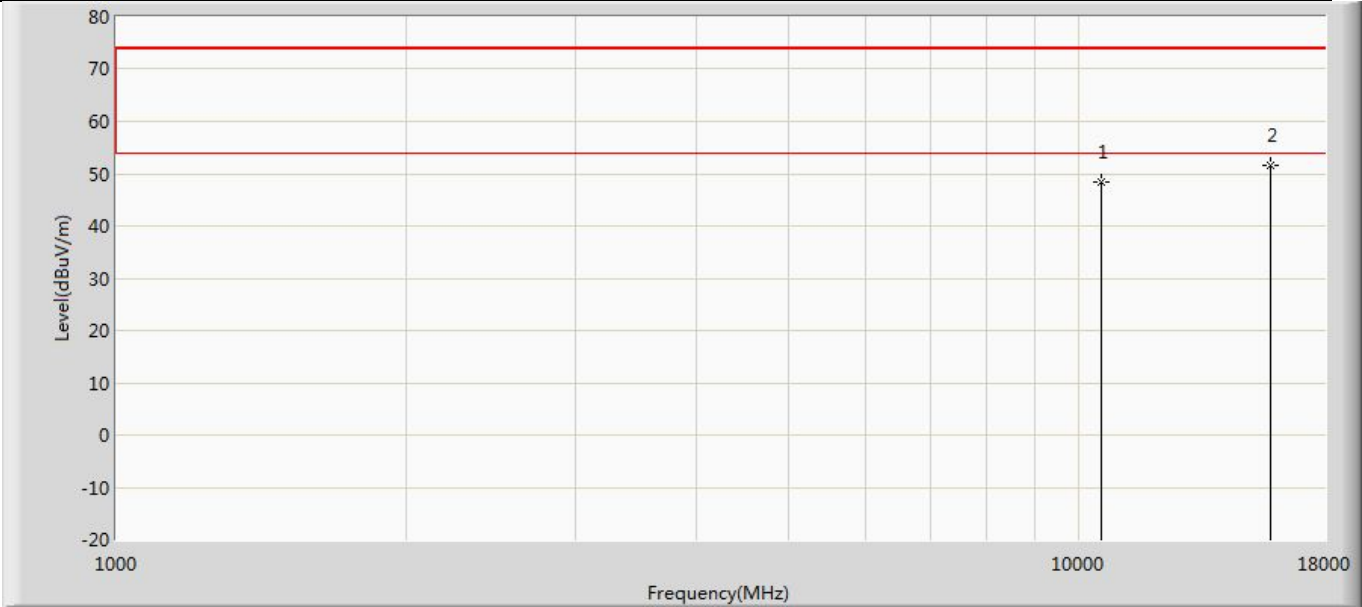


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	48.390	51.576	-25.610	74.000	-3.185	PK
2	*	15810.000	51.604	50.481	-22.396	74.000	1.123	PK

Profile: 2360091R	Page No.: 239
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with Ant1+Ant2	

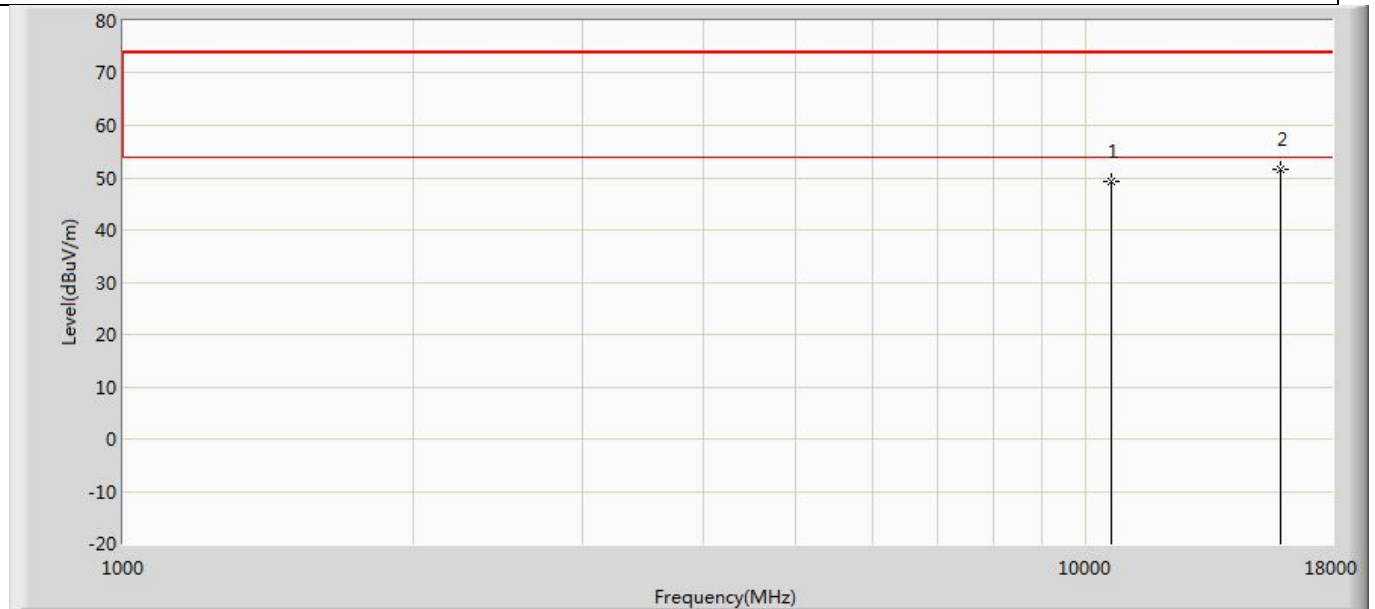


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	49.268	52.444	-24.732	74.000	-3.176	PK
2	*	15930.000	51.600	50.452	-22.400	74.000	1.148	PK

Profile: 2360091R	Page No.: 240
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with Ant1+Ant2	

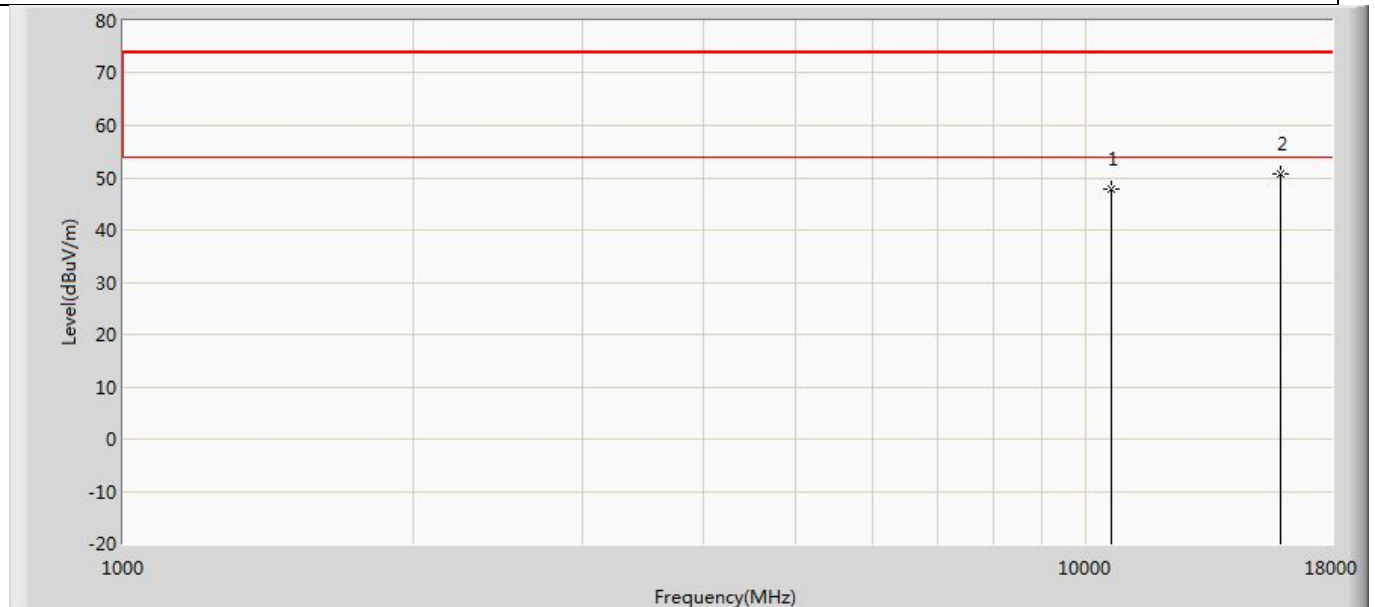


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	47.904	51.080	-26.096	74.000	-3.176	PK
2	*	15930.000	50.591	49.443	-23.409	74.000	1.148	PK

Profile: 2360091R	Page No.: 241
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with Ant1+Ant2	

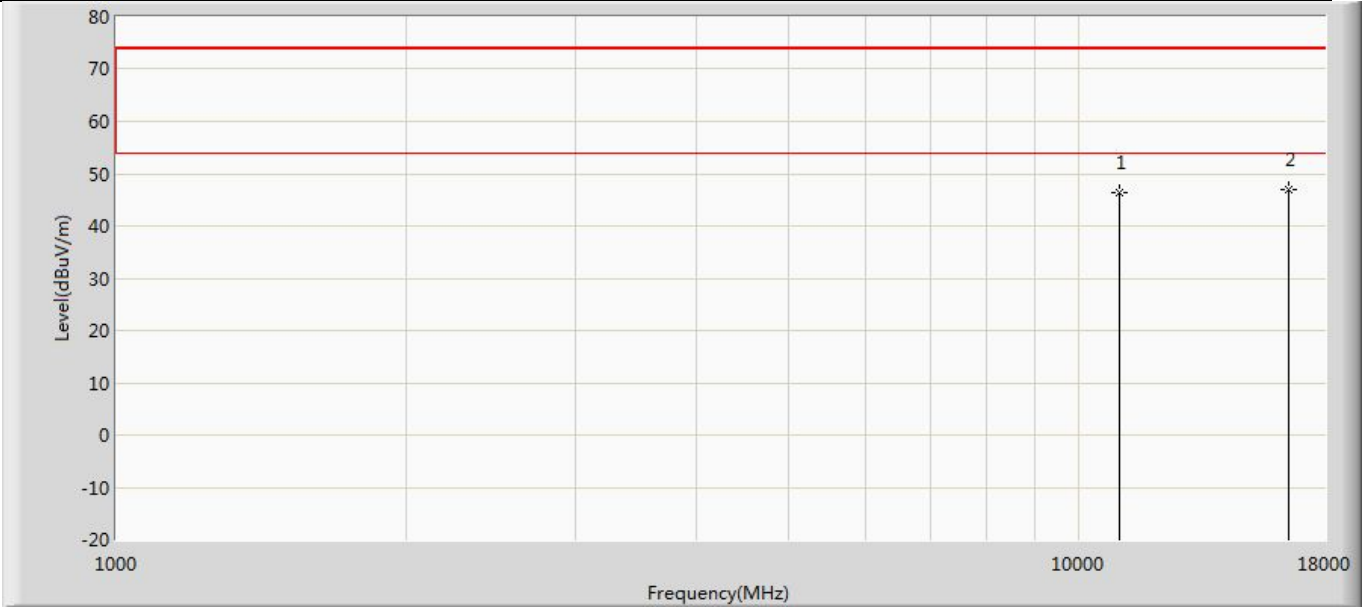


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	46.236	52.068	-27.764	74.000	-5.832	PK
2	*	16530.000	46.945	49.865	-27.055	74.000	-2.920	PK

Profile: 2360091R	Page No.: 242
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with Ant1+Ant2	

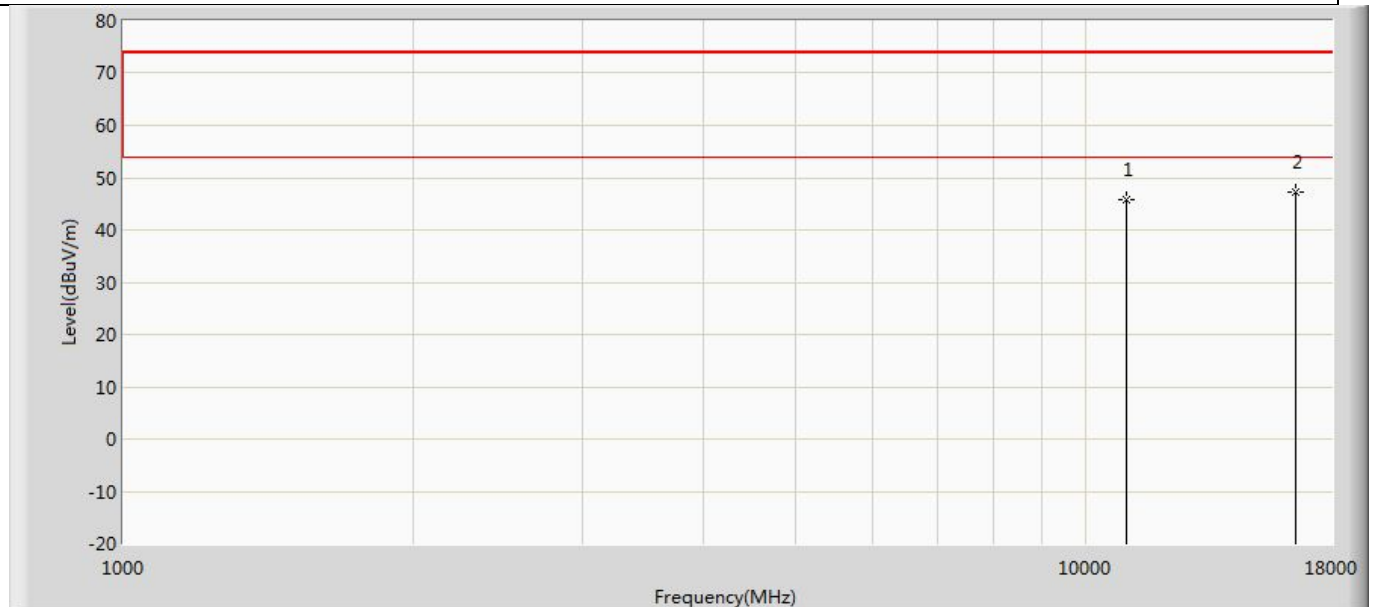


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	45.728	51.560	-28.272	74.000	-5.832	PK
2	*	16530.000	47.385	50.305	-26.615	74.000	-2.920	PK

Profile: 2360091R	Page No.: 243
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5590MHz by 802.11ax(40MHz) with Ant1+Ant2	

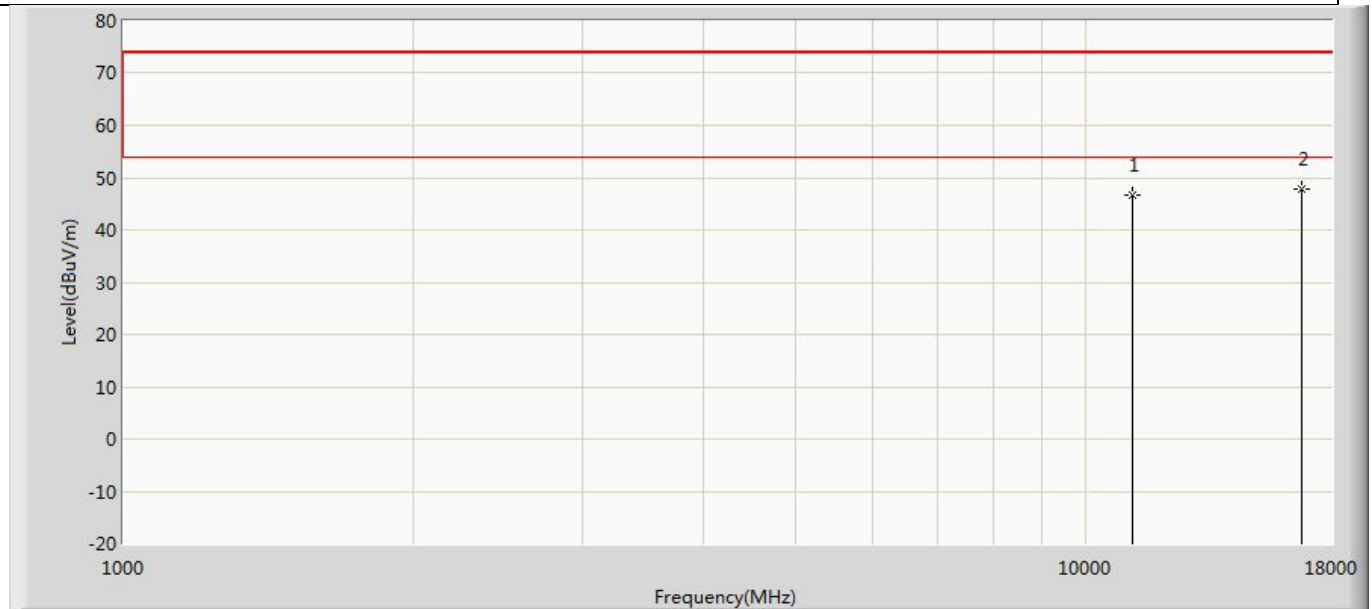


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.702	51.814	-27.298	74.000	-5.111	PK
2	*	16770.000	47.781	50.164	-26.219	74.000	-2.383	PK

Profile: 2360091R	Page No.: 244
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5590MHz by 802.11ax(40MHz) with Ant1+Ant2	

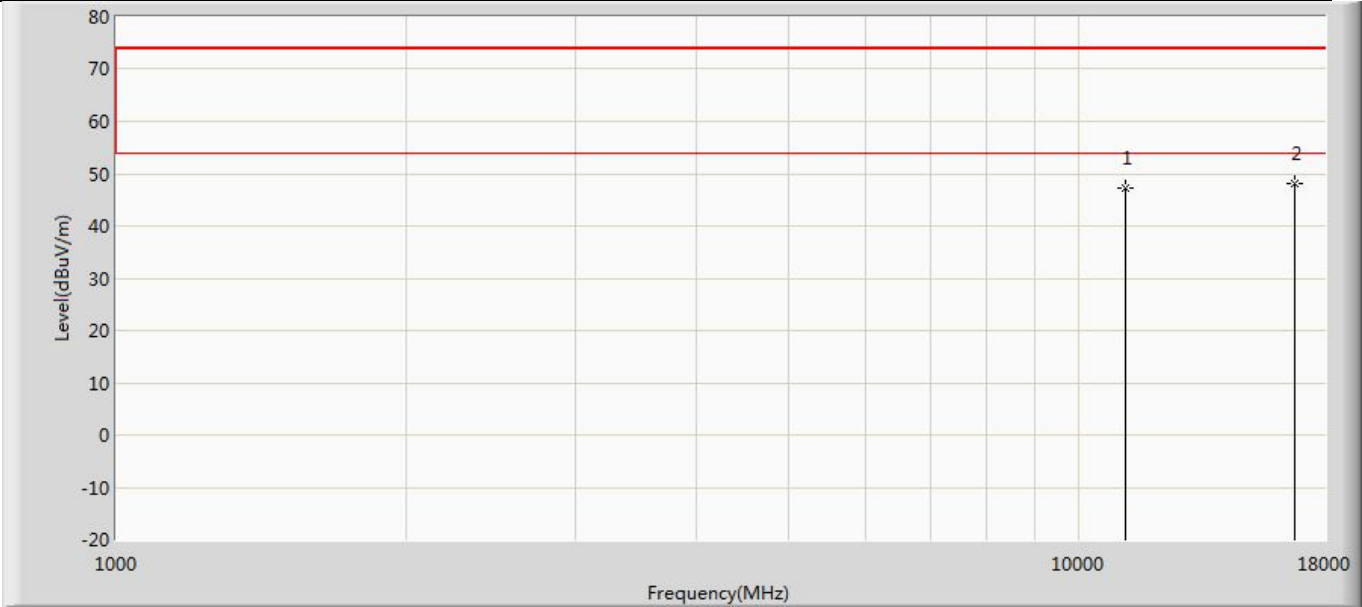


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	47.119	52.231	-26.881	74.000	-5.111	PK
2	*	16770.000	48.200	50.583	-25.800	74.000	-2.383	PK

Profile: 2360091R	Page No.: 245
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5670MHz by 802.11ax(40MHz) with Ant1+Ant2	

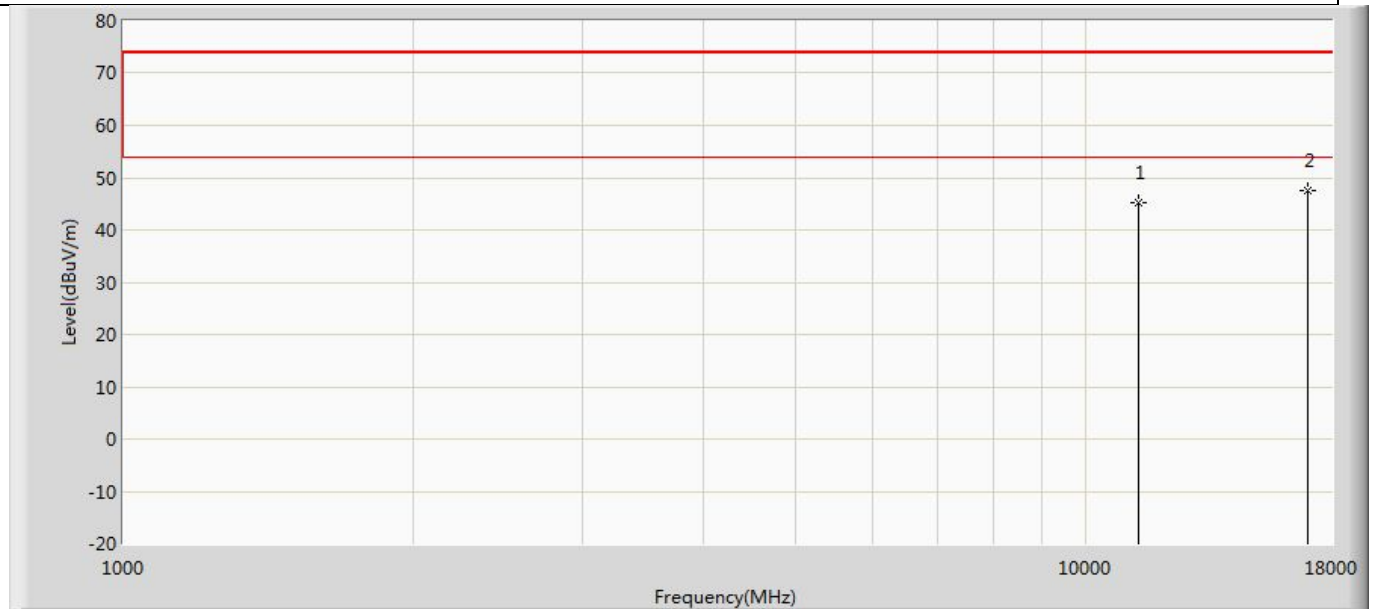


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.202	50.569	-28.798	74.000	-5.366	PK
2	*	17010.000	47.447	50.251	-26.553	74.000	-2.803	PK

Profile: 2360091R	Page No.: 246
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5670MHz by 802.11ax(40MHz) with Ant1+Ant2	

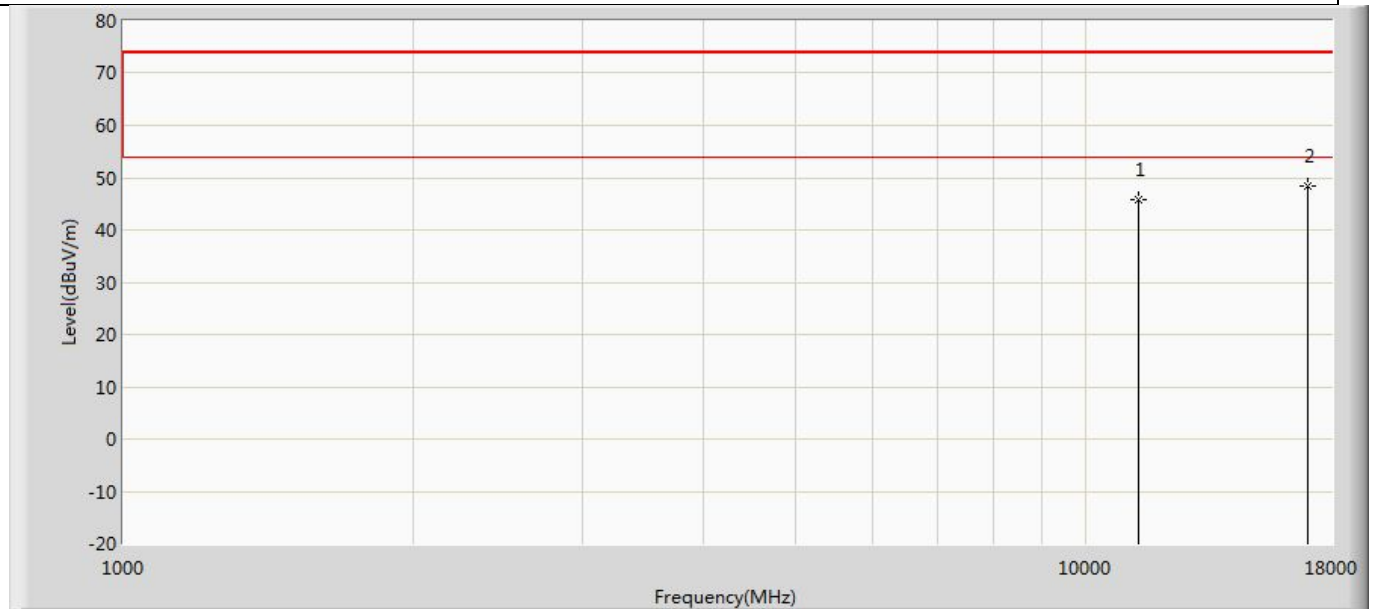


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.837	51.204	-28.163	74.000	-5.366	PK
2	*	17010.000	48.367	51.171	-25.633	74.000	-2.803	PK

Profile: 2360091R	Page No.: 75
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) with Ant1+Ant2	

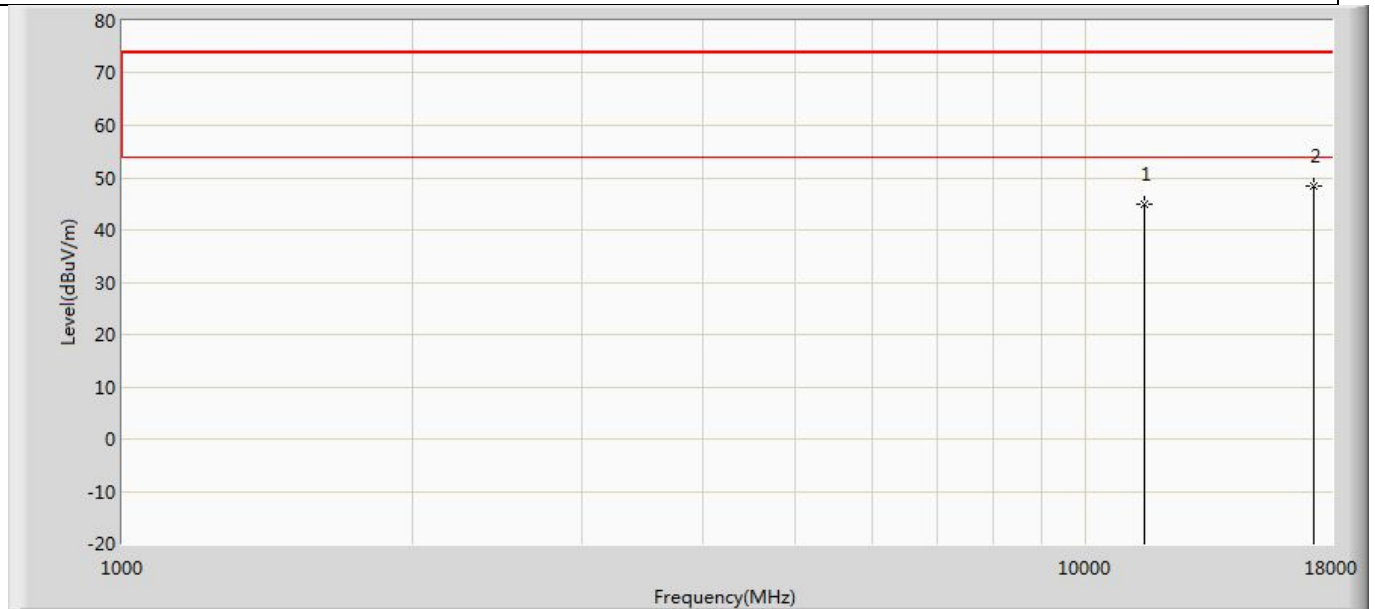


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	44.845	50.113	-29.155	74.000	-5.268	PK
2	*	17265.000	48.470	50.894	-25.530	74.000	-2.424	PK

Profile: 2360091R	Page No.: 76
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5755MHz by 802.11ax(40MHz) with Ant1+Ant2	

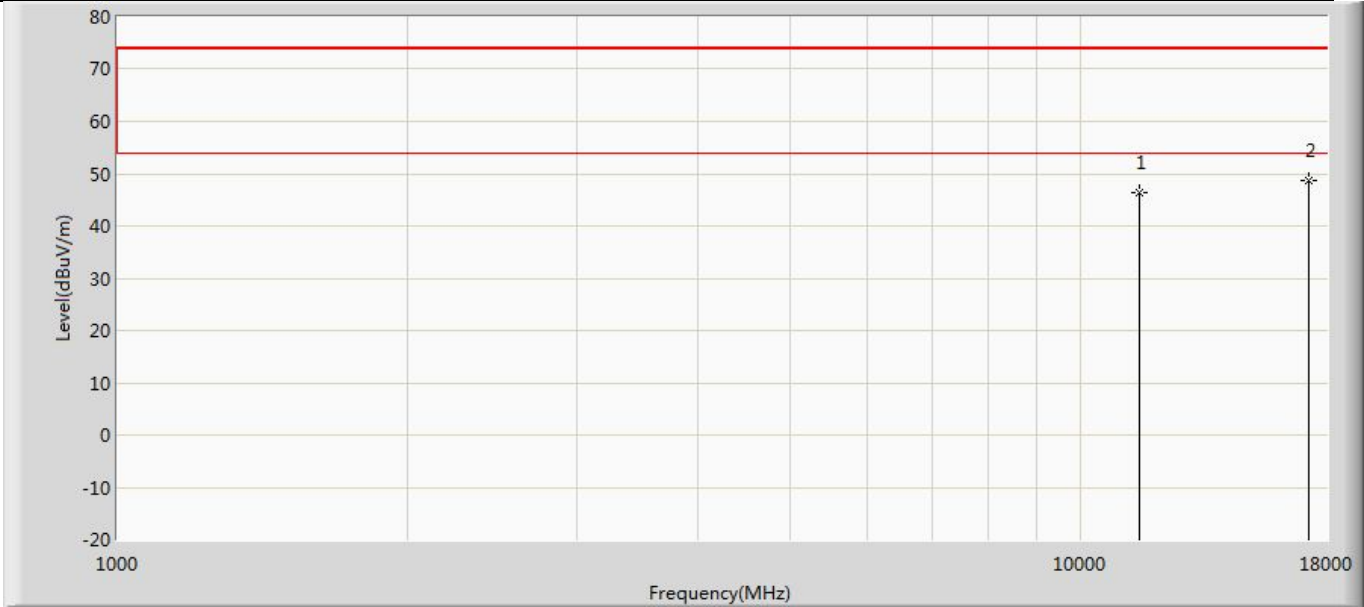


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	46.449	51.717	-27.551	74.000	-5.268	PK
2	*	17265.000	48.569	50.993	-25.431	74.000	-2.424	PK

Profile: 2360091R	Page No.: 77
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) with Ant1+Ant2	

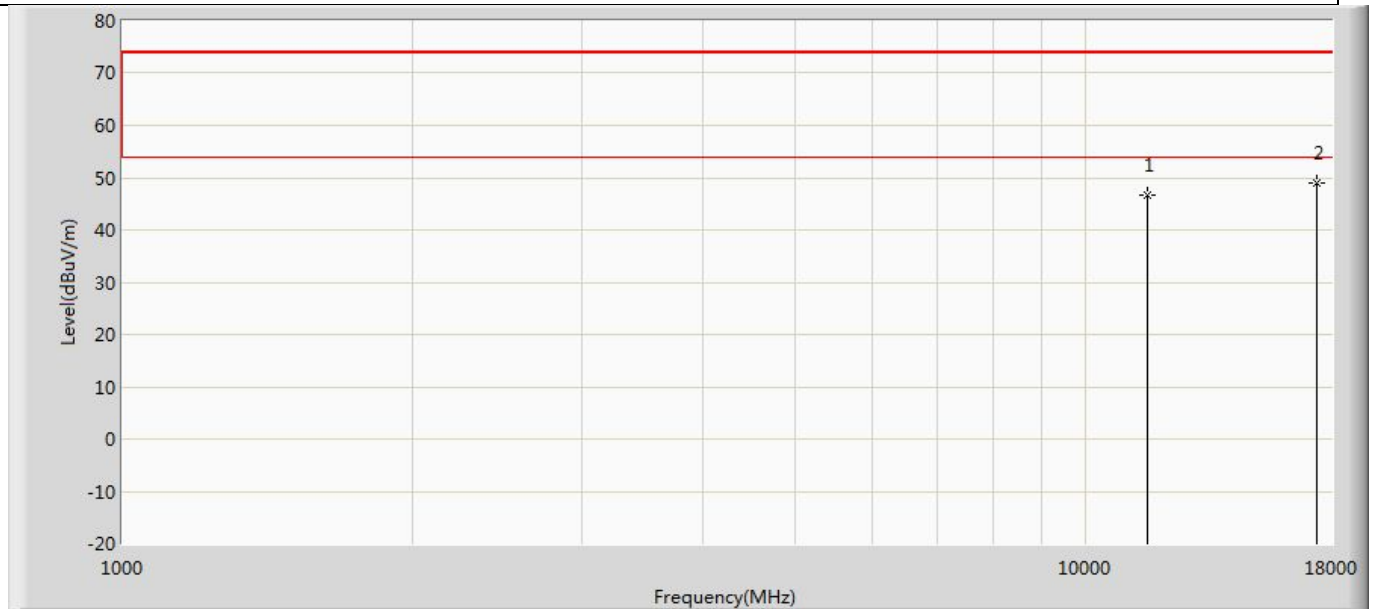


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	46.578	51.732	-27.422	74.000	-5.154	PK
2	*	17385.000	48.933	51.168	-25.067	74.000	-2.236	PK

Profile: 2360091R	Page No.: 78
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5795MHz by 802.11ax(40MHz) with Ant1+Ant2	

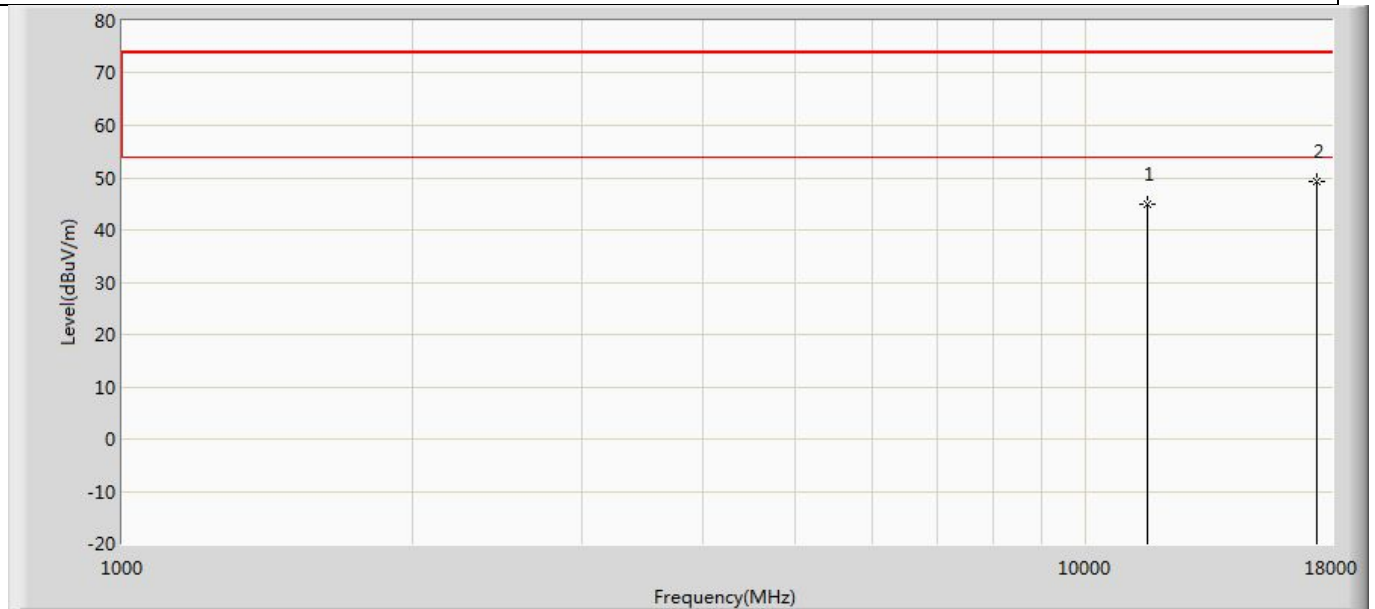


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	44.940	50.094	-29.060	74.000	-5.154	PK
2	*	17385.000	49.258	51.493	-24.742	74.000	-2.236	PK

Profile: 2360091R	Page No.: 247
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with Ant1+Ant2	

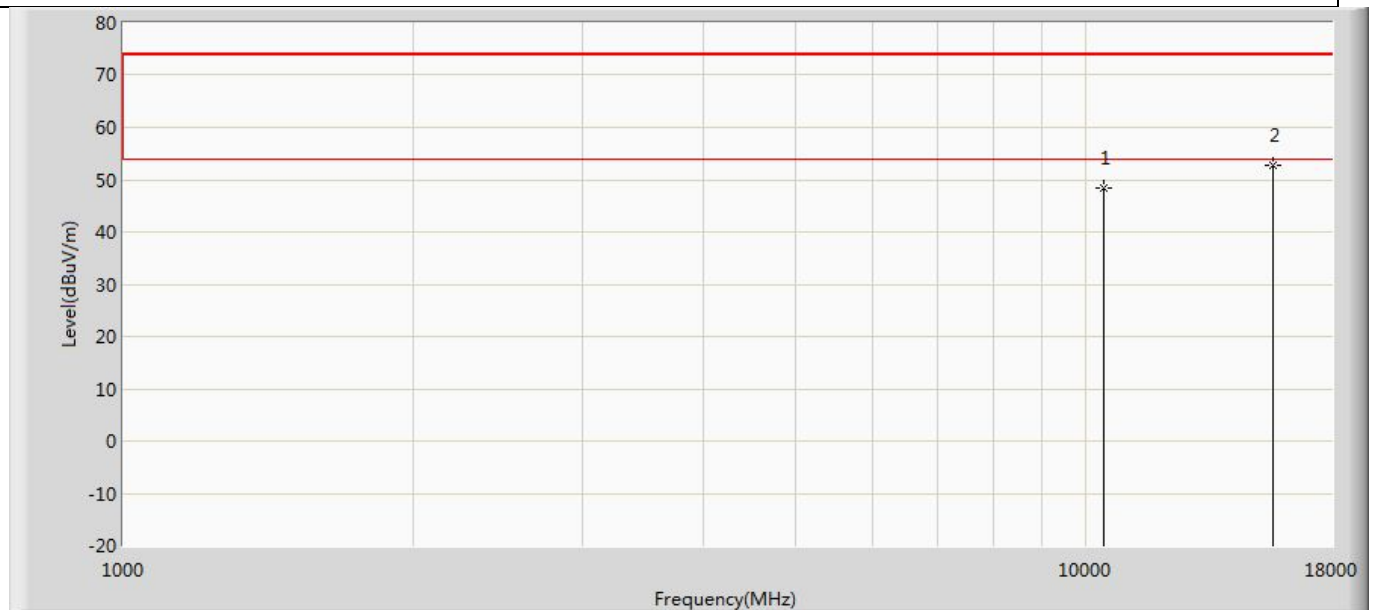


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	48.391	51.386	-25.609	74.000	-2.995	PK
2	*	15630.000	52.782	51.345	-21.218	74.000	1.437	PK

Profile: 2360091R	Page No.: 248
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with Ant1+Ant2	

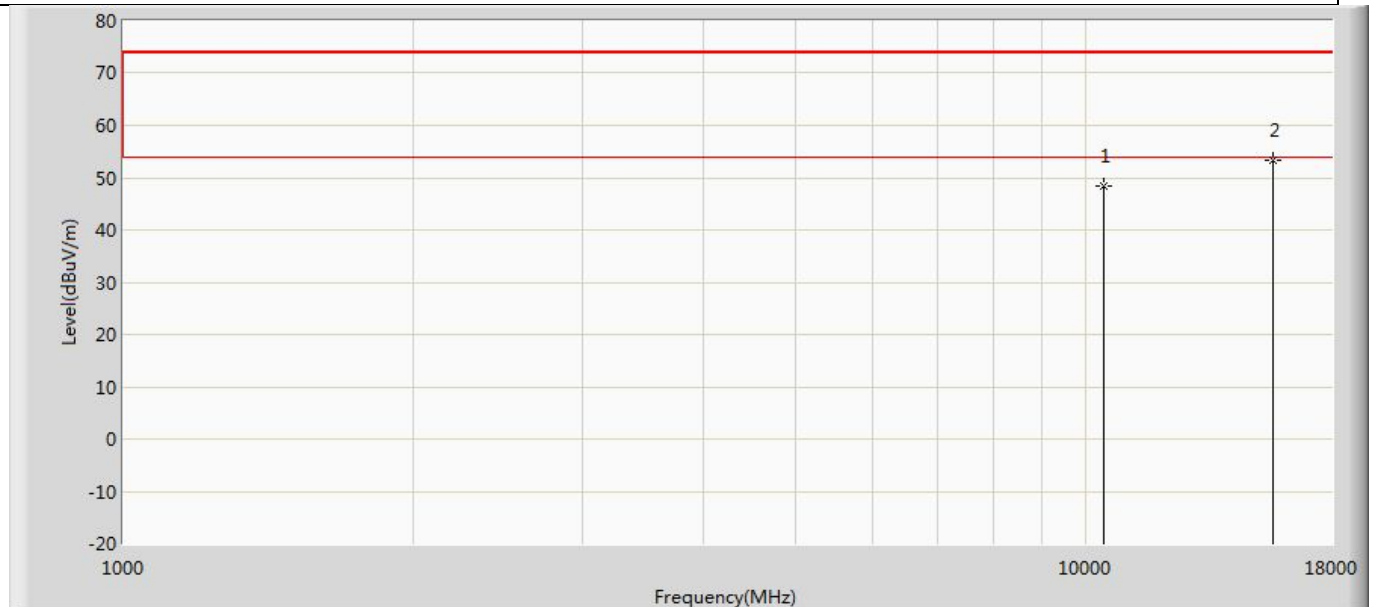


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10420.000	48.472	51.467	-25.528	74.000	-2.995	PK
2	*	15630.000	53.329	51.892	-20.671	74.000	1.437	PK

Profile: 2360091R	Page No.: 249
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with Ant1+Ant2	

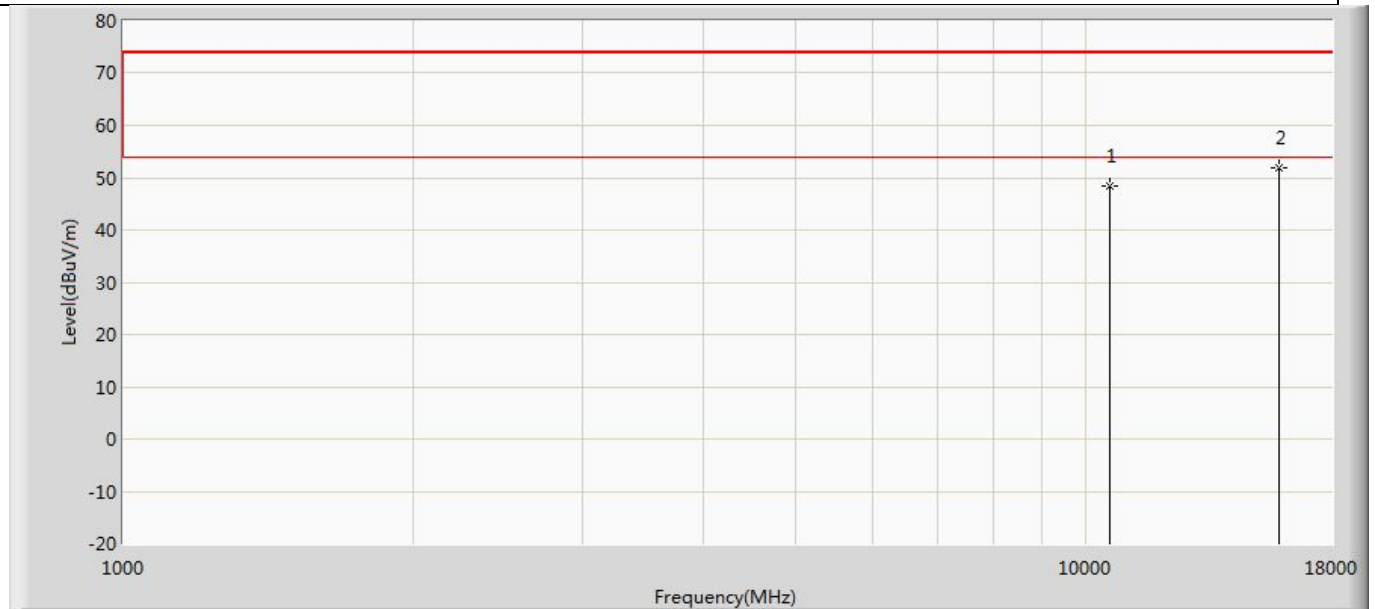


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	48.367	51.349	-25.633	74.000	-2.982	PK
2	*	15870.000	51.967	50.105	-22.033	74.000	1.862	PK

Profile: 2360091R	Page No.: 250
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with Ant1+Ant2	

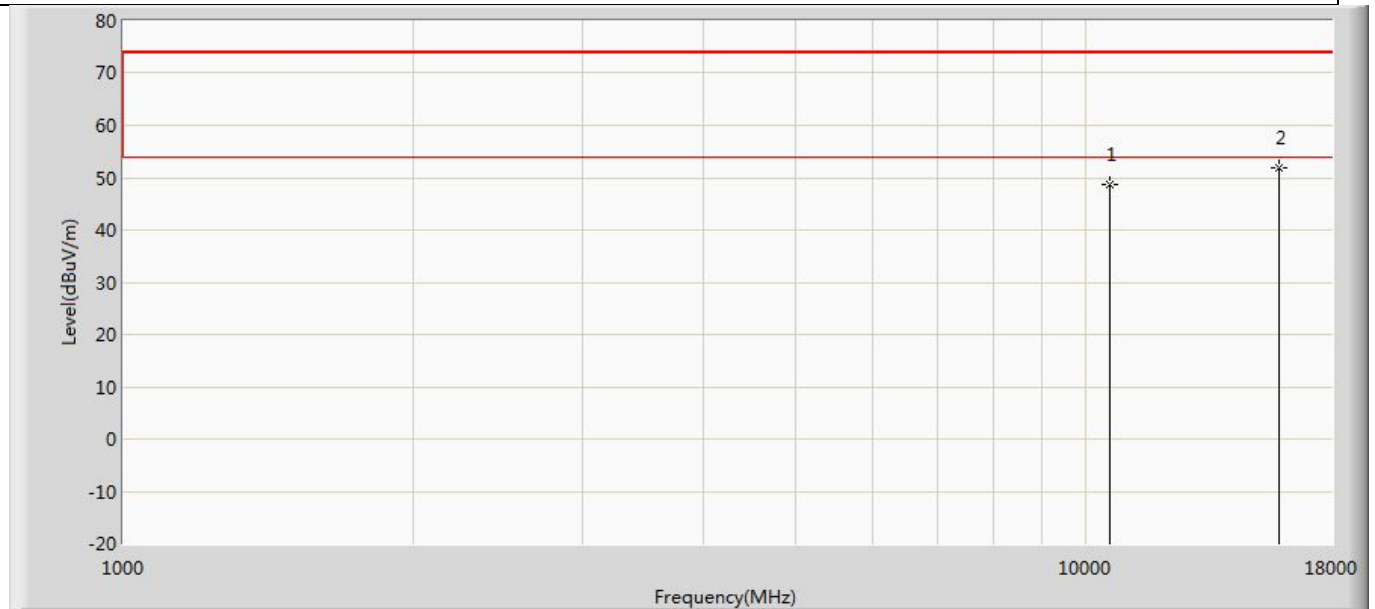


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10580.000	48.613	51.595	-25.387	74.000	-2.982	PK
2	*	15870.000	51.760	49.898	-22.240	74.000	1.862	PK

Profile: 2360091R	Page No.: 251
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with Ant1+Ant2	

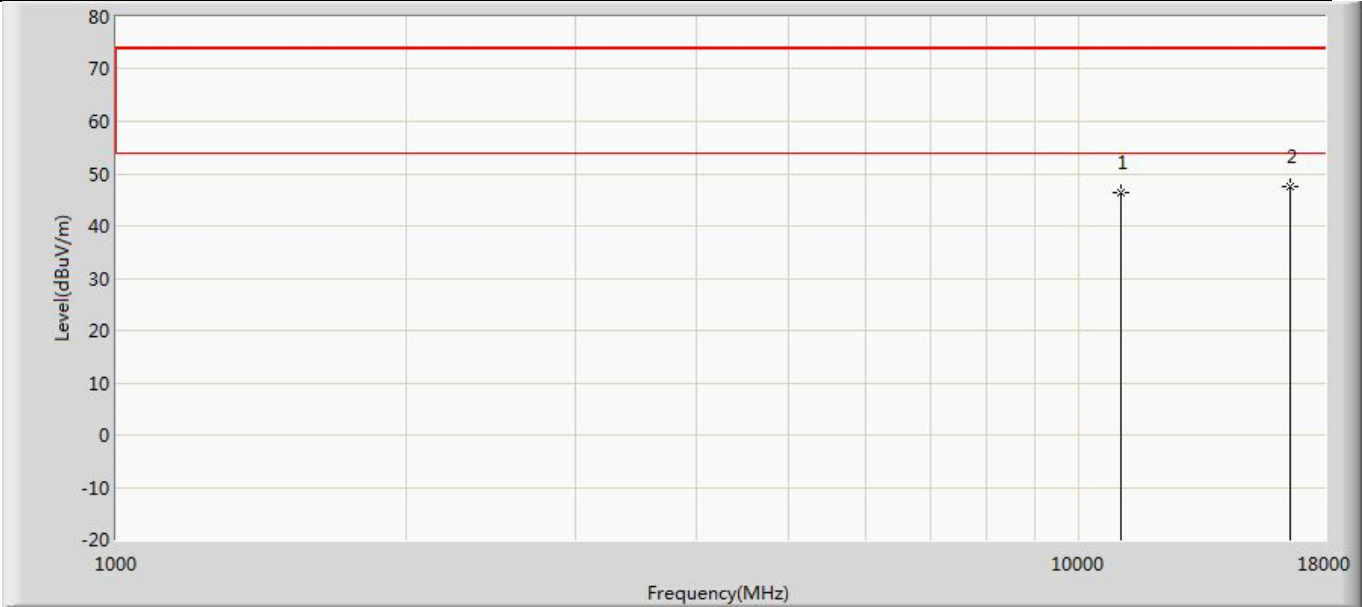


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	46.246	51.779	-27.754	74.000	-5.534	PK
2	*	16590.000	47.544	49.781	-26.456	74.000	-2.237	PK

Profile: 2360091R	Page No.: 252
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with Ant1+Ant2	

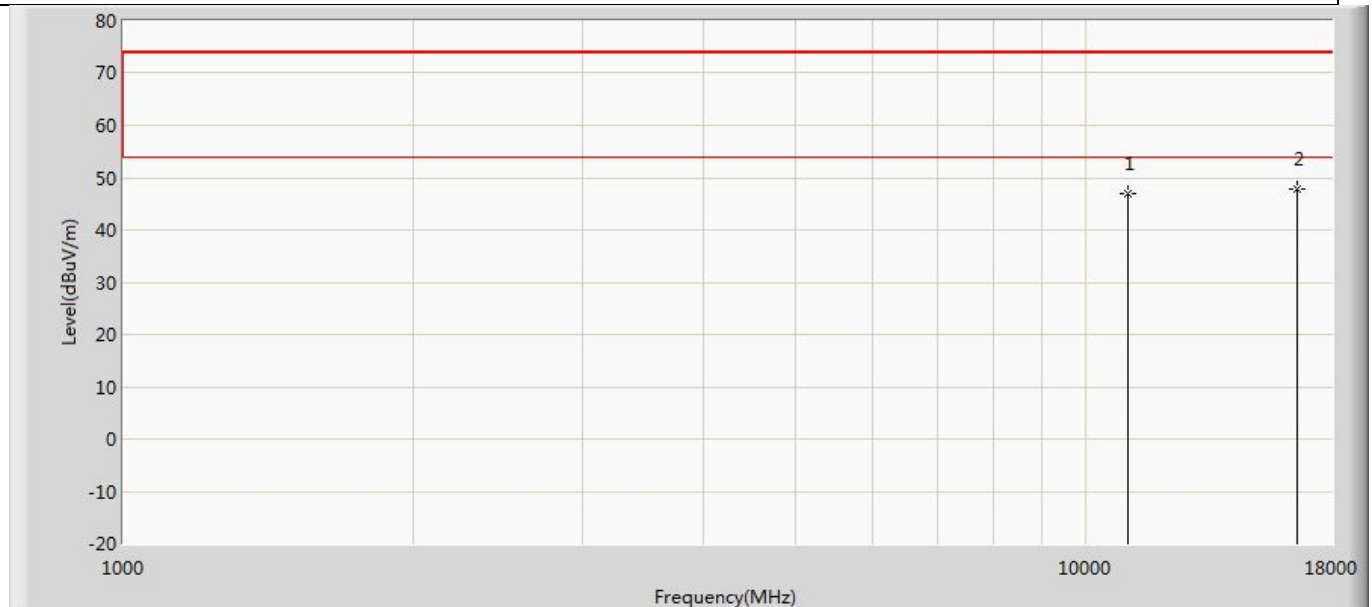


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11060.000	46.978	52.511	-27.022	74.000	-5.534	PK
2	*	16590.000	47.899	50.136	-26.101	74.000	-2.237	PK

Profile: 2360091R	Page No.: 79
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) with Ant1+Ant2	

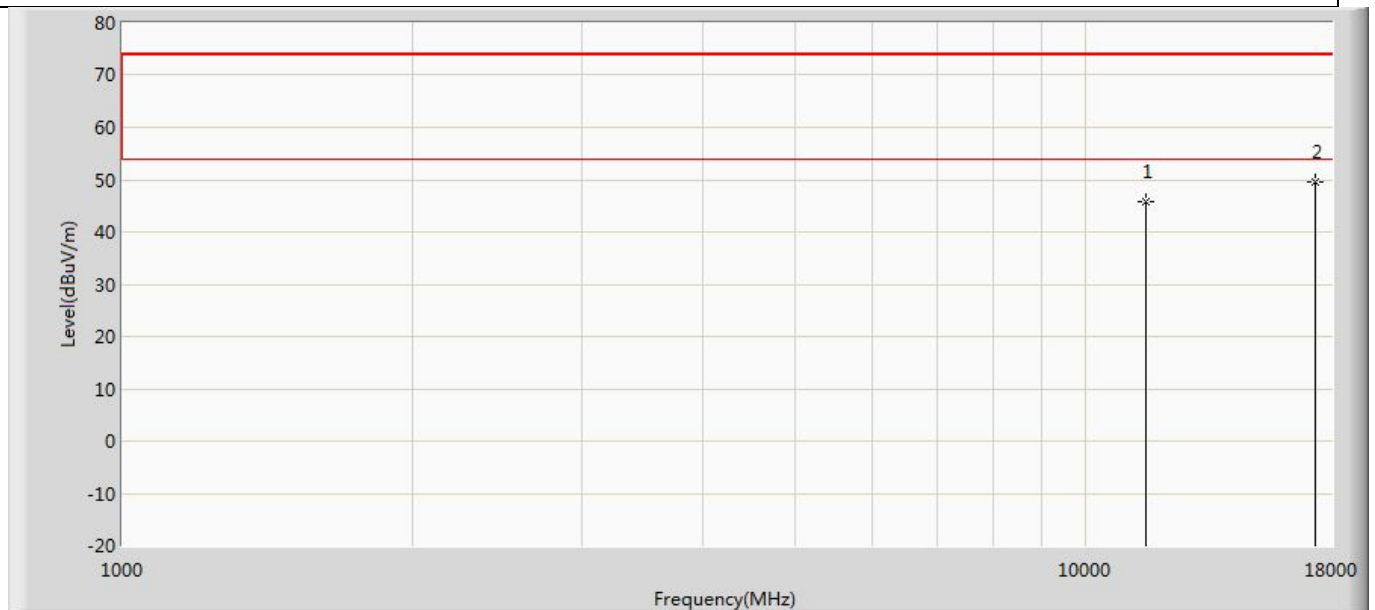

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	45.705	50.393	-28.295	74.000	-4.688	PK
2	*	17325.000	49.469	52.006	-24.531	74.000	-2.538	PK

Profile: 2360091R	Page No.: 80
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5775MHz by 802.11ax(80MHz) with Ant1+Ant2	

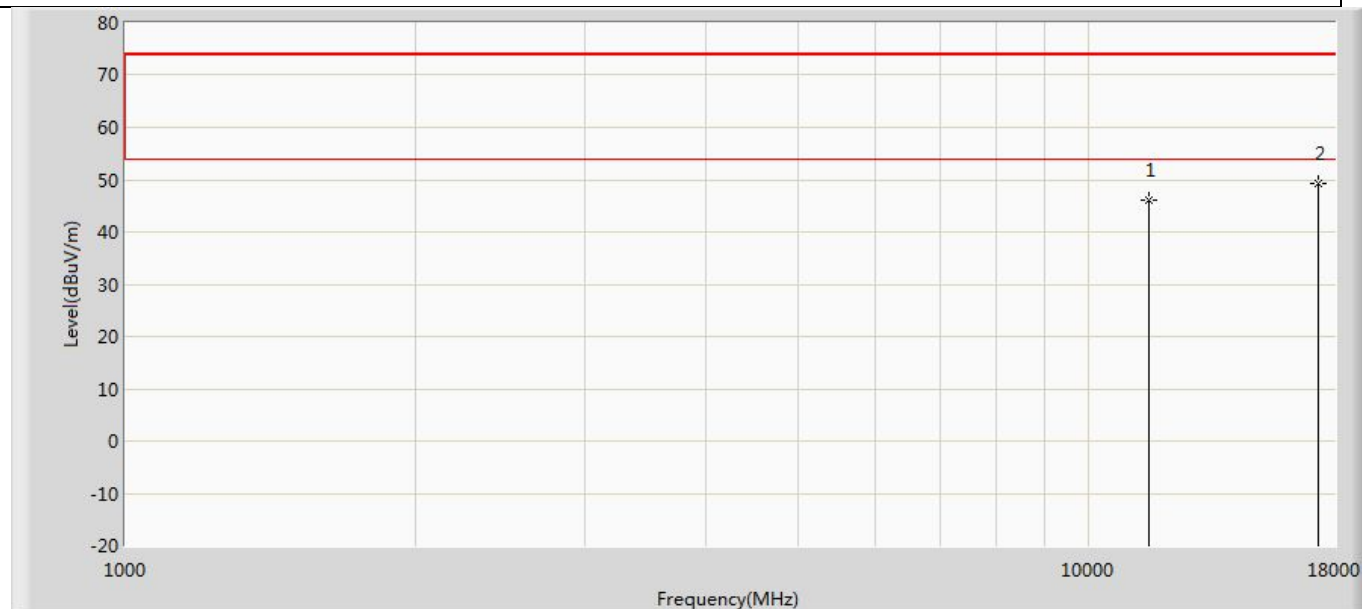

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11550.000	45.955	50.643	-28.045	74.000	-4.688	PK
2	*	17325.000	49.149	51.686	-24.851	74.000	-2.538	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. We have evaluated both SISO and MIMO mode, shown in report is the worst data.