



FCC RF Test Report

APPLICANT : Realme Chongqing Mobile Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : realme
MODEL NAME : RMX5000
FCC ID : 2AUYFRMX5000
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(F), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 20, 2024 ~ Jun. 25, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 6
1.5 Modification of EUT ... 7
1.6 Maximum ERP/EIRP Power and Emission Designator ... 7
1.7 Testing Location ... 10
1.8 Test Software ... 10
1.9 Applicable Standards ... 11
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 12
2.1 Test Mode ... 12
2.2 Connection Diagram of Test System ... 14
2.3 Support Unit used in test configuration and system ... 14
2.4 Measurement Results Explanation Example ... 14
2.5 Frequency List of Low/Middle/High Channels ... 15
3 CONDUCTED TEST ITEMS ... 18
3.1 Measuring Instruments ... 18
3.2 Test Setup ... 18
3.3 Test Result of Conducted Test ... 18
3.4 Conducted Output Power and ERP/EIRP ... 19
3.5 Peak-to-Average Ratio ... 20
3.6 Occupied Bandwidth ... 21
3.7 Conducted Band Edge ... 22
3.8 Conducted Spurious Emission ... 24
3.9 Frequency Stability ... 25
4 RADIATED TEST ITEMS ... 26
4.1 Measuring Instruments ... 26
4.2 Test Setup ... 26
4.3 Test Result of Radiated Test ... 27
4.4 Radiated Spurious Emission ... 28
5 LIST OF MEASURING EQUIPMENT ... 29
6 MEASUREMENT UNCERTAINTY ... 30
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG461305B	Rev. 01	Initial issue of report	Jul. 24, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 17)	ERP < 3 Watt		-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt		-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4) (Band 66)	EIRP < 1Watt		-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB		PASS
3.6	§2.1049	Occupied Bandwidth	-	Report Only	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2)(4) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 26) (Band 66)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 26) (Band 66)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13) (Band 17) (Band 26) (Band 66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 20.35 dB at 1559.50 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Realme Chongqing Mobile Telecommunications Corp., Ltd.
No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

1.2 Manufacturer

Realme Chongqing Mobile Telecommunications Corp., Ltd.
No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	realme
Model Name	RMX5000
FCC ID	2AUYFRMX5000
IMEI Code	Conducted: 864218070019792/864218070019784 Radiation: 864218070019537/864218070019529
HW Version	11
SW Version	realme UI 5.0
EUT Stage	Production Unit



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 12 : 699 MHz ~ 716 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 26 : 824 MHz ~ 849 MHz LTE Band 66 : 1710 MHz ~ 1780 MHz
Rx Frequency	LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 12 : 729 MHz ~ 746 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 17 : 734 MHz ~ 746 MHz LTE Band 26 : 869 MHz ~ 894 MHz LTE Band 66 : 2110 MHz~ 2200 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 66 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<ANT0> LTE Band 5 : 23.97 dBm LTE Band 12 : 24.09 dBm LTE Band 13 : 23.99 dBm LTE Band 17 : 24.02 dBm LTE Band 26 : 24.07 dBm <ANT1> LTE Band 2 : 22.79 dBm LTE Band 4 : 22.94 dBm LTE Band 5 : 23.89 dBm LTE Band 12 : 24.06 dBm LTE Band 13 : 23.93 dBm LTE Band 17 : 24.02 dBm LTE Band 26 : 23.98 dBm LTE Band 66 : 23.51 dBm <ANT4> LTE Band 2 : 23.08 dBm LTE Band 4 : 23.67 dBm LTE Band 66 : 23.73 dBm <ANT5> LTE Band 4 : 23.38 dBm LTE Band 66 : 23.66 dBm
Antenna Gain	<ANT0> LTE Band 5 : -6.5 dBi LTE Band 12 : -7.4 dBi LTE Band 13 : -6.6 dBi



	LTE Band 17 : -7.4 dBi LTE Band 26 : -6.5 dBi <ANT1> LTE Band 2 : -2.7 dBi LTE Band 4 : -2.8 dBi LTE Band 5 : -7.9 dBi LTE Band 12 : -8.6 dBi LTE Band 13 : -7.8 dBi LTE Band 17 : -8.6 dBi LTE Band 26 : -7.9 dBi LTE Band 66 : -2.8 dBi <ANT4> LTE Band 2 : -3.8 dBi LTE Band 4 : -4.3 dBi LTE Band 66 : -4.3 dBi <ANT5> LTE Band 4 : -11.4 dBi LTE Band 66 : -11.4 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM (Downlink only)

Note:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, so only the maximum ERP/EIRP of An.1 for LTE Band2/4/66 and Ant. 0 for LTE Band5/12/13/17/26 are shown in the report.
2. For conducted test items of LTE Band2/66, the whole testing has assessed Ant. 4 by referring to the higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power and Emission Designator

LTE Band 2		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
1.4	1850.7 ~ 1909.3	0.0998	1M09G7D	0.0851	1M09W7D
3	1851.5 ~ 1908.5	0.1005	2M70G7D	0.0857	2M70W7D
5	1852.5 ~ 1907.5	0.0998	4M50G7D	0.0849	4M51W7D
10	1855.0 ~ 1905.0	0.0998	8M99G7D	0.0855	9M03W7D
15	1857.5 ~ 1902.5	0.1009	13M4G7D	0.0853	13M4W7D
20	1860.0 ~ 1900.0	0.1021	18M0G7D	0.0867	17M9W7D



LTE Band 4		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
1.4	1710.7 ~ 1754.3	0.1016	1M09G7D	0.0836	1M09W7D
3	1711.5 ~ 1753.5	0.1016	2M71G7D	0.0841	2M73W7D
5	1712.5 ~ 1752.5	0.1014	4M50G7D	0.0843	4M49W7D
10	1715.0 ~ 1750.0	0.1012	9M03G7D	0.0851	9M01W7D
15	1717.5 ~ 1747.5	0.1009	13M5G7D	0.0851	13M5W7D
20	1720.0 ~ 1745.0	0.1033	17M9G7D	0.0861	17M9W7D
LTE Band 5		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.0336	1M09G7D	0.0279	1M10W7D
3	825.5 ~ 847.5	0.0334	2M71G7D	0.0280	2M72W7D
5	826.5 ~ 846.5	0.0333	4M49G7D	0.0279	4M50W7D
10	829.0 ~ 844.0	0.0340	9M07G7D	0.0285	8M99W7D
LTE Band 12		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	699.7 ~ 715.3	0.0277	1M10G7D	0.0220	1M09W7D
3	700.5 ~ 714.5	0.0283	2M72G7D	0.0219	2M70W7D
5	701.5 ~ 713.5	0.0281	4M50G7D	0.0221	4M50W7D
10	704.0 ~ 711.0	0.0284	9M03G7D	0.0223	8M99W7D
LTE Band 13		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	779.5 ~ 784.5	0.0333	4M51G7D	0.0266	4M50W7D
10	782.0	0.0334	9M07G7D	0.0267	9M01W7D
LTE Band 17		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	706.5 ~ 713.5	0.0274	4M50G7D	0.0223	4M50W7D
10	709.0 ~ 711.0	0.0280	9M03G7D	0.0226	8M99W7D



LTE Band 26		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.0343	1M09G7D	0.0284	1M10W7D
3	825.5 ~ 847.5	0.0344	2M71G7D	0.0286	2M72W7D
5	826.5 ~ 846.5	0.0343	4M49G7D	0.0284	4M50W7D
10	829.0 ~ 844.0	0.0340	9M07G7D	0.0286	8M99W7D
15	831.5 ~ 841.5	0.0348	13M5G7D	0.0289	13M5W7D
CH26790	824.0	0.0344	13M5G7D	0.0284	13M4W7D
LTE Band 66		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
1.4	1710.7 ~ 1779.3	0.1156	1M09G7D	0.0982	1M09W7D
3	1711.5 ~ 1778.5	0.1164	2M71G7D	0.0977	2M73W7D
5	1712.5 ~ 1777.5	0.1153	4M50G7D	0.0973	4M49W7D
10	1715.0 ~ 1775.0	0.1153	9M03G7D	0.0979	9M01W7D
15	1717.5 ~ 1772.5	0.1164	13M5G7D	0.0975	13M5W7D
20	1720.0 ~ 1770.0	0.1178	17M9G7D	0.0993	17M9W7D

Note:

1. LTE Band 26 overlaps the entire frequency range of LTE Band 5. Therefore, the test results provided in this report covers Band 5 and the portion of Band 26 subject to Part 22.
2. LTE Band 66 overlaps the entire frequency range of LTE Band 4. Therefore, the test results provided in this report covers Band 66 as well as Band 4.
3. LTE Band 12 overlaps the entire frequency range of LTE Band 17. Therefore, the test results provided in this report covers Band 12 as well as Band 17.
4. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24



1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(F), 27(H)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	-	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	-	v	v	v	v	v	v
	26	v	v	v	v	v	-	v	v	v	-	v	v	v	v	v	v
Peak-to-Ave rage Ratio	2						v	v	v	v	-			v		v	
	12				v	-	-	v	v	v	-			v		v	
	13	-	-		v	-	-	v	v	v	-			v		v	
	26					v	-	v	v	v	-			v		v	
	66						v	v	v	v	-			v		v	
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v		-			v		v	
	12	v	v	v	v	-	-	v	v		-			v		v	
	13	-	-	v	v	-	-	v	v		-			v		v	
	26	v	v	v	v	v	-	v	v		-			v		v	
	66	v	v	v	v	v	v	v	v		-			v		v	
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	-	v		v	v		v
	12	v	v	v	v	-	-	v	v	v	-	v		v	v		v
	13	-	-	v	v	-	-	v	v	v	-	v		v	v		v
	26	v	v	v	v	v	-	v	v	v	-	v		v	v		v
	66	v	v	v	v	v	v	v	v	v	-	v		v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H	
Conducted Spurious Emission	2	v	v	v	v	v	v	v			-	v			v	v	v	
	12	v	v	v	v	-	-	v			-	v			v	v	v	
	13	-	-	v	v	-	-	v			-	v			v	v	v	
	26	v	v	v	v	v	-	v			-	v			v	v	v	
	66	v	v	v	v	v	v	v			-	v			v	v	v	
Frequency Stability	2				v			v			-			v		v		
	12				v	-	-	v			-			v		v		
	13	-	-		v	-	-	v			-			v		v		
	26				v		-	v			-			v		v		
	66				v			v			-			v		v		
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	
	4	v	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	
	5	v	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	
	12	v	v	v	v	-	-	v	v	v	-	v	v	v	v	v	v	
	13	-	-	v	v	-	-	v	v	v	-	v	v	v	v	v	v	
	17	-	-	v	v	-	-	v	v	v	-	v	v	v	v	v	v	
	26	v	v	v	v	v	-	v	v	v	-	v	v	v	v	v	v	
	66	v	v	v	v	v	v	v	v	v	-	v	v	v	v	v	v	
Radiated Spurious Emission	2	Worst Case															v	
	12	Worst Case															v	
	13	Worst Case															v	
	26	Worst Case															v	
	66	Worst Case															v	
Note	<p>1. The mark "v" means that this configuration is chosen for testing</p> <p>2. The mark "-" means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>																	

2.2 Connection Diagram of Test System

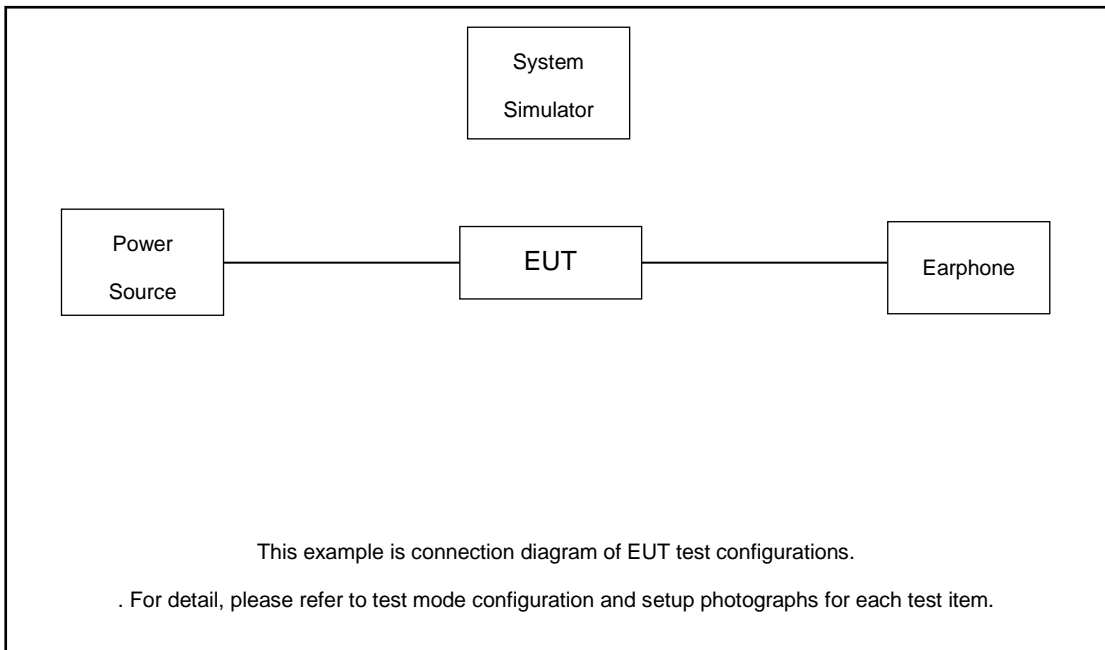

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.5 + 10 = 14.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5



LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	132072	132322	132572
	Frequency	1720	1745	1770
15	Channel	132047	132322	132597
	Frequency	1717.5	1745	1772.5
10	Channel	132022	132322	132622
	Frequency	1715	1745	1775
5	Channel	131997	132322	132647
	Frequency	1712.5	1745	1777.5
3	Channel	131987	132322	132657
	Frequency	1711.5	1745	1778.5
1.4	Channel	131979	132322	132665
	Frequency	1710.7	1745	1779.3

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

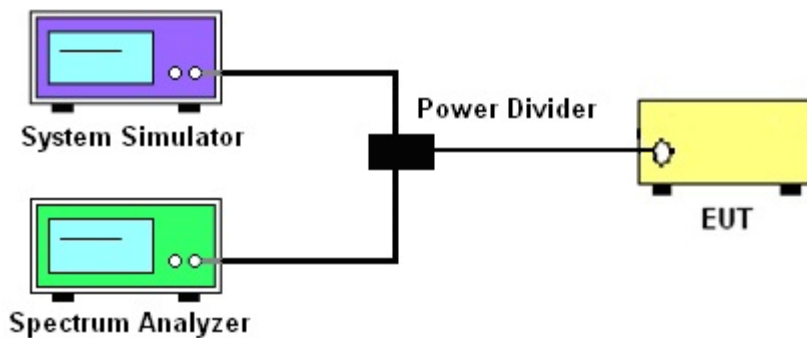

3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5 and Band 26.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12, Band 13 and Band 17.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4 and Band 66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

8. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

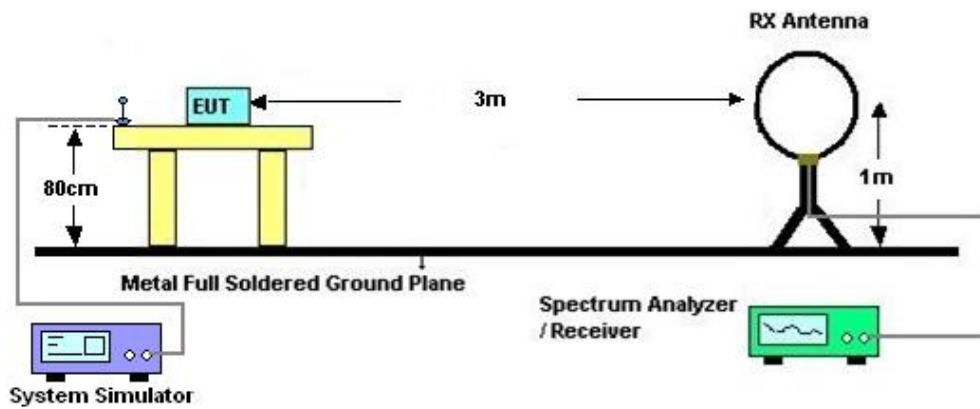

4.2.2 For radiated test from 30MHz to 1GHz

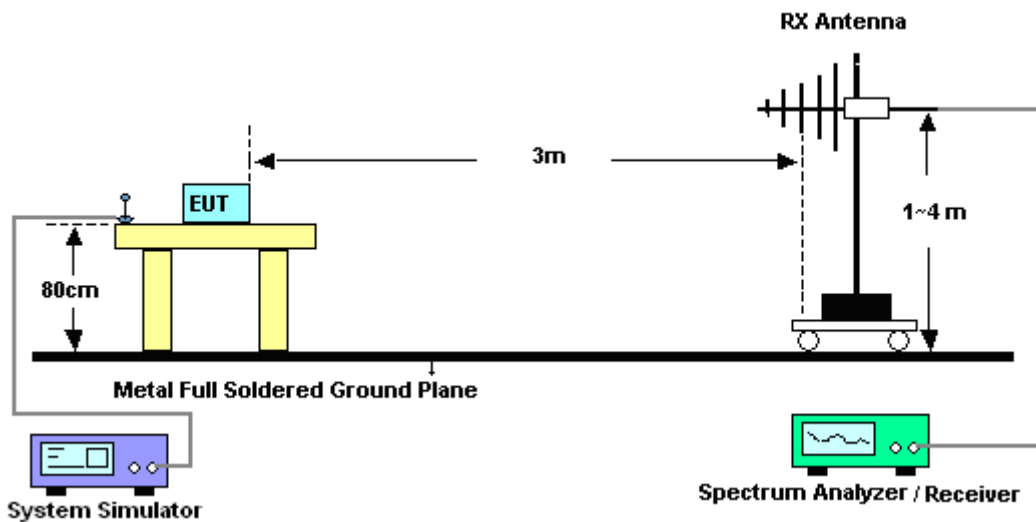

4.2.3 For radiated test above 1GHz

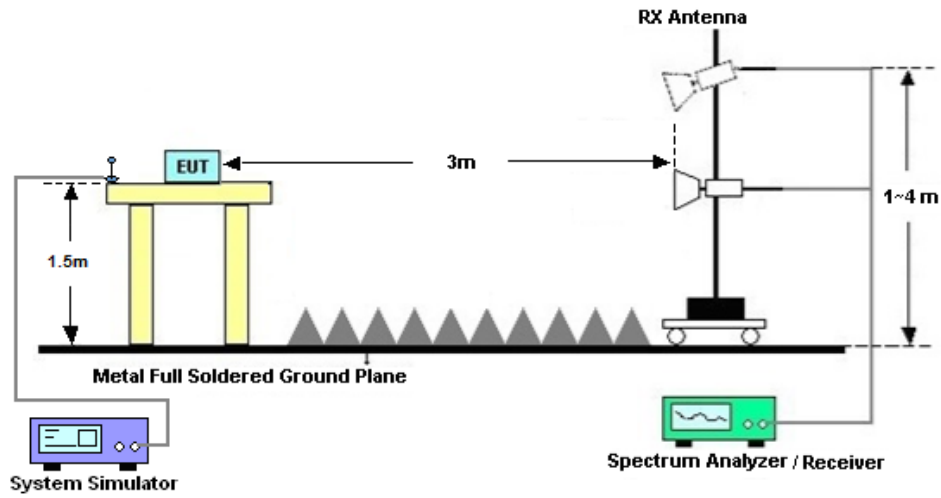

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11. $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$
 $= -13dBm.$

13. For Band 7, 38, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 20, 2024~ Jun. 24, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Jun. 20, 2024~ Jun. 24, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Jun. 20, 2024~ Jun. 24, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Jun. 20, 2024~ Jun. 24, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Jun. 24, 2024~ Jun. 25, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jun. 24, 2024~ Jun. 25, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Jun. 24, 2024~ Jun. 25, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jun. 24, 2024~ Jun. 25, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Jun. 24, 2024~ Jun. 25, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Jun. 24, 2024~ Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Jun. 24, 2024~ Jun. 25, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Jun. 24, 2024~ Jun. 25, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 24, 2024~ Jun. 25, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Jun. 24, 2024~ Jun. 25, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 24, 2024~ Jun. 25, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 24, 2024~ Jun. 25, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.48 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.53 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.02 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Lorenzo Liu	Temperature :	24~26°C
		Relative Humidity :	50~53%

Conducted Output Power(Average power) and ERP/EIRP

LTE Band 2_ANT1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				18700	18900	19100			
Frequency (MHz)				1860	1880	1900	L	M	H
20	QPSK	1	0	22.73	22.79	22.73	0.1007	0.1021	0.1007
20	QPSK	1	49	22.69	22.70	22.72	0.0998	0.1000	0.1005
20	QPSK	1	99	22.60	22.61	22.66	0.0977	0.0979	0.0991
20	QPSK	50	0	21.71	21.78	21.68	0.0796	0.0809	0.0791
20	QPSK	50	24	21.70	21.65	21.67	0.0794	0.0785	0.0789
20	QPSK	50	50	21.66	21.59	21.67	0.0787	0.0774	0.0789
20	QPSK	100	0	21.68	21.73	21.64	0.0791	0.0800	0.0783
20	16QAM	1	0	22.08	22.04	22.07	0.0867	0.0859	0.0865
20	64QAM	1	0	20.73	20.87	20.78	0.0635	0.0656	0.0643
Channel				18675	18900	19125	EIRP(W)		
Frequency (MHz)				1857.5	1880	1902.5	L	M	H
15	QPSK	1	0	22.68	22.74	22.66	0.0995	0.1009	0.0991
15	16QAM	1	0	22.01	21.95	22.00	0.0853	0.0841	0.0851
Channel				18650	18900	19150	EIRP(W)		
Frequency (MHz)				1855	1880	1905	L	M	H
10	QPSK	1	0	22.67	22.69	22.64	0.0993	0.0998	0.0986
10	16QAM	1	0	22.02	21.97	21.97	0.0855	0.0845	0.0845
Channel				18625	18900	19175	EIRP(W)		
Frequency (MHz)				1852.5	1880	1907.5	L	M	H
5	QPSK	1	0	22.68	22.69	22.65	0.0995	0.0998	0.0989
5	16QAM	1	0	21.98	21.99	21.99	0.0847	0.0849	0.0849
Channel				18615	18900	19185	EIRP(W)		
Frequency (MHz)				1851.5	1880	1908.5	L	M	H
3	QPSK	1	0	22.65	22.72	22.63	0.0989	0.1005	0.0984
3	16QAM	1	0	22.03	21.94	22.00	0.0857	0.0839	0.0851
Channel				18607	18900	19193	EIRP(W)		
Frequency (MHz)				1850.7	1880	1909.3	L	M	H
1.4	QPSK	1	0	22.64	22.69	22.67	0.0986	0.0998	0.0993
1.4	16QAM	1	0	22.00	21.95	21.97	0.0851	0.0841	0.0845



LTE Band 4_ANT1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				20050	20175	20300	EIRP(W)		
Frequency (MHz)				1720	1732.5	1745	L	M	H
20	QPSK	1	0	22.74	22.94	22.78	0.0986	0.1033	0.0995
20	QPSK	1	49	22.64	22.71	22.71	0.0964	0.0979	0.0979
20	QPSK	1	99	22.53	22.56	22.59	0.0940	0.0946	0.0953
20	QPSK	50	0	21.70	21.80	21.73	0.0776	0.0794	0.0782
20	QPSK	50	24	21.69	21.73	21.72	0.0774	0.0782	0.0780
20	QPSK	50	50	21.62	21.66	21.68	0.0762	0.0769	0.0773
20	QPSK	100	0	21.68	21.71	21.69	0.0773	0.0778	0.0774
20	16QAM	1	0	22.07	22.15	21.89	0.0845	0.0861	0.0811
20	64QAM	1	0	20.86	21.04	20.82	0.0640	0.0667	0.0634
Channel				20025	20175	20325	EIRP(W)		
Frequency (MHz)				1717.5	1732.5	1747.5	L	M	H
15	QPSK	1	0	22.84	22.66	22.71	0.1009	0.0968	0.0979
15	16QAM	1	0	22.10	21.97	21.79	0.0851	0.0826	0.0793
Channel				20000	20175	20350	EIRP(W)		
Frequency (MHz)				1715	1732.5	1750	L	M	H
10	QPSK	1	0	22.85	22.67	22.69	0.1012	0.0971	0.0975
10	16QAM	1	0	22.10	21.97	21.82	0.0851	0.0826	0.0798
Channel				19975	20175	20375	EIRP(W)		
Frequency (MHz)				1712.5	1732.5	1752.5	L	M	H
5	QPSK	1	0	22.86	22.66	22.69	0.1014	0.0968	0.0975
5	16QAM	1	0	22.06	21.99	21.81	0.0843	0.0830	0.0796
Channel				19965	20175	20385	EIRP(W)		
Frequency (MHz)				1711.5	1732.5	1753.5	L	M	H
3	QPSK	1	0	22.87	22.66	22.69	0.1016	0.0968	0.0975
3	16QAM	1	0	22.05	22.02	21.83	0.0841	0.0836	0.0800
Channel				19950	20175	20393	EIRP(W)		
Frequency (MHz)				1710	1732.5	1754.3	L	M	H
1.4	QPSK	1	0	22.87	22.69	22.71	0.1016	0.0975	0.0979
1.4	16QAM	1	0	21.75	22.02	21.81	0.0785	0.0836	0.0796



LTE Band 5_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				20450	20525	20600			
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	23.91	23.97	23.88	0.0336	0.0340	0.0333
10	QPSK	1	25	23.89	23.91	23.84	0.0334	0.0336	0.0330
10	QPSK	1	49	23.90	23.80	23.80	0.0335	0.0327	0.0327
10	QPSK	25	0	22.93	22.95	22.88	0.0268	0.0269	0.0265
10	QPSK	25	12	22.89	22.87	22.87	0.0265	0.0264	0.0264
10	QPSK	25	25	22.90	22.89	22.84	0.0266	0.0265	0.0262
10	QPSK	50	0	22.88	22.89	22.86	0.0265	0.0265	0.0264
10	16QAM	1	0	23.08	23.08	23.20	0.0277	0.0277	0.0285
10	64QAM	1	0	22.03	21.92	22.14	0.0218	0.0212	0.0223
Channel				20425	20525	20625	ERP(W)		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	23.85	23.87	23.80	0.0331	0.0333	0.0327
5	16QAM	1	0	22.99	22.99	23.10	0.0272	0.0272	0.0279
Channel				20415	20525	20635	ERP(W)		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	23.81	23.89	23.83	0.0328	0.0334	0.0330
3	16QAM	1	0	22.99	22.99	23.12	0.0272	0.0272	0.0280
Channel				20407	20525	20643	ERP(W)		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	23.82	23.91	23.79	0.0329	0.0336	0.0327
1.4	16QAM	1	0	23.02	23.02	23.11	0.0274	0.0274	0.0279



LTE Band 12_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23060	23095	23130			
Frequency (MHz)				704	707.5	711	L	M	H
10	QPSK	1	0	24.04	24.09	24.05	0.0281	0.0284	0.0282
10	QPSK	1	25	23.98	24.02	23.96	0.0277	0.0280	0.0276
10	QPSK	1	49	23.93	24.06	24.04	0.0274	0.0282	0.0281
10	QPSK	25	0	22.98	23.04	22.99	0.0220	0.0223	0.0221
10	QPSK	25	12	22.88	22.99	22.92	0.0215	0.0221	0.0217
10	QPSK	25	25	22.58	22.63	22.60	0.0201	0.0203	0.0202
10	QPSK	50	0	22.70	22.73	22.69	0.0207	0.0208	0.0206
10	16QAM	1	0	22.99	23.04	22.90	0.0221	0.0223	0.0216
10	64QAM	1	0	21.94	22.05	22.01	0.0173	0.0178	0.0176
Channel				23035	23095	23155	ERP(W)		
Frequency (MHz)				701.5	707.5	713.5	L	M	H
5	QPSK	1	0	24.03	24.02	24.00	0.0281	0.0280	0.0279
5	16QAM	1	0	23.00	22.93	22.78	0.0221	0.0218	0.0210
Channel				23025	23095	23165	ERP(W)		
Frequency (MHz)				700.5	707.5	714.5	L	M	H
3	QPSK	1	0	24.07	23.91	23.94	0.0283	0.0273	0.0275
3	16QAM	1	0	22.90	22.96	22.87	0.0216	0.0219	0.0215
Channel				23017	23095	23173	ERP(W)		
Frequency (MHz)				699.7	707.5	715.3	L	M	H
1.4	QPSK	1	0	23.97	23.90	23.92	0.0277	0.0272	0.0274
1.4	16QAM	1	0	22.98	22.89	22.79	0.0220	0.0216	0.0211



LTE Band 13_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23230					
Frequency (MHz)				782				M	
10	QPSK	1	0		23.99			0.0334	
10	QPSK	1	25		23.88			0.0326	
10	QPSK	1	49		23.98			0.0333	
10	QPSK	25	0		23.10			0.0272	
10	QPSK	25	12		23.02			0.0267	
10	QPSK	25	25		23.07			0.0270	
10	QPSK	50	0		23.08			0.0271	
10	16QAM	1	0		23.01			0.0267	
10	64QAM	1	0		22.42			0.0233	
Channel				23205	23230	23255	ERP(W)		
Frequency (MHz)				779.5	782	784.5	L	M	H
5	QPSK	1	0	23.89	23.97	23.98	0.0327	0.0333	0.0333
5	16QAM	1	0	23.00	22.91	22.92	0.0266	0.0261	0.0261

LTE Band 17_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23780	23790	23800			
Frequency (MHz)				709	710	711	L	M	H
10	QPSK	1	0	23.97	24.02	24.00	0.0277	0.0280	0.0279
10	QPSK	1	25	23.95	23.92	23.98	0.0275	0.0274	0.0277
10	QPSK	1	49	23.79	23.77	23.77	0.0265	0.0264	0.0264
10	QPSK	25	0	22.91	22.94	22.91	0.0217	0.0218	0.0217
10	QPSK	25	12	22.88	22.87	22.90	0.0215	0.0215	0.0216
10	QPSK	25	25	22.83	22.89	22.88	0.0213	0.0216	0.0215
10	QPSK	50	0	22.89	22.99	22.91	0.0216	0.0221	0.0217
10	16QAM	1	0	23.00	23.10	23.01	0.0221	0.0226	0.0222
10	64QAM	1	0	21.95	21.94	22.00	0.0174	0.0173	0.0176
Channel				23755	23790	23825	ERP(W)		
Frequency (MHz)				706.5	710	713.5	L	M	H
5	QPSK	1	0	23.91	23.92	23.92	0.0273	0.0274	0.0274
5	16QAM	1	0	22.94	23.03	22.93	0.0218	0.0223	0.0218



LTE Band 26_ANT0:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)			
Channel				26790	26865	26915	26965				
Frequency (MHz)				824	831.5	836.5	841.5	Straddle Ch	L	M	H
15	QPSK	1	0	24.01	24.02	24.07	24.02	0.0344	0.0344	0.0348	0.0344
15	QPSK	1	37	23.98	23.99	23.98	23.94	0.0341	0.0342	0.0341	0.0338
15	QPSK	1	74	23.95	24.01	24.01	23.90	0.0339	0.0344	0.0344	0.0335
15	QPSK	36	0	22.94	22.98	23.00	22.95	0.0269	0.0271	0.0272	0.0269
15	QPSK	36	20	22.87	22.93	22.89	22.88	0.0264	0.0268	0.0265	0.0265
15	QPSK	36	39	22.94	22.95	22.91	22.84	0.0269	0.0269	0.0267	0.0262
15	QPSK	75	0	22.95	22.97	22.98	22.92	0.0269	0.0270	0.0271	0.0267
15	16QAM	1	0	23.18	23.21	23.26	23.21	0.0284	0.0286	0.0289	0.0286
15	64QAM	1	0	21.94	22.00	21.95	22.18	0.0213	0.0216	0.0214	0.0225
Channel					26840	26915	26990	ERP(W)			
Frequency (MHz)					829	836.5	844		L	M	H
10	QPSK	1	0		23.94	23.97	23.94		0.0338	0.0340	0.0338
10	16QAM	1	0		23.15	23.21	23.11		0.0282	0.0286	0.0279
Channel					26815	26915	27015	ERP(W)			
Frequency (MHz)					826.5	836.5	846.5		L	M	H
5	QPSK	1	0		23.97	24.00	23.95		0.0340	0.0343	0.0339
5	16QAM	1	0		23.14	23.19	23.15		0.0281	0.0284	0.0282
Channel					26815	26915	27025	ERP(W)			
Frequency (MHz)					825.5	836.5	847.5		L	M	H
3	QPSK	1	0		23.97	24.02	23.97		0.0340	0.0344	0.0340
3	16QAM	1	0		23.11	23.21	23.16		0.0279	0.0286	0.0282
Channel					26797	26915	27033	ERP(W)			
Frequency (MHz)					824.7	836.5	848.3		L	M	H
1.4	QPSK	1	0		23.96	24.00	23.94		0.0340	0.0343	0.0338
1.4	16QAM	1	0		23.13	23.18	23.16		0.0281	0.0284	0.0282



LTE Band 66_ANT1:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				132072	132322	132572	EIRP(W)		
Frequency (MHz)				1720	1745	1770	L	M	H
20	QPSK	1	0	23.48	23.51	23.34	0.1169	0.1178	0.1132
20	QPSK	1	49	23.38	23.37	23.04	0.1143	0.1140	0.1057
20	QPSK	1	99	23.26	23.25	22.91	0.1112	0.1109	0.1026
20	QPSK	50	0	22.37	22.45	22.20	0.0906	0.0923	0.0871
20	QPSK	50	24	22.31	22.31	22.11	0.0893	0.0893	0.0853
20	QPSK	50	50	22.27	22.28	22.04	0.0885	0.0887	0.0839
20	QPSK	100	0	22.35	22.36	22.10	0.0902	0.0904	0.0851
20	16QAM	1	0	22.77	22.62	22.65	0.0993	0.0959	0.0966
20	64QAM	1	0	21.60	21.58	21.53	0.0759	0.0755	0.0746
Channel				132047	132322	132597	EIRP(W)		
Frequency (MHz)				1717.5	1745	1772.5	L	M	H
15	QPSK	1	0	23.40	23.46	23.28	0.1148	0.1164	0.1117
15	16QAM	1	0	22.69	22.55	22.59	0.0975	0.0944	0.0953
Channel				132022	132322	132622	EIRP(W)		
Frequency (MHz)				1715	1745	1775	L	M	H
10	QPSK	1	0	23.42	23.41	23.26	0.1153	0.1151	0.1112
10	16QAM	1	0	22.71	22.56	22.59	0.0979	0.0946	0.0953
Channel				131997	132322	132647	EIRP(W)		
Frequency (MHz)				1712.5	1745	1777.5	L	M	H
5	QPSK	1	0	23.41	23.42	23.26	0.1151	0.1153	0.1112
5	16QAM	1	0	22.68	22.54	22.56	0.0973	0.0942	0.0946
Channel				131987	132322	132657	EIRP(W)		
Frequency (MHz)				1711.5	1745	1778.5	L	M	H
3	QPSK	1	0	23.38	23.46	23.26	0.1143	0.1164	0.1112
3	16QAM	1	0	22.70	22.57	22.60	0.0977	0.0948	0.0955
Channel				131979	132322	132665	EIRP(W)		
Frequency (MHz)				1710.7	1745	1779.3	L	M	H
1.4	QPSK	1	0	23.43	23.42	23.27	0.1156	0.1153	0.1114
1.4	16QAM	1	0	22.72	22.54	22.57	0.0982	0.0942	0.0948



LTE Band 2


Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	5.01	5.88	6.32	PASS



LTE Band 2 / 20MHz / QPSK


Middle Channel / Full RB

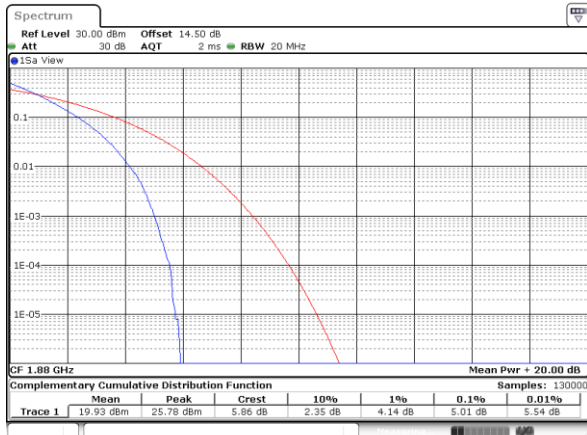

Date: 21 JUN 2024 13:18:11

LTE Band 2 / 20MHz / 16QAM


Middle Channel / Full RB

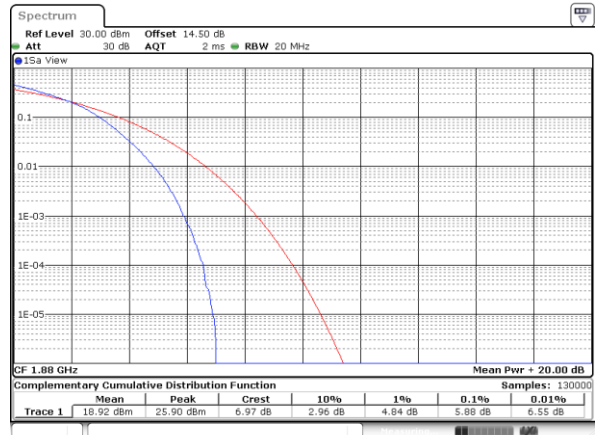

Date: 21 JUN 2024 13:18:38

LTE Band 2 / 20MHz / 64QAM

Middle Channel / Full RB

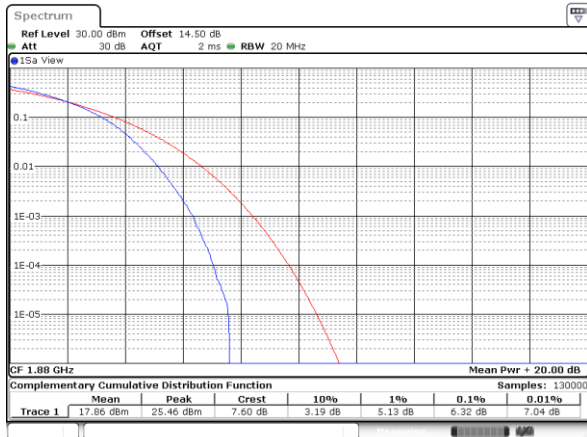

Date: 21 JUN 2024 13:19:06




26dB Bandwidth

Mode	LTE Band 2 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.26	1.30	2.99	2.98	4.90	5.03	9.61	9.65	14.30	14.15	18.98	18.70




LTE Band 2

Middle Channel / 1.4MHz / QPSK

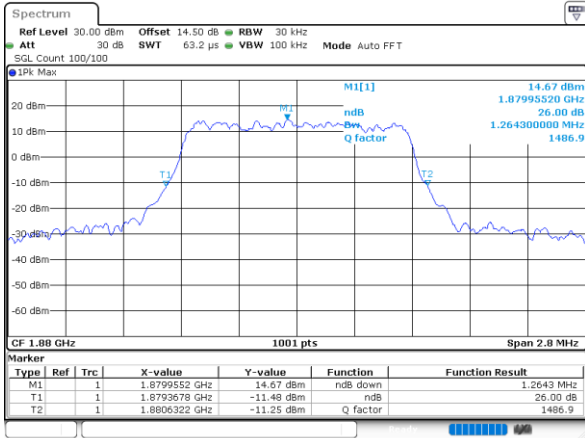


Date: 21 JUN 2024 10:30:08

Middle Channel / 1.4MHz / 16QAM

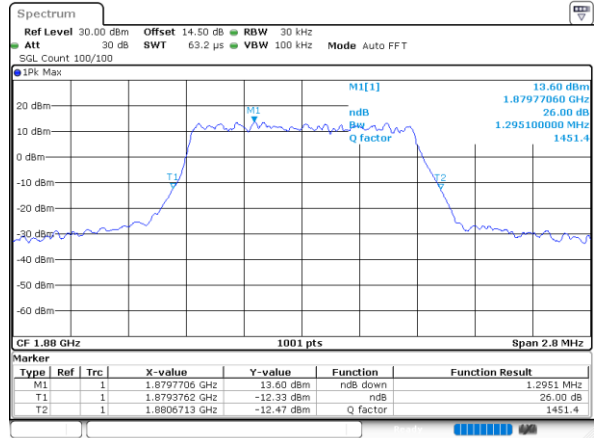


Date: 21 JUN 2024 10:30:47

Middle Channel / 3MHz / QPSK

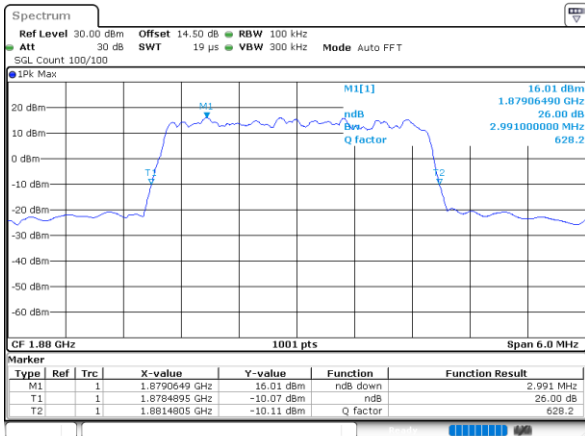


Date: 21 JUN 2024 10:50:57

Middle Channel / 3MHz / 16QAM

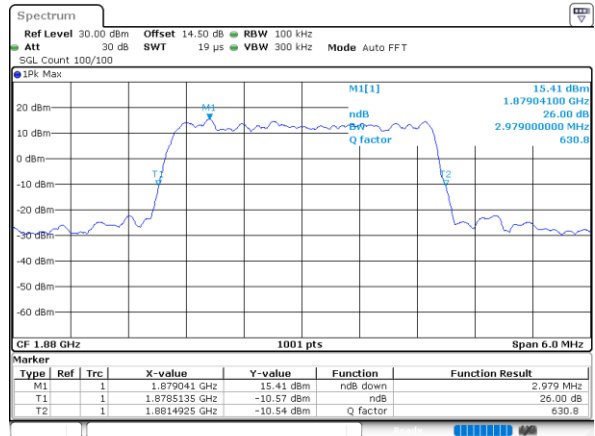


Date: 21 JUN 2024 10:51:37

Middle Channel / 5MHz / QPSK

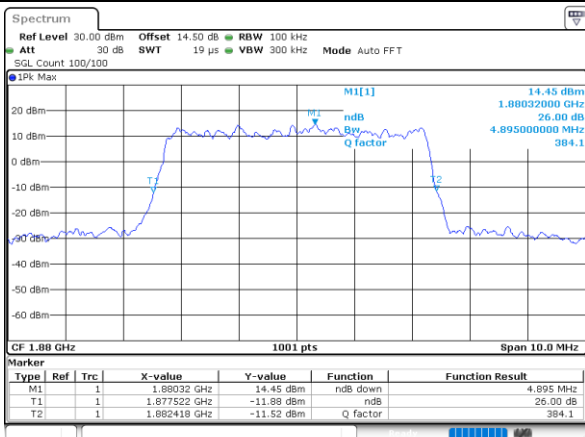

Date: 21 JUN 2024 11:16:03

Middle Channel / 5MHz / 16QAM

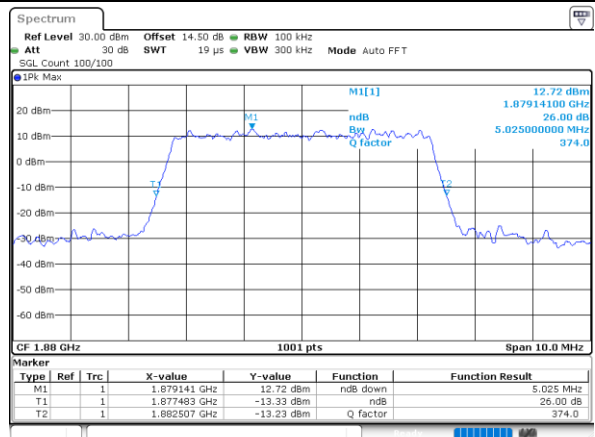


Date: 21 JUN 2024 11:16:42




LTE Band 2

Middle Channel / 10MHz / QPSK

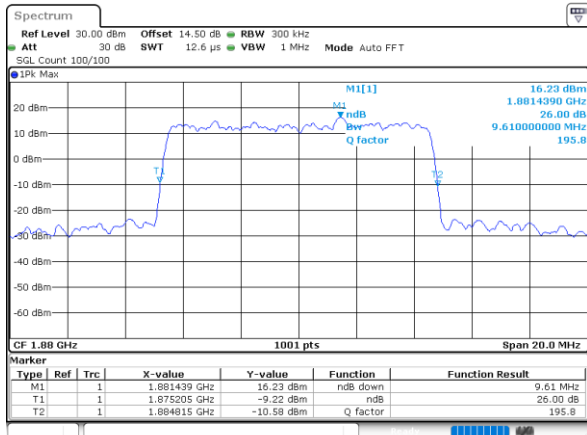


Date: 21 JUN 2024 11:39:22

Middle Channel / 10MHz / 16QAM

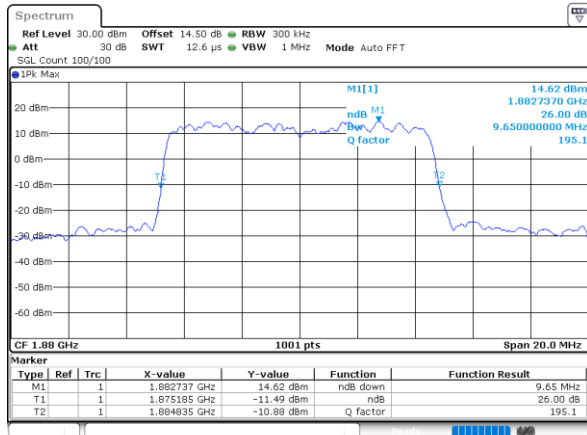


Date: 21 JUN 2024 11:40:02

Middle Channel / 15MHz / QPSK

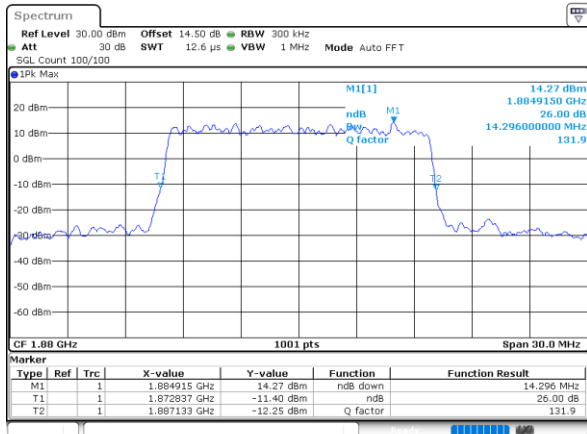


Date: 21 JUN 2024 12:01:41

Middle Channel / 15MHz / 16QAM

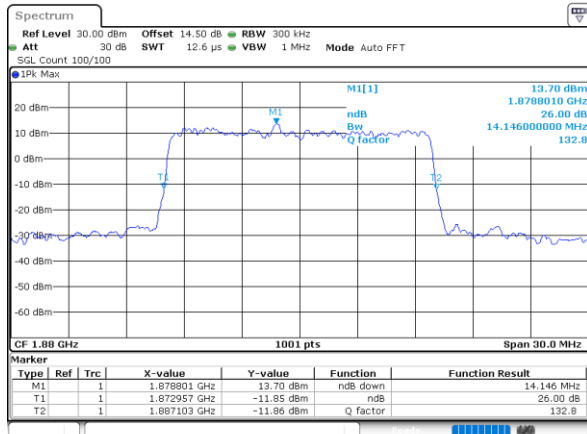


Date: 21 JUN 2024 12:02:21

Middle Channel / 20MHz / QPSK

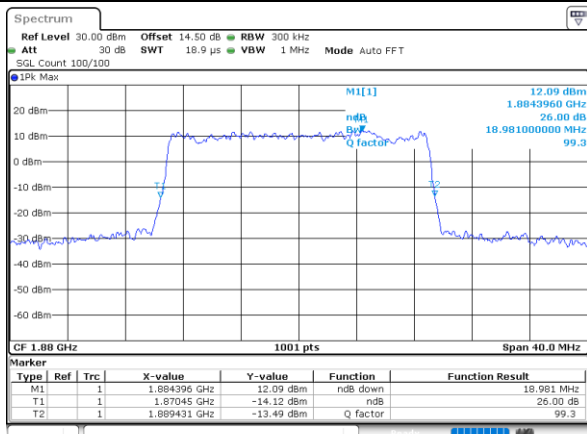

Date: 21 JUN 2024 13:17:03

Middle Channel / 20MHz / 16QAM

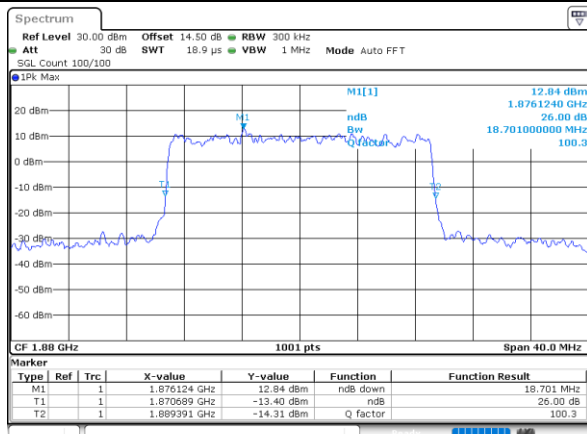

Date: 21 JUN 2024 13:17:43




Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.09	2.70	2.70	4.50	4.51	8.99	9.03	13.43	13.43	17.98	17.86




LTE Band 2

Middle Channel / 1.4MHz / QPSK

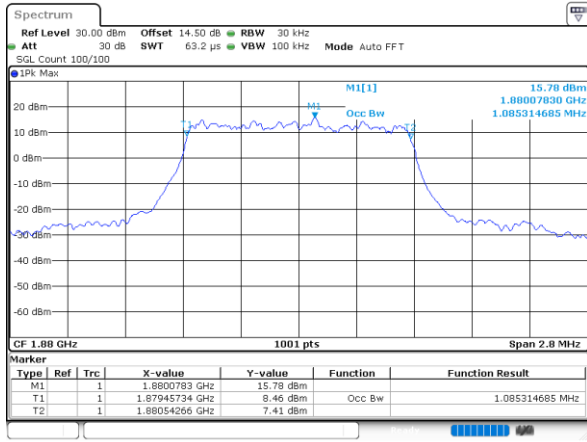


Date: 21 JUN 2024 10:29:54

Middle Channel / 1.4MHz / 16QAM

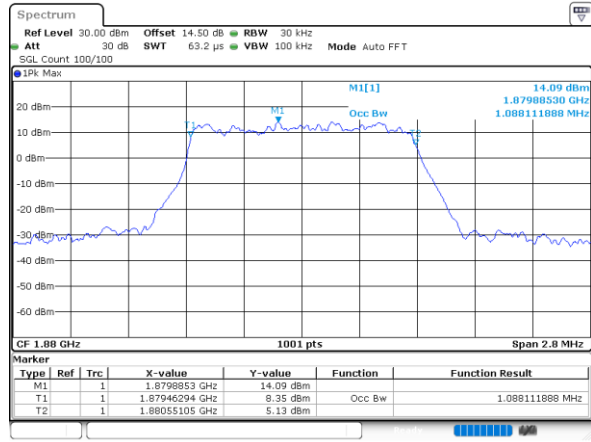


Date: 21 JUN 2024 10:30:33

Middle Channel / 3MHz / QPSK

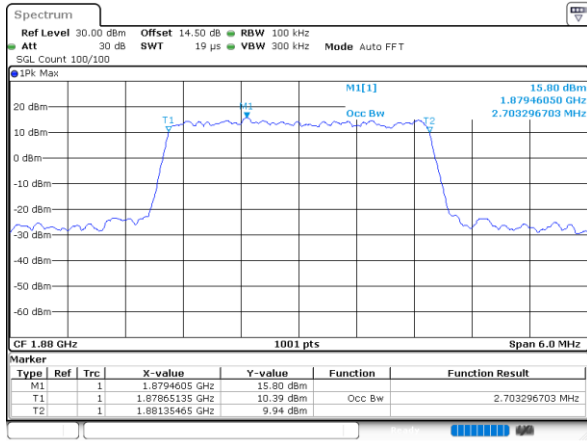


Date: 21 JUN 2024 10:50:43

Middle Channel / 3MHz / 16QAM

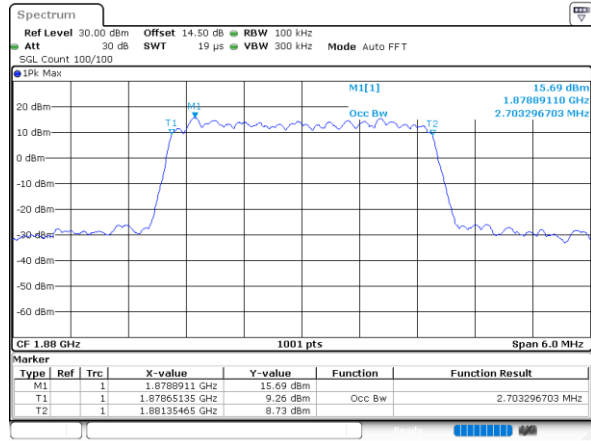


Date: 21 JUN 2024 10:51:23

Middle Channel / 5MHz / QPSK

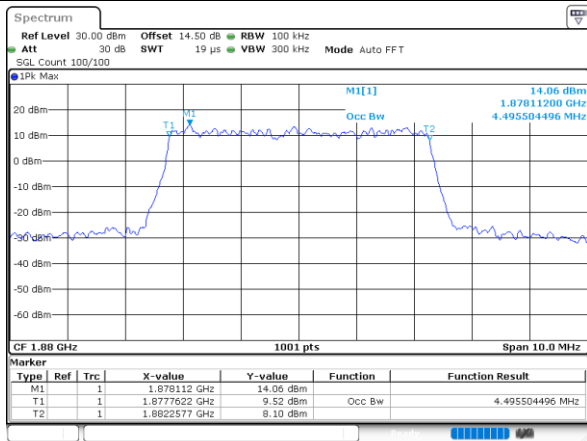

Date: 21 JUN 2024 11:15:49

Middle Channel / 5MHz / 16QAM

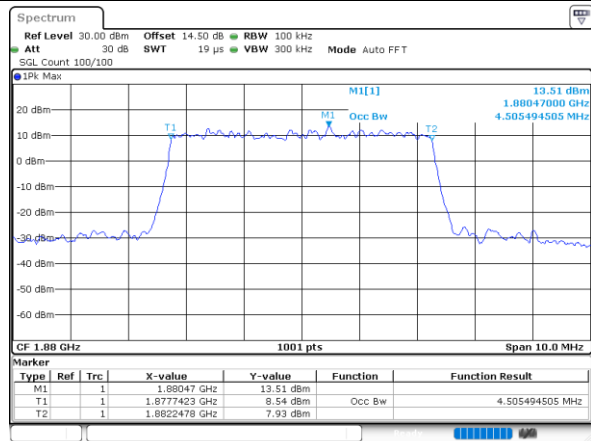


Date: 21 JUN 2024 11:16:28




LTE Band 2

Middle Channel / 10MHz / QPSK

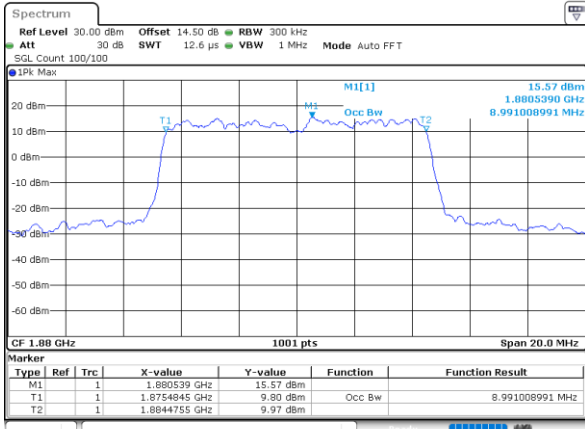


Date: 21 JUN 2024 11:39:08

Middle Channel / 10MHz / 16QAM

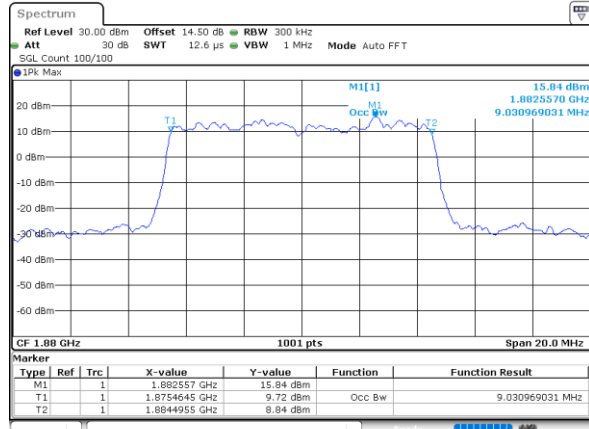


Date: 21 JUN 2024 11:39:48

Middle Channel / 15MHz / QPSK

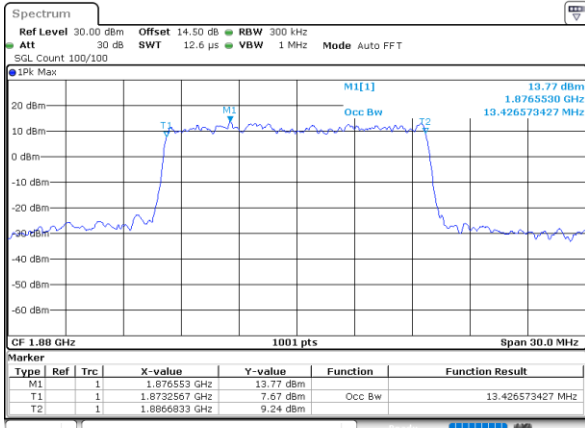


Date: 21 JUN 2024 12:01:27

Middle Channel / 15MHz / 16QAM

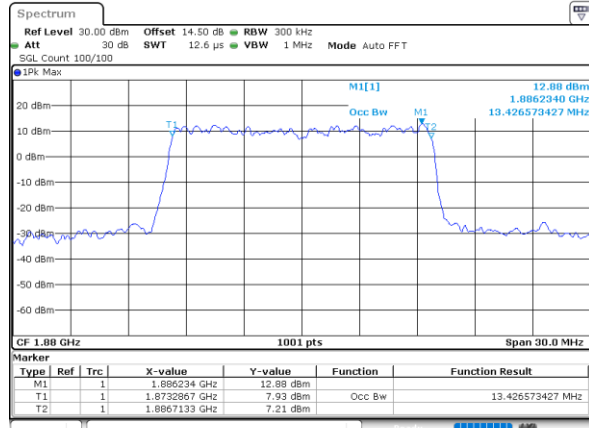


Date: 21 JUN 2024 12:02:07

Middle Channel / 20MHz / QPSK

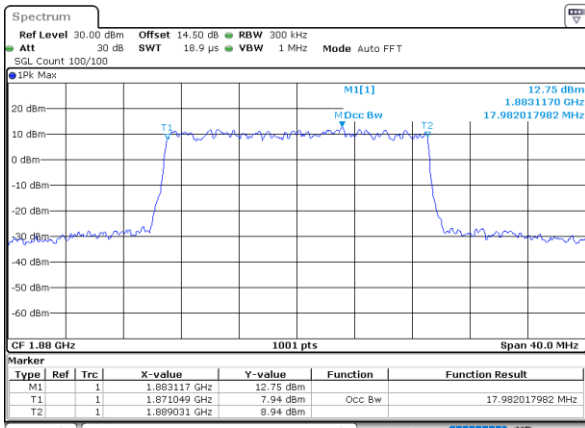

Date: 21 JUN 2024 13:16:49

Middle Channel / 20MHz / 16QAM

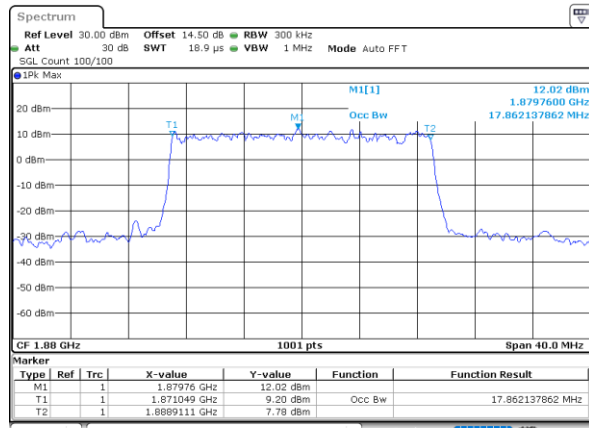


Date: 21 JUN 2024 13:17:29



Conducted Band Edge


LTE Band 2 / 1.4MHz / QPSK

Lowest Band Edge / 1RB

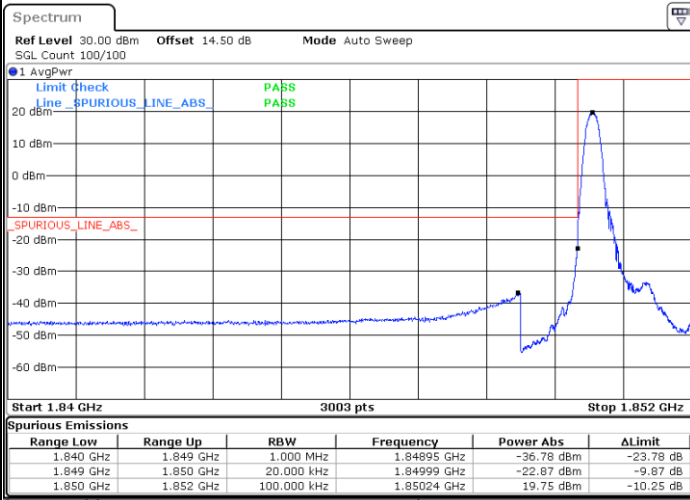


Date: 21.JUN.2024 10:21:41

Highest Band Edge / 1RB

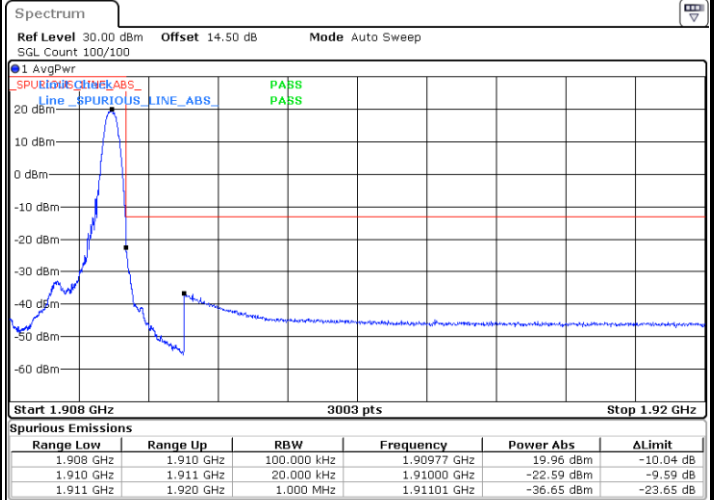


Date: 21.JUN.2024 10:31:52

Lowest Band Edge / Full RB

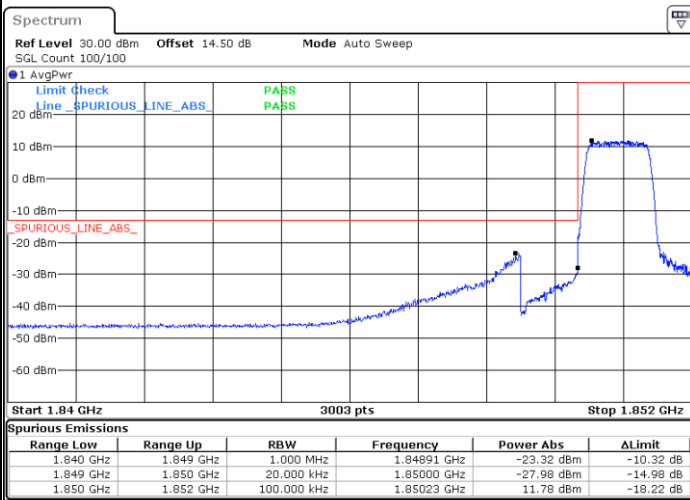

Date: 21.JUN.2024 10:26:07

Highest Band Edge / Full RB

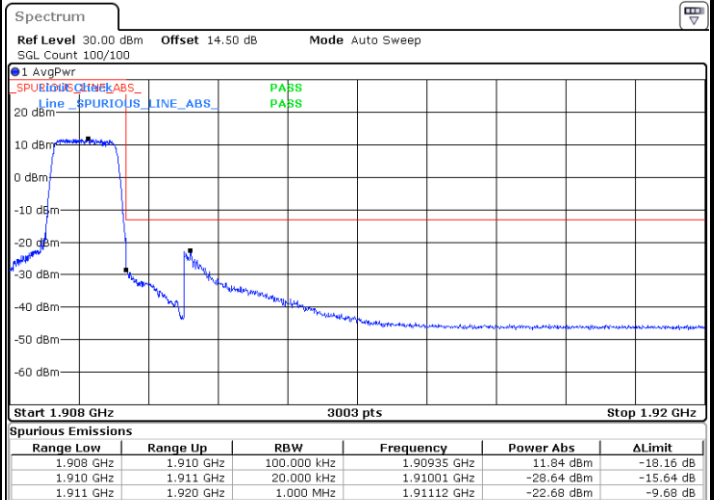


Date: 21.JUN.2024 10:36:18




LTE Band 2 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

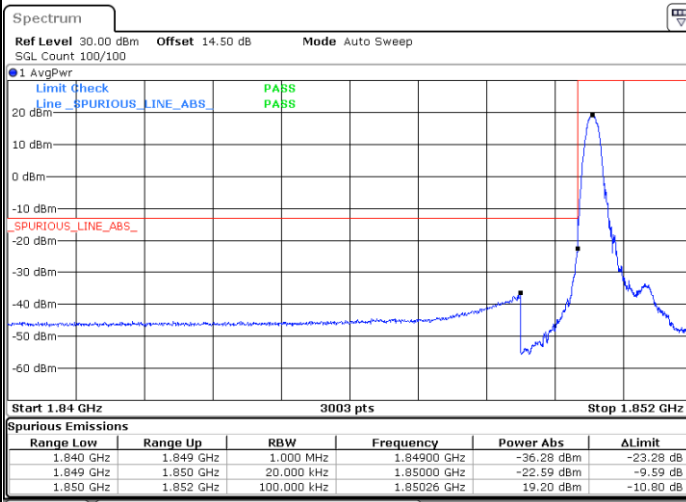


Date: 21.JUN.2024 10:22:47

Highest Band Edge / 1 RB

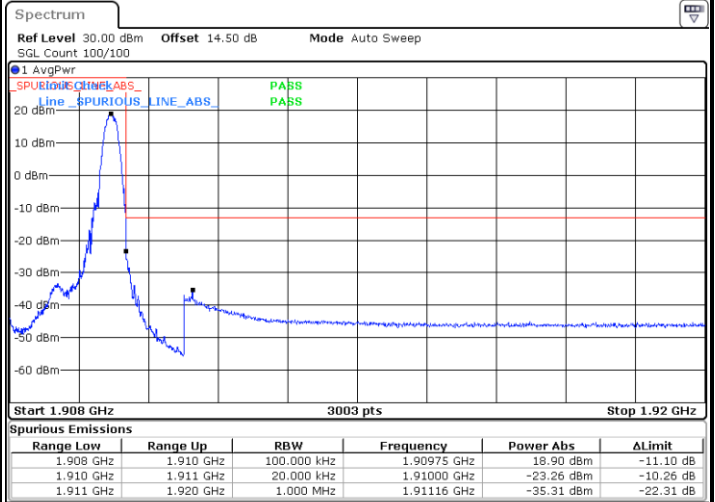


Date: 21.JUN.2024 10:32:57

Lowest Band Edge / Full RB

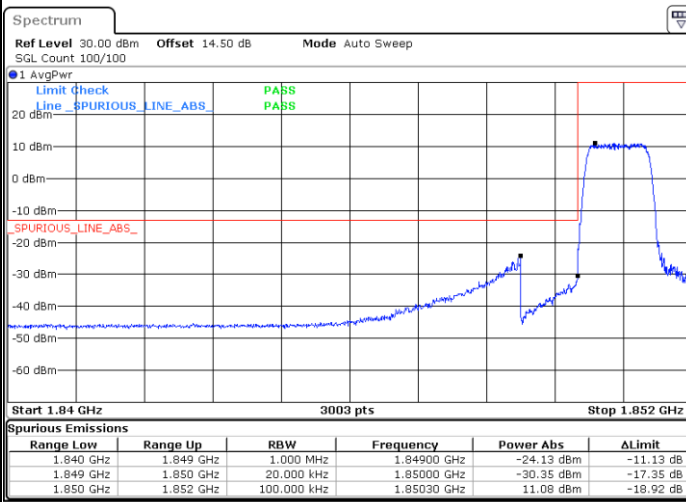

Date: 21.JUN.2024 10:27:13

Highest Band Edge / Full RB

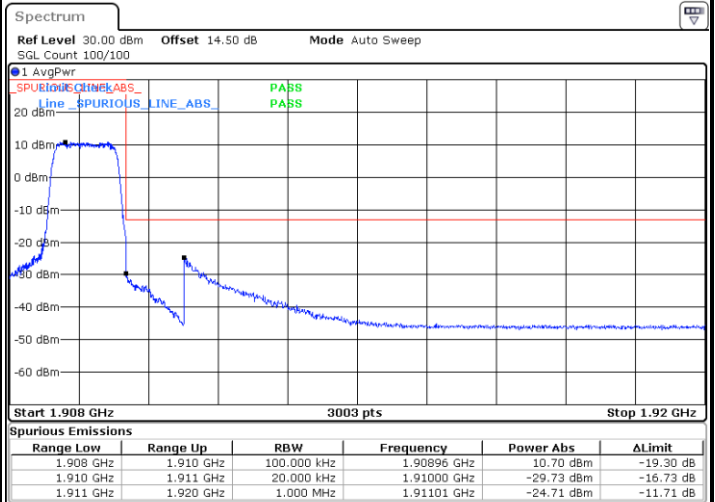


Date: 21.JUN.2024 10:37:23




LTE Band 2 / 1.4MHz / 64QAM

Lowest Band Edge / 1 RB

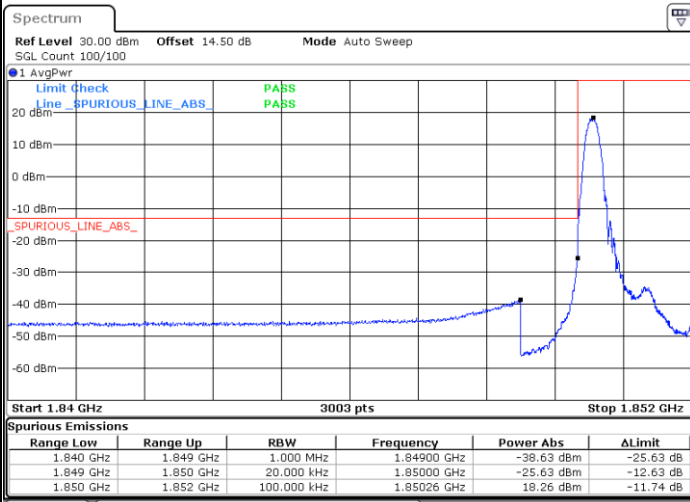


Date: 21.JUN.2024 10:23:52

Highest Band Edge / 1 RB

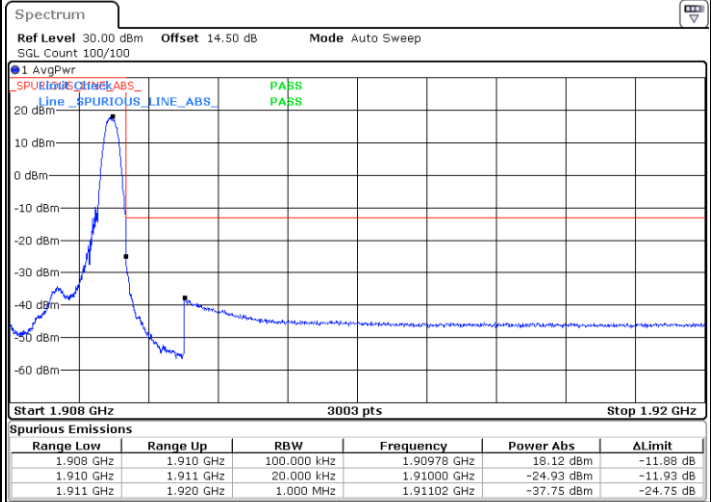


Date: 21.JUN.2024 10:34:03

Lowest Band Edge / Full RB

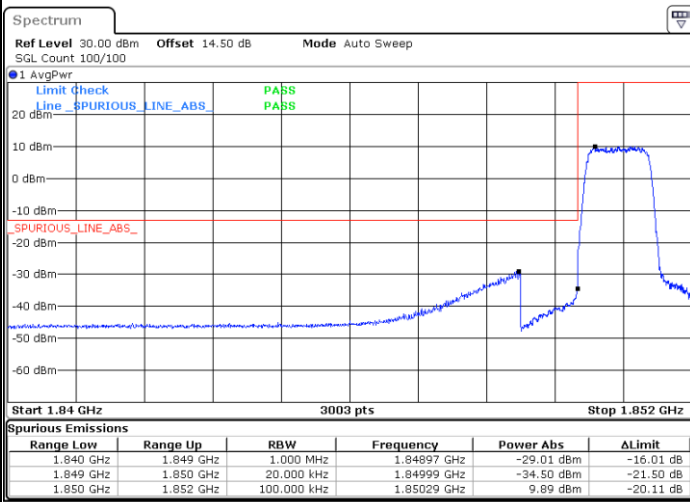

Date: 21.JUN.2024 10:28:18

Highest Band Edge / Full RB

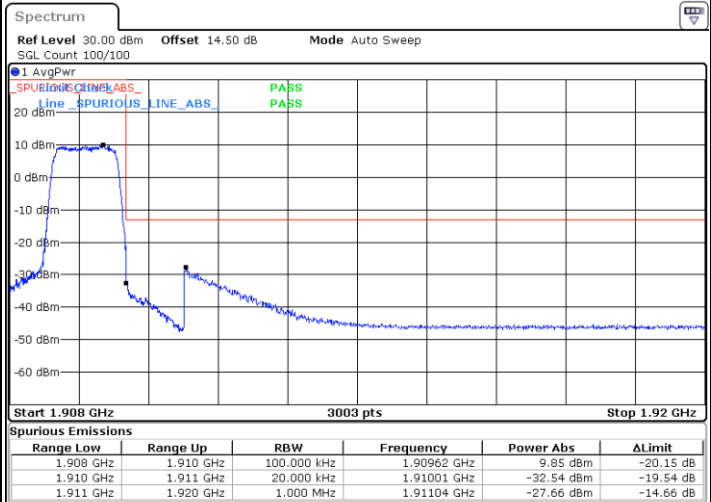


Date: 21.JUN.2024 10:38:29




LTE Band 2 / 3MHz / QPSK

Lowest Band Edge / 1RB

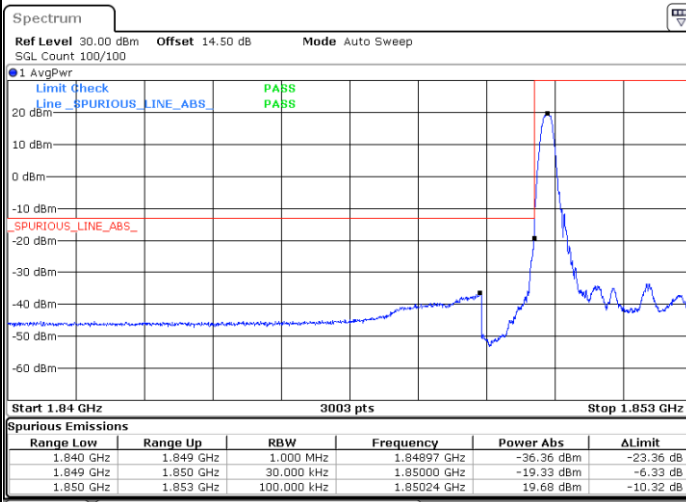


Date: 21.JUN.2024 10:42:31

Highest Band Edge / 1RB

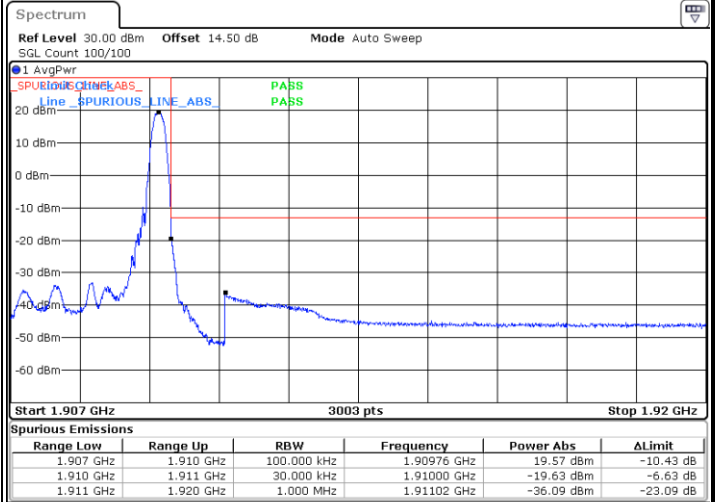


Date: 21.JUN.2024 10:52:41

Lowest Band Edge / Full RB

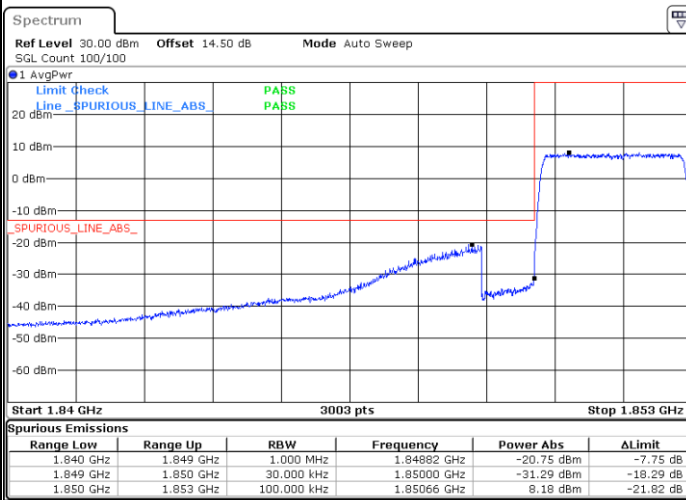

Date: 21.JUN.2024 10:46:57

Highest Band Edge / Full RB

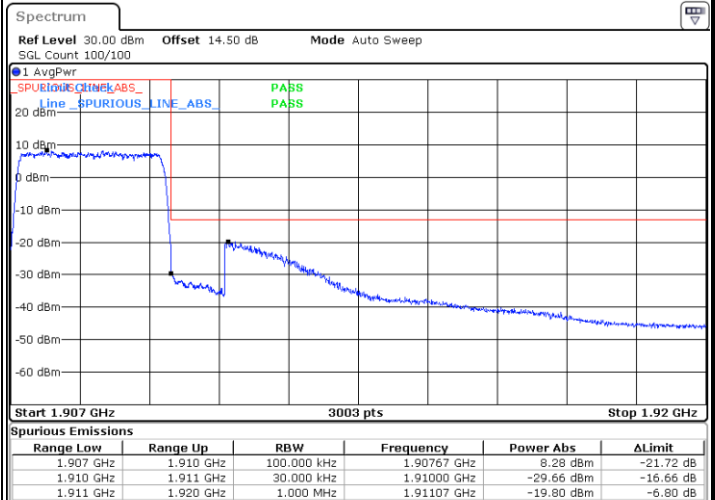


Date: 21.JUN.2024 10:55:58




LTE Band 2 / 3MHz / 16QAM

Lowest Band Edge / 1 RB

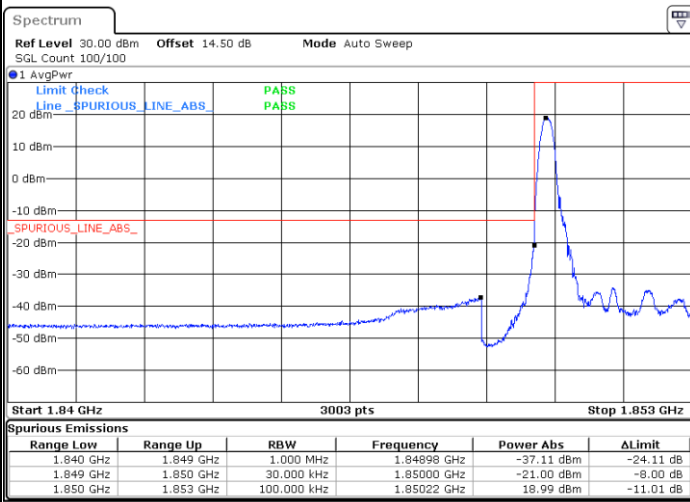


Date: 21.JUN.2024 10:43:36

Highest Band Edge / 1 RB

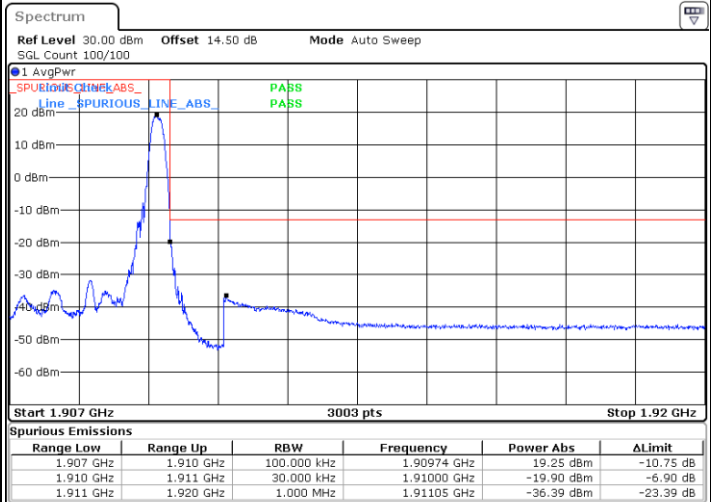


Date: 21.JUN.2024 10:53:47

Lowest Band Edge / Full RB

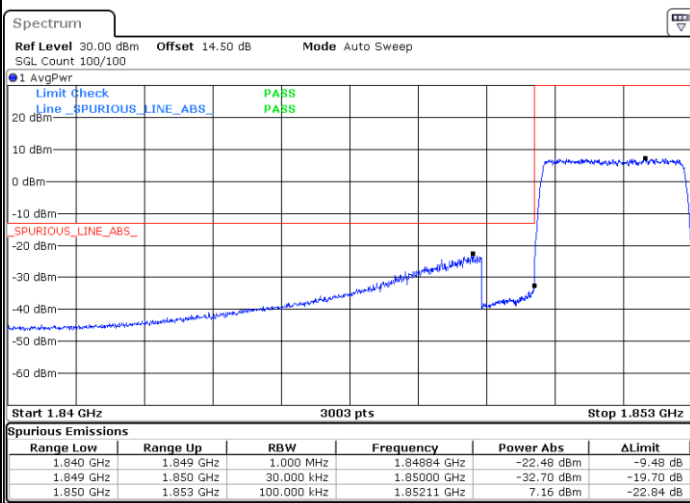

Date: 21.JUN.2024 10:48:02

Highest Band Edge / Full RB

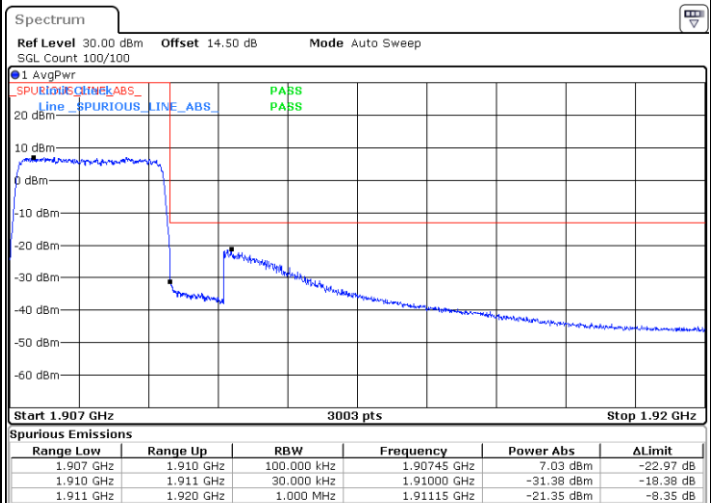


Date: 21.JUN.2024 10:57:03




LTE Band 2 / 3MHz / 64QAM

Lowest Band Edge / 1 RB

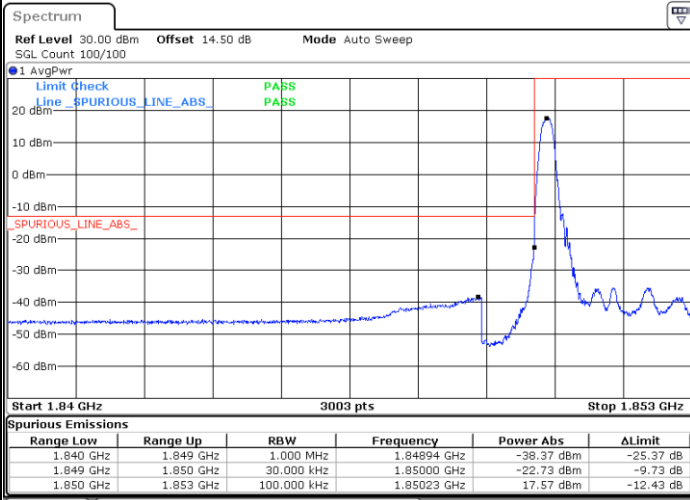


Date: 21.JUN.2024 10:44:41

Highest Band Edge / 1 RB

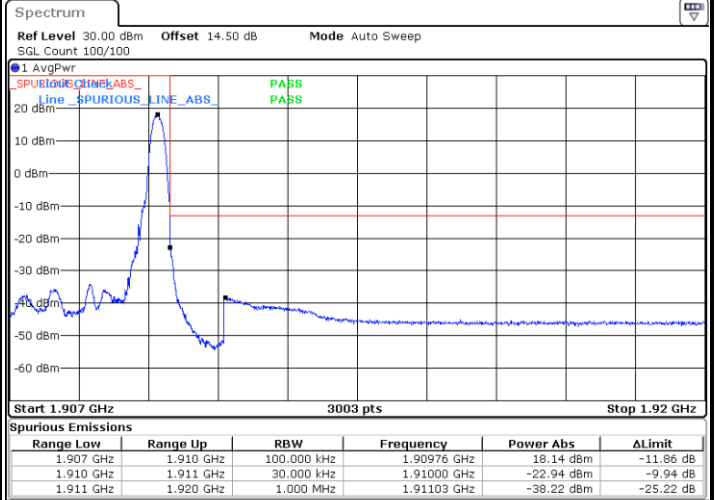


Date: 21.JUN.2024 10:54:52

Lowest Band Edge / Full RB

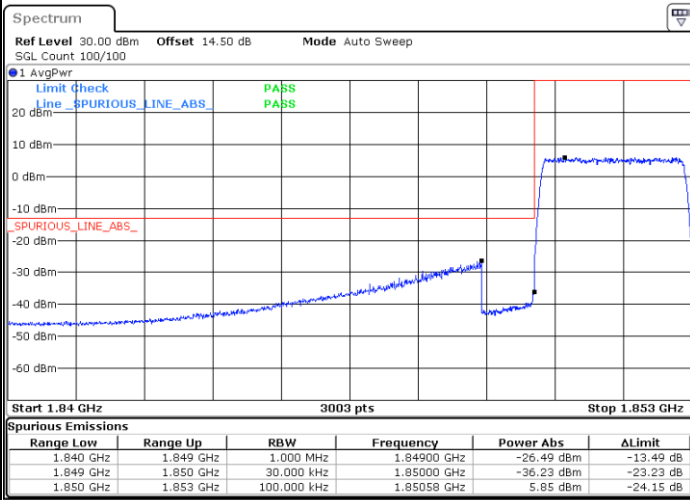

Date: 21.JUN.2024 10:49:07

Highest Band Edge / Full RB

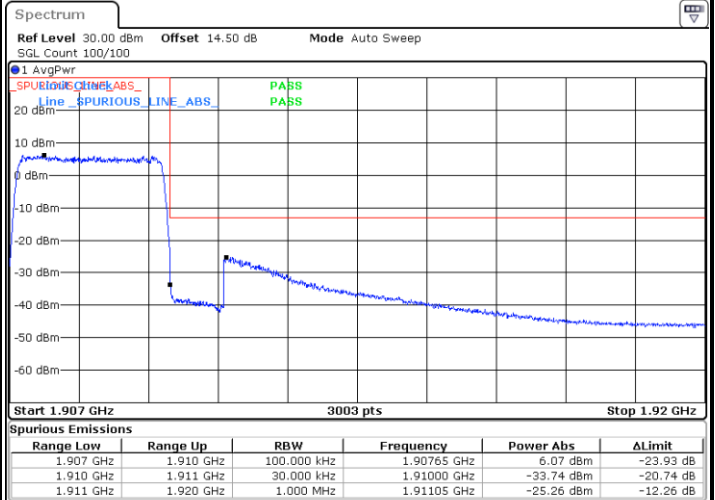


Date: 21.JUN.2024 10:58:08




LTE Band 2 / 5MHz / QPSK

Lowest Band Edge / 1RB

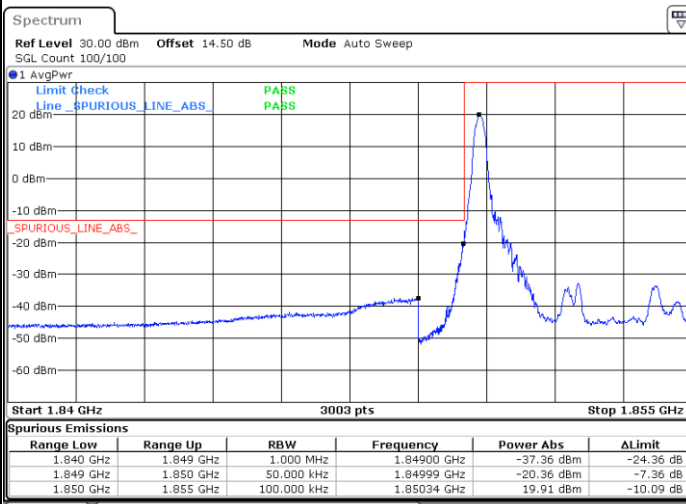


Date: 21.JUN.2024 11:08:12

Highest Band Edge / 1RB

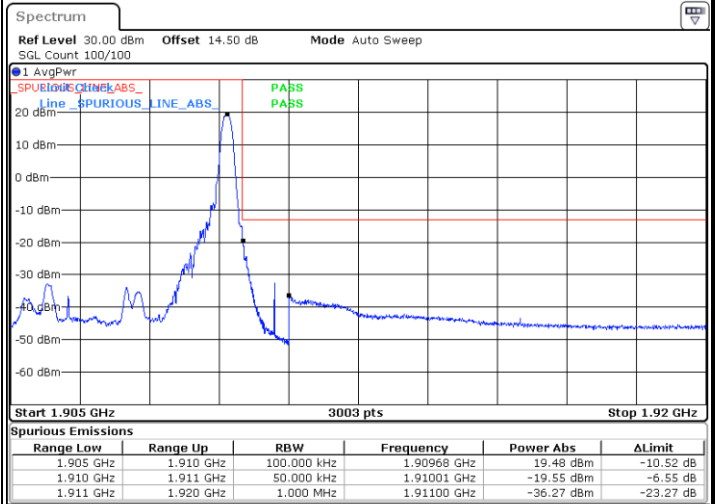


Date: 21.JUN.2024 11:17:42

Lowest Band Edge / Full RB

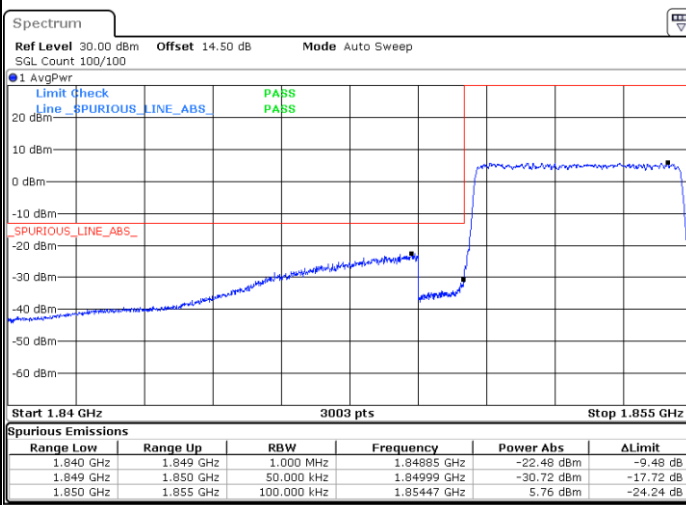

Date: 21.JUN.2024 11:12:18

Highest Band Edge / Full RB

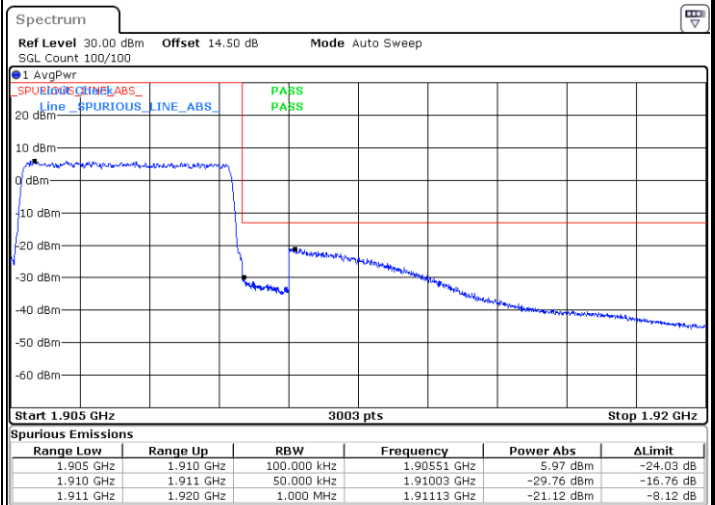


Date: 21.JUN.2024 11:20:44




LTE Band 2 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

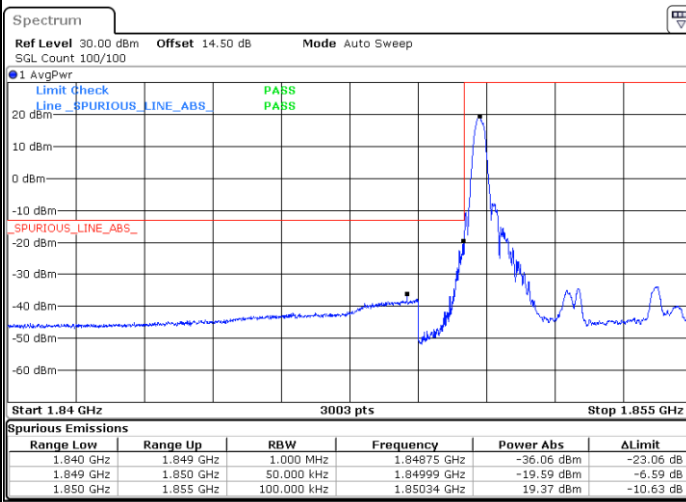


Date: 21.JUN.2024 11:09:12

Highest Band Edge / 1 RB

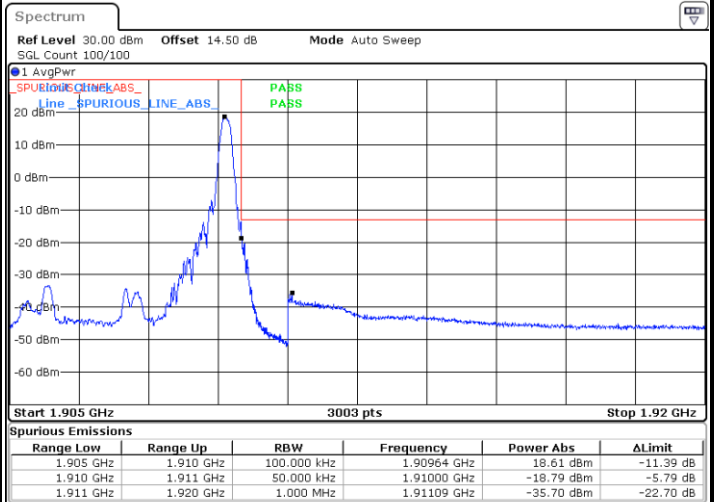


Date: 21.JUN.2024 11:18:42

Lowest Band Edge / Full RB

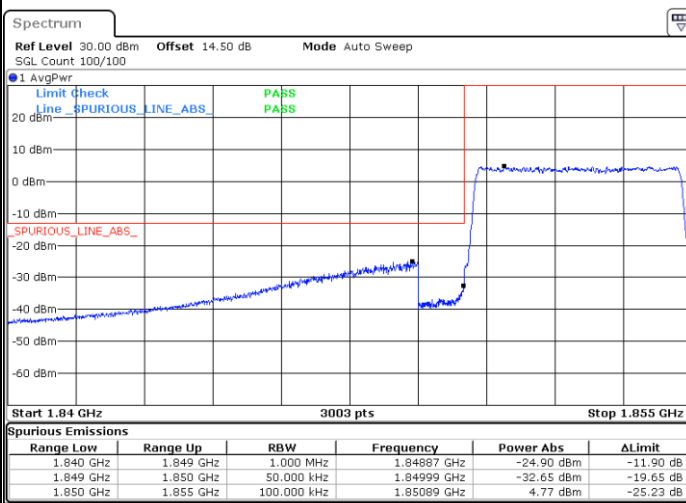

Date: 21.JUN.2024 11:13:18

Highest Band Edge / Full RB

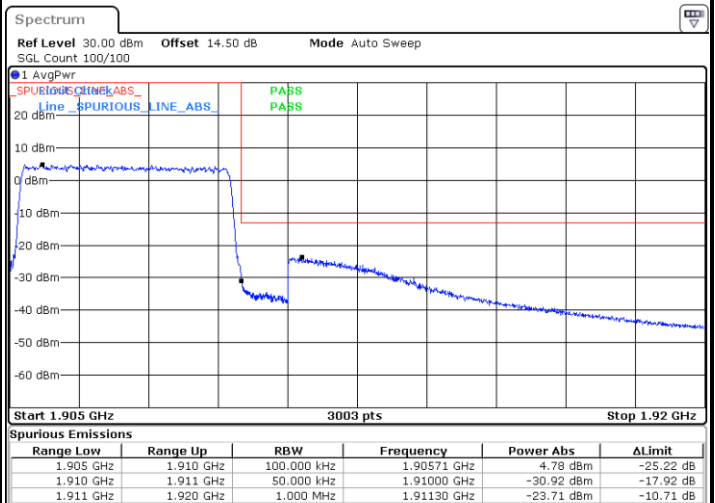


Date: 21.JUN.2024 11:21:44




LTE Band 2 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

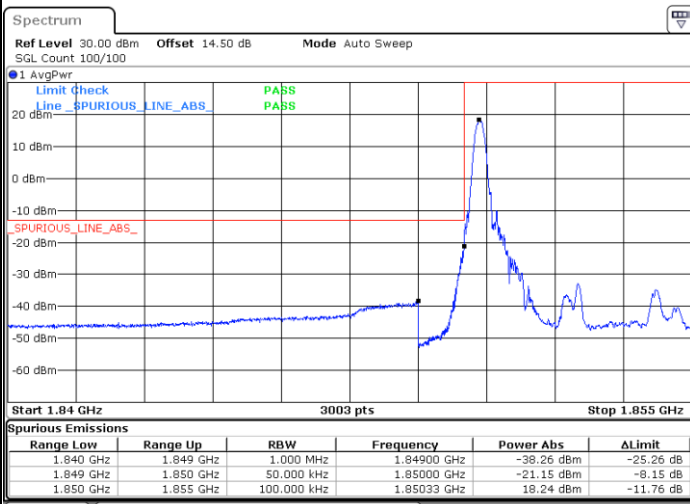


Date: 21.JUN.2024 11:10:13

Highest Band Edge / 1 RB

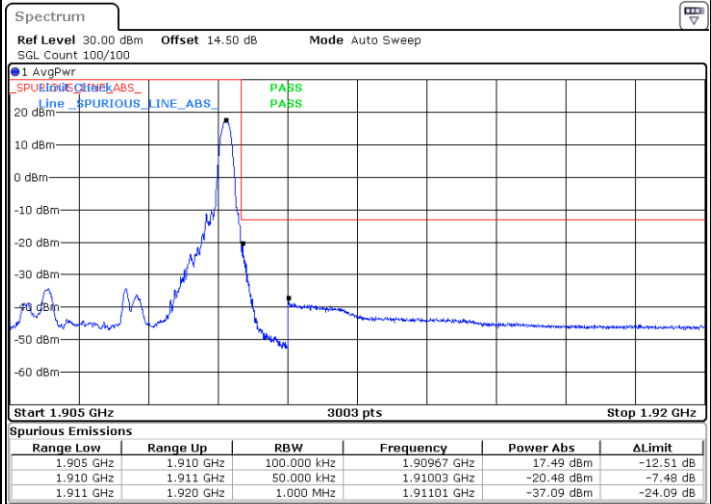


Date: 21.JUN.2024 11:19:43

Lowest Band Edge / Full RB

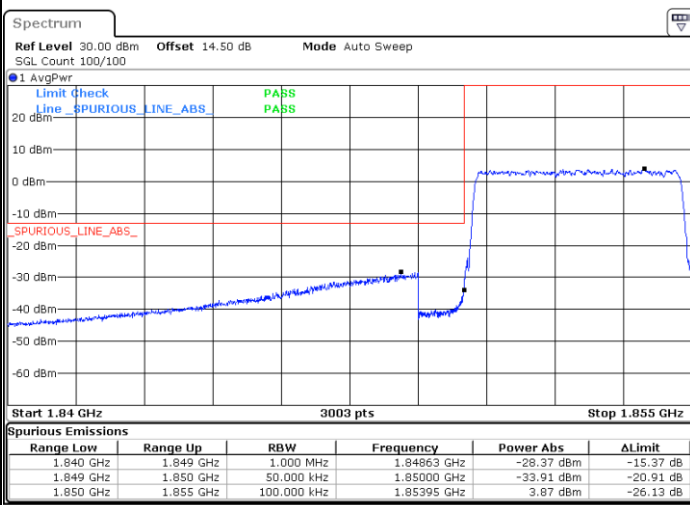

Date: 21.JUN.2024 11:14:19

Highest Band Edge / Full RB

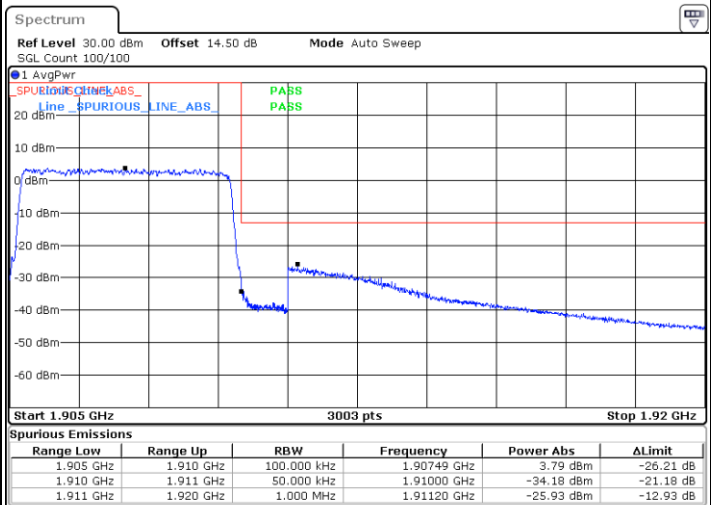


Date: 21.JUN.2024 11:22:45




LTE Band 2 / 10MHz / QPSK

Lowest Band Edge / 1RB

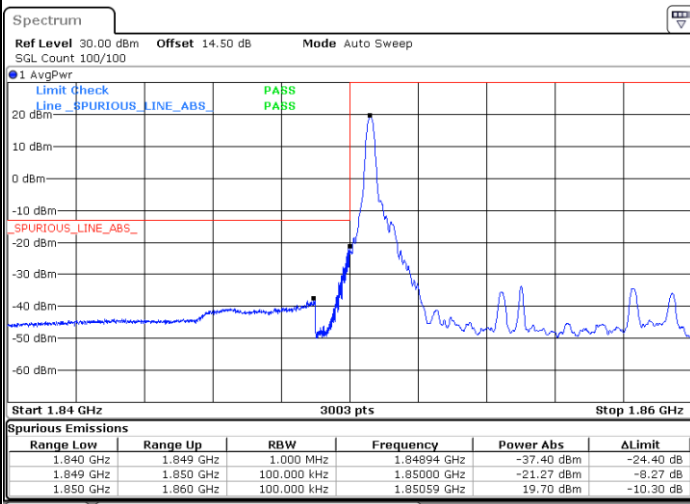


Date: 21.JUN.2024 11:31:22

Highest Band Edge / 1RB

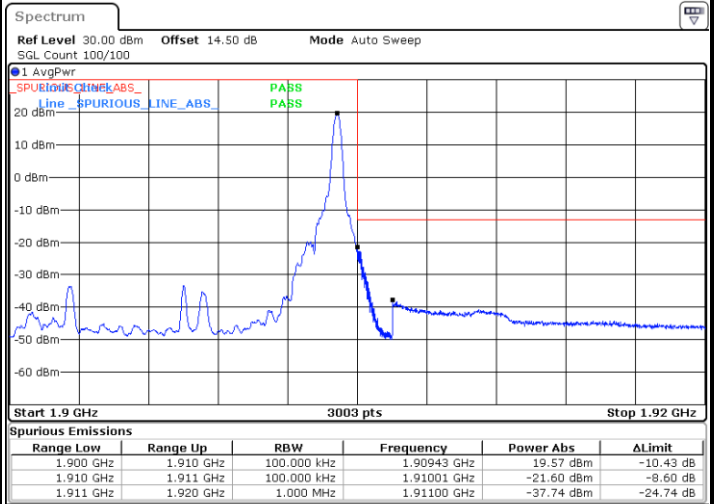


Date: 21.JUN.2024 11:41:02

Lowest Band Edge / Full RB

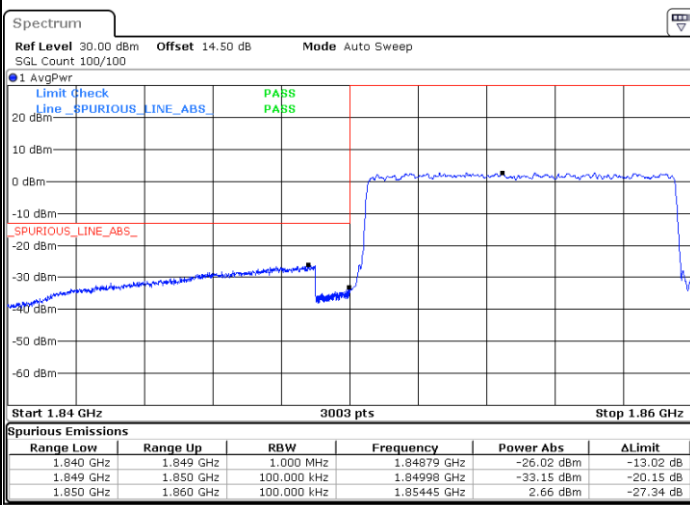

Date: 21.JUN.2024 11:34:27

Highest Band Edge / Full RB

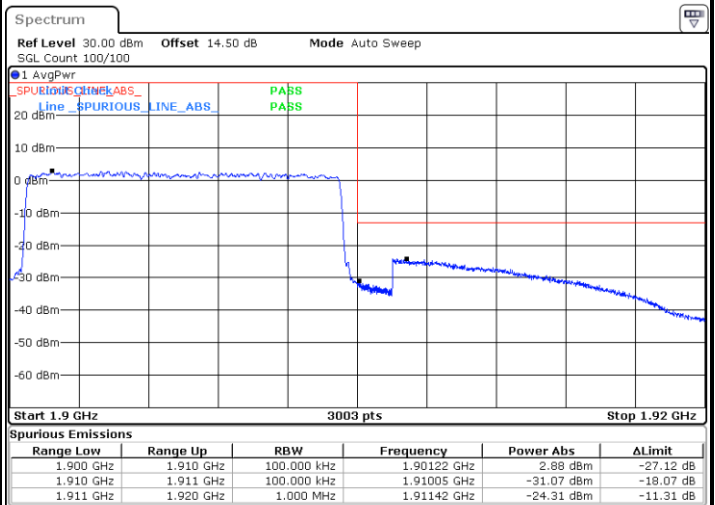


Date: 21.JUN.2024 11:44:07




LTE Band 2 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

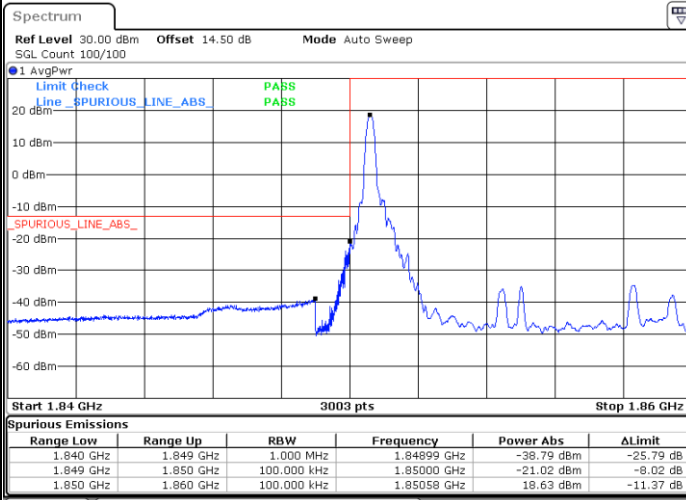


Date: 21.JUN.2024 11:32:24

Highest Band Edge / 1 RB

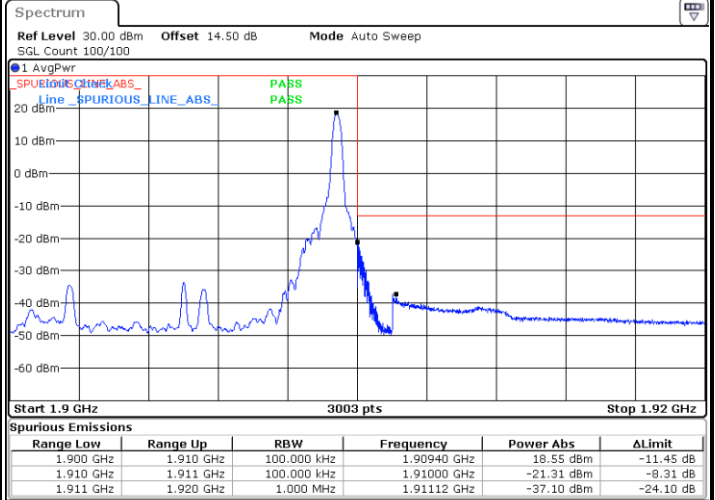


Date: 21.JUN.2024 11:42:04

Lowest Band Edge / Full RB

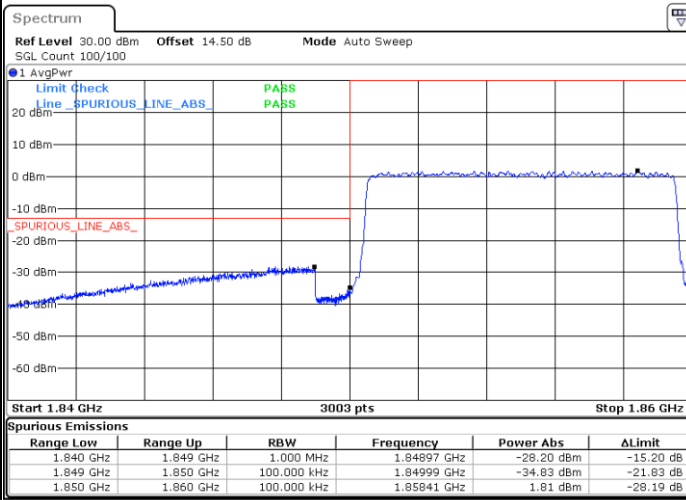

Date: 21.JUN.2024 11:35:28

Highest Band Edge / Full RB

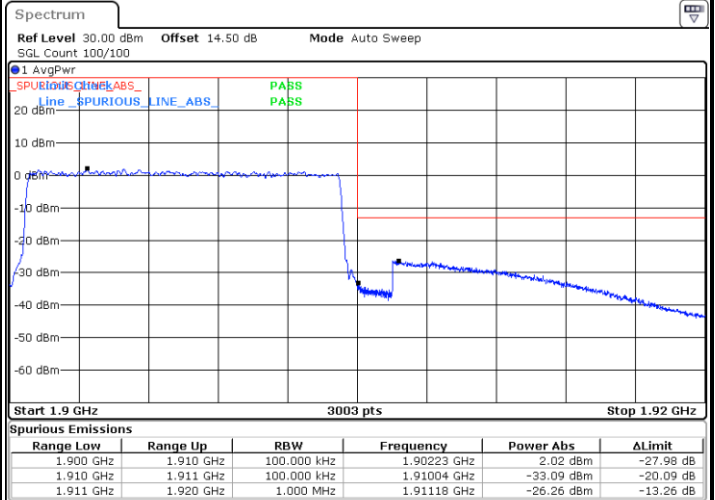


Date: 21.JUN.2024 11:45:08




LTE Band 2 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

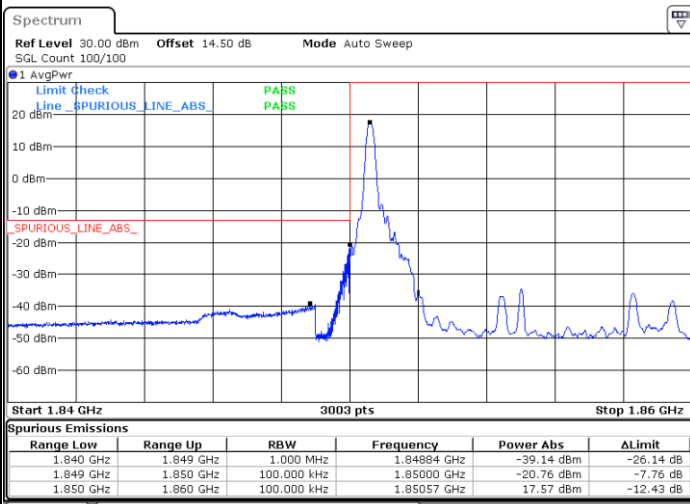


Date: 21.JUN.2024 11:33:25

Highest Band Edge / 1 RB

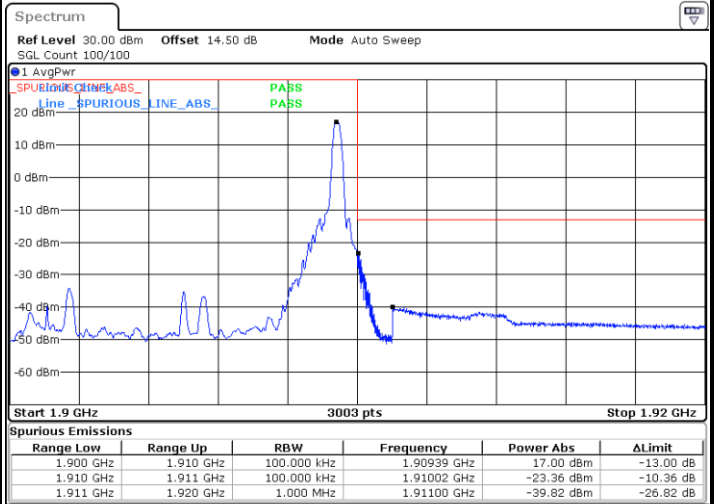


Date: 21.JUN.2024 11:43:05

Lowest Band Edge / Full RB

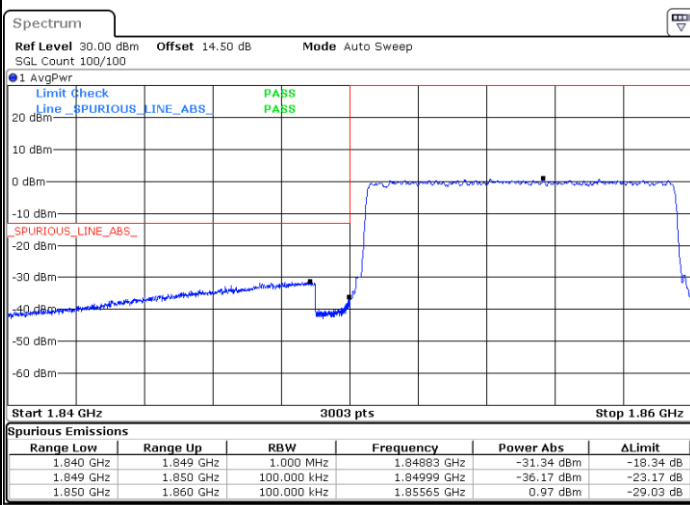

Date: 21.JUN.2024 11:36:29

Highest Band Edge / Full RB

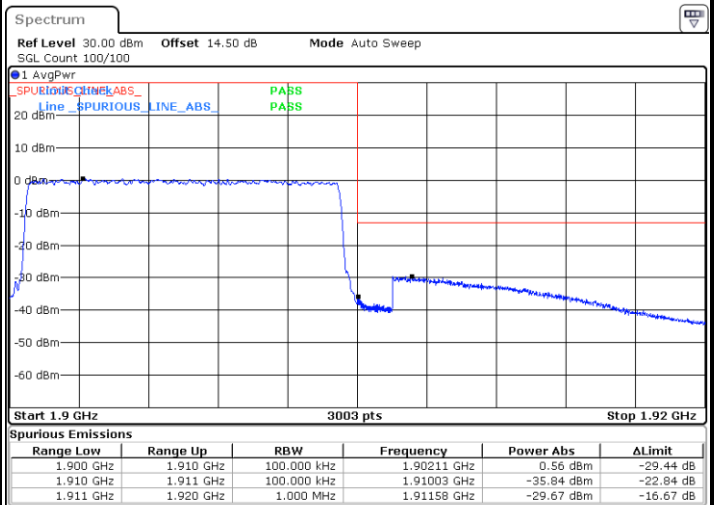


Date: 21.JUN.2024 11:46:10




LTE Band 2 / 15MHz / QPSK

Lowest Band Edge / 1RB

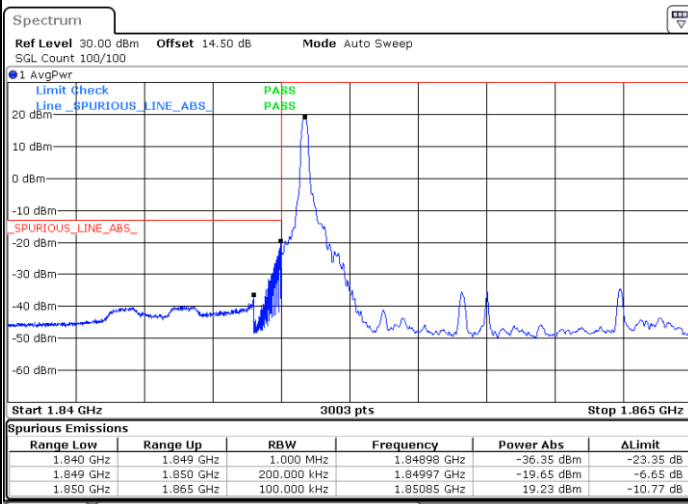


Date: 21.JUN.2024 11:53:41

Highest Band Edge / 1RB

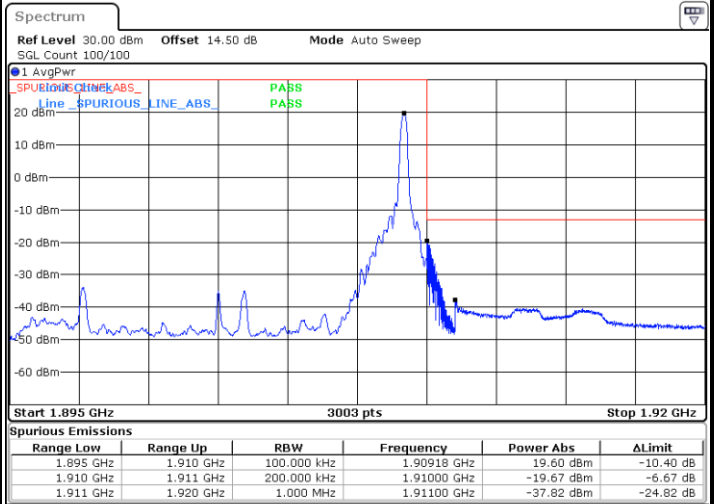


Date: 21.JUN.2024 12:03:22

Lowest Band Edge / Full RB

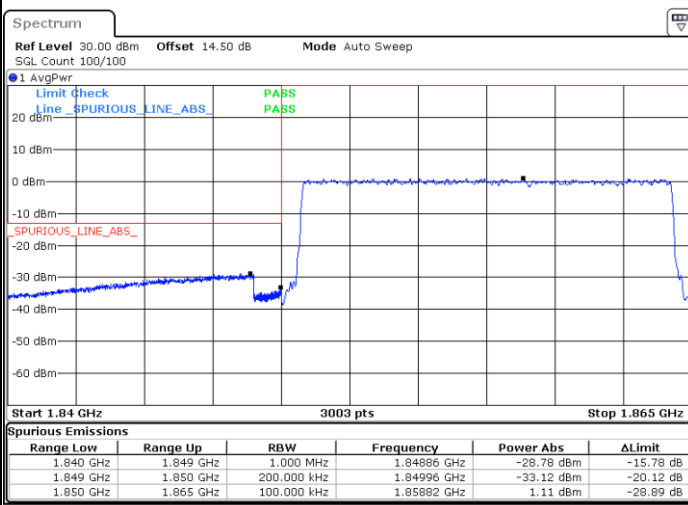

Date: 21.JUN.2024 11:56:46

Highest Band Edge / Full RB

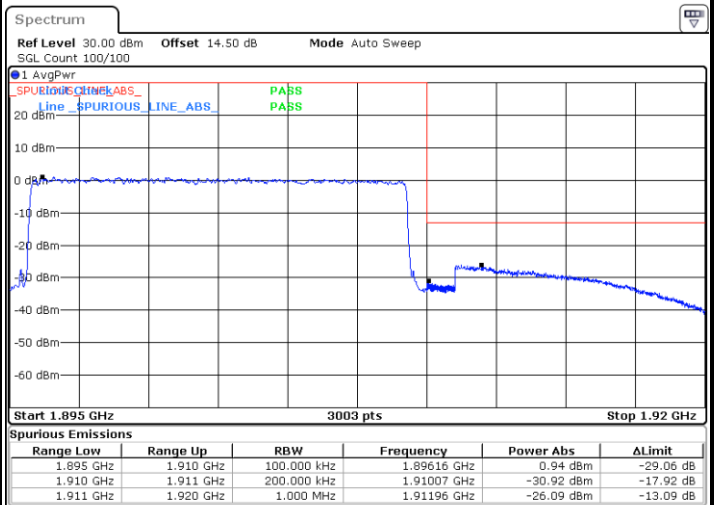


Date: 21.JUN.2024 12:06:26




LTE Band 2 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

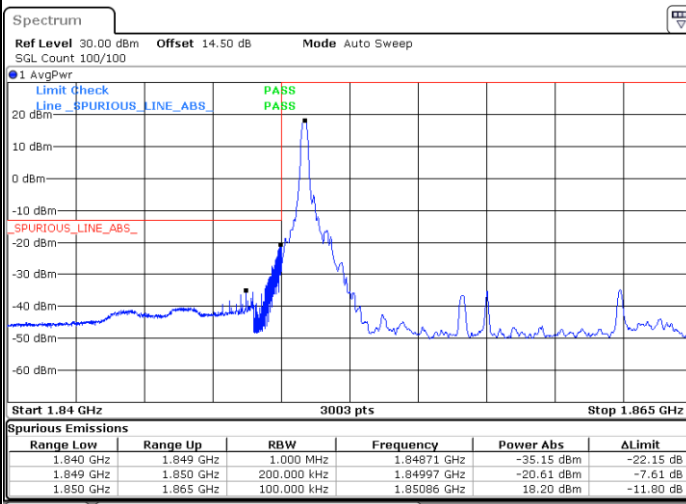


Date: 21.JUN.2024 11:54:43

Highest Band Edge / 1 RB

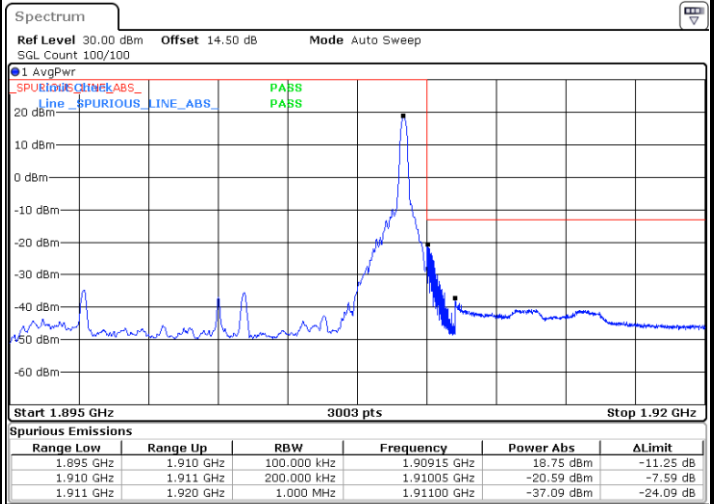


Date: 21.JUN.2024 12:04:23

Lowest Band Edge / Full RB

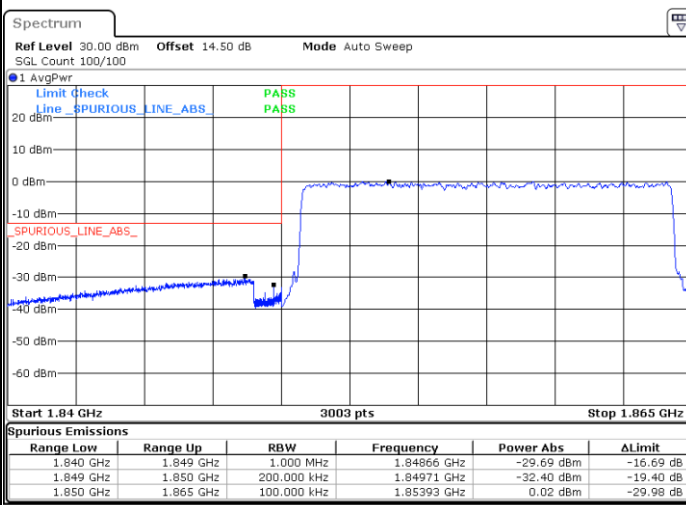

Date: 21.JUN.2024 11:57:47

Highest Band Edge / Full RB

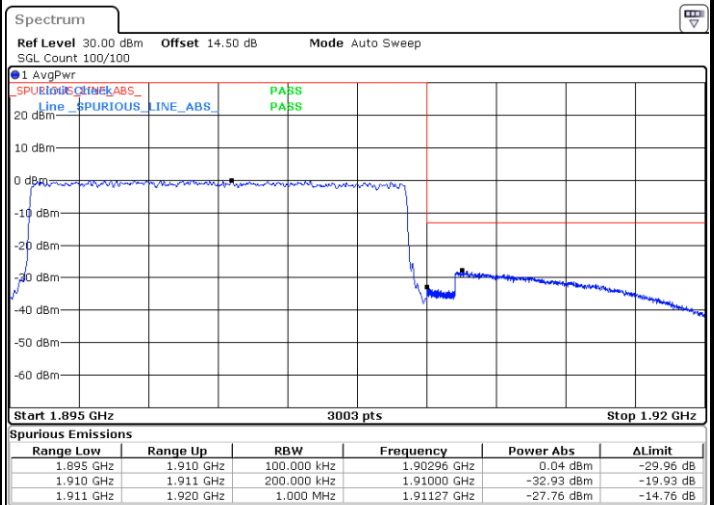


Date: 21.JUN.2024 12:07:28




LTE Band 2 / 15MHz / 64QAM

Lowest Band Edge / 1 RB

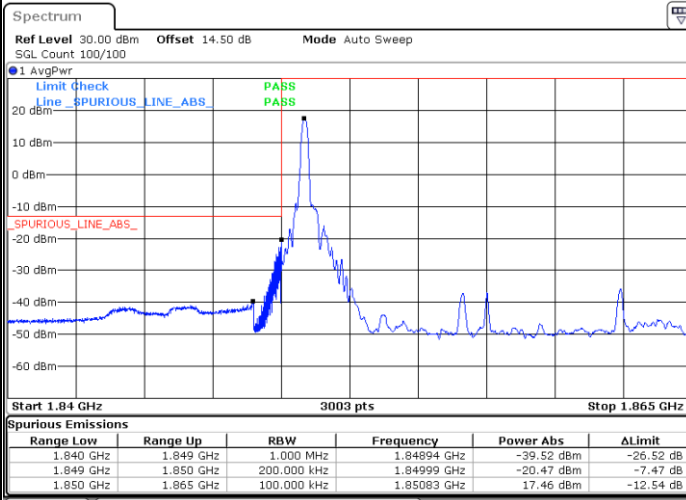


Date: 21.JUN.2024 11:55:44

Highest Band Edge / 1 RB

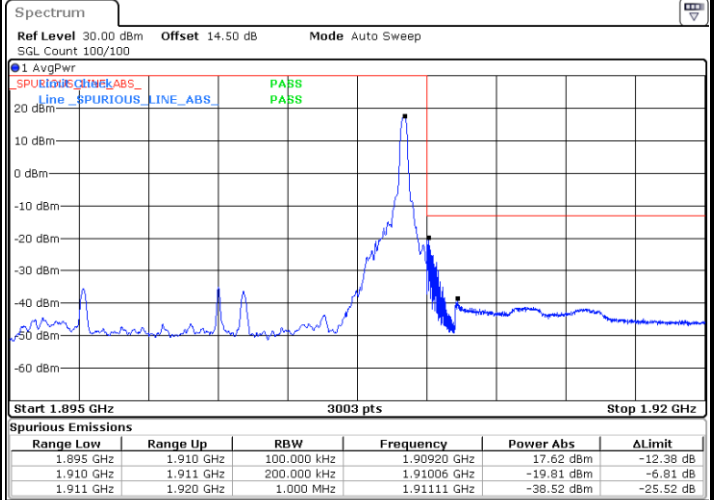


Date: 21.JUN.2024 12:05:25

Lowest Band Edge / Full RB

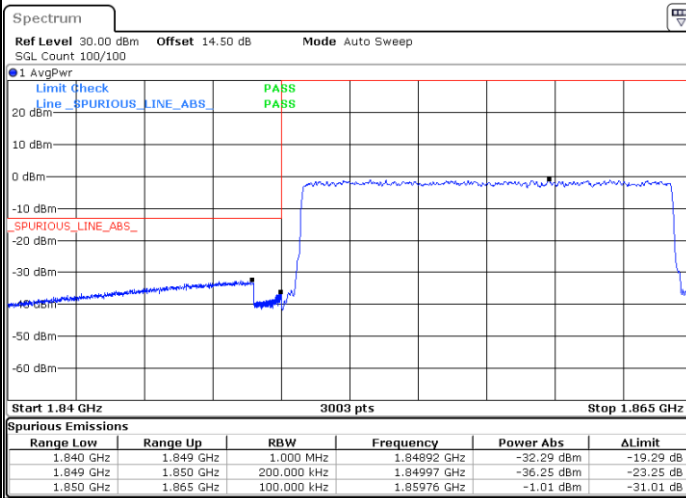

Date: 21.JUN.2024 11:58:48

Highest Band Edge / Full RB

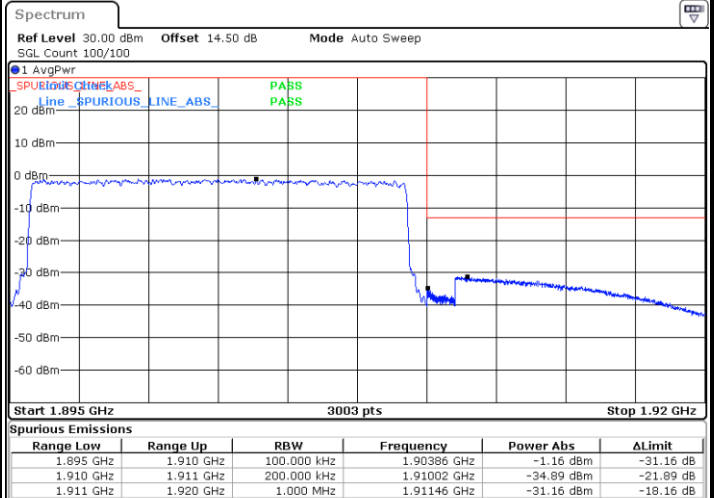


Date: 21.JUN.2024 12:08:29




LTE Band 2 / 20MHz / QPSK

Lowest Band Edge / 1RB

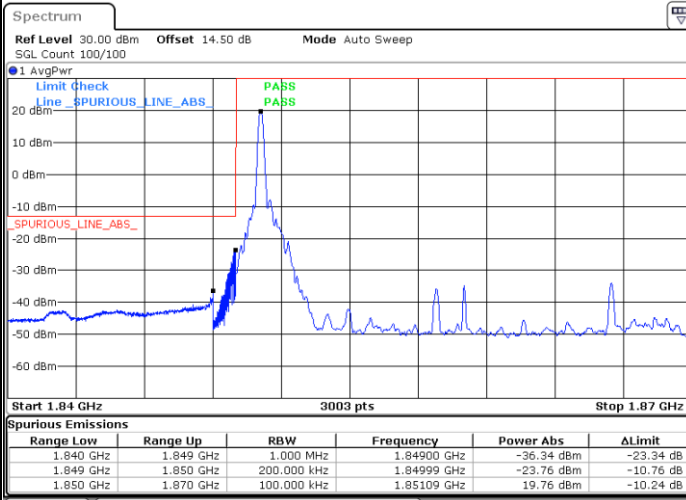


Date: 21.JUN.2024 13:09:02

Highest Band Edge / 1RB

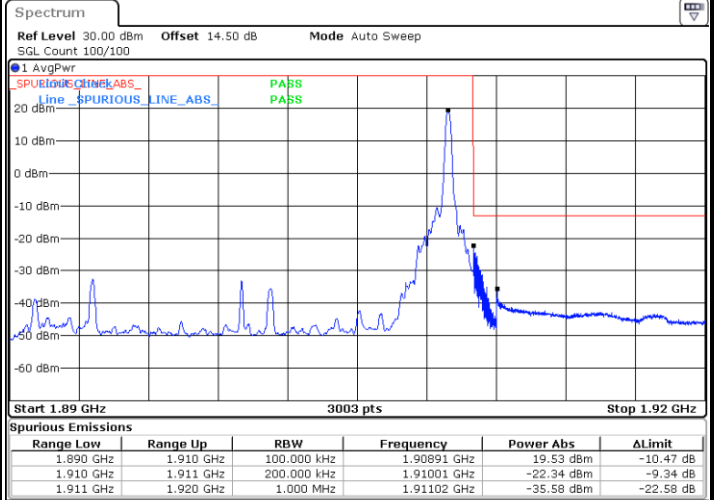


Date: 21.JUN.2024 13:20:07

Lowest Band Edge / Full RB

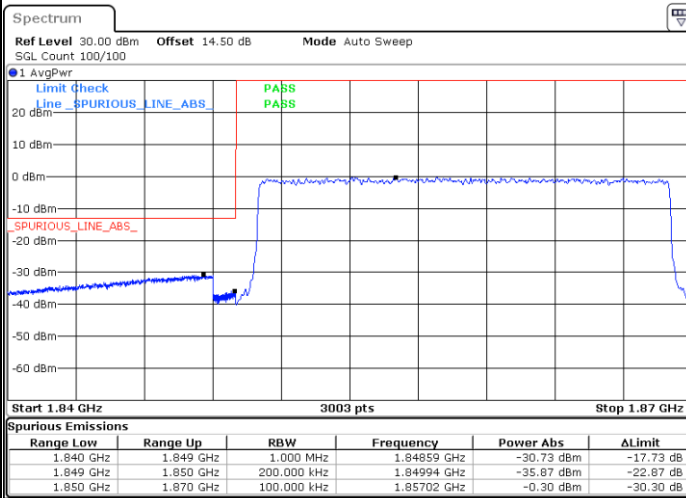

Date: 21.JUN.2024 13:12:07

Highest Band Edge / Full RB

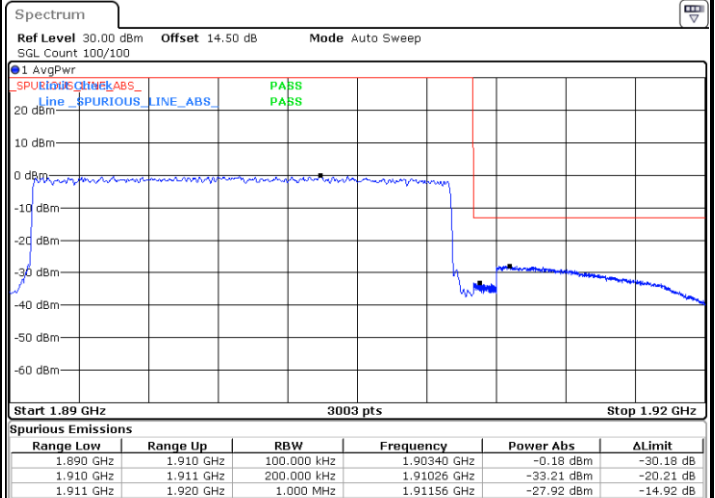


Date: 21.JUN.2024 13:23:12




LTE Band 2 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

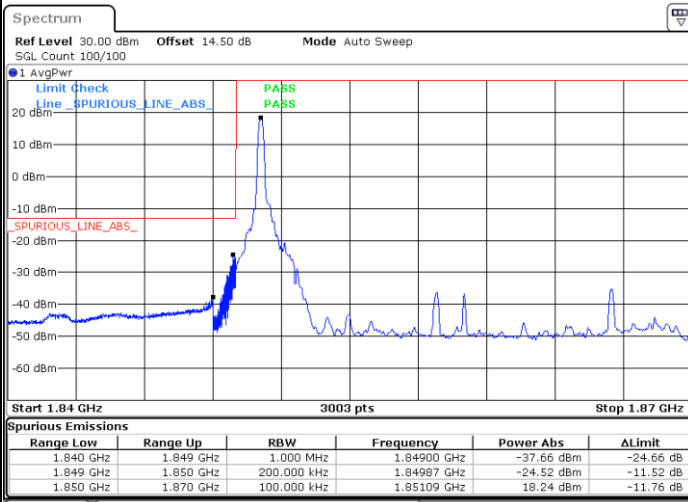


Date: 21.JUN.2024 13:10:03

Highest Band Edge / 1 RB

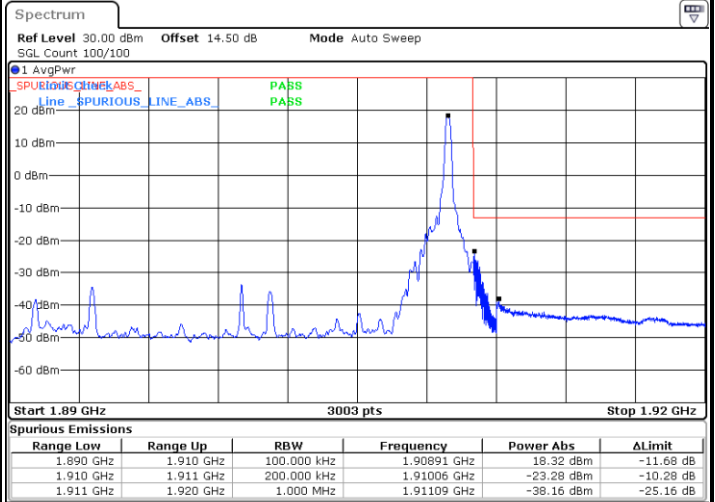


Date: 21.JUN.2024 13:21:09

Lowest Band Edge / Full RB

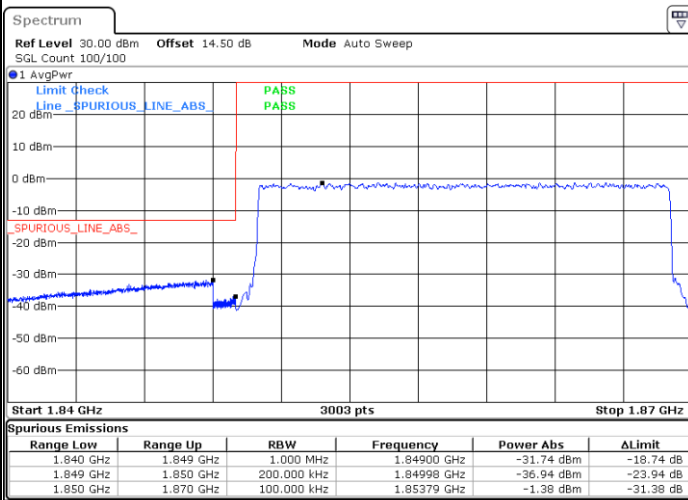

Date: 21.JUN.2024 13:13:08

Highest Band Edge / Full RB

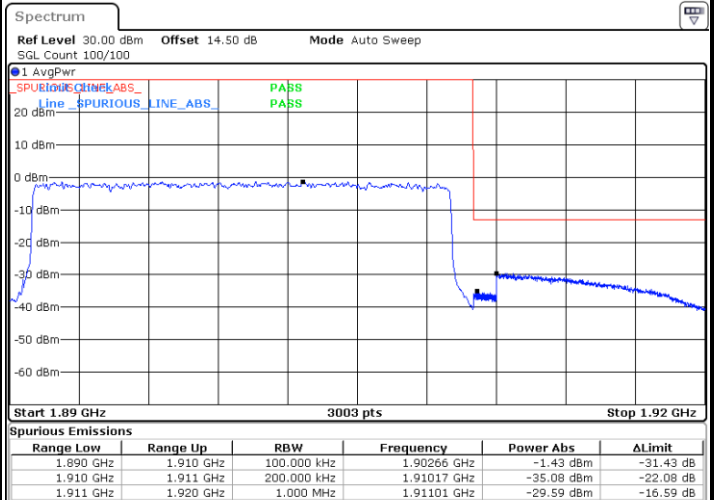

Date: 21.JUN.2024 13:24:14