

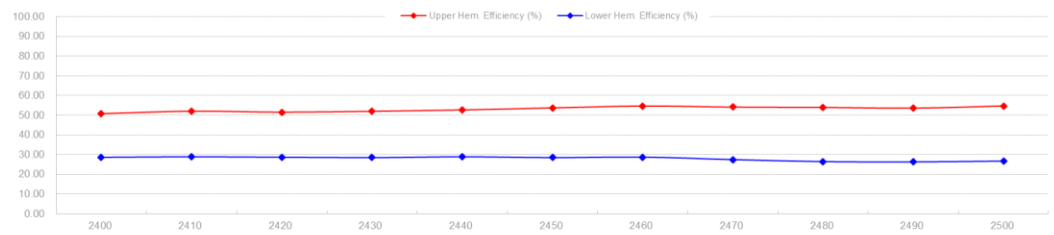
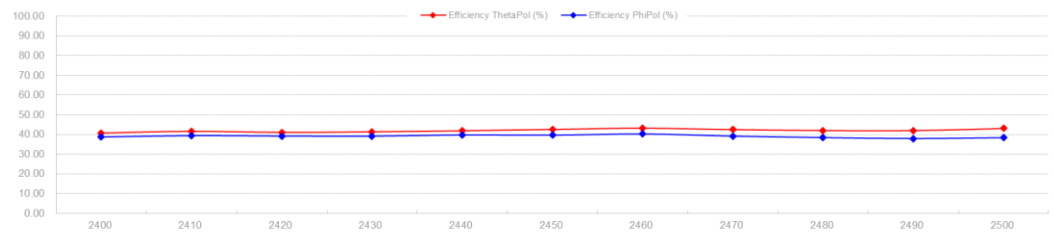
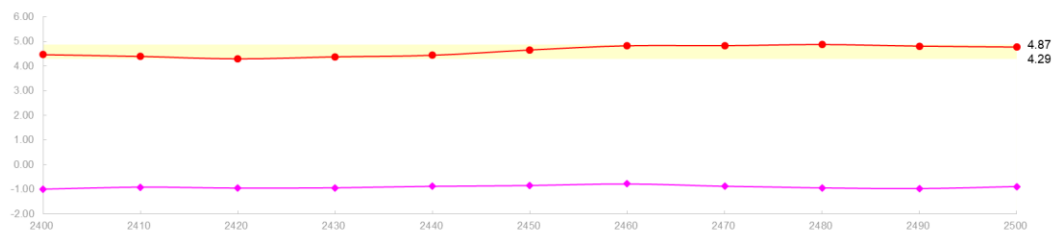
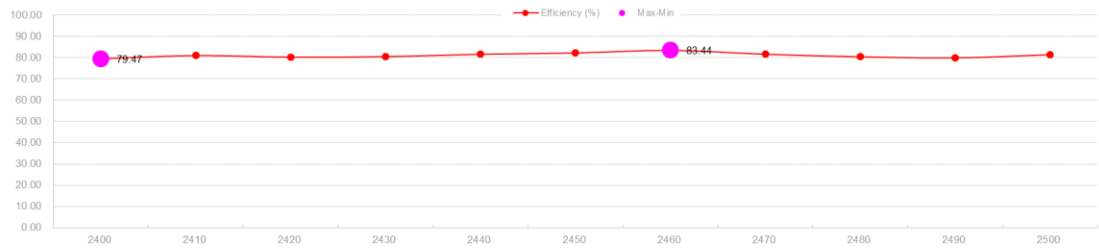















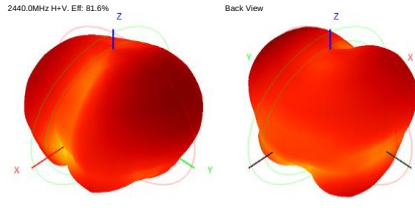



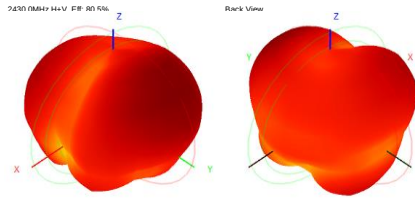



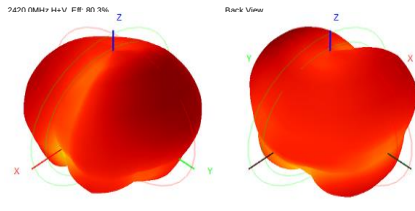



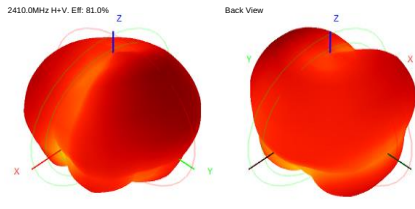




深圳爱特立科技有限公司


Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Efficiency (dBi)	-1.00	-0.92	-0.95	-0.94	-0.88	-0.85	-0.79	-0.88	-0.95	-0.97	-0.89
Gain (dBi)	4.46	4.39	4.29	4.37	4.44	4.65	4.82	4.83	4.87	4.81	4.77
Efficiency (%)	79.47	81.00	80.27	80.51	81.62	82.22	83.44	81.62	80.42	79.90	81.43
Directivity (dB)	5.46	5.30	5.24	5.31	5.32	5.50	5.61	5.71	5.82	5.78	5.66
Peak Gain Position (Theta)	30.00	30.00	45.00	45.00	45.00	45.00	45.00	45.00	45.00	45.00	45.00
Peak Gain Position (Phi)	90.00	90.00	90.00	90.00	90.00	90.00	90.00	90.00	90.00	90.00	90.00
Efficiency ThetaPol (%)	40.74	41.59	41.07	41.34	41.86	42.57	43.18	42.47	41.98	41.95	43.04
Efficiency PhiPol (%)	38.73	39.41	39.20	39.16	39.76	39.65	40.27	39.15	38.43	37.94	38.39
Upper Hem. Efficiency (%)	50.79	52.06	51.55	52.01	52.68	53.72	54.67	54.14	53.97	53.58	54.71
Lower Hem. Efficiency (%)	28.68	28.94	28.71	28.50	28.93	28.50	28.77	27.49	26.45	26.32	26.72

T90(H)圆度	7.76	7.78	8.04	7.88	7.85	8.06	8.51	8.83	9.00	9.14	9.29
Gain 15deg (dBi)											
E1(XZ)波瓣宽度	78.00	86.00	93.00	99.00	158.00	24.00	22.00	22.00	22.00	23.00	24.00
E1(XZ)前后比	2.27	2.26	1.99	1.57	0.85	0.00	0.00	0.00	0.00	0.00	0.00
E2(YZ)波瓣宽度	63.00	64.00	63.00	63.00	63.00	59.00	58.00	57.00	58.00	58.00	60.00
E2(YZ)前后比	4.31	4.39	4.34	4.61	4.86	5.06	5.10	5.00	5.03	4.72	4.35
最大增益处轴比(P)	8.57	8.87	7.59	7.65	7.82	7.76	7.72	7.75	7.53	7.17	6.66
仰角 10 度最差(大)轴比(P)	74.44	61.81	64.31	64.10	60.87	71.58	59.21	62.03	54.17	58.96	61.80
Hc(XY)波瓣宽度	51.00	51.00	58.00	60.00	61.00	61.00	62.00	64.00	67.00	69.00	69.00
Hc(XY)前后比	2.94	2.96	2.67	2.44	2.20	2.09	1.84	1.50	1.14	0.69	0.57
左旋圆极化效率(%)	33.41	34.53	34.17	33.98	34.32	34.56	34.80	34.09	34.06	34.16	35.42
右旋圆极化效率(%)	46.06	46.47	46.10	46.52	47.30	47.66	48.64	47.53	46.36	45.73	46.00






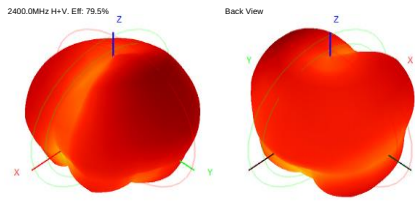


2480.0MHz H+V, EF: 80.4%




Back View




2480.0MHz Total(E2-YZ), Max= 4.87dBi






Total(H+V), Max= 0.94dBi, Cx/D=9.00




2490.0MHz H+V, EF: 79.9%




Back View




2490.0MHz Total(E2-YZ), Max= 4.81dBi






Total(H+V), Max= 0.94dBi, Cx/D=9.14




2500.0MHz H+V, EF: 81.4%



Back View



2500.0MHz Total(E2-YZ), Max= 4.77dBi



Total(H+V), Max= 1.03dBi, Cx/D=9.29

