


Maximum location: X=3.00, Y=47.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.332508
SAR 1g (W/Kg)	0.430507

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5116	0.4353	0.3685	0.3104	0.2597

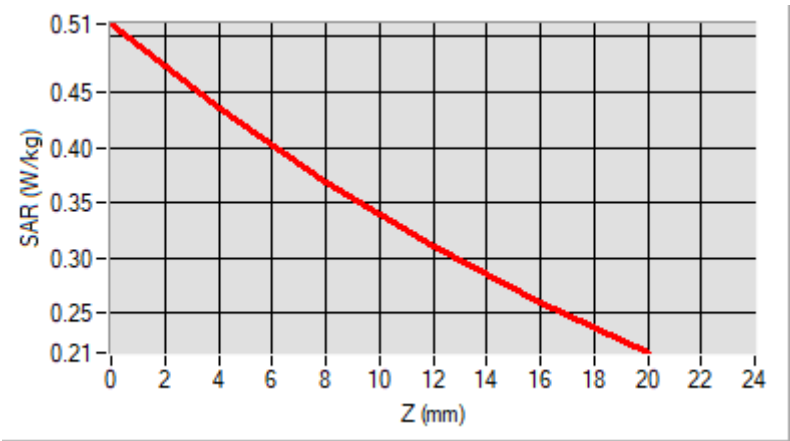

F. 3D Image

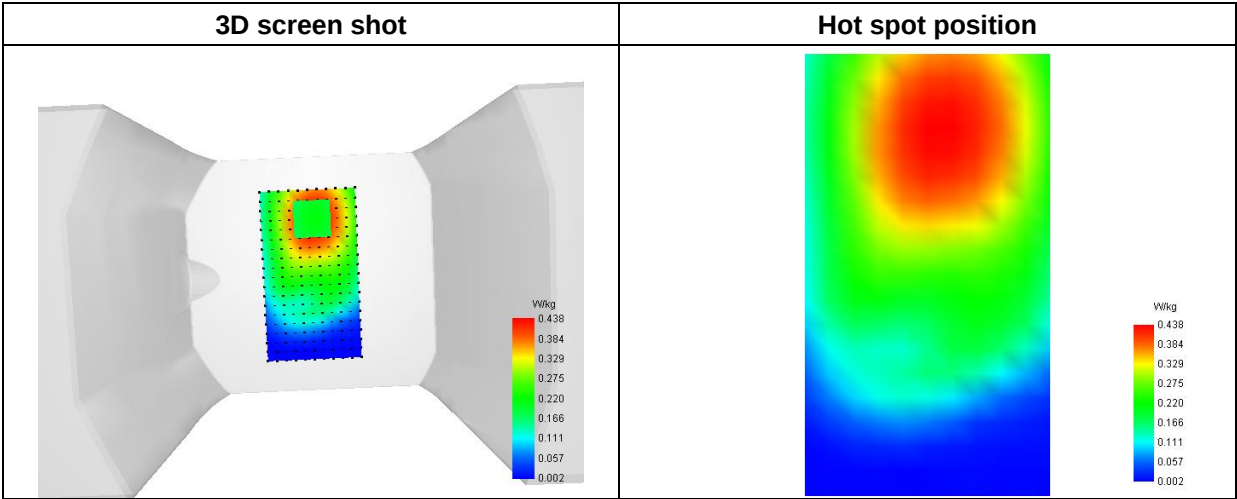

MEASUREMENT 33/52

Type: Measurement (Complete)
Date of measurement: 2023-10-28
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 41
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative Permittivity (real part)	39.643668
Conductivity (S/m)	1.933214
Power Variation (%)	0.354083
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

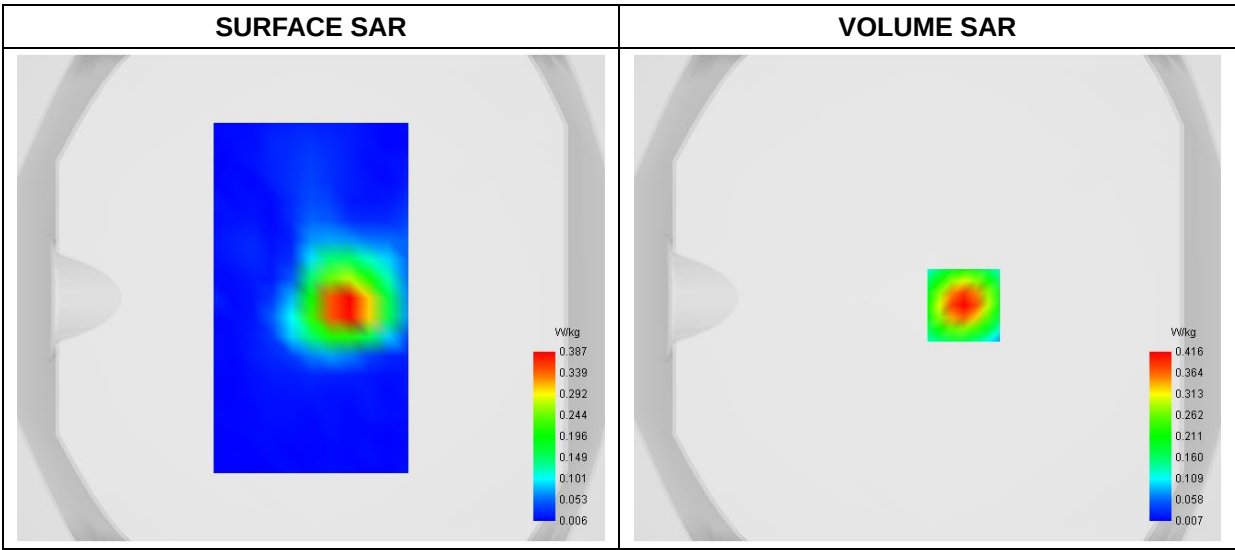


Maximum location: X=15.00, Y=-3.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.169063
SAR 1g (W/Kg)	0.376672

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.7469	0.4156	0.2161	0.1044	0.0458

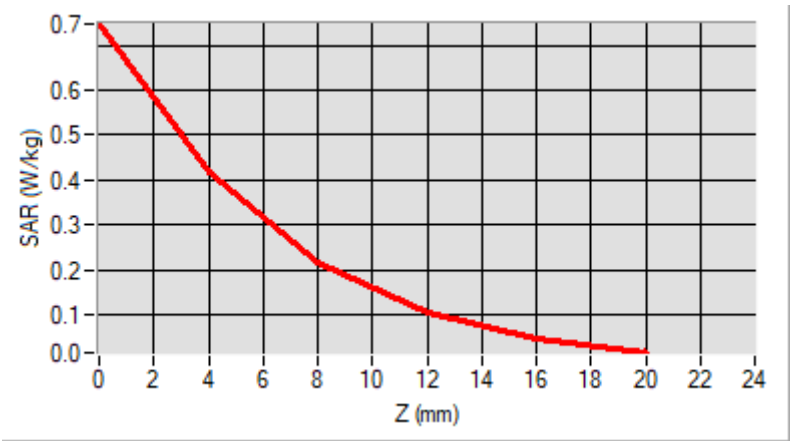

F. 3D Image

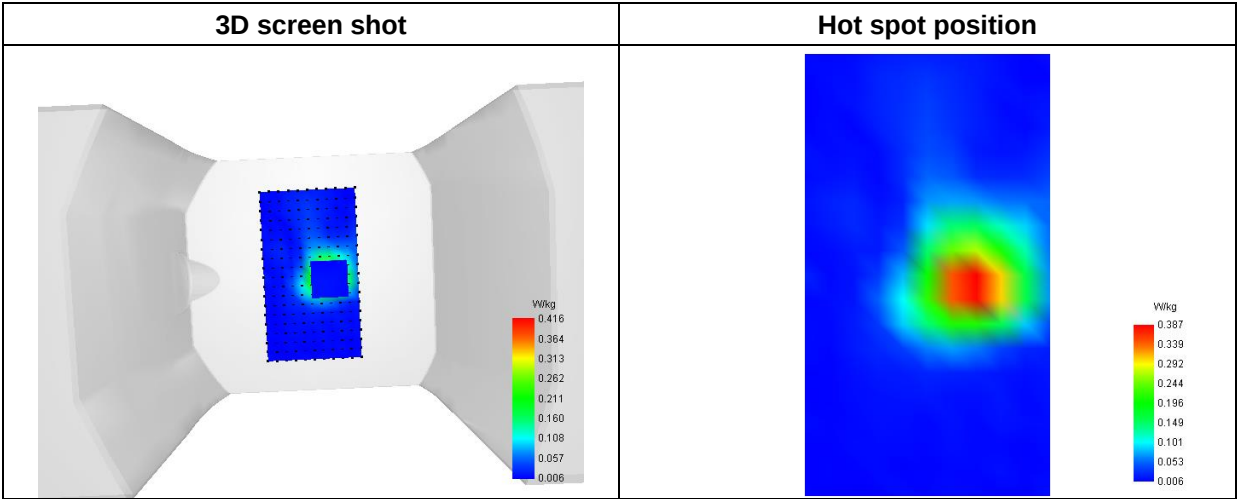

MEASUREMENT 34/53

Type: Measurement (Complete)
Date of measurement: 2023-10-27
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	39.513275
Conductivity (S/m)	1.392987
Power Variation (%)	-1.378500
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

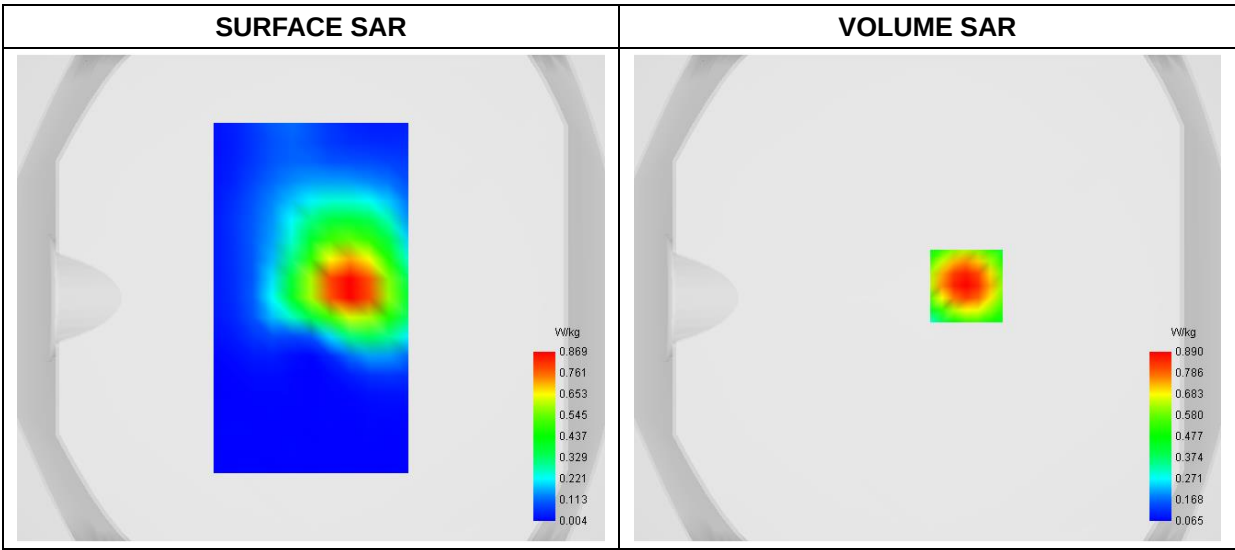


Maximum location: X=16.00, Y=5.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.501949
SAR 1g (W/Kg)	0.827830

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.2279	0.8896	0.6378	0.4550	0.3226

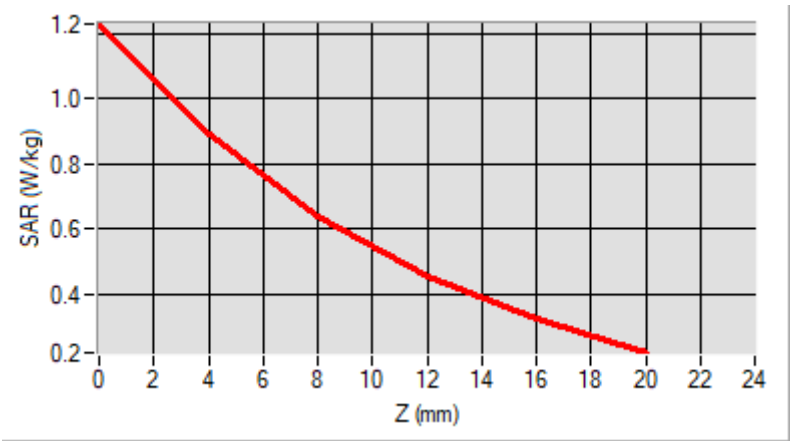

F. 3D Image

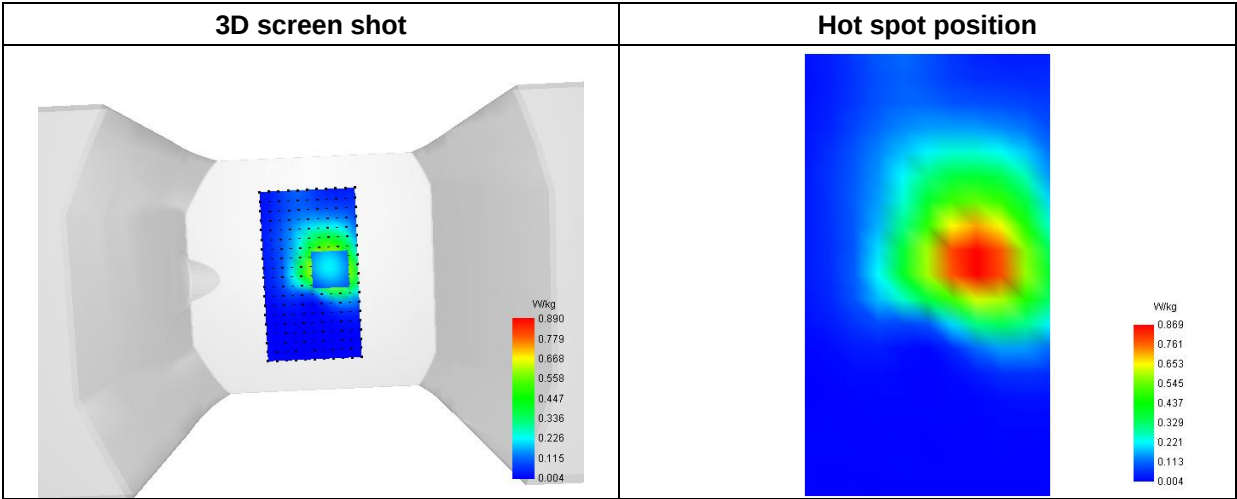

MEASUREMENT 35/54

Type: Measurement (Complete)
Date of measurement: 2023-10-26
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 71
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	673.000000
Relative Permittivity (real part)	41.143425
Conductivity (S/m)	0.871419
Power Variation (%)	-1.329200
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

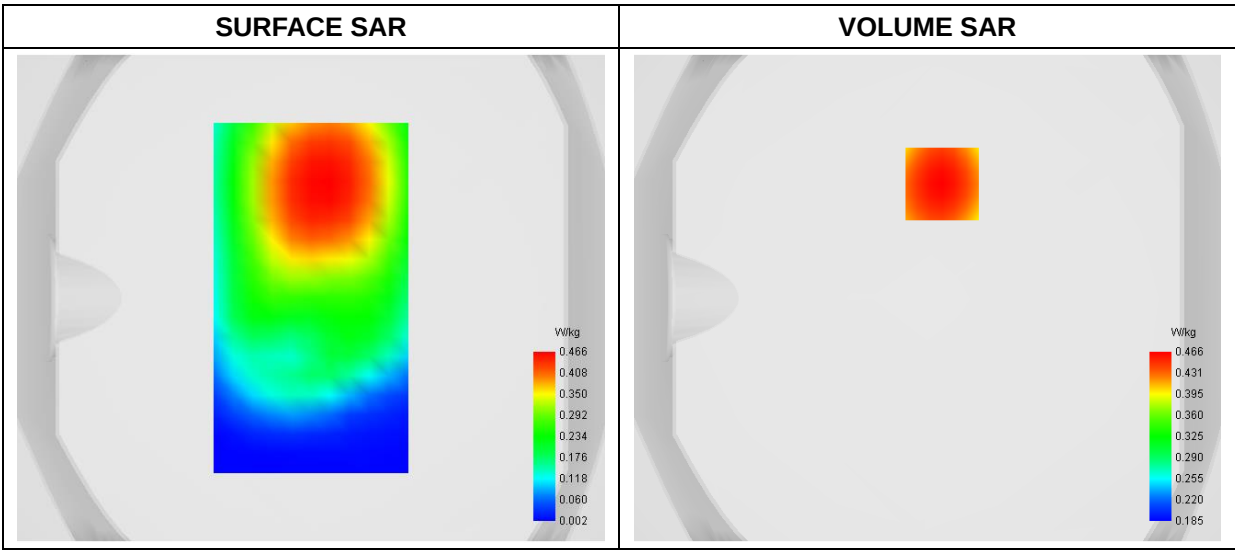


Maximum location: X=6.00, Y=47.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.355080
SAR 1g (W/Kg)	0.459331

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5463	0.4657	0.3945	0.3323	0.2776

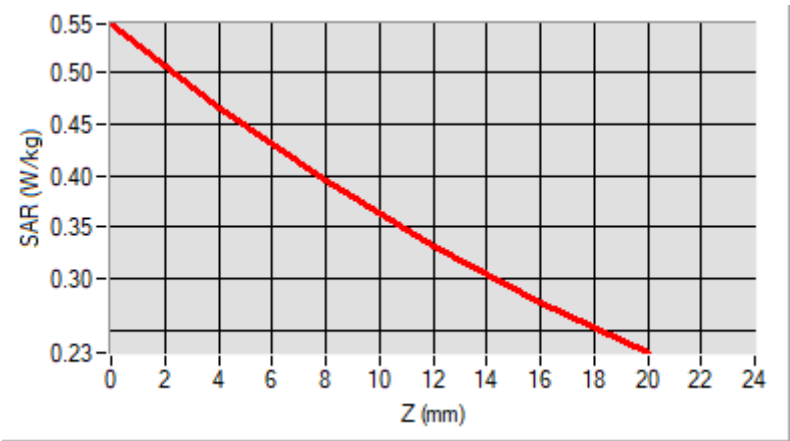

F. 3D Image

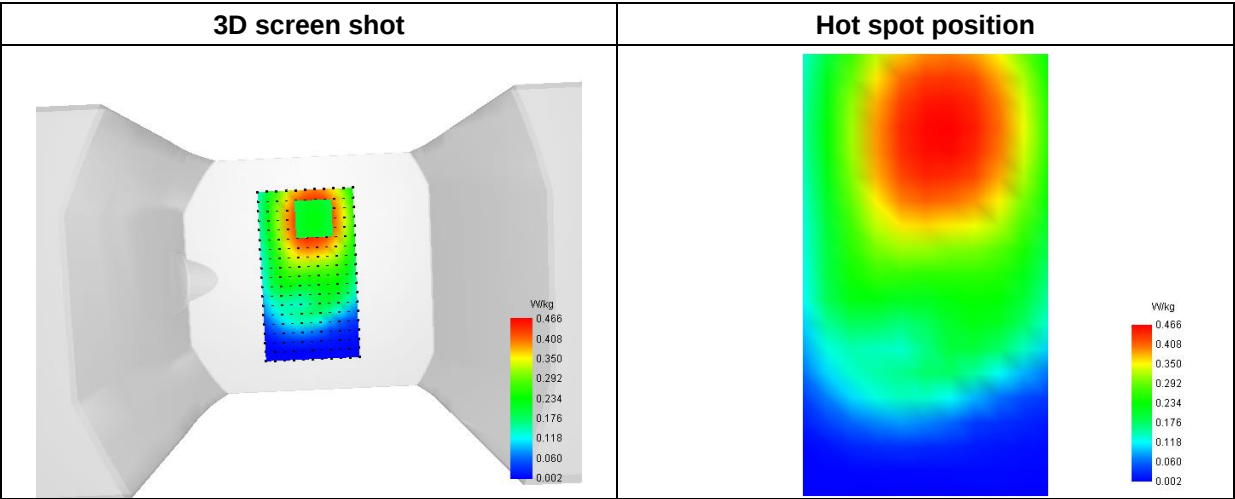

MEASUREMENT 36

Type: Measurement (Complete)
Date of measurement: 2023-10-28
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	39.642301
Conductivity (S/m)	1.931638
Power Variation (%)	0.3668900
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

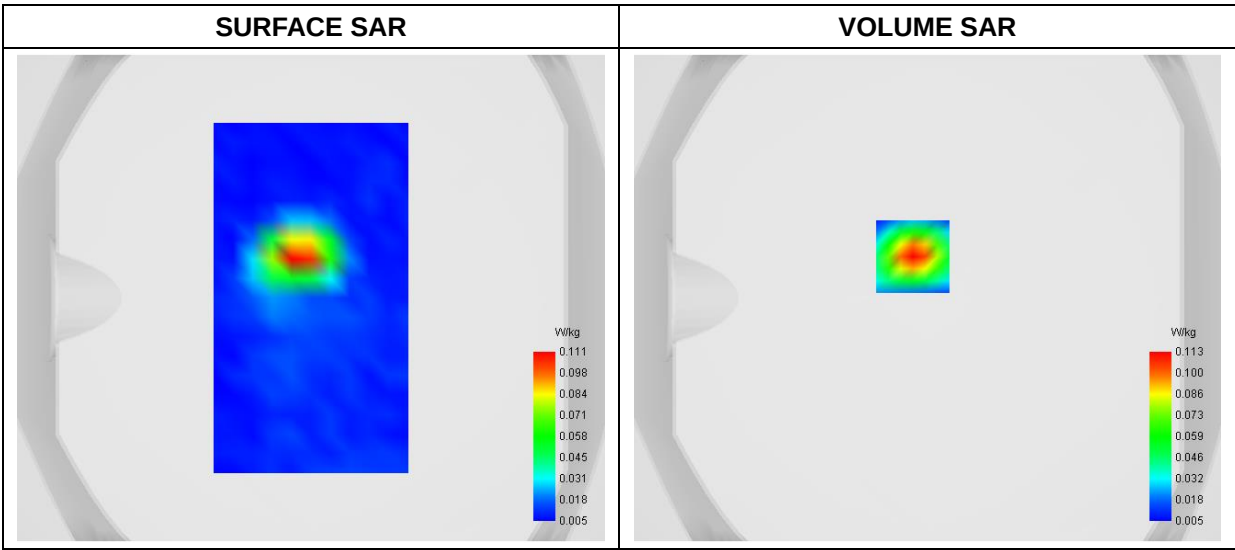


Maximum location: X=-6.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.042740
SAR 1g (W/Kg)	0.104430

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2597	0.1133	0.0447	0.0187	0.0110

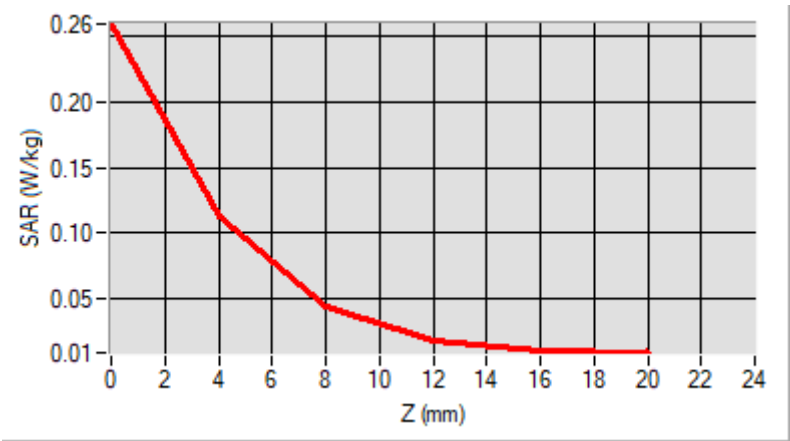

F. 3D Image

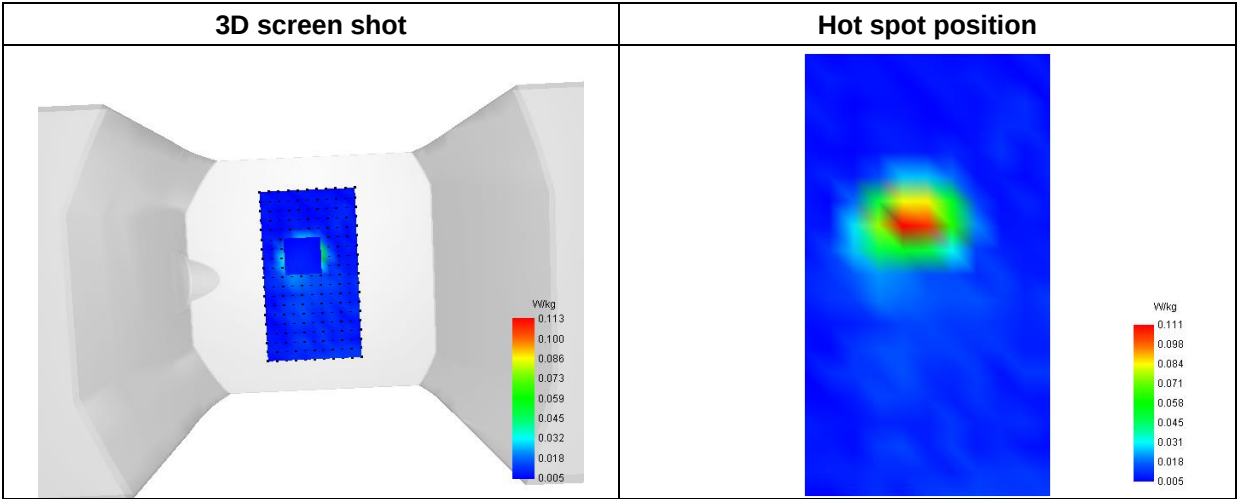

MEASUREMENT 37

Type: Measurement (Complete)
Date of measurement: 2023-10-29
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	36.223869
Conductivity (S/m)	4.641611
Power Variation (%)	-1.526900
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

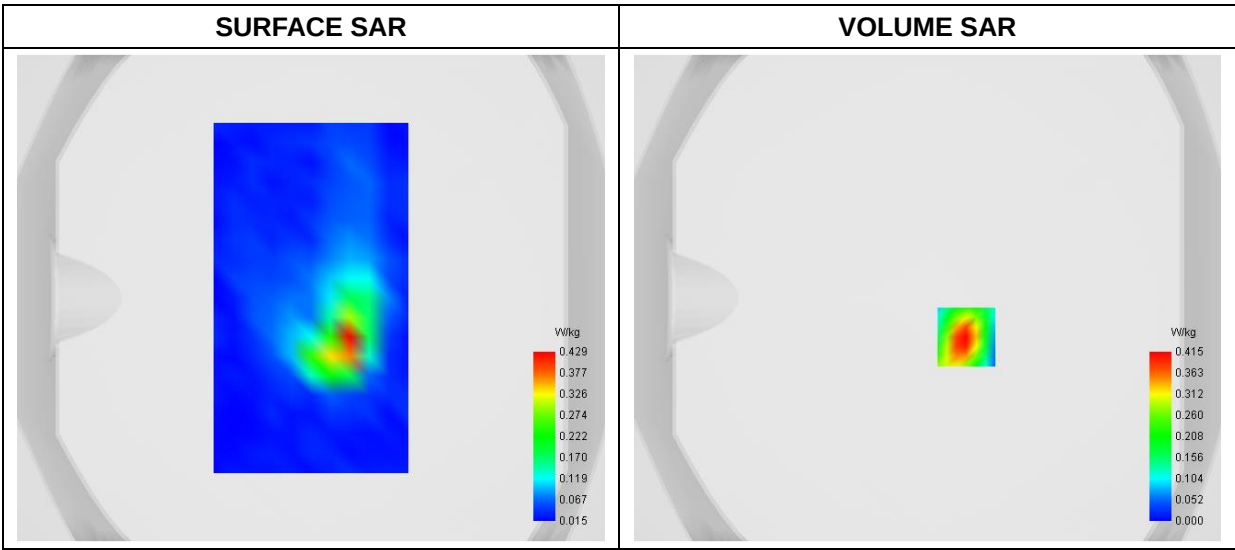


Maximum location: X=16.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.065627
SAR 1g (W/Kg)	0.222307

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7997	0.4154	0.1780	0.0655	0.0219	0.0083	0.0118	0.0026	0.0301

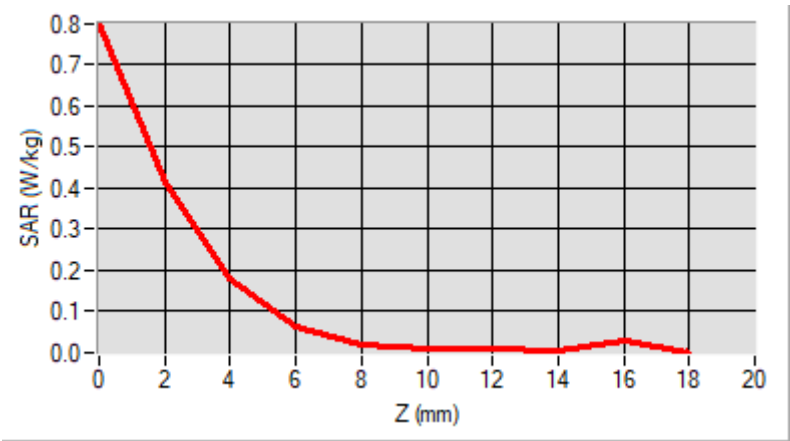

F. 3D Image

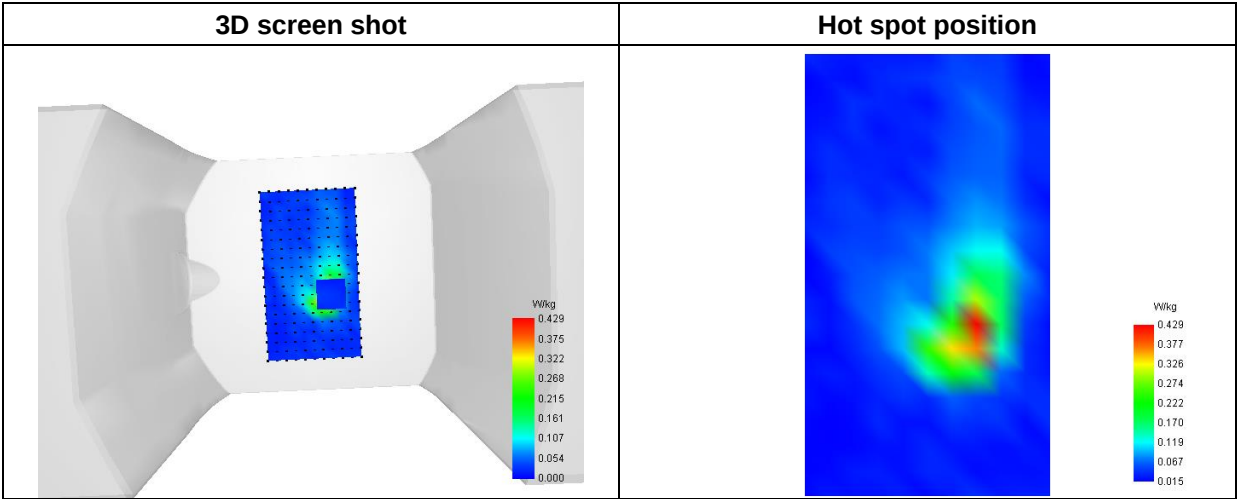

MEASUREMENT 38

Type: Measurement (Complete)
Date of measurement: 2023-10-29
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.3GHz)_ 802.11ac 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5260.000000
Relative Permittivity (real part)	36.222839
Conductivity (S/m)	4.641926
Power Variation (%)	1.118500
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

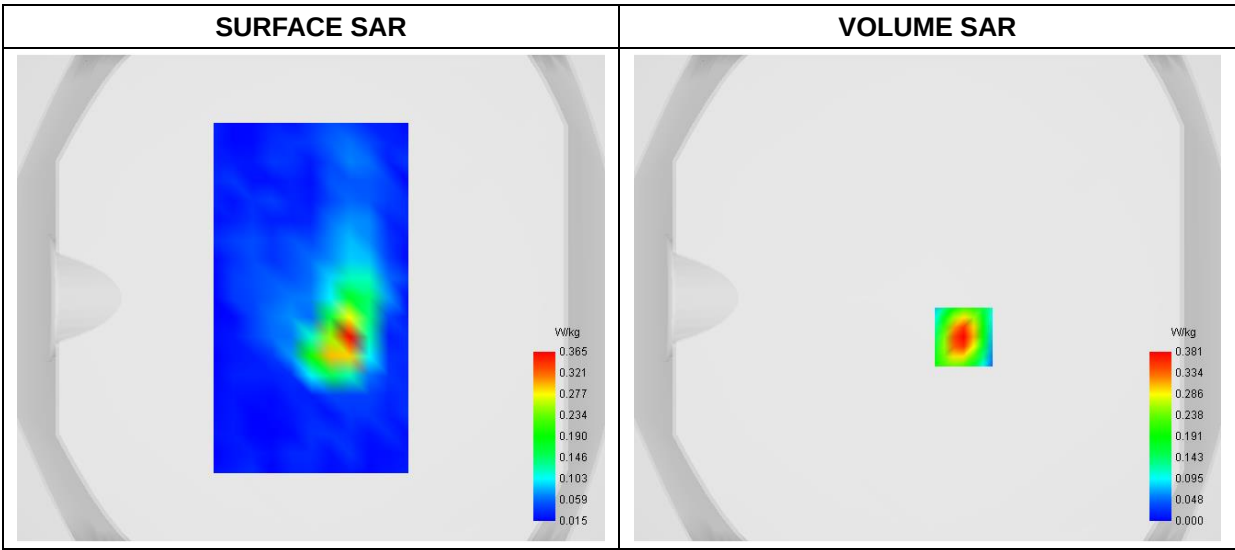


Maximum location: X=15.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.050627
SAR 1g (W/Kg)	0.204019

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.8523	0.3812	0.1339	0.0097	0.0152	0.0080	0.0042	0.0092	0.0144

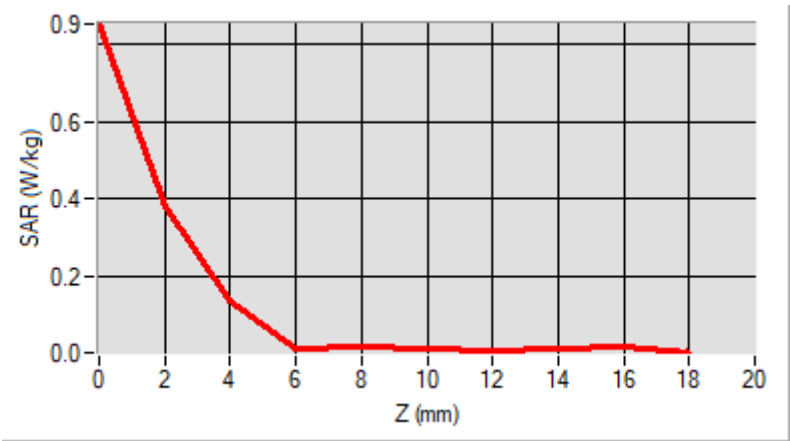

F. 3D Image

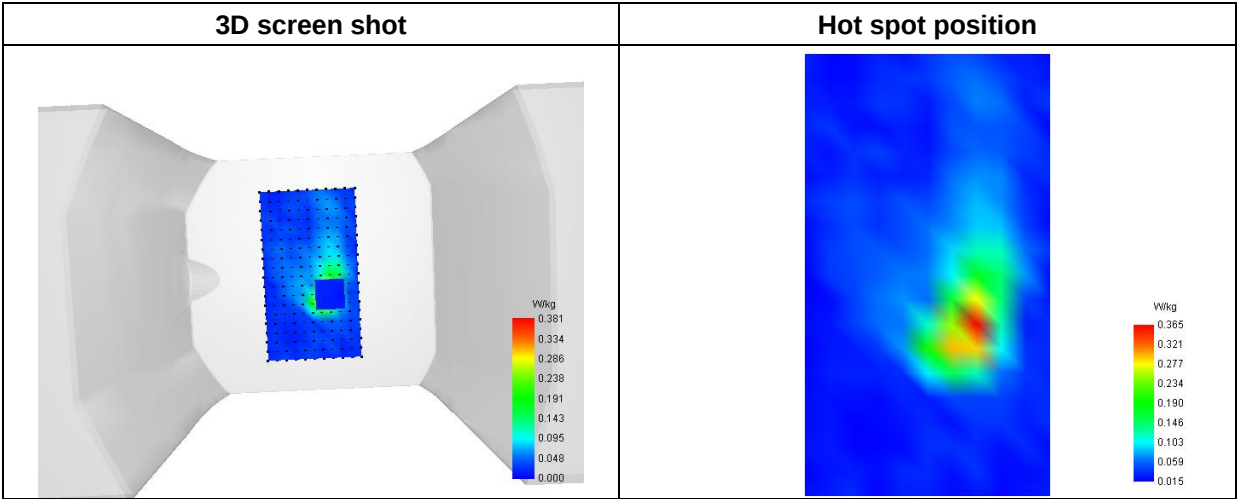

MEASUREMENT 39

Type: Measurement (Complete)
Date of measurement: 22023-10-30
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.6GHz)_802.11ac 80MHz
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5700.000000
Relative Permittivity (real part)	36.632963
Conductivity (S/m)	5.112781
Power Variation (%)	0.758600
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

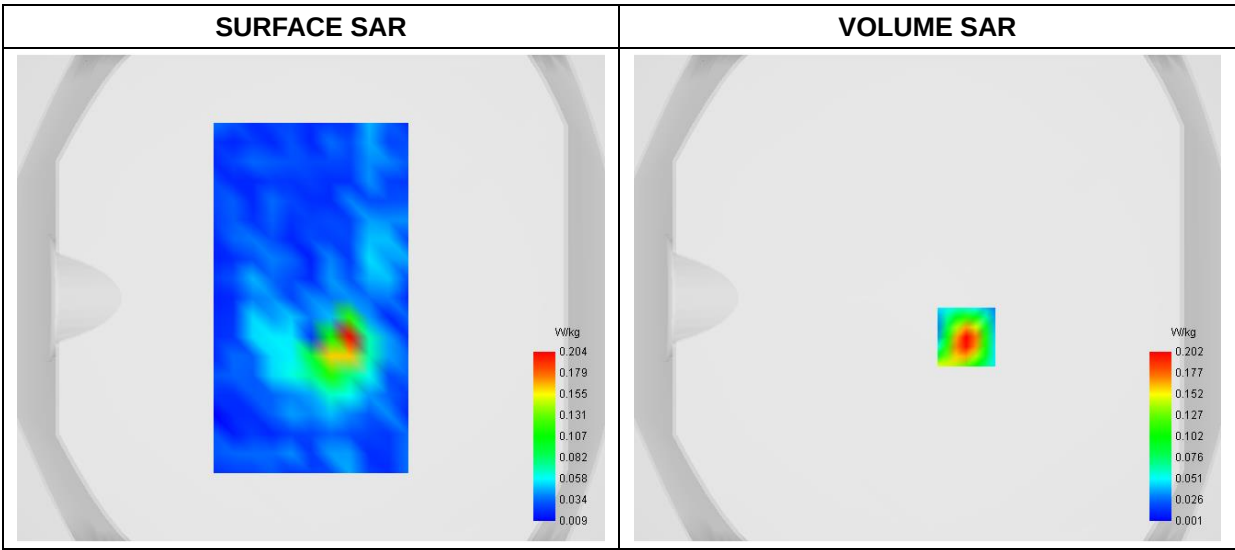


Maximum location: X=16.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.040117
SAR 1g (W/Kg)	0.114648

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.4270	0.2024	0.0766	0.0227	0.0056	0.0016	0.0016	0.0040	0.0108

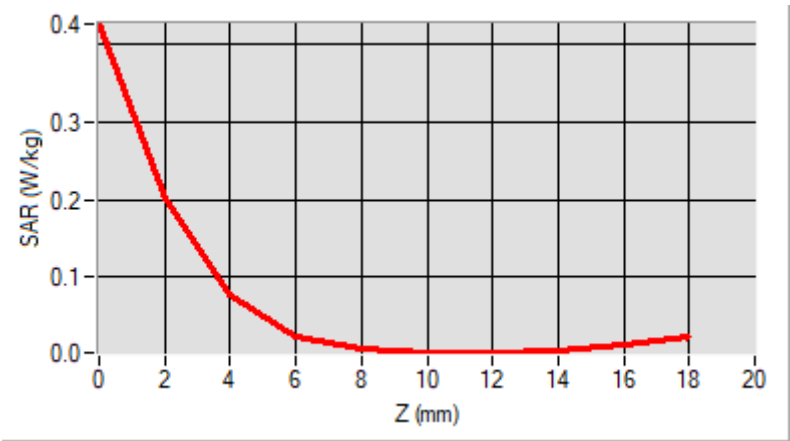

F. 3D Image

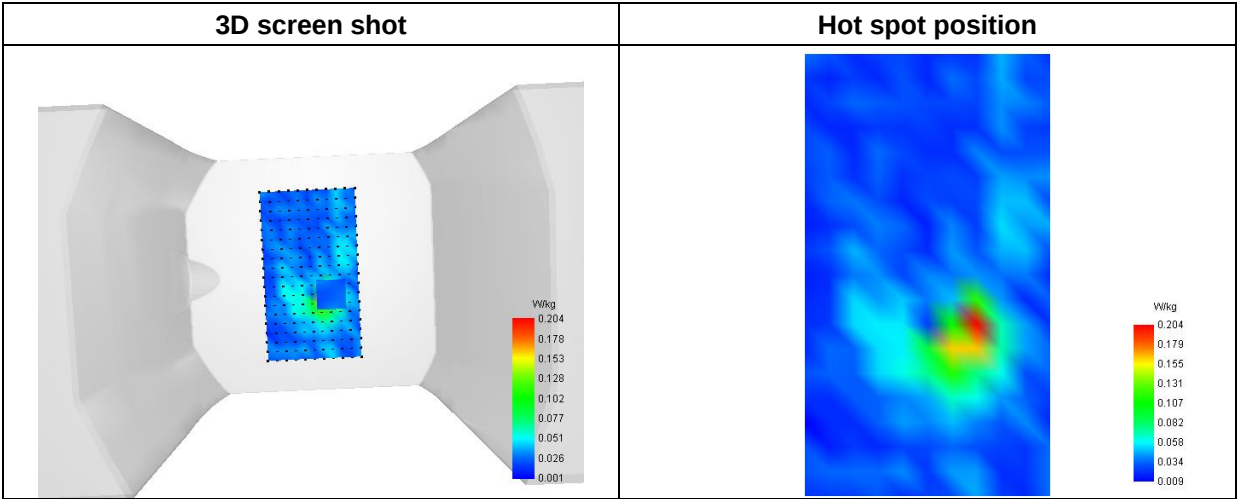

MEASUREMENT 40

Type: Measurement (Complete)
Date of measurement: 2023-10-30
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_ 802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative Permittivity (real part)	36.742273
Conductivity (S/m)	5.283836
Power Variation (%)	-1.335400
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

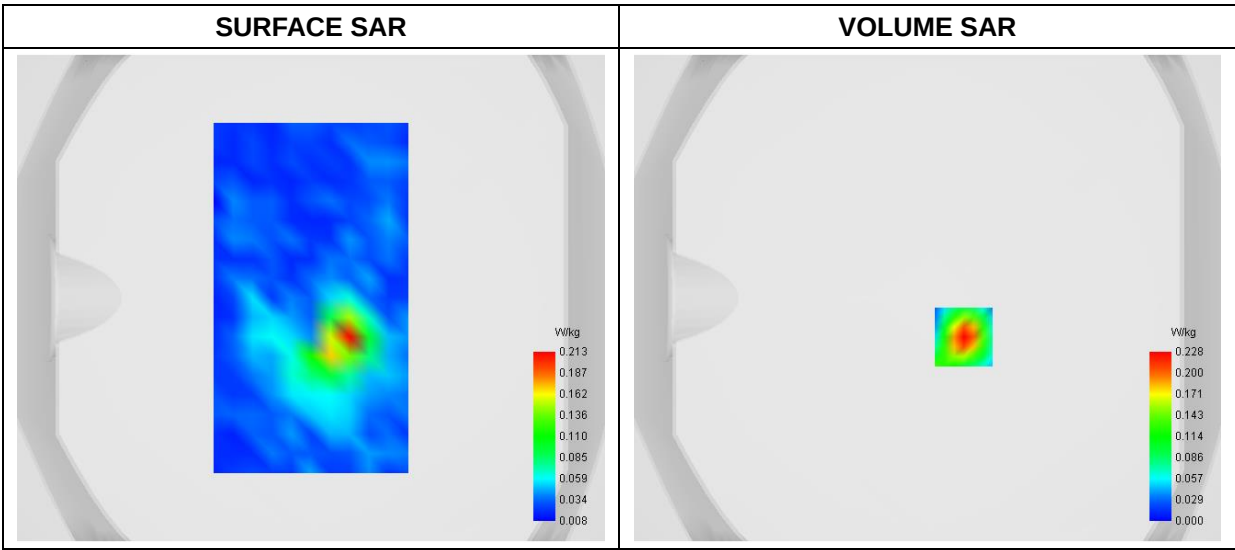


Maximum location: X=15.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038794
SAR 1g (W/Kg)	0.128241

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.5020	0.2282	0.0784	0.0186	0.0025	0.0001	0.0001	0.0014	0.0072

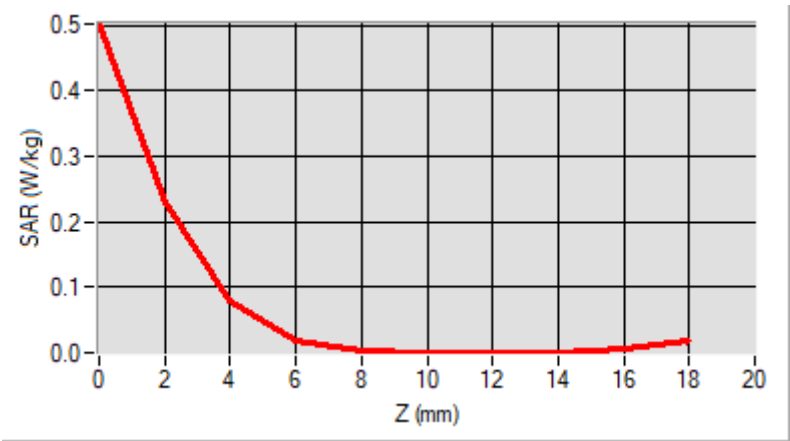

F. 3D Image

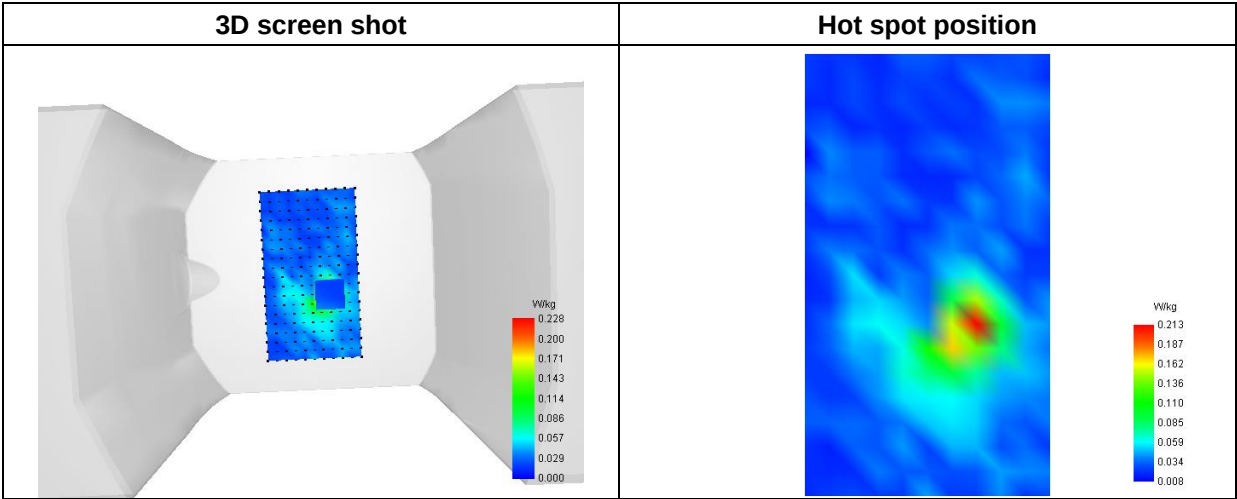

MEASUREMENT 41

Type: Measurement (Complete)
Date of measurement: 2023-10-26
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat plane
Device Position	Back
Band	GPRS850_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	40.832245
Conductivity (S/m)	0.891245
Power Variation (%)	1.108572
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

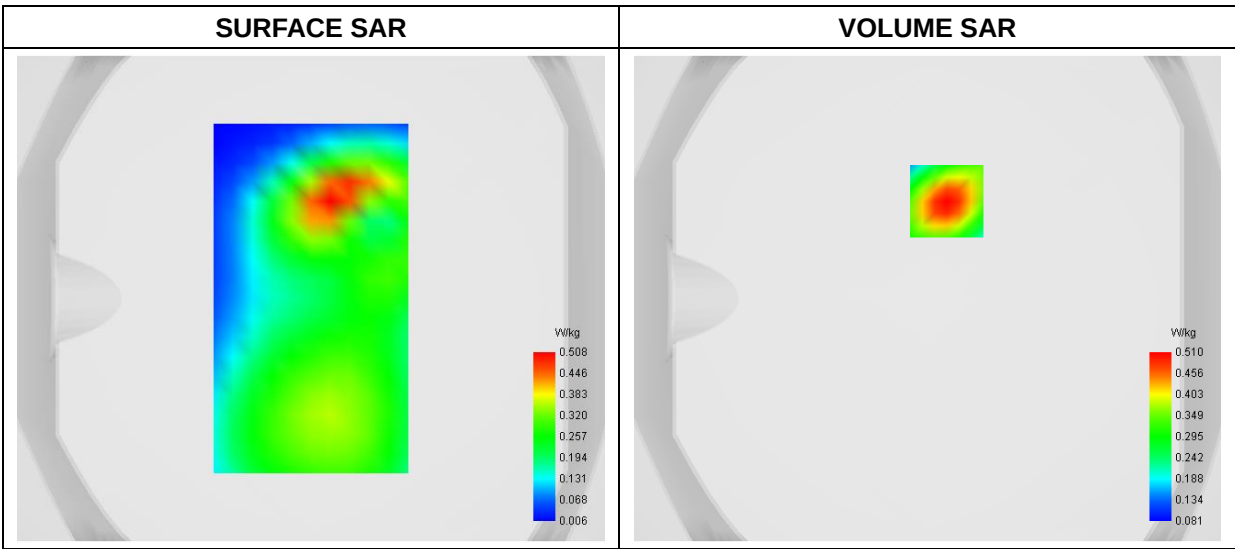


Maximum location: X=8.00, Y=40.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.289099
SAR 1g (W/Kg)	0.474099

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.7414	0.5100	0.3508	0.2460	0.1776

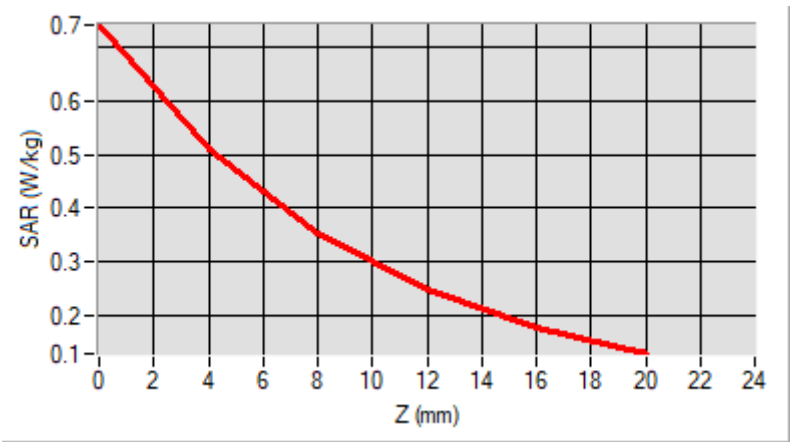

F. 3D Image

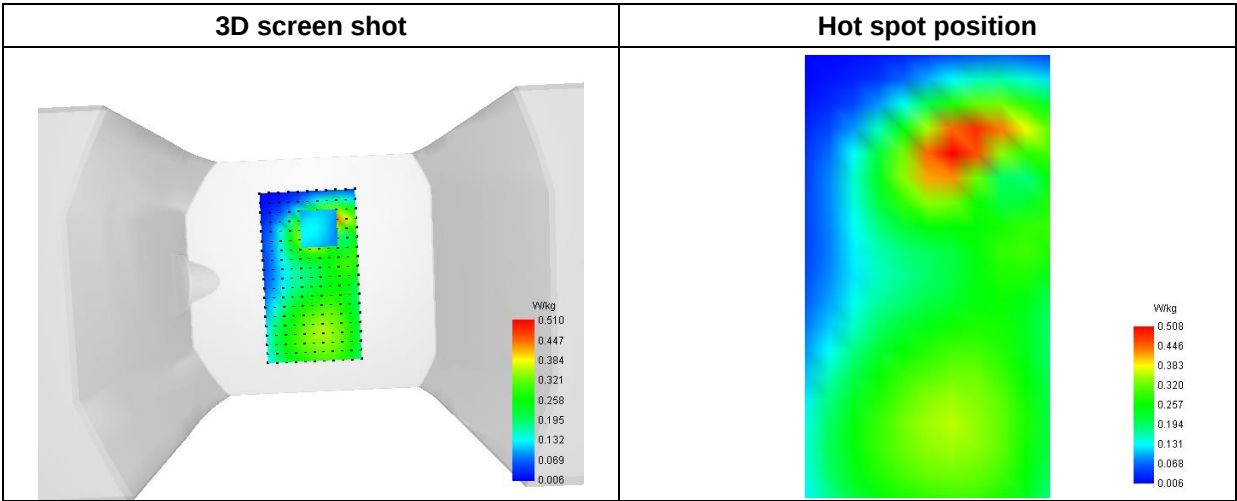

MEASUREMENT 42

Type: Measurement (Complete)
Date of measurement: 2023-10-27
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat plane
Device Position	Back
Band	GPRS1900_2TX
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	39.112245
Conductivity (S/m)	1.392081
Power Variation (%)	-0.737400
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

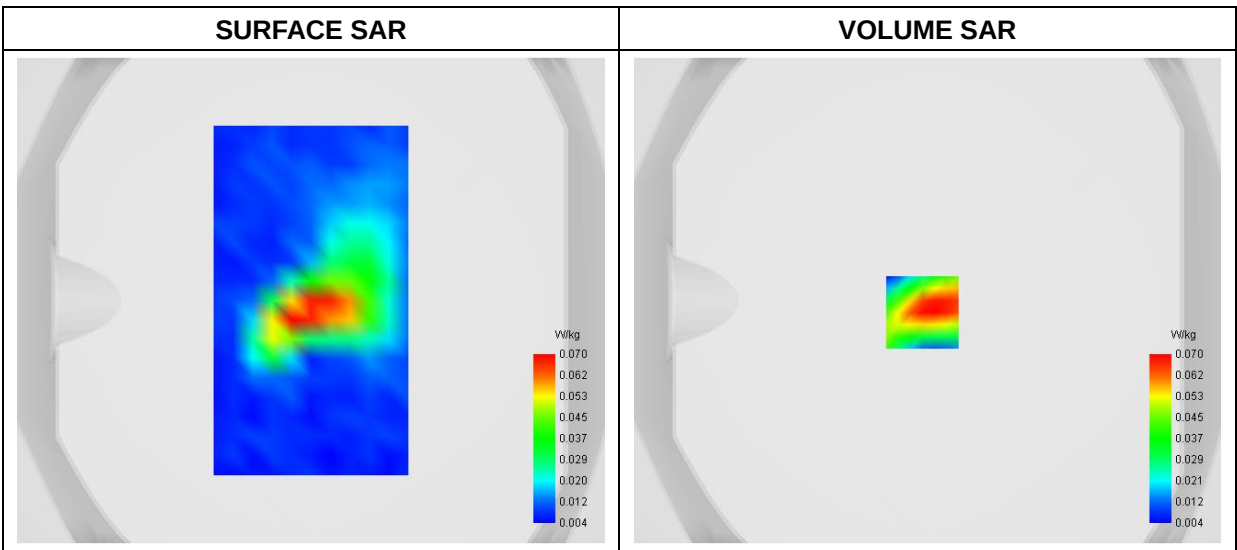


Maximum location: X=-2.00, Y=-5.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.033724
SAR 1g (W/Kg)	0.065480

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2046	0.0698	0.0357	0.0270	0.0132

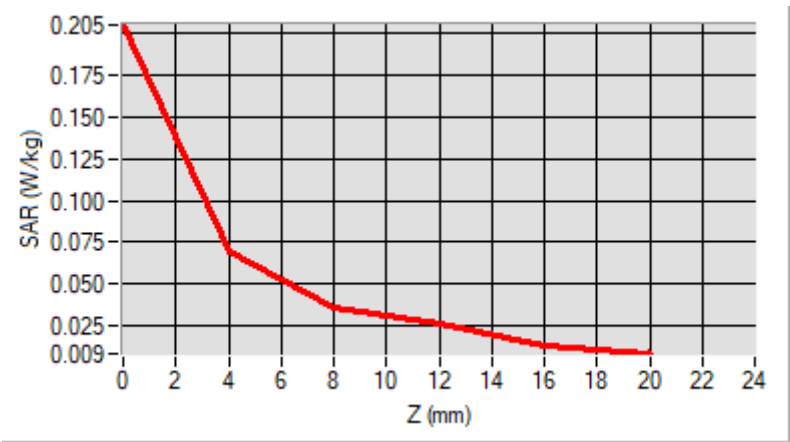

F. 3D Image

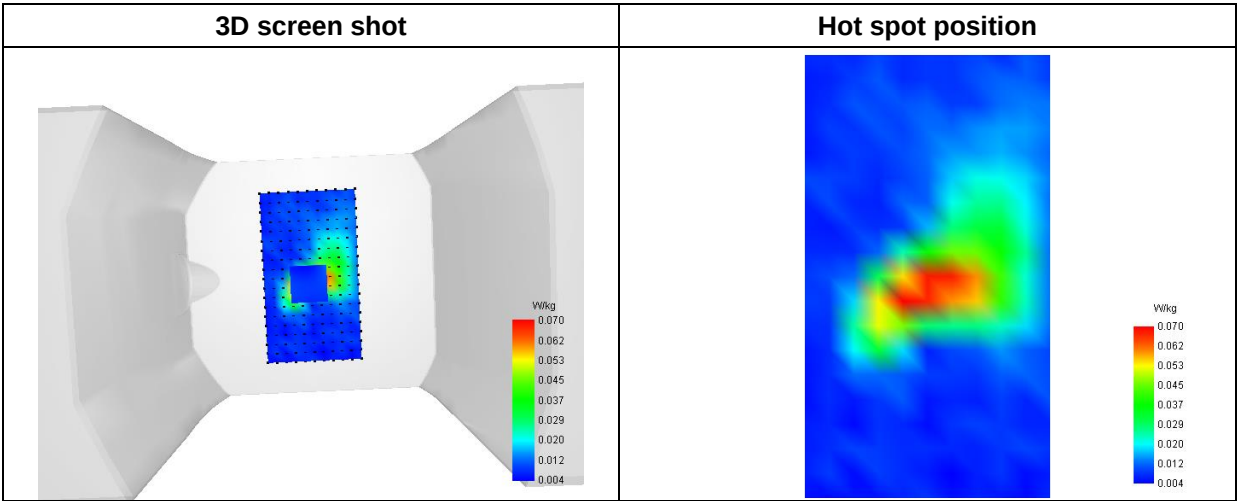

MEASUREMENT 55

Type: Measurement (Complete)
Date of measurement: 2023-10-28
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	39.642301
Conductivity (S/m)	1.931638
Power Variation (%)	0.365700
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

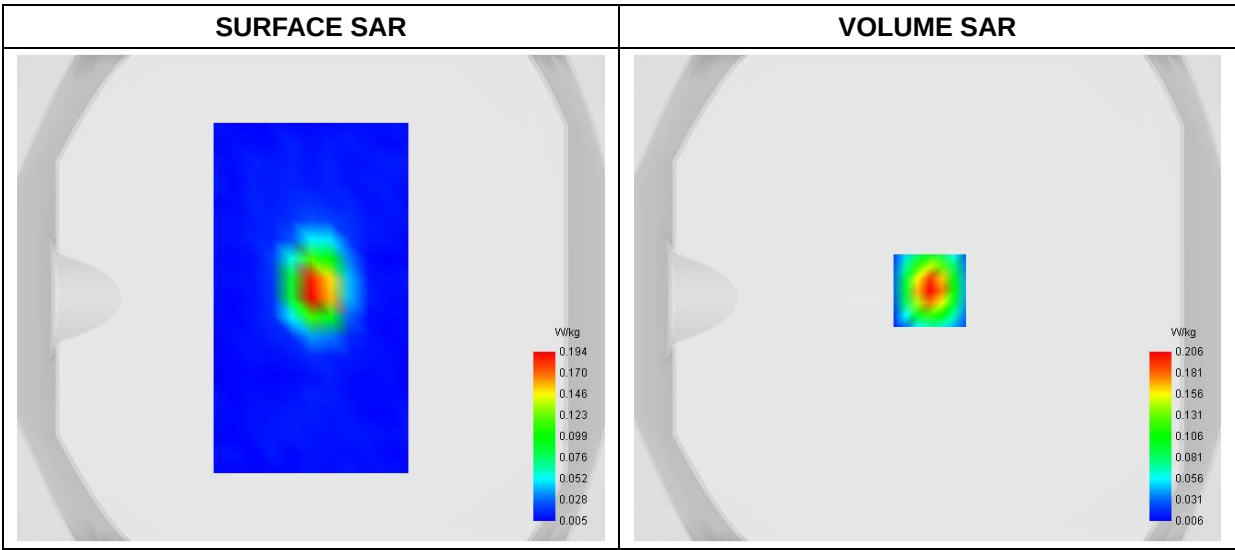


Maximum location: X=1.00, Y=3.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.077486
SAR 1g (W/Kg)	0.182199

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3761	0.2057	0.1075	0.0556	0.0298

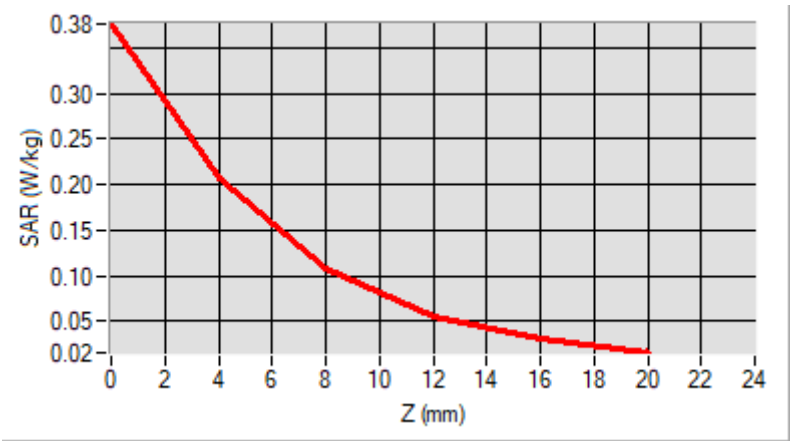

F. 3D Image

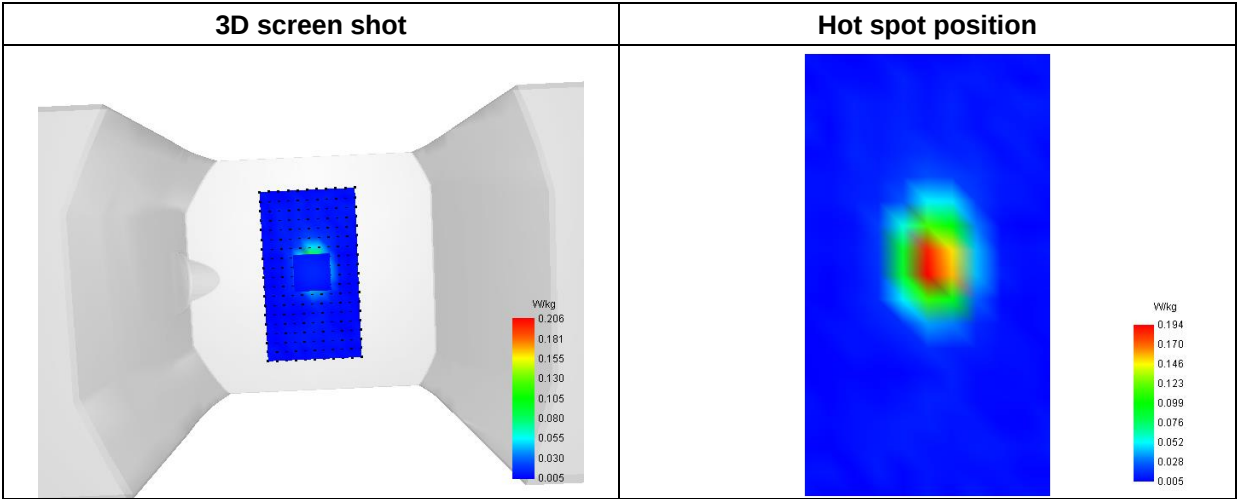

MEASUREMENT 56

Type: Measurement (Complete)
Date of measurement: 2023-10-29
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	36.223869
Conductivity (S/m)	4.641611
Power Variation (%)	0.360452
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

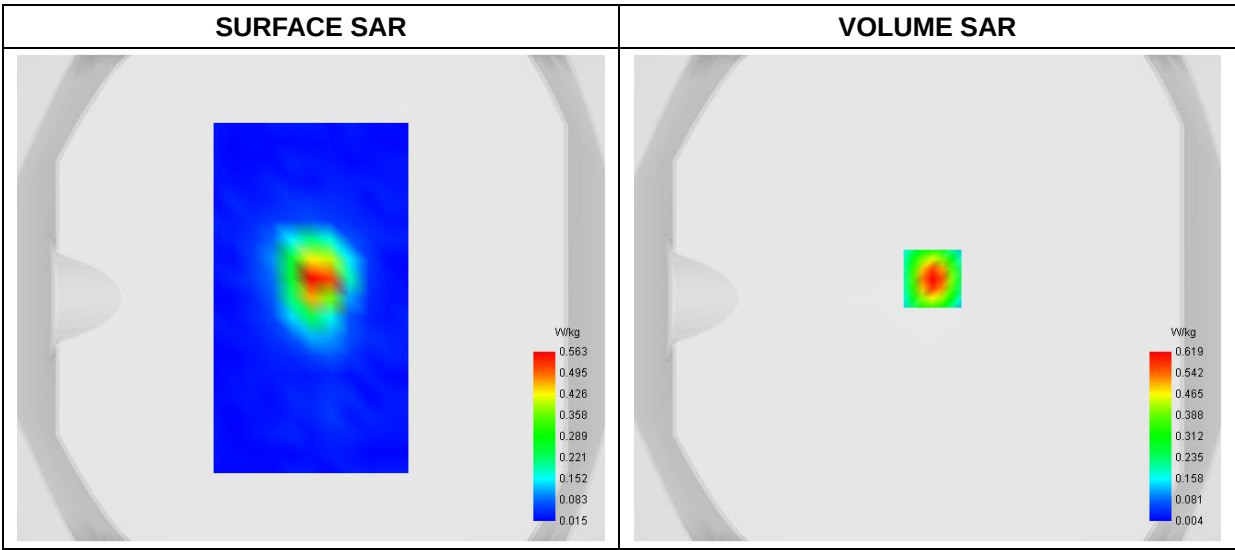


Maximum location: X=2.00, Y=8.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.095431
SAR 1g (W/Kg)	0.324593

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.2219	0.6188	0.2684	0.0998	0.0340	0.0124	0.0073	0.0090	0.0163

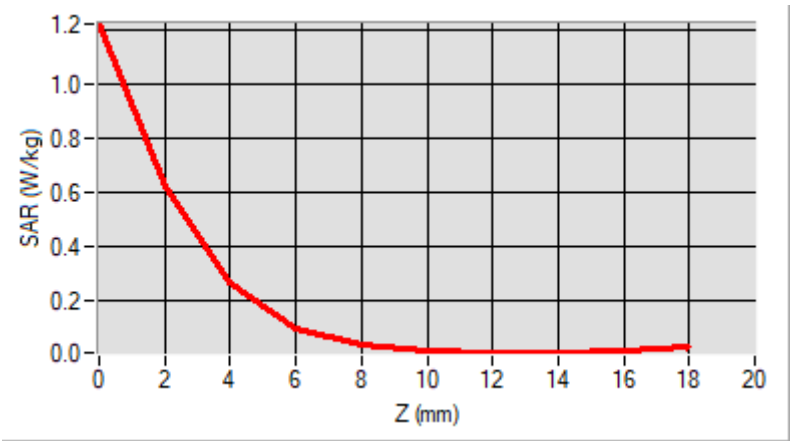

F. 3D Image

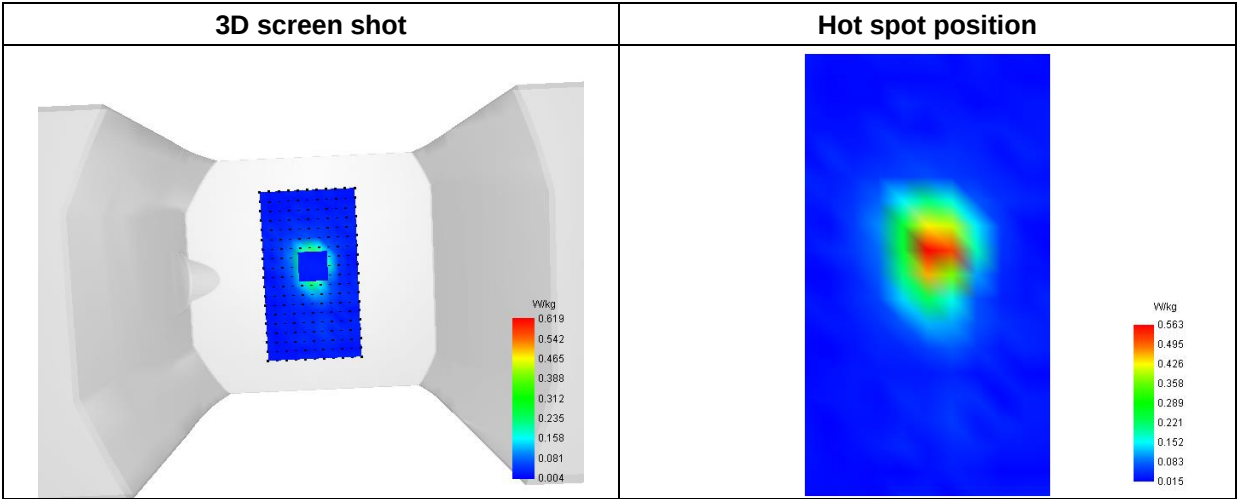

MEASUREMENT 57

Type: Measurement (Complete)
Date of measurement: 2023-10-30
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.8GHz)_ 802.11a
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative Permittivity (real part)	36.742273
Conductivity (S/m)	5.283836
Power Variation (%)	0.446590
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

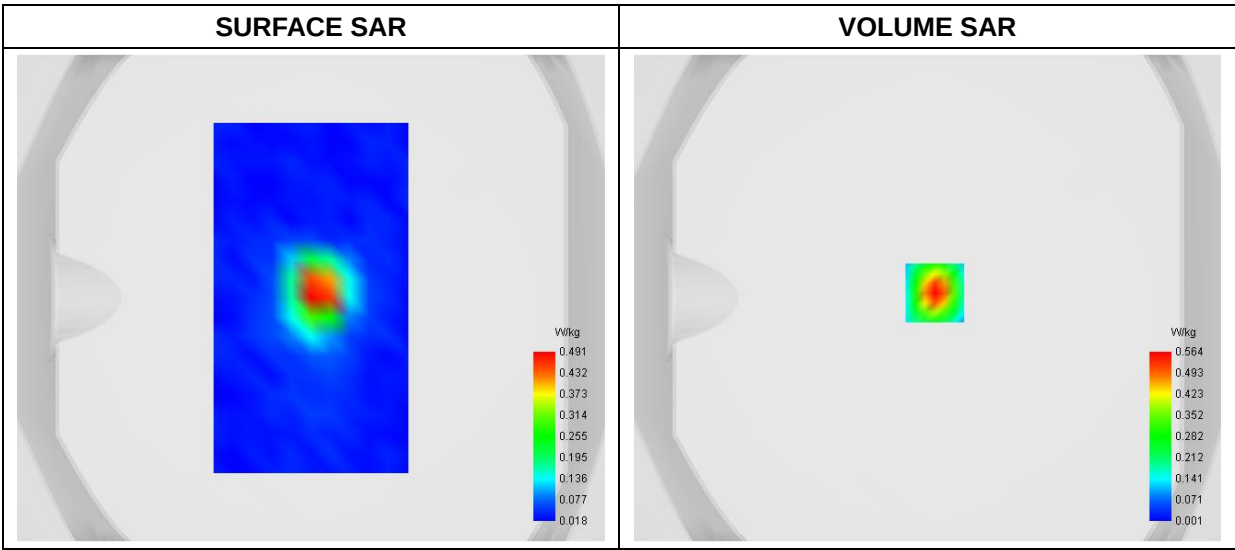


Maximum location: X=3.00, Y=2.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.075727
SAR 1g (W/Kg)	0.289868

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.1681	0.5635	0.2217	0.0688	0.0167	0.0035	0.0016	0.0033	0.0102

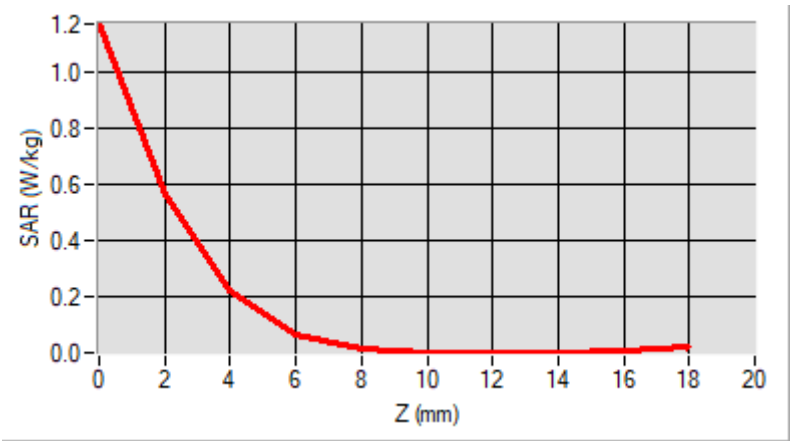

F. 3D Image

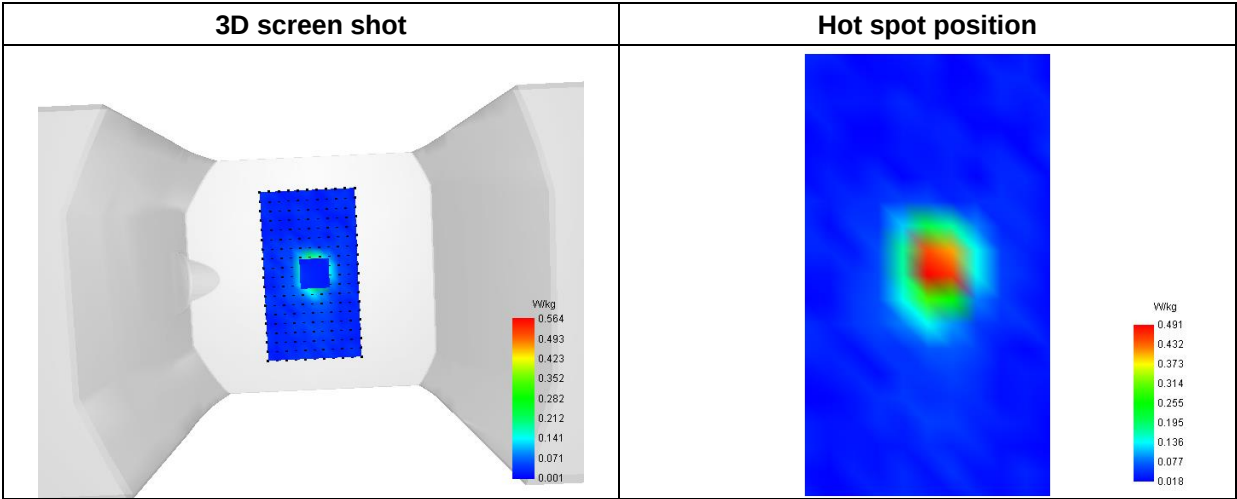

Annex C. EUT Photos


EUT View 1



EUT View 2




Antenna View

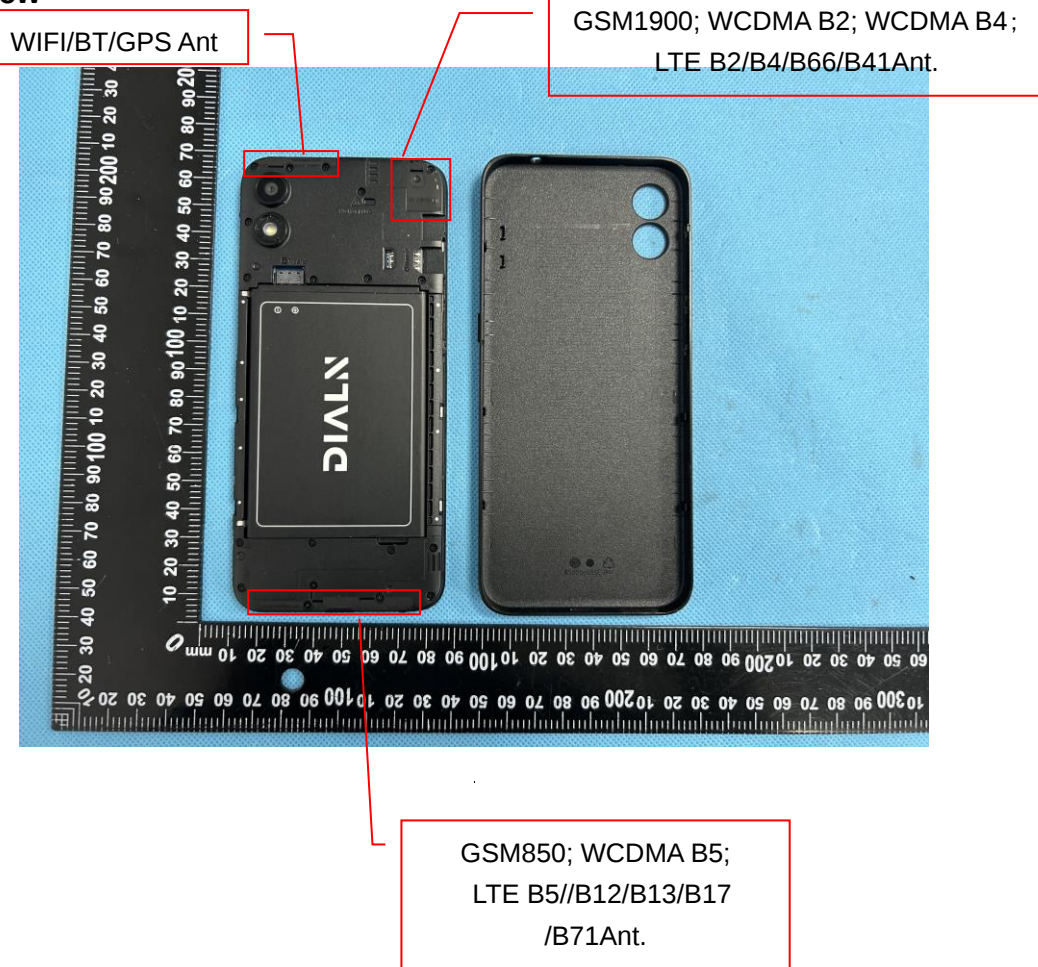


Annex D. Test Setup Photos

Head Exposure Conditions


Right Cheek

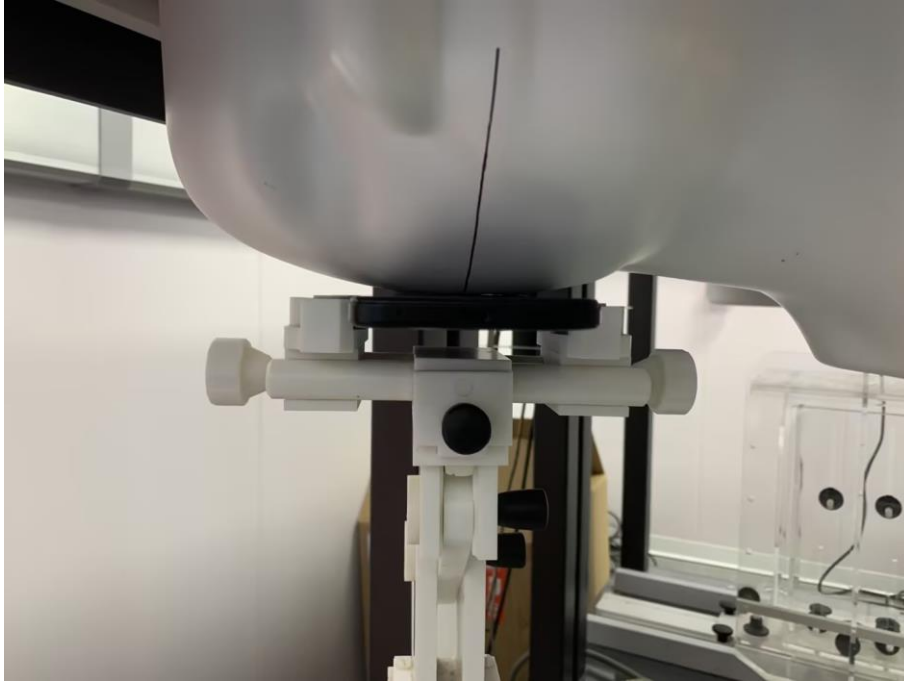


Right Tilt

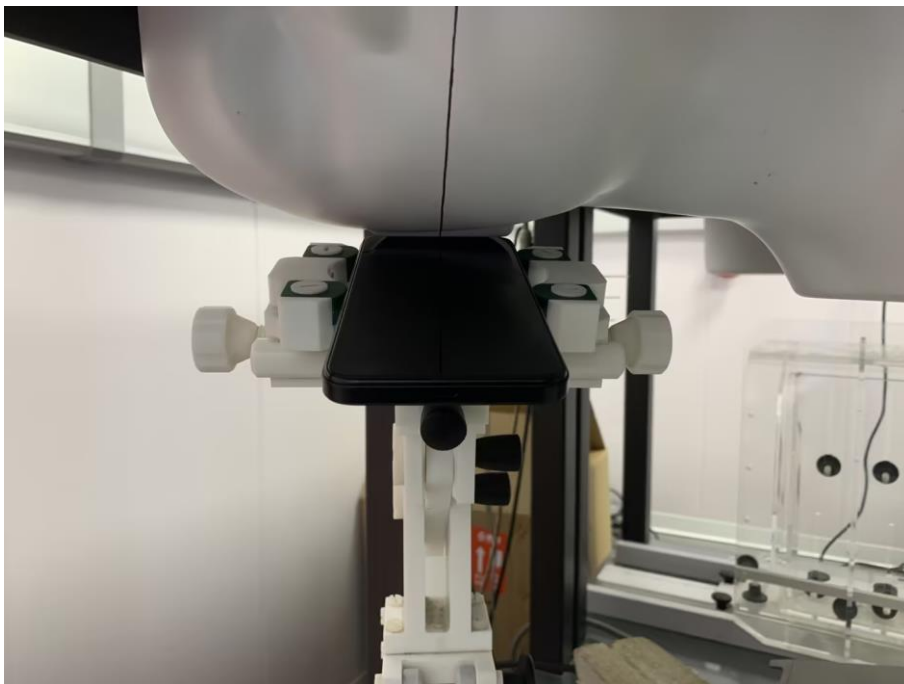

Left Cheek

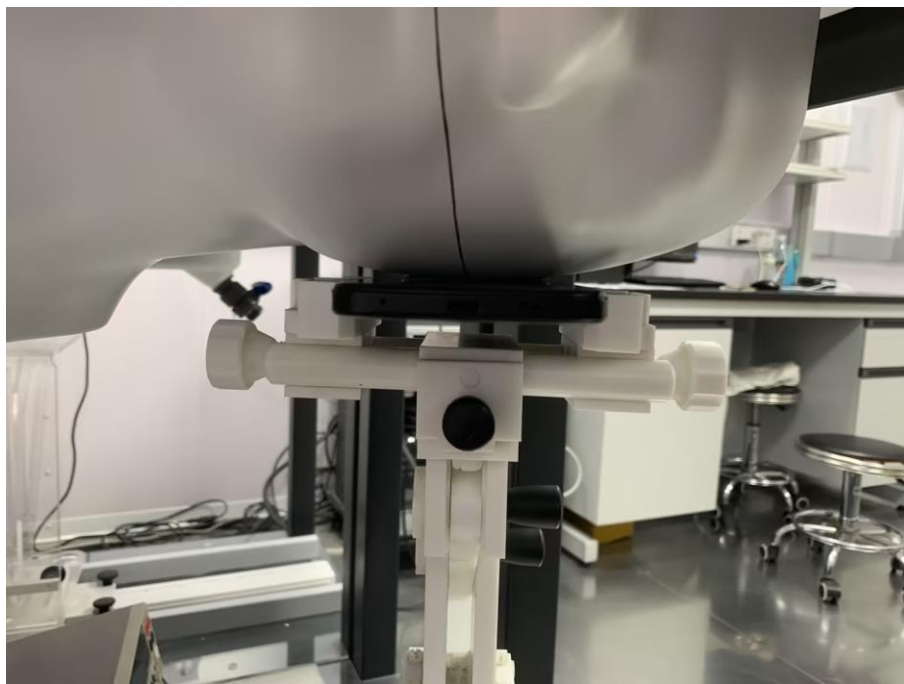


Left Tilt

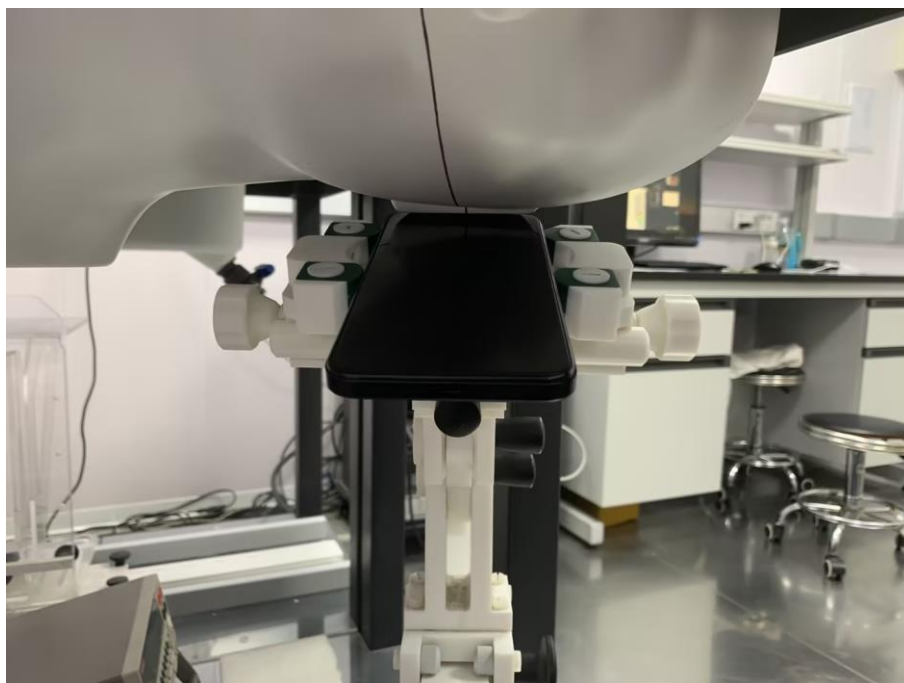


Body mode Exposure Conditions

Test distance: 10mm

Body Front

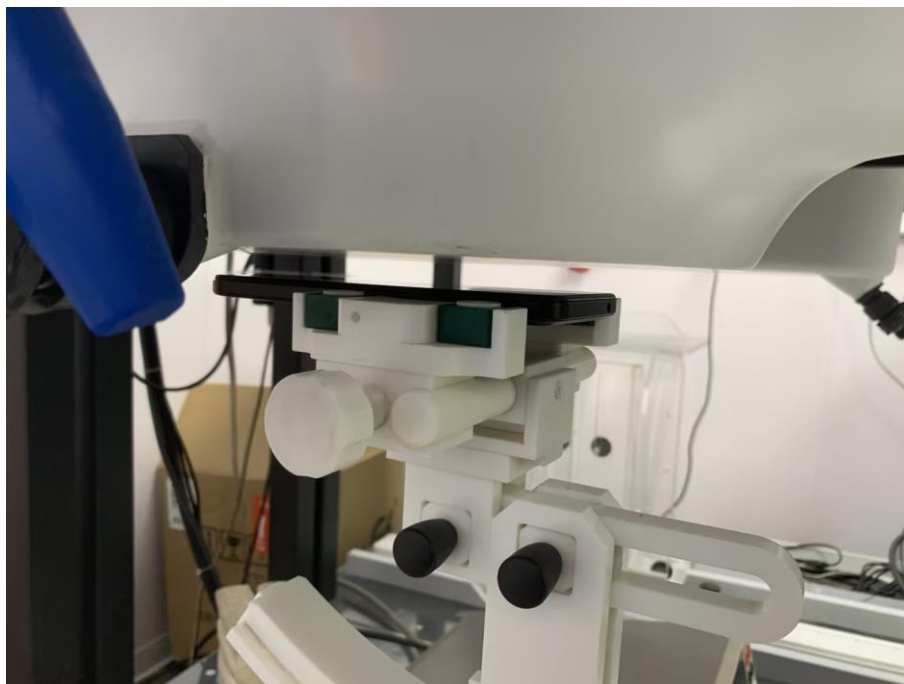

Body Back

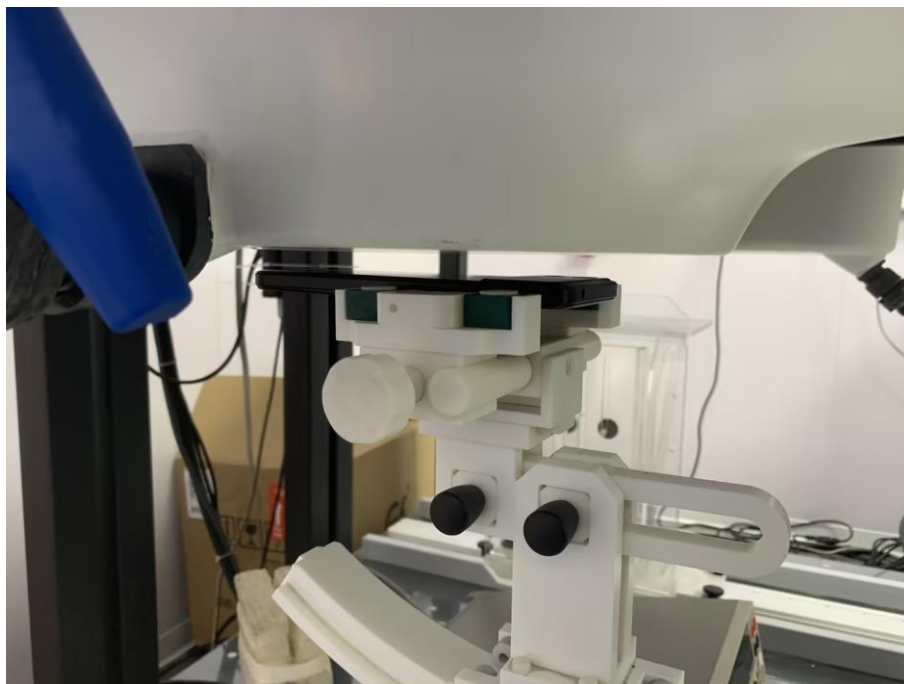

Body Right




Body Left



Body Top



Body Bottom

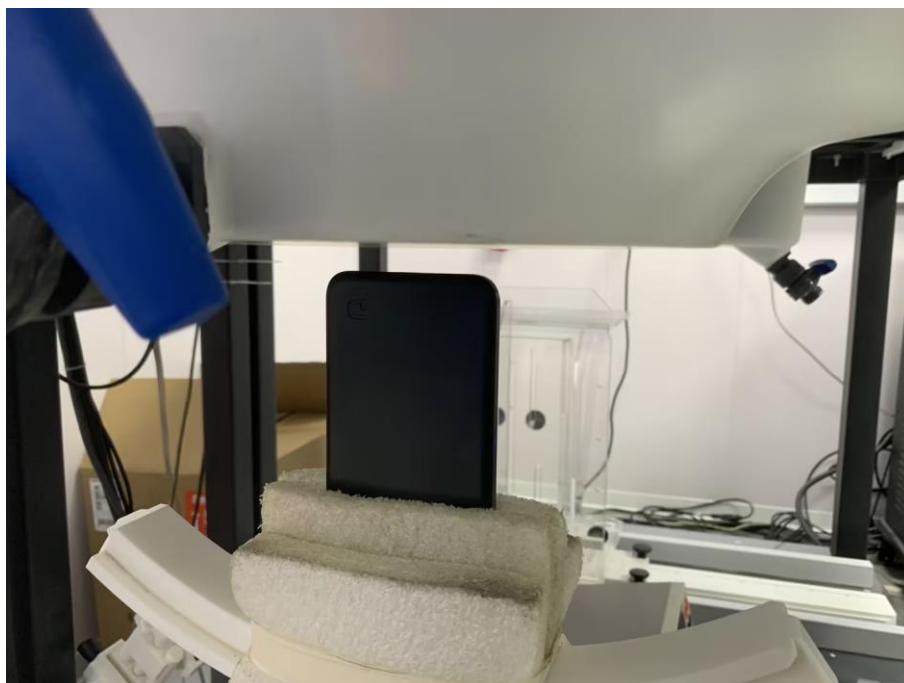

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******