



FCC TEST REPORT

Applicant: Stark Future SL
Address: C/Batan 6, 08830, Sant boi de Llobregat, Barcelona, Spain
Manufacturer: Stark Future SL
Address: C/Batan 6, 08830, Sant boi de Llobregat, Barcelona, Spain
EUT: Stark Varg
Trade Mark: N/A
Model Number: SMX1
Date of Receipt: Aug. 23, 2023
Test Date: Aug. 23, 2023 - Sep. 01, 2023
Date of Report: Sep. 01, 2023
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China
Applicable Standards: FCC Part 15 Subpart B
ANSI C63.4:2014
Test Result: Pass
Report Number: DL-20230901043E

Prepared (Test Engineer): HuiLian Xu

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION.....	4
4. TEST INSTRUMENT USED.....	5
5. CONDUCTED EMISSION TEST.....	6
6. RADIATION EMISSION TEST.....	10
7. SETUP PHOTOGRAPHS.....	16
8. EUT PHOTOGRAPHS.....	17

**1. VERSION**

Version No.	Date	Description
00	Sep. 01, 2023	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
FCC PART 15 B	Conducted Emission at power ports	Class A	PASS	
	Radiated Emission below 1GHz	Class A	PASS	
	Radiated Emission above 1GHz	Class A	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China



3. GENERAL INFORMATION


3.1 Description of Device (EUT)

EUT: Stark Varg
Trade Mark: N/A
Model Number: SMX1
Test Model: SMX1
Model difference: N/A
Power Supply: 370V from battery
420V from charger
Working Frequency: Above 2GHz

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

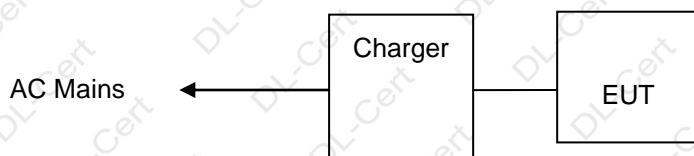

3.4 Test Mode Description

Mode1. On Mode(System running) Mode2. Charging Mode

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.56\text{dB}$

Radiated Emission Uncertainty : $\pm 3.65\text{dB}$



4. TEST INSTRUMENT USED

For Conducted Emission Test (843 Shielded Room)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
EMI Receiver	R&S	ESR	101421	Nov. 05, 2022	Nov. 04, 2023
LISN	R&S	ENV216	102417	Nov. 05, 2022	Nov. 04, 2023
Clamp	COM-POWER	CLA-050	431071	Nov. 05, 2022	Nov. 04, 2023
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 05, 2022	Nov. 04, 2023
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 05, 2022	Nov. 04, 2023
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 05, 2022	Nov. 04, 2023
843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2022	Nov. 04, 2023
843 Cable 1#	ChengYu	CE Cable	002	Nov. 05, 2022	Nov. 04, 2023

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Sep. 20, 2022	Sep. 19, 2025
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 05, 2022	Nov. 04, 2023
EMI Receiver	R&S	ESRP7	101393	Nov. 05, 2022	Nov. 04, 2023
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 05, 2022	Nov. 04, 2023
Amplifier	EMEC	EM01G8GA	00270	Nov. 05, 2022	Nov. 04, 2023
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 05, 2022	Nov. 04, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2022	Nov. 04, 2023
966 Cable 1#	ChengYu	966	004	Nov. 05, 2022	Nov. 04, 2023
966 Cable 2#	ChengYu	966	003	Nov. 05, 2022	Nov. 04, 2023


Other

Name	Manufacturer	Model	Software version
EMC Conduction Test System	FALA	EZ_EMG	EMC-CON 3A1.1
EMC radiation test system	FALA	EZ_EMG	FA-03A2
RF test system	MAIWEI	MTS8310	2.0.0.0
RF communication test system	MAIWEI	MTS8200	2.0.0.0

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

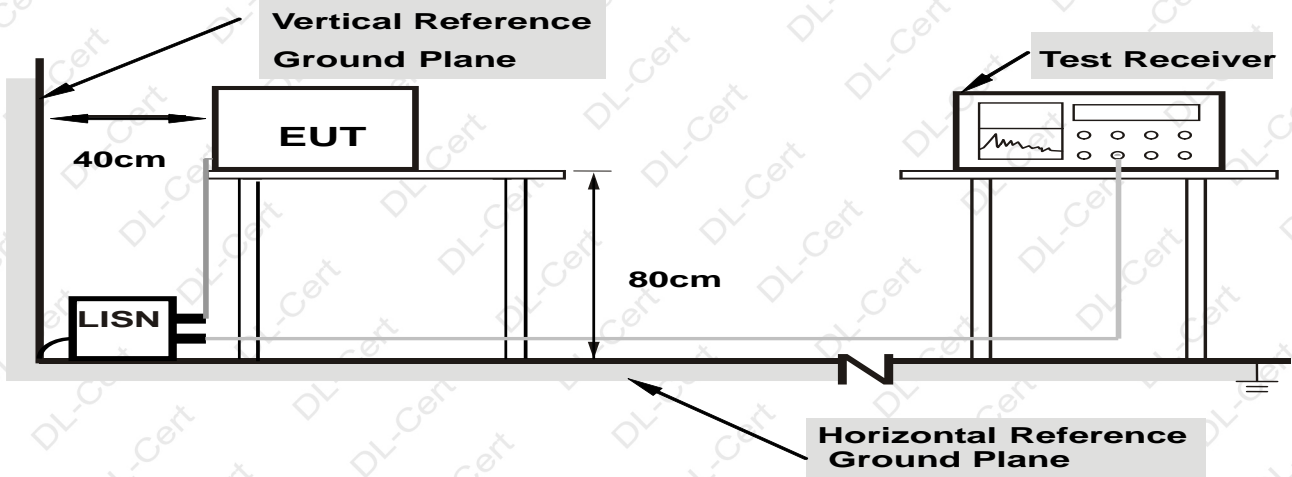

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC PART 15 B

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15~0.50	79	73
0.50~30.00	66	60

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC PART 15 B requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

- 5.4.1 Setup the EUT and simulators as shown in Section 5.1.
- 5.4.2 Turn on the power of all equipments.
- 5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.4** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.


5.6 Test Result

PASS

Please refer to the following page.



Conducted Emission Test Data			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 2

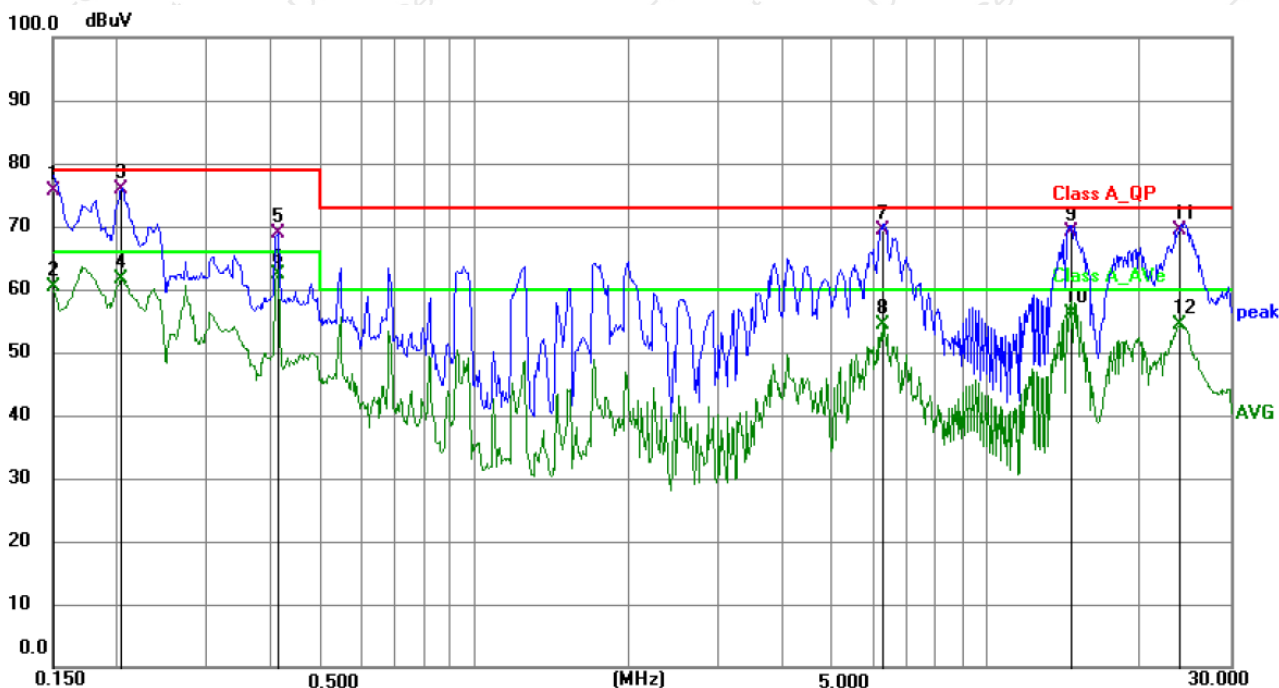


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	55.93	19.74	75.67	79.00	-3.33	QP	P	
2	0.1500	40.69	19.74	60.43	66.00	-5.57	AVG	P	
3 *	0.2040	56.20	19.80	76.00	79.00	-3.00	QP	P	
4	0.2040	41.72	19.80	61.52	66.00	-4.48	AVG	P	
5	0.4110	48.99	19.82	68.81	79.00	-10.19	QP	P	
6	0.4110	42.58	19.82	62.40	66.00	-3.60	AVG	P	
7	6.2700	48.89	20.44	69.33	73.00	-3.67	QP	P	
8	6.2700	34.01	20.44	54.45	60.00	-5.55	AVG	P	
9	14.7030	47.73	21.37	69.10	73.00	-3.90	QP	P	
10	14.7030	34.79	21.37	56.16	60.00	-3.84	AVG	P	
11	23.8200	46.98	22.50	69.48	73.00	-3.52	QP	P	
12	23.8200	31.86	22.50	54.36	60.00	-5.64	AVG	P	

Remark: Correct Factor = Cable lose + LISN insertion loss;
 Level = Reading + Correct factor; Margin = Level – Limit;



Conducted Emission Test Data			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 2

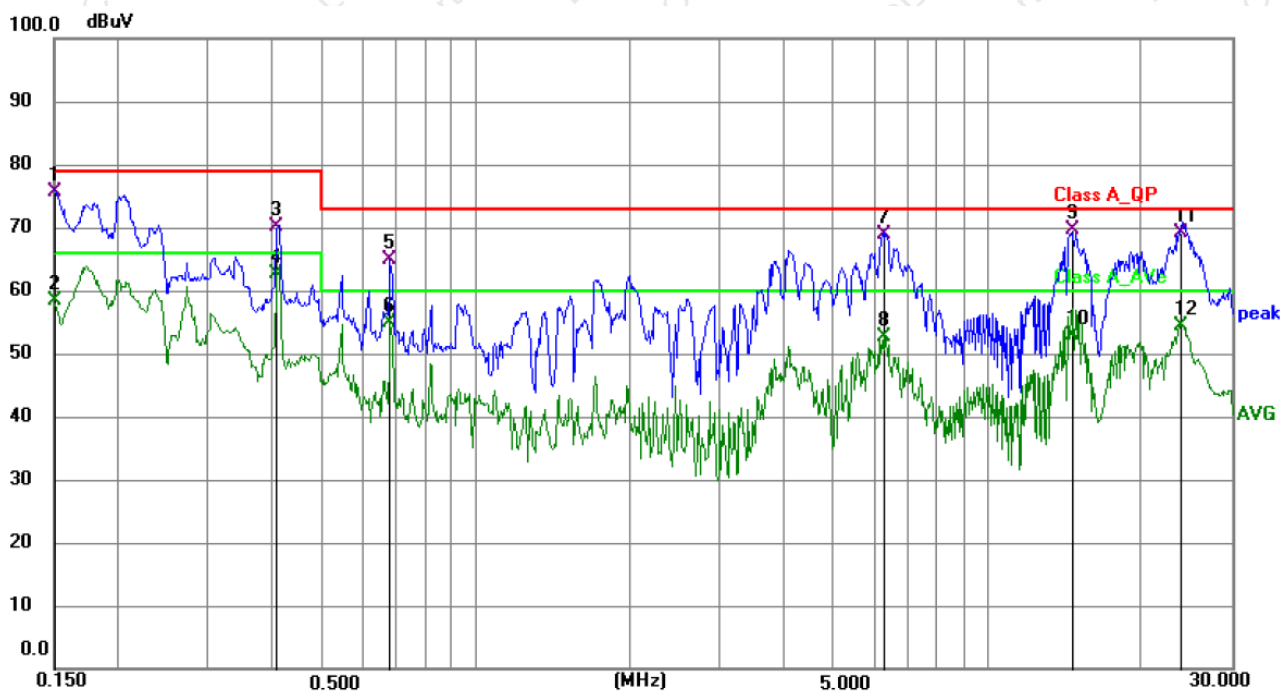

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	55.93	19.74	75.67	79.00	-3.33	QP	P	
2	0.1500	38.69	19.74	58.43	66.00	-7.57	AVG	P	
3	0.4100	50.42	19.82	70.24	79.00	-8.76	QP	P	
4 *	0.4100	42.93	19.82	62.75	66.00	-3.25	AVG	P	
5	0.6809	45.03	19.91	64.94	73.00	-8.06	QP	P	
6	0.6809	34.99	19.91	54.90	60.00	-5.10	AVG	P	
7	6.2930	48.38	20.44	68.82	73.00	-4.18	QP	P	
8	6.2930	32.19	20.44	52.63	60.00	-7.37	AVG	P	
9	14.5950	48.21	21.36	69.57	73.00	-3.43	QP	P	
10	14.5950	31.40	21.36	52.76	60.00	-7.24	AVG	P	
11	23.9591	46.57	22.51	69.08	73.00	-3.92	QP	P	
12	23.9591	31.79	22.51	54.30	60.00	-5.70	AVG	P	


Remark: Correct Factor = Cable lose + LISN insertion loss;

Level = Reading + Correct factor; Margin = Level – Limit;


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

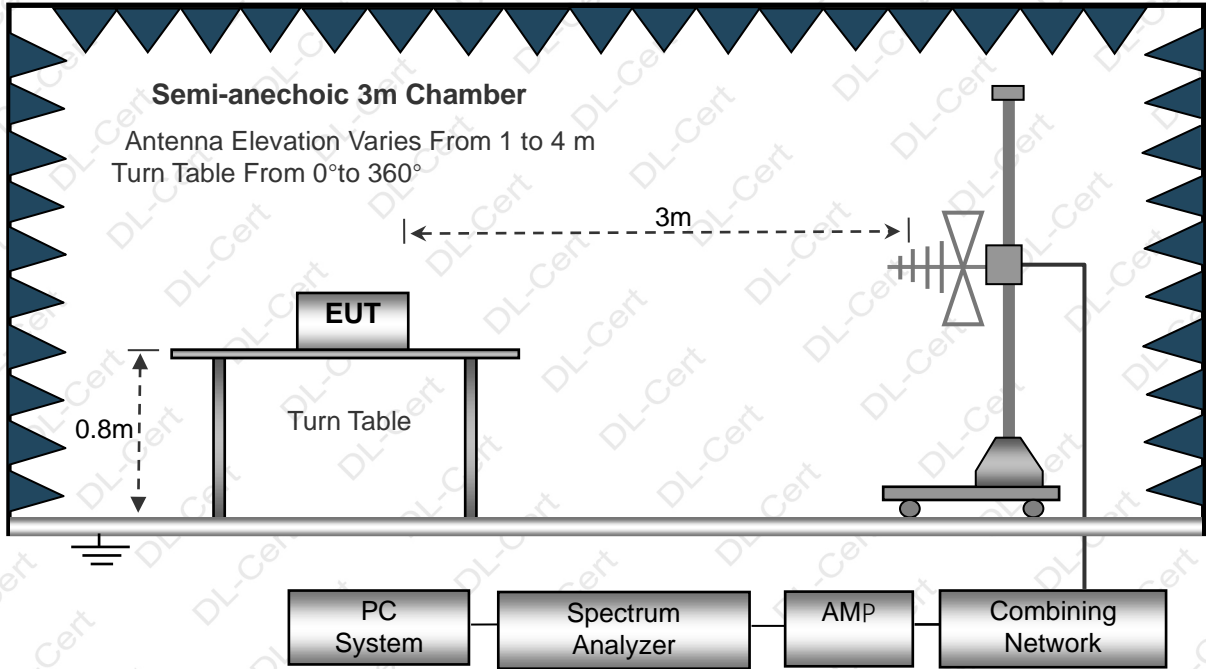

Above 1GHz

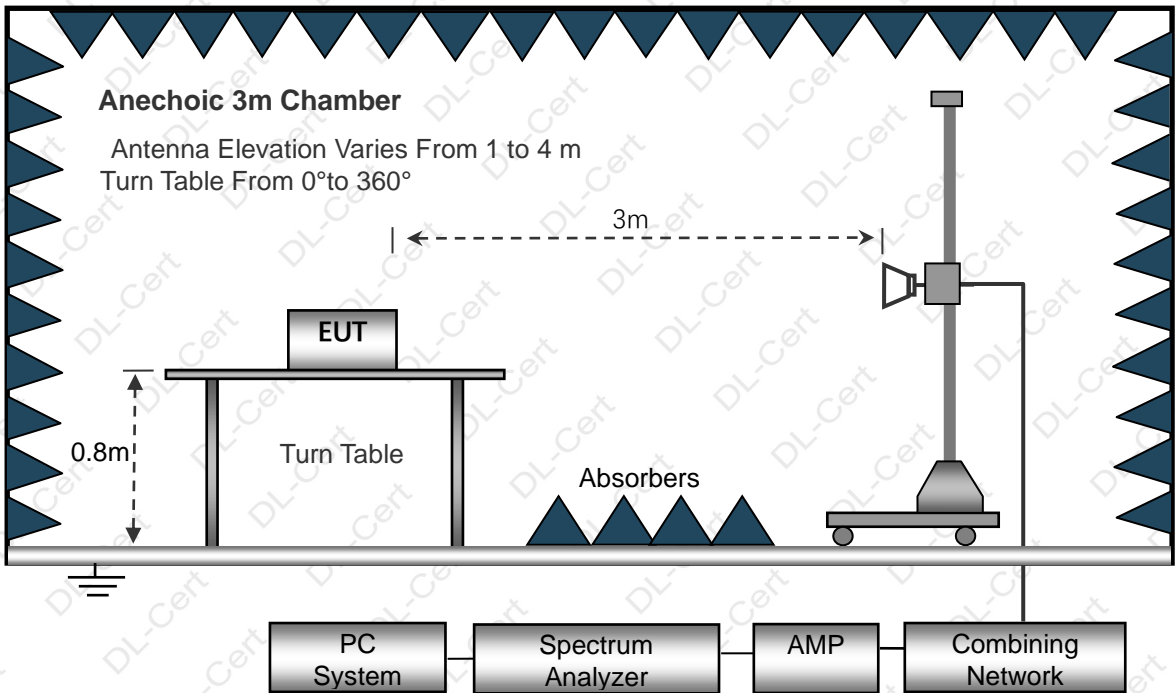

6.2 Test Standard and Limit

FCC PART 15 B



Below 1GHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	50.0
88 ~ 216	3	53.5
216 ~ 960	3	56.0
960 ~ 1000	3	64.0

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m	Detector
1000~6000	3	80.0	PEAK
1000~6000	3	60.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC PART 15 B regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

6) Only record the worst case data in the report.

6.6 Test Result


PASS

Please refer to the following page.

Above 1GHz, the PK emission below the average's limit, the average's emission was no recording.



Radiation Emission Test Data Below 1GHz			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

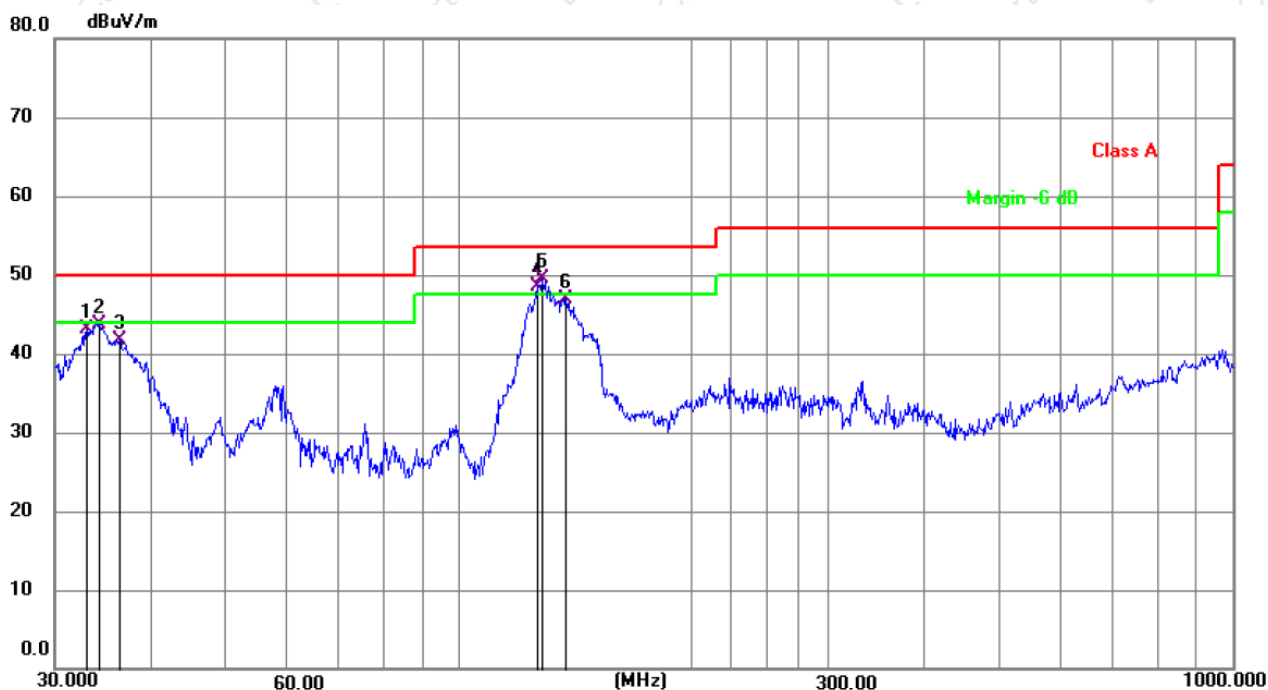

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.9791	60.87	-17.73	43.14	50.00	-6.86	QP
2	34.2760	61.24	-17.62	43.62	50.00	-6.38	QP
3	36.3813	59.02	-17.33	41.69	50.00	-8.31	QP
4 !	126.3285	66.75	-18.31	48.44	53.50	-5.06	QP
5 *	128.1130	67.67	-18.26	49.41	53.50	-4.09	QP
6	137.4200	64.52	-17.63	46.89	53.50	-6.61	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data Below 1GHz			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

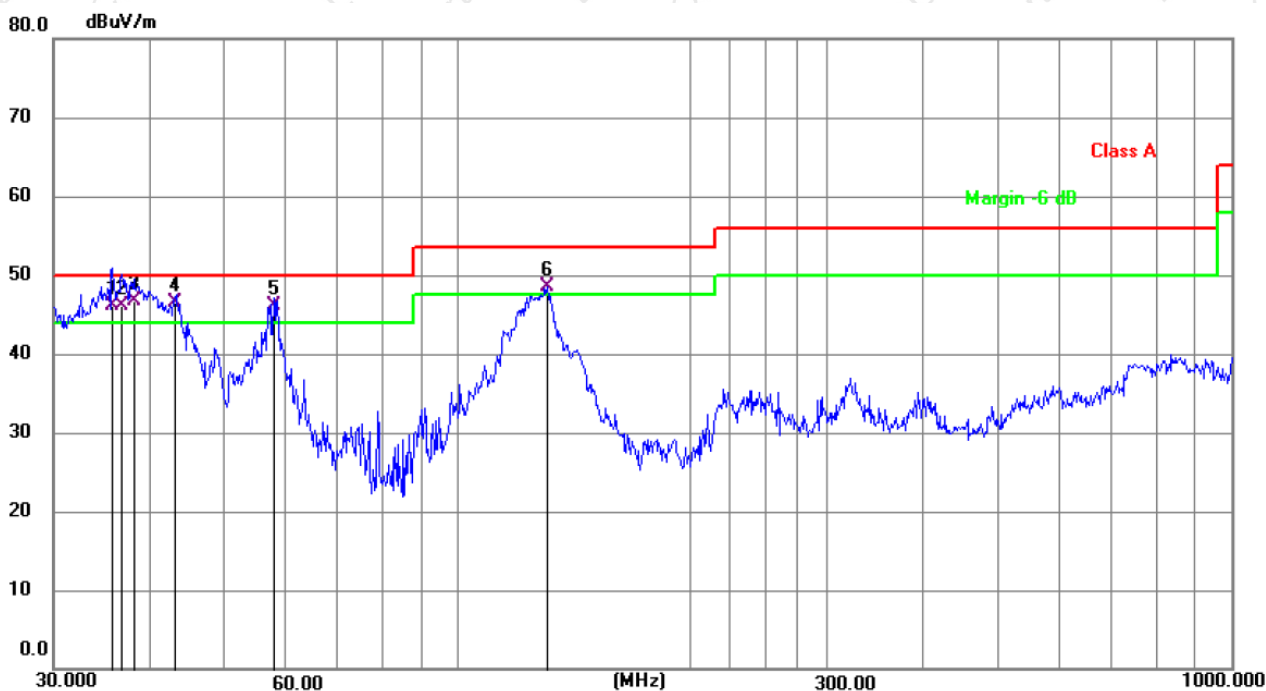

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	35.7490	63.60	-17.47	46.13	50.00	-3.87	QP
2 !	36.7661	63.27	-17.26	46.01	50.00	-3.99	QP
3 *	38.0782	63.71	-17.09	46.62	50.00	-3.38	QP
4 !	43.2014	64.13	-17.63	46.50	50.00	-3.50	QP
5 !	57.7961	64.24	-18.13	46.11	50.00	-3.89	QP
6 !	130.3790	66.64	-18.13	48.51	53.50	-4.99	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data Above 1GHz			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

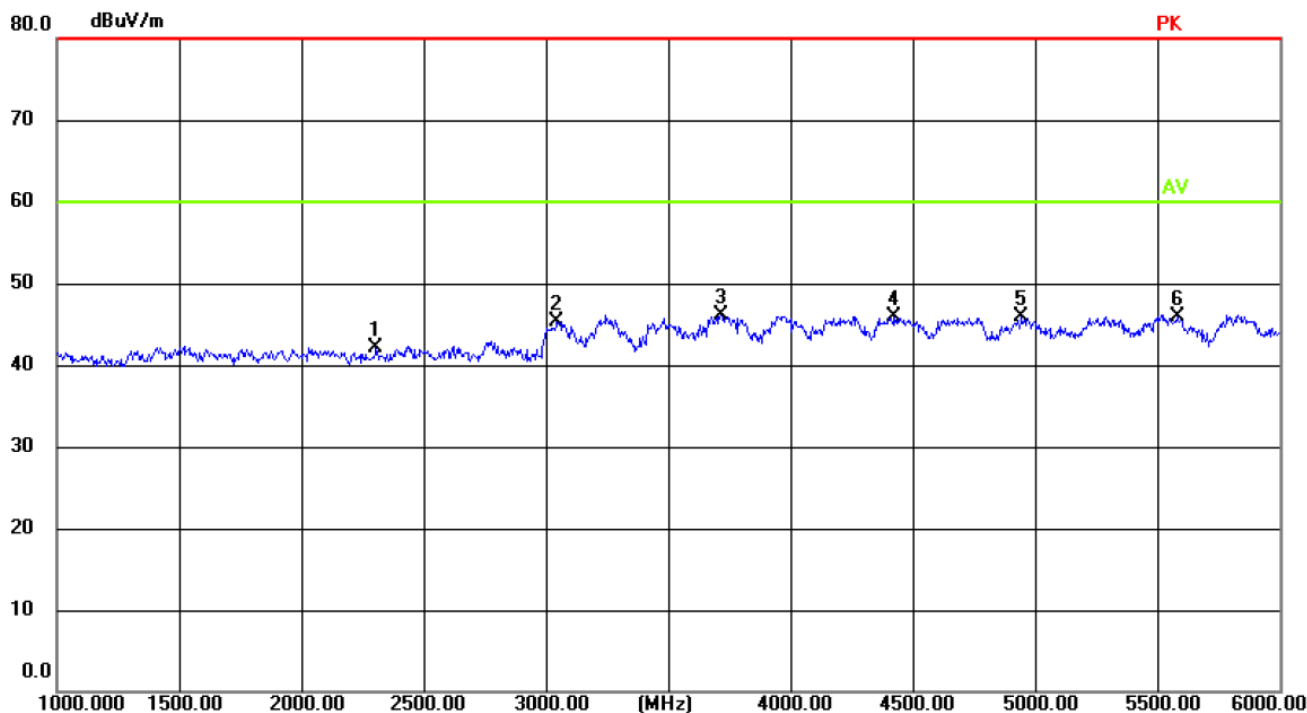

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		2305.000	50.14	-8.07	42.07	80.00	-37.93	peak
2		3045.000	51.89	-6.62	45.27	80.00	-34.73	peak
3	*	3715.000	52.93	-6.79	46.14	80.00	-33.86	peak
4		4425.000	52.34	-6.50	45.84	80.00	-34.16	peak
5		4945.000	51.48	-5.63	45.85	80.00	-34.15	peak
6		5580.000	51.03	-5.22	45.81	80.00	-34.19	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data Above 1GHz			
Temperature:	24.5°C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

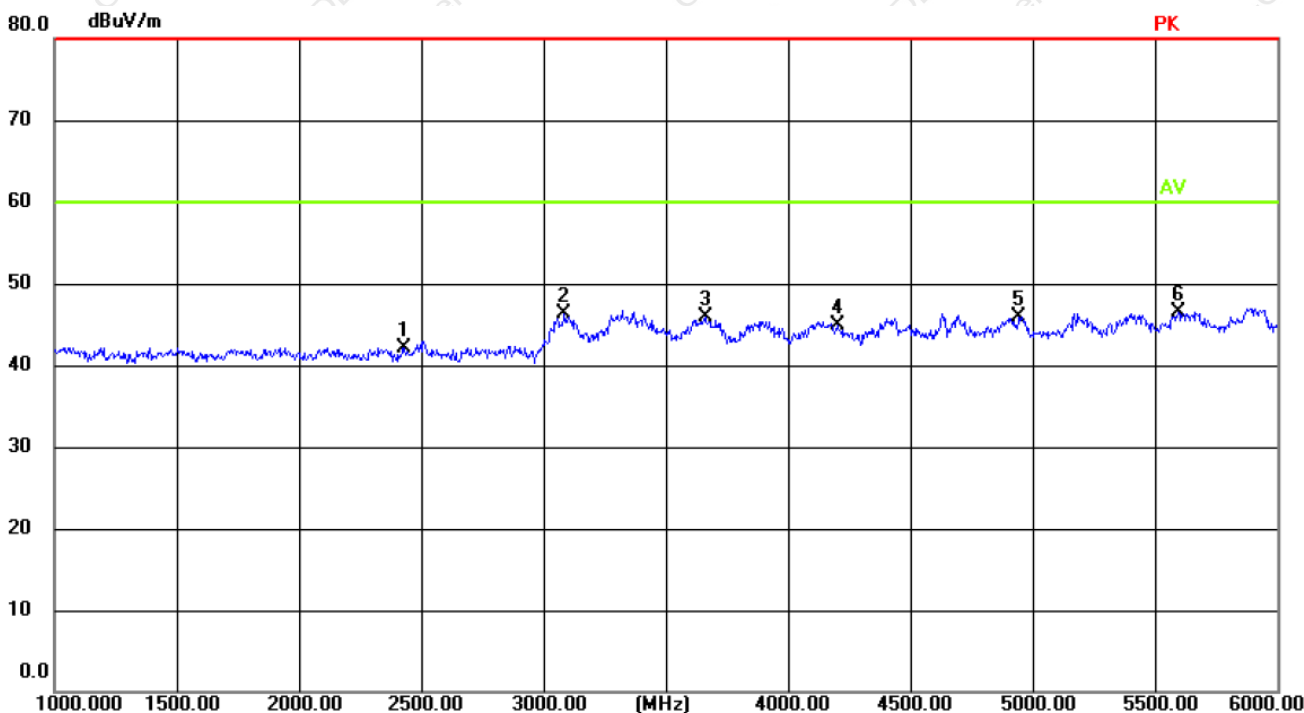

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		2430.000	50.02	-7.94	42.08	80.00	-37.92	peak
2		3085.000	52.81	-6.60	46.21	80.00	-33.79	peak
3		3660.000	52.69	-6.69	46.00	80.00	-34.00	peak
4		4200.000	51.79	-6.92	44.87	80.00	-35.13	peak
5		4945.000	51.48	-5.63	45.85	80.00	-34.15	peak
6	*	5595.000	51.64	-5.22	46.42	80.00	-33.58	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



7. SETUP PHOTOGRAPHS

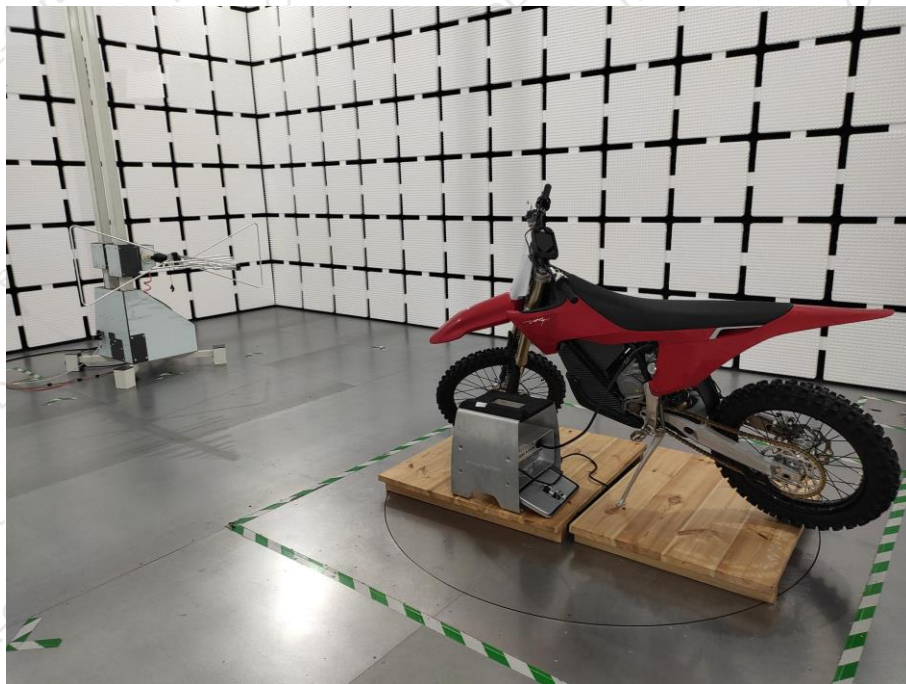



8. EUT PHOTOGRAPHS





***** END OF REPORT *****