


Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

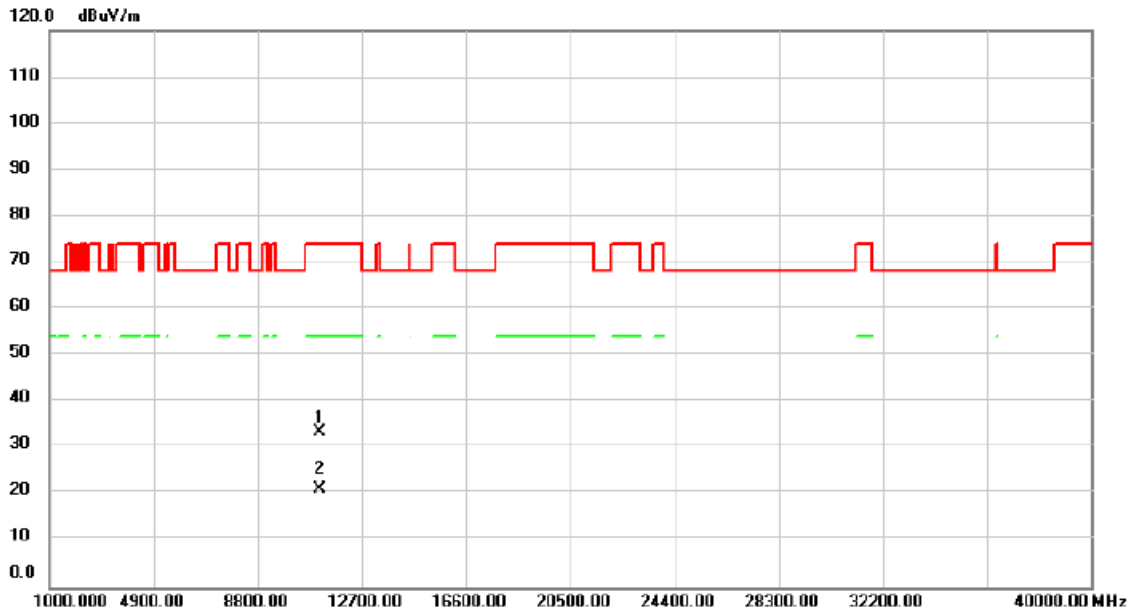


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11100.00	33.59	-0.04	33.55	74.00	-40.45	peak		
2	*	11100.00	21.05	-0.04	21.01	54.00	-32.99	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

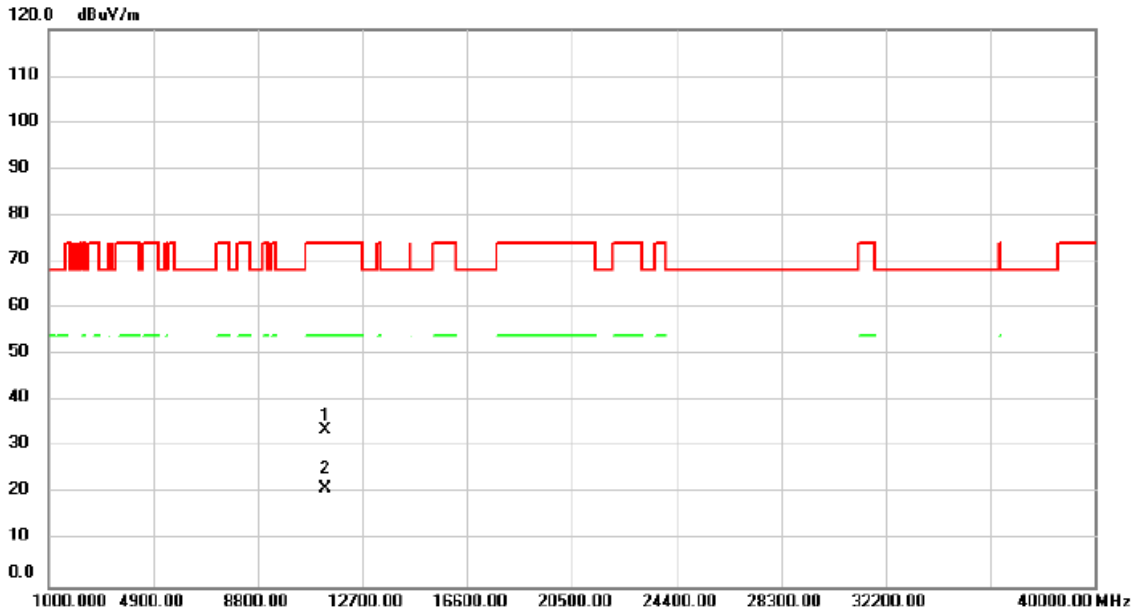


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11340.00	33.11	0.49	33.60	74.00	-40.40	peak		
2	*	11340.00	20.77	0.49	21.26	54.00	-32.74	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

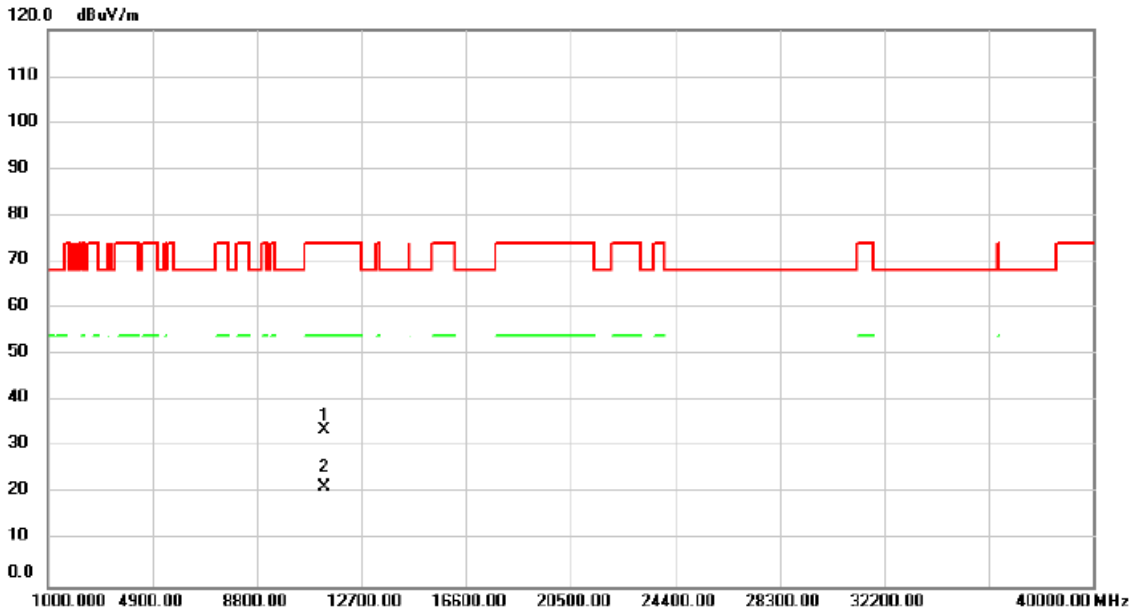


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		11340.00	33.32	0.49	33.81	74.00	-40.19			peak	
2	*	11340.00	20.89	0.49	21.38	54.00	-32.62			AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

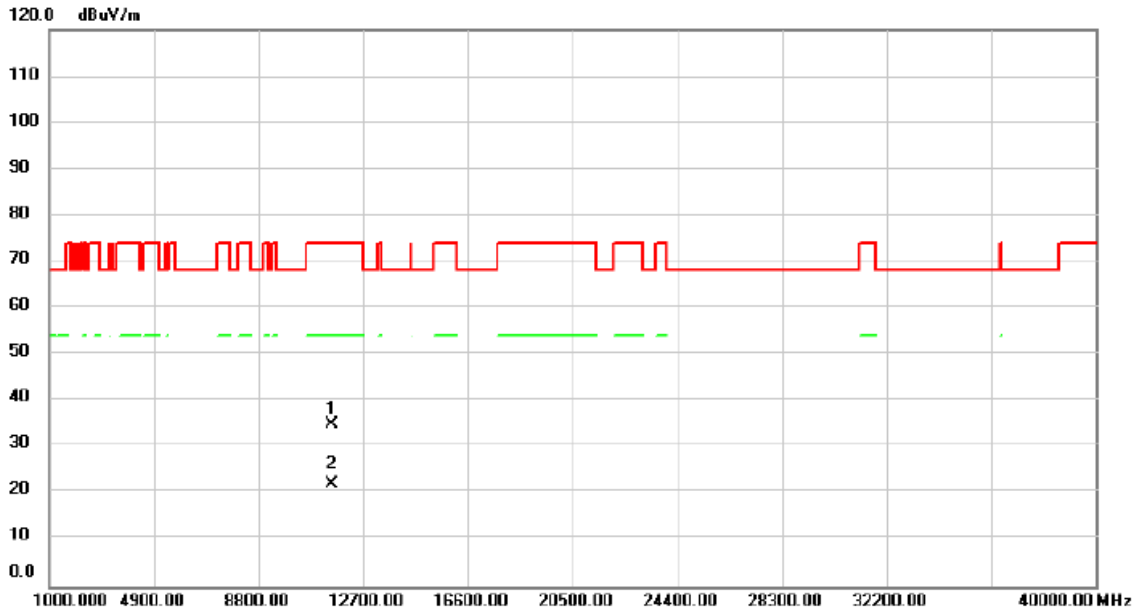


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11510.00	34.02	0.83	34.85	74.00	-39.15	peak		
2	*	11510.00	21.11	0.83	21.94	54.00	-32.06	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

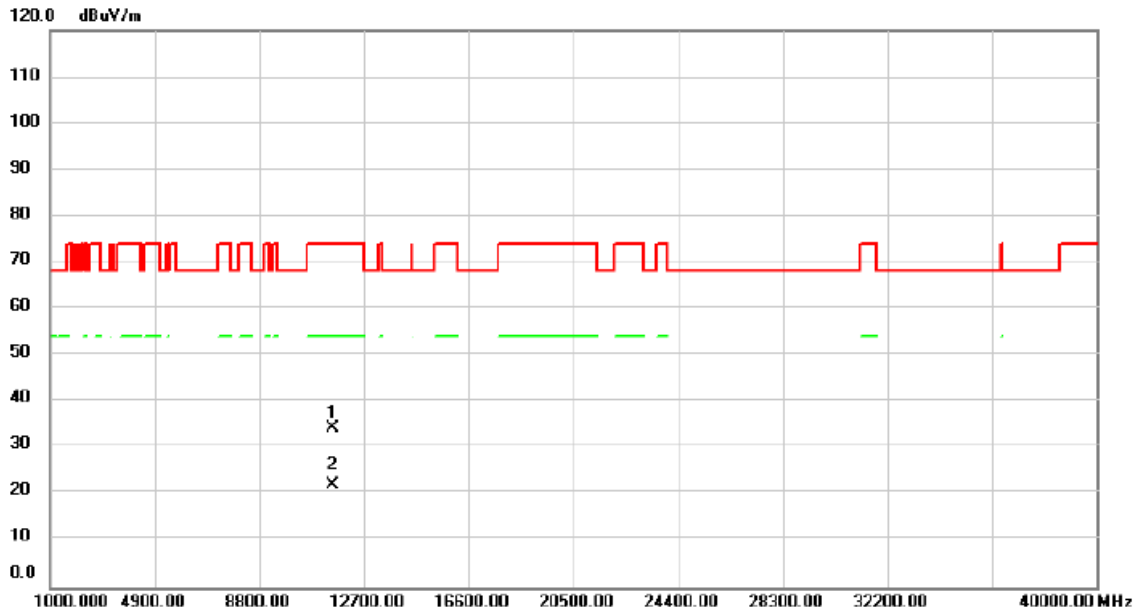


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11510.00	33.61	0.83	34.44	74.00	-39.56			peak
2	*	11510.00	21.19	0.83	22.02	54.00	-31.98			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

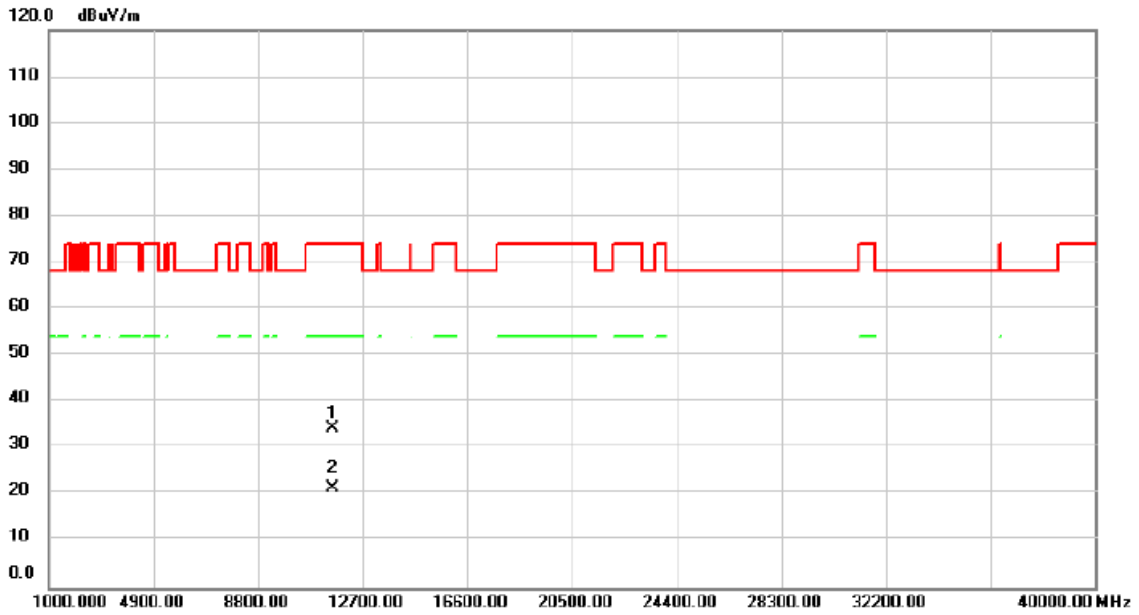


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11590.00	33.40	0.84	34.24	74.00	-39.76			peak
2	*	11590.00	20.64	0.84	21.48	54.00	-32.52			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

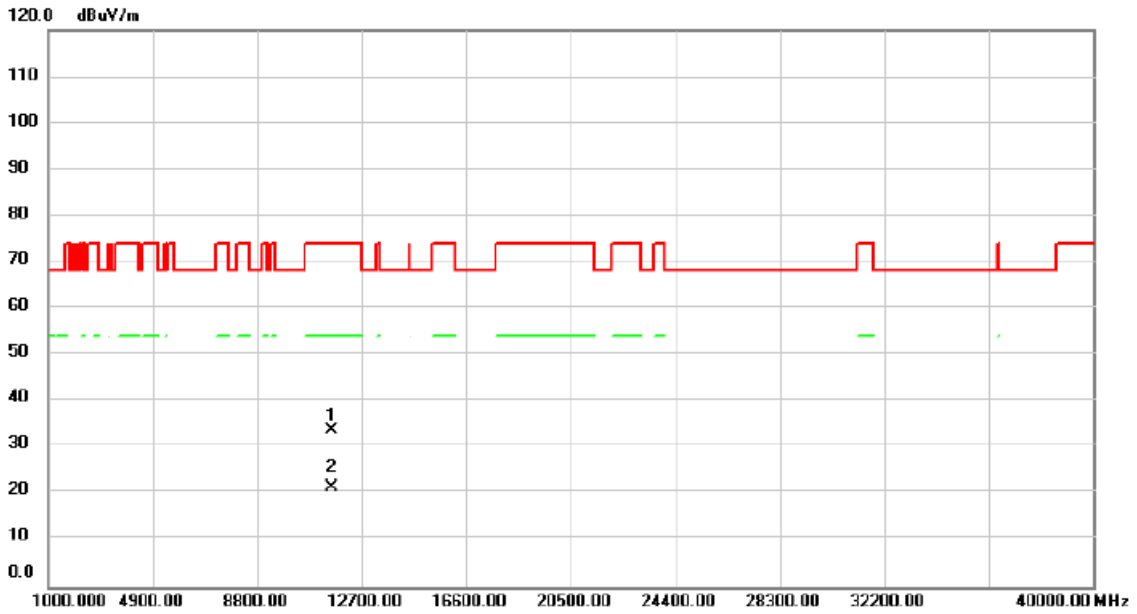


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11590.00	32.95	0.84	33.79	74.00	-40.21	peak		
2	*	11590.00	20.70	0.84	21.54	54.00	-32.46	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

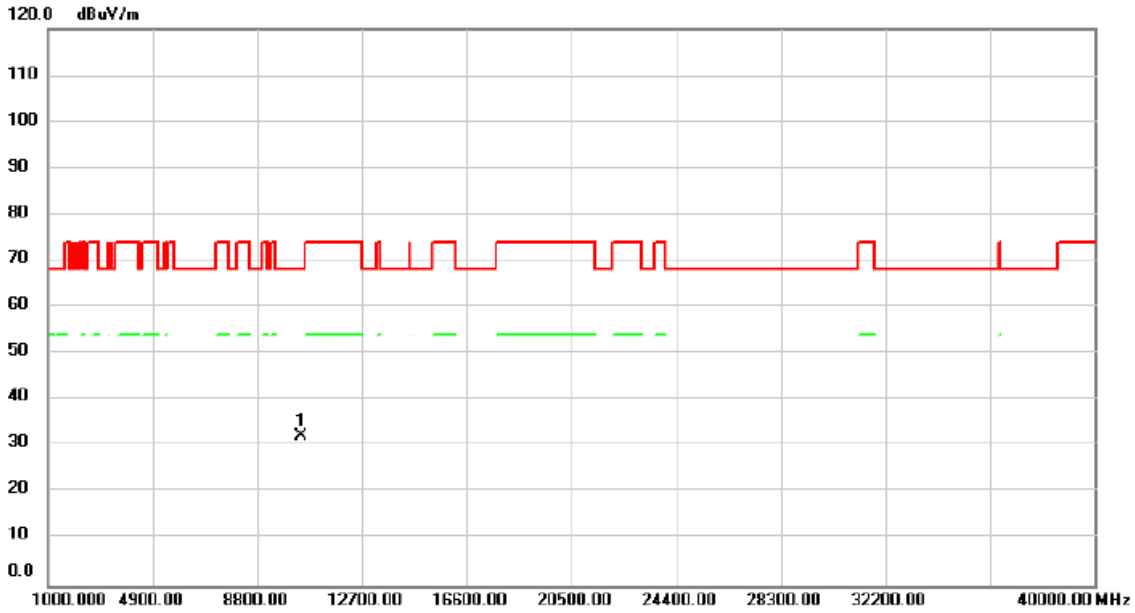


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	10420.00	32.68	-0.54	32.14	68.20	-36.06			peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

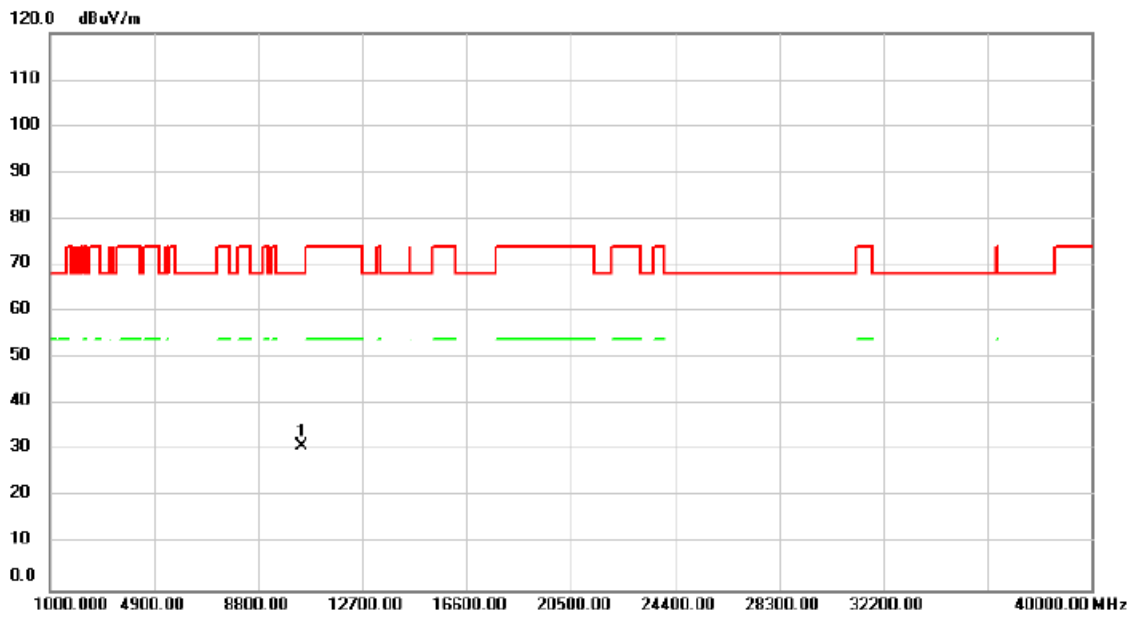


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.00	31.53	-0.54	30.99	68.20	-37.21			peak

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

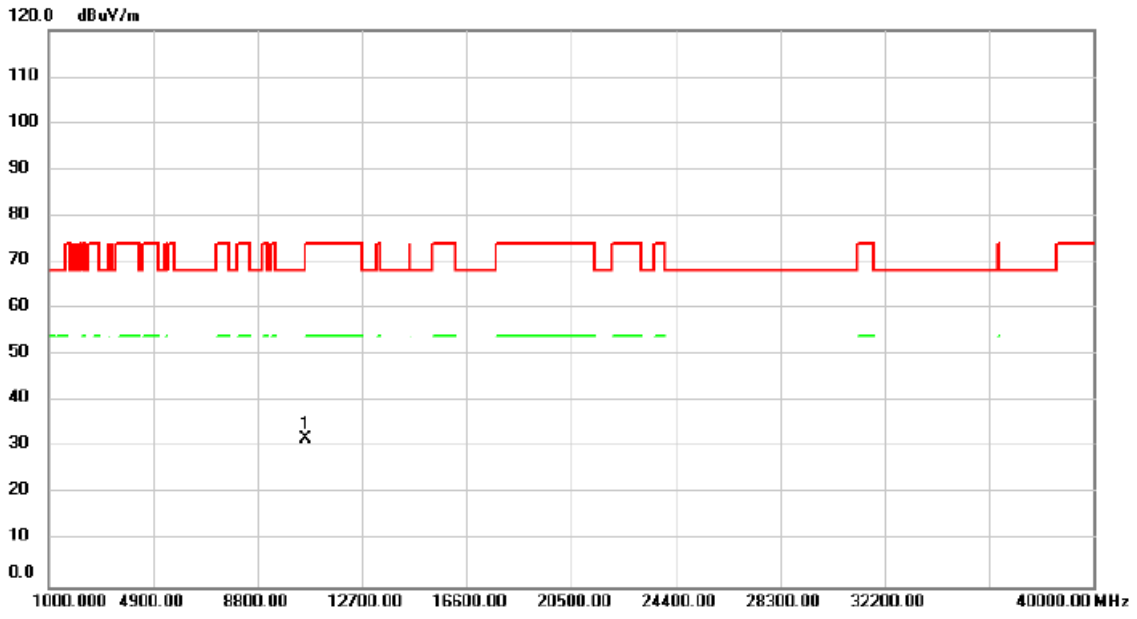


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	10580.00	32.28	-0.42	31.86	68.20	-36.34	peak			

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

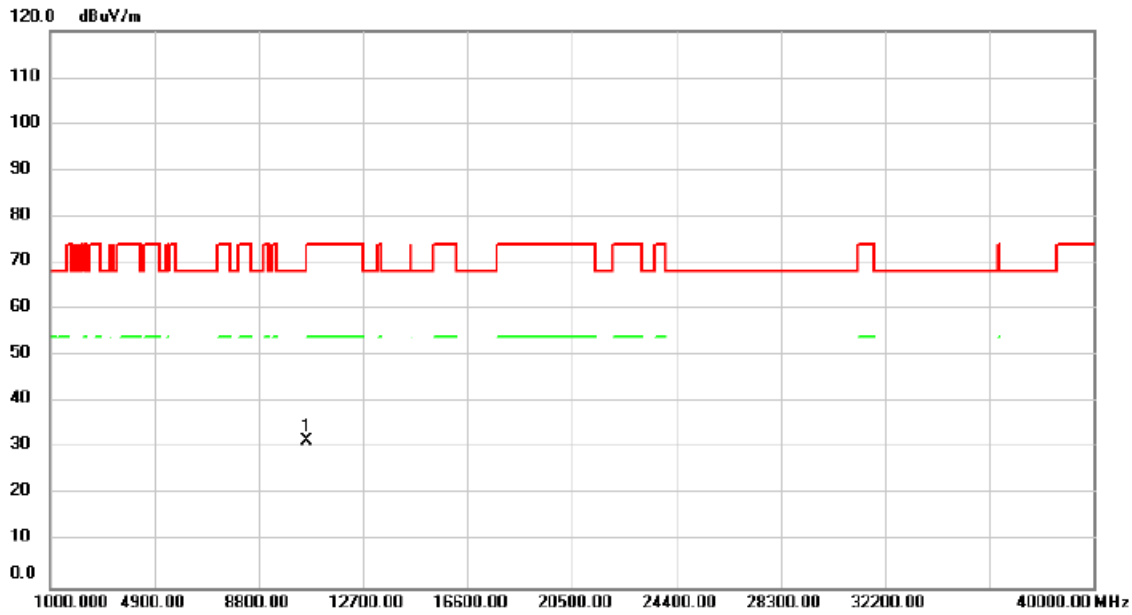


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10580.00	32.07	-0.42	31.65	68.20	-36.55	peak		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

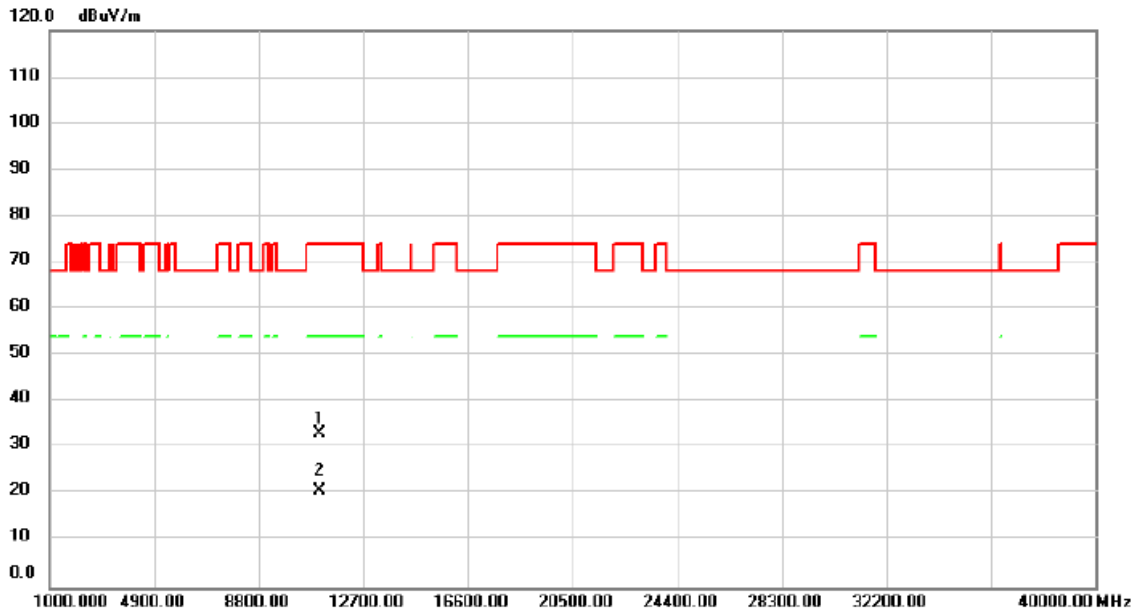


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11060.00	33.31	-0.13	33.18	74.00	-40.82			peak
2	*	11060.00	21.06	-0.13	20.93	54.00	-33.07			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

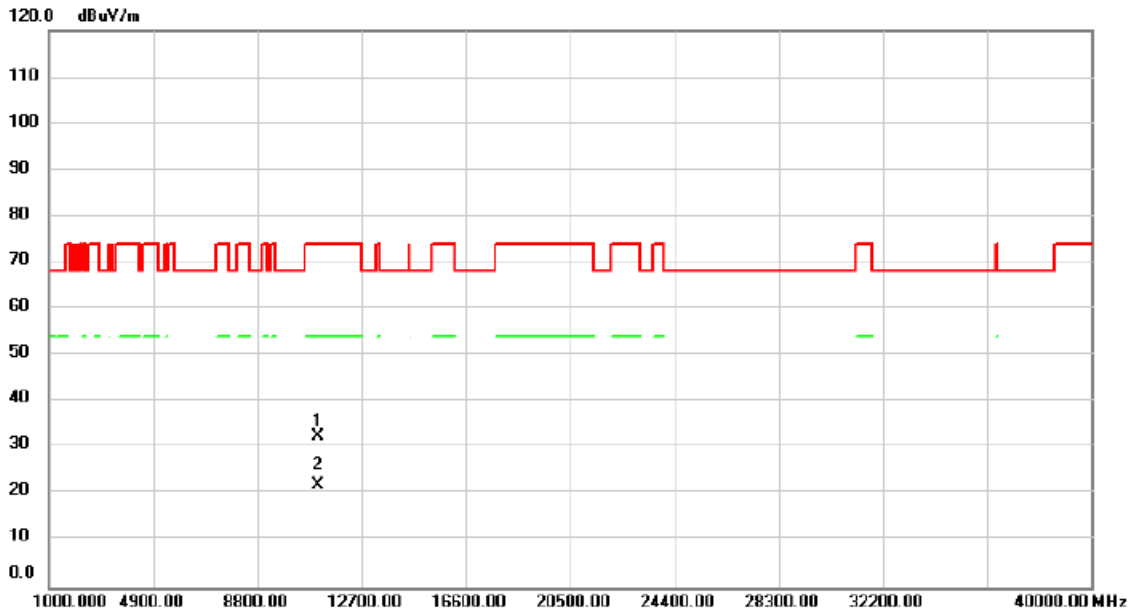


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11060.00	32.61	-0.13	32.48	74.00	-41.52	peak		
2	*	11060.00	22.11	-0.13	21.98	54.00	-32.02	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

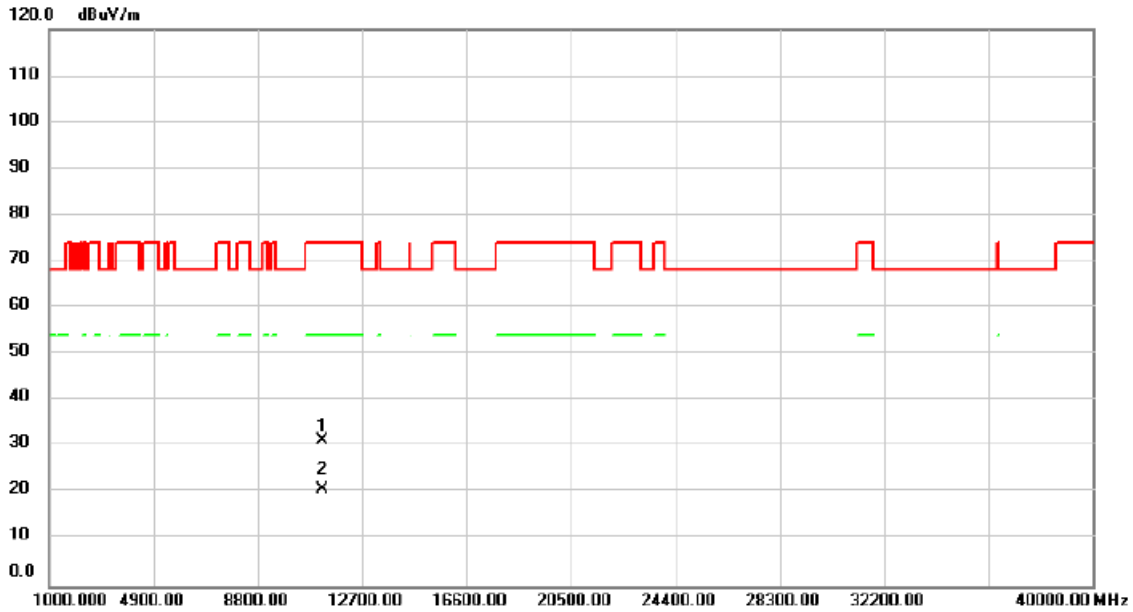


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		11220.00	31.08	0.22	31.30	74.00	-42.70			peak	
2	*	11220.00	20.59	0.22	20.81	54.00	-33.19			AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

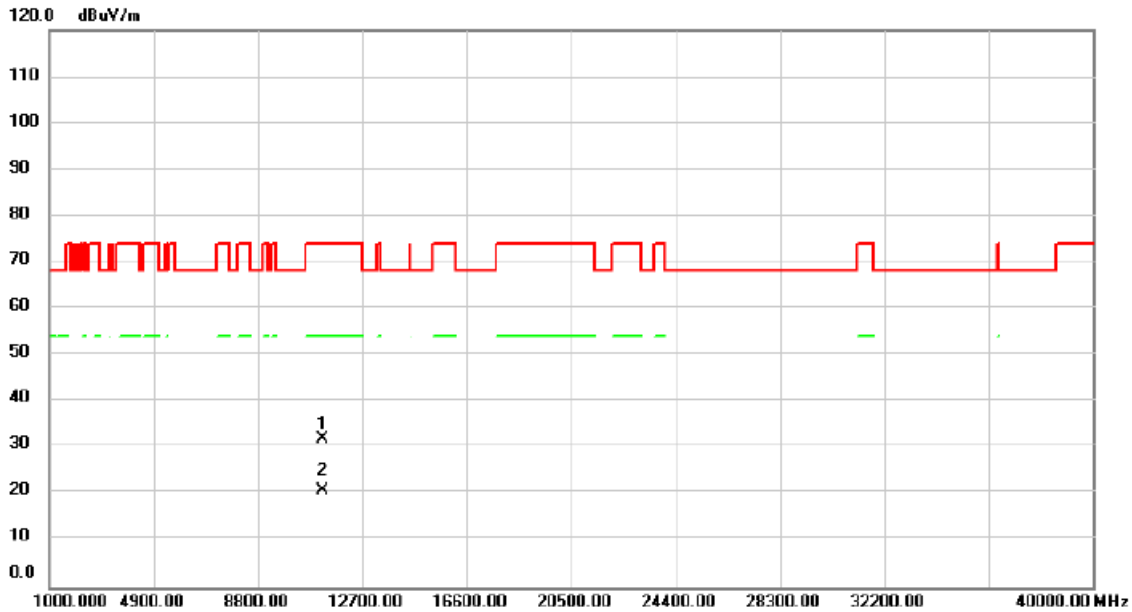


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11220.00	31.63	0.22	31.85	74.00	-42.15	peak		
2	*	11220.00	20.68	0.22	20.90	54.00	-33.10	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

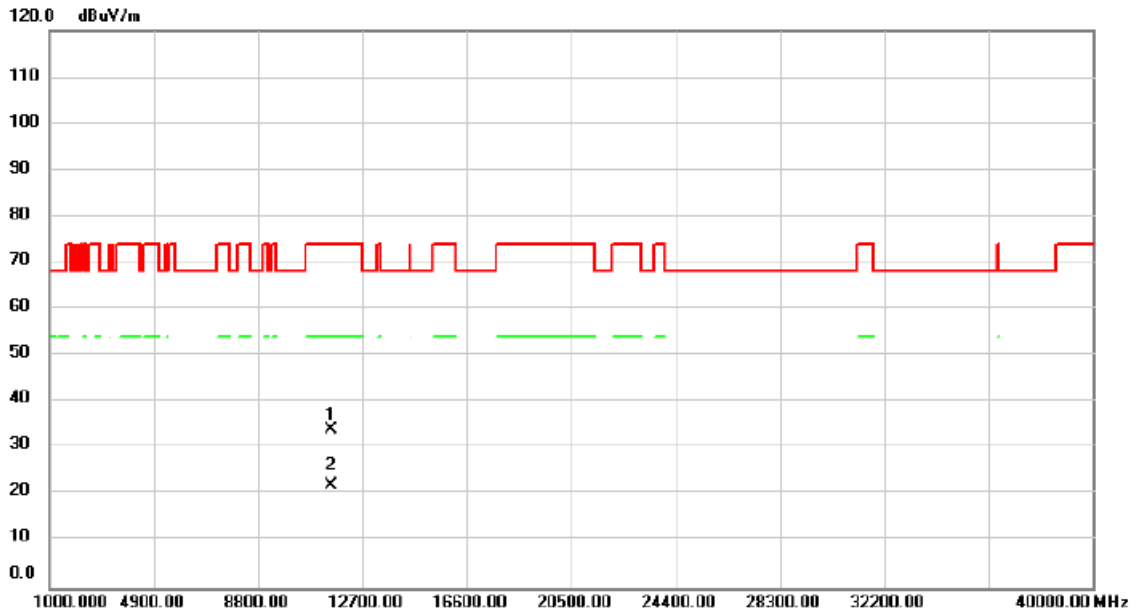


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11550.00	33.14	0.84	33.98	74.00	-40.02			peak
2	*	11550.00	21.10	0.84	21.94	54.00	-32.06			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

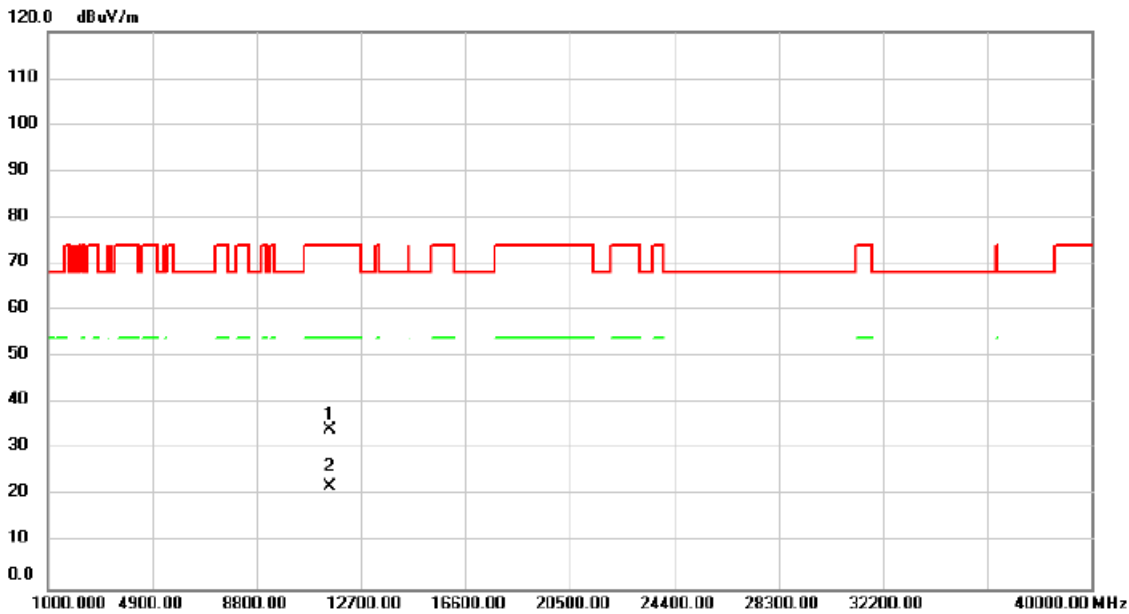


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11550.00	33.37	0.84	34.21	74.00	-39.79	peak		
2	*	11550.00	21.18	0.84	22.02	54.00	-31.98	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**Straddle channel:**

Test Mode	IEEE 802.11a	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

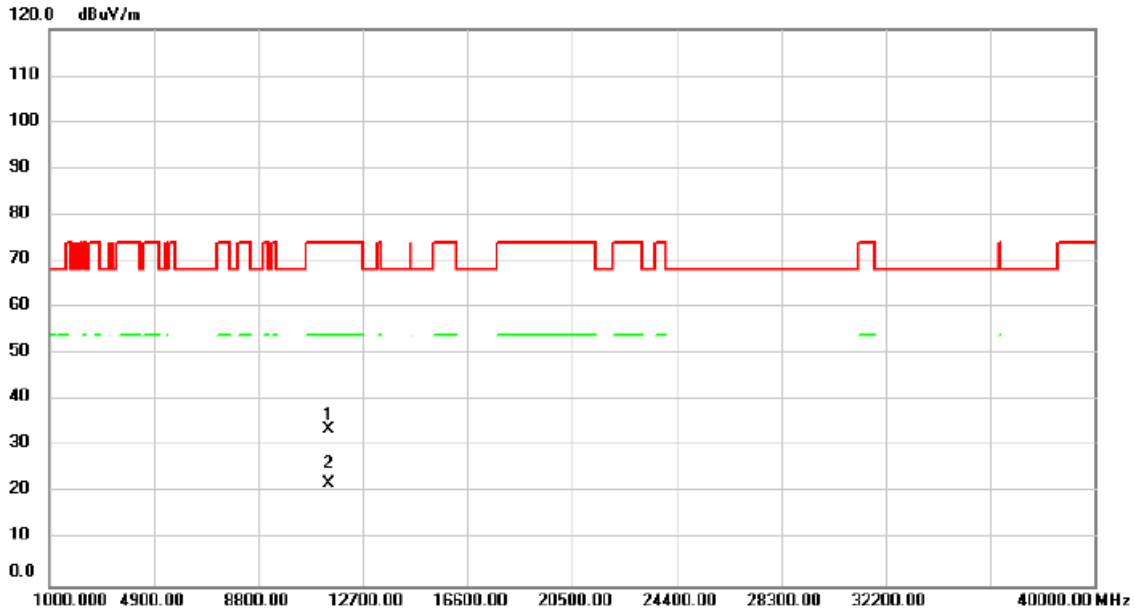


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11440.00	33.03	0.70	33.73	74.00	-40.27	peak			
2	*	11440.00	21.34	0.70	22.04	54.00	-31.96	AVG			

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

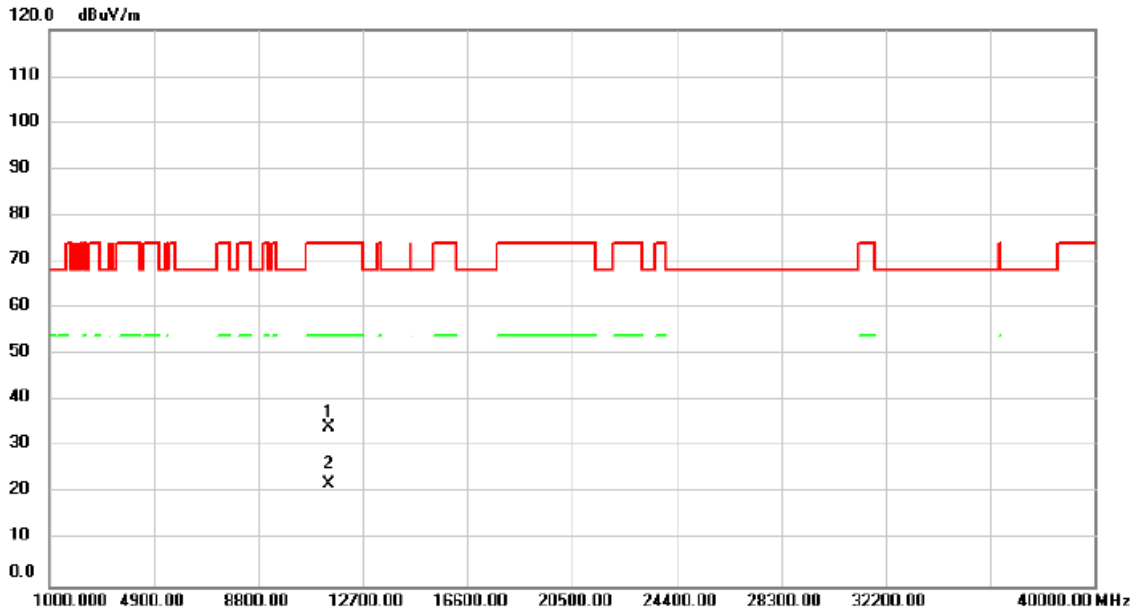


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		11440.00	33.78	0.70	34.48	74.00	-39.52			peak	
2	*	11440.00	21.32	0.70	22.02	54.00	-31.98			AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

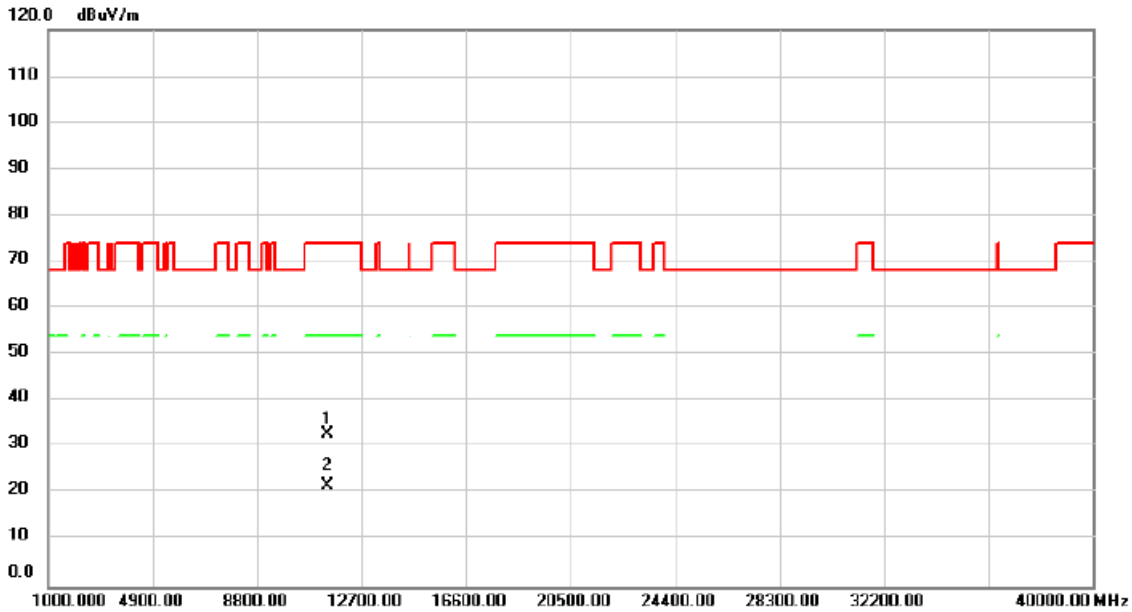


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		11440.00	32.19	0.70	32.89	74.00	-41.11	peak		
2	*	11440.00	21.02	0.70	21.72	54.00	-32.28	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

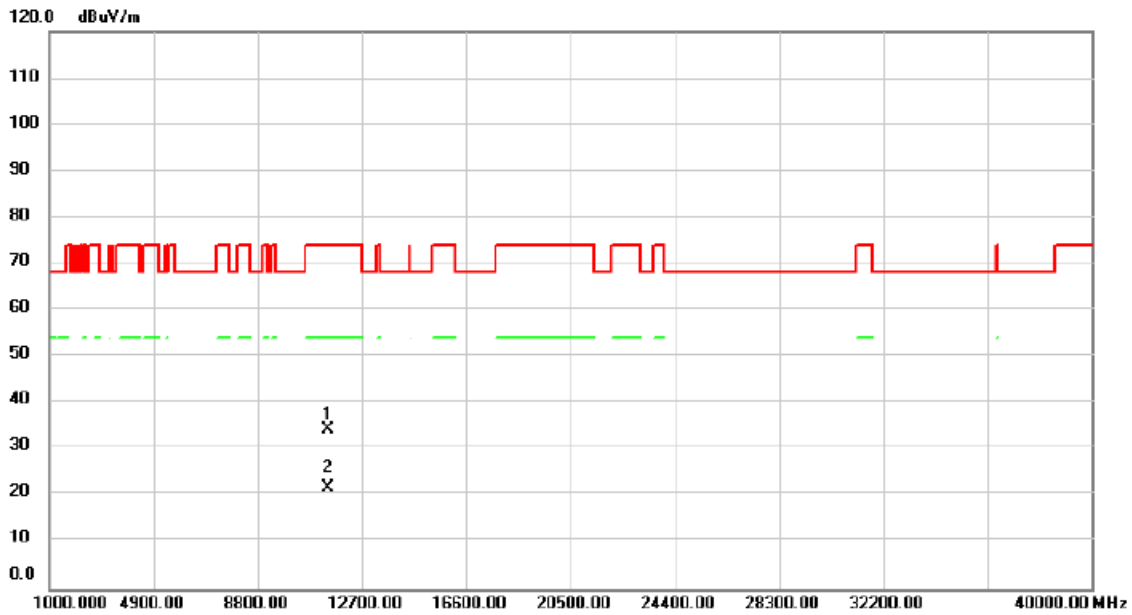


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11440.00	33.73	0.70	34.43	74.00	-39.57			peak
2	*	11440.00	21.18	0.70	21.88	54.00	-32.12			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/11
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

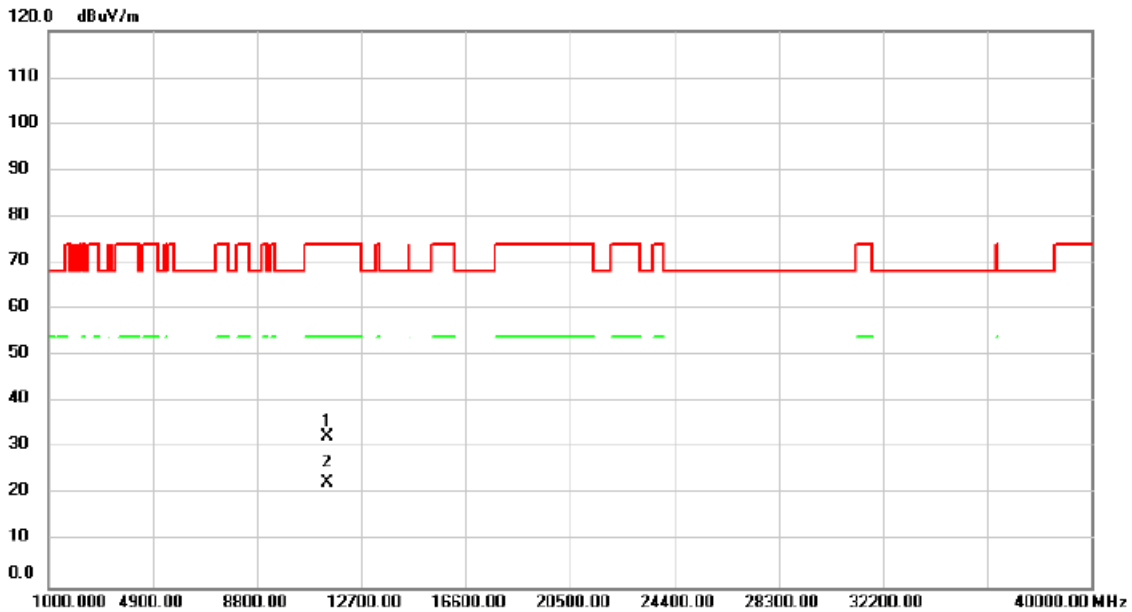


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11420.00	31.91	0.66	32.57	74.00	-41.43			peak
2	*	11420.00	21.89	0.66	22.55	54.00	-31.45			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/6/11
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

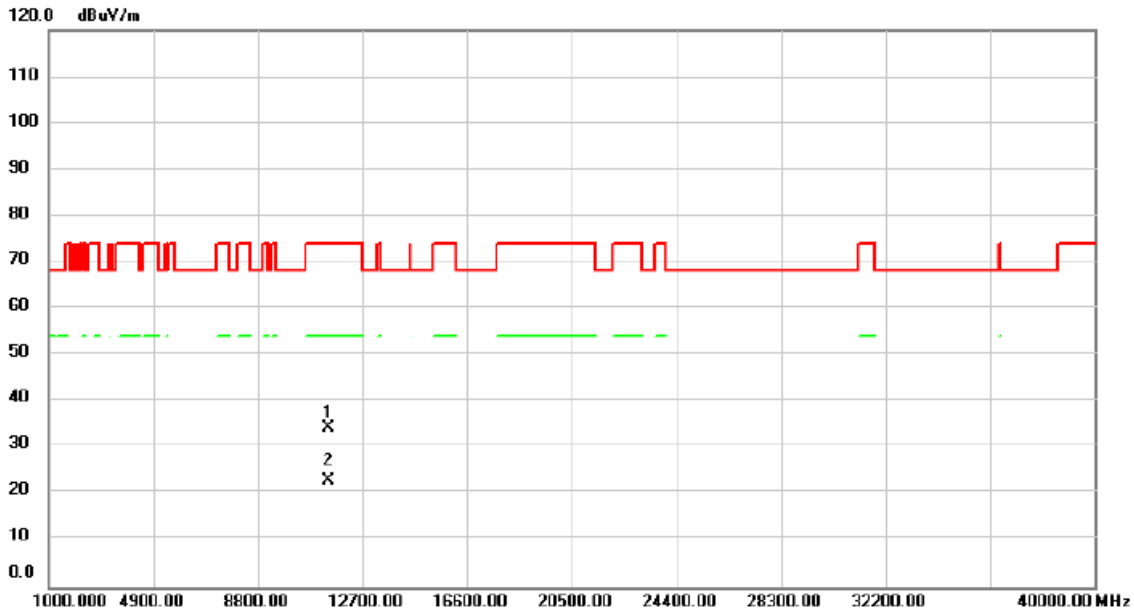


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11420.00	33.57	0.66	34.23	74.00	-39.77			peak
2	*	11420.00	22.23	0.66	22.89	54.00	-31.11			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/6/11
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

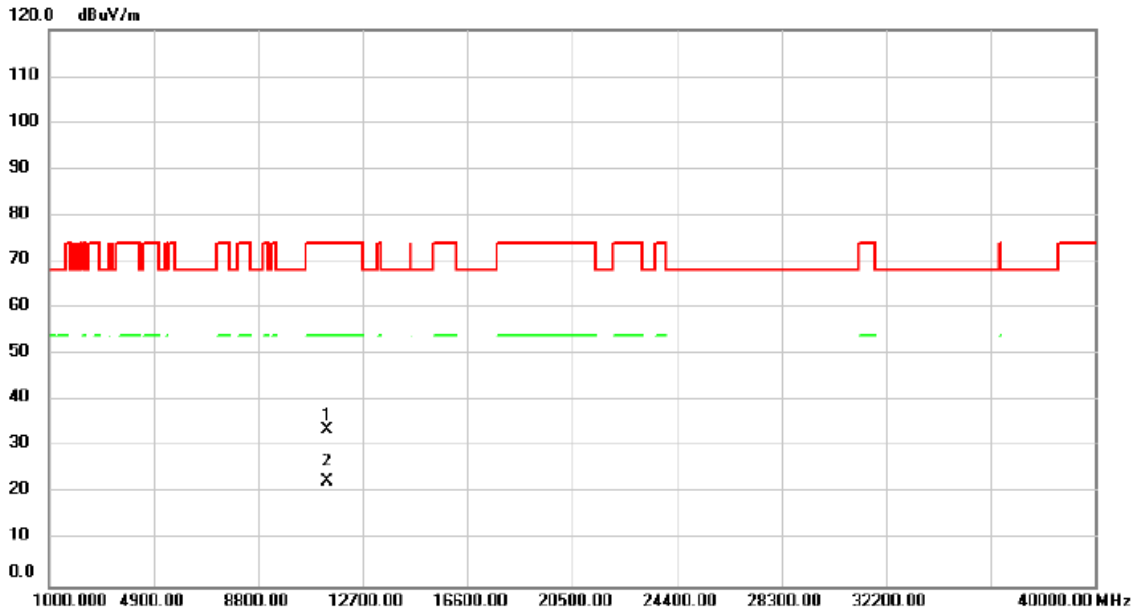


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11380.00	33.34	0.56	33.90	74.00	-40.10	peak		
2	*	11380.00	22.09	0.56	22.65	54.00	-31.35	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/6/11
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

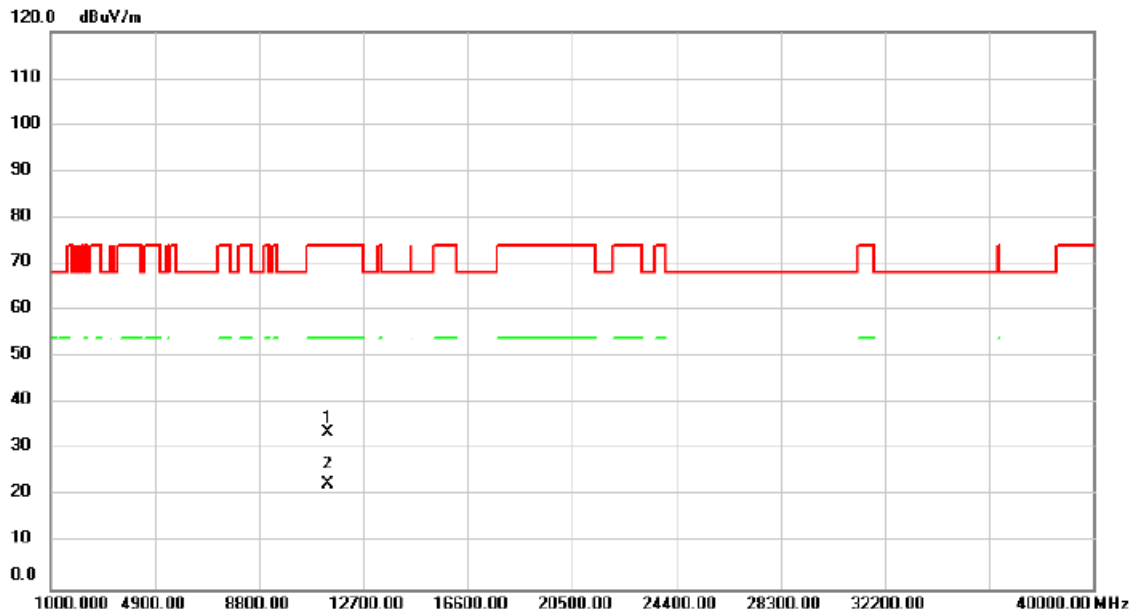


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11380.00	33.09	0.56	33.65	74.00	-40.35	peak		
2	*	11380.00	22.10	0.56	22.66	54.00	-31.34	AVG		

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

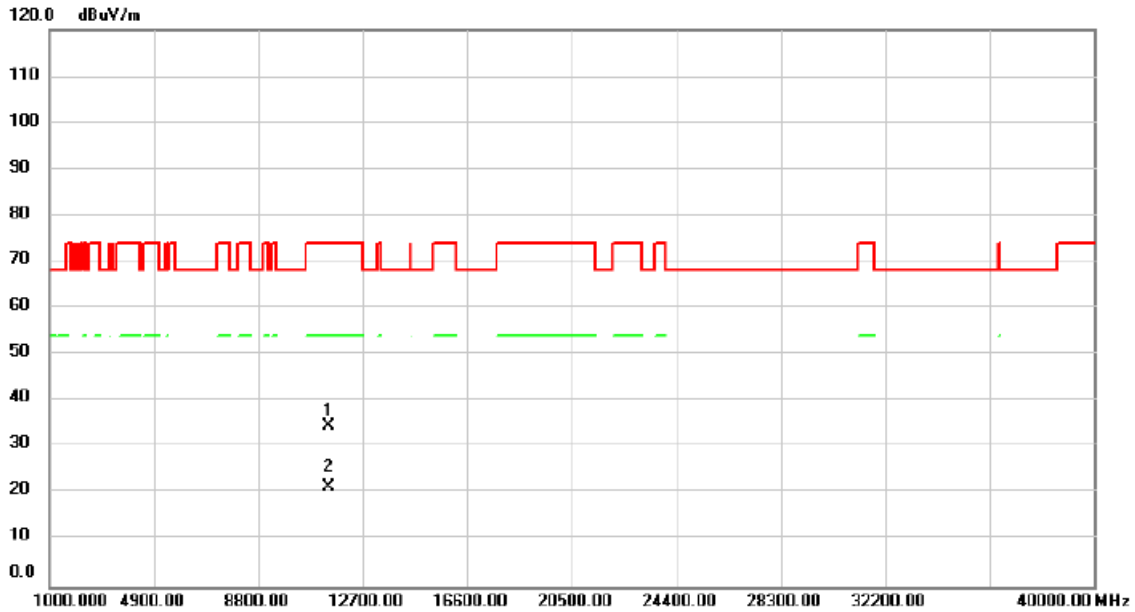


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11440.00	33.81	0.70	34.51	74.00	-39.49			peak
2	*	11440.00	20.89	0.70	21.59	54.00	-32.41			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/6/11
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

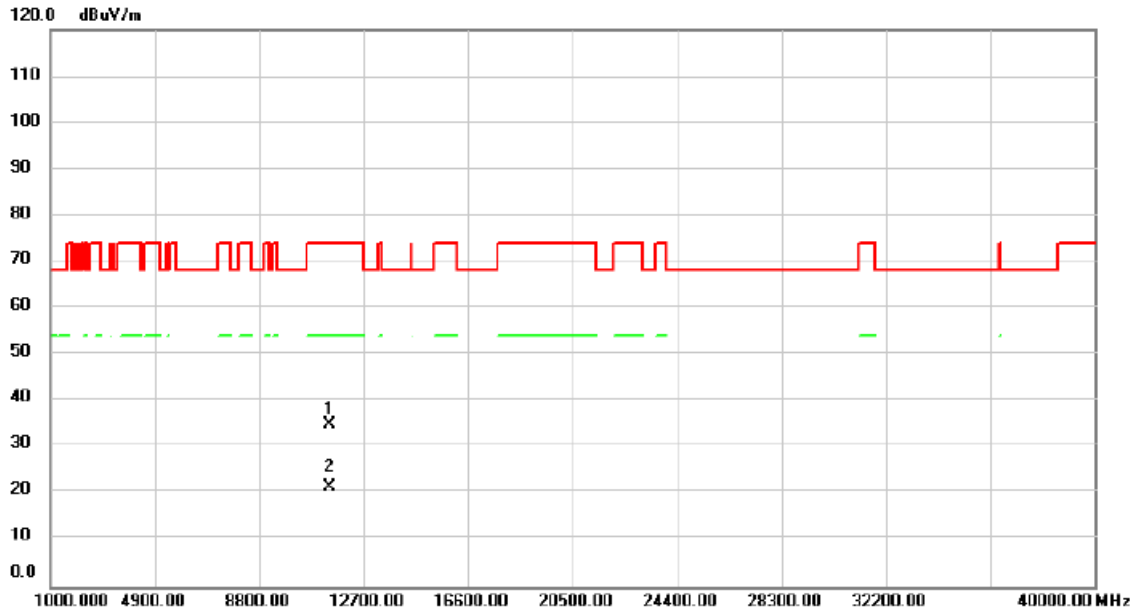


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11440.00	34.22	0.70	34.92	74.00	-39.08			peak
2	*	11440.00	20.85	0.70	21.55	54.00	-32.45			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

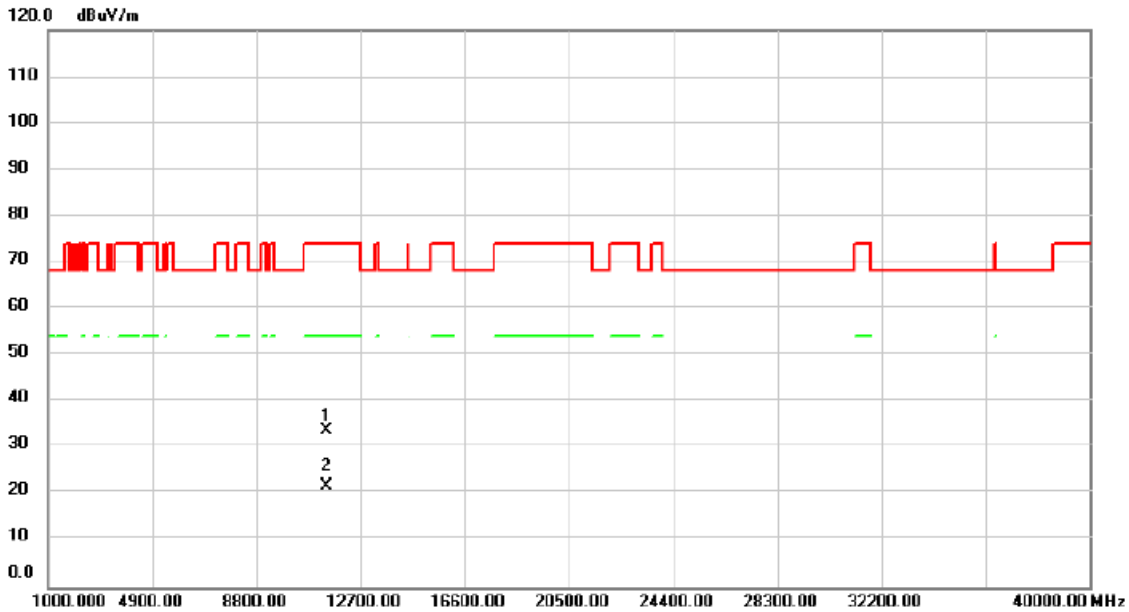


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11420.00	33.22	0.66	33.88	74.00	-40.12			peak
2	*	11420.00	21.14	0.66	21.80	54.00	-32.20			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/6/12
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

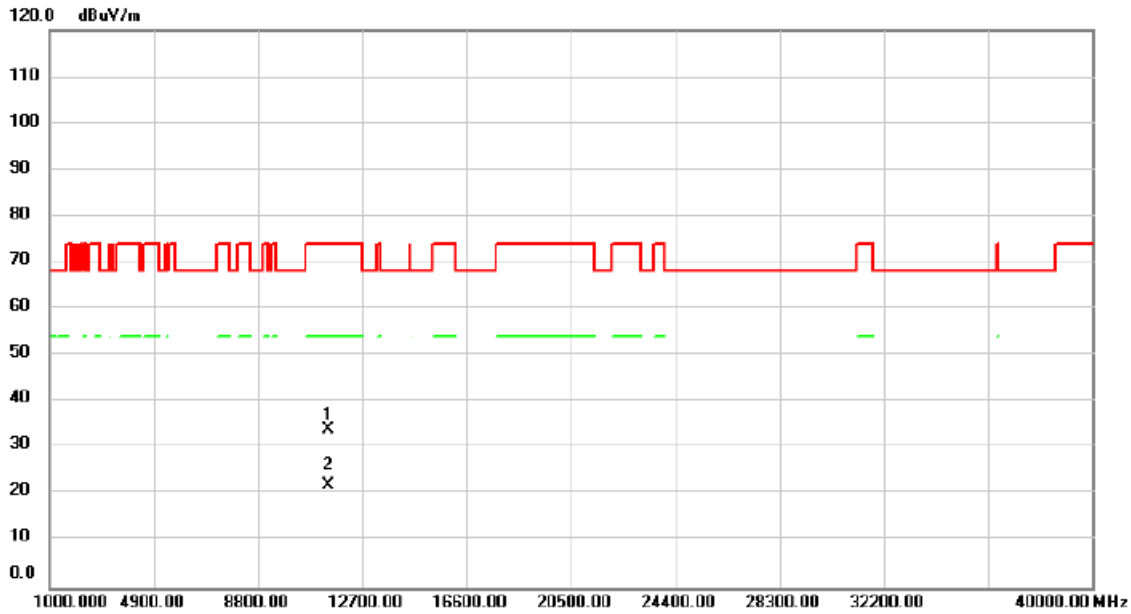


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		11420.00	33.41	0.66	34.07	74.00	-39.93			peak	
2	*	11420.00	21.25	0.66	21.91	54.00	-32.09			AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

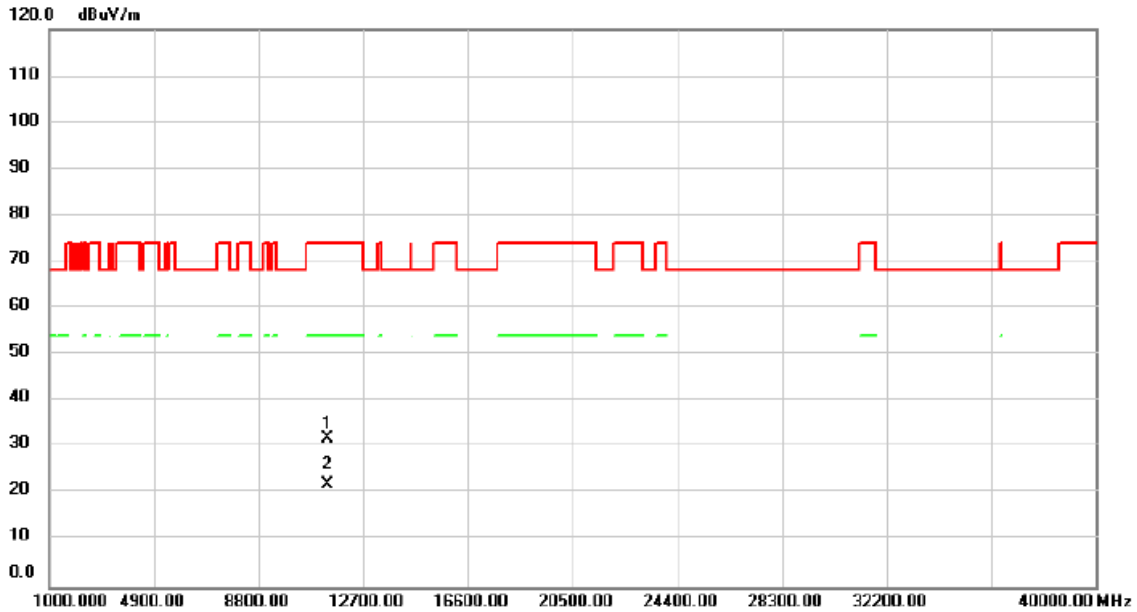


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		11380.00	31.33	0.56	31.89	74.00	-42.11			peak	
2	*	11380.00	21.39	0.56	21.95	54.00	-32.05			AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/6/12
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

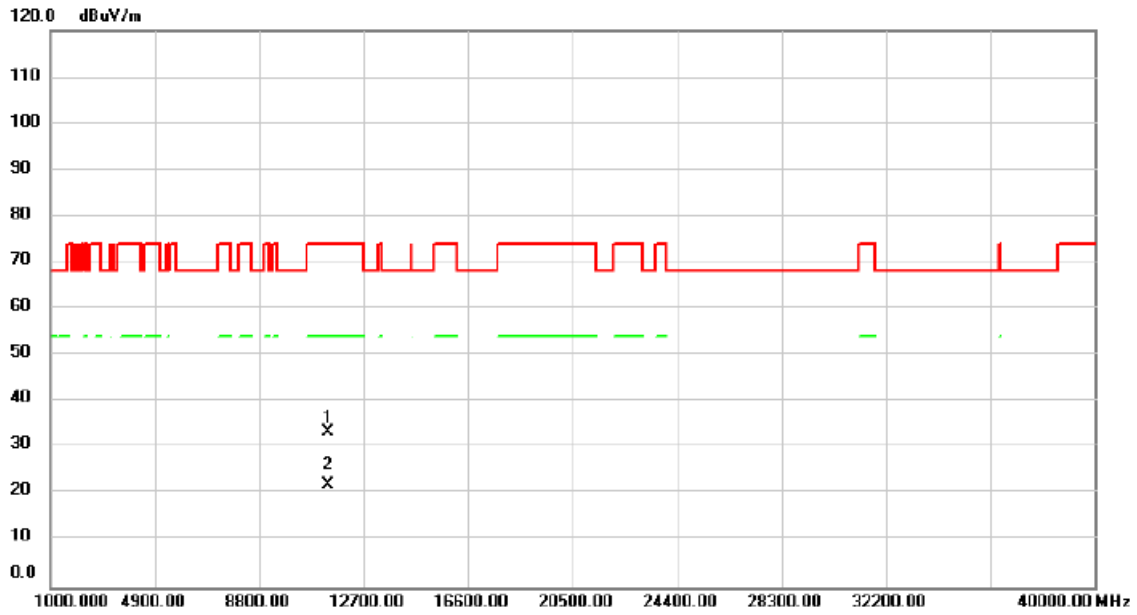

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11380.00	32.86	0.56	33.42	74.00	-40.58			peak
2	*	11380.00	21.38	0.56	21.94	54.00	-32.06			AVG

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


## APPENDIX E BANDWIDTH



Test Mode	UNII-1_ IEEE 802.11a
-----------	----------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	18.590	16.300
40	5200	18.490	16.300
48	5240	18.550	16.300

### CH36

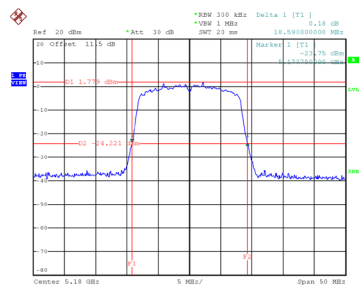


Date: 31.MAY.2024 22:09:21

### CH40 26 dB Bandwidth

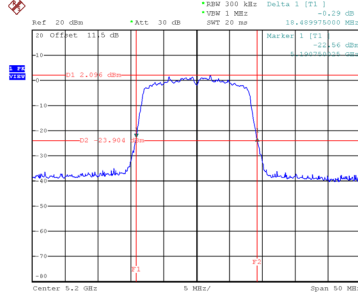


Date: 31.MAY.2024 22:10:35

### CH48

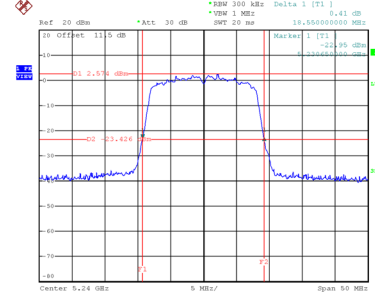


Date: 31.MAY.2024 22:11:46


### 99 % Occupied Bandwidth

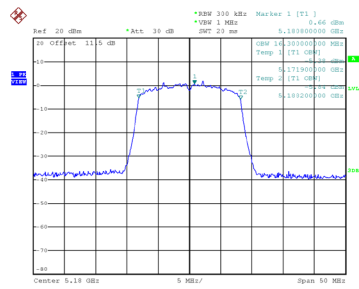

Date: 31.MAY.2024 22:08:52

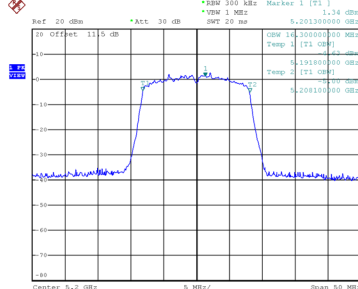

Date: 31.MAY.2024 22:10:05

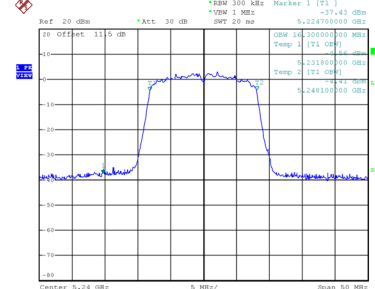


Date: 31.MAY.2024 22:11:15

Test Mode	UNII-1_ IEEE 802.11ac (VHT20)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	19.750	17.400
40	5200	19.750	17.400
48	5240	19.850	17.400

### CH36

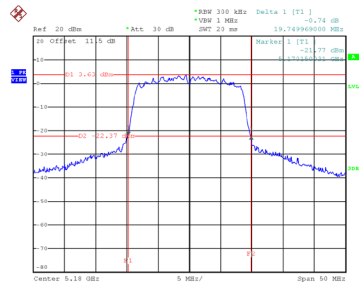


Date: 31.MAY.2024 22:31:02

### CH40 26 dB Bandwidth

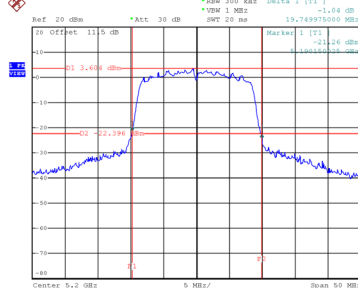


Date: 31.MAY.2024 22:32:04

### CH48

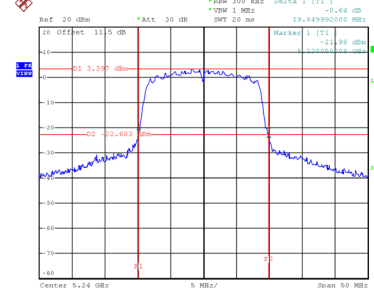


Date: 31.MAY.2024 22:33:13


### 99 % Occupied Bandwidth

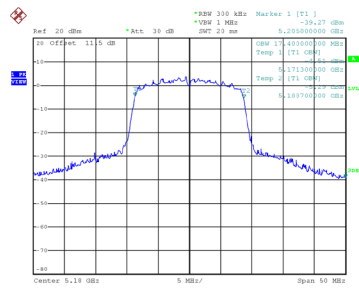

Date: 31.MAY.2024 22:33:34

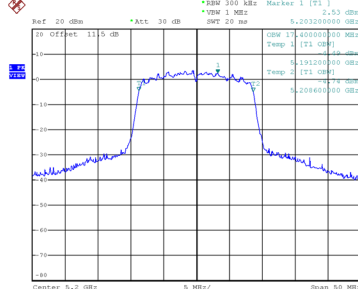

Date: 31.MAY.2024 22:33:34

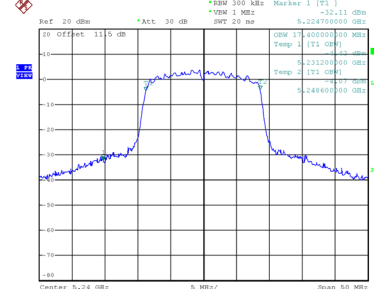


Date: 31.MAY.2024 22:32:45

Test Mode	UNII-1_ IEEE 802.11ac (VHT40)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	38.409	35.800
46	5230	38.590	35.800

### CH38

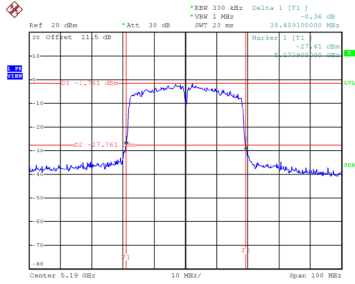


Date: 31.MAY.2024 23:22:16

### CH46 26 dB Bandwidth

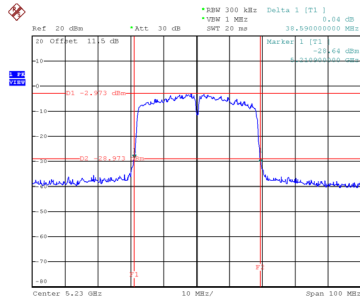


Date: 31.MAY.2024 23:24:06

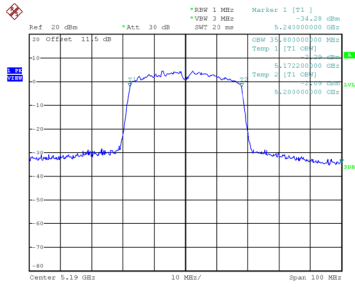

Date: 31.MAY.2024 23:21:54

### 99 % Occupied Bandwidth

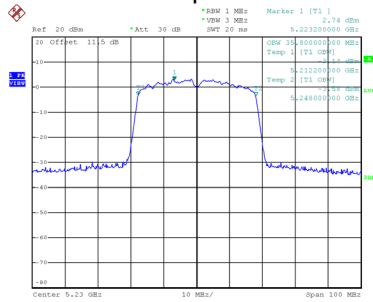


Date: 31.MAY.2024 23:23:21

Test Mode	UNII-1_ IEEE 802.11ac (VHT80)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	80.000	74.800

### CH42 26 dB Bandwidth

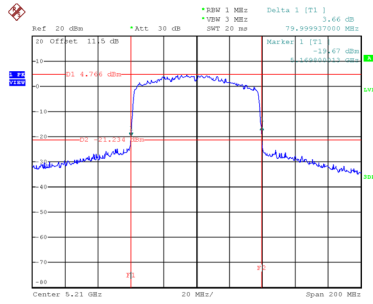

Date: 31.MAY.2024 23:37:52

### 99 % Occupied Bandwidth

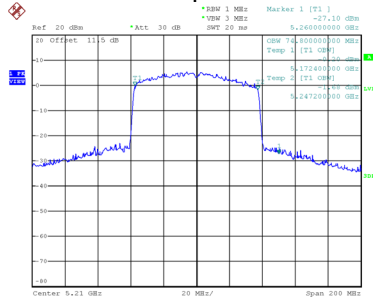


Date: 31.MAY.2024 23:37:13

Test Mode	UNII-1_ IEEE 802.11ax (HE20)
-----------	------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.450	18.800
40	5200	20.450	18.800
48	5240	20.500	18.700

### CH36

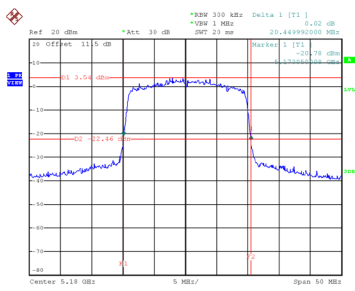


Date: 3.JUN.2024 11:44:43

### CH40 26 dB Bandwidth

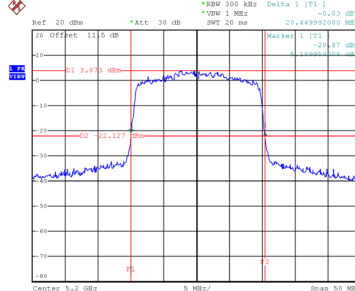


Date: 3.JUN.2024 11:45:54

### CH48

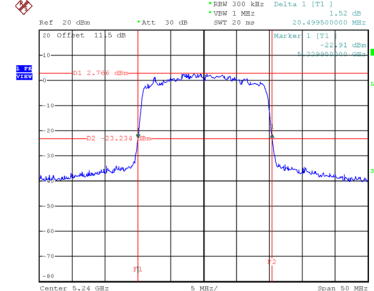


Date: 3.JUN.2024 11:46:58


### 99 % Occupied Bandwidth

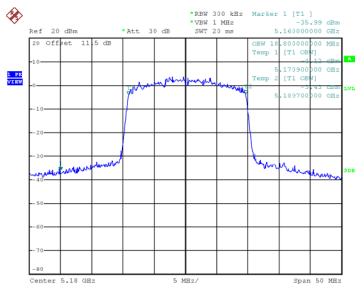

Date: 3.JUN.2024 11:44:12

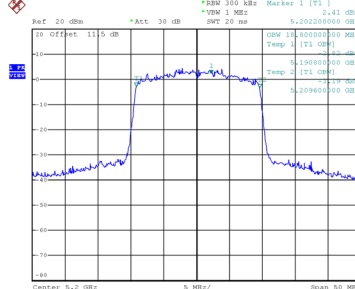

Date: 3.JUN.2024 11:45:25

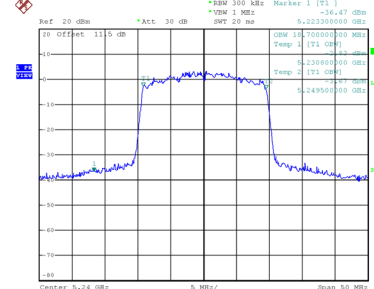


Date: 3.JUN.2024 11:46:30

Test Mode	UNII-1_ IEEE 802.11ax (HE40)
-----------	------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.700	37.600
46	5230	39.800	37.400

### CH38

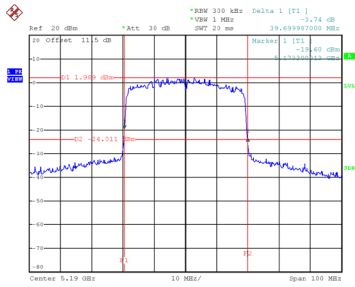


Date: 3.JUN.2024 12:03:39

### CH46 26 dB Bandwidth

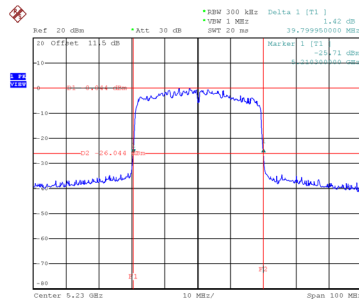


Date: 3.JUN.2024 12:05:00

### 99 % Occupied Bandwidth

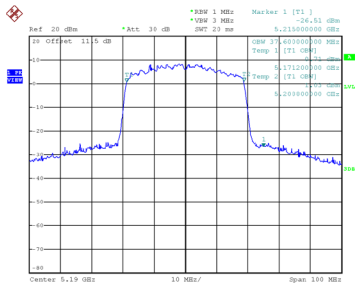

Date: 3.JUN.2024 12:02:59

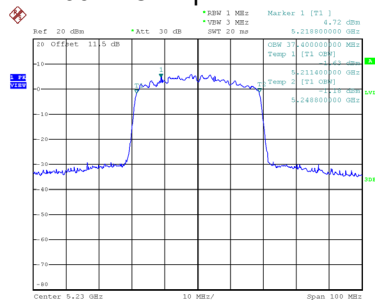


Date: 3.JUN.2024 12:04:22

Test Mode	UNII-1_ IEEE 802.11ax (HE80)
-----------	------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	81.800	76.800

### CH42 26 dB Bandwidth

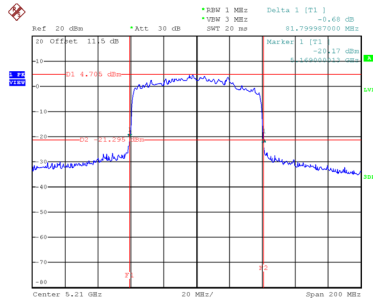

Date: 3.JUN.2024 12:24:39

### 99 % Occupied Bandwidth

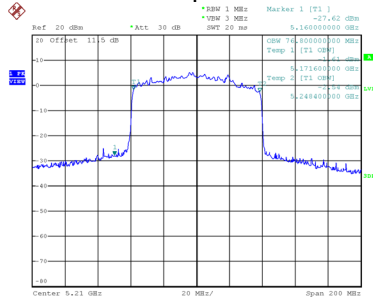


Date: 3.JUN.2024 12:24:02

Test Mode	UNII-2A_ IEEE 802.11a
-----------	-----------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	18.550	16.300
60	5300	18.600	16.300
64	5320	18.650	16.300

### CH52

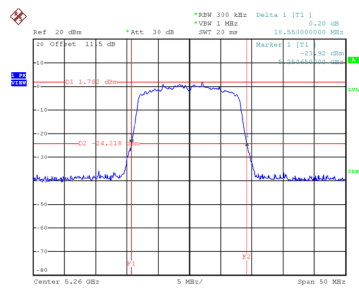


Date: 31.MAY.2024 22:13:01

### CH60 26 dB Bandwidth

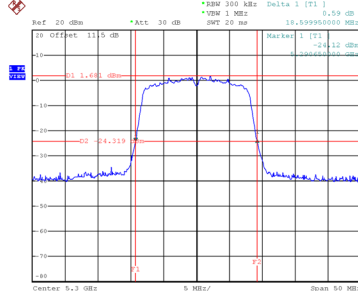


Date: 31.MAY.2024 22:14:12

### CH64

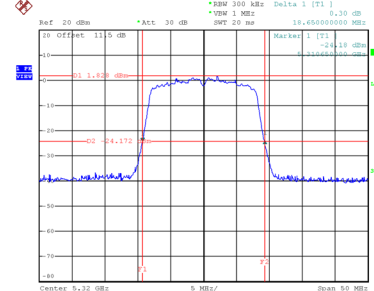


Date: 31.MAY.2024 22:15:22


### 99 % Occupied Bandwidth

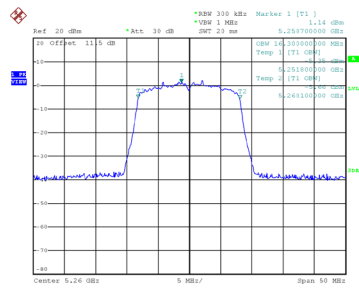

Date: 31.MAY.2024 22:12:32

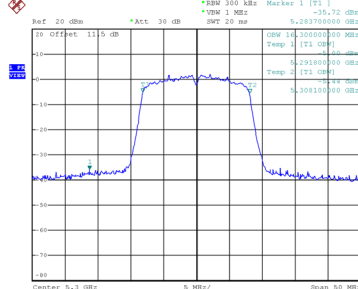

Date: 31.MAY.2024 22:13:42

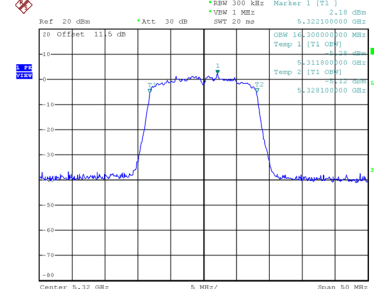


Date: 31.MAY.2024 22:14:52



Test Mode	UNII-2A_ IEEE 802.11ac (VHT20)
-----------	--------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	19.800	17.400
60	5300	19.509	17.400
64	5320	19.850	17.400

### CH52

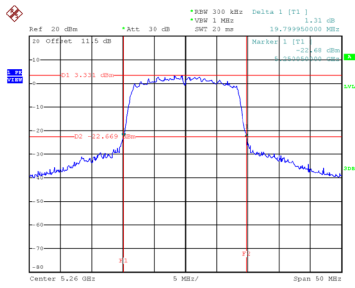


Date: 31.MAY.2024 22:14:32

### CH60 26 dB Bandwidth

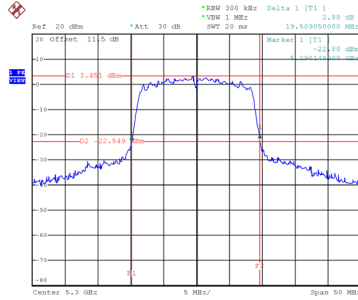


Date: 31.MAY.2024 22:15:148

### CH64

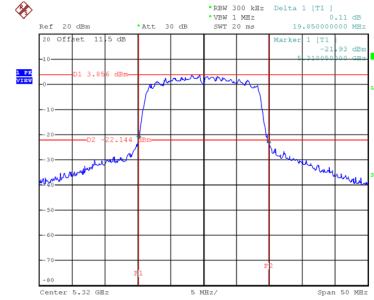


Date: 31.MAY.2024 22:18:125


### 99 % Occupied Bandwidth

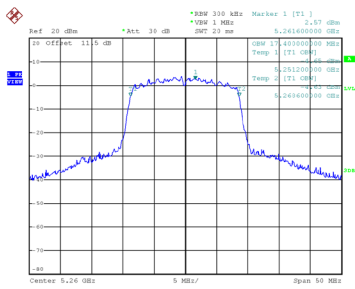

Date: 31.MAY.2024 22:14:03

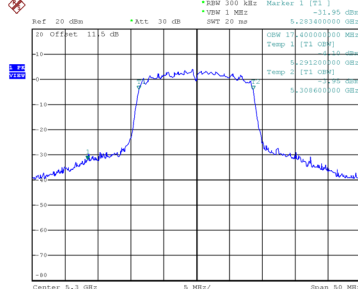

Date: 31.MAY.2024 22:15:117

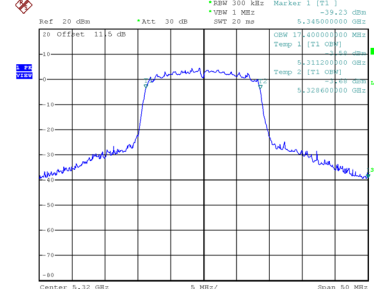


Date: 31.MAY.2024 22:17:157

Test Mode	UNII-2A_ IEEE 802.11ac (VHT40)
-----------	--------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	38.390	36.000
62	5310	38.609	36.000

### CH54

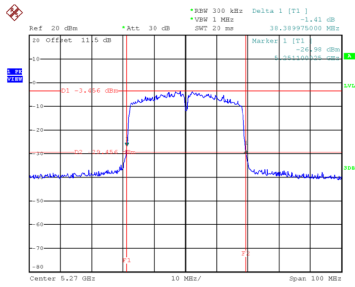


Date: 31.MAY.2024 23:25:39

### CH62 26 dB Bandwidth

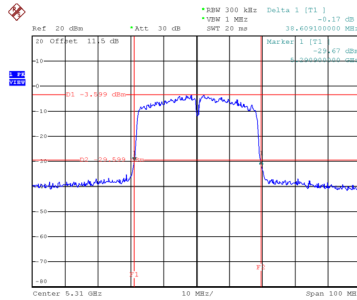


Date: 31.MAY.2024 23:27:14

### 99 % Occupied Bandwidth

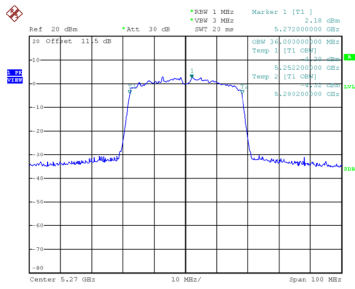

Date: 31.MAY.2024 23:24:54

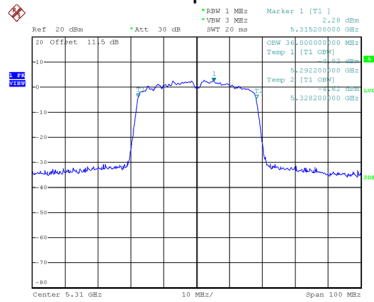


Date: 31.MAY.2024 23:26:31

Test Mode	UNII-2A_ IEEE 802.11ac (VHT80)
-----------	--------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	80.200	74.800

### CH58 26 dB Bandwidth

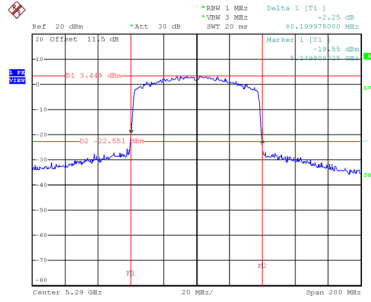

Date: 31.MAY.2024 23:39:37

### 99 % Occupied Bandwidth

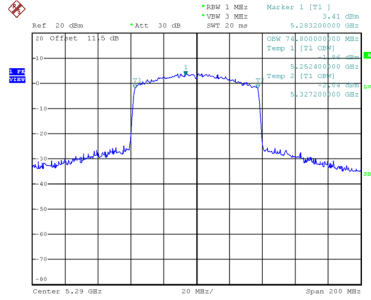


Date: 31.MAY.2024 23:38:55

Test Mode	UNII-2A_ IEEE 802.11ax (HE20)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.500	18.800
60	5300	20.400	18.700
64	5320	20.390	18.800

### CH52

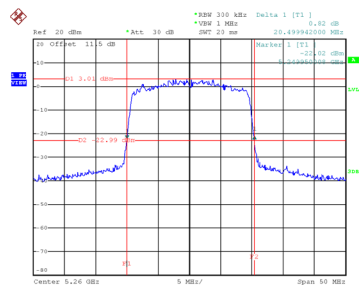


Date: 3.JUN.2024 11:48:09

### CH60 26 dB Bandwidth

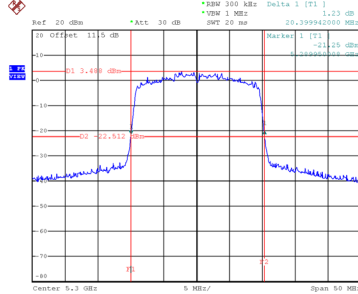


Date: 3.JUN.2024 11:49:42

### CH64

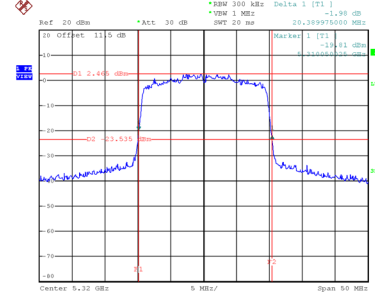


Date: 3.JUN.2024 11:51:06


### 99 % Occupied Bandwidth

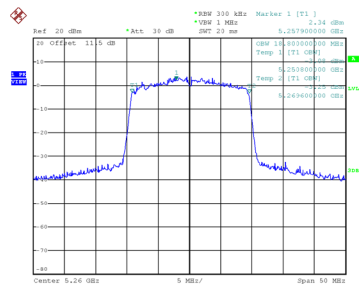

Date: 3.JUN.2024 11:47:40

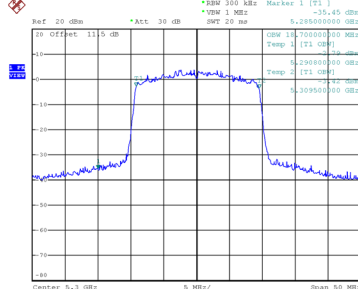

Date: 3.JUN.2024 11:48:58

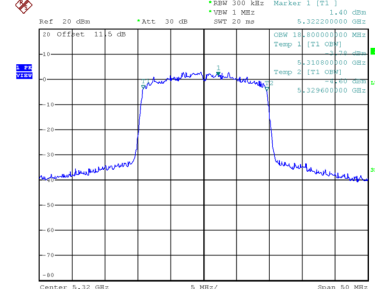


Date: 3.JUN.2024 11:50:17

Test Mode	UNII-2A_ IEEE 802.11ax (HE40)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.800	37.400
62	5310	39.700	37.400

### CH54

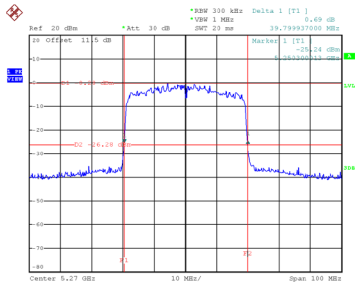


Date: 3.JUN.2024 12:06:25

### CH62 26 dB Bandwidth

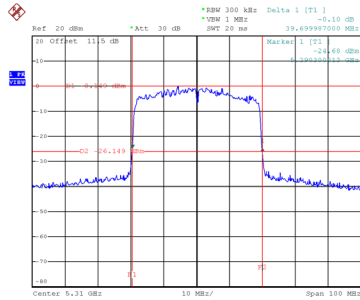


Date: 3.JUN.2024 12:08:01

### 99 % Occupied Bandwidth

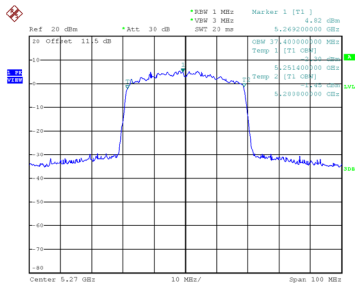

Date: 3.JUN.2024 12:05:44

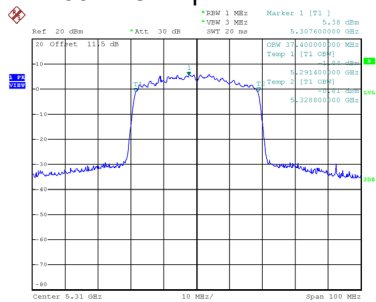


Date: 3.JUN.2024 12:07:15

Test Mode	UNII-2A_ IEEE 802.11ax (HE80)
-----------	-------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	81.800	76.800

### CH58 26 dB Bandwidth

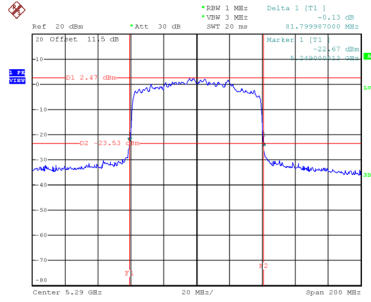

Date: 3.JUN.2024 12:25:57

### 99 % Occupied Bandwidth

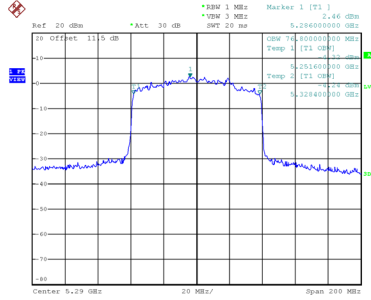


Date: 3.JUN.2024 12:25:19

Test Mode	UNII-2C_ IEEE 802.11a
-----------	-----------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	18.650	16.300
116	5580	18.550	16.300
140	5700	18.500	16.400
144	5720	18.489	16.300

**CH100**

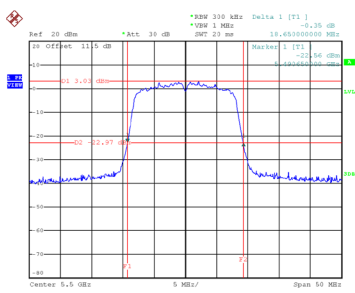


Date: 31.MAY.2024 22:16:51

**CH116**  
26 dB Bandwidth

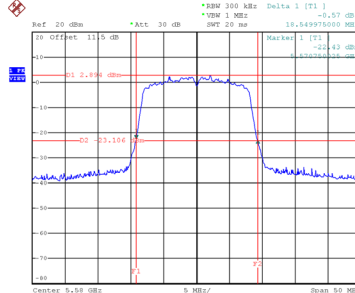


Date: 31.MAY.2024 22:18:00

**CH140**

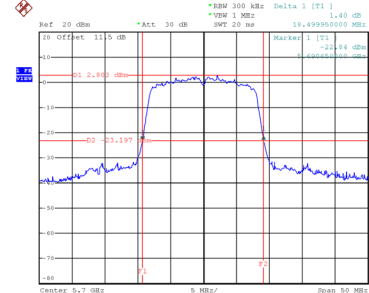


Date: 31.MAY.2024 22:19:18

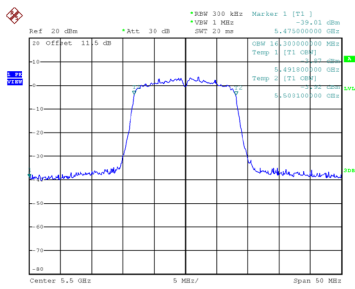


Date: 31.MAY.2024 22:16:21

**99 % Occupied Bandwidth**

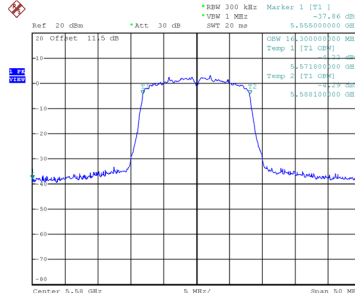


Date: 31.MAY.2024 22:17:30

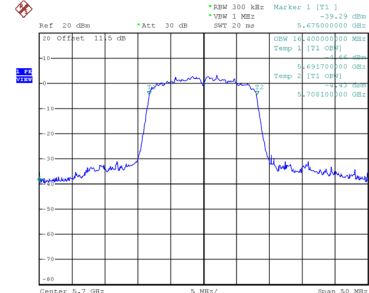


Date: 31.MAY.2024 22:18:48

**26 dB Bandwidth**

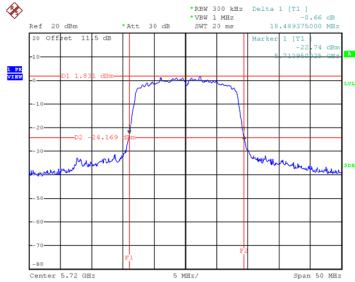

Date: 3.JUN.2024 12:54:30

**99 % Occupied Bandwidth**

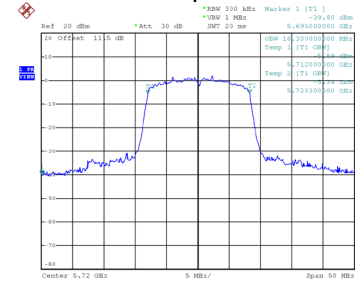


Date: 3.JUN.2024 12:53:59

Test Mode	UNII-2C_ IEEE 802.11ac (VHT20)
-----------	--------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.000	17.600
116	5580	22.750	17.600
140	5700	28.289	17.800
144	5720	20.390	17.500

**CH100**

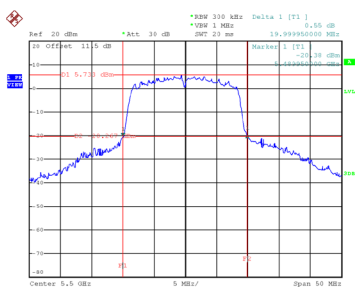


Date: 31.MAY.2024 22:39:44

**CH116**  
26 dB Bandwidth

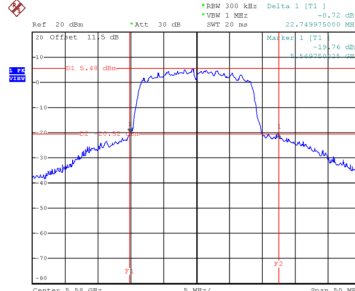


Date: 31.MAY.2024 22:40:57


**CH140**

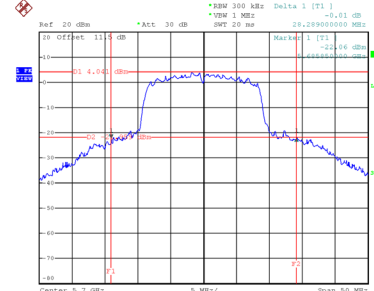


Date: 31.MAY.2024 22:42:08

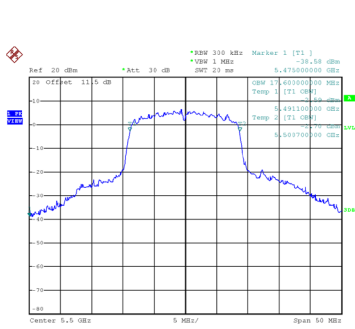

Date: 31.MAY.2024 22:39:08

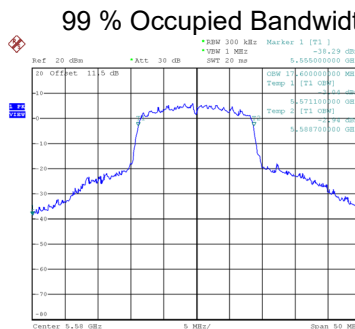


Date: 31.MAY.2024 22:40:30

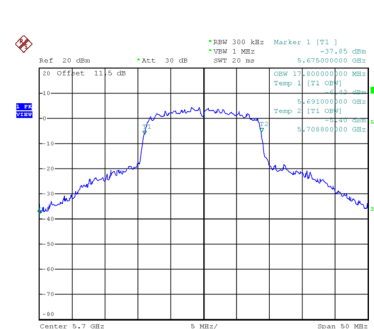


Date: 31.MAY.2024 22:41:39

**26 dB Bandwidth**

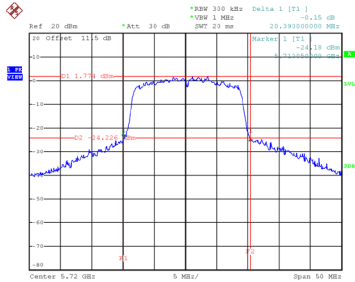

Date: 3.JUN.2024 13:00:57

**CH144**  
99 % Occupied Bandwidth

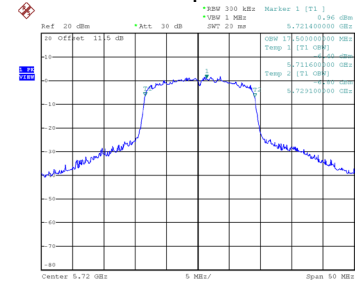


Date: 3.JUN.2024 13:00:23



Test Mode	UNII-2C_ IEEE 802.11ac (VHT40)
-----------	--------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	38.500	36.000
110	5550	38.400	36.000
134	5670	38.590	36.200
142	5710	38.998	36.200


### CH102

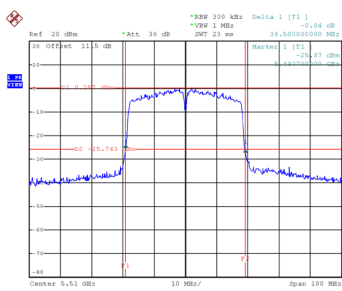

Date: 31.MAY.2024 23:29:04


### CH110

#### 26 dB Bandwidth

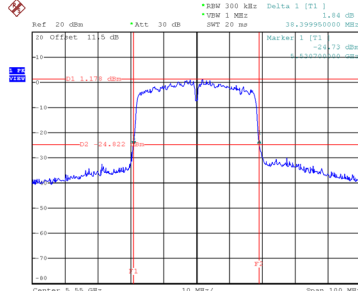


Date: 31.MAY.2024 23:30:52

### CH134

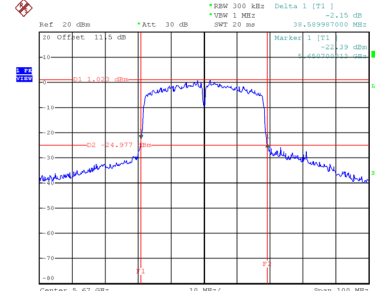


Date: 31.MAY.2024 23:32:25


### 99 % Occupied Bandwidth

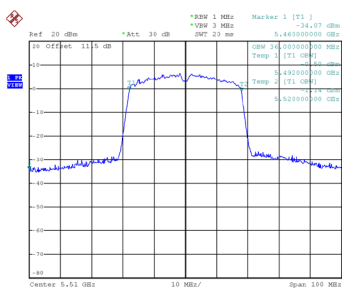

Date: 31.MAY.2024 23:28:21

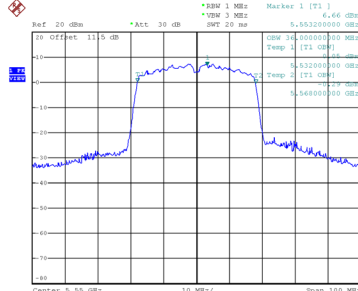


Date: 31.MAY.2024 23:30:09

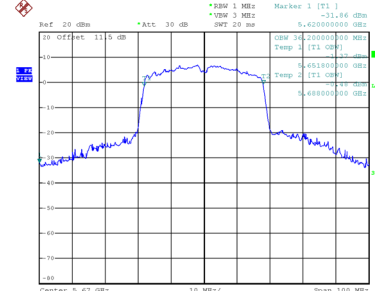


Date: 31.MAY.2024 23:31:41

### 26 dB Bandwidth

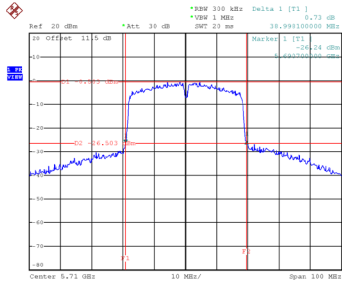

Date: 3.JUN.2024 13:04:11

### 99 % Occupied Bandwidth

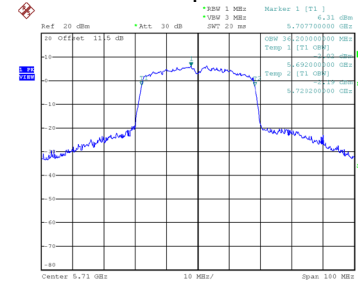


Date: 3.JUN.2024 13:03:17

est Mode UNII-2C\_ IEEE 802.11ac (VHT80)


Channel	Frequency (MHz)	26 Db Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	80.000	75.200
122	5610	80.000	75.200
138	5690	79.800	75.200

### CH106

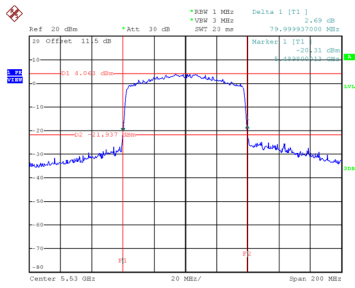


Date: 31.MAY.2024 23:41:07

### CH122 26 dB Bandwidth

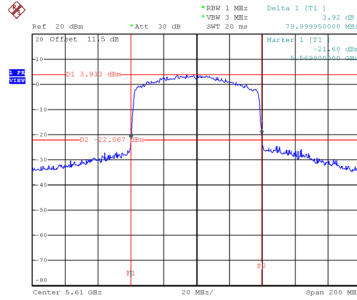


Date: 31.MAY.2024 23:42:38

### CH138

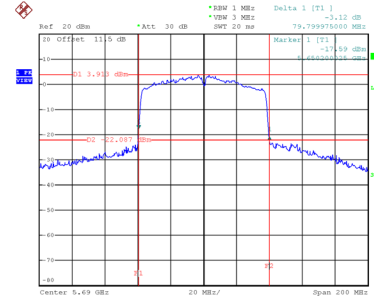


Date: 3.JUN.2024 13:06:46


### 99 % Occupied Bandwidth

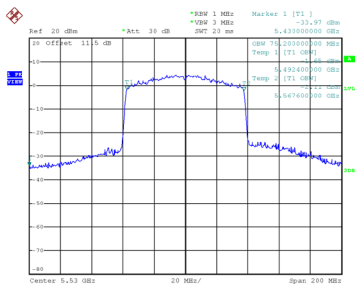

Date: 31.MAY.2024 23:40:29

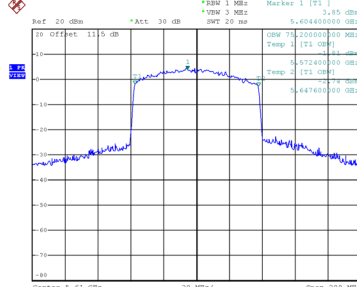

Date: 31.MAY.2024 23:41:59

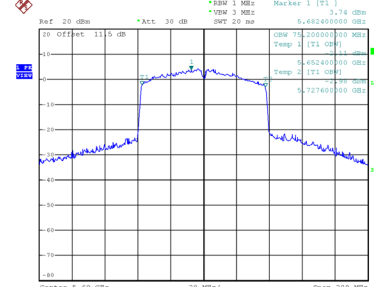


Date: 3.JUN.2024 13:06:05

Test Mode	UNII-2C_ IEEE 802.11ax (HE20)
-----------	-------------------------------

Channel	Frequency (MHz)	26 Db Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.350	18.700
116	5580	20.450	18.700
140	5700	20.490	18.900
144	5720	24.950	19.000


**CH100**

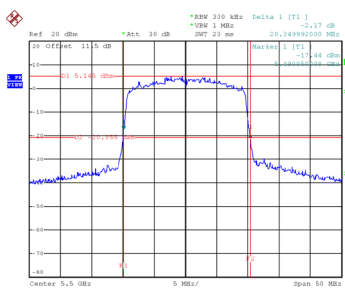

Date: 3 JUN 2024 11:53:02


**CH116**

**26 dB Bandwidth**

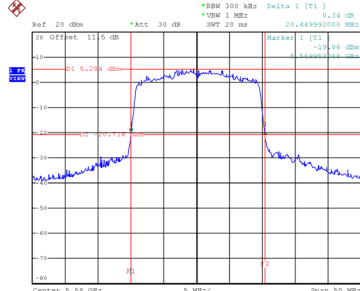


Date: 3 JUN 2024 11:54:21

**CH140**

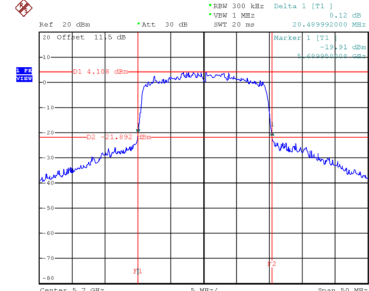


Date: 3 JUN 2024 11:55:38


**99 % Occupied Bandwidth**

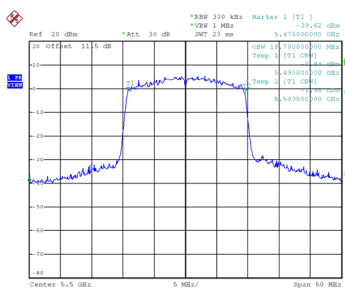

Date: 3 JUN 2024 11:52:33

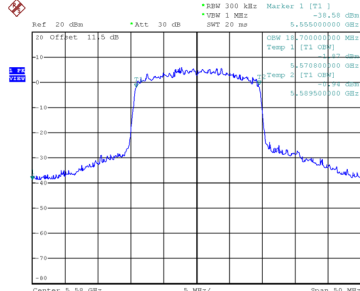


Date: 3 JUN 2024 11:53:51

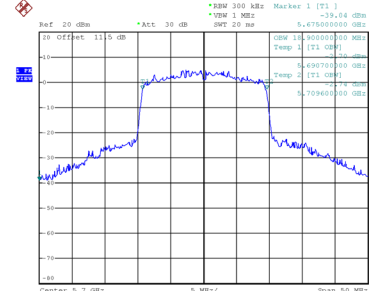


Date: 3 JUN 2024 11:55:09

**26 dB Bandwidth**

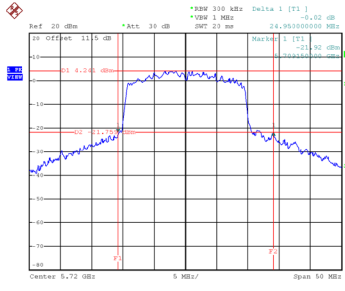

Date: 3 JUN 2024 14:27:22

**99 % Occupied Bandwidth**

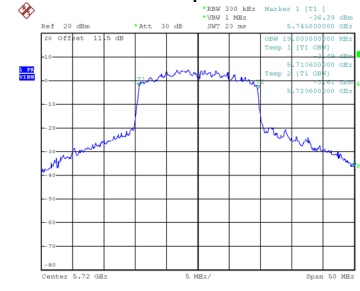


Date: 3 JUN 2024 14:26:57

Test Mode	UNII-2C_ IEEE 802.11ax (HE40)
-----------	-------------------------------

Channel	Frequency (MHz)	26 Db Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	39.500	37.600
110	5550	39.590	37.400
134	5670	39.900	37.800
142	5710	41.100	41.400


**CH102**

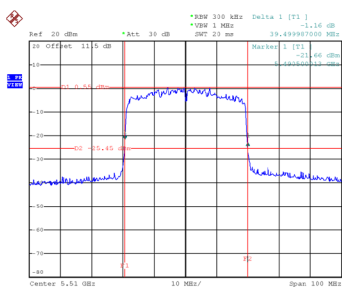

Date: 3 JUN.2024 12:09:30


**CH110**

**26 dB Bandwidth**

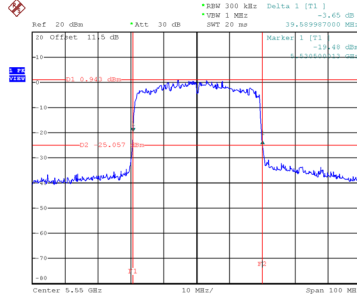


Date: 3 JUN.2024 12:11:03

**CH134**

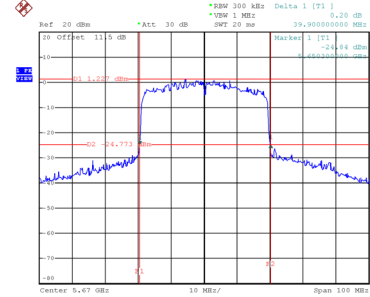


Date: 3 JUN.2024 12:12:46


**99 % Occupied Bandwidth**

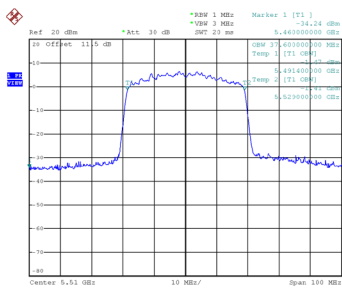

Date: 3 JUN.2024 12:08:46

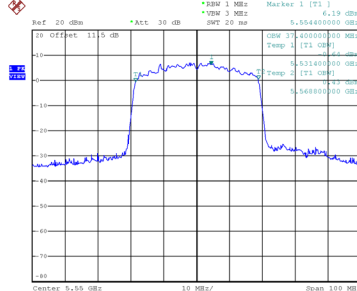


Date: 3 JUN.2024 12:10:20

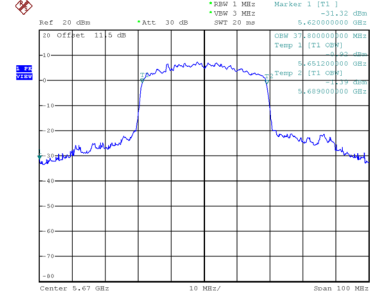

Date: 3 JUN.2024 12:12:06


**26 dB Bandwidth**

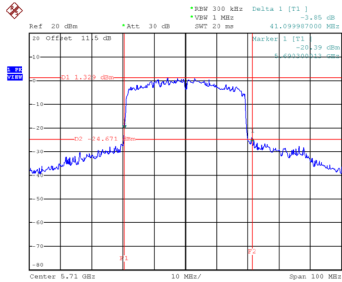

Date: 3 JUN.2024 14:34:10

**CH142**

**99 % Occupied Bandwidth**

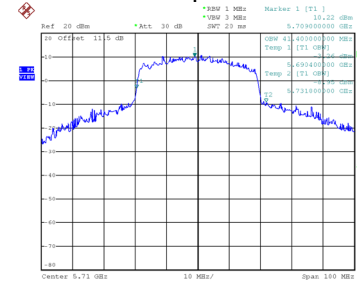

Date: 3 JUN.2024 14:22:28