

**Appendix H. Peak Power Spectral Density (E.I.R.P.)****1.1. Test Result and Data**

For CRIUS CO310-G1-Aux-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	1	5955	-6.53	-6.53	0.00	5.10	-1.43	-1.00
11ax HE20	NSS1-MCS0	45	6175	-6.52	-6.52	0.00	5.10	-1.42	-1.00
11ax HE20	NSS1-MCS0	93	6415	-6.81	-6.81	0.00	5.10	-1.71	-1.00
11ax HE40	NSS1-MCS0	3	5965	-6.50	-6.49	0.00	5.10	-1.39	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.04	-7.04	0.00	5.10	-1.94	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.06	-7.06	0.00	5.10	-1.96	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.13	-7.13	0.00	5.10	-2.03	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.08	-7.08	0.00	5.10	-1.98	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.64	-6.64	0.00	5.10	-1.54	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.97	-6.97	0.00	5.10	-1.87	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.77	-6.76	0.00	5.10	-1.66	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.10	-7.10	0.00	5.10	-2.00	-1.00

For CRIUS CO310-G1-Aux-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	97	6435	-7.41	-7.41	0.00	3.36	-4.05	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.63	-7.63	0.00	3.36	-4.27	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.57	-7.57	0.00	3.36	-4.21	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.59	-7.59	0.00	3.36	-4.23	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.77	-7.77	0.00	3.36	-4.41	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.43	-6.43	0.00	3.36	-3.07	-1.00



For CRIUS CO310-G1-Aux-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	117	6535	-7.78	-7.78	0.00	4.99	-2.79	-1.00
11ax HE20	NSS1-MCS0	153	6715	-7.97	-7.97	0.00	4.99	-2.98	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.75	-7.75	0.00	4.99	-2.76	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.87	-7.87	0.00	4.99	-2.88	-1.00
11ax HE40	NSS1-MCS0	155	6725	-8.09	-8.09	0.00	4.99	-3.10	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.70	-7.70	0.00	4.99	-2.71	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.63	-6.63	0.00	4.99	-1.64	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.99	-6.99	0.00	4.99	-2.00	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.86	-6.86	0.00	4.99	-1.87	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.24	-7.24	0.00	4.99	-2.25	-1.00

For CRIUS CO310-G1-Aux-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	189	6895	-7.61	-7.61	0.00	4.21	-3.40	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.70	-7.70	0.00	4.21	-3.49	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.63	-7.63	0.00	4.21	-3.42	-1.00
11ax HE20	NSS1-MCS0	233	7115	-11.31	-11.31	0.00	4.21	-7.10	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.45	-7.45	0.00	4.21	-3.24	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.60	-7.60	0.00	4.21	-3.39	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.35	-7.35	0.00	4.21	-3.14	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.86	-6.86	0.00	4.21	-2.65	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.60	-6.60	0.00	4.21	-2.39	-1.00
11ax HE160	NSS1-MCS0	207	6985	-7.39	-7.39	0.00	4.21	-3.18	-1.00



For CRIUS CO310-G1-Aux

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.57	-7.57	0.00	3.36	-4.21	-1.00
11ax HE80	NSS1-MCS0	6545	-6.69	-6.69	0.00	3.36	-3.33	-1.00
11ax HE160	NSS1-MCS0	6505	-7.10	-7.10	0.00	3.36	-3.74	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.68	-7.68	0.00	4.99	-2.69	-1.00
11ax HE80	NSS1-MCS0	6545	-6.54	-6.54	0.00	4.99	-1.55	-1.00
11ax HE160	NSS1-MCS0	6505	-7.50	-7.50	0.00	4.99	-2.51	-1.00



For CRIUS CO310-G1-Aux

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.72	-7.72	0.00	4.99	-2.73	-1.00
11ax HE40	NSS1-MCS0	6885	-8.04	-8.04	0.00	4.99	-3.05	-1.00
11ax HE80	NSS1-MCS0	6865	-6.99	-6.99	0.00	4.99	-2.00	-1.00
11ax HE160	NSS1-MCS0	6825	-7.68	-7.68	0.00	4.99	-2.69	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.73	-7.73	0.00	4.21	-3.52	-1.00
11ax HE40	NSS1-MCS0	6885	-7.73	-7.73	0.00	4.21	-3.52	-1.00
11ax HE80	NSS1-MCS0	6865	-6.95	-6.95	0.00	4.21	-2.74	-1.00
11ax HE160	NSS1-MCS0	6825	-7.93	-7.93	0.00	4.21	-3.72	-1.00



For CRIUS CO310-G1-Main-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	1	5955	-7.26	-7.26	0.00	3.91	-3.35	-1.00
11ax HE20	NSS1-MCS0	45	6175	-7.50	-7.49	0.00	3.91	-3.58	-1.00
11ax HE20	NSS1-MCS0	93	6415	-7.19	-7.19	0.00	3.91	-3.28	-1.00
11ax HE40	NSS1-MCS0	3	5965	-7.09	-7.09	0.00	3.91	-3.18	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.15	-7.15	0.00	3.91	-3.24	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.23	-7.23	0.00	3.91	-3.32	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.12	-7.12	0.00	3.91	-3.21	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.15	-7.15	0.00	3.91	-3.24	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.98	-6.98	0.00	3.91	-3.07	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.65	-6.65	0.00	3.91	-2.74	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.79	-6.79	0.00	3.91	-2.88	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.37	-7.37	0.00	3.91	-3.46	-1.00

For CRIUS CO310-G1-Main-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	97	6435	-6.91	-6.90	0.00	2.41	-4.49	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.13	-7.13	0.00	2.41	-4.72	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.24	-7.24	0.00	2.41	-4.83	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.14	-7.14	0.00	2.41	-4.73	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.27	-7.27	0.00	2.41	-4.86	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.38	-6.38	0.00	2.41	-3.97	-1.00



For CRIUS CO310-G1-Main-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	117	6535	-7.28	-7.28	0.00	2.67	-4.61	-1.00
11ax HE20	NSS1-MCS0	153	6715	-7.29	-7.29	0.00	2.67	-4.62	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.34	-7.34	0.00	2.67	-4.67	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.15	-7.15	0.00	2.67	-4.48	-1.00
11ax HE40	NSS1-MCS0	155	6725	-7.34	-7.34	0.00	2.67	-4.67	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.22	-7.22	0.00	2.67	-4.55	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.71	-6.71	0.00	2.67	-4.04	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.69	-6.69	0.00	2.67	-4.02	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.69	-6.69	0.00	2.67	-4.02	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.27	-7.27	0.00	2.67	-4.60	-1.00

For CRIUS CO310-G1-Main-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	189	6895	-7.41	-7.41	0.00	2.15	-5.26	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.35	-7.35	0.00	2.15	-5.20	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.10	-7.10	0.00	2.15	-4.95	-1.00
11ax HE20	NSS1-MCS0	233	7115	-10.93	-10.92	0.00	2.15	-8.77	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.19	-7.19	0.00	2.15	-5.04	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.17	-7.16	0.00	2.15	-5.01	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.12	-7.12	0.00	2.15	-4.97	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.32	-6.31	0.00	2.15	-4.16	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.51	-6.51	0.00	2.15	-4.36	-1.00
11ax HE160	NSS1-MCS0	207	6985	-7.27	-7.27	0.00	2.15	-5.12	-1.00



For CRIUS CO310-G1-Main

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.22	-7.22	0.00	2.41	-4.81	-1.00
11ax HE80	NSS1-MCS0	6545	-6.60	-6.60	0.00	2.41	-4.19	-1.00
11ax HE160	NSS1-MCS0	6505	-7.13	-7.13	0.00	2.41	-4.72	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.32	-7.32	0.00	2.67	-4.65	-1.00
11ax HE80	NSS1-MCS0	6545	-6.71	-6.71	0.00	2.67	-4.04	-1.00
11ax HE160	NSS1-MCS0	6505	-7.23	-7.23	0.00	2.67	-4.56	-1.00



For CRIUS CO310-G1-Main

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.13	-7.13	0.00	2.67	-4.46	-1.00
11ax HE40	NSS1-MCS0	6885	-7.47	-7.47	0.00	2.67	-4.80	-1.00
11ax HE80	NSS1-MCS0	6865	-6.71	-6.71	0.00	2.67	-4.04	-1.00
11ax HE160	NSS1-MCS0	6825	-7.25	-7.25	0.00	2.67	-4.58	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.35	-7.35	0.00	2.15	-5.20	-1.00
11ax HE40	NSS1-MCS0	6885	-7.34	-7.34	0.00	2.15	-5.19	-1.00
11ax HE80	NSS1-MCS0	6865	-7.18	-7.18	0.00	2.15	-5.03	-1.00
11ax HE160	NSS1-MCS0	6825	-7.29	-7.29	0.00	2.15	-5.14	-1.00



For CRIUS CO310-G1-Mimo- U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	1	5955	-11.94	-12.03	-8.97	0.00	7.53	-1.44	-1.00
11ax HE20	NSS1-MCS0	45	6175	-12.03	-12.12	-9.07	0.00	7.53	-1.54	-1.00
11ax HE20	NSS1-MCS0	93	6415	-12.09	-12.18	-9.12	0.00	7.53	-1.59	-1.00
11ax HE40	NSS1-MCS0	3	5965	-12.80	-12.85	-9.81	0.00	7.53	-2.28	-1.00
11ax HE40	NSS1-MCS0	43	6165	-12.23	-12.22	-9.21	0.00	7.53	-1.68	-1.00
11ax HE40	NSS1-MCS0	91	6405	-12.40	-12.21	-9.29	0.00	7.53	-1.76	-1.00
11ax HE80	NSS1-MCS0	7	5985	-12.40	-12.34	-9.36	0.00	7.53	-1.83	-1.00
11ax HE80	NSS1-MCS0	39	6145	-12.28	-12.22	-9.24	0.00	7.53	-1.71	-1.00
11ax HE80	NSS1-MCS0	87	6385	-12.37	-12.66	-9.50	0.00	7.53	-1.97	-1.00
11axHE160	NSS1-MCS0	15	6025	-12.08	-12.34	-9.19	0.00	5.91	-3.28	-1.00
11ax HE160	NSS1-MCS0	47	6185	-12.00	-12.30	-9.14	0.00	7.53	-1.61	-1.00
11ax HE160	NSS1-MCS0	79	6345	-12.26	-12.36	-9.30	0.00	7.53	-1.77	-1.00

For CRIUS CO310-G1-Mimo- U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	97	6435	-12.33	-12.19	-9.25	0.00	5.91	-3.34	-1.00
11ax HE20	NSS1-MCS0	105	6475	-11.68	-11.50	-8.58	0.00	5.91	-2.67	-1.00
11ax HE20	NSS1-MCS0	113	6515	-11.67	-11.53	-8.59	0.00	5.91	-2.68	-1.00
11ax HE40	NSS1-MCS0	99	6445	-12.26	-12.55	-9.39	0.00	5.91	-3.48	-1.00
11ax HE40	NSS1-MCS0	107	6485	-11.94	-11.74	-8.83	0.00	5.91	-2.92	-1.00
11ax HE80	NSS1-MCS0	103	6465	-11.06	-11.66	-8.34	0.00	5.91	-2.43	-1.00



For CRIUS CO310-G1-Mimo- U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	117	6535	-12.50	-12.55	-9.52	0.00	6.92	-2.60	-1.00
11ax HE20	NSS1-MCS0	153	6715	-12.47	-12.66	-9.55	0.00	6.92	-2.63	-1.00
11ax HE20	NSS1-MCS0	181	6855	-12.41	-12.68	-9.53	0.00	6.92	-2.61	-1.00
11ax HE40	NSS1-MCS0	123	6565	-12.96	-12.48	-9.70	0.00	6.92	-2.78	-1.00
11ax HE40	NSS1-MCS0	155	6725	-12.59	-12.61	-9.59	0.00	6.92	-2.67	-1.00
11ax HE40	NSS1-MCS0	179	6845	-12.56	-12.89	-9.71	0.00	6.92	-2.79	-1.00
11ax HE80	NSS1-MCS0	135	6625	-12.35	-12.58	-9.45	0.00	6.92	-2.53	-1.00
11ax HE80	NSS1-MCS0	151	6705	-12.31	-12.46	-9.38	0.00	6.92	-2.46	-1.00
11ax HE80	NSS1-MCS0	167	6785	-12.35	-12.45	-9.39	0.00	6.92	-2.47	-1.00
11ax HE160	NSS1-MCS0	143	6665	-12.58	-12.73	-9.64	0.00	6.92	-2.72	-1.00

For CRIUS CO310-G1-Mimo- U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	189	6895	-12.09	-12.56	-9.31	0.00	6.25	-3.06	-1.00
11ax HE20	NSS1-MCS0	213	7015	-12.58	-12.62	-9.59	0.00	6.25	-3.34	-1.00
11ax HE20	NSS1-MCS0	229	7095	-11.92	-12.15	-9.02	0.00	6.25	-2.77	-1.00
11ax HE20	NSS1-MCS0	233	7115	-19.56	-18.56	-16.02	0.00	6.25	-9.77	-1.00
11ax HE40	NSS1-MCS0	195	6925	-12.08	-12.01	-9.03	0.00	6.25	-2.78	-1.00
11ax HE40	NSS1-MCS0	211	7005	-12.68	-12.03	-9.34	0.00	6.25	-3.09	-1.00
11ax HE40	NSS1-MCS0	227	7085	-11.94	-12.11	-9.01	0.00	6.25	-2.76	-1.00
11ax HE80	NSS1-MCS0	199	6945	-11.14	-11.38	-8.25	0.00	6.25	-2.00	-1.00
11ax HE80	NSS1-MCS0	215	7025	-11.54	-12.06	-8.78	0.00	6.25	-2.53	-1.00
11ax HE160	NSS1-MCS0	207	6985	-12.05	-12.60	-9.31	0.00	6.25	-3.06	-1.00



For CRIUS CO310-G1-Mimo

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.17	-12.34	-9.24	0.00	5.91	-3.33	-1.00
11ax HE80	NSS1-MCS0	6545	-12.64	-13.02	-9.82	0.00	5.91	-3.91	-1.00
11ax HE160	NSS1-MCS0	6505	-11.94	-12.04	-8.98	0.00	5.91	-3.07	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.44	-12.90	-9.65	0.00	6.92	-2.73	-1.00
11ax HE80	NSS1-MCS0	6545	-12.68	-12.75	-9.71	0.00	6.92	-2.79	-1.00
11ax HE160	NSS1-MCS0	6505	-12.02	-12.80	-9.38	0.00	6.92	-2.46	-1.00



For CRIUS CO310-G1-Mimo

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-12.74	-13.36	-10.02	0.00	6.92	-3.10	-1.00
11ax HE40	NSS1-MCS0	6885	-12.99	-13.54	-10.25	0.00	6.92	-3.33	-1.00
11ax HE80	NSS1-MCS0	6865	-12.13	-12.98	-9.52	0.00	6.92	-2.60	-1.00
11ax HE160	NSS1-MCS0	6825	-12.03	-12.97	-9.46	0.00	6.92	-2.54	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-13.01	-13.53	-10.25	0.00	6.25	-4.00	-1.00
11ax HE40	NSS1-MCS0	6885	-12.39	-12.99	-9.67	0.00	6.25	-3.42	-1.00
11ax HE80	NSS1-MCS0	6865	-12.25	-12.93	-9.56	0.00	6.25	-3.31	-1.00
11ax HE160	NSS1-MCS0	6825	-13.22	-14.05	-10.60	0.00	6.25	-4.35	-1.00



For CRIUS N310-G1-Aux- U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	1	5955	-6.53	-6.53	0.00	3.43	-3.10	-1.00
11ax HE20	NSS1-MCS0	45	6175	-6.52	-6.52	0.00	3.43	-3.09	-1.00
11ax HE20	NSS1-MCS0	93	6415	-6.81	-6.81	0.00	3.43	-3.38	-1.00
11ax HE40	NSS1-MCS0	3	5965	-6.50	-6.49	0.00	3.43	-3.06	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.04	-7.04	0.00	3.43	-3.61	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.06	-7.06	0.00	3.43	-3.63	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.13	-7.13	0.00	3.43	-3.70	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.08	-7.08	0.00	3.43	-3.65	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.64	-6.64	0.00	3.43	-3.21	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.97	-6.97	0.00	3.43	-3.54	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.77	-6.76	0.00	3.43	-3.33	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.10	-7.10	0.00	3.43	-3.67	-1.00

For CRIUS N310-G1-Aux- U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	97	6435	-7.41	-7.41	0.00	3.50	-3.91	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.63	-7.63	0.00	3.50	-4.13	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.57	-7.57	0.00	3.50	-4.07	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.59	-7.59	0.00	3.50	-4.09	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.77	-7.77	0.00	3.50	-4.27	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.43	-6.43	0.00	3.50	-2.93	-1.00



For CRIUS N310-G1-Aux- U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	117	6535	-7.78	-7.78	0.00	4.04	-3.74	-1.00
11ax HE20	NSS1-MCS0	153	6715	-7.97	-7.97	0.00	4.04	-3.93	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.75	-7.75	0.00	4.04	-3.71	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.87	-7.87	0.00	4.04	-3.83	-1.00
11ax HE40	NSS1-MCS0	155	6725	-8.09	-8.09	0.00	4.04	-4.05	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.70	-7.70	0.00	4.04	-3.66	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.63	-6.63	0.00	4.04	-2.59	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.99	-6.99	0.00	4.04	-2.95	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.86	-6.86	0.00	4.04	-2.82	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.24	-7.24	0.00	4.04	-3.20	-1.00

For CRIUS N310-G1-Aux- U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	189	6895	-7.61	-7.61	0.00	3.45	-4.16	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.70	-7.70	0.00	3.45	-4.25	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.63	-7.63	0.00	3.45	-4.18	-1.00
11ax HE20	NSS1-MCS0	233	7115	-11.31	-11.31	0.00	3.45	-7.86	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.45	-7.45	0.00	3.45	-4.00	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.60	-7.60	0.00	3.45	-4.15	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.35	-7.35	0.00	3.45	-3.90	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.86	-6.86	0.00	3.45	-3.41	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.60	-6.60	0.00	3.45	-3.15	-1.00
11ax HE160	NSS1-MCS0	207	6985	-7.39	-7.39	0.00	3.45	-3.94	-1.00



For CRIUS N310-G1-Aux

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.57	-7.57	0.00	3.50	-4.07	-1.00
11ax HE80	NSS1-MCS0	6545	-6.69	-6.69	0.00	3.50	-3.19	-1.00
11ax HE160	NSS1-MCS0	6505	-7.10	-7.10	0.00	3.50	-3.60	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.68	-7.68	0.00	4.04	-3.64	-1.00
11ax HE80	NSS1-MCS0	6545	-6.54	-6.54	0.00	4.04	-2.50	-1.00
11ax HE160	NSS1-MCS0	6505	-7.50	-7.50	0.00	4.04	-3.46	-1.00



For CRIUS N310-G1-Aux

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.72	-7.72	0.00	4.04	-3.68	-1.00
11ax HE40	NSS1-MCS0	6885	-8.04	-8.04	0.00	4.04	-4.00	-1.00
11ax HE80	NSS1-MCS0	6865	-6.99	-6.99	0.00	4.04	-2.95	-1.00
11ax HE160	NSS1-MCS0	6825	-7.68	-7.68	0.00	4.04	-3.64	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.73	-7.73	0.00	3.45	-4.28	-1.00
11ax HE40	NSS1-MCS0	6885	-7.73	-7.73	0.00	3.45	-4.28	-1.00
11ax HE80	NSS1-MCS0	6865	-6.95	-6.95	0.00	3.45	-3.50	-1.00
11ax HE160	NSS1-MCS0	6825	-7.93	-7.93	0.00	3.45	-4.48	-1.00



For CRIUS N310-G1-Main-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	1	5955	-7.26	-7.26	0.00	4.99	-2.27	-1.00
11ax HE20	NSS1-MCS0	45	6175	-7.50	-7.49	0.00	4.99	-2.50	-1.00
11ax HE20	NSS1-MCS0	93	6415	-7.19	-7.19	0.00	4.99	-2.20	-1.00
11ax HE40	NSS1-MCS0	3	5965	-7.09	-7.09	0.00	4.99	-2.10	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.15	-7.15	0.00	4.99	-2.16	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.23	-7.23	0.00	4.99	-2.24	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.12	-7.12	0.00	4.99	-2.13	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.15	-7.15	0.00	4.99	-2.16	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.98	-6.98	0.00	4.99	-1.99	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.65	-6.65	0.00	4.99	-1.66	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.79	-6.79	0.00	4.99	-1.80	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.37	-7.37	0.00	4.99	-2.38	-1.00

For CRIUS N310-G1-Main-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	97	6435	-6.91	-6.90	0.00	4.75	-2.15	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.13	-7.13	0.00	4.75	-2.38	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.24	-7.24	0.00	4.75	-2.49	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.14	-7.14	0.00	4.75	-2.39	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.27	-7.27	0.00	4.75	-2.52	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.38	-6.38	0.00	4.75	-1.63	-1.00



For CRIUS N310-G1-Main-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	117	6535	-7.28	-7.28	0.00	5.68	-1.60	-1.00
11ax HE20	NSS1-MCS0	153	6715	-7.29	-7.29	0.00	5.68	-1.61	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.34	-7.34	0.00	5.68	-1.66	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.15	-7.15	0.00	5.68	-1.47	-1.00
11ax HE40	NSS1-MCS0	155	6725	-7.34	-7.34	0.00	5.68	-1.66	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.22	-7.22	0.00	5.68	-1.54	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.71	-6.71	0.00	5.68	-1.03	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.69	-6.69	0.00	5.68	-1.01	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.69	-6.69	0.00	5.68	-1.01	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.27	-7.27	0.00	5.68	-1.59	-1.00

For CRIUS N310-G1-Main-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	189	6895	-7.41	-7.41	0.00	3.60	-3.81	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.35	-7.35	0.00	3.60	-3.75	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.10	-7.10	0.00	3.60	-3.50	-1.00
11ax HE20	NSS1-MCS0	233	7115	-18.42	-18.42	0.00	3.60	-14.82	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.19	-7.19	0.00	3.60	-3.59	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.17	-7.16	0.00	3.60	-3.56	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.12	-7.12	0.00	3.60	-3.52	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.32	-6.31	0.00	3.60	-2.71	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.51	-6.51	0.00	3.60	-2.91	-1.00
11ax HE160	NSS1-MCS0	207	6985	-7.27	-7.27	0.00	3.60	-3.67	-1.00



For CRIUS N310-G1-Main

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.22	-7.22	0.00	4.75	-2.47	-1.00
11ax HE80	NSS1-MCS0	6545	-6.60	-6.60	0.00	4.75	-1.85	-1.00
11ax HE160	NSS1-MCS0	6505	-7.13	-7.13	0.00	4.75	-2.38	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.32	-7.32	0.00	5.68	-1.64	-1.00
11ax HE80	NSS1-MCS0	6545	-6.71	-6.71	0.00	5.68	-1.03	-1.00
11ax HE160	NSS1-MCS0	6505	-7.23	-7.23	0.00	5.68	-1.55	-1.00



For CRIUS N310-G1-Main

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.13	-7.13	0.00	5.68	-1.45	-1.00
11ax HE40	NSS1-MCS0	6885	-7.47	-7.47	0.00	5.68	-1.79	-1.00
11ax HE80	NSS1-MCS0	6865	-6.71	-6.71	0.00	5.68	-1.03	-1.00
11ax HE160	NSS1-MCS0	6825	-7.25	-7.25	0.00	5.68	-1.57	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.35	-7.35	0.00	3.60	-3.75	-1.00
11ax HE40	NSS1-MCS0	6885	-7.34	-7.34	0.00	3.60	-3.74	-1.00
11ax HE80	NSS1-MCS0	6865	-7.18	-7.18	0.00	3.60	-3.58	-1.00
11ax HE160	NSS1-MCS0	6825	-7.29	-7.29	0.00	3.60	-3.69	-1.00



For CRIUS N310-G1-Mimo-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	1	5955	-11.94	-12.03	-8.97	0.00	7.26	-1.71	-1.00
11ax HE20	NSS1-MCS0	45	6175	-12.03	-12.12	-9.07	0.00	7.26	-1.81	-1.00
11ax HE20	NSS1-MCS0	93	6415	-12.09	-12.18	-9.12	0.00	7.26	-1.86	-1.00
11ax HE40	NSS1-MCS0	3	5965	-12.80	-12.85	-9.81	0.00	7.26	-2.55	-1.00
11ax HE40	NSS1-MCS0	43	6165	-12.23	-12.22	-9.21	0.00	7.26	-1.95	-1.00
11ax HE40	NSS1-MCS0	91	6405	-12.40	-12.21	-9.29	0.00	7.26	-2.03	-1.00
11ax HE80	NSS1-MCS0	7	5985	-12.40	-12.34	-9.36	0.00	7.26	-2.10	-1.00
11ax HE80	NSS1-MCS0	39	6145	-12.28	-12.22	-9.24	0.00	7.26	-1.98	-1.00
11ax HE80	NSS1-MCS0	87	6385	-12.37	-12.66	-9.50	0.00	7.26	-2.24	-1.00
11axHE160	NSS1-MCS0	15	6025	-12.08	-12.34	-9.19	0.00	7.26	-1.93	-1.00
11ax HE160	NSS1-MCS0	47	6185	-12.00	-12.30	-9.14	0.00	7.26	-1.88	-1.00
11ax HE160	NSS1-MCS0	79	6345	-12.26	-12.36	-9.30	0.00	7.26	-2.04	-1.00

For CRIUS N310-G1-Mimo-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	97	6435	-12.33	-12.19	-9.25	0.00	7.16	-2.09	-1.00
11ax HE20	NSS1-MCS0	105	6475	-11.68	-11.50	-8.58	0.00	7.16	-1.42	-1.00
11ax HE20	NSS1-MCS0	113	6515	-11.67	-11.53	-8.59	0.00	7.16	-1.43	-1.00
11ax HE40	NSS1-MCS0	99	6445	-12.26	-12.55	-9.39	0.00	7.16	-2.23	-1.00
11ax HE40	NSS1-MCS0	107	6485	-11.94	-11.74	-8.83	0.00	7.16	-1.67	-1.00
11ax HE80	NSS1-MCS0	103	6465	-11.06	-11.66	-8.34	0.00	7.16	-1.18	-1.00



For CRIUS N310-G1-Mimo-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	117	6535	-12.50	-12.55	-9.52	0.00	7.91	-1.61	-1.00
11ax HE20	NSS1-MCS0	153	6715	-12.47	-12.66	-9.55	0.00	7.91	-1.64	-1.00
11ax HE20	NSS1-MCS0	181	6855	-12.41	-12.68	-9.53	0.00	7.91	-1.62	-1.00
11ax HE40	NSS1-MCS0	123	6565	-12.96	-12.48	-9.70	0.00	7.91	-1.79	-1.00
11ax HE40	NSS1-MCS0	155	6725	-12.59	-12.61	-9.59	0.00	7.91	-1.68	-1.00
11ax HE40	NSS1-MCS0	179	6845	-12.56	-12.89	-9.71	0.00	7.91	-1.80	-1.00
11ax HE80	NSS1-MCS0	135	6625	-12.35	-12.58	-9.45	0.00	7.91	-1.54	-1.00
11ax HE80	NSS1-MCS0	151	6705	-12.31	-12.46	-9.38	0.00	7.91	-1.47	-1.00
11ax HE80	NSS1-MCS0	167	6785	-12.35	-12.45	-9.39	0.00	7.91	-1.48	-1.00
11ax HE160	NSS1-MCS0	143	6665	-12.58	-12.73	-9.64	0.00	7.91	-1.73	-1.00

For CRIUS N310-G1-Mimo-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	189	6895	-12.09	-12.56	-9.31	0.00	6.54	-2.77	-1.00
11ax HE20	NSS1-MCS0	213	7015	-12.58	-12.62	-9.59	0.00	6.54	-3.05	-1.00
11ax HE20	NSS1-MCS0	229	7095	-11.92	-12.15	-9.02	0.00	6.54	-2.48	-1.00
11ax HE20	NSS1-MCS0	233	7115	-19.56	-18.56	-16.02	0.00	6.54	-9.48	-1.00
11ax HE40	NSS1-MCS0	195	6925	-12.08	-12.01	-9.03	0.00	6.54	-2.49	-1.00
11ax HE40	NSS1-MCS0	211	7005	-12.68	-12.03	-9.34	0.00	6.54	-2.80	-1.00
11ax HE40	NSS1-MCS0	227	7085	-11.94	-12.11	-9.01	0.00	6.54	-2.47	-1.00
11ax HE80	NSS1-MCS0	199	6945	-11.14	-11.38	-8.25	0.00	6.54	-1.71	-1.00
11ax HE80	NSS1-MCS0	215	7025	-11.54	-12.06	-8.78	0.00	6.54	-2.24	-1.00
11ax HE160	NSS1-MCS0	207	6985	-12.05	-12.60	-9.31	0.00	6.54	-2.77	-1.00



For CRIUS N310-G1-Mimo

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.17	-12.34	-9.24	0.00	7.16	-2.08	-1.00
11ax HE80	NSS1-MCS0	6545	-12.64	-13.02	-9.82	0.00	7.16	-2.66	-1.00
11ax HE160	NSS1-MCS0	6505	-11.94	-12.04	-8.98	0.00	7.16	-1.82	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.44	-12.90	-9.65	0.00	7.91	-1.74	-1.00
11ax HE80	NSS1-MCS0	6545	-12.68	-12.75	-9.71	0.00	7.91	-1.80	-1.00
11ax HE160	NSS1-MCS0	6505	-12.02	-12.80	-9.38	0.00	7.91	-1.47	-1.00



For CRIUS N310-G1-Mimo

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-12.74	-13.36	-10.02	0.00	7.91	-2.11	-1.00
11ax HE40	NSS1-MCS0	6885	-12.99	-13.54	-10.25	0.00	7.91	-2.34	-1.00
11ax HE80	NSS1-MCS0	6865	-12.13	-12.98	-9.52	0.00	7.91	-1.61	-1.00
11ax HE160	NSS1-MCS0	6825	-12.03	-12.97	-9.46	0.00	7.91	-1.55	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-13.01	-13.53	-10.25	0.00	6.54	-3.71	-1.00
11ax HE40	NSS1-MCS0	6885	-12.39	-12.99	-9.67	0.00	6.54	-3.13	-1.00
11ax HE80	NSS1-MCS0	6865	-12.25	-12.93	-9.56	0.00	6.54	-3.02	-1.00
11ax HE160	NSS1-MCS0	6825	-13.22	-14.05	-10.60	0.00	6.54	-4.06	-1.00



For CRIUS N320-G1-Aux U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	1	5955	-6.53	-6.53	0.00	2.31	-4.22	-1.00
11ax HE20	NSS1-MCS0	45	6175	-6.52	-6.52	0.00	2.31	-4.21	-1.00
11ax HE20	NSS1-MCS0	93	6415	-6.81	-6.81	0.00	2.31	-4.50	-1.00
11ax HE40	NSS1-MCS0	3	5965	-6.50	-6.49	0.00	2.31	-4.18	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.04	-7.04	0.00	2.31	-4.73	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.06	-7.06	0.00	2.31	-4.75	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.13	-7.13	0.00	2.31	-4.82	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.08	-7.08	0.00	2.31	-4.77	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.64	-6.64	0.00	2.31	-4.33	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.97	-6.97	0.00	2.31	-4.66	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.77	-6.76	0.00	2.31	-4.45	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.10	-7.10	0.00	2.31	-4.79	-1.00

For CRIUS N320-G1-Aux U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	97	6435	-7.41	-7.41	0.00	1.98	-5.43	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.63	-7.63	0.00	1.98	-5.65	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.57	-7.57	0.00	1.98	-5.59	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.59	-7.59	0.00	1.98	-5.61	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.77	-7.77	0.00	1.98	-5.79	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.43	-6.43	0.00	1.98	-4.45	-1.00



For CRIUS N320-G1-Aux-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	117	6535	-7.78	-7.78	0.00	2.58	-5.20	-1.00
11ax HE20	NSS1-MCS0	153	6715	-7.97	-7.97	0.00	2.58	-5.39	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.75	-7.75	0.00	2.58	-5.17	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.87	-7.87	0.00	2.58	-5.29	-1.00
11ax HE40	NSS1-MCS0	155	6725	-8.09	-8.09	0.00	2.58	-5.51	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.70	-7.70	0.00	2.58	-5.12	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.63	-6.63	0.00	2.58	-4.05	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.99	-6.99	0.00	2.58	-4.41	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.86	-6.86	0.00	2.58	-4.28	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.24	-7.24	0.00	2.58	-4.66	-1.00

For CRIUS N320-G1-Aux-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT B					
11ax HE20	NSS1-MCS0	189	6895	-7.61	-7.61	0.00	2.19	-5.42	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.70	-7.70	0.00	2.19	-5.51	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.63	-7.63	0.00	2.19	-5.44	-1.00
11ax HE20	NSS1-MCS0	233	7115	-11.31	-11.31	0.00	2.19	-9.12	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.45	-7.45	0.00	2.19	-5.26	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.60	-7.60	0.00	2.19	-5.41	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.35	-7.35	0.00	2.19	-5.16	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.86	-6.86	0.00	2.19	-4.67	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.60	-6.60	0.00	2.19	-4.41	-1.00
11ax HE160	NSS1-MCS0	207	6985	-7.39	-7.39	0.00	2.19	-5.20	-1.00



For CRIUS N320-G1-Aux

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.57	-7.57	0.00	1.98	-5.59	-1.00
11ax HE80	NSS1-MCS0	6545	-6.69	-6.69	0.00	1.98	-4.71	-1.00
11ax HE160	NSS1-MCS0	6505	-7.10	-7.10	0.00	1.98	-5.12	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE40	NSS1-MCS0	6525	-7.68	-7.68	0.00	2.58	-5.10	-1.00
11ax HE80	NSS1-MCS0	6545	-6.54	-6.54	0.00	2.58	-3.96	-1.00
11ax HE160	NSS1-MCS0	6505	-7.50	-7.50	0.00	2.58	-4.92	-1.00



For CRIUS N320-G1-Aux

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.72	-7.72	0.00	2.58	-5.14	-1.00
11ax HE40	NSS1-MCS0	6885	-8.04	-8.04	0.00	2.58	-5.46	-1.00
11ax HE80	NSS1-MCS0	6865	-6.99	-6.99	0.00	2.58	-4.41	-1.00
11ax HE160	NSS1-MCS0	6825	-7.68	-7.68	0.00	2.58	-5.10	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT B					
11ax HE20	NSS1-MCS0	6875	-7.73	-7.73	0.00	2.19	-5.54	-1.00
11ax HE40	NSS1-MCS0	6885	-7.73	-7.73	0.00	2.19	-5.54	-1.00
11ax HE80	NSS1-MCS0	6865	-6.95	-6.95	0.00	2.19	-4.76	-1.00
11ax HE160	NSS1-MCS0	6825	-7.93	-7.93	0.00	2.19	-5.74	-1.00



For CRIUS N320-G1-Main-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	1	5955	-7.26	-7.26	0.00	3.80	-3.46	-1.00
11ax HE20	NSS1-MCS0	45	6175	-7.50	-7.49	0.00	3.80	-3.69	-1.00
11ax HE20	NSS1-MCS0	93	6415	-7.19	-7.19	0.00	3.80	-3.39	-1.00
11ax HE40	NSS1-MCS0	3	5965	-7.09	-7.09	0.00	3.80	-3.29	-1.00
11ax HE40	NSS1-MCS0	43	6165	-7.15	-7.15	0.00	3.80	-3.35	-1.00
11ax HE40	NSS1-MCS0	91	6405	-7.23	-7.23	0.00	3.80	-3.43	-1.00
11ax HE80	NSS1-MCS0	7	5985	-7.12	-7.12	0.00	3.80	-3.32	-1.00
11ax HE80	NSS1-MCS0	39	6145	-7.15	-7.15	0.00	3.80	-3.35	-1.00
11ax HE80	NSS1-MCS0	87	6385	-6.98	-6.98	0.00	3.80	-3.18	-1.00
11ax HE160	NSS1-MCS0	15	6025	-6.65	-6.65	0.00	3.80	-2.85	-1.00
11ax HE160	NSS1-MCS0	47	6185	-6.79	-6.79	0.00	3.80	-2.99	-1.00
11ax HE160	NSS1-MCS0	79	6345	-7.37	-7.37	0.00	3.80	-3.57	-1.00

For CRIUS N320-G1-Main-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	97	6435	-6.91	-6.90	0.00	3.77	-3.13	-1.00
11ax HE20	NSS1-MCS0	105	6475	-7.13	-7.13	0.00	3.77	-3.36	-1.00
11ax HE20	NSS1-MCS0	113	6515	-7.24	-7.24	0.00	3.77	-3.47	-1.00
11ax HE40	NSS1-MCS0	99	6445	-7.14	-7.14	0.00	3.77	-3.37	-1.00
11ax HE40	NSS1-MCS0	107	6485	-7.27	-7.27	0.00	3.77	-3.50	-1.00
11ax HE80	NSS1-MCS0	103	6465	-6.38	-6.38	0.00	3.77	-2.61	-1.00



For CRIUS N320-G1-Main-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	153	6715	-7.29	-7.29	0.00	4.00	-3.29	-1.00
11ax HE20	NSS1-MCS0	181	6855	-7.34	-7.34	0.00	4.00	-3.34	-1.00
11ax HE40	NSS1-MCS0	123	6565	-7.15	-7.15	0.00	4.00	-3.15	-1.00
11ax HE40	NSS1-MCS0	155	6725	-7.34	-7.34	0.00	4.00	-3.34	-1.00
11ax HE40	NSS1-MCS0	179	6845	-7.22	-7.22	0.00	4.00	-3.22	-1.00
11ax HE80	NSS1-MCS0	135	6625	-6.71	-6.71	0.00	4.00	-2.71	-1.00
11ax HE80	NSS1-MCS0	151	6705	-6.69	-6.69	0.00	4.00	-2.69	-1.00
11ax HE80	NSS1-MCS0	167	6785	-6.69	-6.69	0.00	4.00	-2.69	-1.00
11ax HE160	NSS1-MCS0	143	6665	-7.27	-7.27	0.00	4.00	-3.27	-1.00

For CRIUS N320-G1-Main-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A					
11ax HE20	NSS1-MCS0	189	6895	-7.41	-7.41	0.00	4.23	-3.18	-1.00
11ax HE20	NSS1-MCS0	213	7015	-7.35	-7.35	0.00	4.23	-3.12	-1.00
11ax HE20	NSS1-MCS0	229	7095	-7.10	-7.10	0.00	4.23	-2.87	-1.00
11ax HE20	NSS1-MCS0	233	7115	-10.93	-10.92	0.00	4.23	-6.69	-1.00
11ax HE40	NSS1-MCS0	195	6925	-7.19	-7.19	0.00	4.23	-2.96	-1.00
11ax HE40	NSS1-MCS0	211	7005	-7.17	-7.16	0.00	4.23	-2.93	-1.00
11ax HE40	NSS1-MCS0	227	7085	-7.12	-7.12	0.00	4.23	-2.89	-1.00
11ax HE80	NSS1-MCS0	199	6945	-6.32	-6.31	0.00	4.23	-2.08	-1.00
11ax HE80	NSS1-MCS0	215	7025	-6.51	-6.51	0.00	4.23	-2.28	-1.00



For CRIUS N320-G1-Main

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.22	-7.22	0.00	3.77	-3.45	-1.00
11ax HE80	NSS1-MCS0	6545	-6.60	-6.60	0.00	3.77	-2.83	-1.00
11ax HE160	NSS1-MCS0	6505	-7.13	-7.13	0.00	3.77	-3.36	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE40	NSS1-MCS0	6525	-7.32	-7.32	0.00	4.00	-3.32	-1.00
11ax HE80	NSS1-MCS0	6545	-6.71	-6.71	0.00	4.00	-2.71	-1.00
11ax HE160	NSS1-MCS0	6505	-7.23	-7.23	0.00	4.00	-3.23	-1.00



For CRIUS N320-G1-Main

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.13	-7.13	0.00	4.00	-3.13	-1.00
11ax HE40	NSS1-MCS0	6885	-7.47	-7.47	0.00	4.00	-3.47	-1.00
11ax HE80	NSS1-MCS0	6865	-6.71	-6.71	0.00	4.00	-2.71	-1.00
11ax HE160	NSS1-MCS0	6825	-7.25	-7.25	0.00	4.00	-3.25	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)	W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A					
11ax HE20	NSS1-MCS0	6875	-7.35	-7.35	0.00	4.23	-3.12	-1.00
11ax HE40	NSS1-MCS0	6885	-7.34	-7.34	0.00	4.23	-3.11	-1.00
11ax HE80	NSS1-MCS0	6865	-7.18	-7.18	0.00	4.23	-2.95	-1.00
11ax HE160	NSS1-MCS0	6825	-7.29	-7.29	0.00	4.23	-3.06	-1.00



For CRIUS N320-G1-Mimo-U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	1	5955	-11.94	-12.03	-8.97	0.00	6.10	-2.87	-1.00
11ax HE20	NSS1-MCS0	45	6175	-12.03	-12.12	-9.07	0.00	6.10	-2.97	-1.00
11ax HE20	NSS1-MCS0	93	6415	-12.09	-12.18	-9.12	0.00	6.10	-3.02	-1.00
11ax HE40	NSS1-MCS0	3	5965	-12.80	-12.85	-9.81	0.00	6.10	-3.71	-1.00
11ax HE40	NSS1-MCS0	43	6165	-12.23	-12.22	-9.21	0.00	6.10	-3.11	-1.00
11ax HE40	NSS1-MCS0	91	6405	-12.40	-12.21	-9.29	0.00	6.10	-3.19	-1.00
11ax HE80	NSS1-MCS0	7	5985	-12.40	-12.34	-9.36	0.00	6.10	-3.26	-1.00
11ax HE80	NSS1-MCS0	39	6145	-12.28	-12.22	-9.24	0.00	6.10	-3.14	-1.00
11ax HE80	NSS1-MCS0	87	6385	-12.37	-12.66	-9.50	0.00	6.10	-3.40	-1.00
11ax HE160	NSS1-MCS0	15	6025	-12.08	-12.34	-9.19	0.00	6.10	-3.09	-1.00
11ax HE160	NSS1-MCS0	47	6185	-12.00	-12.30	-9.14	0.00	6.10	-3.04	-1.00
11ax HE160	NSS1-MCS0	79	6345	-12.26	-12.36	-9.30	0.00	6.10	-3.20	-1.00

For CRIUS N320-G1-Mimo-U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	97	6435	-12.33	-12.19	-9.25	0.00	5.93	-3.32	-1.00
11ax HE20	NSS1-MCS0	105	6475	-11.68	-11.50	-8.58	0.00	5.93	-2.65	-1.00
11ax HE20	NSS1-MCS0	113	6515	-11.67	-11.53	-8.59	0.00	5.93	-2.66	-1.00
11ax HE40	NSS1-MCS0	99	6445	-12.26	-12.55	-9.39	0.00	5.93	-3.46	-1.00
11ax HE40	NSS1-MCS0	107	6485	-11.94	-11.74	-8.83	0.00	5.93	-2.90	-1.00
11ax HE80	NSS1-MCS0	103	6465	-11.06	-11.66	-8.34	0.00	5.93	-2.41	-1.00



For CRIUS N320-G1-Mimo-U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	117	6535	-12.50	-12.55	-9.52	0.00	6.33	-3.19	-1.00
11ax HE20	NSS1-MCS0	153	6715	-12.47	-12.66	-9.55	0.00	6.33	-3.22	-1.00
11ax HE20	NSS1-MCS0	181	6885	-12.41	-12.68	-9.53	0.00	6.33	-3.20	-1.00
11ax HE40	NSS1-MCS0	123	6565	-12.96	-12.48	-9.70	0.00	6.33	-3.37	-1.00
11ax HE40	NSS1-MCS0	155	6725	-12.59	-12.61	-9.59	0.00	6.33	-3.26	-1.00
11ax HE40	NSS1-MCS0	179	6845	-12.56	-12.89	-9.71	0.00	6.33	-3.38	-1.00
11ax HE80	NSS1-MCS0	135	6625	-12.35	-12.58	-9.45	0.00	6.33	-3.12	-1.00
11ax HE80	NSS1-MCS0	151	6705	-12.31	-12.46	-9.38	0.00	6.33	-3.05	-1.00
11ax HE80	NSS1-MCS0	167	6785	-12.35	-12.45	-9.39	0.00	6.33	-3.06	-1.00
11ax HE160	NSS1-MCS0	143	6665	-12.58	-12.73	-9.64	0.00	6.33	-3.31	-1.00

For CRIUS N320-G1-Mimo-U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Cycle CF(dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
				ANT A	ANT B					
11ax HE20	NSS1-MCS0	189	6895	-12.09	-12.56	-9.31	0.00	6.28	-3.03	-1.00
11ax HE20	NSS1-MCS0	213	7015	-12.58	-12.62	-9.59	0.00	6.28	-3.31	-1.00
11ax HE20	NSS1-MCS0	229	7095	-11.92	-12.15	-9.02	0.00	6.28	-2.74	-1.00
11ax HE20	NSS1-MCS0	233	7115	-19.56	-18.56	-16.02	0.00	6.28	-9.74	-1.00
11ax HE40	NSS1-MCS0	195	6925	-12.08	-12.01	-9.03	0.00	6.28	-2.75	-1.00
11ax HE40	NSS1-MCS0	211	7005	-12.68	-12.03	-9.34	0.00	6.28	-3.06	-1.00
11ax HE40	NSS1-MCS0	227	7085	-11.94	-12.11	-9.01	0.00	6.28	-2.73	-1.00
11ax HE80	NSS1-MCS0	199	6945	-11.14	-11.38	-8.25	0.00	6.28	-1.97	-1.00
11ax HE80	NSS1-MCS0	215	7025	-11.54	-12.06	-8.78	0.00	6.28	-2.50	-1.00
11ax HE160	NSS1-MCS0	207	6985	-12.05	-12.60	-9.31	0.00	6.28	-3.03	-1.00



For CRIUS N320-G1-Mimo

Maximum Conducted PSD (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.17	-12.34	-9.24	0.00	5.93	-3.31	-1.00
11ax HE80	NSS1-MCS0	6545	-12.64	-13.02	-9.82	0.00	5.93	-3.89	-1.00
11ax HE160	NSS1-MCS0	6505	-11.94	-12.04	-8.98	0.00	5.93	-3.05	-1.00

Maximum Conducted PSD (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE40	NSS1-MCS0	6525	-12.44	-12.90	-9.65	0.00	6.33	-3.32	-1.00
11ax HE80	NSS1-MCS0	6545	-12.68	-12.75	-9.71	0.00	6.33	-3.38	-1.00
11ax HE160	NSS1-MCS0	6505	-12.02	-12.80	-9.38	0.00	6.33	-3.05	-1.00



For CRIUS N320-G1-Mimo

Maximum Conducted PSD (Within 6525-6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-12.74	-13.36	-10.02	0.00	6.33	-3.69	-1.00
11ax HE40	NSS1-MCS0	6885	-12.99	-13.54	-10.25	0.00	6.33	-3.92	-1.00
11ax HE80	NSS1-MCS0	6865	-12.13	-12.98	-9.52	0.00	6.33	-3.19	-1.00
11ax HE160	NSS1-MCS0	6825	-12.03	-12.97	-9.46	0.00	6.33	-3.13	-1.00

Maximum Conducted PSD (Extends across 6875MHz band)

Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm/MHz)		W/O duty factor Total PSD (dBm/MHz)	Duty Factor (dB)	Antenna Gain (dBi)	Total Corr'd EIRP PSD (dBm/MHz)	E.I.R.P PSD Limit (dBm/MHz)
			ANT A	ANT B					
11ax HE20	NSS1-MCS0	6875	-13.01	-13.53	-10.25	0.00	6.28	-3.97	-1.00
11ax HE40	NSS1-MCS0	6885	-12.39	-12.99	-9.67	0.00	6.28	-3.39	-1.00
11ax HE80	NSS1-MCS0	6865	-12.25	-12.93	-9.56	0.00	6.28	-3.28	-1.00
11ax HE160	NSS1-MCS0	6825	-13.22	-14.05	-10.60	0.00	6.28	-4.32	-1.00



U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX


ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH01Modulation Type: 802.11ax HE40 (14.6Mbps)
CH03

CH45



CH43

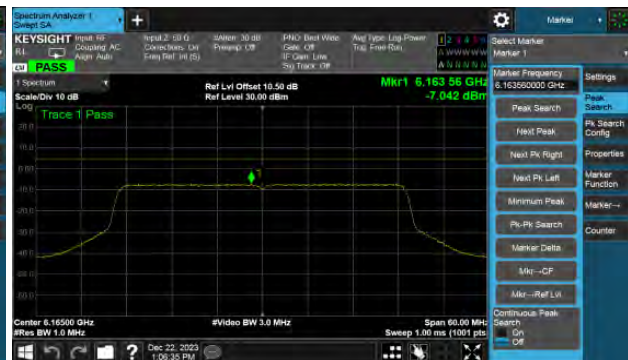

CH93



CH91





U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH07Modulation Type: 802.11ax HE160 (61.3Mbps)
CH15

CH39



CH47



CH87



CH79





U-NII-6

For CRIUS C0310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX



ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)


CH97

Modulation Type: 802.11ax HE40 (14.6Mbps)


CH99

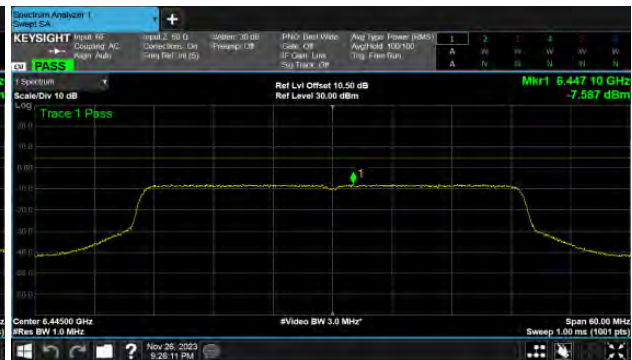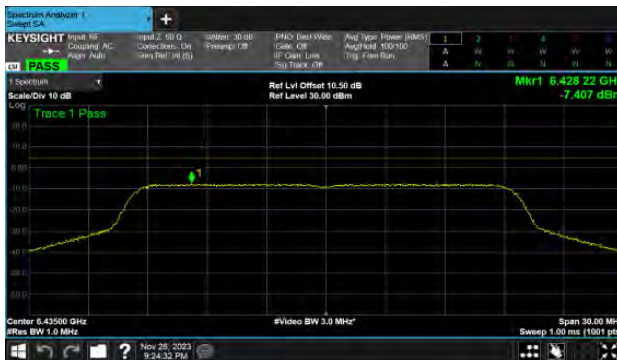


CH105

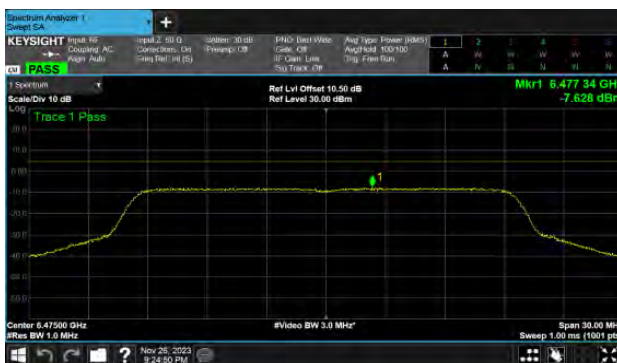

CH107

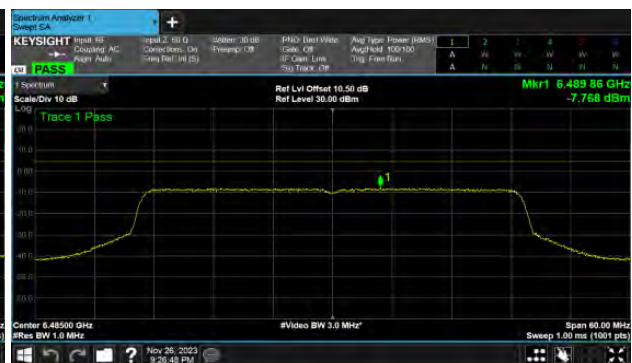

CH113

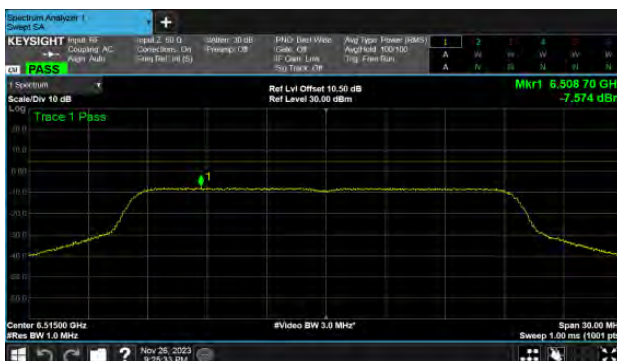



U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH103






Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

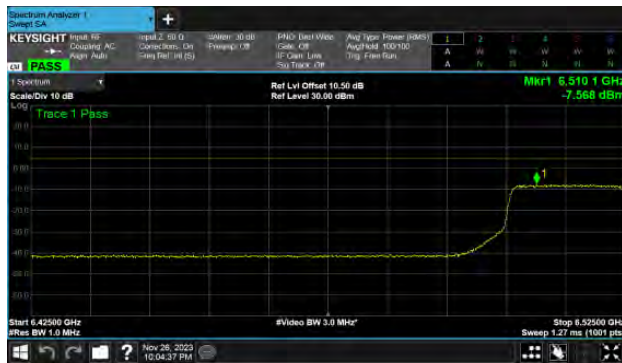


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

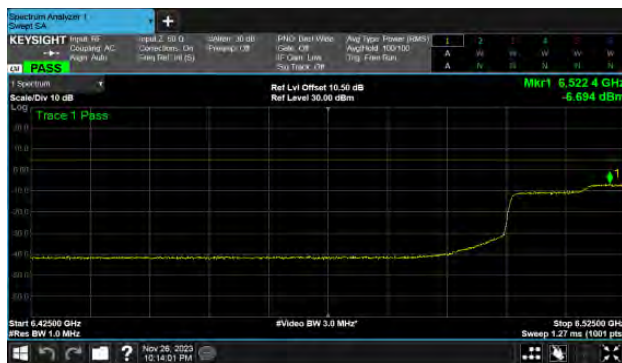

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

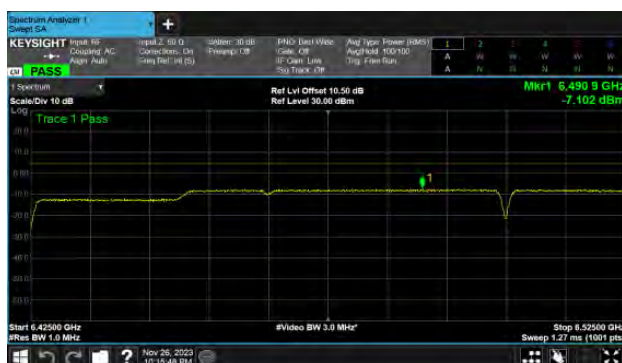




Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

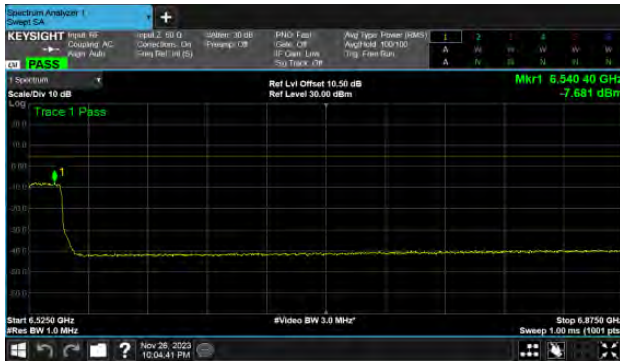


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

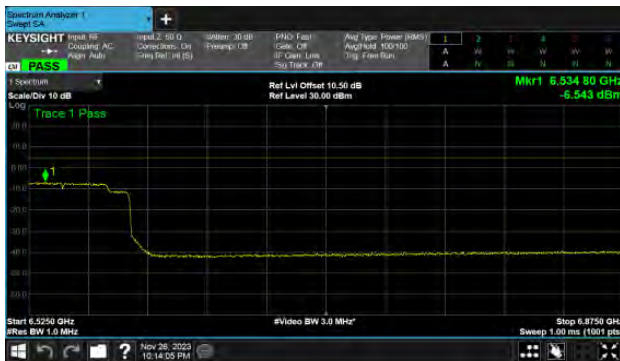

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

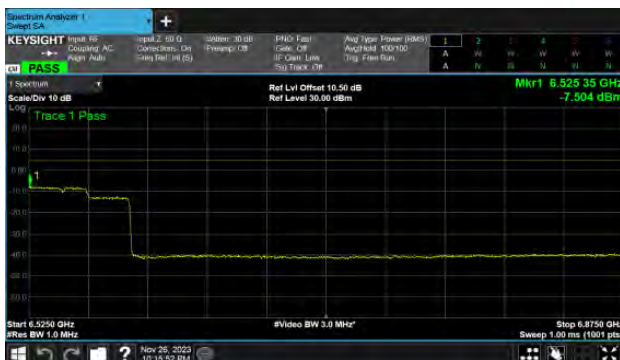







U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX


ANT B

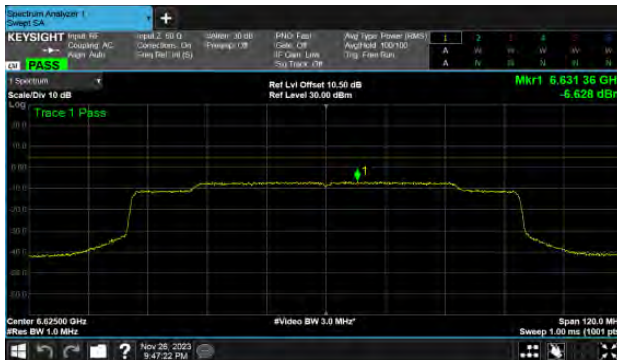Modulation Type: 802.11ax HE80 (30.6Mbps)
CH135Modulation Type: 802.11ax HE160 (61.3Mbps)
CH143

CH151

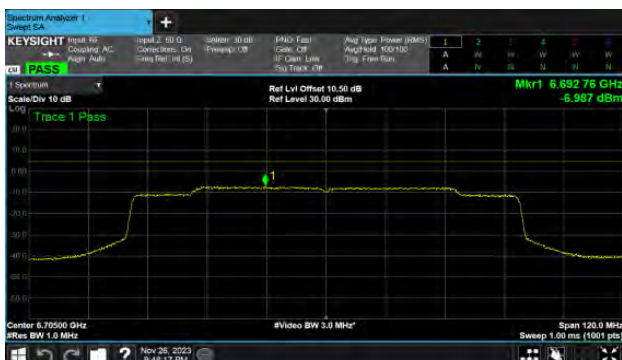




CH167

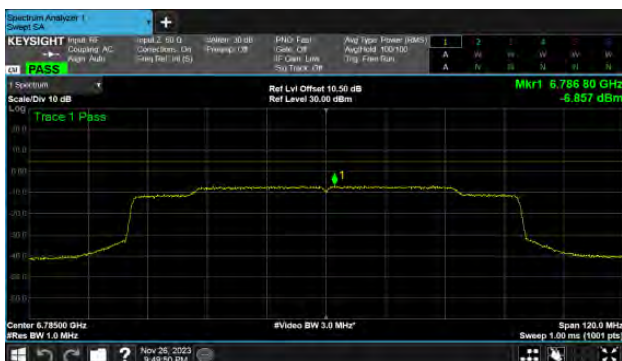

Within 6525-6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B

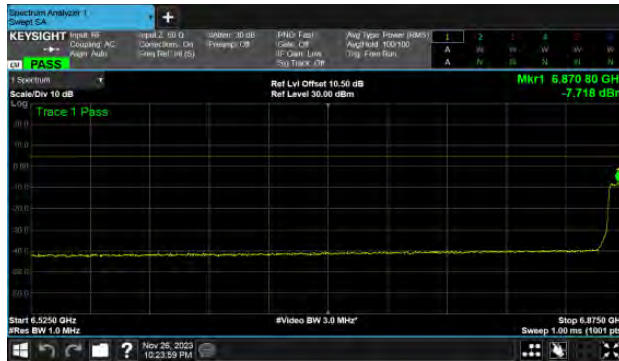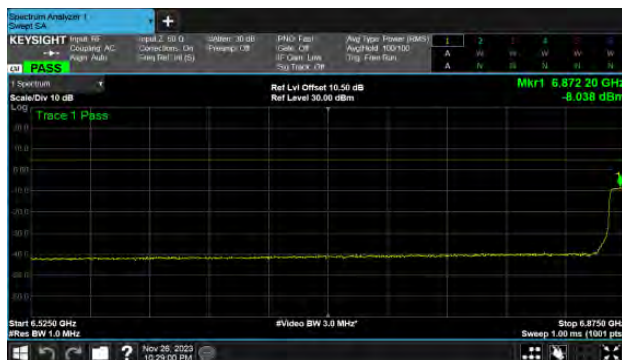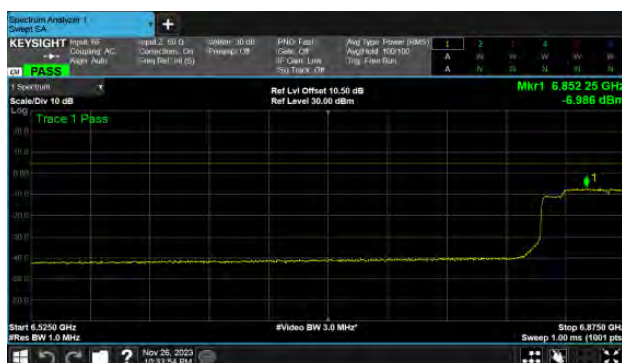Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183







U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX


ANT B

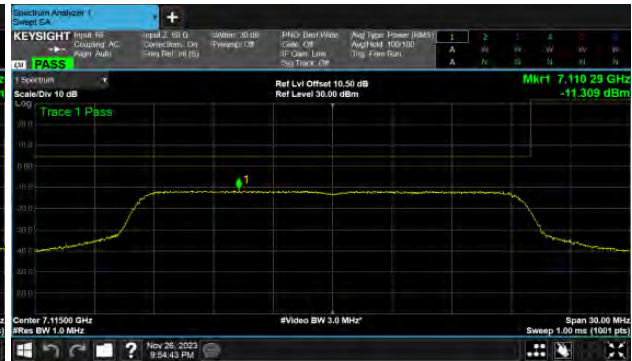Modulation Type: 802.11ax HE20 (7.3Mbps)
CH189Modulation Type: 802.11ax HE20 (7.3Mbps)
CH233

CH213

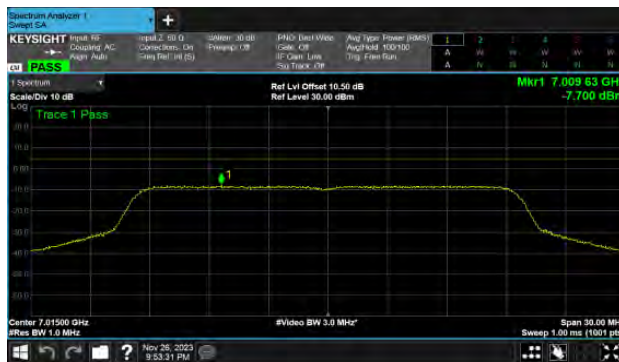

CH229

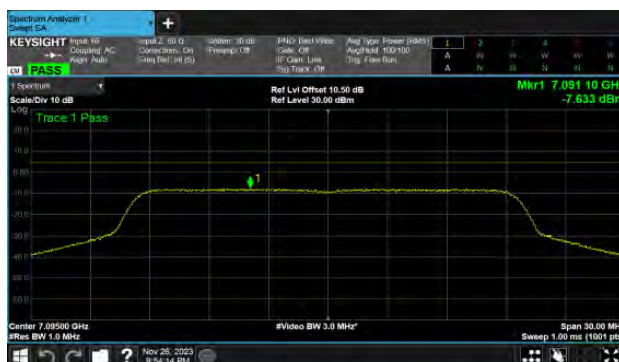





U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX


ANT B

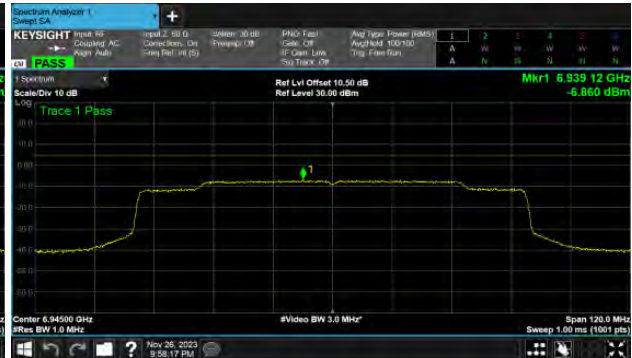Modulation Type: 802.11ax HE40 (14.6Mbps)
CH195Modulation Type: 802.11ax HE80 (30.6Mbps)
CH199


CH211

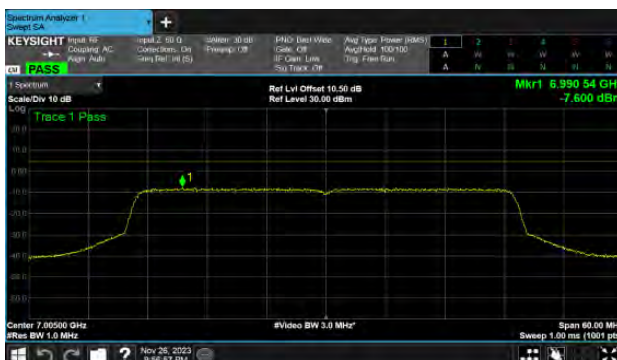

CH215

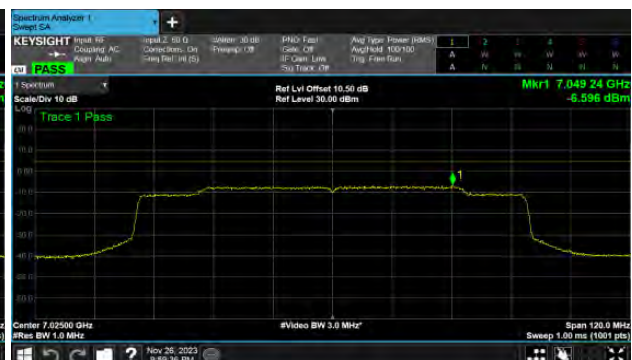

CH227

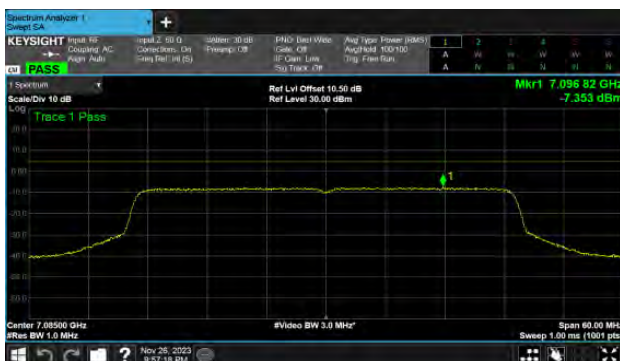




U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-AUX

ANT B

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH207

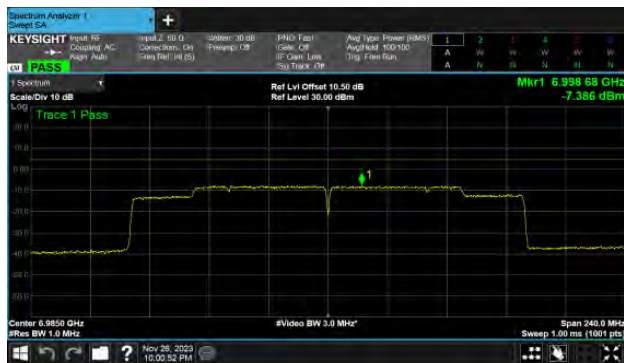




U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH01Modulation Type: 802.11ax HE40 (14.6Mbps)
CH03

CH45

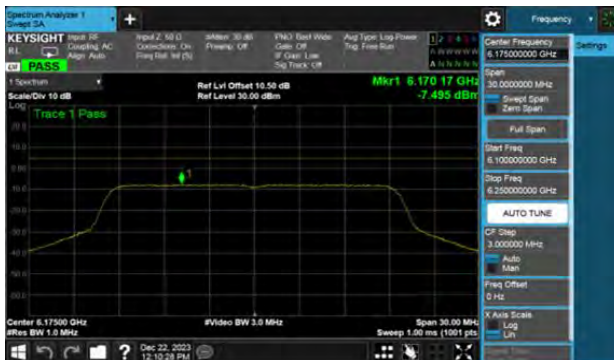

CH43



CH93



CH91





U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN

ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH07Modulation Type: 802.11ax HE160 (61.3Mbps)
CH15

CH39



CH47



CH87



CH79








U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

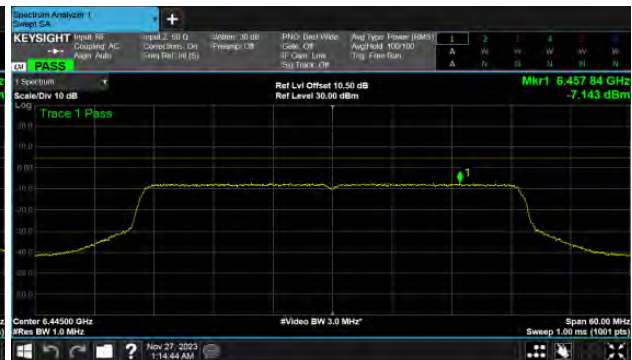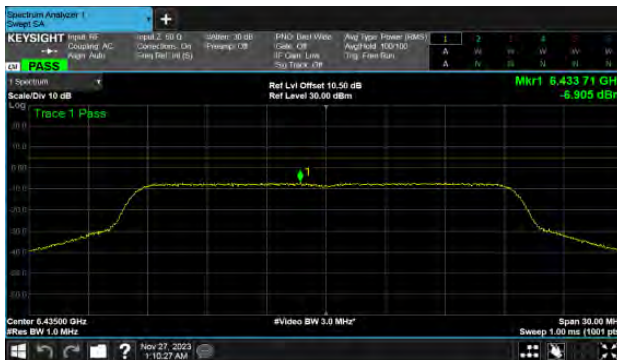Modulation Type: 802.11ax HE20 (7.3Mbps)
CH97Modulation Type: 802.11ax HE40 (14.6Mbps)
CH99


CH105

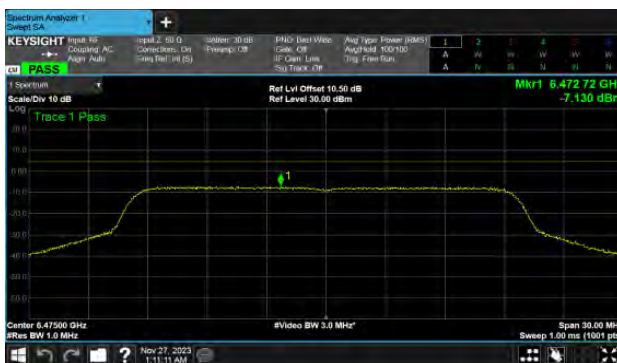

CH107

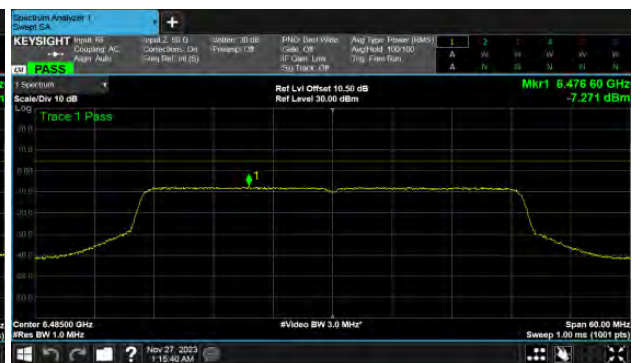

CH113

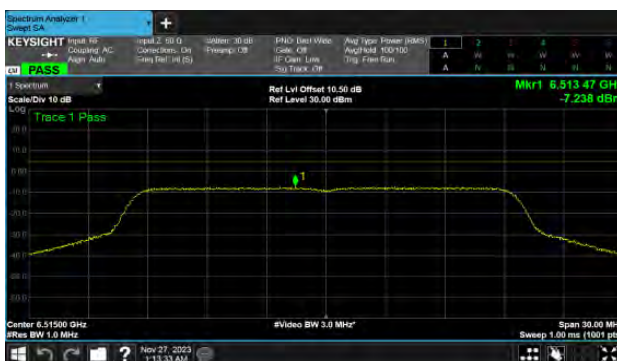



U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN

ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH103






Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN

ANT A


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

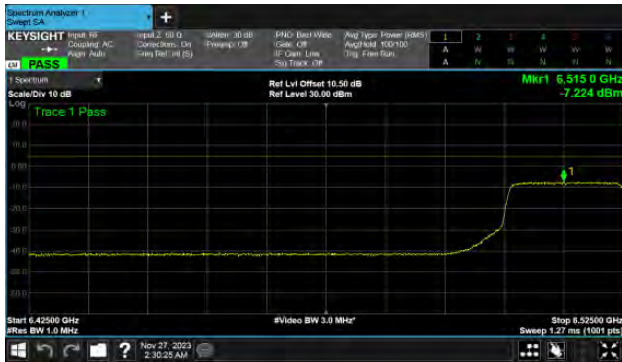


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

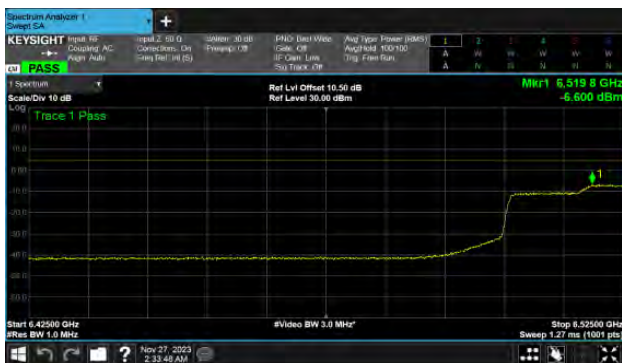

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

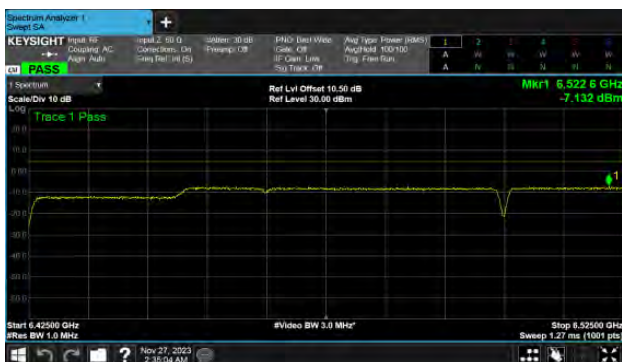








U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

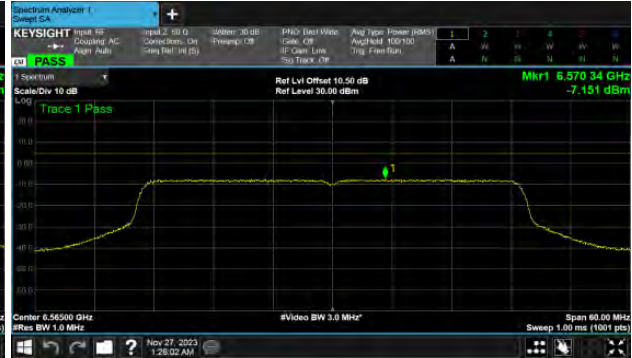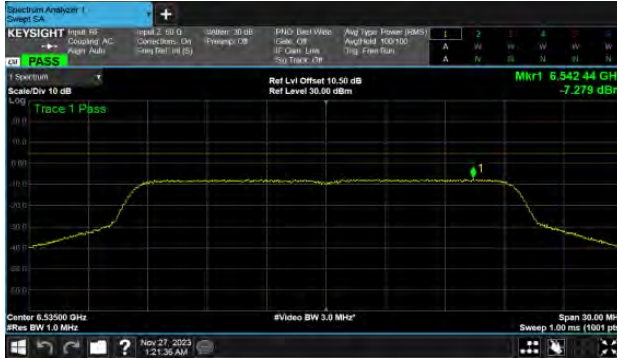Modulation Type: 802.11ax HE20 (7.3Mbps)
CH117Modulation Type: 802.11ax HE40 (14.6Mbps)
CH123


CH153

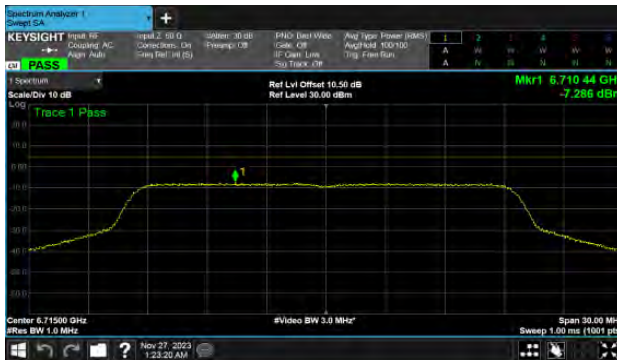


CH155

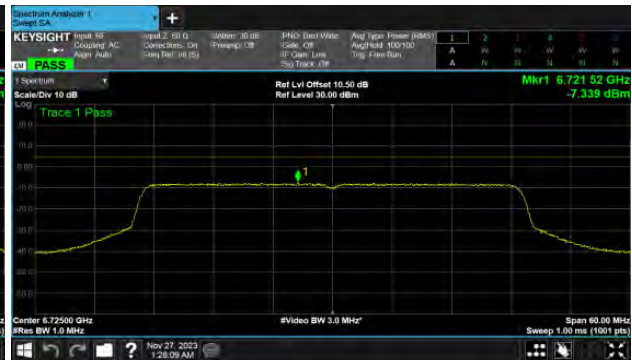

CH181

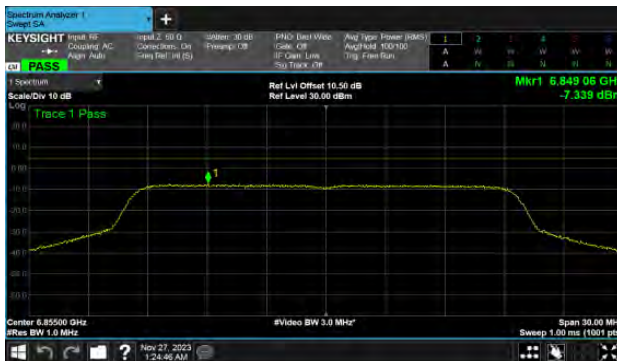

CH179

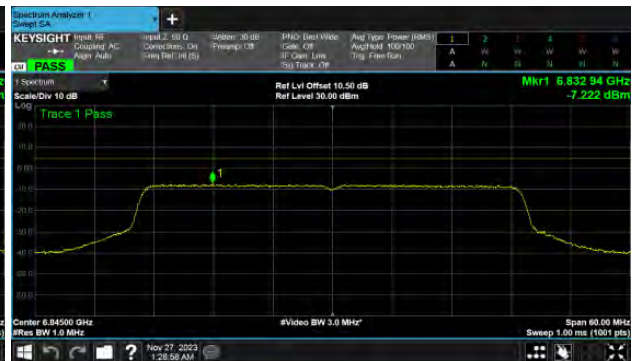





U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

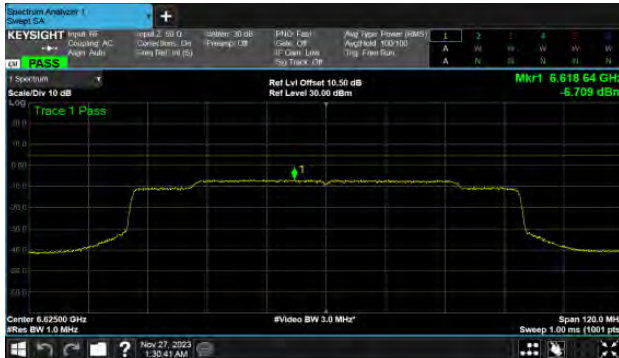Modulation Type: 802.11ax HE80 (30.6Mbps)
CH135Modulation Type: 802.11ax HE160 (61.3Mbps)
CH143

CH151

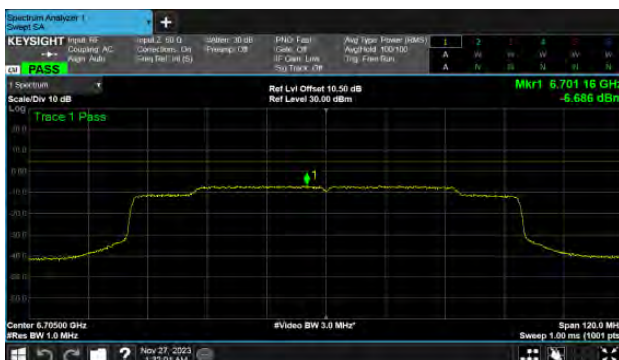

CH167

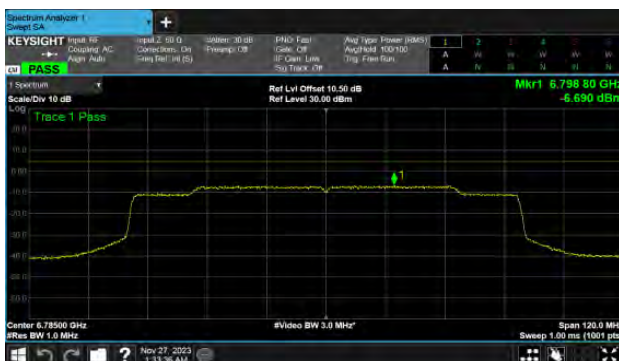




Within 6525-6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

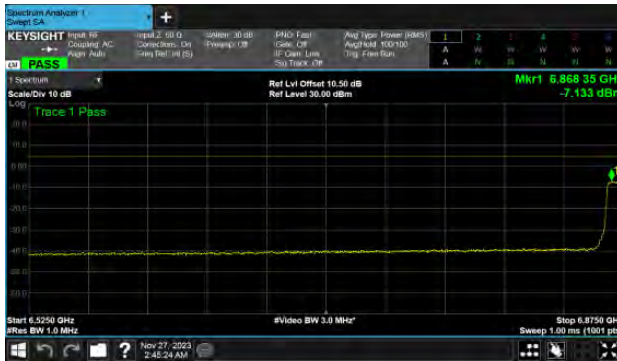

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

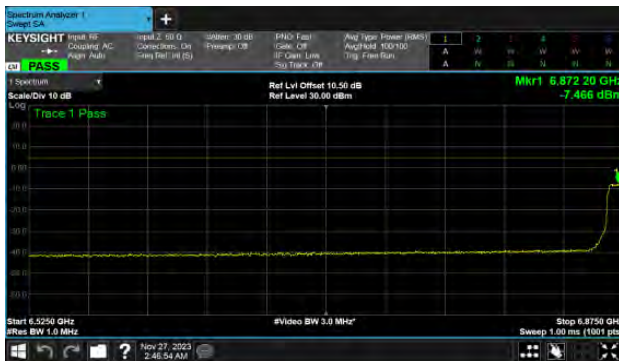

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

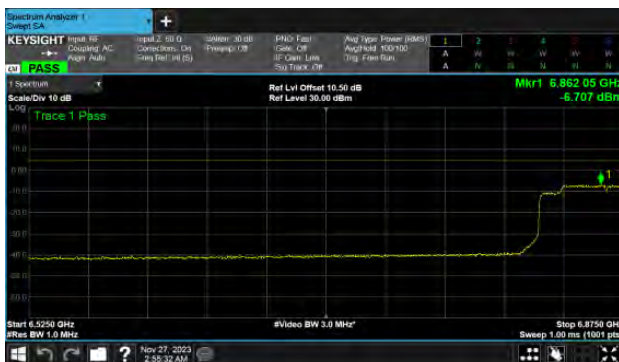





Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

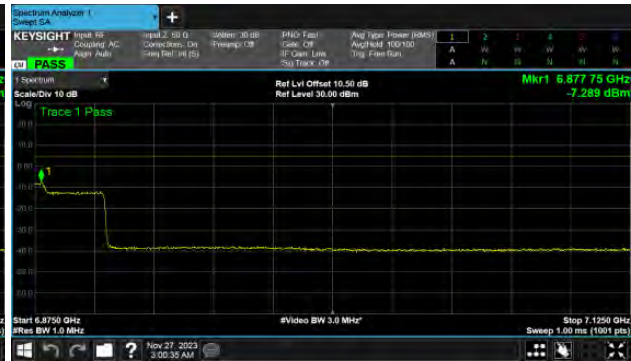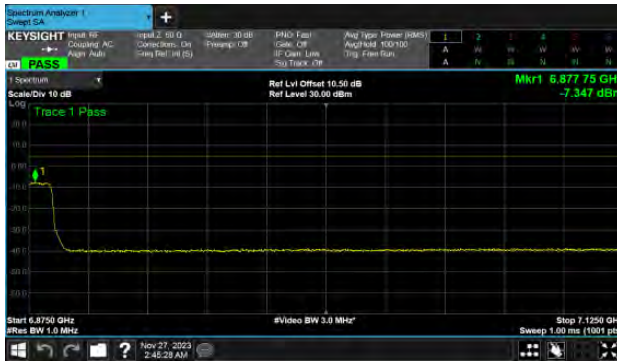

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

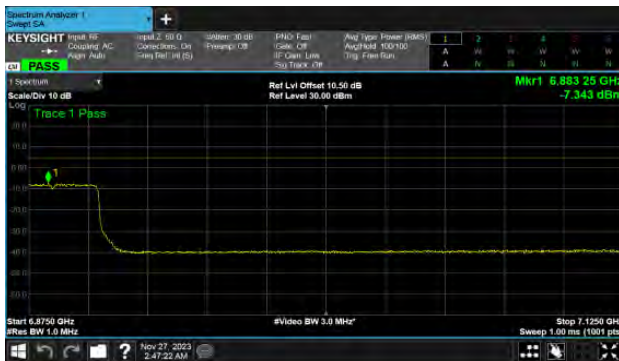

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183


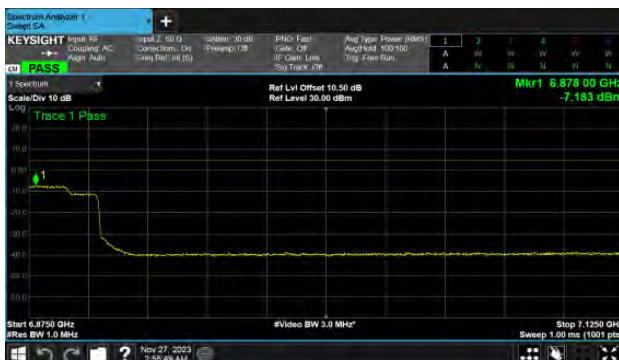





U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

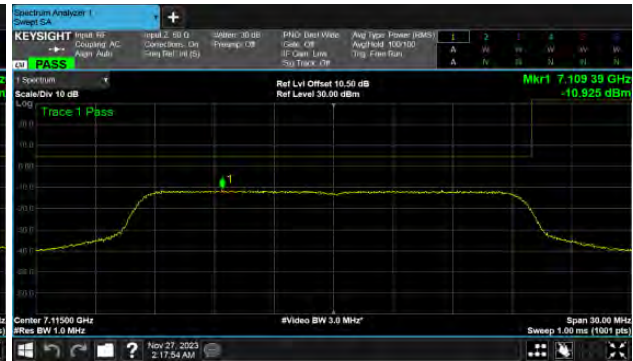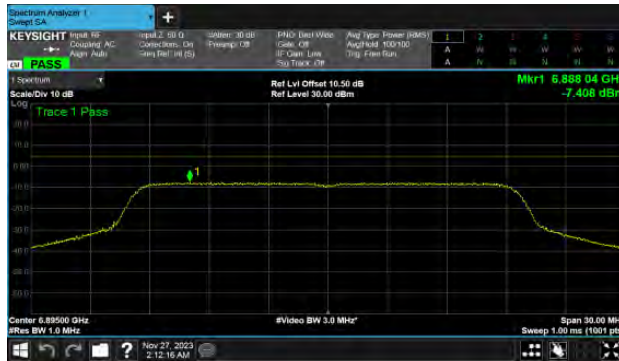Modulation Type: 802.11ax HE20 (7.3Mbps)
CH189Modulation Type: 802.11ax HE20 (7.3Mbps)
CH233

CH213

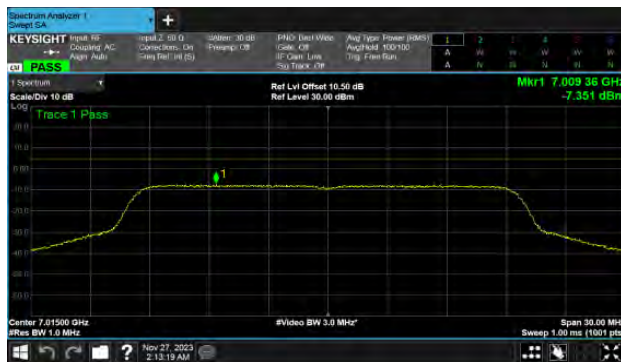

CH229


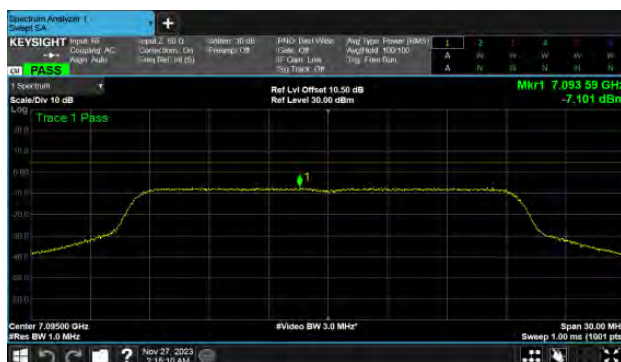





U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN


ANT A

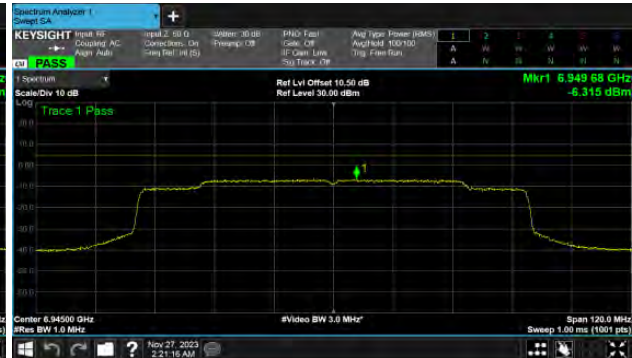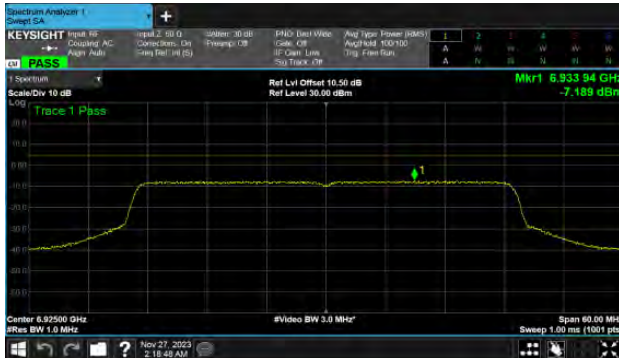Modulation Type: 802.11ax HE40 (14.6Mbps)
CH195Modulation Type: 802.11ax HE80 (30.6Mbps)
CH199


CH211

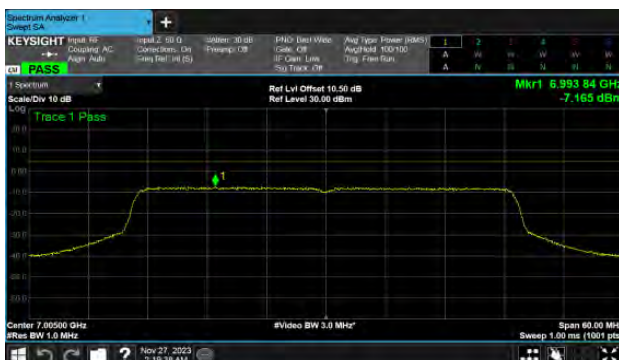

CH215

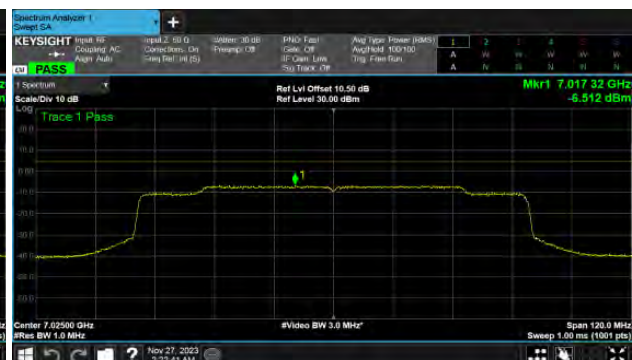

CH227

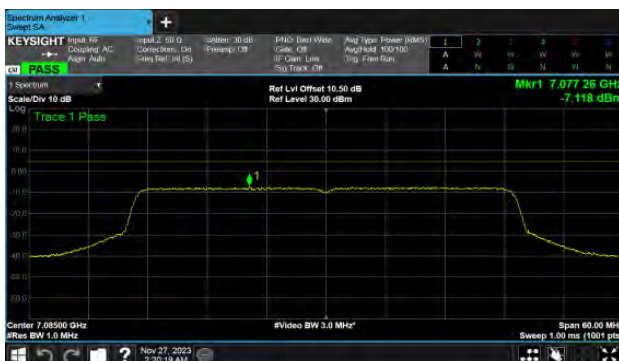



U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-MAIN

ANT A

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH207




U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH01

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH03

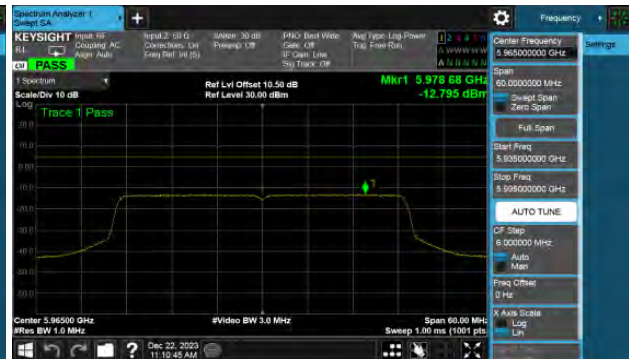

CH45

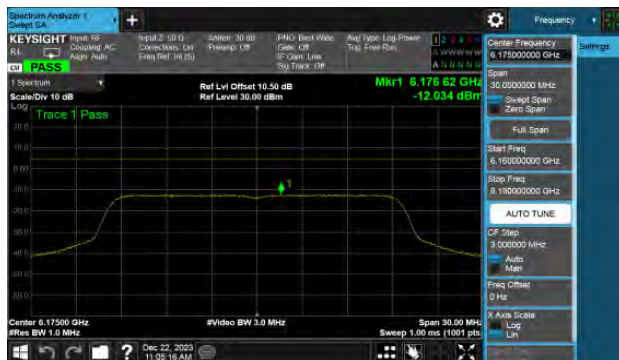

CH43



CH93



CH91





U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH07Modulation Type: 802.11ax HE160 (61.3Mbps)
CH15

CH39



CH47



CH87



CH79






U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH103

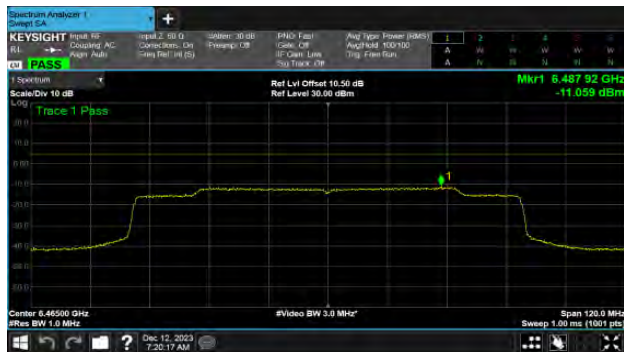






Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

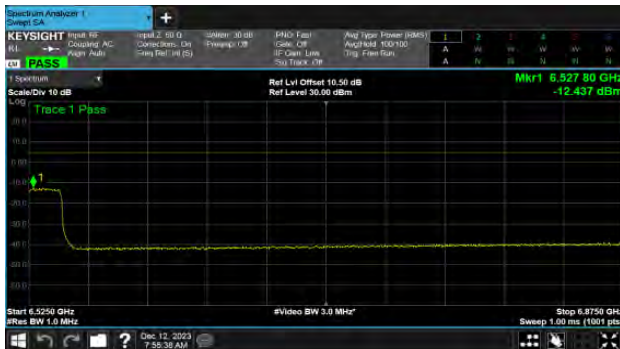


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

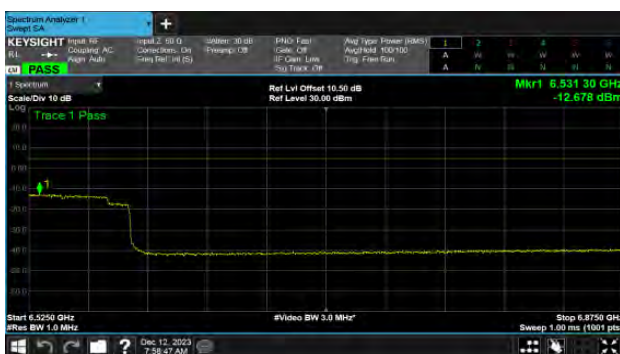

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111


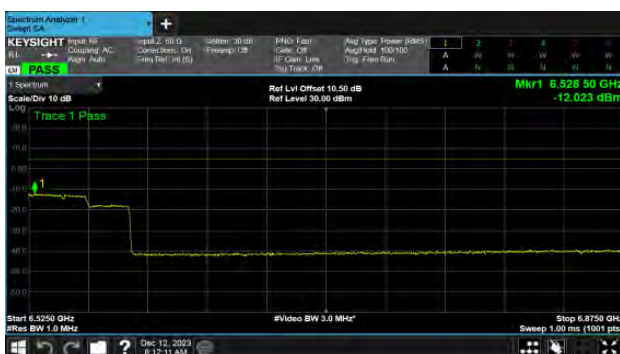





U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

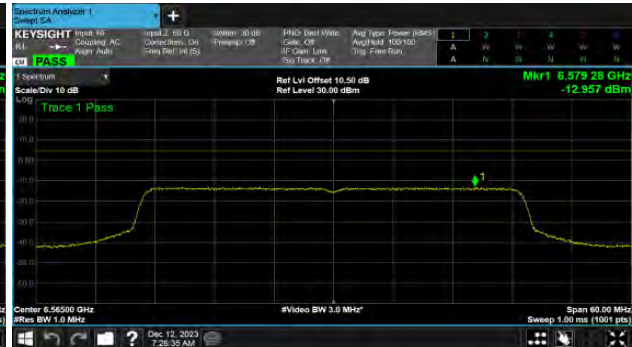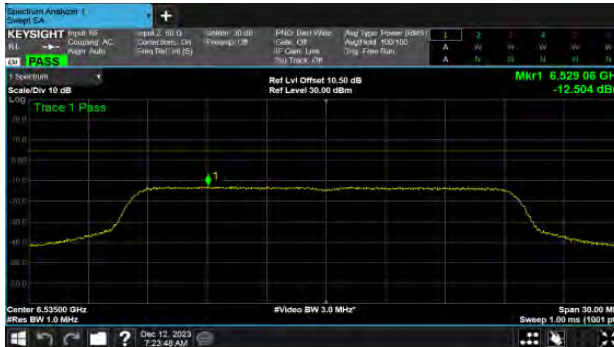Modulation Type: 802.11ax HE20 (7.3Mbps)
CH117Modulation Type: 802.11ax HE40 (14.6Mbps)
CH123


CH153

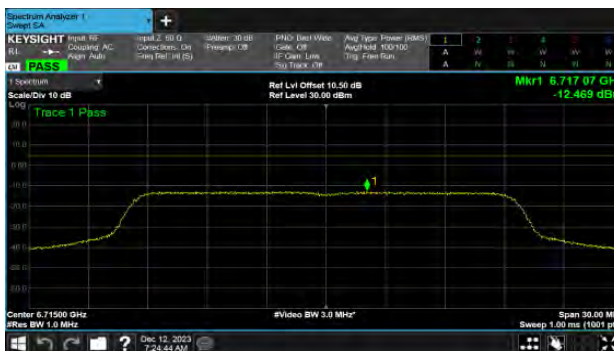


CH155

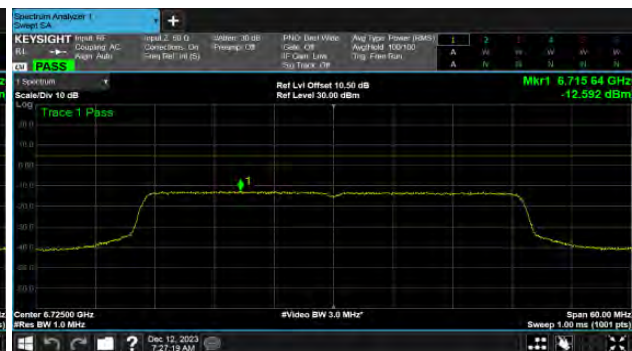

CH181

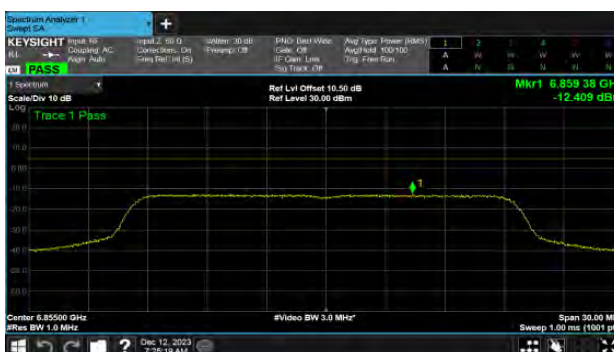

CH179


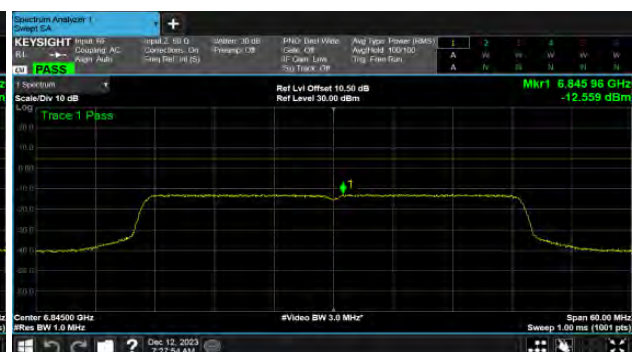





U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

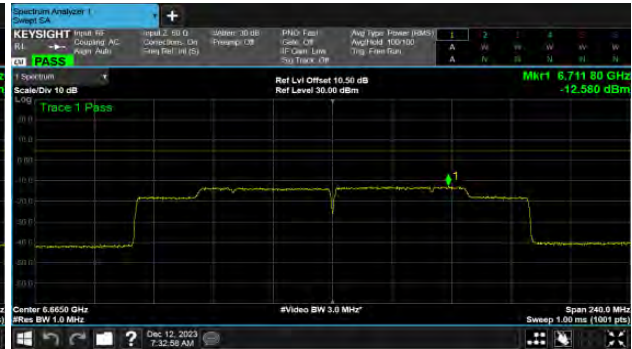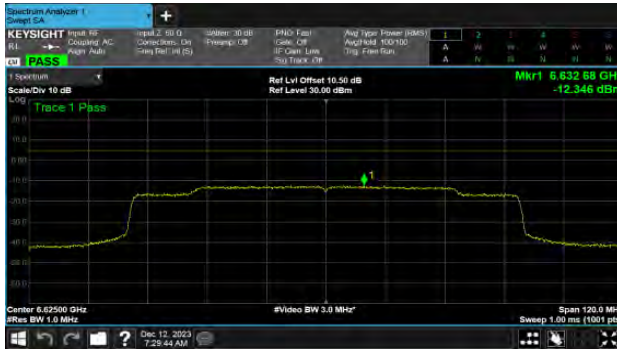Modulation Type: 802.11ax HE80 (30.6Mbps)
CH135Modulation Type: 802.11ax HE160 (61.3Mbps)
CH143

CH151

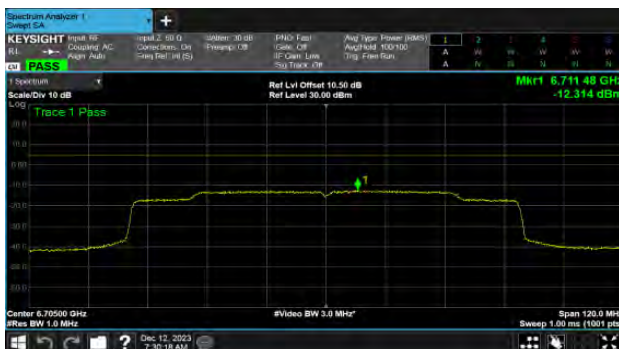


CH167

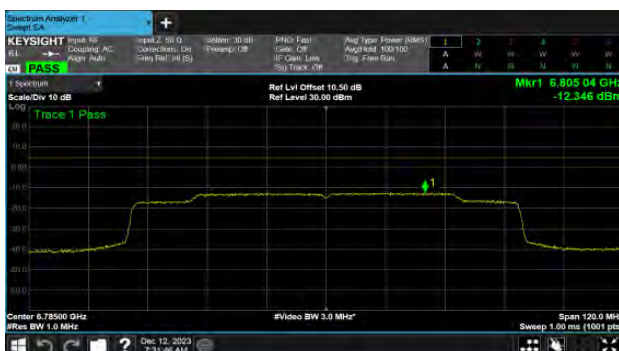

Within 6525-6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

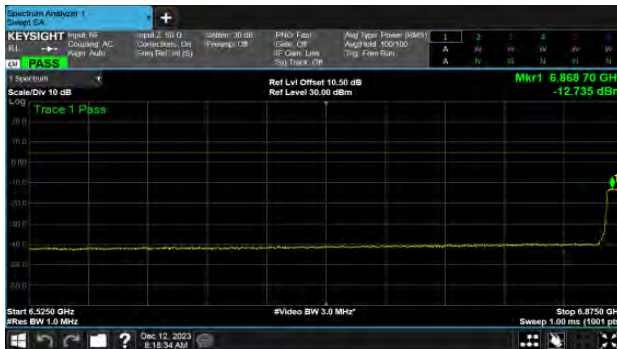Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183




Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

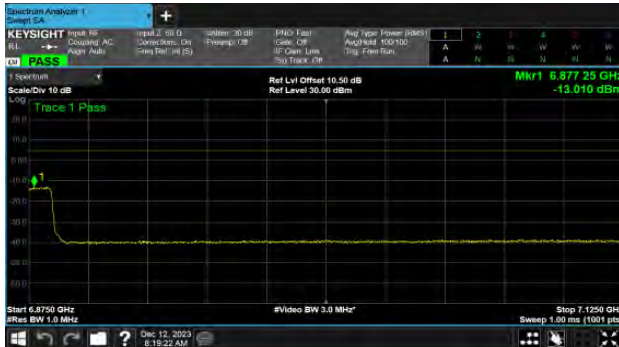

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187



Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183








U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

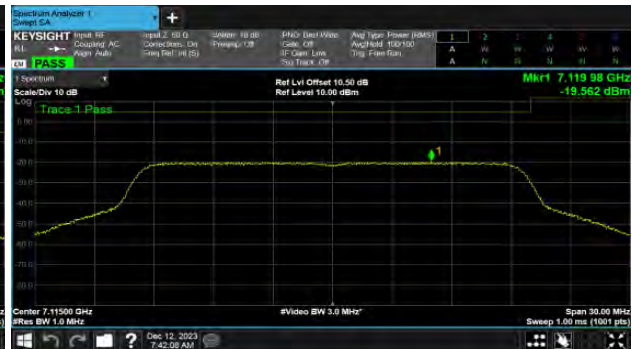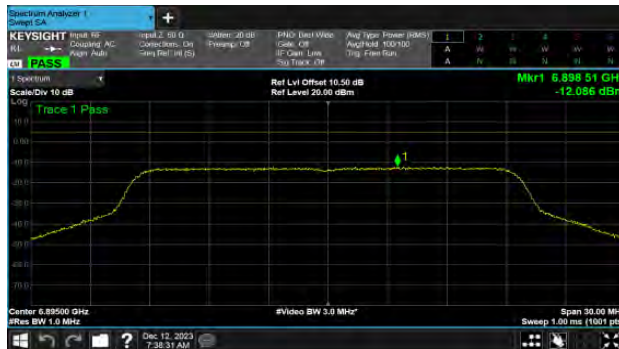Modulation Type: 802.11ax HE20 (7.3Mbps)
CH189Modulation Type: 802.11ax HE20 (7.3Mbps)
CH233

CH213

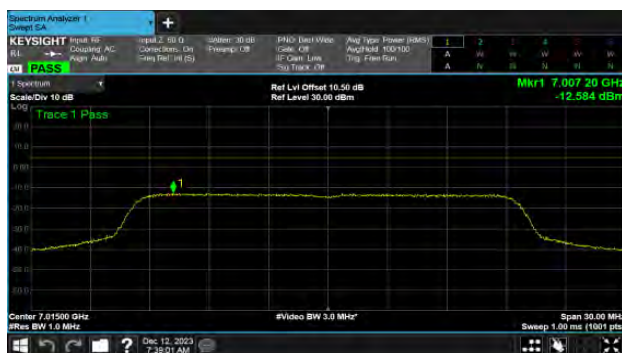

CH229


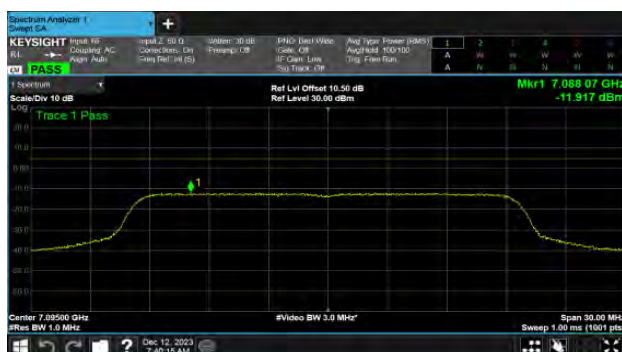





U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

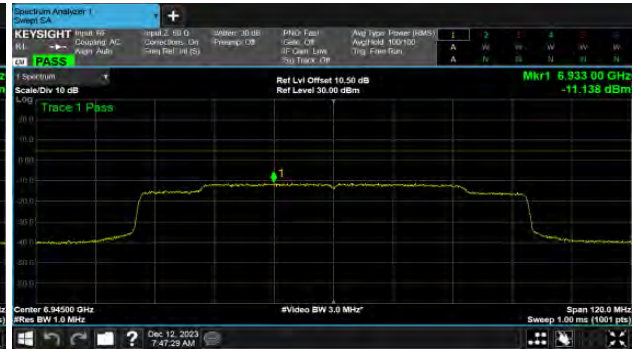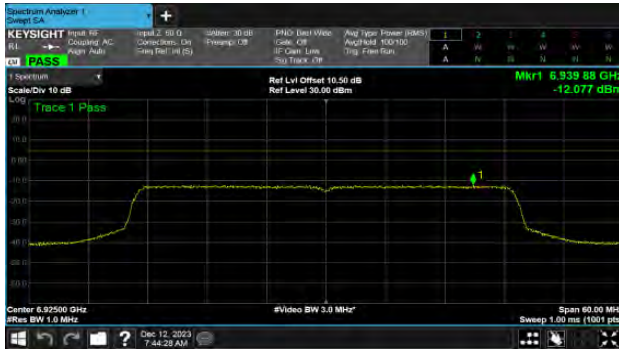Modulation Type: 802.11ax HE40 (14.6Mbps)
CH195Modulation Type: 802.11ax HE80 (30.6Mbps)
CH199


CH211

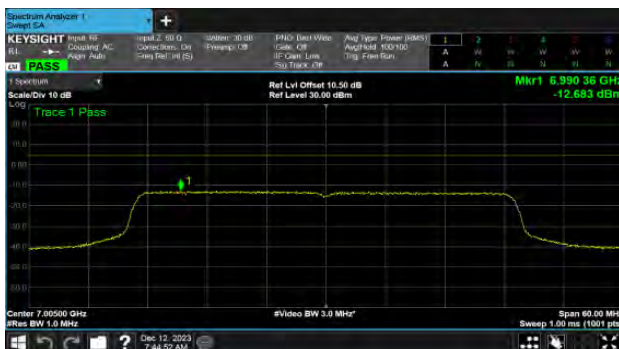

CH215

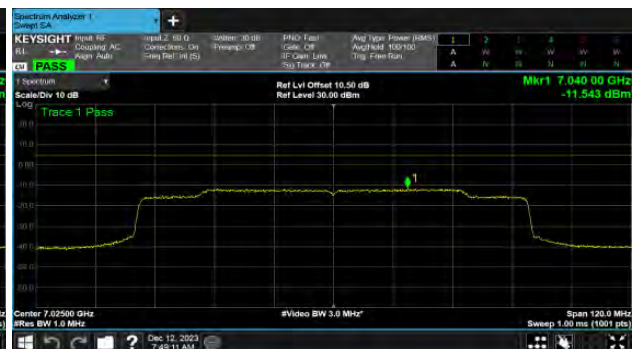

CH227

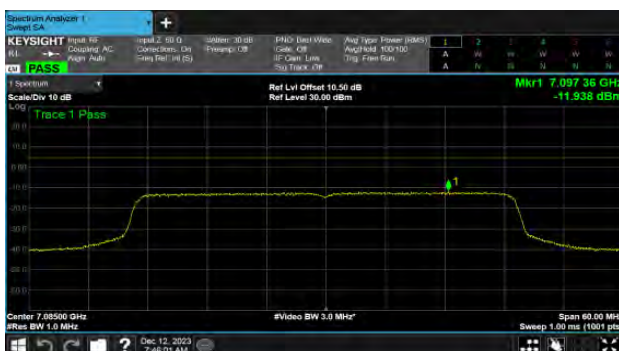




U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH207

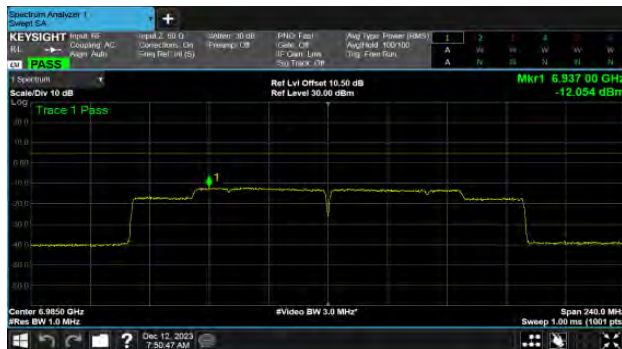



U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH01Modulation Type: 802.11ax HE40 (14.6Mbps)
CH03

CH45



CH43



CH93



CH91





U-NII-5

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH07Modulation Type: 802.11ax HE160 (61.3Mbps)
CH15

CH39



CH47



CH87



CH79







U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

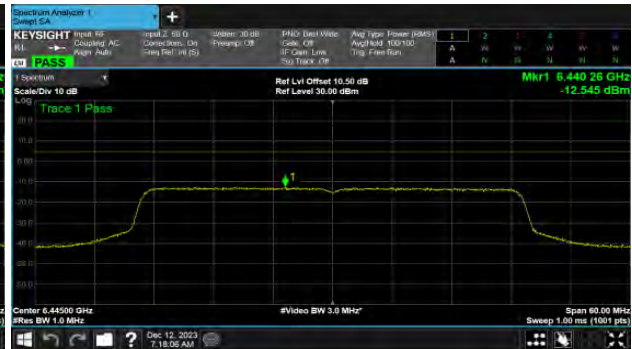Modulation Type: 802.11ax HE20 (7.3Mbps)
CH97Modulation Type: 802.11ax HE40 (14.6Mbps)
CH99


CH105

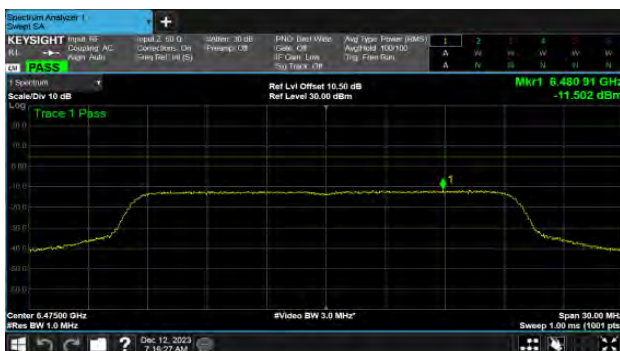

CH107

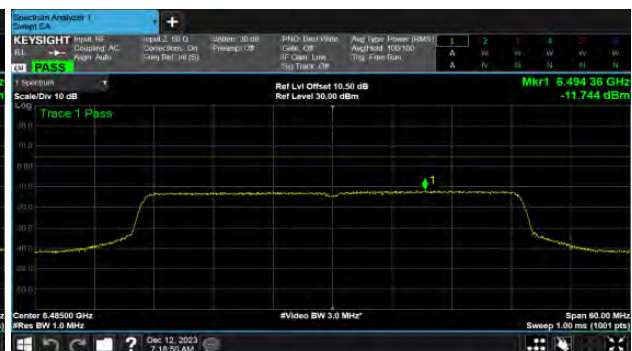

CH113

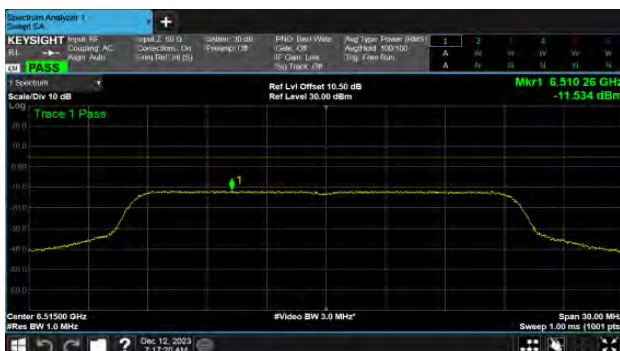



U-NII-6

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)

CH103






Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

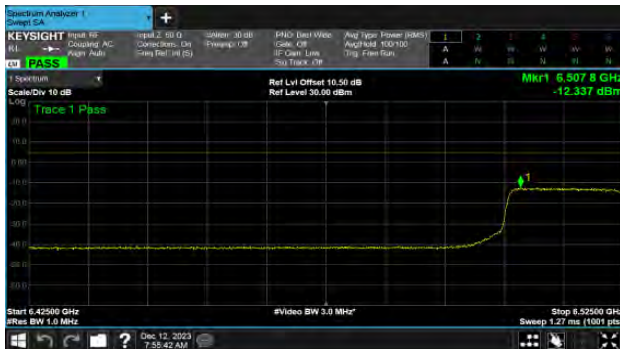


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

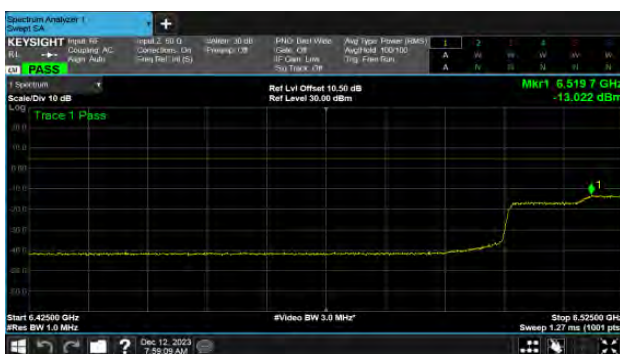

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

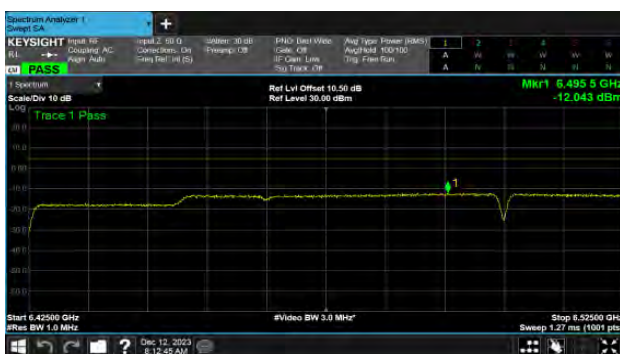




Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

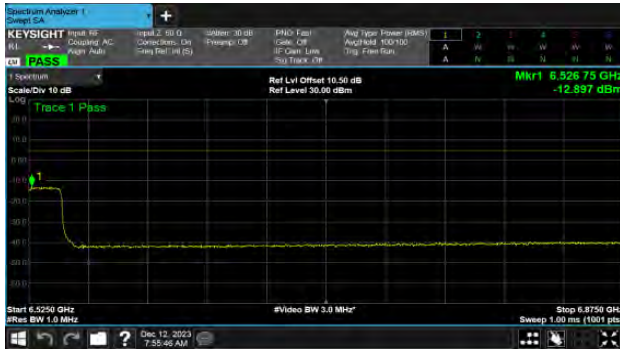


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

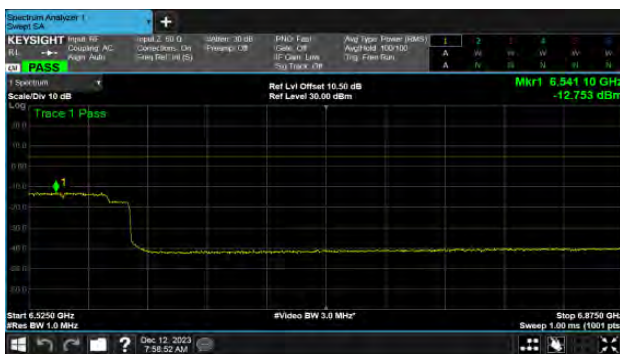

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111


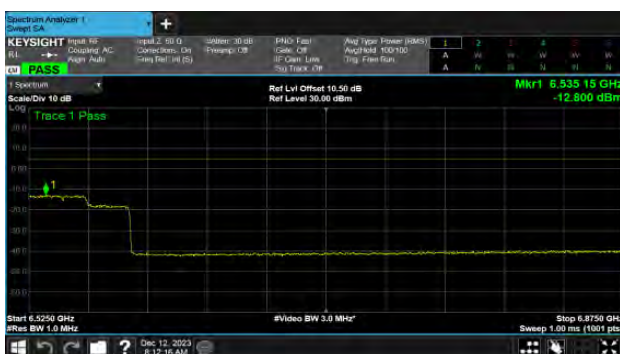





U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

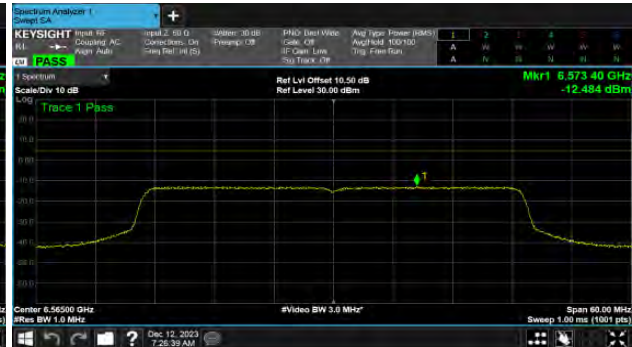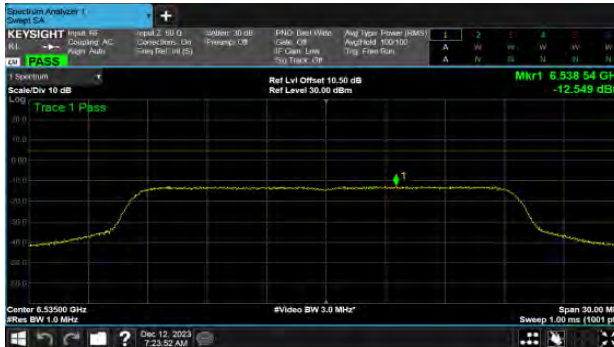Modulation Type: 802.11ax HE20 (7.3Mbps)
CH117Modulation Type: 802.11ax HE40 (14.6Mbps)
CH123


CH153

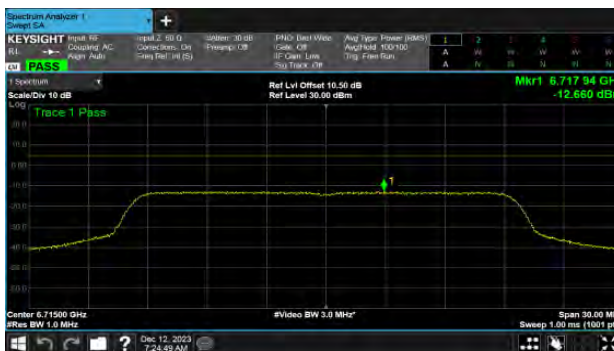


CH155

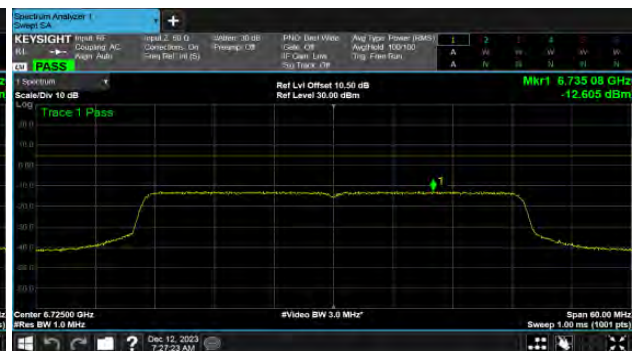

CH181

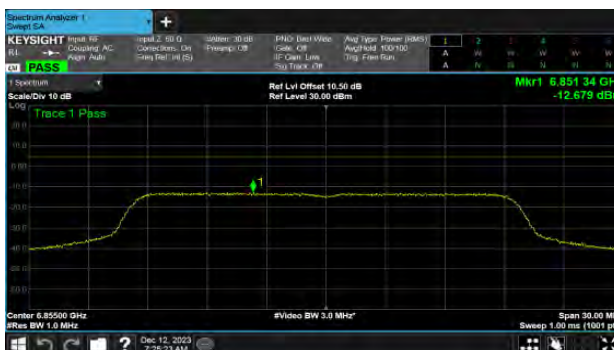

CH179

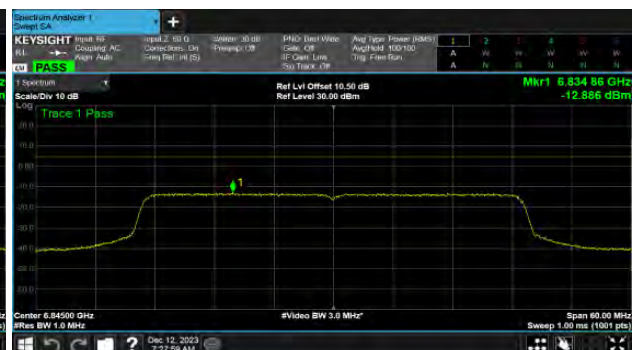




U-NII-7

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH135Modulation Type: 802.11ax HE160 (61.3Mbps)
CH143

CH151

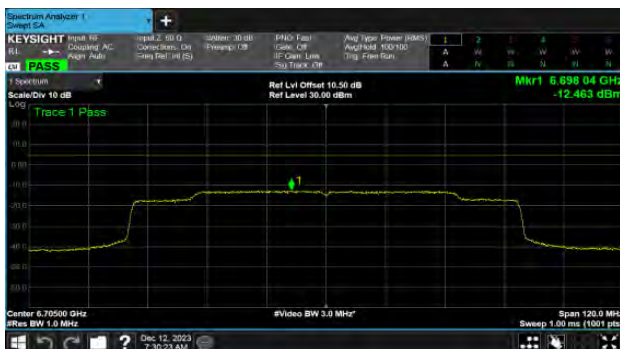

CH167

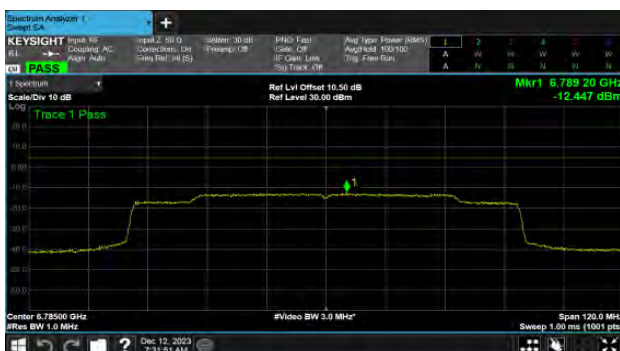










U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

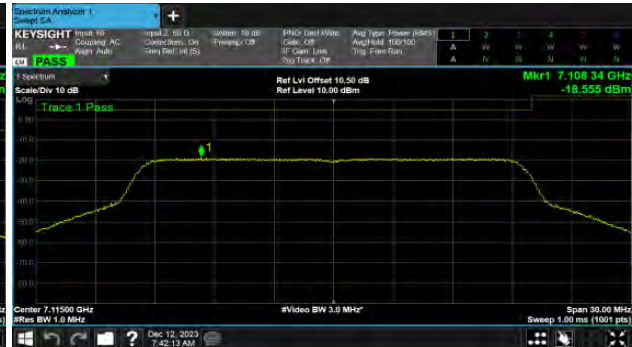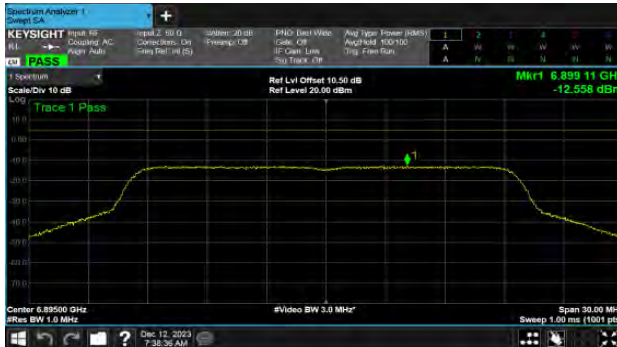Modulation Type: 802.11ax HE20 (7.3Mbps)
CH189Modulation Type: 802.11ax HE20 (7.3Mbps)
CH233

CH213

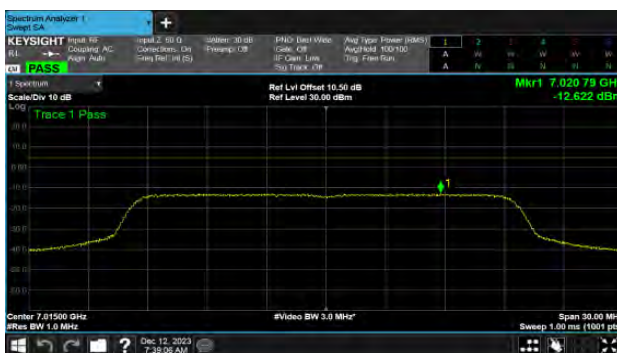

CH229


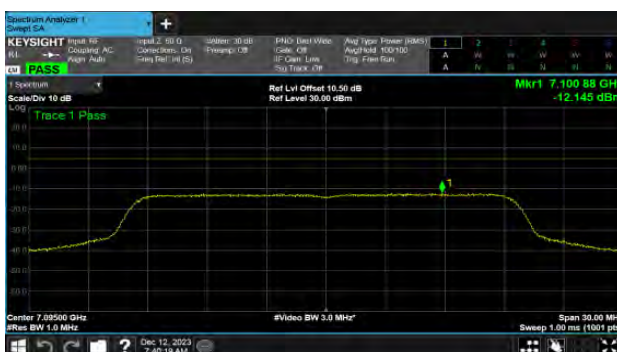





U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

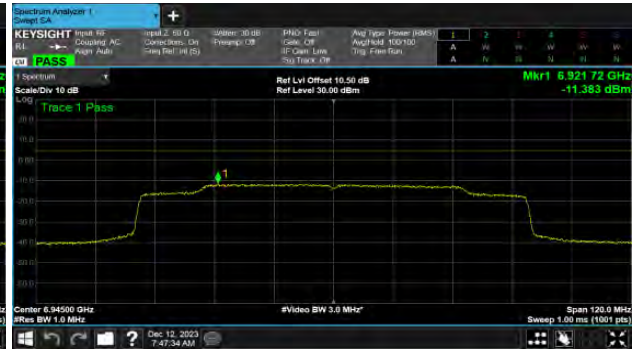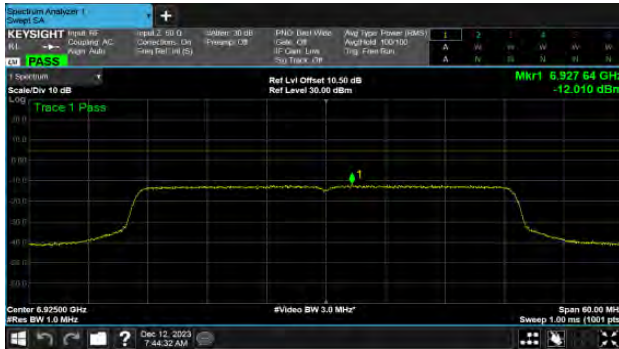Modulation Type: 802.11ax HE40 (14.6Mbps)
CH195Modulation Type: 802.11ax HE80 (30.6Mbps)
CH199


CH211

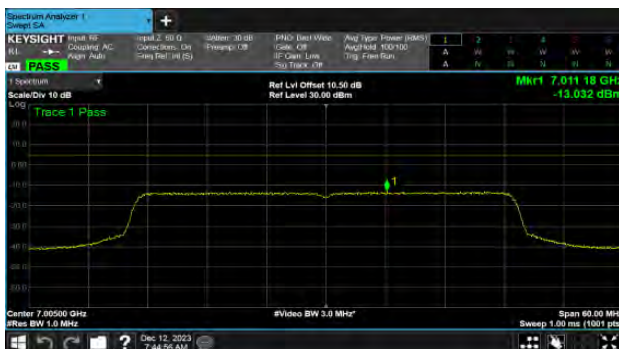

CH215

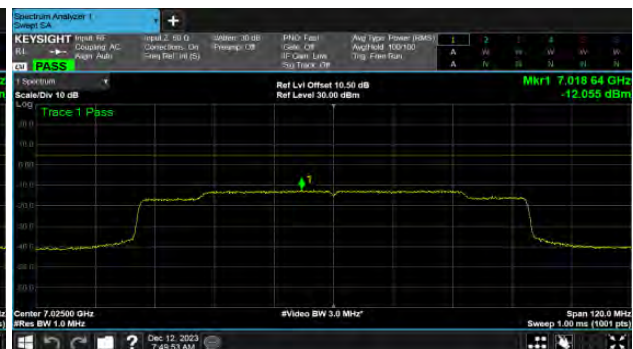

CH227

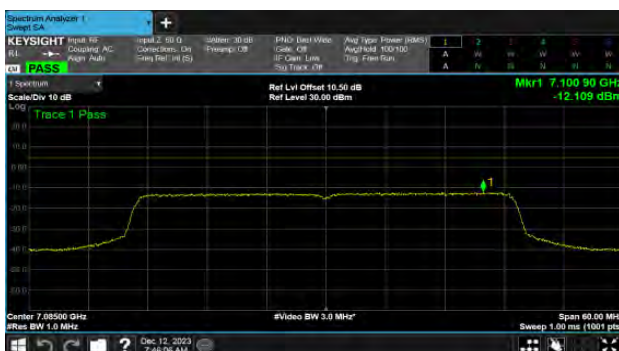



U-NII-8

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH207

