

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W174R-D029
AGR No. : A173A-081
Applicant : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
Manufacturer : Samsung Electronics Co Ltd
Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
Type of Equipment : AWG (Advanced Wireless Gateway)
FCC ID. : A3LGXMC990CL
Model Name : GX-MC990CL
Serial number : N/A
Total page of Report : 371 pages (including this page)
Date of Incoming : March 10, 2017
Date of issue : April 11, 2017


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART E Section 15.407*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:

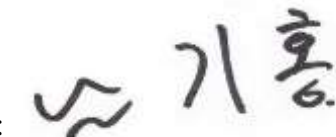

Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	9
2. TEST SUMMARY.....	10
2.1 TEST ITEMS AND RESULTS	10
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	10
2.3 RELATED SUBMITTAL(S) / GRANT(S)	10
2.4 PURPOSE OF THE TEST	10
2.5 TEST METHODOLOGY.....	10
2.6 TEST FACILITY.....	10
3. GENERAL INFORMATION.....	11
3.1 PRODUCT DESCRIPTION.....	11
4. EUT MODIFICATIONS.....	13
5. SYSTEM TEST CONFIGURATION	14
5.1 JUSTIFICATION.....	14
5.2 PERIPHERAL EQUIPMENT	14
5.4 CONFIGURATION OF TEST SYSTEM.....	19
5.5 ANTENNA REQUIREMENT	19
6. PRELIMINARY TEST	20
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	20
6.2 GENERAL RADIATED EMISSIONS TESTS	20
7. MINIMUM 26 DB BANDWIDTH.....	21
7.1 OPERATING ENVIRONMENT	21
7.2 TEST SET-UP	21
7.3 TEST EQUIPMENT USED.....	21
7.4 TEST DATA FOR 802.11A RLAN MODE.....	22
7.4.1 Test data for Antenna 0	22
7.4.2 Test data for Antenna 1	27
7.4.3 Test data for Antenna 2	32
7.4.4 Test data for Antenna 3	37
7.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	42
7.5.1 Test data for Antenna 0	42
7.5.2 Test data for Antenna 1	47

7.5.3 Test data for Antenna 2	52
7.5.4 Test data for Antenna 3	57
7.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	62
7.6.1 Test data for Antenna 0	62
7.6.2 Test data for Antenna 1	65
7.6.3 Test data for Antenna 2	68
7.6.4 Test data for Antenna 3	71
7.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	74
7.7.1 Test data for Antenna 0	74
7.7.2 Test data for Antenna 1	76
7.7.3 Test data for Antenna 2	78
7.7.4 Test data for Antenna 3	80
8. 99 % OCCUPIED BANDWIDTH.....	82
8.1 OPERATING ENVIRONMENT	82
8.2 TEST SET-UP	82
8.3 TEST EQUIPMENT USED	82
8.4 TEST DATA FOR 802.11A RLAN MODE.....	83
8.4.1 Test data for Antenna 0	83
8.4.2 Test data for Antenna 1	88
8.4.3 Test data for Antenna 2	93
8.4.4 Test data for Antenna 3	98
8.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	103
8.5.1 Test data for Antenna 0	103
8.5.2 Test data for Antenna 1	108
8.5.3 Test data for Antenna 2	113
8.5.4 Test data for Antenna 3	118
8.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	123
8.6.1 Test data for Antenna 0	123
8.6.2 Test data for Antenna 1	126
8.6.3 Test data for Antenna 2	129
8.6.4 Test data for Antenna 3	132
8.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	135
8.7.1 Test data for Antenna 0	135
8.7.2 Test data for Antenna 1	137
8.7.3 Test data for Antenna 2	139
8.7.4 Test data for Antenna 3	141
9. 6 DB BANDWIDTH	143

9.1 OPERATING ENVIRONMENT	143
9.2 TEST SET-UP	143
9.3 TEST EQUIPMENT USED	143
9.4 TEST DATA FOR 802.11A RLAN MODE	144
<i>9.4.1 Test data for Antenna 0</i>	144
<i>9.4.2 Test data for Antenna 1</i>	146
<i>9.4.3 Test data for Antenna 2</i>	148
<i>9.4.4 Test data for Antenna 3</i>	150
9.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	152
<i>9.5.1 Test data for Antenna 0</i>	152
<i>9.5.2 Test data for Antenna 1</i>	154
<i>9.5.3 Test data for Antenna 2</i>	156
<i>9.5.4 Test data for Antenna 3</i>	158
9.6 TEST DATA FOR 802.11N_HT40 RLAN MODE	160
<i>9.6.1 Test data for Antenna 0</i>	160
<i>9.6.2 Test data for Antenna 1</i>	162
<i>9.6.3 Test data for Antenna 2</i>	164
<i>9.6.4 Test data for Antenna 3</i>	166
9.7 TEST DATA FOR 802.11AC_VHT80 RLAN MODE	168
<i>9.7.1 Test data for Antenna 0</i>	168
<i>9.7.2 Test data for Antenna 1</i>	169
<i>9.7.3 Test data for Antenna 2</i>	170
<i>9.7.4 Test data for Antenna 3</i>	171
10 MAXIMUM PEAK OUTPUT POWER	172
10.1 OPERATING ENVIRONMENT	172
10.2 TEST SET-UP	172
10.3 TEST EQUIPMENT USED	172
10.4 TEST DATA FOR 802.11A RLAN MODE	173
<i>10.4.1 Test data for Antenna 0</i>	173
<i>10.4.2 Test data for Antenna 1</i>	178
<i>10.4.3 Test data for Antenna 2</i>	183
<i>10.4.4 Test data for Antenna 3</i>	188
<i>10.4.5 Test data for Multiple Transmit</i>	193
10.5 TEST DATA FOR 802.11N_HT20 RLAN MODE	194
<i>10.5.1 Test data for Antenna 0</i>	194
<i>10.5.2 Test data for Antenna 1</i>	199
<i>10.5.3 Test data for Antenna 2</i>	204

10.5.4 Test data for Antenna 3	209
10.5.5 Test data for Multiple Transmit	214
10.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	215
10.6.1 Test data for Antenna 0	215
10.6.2 Test data for Antenna 1	218
10.6.3 Test data for Antenna 2	221
10.6.4 Test data for Antenna 3	224
10.6.5 Test data for Multiple Transmit	227
10.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	228
10.7.1 Test data for Antenna 0	228
10.7.2 Test data for Antenna 1	230
10.7.3 Test data for Antenna 2	232
10.7.4 Test data for Antenna 3	234
10.7.5 Test data for Multiple Transmit	236
11. PEAK POWER SPECTRUL DENSITY	237
11.1 OPERATING ENVIRONMENT	237
11.2 TEST SET-UP	237
11.3 TEST EQUIPMENT USED.....	237
11.4 TEST DATA FOR 802.11A RLAN MODE.....	238
11.4.1 Test data for Antenna 0	238
11.4.2 Test data for Antenna 1	243
11.4.3 Test data for Antenna 2	248
11.4.4 Test data for Antenna 3	253
11.4.5 Test data for Multiple Transmit	258
11.5 TEST DATA FOR 802.11N_HT20 RLAN MODE.....	259
11.5.1 Test data for Antenna 0	259
11.5.2 Test data for Antenna 1	264
11.5.3 Test data for Antenna 2	269
11.5.4 Test data for Antenna 3	274
11.5.5 Test data for Multiple Transmit	279
11.6 TEST DATA FOR 802.11N_HT40 RLAN MODE.....	280
11.6.1 Test data for Antenna 0	280
11.6.2 Test data for Antenna 1	283
11.6.3 Test data for Antenna 2	286
11.6.4 Test data for Antenna 3	289
11.6.5 Test data for Multiple Transmit	292
11.7 TEST DATA FOR 802.11AC_HT80 RLAN MODE.....	293

11.7.1 Test data for Antenna 0	293
11.7.2 Test data for Antenna 1	295
11.7.3 Test data for Antenna 2	297
11.7.4 Test data for Antenna 3	299
11.7.5 Test data for Multiple Transmit	301
12. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	302
12.1 OPERATING ENVIRONMENT	302
12.2 TEST SET-UP	302
12.3 TEST EQUIPMENT USED.....	302
12.4 TEST DATA FOR U-NII-1	303
12.5 TEST DATA FOR U-NII-3	304
13. FREQUENCY STABILITY WITH VOLTAGE VARIATION.....	305
13.1 OPERATING ENVIRONMENT	305
13.2 TEST SET-UP	305
13.3 TEST EQUIPMENT USED.....	305
13.4 TEST DATA FOR U-NII-1	306
13.5 TEST DATA FOR U-NII-3	307
14. DUTY CYCLE.....	308
14.1 OPERATING ENVIRONMENT	308
14.2 TEST SET-UP	308
14.3 TEST EQUIPMENT USED.....	308
14.4 TEST DATA FOR WORST CASE.....	309
14.5 TEST DATA.....	311
15. RADIATED SPURIOUS EMISSIONS	315
15.1 OPERATING ENVIRONMENT	315
15.2 TEST SET-UP	315
15.3 TEST EQUIPMENT USED.....	315
15.5 TEST DATA FOR BELOW 30 MHz	316
15.6 TEST DATA FOR 30 MHz ~ 1 GHz.....	317
15.7 TEST DATA FOR FREQUENCY U-NII-1.....	318
15.7.1 Test data for 802.11a RLAN Mode	318
15.7.2 Test data for 802.11n_HT20 RLAN Mode.....	329
15.7.3 Test data for 802.11n_HT40 RLAN Mode.....	331
15.7.4 Test data for 802.11ac_HT80 RLAN Mode	333
15.8 TEST DATA FOR FREQUENCY U-NII-3.....	335
15.8.1 Test data for 802.11a RLAN Mode	335

15.8.2 Test data for 802.11n_HT20 RLAN Mode.....	346
15.8.3 Test data for 802.11n_HT40 RLAN Mode.....	348
15.8.4 Test data for 802.11ac_HT80 RLAN Mode	350
16. RADIATED RESTRICTED BAND EDGE MEASUREMENTS	352
16.1 OPERATING ENVIRONMENT	352
16.2 TEST SET-UP	352
16.3 TEST EQUIPMENT USED.....	352
16.5 TEST DATA FOR FREQUENCY U-NII-1.....	353
16.5.1 Test data for 802.11a RLAN Mode	353
16.5.2 Test data for 802.11n_HT20 RLAN Mode.....	357
16.5.3 Test data for 802.11n_HT40 RLAN Mode.....	358
16.5.4 Test data for 802.11ac_HT80 RLAN Mode	359
16.6 TEST DATA FOR FREQUENCY U-NII-3.....	360
16.6.1 Test data for 802.11a RLAN Mode	360
16.6.2 Test data for 802.11n_HT20 RLAN Mode.....	366
16.6.3 Test data for 802.11n_HT40 RLAN Mode.....	367
16.6.4 Test data for 802.11ac_HT80 RLAN Mode	368
17. CONDUCTED EMISSION TEST.....	369
17.1 OPERATING ENVIRONMENT	369
17.2 TEST SET-UP	369
17.3 TEST EQUIPMENT USED.....	369
17.4 TEST DATA FOR 802.11B WLAN MODE AND 802.11A RLAN MODE	370

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W174R-D029	April 11, 2017	Initial Issue	All

DOCUMENT HISTORY

Revision No.	Issued Date	Revisions	Effect Section
Original	April 11, 2017	Initial Issue	-
Revision 01	May 15, 2017	Revise Data (Section 2.1 Product Description) Added Test(Section 8. 99 % Occupied Bandwidth) Additional Test(Section 10. Maximum Peak Output Power) Provide Plots(Section 14. Radiated Spurious Emissions Section 15. Radiated Restricted Band Edge Measurements)	Section 2.1, Section 8, Section 10, Section 14, Section 15,
Revision 02	May 17, 2017	Revise Test set-up (Section 10. Maximum Peak Output Power)	Section 10.2
Revision 03	May 23, 2017	Re-Test(Section 7. MINIMUM 26 DB BANDWIDTH, Section 8. 99 % OCCUPIED BANDWIDTH, Section 10. MAXIMUM PEAK OUTPUT POWER, Section 11. PEAK POWER SPECTRUL DENSITY) Additional Test(Section 14. DUTY CYCLE) Provide Plots(Section 16.5 Test data for Frequency U-NII-1, Section 16.6 Test data for Frequency U-NII-3) Revise Remark 2(Section 10.4.5, 10.5.5, 10.6.5, 10.7.5) Added Item.(Note.)(Section 12.4 Test Data for U-NII-1, Section 12.5 Test Data For U-NII-3) Revise Test set-up(Section 15.2. TEST SET-UP, Section 16.2. Test set-up) Revise Limit(16.6 Test data for Frequency U-NII-3)	Section 7, Section 8, Section 10, Section10.4.5 ~ 10.7.5, Section 11, Section 12.4, Section 12.5, Section 14, Section 15.2, Section 16.2, Section 16.5, Section 16.6

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058
 Contact Person : Chan Ho Youn / General Manager
 Telephone No. : 973-808-6362
 FCC ID : A3LGXMC990CL
 Model Name : GX-MC990CL
 Brand Name : -
 Serial Number : N/A
 Date : April 11, 2017

EQUIPMENT CLASS	Unlicensed National Information Infrastructure(UNII)
E.U.T. DESCRIPTION	AWG (Advanced Wireless Gateway)
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART E Section 15.407 KDB 789033 D01 General UNII Test Procedures
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.407(a)	26 dB Bandwidth	PASS
	99 % Occupied Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	Met the Limit / PASS
15.407(a)	Peak Power Spectral Density	Met the Limit / PASS
15.407(a)	Peak Excursion	Met the Limit / PASS
15.407(g)	Frequency Stability	Met the Limit / PASS
15.407(b)	Undesirable Emissions	Met the Limit / PASS
15.205, 15.407(b)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Met the Limit / PASS
15.207	AC Conducted Emissions 150 kHz-30 MHz	Met the Limit / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART E Section 15.407

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

It should not be reproduced in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model GX-MC990CL (referred to as the EUT in this report) is a AWG (Advanced Wireless Gateway). Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	AWG (Advanced Wireless Gateway)		
FREQUENCY RANGE	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))			
		5 775 MHz (802.11ac(VHT80))	
MAX. RF OUTPUT POWER	WLAN 2.4 GHz Band	Antenna 0	Wi-Fi 802.11b (16.38 dBm) Wi-Fi 802.11g (20.09 dBm) Wi-Fi 802.11n(HT20) (20.12 dBm) Wi-Fi 802.11n(HT40) (21.87 dBm)
		Antenna 1	Wi-Fi 802.11b (16.46 dBm) Wi-Fi 802.11g (20.26 dBm) Wi-Fi 802.11n(HT20) (21.20 dBm) Wi-Fi 802.11n(HT40) (22.39 dBm)
		Antenna 2	Wi-Fi 802.11b (16.56 dBm) Wi-Fi 802.11g (20.99 dBm) Wi-Fi 802.11n(HT20) (21.28 dBm) Wi-Fi 802.11n(HT40) (21.74 dBm)
		Multiple transmit	Wi-Fi 802.11b (21.24 dBm) Wi-Fi 802.11g (25.24 dBm) Wi-Fi 802.11n(HT20) (25.67 dBm) Wi-Fi 802.11n(HT40) (26.78 dBm)

MAX. RF OUTPUT POWER	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (14.17 dBm) Wi-Fi 802.11n(HT20) (13.67 dBm) Wi-Fi 802.11n(HT40) (14.90 dBm) Wi-Fi 802.11ac(HT80) (1.62 dBm)
			Antenna 1	Wi-Fi 802.11a (12.41 dBm) Wi-Fi 802.11n(HT20) (12.69 dBm) Wi-Fi 802.11n(HT40) (14.14 dBm) Wi-Fi 802.11ac(HT80) (0.97 dBm)
			Antenna 2	Wi-Fi 802.11a (12.05 dBm) Wi-Fi 802.11n(HT20) (12.35 dBm) Wi-Fi 802.11n(HT40) (13.97 dBm) Wi-Fi 802.11ac(HT80) (0.59 dBm)
			Antenna 3	Wi-Fi 802.11a (13.14 dBm) Wi-Fi 802.11n(HT20) (13.63 dBm) Wi-Fi 802.11n(HT40) (15.06 dBm) Wi-Fi 802.11ac(HT80) (2.32 dBm)
			Multiple transmit	Wi-Fi 802.11a (18.99 dBm) Wi-Fi 802.11n(HT20) (19.14 dBm) Wi-Fi 802.11n(HT40) (20.56 dBm) Wi-Fi 802.11ac(HT80) (7.45 dBm)
			Antenna 0	Wi-Fi 802.11a (11.45 dBm) Wi-Fi 802.11n(HT20) (15.49 dBm) Wi-Fi 802.11n(HT40) (12.28 dBm) Wi-Fi 802.11ac(HT80) (3.65 dBm)
	WLAN 5 GHz Band	5 725 MHz ~ 5 850 MHz Band	Antenna 1	Wi-Fi 802.11a (12.65 dBm) Wi-Fi 802.11n(HT20) (15.78 dBm) Wi-Fi 802.11n(HT40) (13.38 dBm) Wi-Fi 802.11ac(HT80) (4.45 dBm)
			Antenna 2	Wi-Fi 802.11a (13.94 dBm) Wi-Fi 802.11n(HT20) (15.99 dBm) Wi-Fi 802.11n(HT40) (12.71 dBm) Wi-Fi 802.11ac(HT80) (3.85 dBm)
			Antenna 3	Wi-Fi 802.11a (14.78 dBm) Wi-Fi 802.11n(HT20) (13.93 dBm) Wi-Fi 802.11n(HT40) (13.38 dBm) Wi-Fi 802.11ac(HT80) (4.90 dBm)
			Multiple transmit	Wi-Fi 802.11a (19.41 dBm) Wi-Fi 802.11n(HT20) (22.01 dBm) Wi-Fi 802.11n(HT40) (18.98 dBm) Wi-Fi 802.11ac(HT80) (10.26 dBm)

MODULATION TYPE	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
ANTENNA TYPE	WLAN 2.4 GHz Band	1.60 dBi	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz	2.80 dBi
		5 725 MHz ~ 5 850 MHz	5.0 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz, 54 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	DATA_GW_MAIN	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
GX-MC990CL	Samsung Electronics Co Ltd	AWG (Advanced Wireless Gateway) (EUT)	TEST JIG
ProBooks 650 G2	H.P.	Notebook PC	TEST JIG
JIG	N/A	TEST JIG	EUT / Notebook PC
A3514_FPNT	POWERNET CORPORATION	AC/DC ADAPTER	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

UNII 1

Modulation	DATA RATE	OUTPUT POWER[dBm]			
		Ant 0	Ant 1	Ant 2	Ant 3
802.11 a	6 Mbps	14.17	12.41	12.05	13.14
	9 Mbps	13.88	12.08	11.67	12.96
	12 Mbps	13.53	11.84	11.32	12.79
	18 Mbps	13.24	11.49	11.22	12.52
	24 Mbps	12.85	11.27	10.96	12.29
	36 Mbps	12.69	11.13	10.68	11.89
	48 Mbps	12.44	10.88	10.47	11.70
	54 Mbps	12.08	10.48	10.16	11.33
HT 20	6.5 Mbps	13.67	12.69	12.35	13.63
	13 Mbps	13.45	12.44	12.01	13.28
	19.5 Mbps	13.24	12.21	11.71	13.16
	26 Mbps	13.05	11.84	11.49	12.89
	39 Mbps	12.86	11.44	11.16	12.55
	52 Mbps	12.49	11.28	10.80	12.29
	58.5 Mbps	12.39	11.11	10.50	12.11
	65 Mbps	12.28	10.80	10.23	11.91
HT 40	13.5 Mbps	14.90	14.14	13.97	15.06
	27 Mbps	14.69	13.85	13.77	14.80
	40.5 Mbps	14.45	13.61	13.65	14.70
	54 Mbps	14.05	13.44	13.44	14.49
	81 Mbps	13.84	13.14	13.21	14.10
	108 Mbps	13.53	12.90	12.95	13.84
	121.5 Mbps	13.32	12.80	12.64	13.50
	135 Mbps	13.20	12.69	12.49	13.35

VHT80	29.3 Mbps	1.62	0.97	0.59	2.32
	58.5 Mbps	1.47	0.75	0.27	2.21
	87.8 Mbps	1.15	0.62	0.04	1.91
	117 Mbps	0.90	0.34	-0.22	1.58
	175.5 Mbps	0.66	0.09	-0.55	1.23
	234 Mbps	0.48	-0.19	-0.77	0.95
	263.3 Mbps	0.13	-0.34	-1.00	0.57
	292.5 Mbps	-0.08	-0.63	-1.11	0.43
	351 Mbps	-0.27	-0.80	-1.37	0.20
	390 Mbps	-0.57	-0.96	-1.55	-0.06

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT20, 13.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT40, 29.3 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

UNII 3

Modulation	DATA RATE	OUTPUT POWER[dBm]			
		Ant 0	Ant 1	Ant 2	Ant 3
802.11 a	6 Mbps	11.45	12.65	13.94	14.78
	9 Mbps	11.34	12.39	13.56	14.55
	12 Mbps	11.20	12.00	13.38	14.26
	18 Mbps	11.06	11.81	13.13	14.06
	24 Mbps	10.67	11.44	12.90	13.72
	36 Mbps	10.37	11.32	12.72	13.39
	48 Mbps	10.24	11.20	12.35	13.19
	54 Mbps	9.88	10.93	12.16	12.80
HT 20	6.5 Mbps	15.49	15.78	15.99	13.93
	13 Mbps	15.33	15.45	15.64	13.68
	19.5 Mbps	15.18	15.34	15.36	13.33
	26 Mbps	14.97	15.12	15.08	13.12
	39 Mbps	14.64	14.88	14.98	12.73
	52 Mbps	14.37	14.60	14.81	12.37
	58.5 Mbps	14.26	14.25	14.59	12.16
	65 Mbps	14.05	13.96	14.31	12.06
HT 40	13.5 Mbps	12.28	13.38	12.71	13.38
	27 Mbps	11.92	13.04	12.31	13.17
	40.5 Mbps	11.68	12.69	11.97	13.01
	54 Mbps	11.52	12.33	11.63	12.62
	81 Mbps	11.26	12.09	11.34	12.32
	108 Mbps	10.88	11.76	11.18	12.01
	121.5 Mbps	10.61	11.51	10.85	11.69
	135 Mbps	10.45	11.27	10.64	11.46

VHT80	29.3 Mbps	3.65	4.45	3.85	4.90
	58.5 Mbps	3.29	4.32	3.59	4.76
	87.8 Mbps	2.92	4.00	3.22	4.64
	117 Mbps	2.58	3.88	2.96	4.51
	175.5 Mbps	2.20	3.73	2.74	4.37
	234 Mbps	1.90	3.60	2.63	4.19
	263.3 Mbps	1.75	3.24	2.36	3.92
	292.5 Mbps	1.47	3.12	2.10	3.60
	351 Mbps	1.28	2.82	1.78	3.42
	390 Mbps	0.97	2.69	1.58	3.30

- The worse case data rate for each modulation is determined 6 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for IEEE 802.11a, 6.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT20, 13.5 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for HT40, 29.3 Mbps(Ant.0/Ant.1/Ant.2/Ant.3) for VHT80.
- To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is WLAN PCB antenna, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 26 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C

Relative humidity : 47 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 26 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 26 dB.



7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11a RLAN Mode

7.4.1 Test data for Antenna 0


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.63
	Middle	5 220.00	24.53
	High	5 240.00	24.28
5 725 ~ 5 850	Low	5 745.00	21.42
	Middle	5 795.00	21.93
	High	5 825.00	21.58




Tested by: Hyung-Kwon, Oh / Engineer

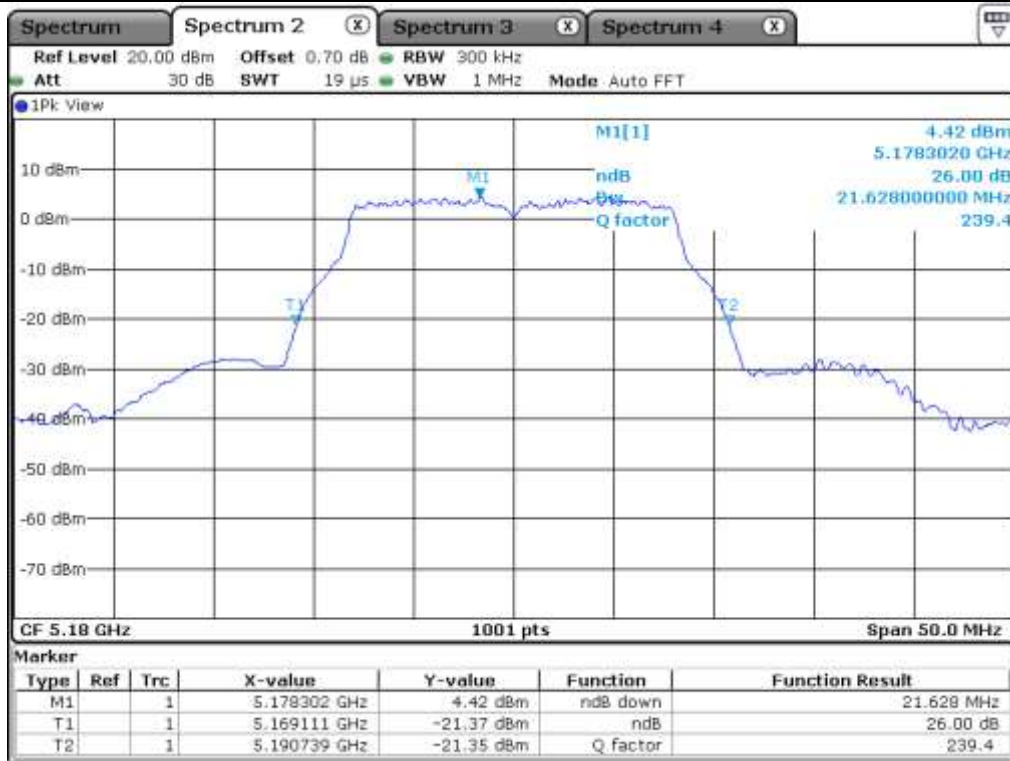


Low Channel (5 180 MHz)

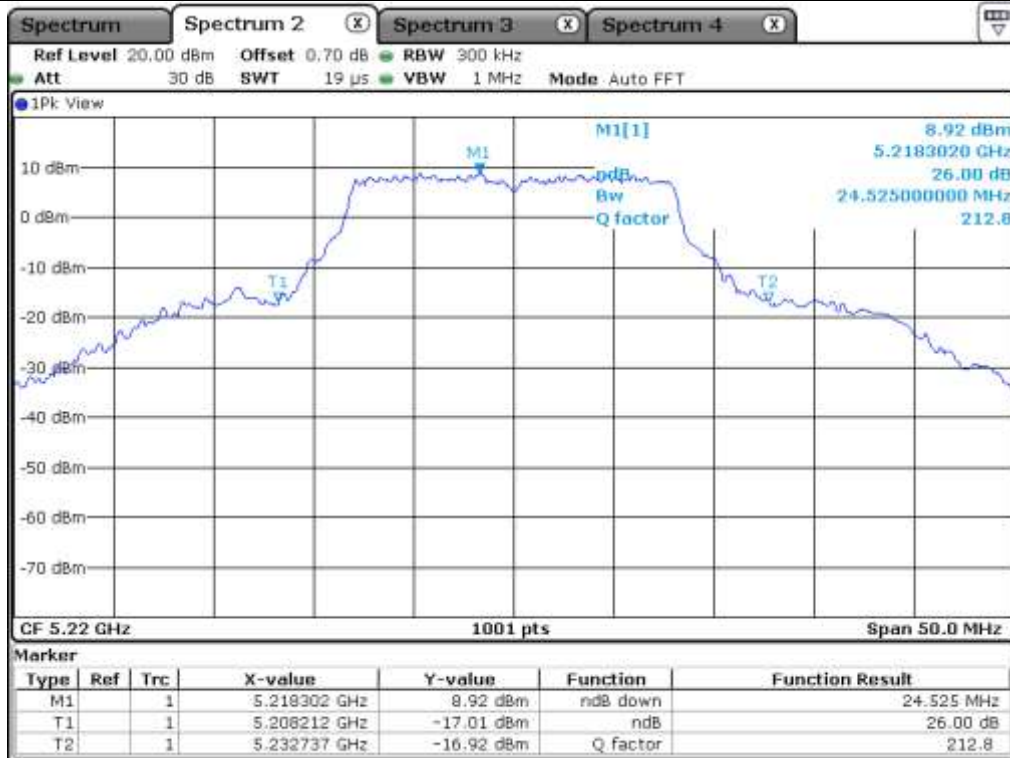


Middle Channel (5 220 MHz)

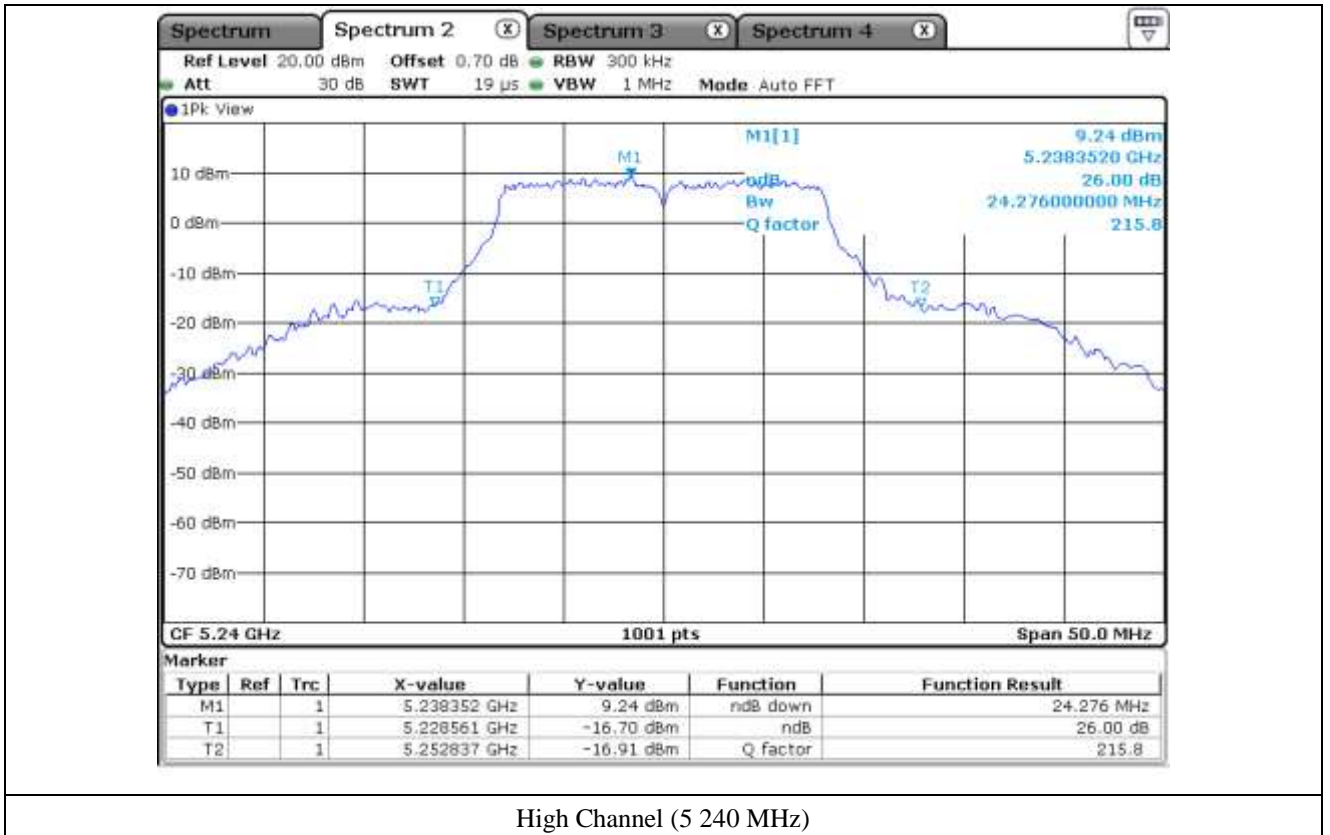


High Channel (5 240 MHz)

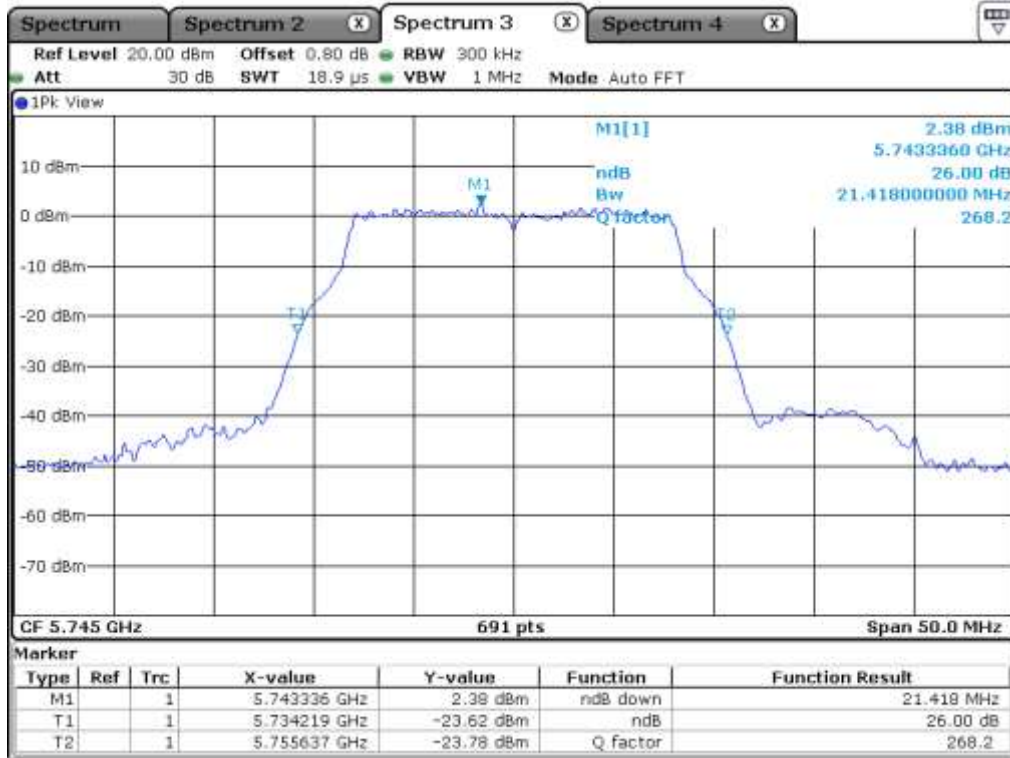

Low Channel (5 745 MHz)

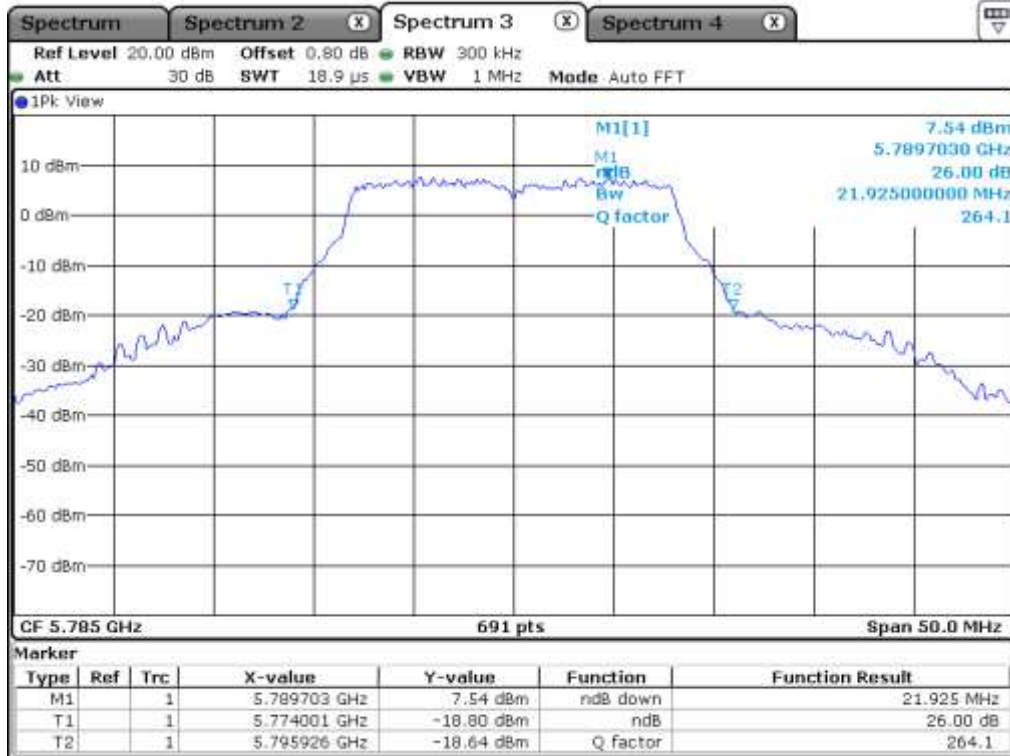

Middle Channel (5 795 MHz)

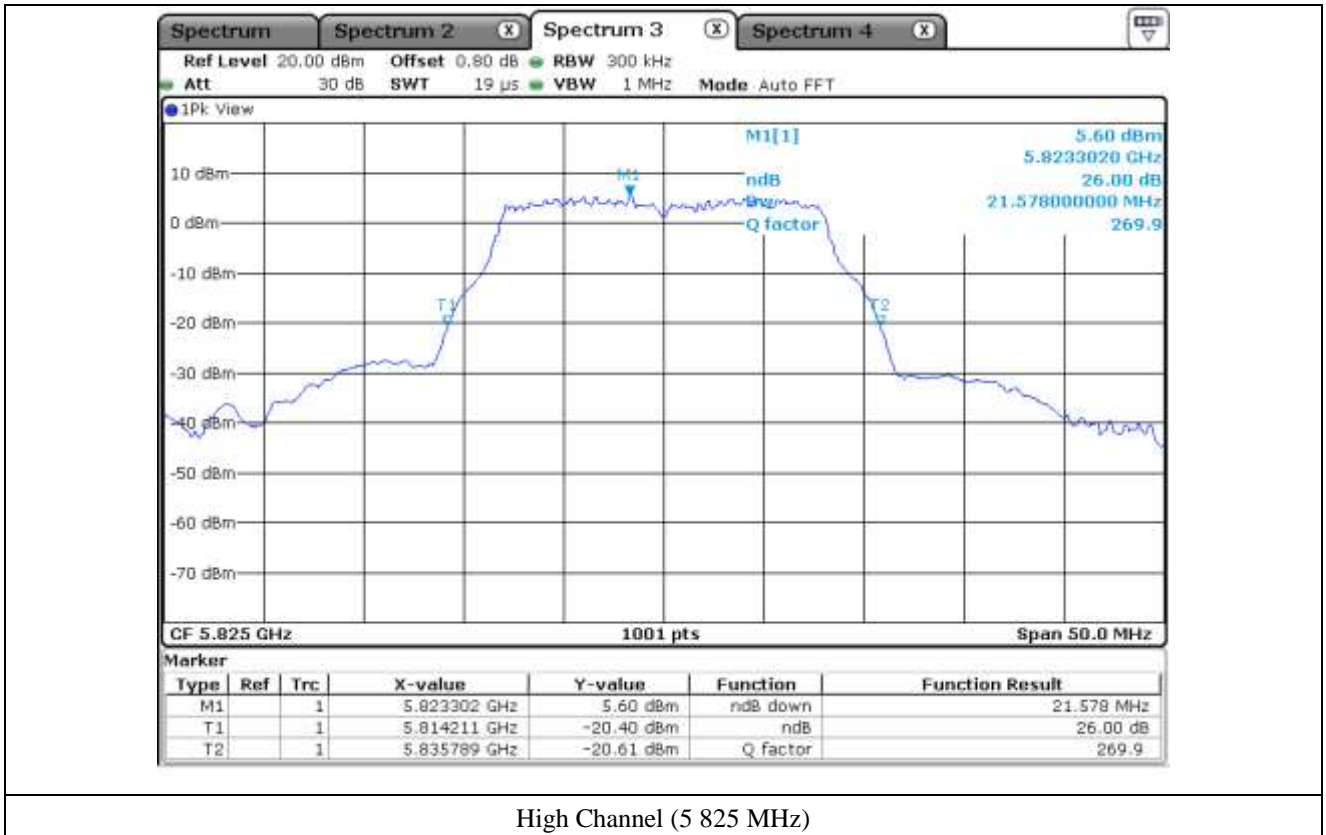

7.4.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.53
	Middle	5 220.00	21.78
	High	5 240.00	21.88
5 725 ~ 5 850	Low	5 745.00	21.49
	Middle	5 795.00	21.93
	High	5 825.00	21.58




Tested by: Hyung-Kwon, Oh / Engineer

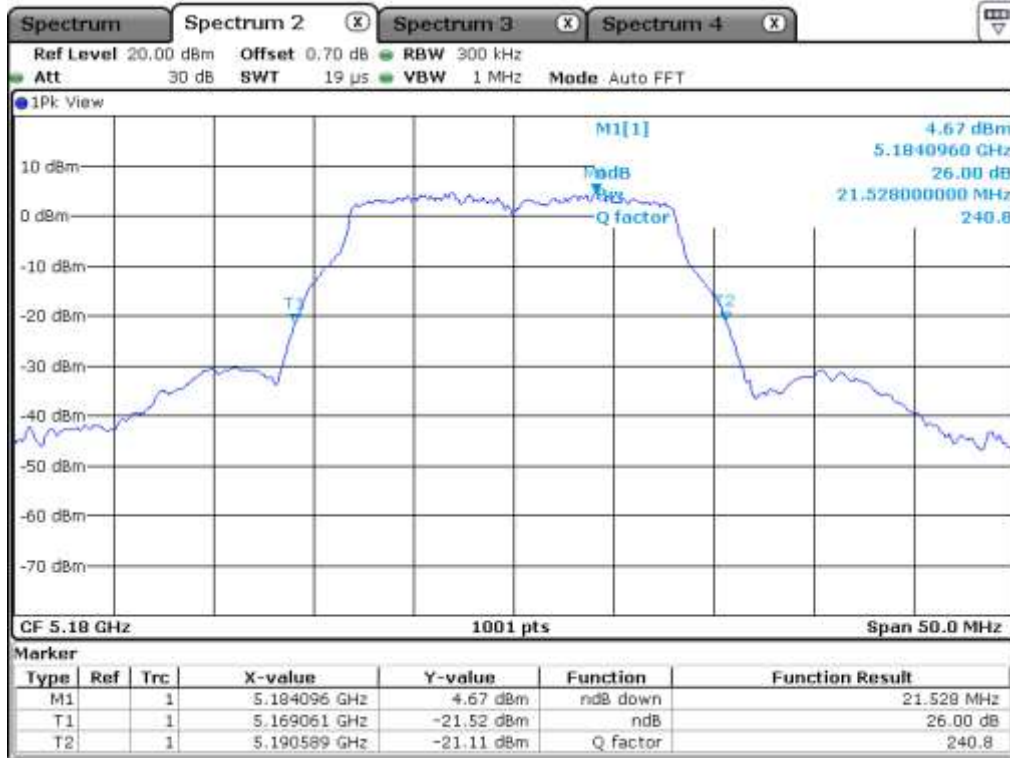


Low Channel (5 180 MHz)

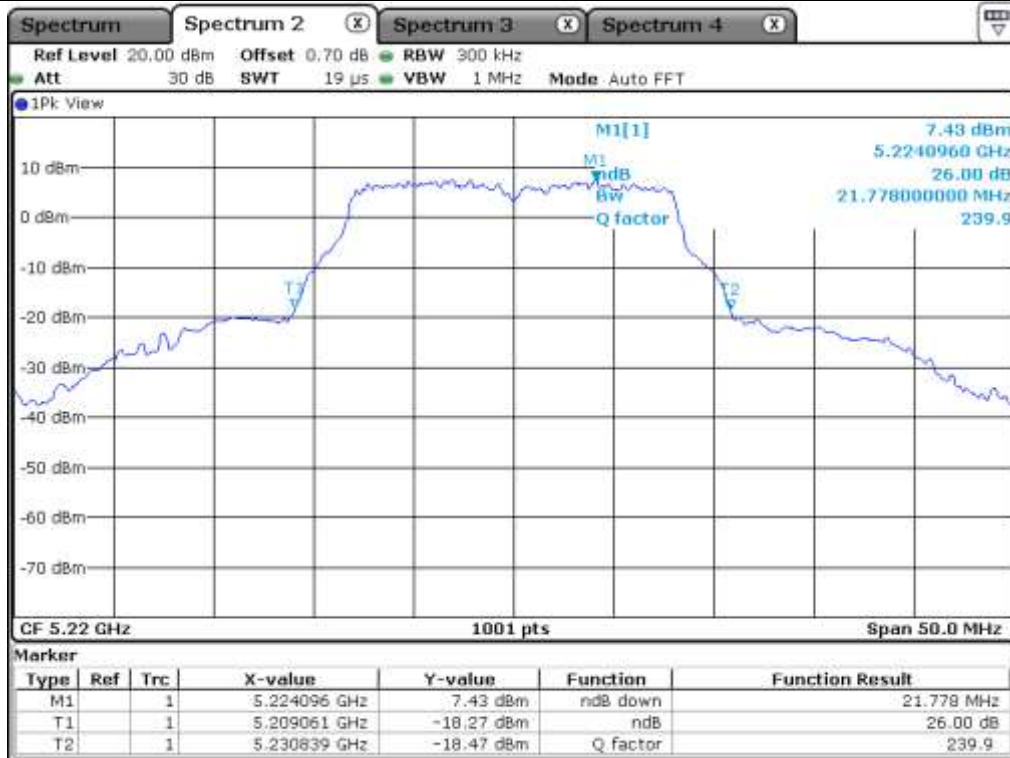

Middle Channel (5 220 MHz)

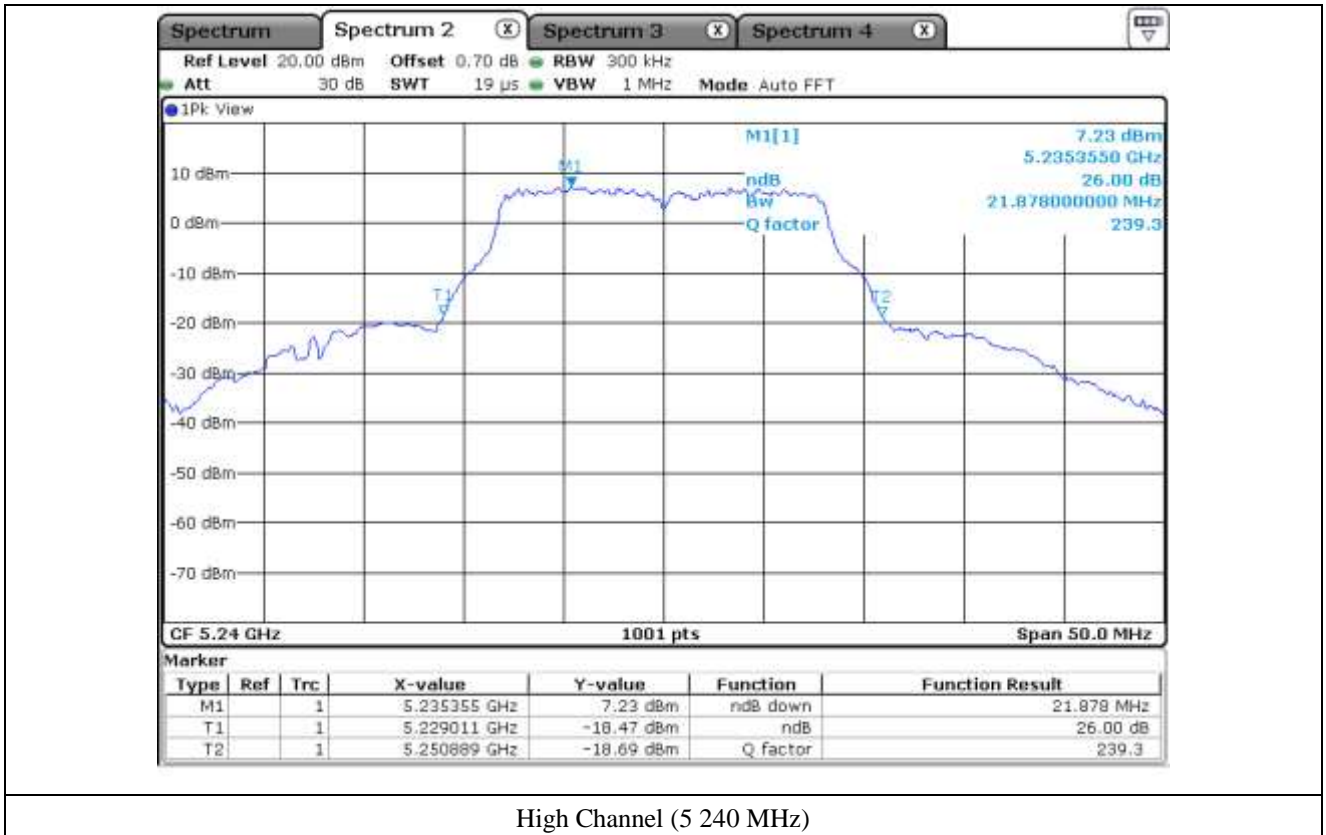


High Channel (5 240 MHz)

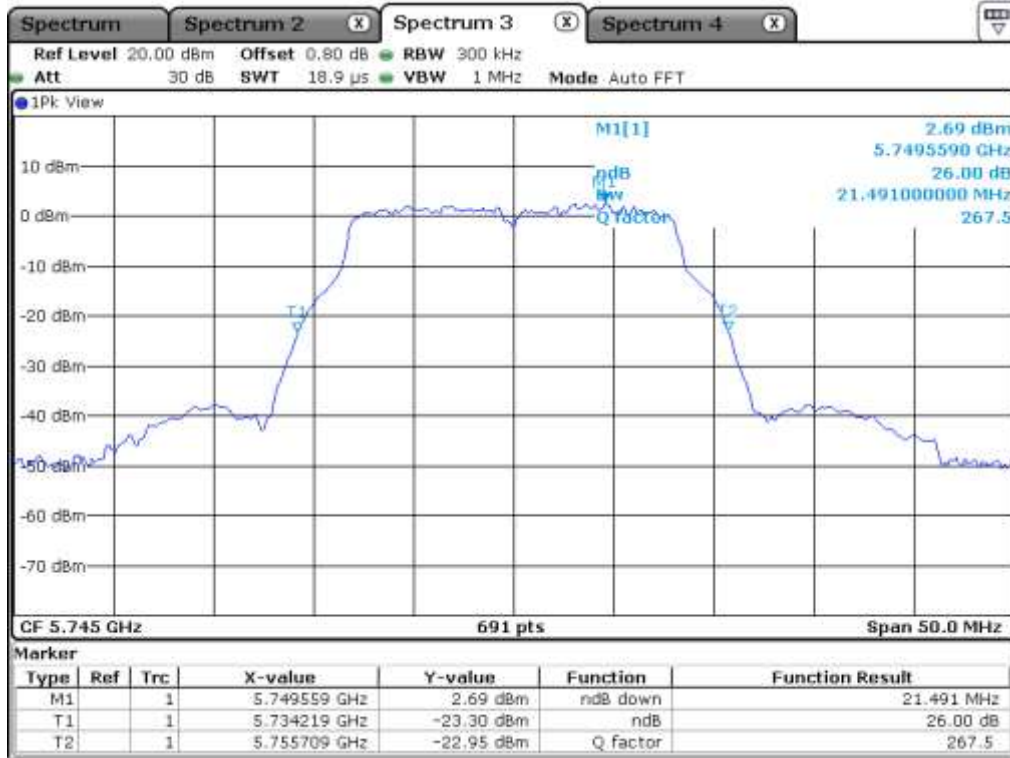

Low Channel (5 745 MHz)



Middle Channel (5 795 MHz)

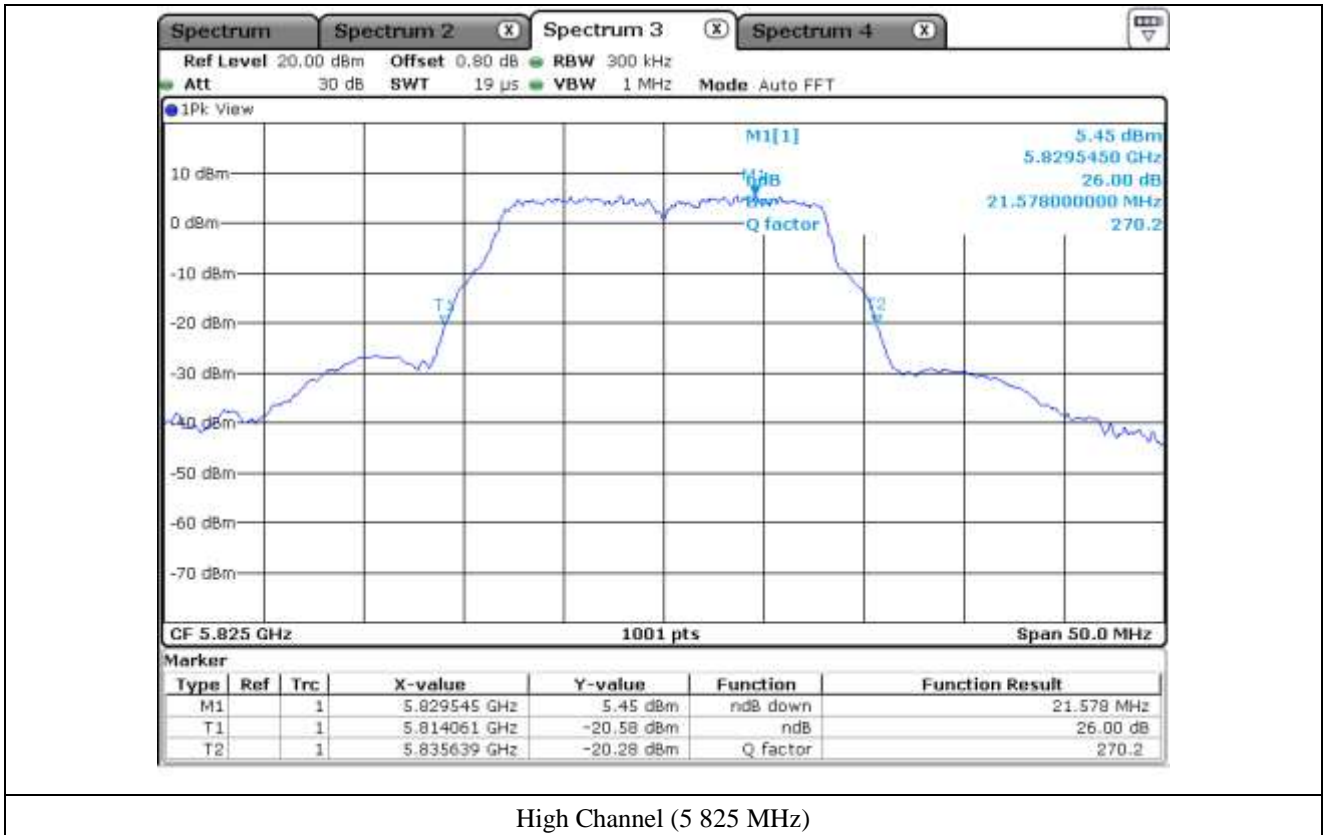

7.4.3 Test data for Antenna 2


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.48
	Middle	5 220.00	21.83
	High	5 240.00	22.08
5 725 ~ 5 850	Low	5 745.00	21.49
	Middle	5 795.00	22.14
	High	5 825.00	21.43




Tested by: Hyung-Kwon, Oh / Engineer

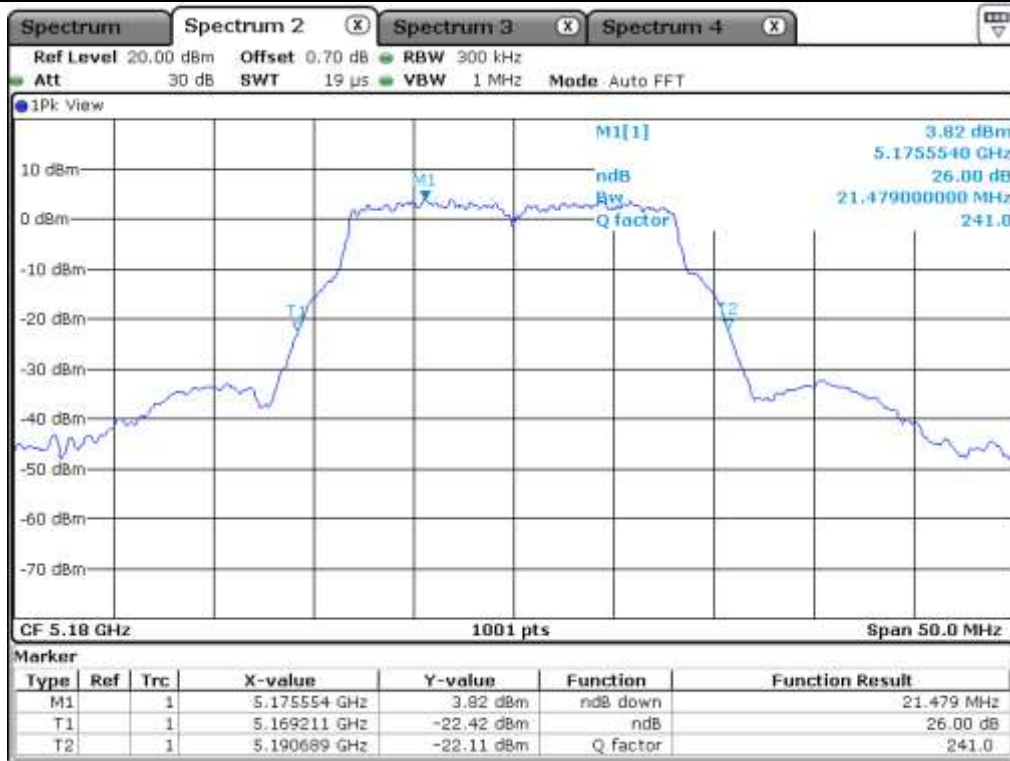


Low Channel (5 180 MHz)

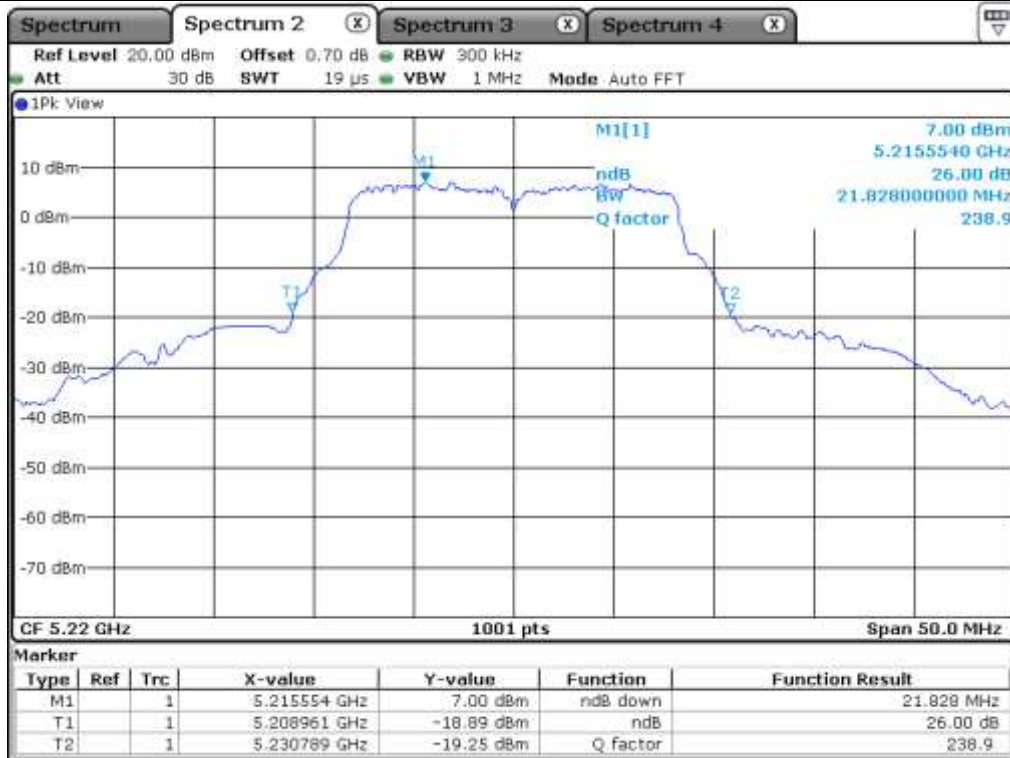


Middle Channel (5 220 MHz)

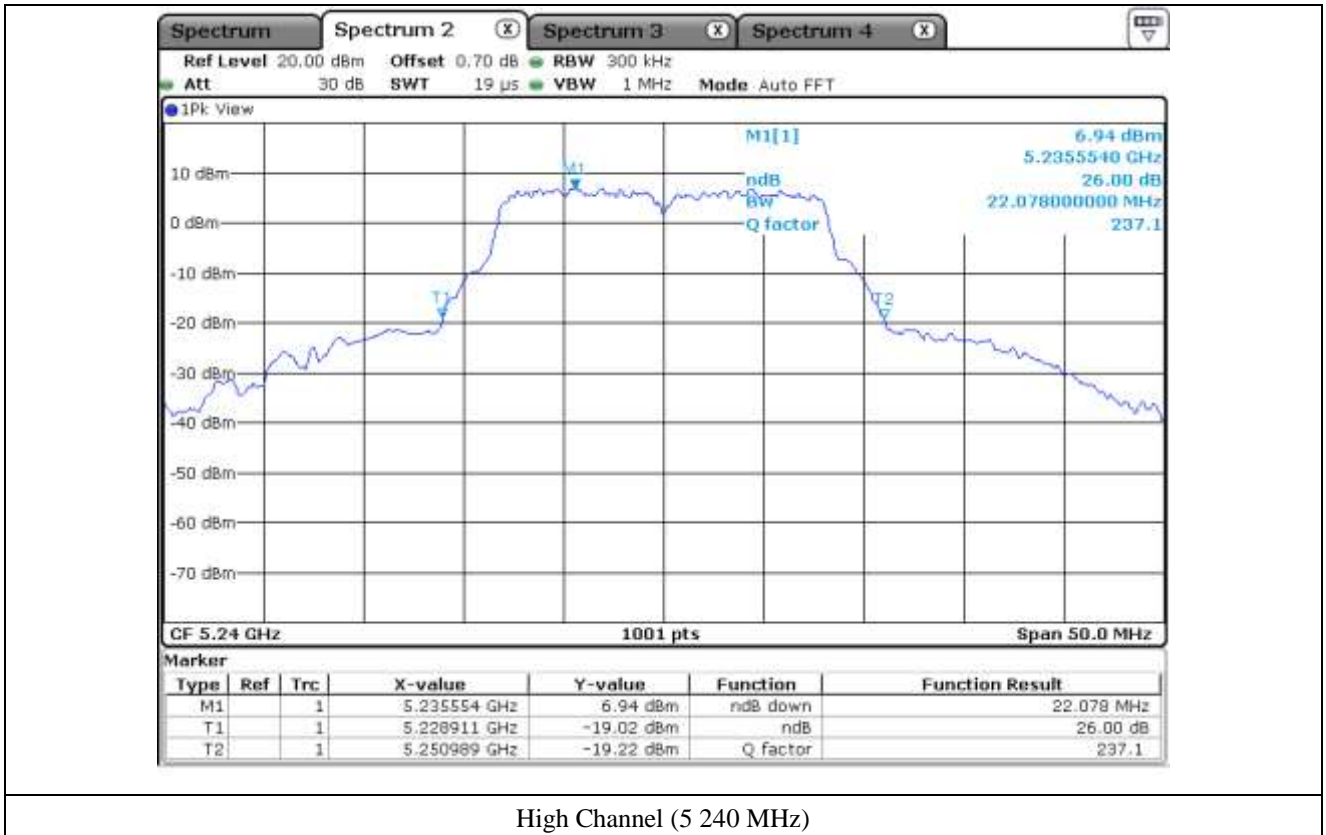


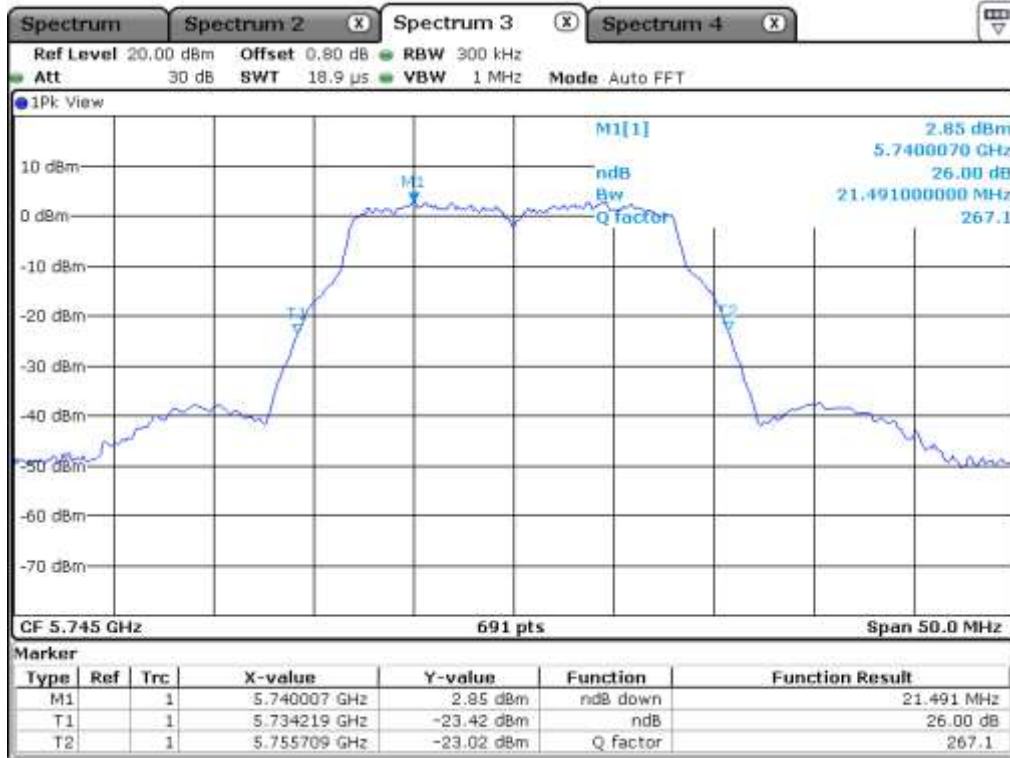

Low Channel (5 745 MHz)

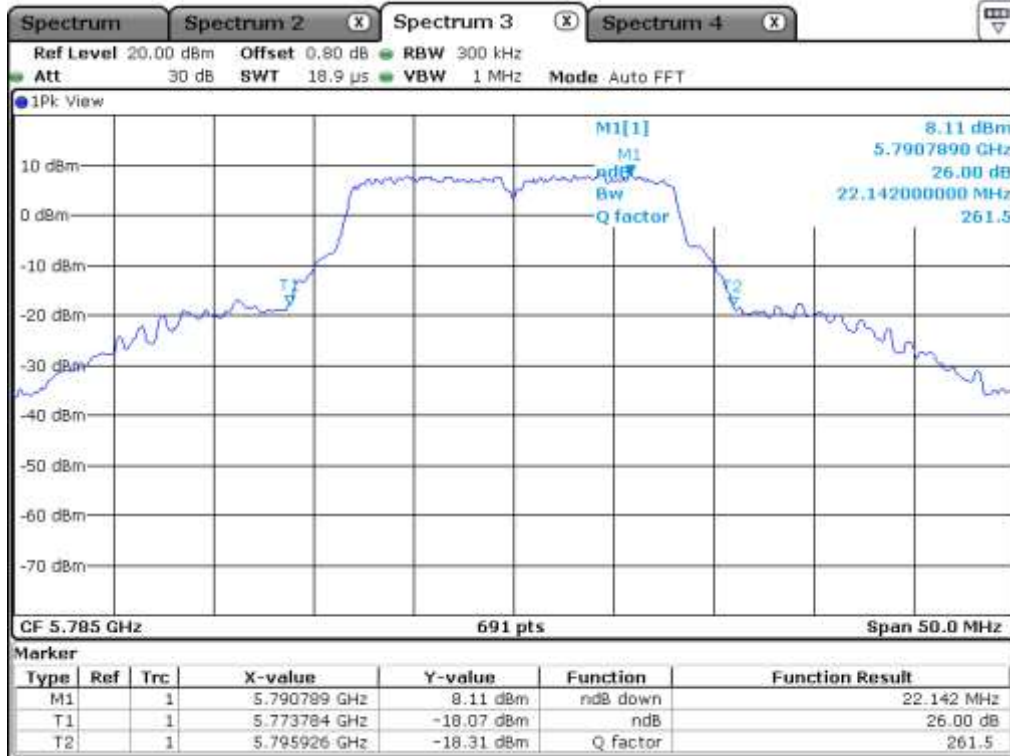

Middle Channel (5 795 MHz)

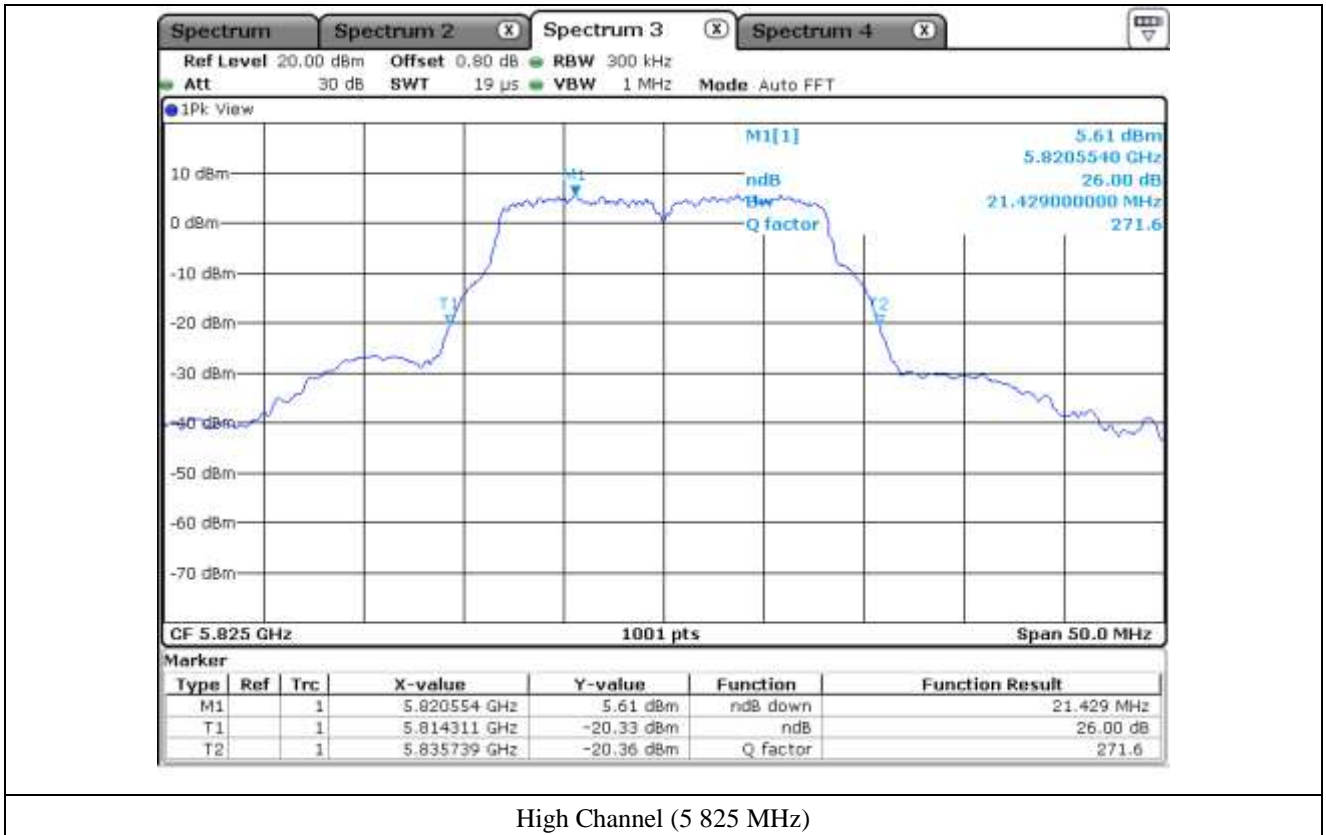

7.4.4 Test data for Antenna 3


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.33
	Middle	5 220.00	23.83
	High	5 240.00	24.03
5 725 ~ 5 850	Low	5 745.00	21.49
	Middle	5 795.00	22.08
	High	5 825.00	21.73




Tested by: Hyung-Kwon, Oh / Engineer

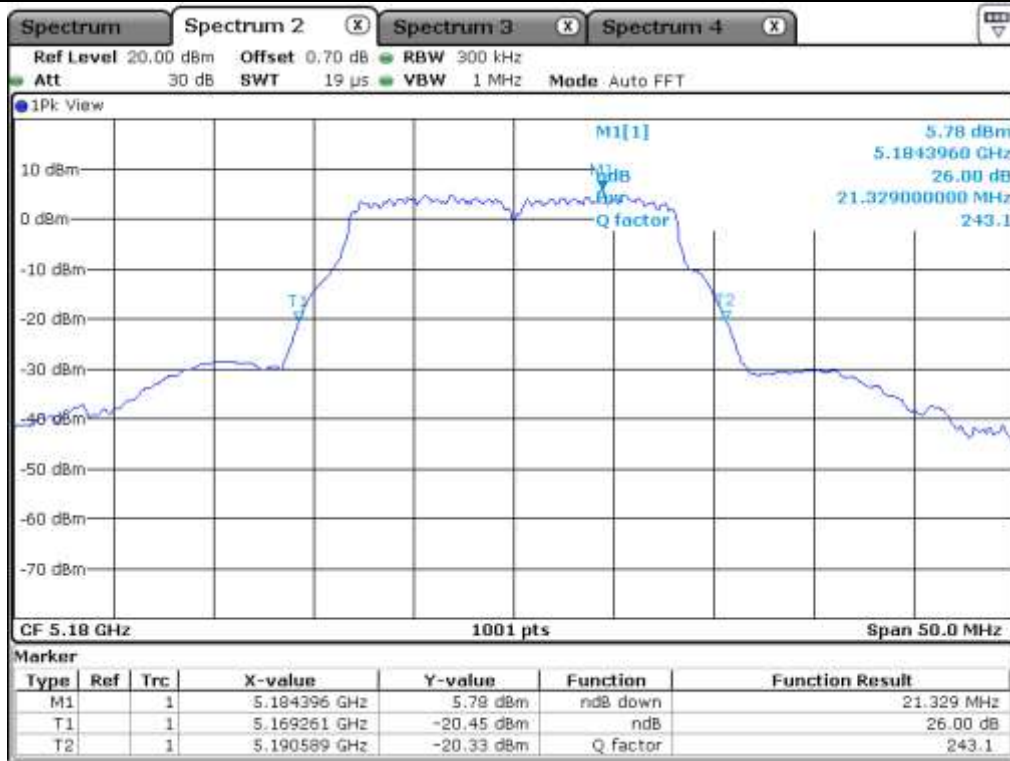


Low Channel (5 180 MHz)

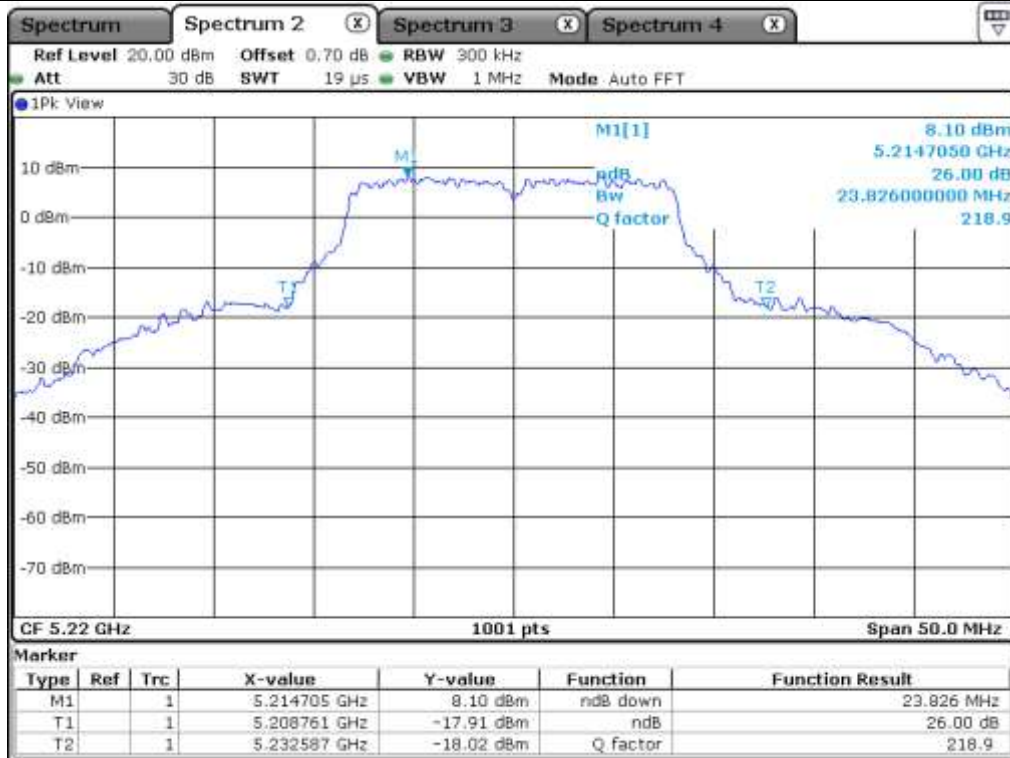


Middle Channel (5 220 MHz)

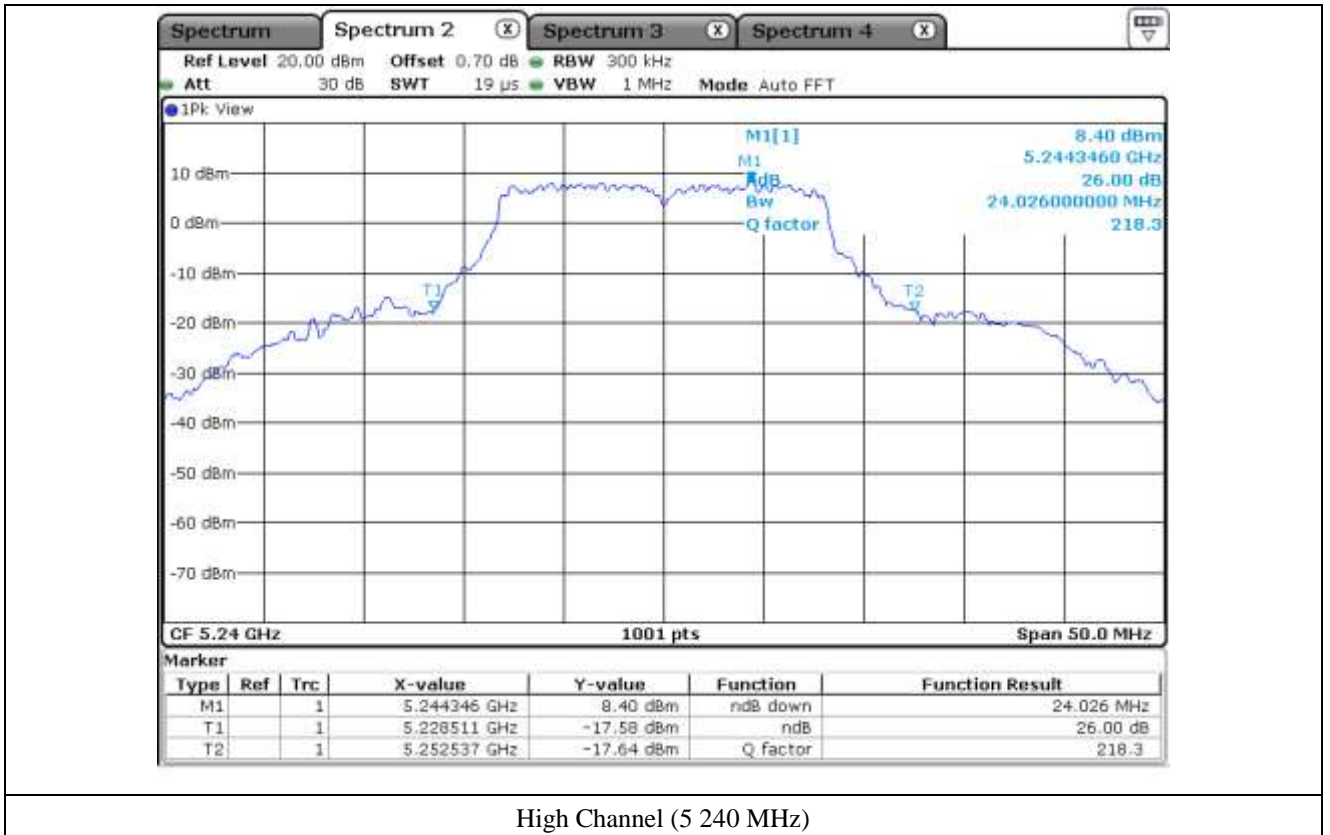


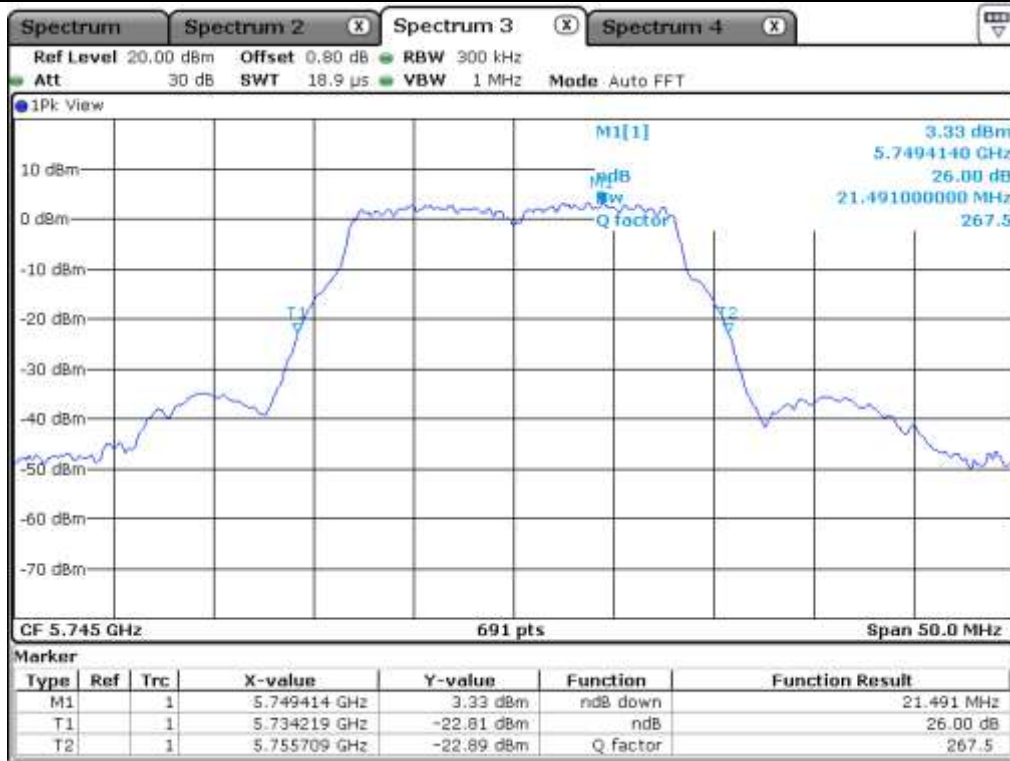

Low Channel (5 745 MHz)

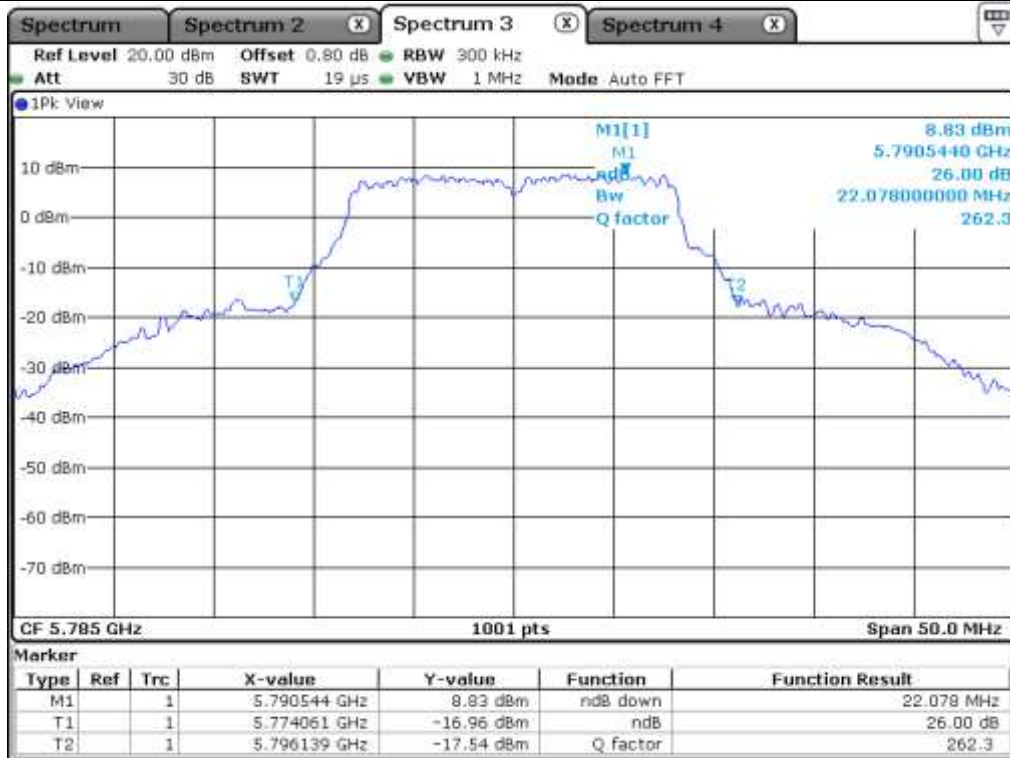

Middle Channel (5 795 MHz)

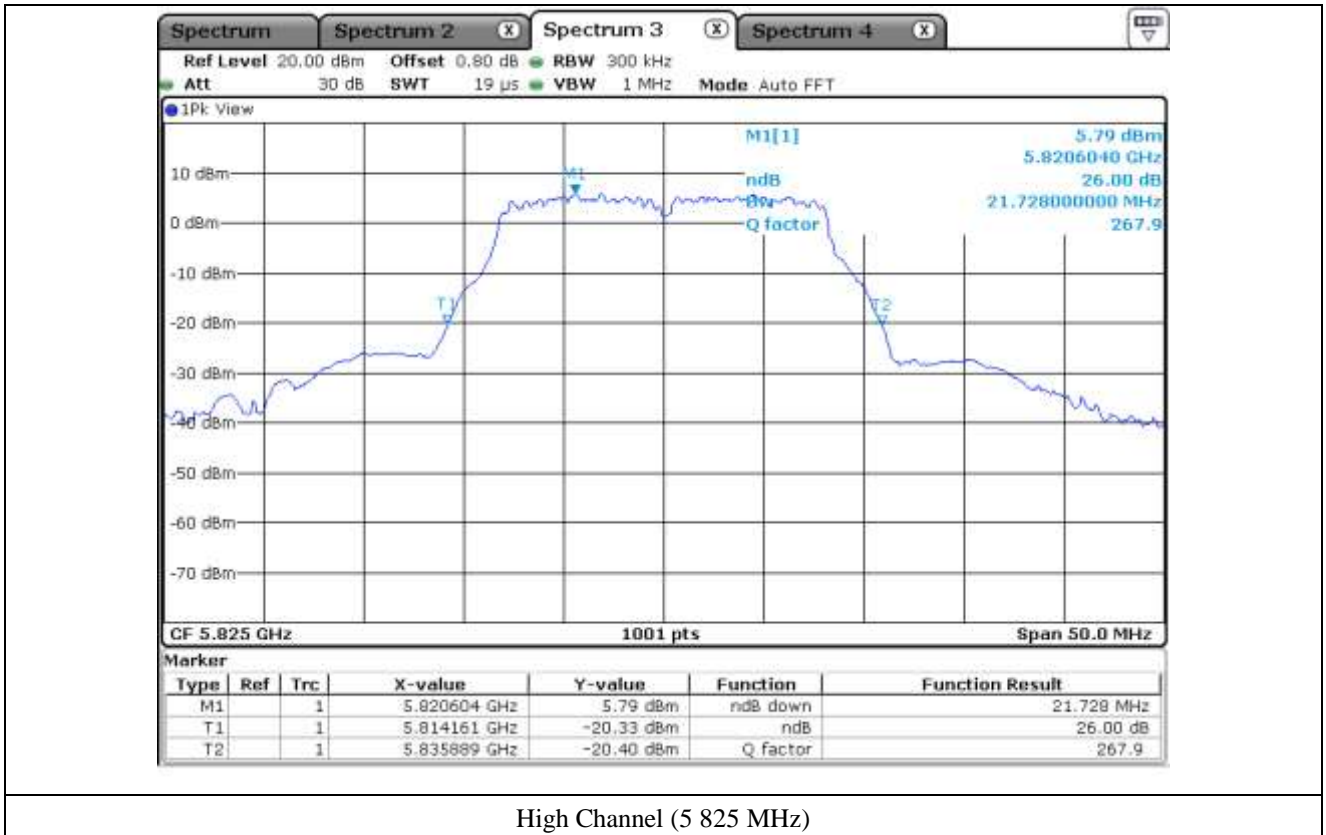

High Channel (5 825 MHz)

7.5 Test data for 802.11n_HT20 RLAN Mode

7.5.1 Test data for Antenna 0


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.63
	Middle	5 220.00	23.28
	High	5 240.00	24.08
5 725 ~ 5 850	Low	5 745.00	21.88
	Middle	5 795.00	23.73
	High	5 825.00	21.98




Tested by: Hyung-Kwon, Oh / Engineer

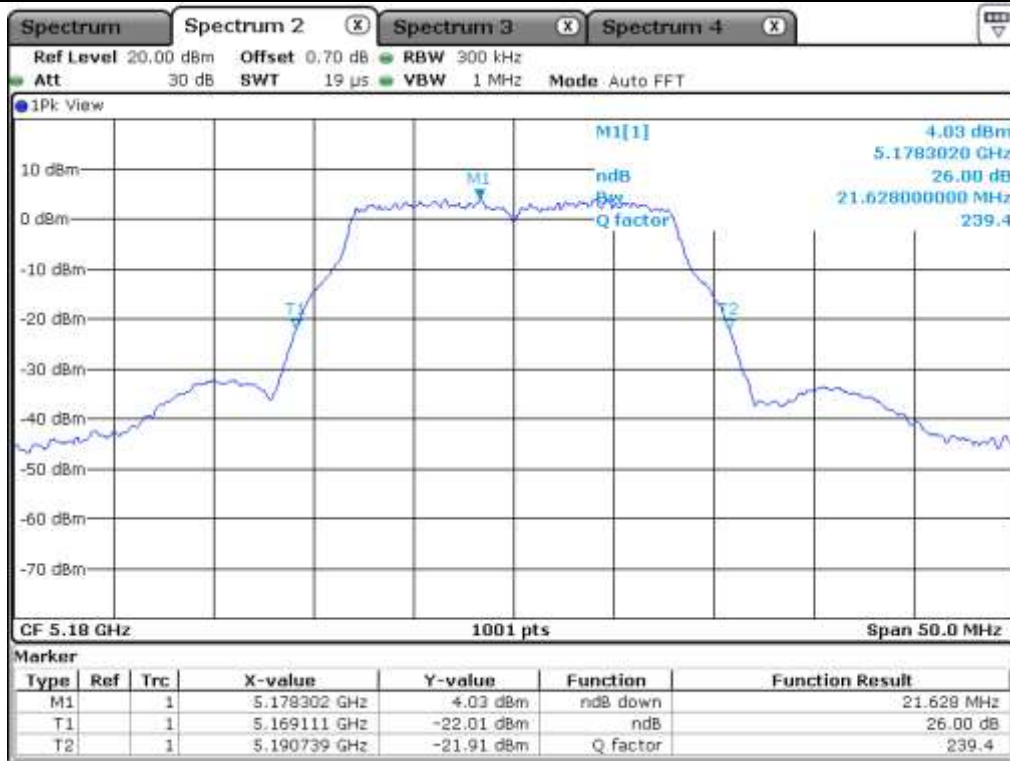


Low Channel (5 180 MHz)

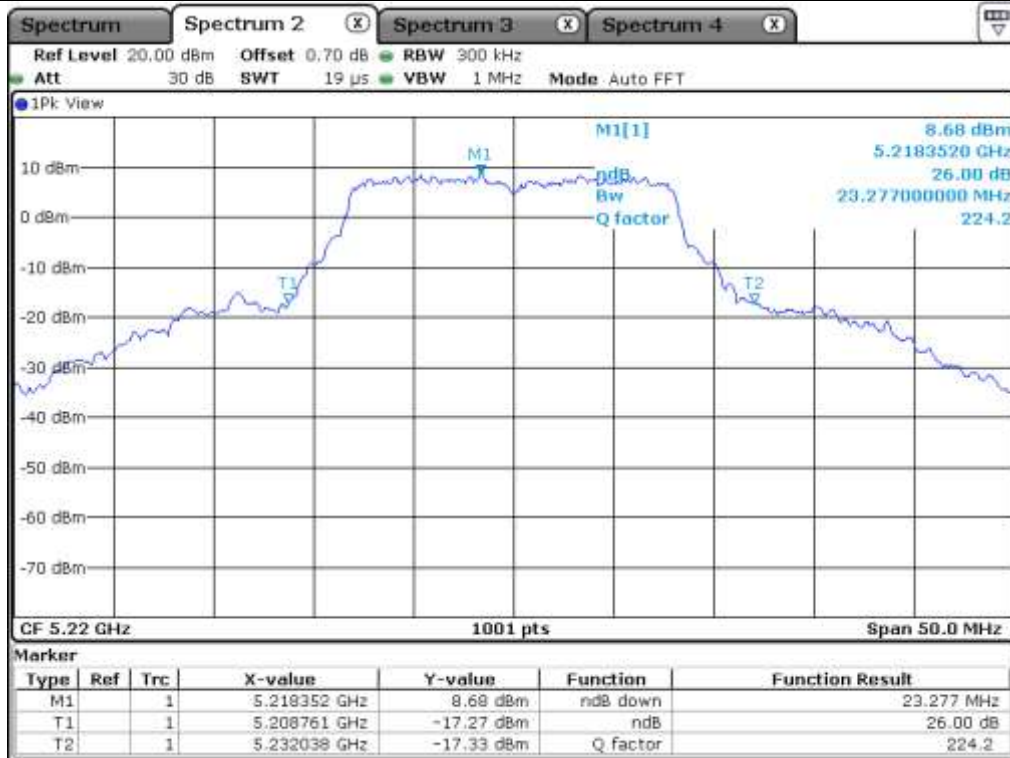


Middle Channel (5 220 MHz)

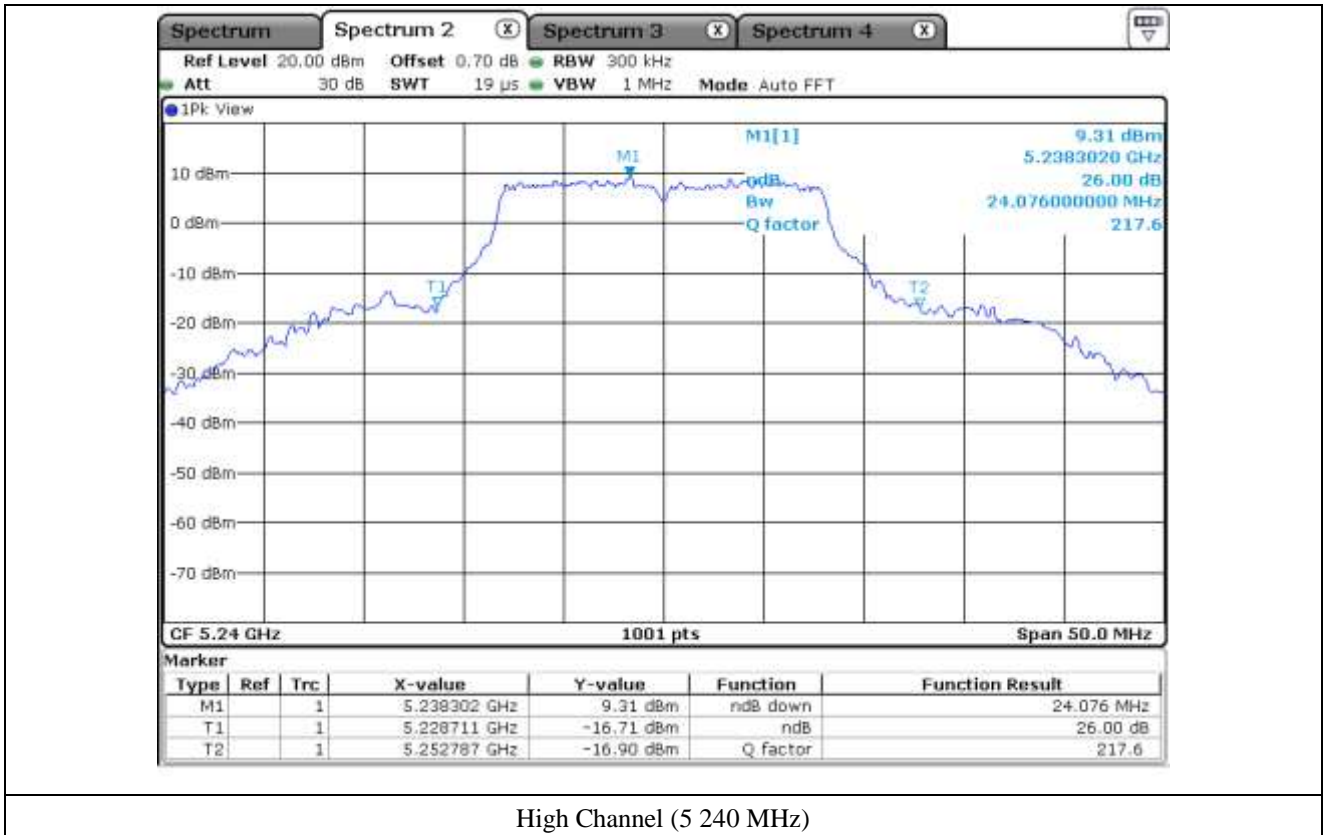


High Channel (5 240 MHz)

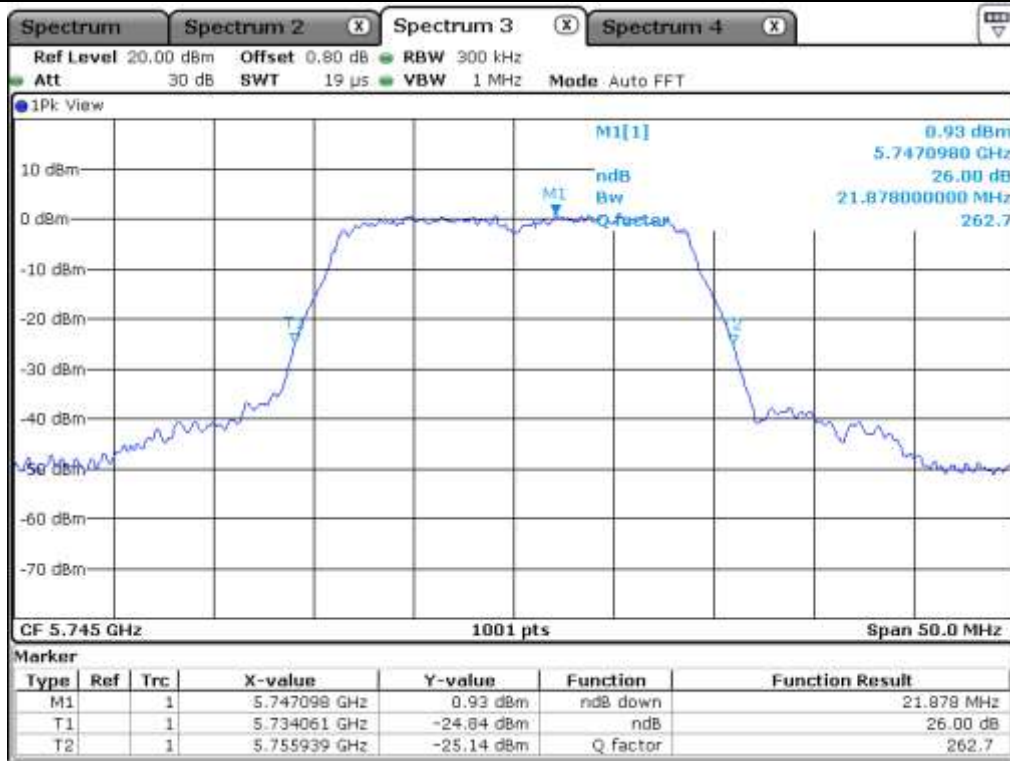

Low Channel (5.745 MHz)

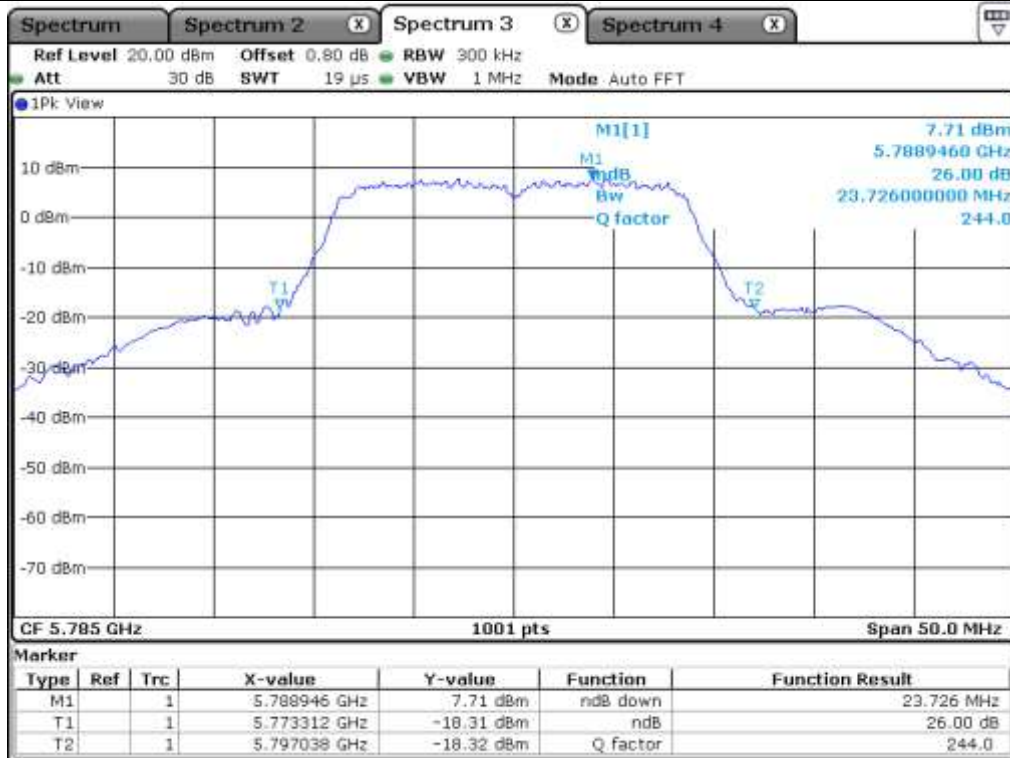

Middle Channel (5.795 MHz)

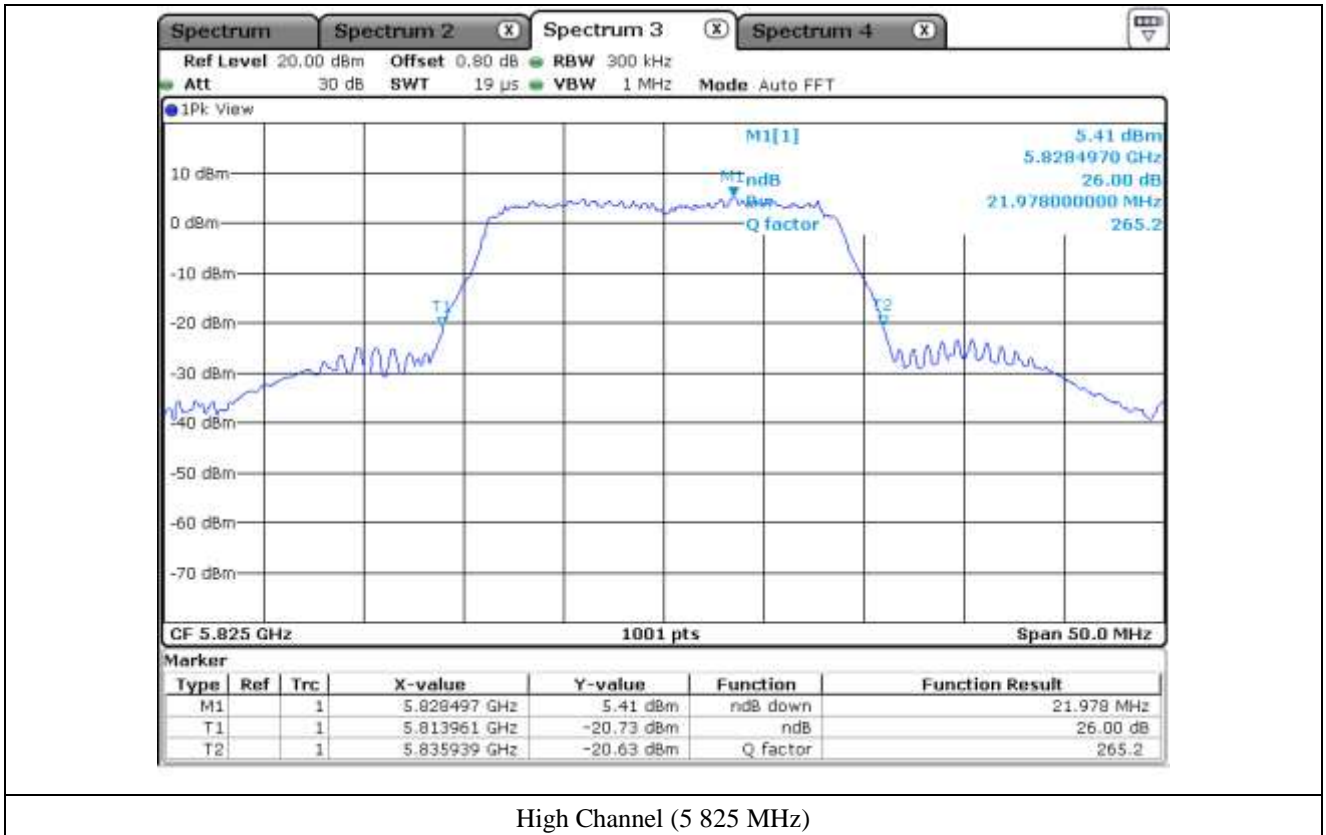

7.5.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.53
	Middle	5 220.00	21.83
	High	5 240.00	21.83
5 725 ~ 5 850	Low	5 745.00	21.68
	Middle	5 795.00	22.33
	High	5 825.00	21.83




Tested by: Hyung-Kwon, Oh / Engineer

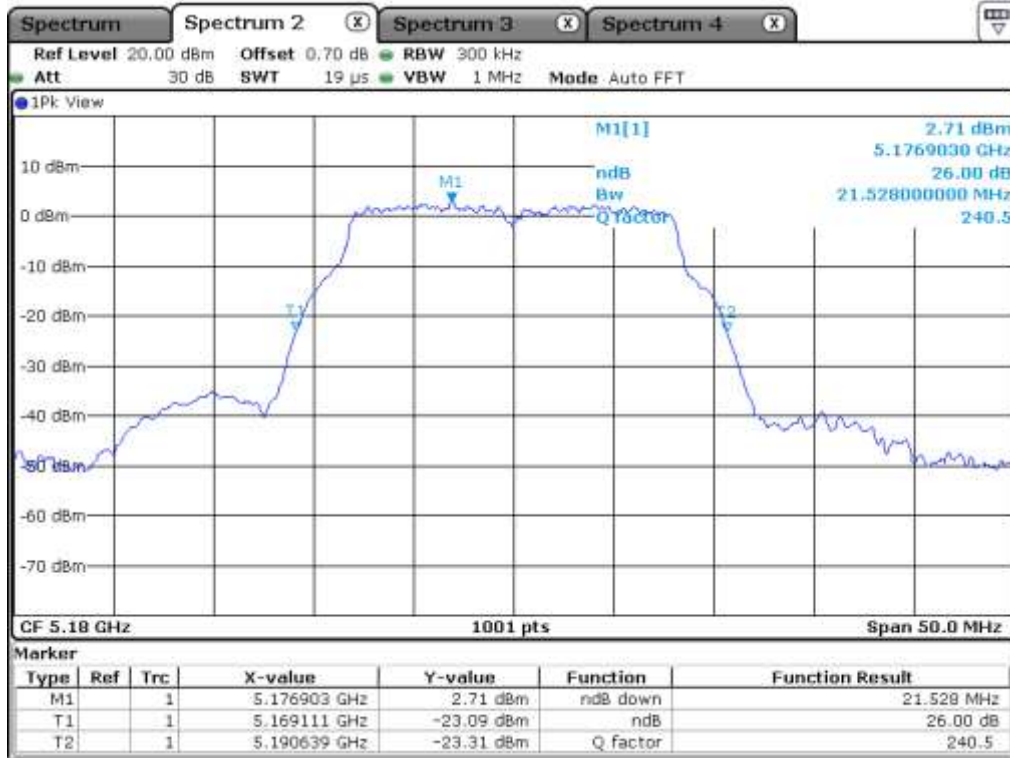


Low Channel (5 180 MHz)

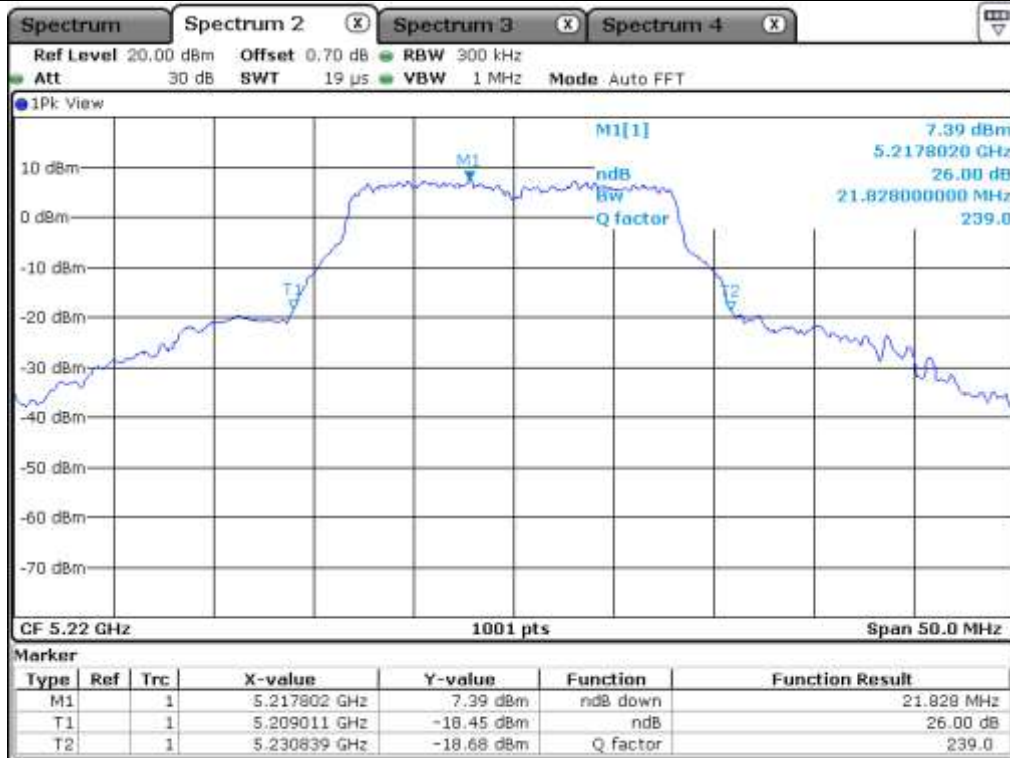


Middle Channel (5 220 MHz)

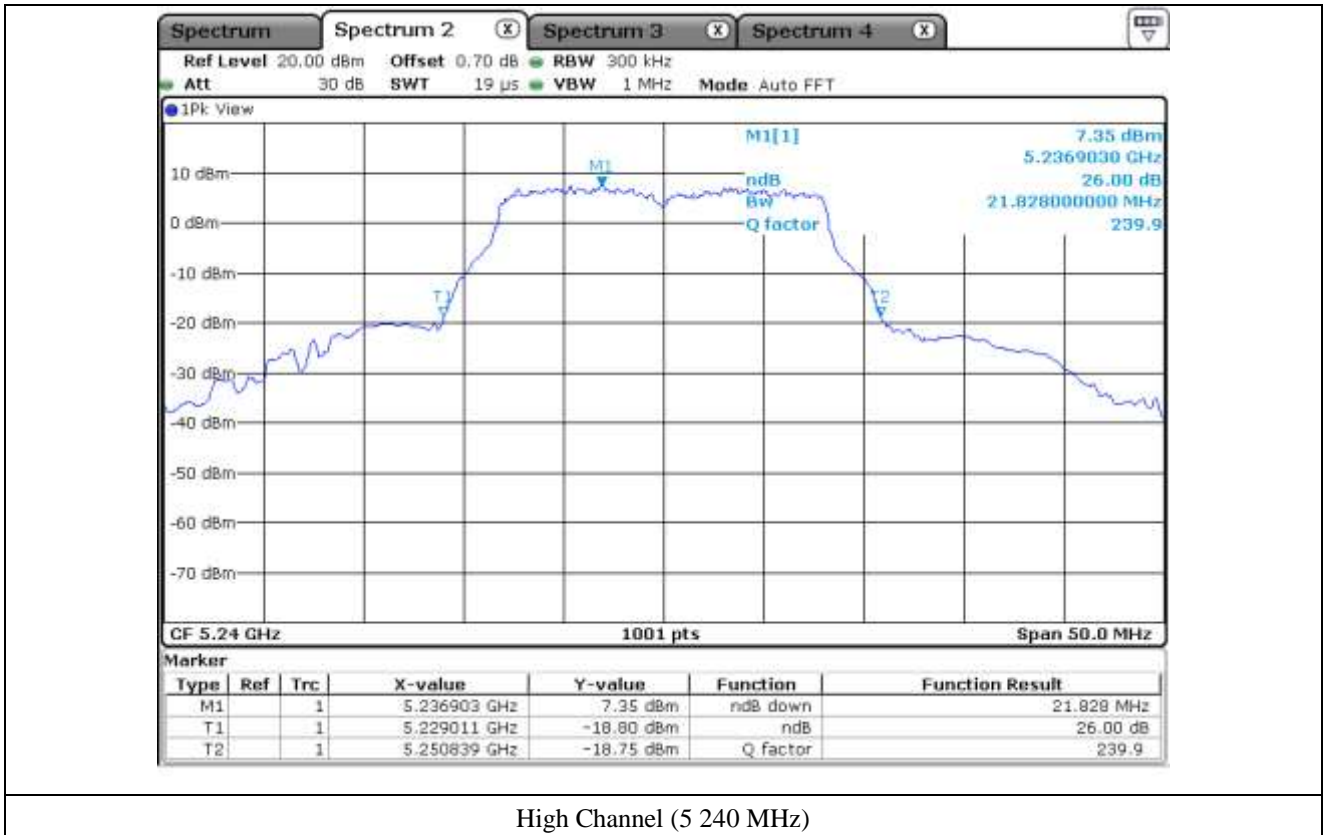


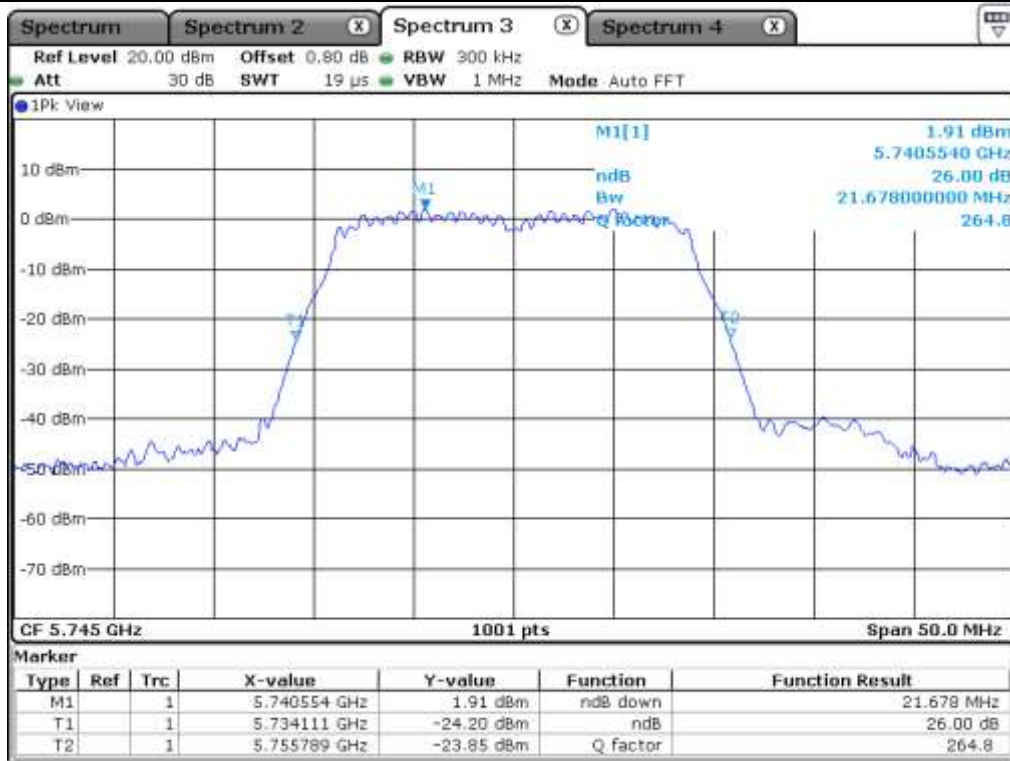

Low Channel (5.745 MHz)

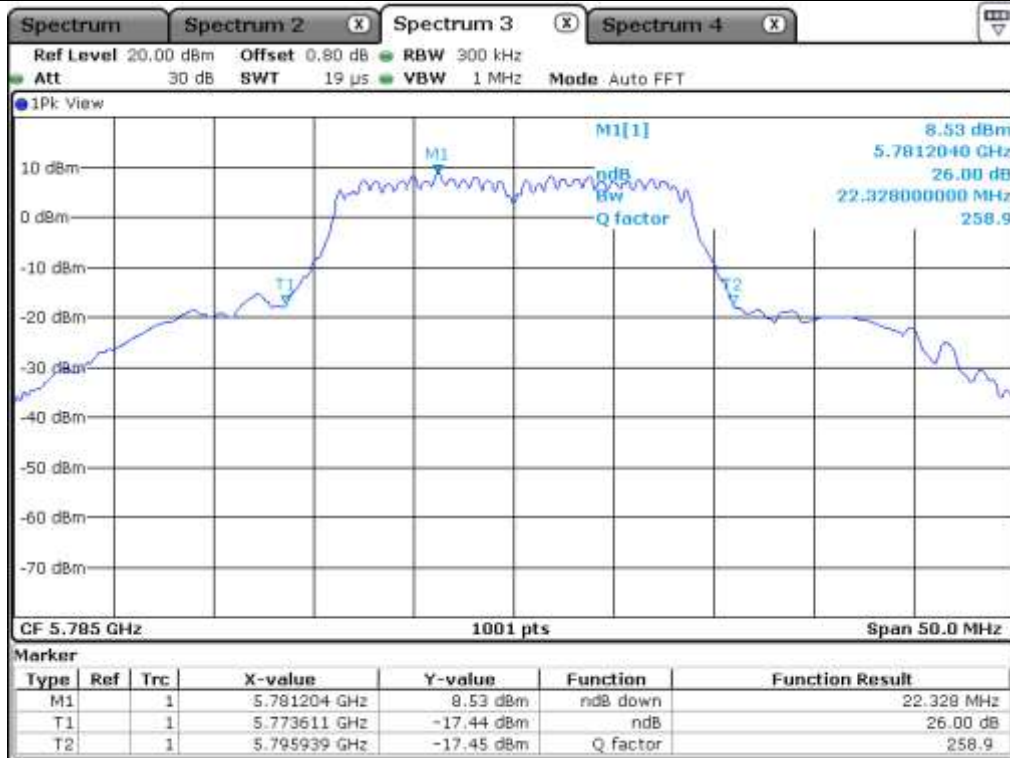

Middle Channel (5.795 MHz)

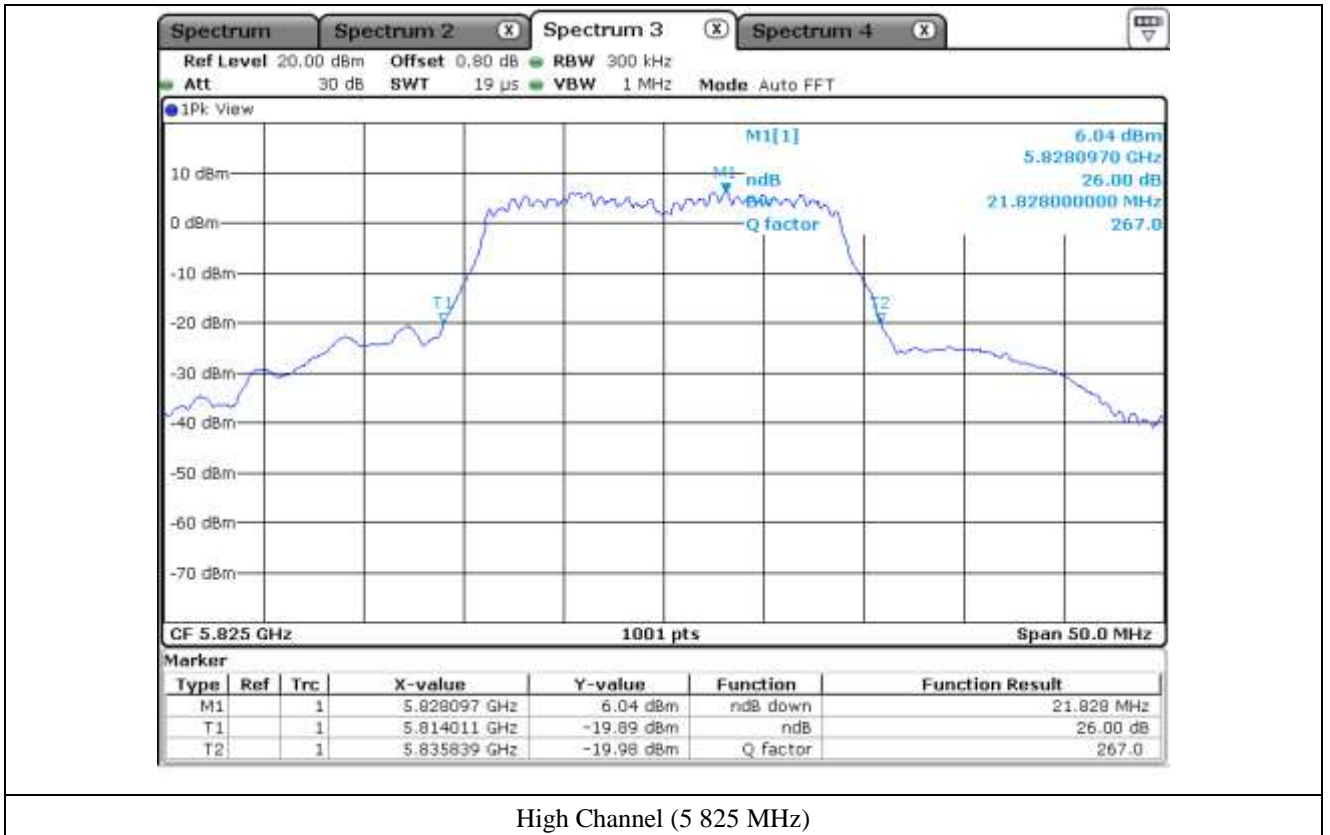

High Channel (5 825 MHz)

7.5.3 Test data for Antenna 2


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.53
	Middle	5 220.00	21.88
	High	5 240.00	21.83
5 725 ~ 5 850	Low	5 745.00	21.63
	Middle	5 795.00	23.28
	High	5 825.00	21.73




Tested by: Hyung-Kwon, Oh / Engineer

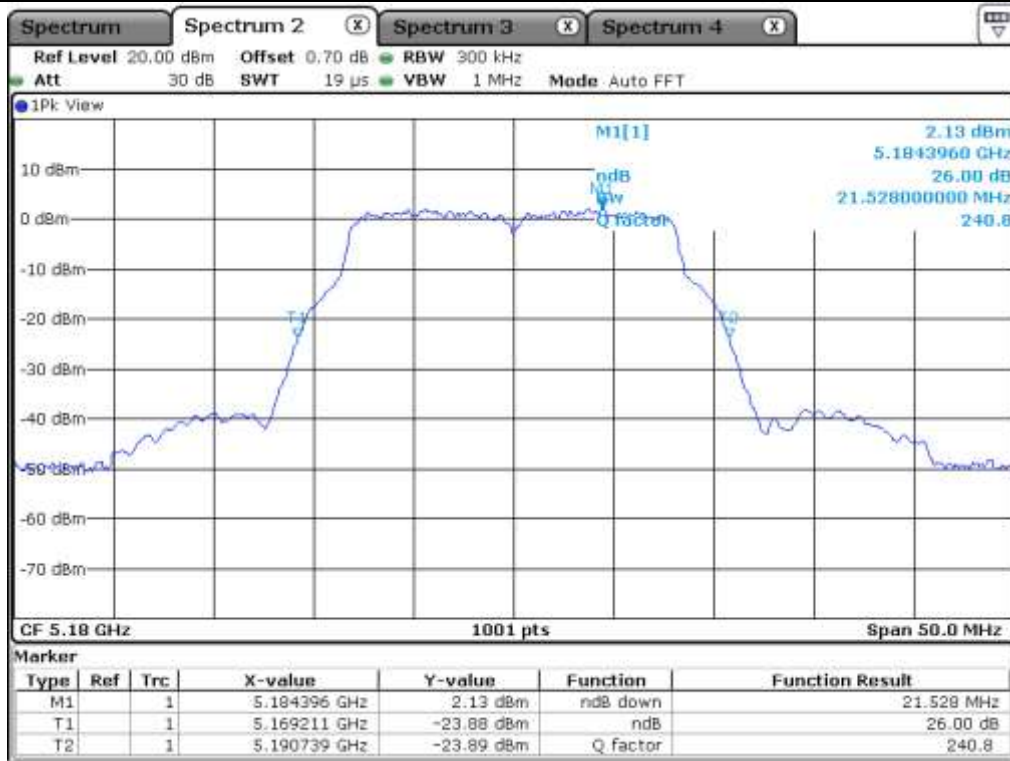


Low Channel (5 180 MHz)

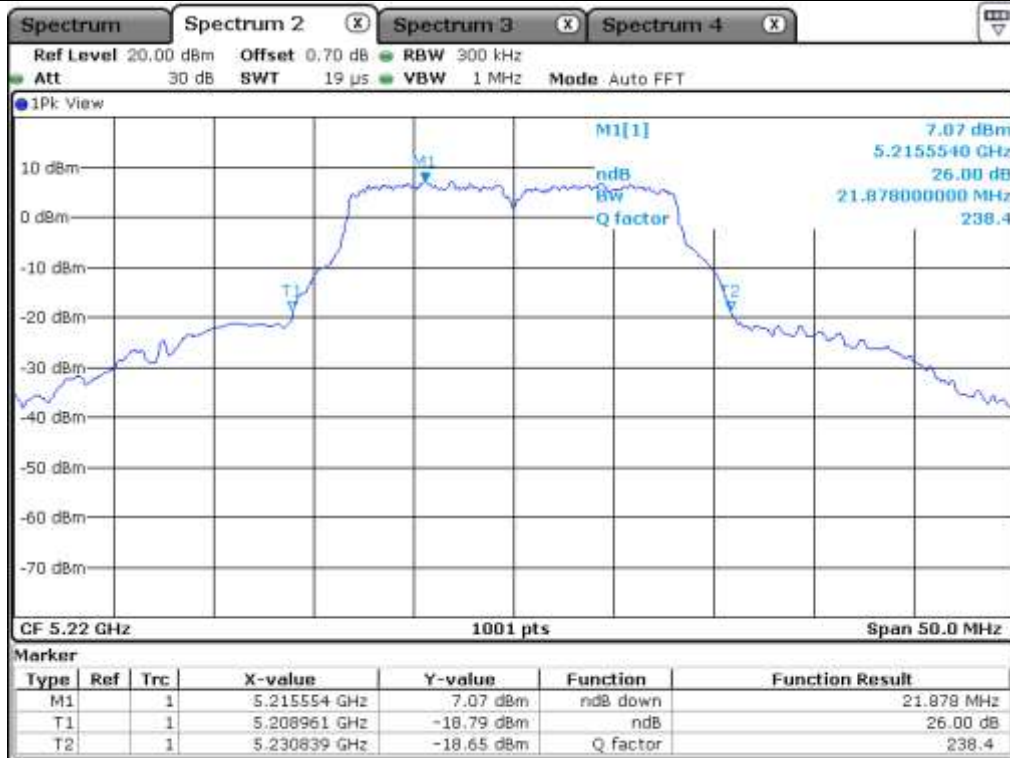


Middle Channel (5 220 MHz)

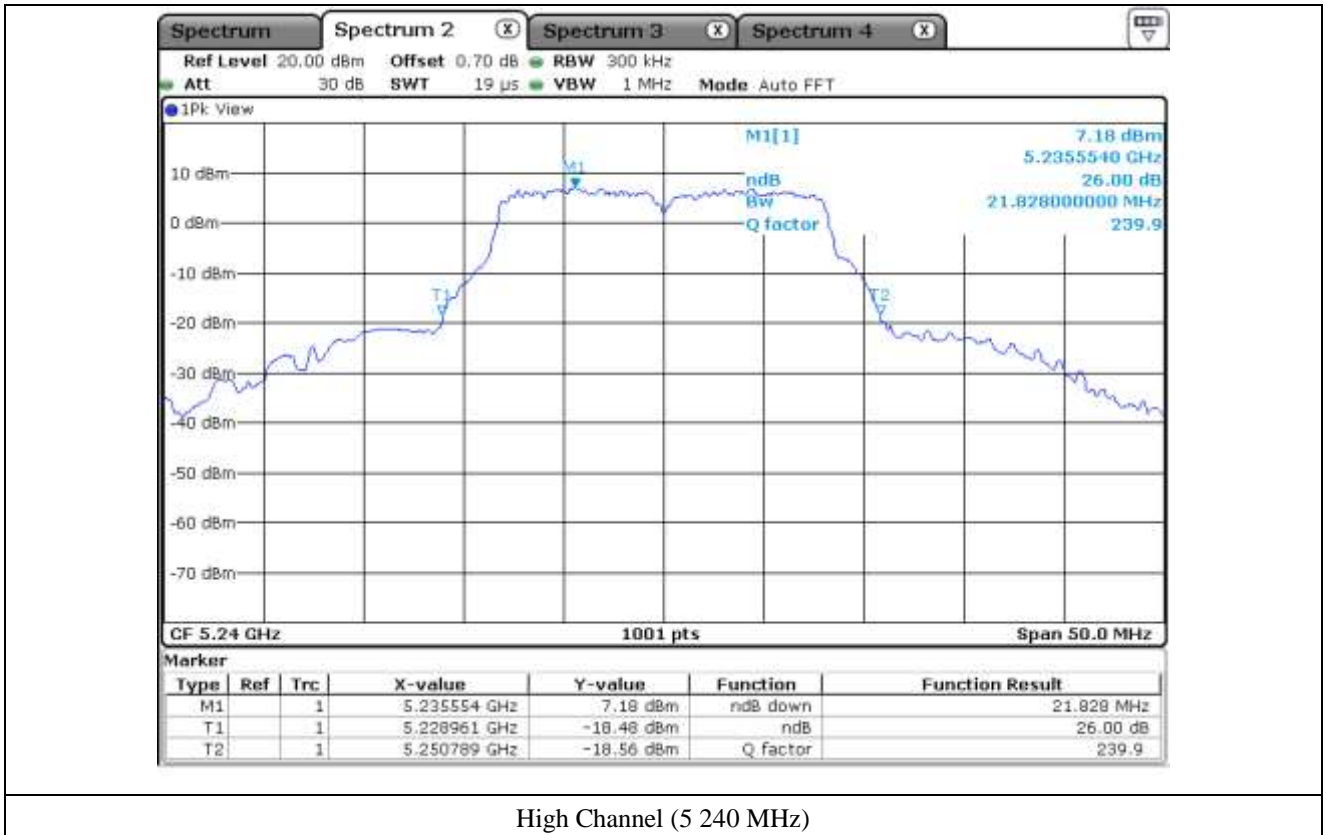


High Channel (5 240 MHz)

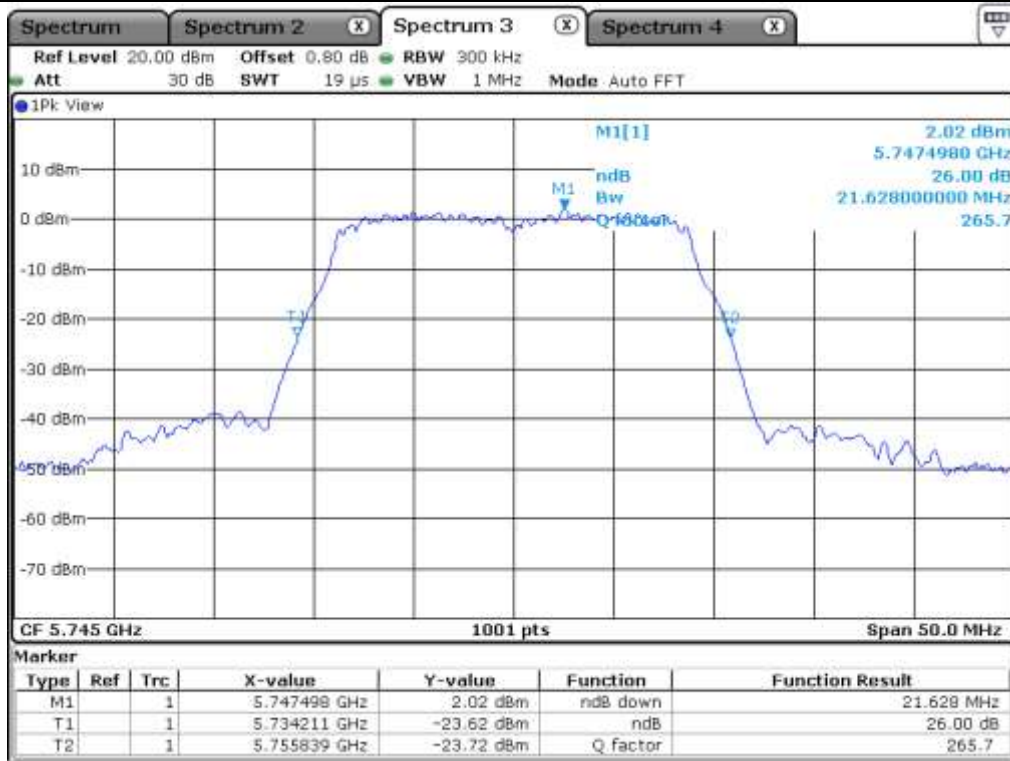

Low Channel (5.745 MHz)

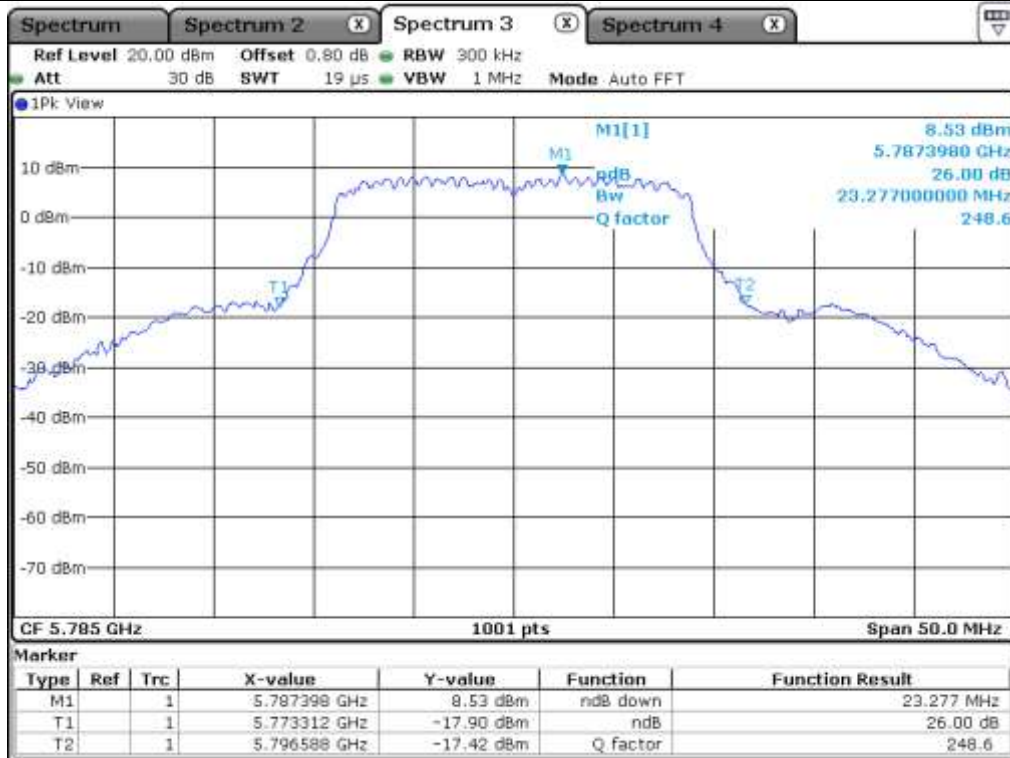

Middle Channel (5.795 MHz)

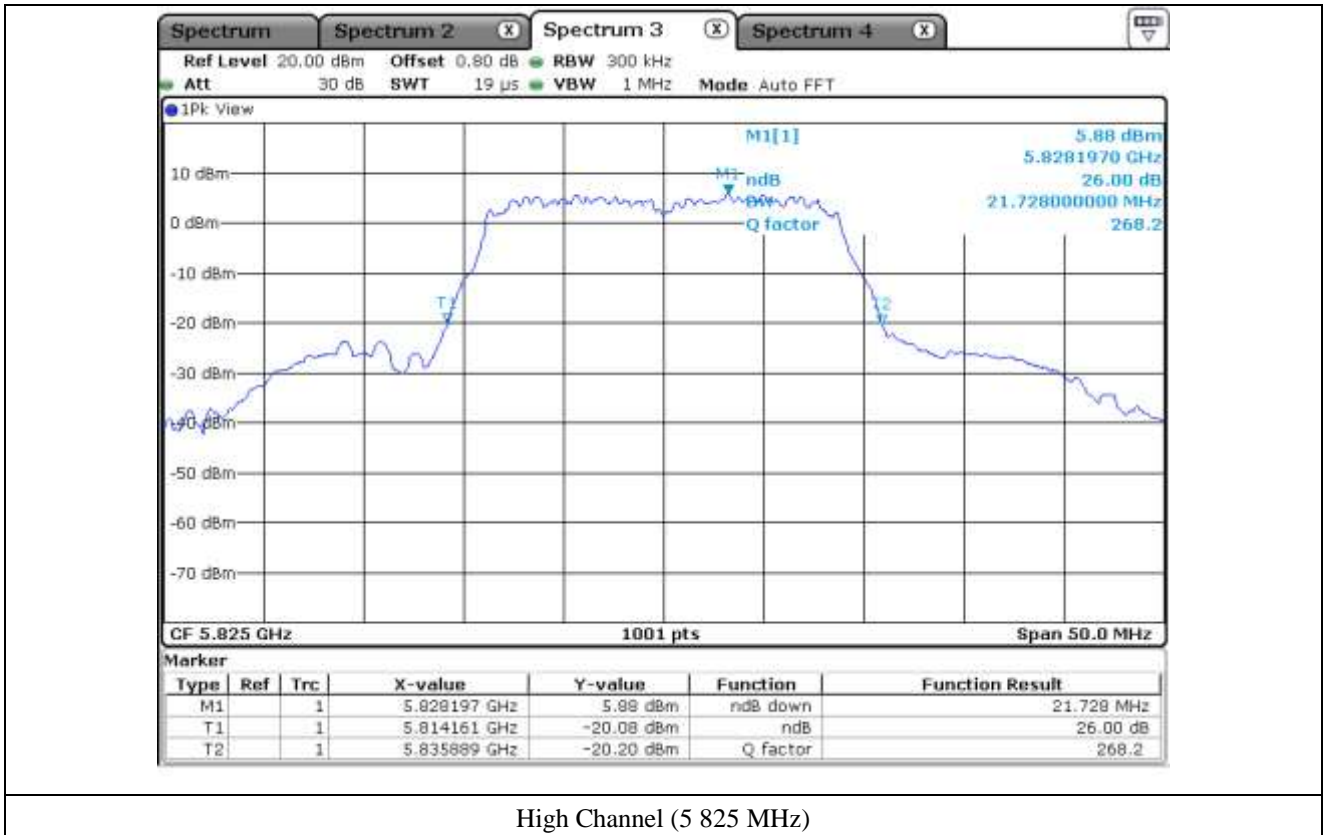

7.5.4 Test data for Antenna 3


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 180.00	21.38
	Middle	5 220.00	23.53
	High	5 240.00	23.88
5 725 ~ 5 850	Low	5 745.00	21.58
	Middle	5 795.00	25.92
	High	5 825.00	21.73




Tested by: Hyung-Kwon, Oh / Engineer

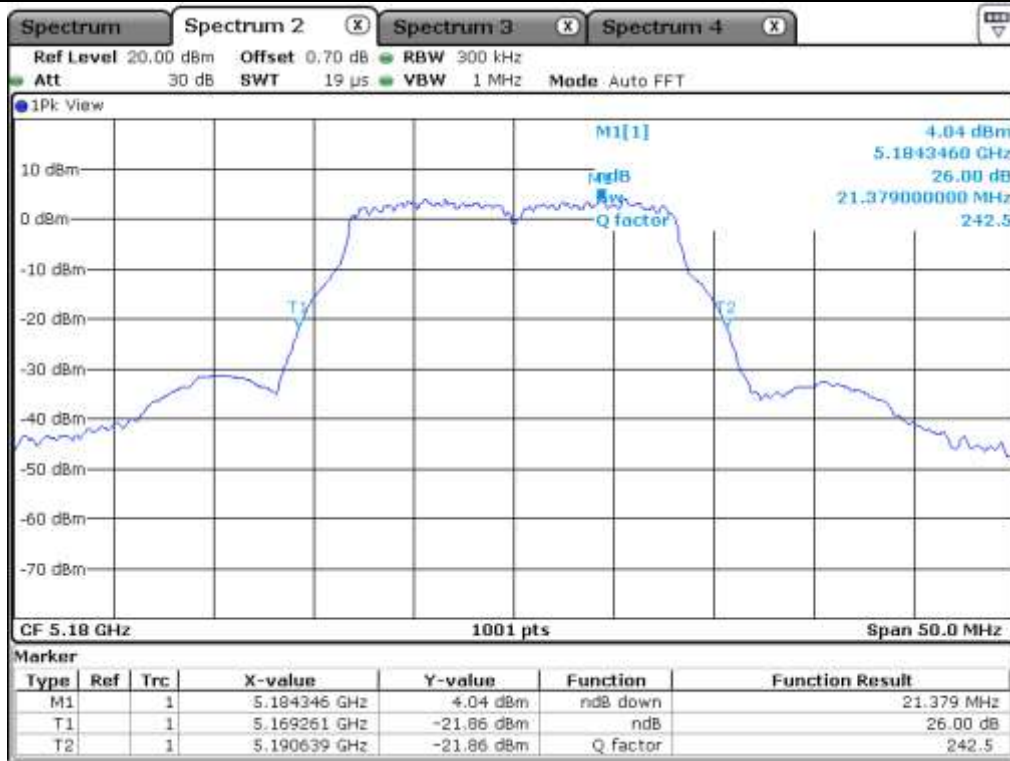


Low Channel (5 180 MHz)

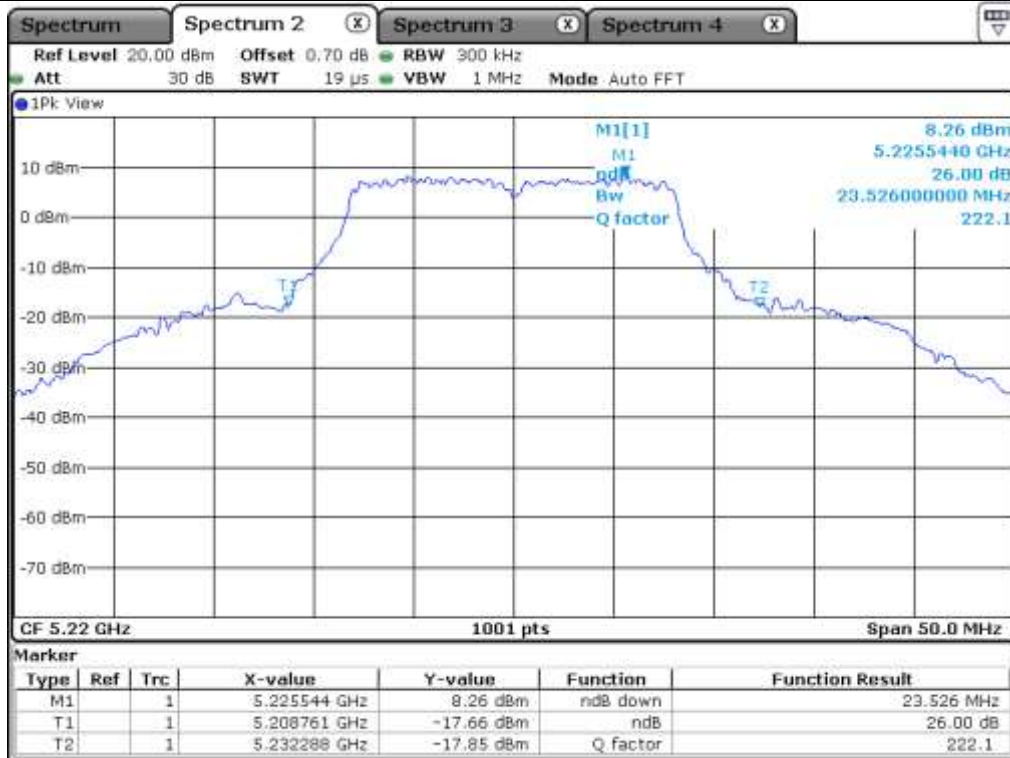


Middle Channel (5 220 MHz)

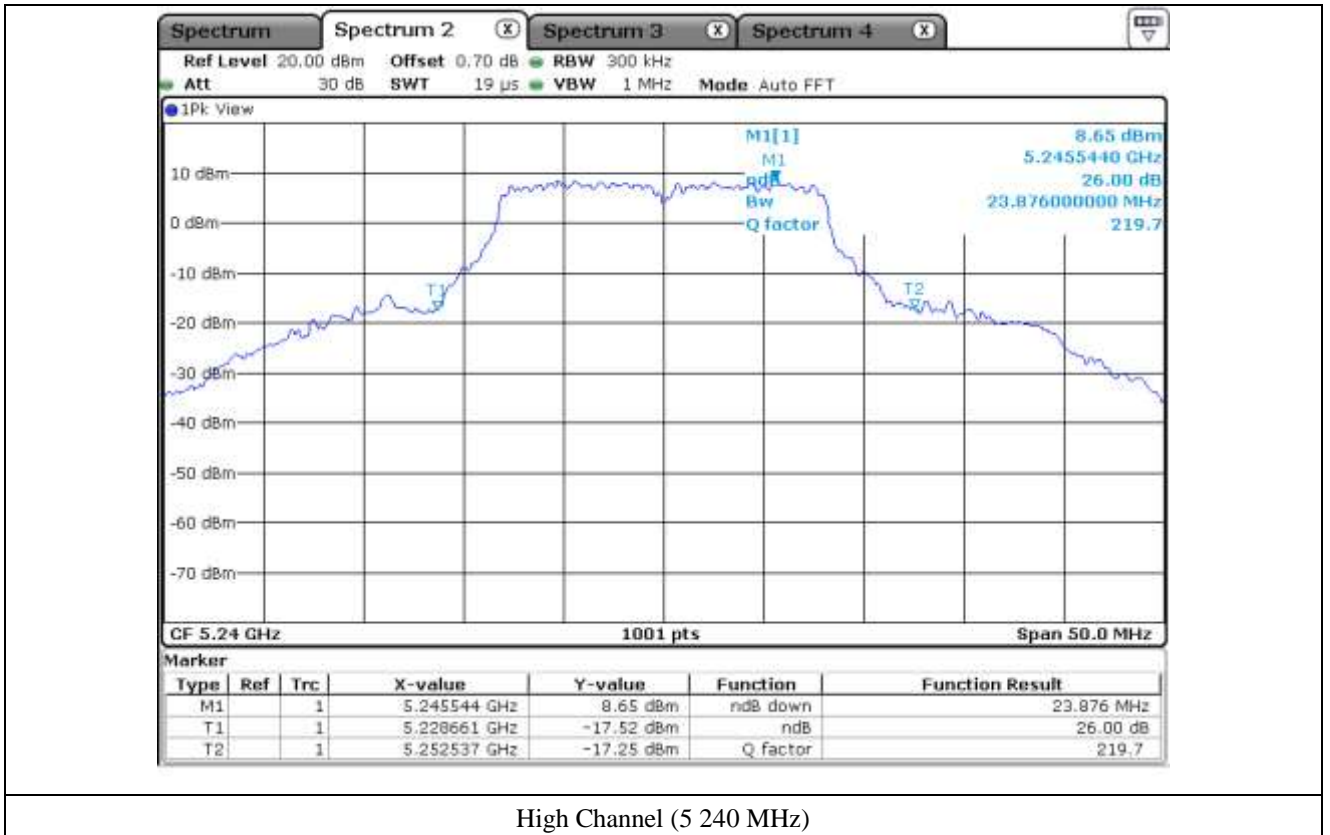


High Channel (5 240 MHz)

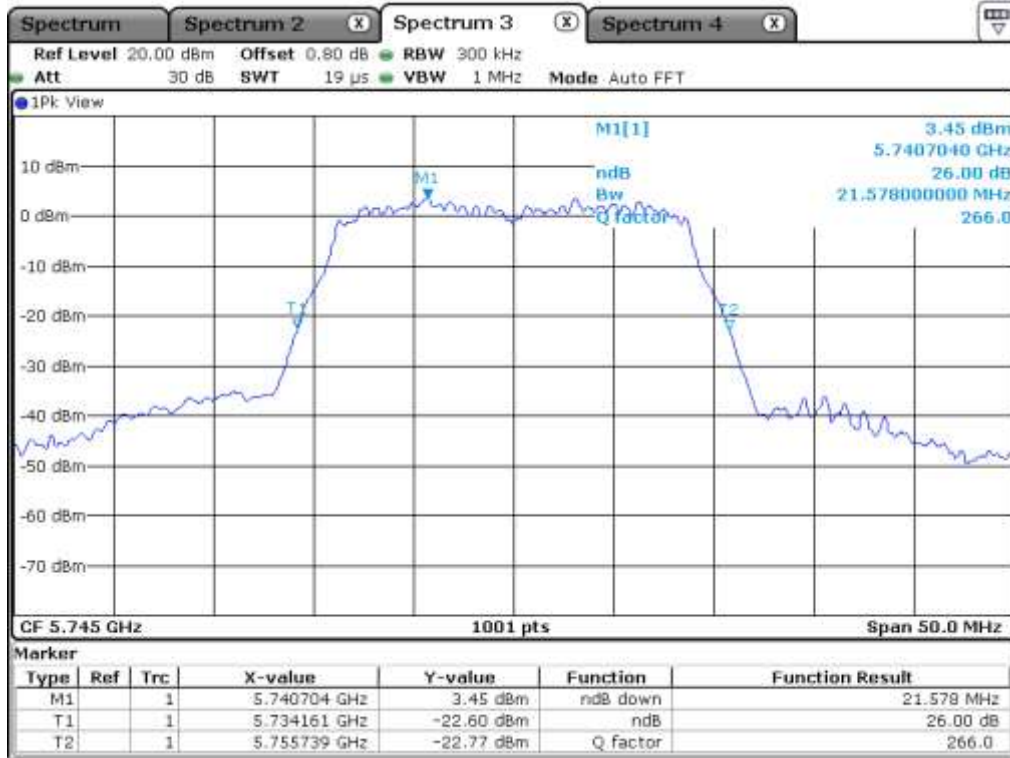

Low Channel (5 745 MHz)

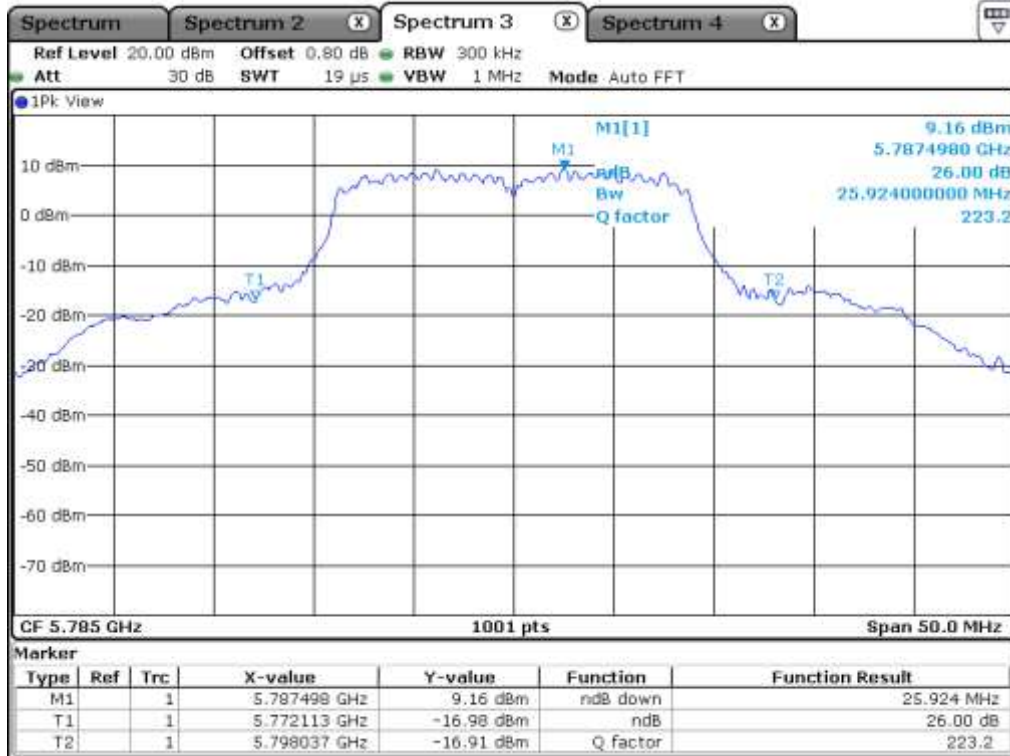

Middle Channel (5 795 MHz)

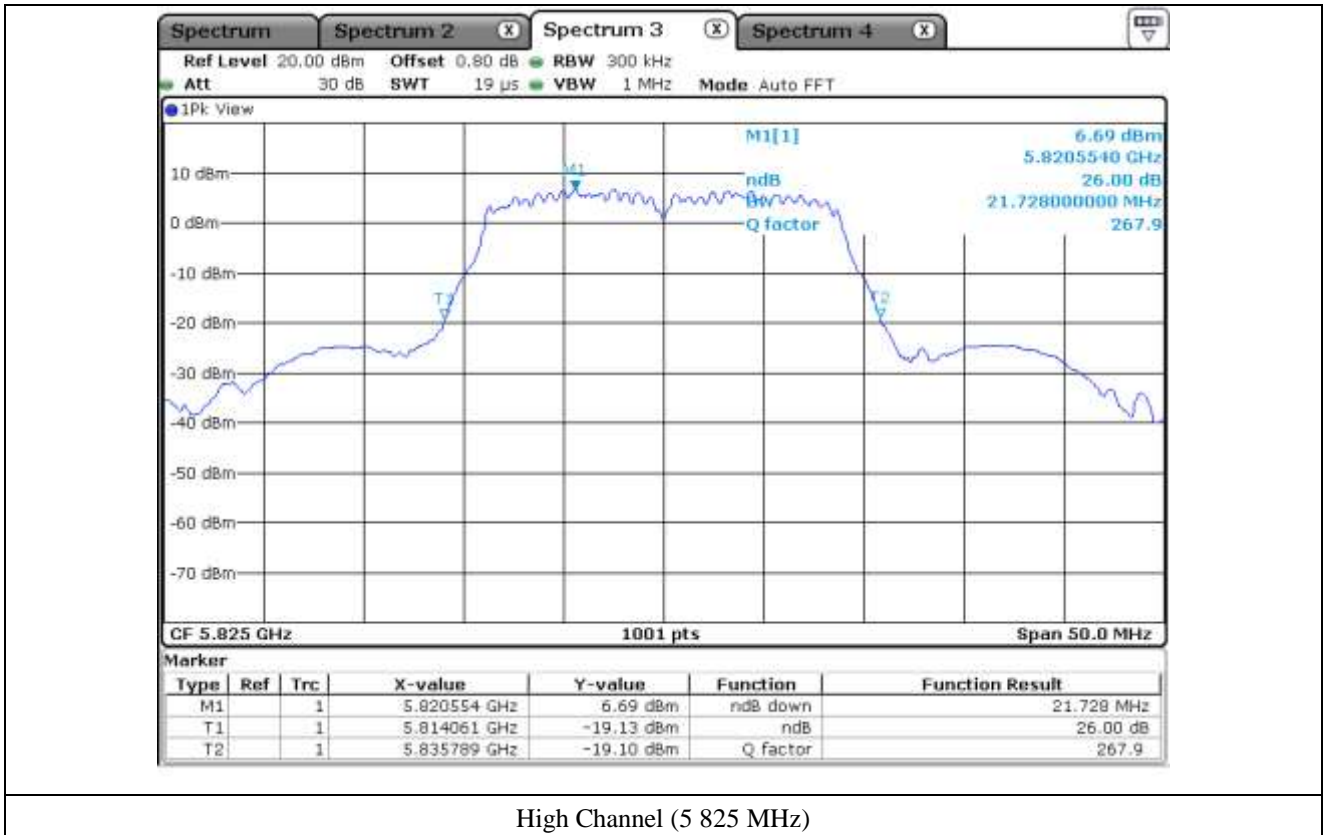

7.6 Test data for 802.11n_HT40 RLAN Mode

7.6.1 Test data for Antenna 0


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.66
	High	5 230.00	42.16
5 725 ~ 5 850	Low	5 755.00	40.66
	High	5 795.00	40.66




Tested by: Hyung-Kwon, Oh / Engineer

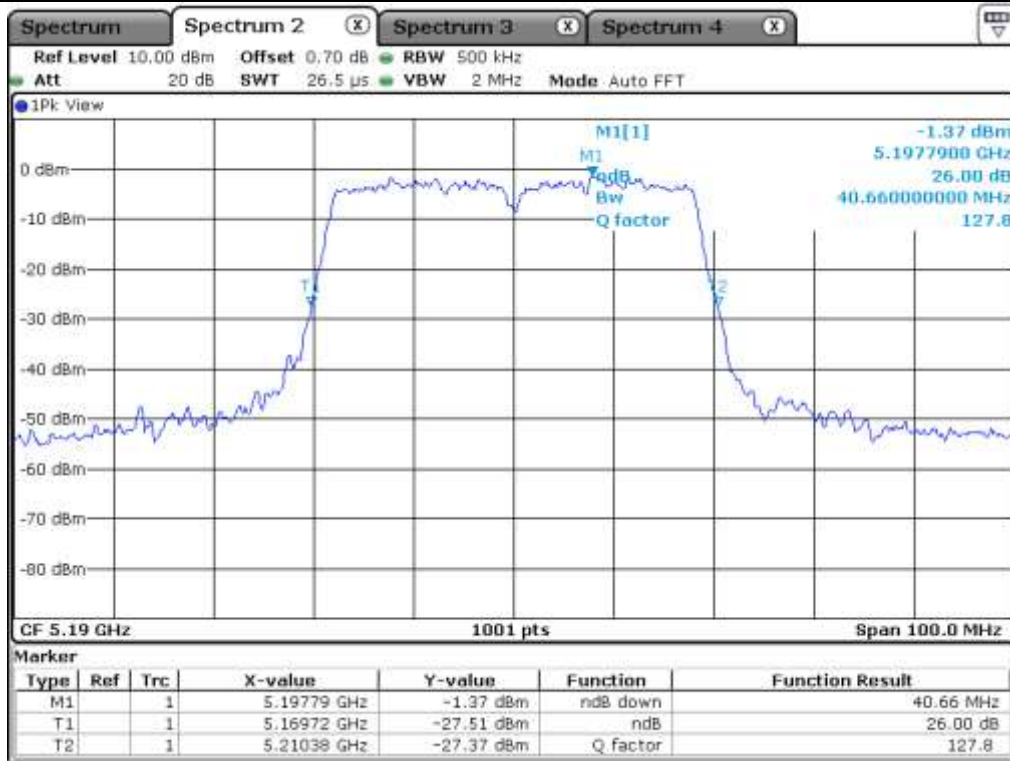


Low Channel (5 190 MHz)

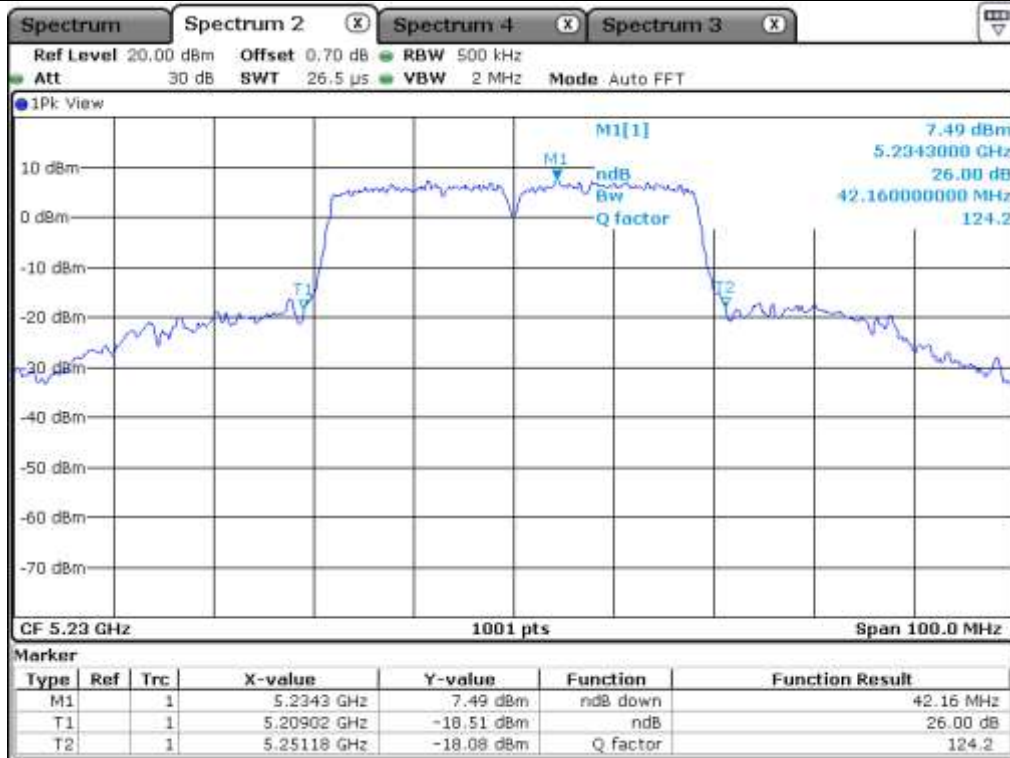

High Channel (5 230 MHz)

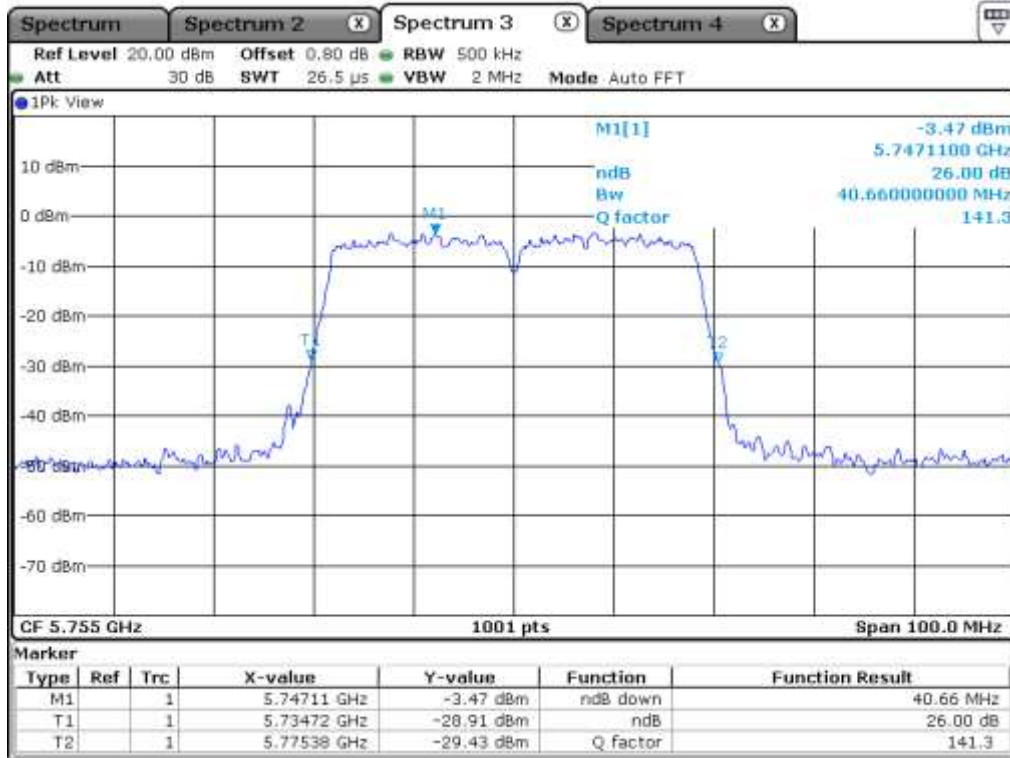

Low Channel (5 755 MHz)

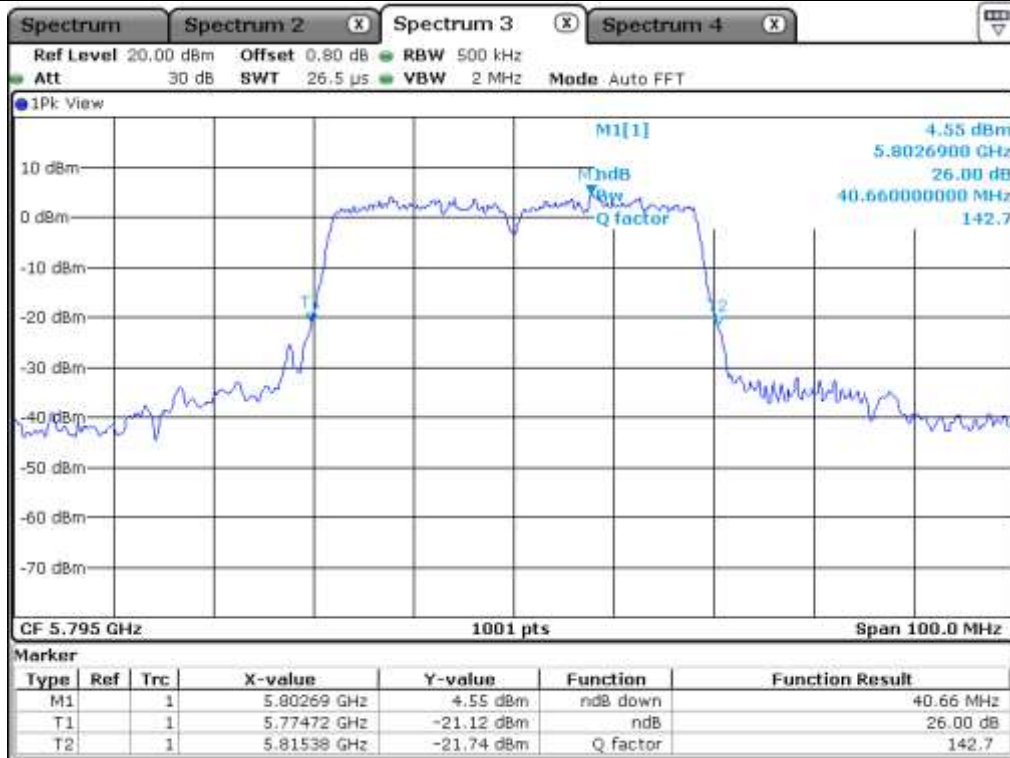

High Channel (5 795 MHz)

7.6.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.06
	High	5 230.00	40.36
5 725 ~ 5 850	Low	5 755.00	40.06
	High	5 795.00	40.26




Tested by: Hyung-Kwon, Oh / Engineer

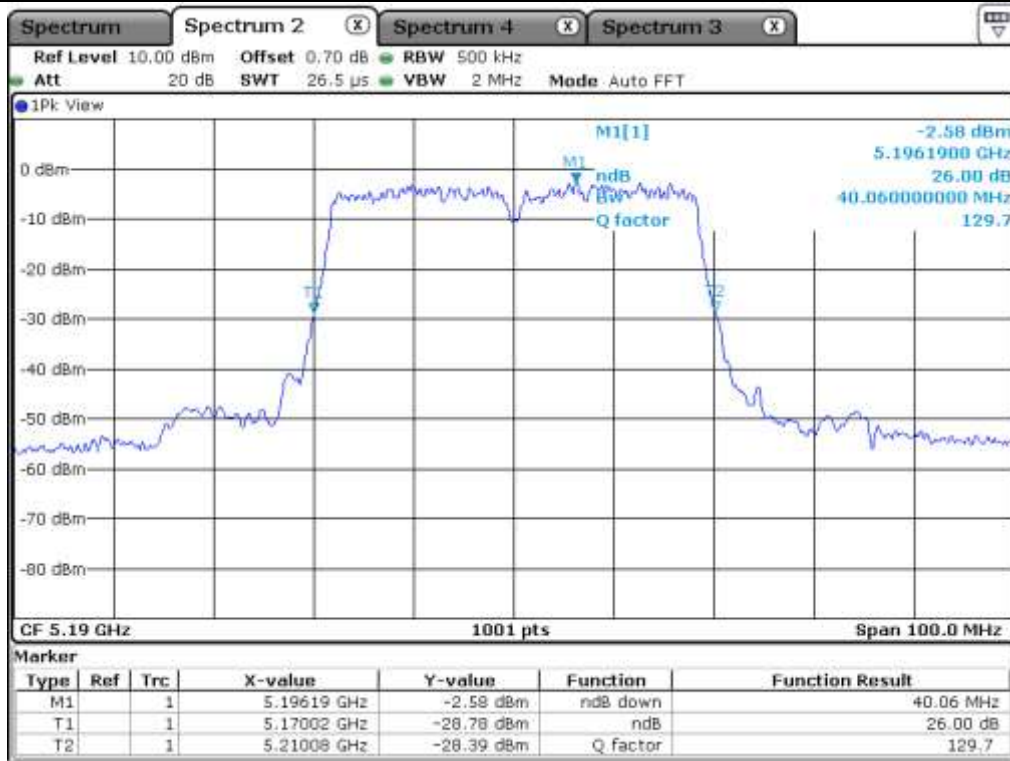


Low Channel (5 190 MHz)

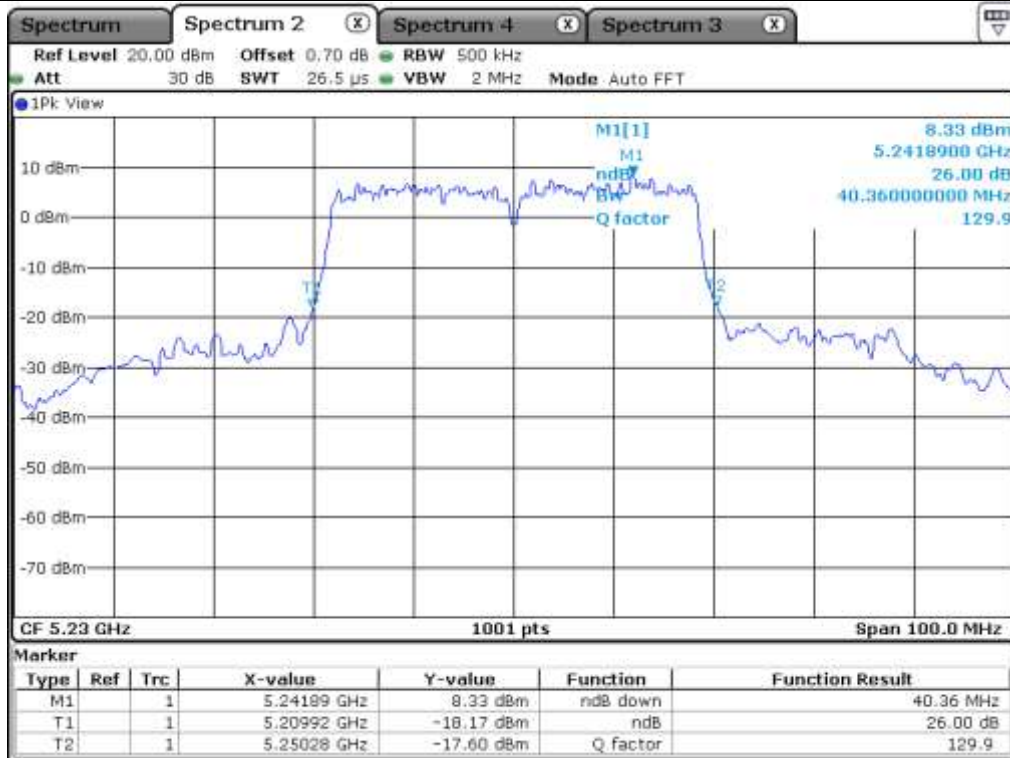

High Channel (5 230 MHz)

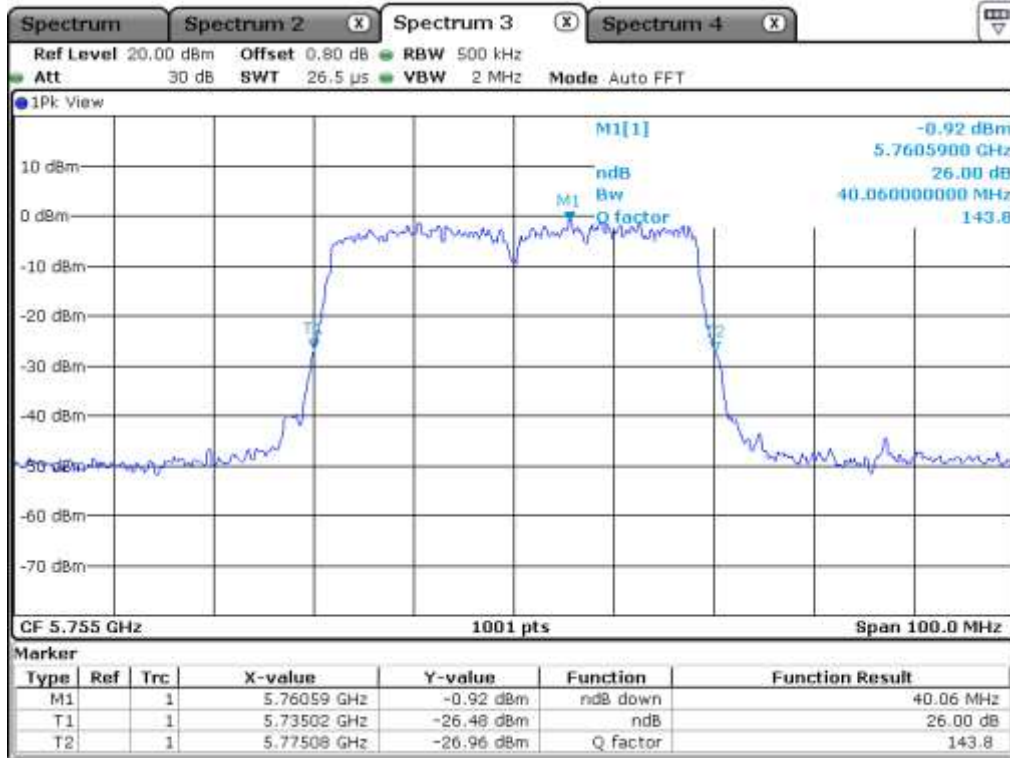

Low Channel (5 755 MHz)

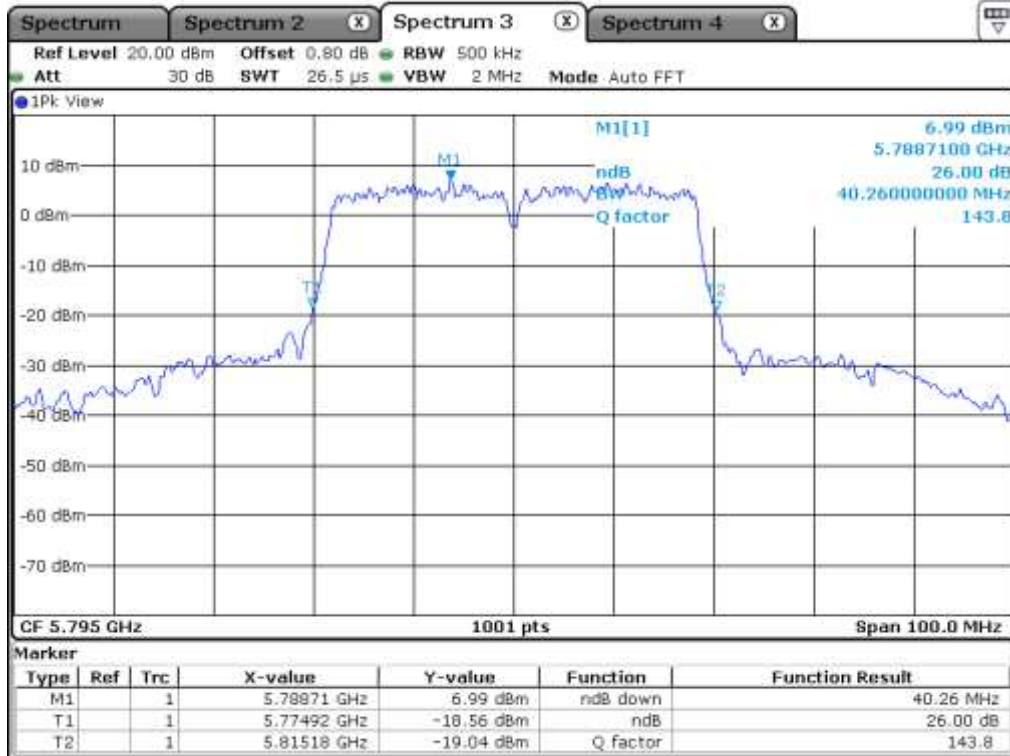

High Channel (5 795 MHz)

7.6.3 Test data for Antenna 2


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	39.86
	High	5 230.00	40.06
5 725 ~ 5 850	Low	5 755.00	39.86
	High	5 795.00	39.86




Tested by: Hyung-Kwon, Oh / Engineer

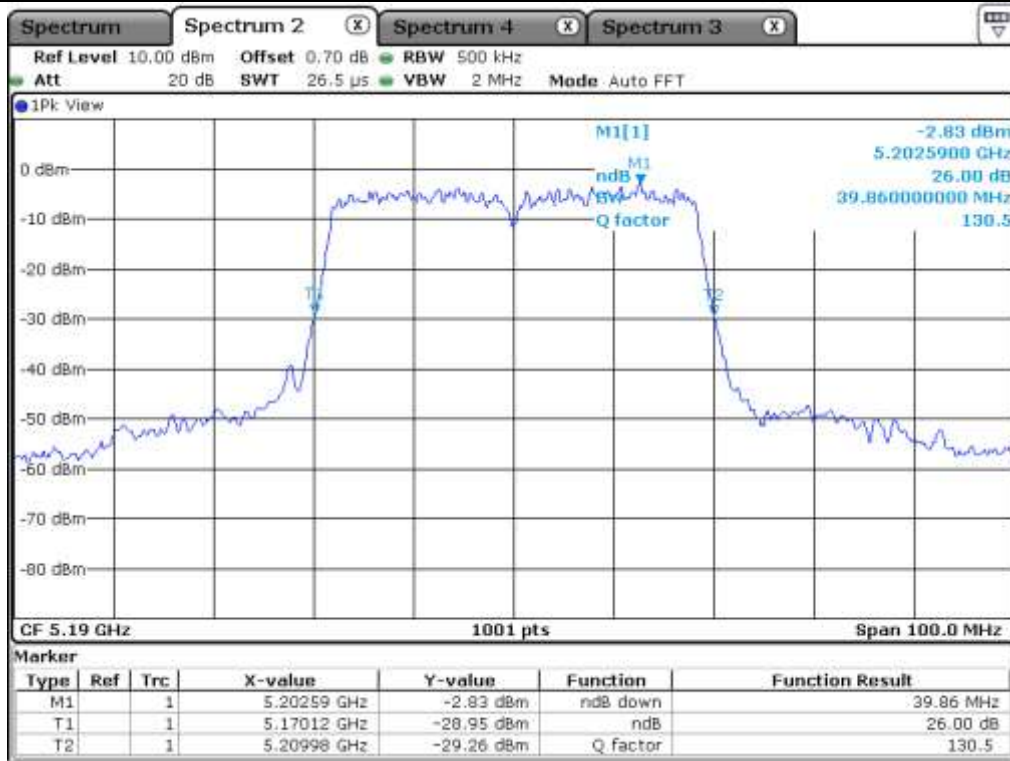


Low Channel (5 190 MHz)

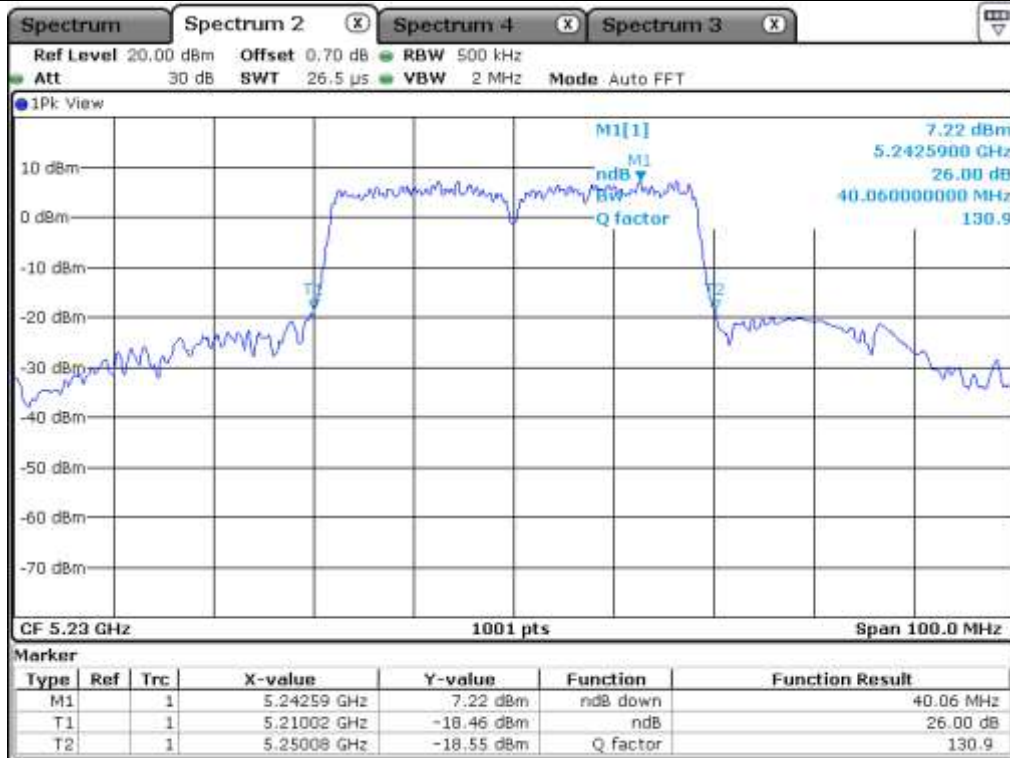

High Channel (5 230 MHz)

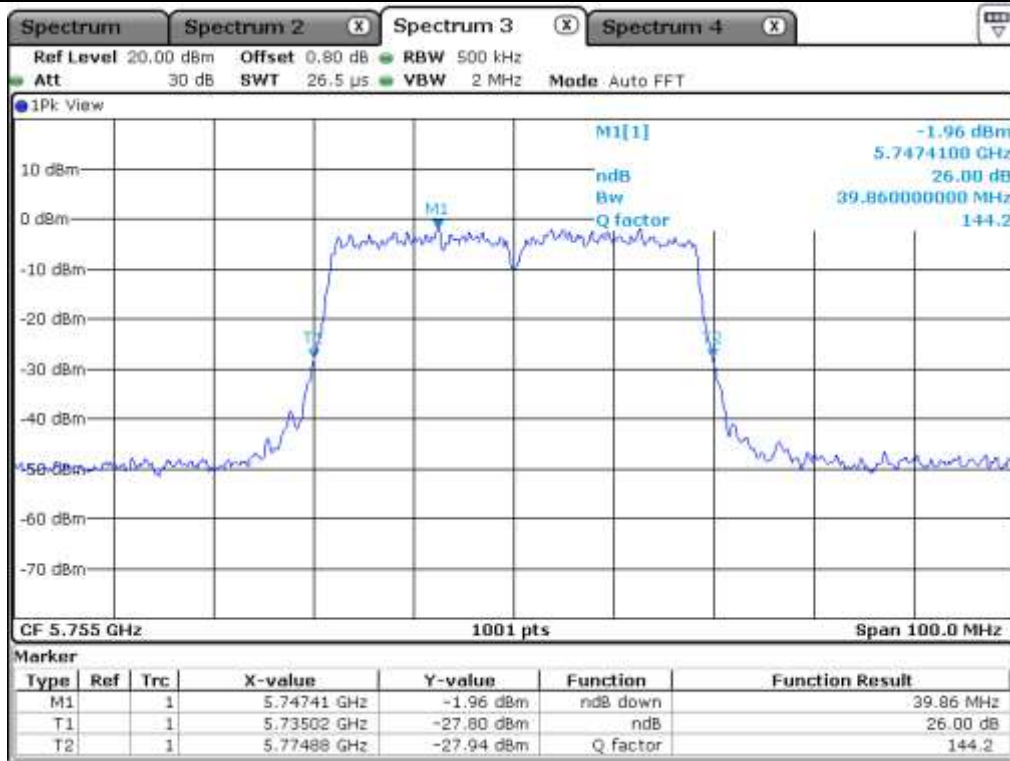

Low Channel (5 755 MHz)

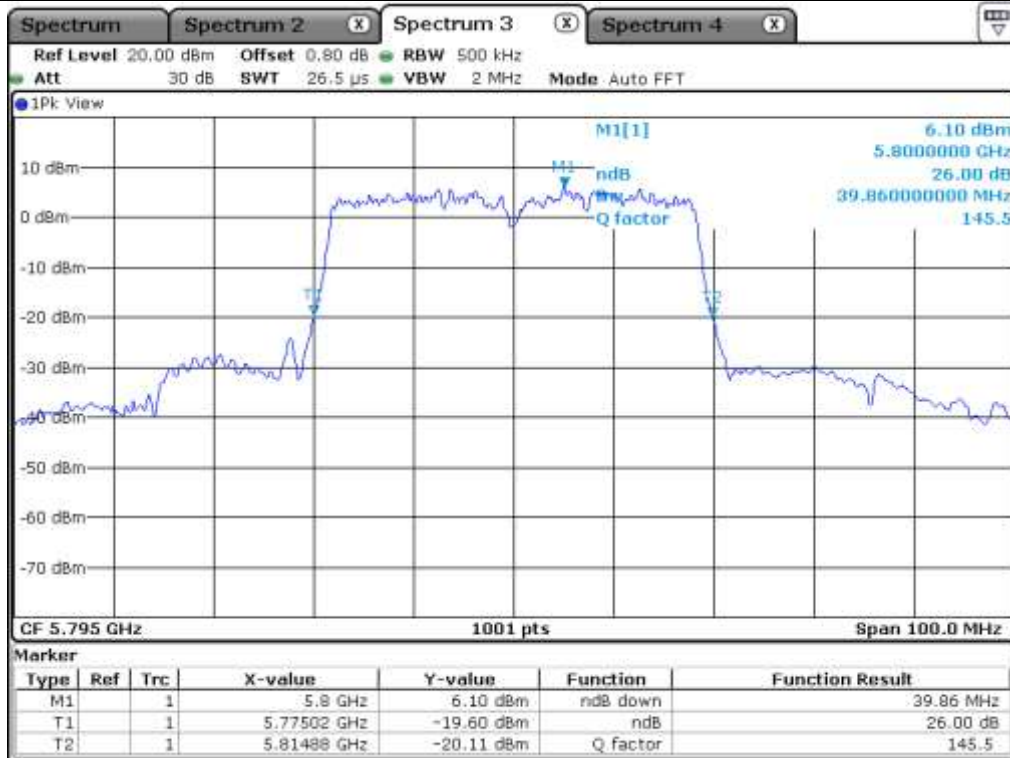

High Channel (5 795 MHz)

7.6.4 Test data for Antenna 3


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Low	5 190.00	40.06
	High	5 230.00	40.96
5 725 ~ 5 850	Low	5 755.00	39.86
	High	5 795.00	40.46




Tested by: Hyung-Kwon, Oh / Engineer

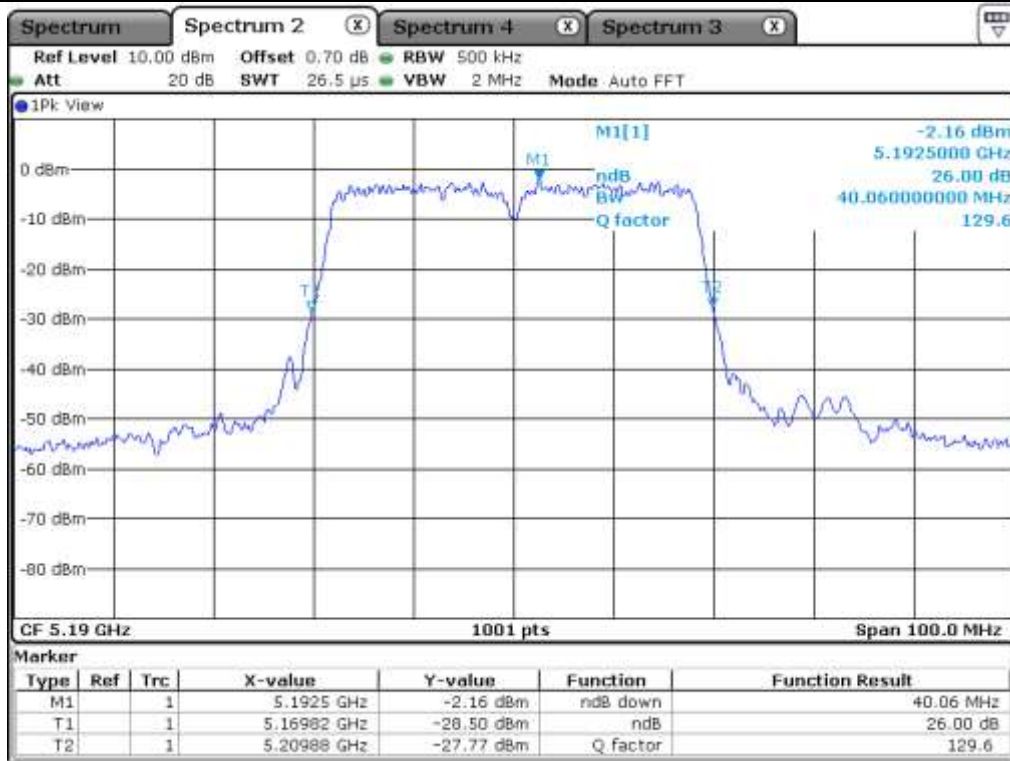


Low Channel (5 190 MHz)

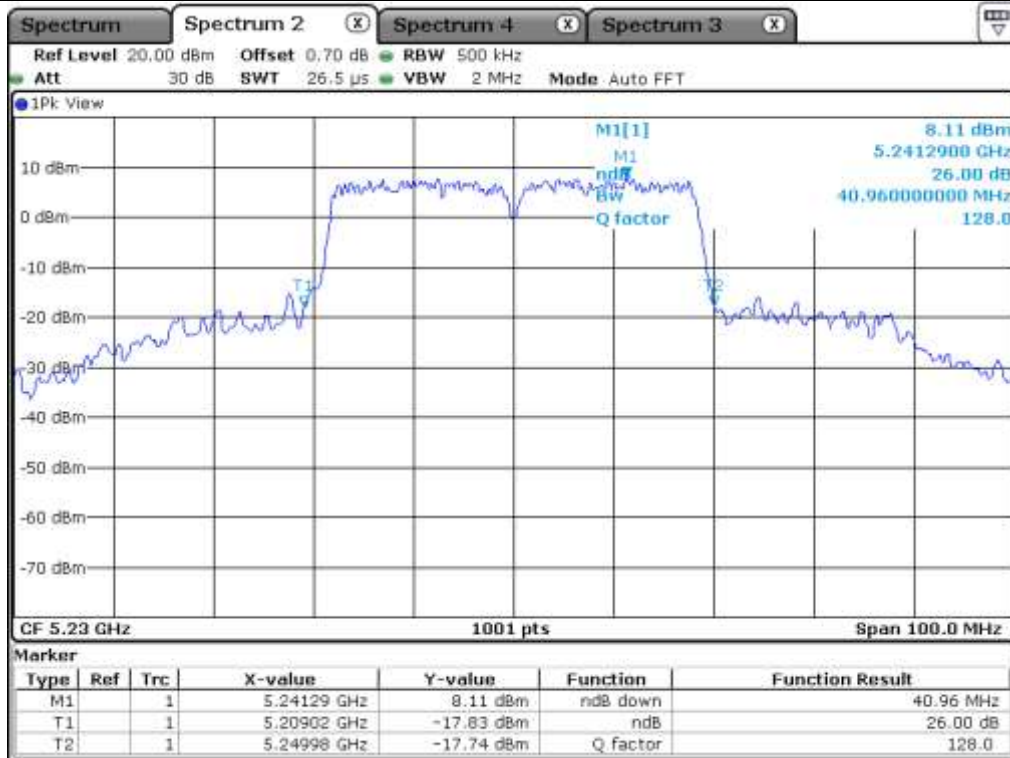

High Channel (5 230 MHz)

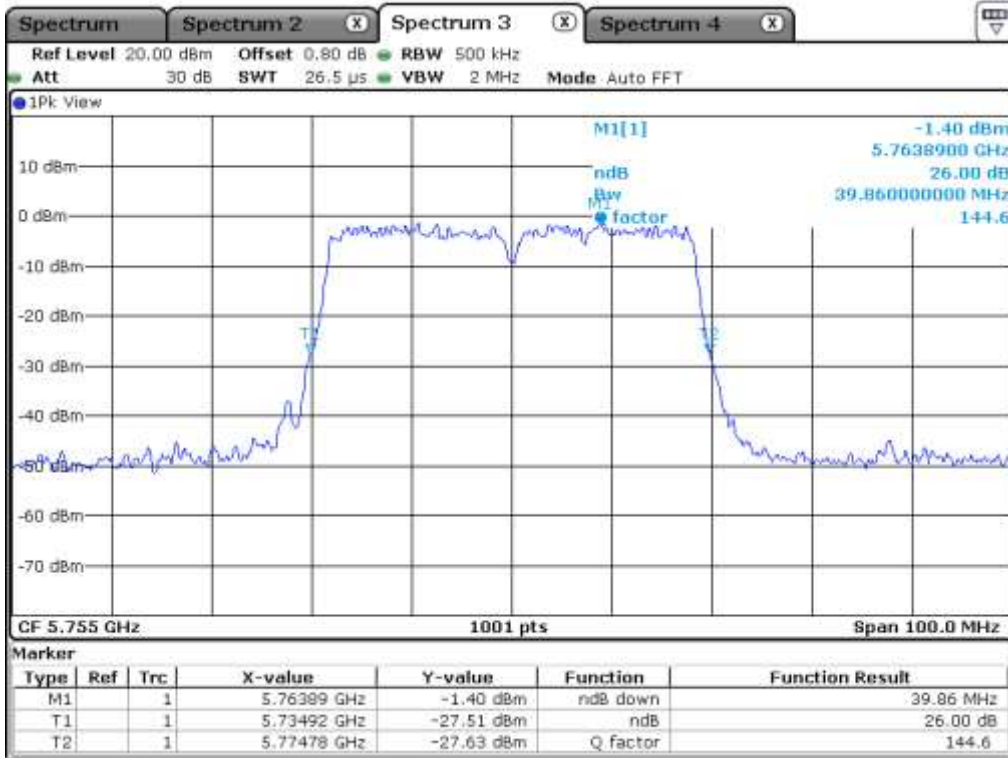

Low Channel (5 755 MHz)

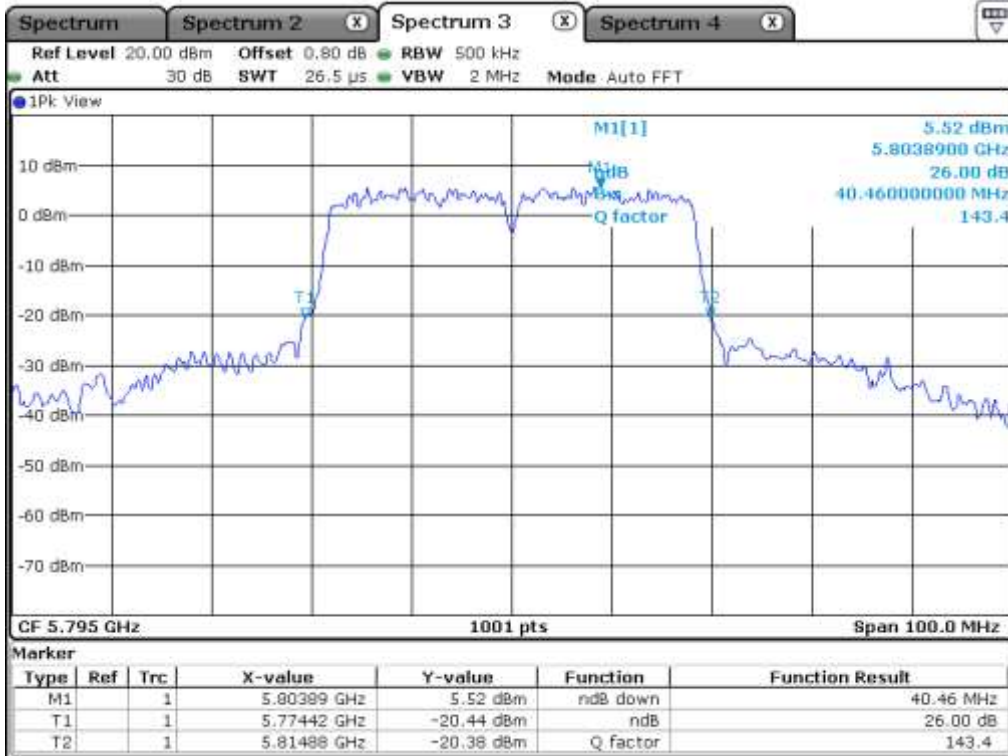

High Channel (5 795 MHz)


7.7 Test data for 802.11ac_VHT80 RLAN Mode


7.7.1 Test data for Antenna 0

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	80.72
5 725 ~ 5 850	Middle	5 775.00	81.12

Tested by: Hyung-Kwon, Oh / Engineer

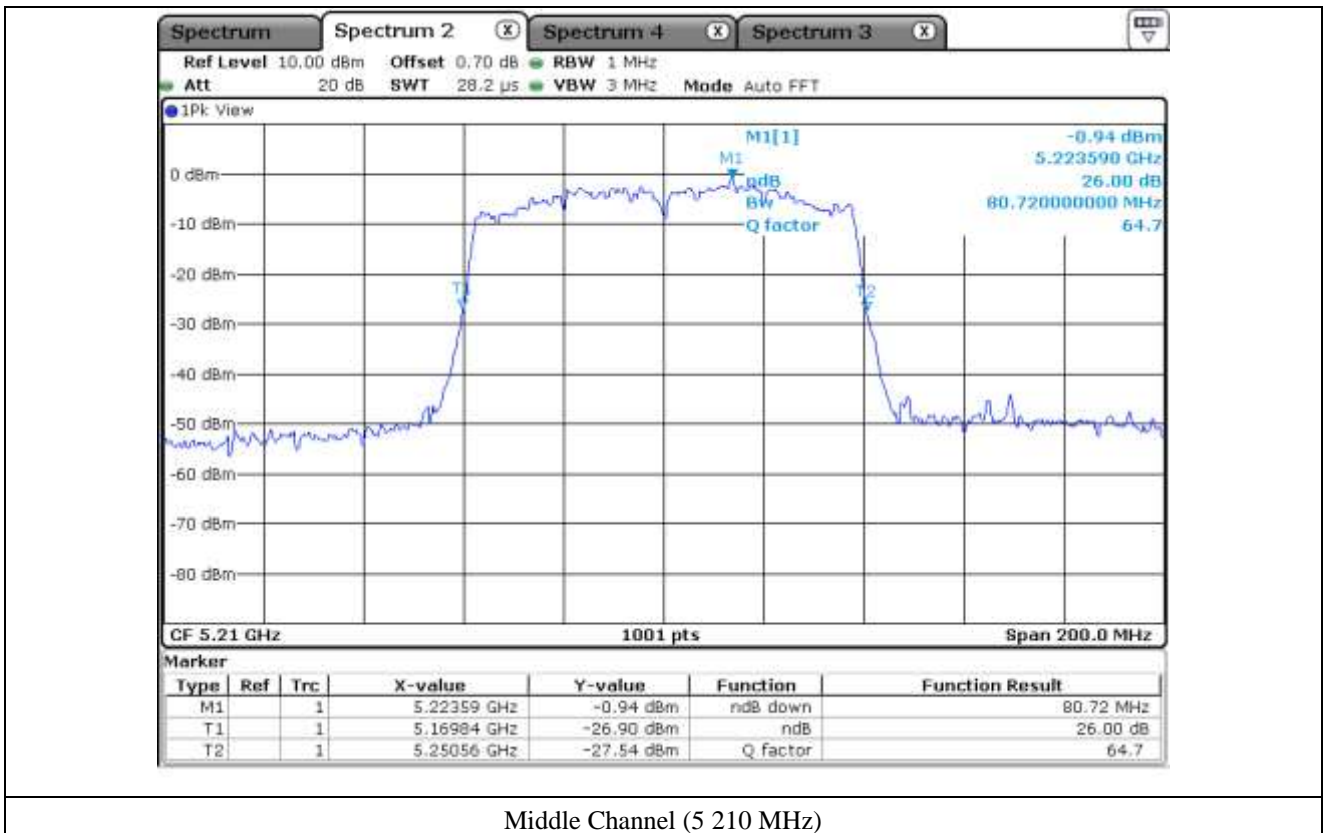

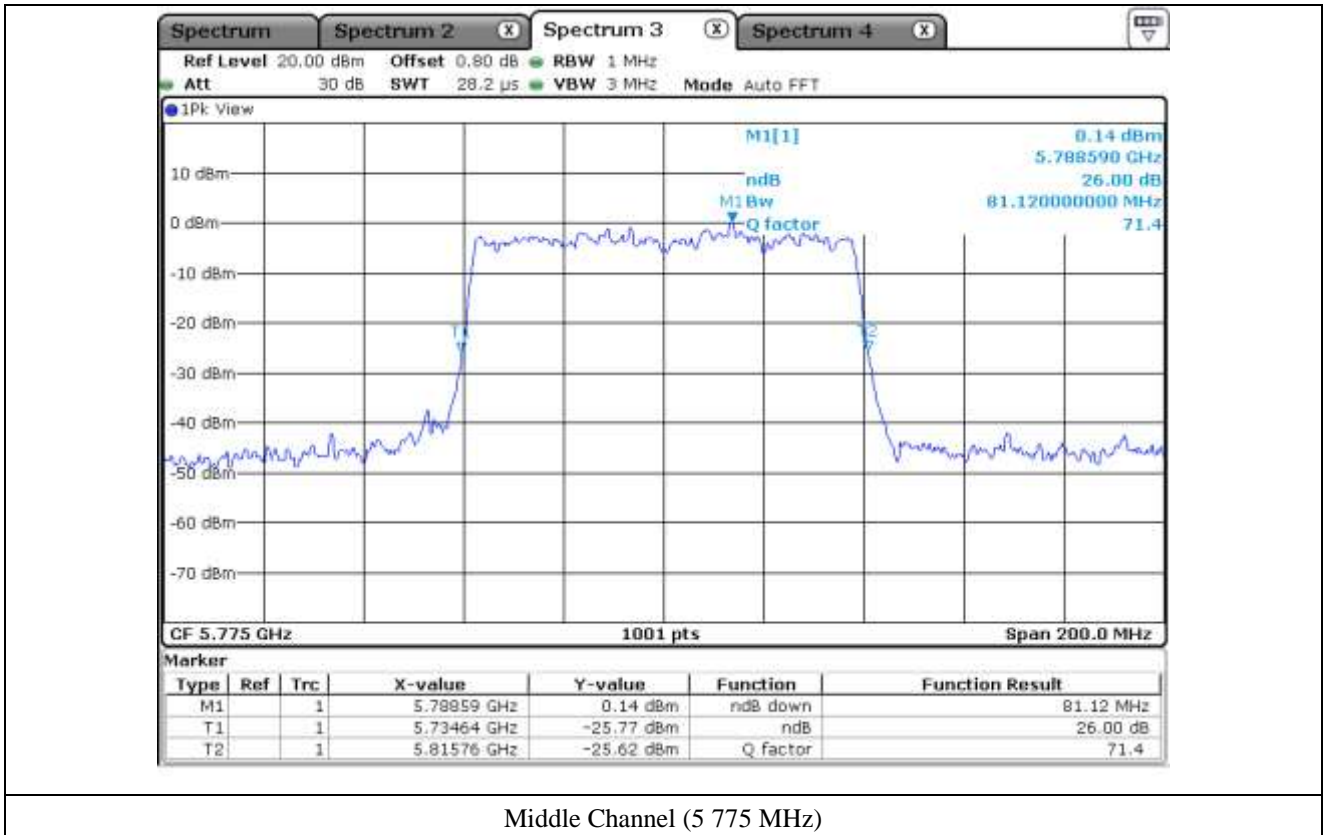


7.7.2 Test data for Antenna 1


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	79.92
5 725 ~ 5 850	Middle	5 775.00	81.92



Tested by: Hyung-Kwon, Oh / Engineer

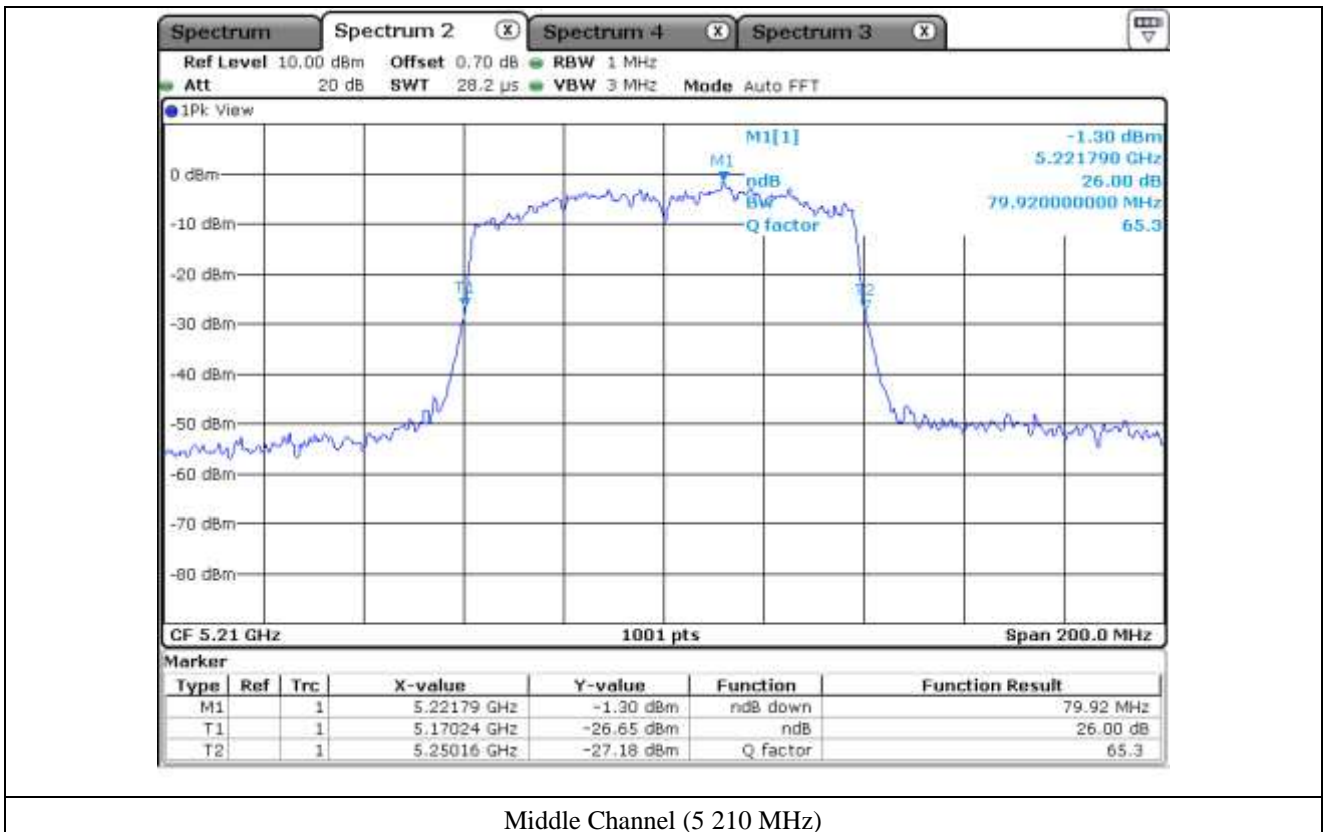

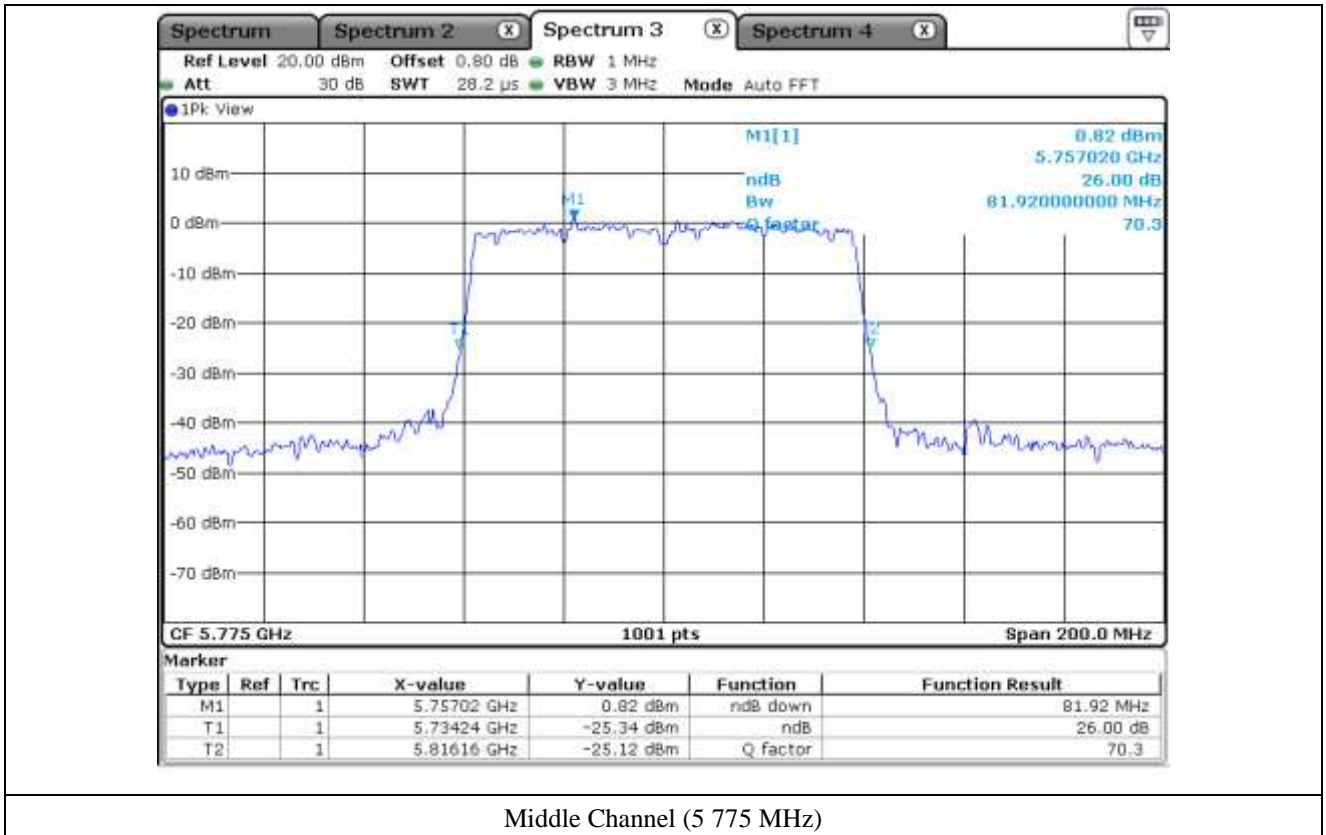


7.7.3 Test data for Antenna 2


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	81.12
5 725 ~ 5 850	Middle	5 775.00	81.12



Tested by: Hyung-Kwon, Oh / Engineer

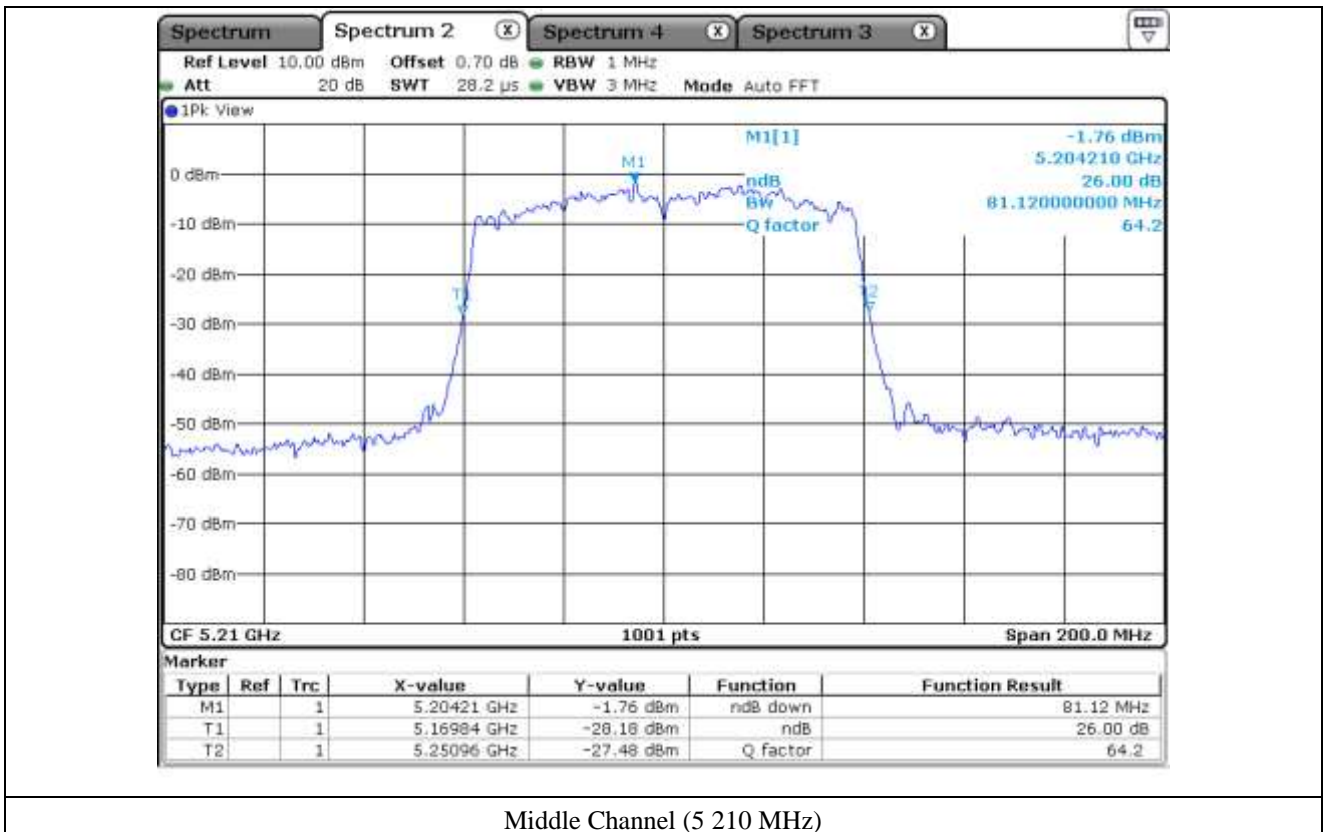

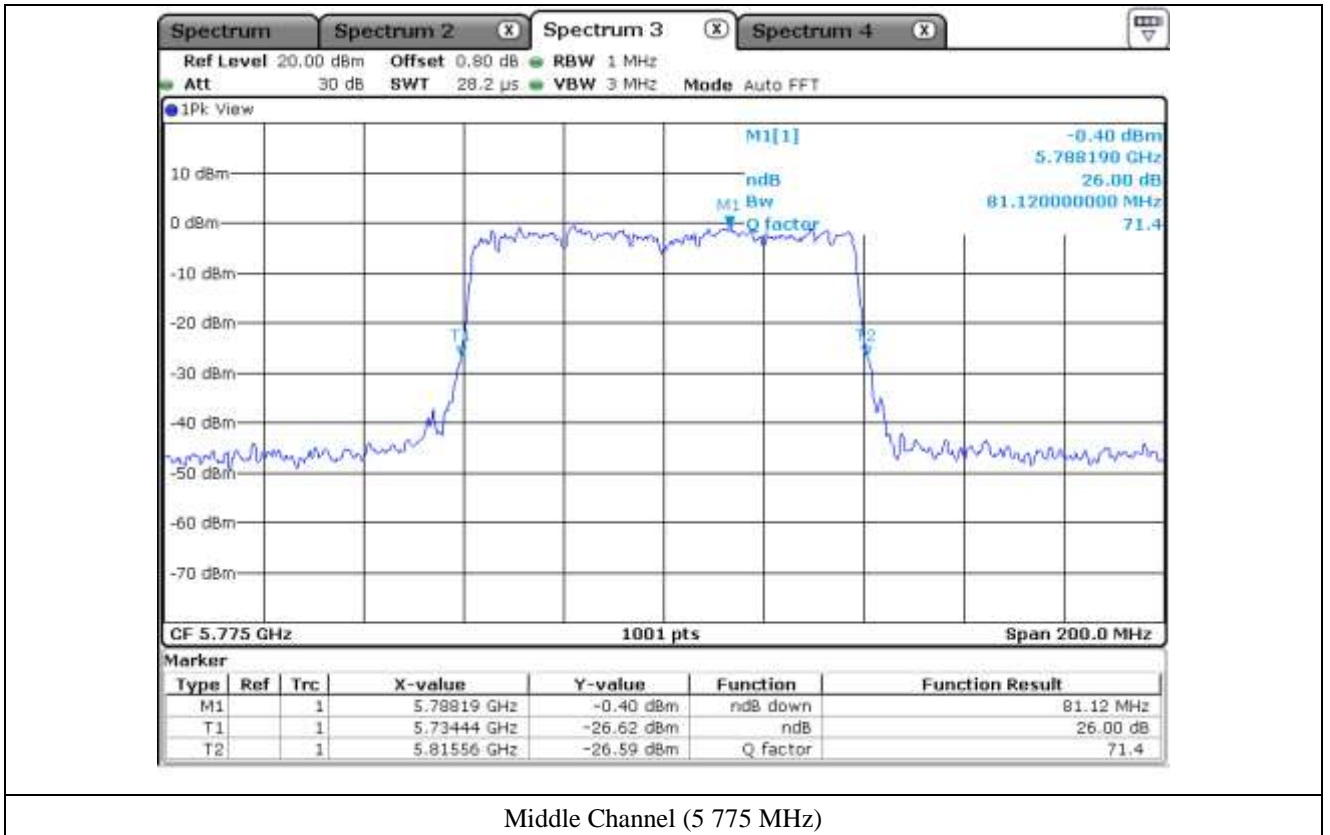



7.7.4 Test data for Antenna 3

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	26 dB Bandwidth (MHz)
5 150 ~ 5 250	Middle	5 210.00	81.12
5 725 ~ 5 850	Middle	5 775.00	81.12

Tested by: Hyung-Kwon, Oh / Engineer

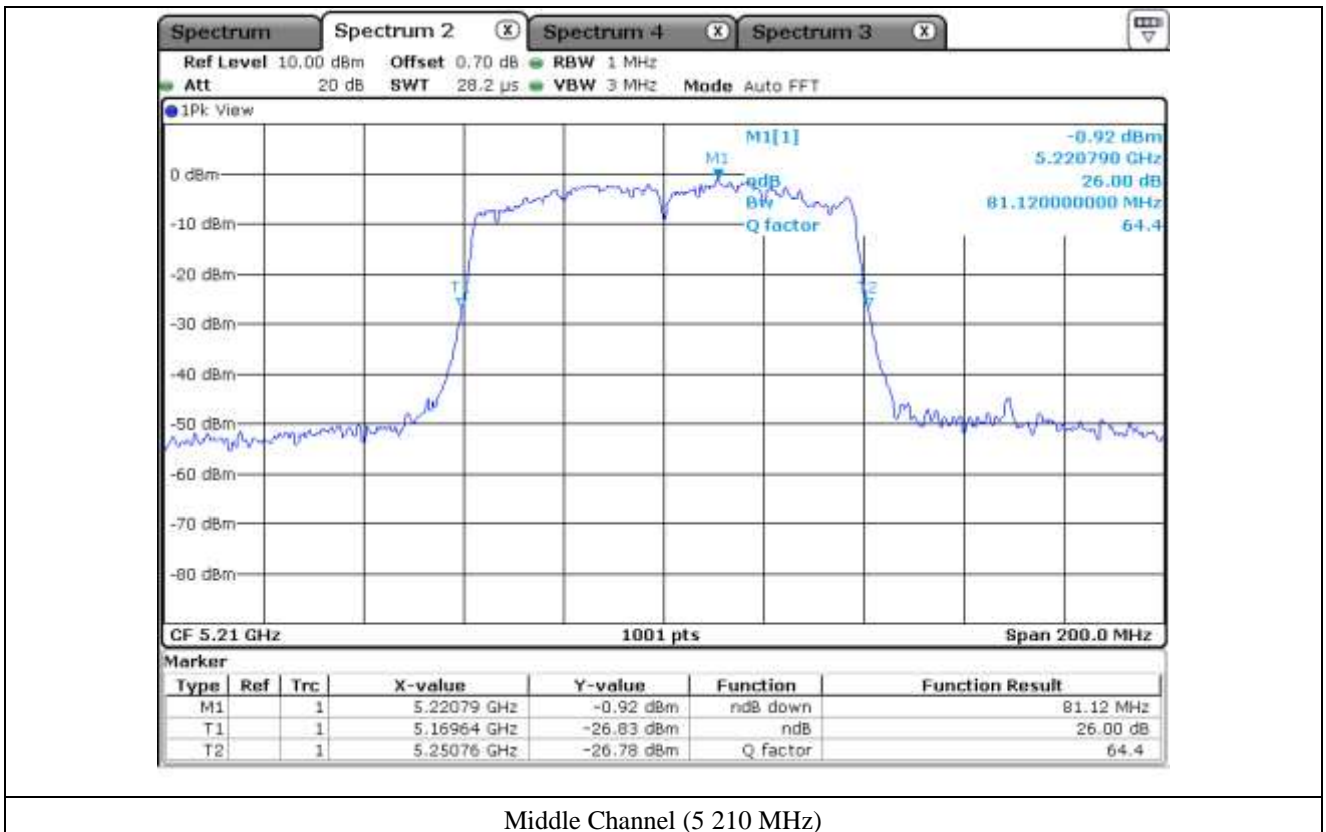

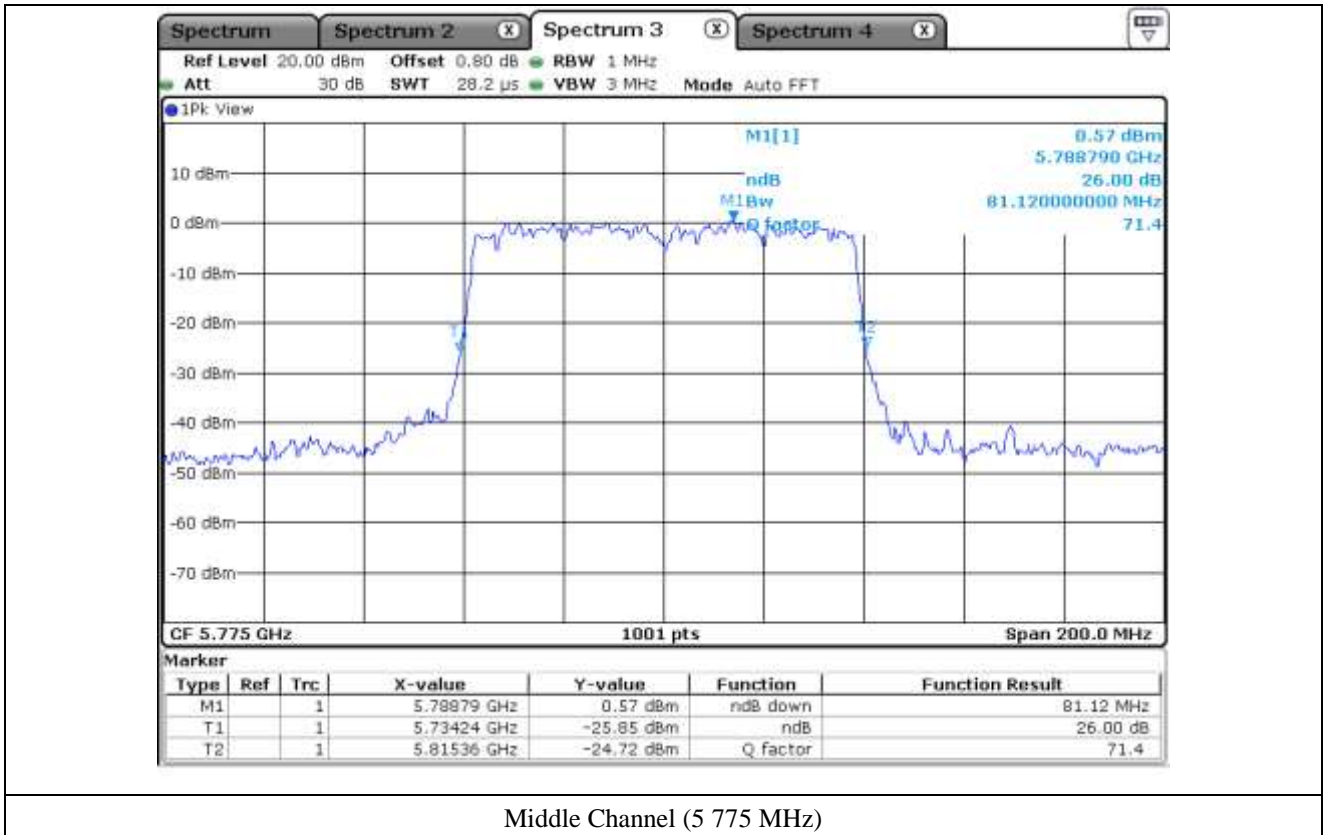

8. 99 % OCCUPIED BANDWIDTH


8.1 Operating environment

Temperature : 24 °C

Relative humidity : 47 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 99 % bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

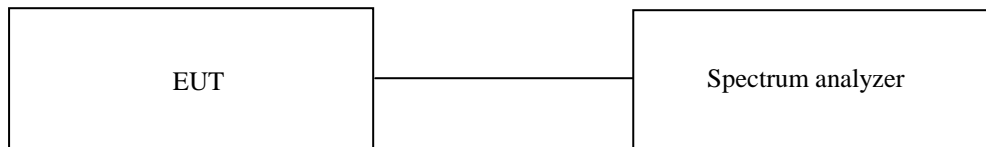

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11a RLAN Mode

8.4.1 Test data for Antenna 0

-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	17.08
	Middle	5 220.00	17.83
	High	5 240.00	17.98
5 725 ~ 5 850	Low	5 745.00	17.03
	Middle	5 795.00	17.18
	High	5 825.00	16.88




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)



Middle Channel (5 220 MHz)

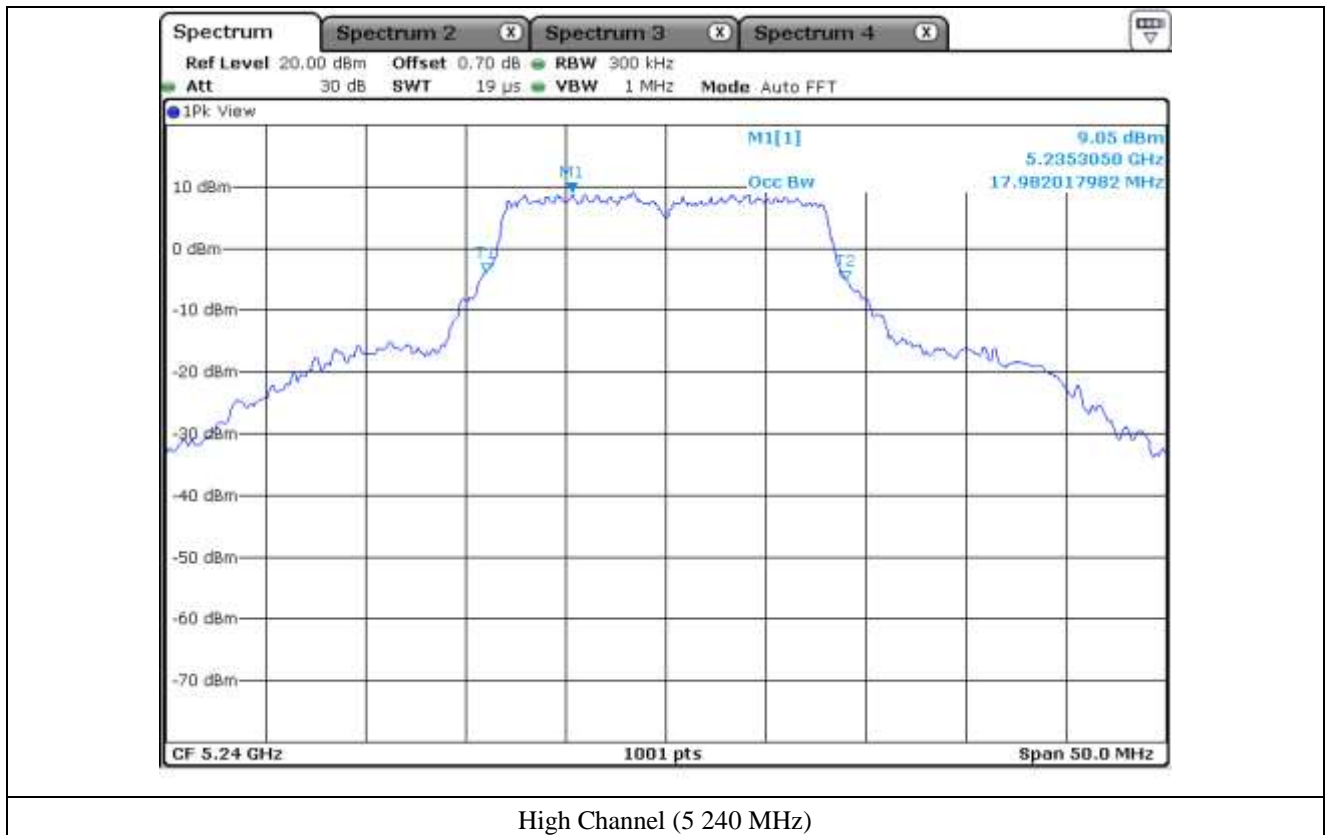

High Channel (5 240 MHz)

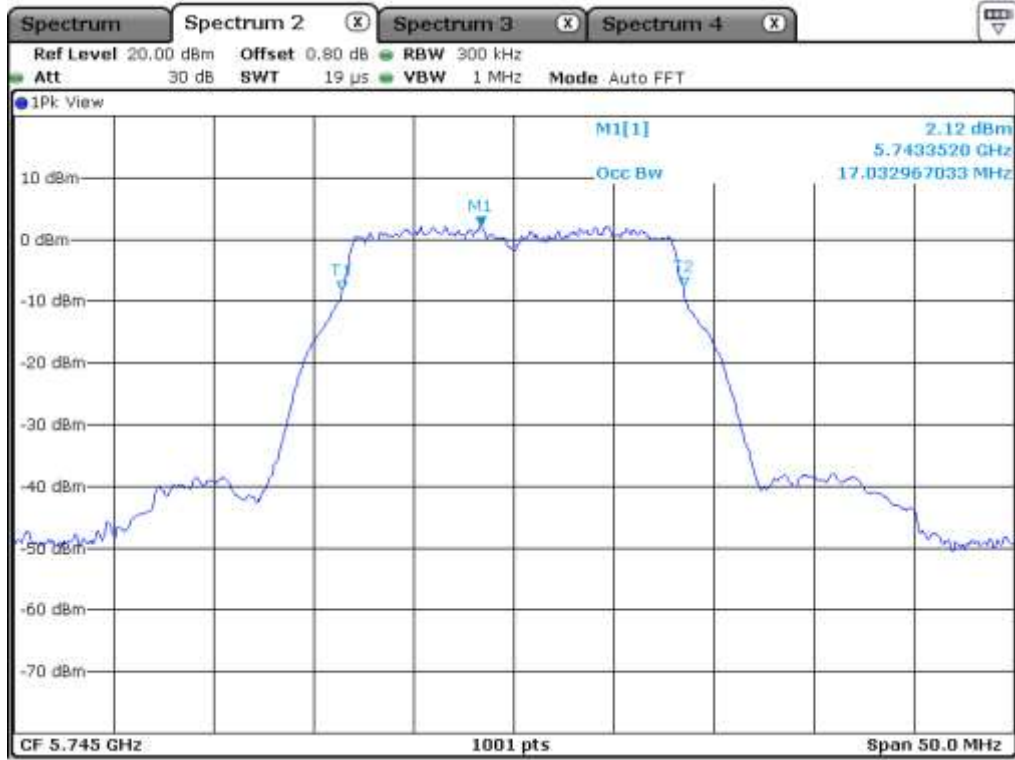

Low Channel (5 745 MHz)



Middle Channel (5 795 MHz)

8.4.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	17.08
	Middle	5 220.00	17.23
	High	5 240.00	17.28
5 725 ~ 5 850	Low	5 745.00	16.83
	Middle	5 795.00	17.18
	High	5 825.00	17.03




Tested by: Hyung-Kwon, Oh / Engineer

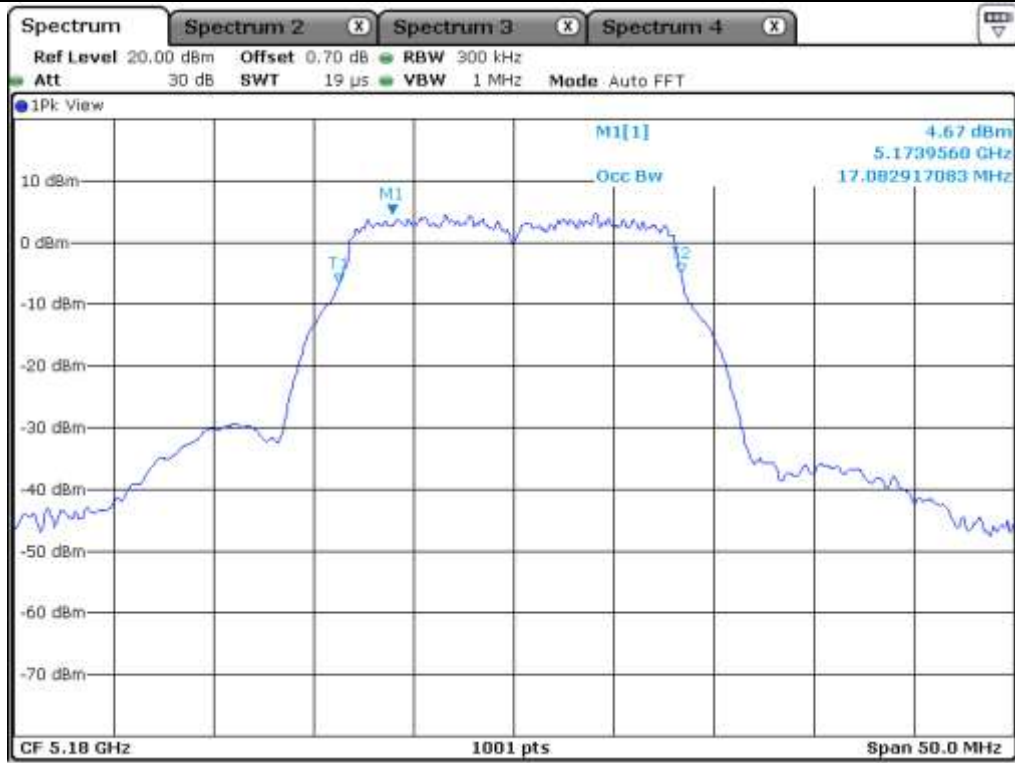


Low Channel (5 180 MHz)




Middle Channel (5 220 MHz)

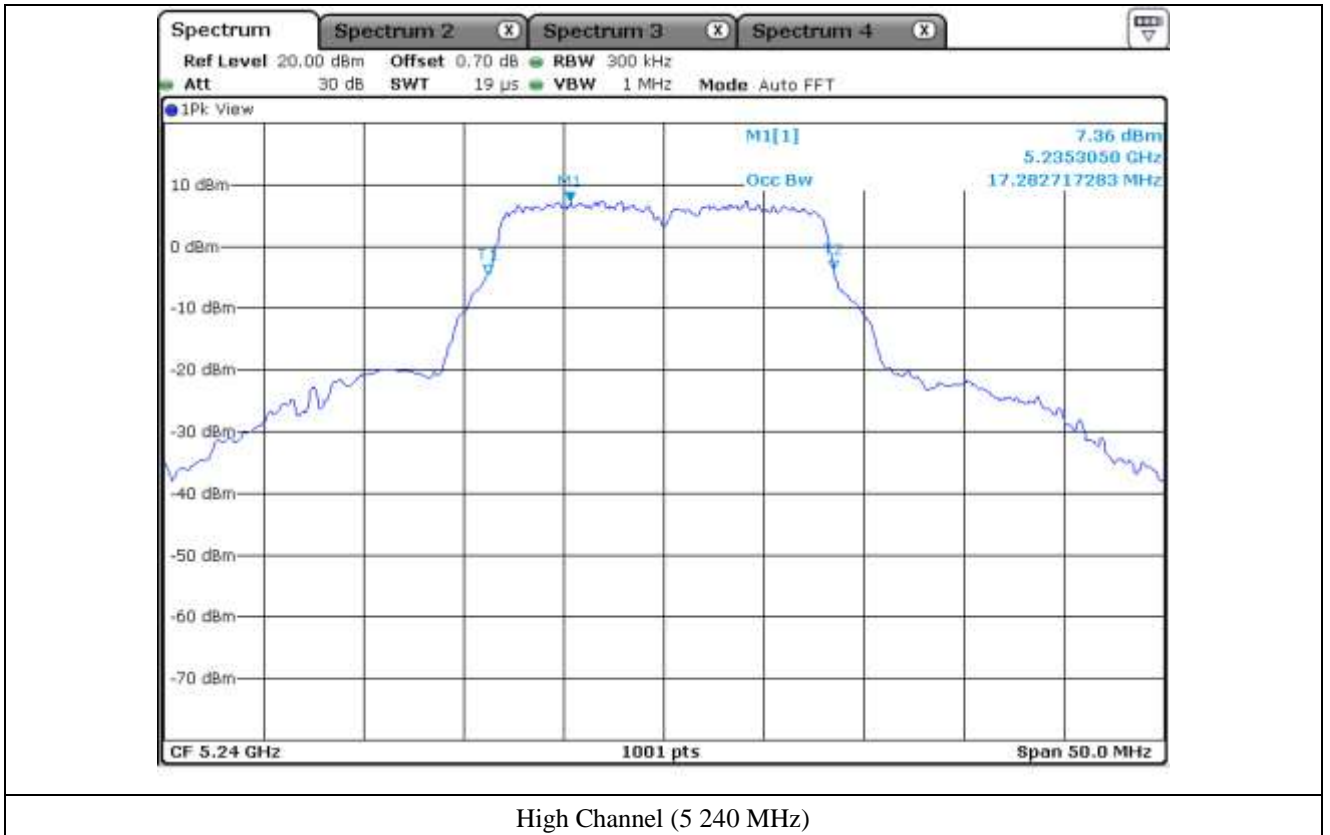

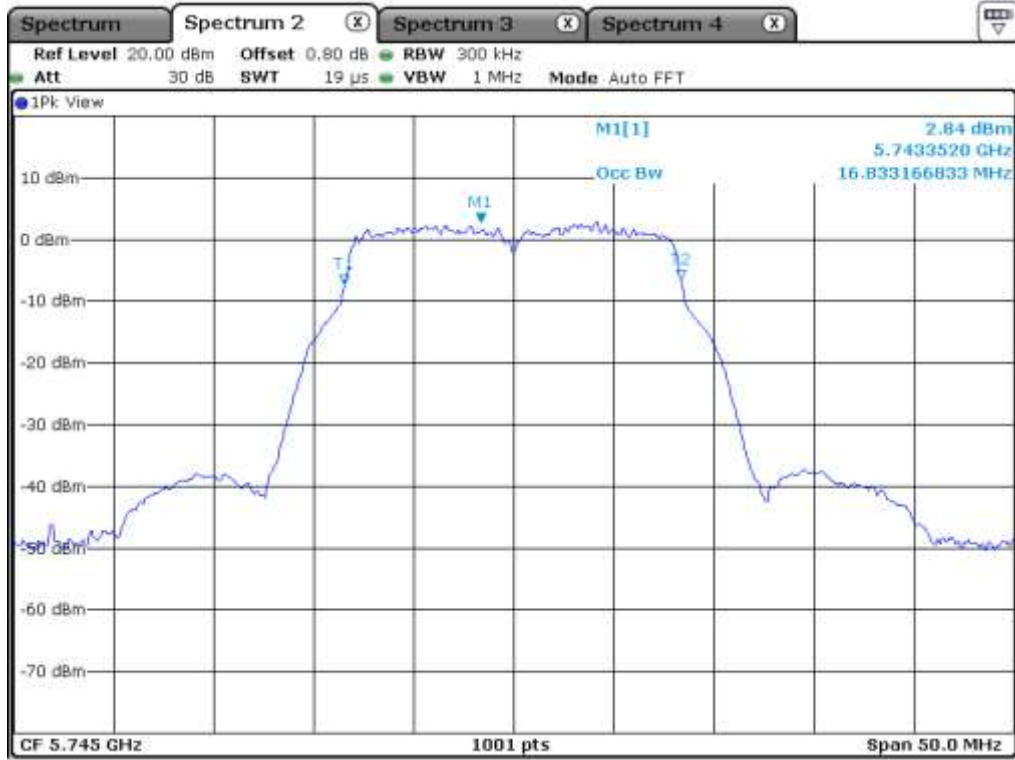

Low Channel (5 745 MHz)

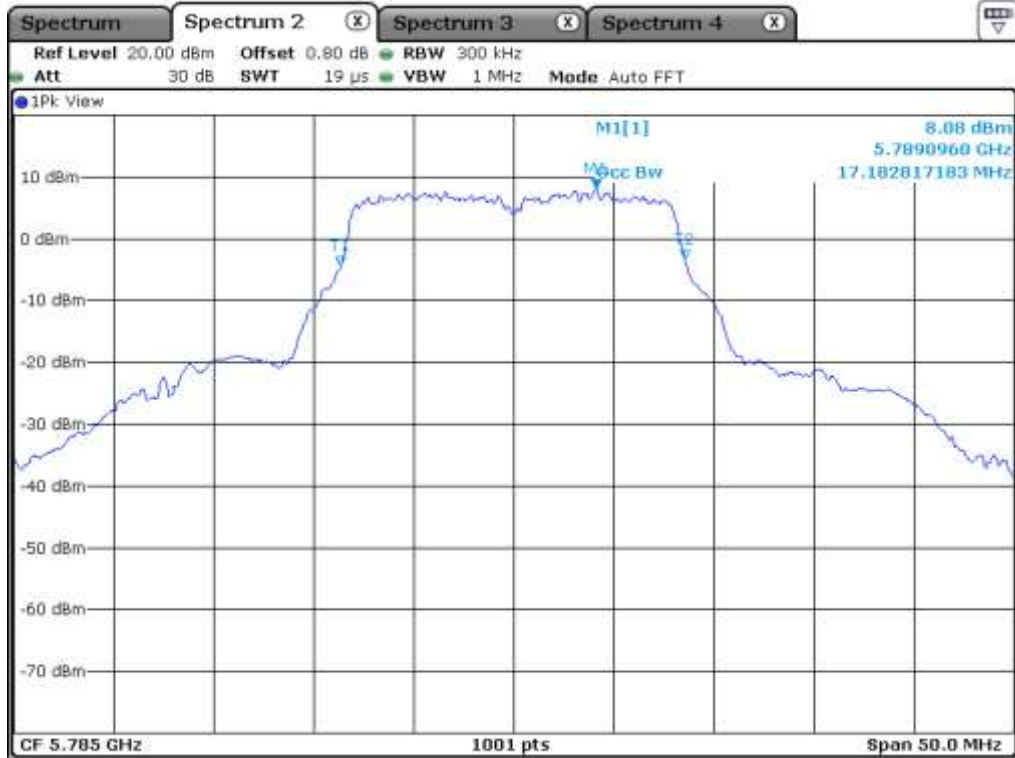

Middle Channel (5 795 MHz)

8.4.3 Test data for Antenna 2

-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.88
	Middle	5 220.00	16.98
	High	5 240.00	17.03
5 725 ~ 5 850	Low	5 745.00	16.73
	Middle	5 795.00	17.18
	High	5 825.00	16.88




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)



Middle Channel (5 220 MHz)

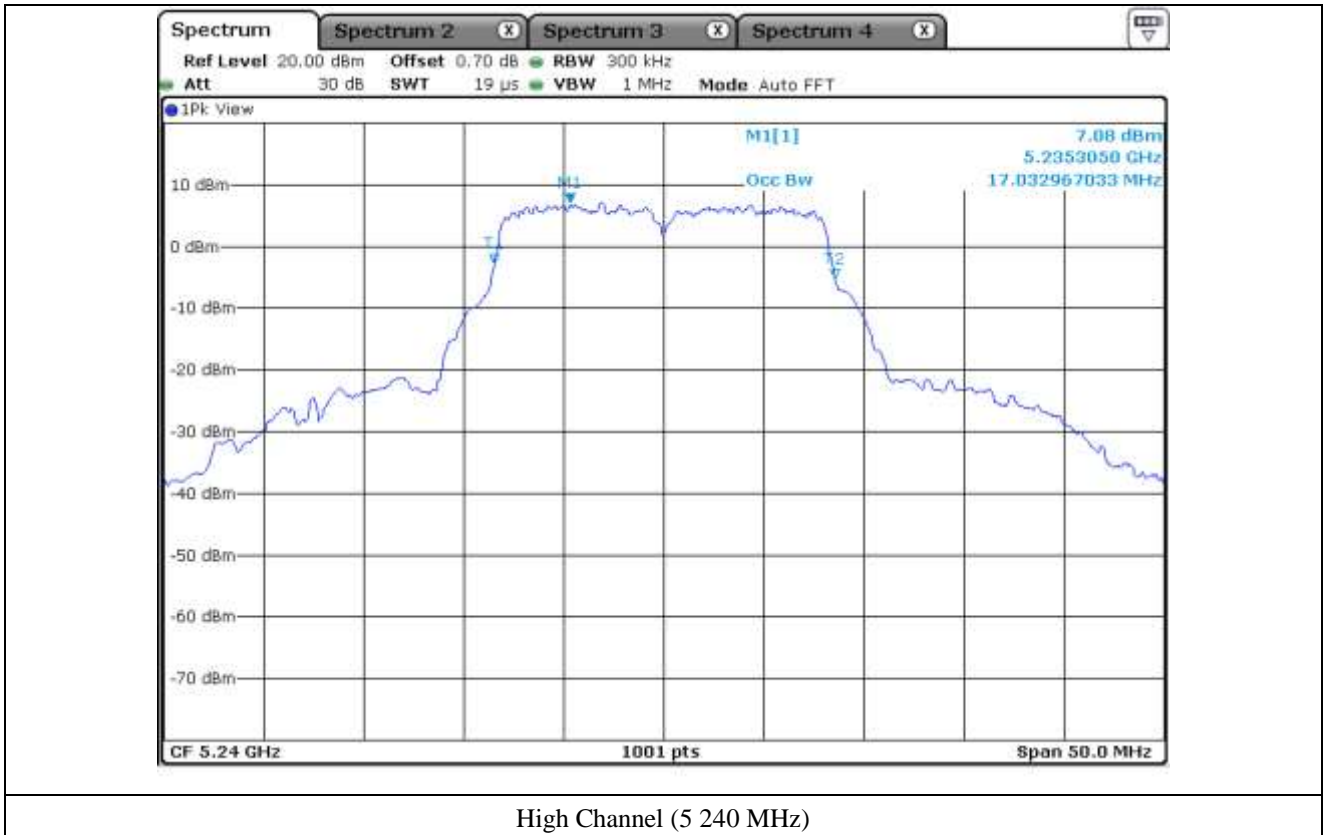

High Channel (5 240 MHz)

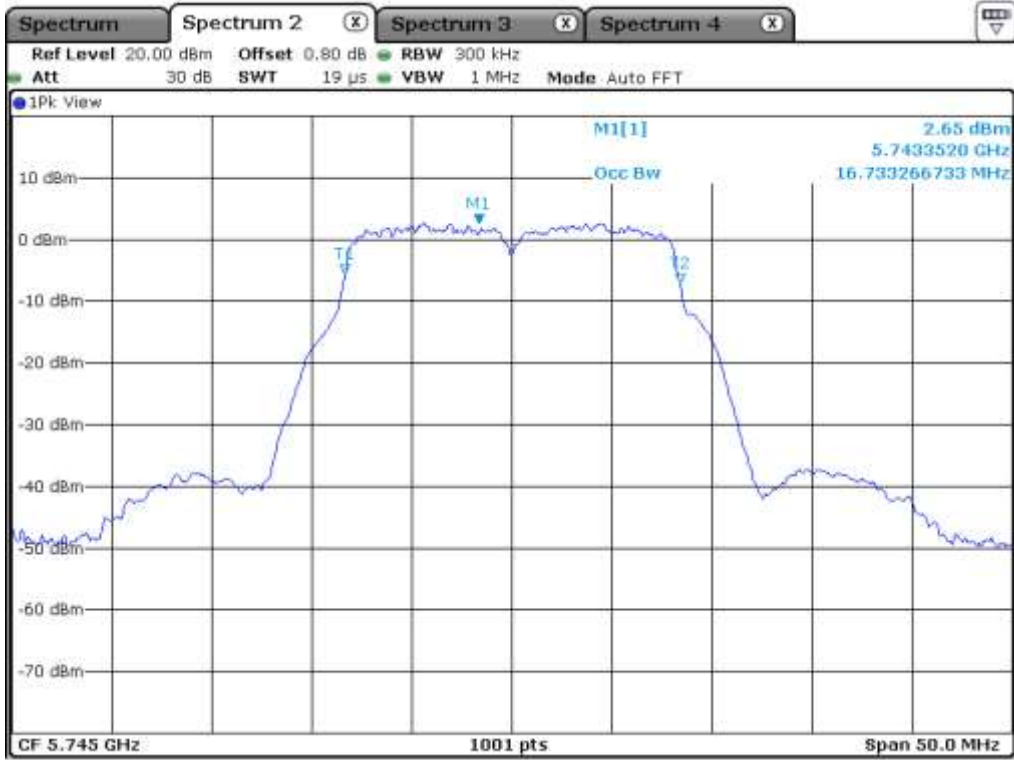

Low Channel (5.745 MHz)



Middle Channel (5.795 MHz)



High Channel (5 825 MHz)

8.4.4 Test data for Antenna 3

-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.88
	Middle	5 220.00	17.58
	High	5 240.00	17.58
5 725 ~ 5 850	Low	5 745.00	16.83
	Middle	5 795.00	17.28
	High	5 825.00	16.88




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)

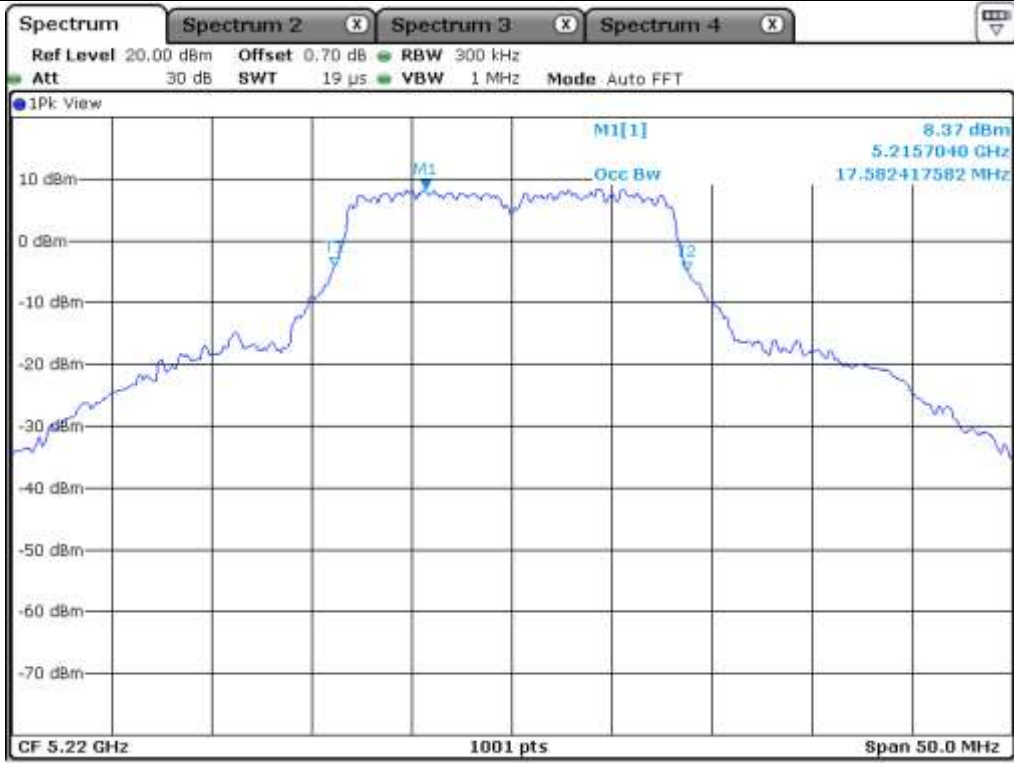


Middle Channel (5 220 MHz)

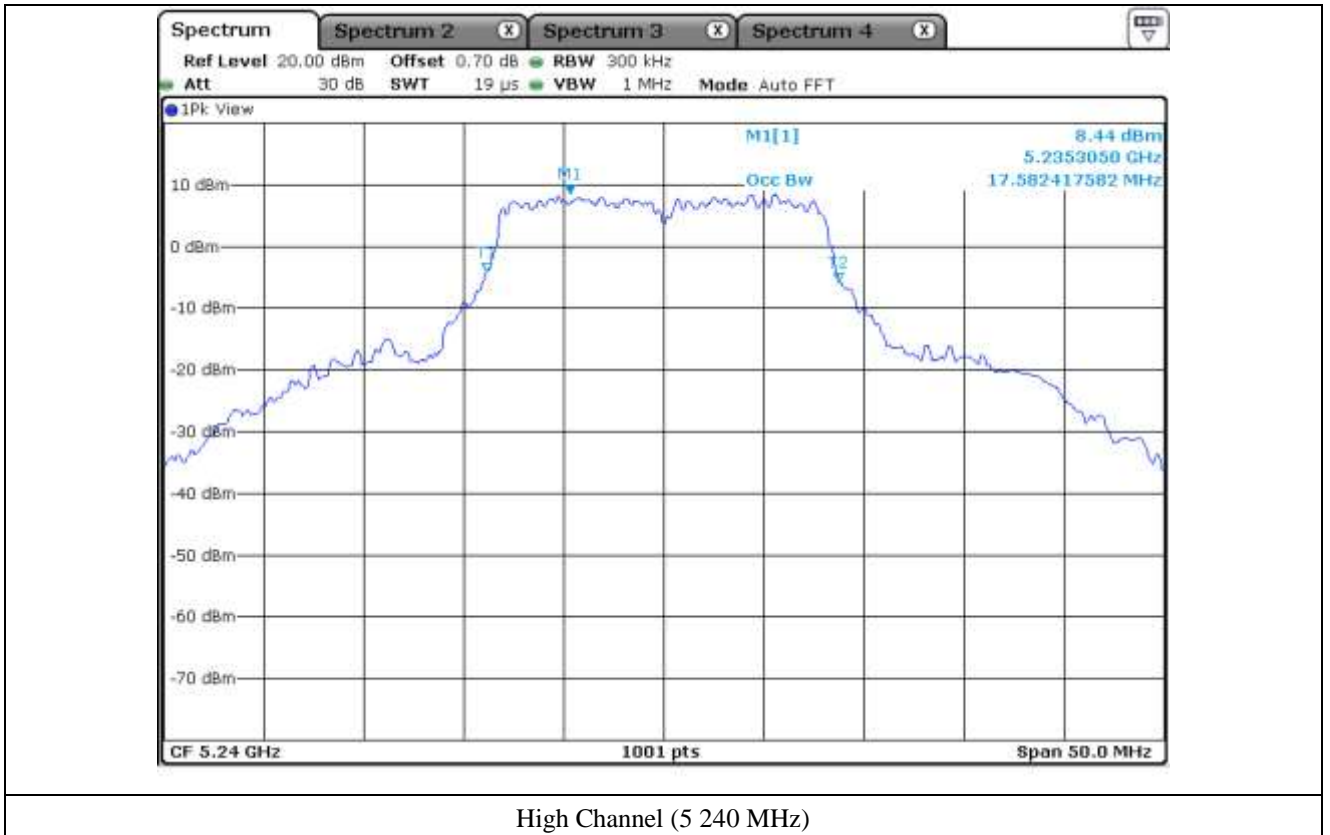


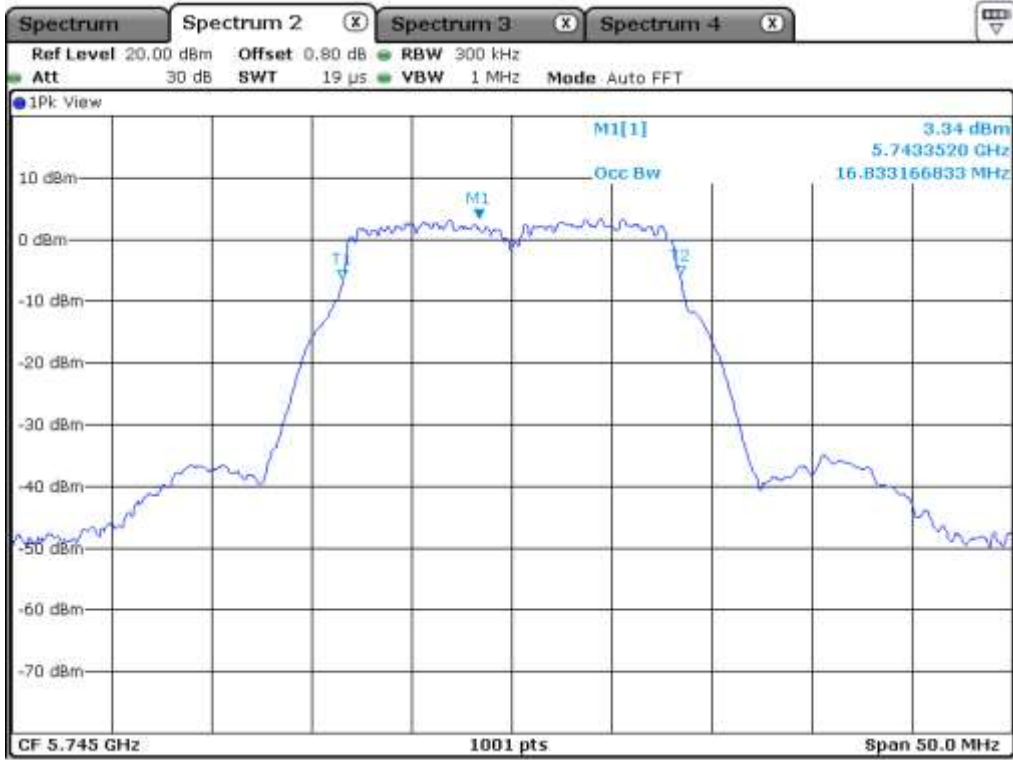

Low Channel (5.745 MHz)

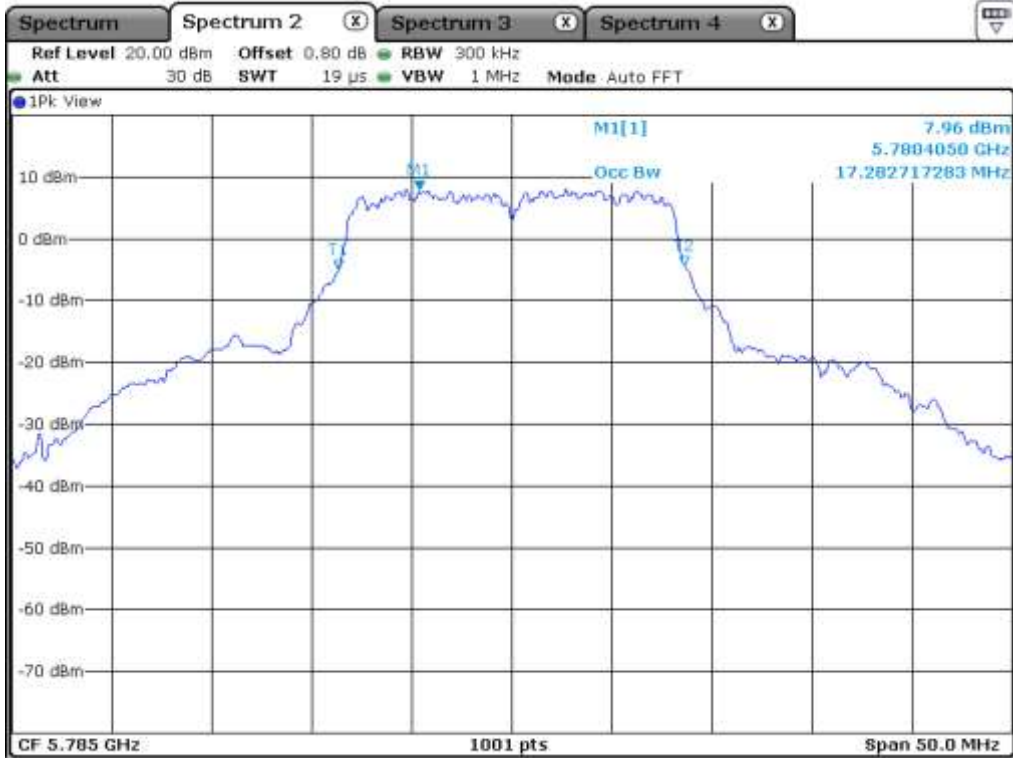

Middle Channel (5.795 MHz)

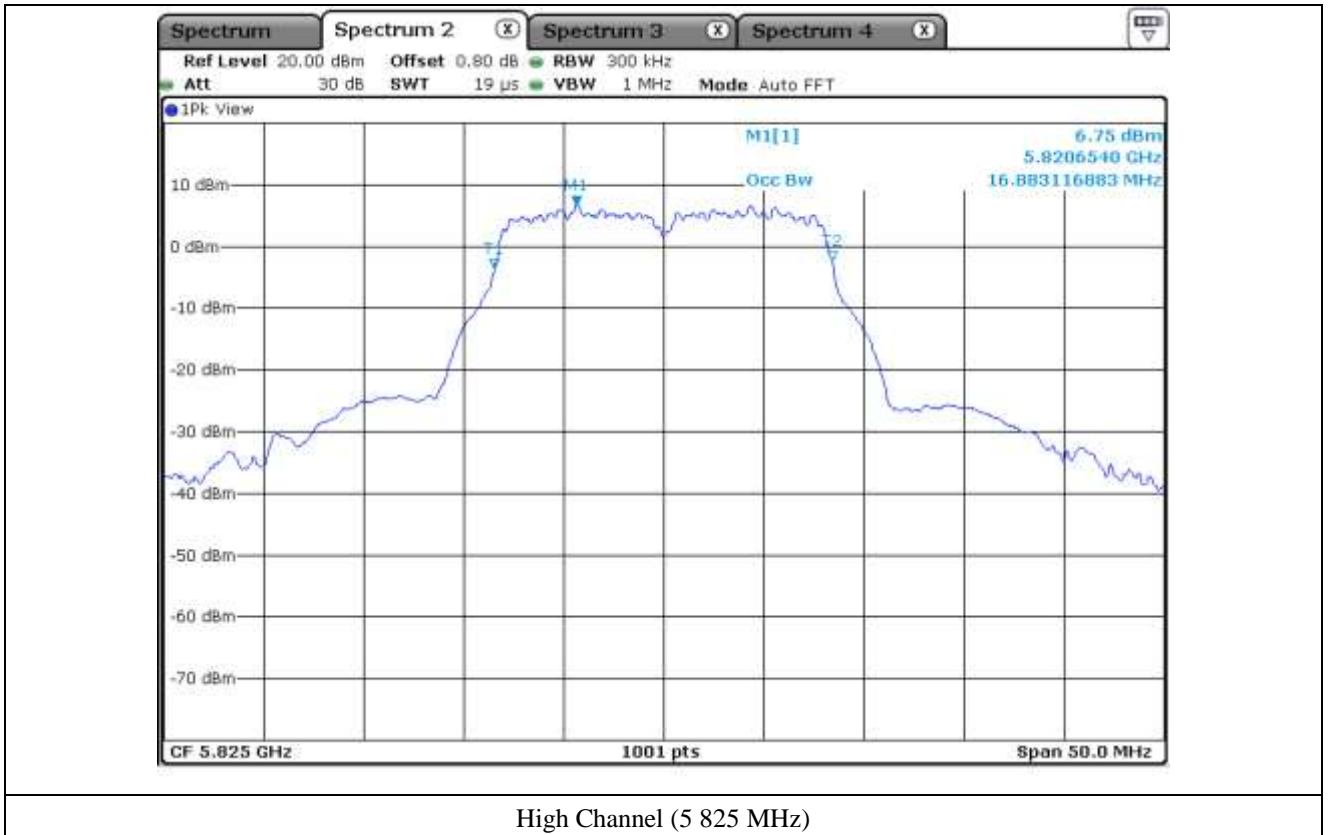

High Channel (5 825 MHz)

8.5 Test data for 802.11n_HT20 RLAN Mode

8.5.1 Test data for Antenna 0

-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.98
	Middle	5 220.00	17.68
	High	5 240.00	17.68
5 725 ~ 5 850	Low	5 745.00	18.03
	Middle	5 795.00	18.48
	High	5 825.00	18.23




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)




Middle Channel (5 220 MHz)

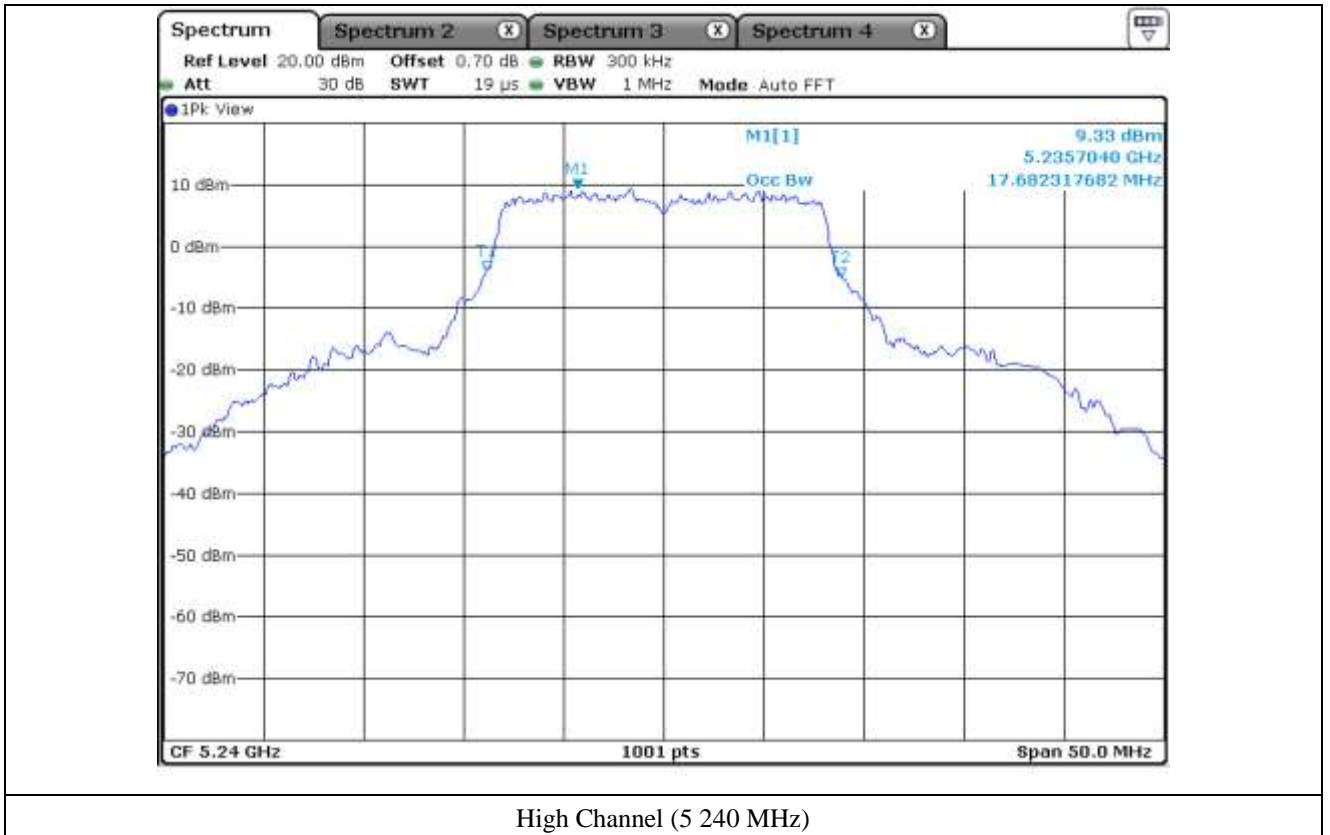


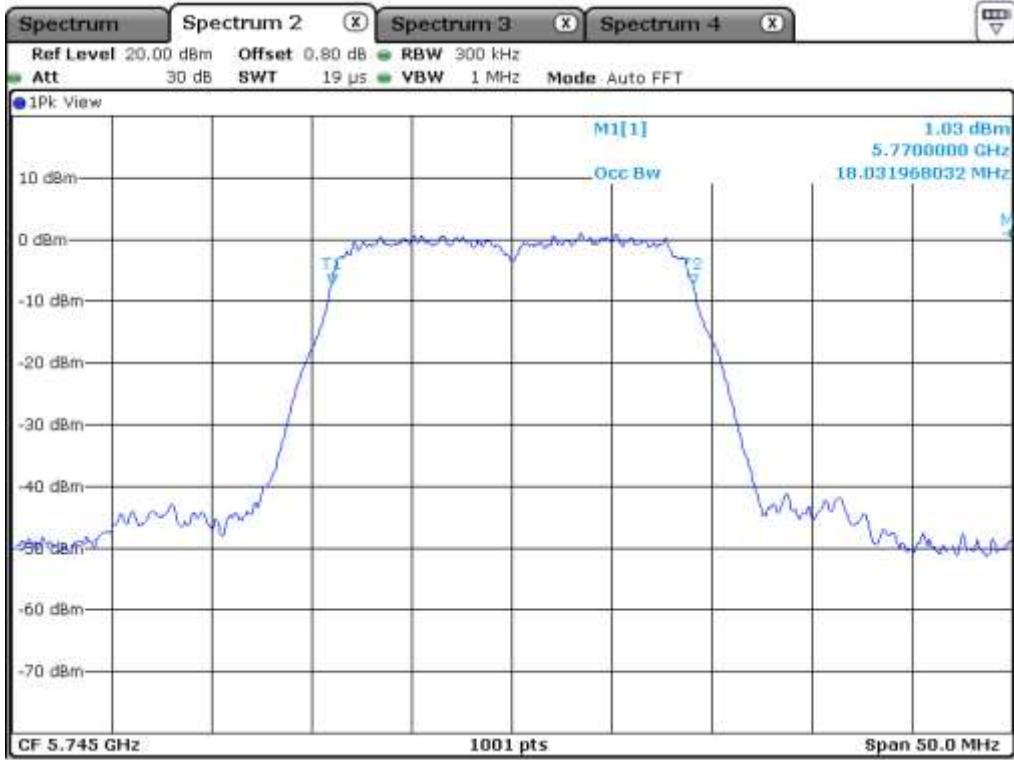

Low Channel (5.745 MHz)

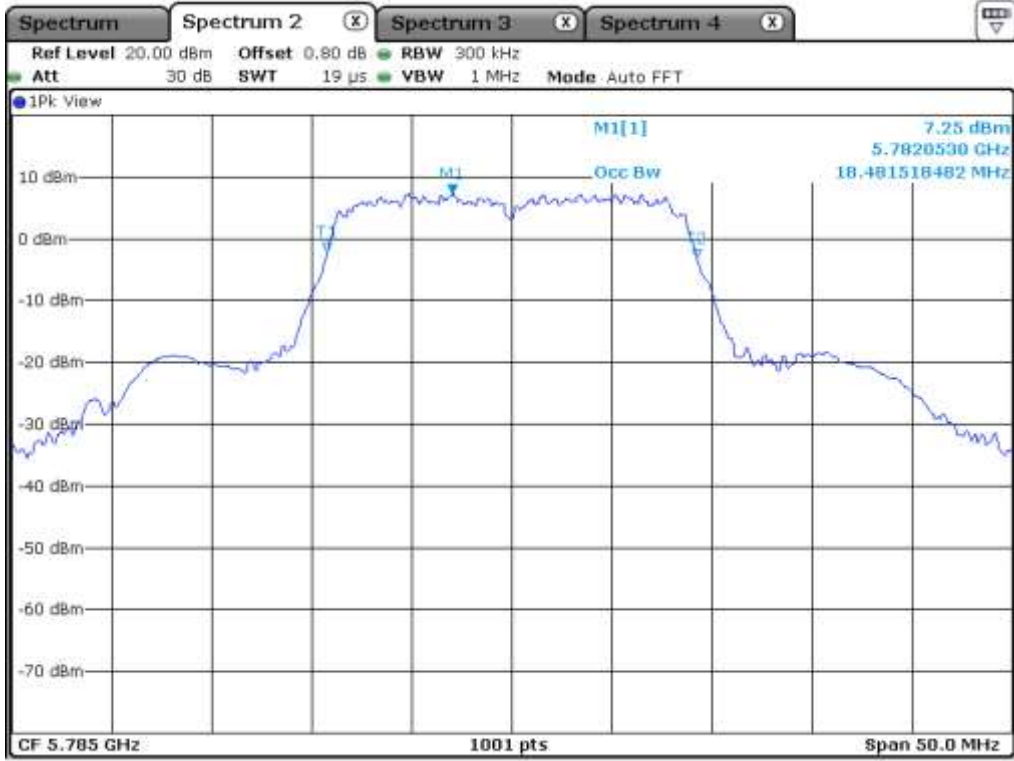

Middle Channel (5.795 MHz)

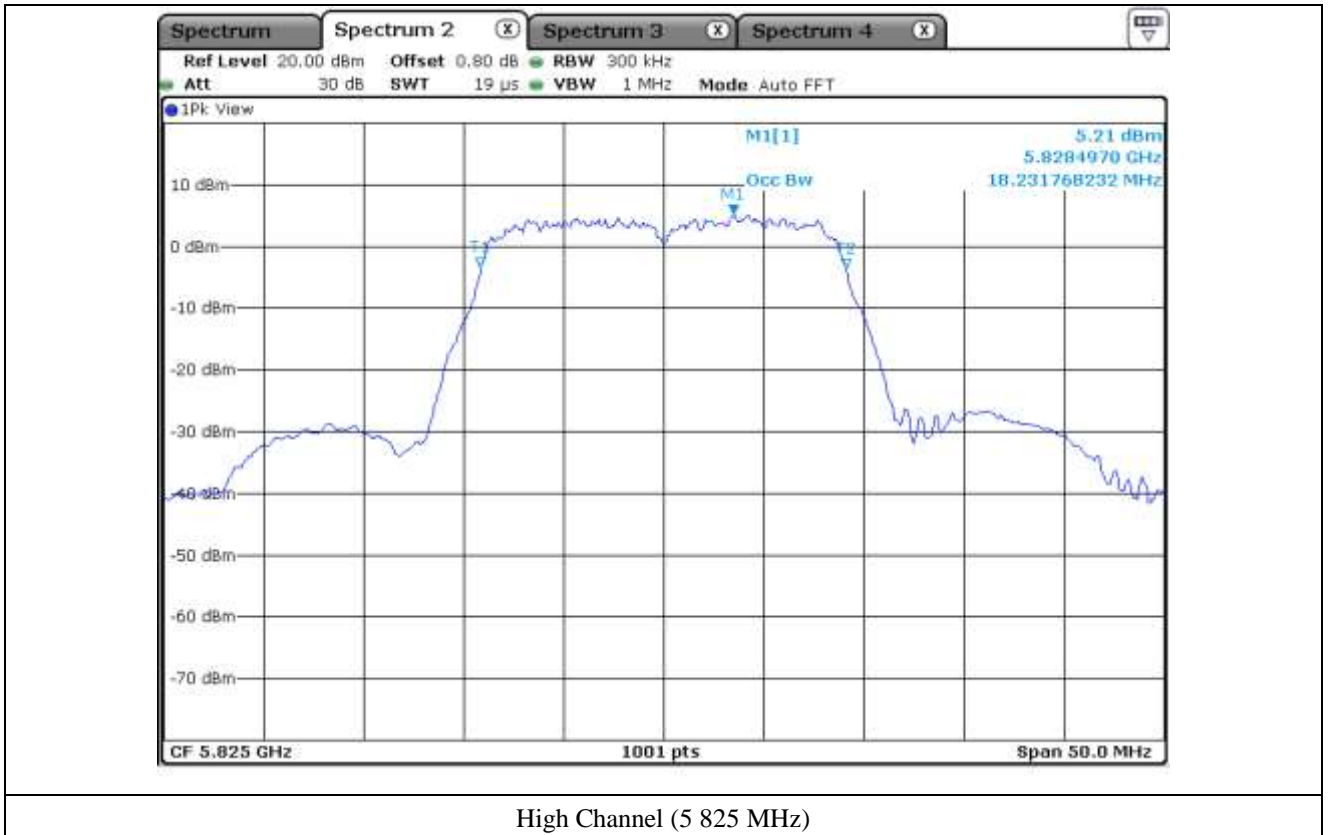

8.5.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.98
	Middle	5 220.00	17.23
	High	5 240.00	17.23
5 725 ~ 5 850	Low	5 745.00	17.98
	Middle	5 795.00	18.23
	High	5 825.00	18.03



Tested by: Hyung-Kwon, Oh / Engineer

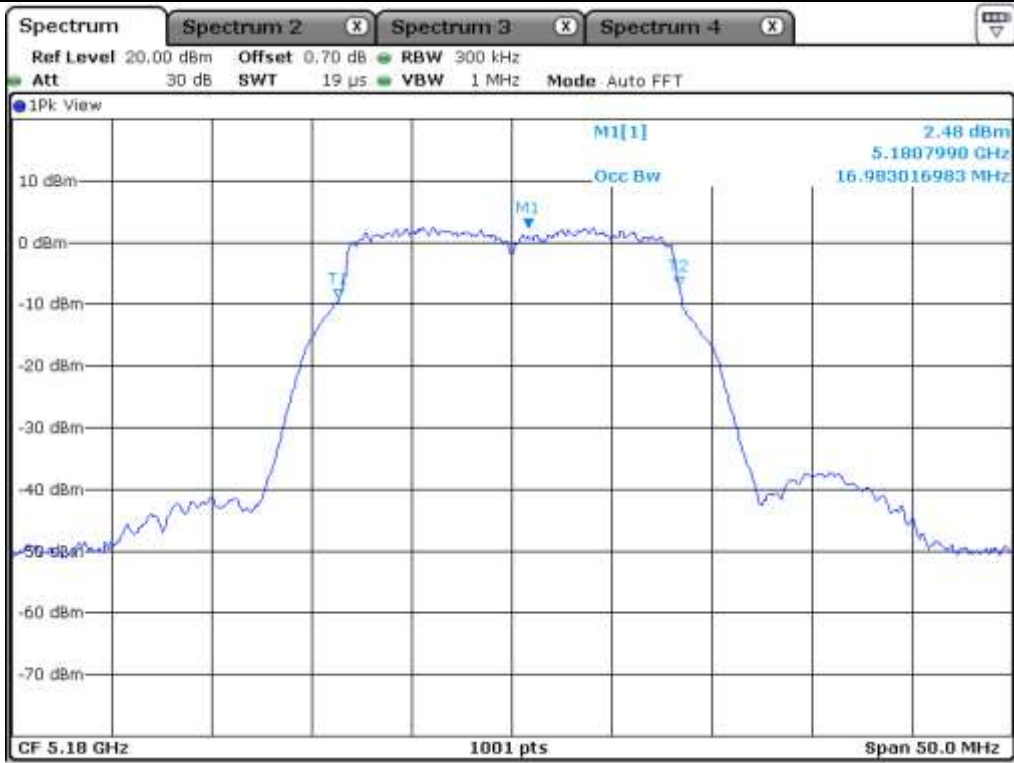


Low Channel (5 180 MHz)




Middle Channel (5 220 MHz)




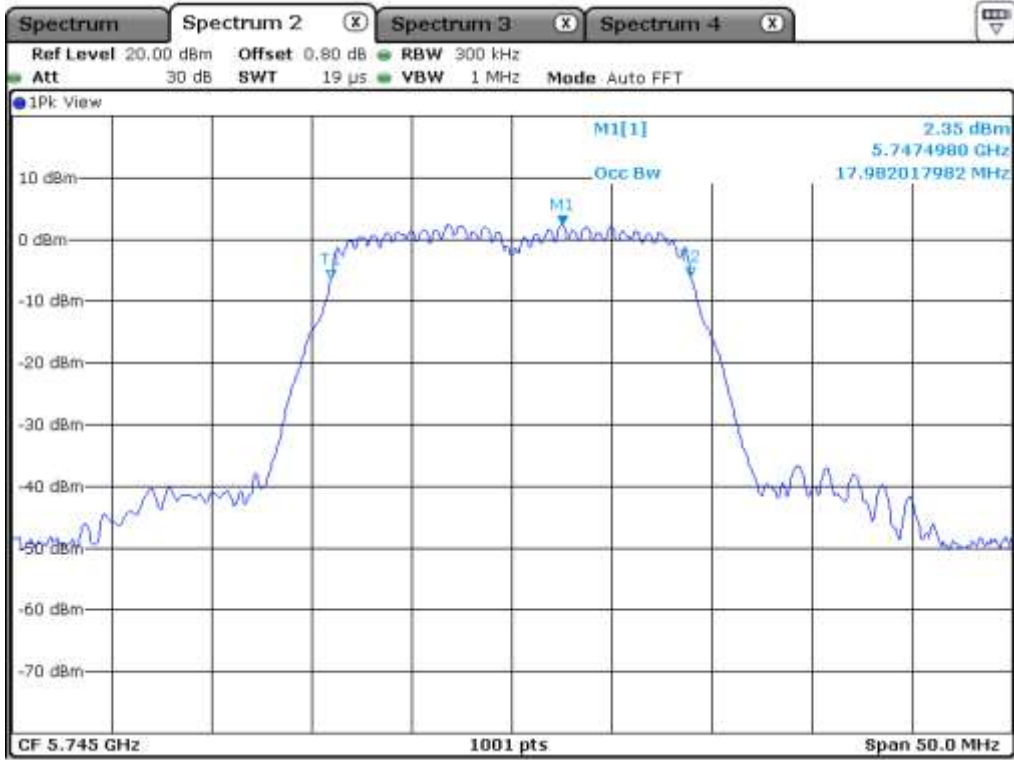

Low Channel (5.745 MHz)

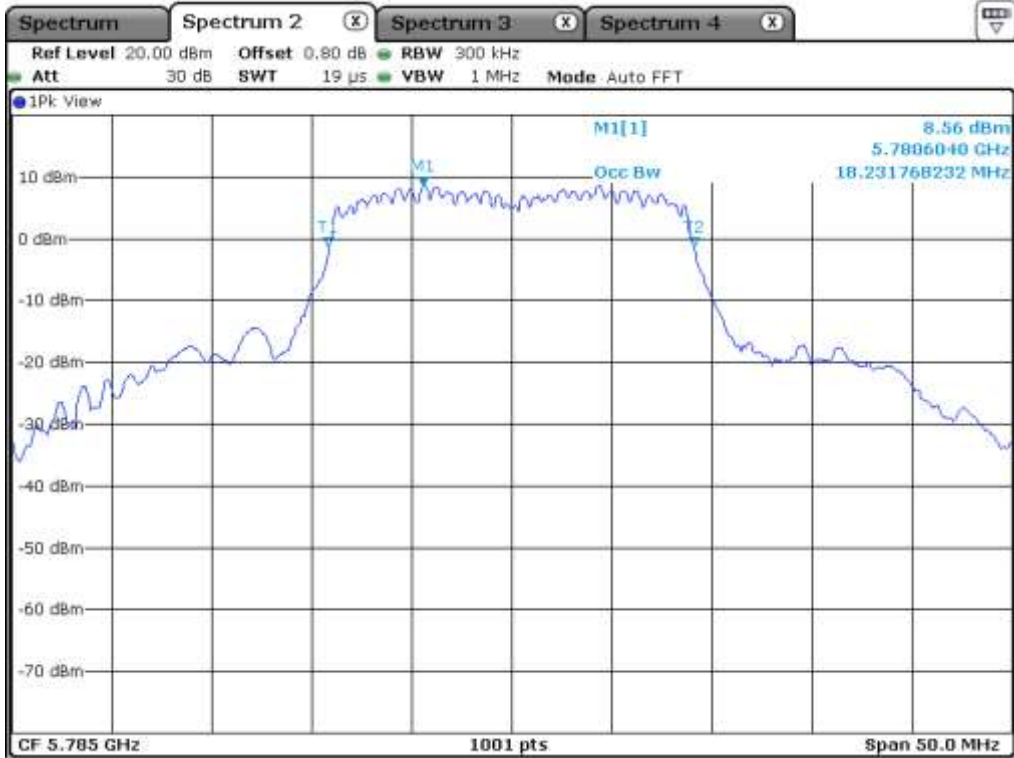

Middle Channel (5.795 MHz)

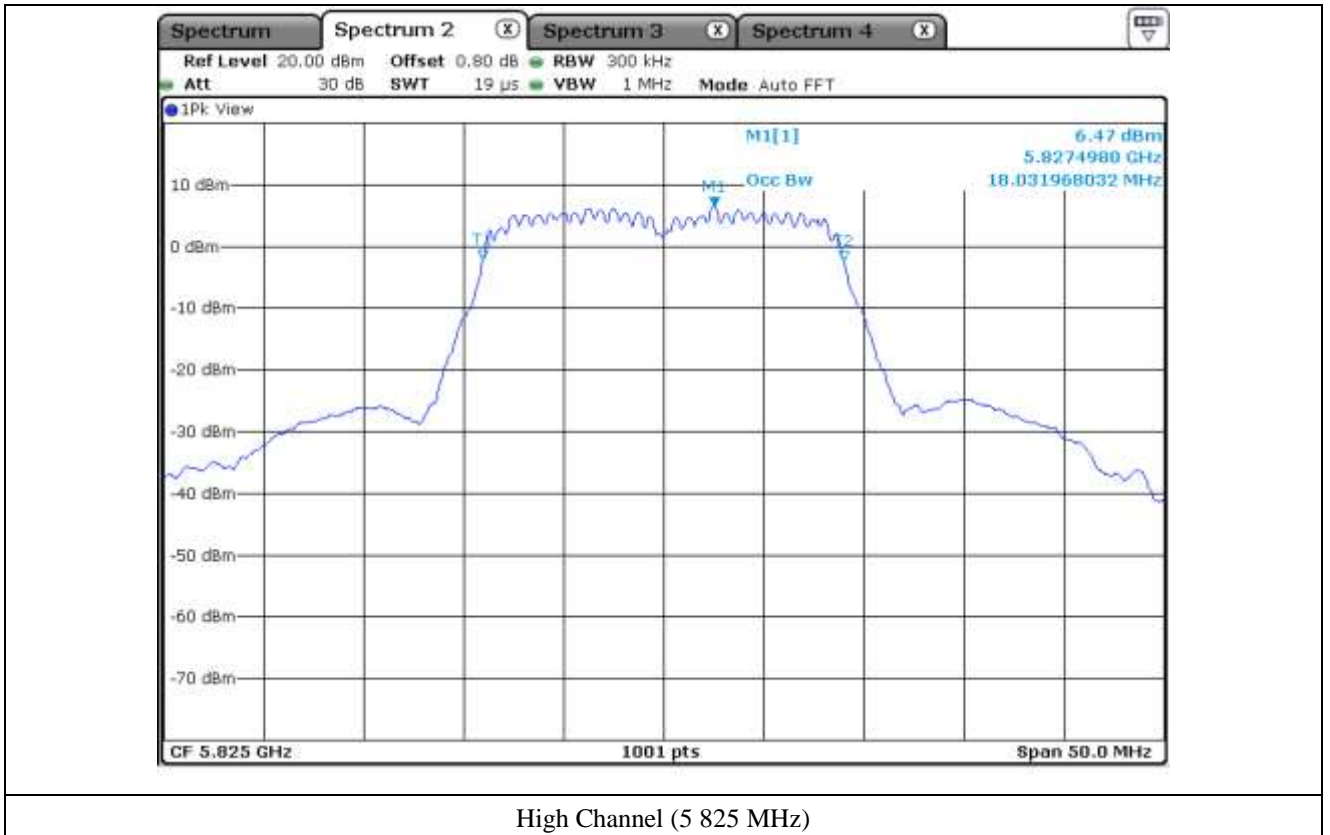

8.5.3 Test data for Antenna 2

-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.83
	Middle	5 220.00	16.68
	High	5 240.00	17.03
5 725 ~ 5 850	Low	5 745.00	17.98
	Middle	5 795.00	18.28
	High	5 825.00	18.03




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)




Middle Channel (5 220 MHz)

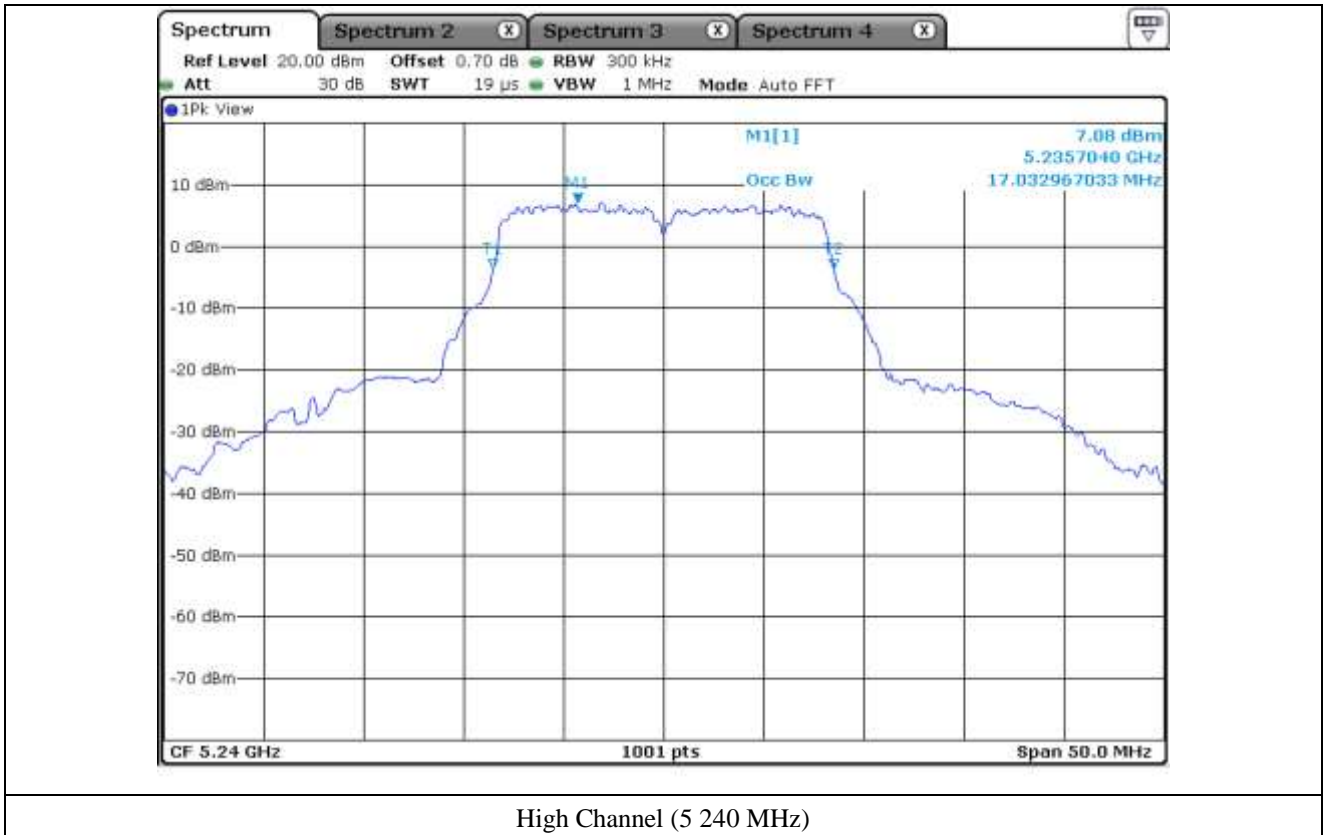


High Channel (5 240 MHz)

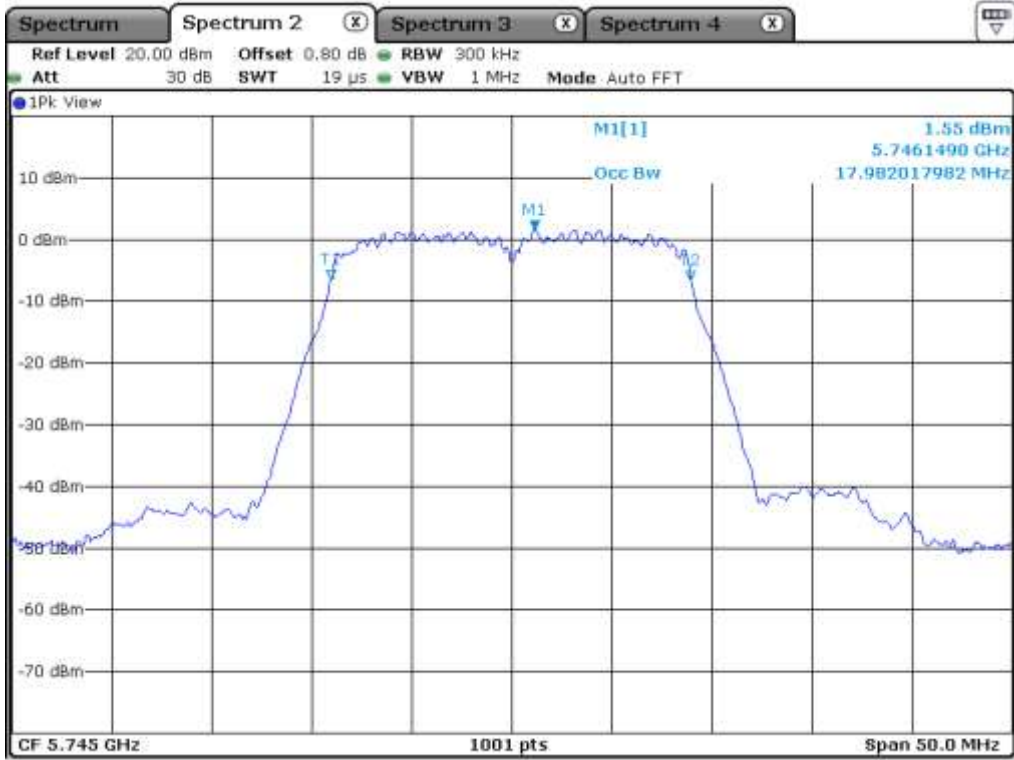

Low Channel (5.745 MHz)

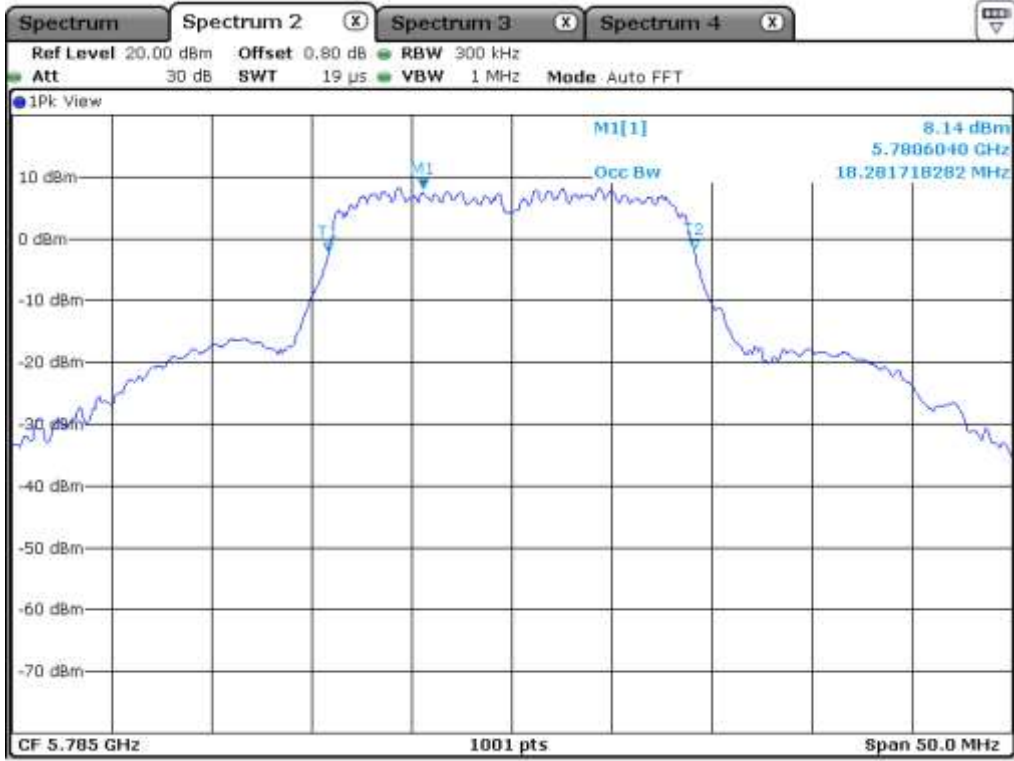

Middle Channel (5.795 MHz)

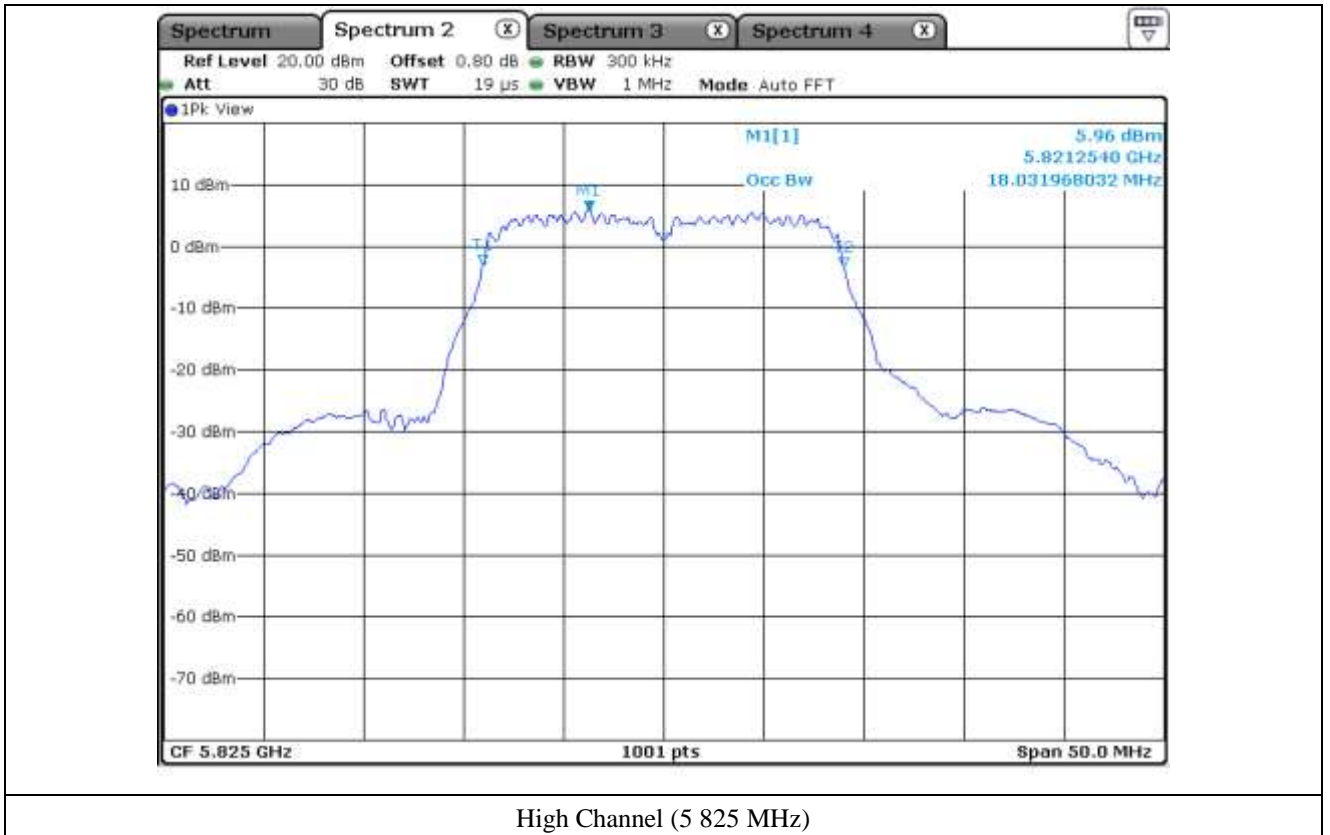

8.5.4 Test data for Antenna 3

-. Test Date : March 20, 2017

-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 180.00	16.83
	Middle	5 220.00	17.53
	High	5 240.00	17.53
5 725 ~ 5 850	Low	5 745.00	17.98
	Middle	5 795.00	18.58
	High	5 825.00	18.03




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 180 MHz)



Middle Channel (5 220 MHz)

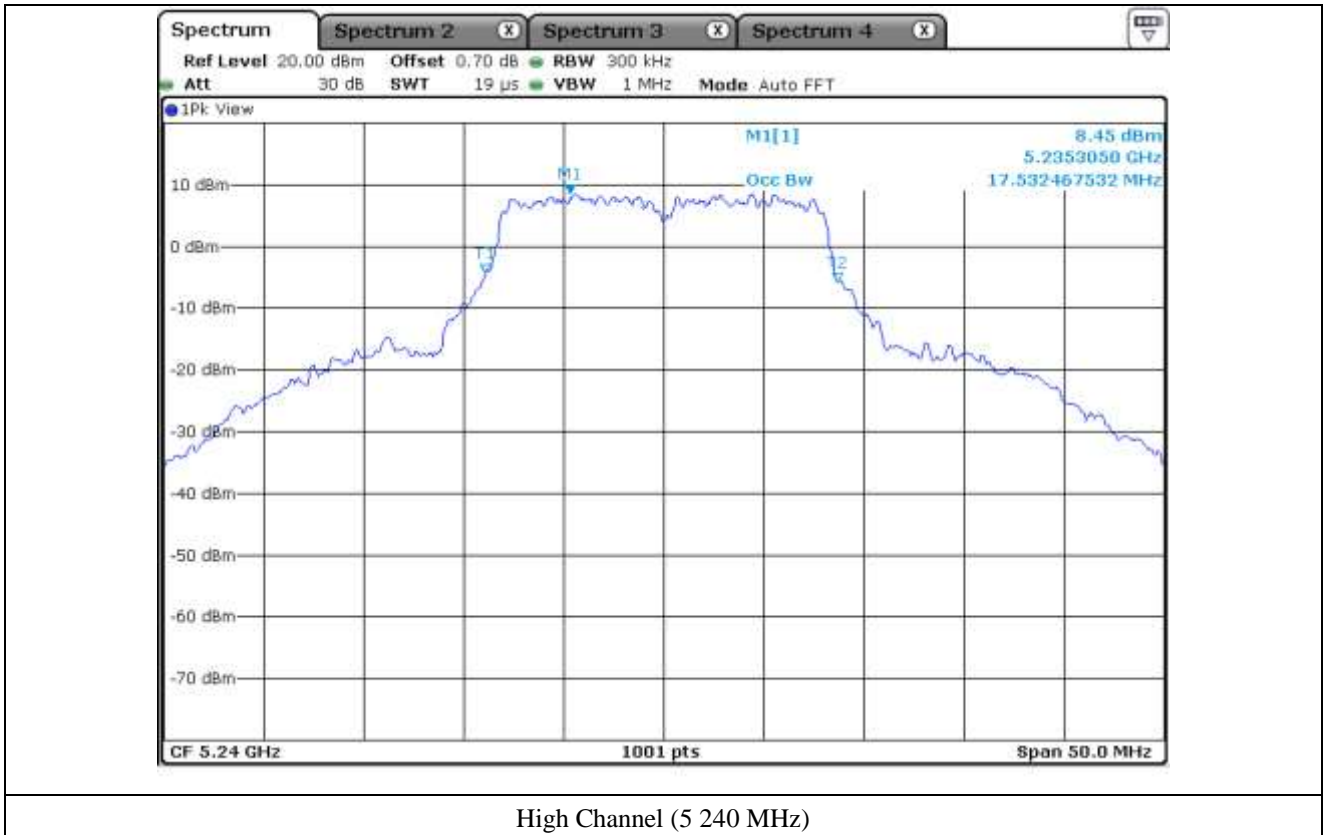


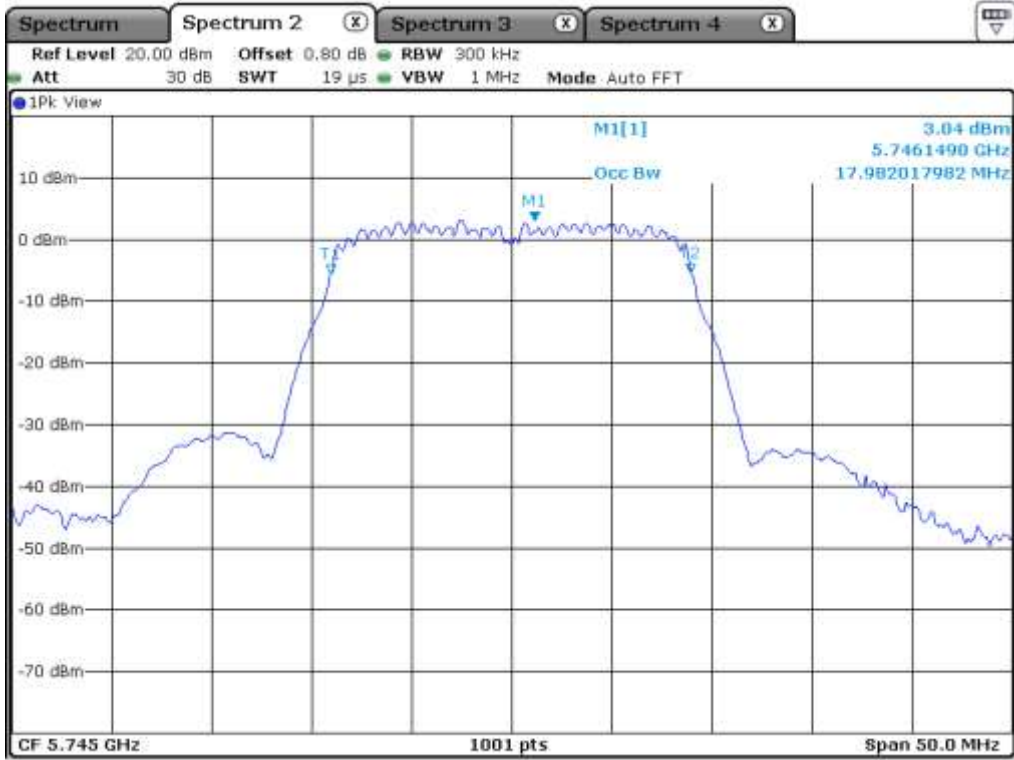

Low Channel (5.745 MHz)



Middle Channel (5.795 MHz)

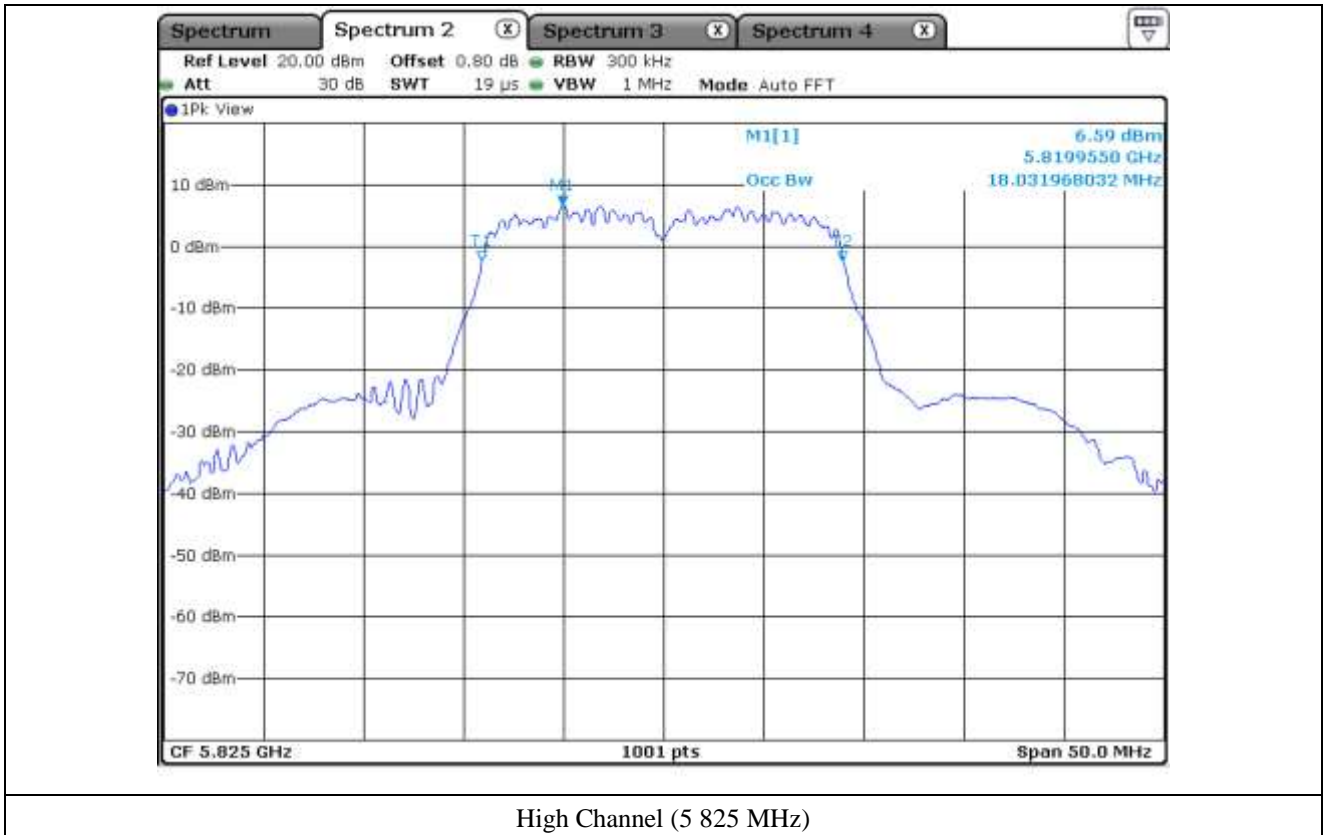

8.6 Test data for 802.11n_HT40_RLAN Mode

8.6.1 Test data for Antenna 0


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 190.00	36.56
	High	5 230.00	36.66
5 725 ~ 5 850	Low	5 755.00	36.56
	High	5 795.00	36.46




Tested by: Hyung-Kwon, Oh / Engineer

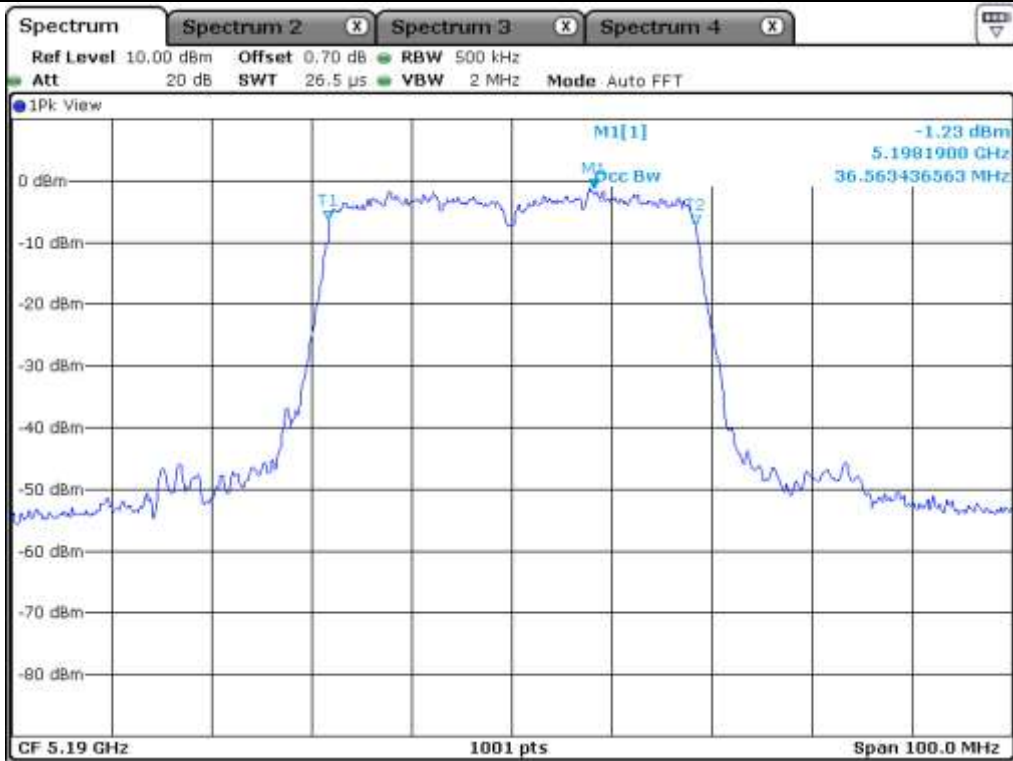


Low Channel (5 190 MHz)

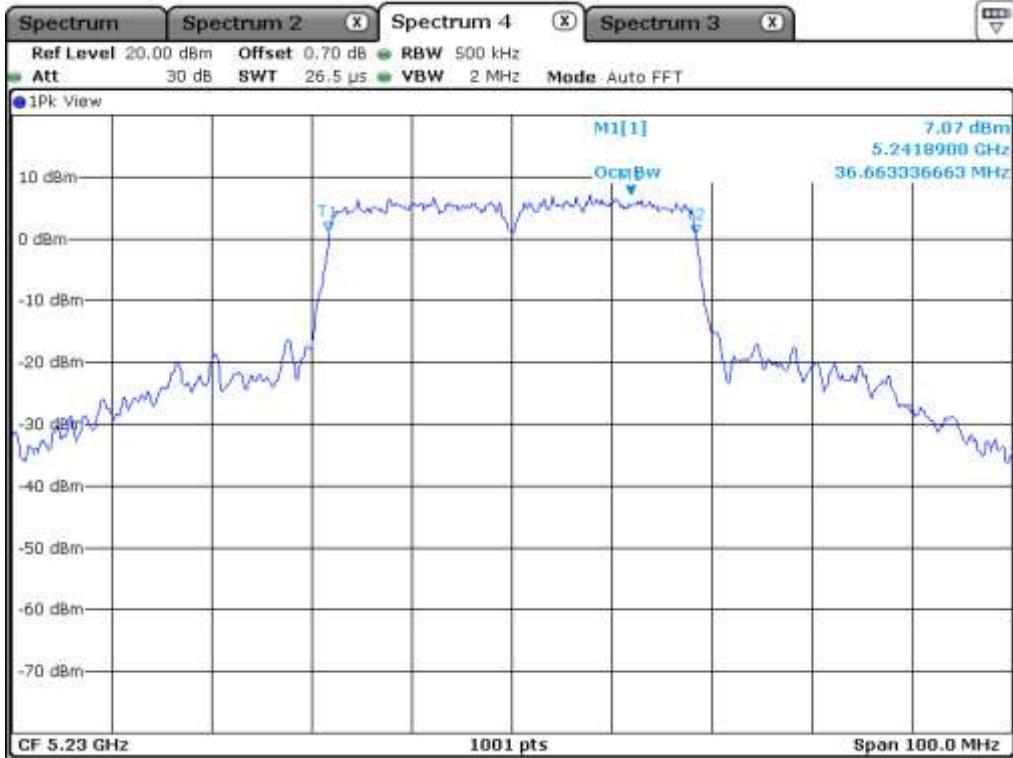

High Channel (5 230 MHz)

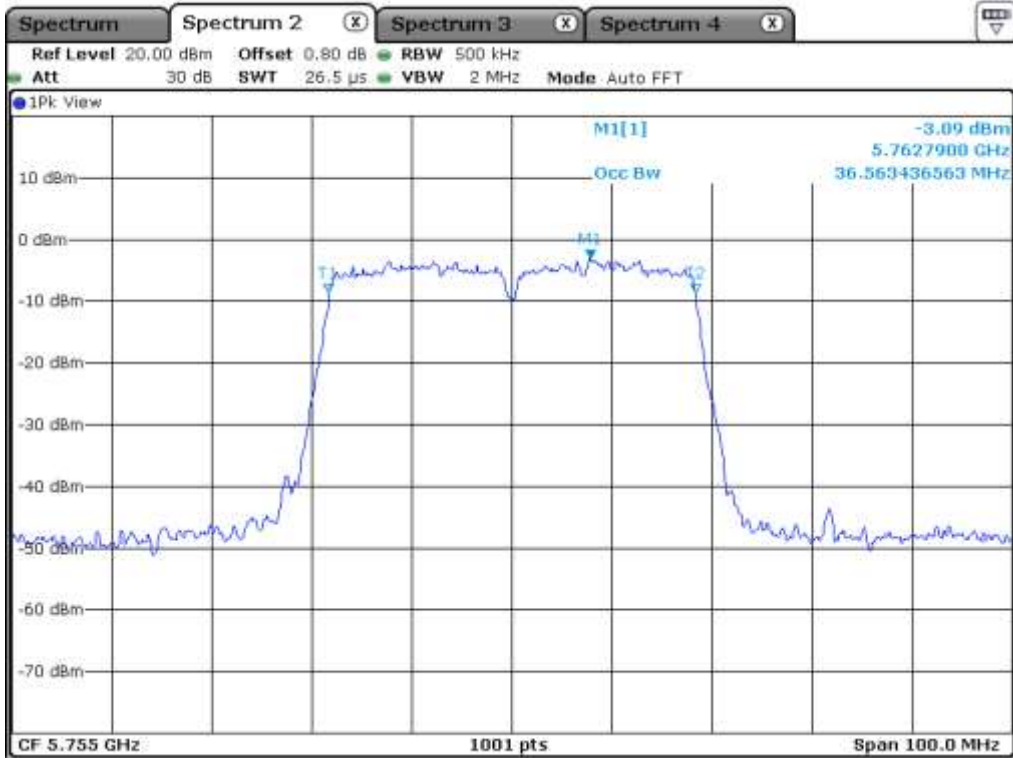

Low Channel (5 755 MHz)

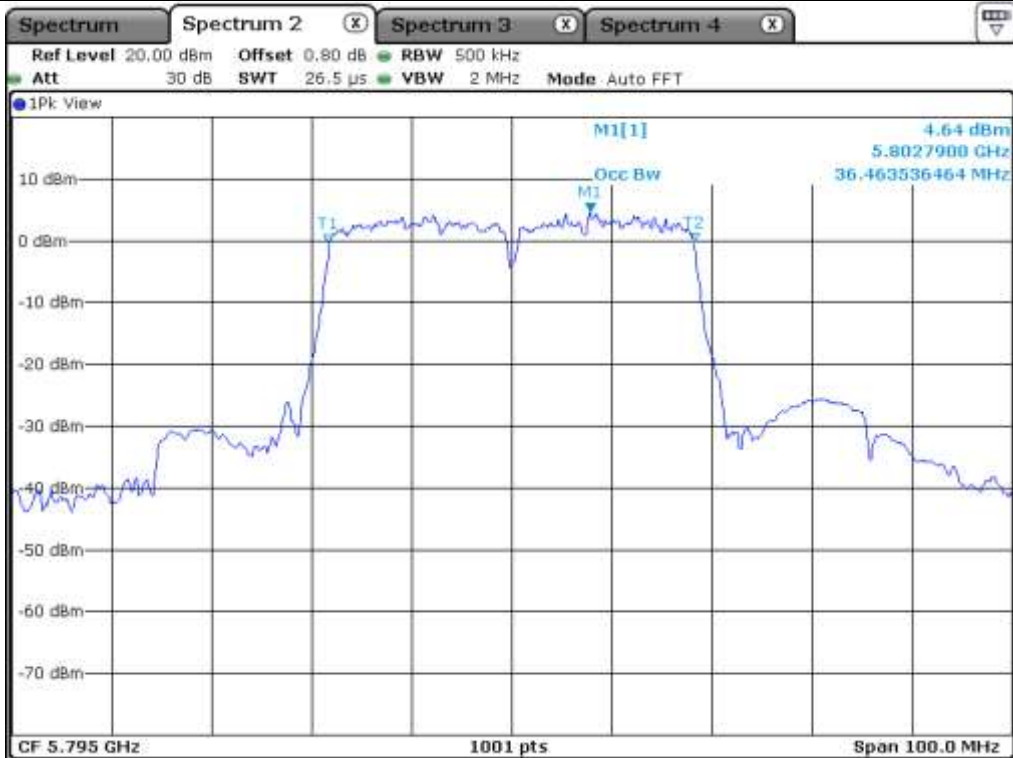

High Channel (5 795 MHz)

8.6.2 Test data for Antenna 1


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 190.00	36.36
	High	5 230.00	36.46
5 725 ~ 5 850	Low	5 755.00	36.36
	High	5 795.00	36.36




Tested by: Hyung-Kwon, Oh / Engineer

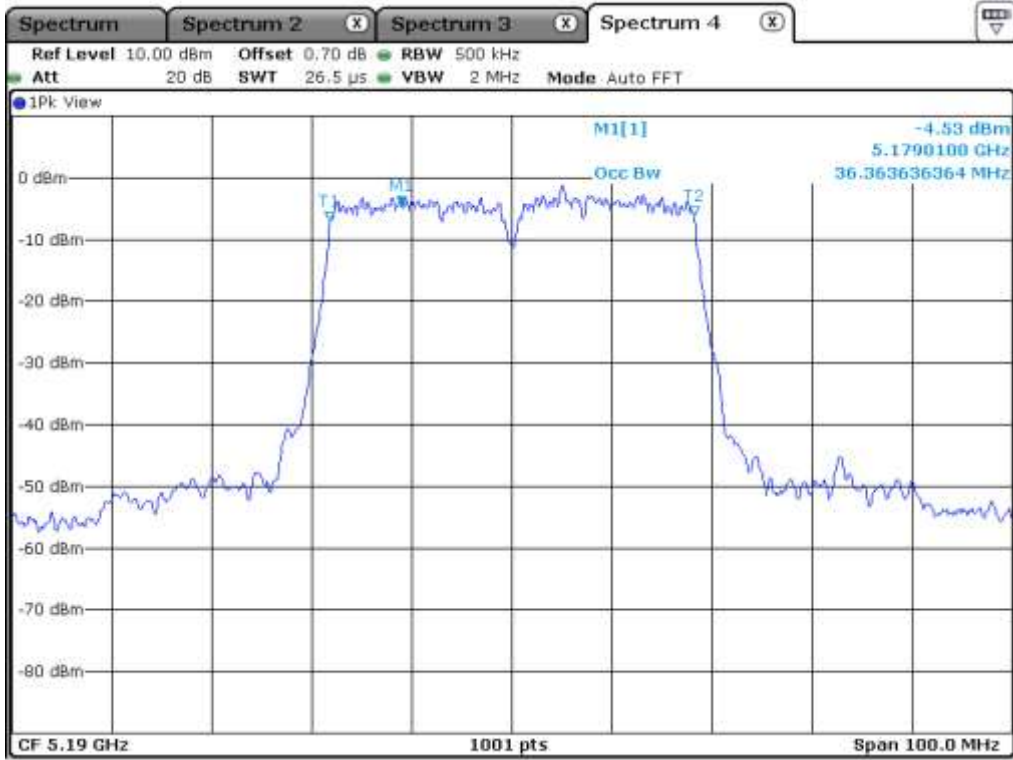


Low Channel (5 190 MHz)

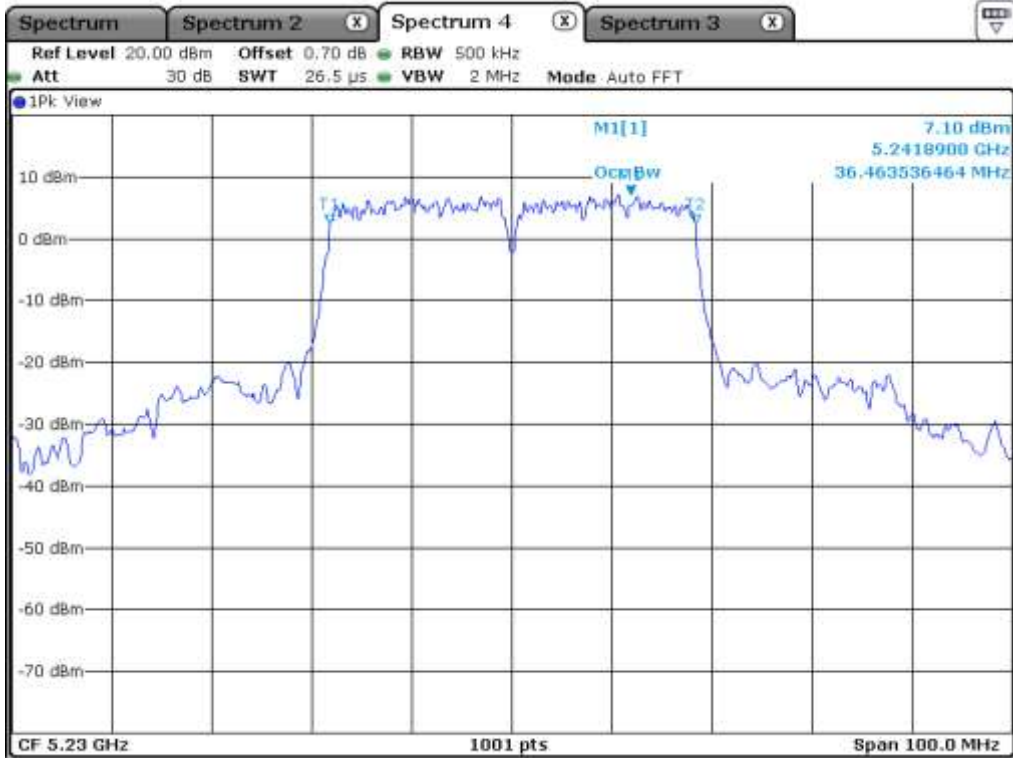

High Channel (5 230 MHz)

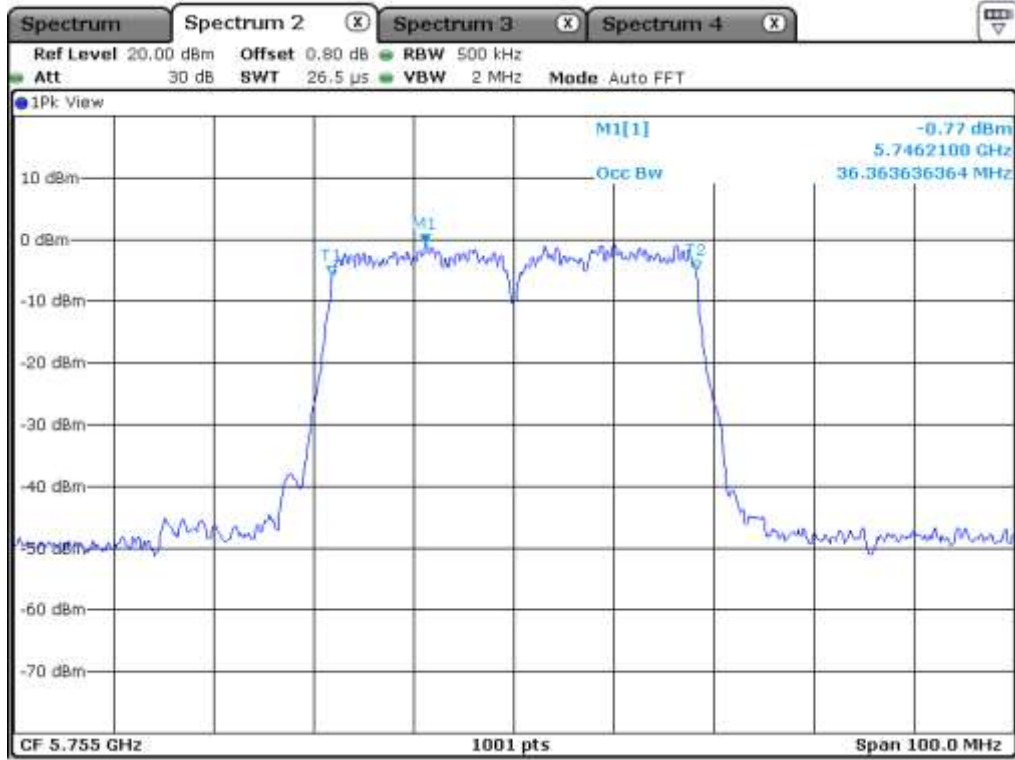

Low Channel (5 755 MHz)

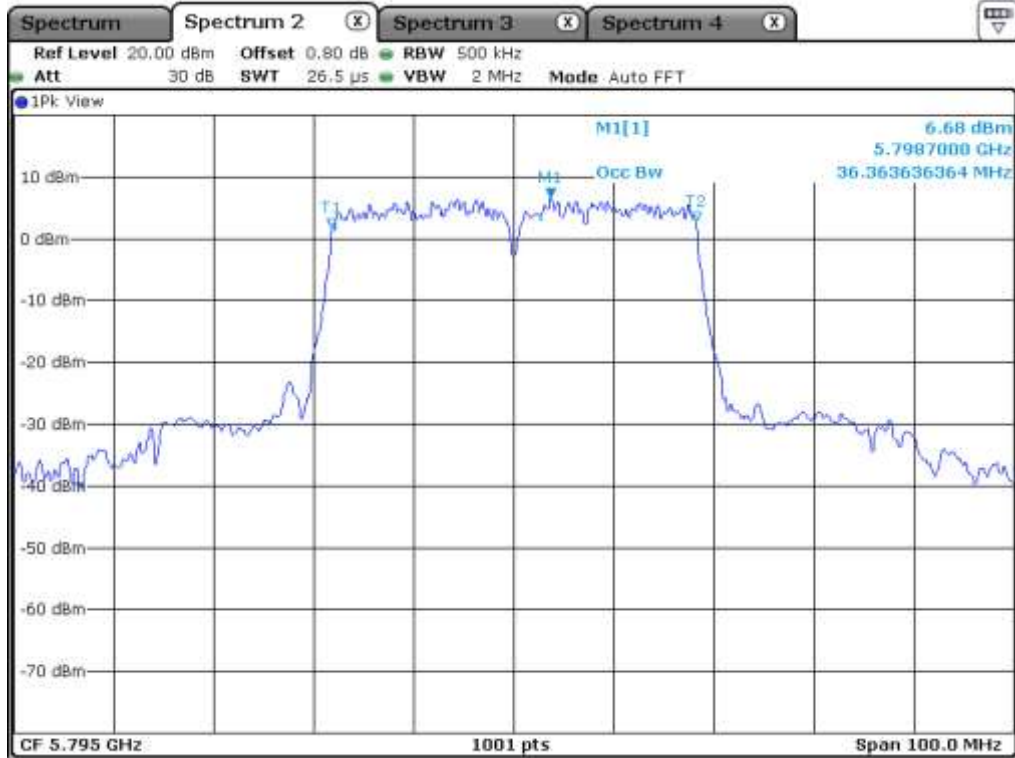

High Channel (5 795 MHz)

8.6.3 Test data for Antenna 2

-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 190.00	36.36
	High	5 230.00	36.46
5 725 ~ 5 850	Low	5 755.00	36.36
	High	5 795.00	36.46




Tested by: Hyung-Kwon, Oh / Engineer




Low Channel (5 190 MHz)

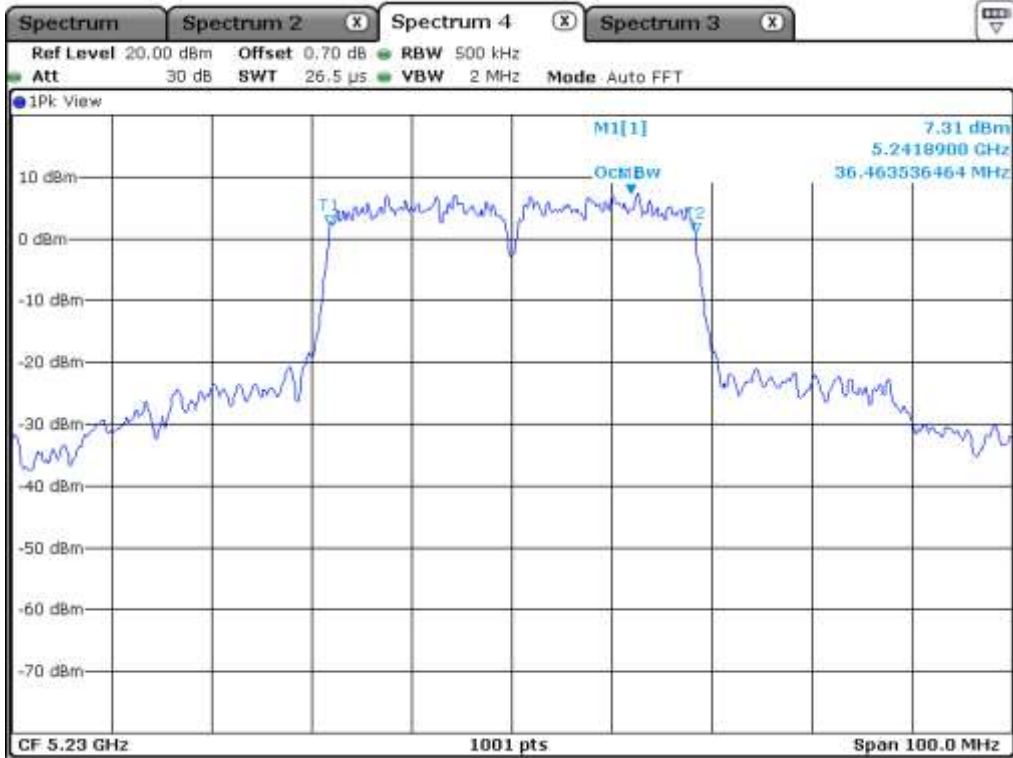

High Channel (5 230 MHz)

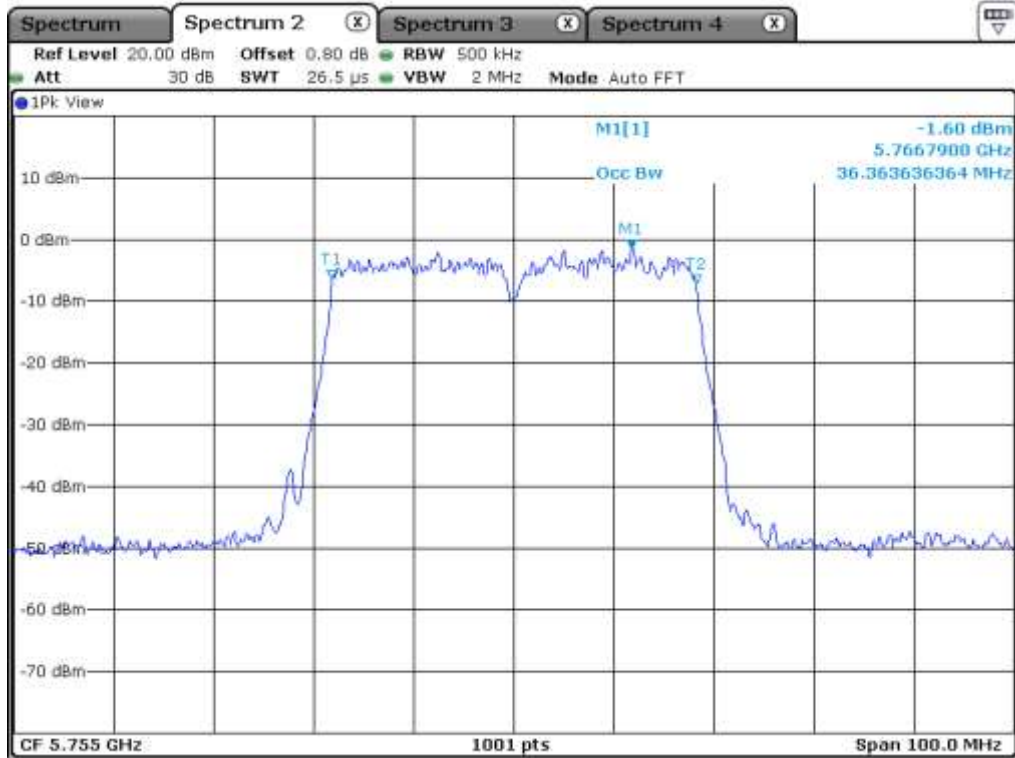

Low Channel (5 755 MHz)

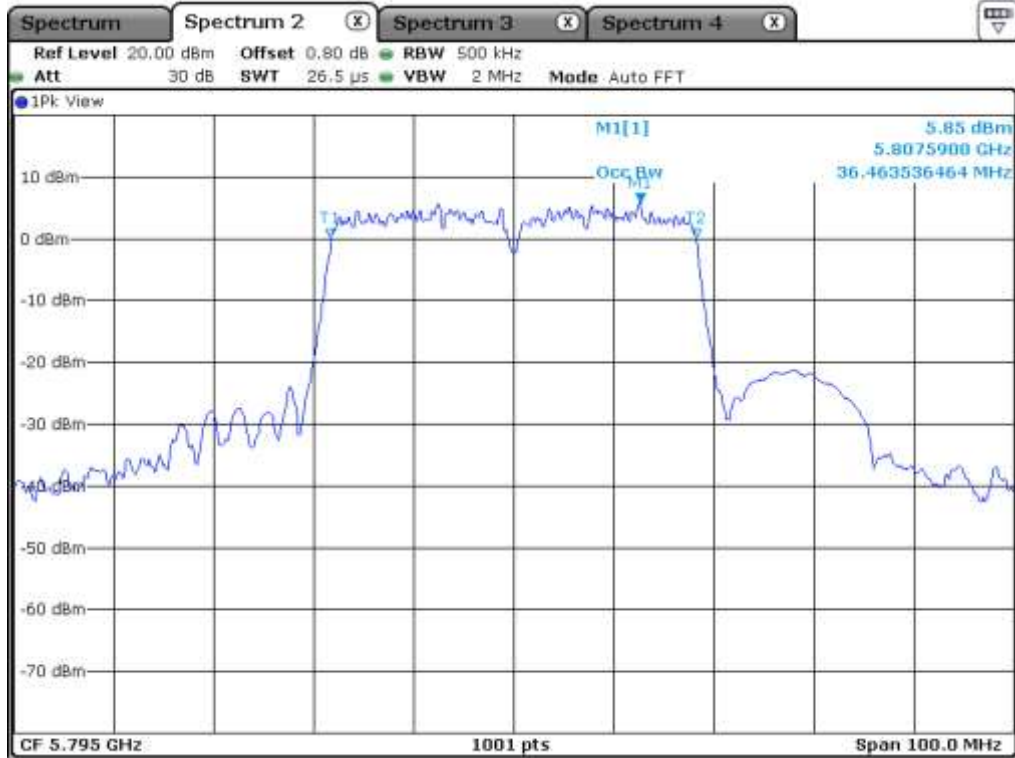

High Channel (5 795 MHz)

8.6.4 Test data for Antenna 3


-. Test Date : March 20, 2017

-. Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Low	5 190.00	36.36
	High	5 230.00	36.46
5 725 ~ 5 850	Low	5 755.00	36.46
	High	5 795.00	36.46




Tested by: Hyung-Kwon, Oh / Engineer

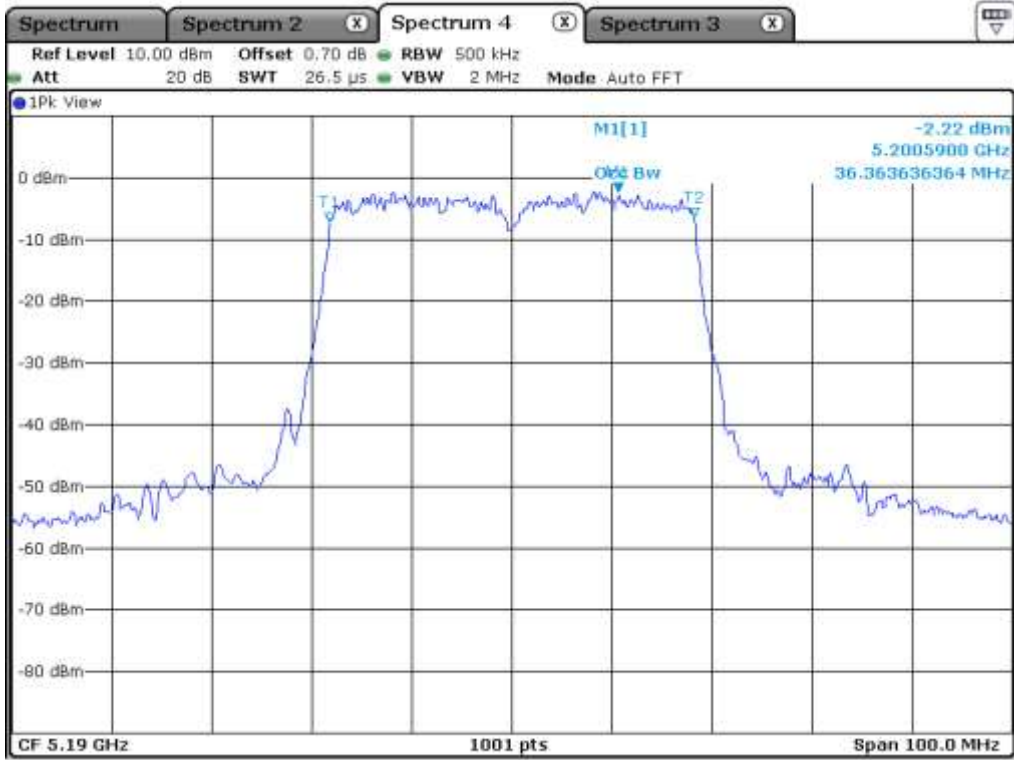


Low Channel (5 190 MHz)

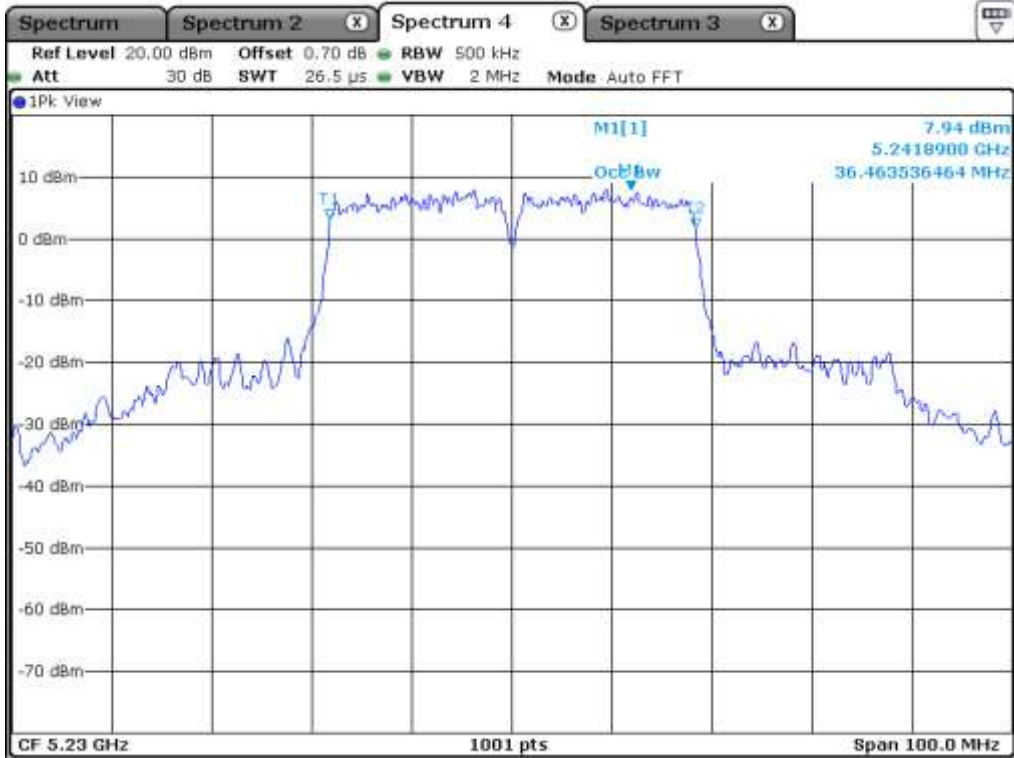

High Channel (5 230 MHz)

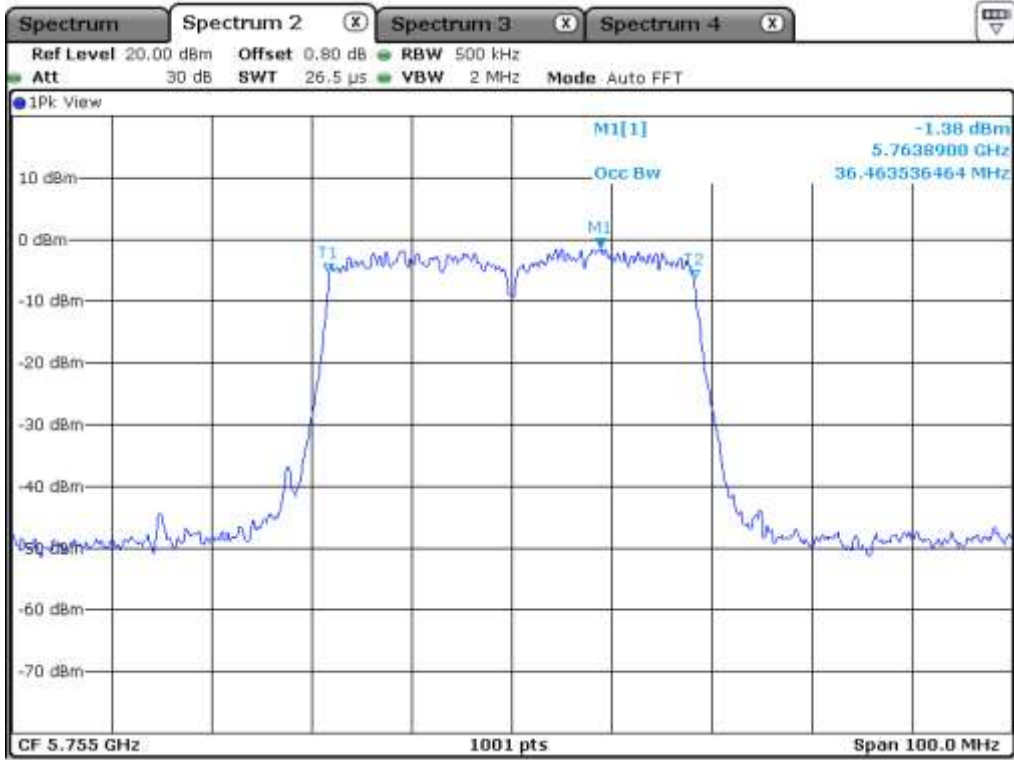

Low Channel (5.755 MHz)

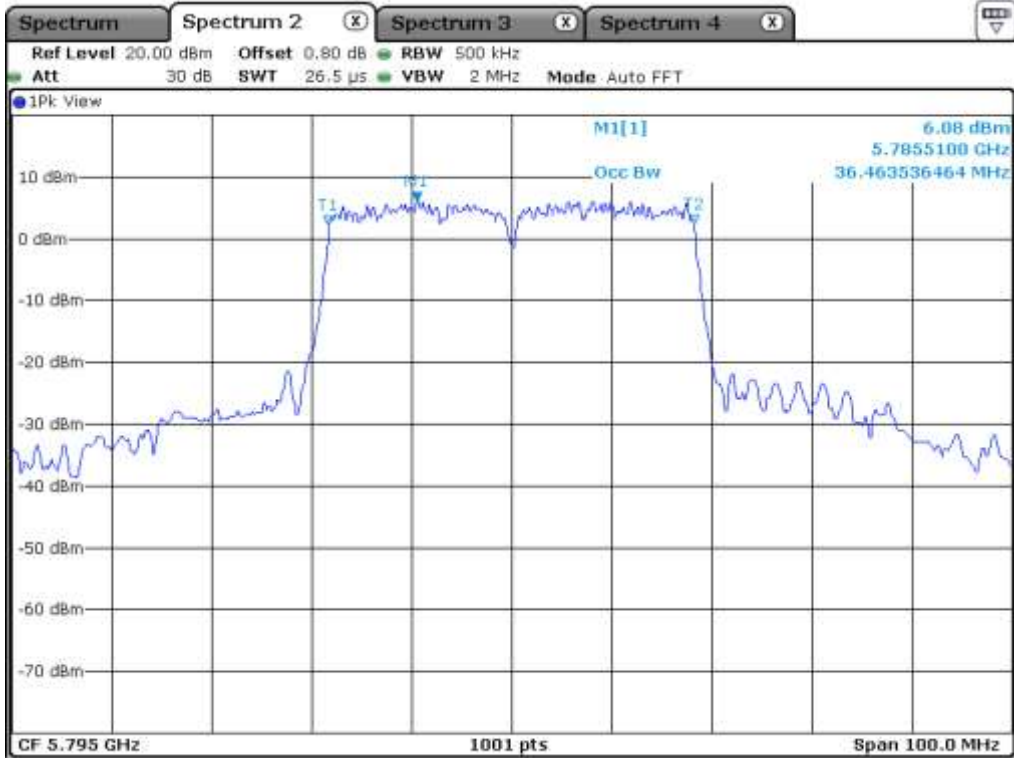

High Channel (5.795 MHz)


8.7 Test data for 802.11ac_VHT80 RLAN Mode

8.7.1 Test data for Antenna 0


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Middle	5 210.00	75.12
5 725 ~ 5 850	Middle	5 775.00	76.12

Tested by: Hyung-Kwon, Oh / Engineer

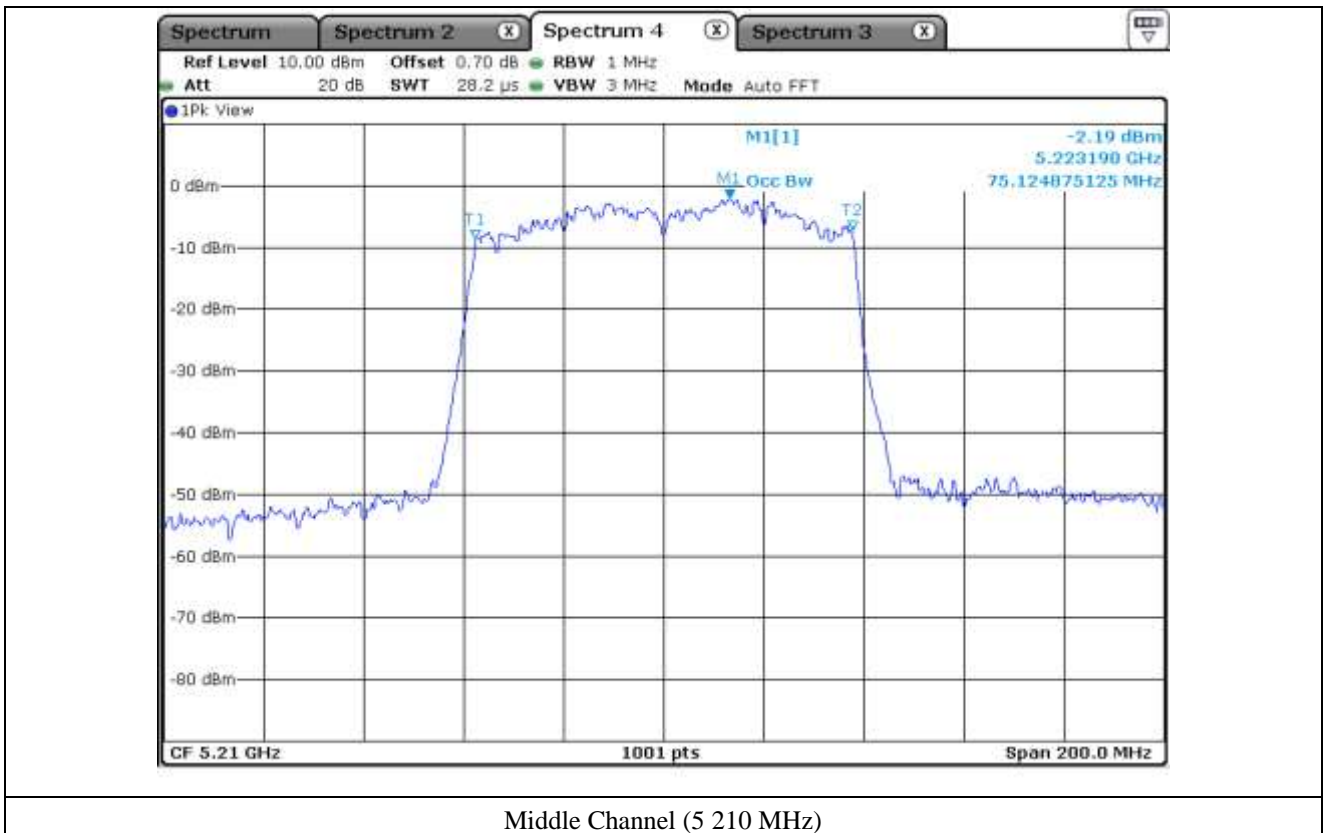

Middle Channel (5 210 MHz)

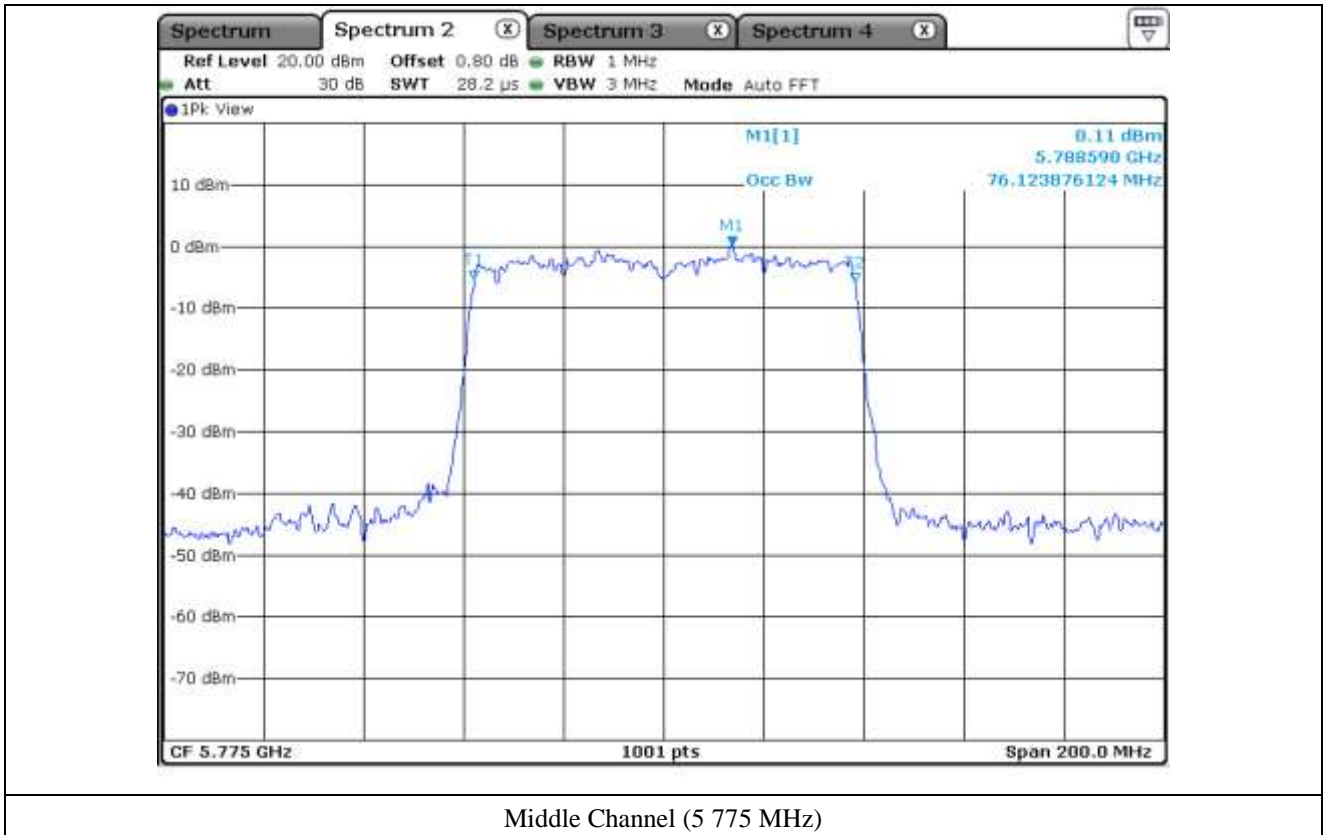



8.7.2 Test data for Antenna 1

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Middle	5 210.00	75.12
5 725 ~ 5 850	Middle	5 775.00	76.12

Tested by: Hyung-Kwon, Oh / Engineer

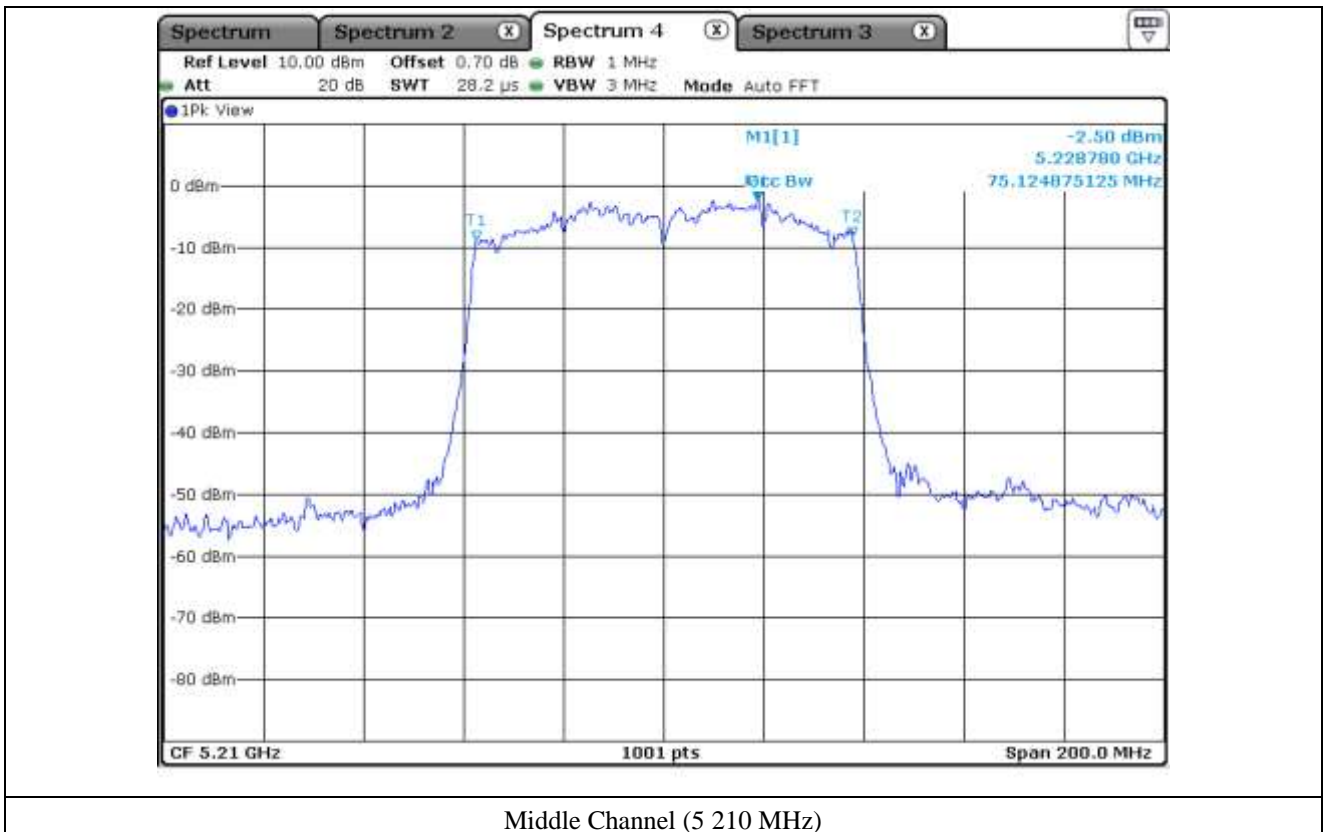

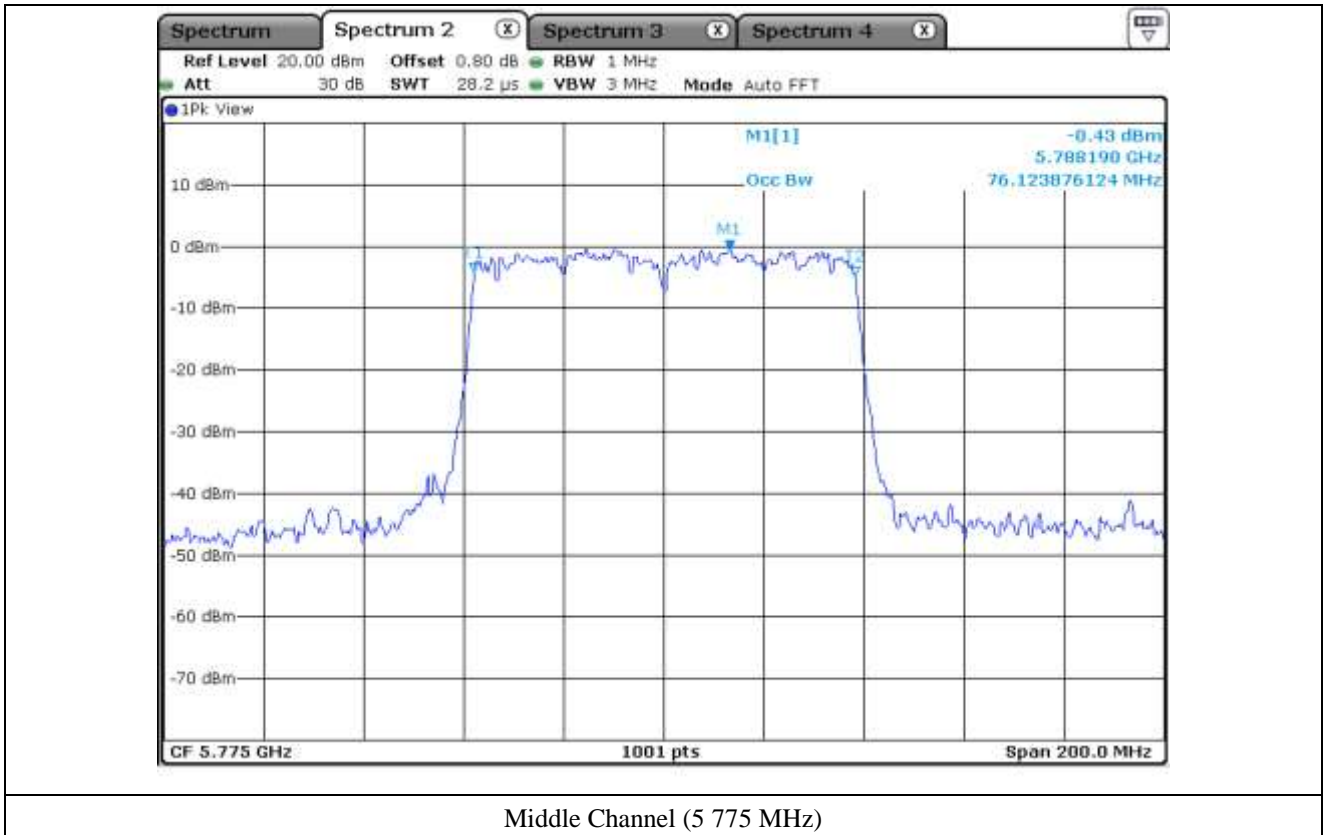



8.7.3 Test data for Antenna 2

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Middle	5 210.00	75.12
5 725 ~ 5 850	Middle	5 775.00	75.92

Tested by: Hyung-Kwon, Oh / Engineer

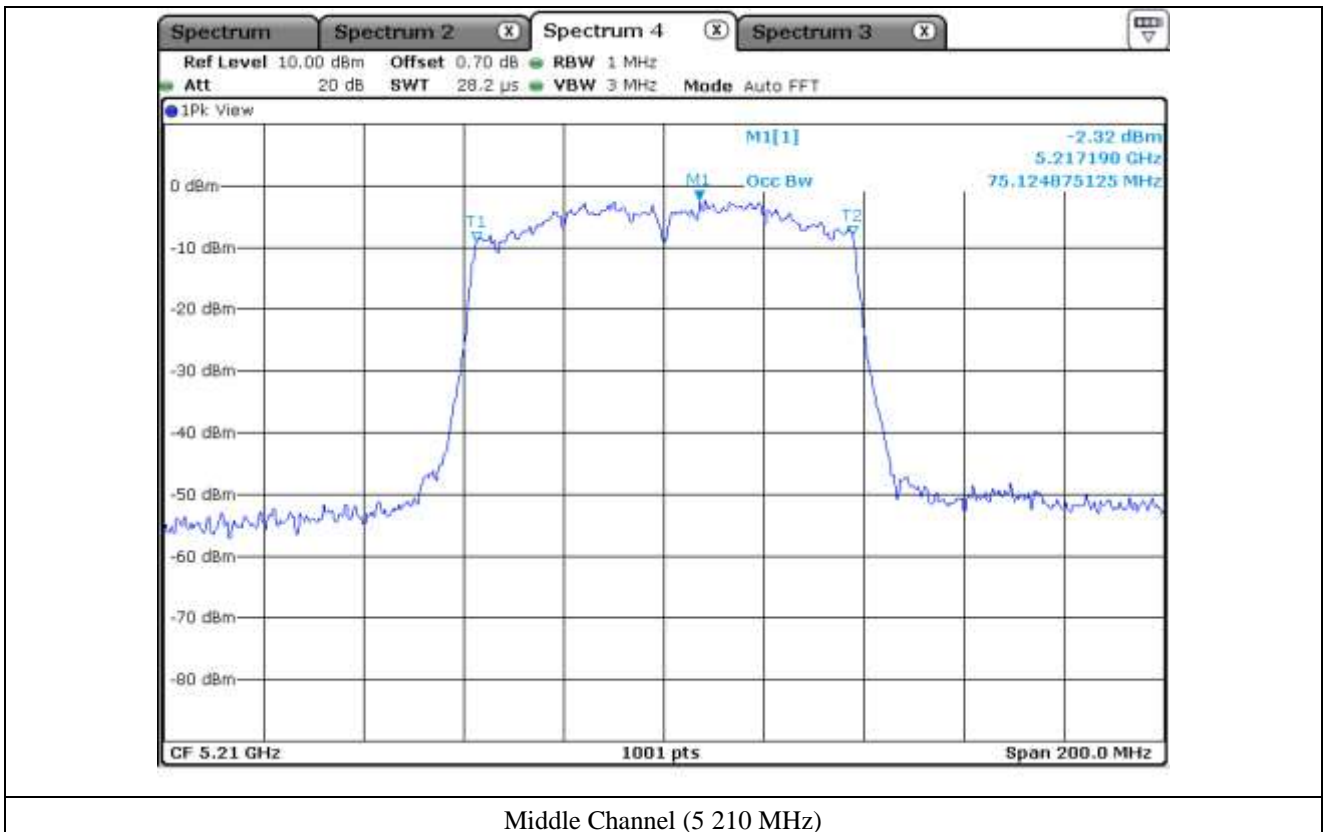

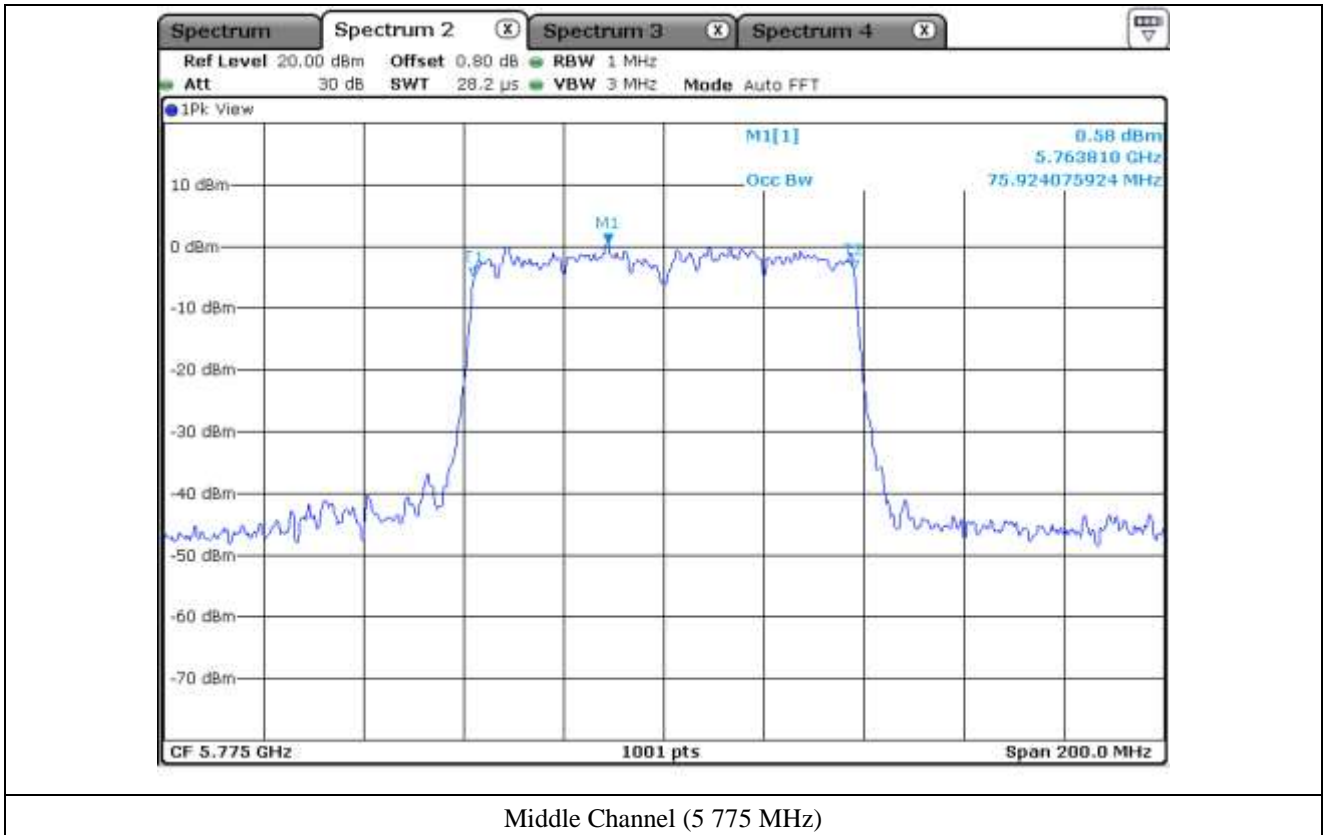


8.7.4 Test data for Antenna 3


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (MHz)
5 150 ~ 5 250	Middle	5 210.00	75.12
5 725 ~ 5 850	Middle	5 775.00	76.12



Tested by: Hyung-Kwon, Oh / Engineer

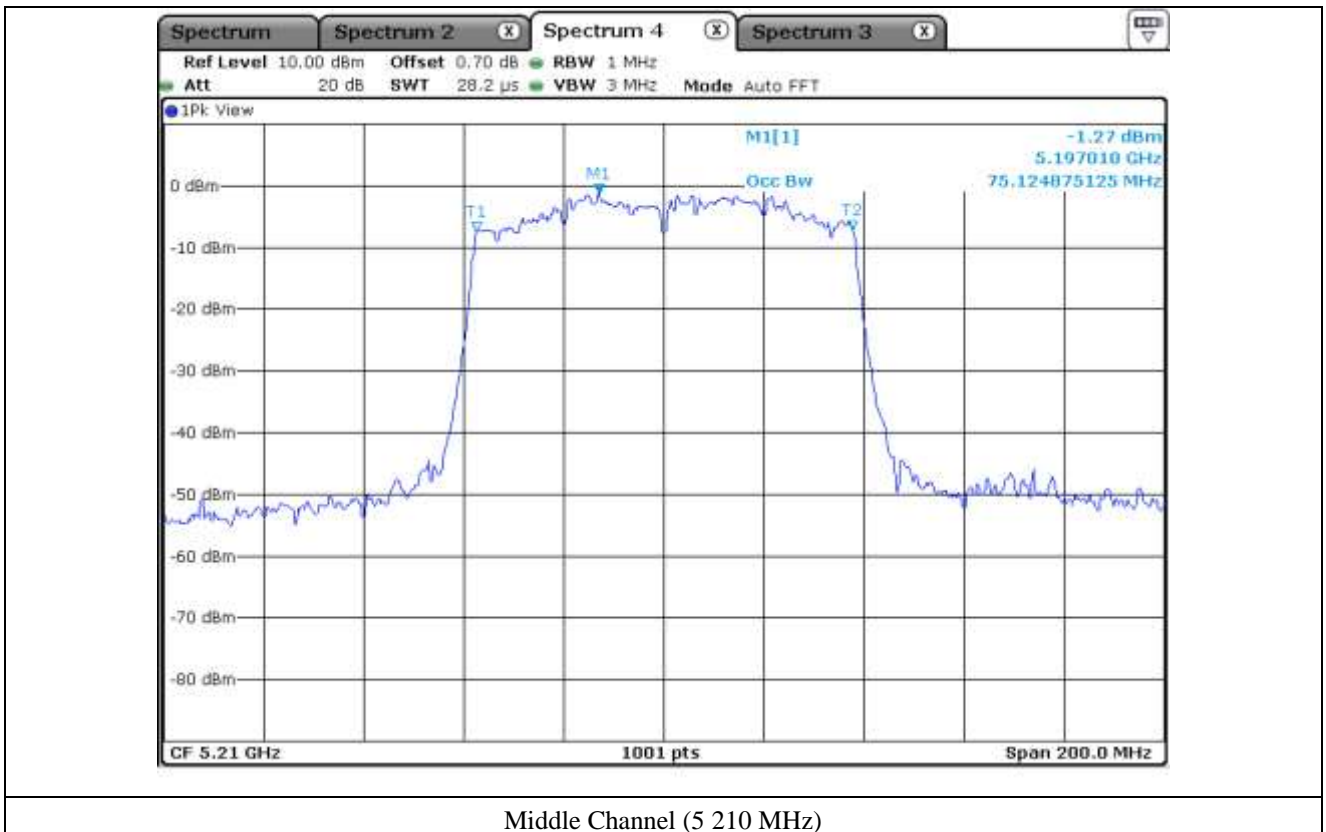

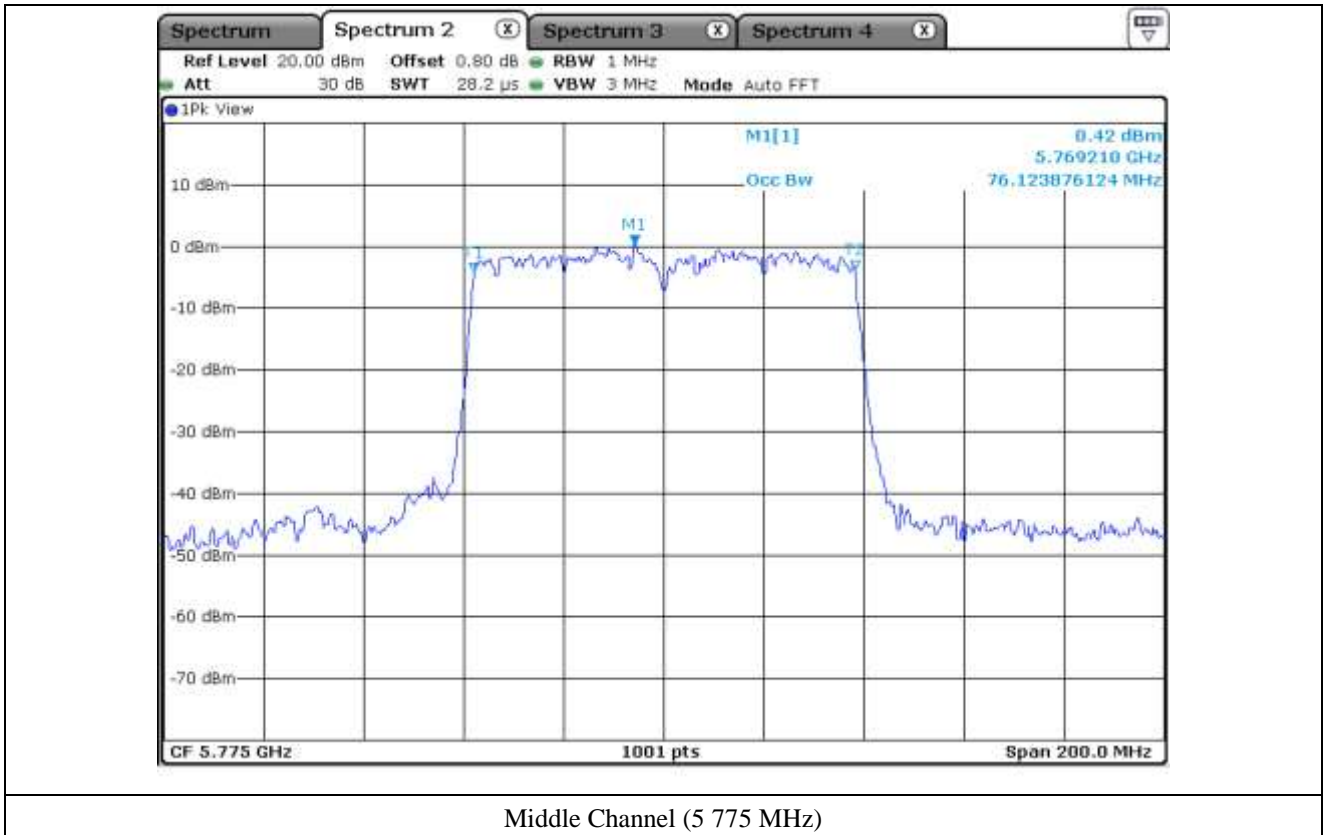

9. 6 dB BANDWIDTH


9.1 Operating environment

Temperature : 24 °C

Relative humidity : 47 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

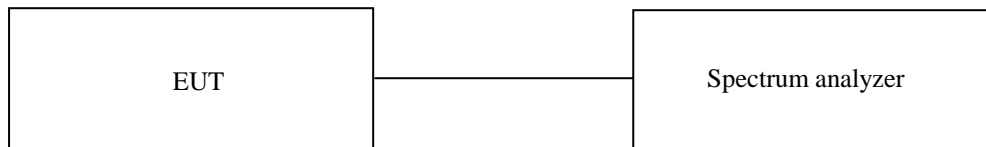

9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101199	May. 04, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

9.4 Test data for 802.11a RLAN Mode

9.4.1 Test data for Antenna 0


-. Test Date : March 20, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	16.38
	Middle	5 785	16.33
	High	5 825	16.33




Tested by: Hyung-Kwon, Oh / Engineer

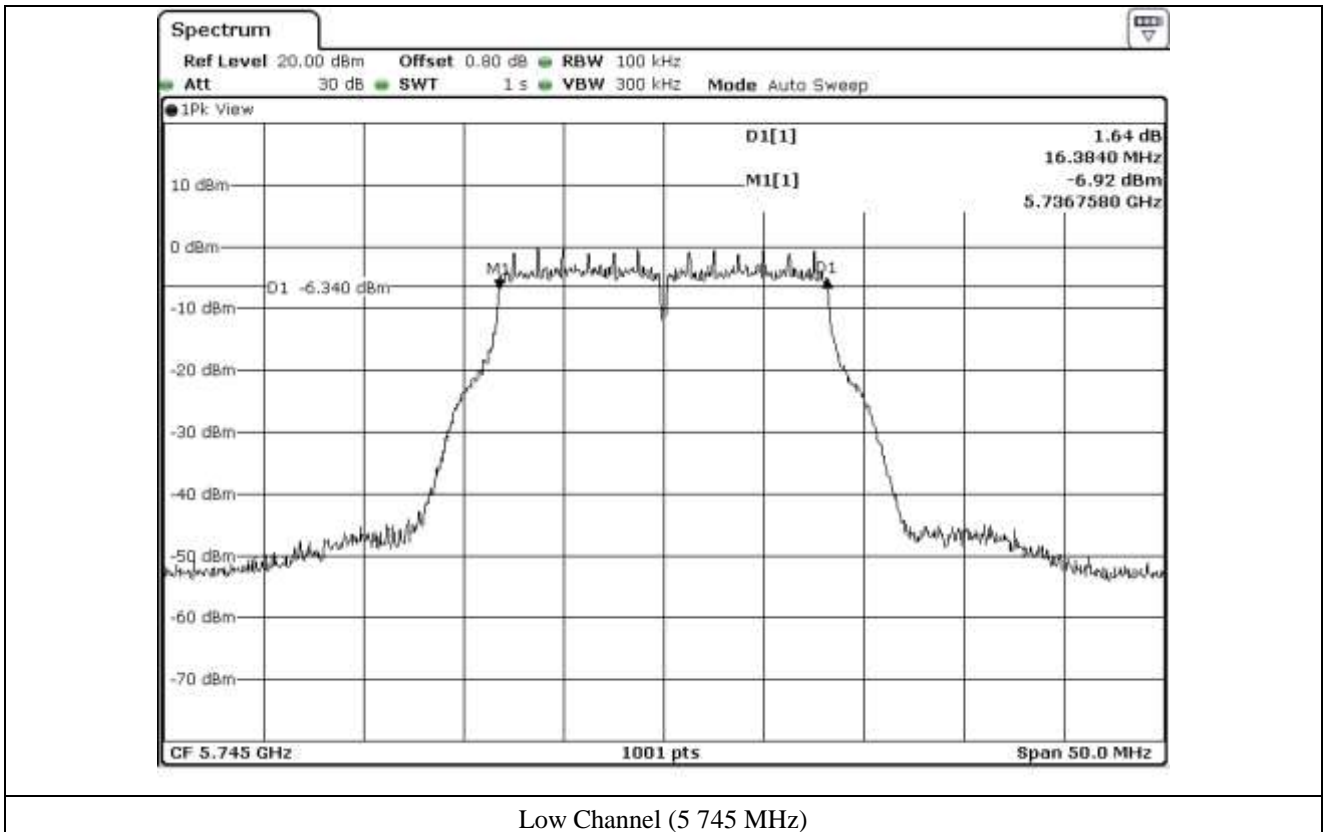

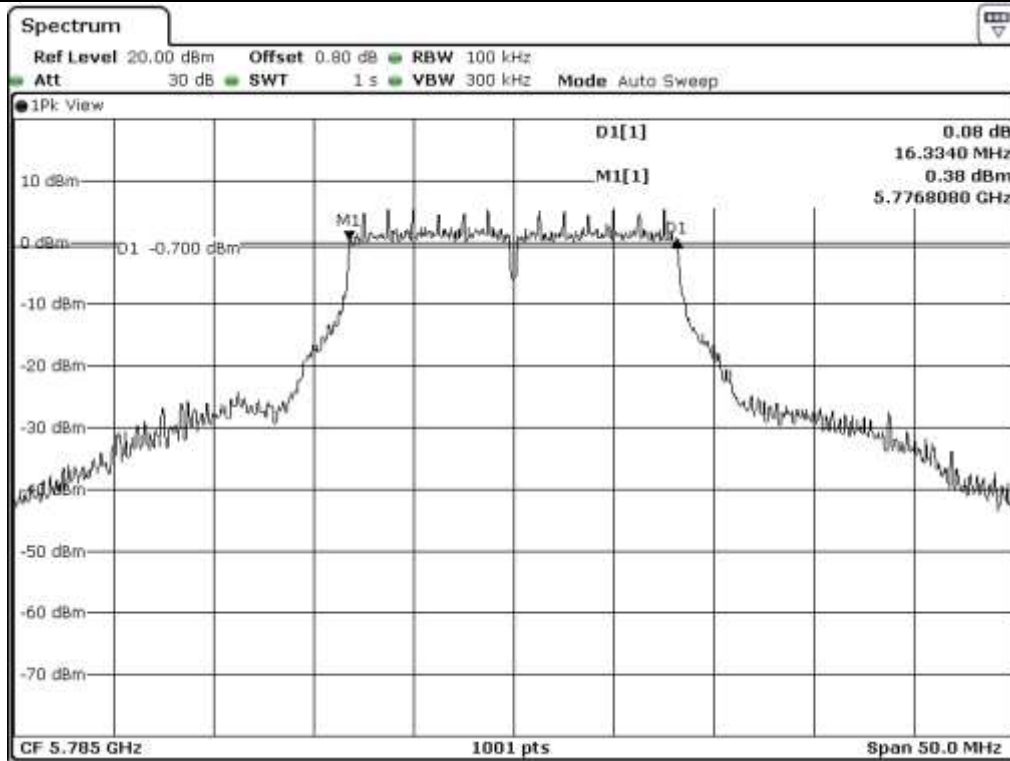

Middle Channel (5.785 MHz)

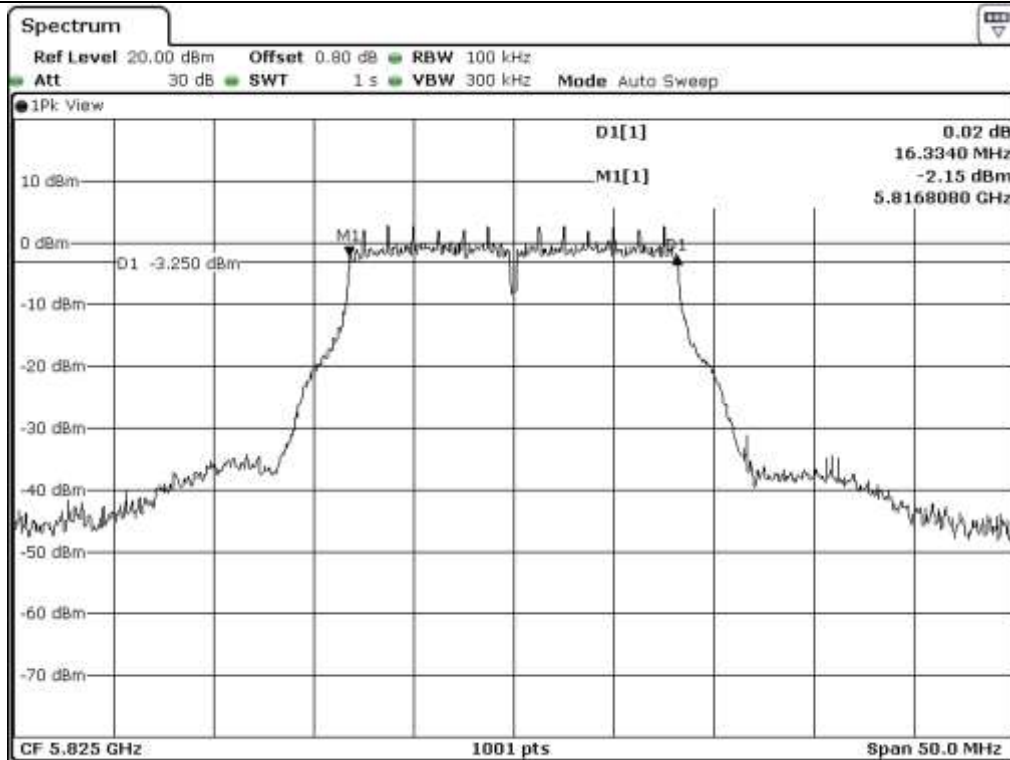

High Channel (5.825 MHz)


9.4.2 Test data for Antenna 1


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	16.38
	Middle	5 785	16.33
	High	5 825	16.33




Tested by: Hyung-Kwon, Oh / Engineer

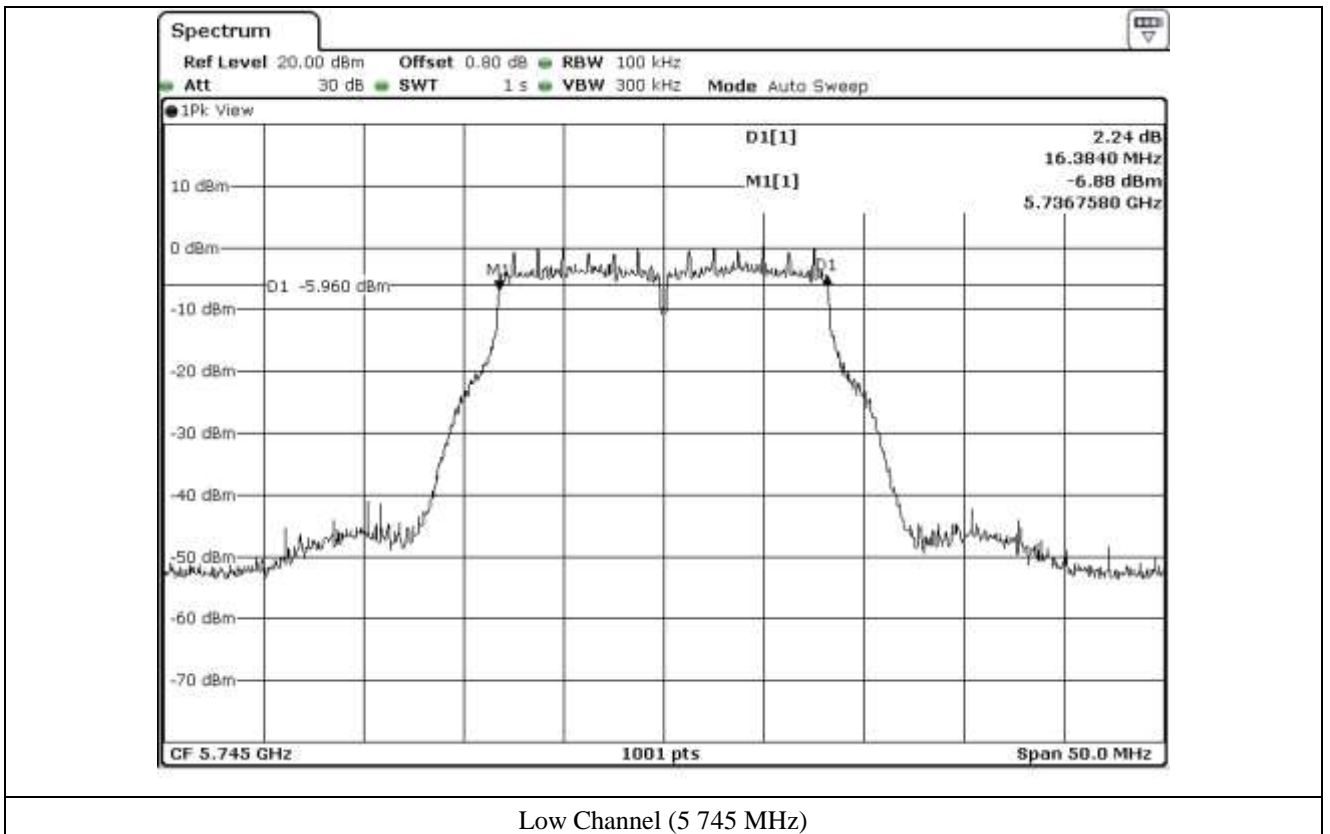

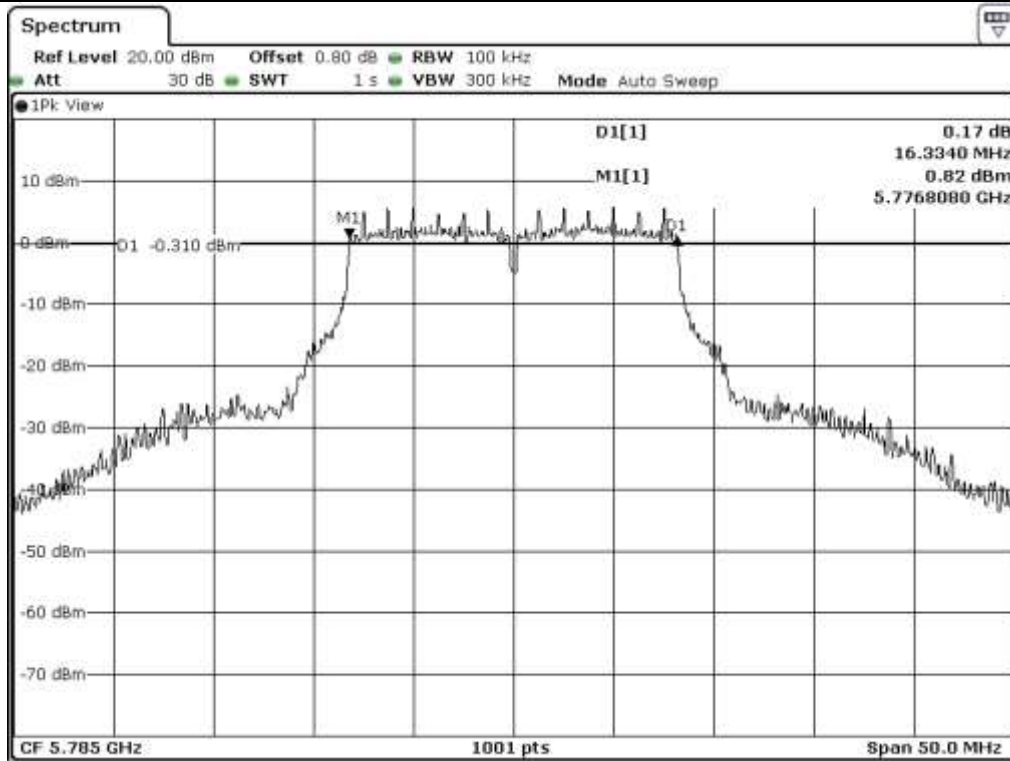

Middle Channel (5.785 MHz)

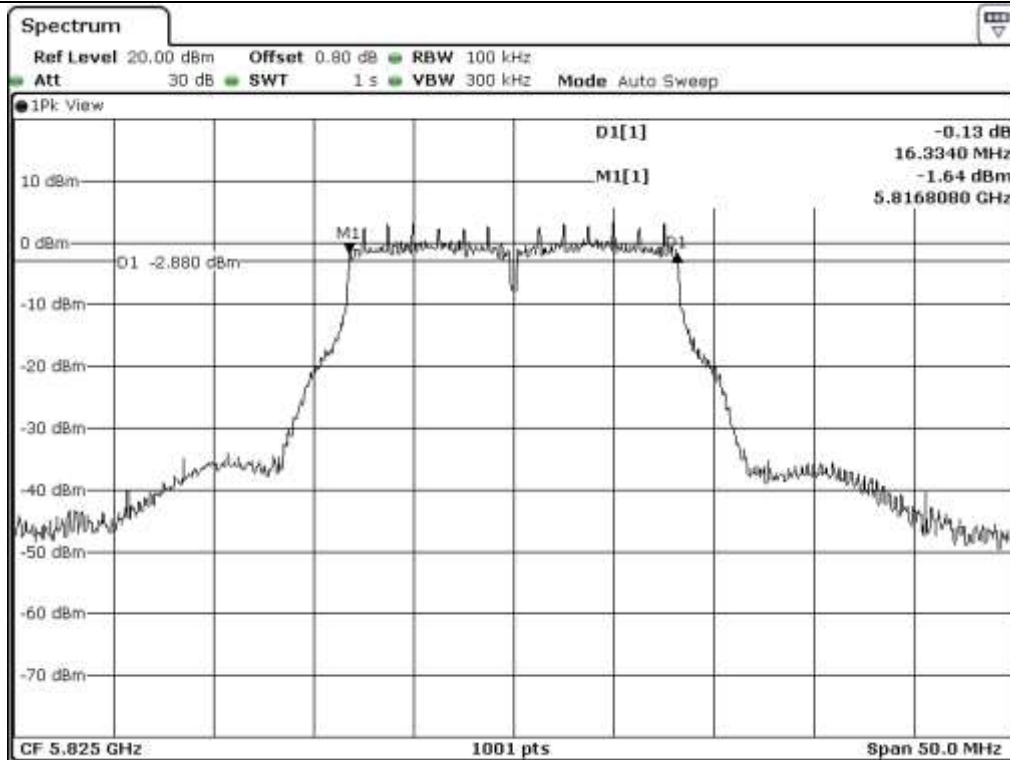

High Channel (5.825 MHz)


9.4.3 Test data for Antenna 2

- Test Date : March 20, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	16.38
	Middle	5 785	16.33
	High	5 825	16.38




Tested by: Hyung-Kwon, Oh / Engineer

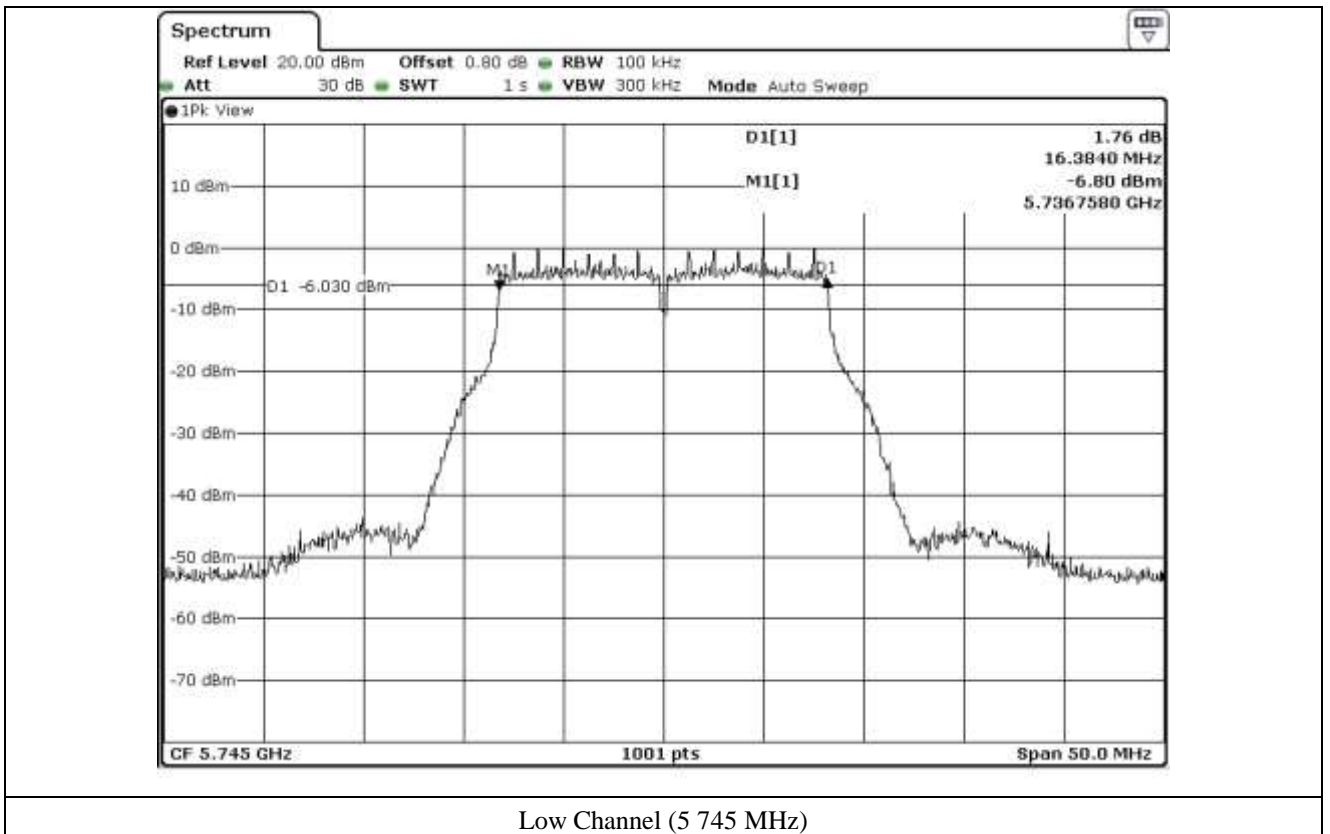

Low Channel (5 745 MHz)

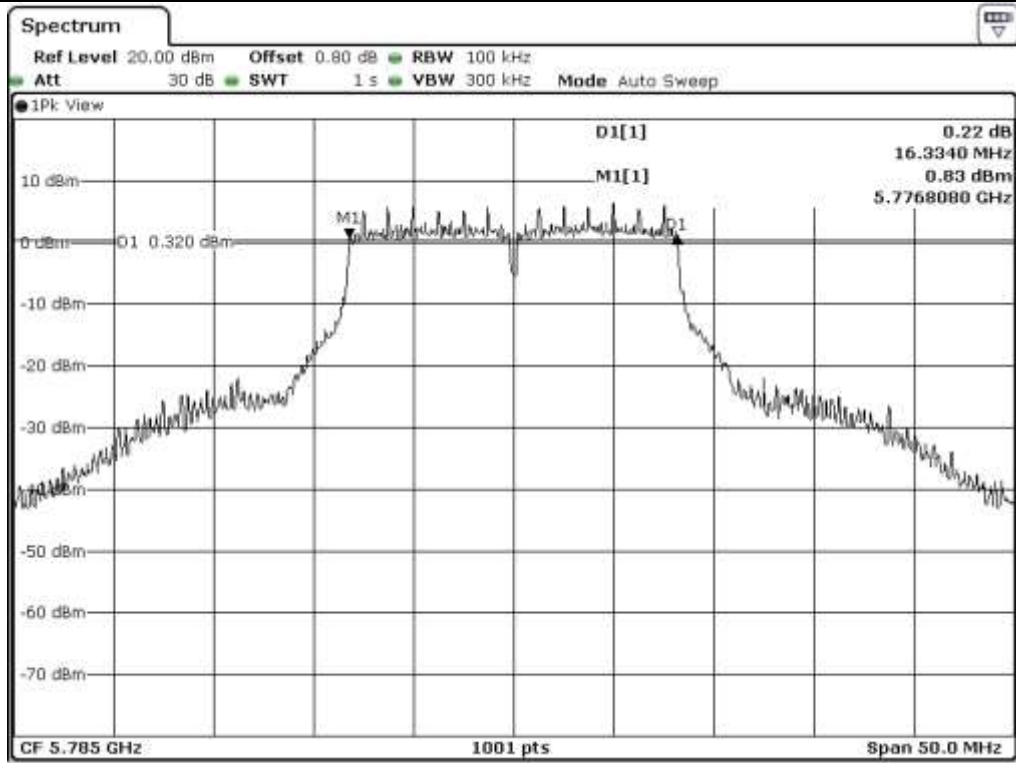

Middle Channel (5.785 MHz)

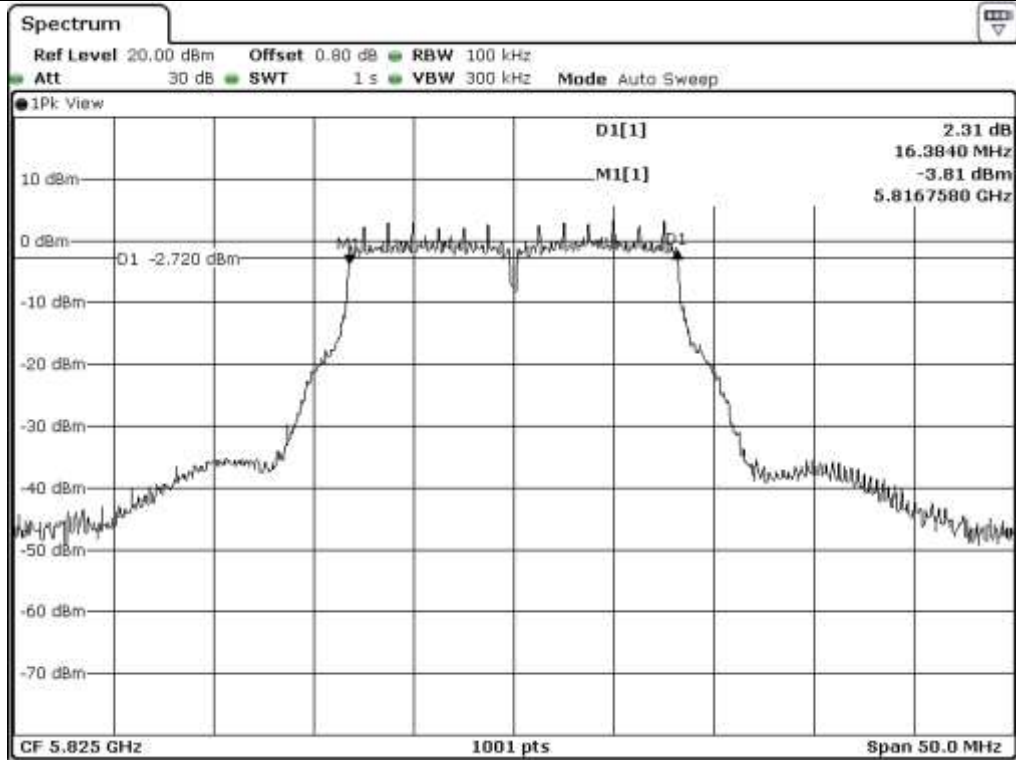

High Channel (5.825 MHz)


9.4.4 Test data for Antenna 3


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	16.38
	Middle	5 785	16.33
	High	5 825	16.33




Tested by: Hyung-Kwon, Oh / Engineer

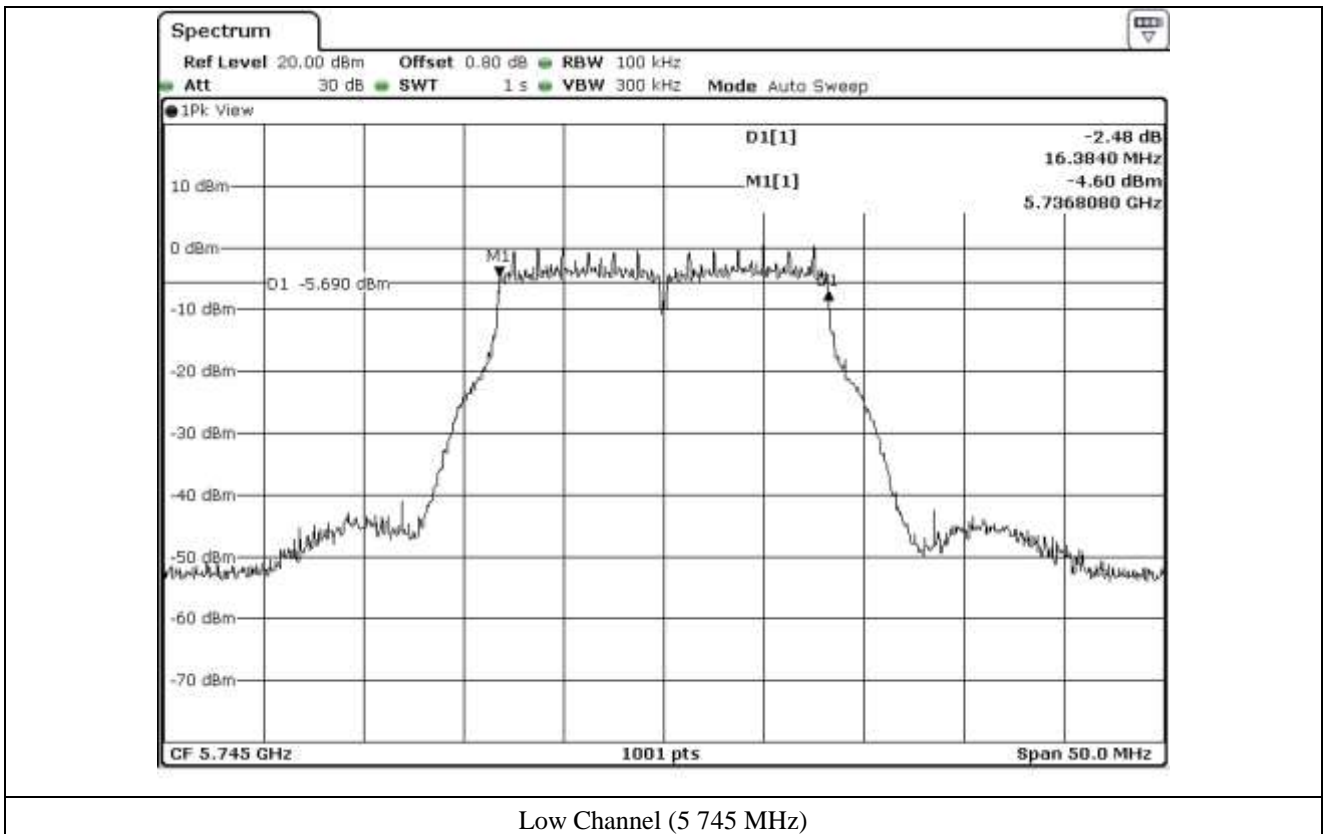

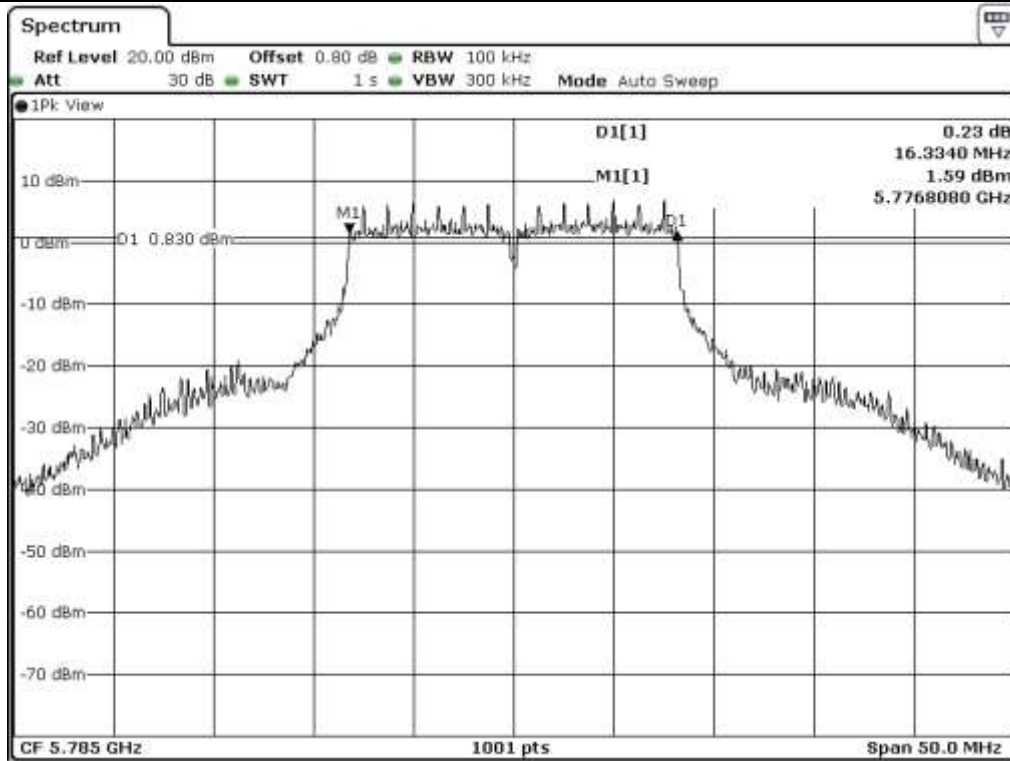

Middle Channel (5.785 MHz)

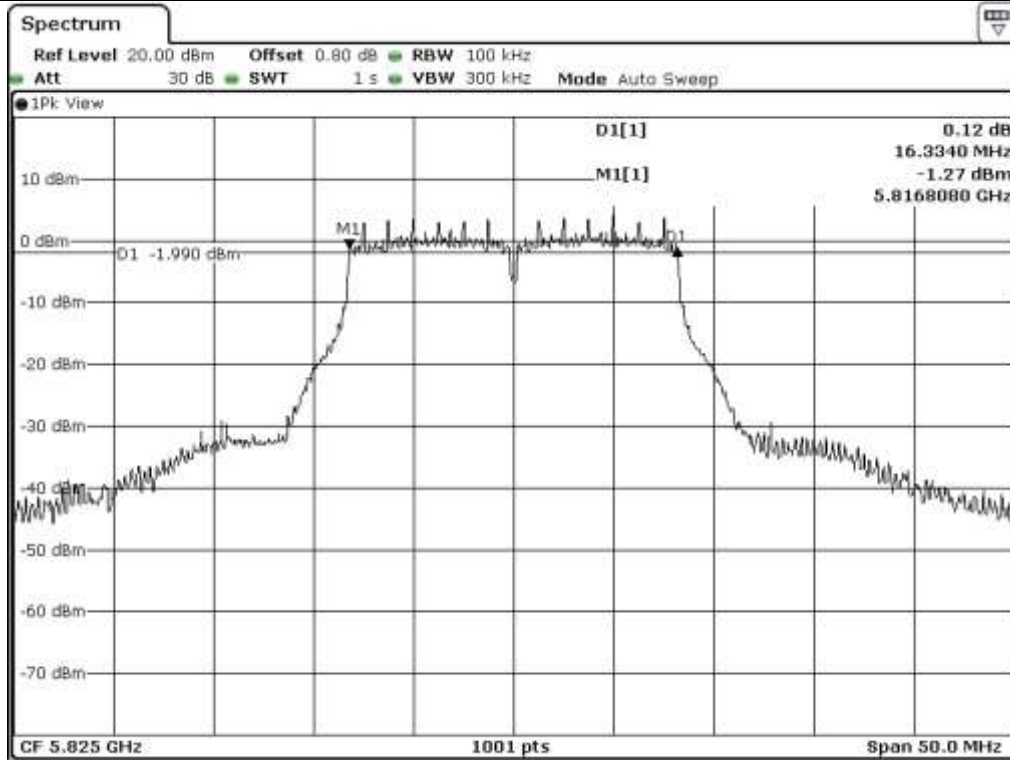

High Channel (5.825 MHz)

9.5 Test data for 802.11n_HT20_RLAN Mode


9.5.1 Test data for Antenna 0


- Test Date : March 20, 2017

- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	17.63
	Middle	5 785	17.58
	High	5 825	17.63

Tested by: Hyung-Kwon, Oh / Engineer

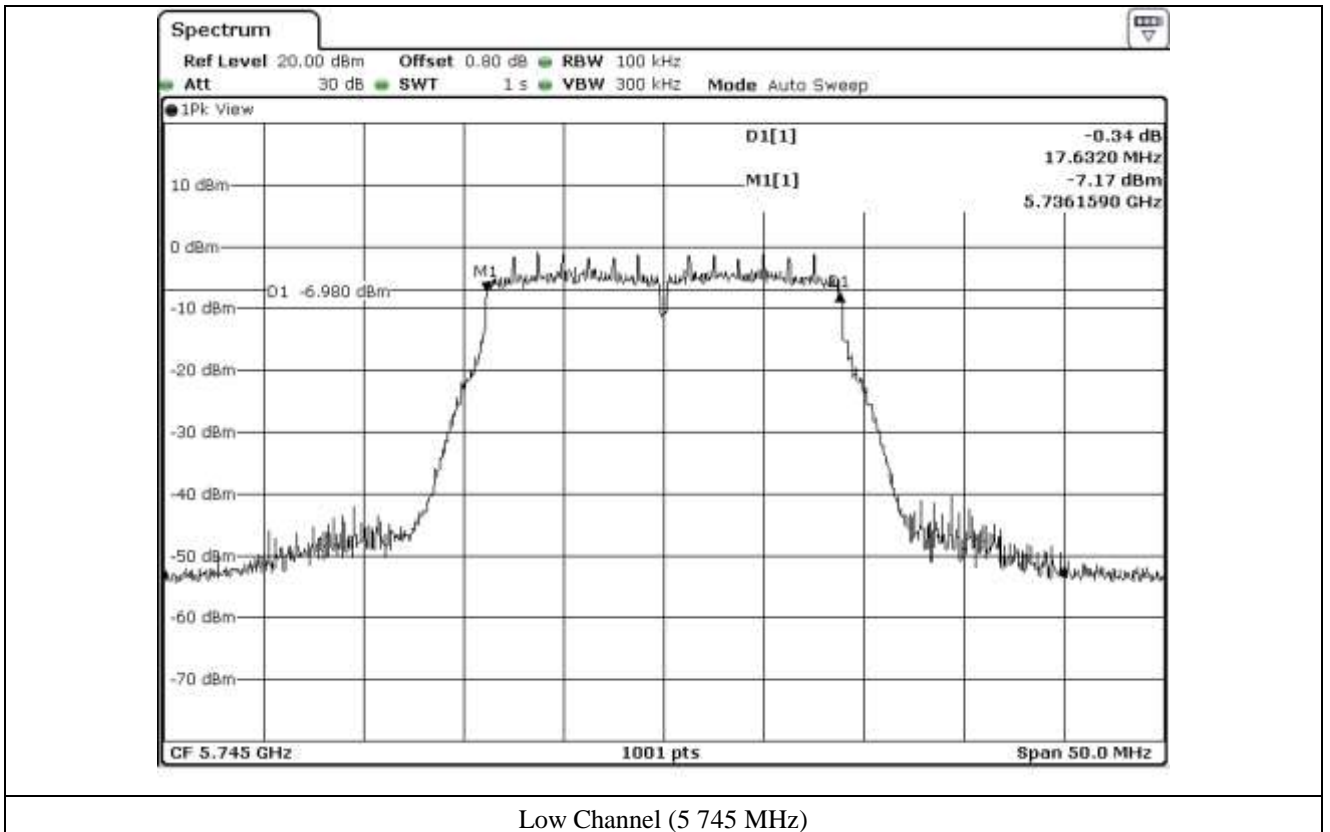

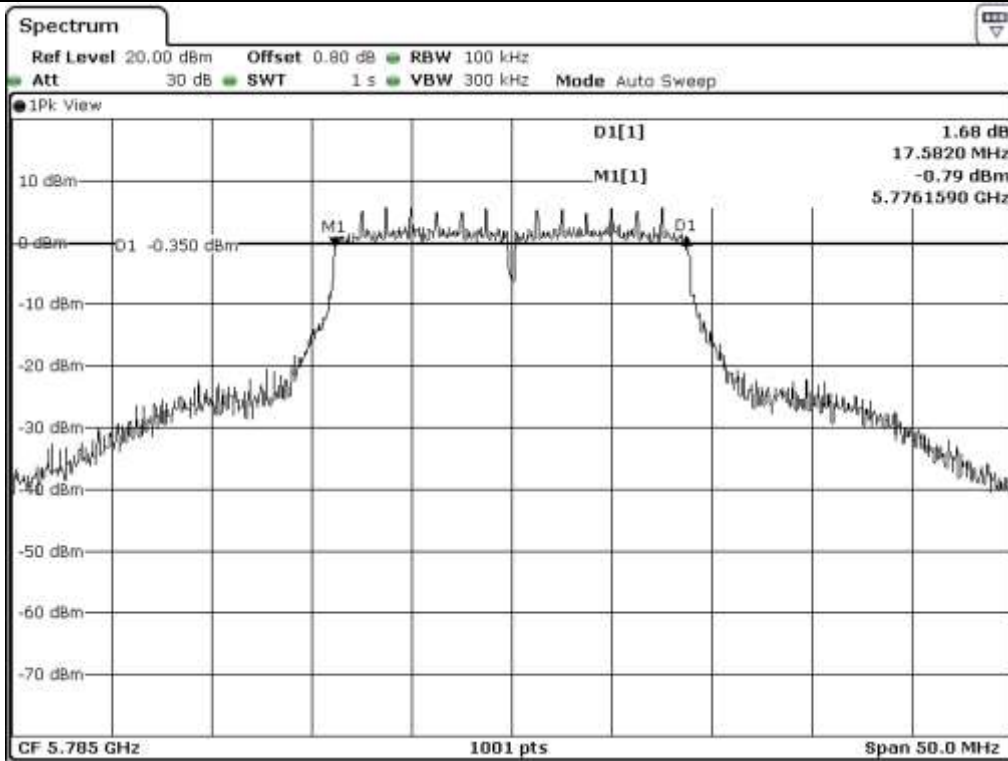

Middle Channel (5.785 MHz)

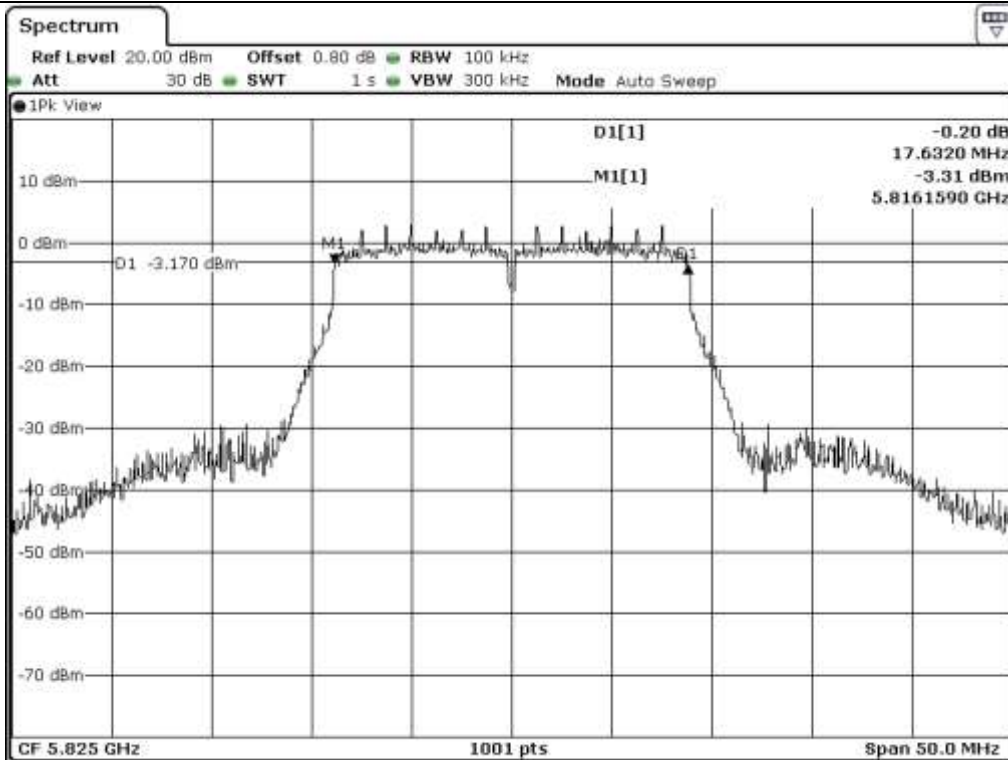

High Channel (5.825 MHz)


9.5.2 Test data for Antenna 1


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	17.63
	Middle	5 785	17.63
	High	5 825	17.63




Tested by: Hyung-Kwon, Oh / Engineer

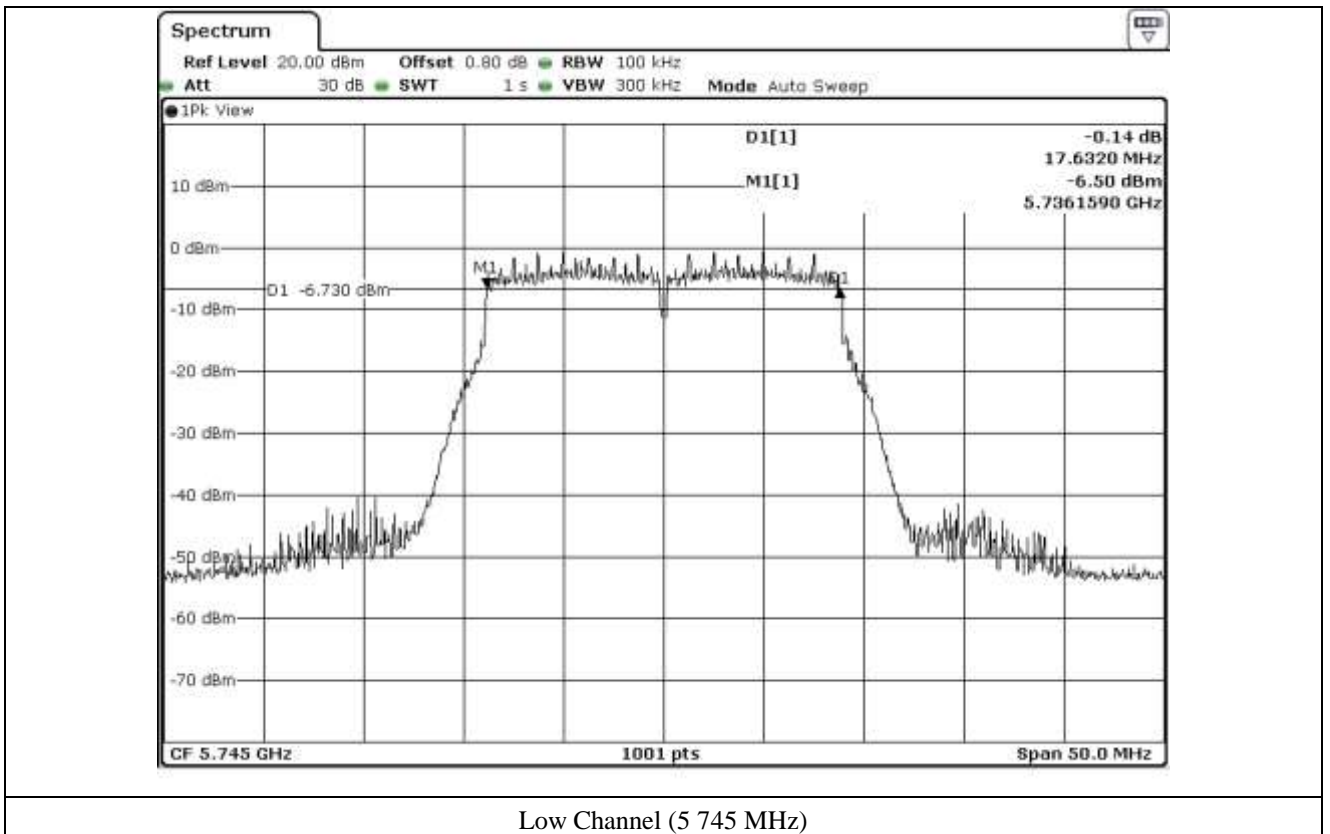

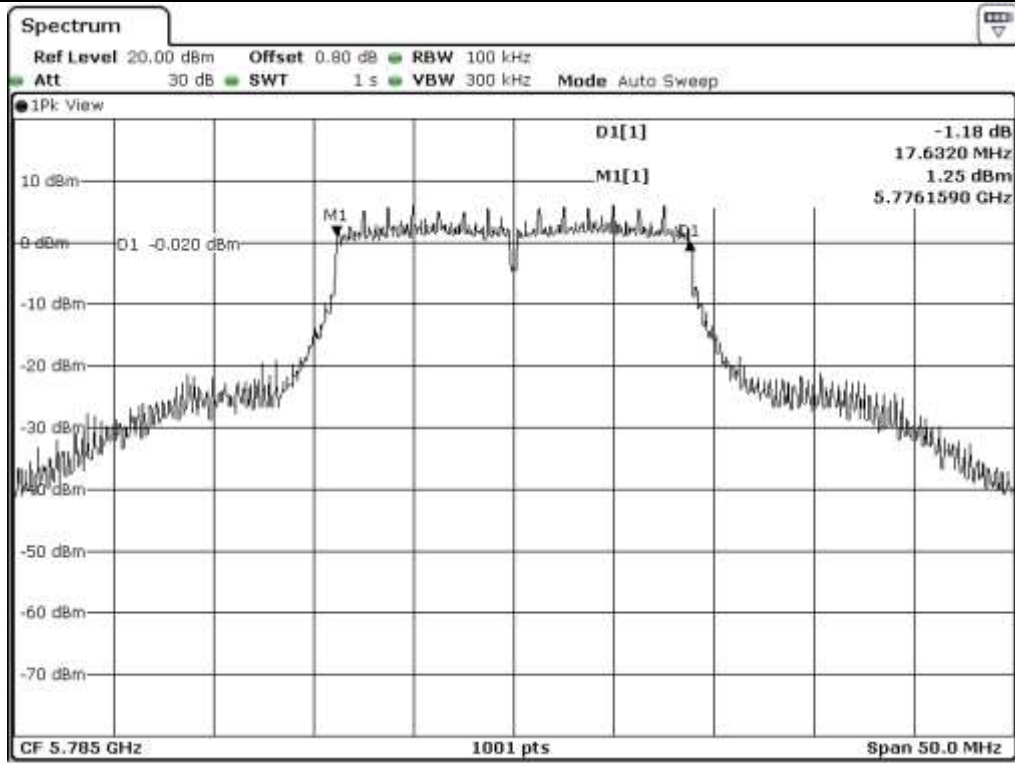

Middle Channel (5.785 MHz)

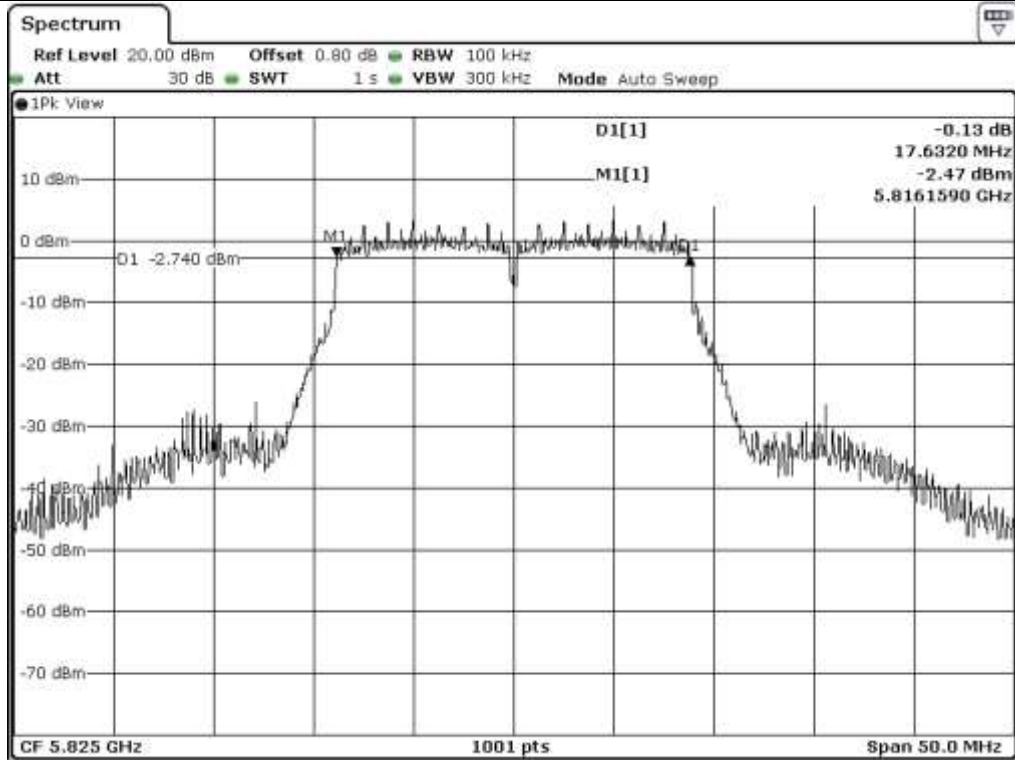


High Channel (5.825 MHz)


9.5.3 Test data for Antenna 2

- Test Date : March 20, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	17.63
	Middle	5 785	17.63
	High	5 825	17.63

Tested by: Hyung-Kwon, Oh / Engineer

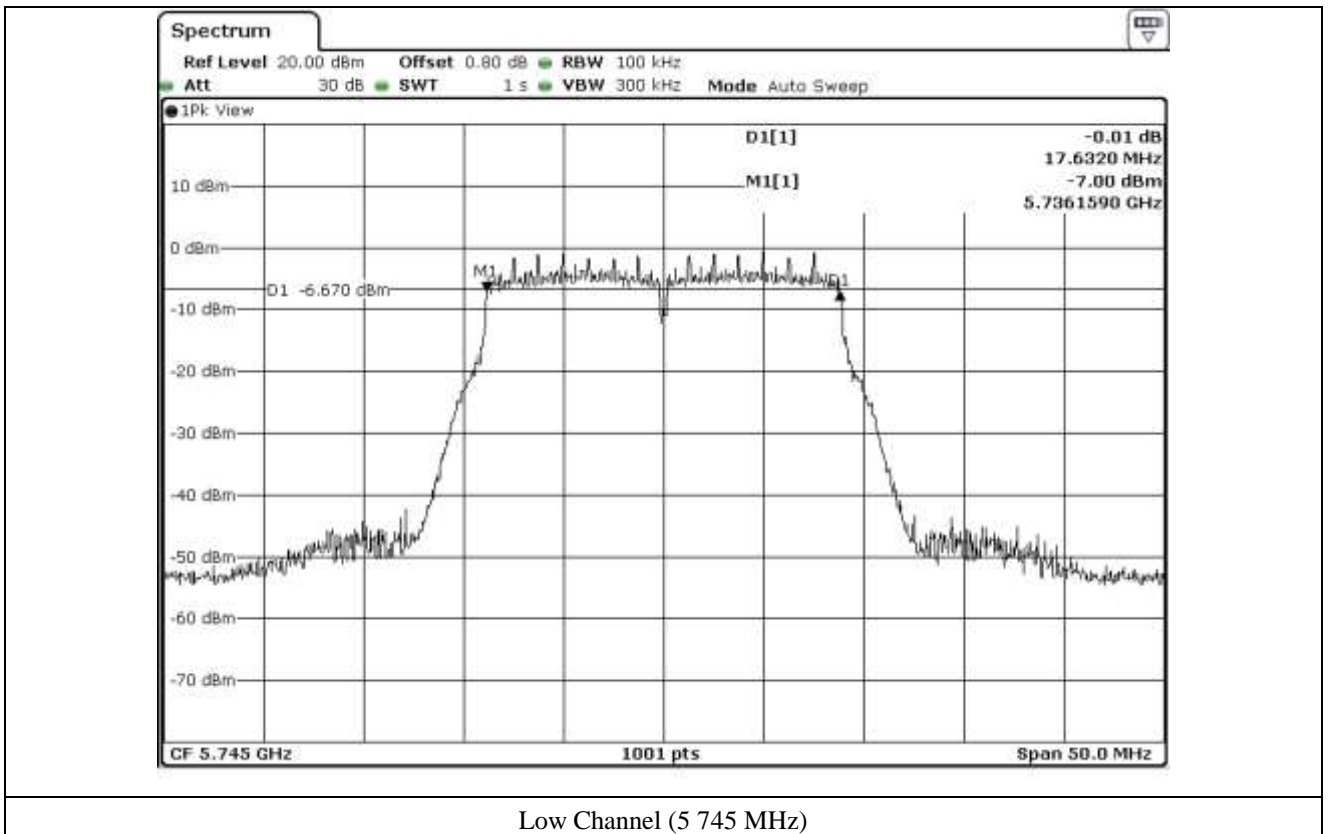

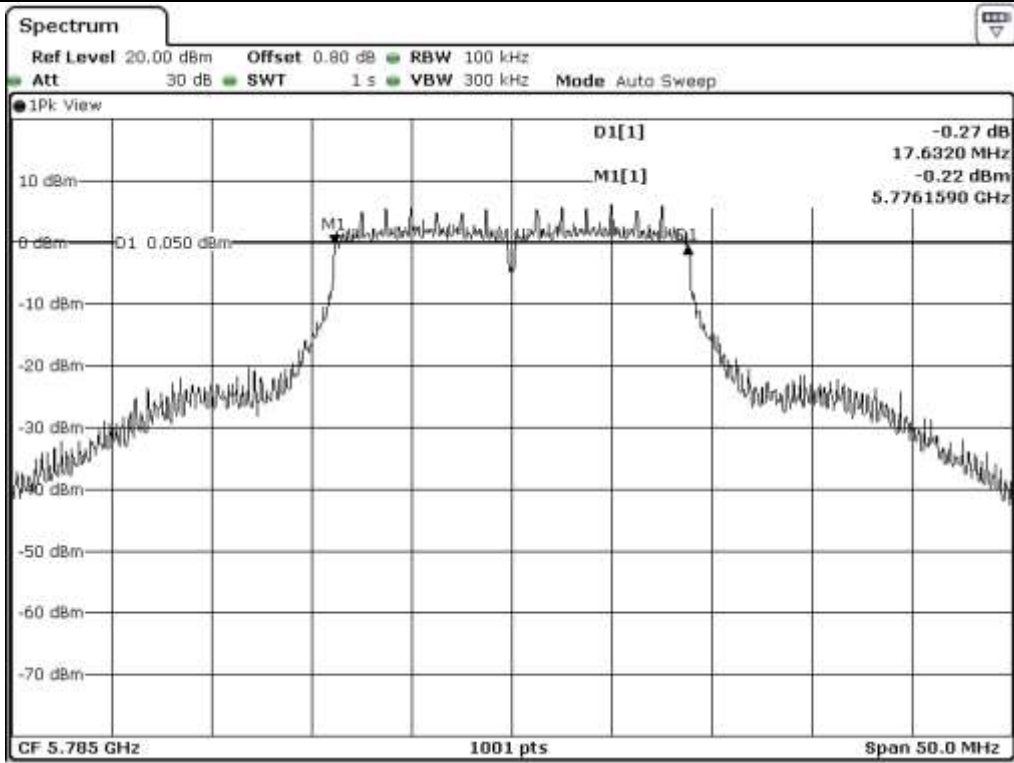

Middle Channel (5.785 MHz)

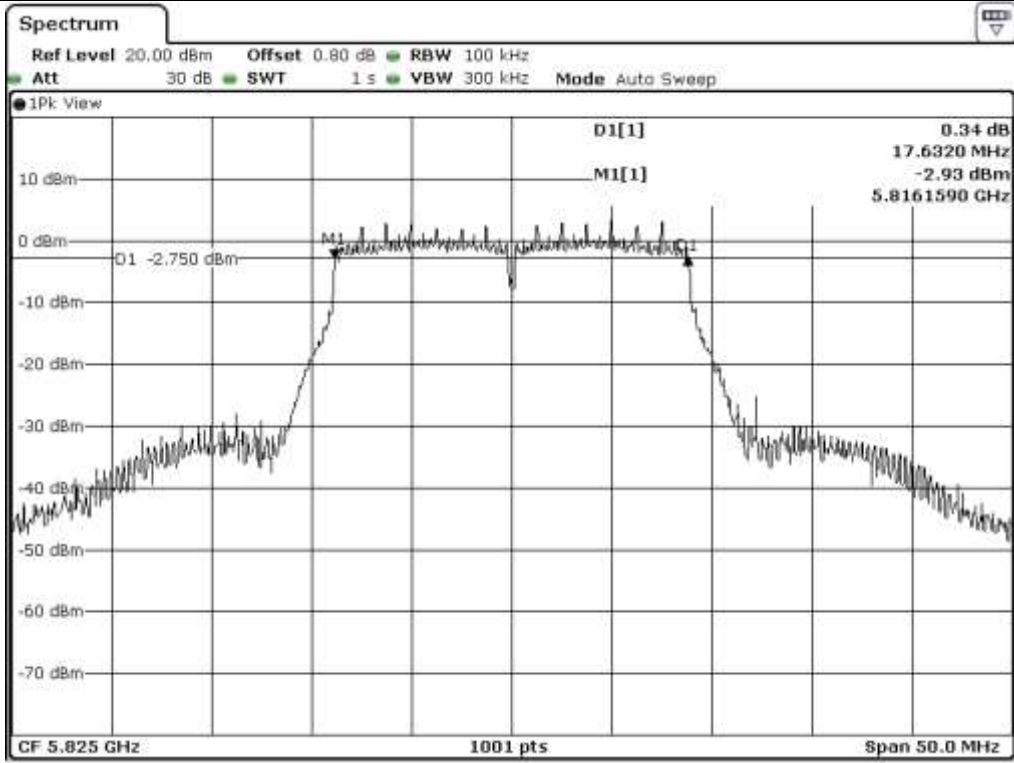


High Channel (5.825 MHz)


9.5.4 Test data for Antenna 3

- Test Date : March 20, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 745	17.63
	Middle	5 785	17.63
	High	5 825	17.63

Tested by: Hyung-Kwon, Oh / Engineer

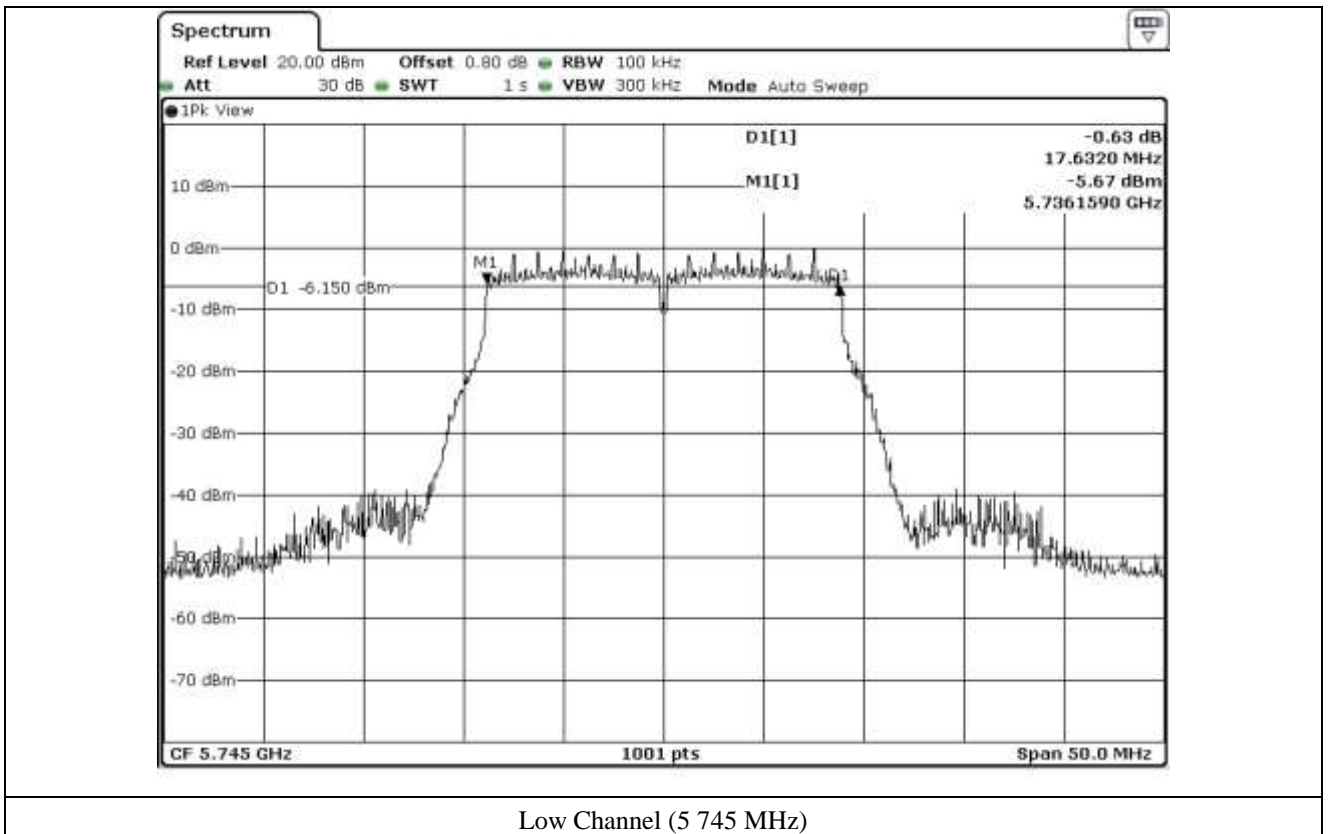

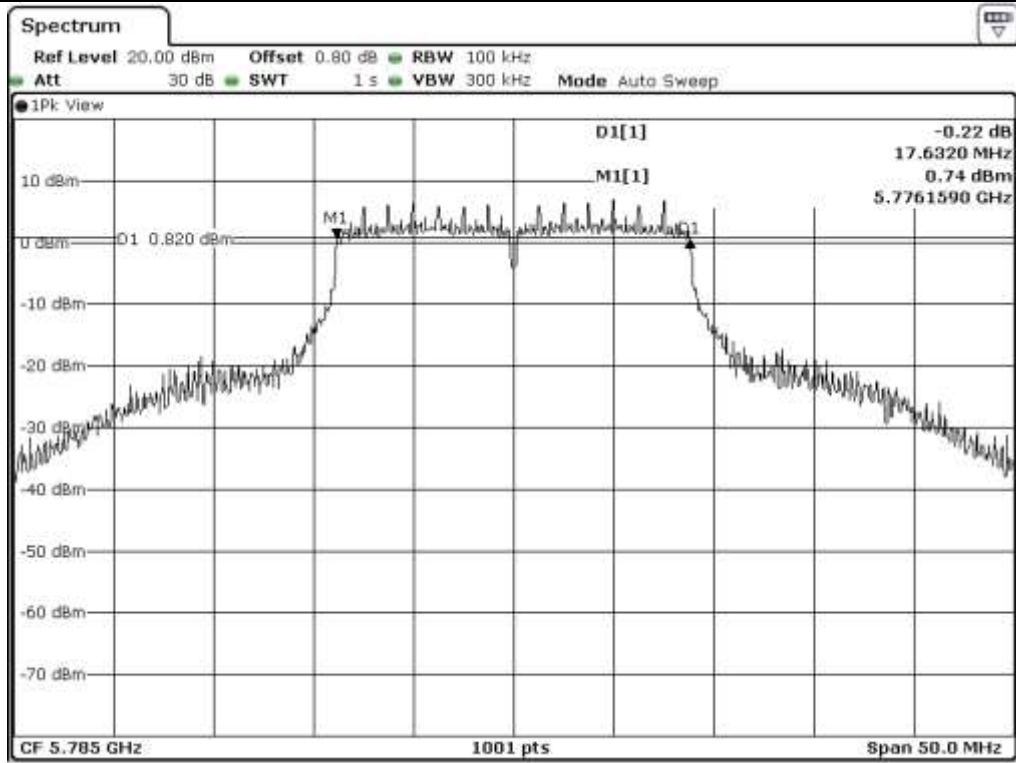

Middle Channel (5.785 MHz)

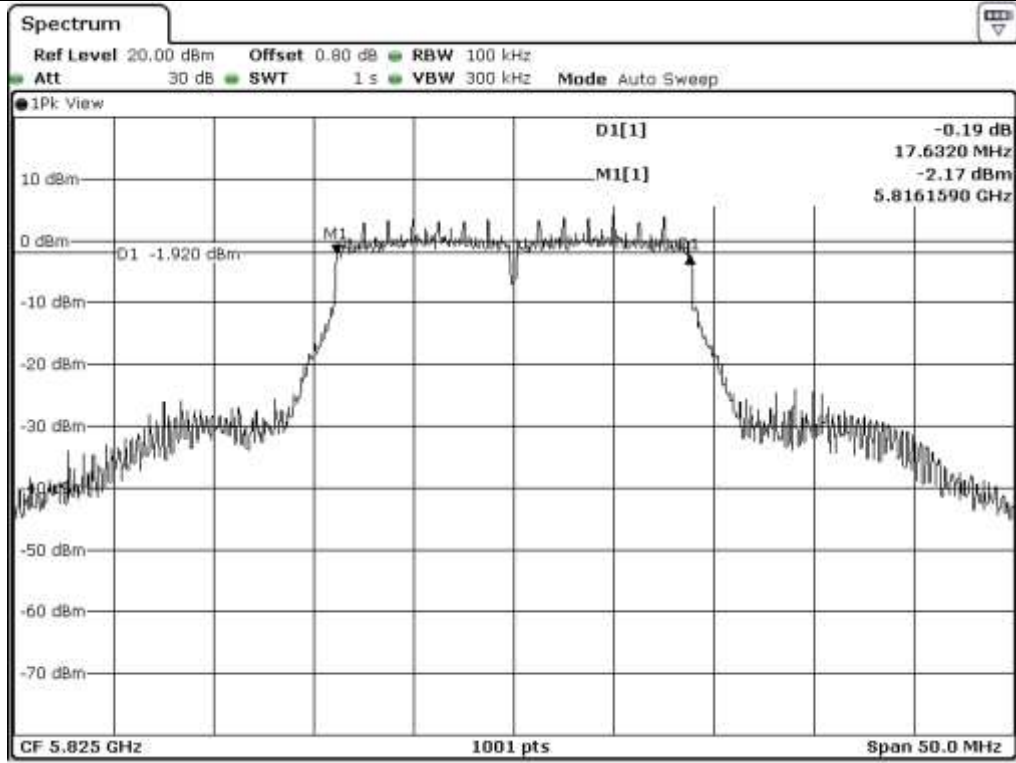

High Channel (5.825 MHz)

9.6 Test data for 802.11n_HT40_RLAN Mode

9.6.1 Test data for Antenna 0


-. Test Date : March 20, 2017


-. Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755	36.36
	High	5 795	36.36



Tested by: Hyung-Kwon, Oh / Engineer

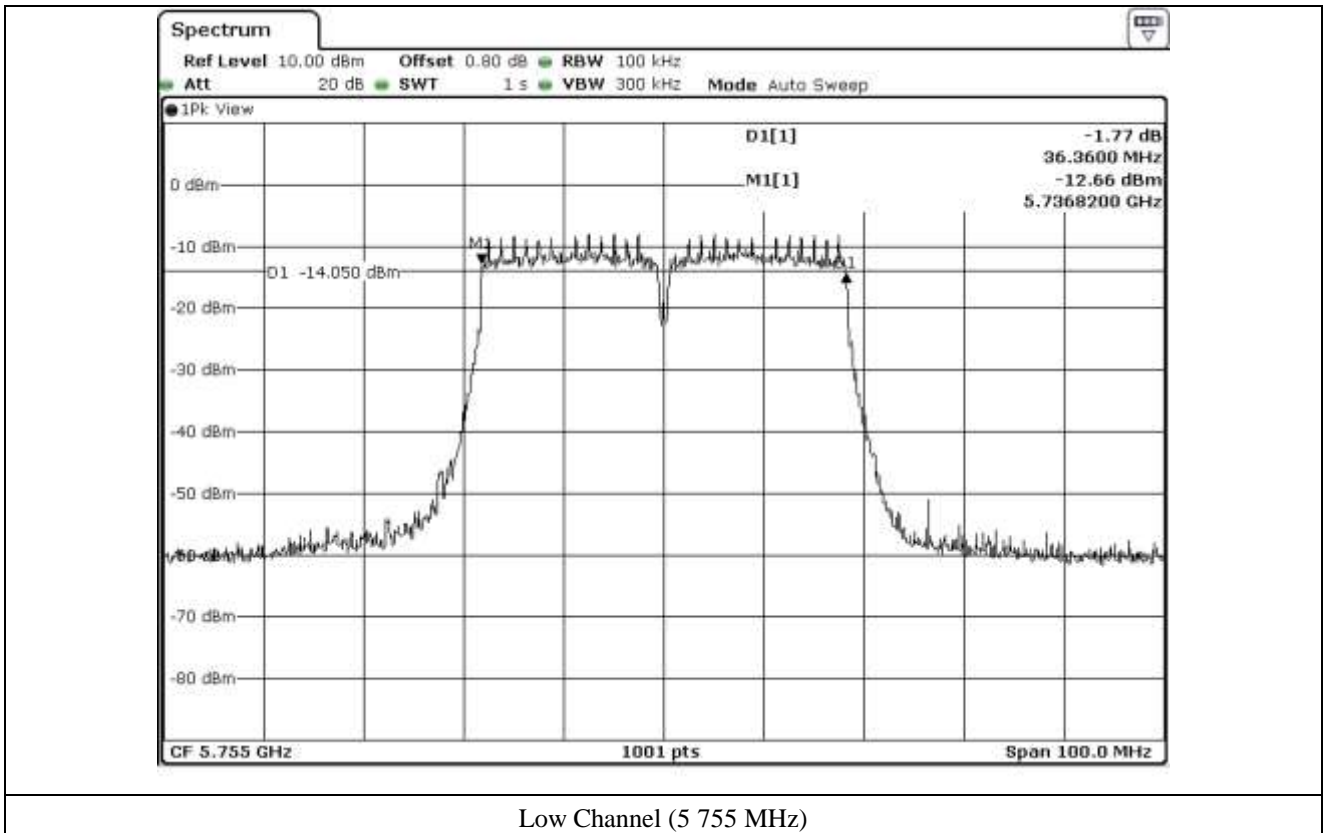

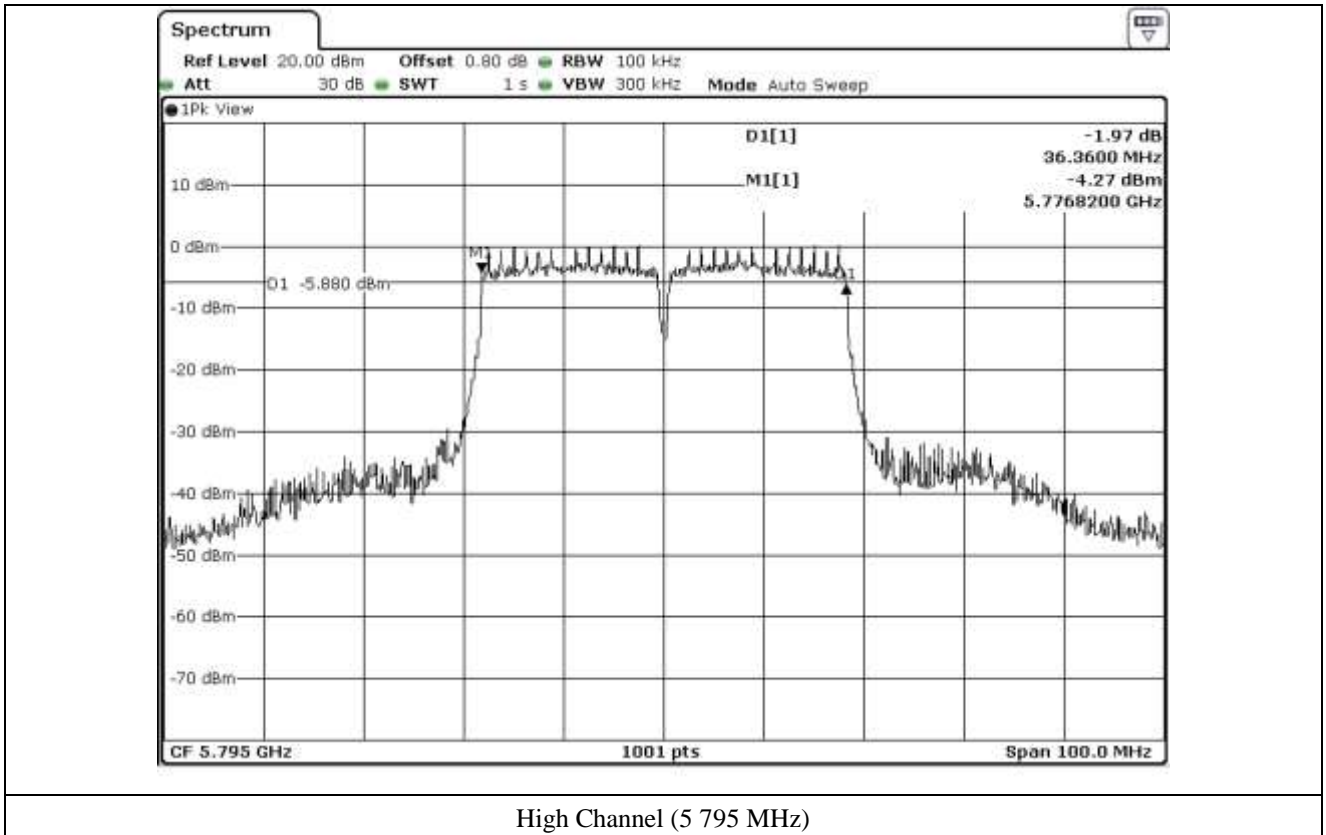

High Channel (5 795 MHz)


9.6.2 Test data for Antenna 1


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755	36.36
	High	5 795	36.36



Tested by: Hyung-Kwon, Oh / Engineer

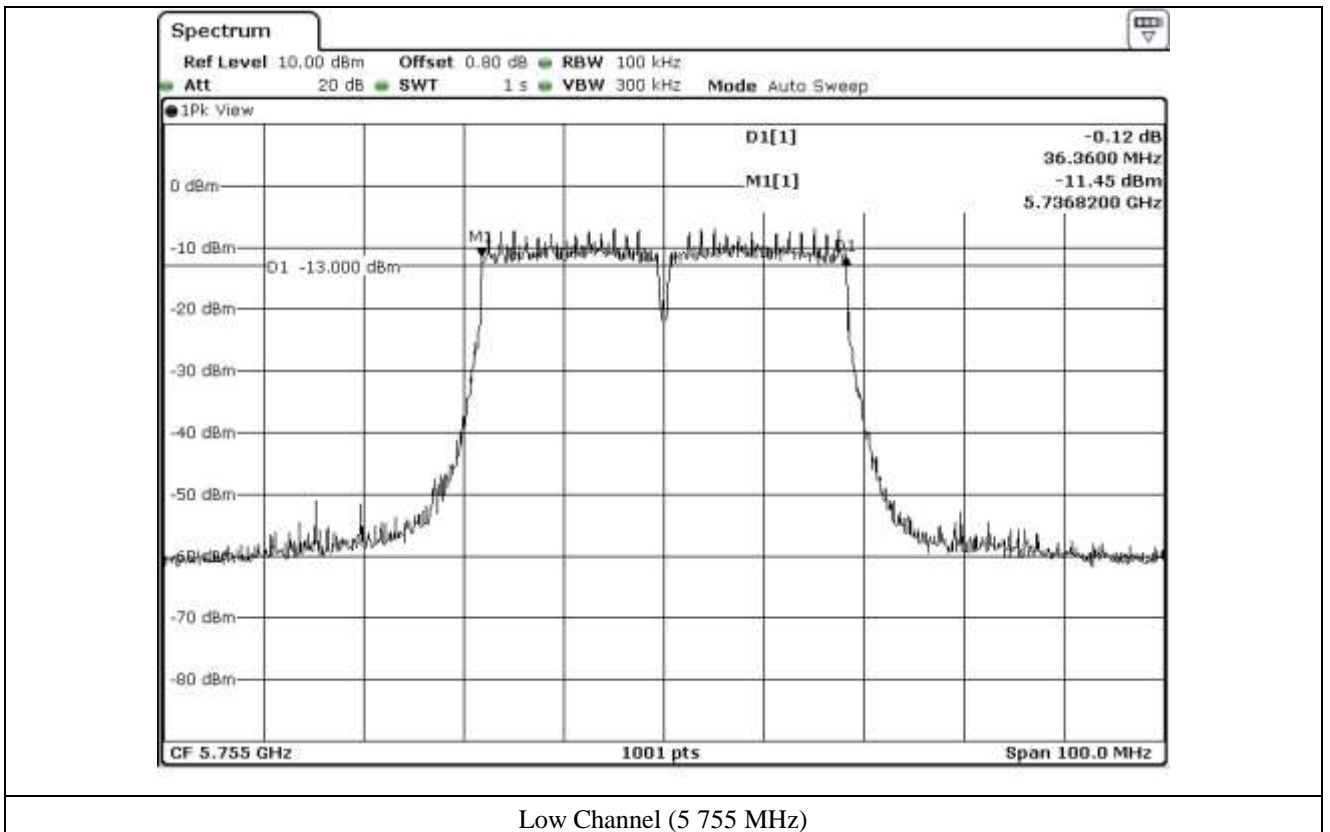

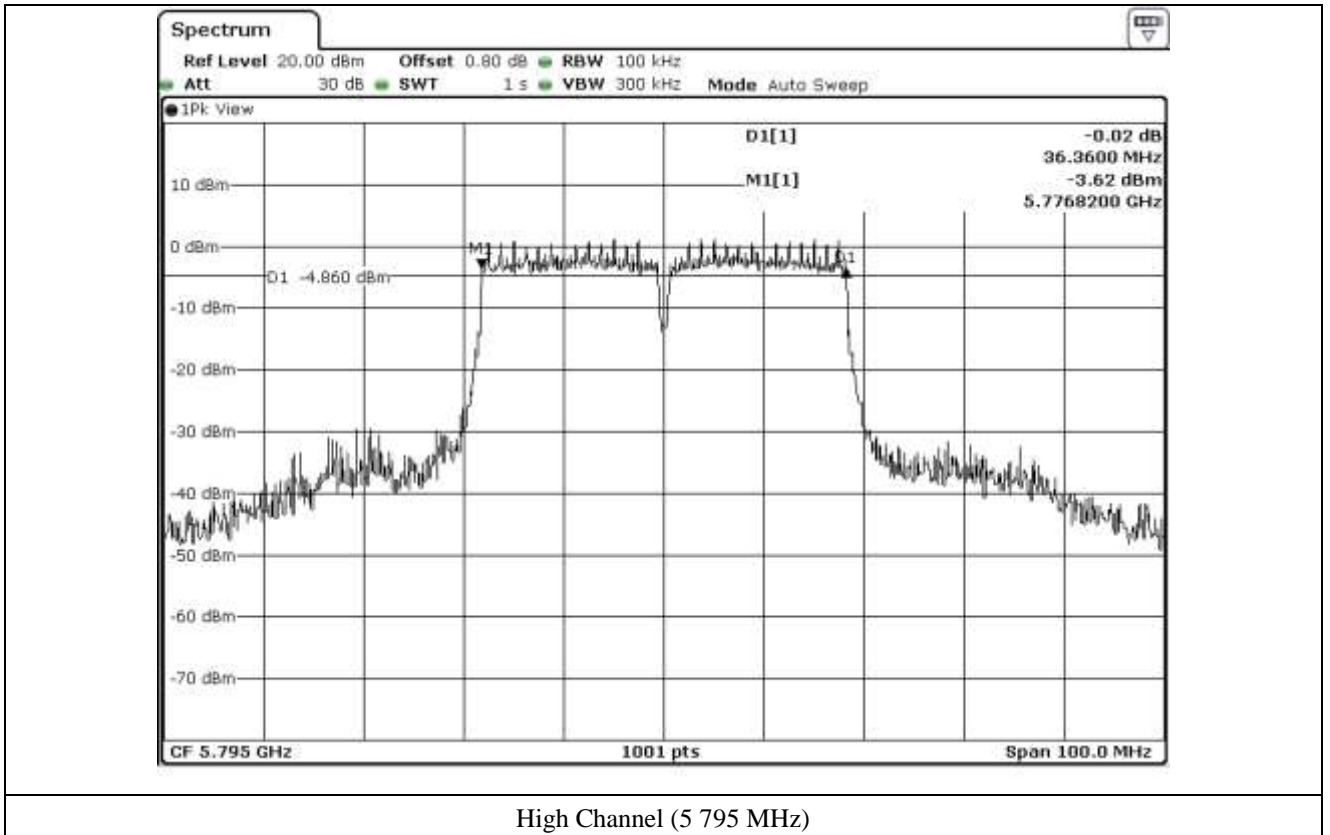


9.6.3 Test data for Antenna 2


- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755	36.36
	High	5 795	36.36



Tested by: Hyung-Kwon, Oh / Engineer

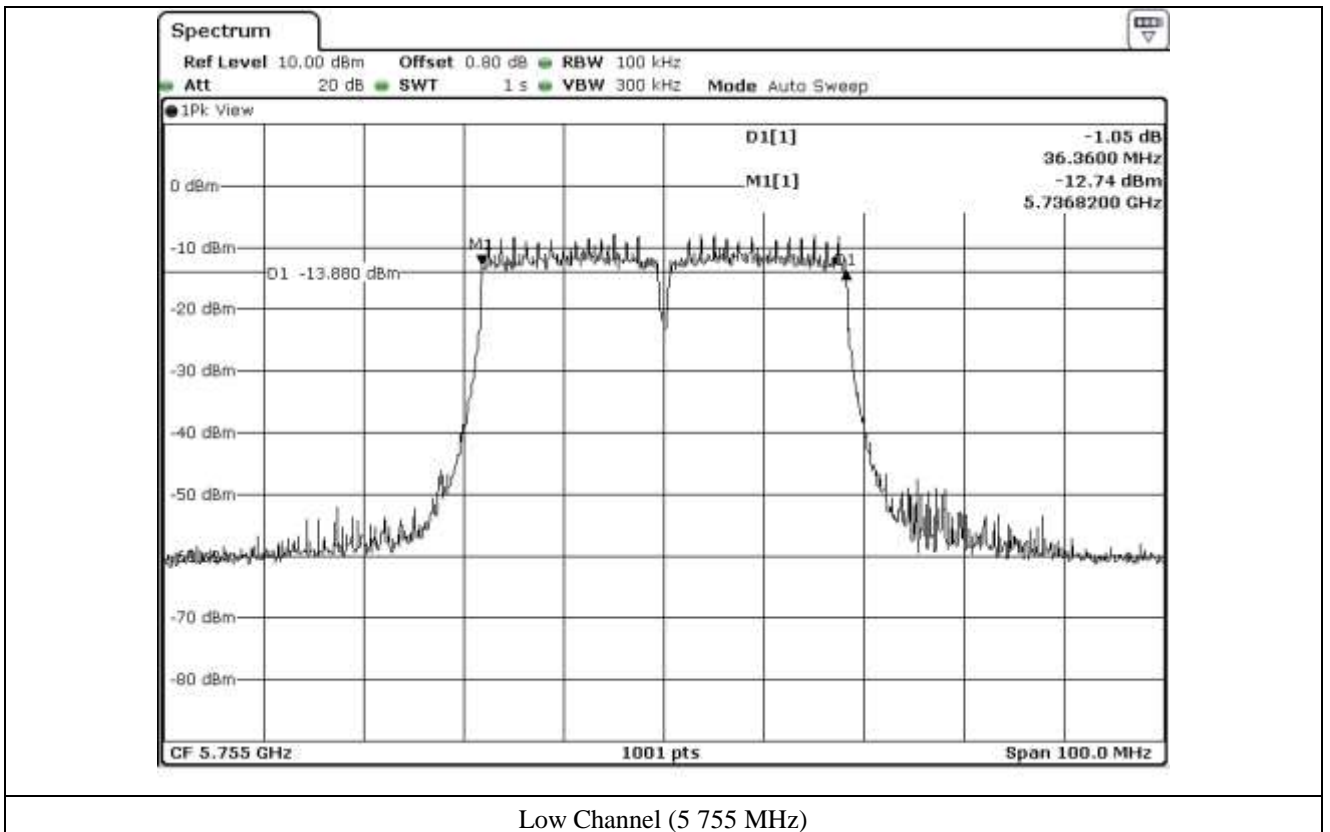

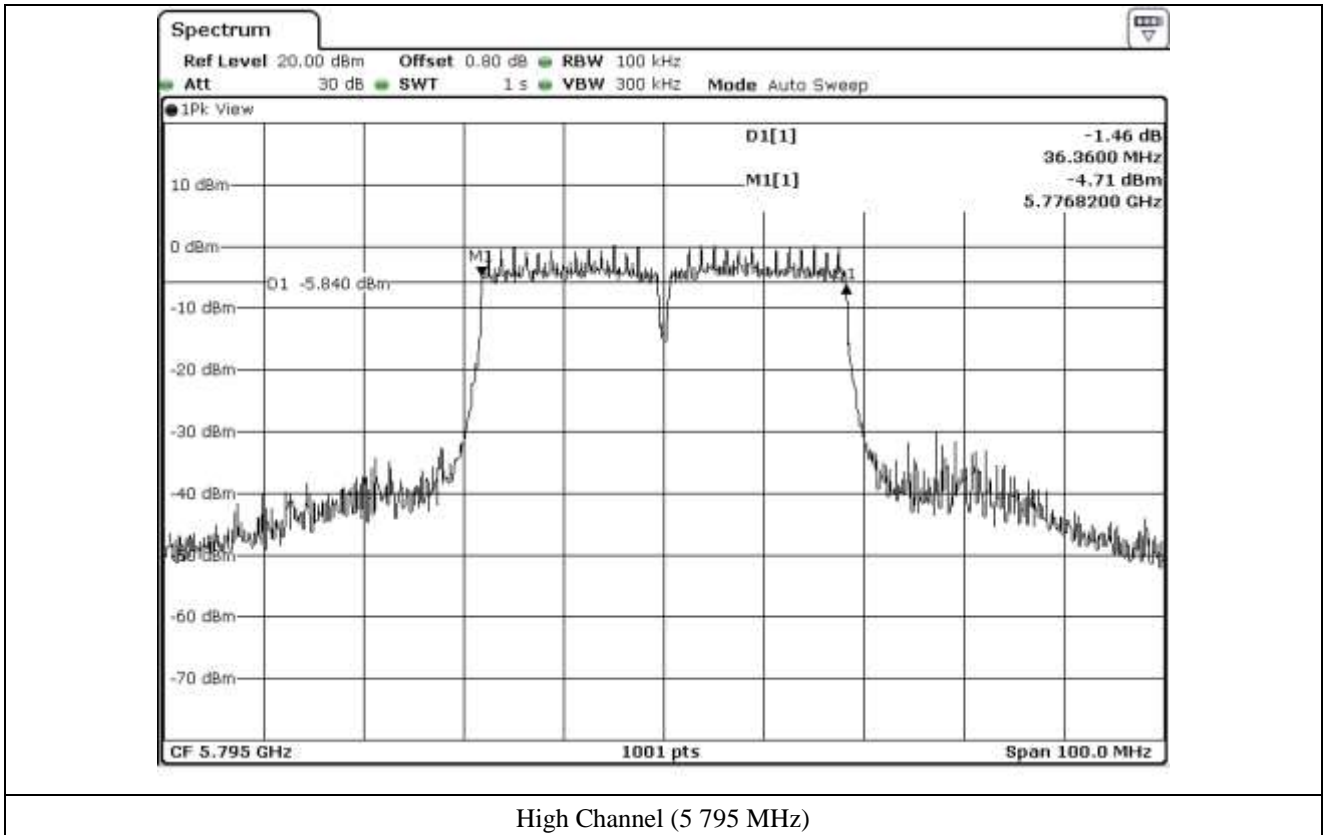


9.6.4 Test data for Antenna 3

- Test Date : March 20, 2017
- Test Result : Pass


FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Low	5 755	36.36
	High	5 795	36.36



Tested by: Hyung-Kwon, Oh / Engineer

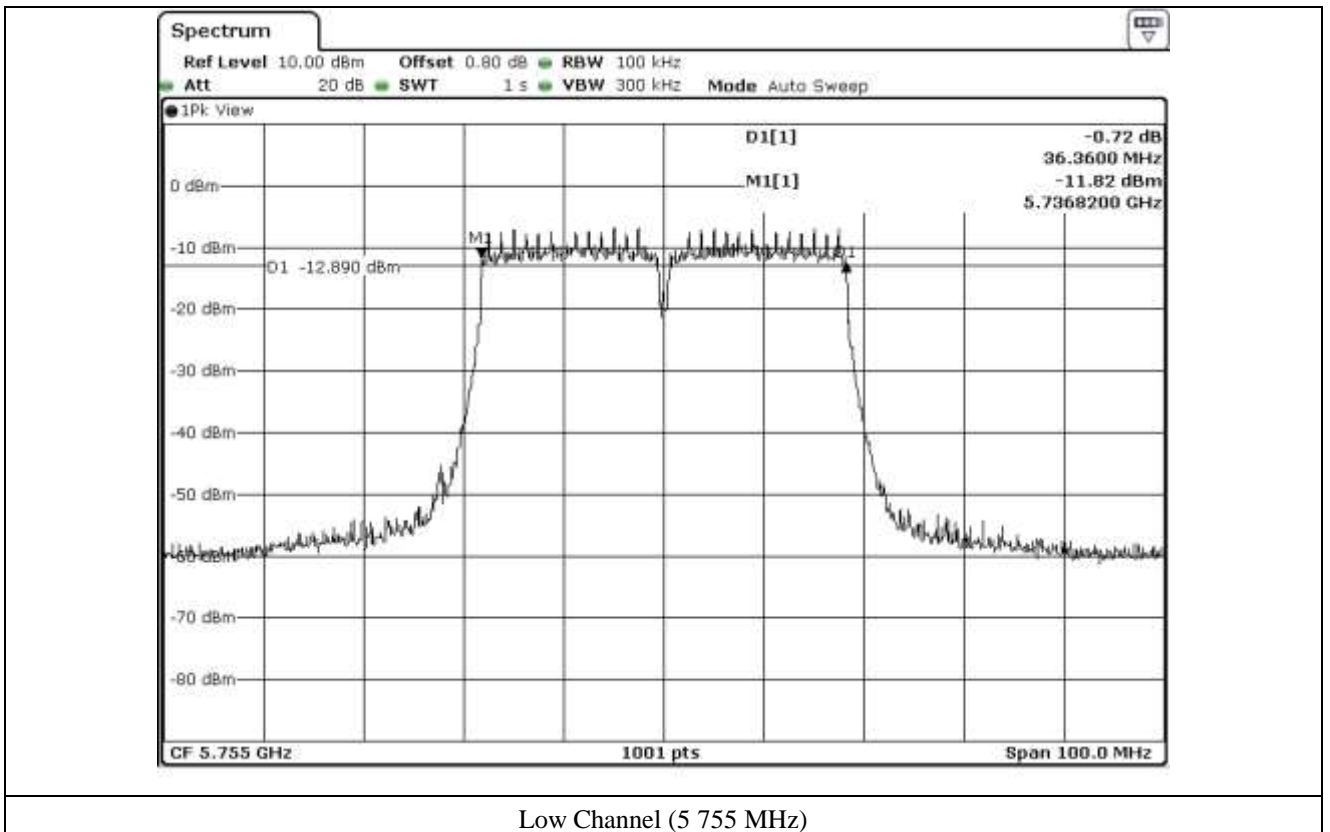

Low Channel (5 755 MHz)

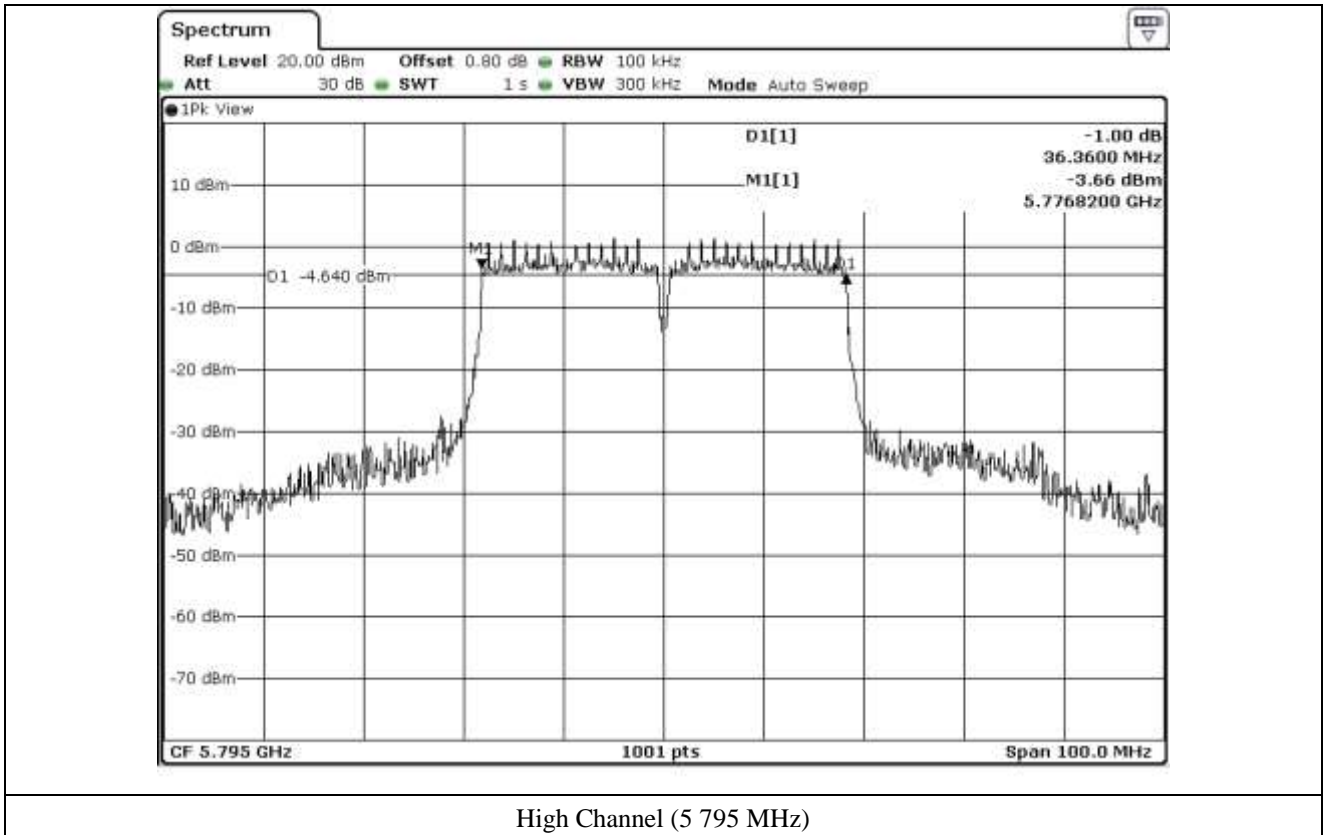

High Channel (5 795 MHz)

9.7 Test data for 802.11ac_VHT80 RLAN Mode


9.7.1 Test data for Antenna 0

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775	76.32



Tested by: Hyung-Kwon, Oh / Engineer

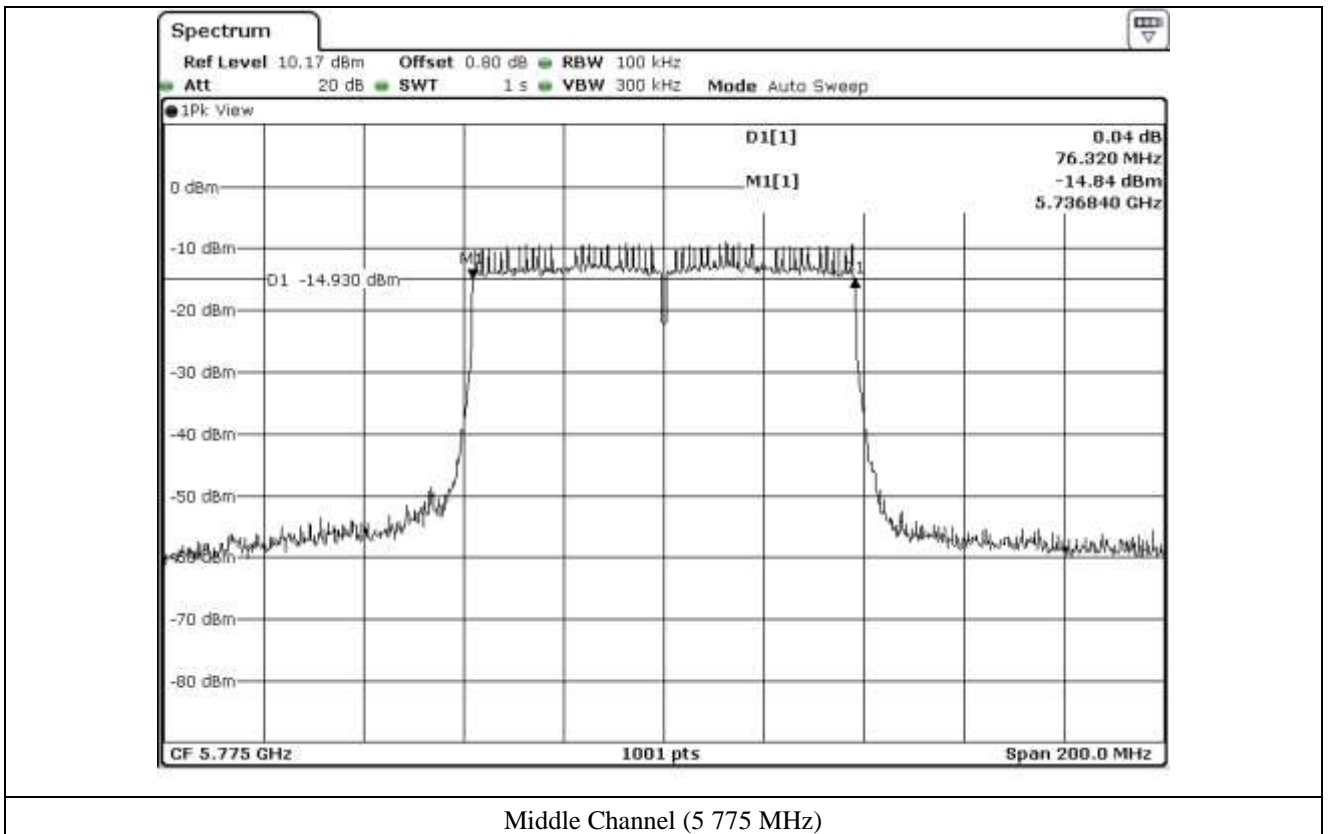


9.7.2 Test data for Antenna 1

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775	76.32



Tested by: Hyung-Kwon, Oh / Engineer

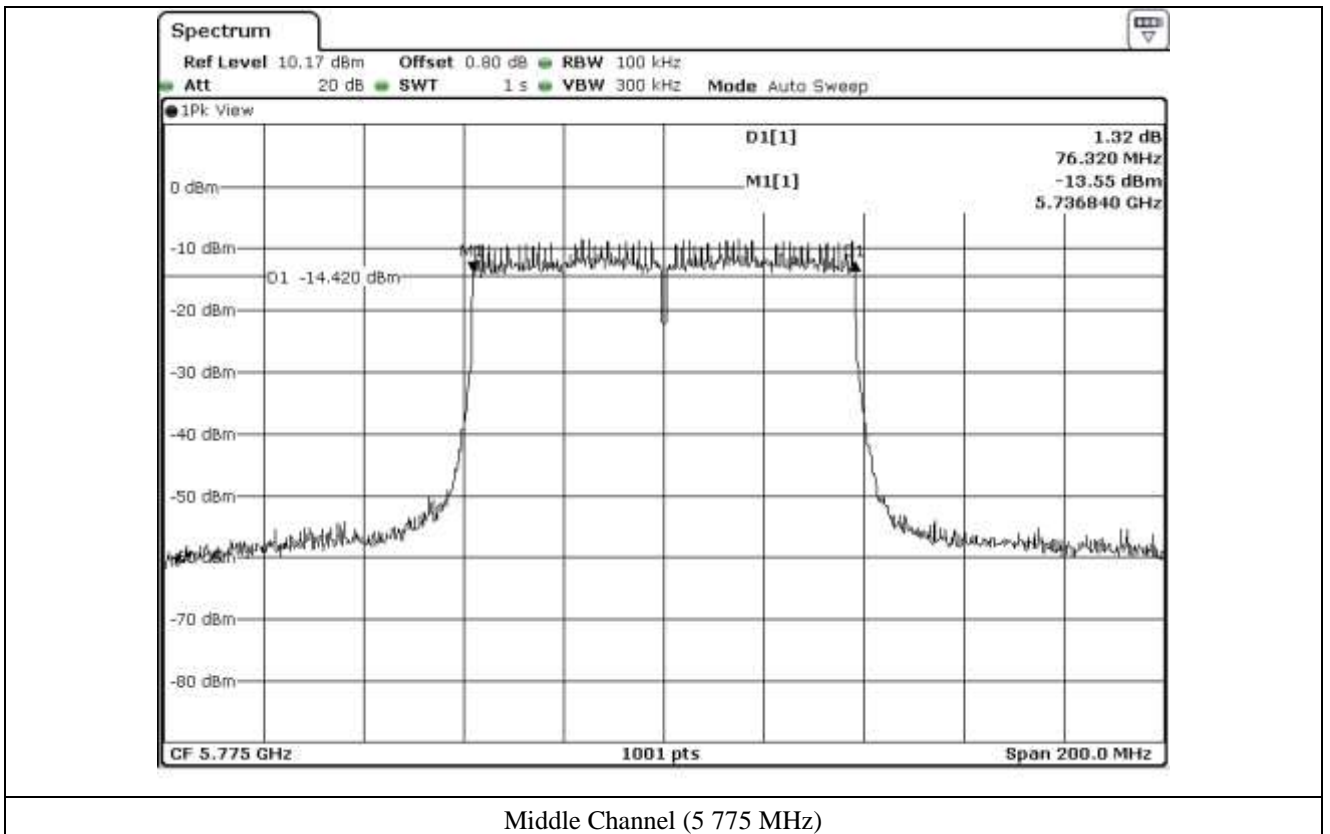

9.7.3 Test data for Antenna 2

- Test Date : March 20, 2017
- Test Result : Pass

FREQUENCY RANGE (MHz)	CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)
5 725 ~ 5 850	Middle	5 775	76.32



Tested by: Hyung-Kwon, Oh / Engineer

