

Plot 7-288. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
911.00	Peak	H	-	-	-79.46	-2.83	24.71	68.20	-43.49
4259.00	Average	H	-	-	-77.84	9.70	38.86	53.98	-15.12
4259.00	Peak	H	-	-	-66.49	9.70	50.21	73.98	-23.77
7607.00	Average	H	-	-	-79.54	15.28	42.74	53.98	-11.24
7607.00	Peak	H	-	-	-68.20	15.28	54.08	73.98	-19.90
9133.00	Average	H	-	-	-79.83	17.94	45.11	53.98	-8.87
9133.00	Peak	H	-	-	-68.29	17.94	56.65	73.98	-17.33
10955.00	Average	H	-	-	-79.49	20.71	48.22	53.98	-5.76
10955.00	Peak	H	-	-	-68.30	20.71	59.41	73.98	-14.57
12481.00	Average	H	-	-	-83.27	23.15	46.88	53.98	-7.10
12481.00	Peak	H	-	-	-72.27	23.15	57.88	73.98	-16.10

Table 7-66. Radiated Measurements (ANT1 2.4GHz – ANT2 5GHz)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 203 of 242	


Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	149
Operating Frequency (MHz)	2437	5745
Data Rate (Mbps)	1	6
Mode	b	a

Table 7-67. Simultaneous Transmission Config-2

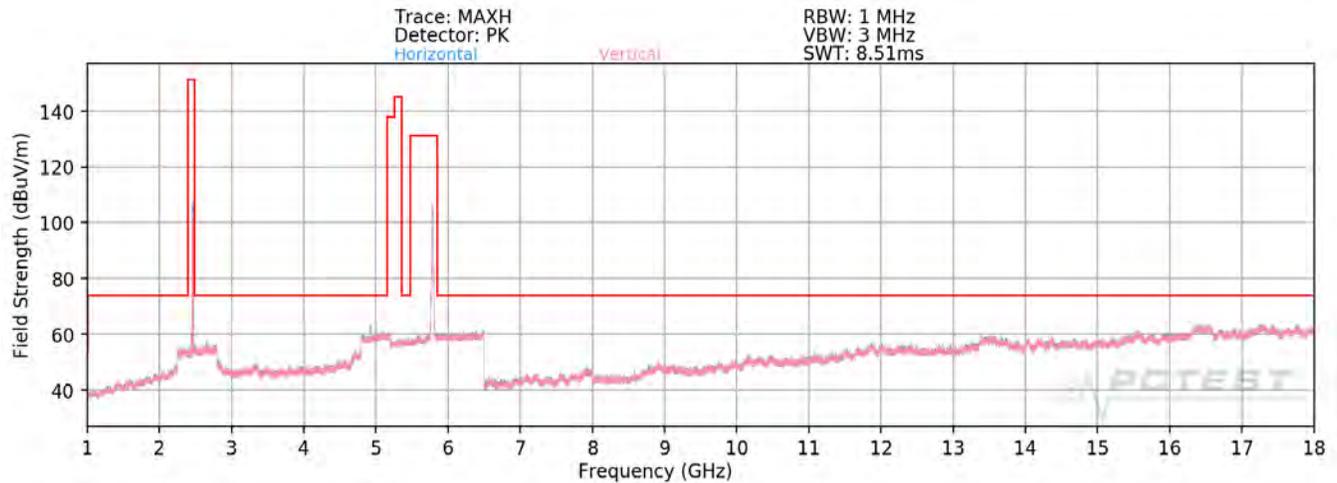


Plot 7-289. Radiated Spurious Plot above 1GHz (5GHz – 2.4 GHz)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 204 of 242	

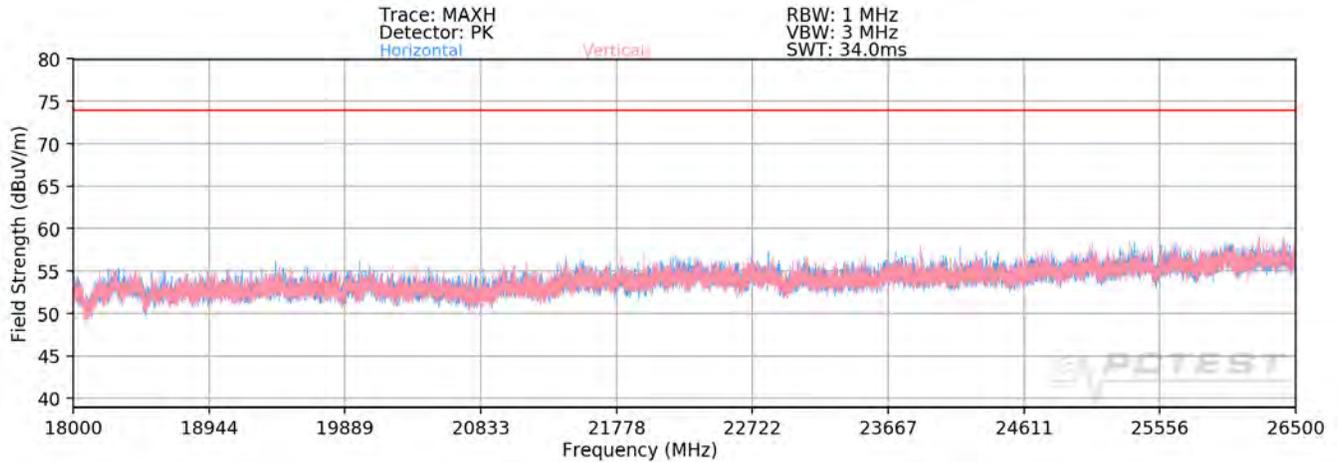

Plot 7-290. Radiated Spurious Plot 18GHz – 26.5GHz (5GHz – 2.4 GHz)

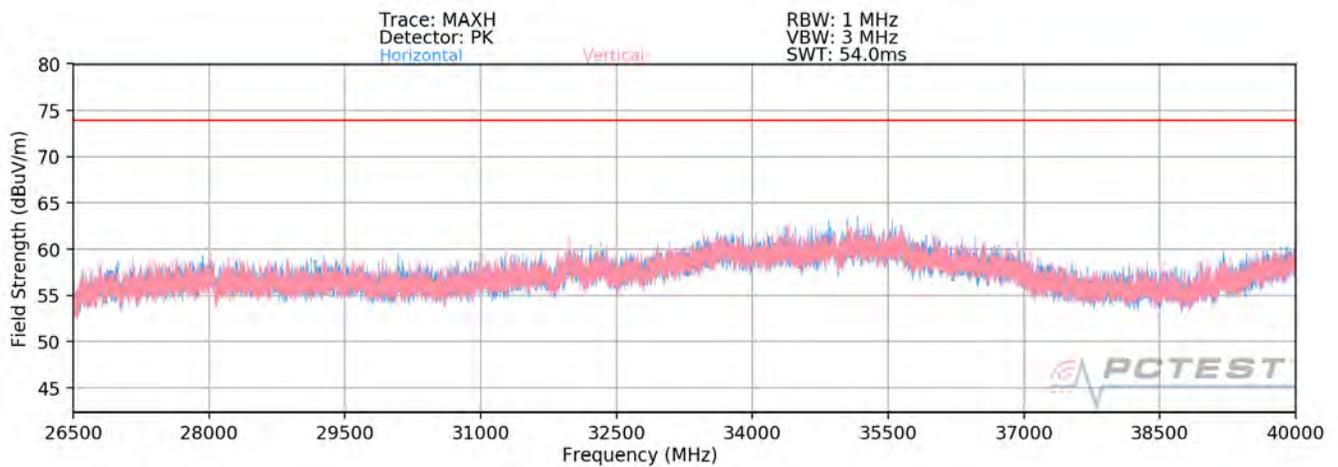

Plot 7-291. Radiated Spurious Plot above 26.5GHz (5GHz – 2.4 GHz)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 205 of 242


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
861.00	Peak	H	-	-	-79.34	-3.54	24.12	68.20	-44.08
4184.00	Average	H	-	-	-78.04	10.28	39.24	53.98	-14.74
4184.00	Peak	H	-	-	-66.70	10.28	50.58	73.98	-23.40
7507.00	Average	H	-	-	-79.48	15.02	42.54	53.98	-11.44
7507.00	Peak	H	-	-	-68.78	15.02	53.24	73.98	-20.74
9108.00	Average	H	-	-	-80.01	18.31	45.30	53.98	-8.68
9108.00	Peak	H	-	-	-67.93	18.31	57.38	73.98	-16.60
10830.00	Average	H	-	-	-79.64	20.19	47.55	53.98	-6.43
10830.00	Peak	H	-	-	-68.61	20.19	58.58	73.98	-15.40
12431.00	Average	H	-	-	-83.68	22.86	46.18	53.98	-7.80
12431.00	Peak	H	-	-	-72.50	22.86	57.36	73.98	-16.62

Table 7-68. Radiated Measurements (ANT1 5GHz – ANT2 2.4GHz)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 206 of 242	


Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	6	165
Operating Frequency (MHz)	2437	5825
Data Rate (Mbps)	6	6.5/7.2
Mode	g	n

Table 7-69. Dual Band Simultaneous Transmission

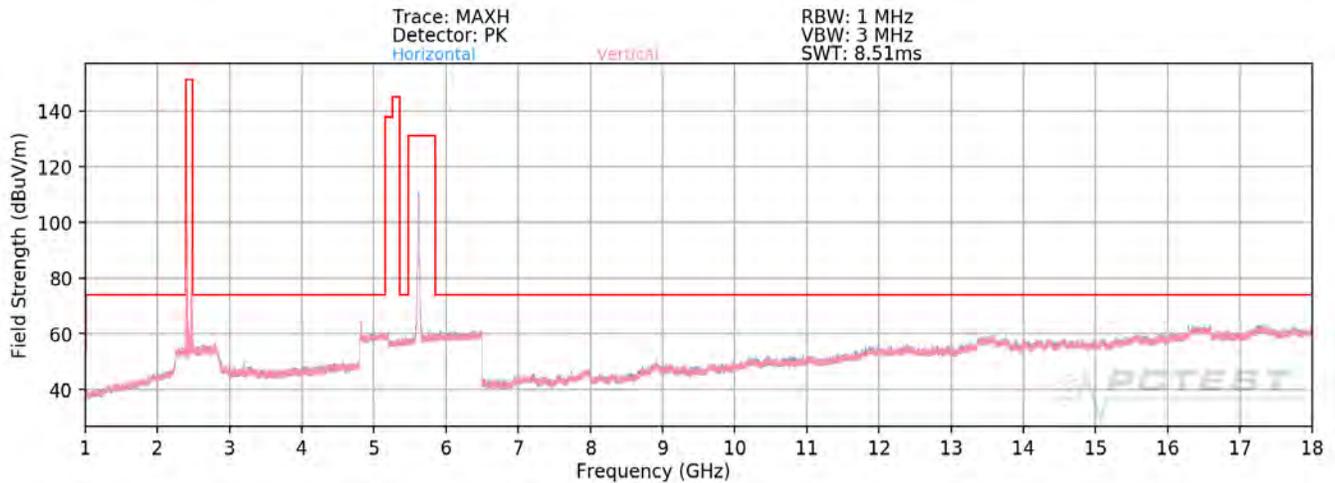


Plot 7-292. Radiated Spurious Plot above 1GHz (Dual Band Simult. Tx)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 207 of 242	

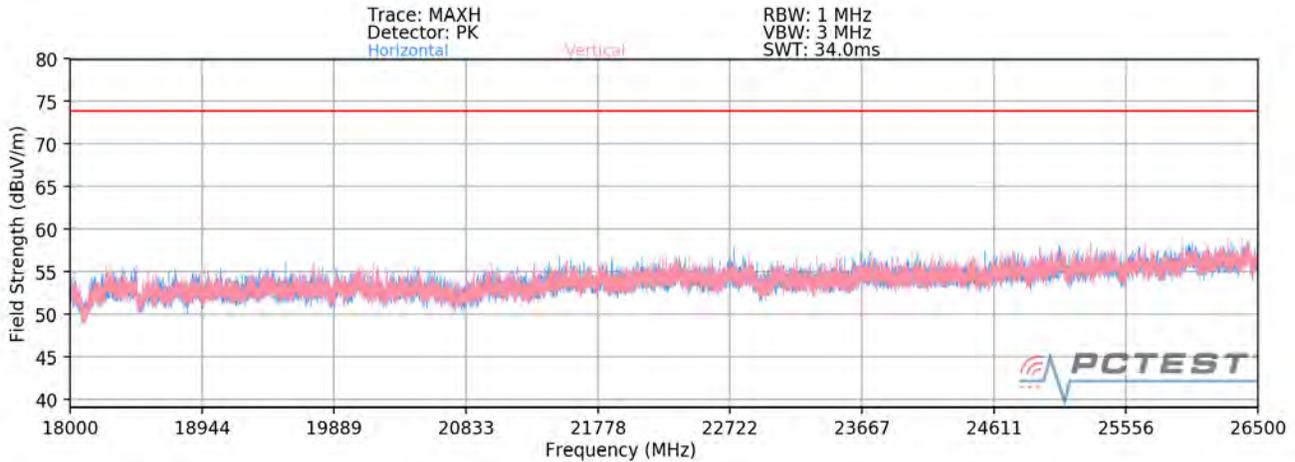

Plot 7-293. Radiated Spurious Plot 18GHz – 26.5GHz (Dual Band Simult. Tx)

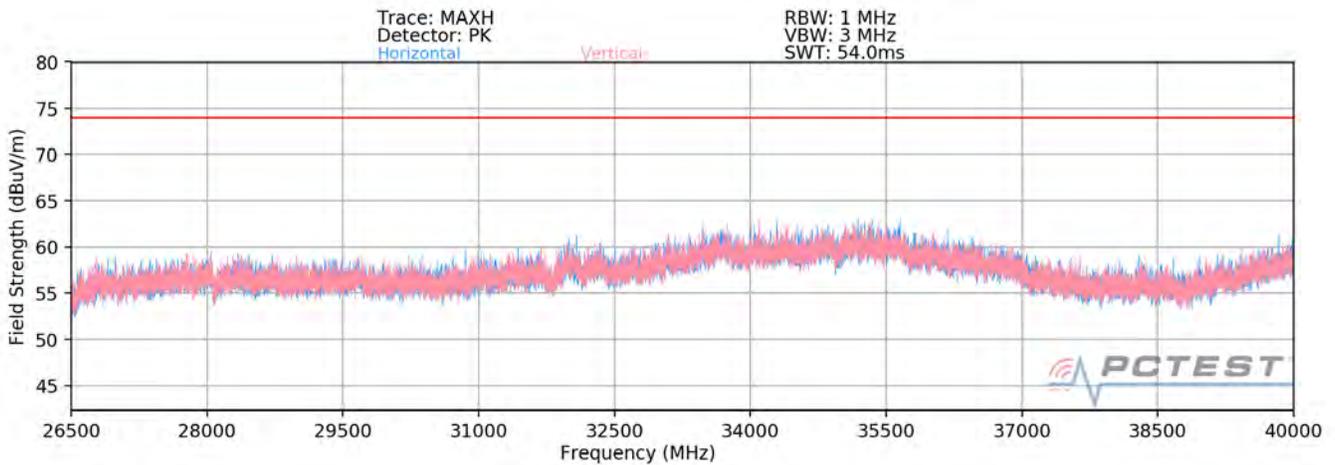

Plot 7-294. Radiated Spurious Plot above 26.5GHz (Dual Band Simult. Tx)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 208 of 242


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
796.00	Peak	H	-	-	-66.29	-4.78	35.93	68.20	-32.27
4004.00	Average	H	-	-	-80.47	11.00	37.53	53.98	-16.45
4004.00	Peak	H	-	-	-69.12	11.00	48.88	73.98	-25.10
7212.00	Peak	H	183.00	294.00	-69.78	15.08	52.30	68.20	-15.90
8828.00	Peak	H	-	-	-70.18	16.67	53.49	68.20	-14.71
10420.00	Peak	H	-	-	-71.90	19.51	54.61	68.20	-13.59
12036.00	Average	H	-	-	-83.44	22.22	45.78	53.98	-8.20
12036.00	Peak	H	-	-	-72.30	22.22	56.92	73.98	-17.06

Table 7-70. Radiated Measurements (Dual Band Simult. Tx)


FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 209 of 242	

7.6.5 SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

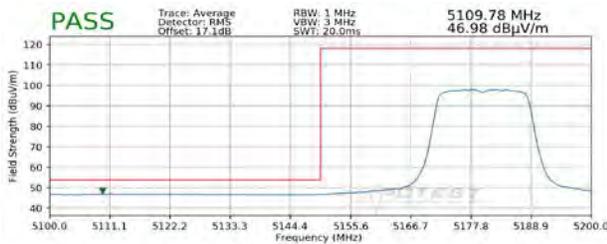


Plot 7-295. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

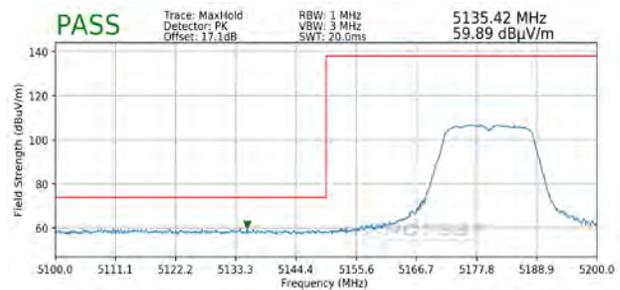


Plot 7-296. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

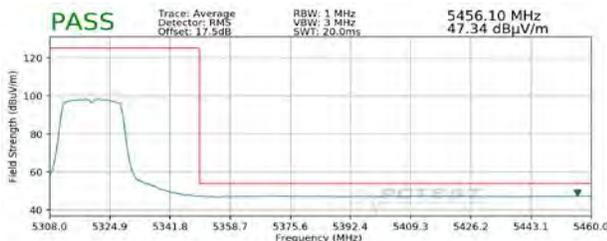


Plot 7-297. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

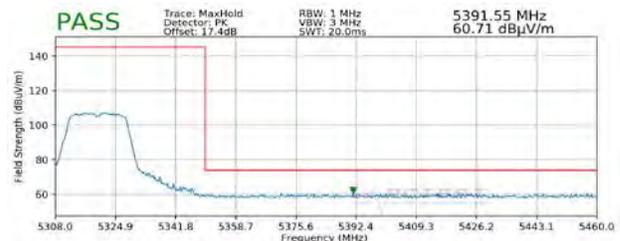


Plot 7-298. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 210 of 242

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

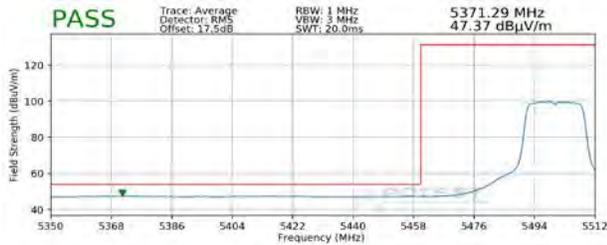


Plot 7-299. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

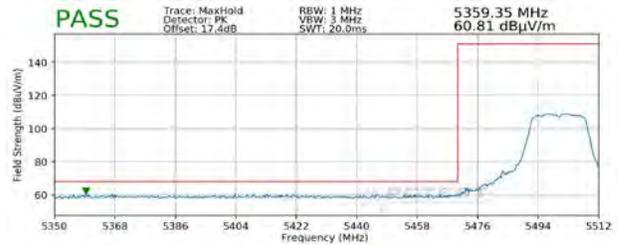

Plot 7-300. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

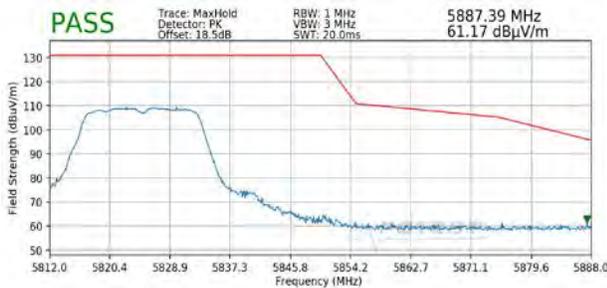


Plot 7-301. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 <p>Proud to be part of </p>	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 211 of 242

7.6.6 SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

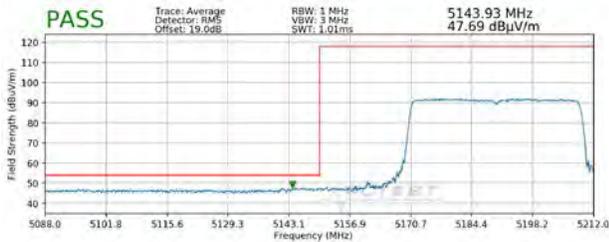


Plot 7-302. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

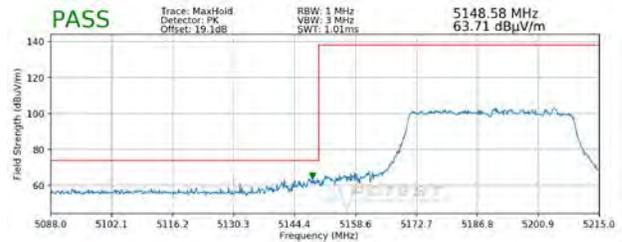


Plot 7-303. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

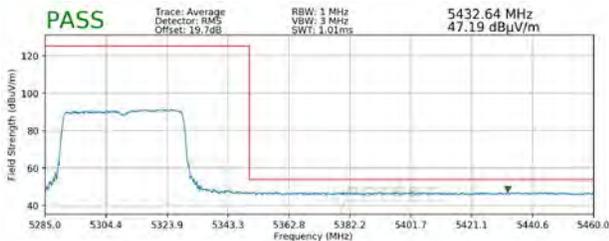


Plot 7-304. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

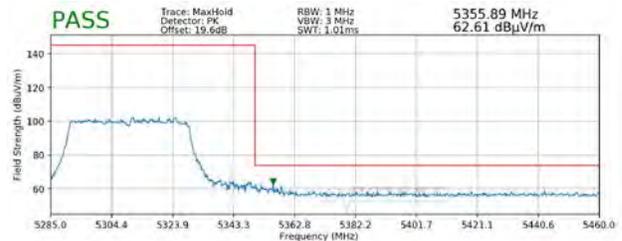


Plot 7-305. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 212 of 242

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

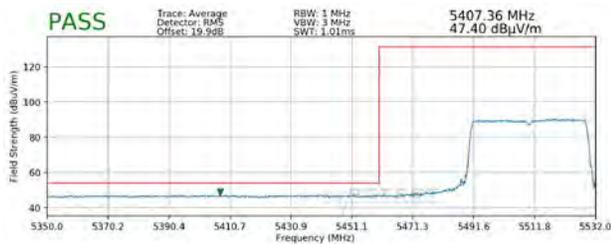


Plot 7-306. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

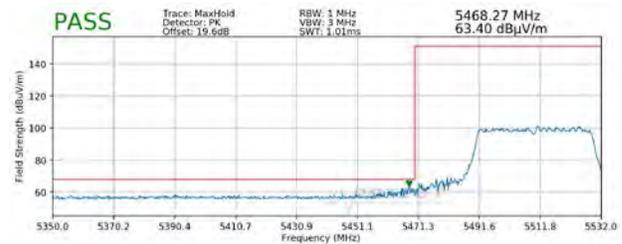


Plot 7-307. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

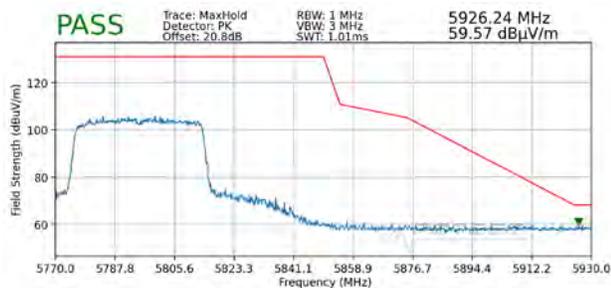


Plot 7-308. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 213 of 242

7.6.7 SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

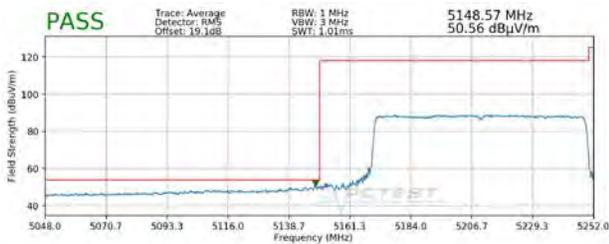


Plot 7-309. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 1)

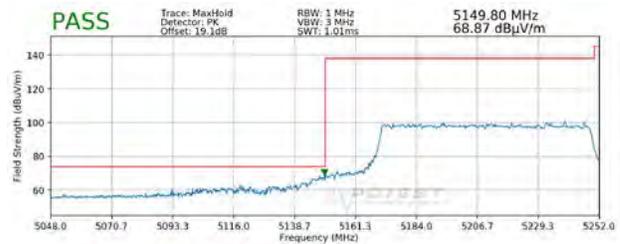


Plot 7-310. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

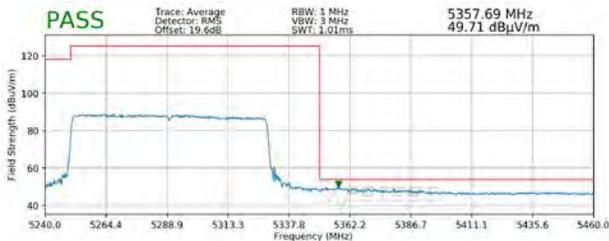


Plot 7-311. Radiated Upper Band Edge Plot SISO ANT1 (Average – UNII Band 2A)

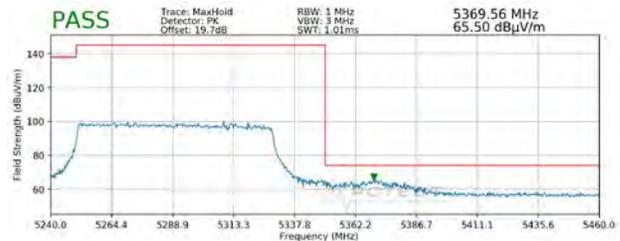


Plot 7-312. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 214 of 242

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

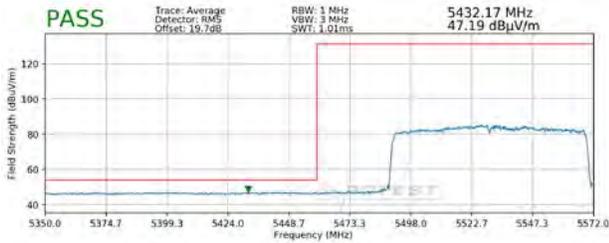


Plot 7-313. Radiated Lower Band Edge Plot SISO ANT1 (Average – UNII Band 2C)

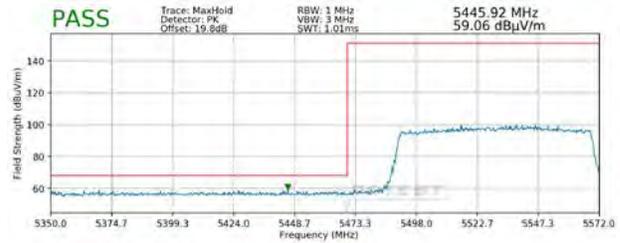

Plot 7-314. Radiated Lower Band Edge Plot SISO ANT1 (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

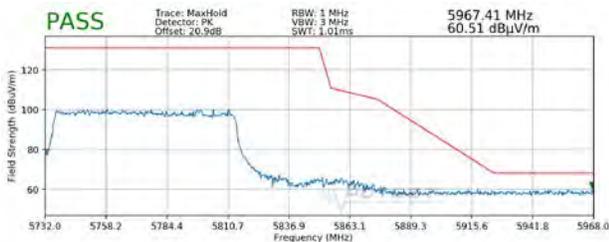

Plot 7-315. Radiated Upper Band Edge Plot SISO ANT1 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 <p>PCTEST Proud to be part of </p>	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 215 of 242

7.6.8 SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36




Plot 7-316. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

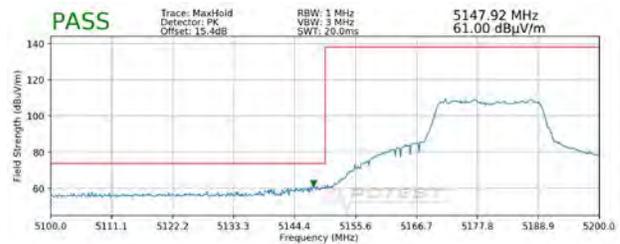


Plot 7-317. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

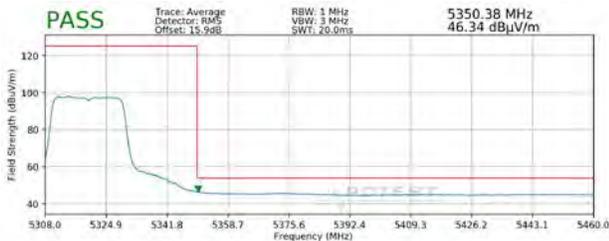


Plot 7-318. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

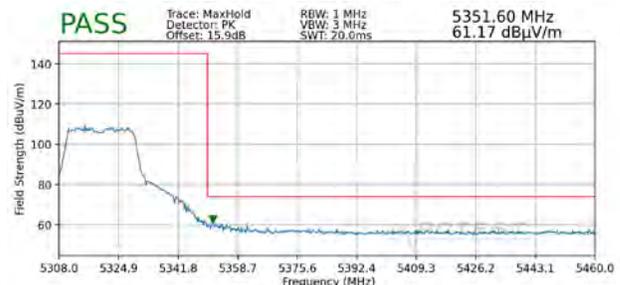


Plot 7-319. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 216 of 242

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

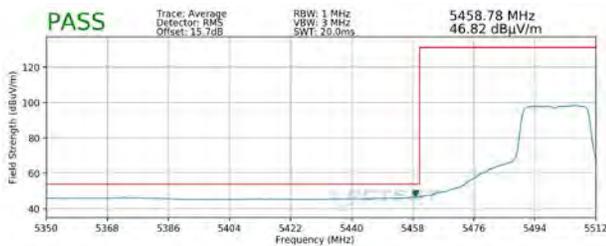


Plot 7-320. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

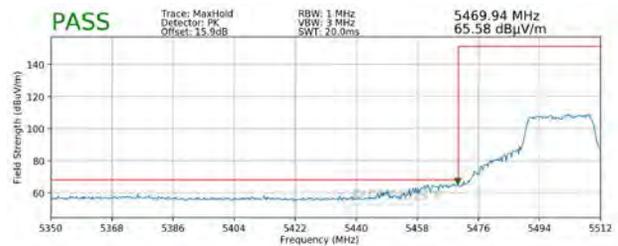

Plot 7-321. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

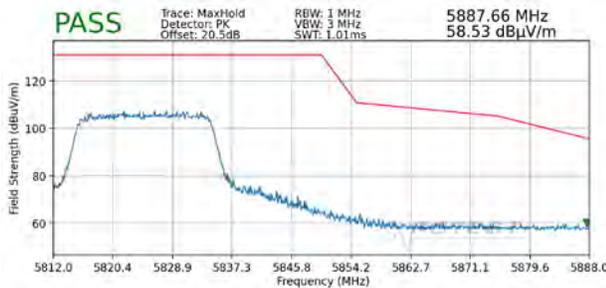

Plot 7-322. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 217 of 242

7.6.9 SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38




Plot 7-323. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

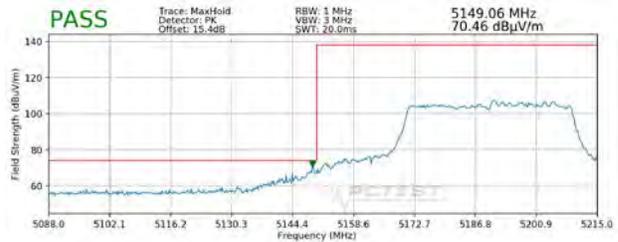


Plot 7-324. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5310MHz
 Channel: 62

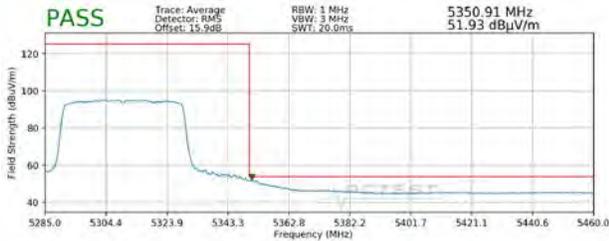


Plot 7-325. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

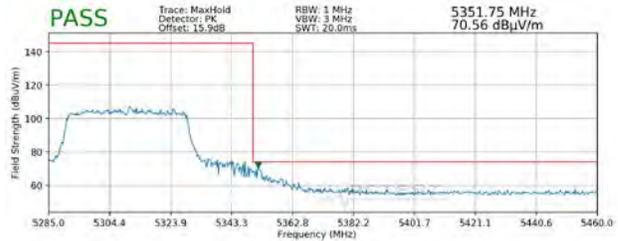


Plot 7-326. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 218 of 242

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

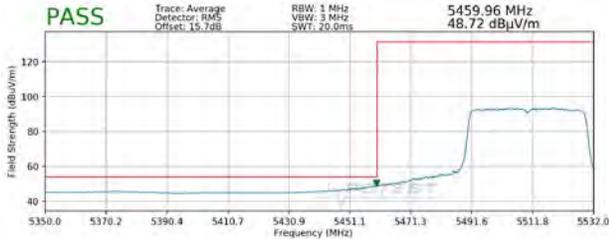


Plot 7-327. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

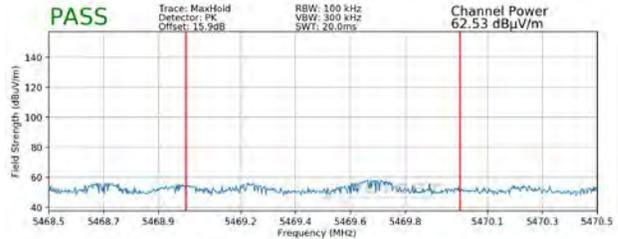

Plot 7-328. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

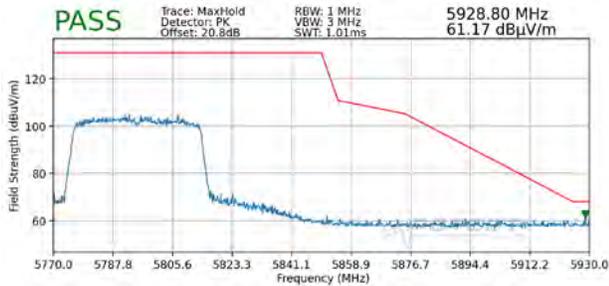

Plot 7-329. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 <p>PCTEST Proud to be part of </p>	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 219 of 242

7.6.10 SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42




Plot 7-330. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 1)

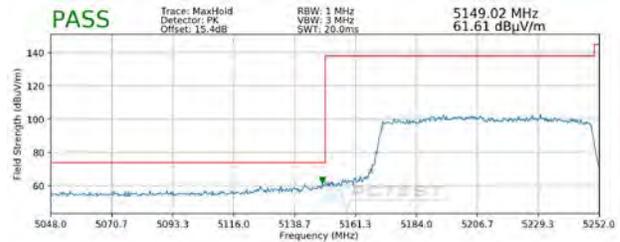


Plot 7-331. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

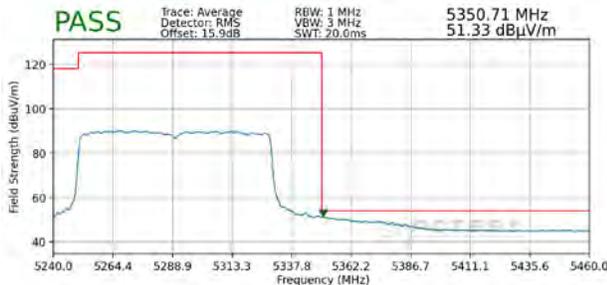


Plot 7-332. Radiated Upper Band Edge Plot SISO ANT2 (Average – UNII Band 2A)

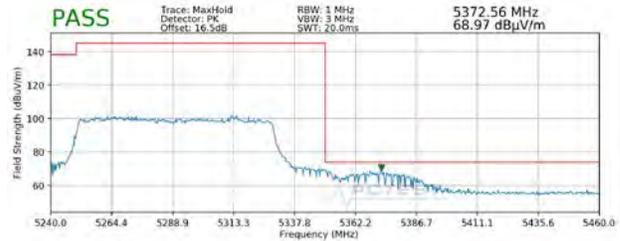


Plot 7-333. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 220 of 242

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

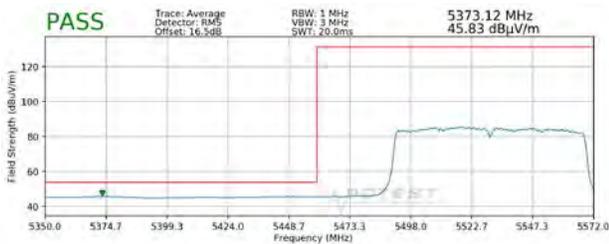


Plot 7-334. Radiated Lower Band Edge Plot SISO ANT2 (Average – UNII Band 2C)

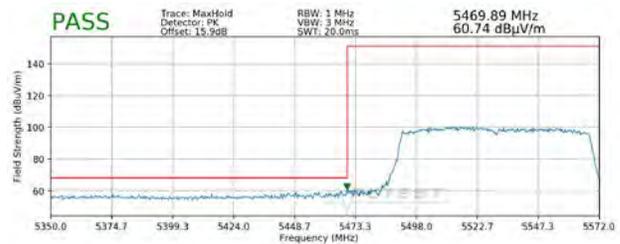

Plot 7-335. Radiated Lower Band Edge Plot SISO ANT2 (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

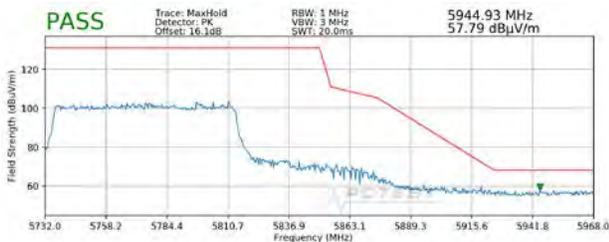


Plot 7-336. Radiated Upper Band Edge Plot SISO ANT2 (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 221 of 242

7.6.11 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

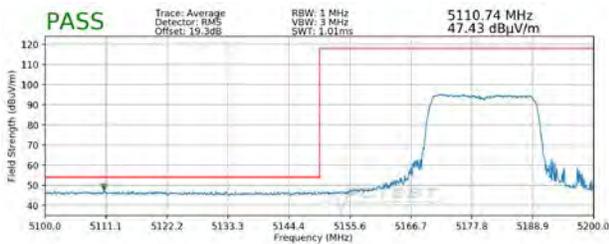


Plot 7-337. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

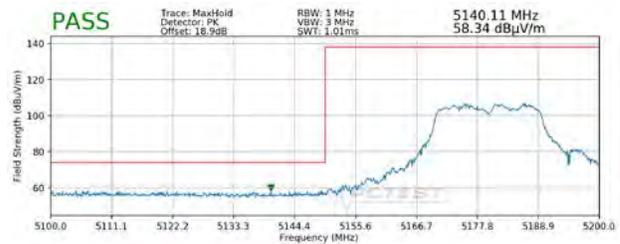


Plot 7-338. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

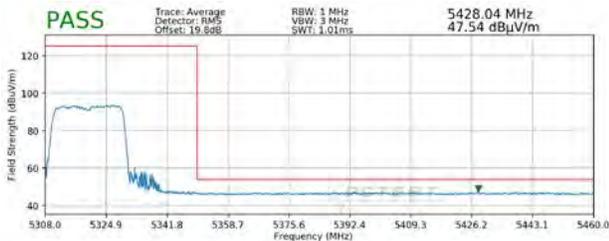


Plot 7-339. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

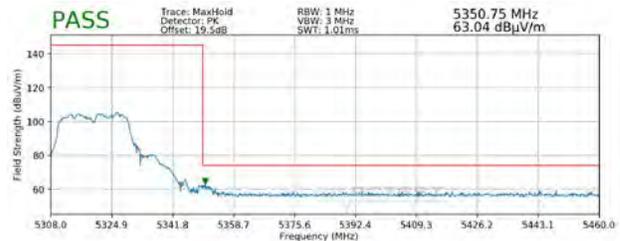


Plot 7-340. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 222 of 242

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

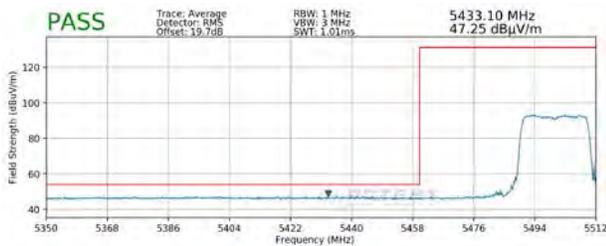


Plot 7-341. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

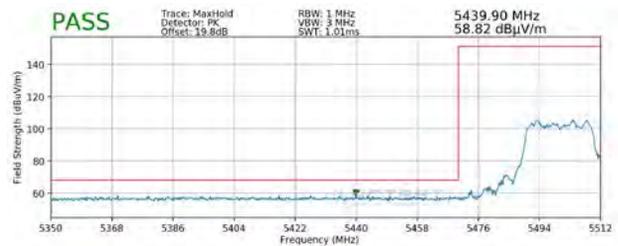

Plot 7-342. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

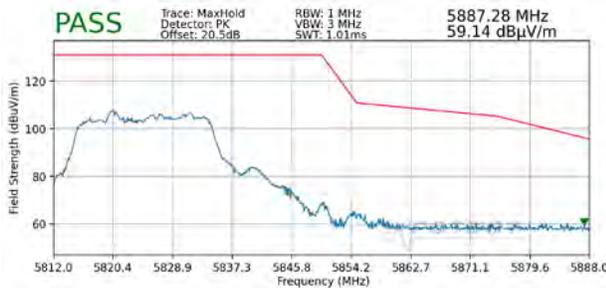


Plot 7-343. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 223 of 242

7.6.12 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

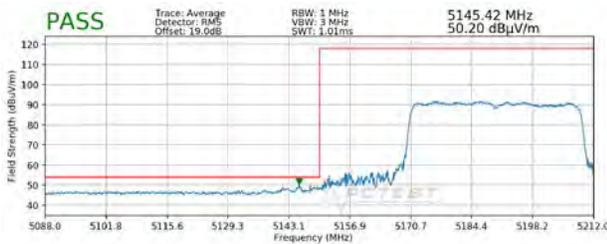


**Plot 7-344. Radiated Lower Band Edge Plot MIMO
(Average – UNII Band 1)**

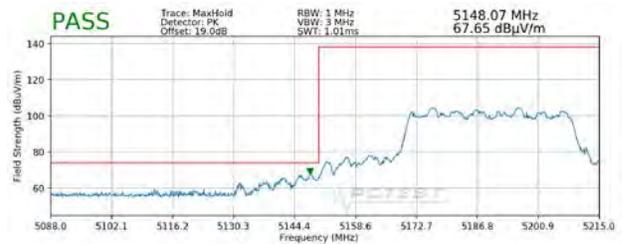


**Plot 7-345. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 1)**

Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

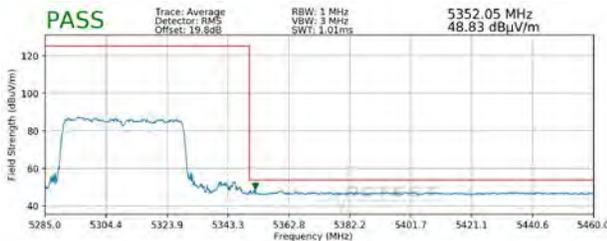


**Plot 7-346. Radiated Upper Band Edge Plot MIMO
(Average – UNII Band 2A)**

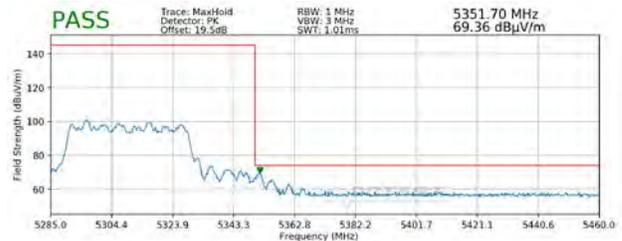


**Plot 7-347. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 2A)**

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 224 of 242

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

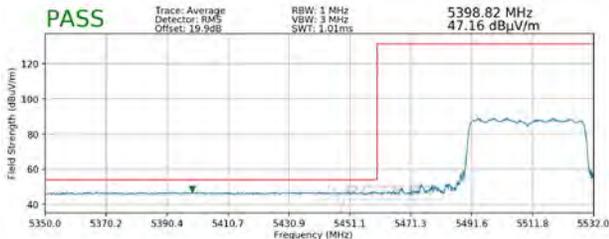


Plot 7-348. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

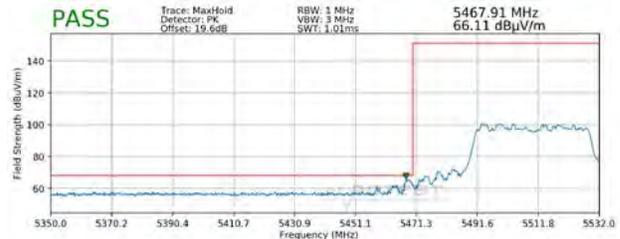

Plot 7-349. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

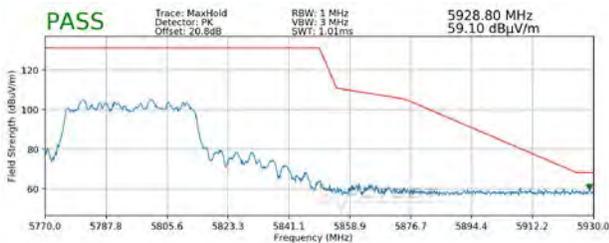


Plot 7-350. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: A3LSMF916JPN	 <p>PCTEST Proud to be part of </p>	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 225 of 242

7.6.13 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

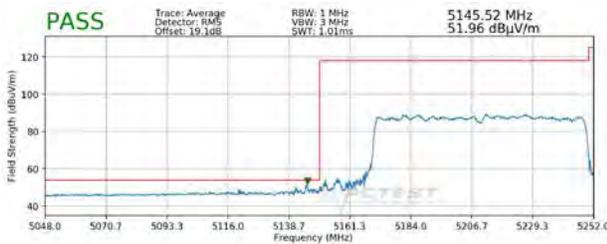


Plot 7-351. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

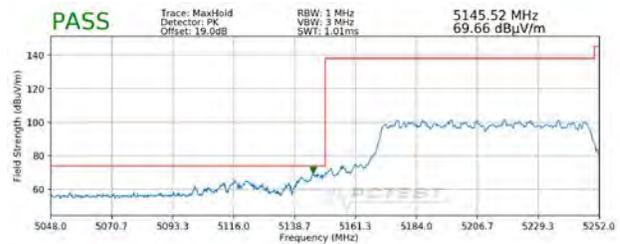


Plot 7-352. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

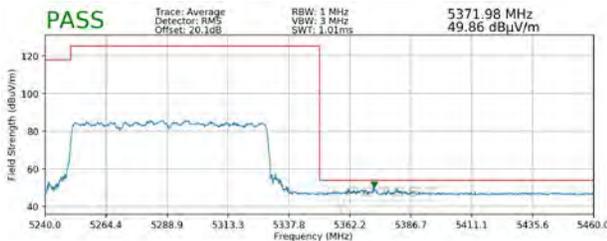


Plot 7-353. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

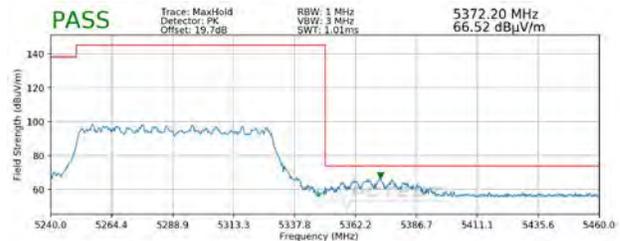


Plot 7-354. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 226 of 242

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

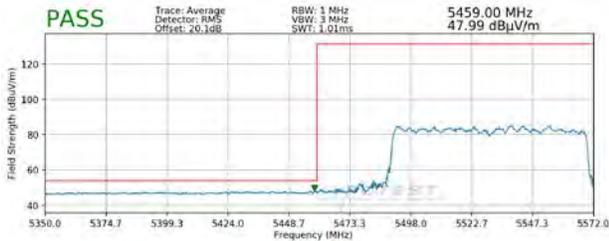


Plot 7-355. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

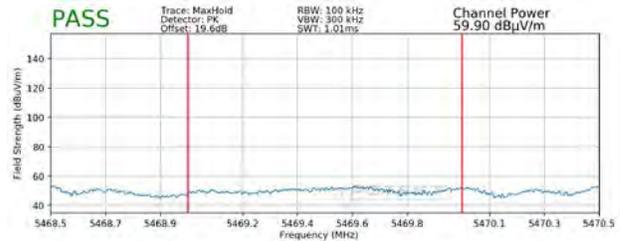

Plot 7-356. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

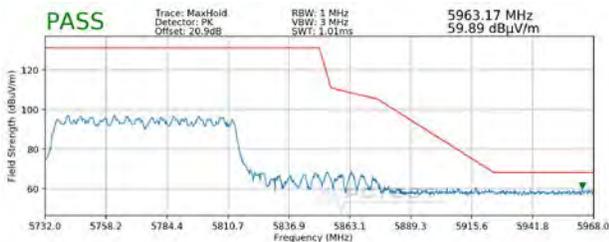

Plot 7-357. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09-A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 227 of 242

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-73 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-71. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 228 of 242	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

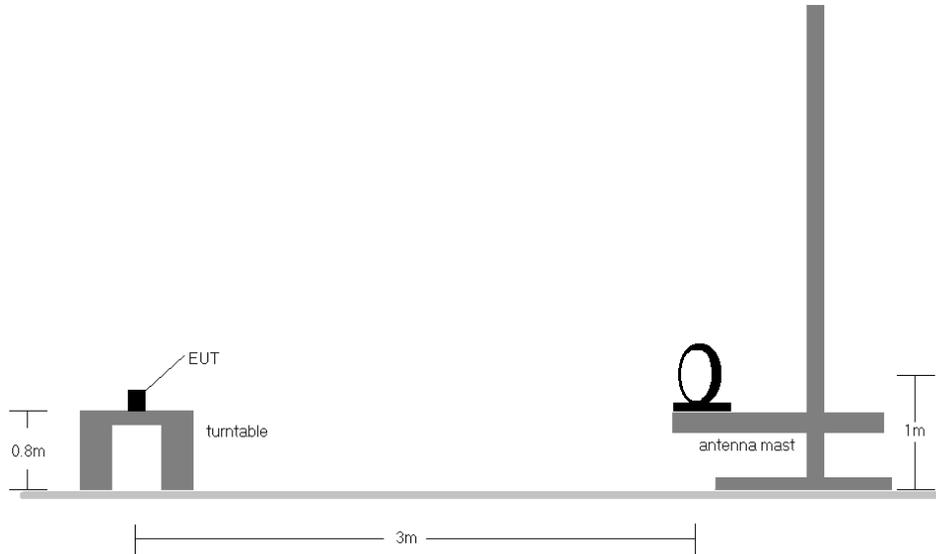


Figure 7-6. Radiated Test Setup < 30MHz

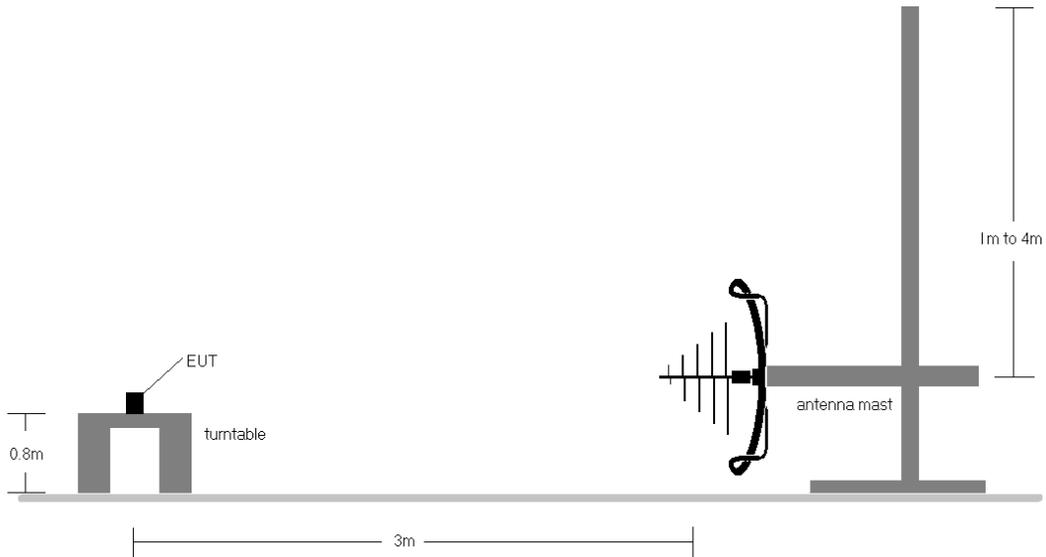


Figure 7-7. Radiated Test Setup < 1GHz


FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 229 of 242

Test Notes


1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-73.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 230 of 242


Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

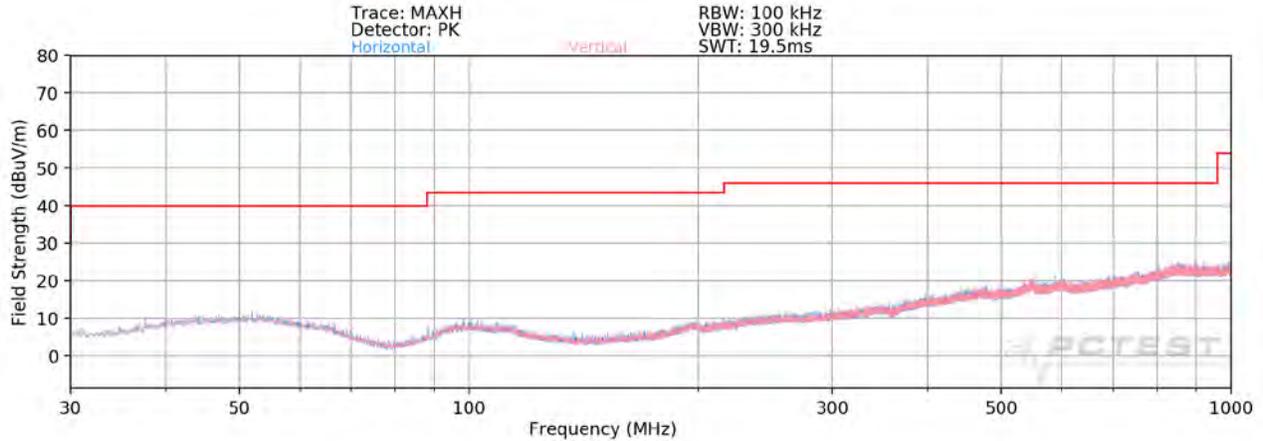

Plot 7-358. Radiated Spurious Plot below 1GHz (2.4GHz – 5GHz)

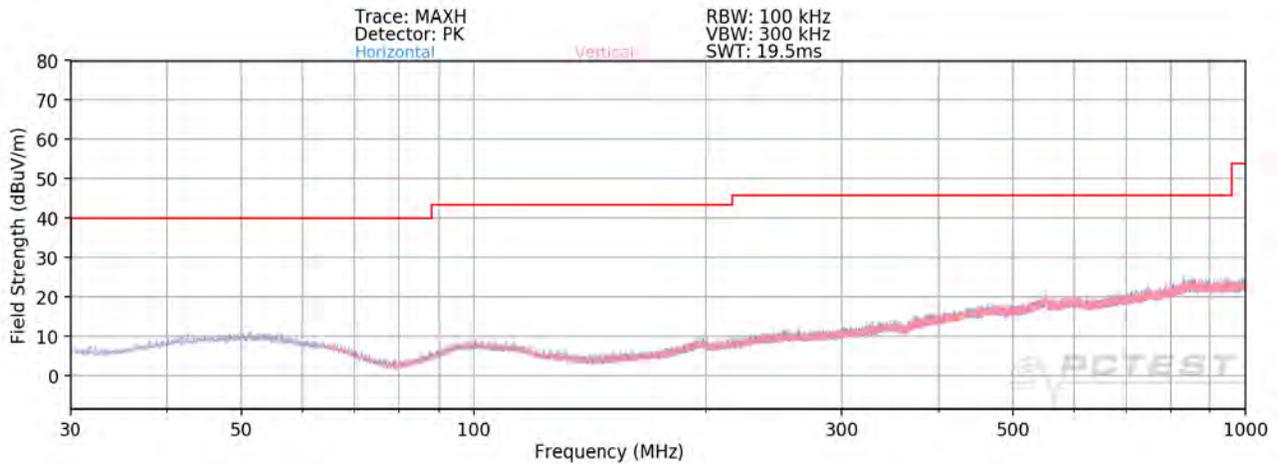

Plot 7-359. Radiated Spurious Plot below 1GHz (5GHz – 2.4 GHz)

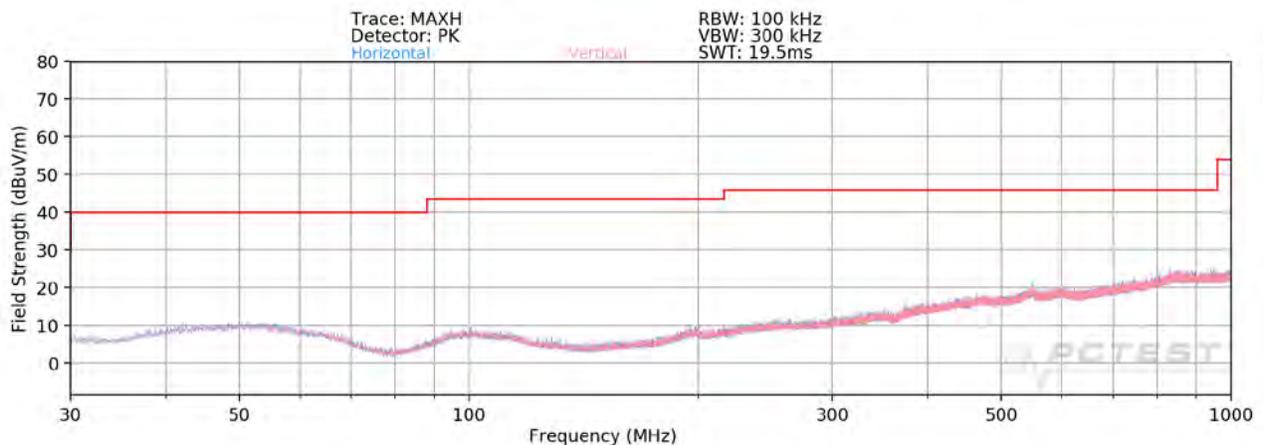

Plot 7-360. Radiated Spurious Plot below 1GHz (Dual Band Simult. Tx)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 231 of 242

7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-72. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 232 of 242	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


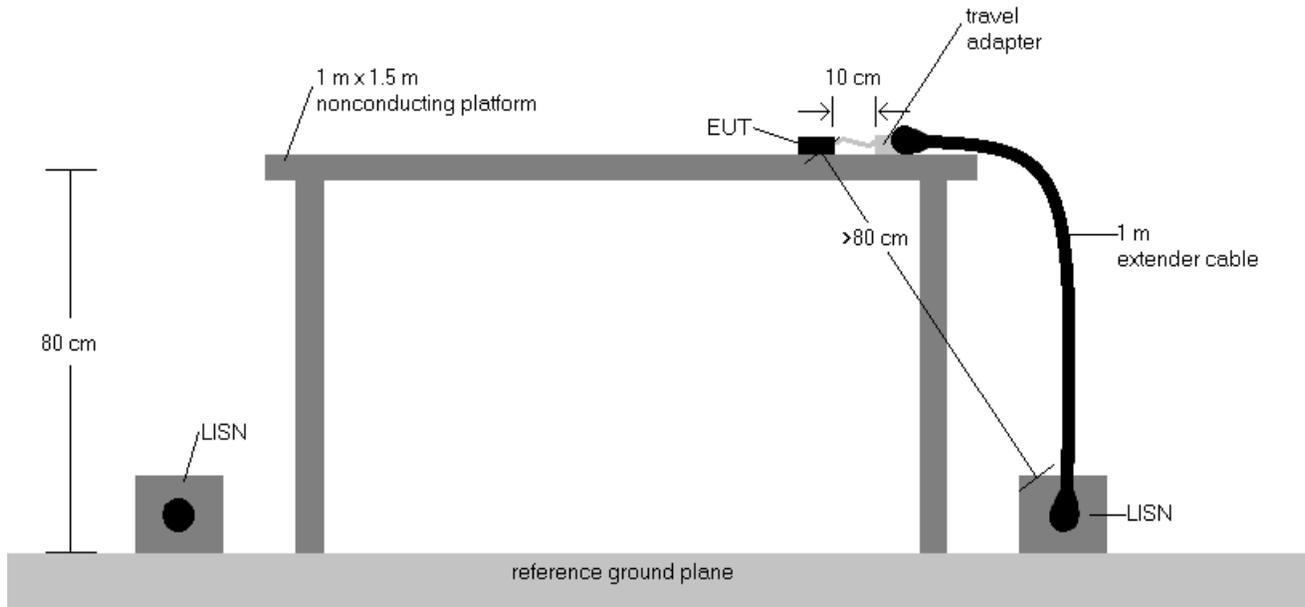


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 233 of 242

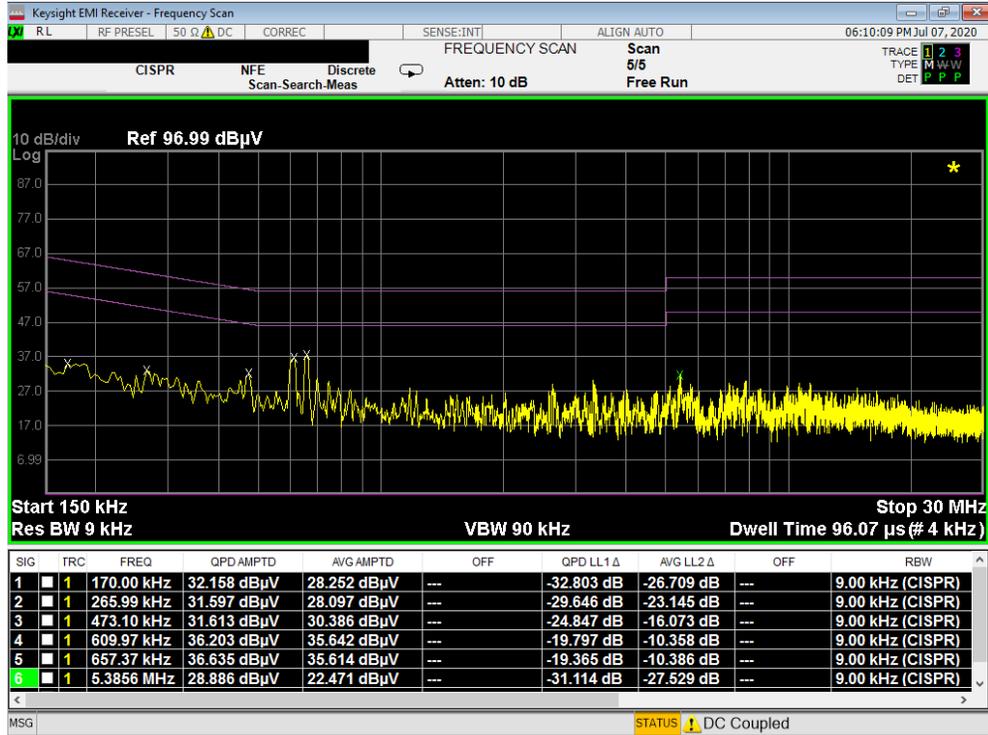


Plot 7-361. Line Conducted Plot with 802.11a UNII Band 1 (L1)

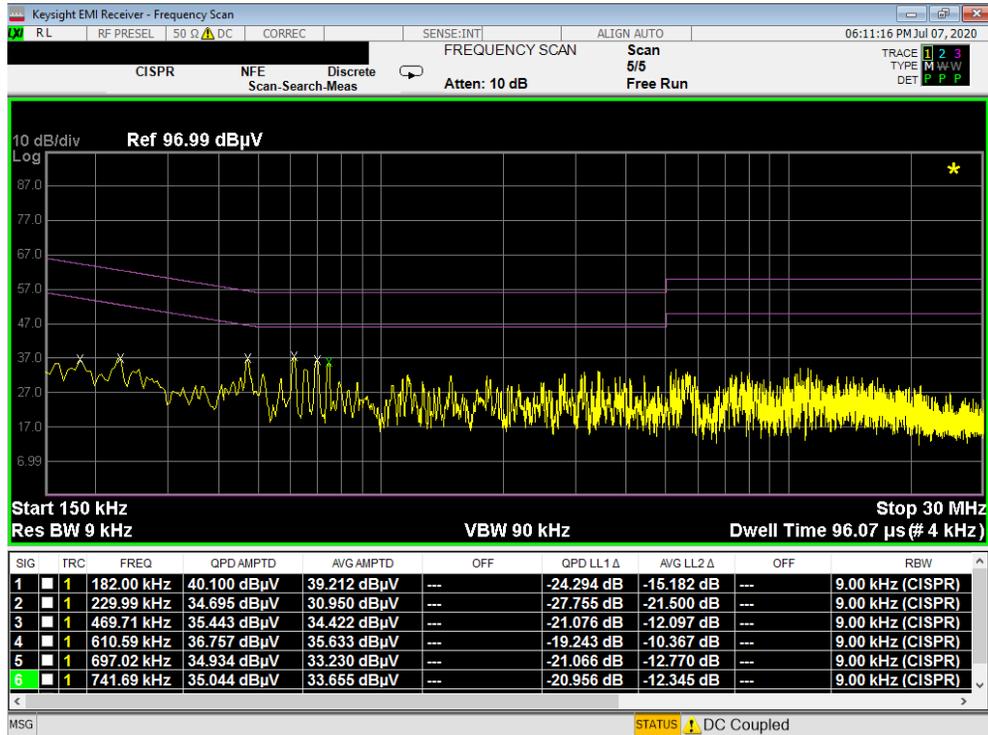


Plot 7-362. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 234 of 242

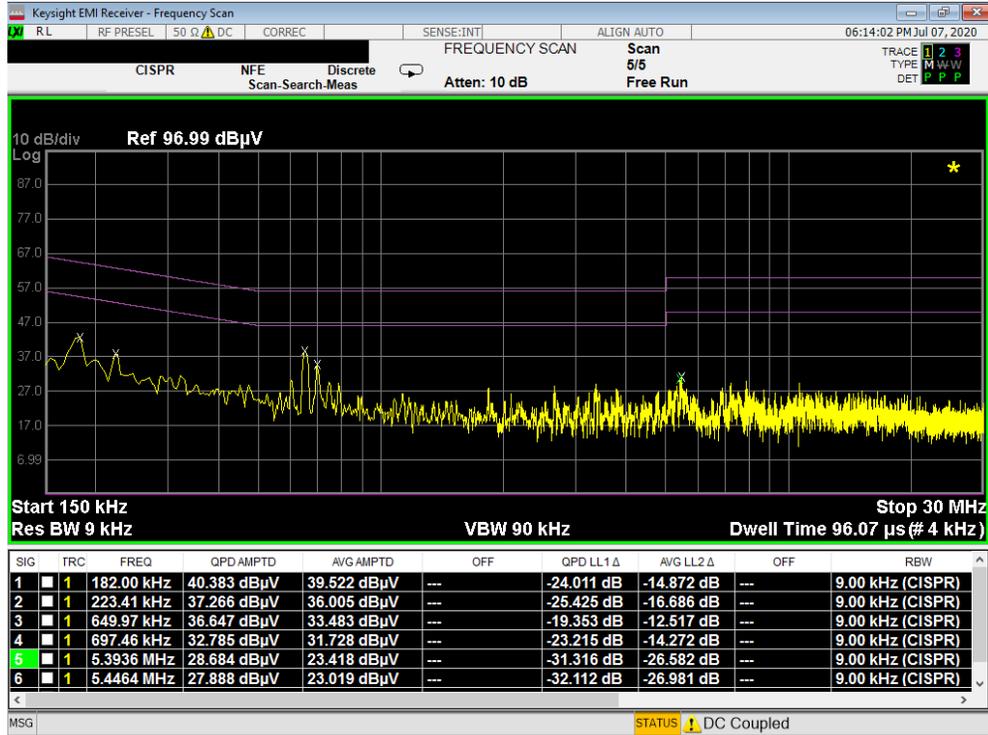


Plot 7-363. Line Conducted Plot with 802.11a UNII Band 2A (L1)

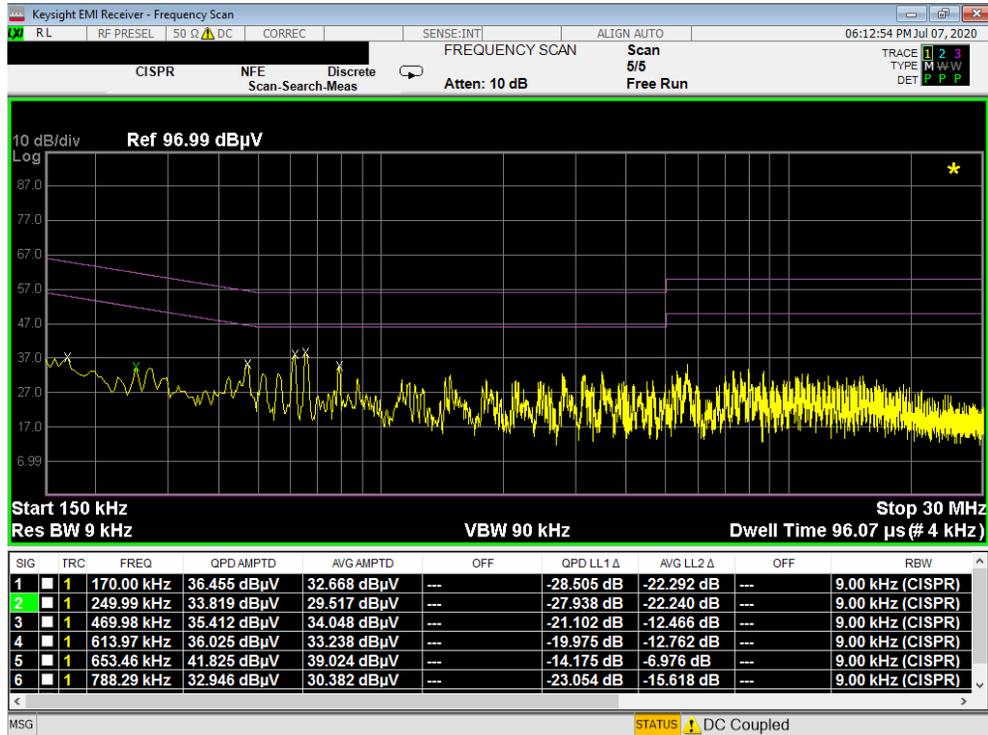


Plot 7-364. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: A3LSMF916JPN	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 235 of 242

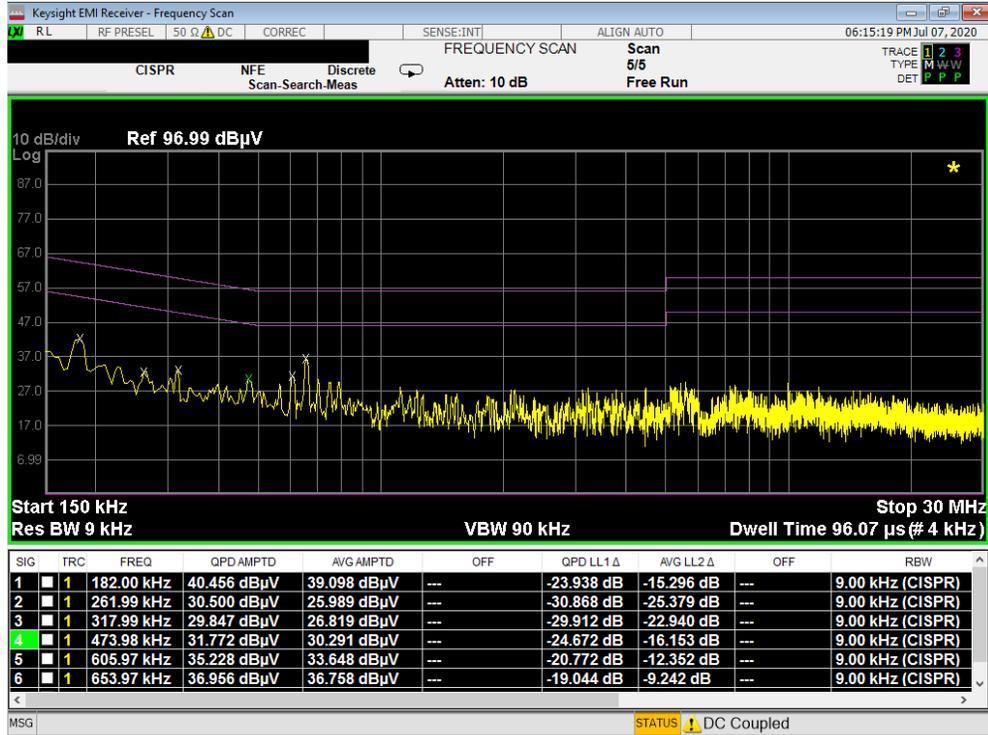


Plot 7-365. Line Conducted Plot with 802.11a UNII Band 2C (L1)

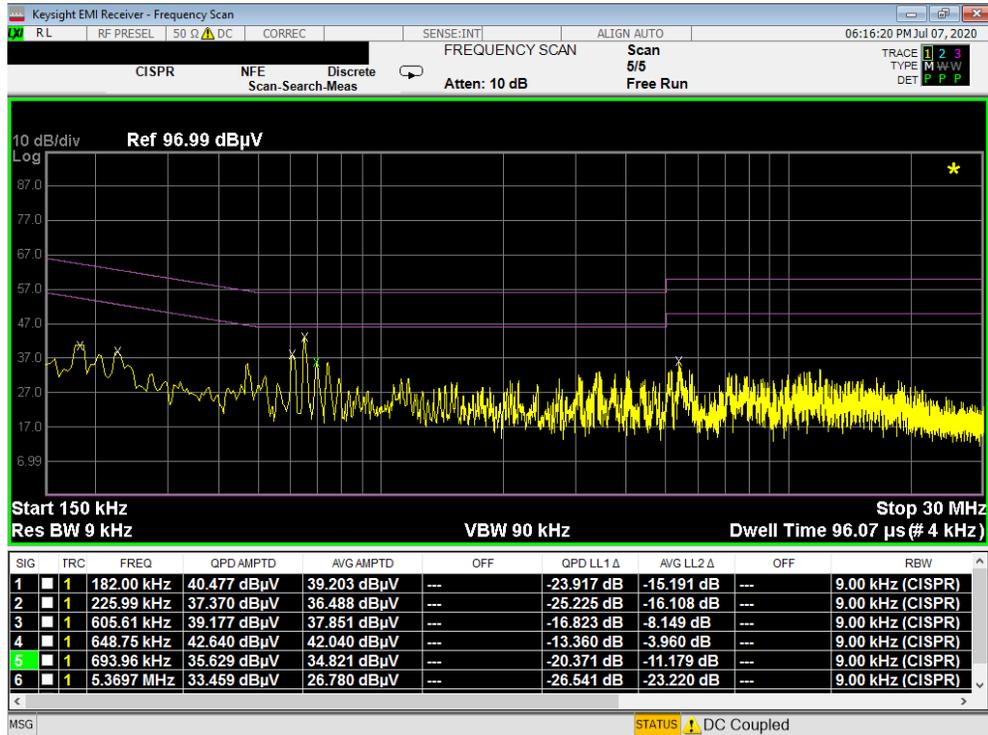


Plot 7-366. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: A3LSMF916JPN	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 236 of 242

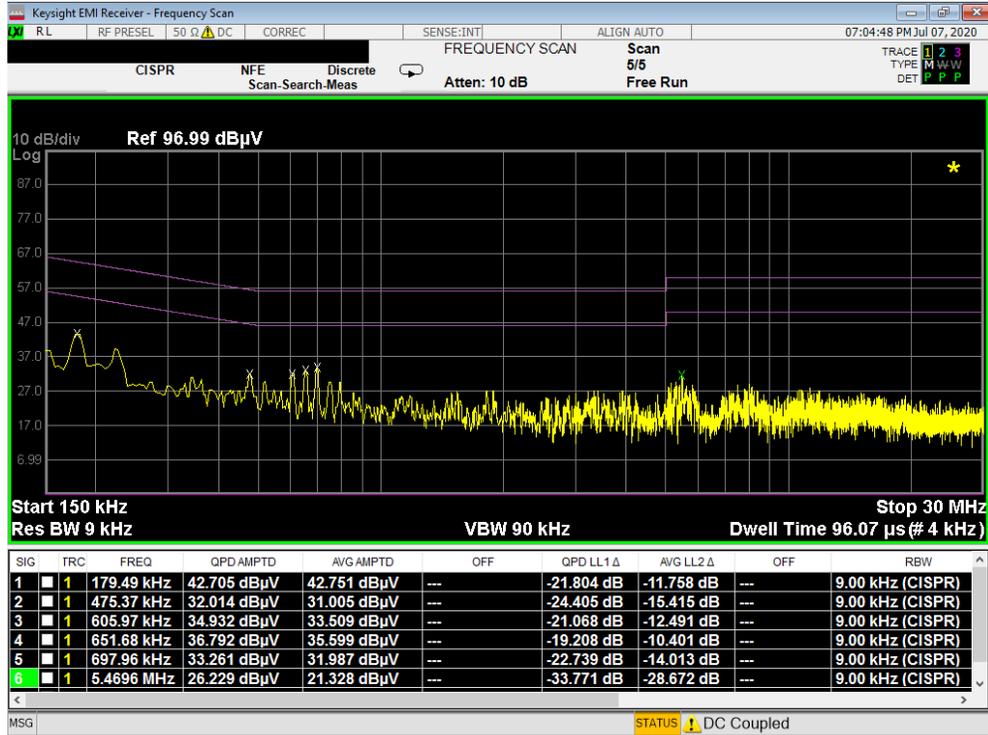


Plot 7-367. Line Conducted Plot with 802.11a UNII Band 3 (L1)

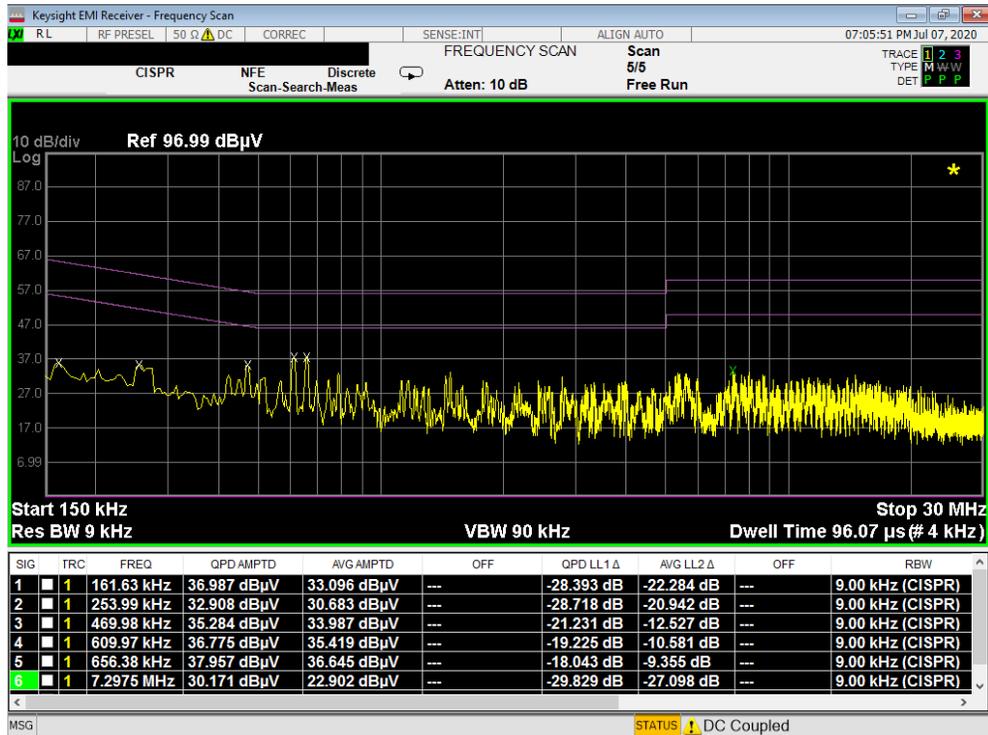


Plot 7-368. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 237 of 242

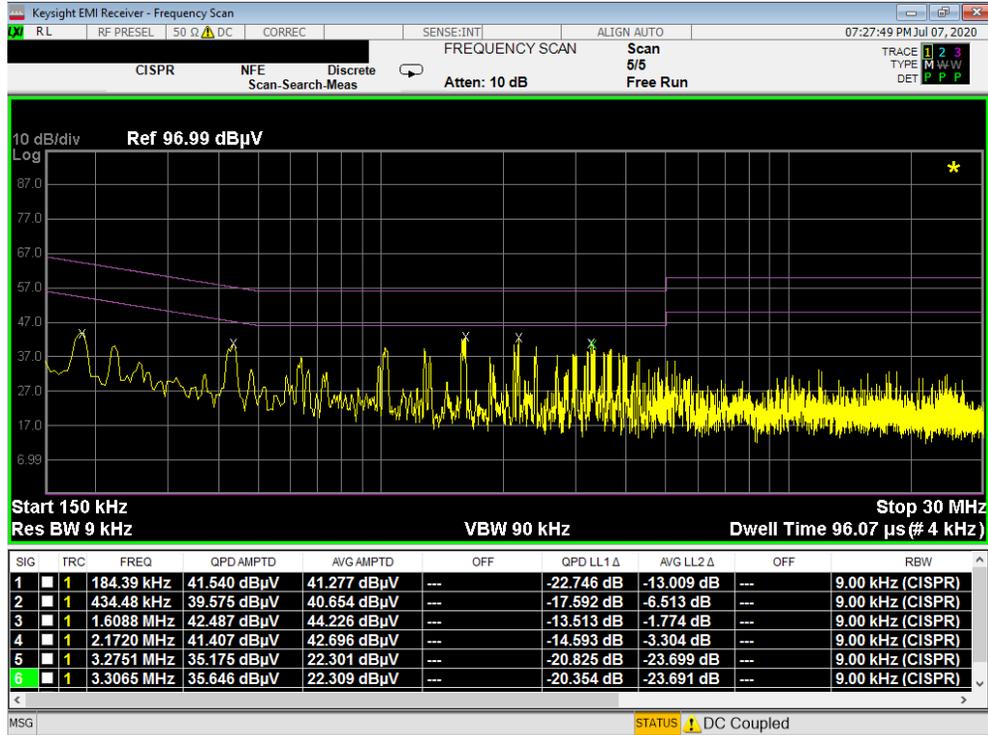


Plot 7-369. Line Conducted Plot with 802.11a UNII Band 1 (L1) with WCP

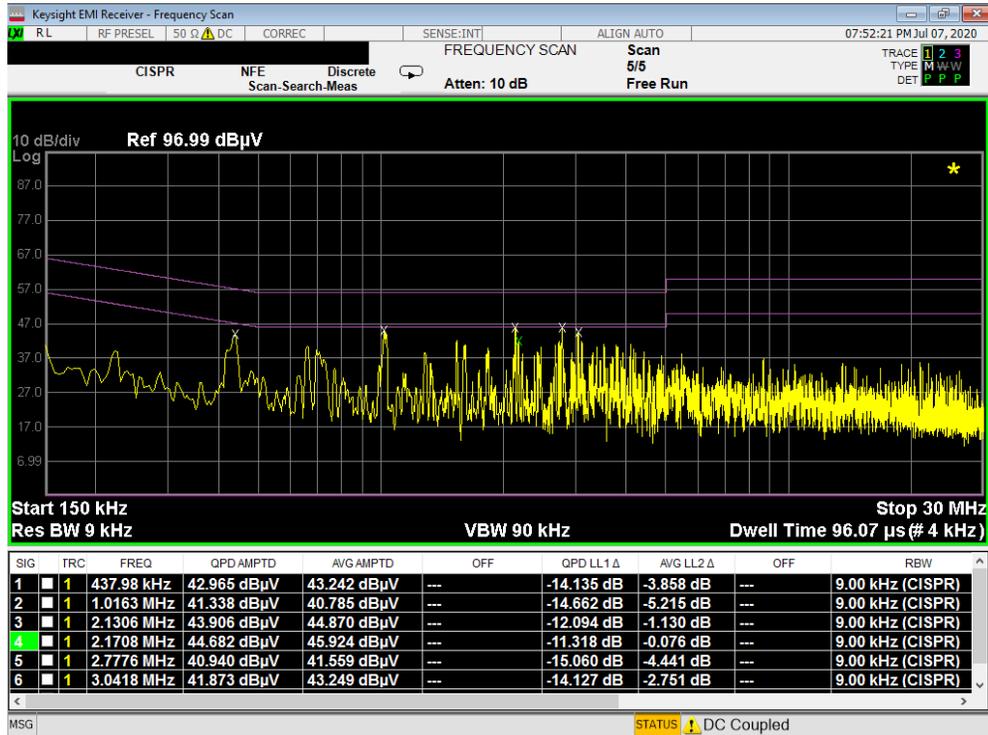


Plot 7-370. Line Conducted Plot with 802.11a UNII Band 1 (N) with WCP

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 238 of 242

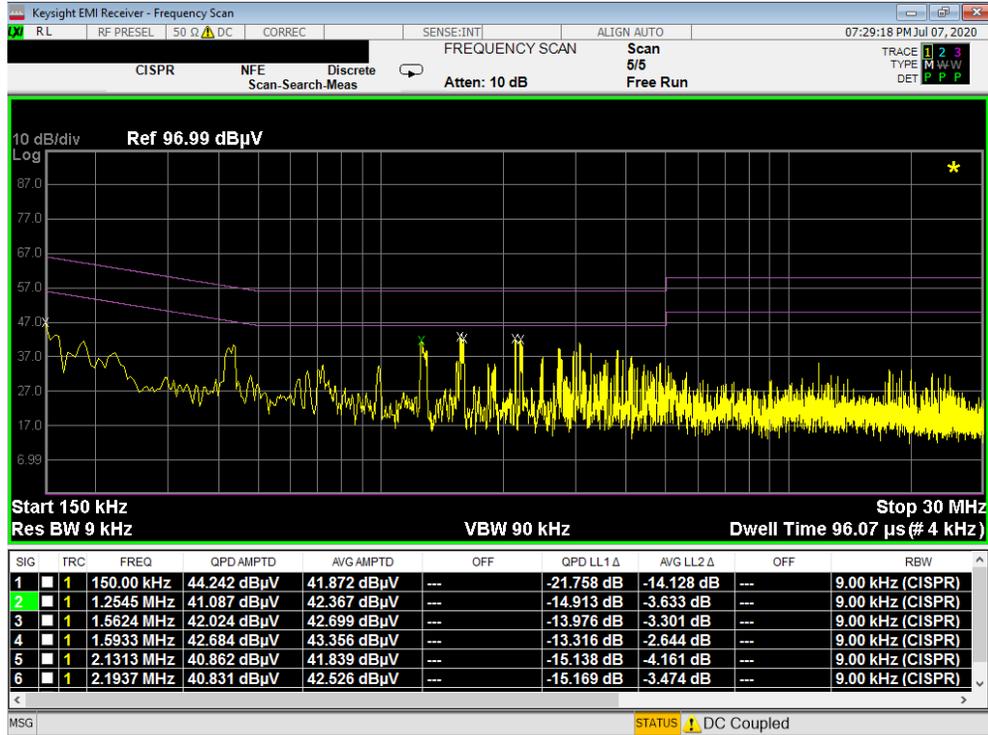


Plot 7-371. Line Conducted Plot with 802.11a UNII Band 2A (L1) with WCP

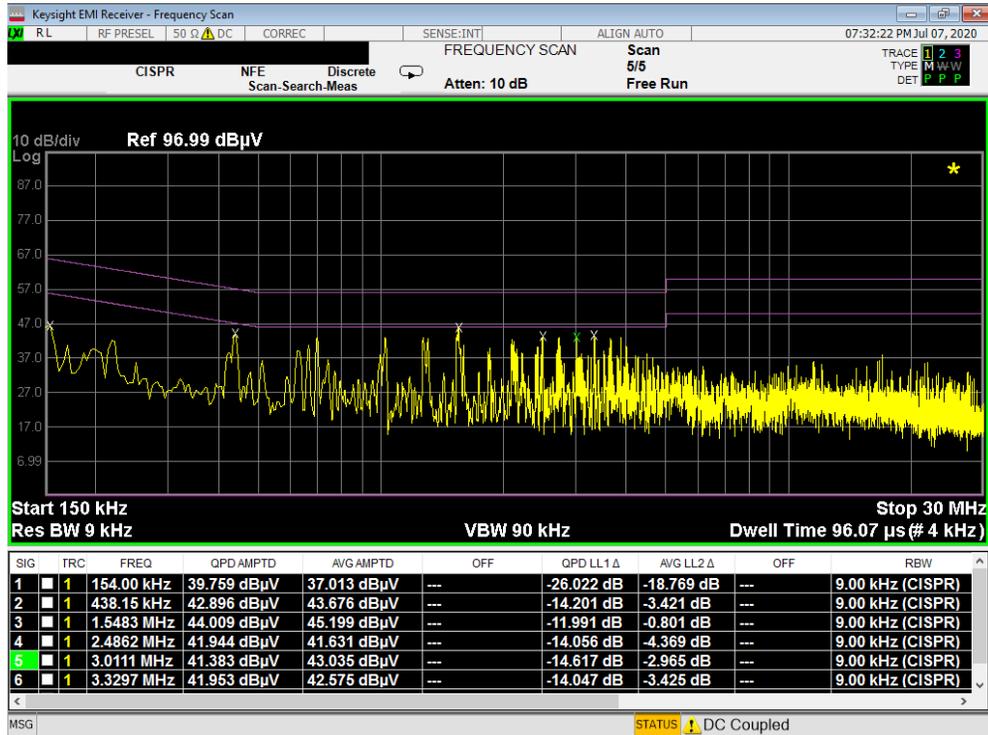


Plot 7-372. Line Conducted Plot with 802.11a UNII Band 2A (N) with WCP

FCC ID: A3LSMF916JPN		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 239 of 242

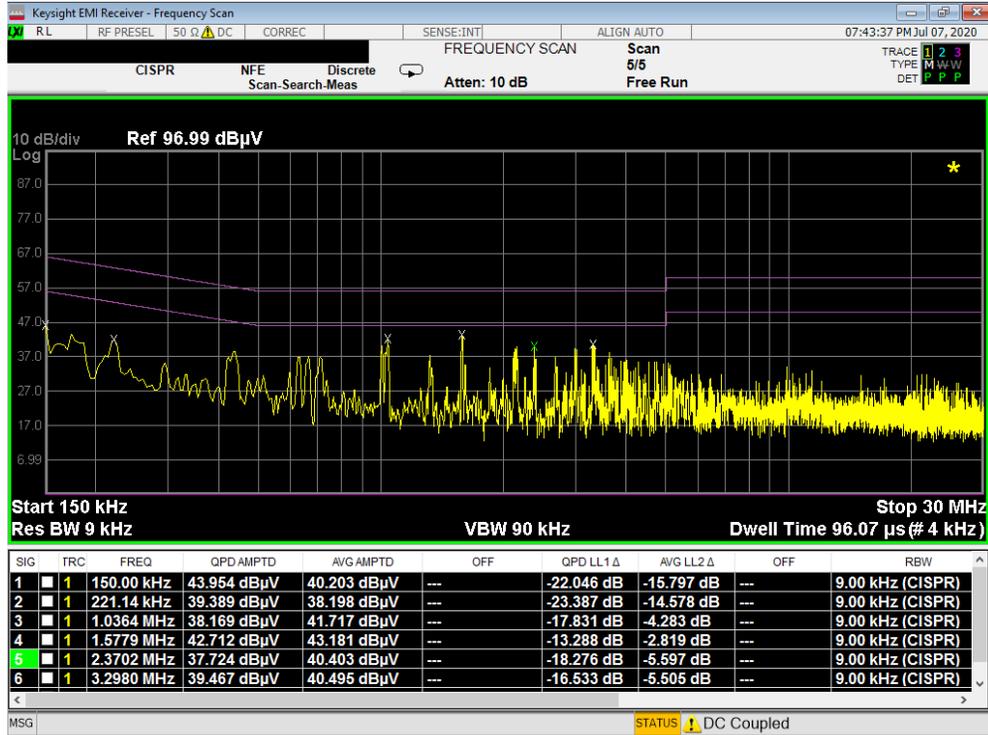


Plot 7-373. Line Conducted Plot with 802.11a UNII Band 2C (L1) with WCP

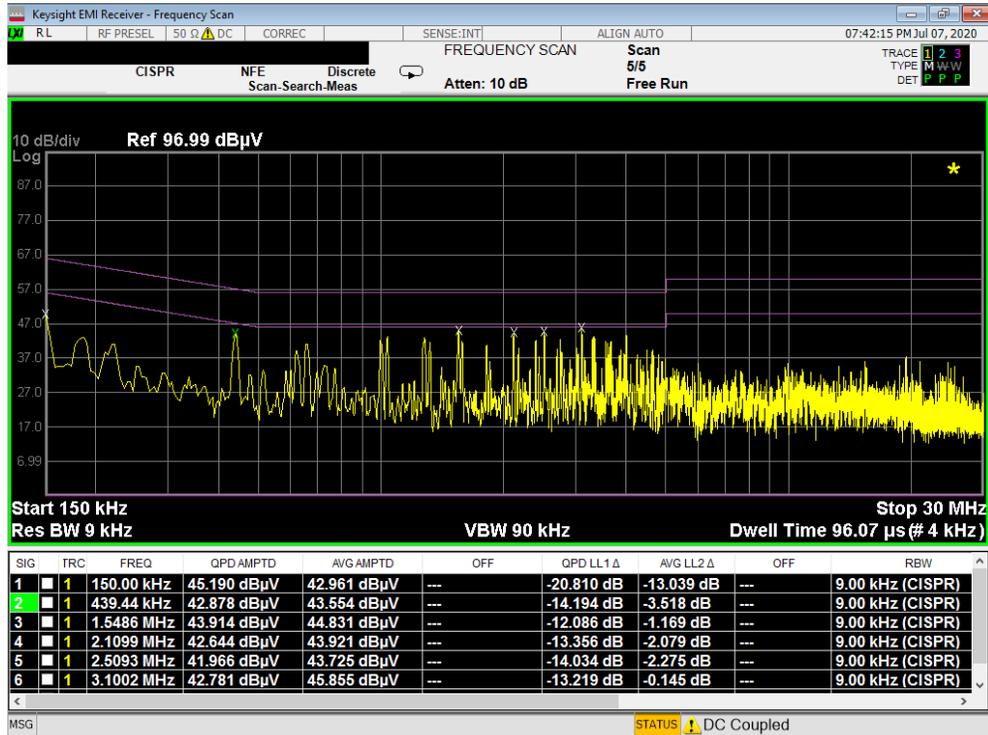


Plot 7-374. Line Conducted Plot with 802.11a UNII Band 2C (N) with WCP

FCC ID: A3LSMF916JPN	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 240 of 242

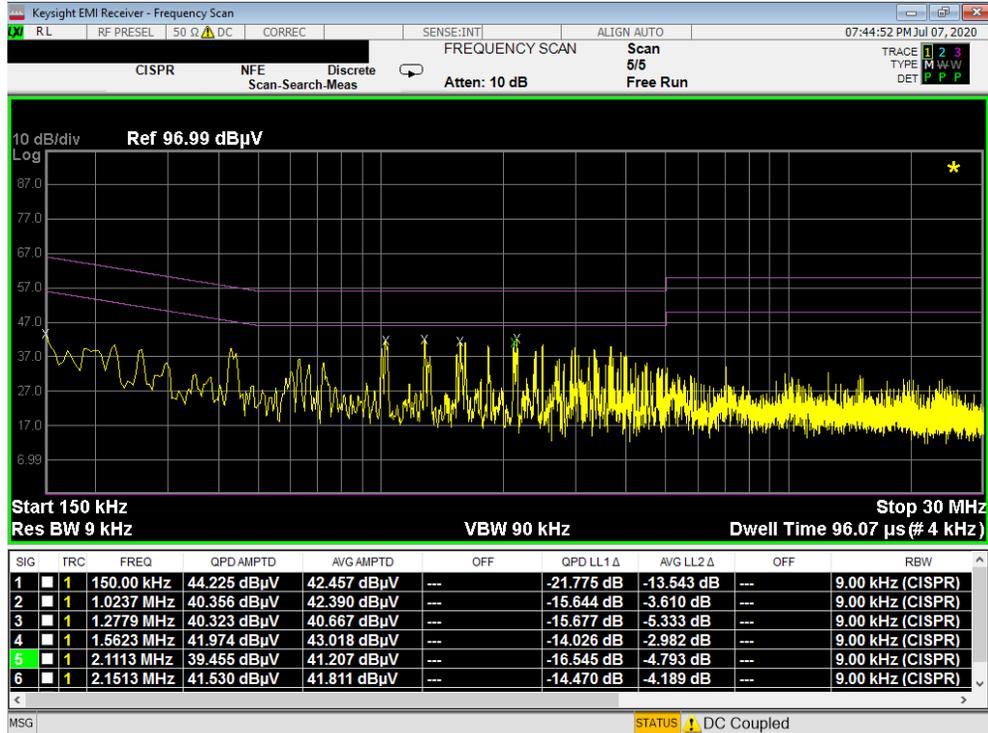

Plot 7-375. Line Conducted Plot with 802.11a UNII Band 3 (L1) with WCP

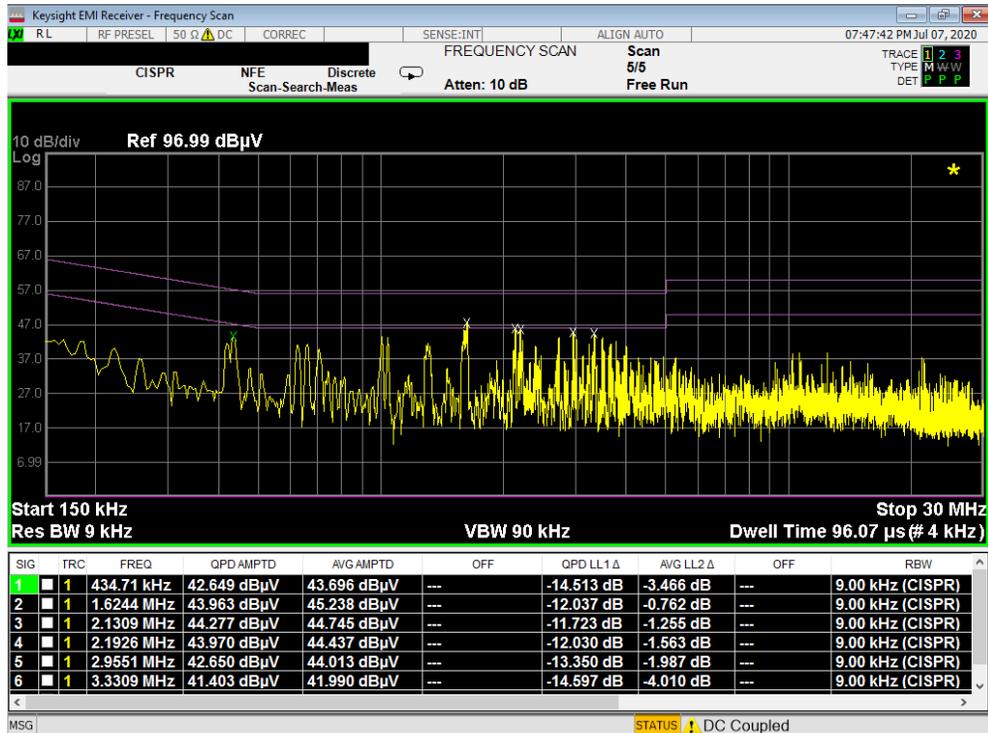


Plot 7-376. Line Conducted Plot with 802.11a UNII Band 3 (N) with WCP

FCC ID: A3LSMF916JPN	PCTEST Proud to be part of element8	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset		Page 241 of 242

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF916JPN** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: A3LSMF916JPN	 <small>Proud to be part of </small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2008190137-09.A3L	Test Dates: 06/11 - 08/07/2020	EUT Type: Portable Handset	Page 242 of 242	