


VERTICAL PEAK PLOT

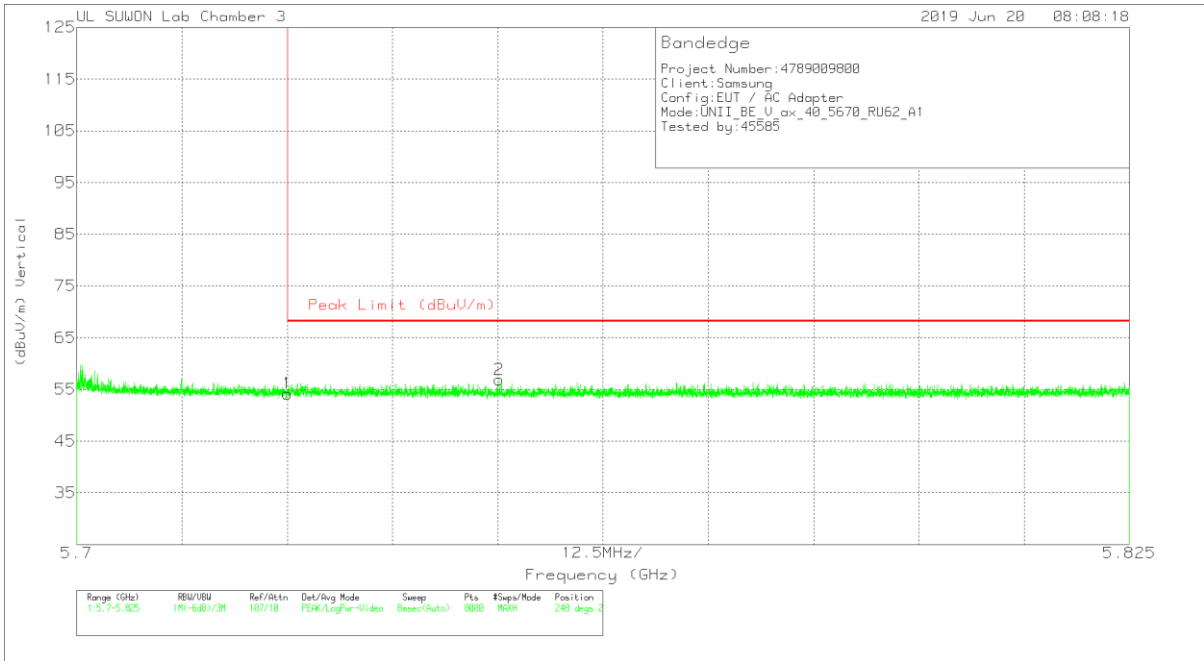

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595_9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.28	Pk	34.8	-17.9	0	54.18	68.2	-14.02	248	258	V
2	5.75	39.98	Pk	34.8	-17.9	0	56.88	68.2	-11.32	248	258	V

Pk - Peak detector

242T RU mode (ANT_2 / HE40 / RU offset 62)

HORIZONTAL PEAK PLOT

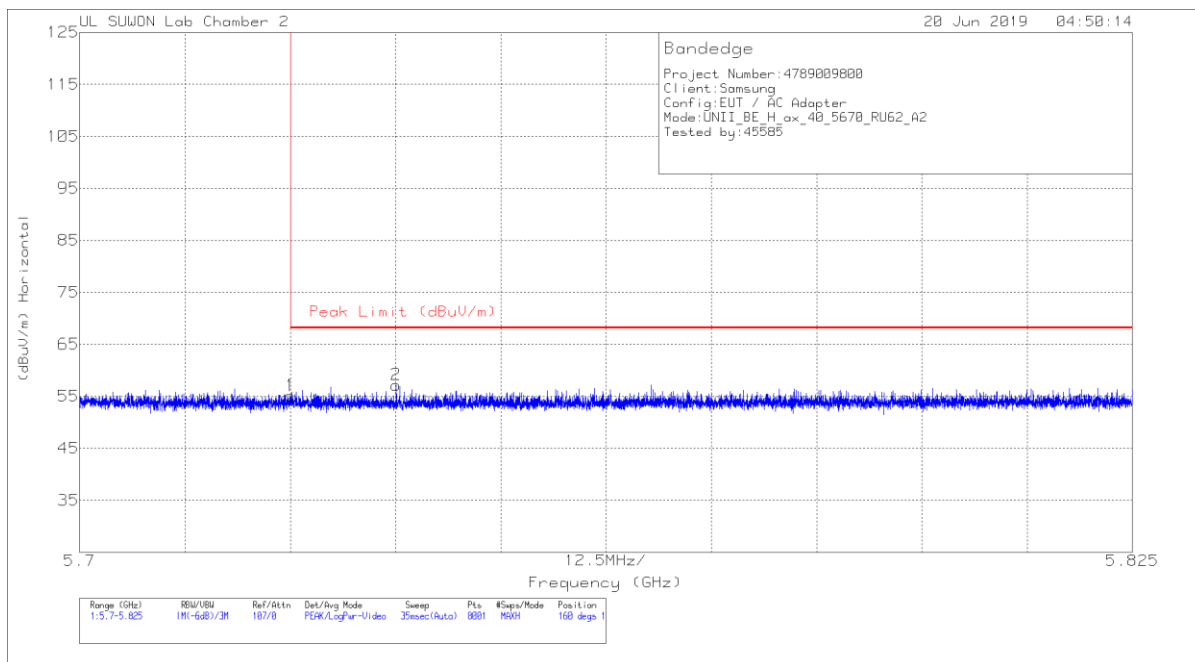


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.03	Pk		-17.6	0	55.13	68.2	-13.07	160	145	H
2	5.738	40.1	Pk		-17.6	0	57.2	68.2	-11	160	145	H

Pk - Peak detector

VERTICAL PEAK PLOT

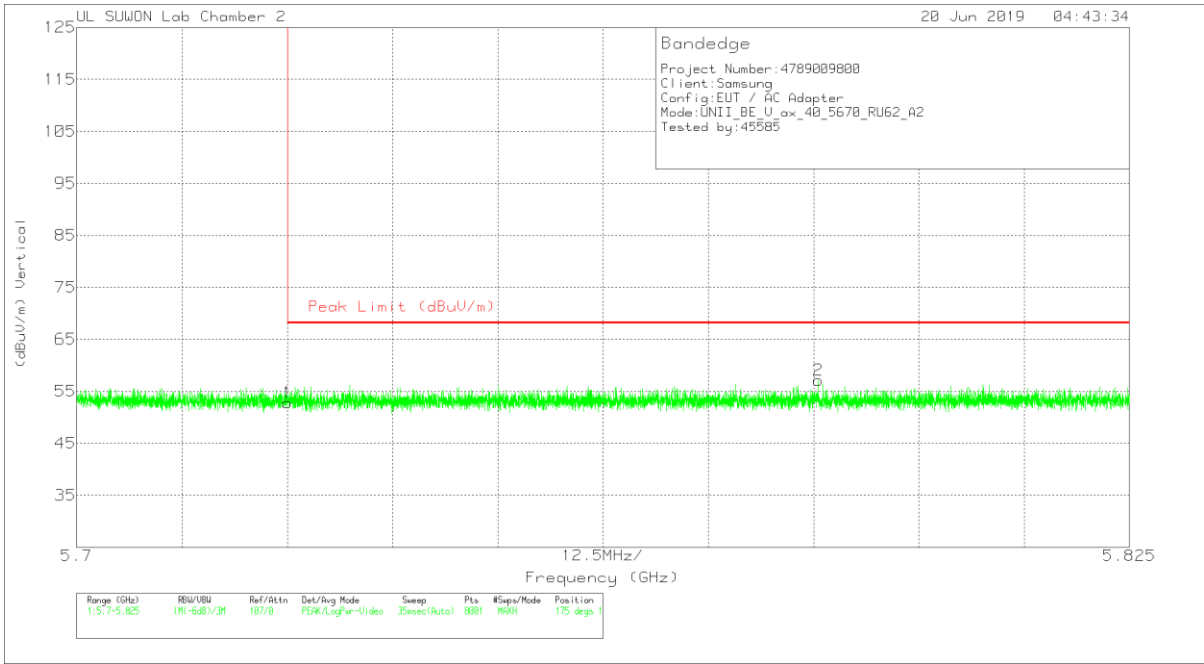

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.65	Pk	34.7	-17.6	0	52.75	68.2	-15.45	175	107	V
2	5.788	39.84	Pk	34.8	-17.5	0	57.14	68.2	-11.06	175	107	V

Pk - Peak detector

106T RU mode (ANT_1 / HE40 / RU offset 56)

HORIZONTAL PEAK PLOT

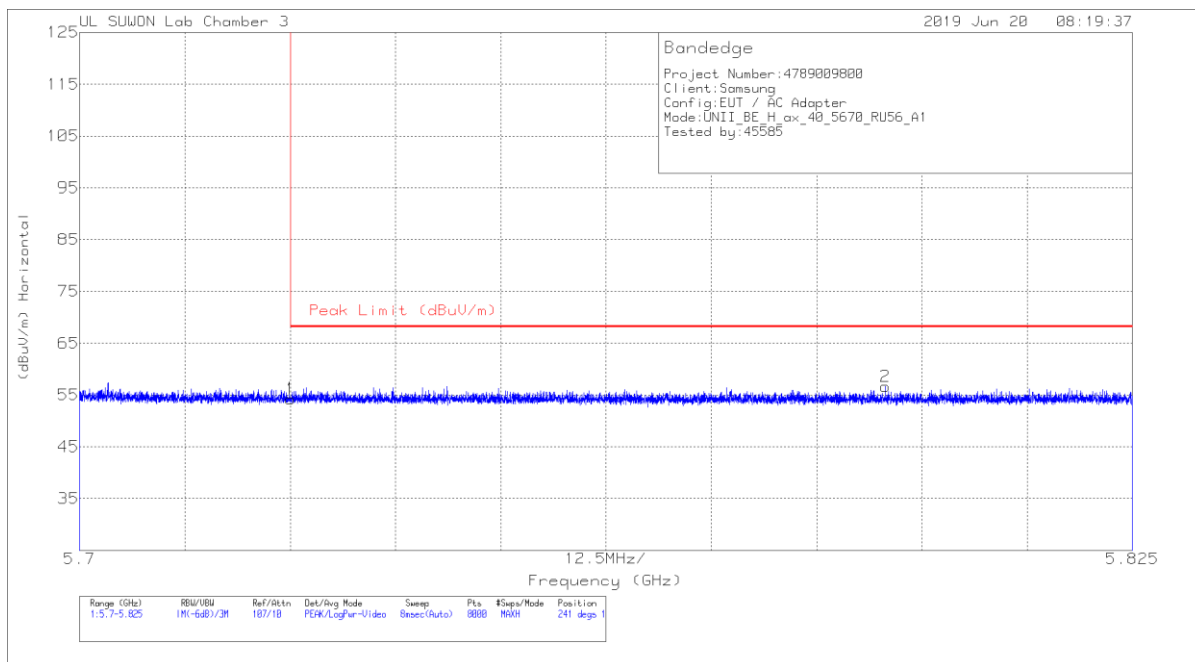


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.35	Pk	34.8	-17.9	0	54.25	68.2	-13.95	241	101	H
2	5.796	39.54	Pk	34.9	-17.8	0	56.64	68.2	-11.56	241	101	H

Pk - Peak detector

VERTICAL PEAK PLOT

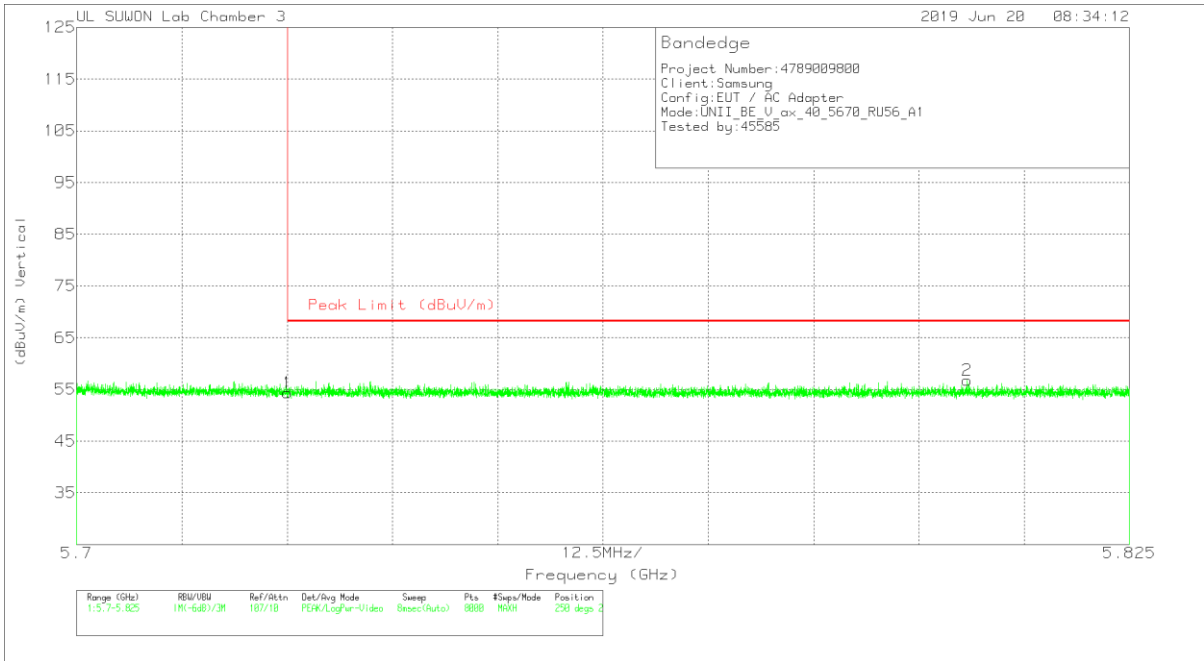

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.46	Pk	34.8	-17.9	0	54.36	68.2	-13.84	250	256	V
2	5.806	39.69	Pk	34.9	-17.8	0	56.79	68.2	-11.41	250	256	V

Pk - Peak detector

106T RU mode (ANT_2 / HE40 / RU offset 56)

HORIZONTAL PEAK PLOT

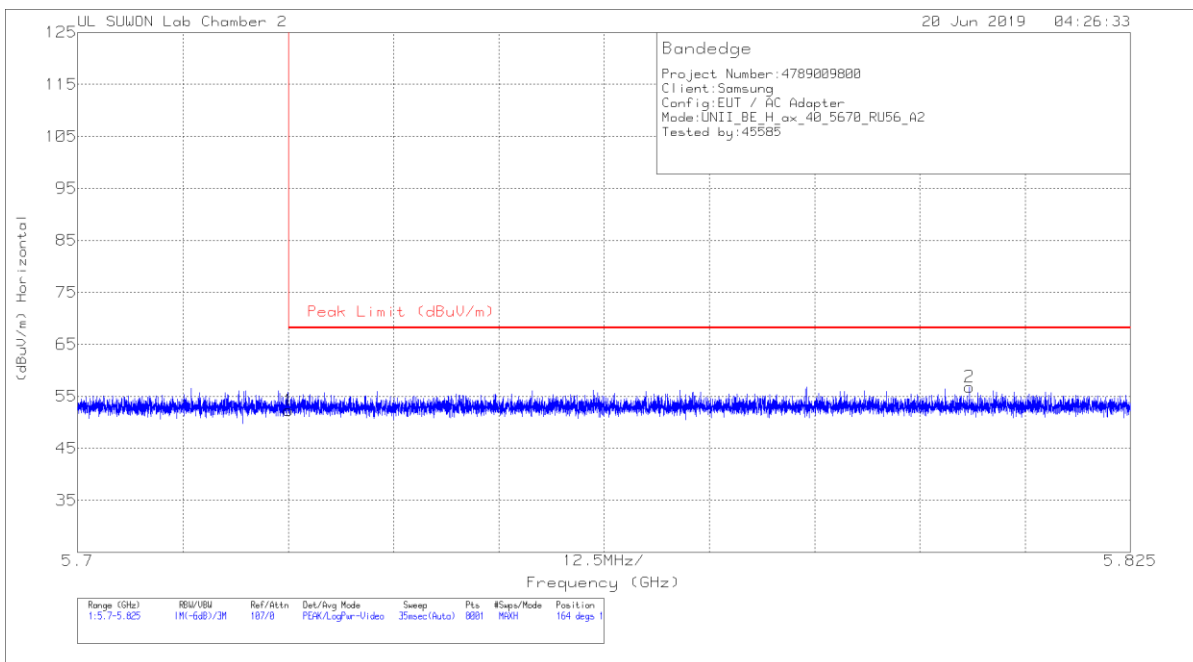

HORIZONTAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.2	Pk	34.7	-17.6	0	52.3	68.2	-15.9	164	100	H
2	5.806	39.51	Pk	34.8	-17.5	0	56.81	68.2	-11.39	164	100	H

Pk - Peak detector

52T RU mode (ANT_1 / HE80 / RU offset 52)

HORIZONTAL PEAK PLOT

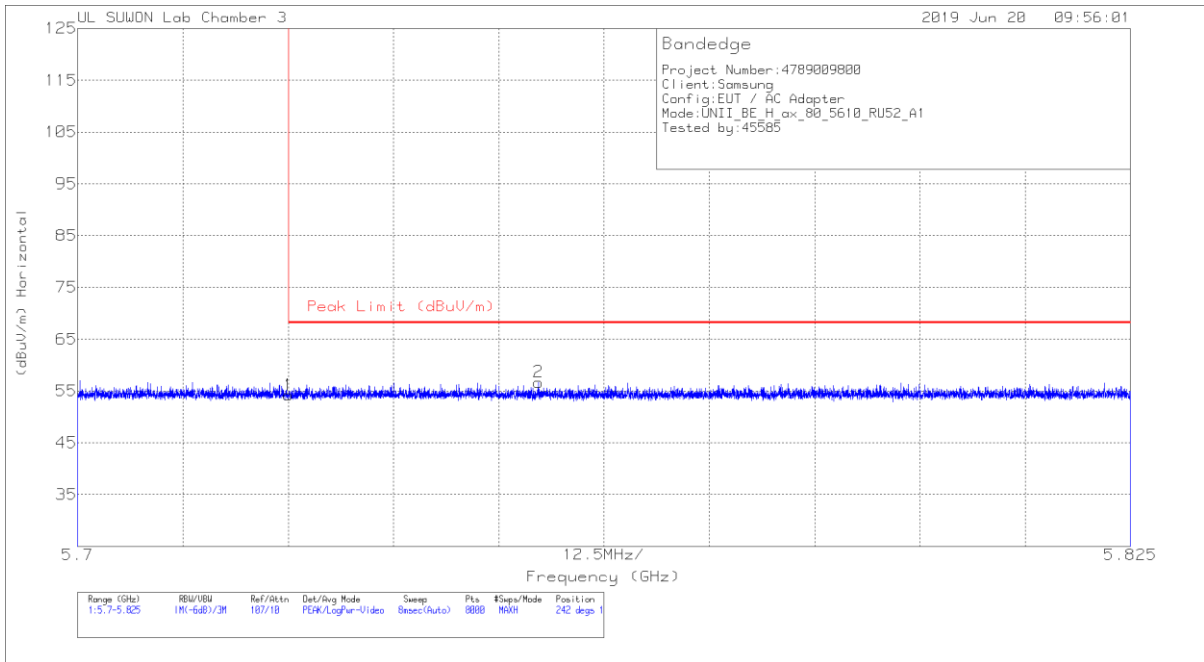


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.3	Pk	34.8	-17.9	0	54.2	68.2	-14	242	101	H
2	5.755	39.81	Pk	34.8	-17.9	0	56.71	68.2	-11.49	242	101	H

Pk - Peak detector

VERTICAL PEAK PLOT

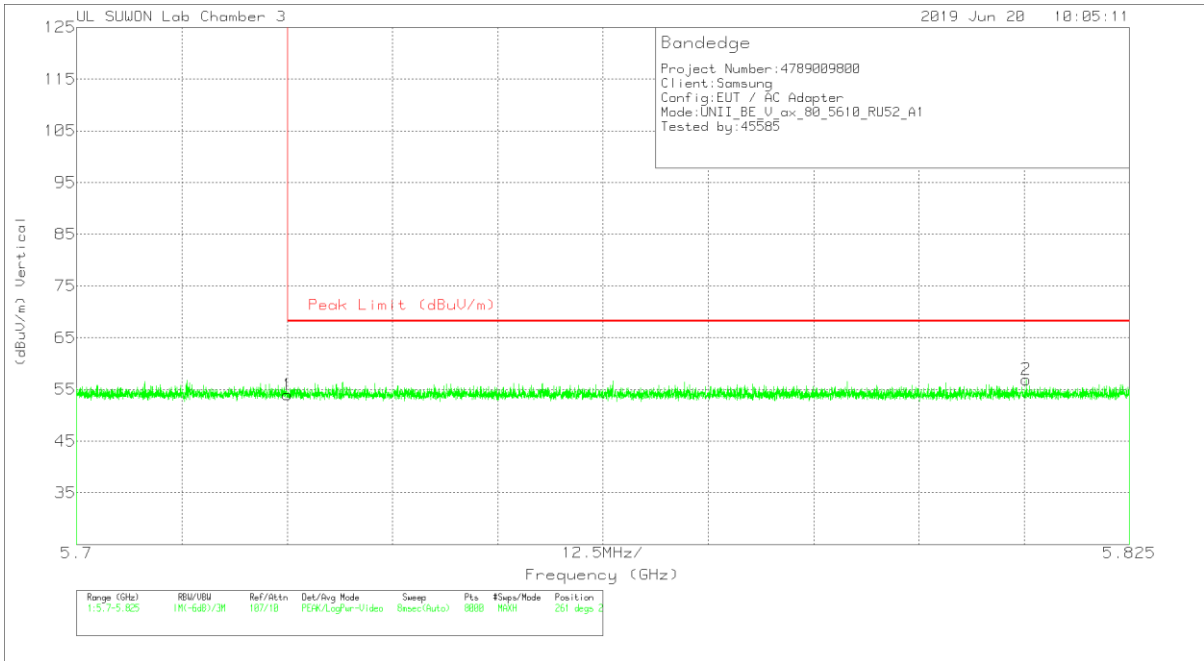

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.1	Pk	34.8	-17.9	0	54	68.2	-14.2	261	245	V
2	5.813	39.73	Pk	34.9	-17.7	0	56.93	68.2	-11.27	261	245	V

Pk - Peak detector

52T RU mode (ANT_2 / HE20 / RU offset 40)

HORIZONTAL PEAK PLOT

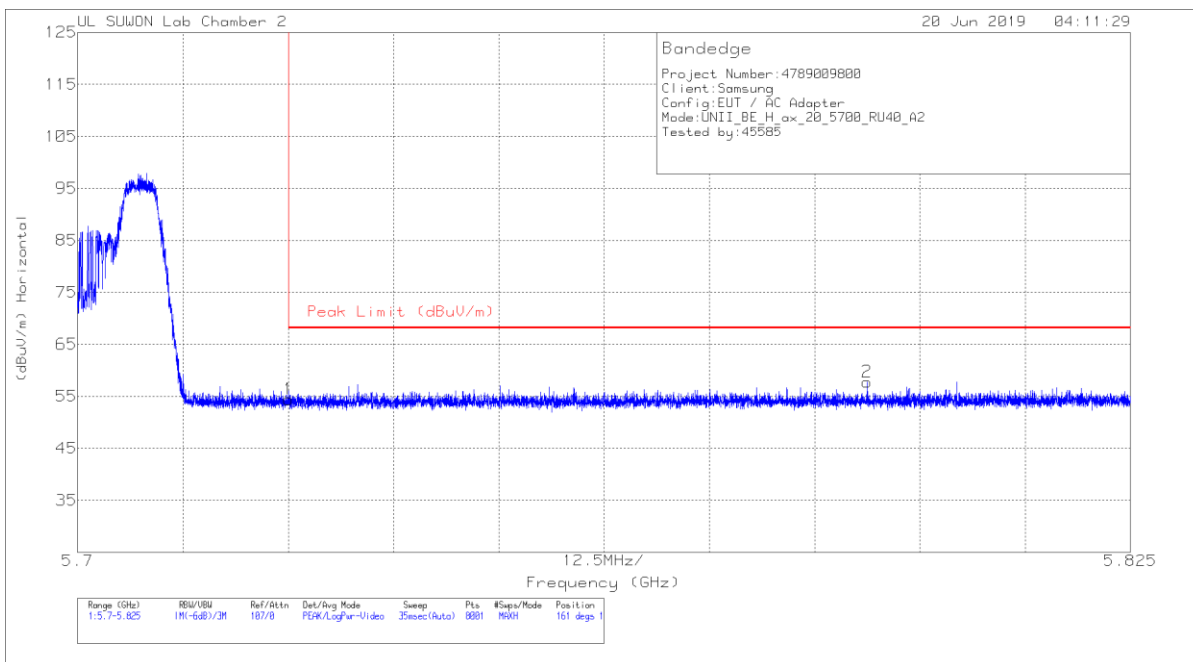


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.34	Pk	34.7	-17.6	0	54.44	68.2	-13.76	161	157	H
2	5.794	40.49	Pk	34.8	-17.5	0	57.79	68.2	-10.41	161	157	H

Pk - Peak detector

VERTICAL PEAK PLOT

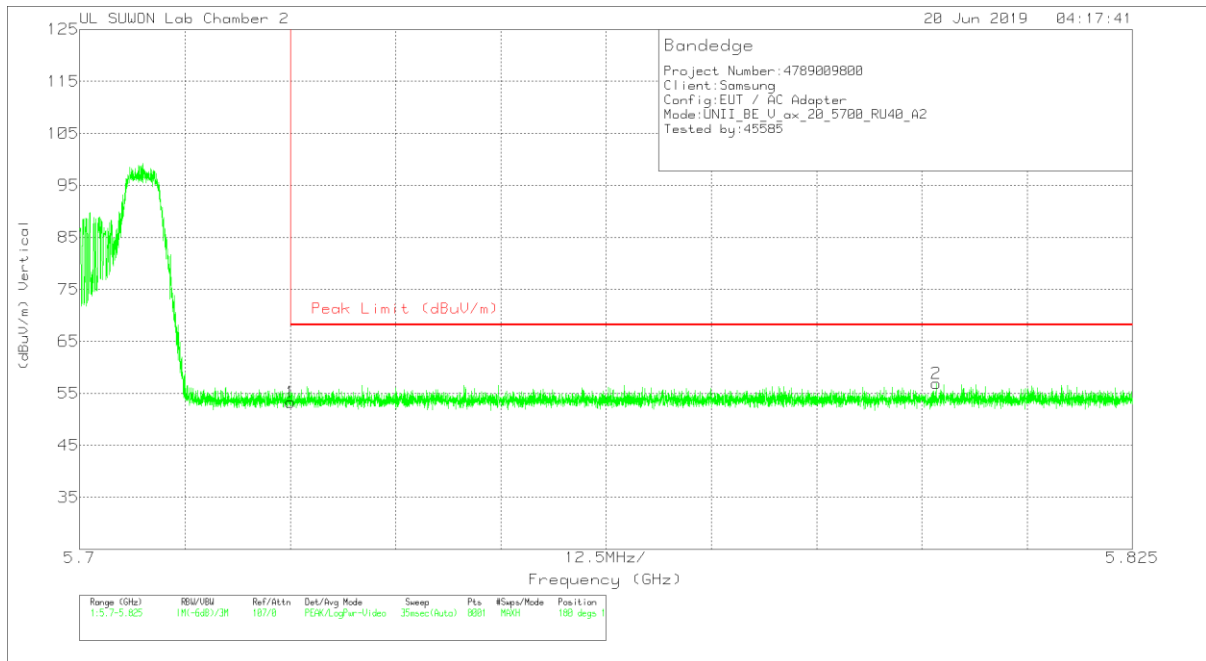

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.17	Pk	34.7	-17.6	0	53.27	68.2	-14.93	180	130	V
2	5.802	39.57	Pk	34.8	-17.5	0	56.87	68.2	-11.33	180	130	V

Pk - Peak detector

26T RU mode (ANT_1 / HE20 / RU offset 8)

HORIZONTAL PEAK PLOT

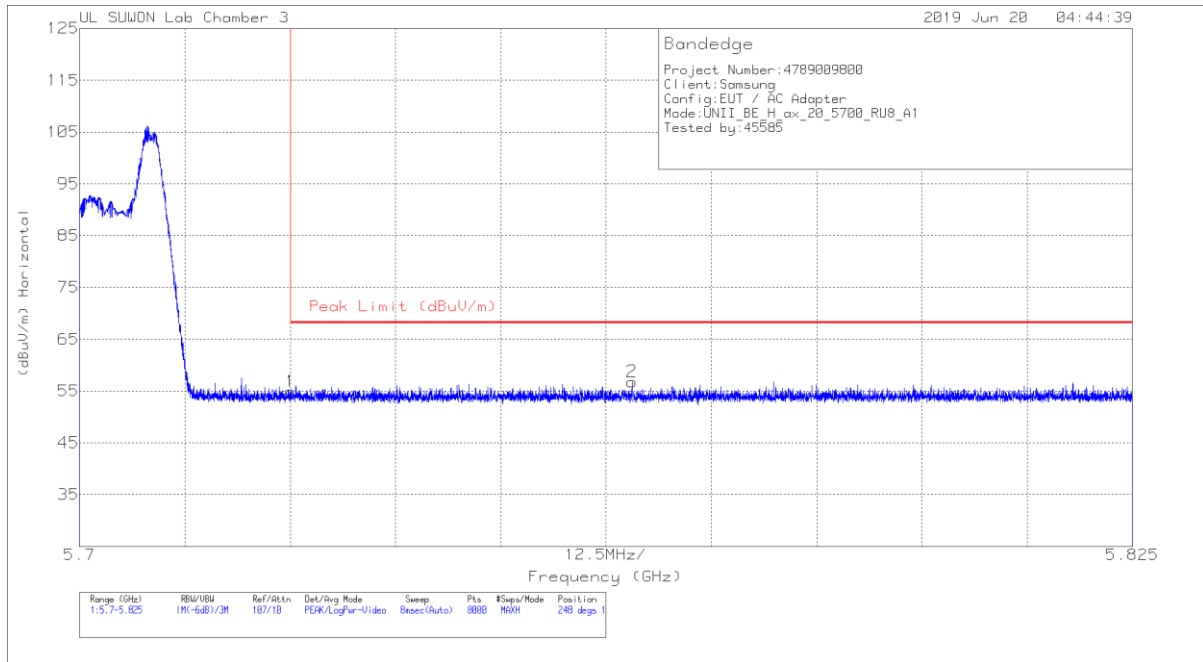


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.03	Pk	34.8	-17.9	0	54.93	68.2	-13.27	248	118	H
2	5.766	39.81	Pk	34.8	-17.8	0	56.81	68.2	-11.39	248	118	H

Pk - Peak detector

VERTICAL PEAK PLOT

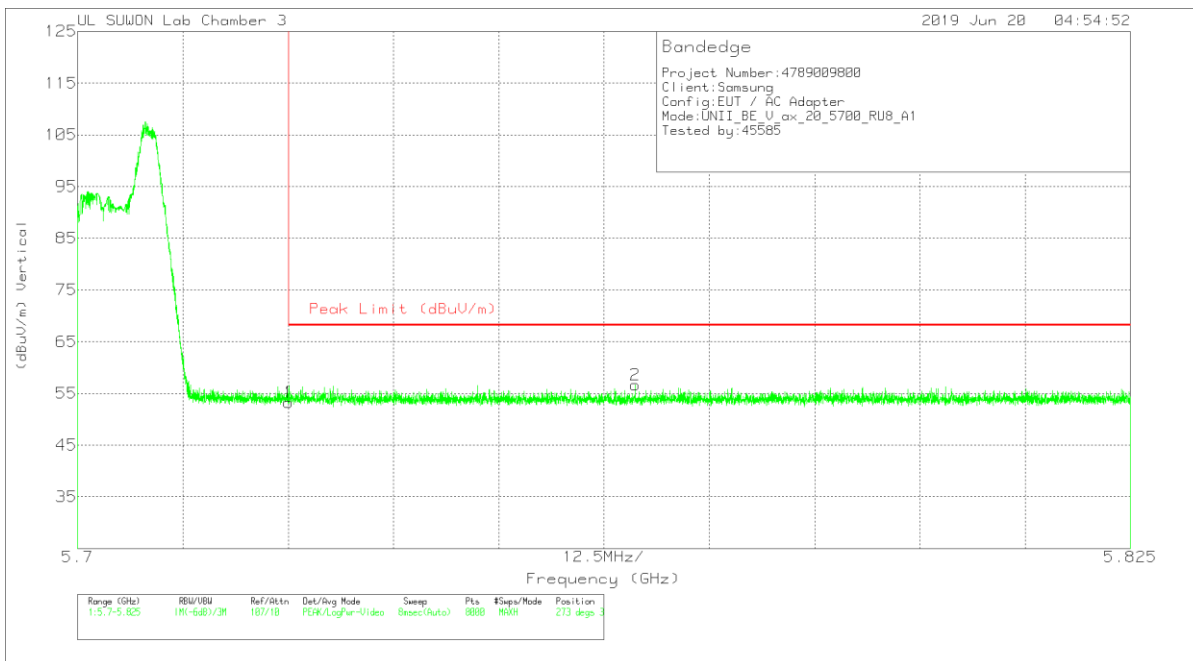

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.36	Pk	34.8	-17.9	0	53.26	68.2	-14.94	273	317	V
2	5.766	39.71	Pk	34.8	-17.9	0	56.61	68.2	-11.59	273	317	V

Pk - Peak detector

26T RU mode (ANT_2 / HE40 / RU offset 17)

HORIZONTAL PEAK PLOT

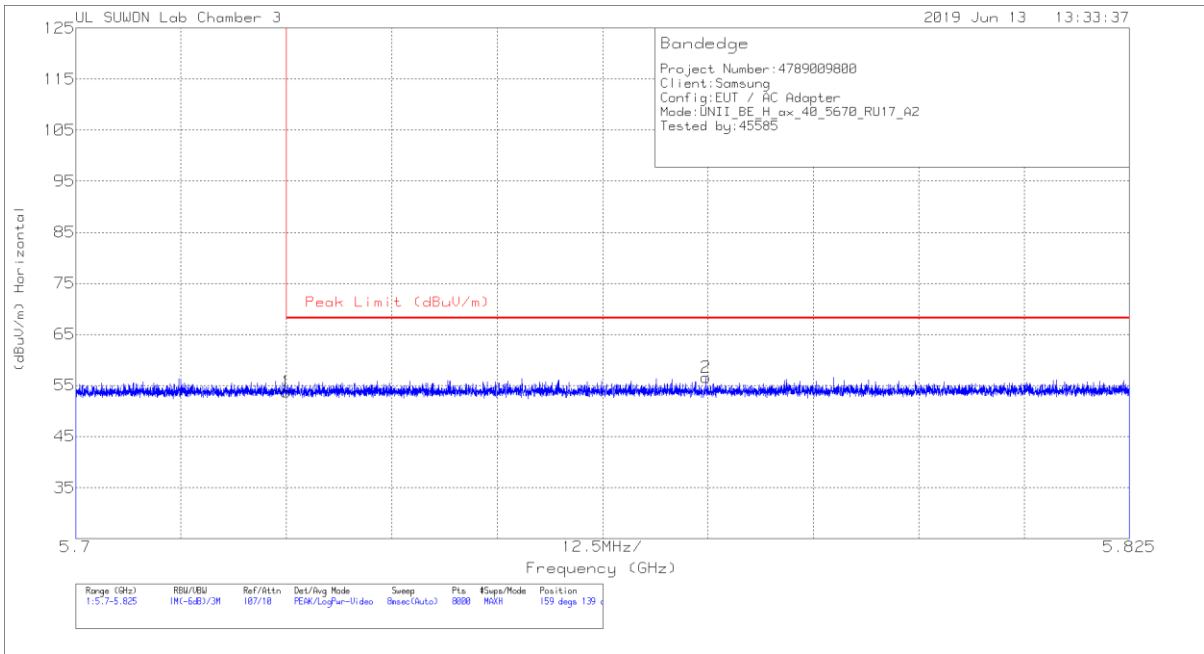


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.86	Pk		-17.9	0	53.76	68.2	-14.44	159	139	H
2	5.775	39.5	Pk		-17.8	0	56.6	68.2	-11.6	159	139	H

Pk - Peak detector

VERTICAL PEAK PLOT

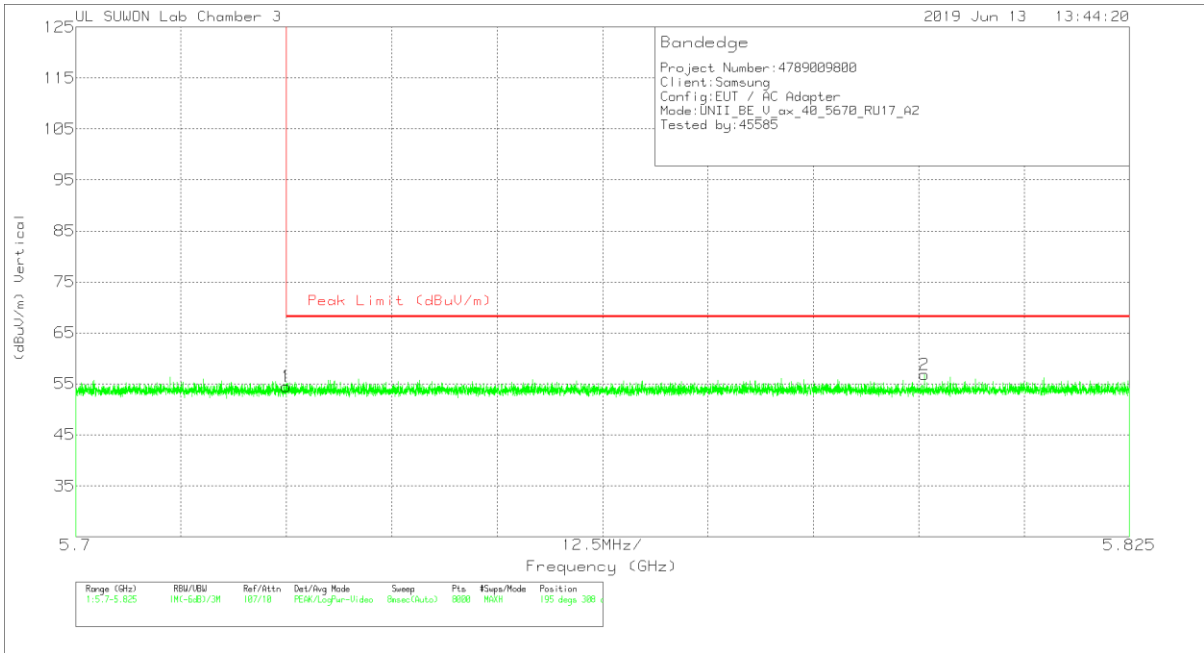

VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0020595 9	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.61	Pk	34.8	-17.9	0	54.51	68.2	-13.69	195	308	V
2	5.801	39.69	Pk	34.9	-17.8	0	56.79	68.2	-11.41	195	308	V

Pk - Peak detector


HARMONICS AND SPURIOUS EMISSIONS

HE20 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

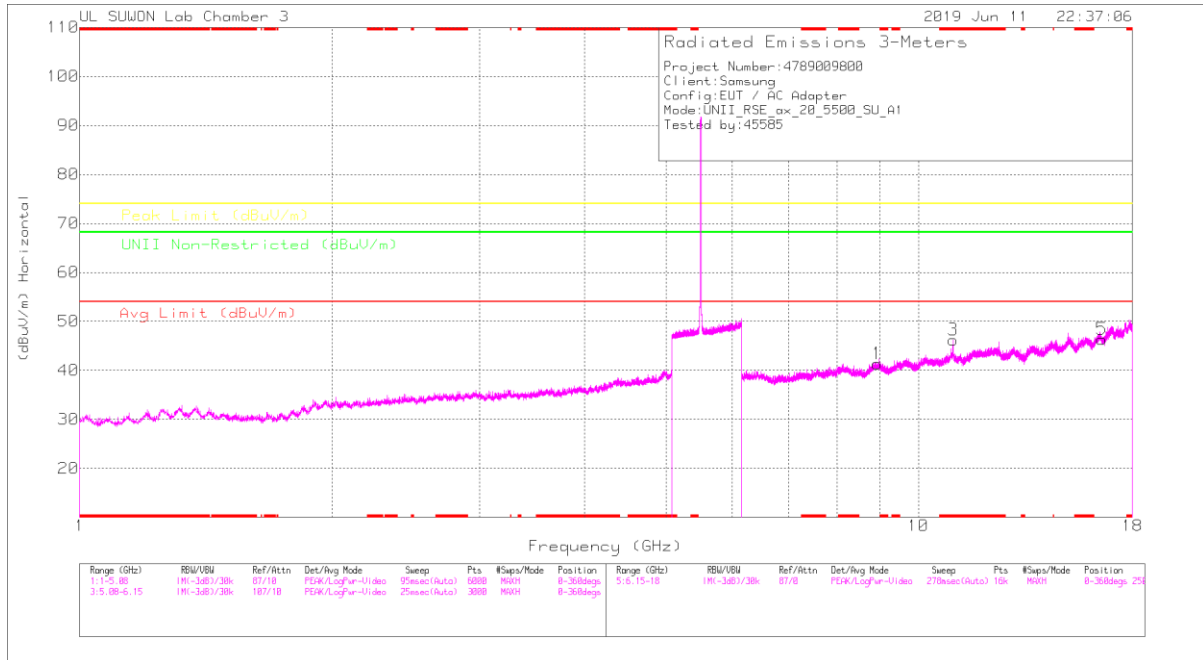

LOW CHANNEL VERTICAL

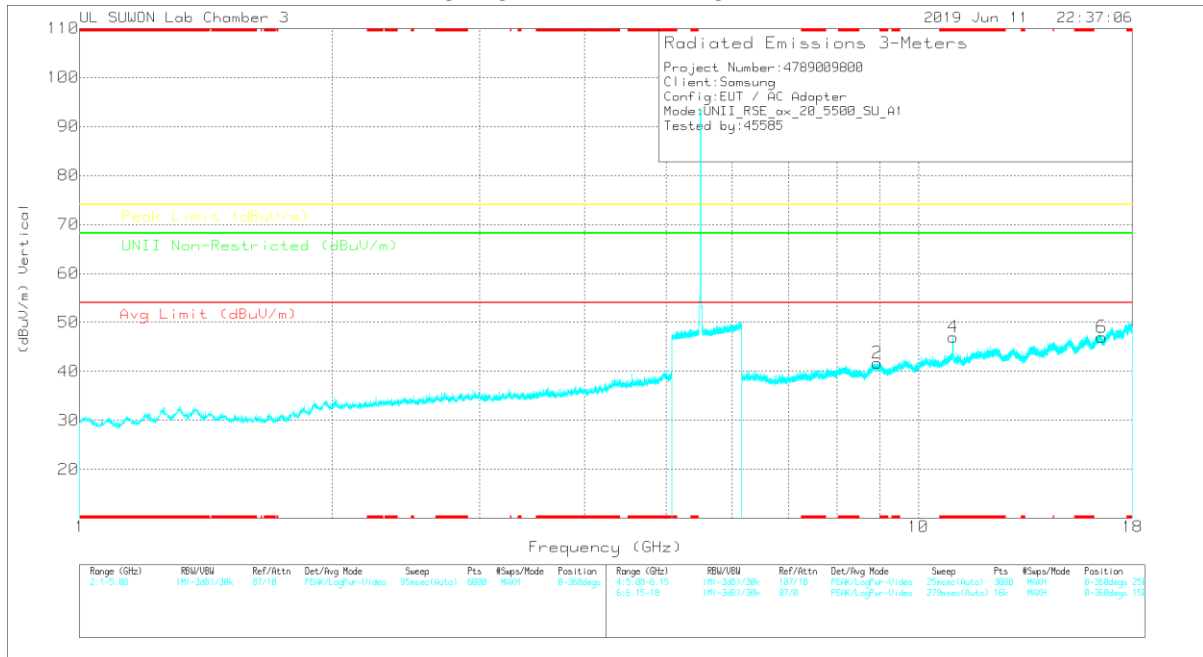

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULRI Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	8.93	25.77	PK	36.6	-21	0	41.37	-	-	-	-	68.2	-26.83	0-360	250	H
3	* 10.999	27.45	PK	38.2	-19.4	0	46.25	-	-	74	-27.75	-	-	0-360	250	H
5	16.545	22.88	PK	40.9	-17.4	0	46.38	-	-	-	-	68.2	-21.82	0-360	250	H
2	8.934	26.15	PK	36.6	-21	0	41.75	-	-	-	-	68.2	-26.45	0-360	250	V
4	* 10.998	28.33	PK	38.2	-19.5	0	47.03	-	-	74	-26.97	-	-	0-360	150	V
6	16.544	23.5	PK	40.9	-17.4	0	47	-	-	-	-	68.2	-21.2	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULRI Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 11.001	38.62	PK-U	38.2	-19.4	0	57.42	-	-	74	-16.58	-	-	162	189	H
* 10.999	26.82	ADR	38.2	-19.4	0	45.62	54	-8.38	-	-	-	-	162	189	H
* 11	39.7	PK-U	38.2	-19.5	0	58.4	-	-	74	-15.6	-	-	188	170	V
* 10.999	27.22	ADR	38.2	-19.4	0	46.02	54	-7.98	-	-	-	-	188	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

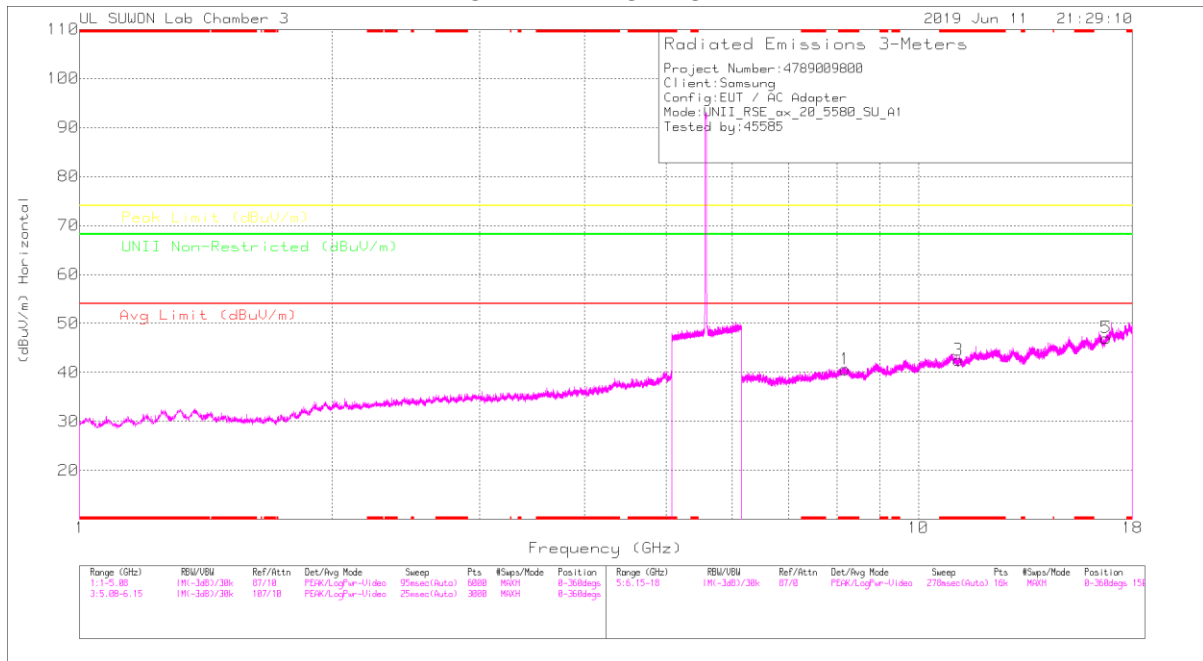

MID CHANNEL VERTICAL

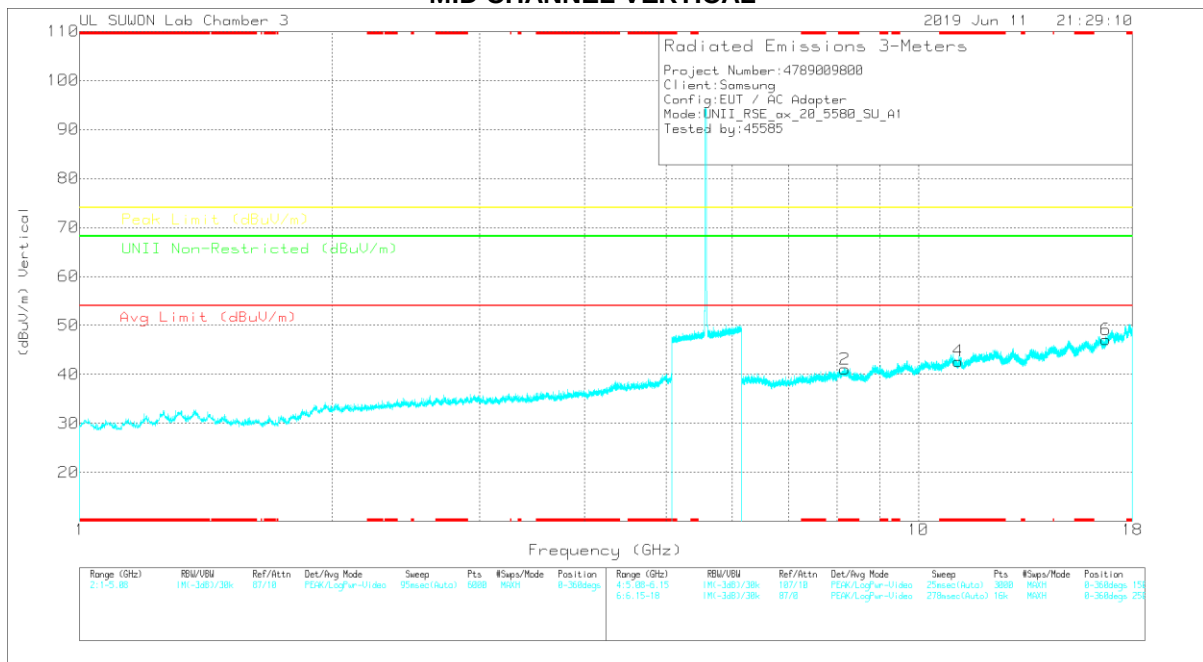

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.178	26.14	PK	36.3	-21.8	0	40.64	-	-	74	-33.36	-	-	0-360	250	H
3	* 11.164	23.82	PK	38.3	-19.6	0	42.52	-	-	74	-31.48	-	-	0-360	250	H
5	16.745	22.54	PK	41.3	-16.8	0	47.04	-	-	-	-	68.2	-21.16	0-360	150	H
2	* 8.171	26.56	PK	36.3	-21.8	0	41.06	-	-	74	-32.94	-	-	0-360	250	V
4	* 11.157	24.07	PK	38.3	-19.7	0	42.67	-	-	74	-31.33	-	-	0-360	149	V
6	16.743	22.67	PK	41.3	-16.9	0	47.07	-	-	-	-	68.2	-21.13	0-360	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

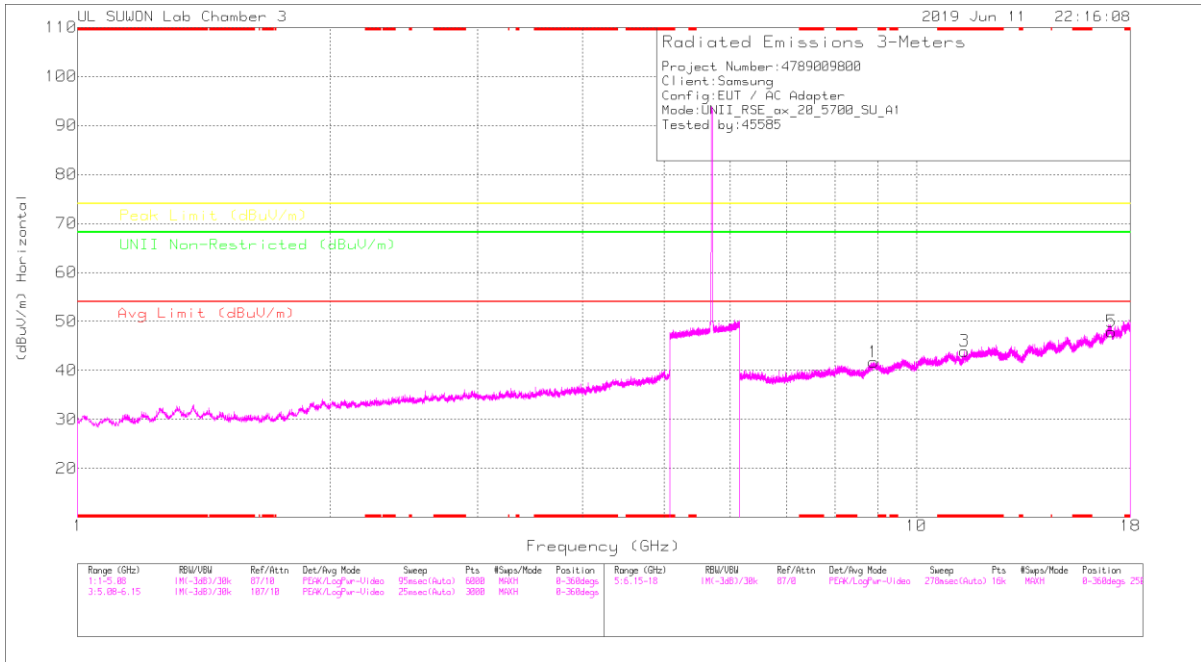

HIGH CHANNEL VERTICAL

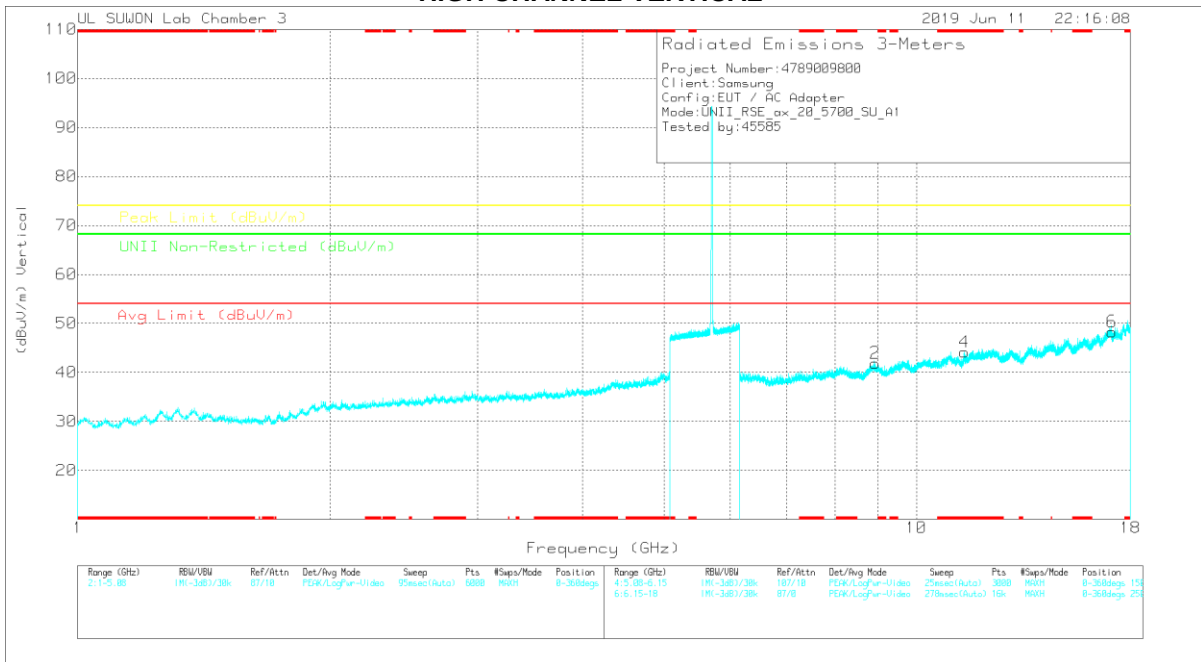

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.893	26.11	PK	36.5	-20.9	0	41.71	-	-	-	-	68.2	-26.49	0-360	150	H
3	* 11.405	25.05	PK	38.5	-19.6	0	43.95	-	-	74	-30.05	-	-	0-360	250	H
5	17.093	22.21	PK	41.6	-15.9	0	47.91	-	-	-	-	68.2	-20.29	0-360	250	H
2	8.933	26.38	PK	36.6	-21.1	0	41.88	-	-	-	-	68.2	-26.32	0-360	250	V
4	* 11.401	25.13	PK	38.5	-19.5	0	44.13	-	-	74	-29.87	-	-	0-360	250	V
6	17.105	22.79	PK	41.6	-16.1	0	48.29	-	-	-	-	68.2	-19.91	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

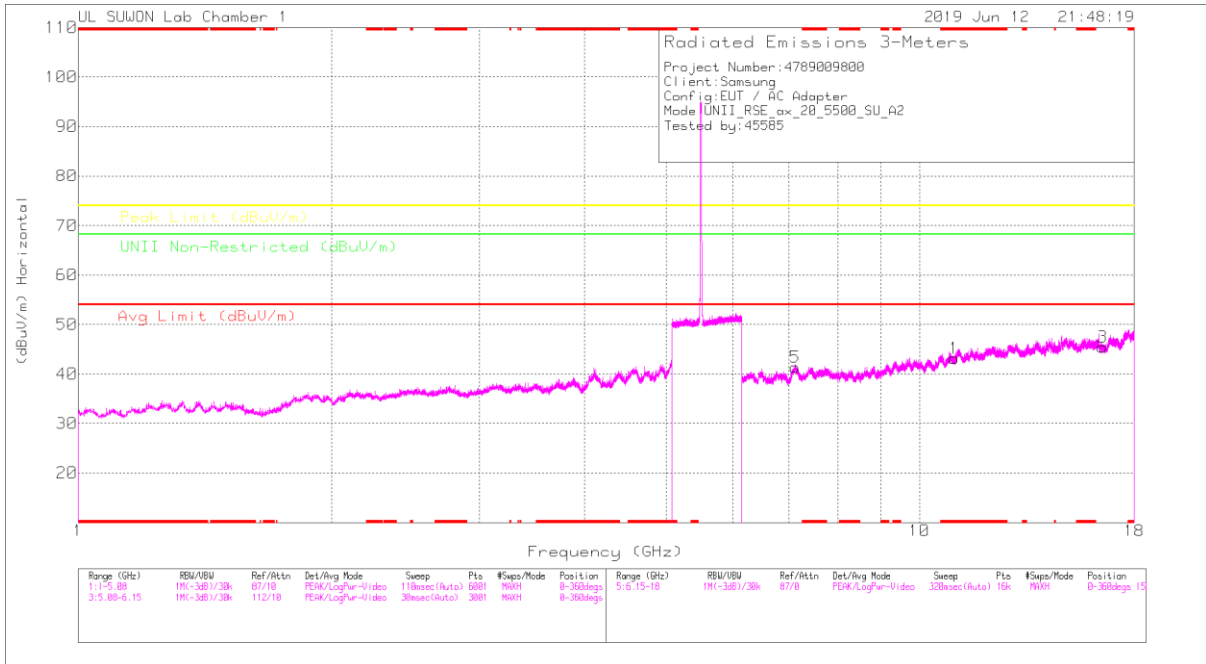

LOW CHANNEL VERTICAL

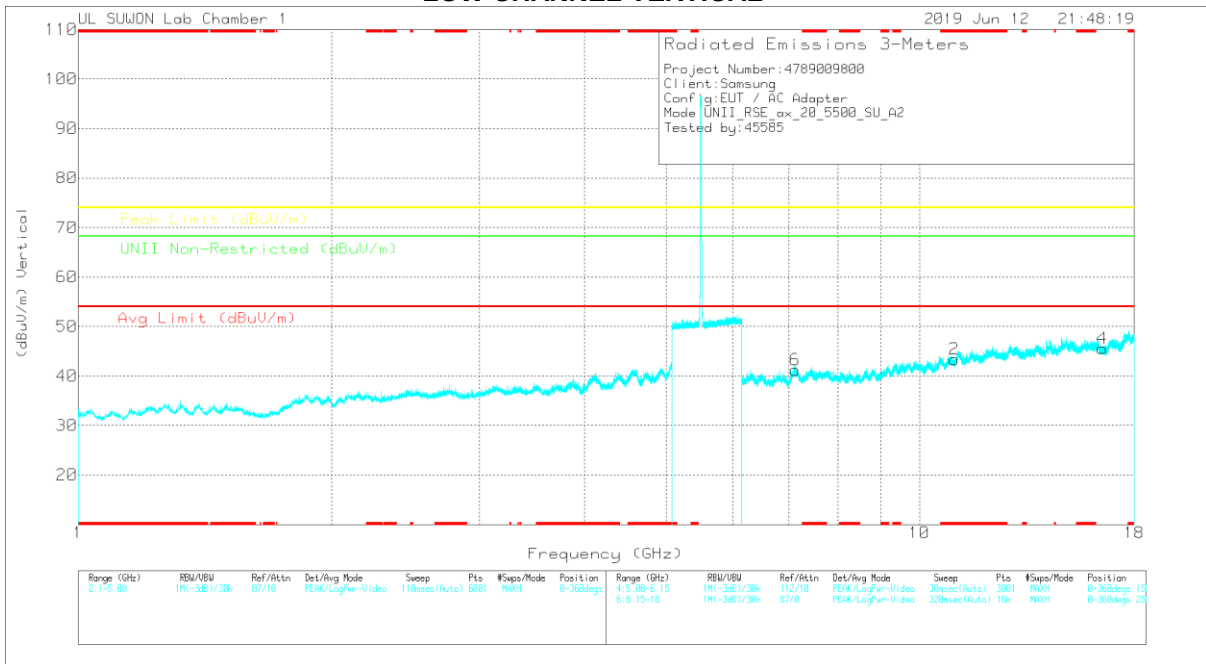

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.00227	25.64	PK	38.1	-20.6	0	43.14	-	-	74	-30.86	-	-	0-360	250	H
3	16.50107	24.76	PK	40.5	-19.8	0	45.46	-	-	-	-	68.2	-22.74	0-360	150	H
5	7.11423	29.17	PK	36	-23.8	0	41.37	-	-	-	-	68.2	-26.83	0-360	150	H
2	* 11.00153	25.77	PK	38.1	-20.5	0	43.37	-	-	74	-30.63	-	-	0-360	150	V
4	16.50033	24.89	PK	40.5	-19.8	0	45.59	-	-	-	-	68.2	-22.61	0-360	150	V
6	7.11349	28.9	PK	36	-23.7	0	41.2	-	-	-	-	68.2	-27	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

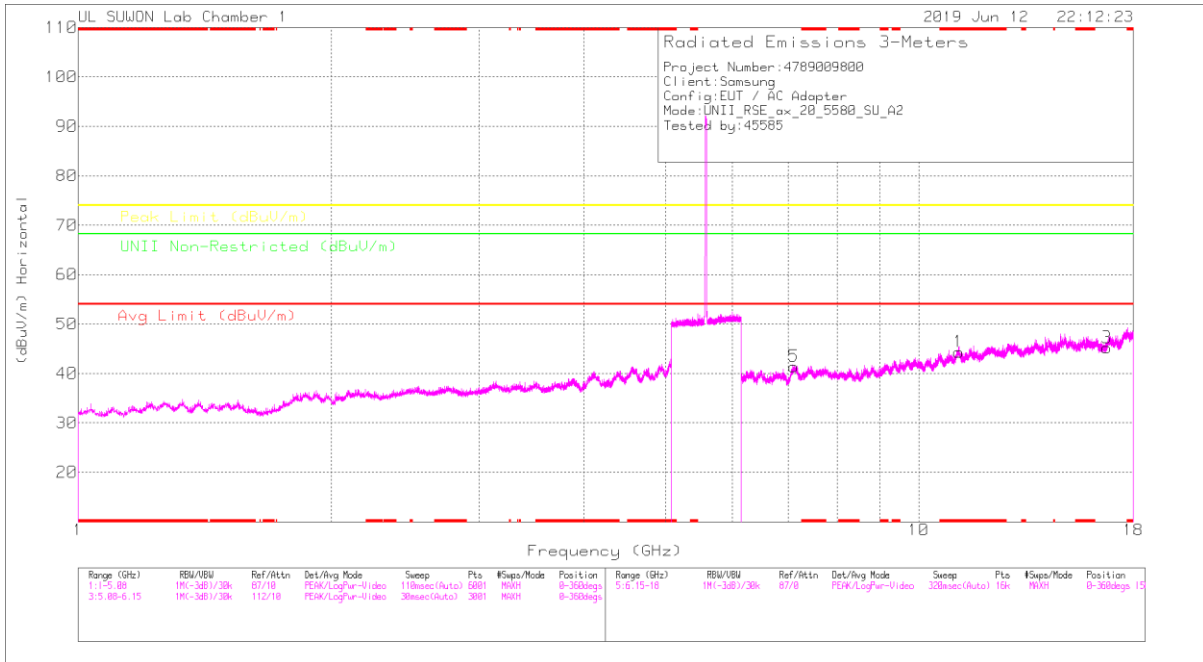

MID CHANNEL VERTICAL

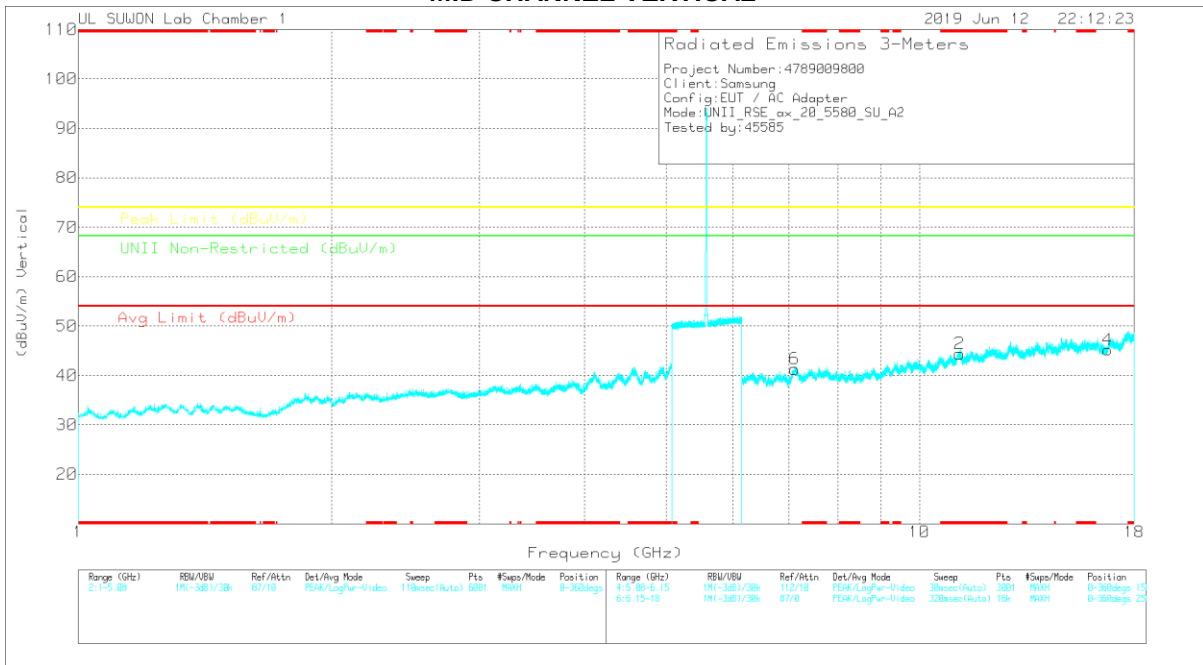

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULH Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 11.1615	25.67	PK	38.2	-19.5	0	44.37	-	-	74	-29.63	-	-	0-360	250	H
3	16.74176	23.51	PK	40.9	-19.2	0	45.21	-	-	-	-	68.2	-22.99	0-360	150	H
5	7.10757	29.13	PK	36	-23.7	0	41.43	-	-	-	-	68.2	-26.77	0-360	250	H
2	* 11.1615	25.68	PK	38.2	-19.5	0	44.38	-	-	74	-29.62	-	-	0-360	250	V
4	16.73954	23.48	PK	40.9	-19.2	0	45.18	-	-	-	-	68.2	-23.02	0-360	250	V
6	7.10831	29.02	PK	36	-23.7	0	41.32	-	-	-	-	68.2	-26.88	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

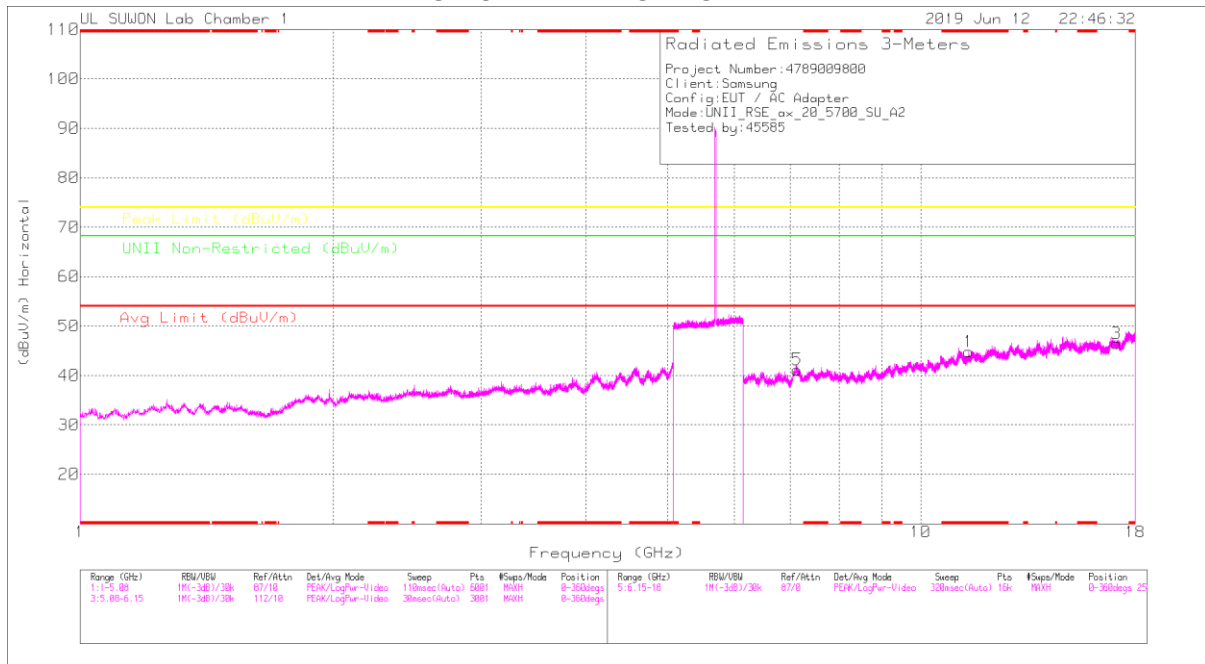

HIGH CHANNEL VERTICAL

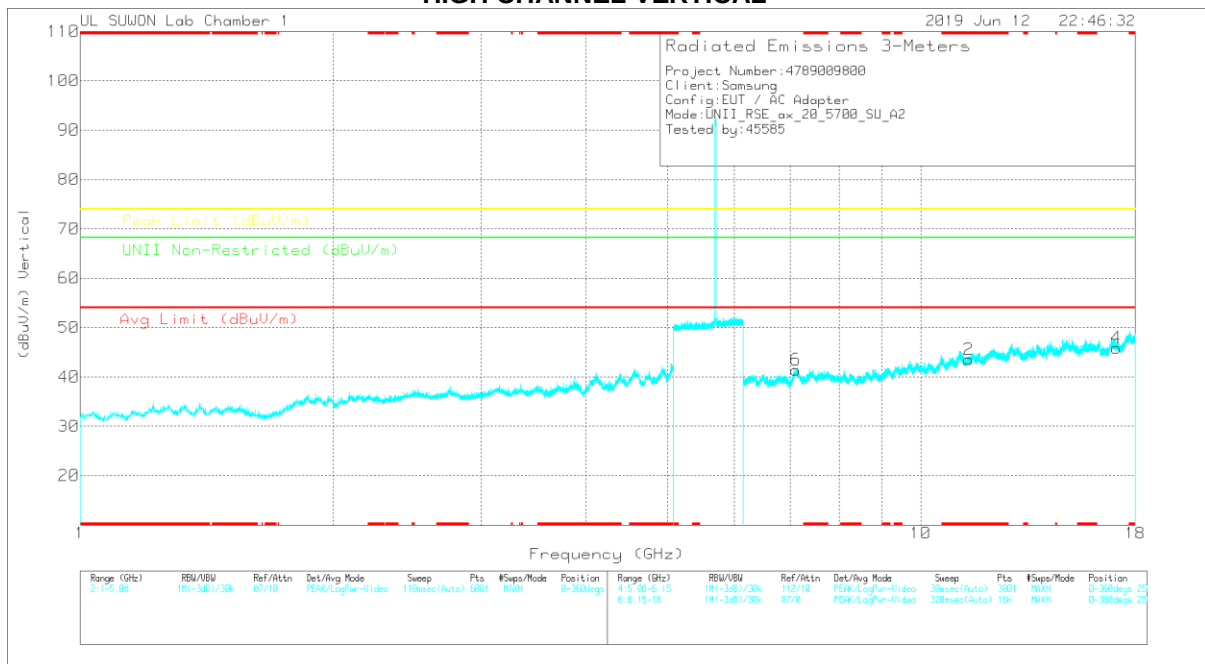

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBμV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBμV/m)	Avg Limit (dBμV/m)	Margin (dB)	Peak Limit (dBμV/m)	Margin (dB)	UNII Non-Restricted (dBμV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.39997	26.72	PK	38.3	-20.2	0	44.82	-	-	74	-29.18	-	-	0-360	150	H
3	17.09872	23.85	PK	41.3	-18.7	0	46.45	-	-	-	-	68.2	-21.75	0-360	250	H
5	7.13053	29.07	PK	36	-23.9	0	41.17	-	-	-	-	68.2	-27.03	0-360	150	H
2	* 11.39922	25.42	PK	38.3	-20.2	0	43.52	-	-	74	-30.48	-	-	0-360	250	V
4	17.1002	23.26	PK	41.3	-18.7	0	45.86	-	-	-	-	68.2	-22.34	0-360	250	V
6	7.10535	29.13	PK	36	-23.7	0	41.43	-	-	-	-	68.2	-26.77	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

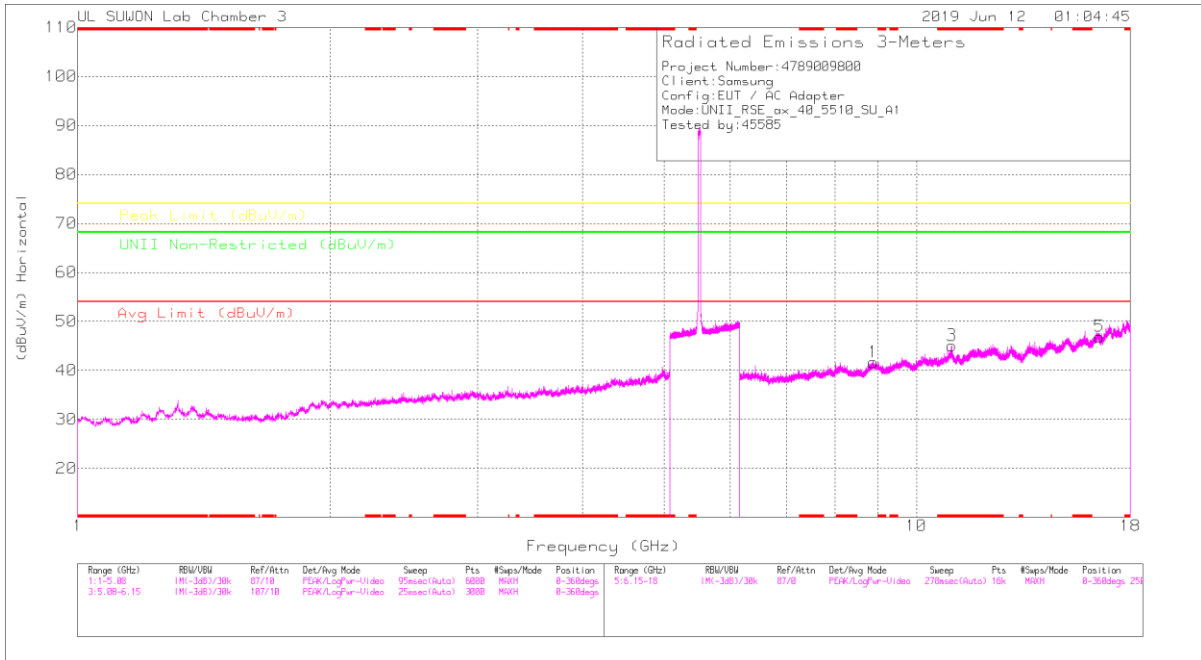

LOW CHANNEL VERTICAL

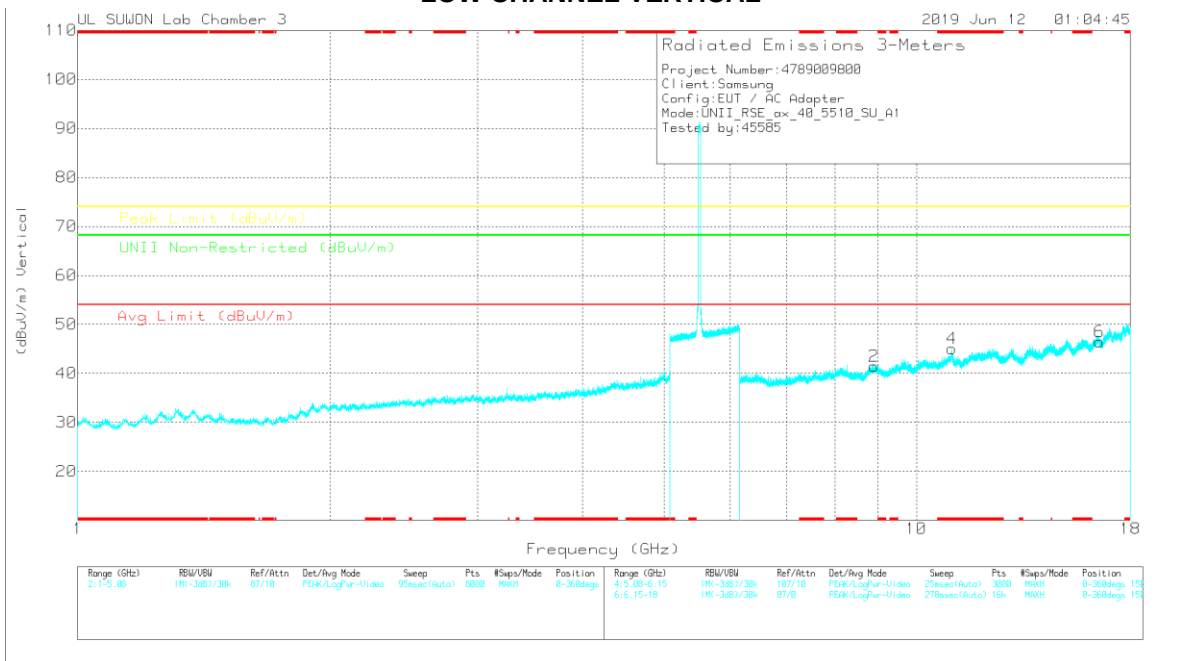

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	8.888	26.06	PK	36.5	-20.9	0	41.66	-	-	-	-	68.2	-26.54	0-360	150	H
3	* 11.021	26.39	PK	38.2	-19.5	0	45.09	-	-	74	-28.91	-	-	0-360	150	H
5	16.53	23.41	PK	40.9	-17.4	0	46.91	-	-	-	-	68.2	-21.29	0-360	250	H
2	8.894	25.92	PK	36.5	-21	0	41.42	-	-	-	-	68.2	-26.78	0-360	250	V
4	* 11.017	26.33	PK	38.2	-19.5	0	45.03	-	-	74	-28.97	-	-	0-360	150	V
6	16.527	22.95	PK	40.9	-17.4	0	46.45	-	-	-	-	68.2	-21.75	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 11.011	36.85	PK-U	38.2	-19.4	0	55.65	-	-	74	-18.35	-	-	163	192	H
* 11.02	25.17	ADR	38.2	-19.5	0	43.67	54	-10.13	-	-	-	-	163	192	H
* 11.02	37.61	PK-U	38.2	-19.4	0	56.41	-	-	74	-17.59	-	-	190	172	V
* 11.014	25.34	ADR	38.2	-19.5	0	44.04	54	-9.96	-	-	-	-	190	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

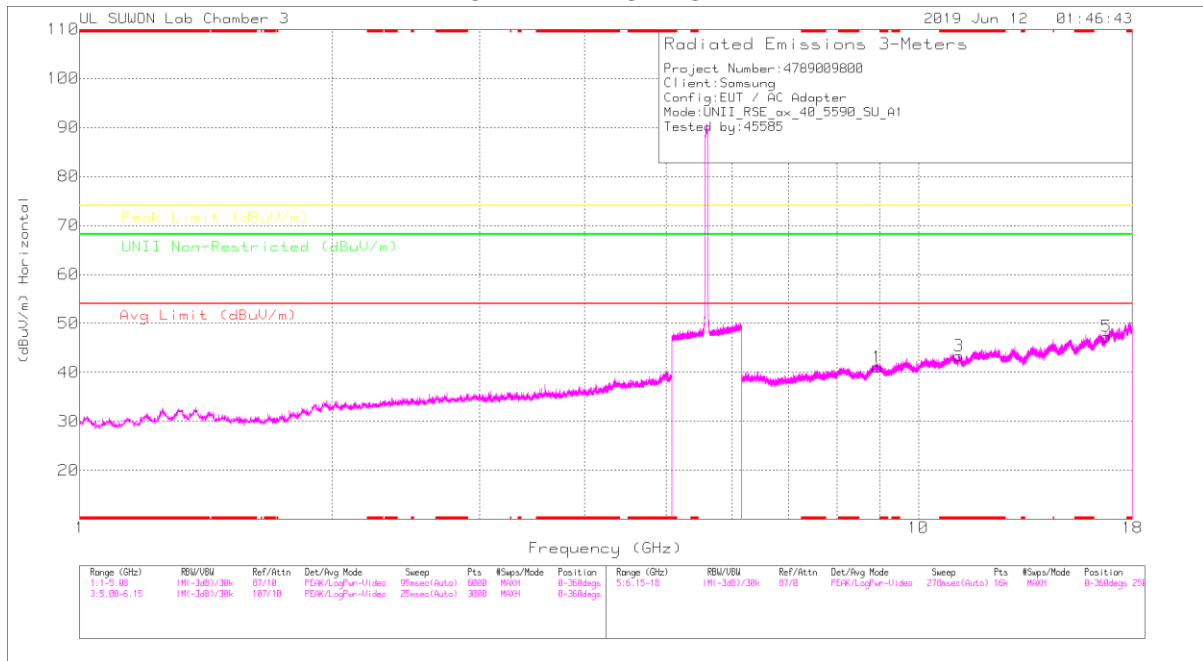

MID CHANNEL VERTICAL

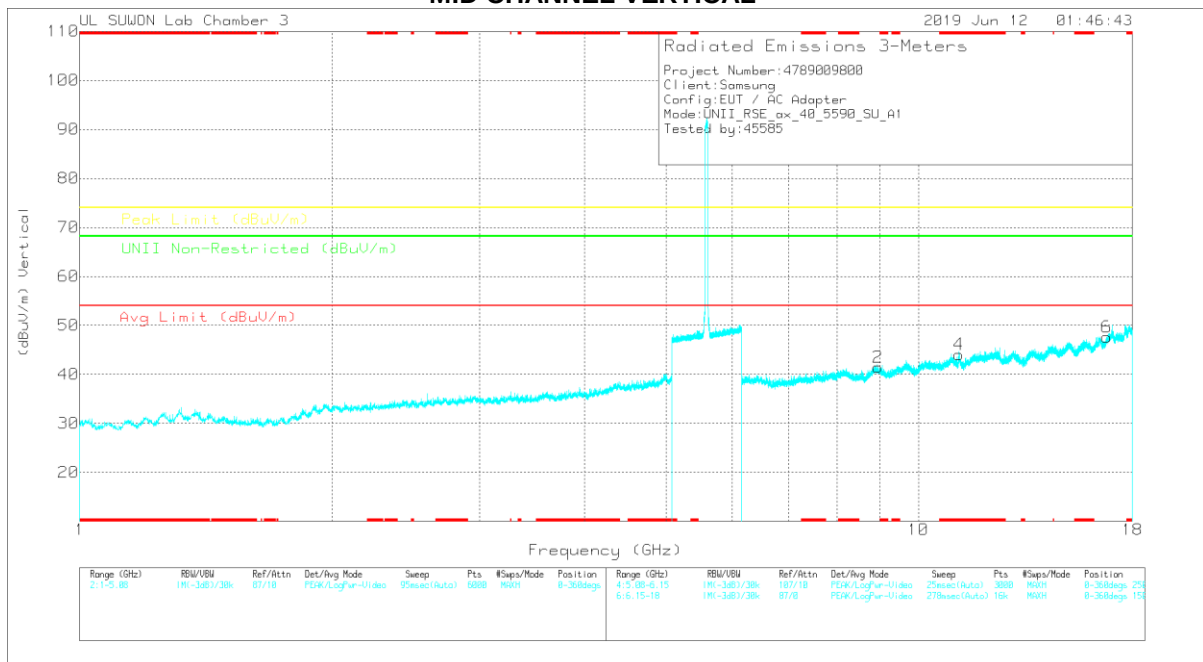

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	8.939	25.45	PK	36.6	-21	0	41.05	-	-	-	-	68.2	-27.15	0-360	250	H
3	* 11.181	24.55	PK	38.3	-19.5	0	43.35	-	-	74	-30.65	-	-	0-360	150	H
5	16.767	22.59	PK	41.4	-16.7	0	47.29	-	-	-	-	68.2	-20.91	0-360	150	H
2	8.943	25.93	PK	36.6	-21.1	0	41.43	-	-	-	-	68.2	-26.77	0-360	250	V
4	* 11.176	25.35	PK	38.3	-19.6	0	44.05	-	-	74	-29.95	-	-	0-360	150	V
6	16.773	22.83	PK	41.4	-16.6	0	47.63	-	-	-	-	68.2	-20.57	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 11.167	35.77	PK-U	38.3	-19.7	0	54.37	-	-	74	-19.63	-	-	162	175	H
* 11.181	24.36	ADR	38.3	-19.5	0	43.16	54	-10.84	-	-	-	-	162	175	H
* 11.175	35.83	PK-U	38.3	-19.6	0	54.53	-	-	74	-19.47	-	-	186	129	V
* 11.175	24.29	ADR	38.3	-19.5	0	43.09	54	-10.91	-	-	-	-	186	129	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

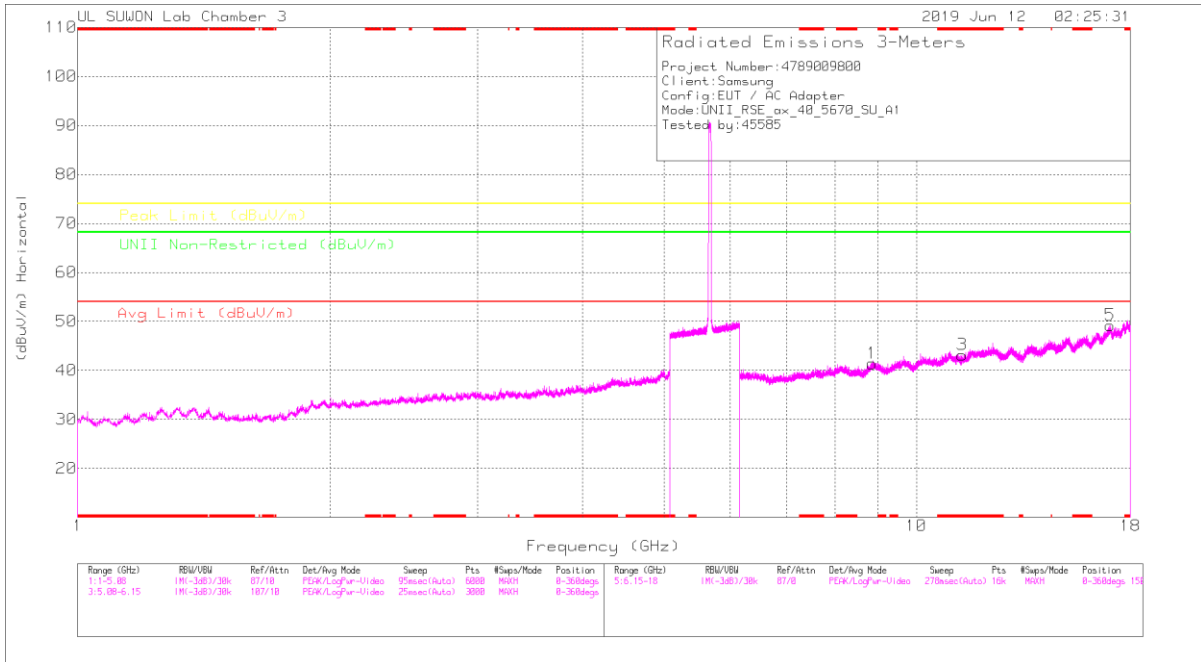

HIGH CHANNEL VERTICAL

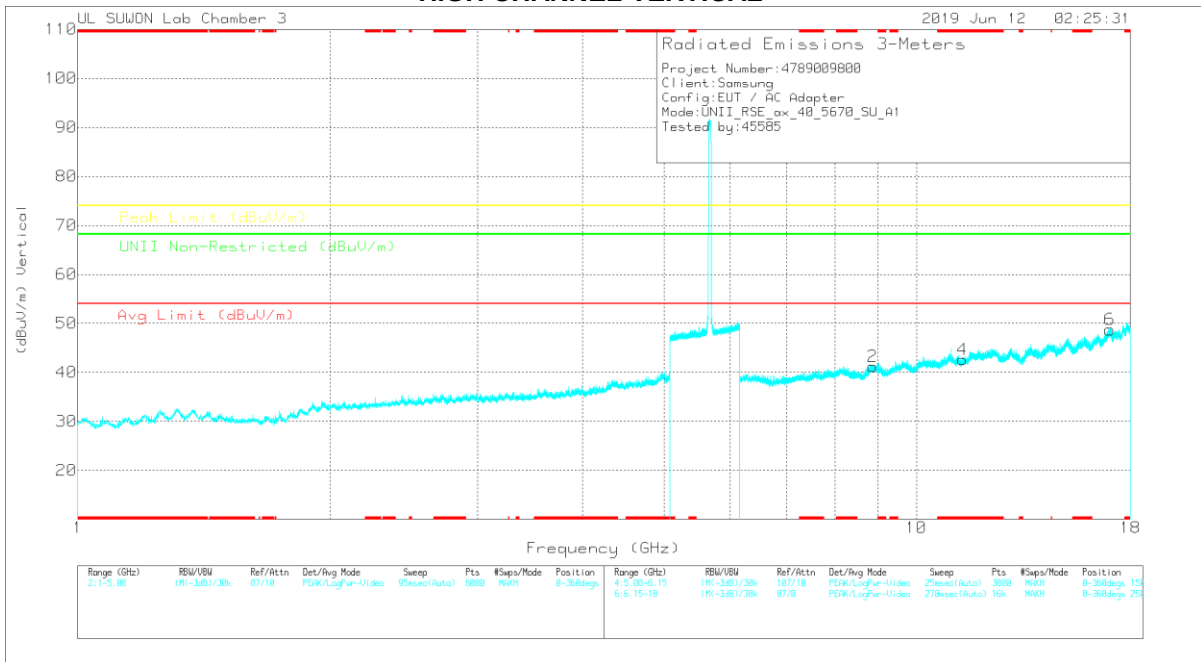

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avd Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.853	25.71	PK	36.5	-20.8	0	41.41	-	-	-	-	68.2	-26.79	0-360	150	H
3	* 11.339	24.49	PK	38.4	-19.7	0	43.19	-	-	74	-30.81	-	-	0-360	250	H
5	17.011	23.41	PK	41.7	-15.9	0	49.21	-	-	-	-	68.2	-18.99	0-360	150	H
2	8.867	25.46	PK	36.5	-20.8	0	41.16	-	-	-	-	68.2	-27.04	0-360	150	V
4	* 11.343	23.87	PK	38.4	-19.7	0	42.57	-	-	74	-31.43	-	-	0-360	150	V
6	17.01	22.92	PK	41.7	-15.9	0	48.72	-	-	-	-	68.2	-19.48	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

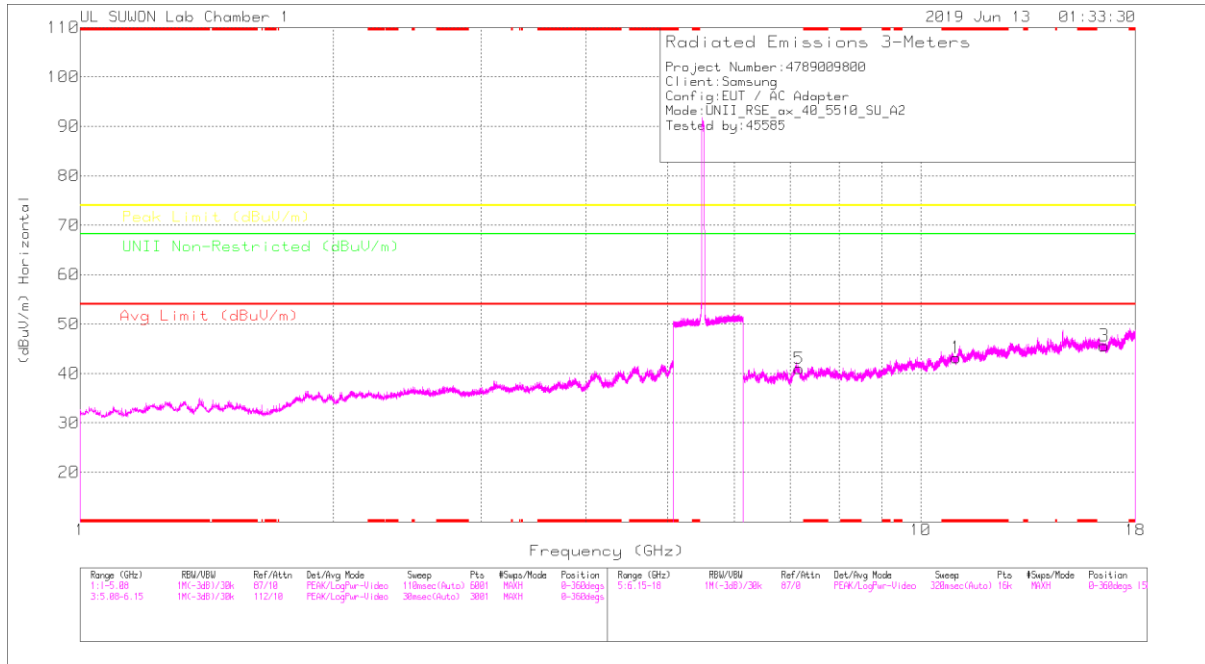

LOW CHANNEL VERTICAL

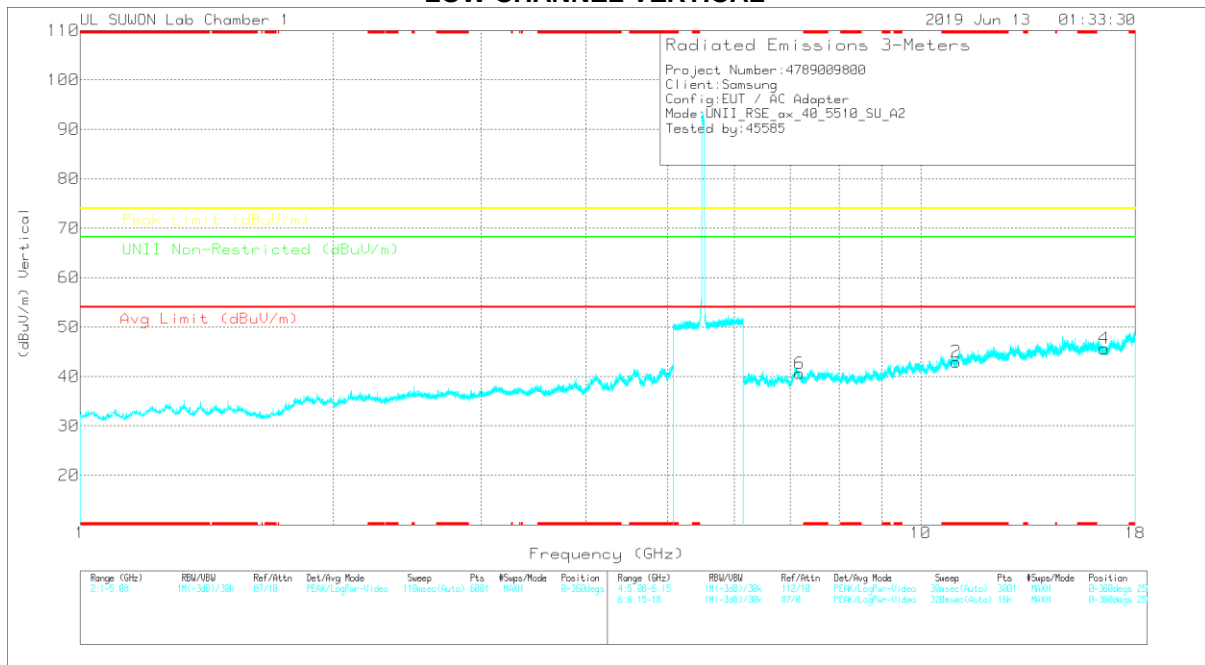

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168724	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.01931	25.71	PK	38.1	-20.6	0	43.21	-	-	74	-30.79	-	-	0-360	250	H
3	16.52847	25	PK	40.5	-19.9	0	45.6	-	-	-	-	68.2	-22.6	0-360	150	H
5	7.16385	29.87	PK	36	-24.9	0	40.97	-	-	-	-	68.2	-27.23	0-360	250	H
2	* 11.01857	25.45	PK	38.1	-20.6	0	42.95	-	-	74	-31.05	-	-	0-360	150	V
4	16.52922	24.96	PK	40.5	-19.8	0	45.66	-	-	-	-	68.2	-22.54	0-360	150	V
6	7.17792	29.59	PK	36.1	-25.1	0	40.59	-	-	-	-	68.2	-27.61	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

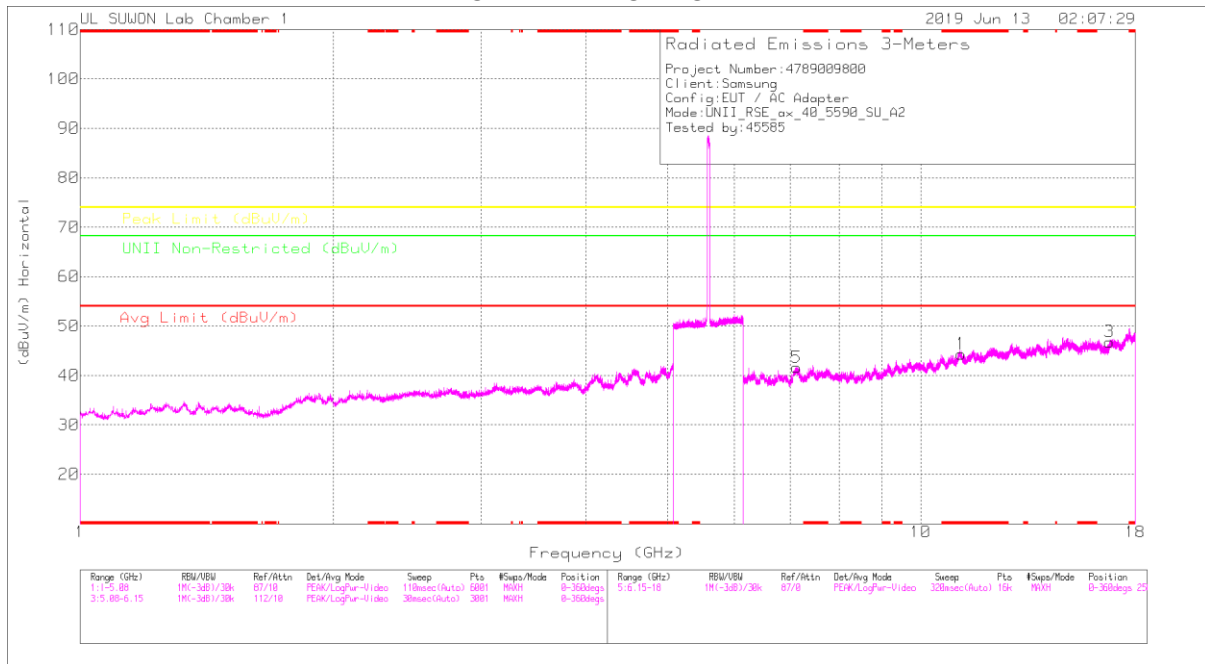

MID CHANNEL VERTICAL

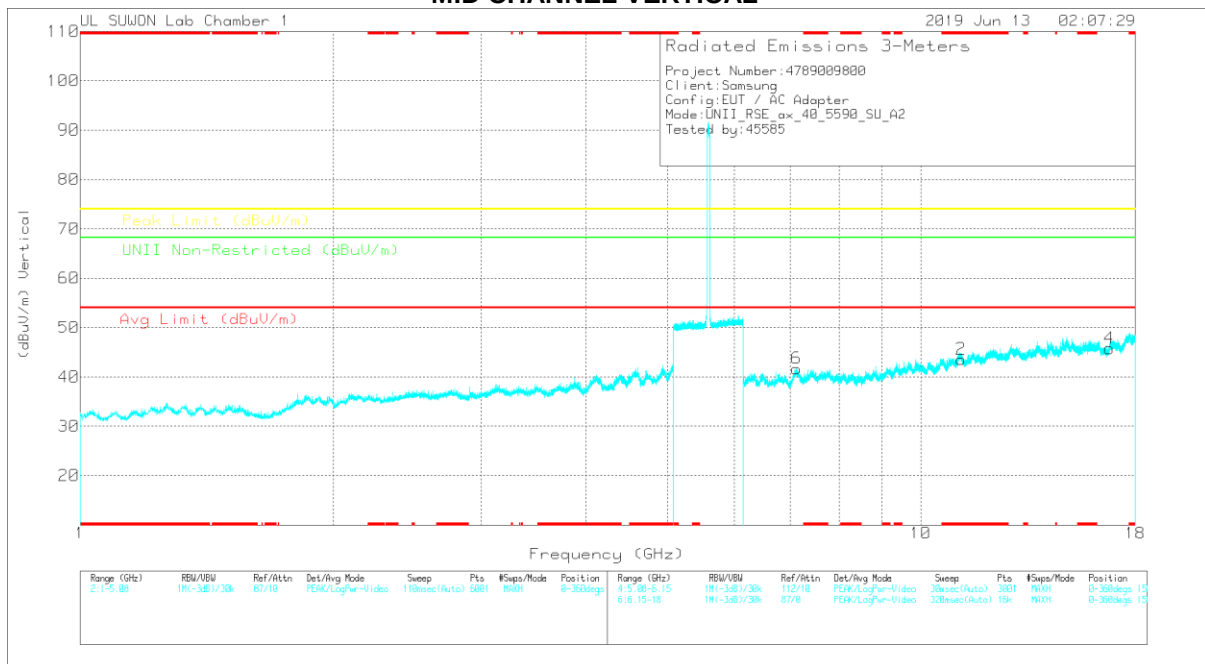

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.17927	25.85	PK	38.2	-19.7	0	44.35	-	-	74	-29.65	-	-	0-360	150	H
3	16.76916	24.59	PK	41	-18.8	0	46.79	-	-	-	-	68.2	-21.41	0-360	250	H
5	7.11794	29.31	PK	36	-23.7	0	41.61	-	-	-	-	68.2	-26.59	0-360	150	H
2	* 11.17853	25.09	PK	38.2	-19.7	0	43.59	-	-	74	-30.41	-	-	0-360	150	V
4	16.77213	23.58	PK	41	-18.8	0	45.78	-	-	-	-	68.2	-22.42	0-360	250	V
6	7.11794	29.4	PK	36	-23.7	0	41.7	-	-	-	-	68.2	-26.5	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

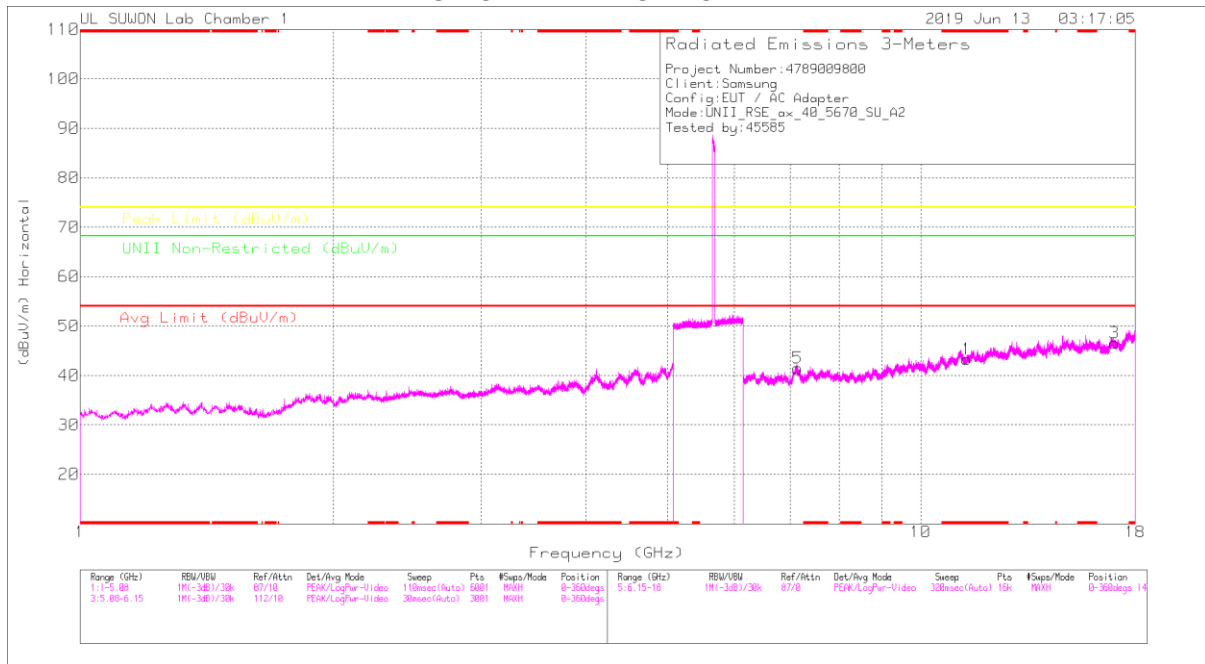

HIGH CHANNEL VERTICAL

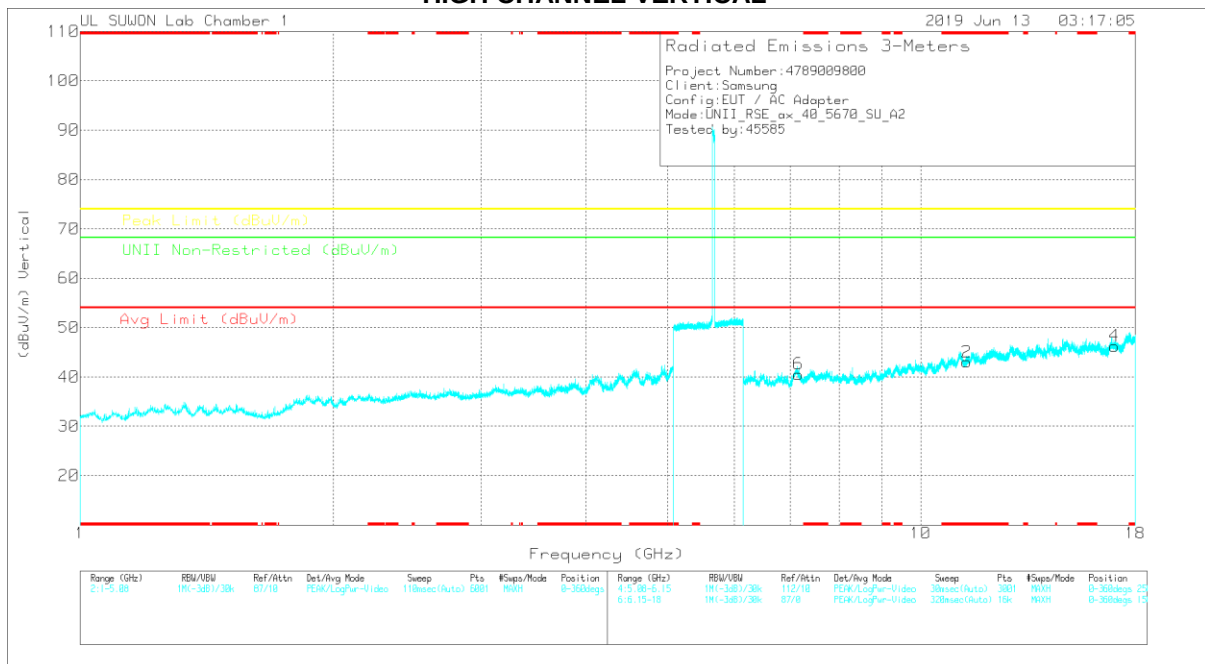

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.34146	25.3	PK	38.3	-20.3	0	43.3	-	-	74	-30.7	-	-	0-360	250	H
3	17.01059	24	PK	41.3	-18.7	0	46.6	-	-	-	-	68.2	-21.6	0-360	149	H
5	7.13941	29.66	PK	36	-24.2	0	41.46	-	-	-	-	68.2	-26.74	0-360	250	H
2	* 11.34072	25.04	PK	38.3	-20.3	0	43.04	-	-	74	-30.96	-	-	0-360	250	V
4	17.01059	23.66	PK	41.3	-18.7	0	46.26	-	-	-	-	68.2	-21.94	0-360	150	V
6	7.15349	29.05	PK	36	-24.5	0	40.55	-	-	-	-	68.2	-27.65	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

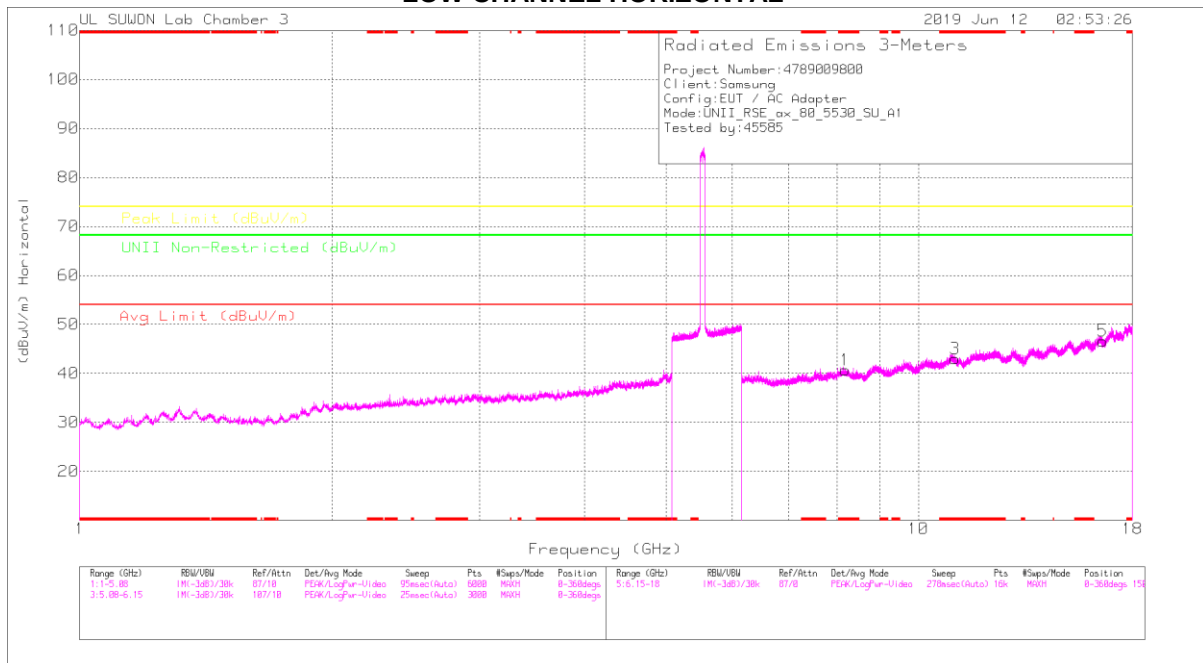

LOW CHANNEL VERTICAL

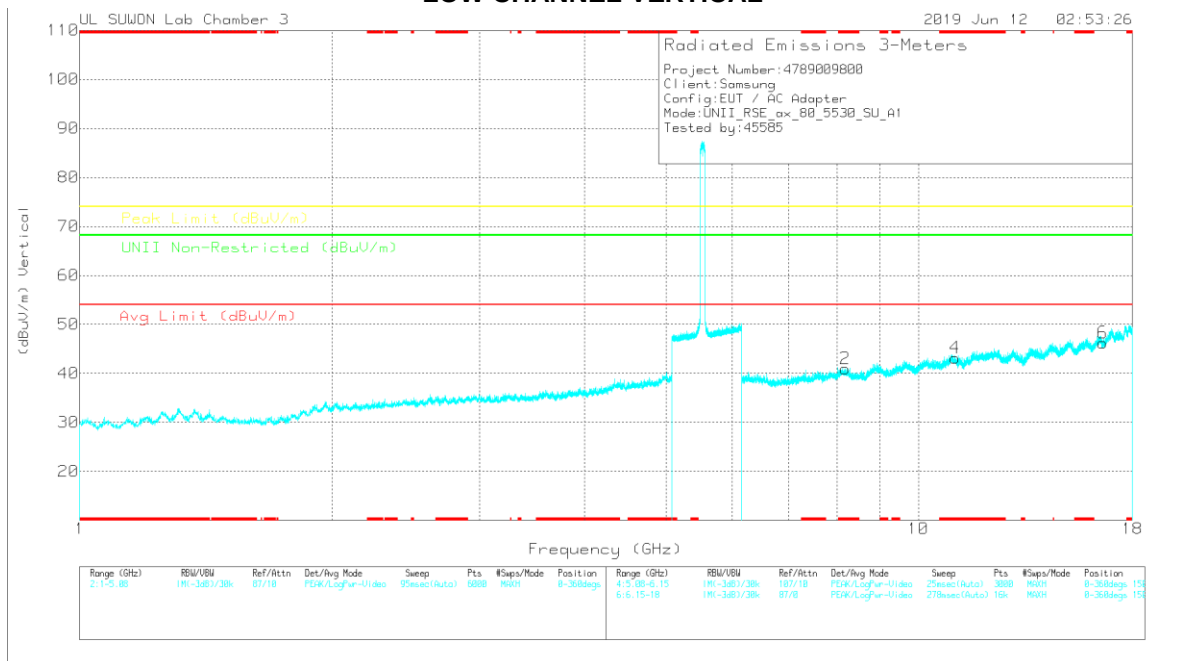

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.182	26.2	PK	36.3	-21.8	0	40.7	-	-	74	-33.3	-	-	0-360	250	H
3	* 11.056	24.29	PK	38.2	-19.5	0	42.99	-	-	74	-31.01	-	-	0-360	150	H
5	16.586	22.92	PK	40.9	-17.2	0	46.62	-	-	-	-	68.2	-21.58	0-360	250	H
2	* 8.178	26.48	PK	36.3	-21.8	0	40.98	-	-	74	-33.02	-	-	0-360	150	V
4	* 11.055	24.38	PK	38.2	-19.4	0	43.18	-	-	74	-30.82	-	-	0-360	250	V
6	16.591	22.44	PK	41	-17.2	0	46.24	-	-	-	-	68.2	-21.96	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

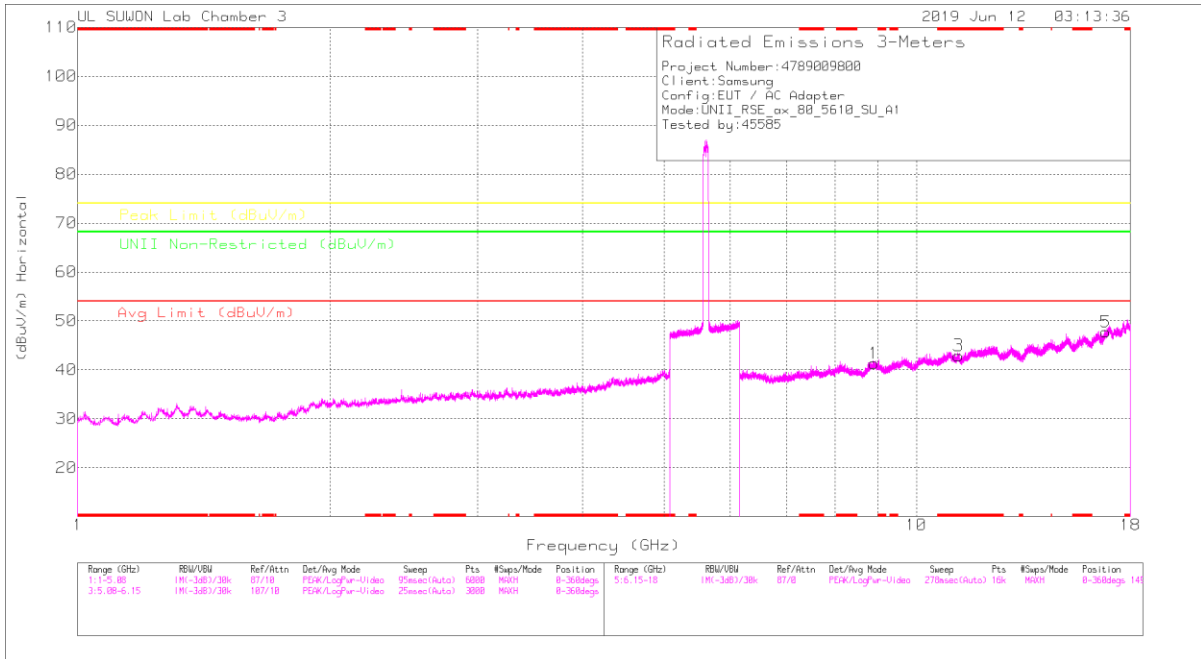

HIGH CHANNEL VERTICAL

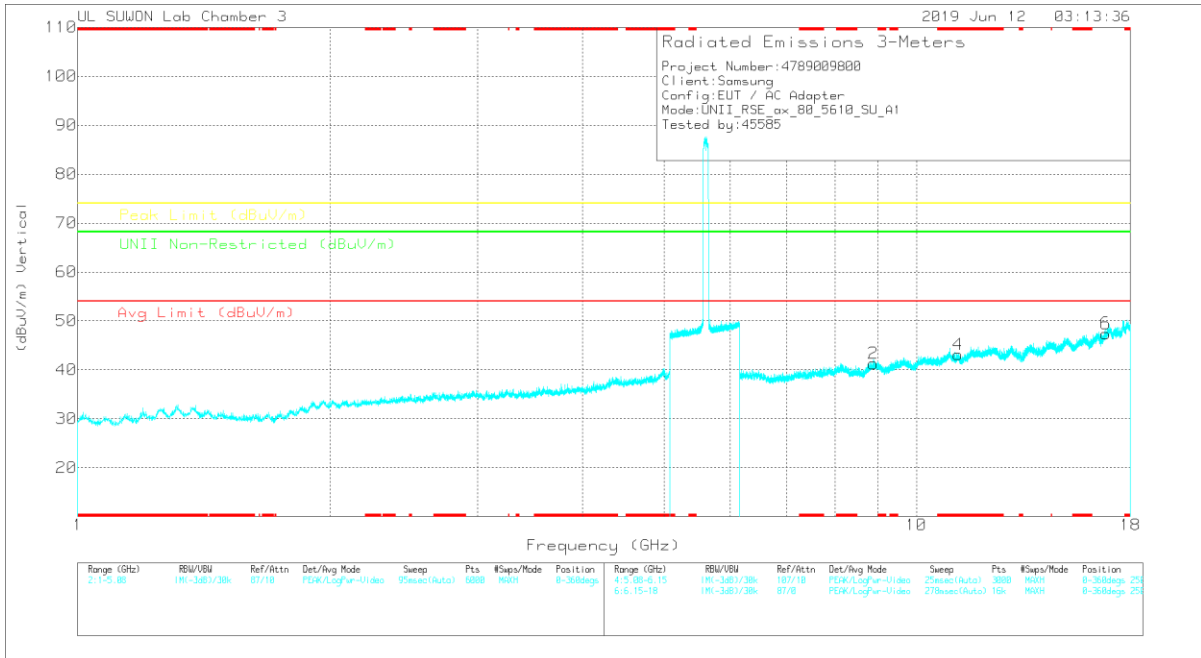

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.897	25.79	PK	36.5	-21	0	41.29	-	-	-	-	68.2	-26.91	0-360	250	H
3	* 11.224	23.91	PK	38.4	-19.4	0	42.91	-	-	74	-31.09	-	-	0-360	149	H
5	16.627	22.64	PK	41.5	-16.4	0	47.74	-	-	-	-	68.2	-20.46	0-360	250	H
2	8.888	25.68	PK	36.5	-20.9	0	41.28	-	-	-	-	68.2	-26.92	0-360	149	V
4	* 11.222	24.09	PK	38.4	-19.4	0	43.09	-	-	74	-30.91	-	-	0-360	149	V
6	16.63	22.31	PK	41.5	-16.4	0	47.41	-	-	-	-	68.2	-20.79	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

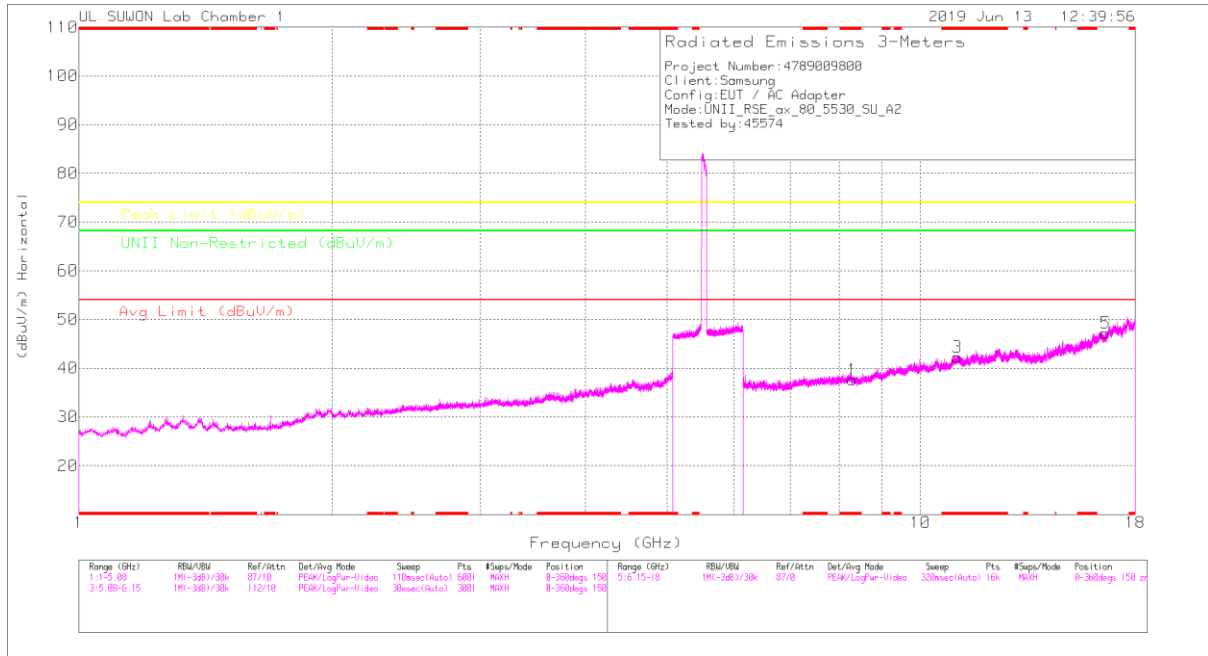

LOW CHANNEL VERTICAL

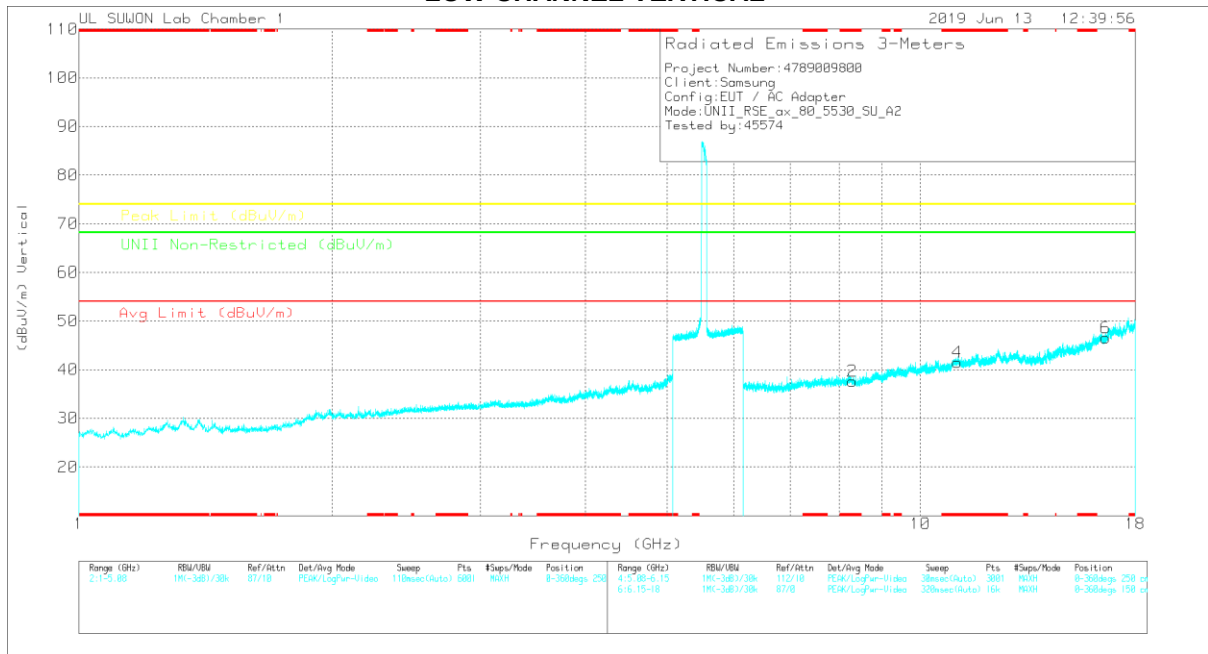

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.29694	26.46	PK	36.4	-25.3	0	37.56	-	-	74	-36.44	-	-	0-360	150	H
3	* 11.06152	26.17	PK	38.2	-22.1	0	42.27	-	-	74	-31.73	-	-	0-360	250	H
5	16.59142	24.94	PK	41	-18.8	0	47.14	-	-	-	-	68.2	-21.06	0-360	250	H
2	* 8.29546	26.64	PK	36.4	-25.4	0	37.64	-	-	74	-36.36	-	-	0-360	250	V
4	* 11.06226	25.42	PK	38.2	-22.1	0	41.52	-	-	74	-32.48	-	-	0-360	250	V
6	16.59179	24.3	PK	41	-18.8	0	46.5	-	-	-	-	68.2	-21.7	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

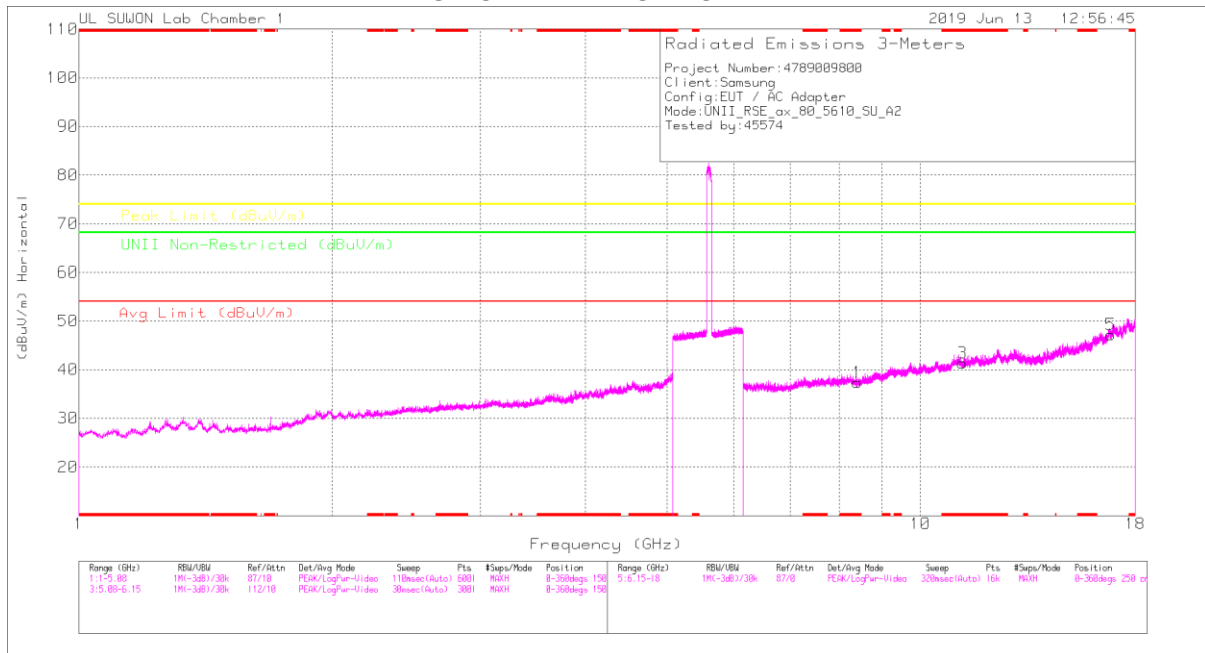

HIGH CHANNEL VERTICAL

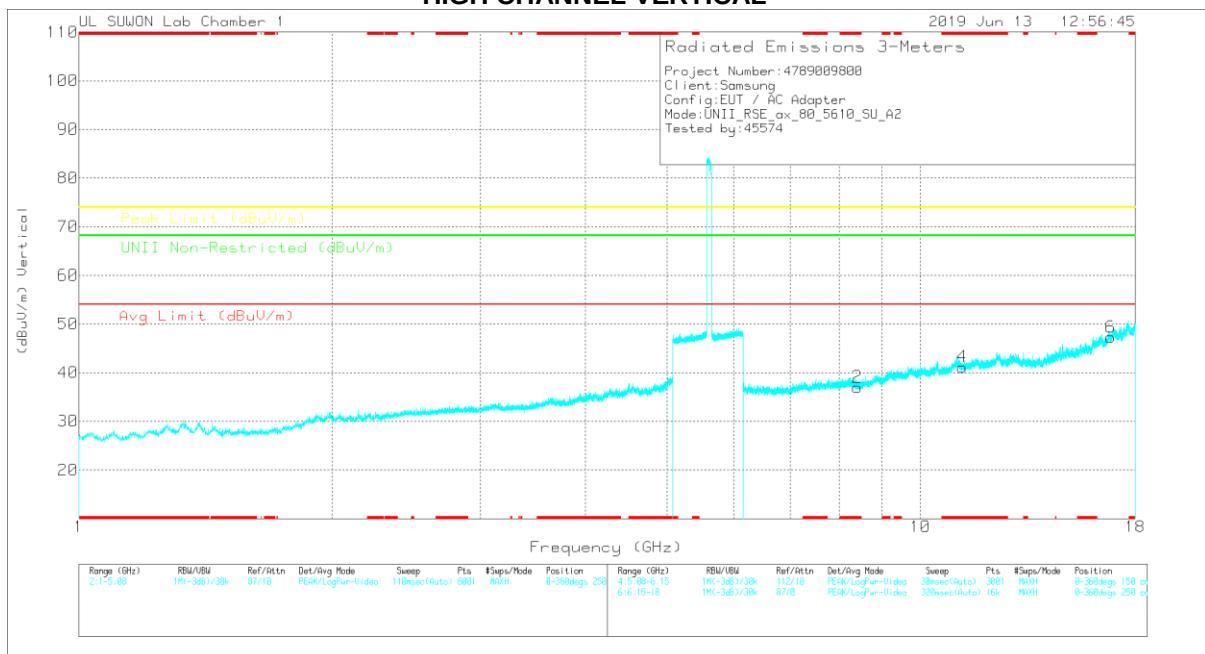

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.41691	26.88	PK	36.3	-25.8	0	37.38	-	-	74	-36.62	-	-	0-360	250	H
3	* 11.21926	25.51	PK	38.4	-22.5	0	41.41	-	-	74	-32.59	-	-	0-360	250	H
5	16.82915	24.1	PK	41.5	-18.4	0	47.2	-	-	-	-	68.2	-21	0-360	250	H
2	* 8.41543	26.53	PK	36.3	-25.8	0	37.03	-	-	74	-36.97	-	-	0-360	250	V
4	* 11.22074	25.27	PK	38.4	-22.5	0	41.17	-	-	74	-32.83	-	-	0-360	150	V
6	16.82989	24.19	PK	41.5	-18.4	0	47.29	-	-	-	-	68.2	-20.91	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_1 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

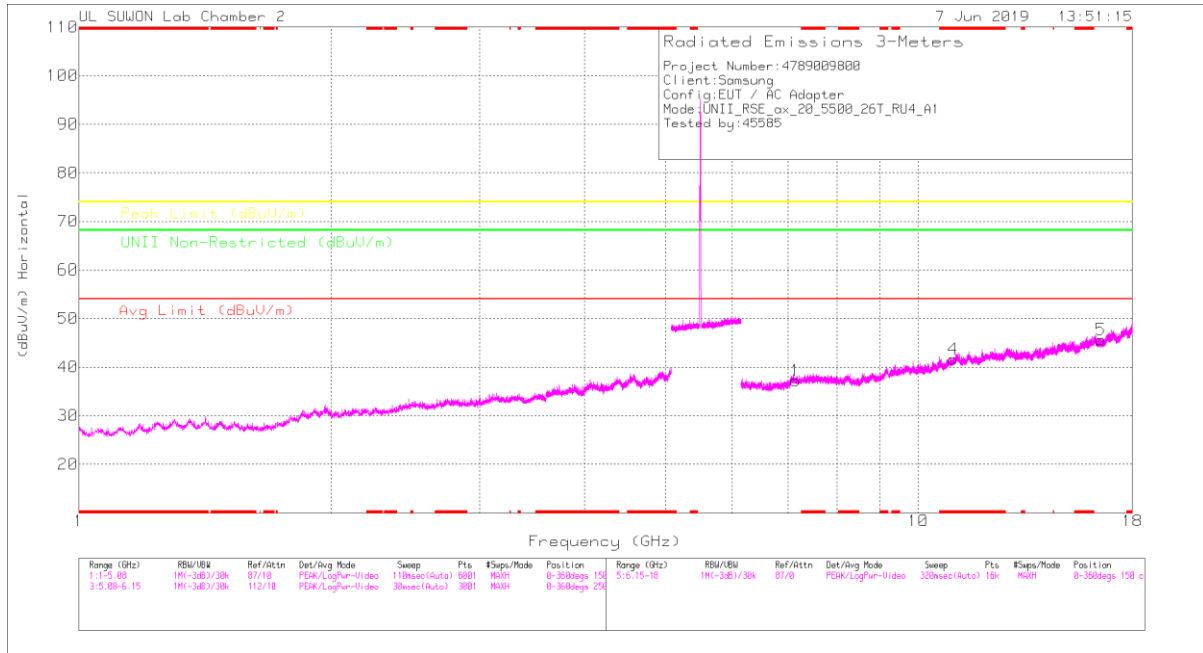

LOW CHANNEL VERTICAL

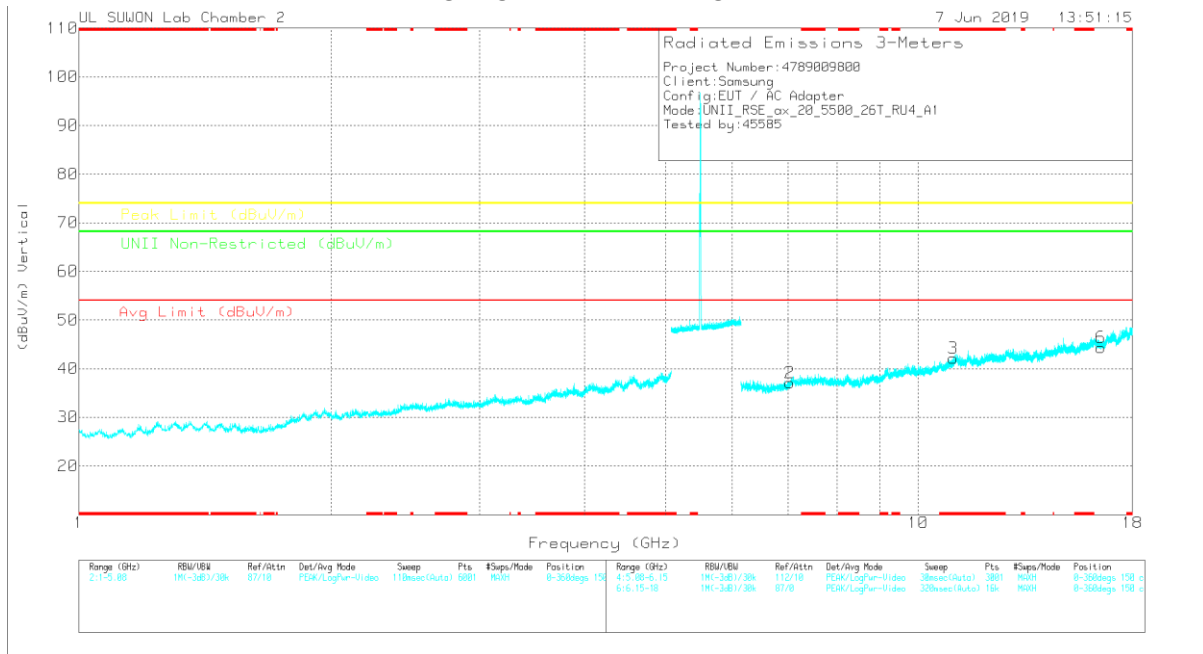

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00108/24	60Hz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.145	25.58	PK	36	-24.3	0	37.28	-	-	-	-	68.2	-30.92	0-360	250	H
4	* 11.004	23.97	PK	38.1	-20.5	0	41.57	-	-	74	-32.43	-	-	0-360	150	H
5	16.5	24.93	PK	40.5	-19.8	0	45.63	-	-	-	-	68.2	-22.57	0-360	250	H
2	7.03	26.34	PK	35.9	-25.1	0	37.14	-	-	-	-	68.2	-31.06	0-360	250	V
3	* 10.999	24.6	PK	38.1	-20.6	0	42.1	-	-	74	-31.9	-	-	0-360	250	V
6	16.5	23.61	PK	40.5	-19.8	0	44.31	-	-	-	-	68.2	-23.89	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

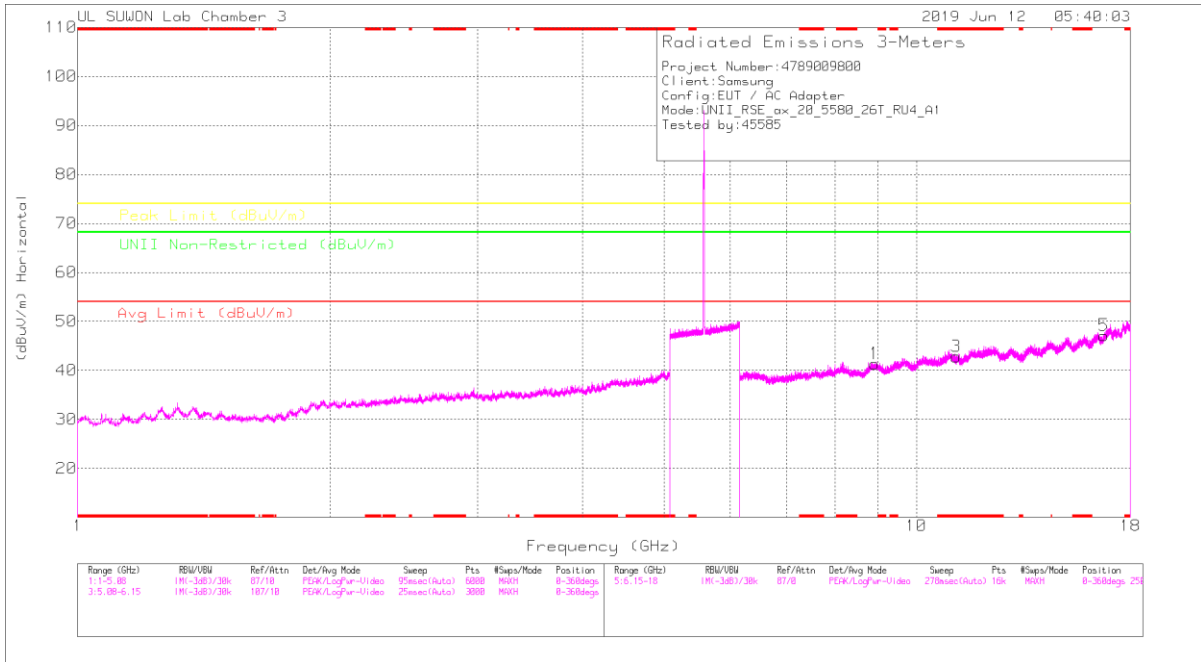

MID CHANNEL VERTICAL

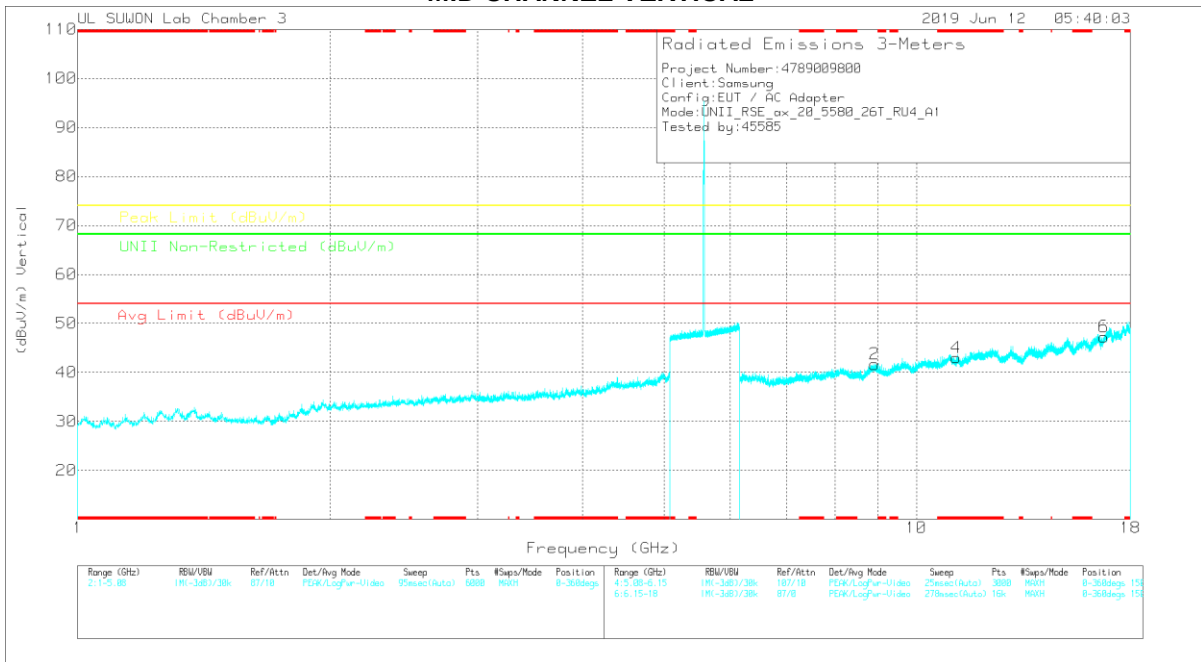

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.911	25.77	PK	36.6	-21	0	41.37	-	-	-	-	68.2	-26.83	0-360	150	H
3	* 11.164	24.12	PK	38.3	-19.6	0	42.82	-	-	74	-31.18	-	-	0-360	150	H
5	16.739	22.73	PK	41.3	-16.9	0	47.13	-	-	-	-	68.2	-21.07	0-360	250	H
2	8.917	26.06	PK	36.6	-21	0	41.66	-	-	-	-	68.2	-26.54	0-360	150	V
4	* 11.159	24.27	PK	38.3	-19.6	0	42.97	-	-	74	-31.03	-	-	0-360	150	V
6	16.742	22.87	PK	41.3	-16.9	0	47.27	-	-	-	-	68.2	-20.93	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

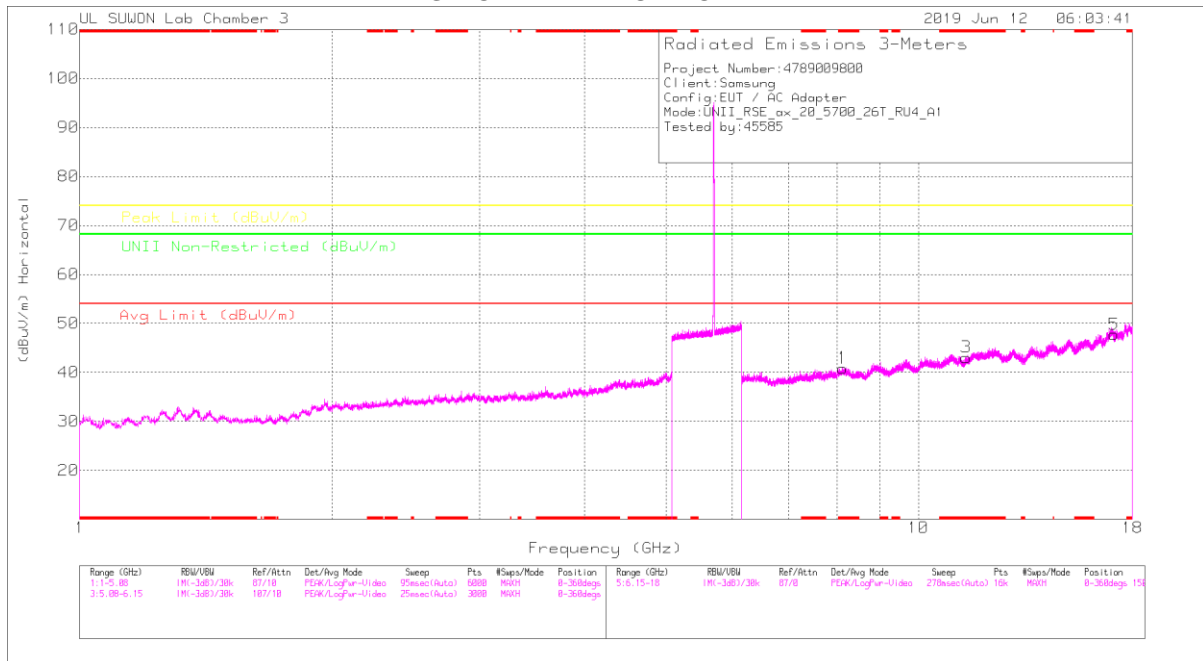

HIGH CHANNEL VERTICAL

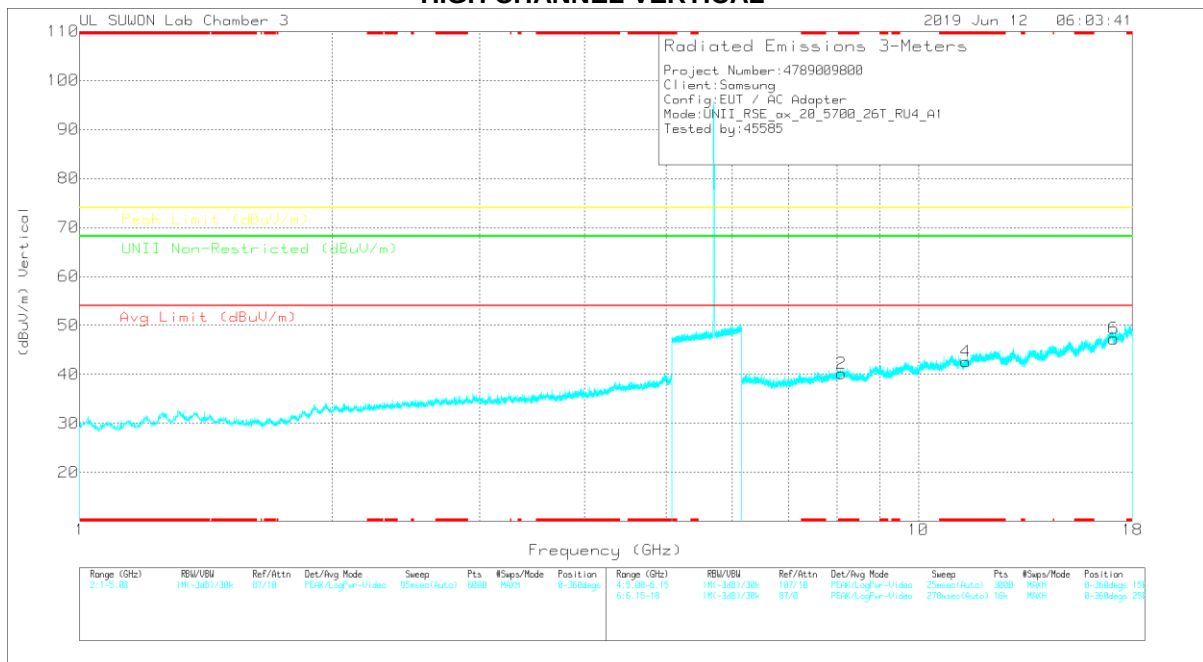

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.126	26.37	PK	36.3	-21.8	0	40.87	-	-	74	-33.13	-	-	0-360	250	H
3	* 11.4	24.26	PK	38.4	-19.6	0	43.06	-	-	74	-30.94	-	-	0-360	250	H
5	17.1	22.33	PK	41.6	-16.2	0	47.73	-	-	-	-	68.2	-20.47	0-360	250	H
2	* 8.092	26.36	PK	36.2	-22.4	0	40.16	-	-	74	-33.84	-	-	0-360	250	V
4	* 11.393	23.78	PK	38.4	-19.6	0	42.58	-	-	74	-31.42	-	-	0-360	150	V
6	17.096	21.81	PK	41.6	-16.1	0	47.31	-	-	-	-	68.2	-20.89	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_2 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

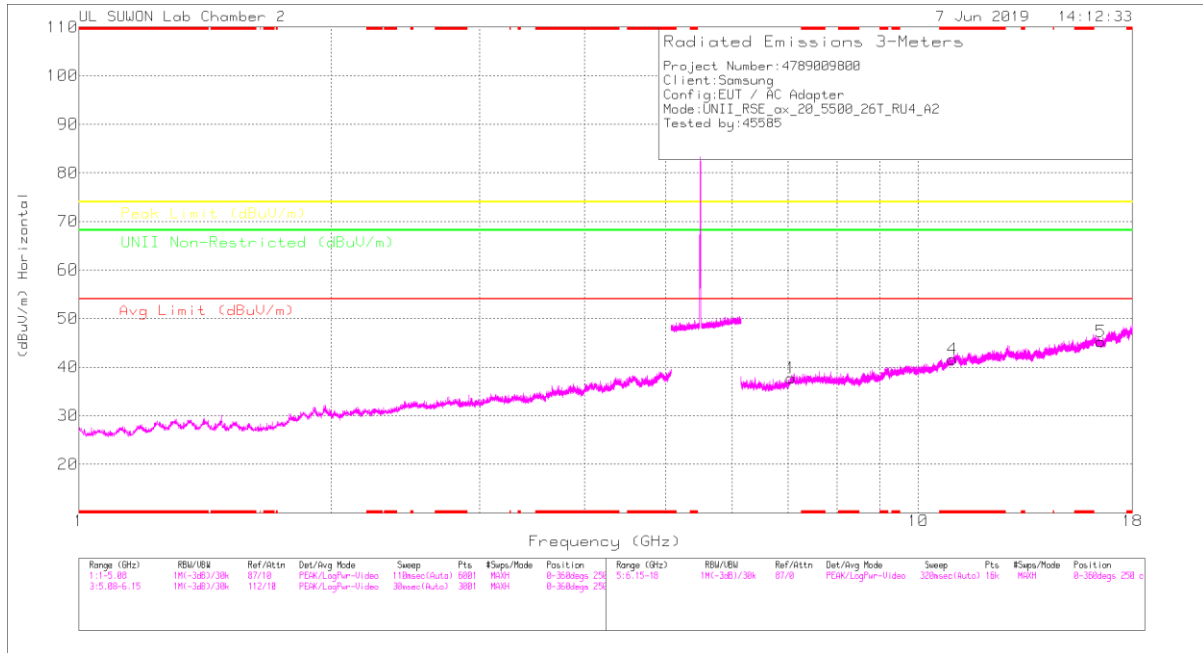

LOW CHANNEL VERTICAL

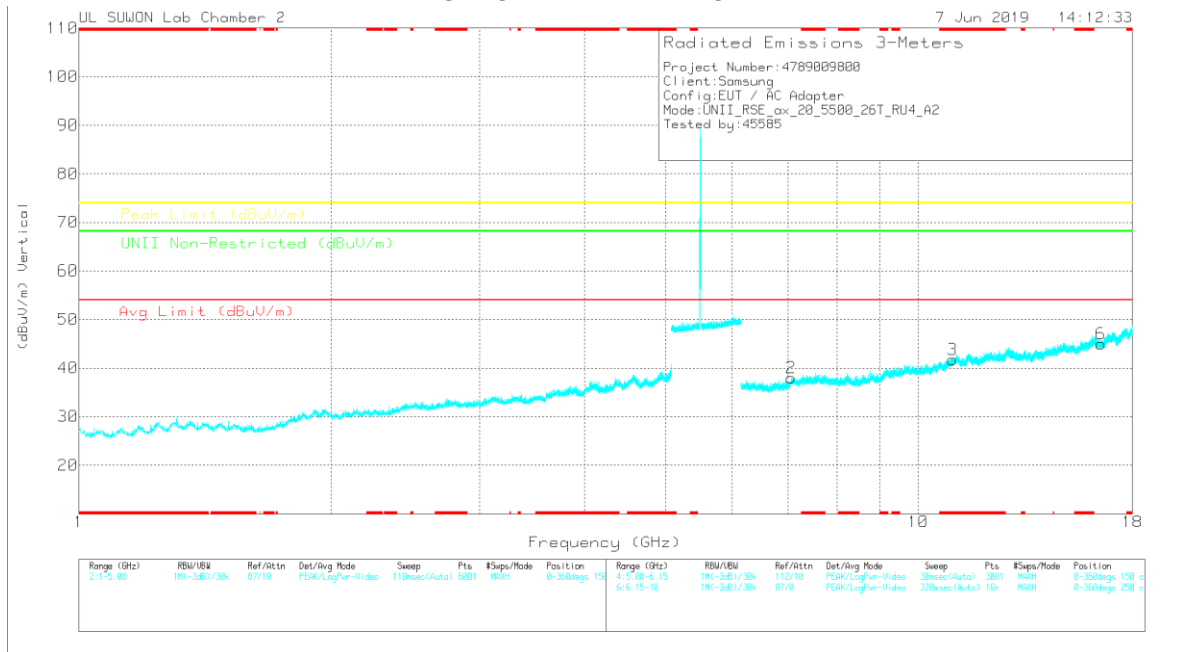

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00108/24	60Hz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.054	26.37	PK	35.9	-24.5	0	37.77	-	-	-	-	68.2	-30.43	0-360	150	H
4	* 10.993	23.98	PK	38.1	-20.5	0	41.58	-	-	74	-32.42	-	-	0-360	150	H
5	16.501	24.49	PK	40.5	-19.8	0	45.19	-	-	-	-	68.2	-23.01	0-360	150	H
2	7.054	26.65	PK	35.9	-24.5	0	38.05	-	-	-	-	68.2	-30.15	0-360	250	V
3	* 10.996	24.16	PK	38.1	-20.5	0	41.76	-	-	74	-32.24	-	-	0-360	250	V
6	16.5	24.25	PK	40.5	-19.8	0	44.95	-	-	-	-	68.2	-23.25	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

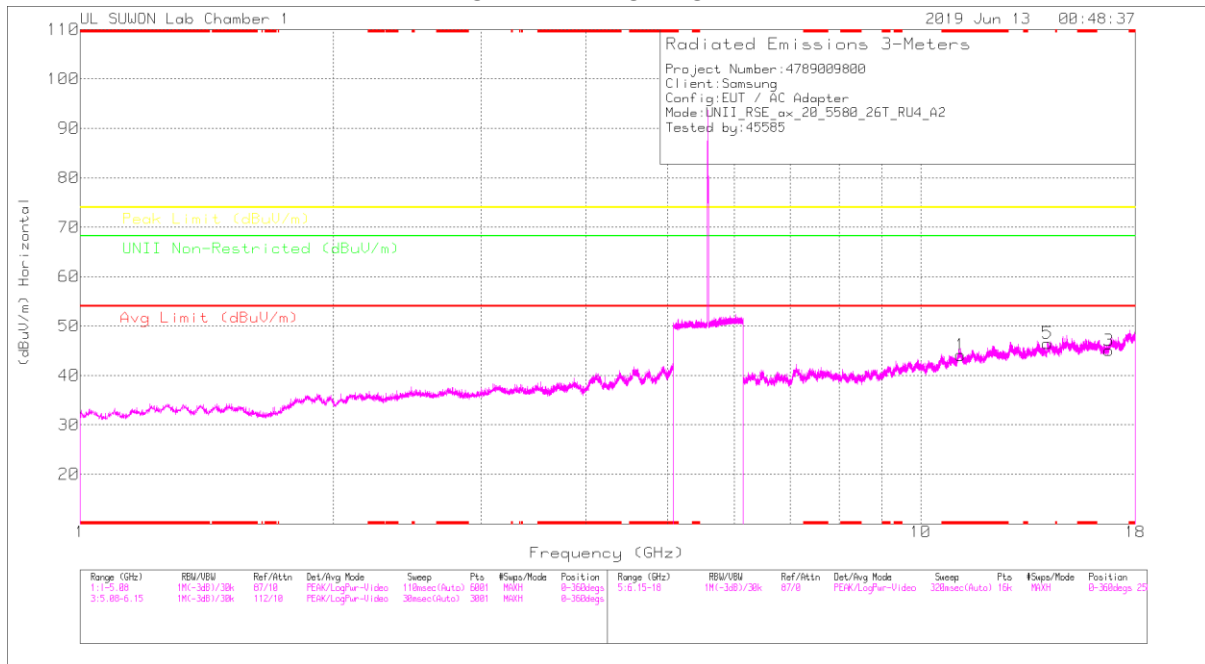

MID CHANNEL VERTICAL

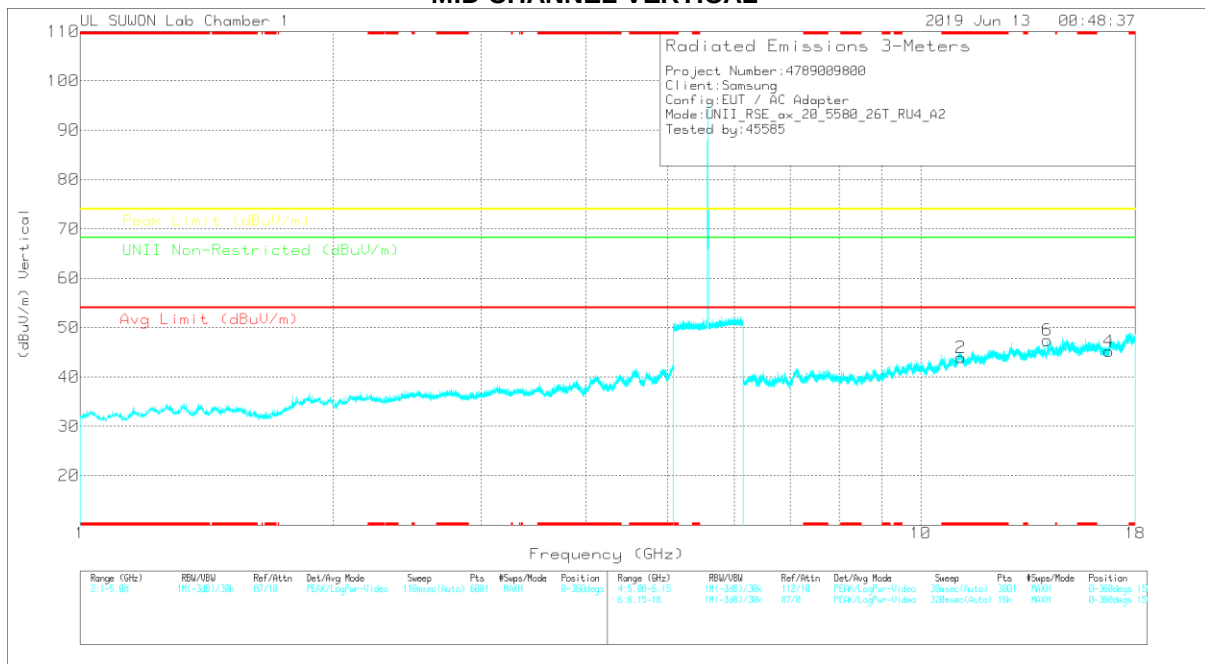

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 11.15854	25.53	PK	38.2	-19.6	0	44.13	-	-	74	-29.87	-	-	0-360	250	H
3	16.7388	23.35	PK	40.9	-19.2	0	45.05	-	-	-	-	68.2	-23.15	0-360	150	H
5	14.1527	27.22	PK	39.3	-20	0	46.52	-	-	-	-	68.2	-21.68	0-360	250	H
2	* 11.16076	25.32	PK	38.2	-19.6	0	43.92	-	-	74	-30.08	-	-	0-360	250	V
4	16.74102	23.48	PK	40.9	-19.2	0	45.18	-	-	-	-	68.2	-23.02	0-360	250	V
6	14.14973	28.23	PK	39.3	-20.1	0	47.43	-	-	-	-	68.2	-20.77	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

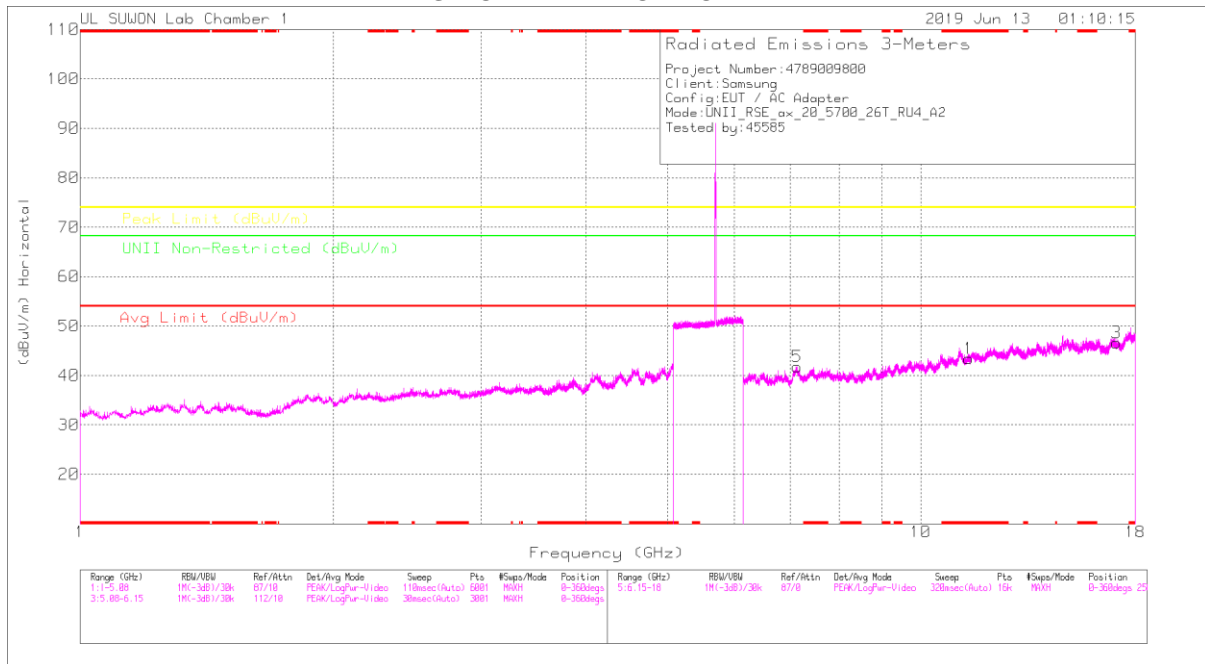

HIGH CHANNEL VERTICAL

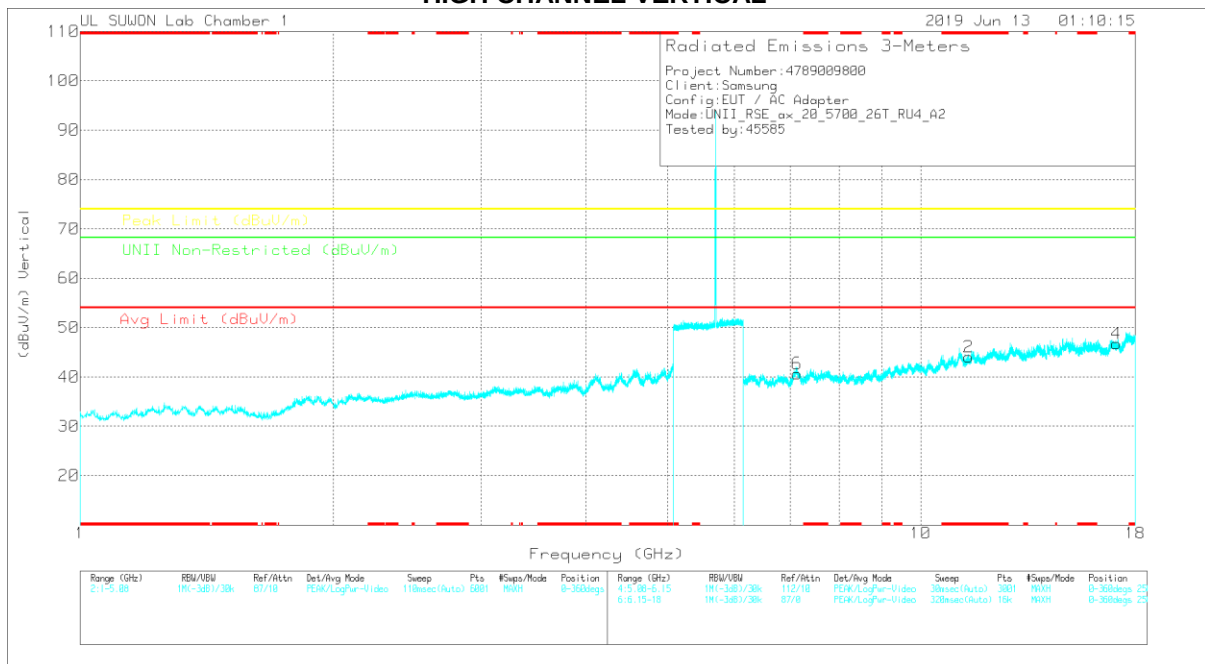

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.39997	25.3	PK	38.3	-20.2	0	43.4	-	-	74	-30.6	-	-	0-360	250	H
3	17.10094	23.92	PK	41.3	-18.6	0	46.62	-	-	-	-	68.2	-21.58	0-360	250	H
5	7.12608	29.64	PK	36	-23.9	0	41.74	-	-	-	-	68.2	-26.46	0-360	250	H
2	* 11.40071	25.96	PK	38.3	-20.2	0	44.06	-	-	74	-29.94	-	-	0-360	250	V
4	17.10168	24	PK	41.3	-18.6	0	46.7	-	-	-	-	68.2	-21.5	0-360	250	V
6	7.13349	28.64	PK	36	-24	0	40.64	-	-	-	-	68.2	-27.56	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 RU mode (ANT_1 / 26T / Low: 0, Mid: 9, High: 9)

LOW CHANNEL HORIZONTAL

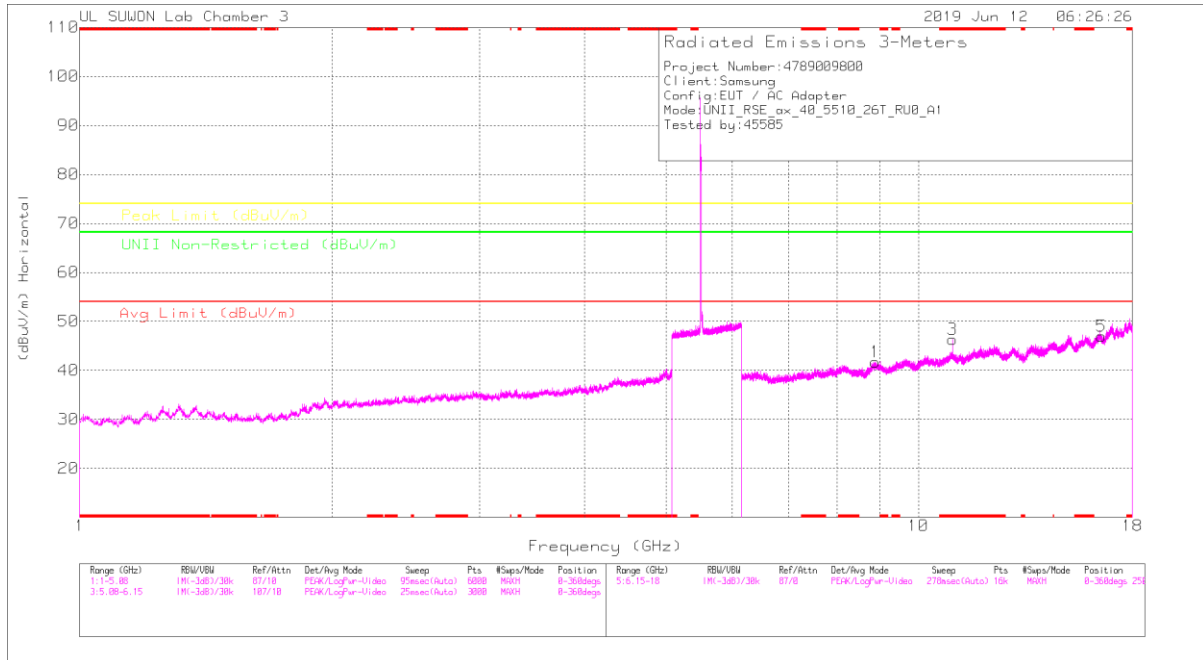

LOW CHANNEL VERTICAL

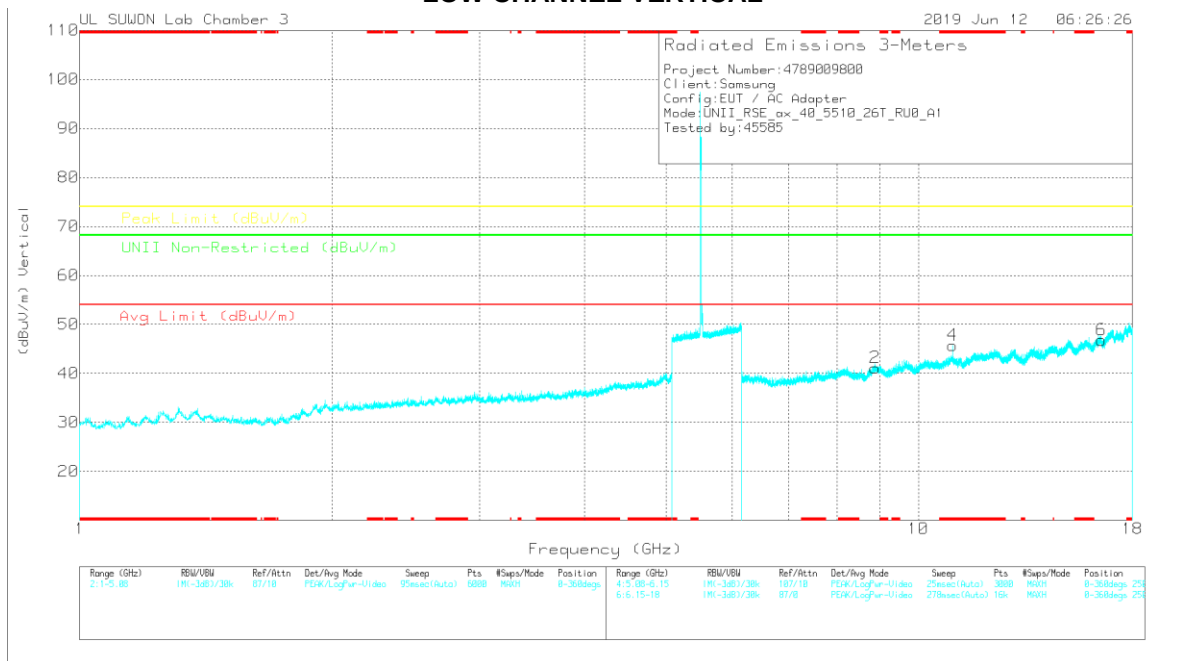

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HPI[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	8.881	26.03	PK	36.5	-20.8	0	41.73	-	-	-	-	68.2	-26.47	0-360	150	H
3	* 10.984	27.5	PK	38.2	-19.4	0	46.3	-	-	74	-27.7	-	-	0-360	250	H
5	16.53	23.45	PK	40.9	-17.4	0	46.95	-	-	-	-	68.2	-21.25	0-360	250	H
2	8.879	25.44	PK	36.5	-20.8	0	41.14	-	-	-	-	68.2	-27.06	0-360	250	V
4	* 10.984	26.94	PK	38.2	-19.4	0	45.74	-	-	74	-28.26	-	-	0-360	250	V
6	16.532	23.3	PK	40.9	-17.4	0	46.8	-	-	-	-	68.2	-21.4	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00205959	6GHz_HPI[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
* 10.985	42.83	PK-U	38.2	-19.5	0	61.53	-	-	74	-12.47	-	-	149	196	H
* 10.984	26.61	ADR	38.2	-19.4	0	45.41	54	-8.59	-	-	-	-	149	196	H
* 10.983	43.33	PK-U	38.2	-19.4	0	62.13	-	-	74	-11.87	-	-	182	187	V
* 10.984	26.86	ADR	38.2	-19.4	0	45.66	54	-8.34	-	-	-	-	182	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average