


484T RU mode (ANT_1 / HE80 / RU offset 66)

HORIZONTAL PEAK PLOT

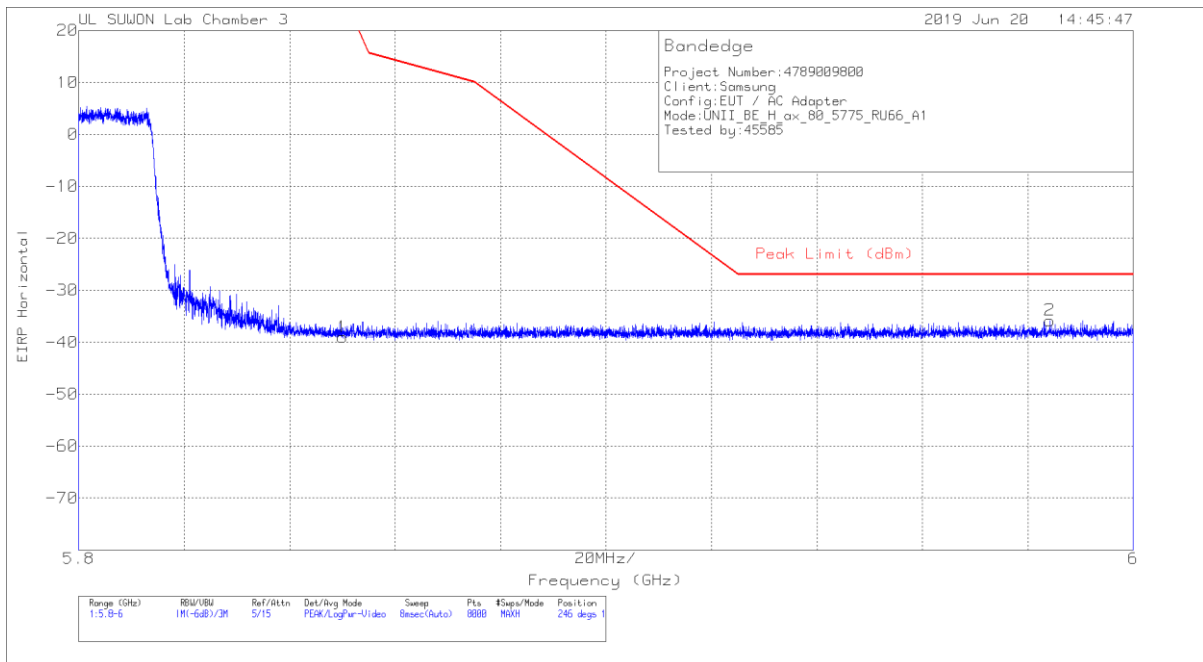


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.14	Pk	35	-17.7	11.8	0	-39.04	26.99	-66.03	246	101	H
2	5.984	-65	Pk	35.1	-17.7	11.8	0	-35.8	-27	-8.8	246	101	H

Pk - Peak detector

VERTICAL PEAK PLOT

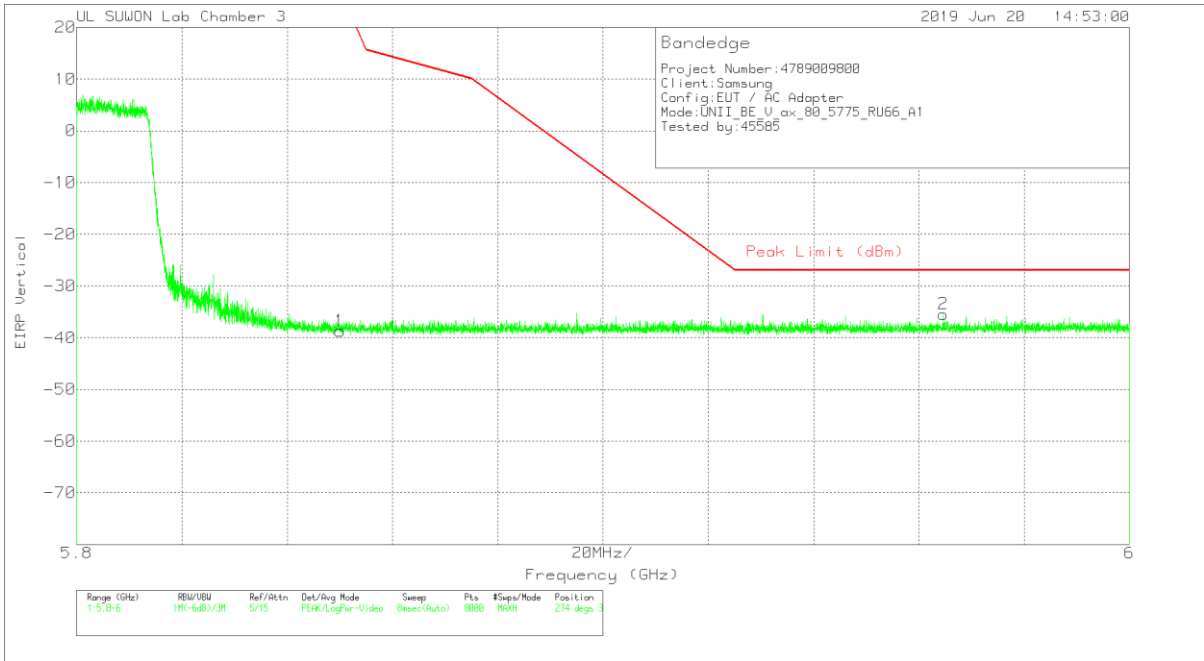

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.8	Pk	35	-17.7	11.8	0	-38.7	26.99	-65.69	274	309	V
2	5.965	-64.63	Pk	35.1	-17.7	11.8	0	-35.43	-27	-8.43	274	309	V

Pk - Peak detector

484T RU mode (ANT_2 / HE80 / RU offset 66)

HORIZONTAL PEAK PLOT

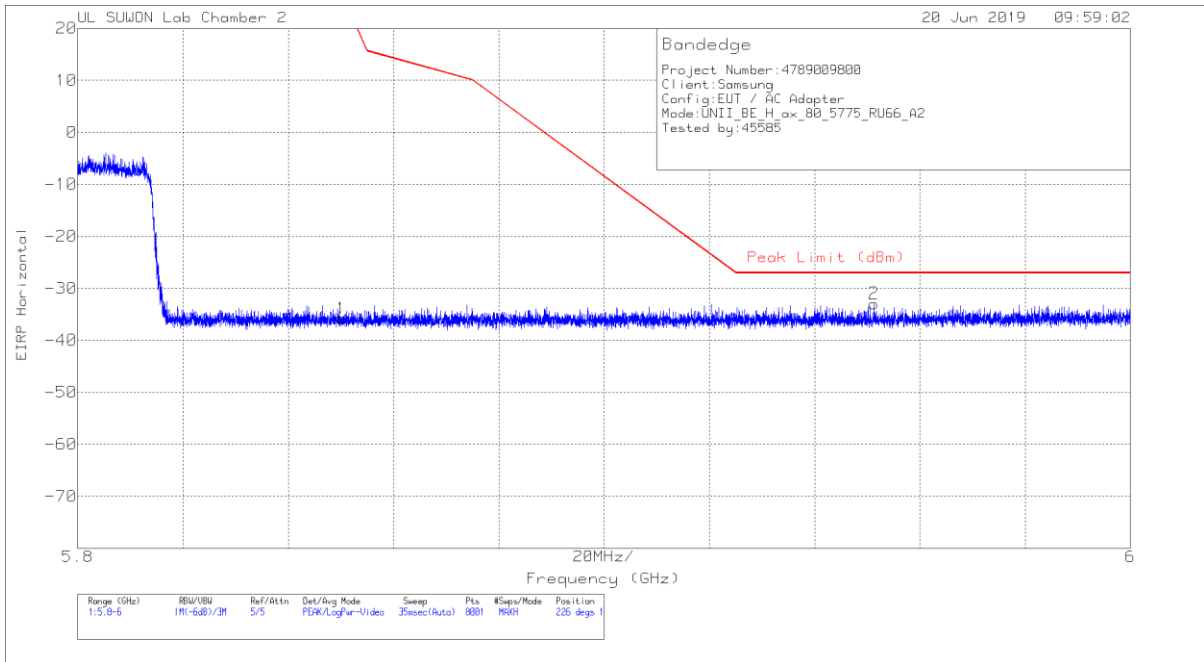


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.55	Pk	34.5	-15.5	11.8	0	-35.75	26.94	-62.69	226	113	H
2	5.951	-63.84	Pk	34.6	-15.5	11.8	0	-32.94	-27	-5.94	226	113	H

Pk - Peak detector

VERTICAL PEAK PLOT

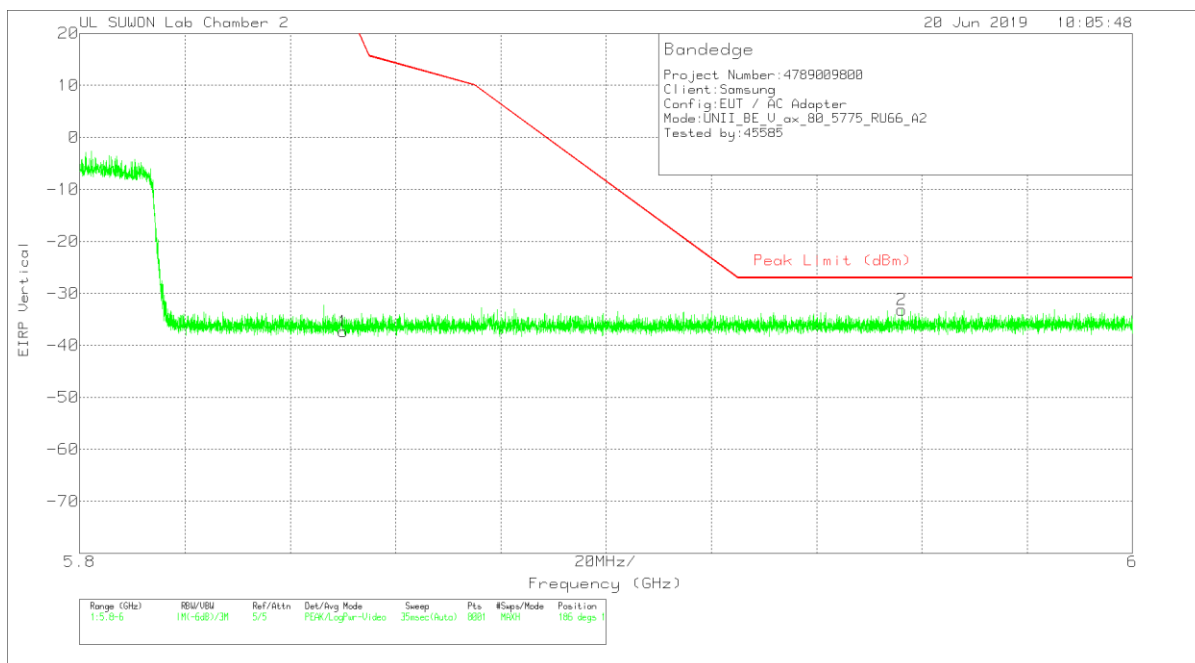

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.15	Pk		-15.5	11.8	0	-37.35	26.94	-64.29	186	127	V
2	5.956	-64.06	Pk		-15.5	11.8	0	-33.16	-27	-6.16	186	127	V

Pk - Peak detector

242T RU mode (ANT_1 / HE40 / RU offset 62)

HORIZONTAL PEAK PLOT

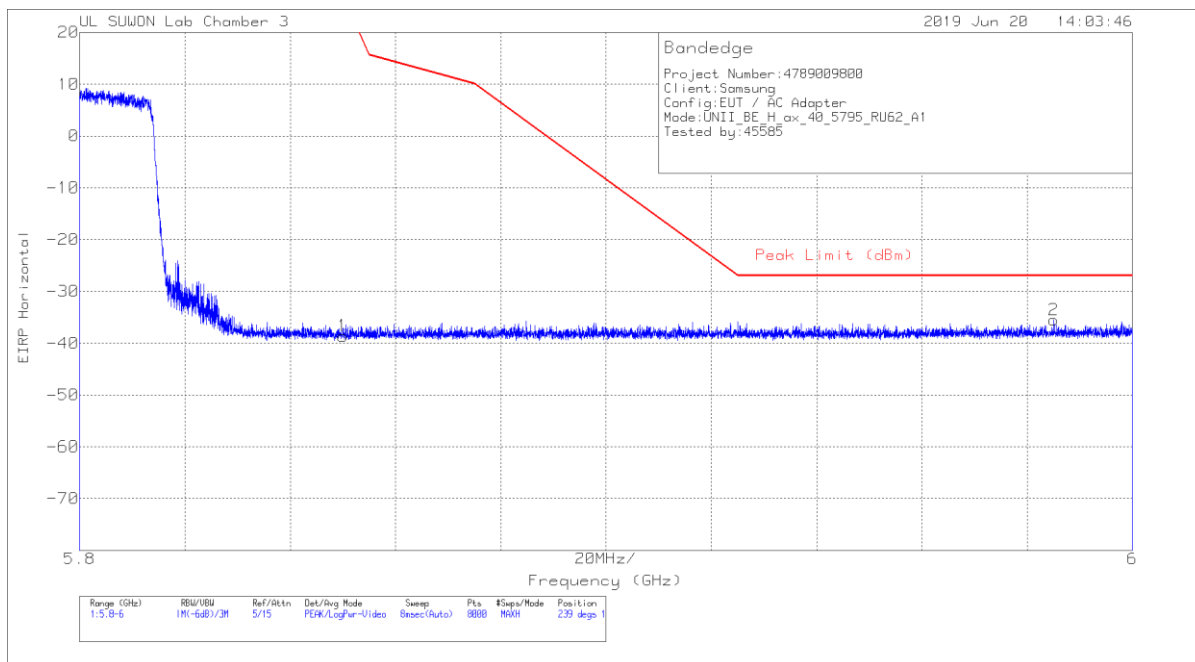


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.7	Pk	35	-17.7	11.8	0	-38.6	26.99	-65.59	239	106	H
2	5.985	-64.7	Pk	35.1	-17.7	11.8	0	-35.5	-27	-8.5	239	106	H

Pk - Peak detector

VERTICAL PEAK PLOT

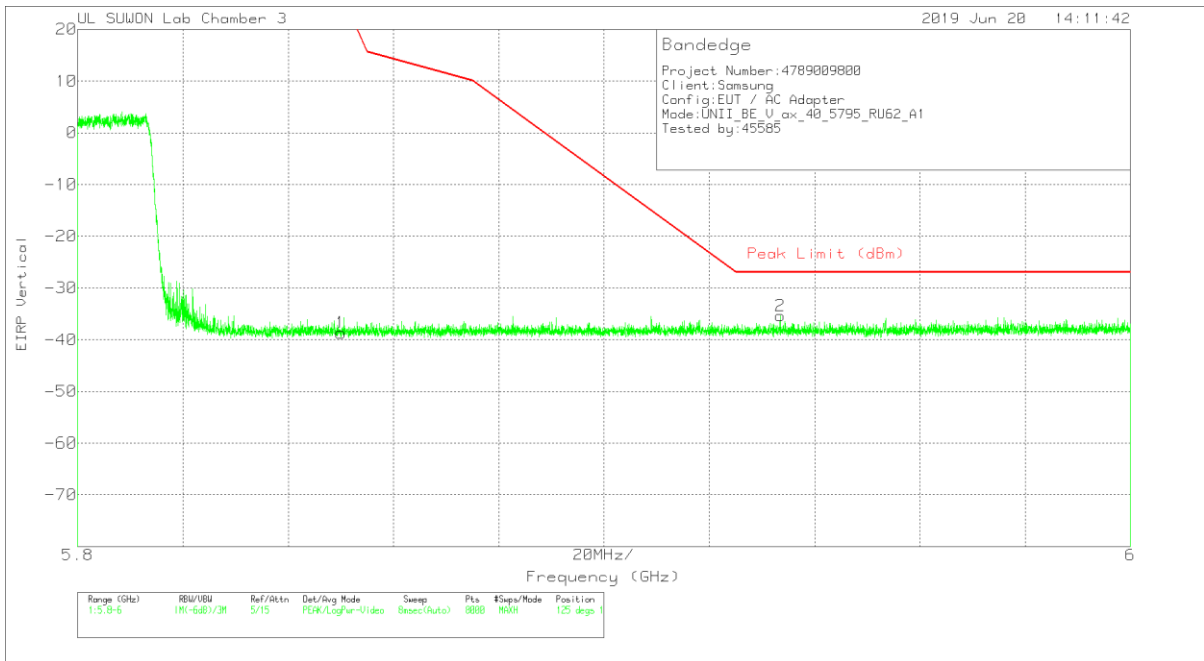

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.79	Pk	35	-17.7	11.8	0	-38.69	26.99	-65.68	125	130	V
2	5.933	-64.56	Pk	35.1	-17.7	11.8	0	-35.36	-27	-8.36	125	130	V

Pk - Peak detector

242T RU mode (ANT_2 / HE40 / RU offset 62)

HORIZONTAL PEAK PLOT

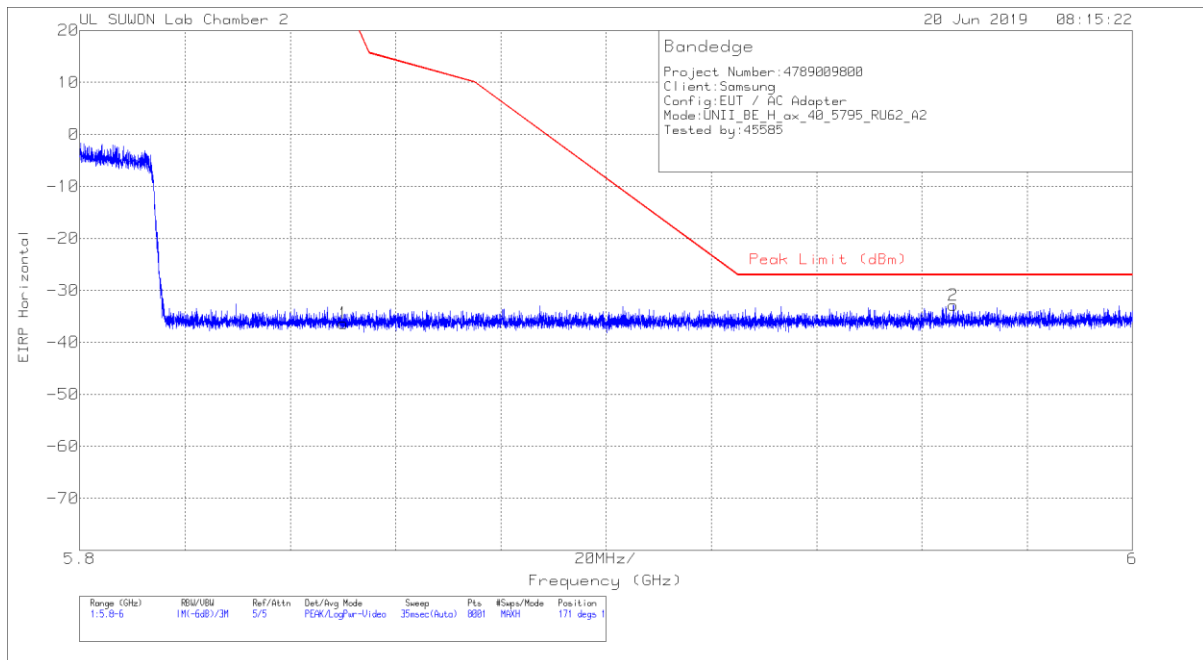


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.15	Pk	34.5	-15.5	11.8	0	-36.35	26.94	-63.29	171	109	H
2	5.966	-63.96	Pk	34.7	-15.4	11.8	0	-32.86	-27	-5.86	171	109	H

Pk - Peak detector

VERTICAL PEAK PLOT

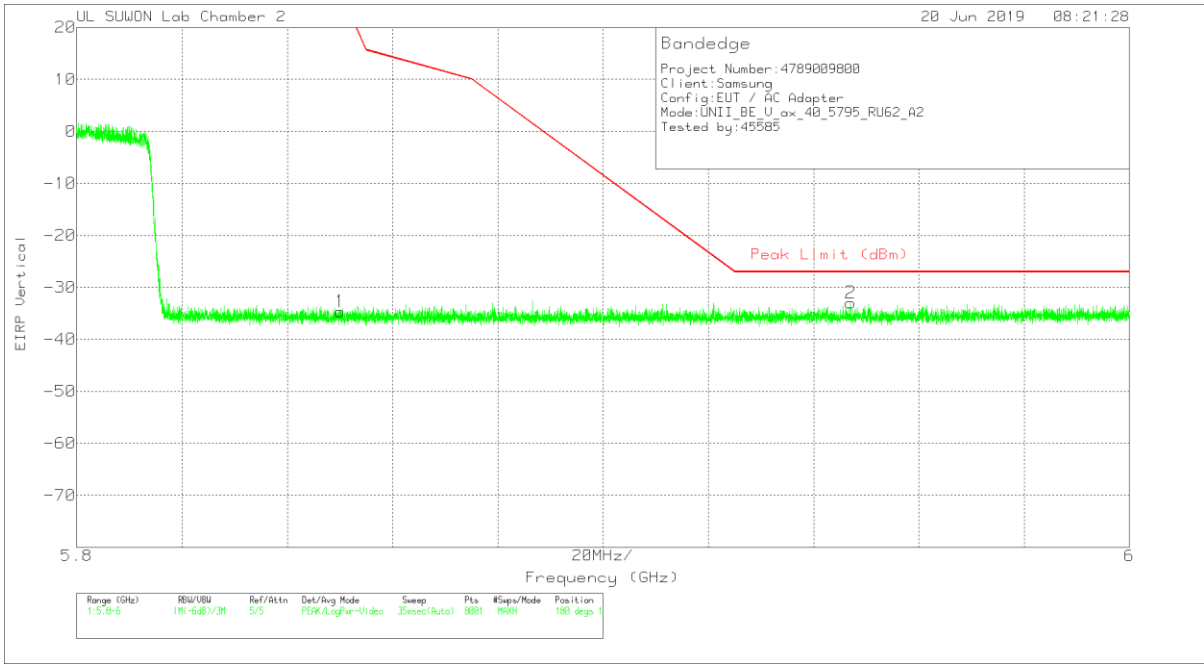

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.43	Pk	34.5	-15.5	11.8	0	-34.63	26.94	-61.57	180	100	V
2	5.947	-63.86	Pk	34.6	-15.5	11.8	0	-32.96	-27	-5.96	180	100	V

Pk - Peak detector

106T RU mode (ANT_1 / HE40 / RU offset 56)

HORIZONTAL PEAK PLOT

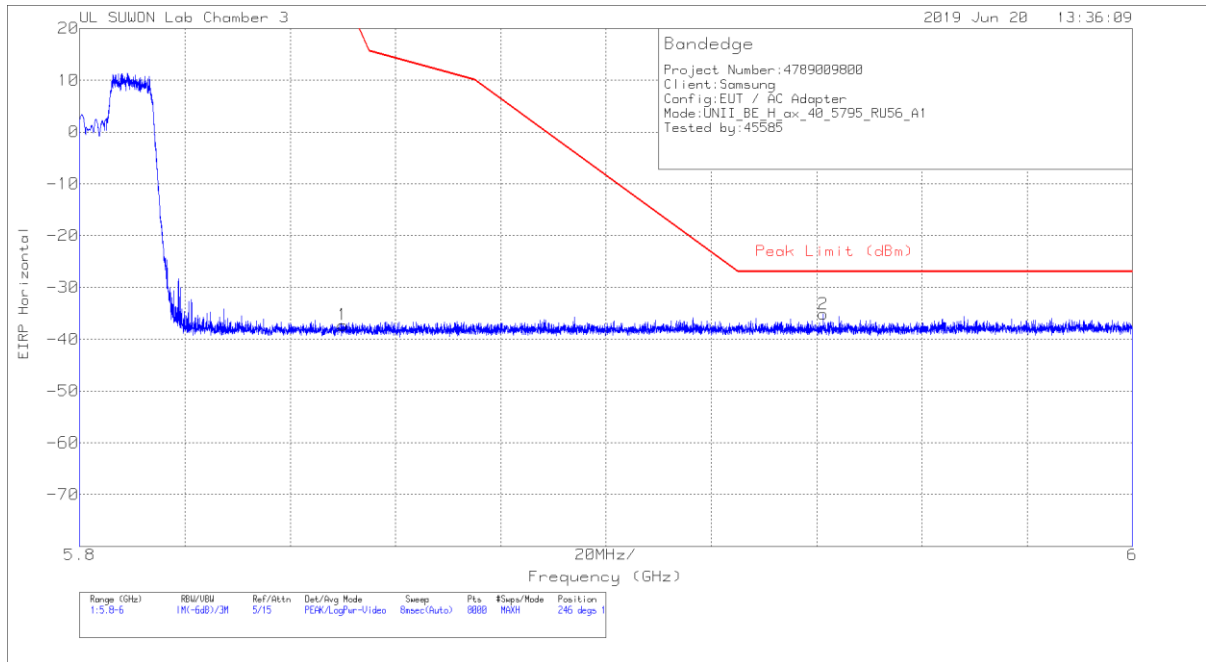


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.35	Pk	35	-17.7	11.8	0	-37.25	26.99	-64.24	246	100	H
2	5.941	-64.33	Pk	35.1	-17.7	11.8	0	-35.13	-27	-8.13	246	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

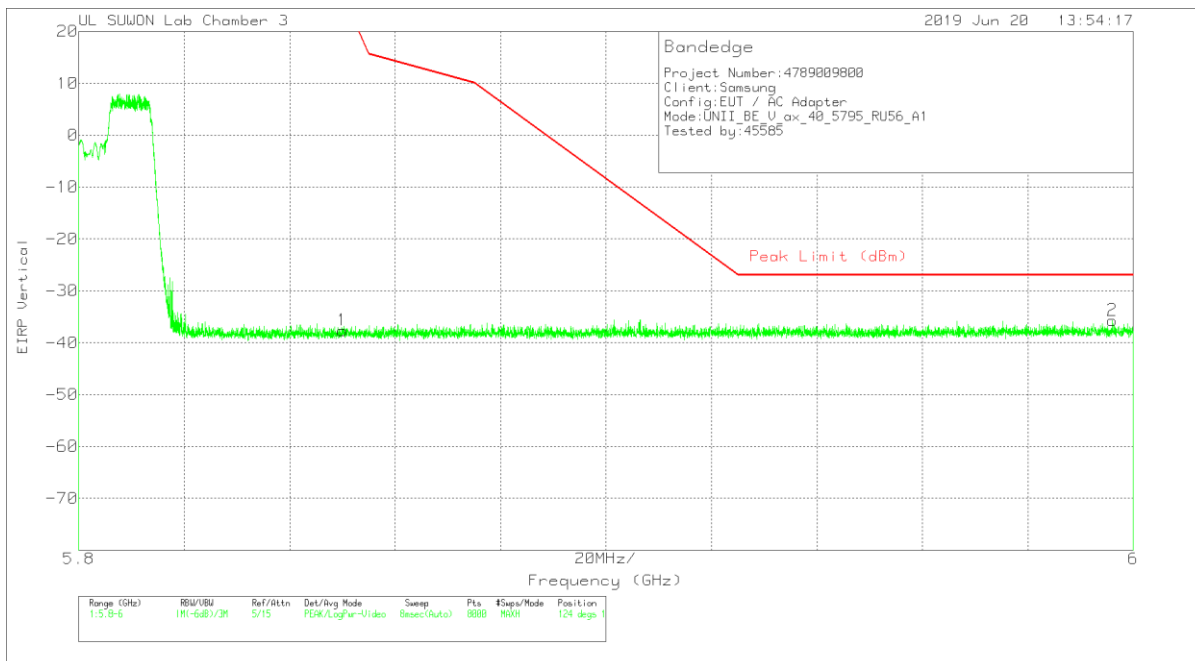

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_002059 59	10dB[dB]	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.72	Pk	35	-17.7	11.8	0	-37.62	26.99	-64.61	124	129	V
2	5.996	-64.99	Pk	35.1	-17.6	11.8	0	-35.69	-27	-8.69	124	129	V

Pk - Peak detector

106T RU mode (ANT_2 / HE40 / RU offset 56)

HORIZONTAL PEAK PLOT

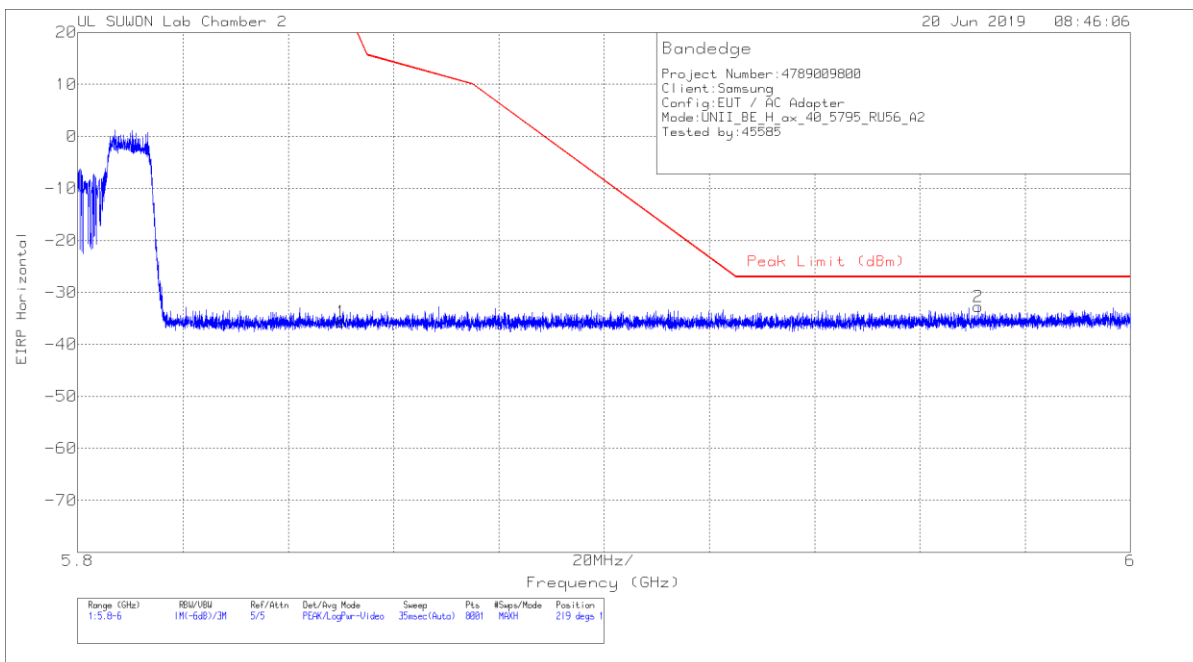


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.43	Pk	34.5	-15.5	11.8	0	-35.63	26.94	-62.57	219	115	H
2	5.971	-63.83	Pk	34.7	-15.4	11.8	0	-32.73	-27	-5.73	219	115	H

Pk - Peak detector

VERTICAL PEAK PLOT

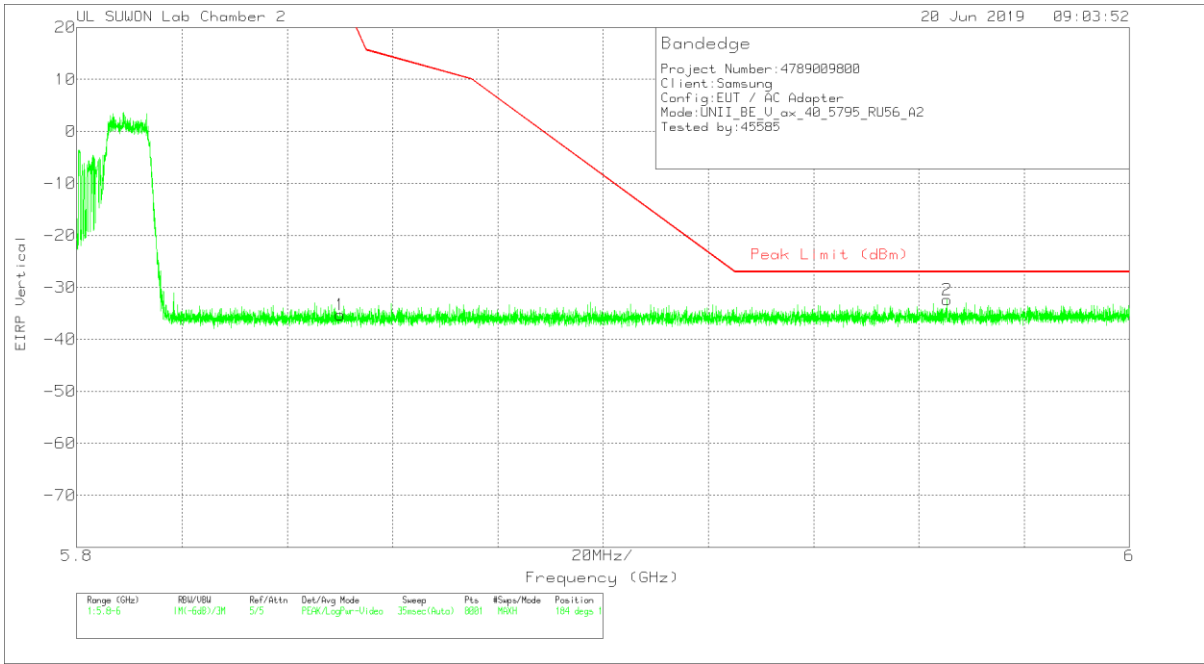

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.08	Pk	34.5	-15.5	11.8	0	-35.28	26.94	-62.22	184	129	V
2	5.965	-63.5	Pk	34.7	-15.4	11.8	0	-32.4	-27	-5.4	184	129	V

Pk - Peak detector

52T RU mode (ANT_1 / HE80 / RU offset 52)

HORIZONTAL PEAK PLOT

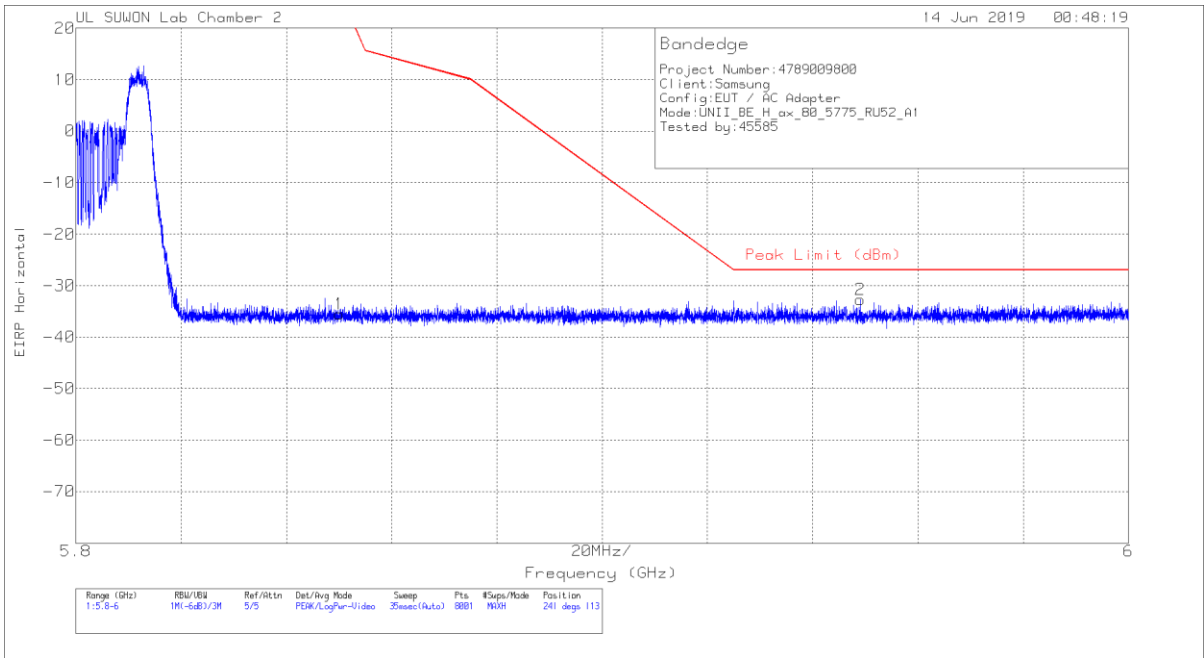


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.26	Pk	34.5	-15.5	11.8	0	-35.46	26.94	-62.4	241	113	H
2	5.949	-63.65	Pk	34.6	-15.5	11.8	0	-32.75	-27	-5.75	241	113	H

Pk - Peak detector

VERTICAL PEAK PLOT

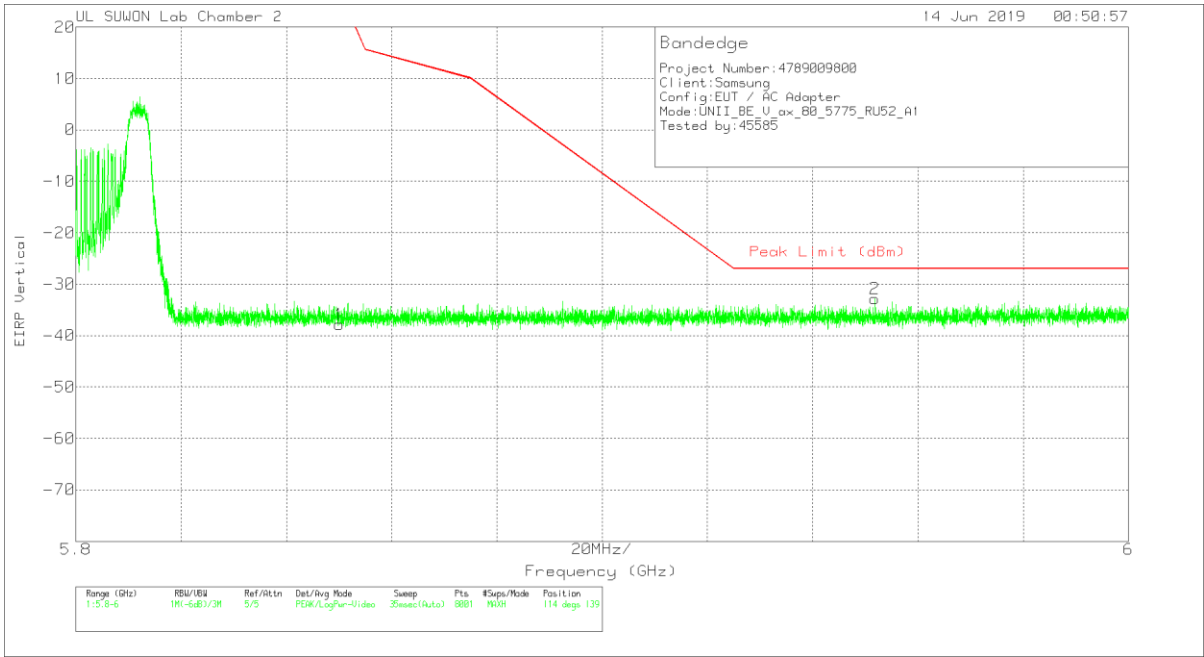

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-68.67	Pk	34.5	-15.5	11.8	0	-37.87	26.94	-64.81	114	139	V
2	5.952	-63.7	Pk	34.6	-15.5	11.8	0	-32.8	-27	-5.8	114	139	V

Pk - Peak detector

52T RU mode (ANT_2 / HE20 / RU offset 40)

HORIZONTAL PEAK PLOT

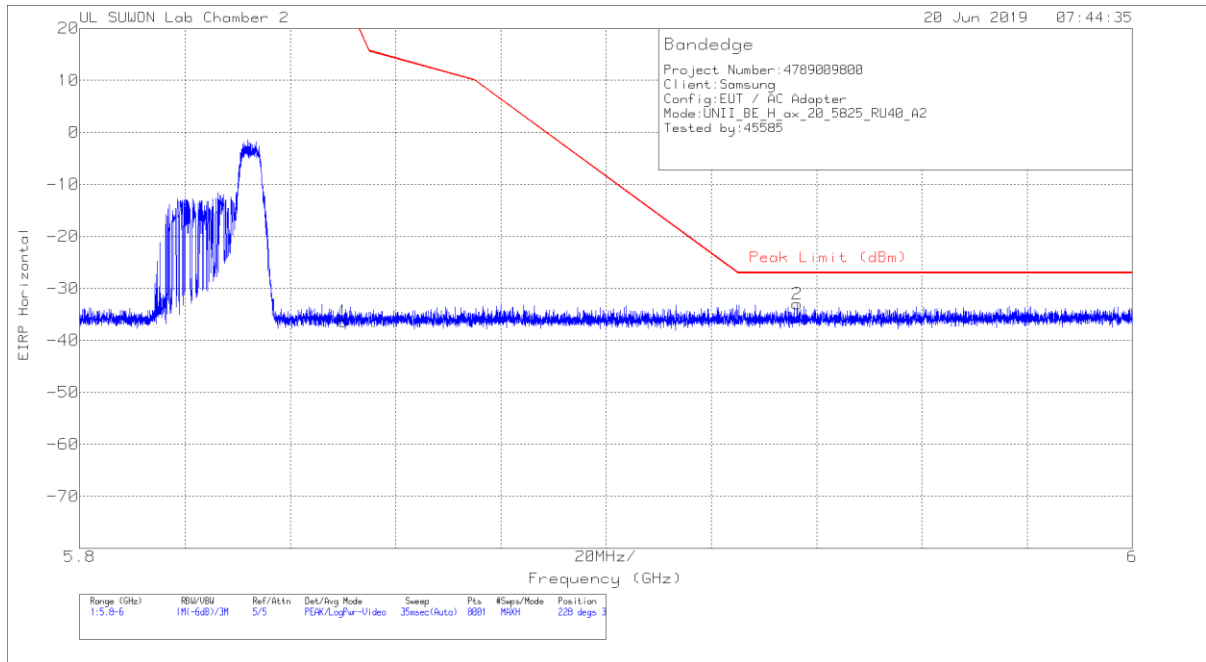


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.15	Pk	34.5	-15.5	11.8	0	-36.35	26.94	-63.29	228	396	H
2	5.936	-63.89	Pk	34.6	-15.5	11.8	0	-32.99	-27	-5.99	228	396	H

Pk - Peak detector

VERTICAL PEAK PLOT

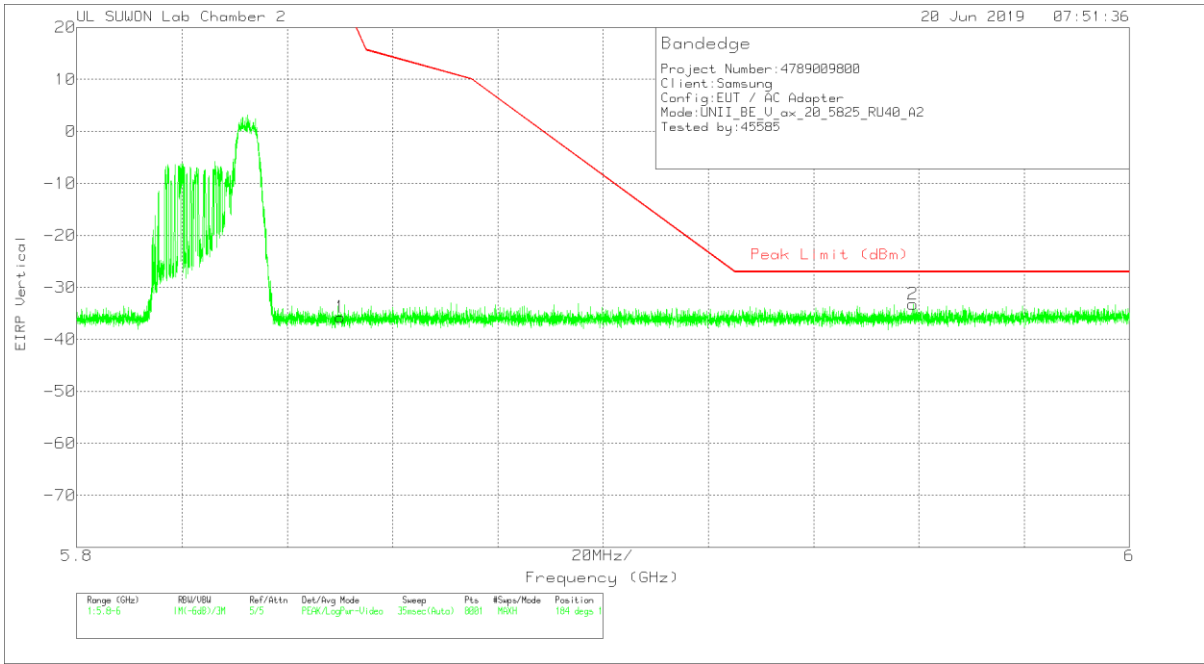

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.53	Pk	34.5	-15.5	11.8	0	-35.73	26.94	-62.67	184	105	V
2	5.959	-64.08	Pk	34.6	-15.5	11.8	0	-33.18	-27	-6.18	184	105	V

Pk - Peak detector

26T RU mode (ANT_1 / HE80 / RU offset 36)

HORIZONTAL PEAK PLOT

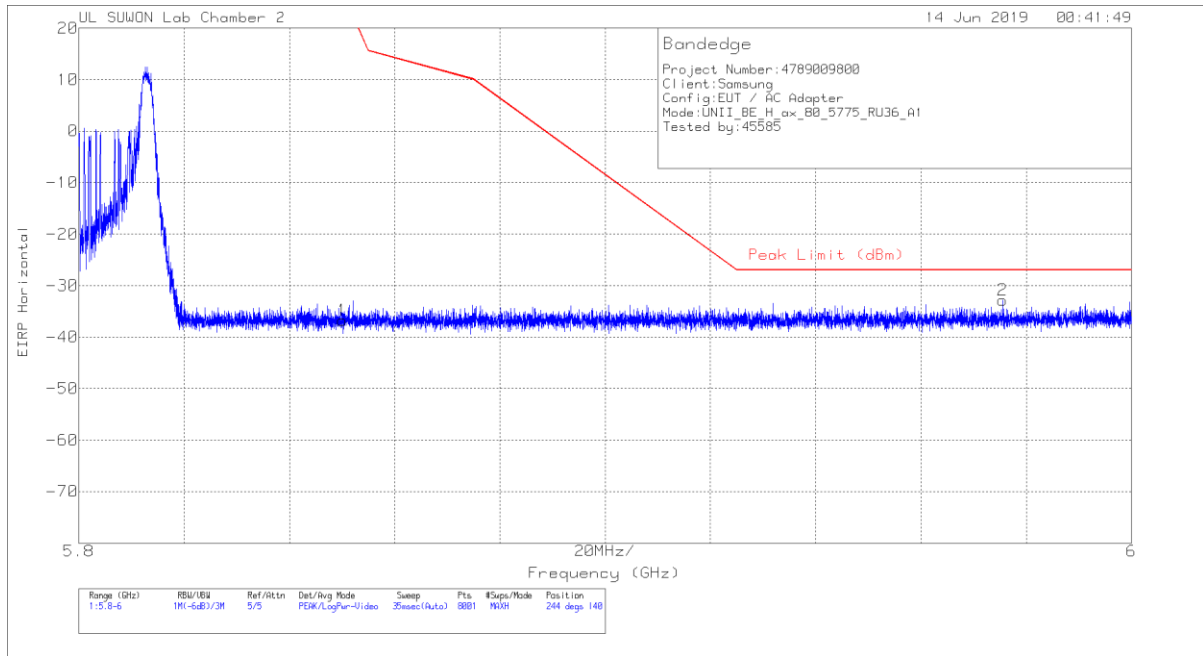


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.57	Pk	34.5	-15.5	11.8	0	-36.77	26.94	-63.71	244	140	H
2	5.976	-63.9	Pk	34.7	-15.4	11.8	0	-32.8	-27	-5.8	244	140	H

Pk - Peak detector

VERTICAL PEAK PLOT

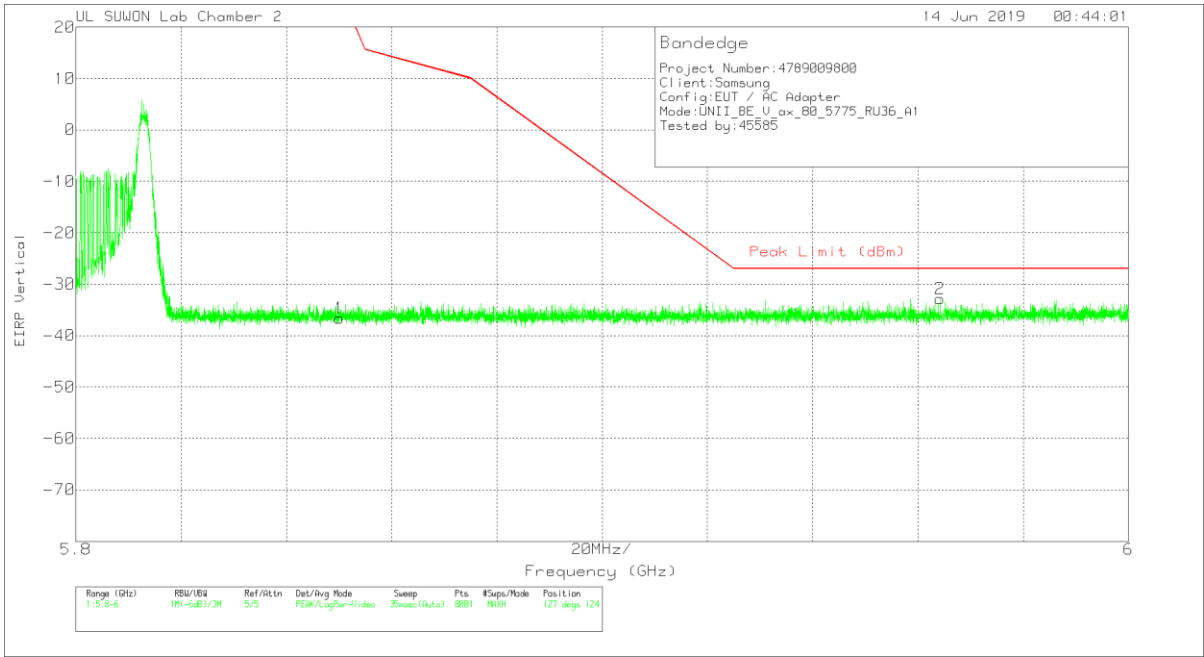

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.42	Pk	34.5	-15.5	11.8	0	-36.62	26.94	-63.56	127	124	V
2	5.964	-63.96	Pk	34.7	-15.4	11.8	0	-32.86	-27	-5.86	127	124	V

Pk - Peak detector

26T RU mode (ANT_2 / HE40 / RU offset 17)

HORIZONTAL PEAK PLOT

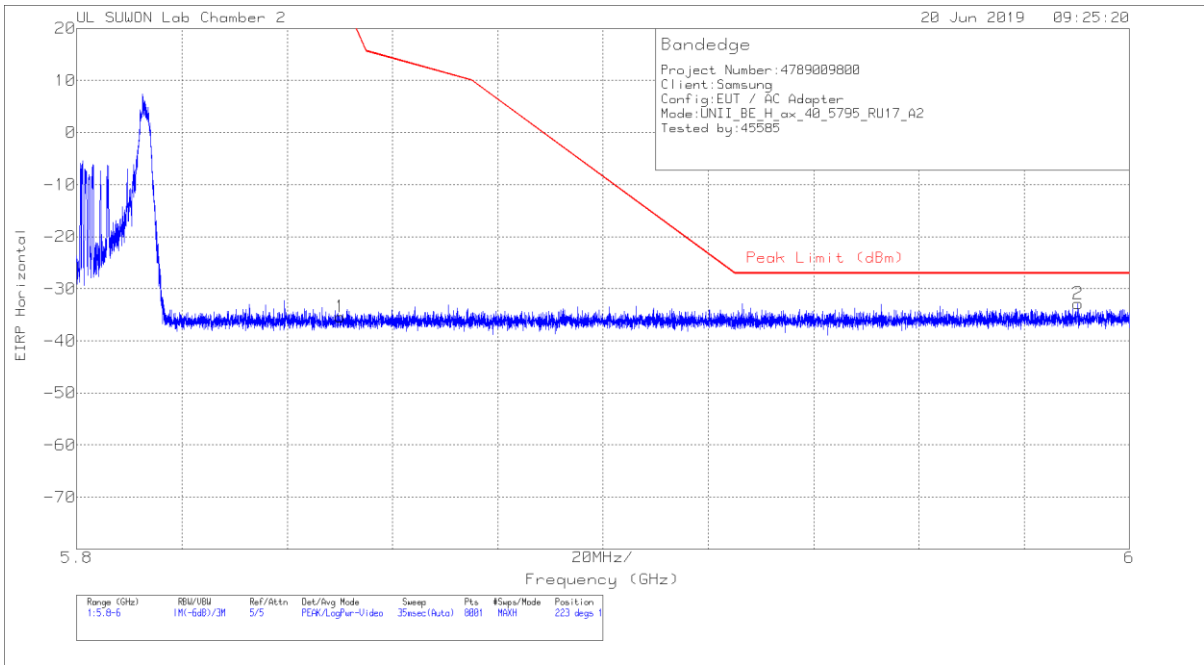


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.16	Pk	34.5	-15.5	11.8	0	-35.36	26.94	-62.3	223	100	H
2	5.99	-64.02	Pk	34.8	-15.4	11.8	0	-32.82	-27	-5.82	223	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

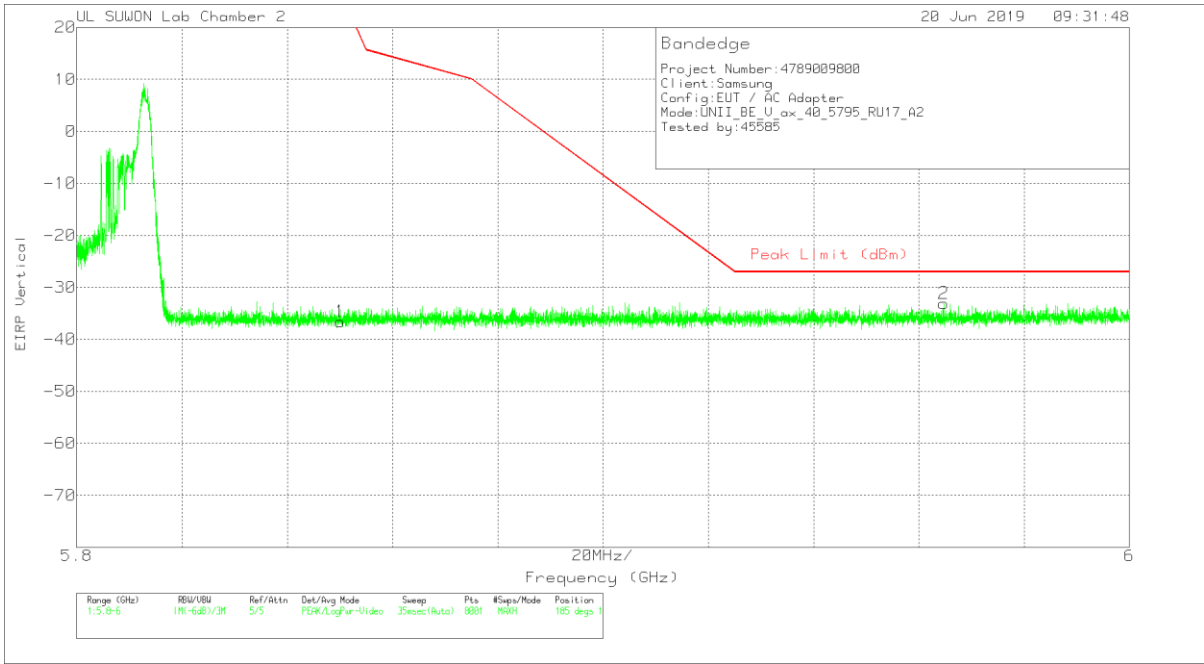

VERTICAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-67.38	Pk	34.5	-15.5	11.8	0	-36.58	26.94	-63.52	185	125	V
2	5.965	-64.18	Pk	34.7	-15.4	11.8	0	-33.08	-27	-6.08	185	125	V

Pk - Peak detector


HARMONICS AND SPURIOUS EMISSIONS

HE20 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

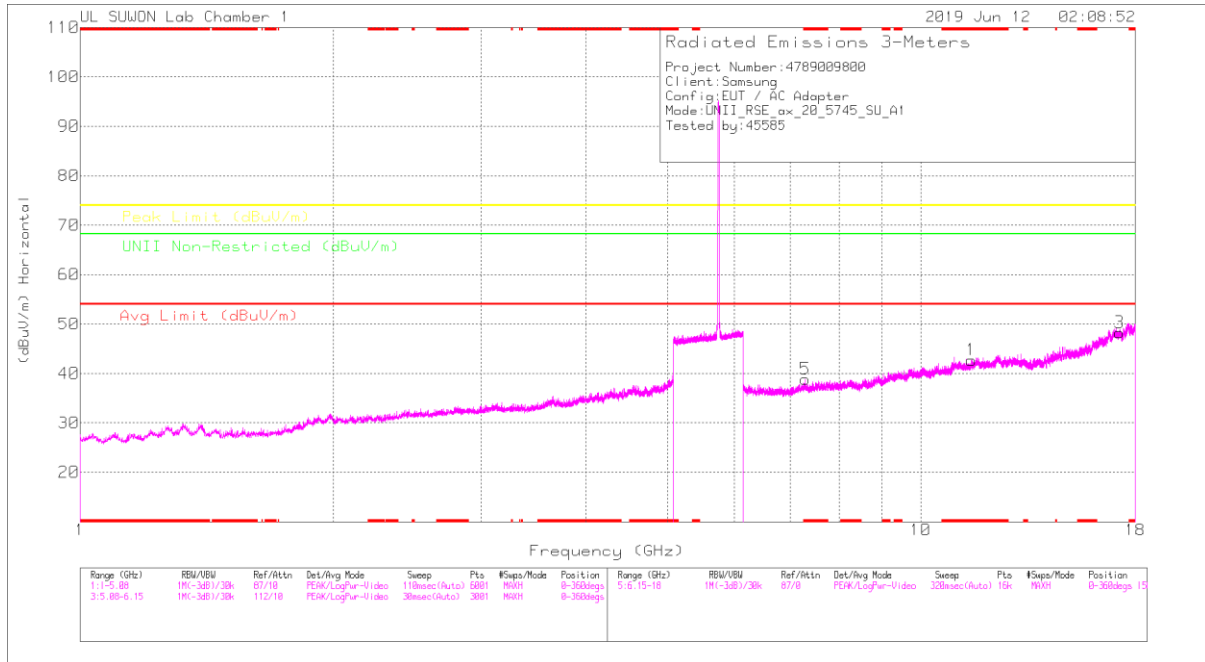

LOW CHANNEL VERTICAL

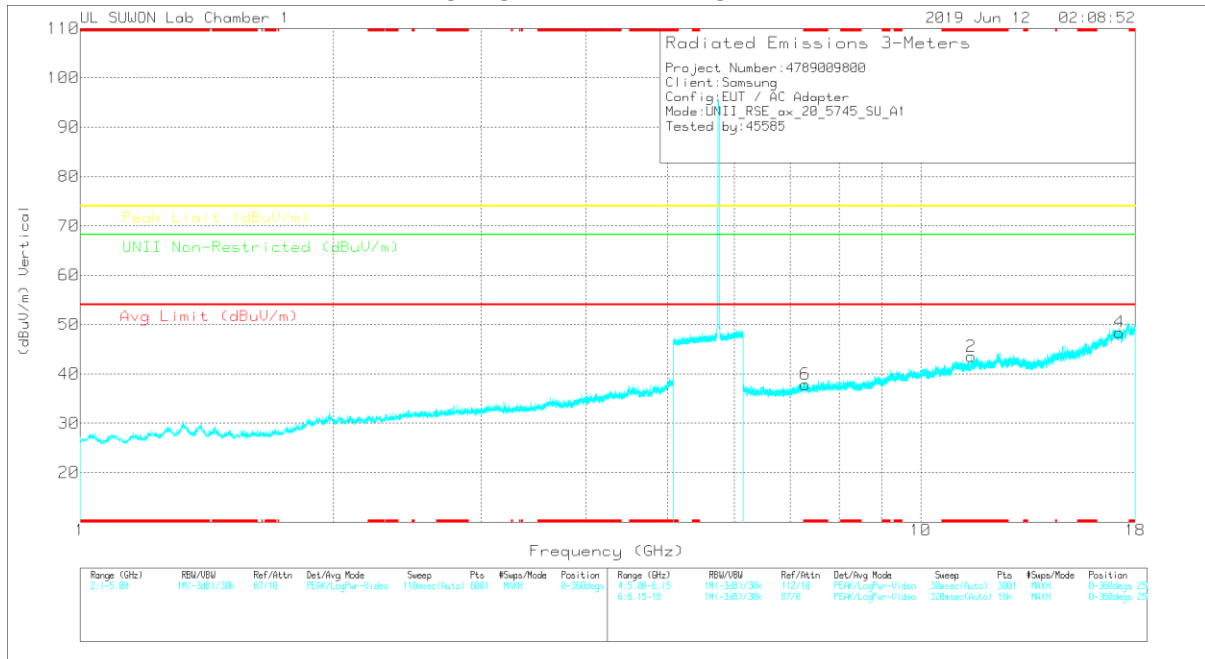

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.49328	26.51	PK	38.5	-22.3	0	42.71	-	-	74	-31.29	-	-	0-360	250	H
3	17.23647	23.68	PK	41.3	-16.7	0	48.28	-	-	-	-	68.2	-19.92	0-360	250	H
5	* 7.28901	29.96	PK	35.8	-26.9	0	38.86	-	-	74	-35.14	-	-	0-360	150	H
2	* 11.49032	27.31	PK	38.5	-22.3	0	43.51	-	-	74	-30.49	-	-	0-360	150	V
4	17.23869	23.84	PK	41.3	-16.7	0	48.44	-	-	-	-	68.2	-19.76	0-360	150	V
6	* 7.28975	28.97	PK	35.8	-26.9	0	37.87	-	-	74	-36.13	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.4907	37.61	PK-U	38.5	-22.3	0	53.81	-	-	74	-20.19	-	-	261	180	H
* 11.49098	25.29	ADR	38.5	-22.3	0	41.49	54	-12.51	-	-	-	-	261	180	H
* 11.4888	39.12	PK-U	38.5	-22.3	0	55.32	-	-	74	-18.68	-	-	192	171	V
* 11.48978	25.76	ADR	38.5	-22.3	0	41.96	54	-12.04	-	-	-	-	192	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

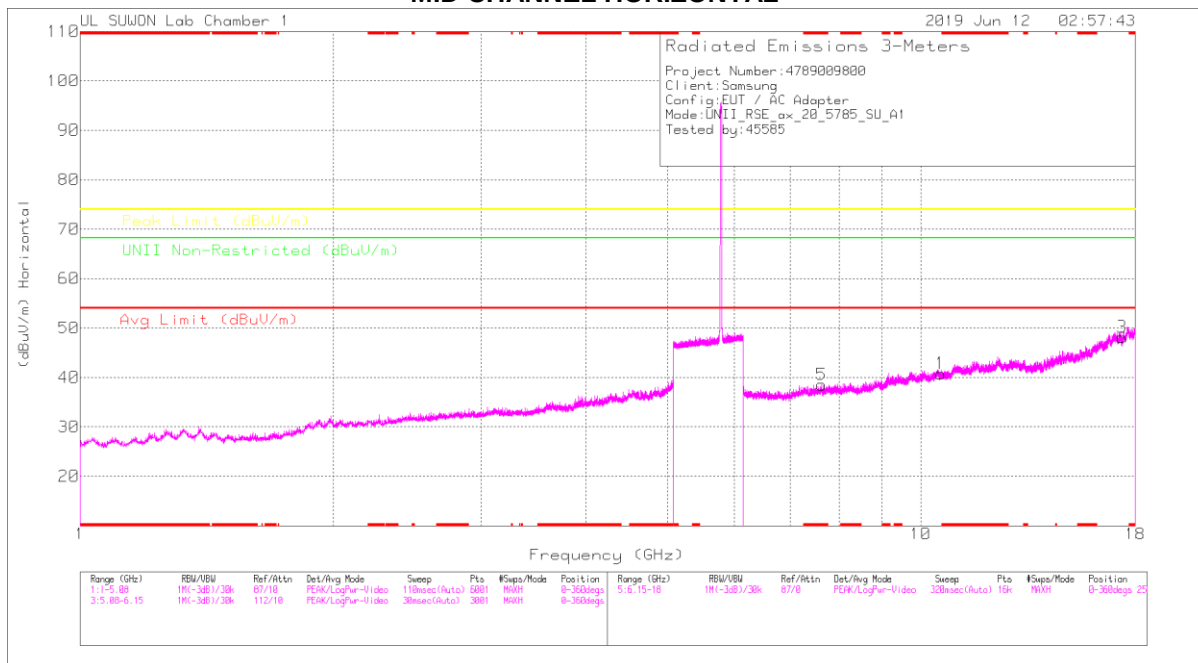

MID CHANNEL VERTICAL

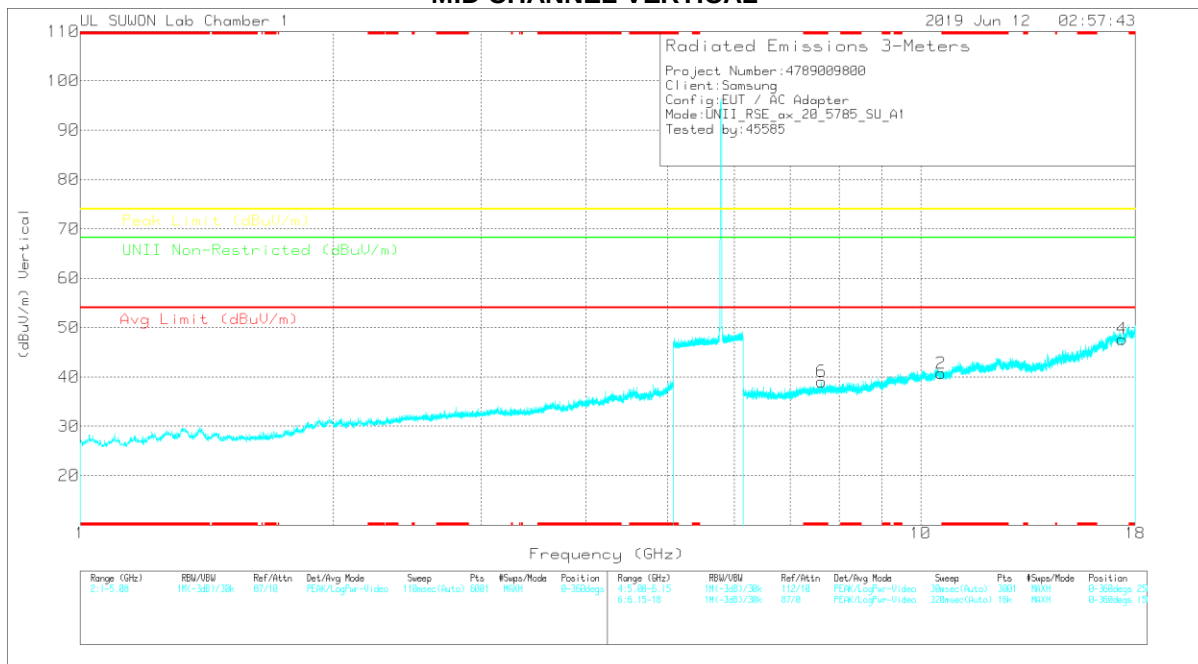

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.56385	25.78	PK	37.8	-22.8	0	40.78	-	-	-	-	68.2	-27.42	0-360	250	H
3	17.3557	24.55	PK	41.2	-17.6	0	48.15	-	-	-	-	68.2	-20.05	0-360	150	H
5	* 7.62005	29.43	PK	35.8	-26.7	0	38.53	-	-	74	-35.47	-	-	0-360	250	H
2	10.57274	25.63	PK	37.8	-22.7	0	40.73	-	-	-	-	68.2	-27.47	0-360	150	V
4	17.3557	24.07	PK	41.2	-17.6	0	47.67	-	-	-	-	68.2	-20.53	0-360	250	V
6	* 7.62005	29.95	PK	35.8	-26.7	0	39.05	-	-	74	-34.95	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

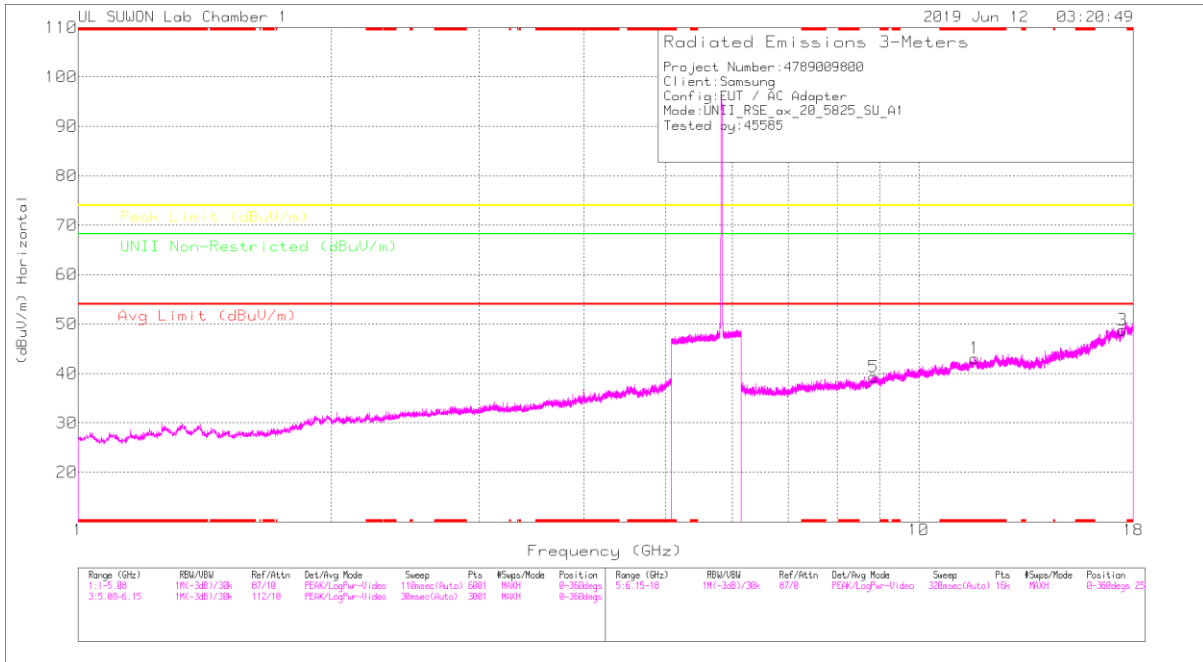

HIGH CHANNEL VERTICAL

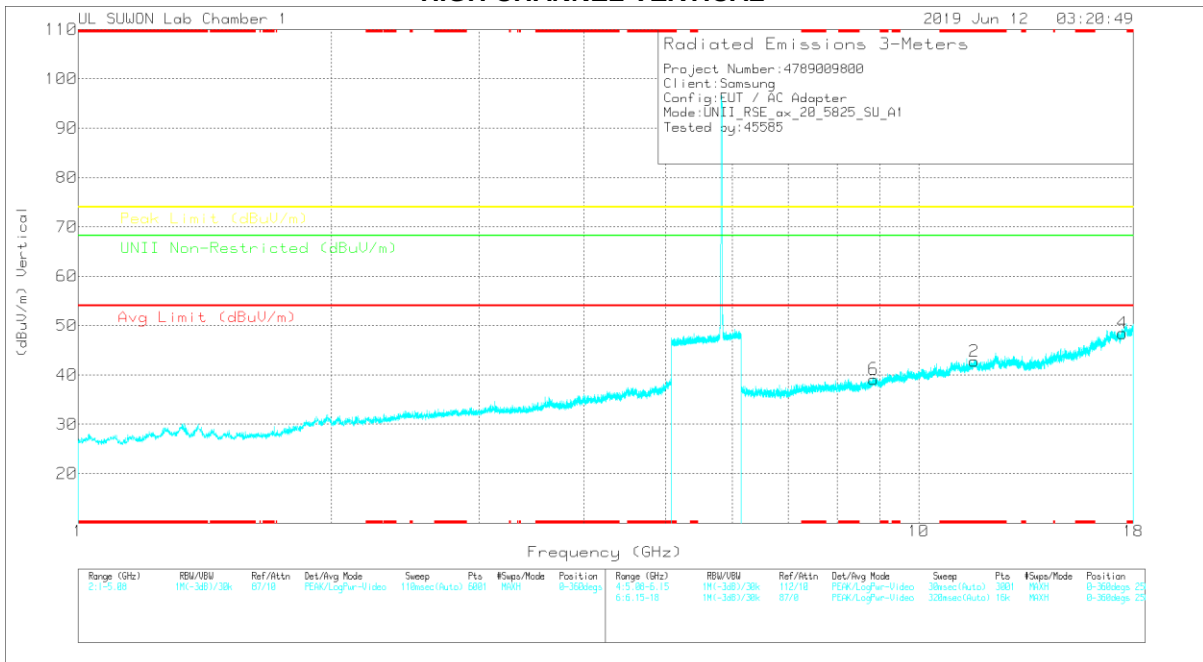

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.65769	25.98	PK	38.7	-21.6	0	43.08	-	-	74	-30.92	-	-	0-360	250	H
3	17.47345	24.08	PK	41.2	-16.5	0	48.78	-	-	-	-	68.2	-19.42	0-360	250	H
5	8.84423	26.91	PK	36.5	-24.1	0	39.31	-	-	-	-	68.2	-28.89	0-360	150	H
2	*11.65102	25.65	PK	38.7	-21.6	0	42.75	-	-	74	-31.25	-	-	0-360	150	V
4	17.47864	23.86	PK	41.2	-16.6	0	48.46	-	-	-	-	68.2	-19.74	0-360	250	V
6	8.84423	26.71	PK	36.5	-24.1	0	39.11	-	-	-	-	68.2	-29.09	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

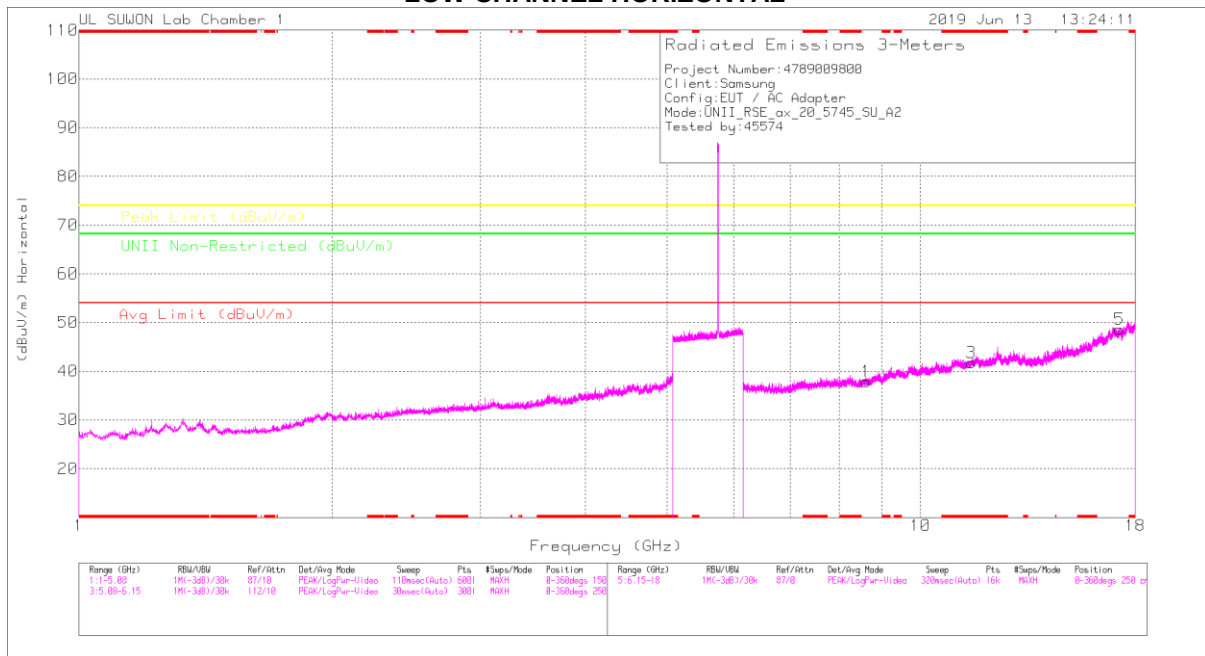

LOW CHANNEL VERTICAL

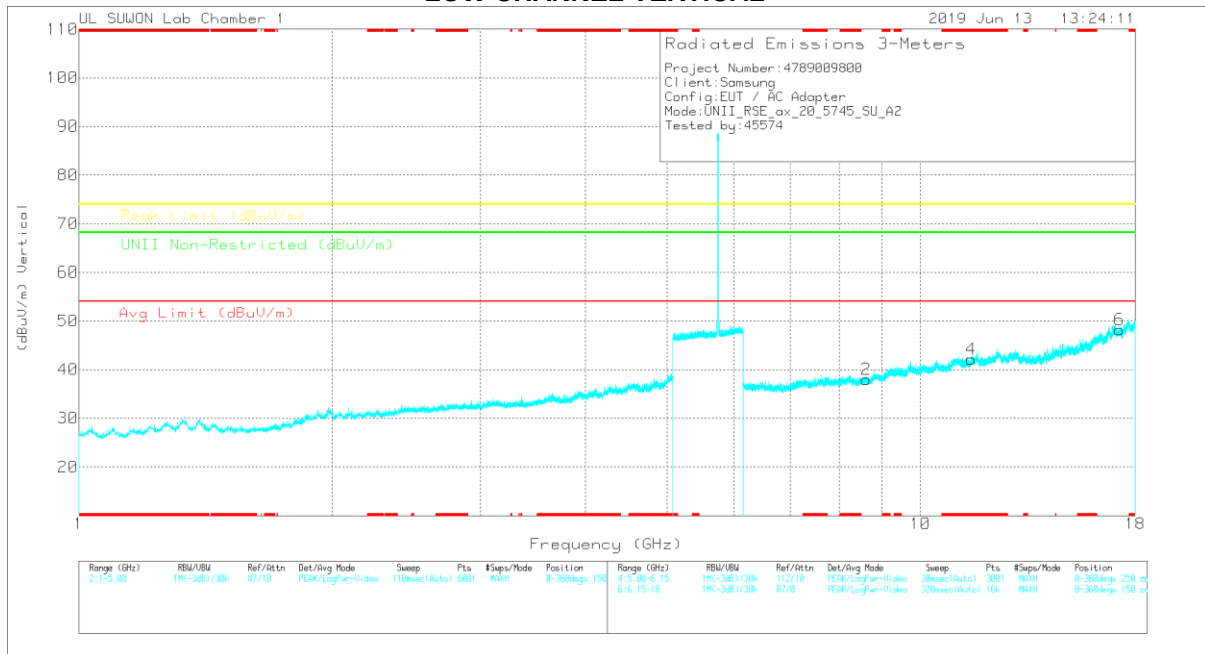

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.61761	26.07	PK	36.3	-24.5	0	37.87	-	-	-	-	68.2	-30.33	0-360	150	H
3	* 11.4918	25.6	PK	38.5	-22.3	0	41.8	-	-	74	-32.2	-	-	0-360	250	H
5	17.23499	24.01	PK	41.3	-16.7	0	48.61	-	-	-	-	68.2	-19.59	0-360	250	H
2	8.61761	26.15	PK	36.3	-24.5	0	37.95	-	-	-	-	68.2	-30.25	0-360	250	V
4	* 11.49106	25.89	PK	38.5	-22.3	0	42.09	-	-	74	-31.91	-	-	0-360	250	V
6	17.23499	23.63	PK	41.3	-16.7	0	48.23	-	-	-	-	68.2	-19.97	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

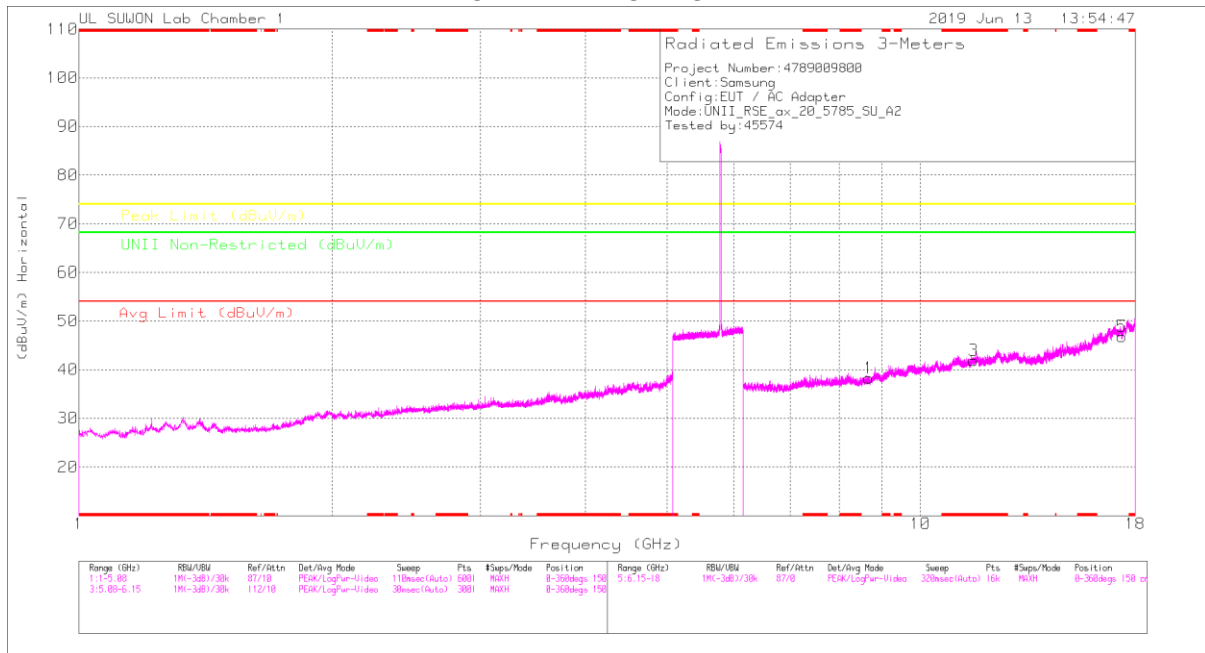

MID CHANNEL VERTICAL

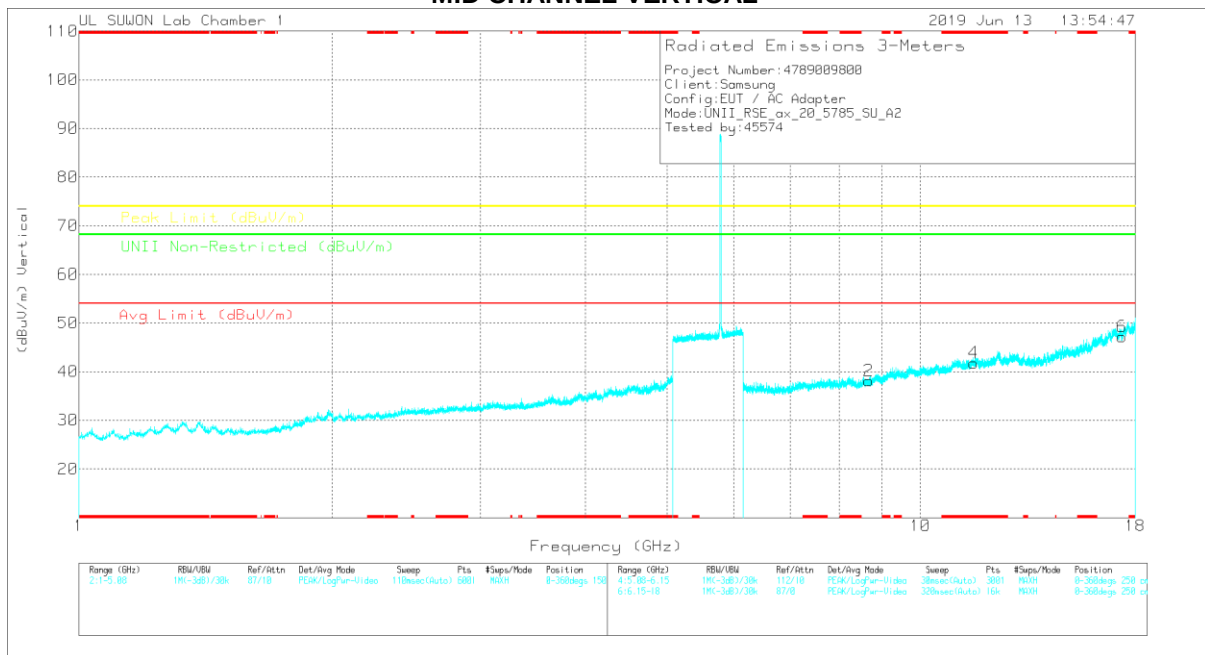

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.67834	27.23	PK	36.4	-25.4	0	38.23	-	-	-	-	68.2	-29.97	0-360	150	H
3	* 11.5703	25.75	PK	38.6	-22.5	0	41.85	-	-	74	-32.15	-	-	0-360	150	H
5	17.35644	23.23	PK	41.2	-17.6	0	46.83	-	-	-	-	68.2	-21.37	0-360	150	H
2	8.67908	27.17	PK	36.4	-25.4	0	38.17	-	-	-	-	68.2	-30.03	0-360	150	V
4	* 11.57104	25.71	PK	38.6	-22.5	0	41.81	-	-	74	-32.19	-	-	0-360	150	V
6	17.35718	23.61	PK	41.2	-17.6	0	47.21	-	-	-	-	68.2	-20.99	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

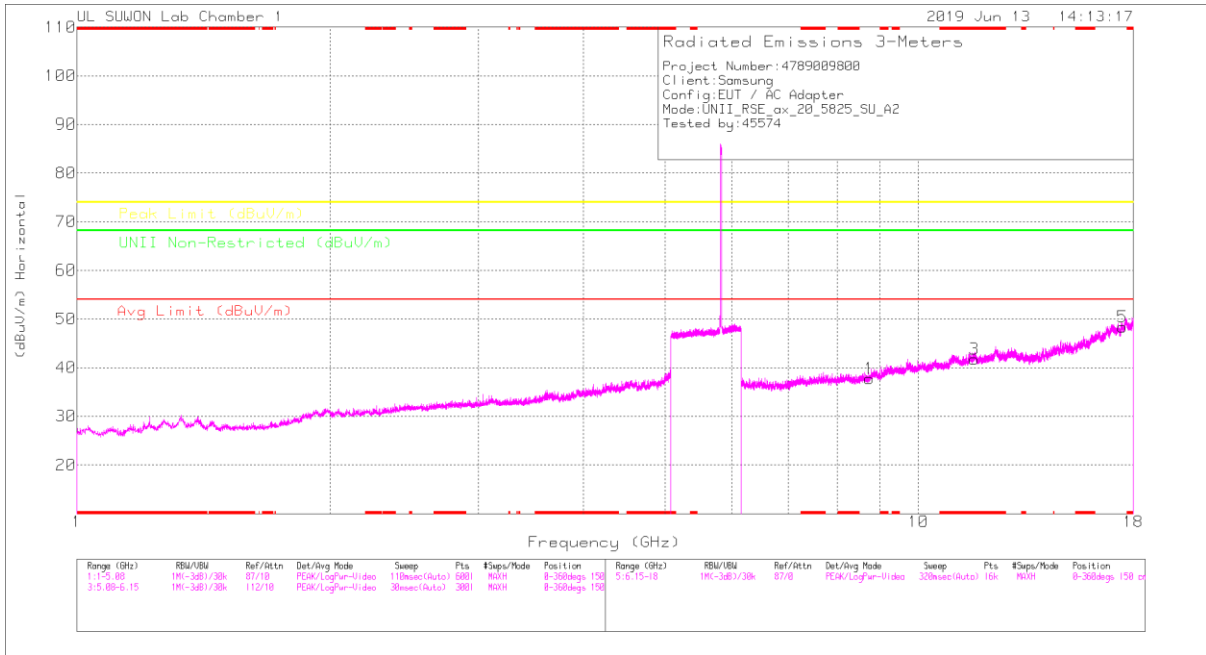

HIGH CHANNEL VERTICAL

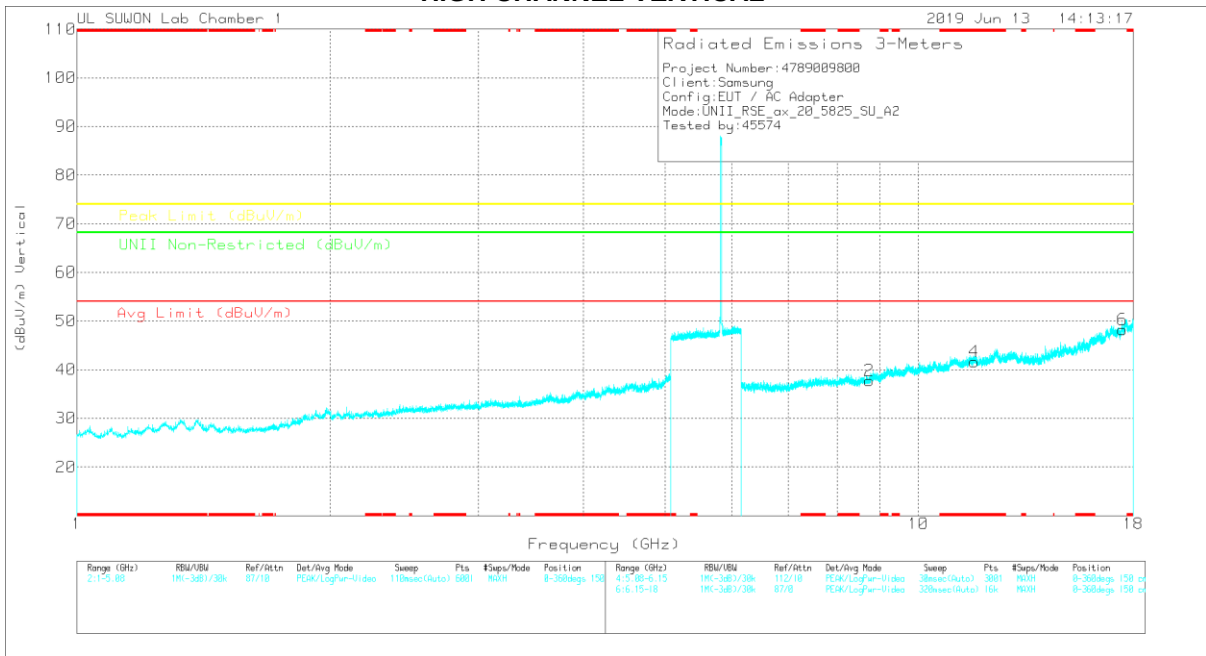

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.73832	26.82	PK	36.4	-25.5	0	37.72	-	-	-	-	68.2	-30.48	0-360	250	H
3	* 11.65102	24.62	PK	38.7	-21.6	0	41.72	-	-	74	-32.28	-	-	0-360	250	H
5	17.47568	23.69	PK	41.2	-16.5	0	48.39	-	-	-	-	68.2	-19.81	0-360	250	H
2	8.73684	26.74	PK	36.4	-25.4	0	37.74	-	-	-	-	68.2	-30.46	0-360	250	V
4	* 11.65102	24.51	PK	38.7	-21.6	0	41.61	-	-	74	-32.39	-	-	0-360	150	V
6	17.47493	23.5	PK	41.2	-16.5	0	48.2	-	-	-	-	68.2	-20	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_1)

LOW CHANNEL HORIZONTAL

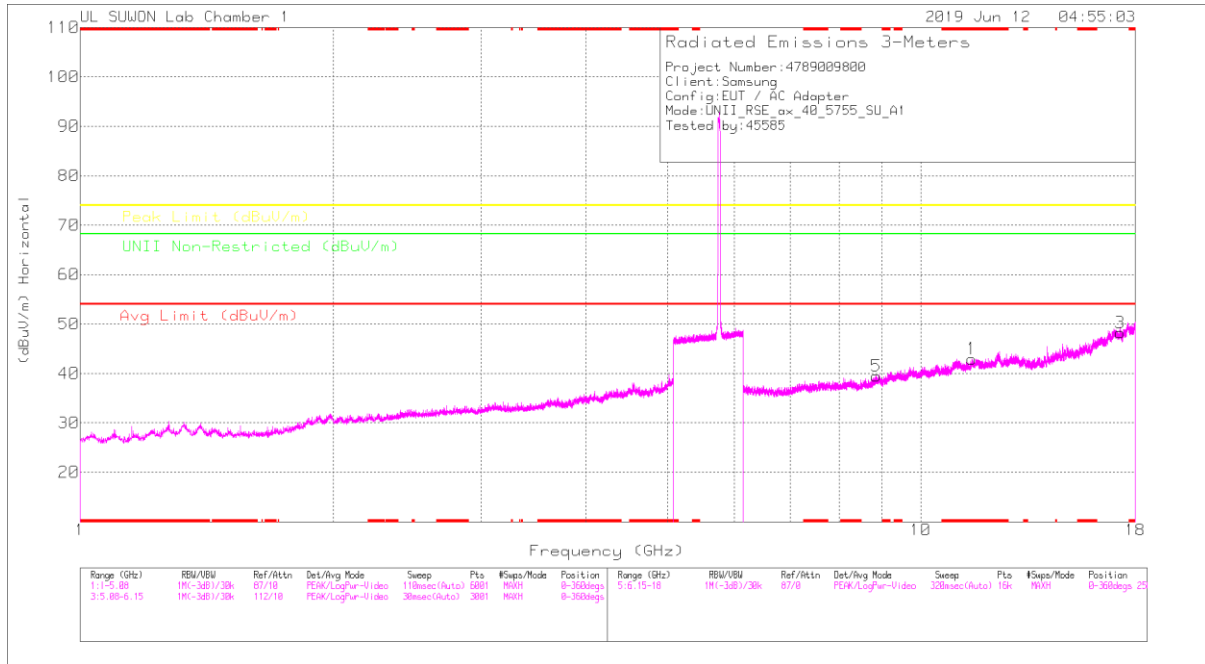

LOW CHANNEL VERTICAL

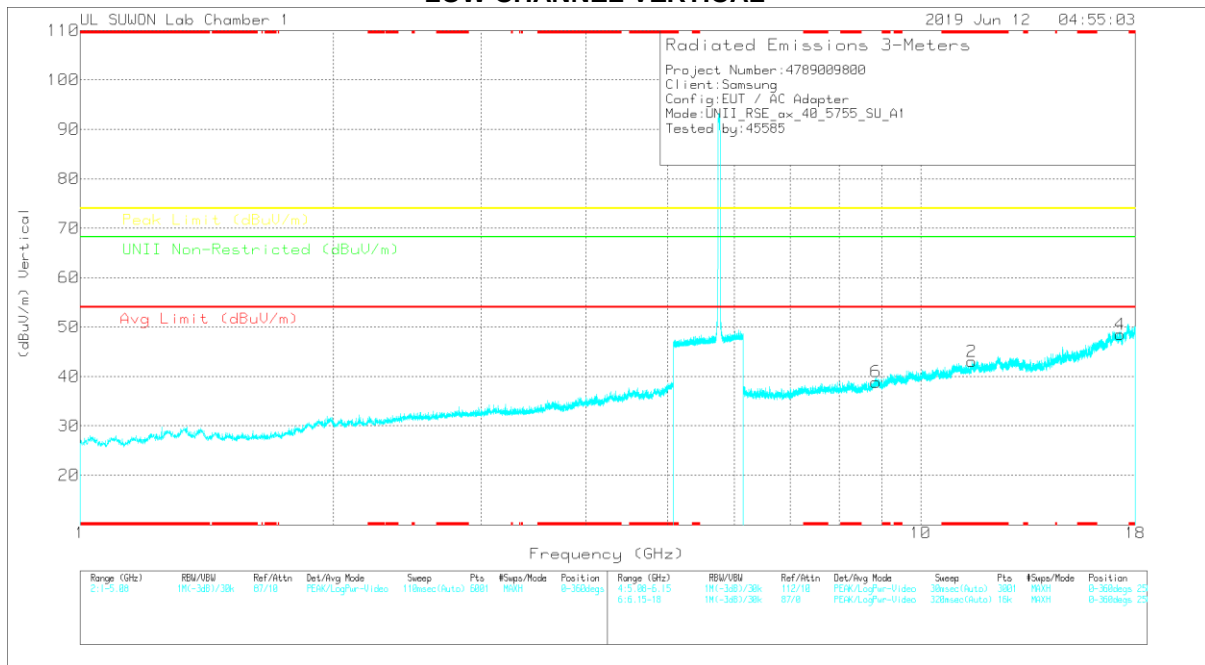

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.50439	26.74	PK	38.5	-22.3	0	42.94	-	-	74	-31.06	-	-	0-360	250	H
3	17.26535	23.45	PK	41.3	-16.5	0	48.25	-	-	-	-	68.2	-19.95	0-360	250	H
5	8.85237	26.95	PK	36.5	-24	0	39.45	-	-	-	-	68.2	-28.75	0-360	250	H
2	* 11.50587	26.84	PK	38.5	-22.3	0	43.04	-	-	74	-30.96	-	-	0-360	250	V
4	17.26609	23.57	PK	41.3	-16.4	0	48.47	-	-	-	-	68.2	-19.73	0-360	150	V
6	8.84867	26.5	PK	36.5	-24.1	0	38.9	-	-	-	-	68.2	-29.3	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

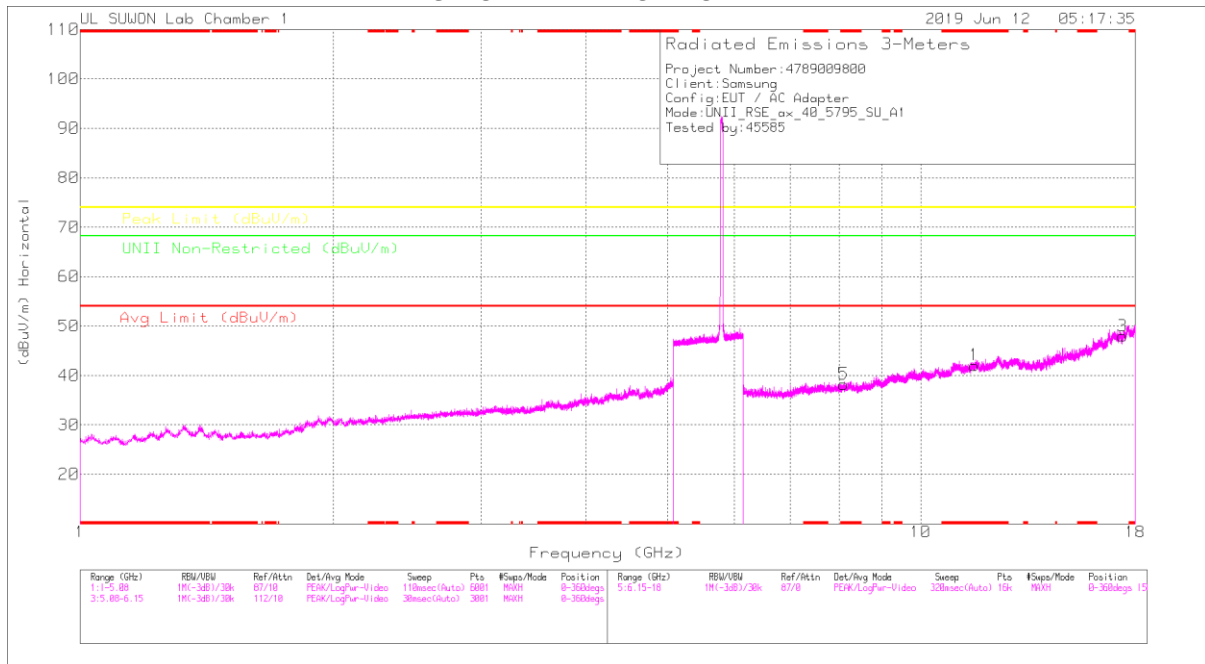

HIGH CHANNEL VERTICAL

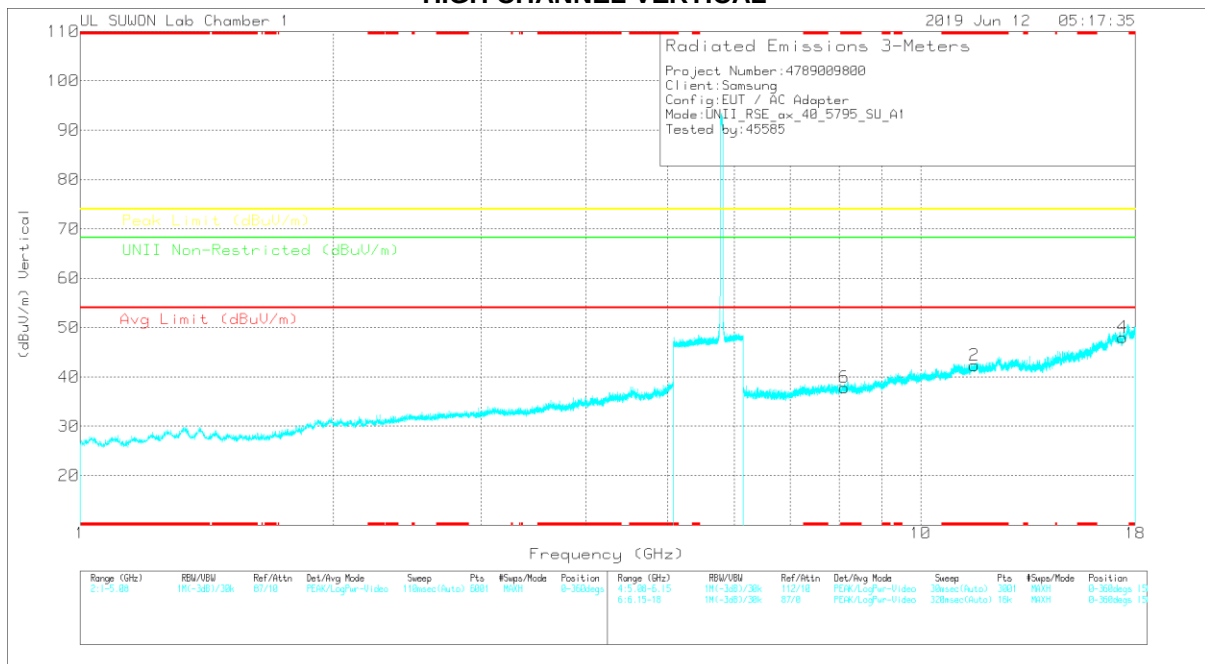

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.58881	25.88	PK	38.6	-22.4	0	42.08	-	-	74	-31.92	-	-	0-360	150	H
3	17.38903	23.9	PK	41.2	-17.1	0	48	-	-	-	-	68.2	-20.2	0-360	150	H
5	* 8.0955	28.35	PK	36.2	-26.3	0	38.25	-	-	74	-35.75	-	-	0-360	250	H
2	* 11.58807	26.15	PK	38.6	-22.4	0	42.35	-	-	74	-31.65	-	-	0-360	250	V
4	17.38607	24.05	PK	41.2	-17.2	0	48.05	-	-	-	-	68.2	-20.15	0-360	250	V
6	* 8.11476	28.08	PK	36.2	-26.4	0	37.88	-	-	74	-36.12	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 SU mode (ANT_2)

LOW CHANNEL HORIZONTAL

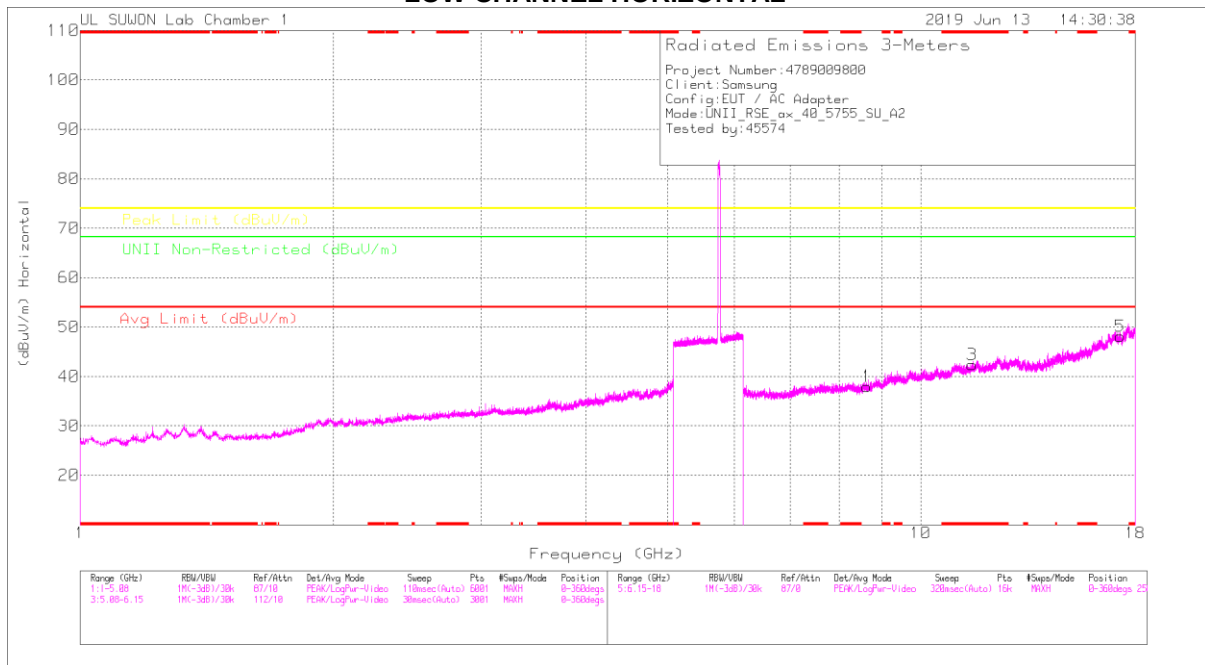

LOW CHANNEL VERTICAL

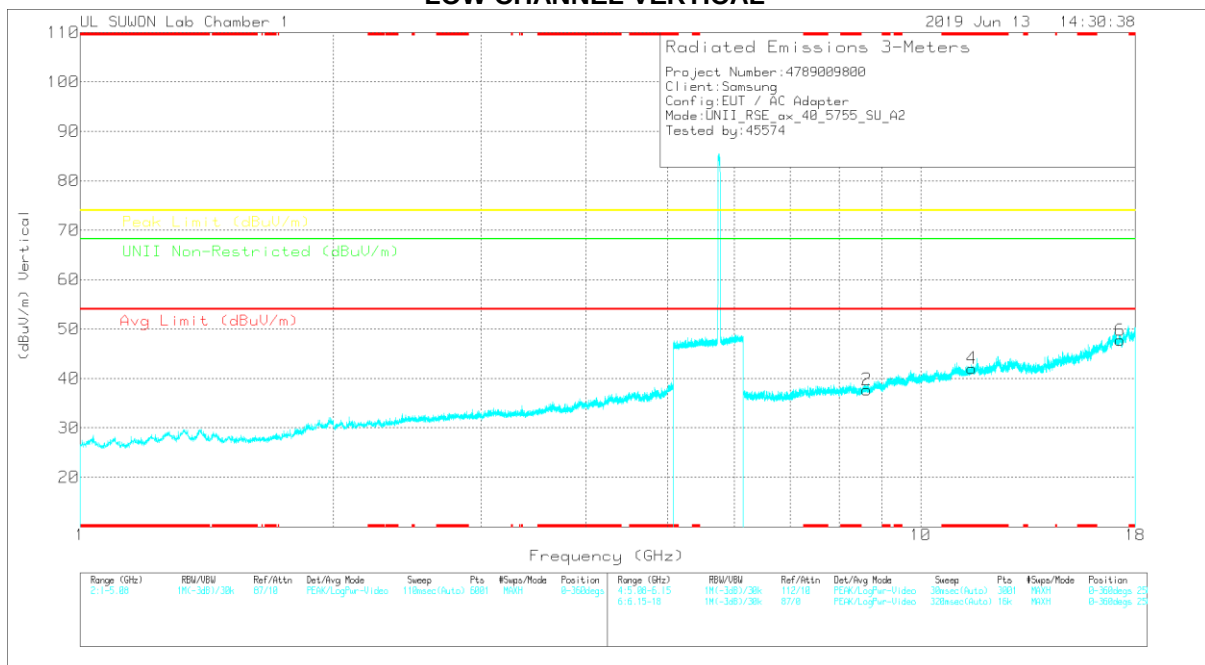

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HRP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.63242	26.46	PK	36.3	-24.8	0	37.96	-	-	-	-	68.2	-30.24	0-360	150	H
3	* 11.51179	26.16	PK	38.5	-22.3	0	42.36	-	-	74	-31.64	-	-	0-360	150	H
5	17.26461	23.33	PK	41.3	-16.5	0	48.13	-	-	-	-	68.2	-20.07	0-360	150	H
2	8.63242	26.24	PK	36.3	-24.8	0	37.74	-	-	-	-	68.2	-30.46	0-360	250	V
4	* 11.51105	25.84	PK	38.5	-22.3	0	42.04	-	-	74	-31.96	-	-	0-360	150	V
6	17.26535	22.92	PK	41.3	-16.5	0	47.72	-	-	-	-	68.2	-20.48	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

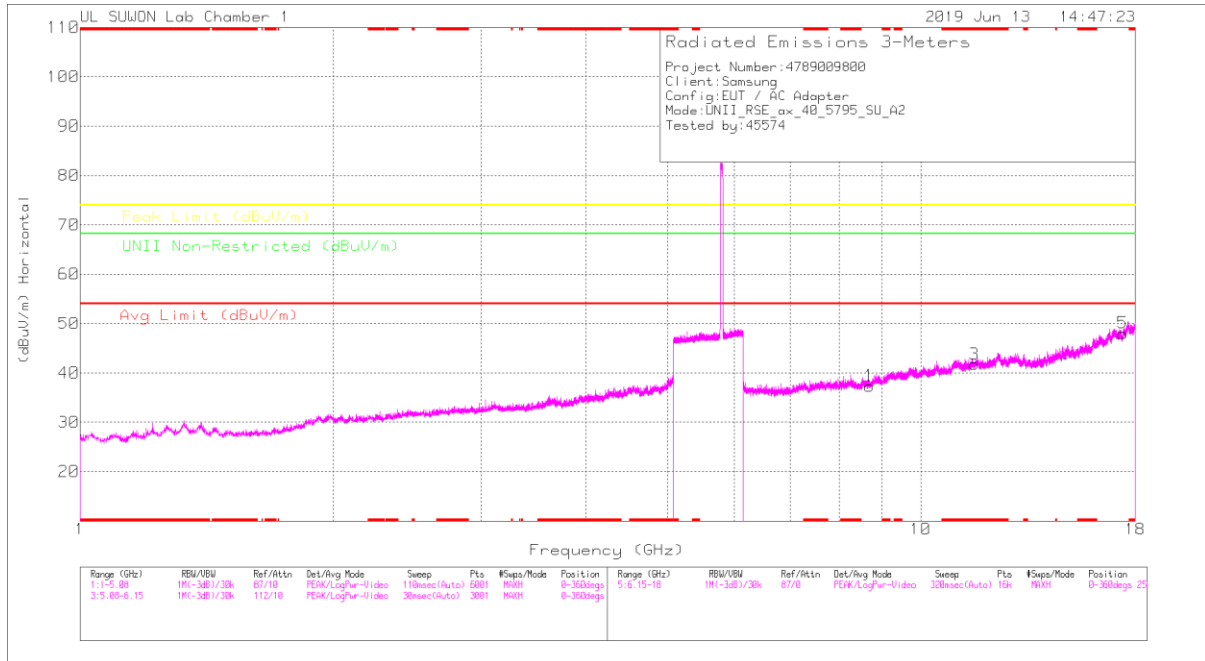

HIGH CHANNEL VERTICAL

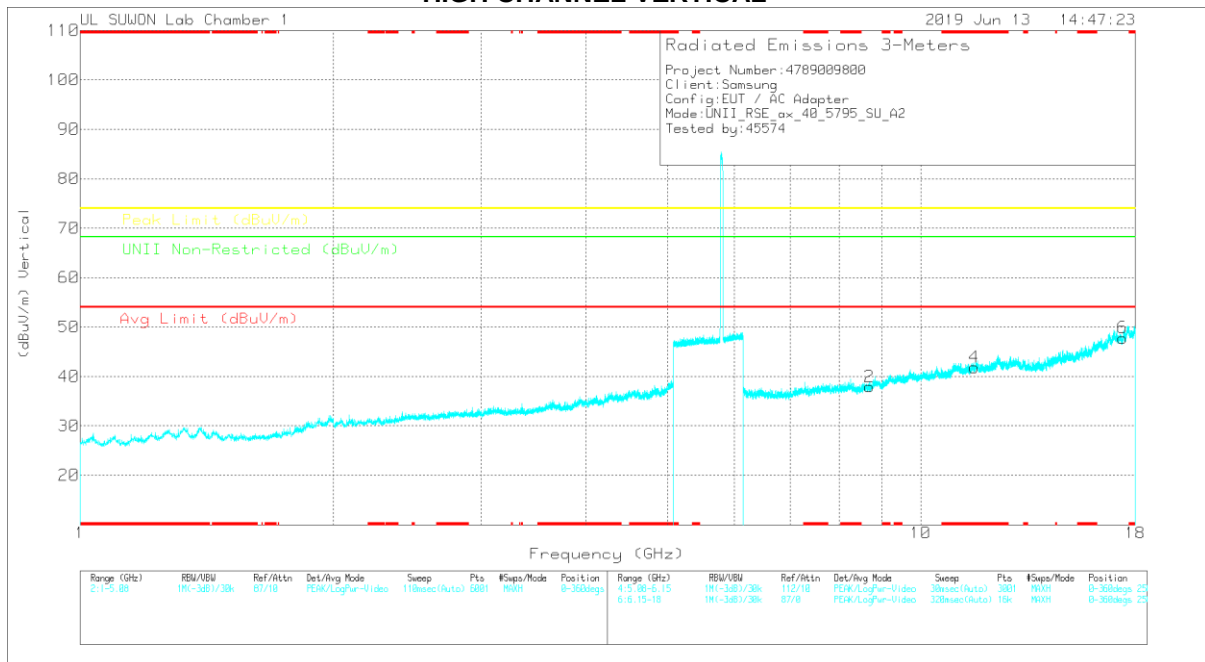

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.69241	26.44	PK	36.4	-25.5	0	37.34	-	-	-	-	68.2	-30.86	0-360	250	H
3	* 11.59029	25.57	PK	38.6	-22.4	0	41.77	-	-	74	-32.23	-	-	0-360	150	H
5	17.38607	24.06	PK	41.2	-17.2	0	48.06	-	-	-	-	68.2	-20.14	0-360	250	H
2	8.69167	27.02	PK	36.4	-25.5	0	37.92	-	-	-	-	68.2	-30.28	0-360	250	V
4	* 11.58955	25.65	PK	38.6	-22.4	0	41.85	-	-	74	-32.15	-	-	0-360	150	V
6	17.38532	23.8	PK	41.2	-17.2	0	47.8	-	-	-	-	68.2	-20.4	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_1)

MID CHANNEL HORIZONTAL

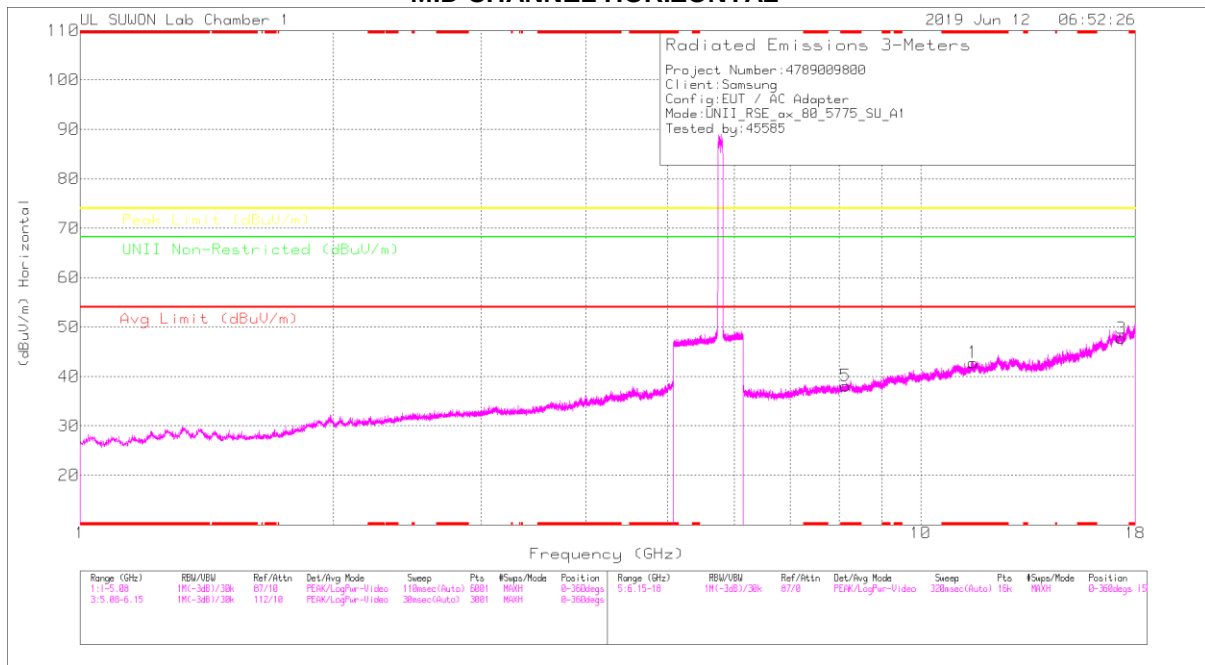

MID CHANNEL VERTICAL

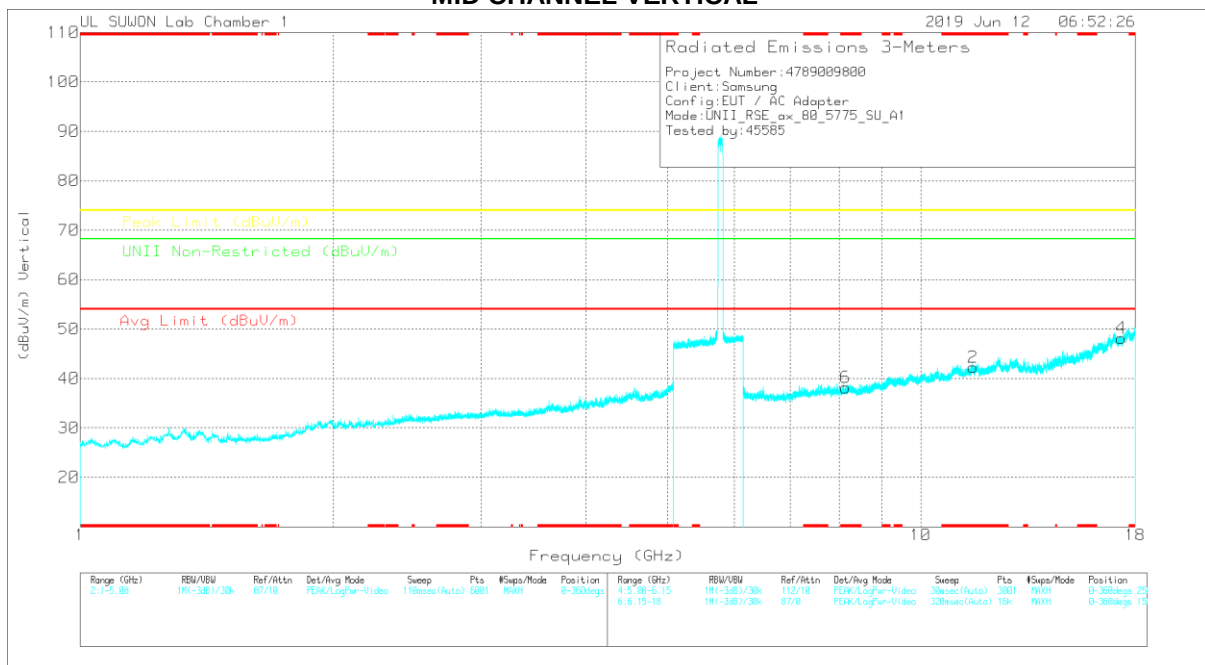

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.55178	26.73	PK	38.6	-22.5	0	42.83	-	-	74	-31.17	-	-	0-360	250	H
3	17.32089	23.42	PK	41.3	-17	0	47.72	-	-	-	-	68.2	-20.48	0-360	250	H
5	* 8.14216	28.12	PK	36.3	-26.3	0	38.12	-	-	74	-35.88	-	-	0-360	150	H
2	* 11.55104	26.17	PK	38.6	-22.5	0	42.27	-	-	74	-31.73	-	-	0-360	150	V
4	17.32386	23.96	PK	41.3	-17.1	0	48.16	-	-	-	-	68.2	-20.04	0-360	250	V
6	* 8.14142	28.26	PK	36.3	-26.4	0	38.16	-	-	74	-35.84	-	-	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE80 SU mode (ANT_2)

MID CHANNEL HORIZONTAL

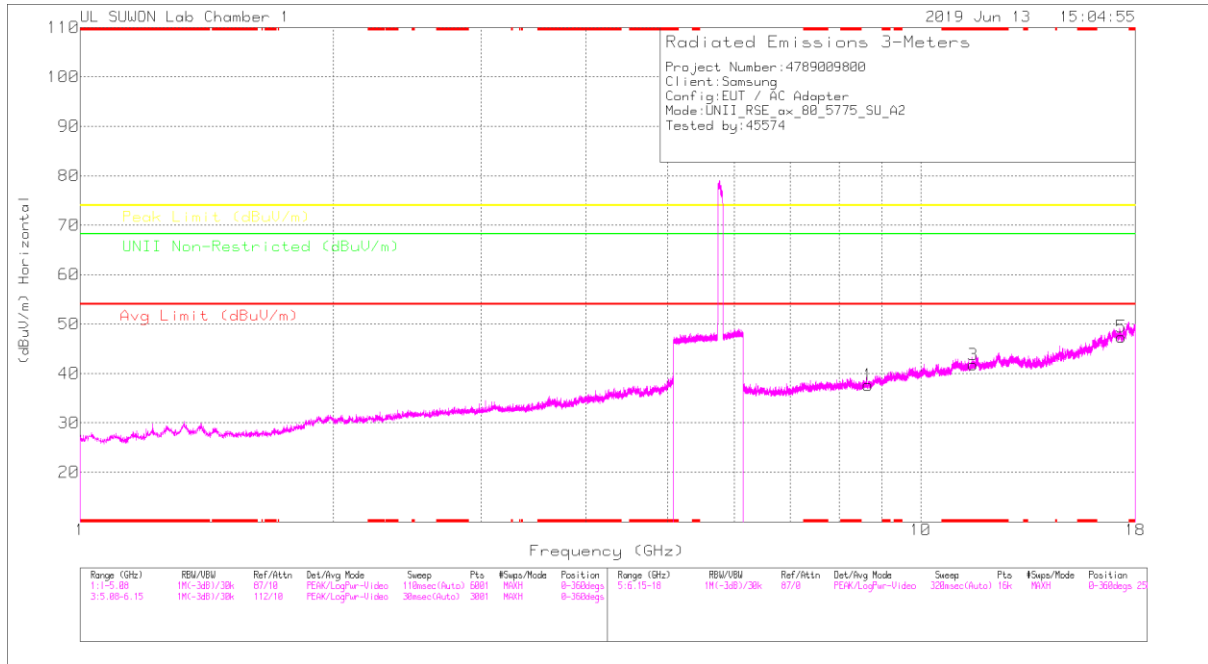

MID CHANNEL VERTICAL

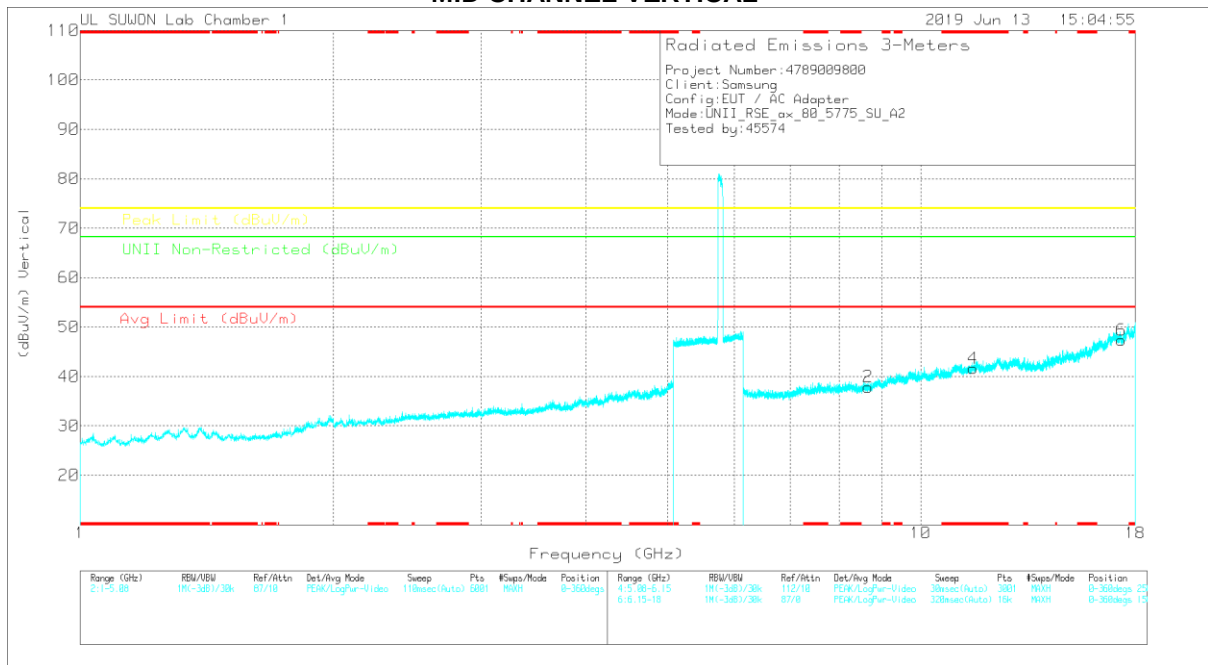

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.66279	26.55	PK	36.4	-25.3	0	37.65	-	-	-	-	68.2	-30.55	0-360	250	H
3	* 11.5503	25.65	PK	38.6	-22.5	0	41.75	-	-	74	-32.25	-	-	0-360	150	H
5	17.32534	23.28	PK	41.2	-17.1	0	47.38	-	-	-	-	68.2	-20.82	0-360	150	H
2	8.66279	26.77	PK	36.4	-25.3	0	37.87	-	-	-	-	68.2	-30.33	0-360	250	V
4	* 11.5503	25.52	PK	38.6	-22.5	0	41.62	-	-	74	-32.38	-	-	0-360	150	V
6	17.3246	23.13	PK	41.3	-17.1	0	47.33	-	-	-	-	68.2	-20.87	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_1 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

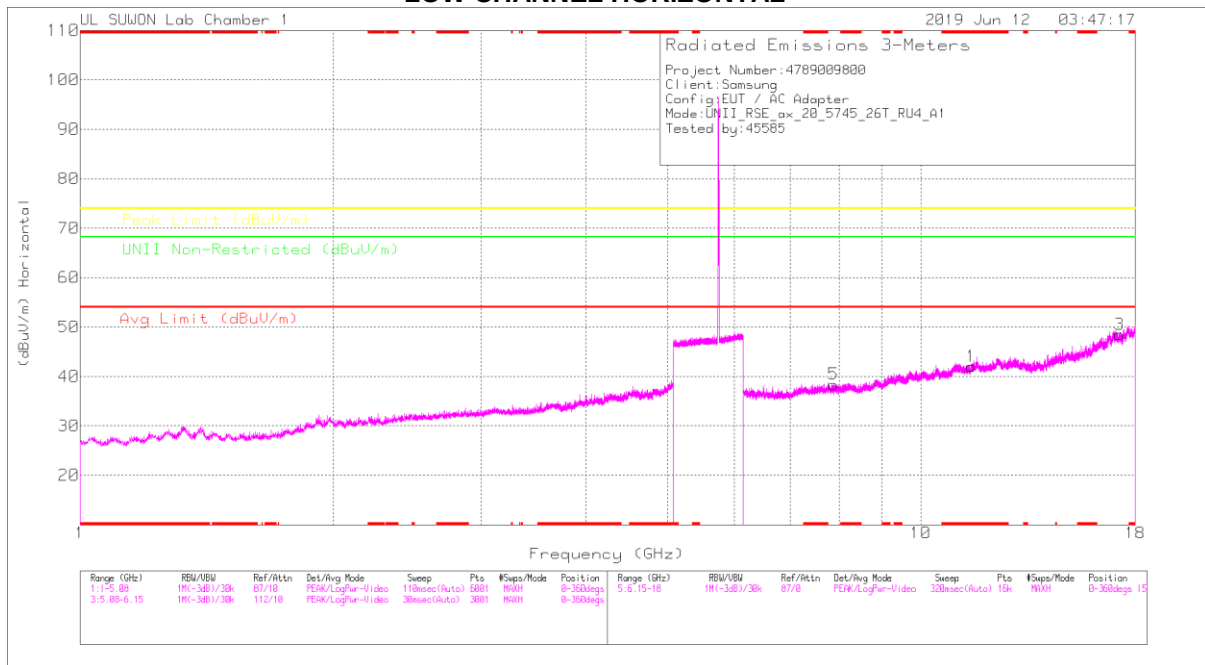

LOW CHANNEL VERTICAL

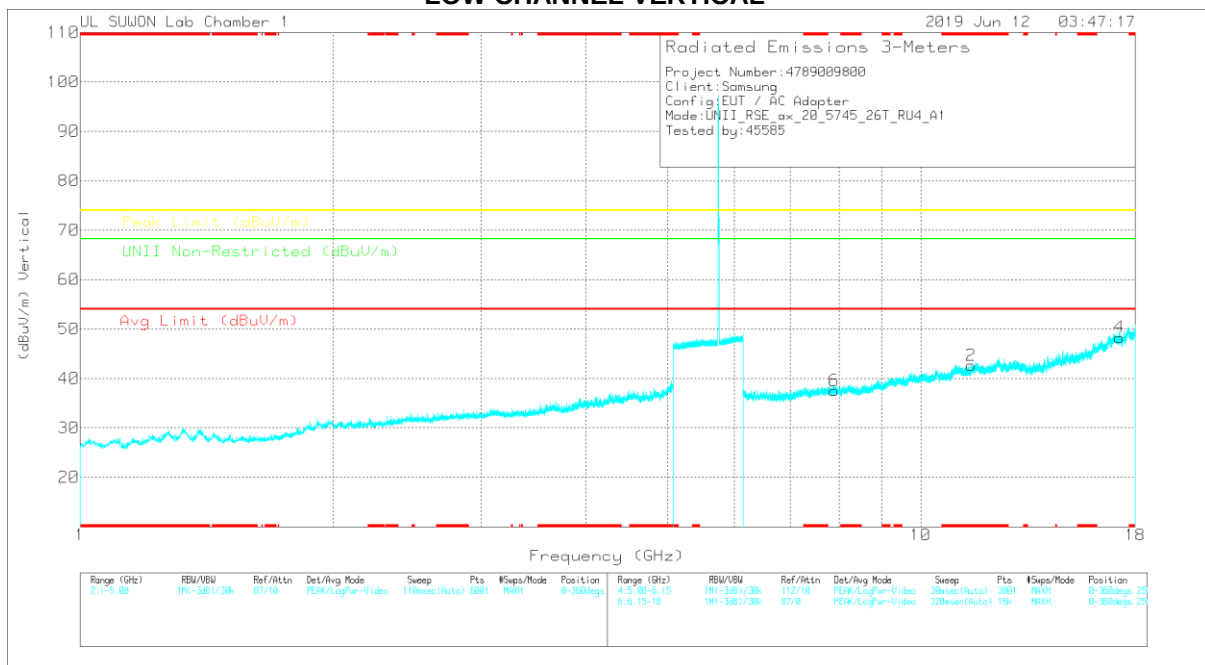

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBµV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	Margin (dB)	ULN Non-Restricted (dBµV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.48958	25.79	PK	38.5	-22.3	0	41.99	-	-	74	-32.01	-	-	0-360	250	H
3	17.23277	23.99	PK	41.3	-16.8	0	48.49	-	-	-	-	68.2	-19.71	0-360	250	H
5	7.88147	28.99	PK	36	-26.6	0	38.39	-	-	-	-	68.2	-29.81	0-360	150	H
2	* 11.49106	26.42	PK	38.5	-22.3	0	42.62	-	-	74	-31.38	-	-	0-360	150	V
4	17.23054	23.81	PK	41.3	-16.8	0	48.31	-	-	-	-	68.2	-19.89	0-360	250	V
6	7.88666	28.07	PK	36	-26.5	0	37.57	-	-	-	-	68.2	-30.63	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

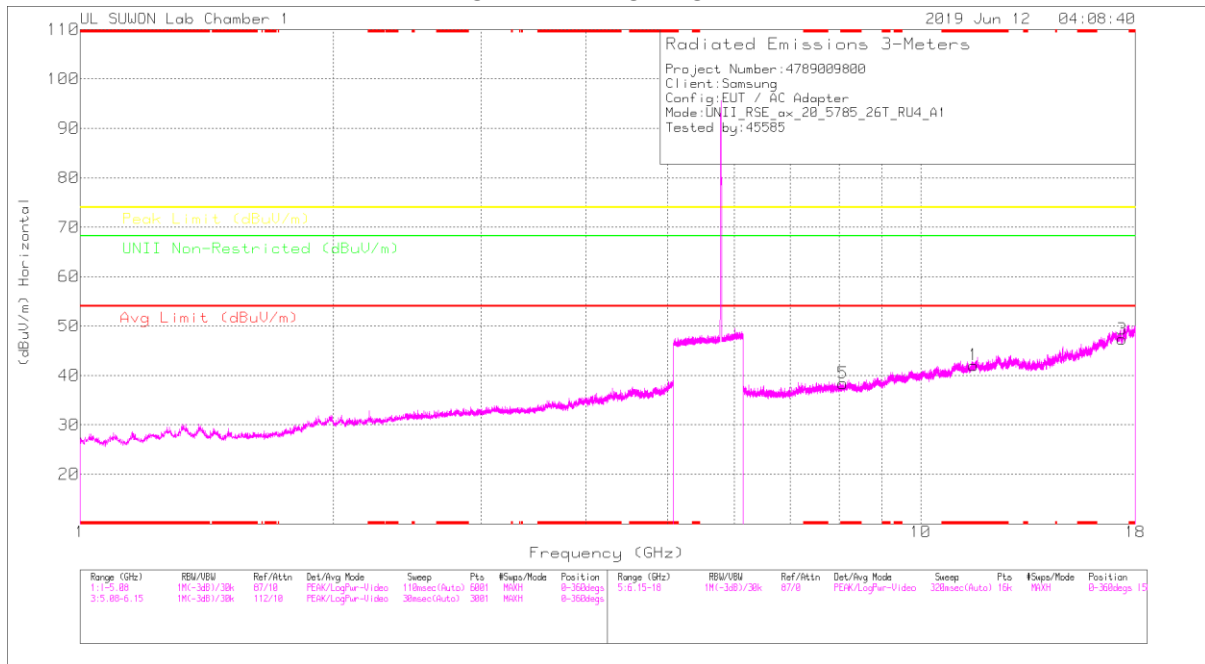

MID CHANNEL VERTICAL

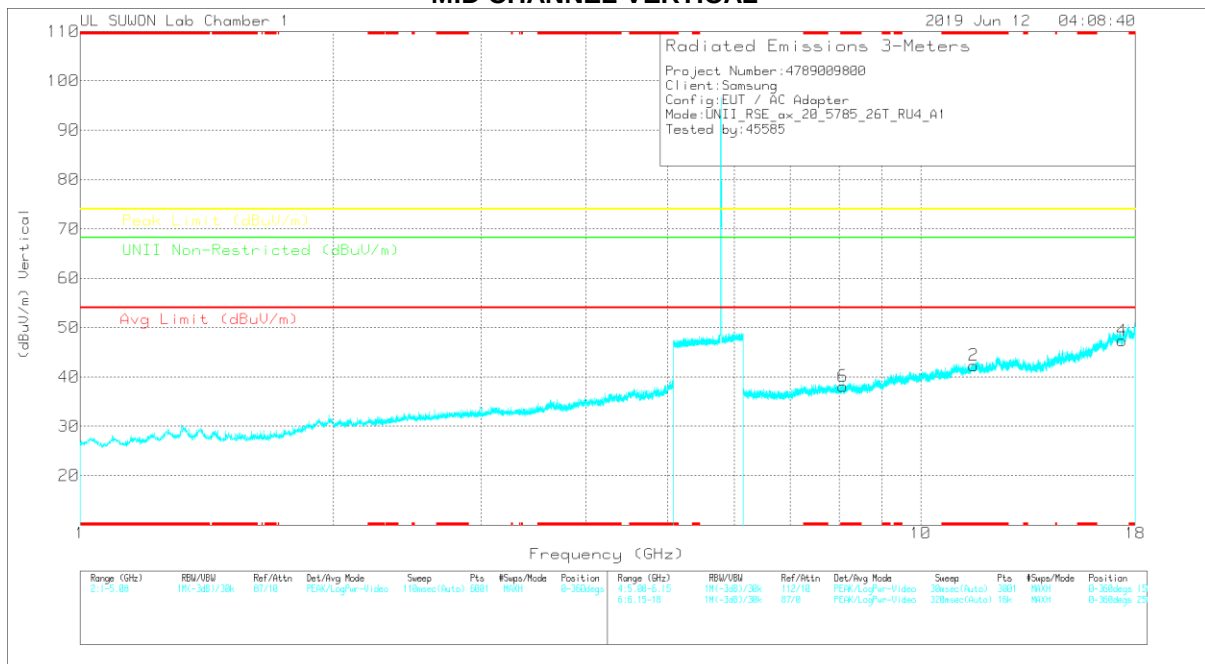

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.56808	25.98	PK	38.6	-22.5	0	42.08	-	-	74	-31.92	-	-	0-360	150	H
3	17.35496	23.74	PK	41.2	-17.6	0	47.34	-	-	-	-	68.2	-20.86	0-360	150	H
5	* 8.08439	28.31	PK	36.2	-26.1	0	38.41	-	-	74	-35.59	-	-	0-360	250	H
2	* 11.56808	26.23	PK	38.6	-22.5	0	42.33	-	-	74	-31.67	-	-	0-360	150	V
4	17.3557	23.76	PK	41.2	-17.6	0	47.36	-	-	-	-	68.2	-20.84	0-360	250	V
6	* 8.08143	27.99	PK	36.2	-26.1	0	38.09	-	-	74	-35.91	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

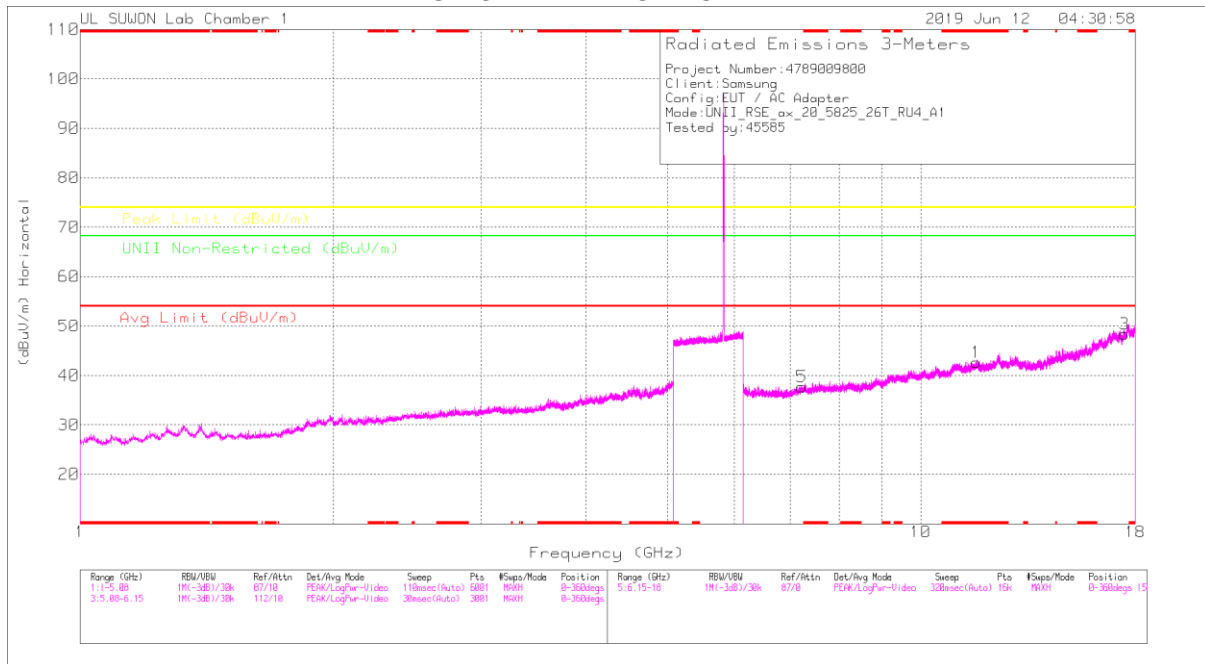

HIGH CHANNEL VERTICAL

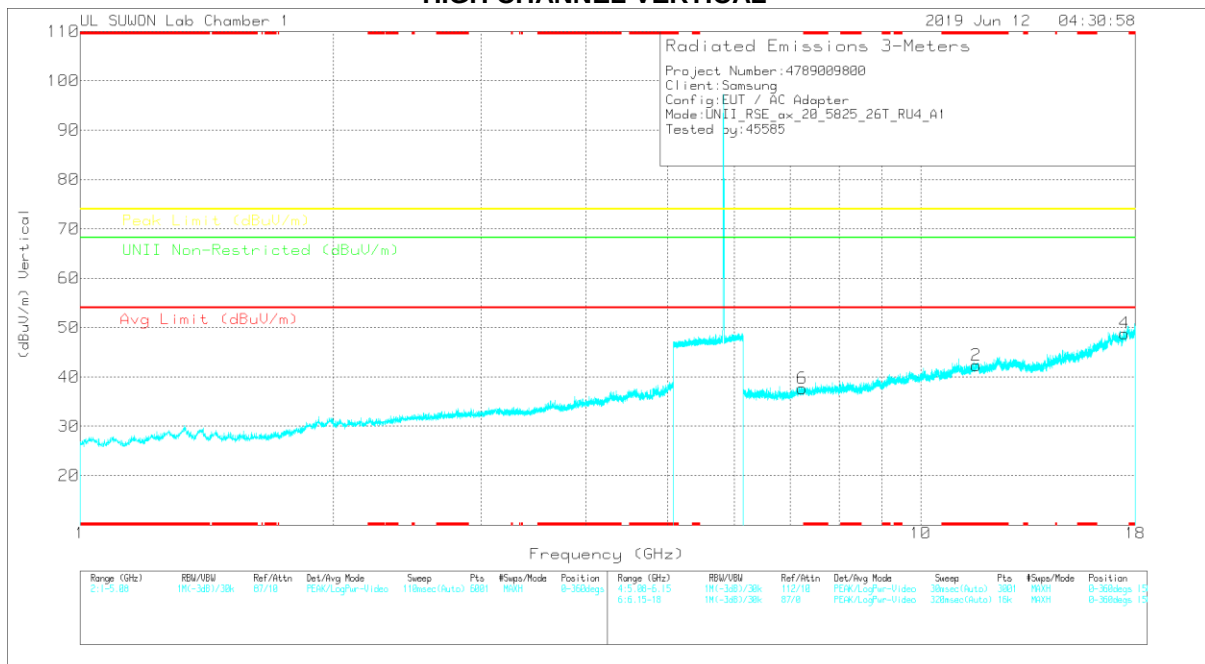

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.65102	25.52	PK	38.7	-21.6	0	42.62	-	-	74	-31.38	-	-	0-360	250	H
3	17.47345	23.69	PK	41.2	-16.5	0	48.39	-	-	-	-	68.2	-19.81	0-360	150	H
5	7.22162	29.16	PK	35.8	-27.3	0	37.66	-	-	-	-	68.2	-30.54	0-360	150	H
2	*11.64954	25.35	PK	38.7	-21.7	0	42.35	-	-	74	-31.65	-	-	0-360	150	V
4	17.47049	24.12	PK	41.2	-16.5	0	48.82	-	-	-	-	68.2	-19.38	0-360	150	V
6	7.22532	29.15	PK	35.8	-27.3	0	37.65	-	-	-	-	68.2	-30.55	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE20 RU mode (ANT_2 / 26T / Low: 4, Mid: 4, High: 4)

LOW CHANNEL HORIZONTAL

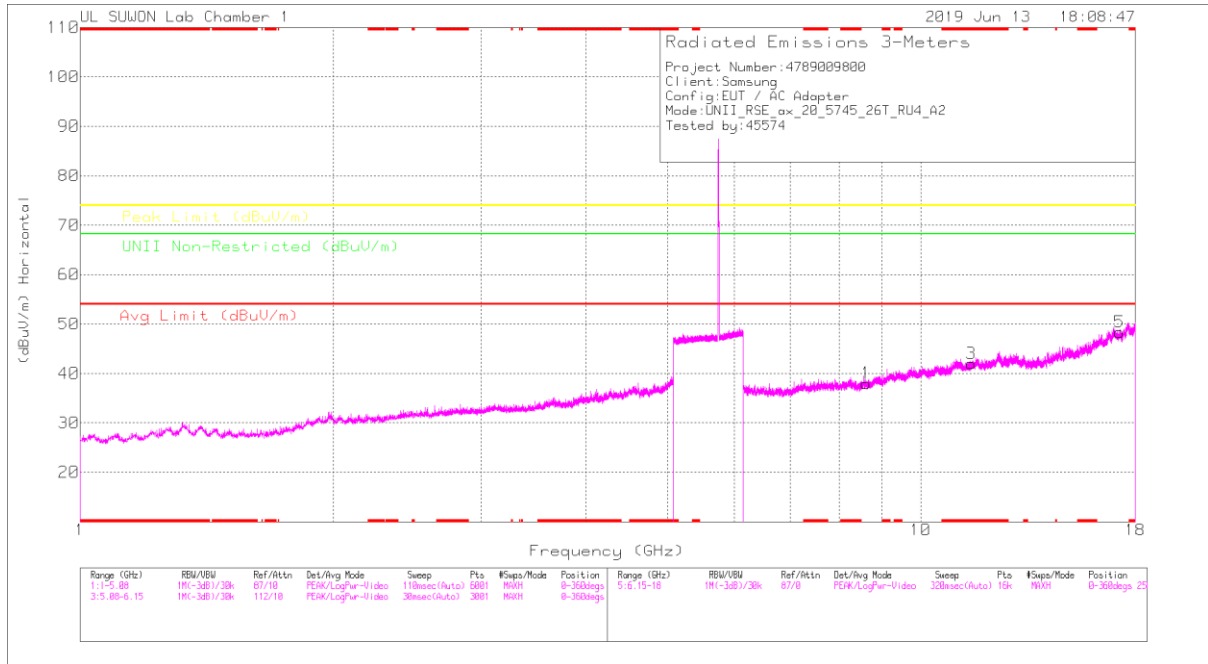

LOW CHANNEL VERTICAL

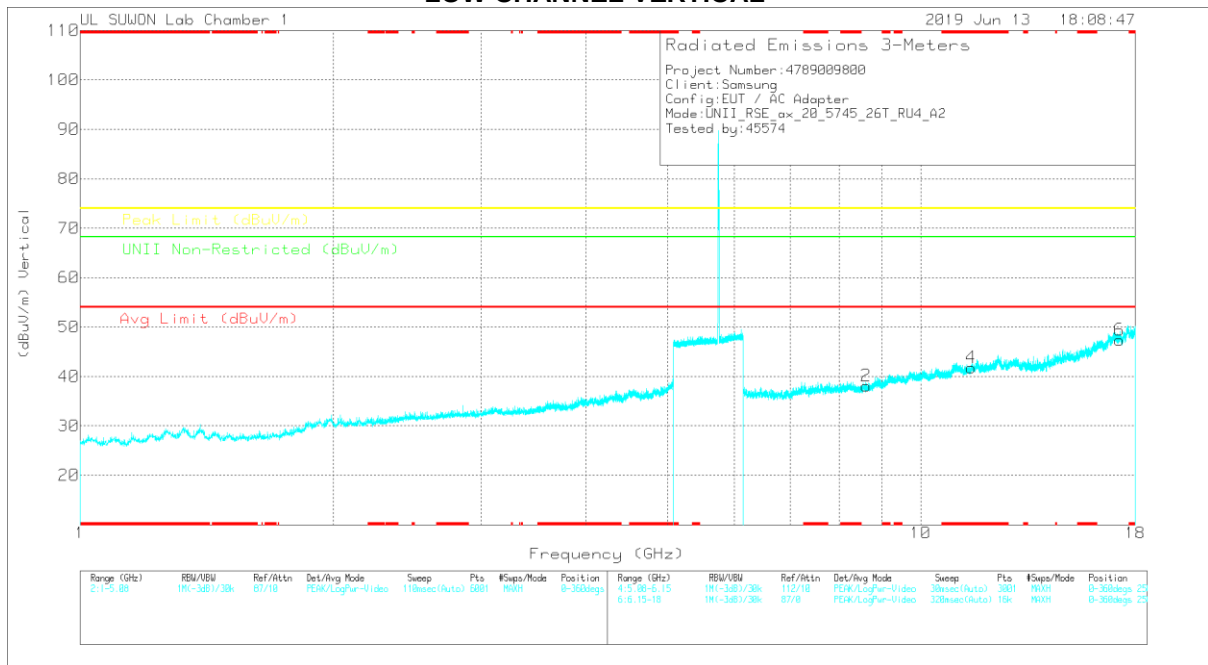

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.61761	26.19	PK	36.3	-24.5	0	37.99	-	-	-	-	68.2	-30.21	0-360	250	H
3	* 11.49032	25.79	PK	38.5	-22.3	0	41.99	-	-	74	-32.01	-	-	0-360	150	H
5	17.23573	23.74	PK	41.3	-16.7	0	48.34	-	-	-	-	68.2	-19.86	0-360	250	H
2	8.61761	26.31	PK	36.3	-24.5	0	38.11	-	-	-	-	68.2	-30.09	0-360	150	V
4	* 11.49032	25.6	PK	38.5	-22.3	0	41.8	-	-	74	-32.2	-	-	0-360	250	V
6	17.23573	22.79	PK	41.3	-16.7	0	47.39	-	-	-	-	68.2	-20.81	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

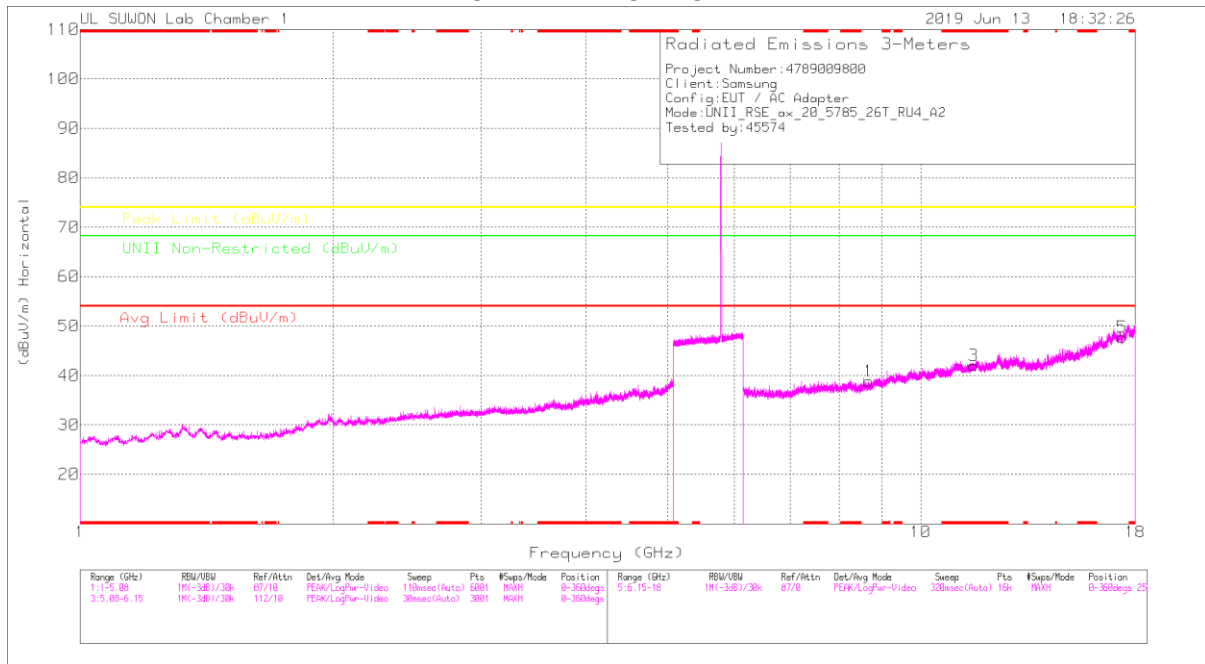

MID CHANNEL VERTICAL

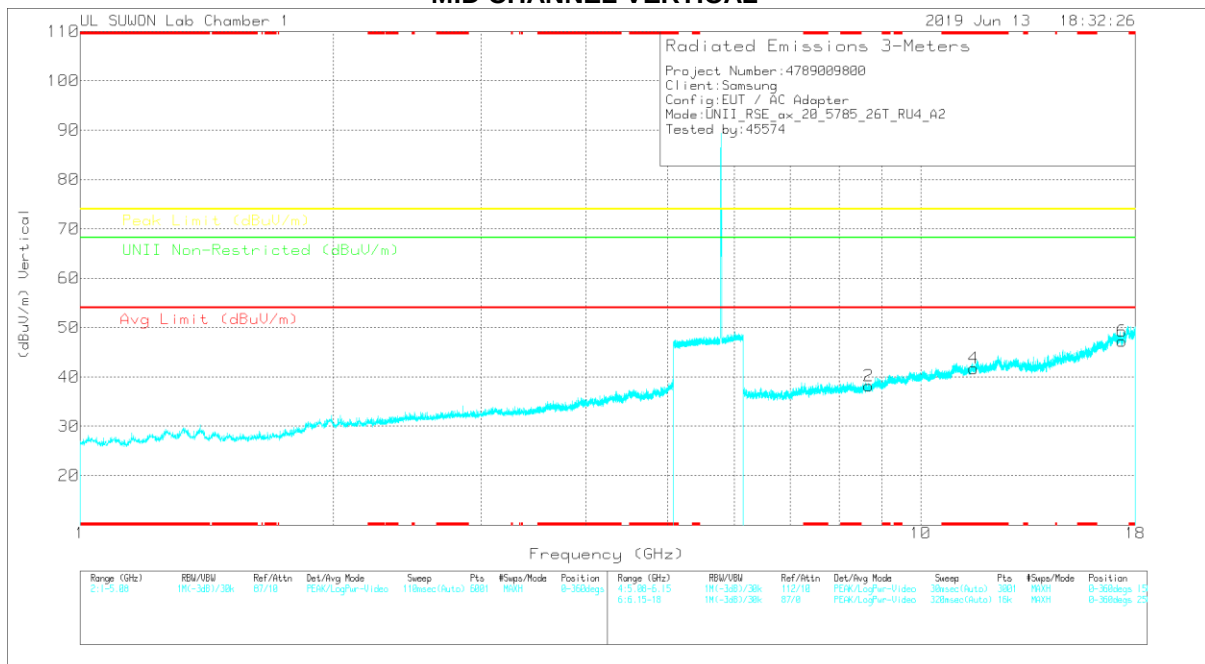

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.67686	27.84	PK	36.4	-25.4	0	38.84	-	-	-	-	68.2	-29.36	0-360	250	H
3	* 11.57104	25.89	PK	38.6	-22.5	0	41.99	-	-	74	-32.01	-	-	0-360	150	H
5	17.35496	24.14	PK	41.2	-17.6	0	47.74	-	-	-	-	68.2	-20.46	0-360	250	H
2	8.6776	27.17	PK	36.4	-25.4	0	38.17	-	-	-	-	68.2	-30.03	0-360	250	V
4	* 11.57104	25.62	PK	38.6	-22.5	0	41.72	-	-	74	-32.28	-	-	0-360	250	V
6	17.35496	23.62	PK	41.2	-17.6	0	47.22	-	-	-	-	68.2	-20.98	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

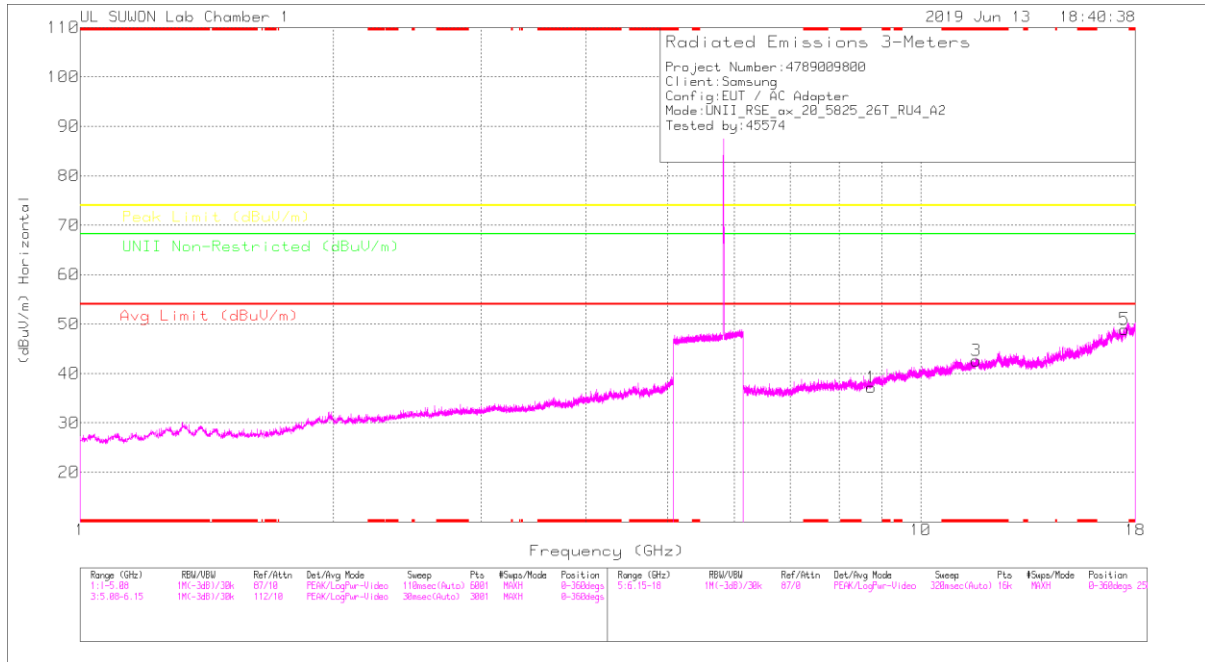

HIGH CHANNEL VERTICAL

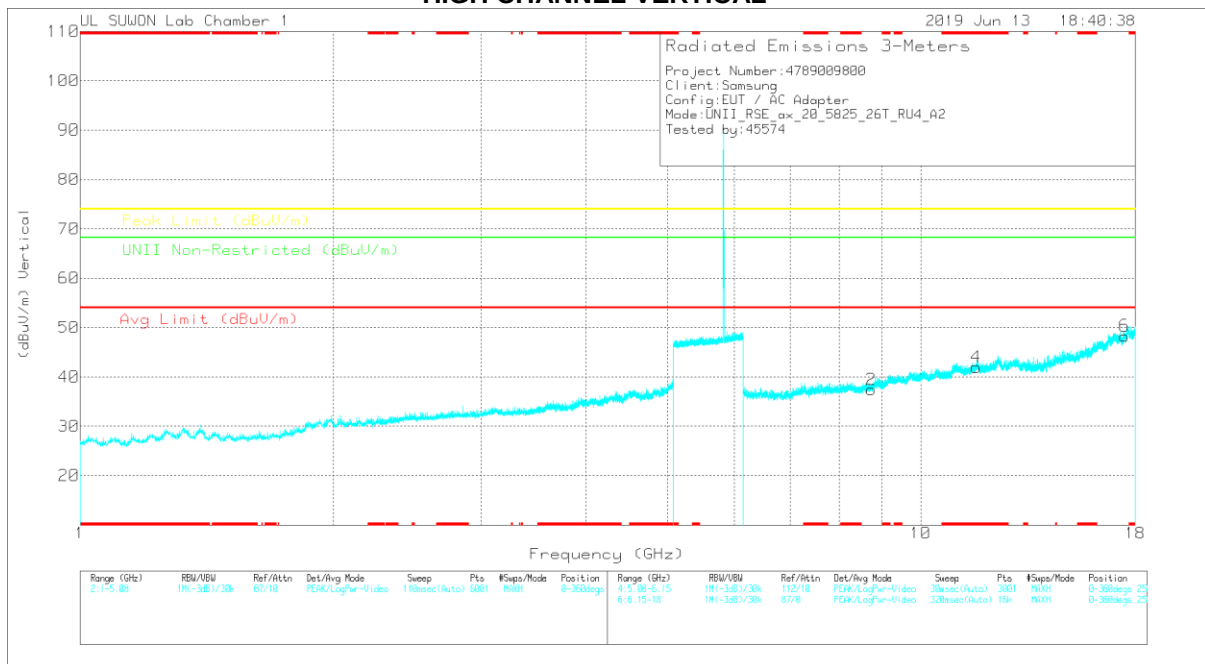

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.73758	26.26	PK	36.4	-25.5	0	37.16	-	-	-	-	68.2	-31.04	0-360	250	H
3	* 11.65028	25.61	PK	38.7	-21.7	0	42.61	-	-	74	-31.39	-	-	0-360	250	H
5	17.47716	24.22	PK	41.2	-16.5	0	48.92	-	-	-	-	68.2	-19.28	0-360	250	H
2	8.73758	26.5	PK	36.4	-25.5	0	37.4	-	-	-	-	68.2	-30.8	0-360	150	V
4	* 11.65028	24.97	PK	38.7	-21.7	0	41.97	-	-	74	-32.03	-	-	0-360	150	V
6	17.47642	23.59	PK	41.2	-16.5	0	48.29	-	-	-	-	68.2	-19.91	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HE40 RU mode (ANT_1 / 26T / Low: 9, High: 9)

LOW CHANNEL HORIZONTAL

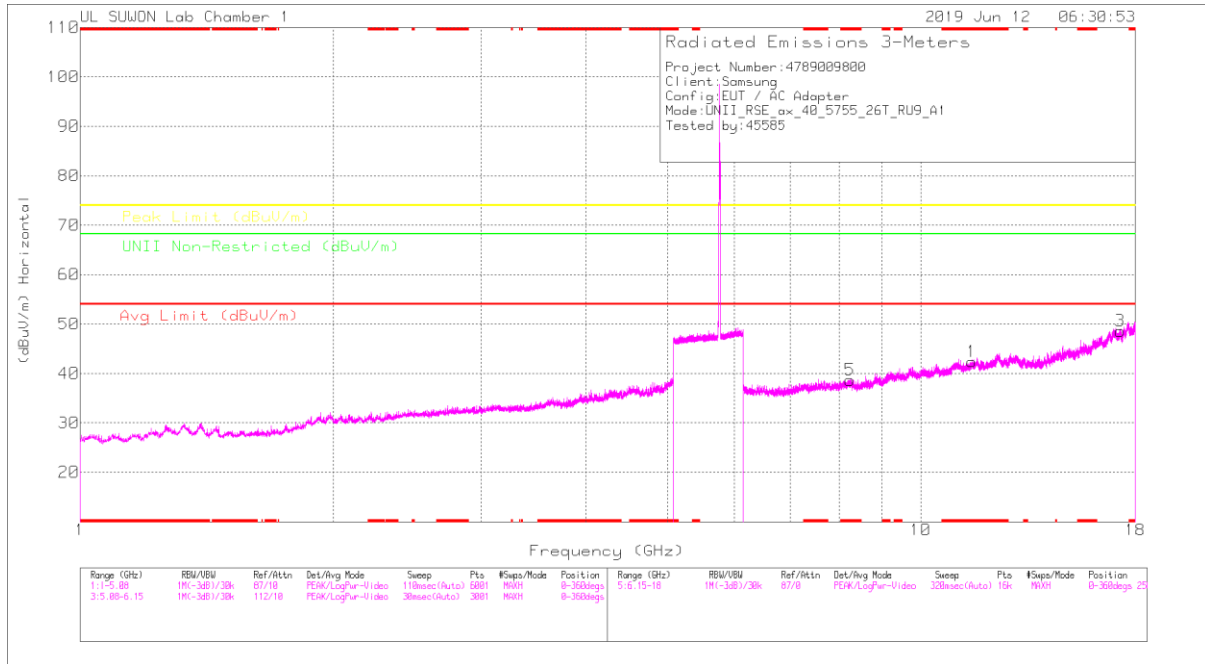

LOW CHANNEL VERTICAL

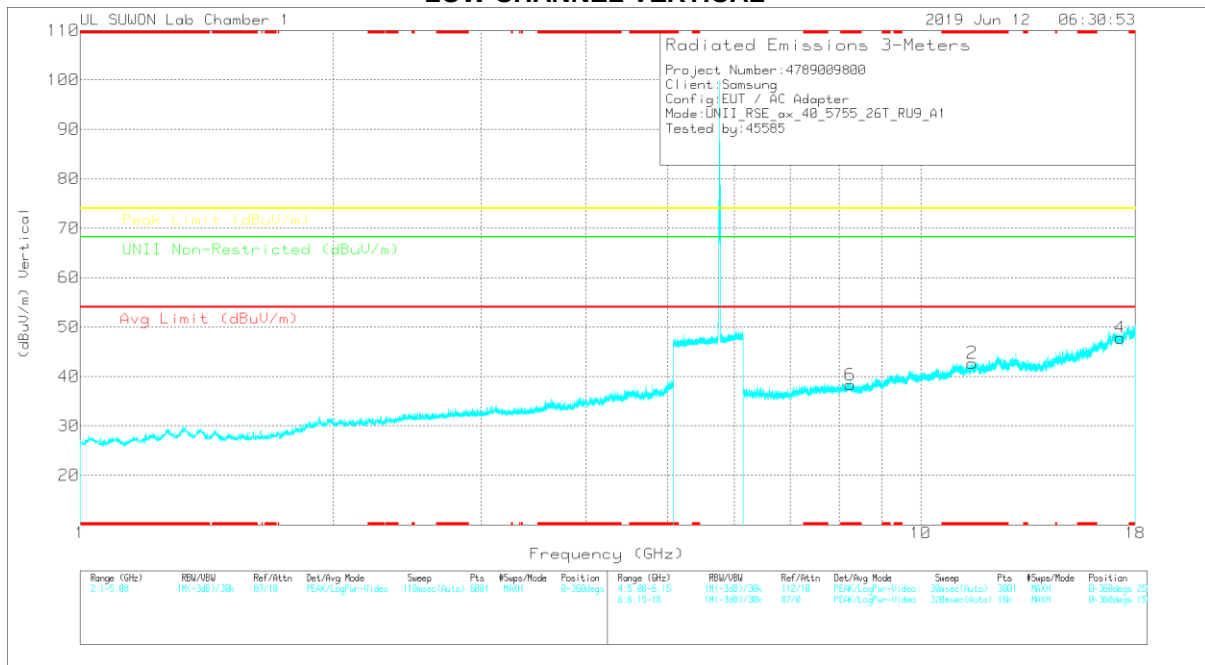

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00108717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.51105	26.19	PK	38.5	-22.3	0	42.39	-	-	74	-31.61	-	-	0-360	150	H
3	17.26017	23.79	PK	41.3	-16.5	0	48.59	-	-	-	-	68.2	-19.61	0-360	150	H
5	* 8.24288	27.66	PK	36.4	-25.4	0	38.66	-	-	74	-35.34	-	-	0-360	250	H
2	* 11.51179	26.47	PK	38.5	-22.3	0	42.67	-	-	74	-31.33	-	-	0-360	250	V
4	17.26313	23.02	PK	41.3	-16.5	0	47.82	-	-	-	-	68.2	-20.38	0-360	150	V
6	* 8.24436	27.32	PK	36.4	-25.4	0	38.32	-	-	74	-35.68	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

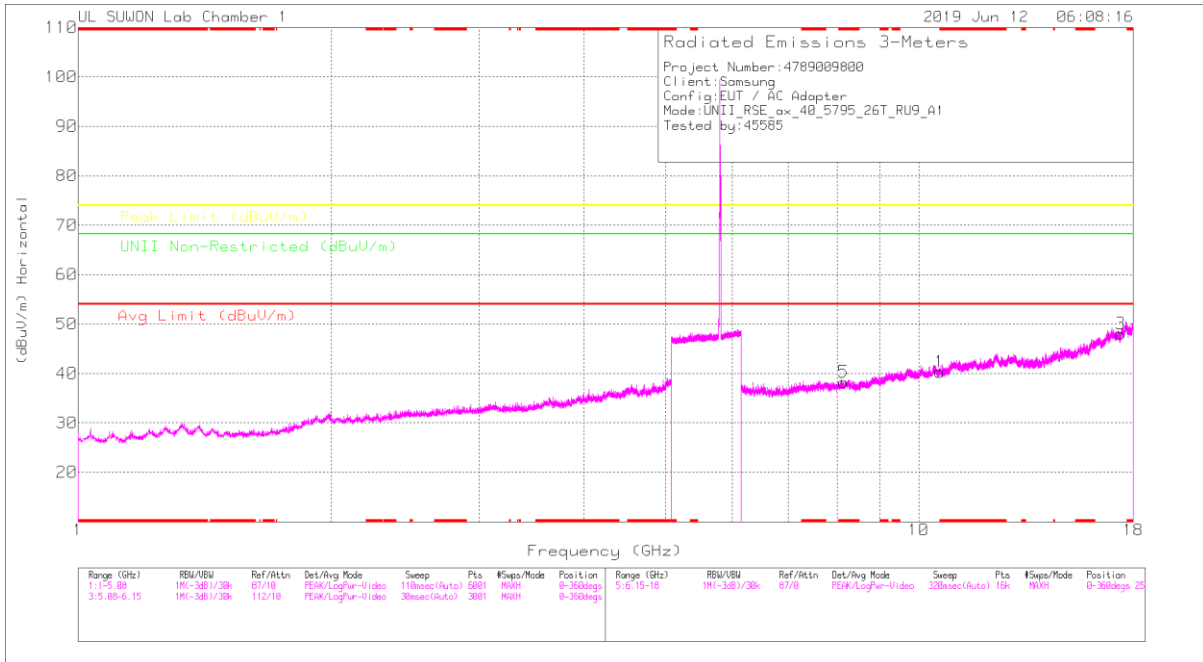

HIGH CHANNEL VERTICAL

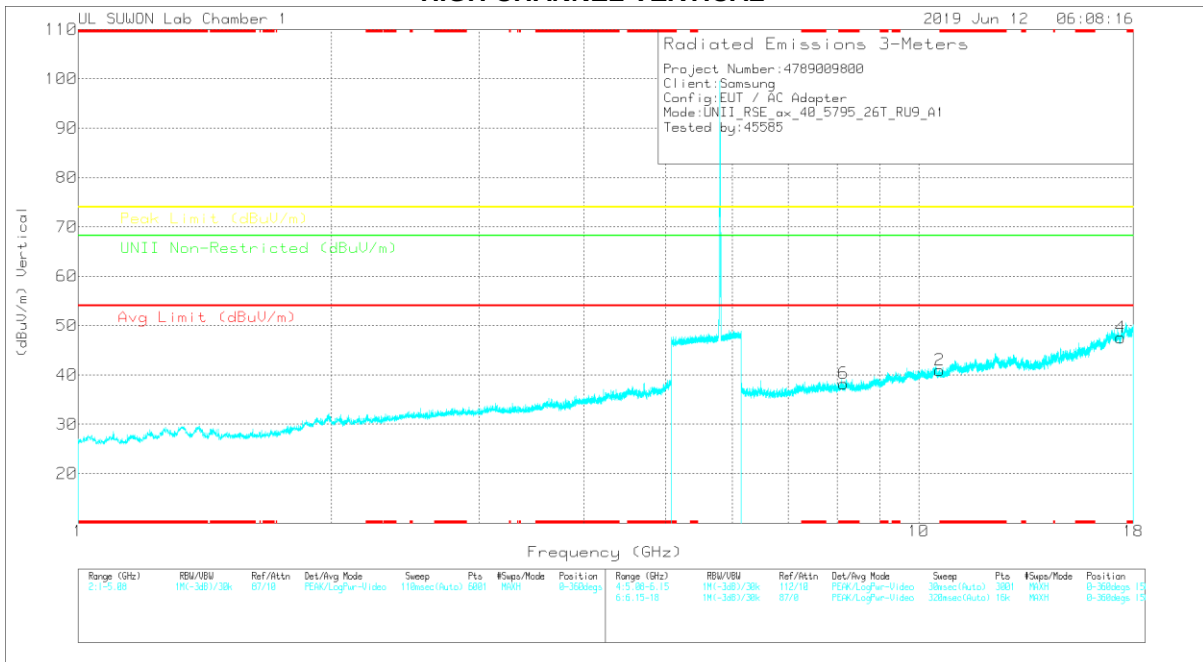

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unl Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.59051	24.92	PK	37.8	-22.4	0	40.32	-	-	-	-	68.2	-27.88	0-360	250	H
3	17.38532	24.03	PK	41.2	-17.2	0	48.03	-	-	-	-	68.2	-20.17	0-360	250	H
5	* 8.13697	28.35	PK	36.3	-26.4	0	38.25	-	-	74	-35.75	-	-	0-360	150	H
2	10.58829	25.65	PK	37.8	-22.5	0	40.95	-	-	-	-	68.2	-27.25	0-360	150	V
4	17.38532	23.57	PK	41.2	-17.2	0	47.57	-	-	-	-	68.2	-20.63	0-360	250	V
6	* 8.14438	28.36	PK	36.3	-26.4	0	38.26	-	-	74	-35.74	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).