


Test Plots


CH.5 5975 MHz

Client Conducted Power (EIRP Authorization Power = 36 dBm)

ANT. 1

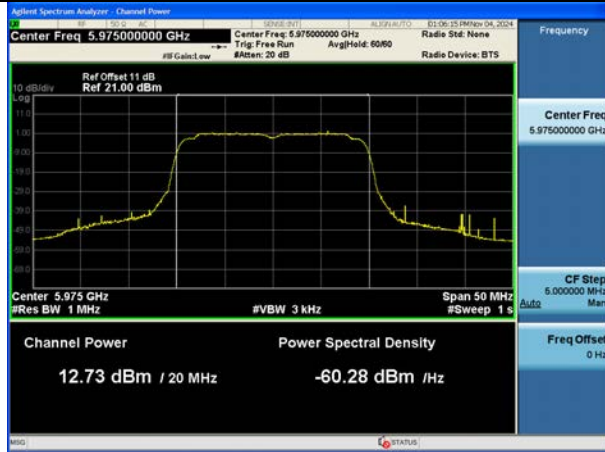


ANT. 2

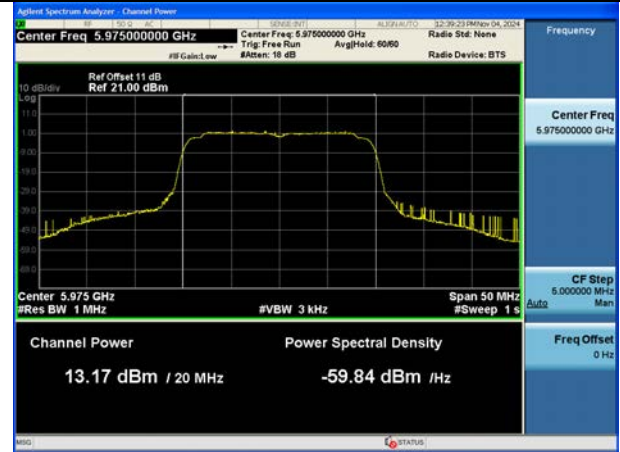

Client Conducted Power (EIRP Authorization Power = 24 dBm)

ANT. 1

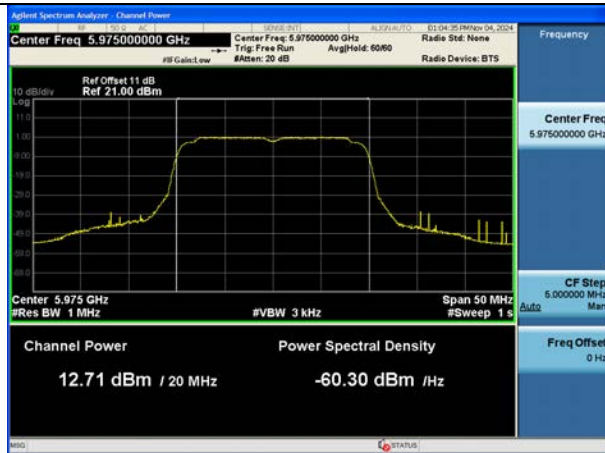

ANT. 2




Client Conducted Power (EIRP Authorization Power = 13 dBm)

ANT. 1




ANT. 2

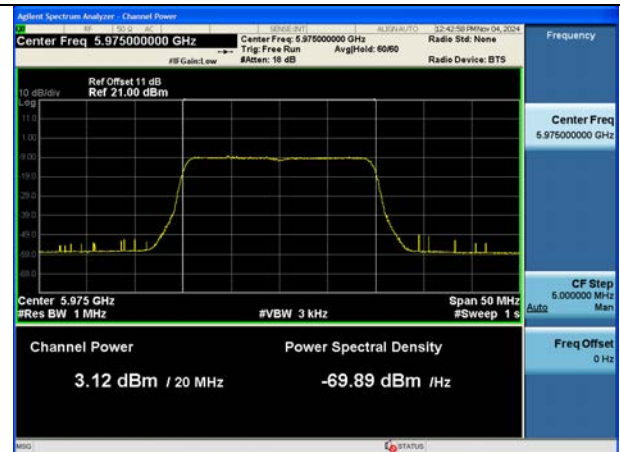

CH.133 6615 MHz

Client Conducted Power (EIRP Authorization Power = 36 dBm)

ANT. 1

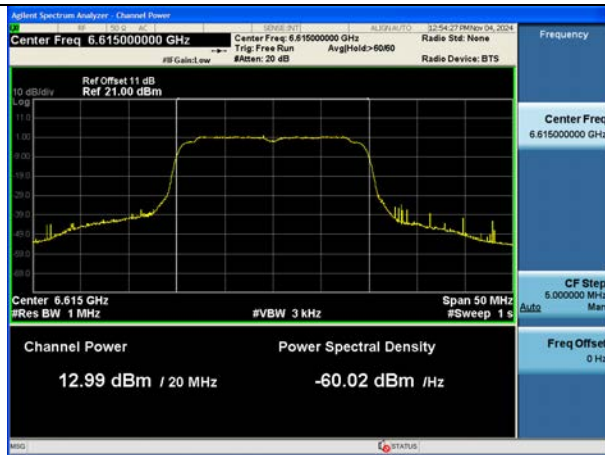

ANT. 2



Client Conducted Power (EIRP Authorization Power = 24 dBm)

ANT. 1



ANT. 2



Client Conducted Power (EIRP Authorization Power = 13 dBm)

ANT. 1



ANT. 2



CMX500 Status

Note:

1. In the beacon signal, the Max Tx Power is represented as double the actual applied power
2. The last point for the authorized EIRP of the AP was determined based on the MIMO target power. As a result, the authorized EIRP of the AP was applied at 3 dB lower than the MIMO target power

EIRP Authorization Power_13 dBm

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
	4917	06:26:02.948	00:00:01.151.221	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	4918	06:26:02.953	00:00:01.156.274	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	4919	06:26:02.953	00:00:01.156.854	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	4920	06:26:02.953	00:00:01.156.899	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	4921	06:26:02.954	00:00:01.157.845	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	4922	06:26:02.954	00:00:01.157.857	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	4923	06:26:02.954	00:00:01.157.871	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	4924	06:26:02.955	00:00:01.158.293	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
	4925	06:26:02.955	00:00:01.158.707	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	4926	06:26:02.955	00:00:01.158.734	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	4927	06:26:02.955	00:00:01.158.748	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	4928	06:26:02.956	00:00:01.159.412	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	4929	06:26:02.956	00:00:01.159.422	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS

Message Tree X

ID=4924 TS=2024-11-04 06:26:02.955 RfN=0 MDOB=wlan_all 8.2

Use RegEx regu

441 TPE:TransmitPowerInfo

442 Max TX Power Count = (0)

443 Interpretation = Regulatory Client EIRP (2)

444 Category = Default (0)

445 MTP = TPE_EIRP (0)

446 EIRP Max Tx Power List

447 Max TX Power For 20 Mhz

448 IsEnabled (1)

449 Max Tx Power = (20)

450 Element

451 Check (1)

452 Element ID = Transmit Power Envelope (195)

453 IE = TransmitPowerEnv LV (195)

EIRP Authorization Power_24 dBm

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
	6404	06:30:09.011	05:29:23.239.685	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	6405	06:30:09.011	05:29:23.239.699	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	6406	06:30:09.012	05:29:23.240.445	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	6407	06:30:09.017	05:29:23.245.513	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	6408	06:30:09.018	05:29:23.246.048	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	6409	06:30:09.018	05:29:23.246.096	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	6410	06:30:09.018	05:29:23.247.041	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	6411	06:30:09.019	05:29:23.247.053	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	6412	06:30:09.019	05:29:23.247.066	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	6413	06:30:09.019	05:29:23.247.483	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
	6414	06:30:09.019	05:29:23.247.489	UPLANE	UPC	CUDA_V2	Flow Status	Ind	
	6415	06:30:09.019	05:29:23.247.539	UPLANE	UPC	CUDA_V2	Flow Status	Rsp	
	6416	06:30:09.019	05:29:23.247.898	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac

Message Tree X

ID=6413 TS=2024-11-04 06:30:09.019 RfN=0 MDOB=wlan_all 8.2

Use RegEx regu

442 TPE:TransmitPowerInfo

443 Max TX Power Count = (0)

444 Interpretation = Regulatory Client EIRP (2)

445 Category = Default (0)

446 MTP = TPE_EIRP (0)

447 EIRP Max Tx Power List

448 Max TX Power For 20 Mhz

449 IsEnabled (1)

449 Max Tx Power = (48)

450 Element

451 Check (1)

452 Element ID = Transmit Power Envelope (195)

453 IE = TransmitPowerEnv LV (195)

454 Transmit Power Envelope LV

EIRP Authorization Power_36 dBm

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
	2813	06:27:42.477	05:26:56.705.837	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	2814	06:27:42.477	05:26:56.706.508	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	2815	06:27:42.481	05:26:56.709.136	UPLANE	UPC	CUDA_V2	Flow Status	Ind	
	2816	06:27:42.481	05:26:56.709.202	UPLANE	UPC	CUDA_V2	Flow Status	Rsp	
	2817	06:27:42.483	05:26:56.711.564	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	2818	06:27:42.483	05:26:56.711.927	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
	2819	06:27:42.489	05:26:56.717.369	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	2820	06:27:42.489	05:26:56.717.776	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
	2821	06:27:42.489	05:26:56.717.980	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	2822	06:27:42.489	05:26:56.718.028	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	2823	06:27:42.490	05:26:56.718.975	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	2824	06:27:42.490	05:26:56.718.986	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	2825	06:27:42.490	05:26:56.719.000	Wlan	Mac Layer	MAC Frame	Control	Req	CTS

Message Tree X

ID=2818 TS=2024-11-04 06:27:42.483 RfN=0 MDOB=wlan_all 8.2

Use RegEx regu

442 TPE:TransmitPowerInfo

443 Max TX Power Count = (0)

444 Interpretation = Regulatory Client EIRP (2)

445 Category = Default (0)

446 MTP = TPE_EIRP (0)

447 EIRP Max Tx Power List

448 Max TX Power For 20 Mhz

449 IsEnabled (1)

449 Max Tx Power = (72)

450 Element

451 Check (1)

452 Element ID = Transmit Power Envelope (195)

453 IE = TransmitPowerEnv LV (195)

454 Transmit Power Envelope LV

Standard AP

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
	2813	06:27:42.477	05:26:56.705.837	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	2814	06:27:42.477	05:26:56.706.508	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	2815	06:27:42.481	05:26:56.709.136	UPLANE	UPC	CUDA_V2	Flow Status	Ind	
	2816	06:27:42.481	05:26:56.709.202	UPLANE	UPC	CUDA_V2	Flow Status	Rsp	
	2817	06:27:42.483	05:26:56.711.564	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	2818	06:27:42.483	05:26:56.711.927	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
	2819	06:27:42.489	05:26:56.717.369	Wlan	Mac Layer	MAC Frame	Control	Ind	Block Ac
	2820	06:27:42.489	05:26:56.717.776	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
	2821	06:27:42.489	05:26:56.717.980	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	2822	06:27:42.489	05:26:56.718.028	Wlan	Mac Layer	MAC Frame	Control	Req	CTS
	2823	06:27:42.490	05:26:56.718.975	Wlan	Mac Layer	MAC Frame	Control	Req	Block Ac
	2824	06:27:42.490	05:26:56.718.986	Wlan	Mac Layer	MAC Frame	Control	Ind	RTS
	2825	06:27:42.490	05:26:56.719.000	Wlan	Mac Layer	MAC Frame	Control	Req	CTS

Message Tree X

ID=2818 TS=2024-11-04 06:27:42.483 RfN=0 MDOB=wlan_all 8.2

Use RegEx regu

685 Omitted

686 OptHeGhzOperationInfo = HeGhzOperationInfo (1)

687 HE 6 GHz Operation Info

688 Primary Channel Index = (5)

689 Control

690 ChannelWidth = 20 Mhz (0)

691 Duplicate Beacon = (1)

692 RegulatoryInfo = Standard power AP (1)

693 Reserved = (0)

694 Channel Center Freq Segment 0 = (5)

695 Channel Center Freq Segment 1 = (0)

696 Minimum Rate (Mb/s) = (0)

697 Element


10.9 Transmit Power Control, Very Low Power Devices

Note :


1. The EUT is a Very Low Power Devices.
2. The test was conducted on Ch 5(5975), where the maximum output power of VLP mode was applied to measure the PSD
3. The EUT was connected to the spectrum analyzer via a conducted connection. Simultaneously, the EUT was able to recognize the CMX500 and establish a conducted connection.

Frequency	RSSI Sensitivity Variation	ANT1 PSD [dBm/MHz]	ANT2 PSD [dBm/MHz]	ANT1 Antenna gain [dBi]	ANT2 Antenna gain [dBi]	MIMO Summed PSD [dBm/MHz]	Directional Antenna Gain [dBi]	MIMO EIRP [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
5975	Low	-9.489	-9.762	-2.45	-6.49	-6.61	-1.23	-7.84	-5	2.84
	High	-15.159	-14.052	-2.45	-6.49	-11.56	-1.23	-12.79	-11	1.79

RSSI Sensitivity Variation (Low)

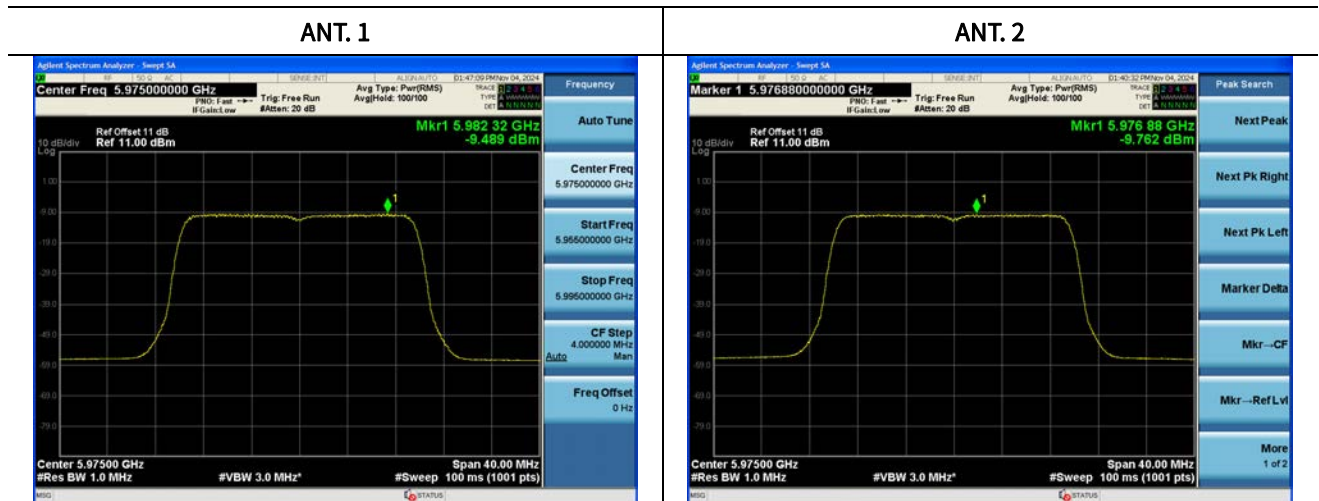

RSSI Sensitivity Variation (High)

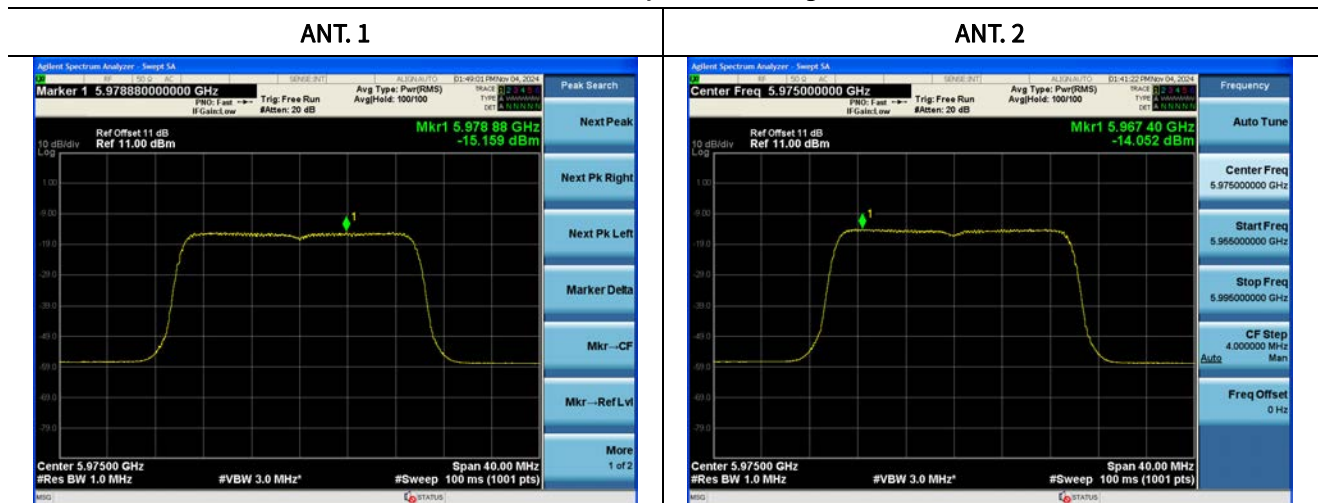

CMX500 Status

Note:

1. In the beacon signal, the Max Tx Power is represented as double the actual applied power
2. To achieve maximum output in VLP mode, the Max Tx Power was set to 30 dBm

CMX500 - EIRP Authorization Power_30 dBm (VLP)

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
✓	382	06:33:11.145	00:00:00.266.657	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	383	06:33:11.165	00:00:00.287.143	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	384	06:33:11.185	00:00:00.307.199	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
✓	385	06:33:11.206	00:00:00.328.085	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	386	06:33:11.227	00:00:00.348.570	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	387	06:33:11.247	00:00:00.369.057	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	388	06:33:11.268	00:00:00.389.543	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	389	06:33:11.288	00:00:00.409.599	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
✓	390	06:33:11.309	00:00:00.430.486	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	391	06:33:11.329	00:00:00.450.972	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	392	06:33:11.349	00:00:00.471.457	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	393	06:33:11.370	00:00:00.491.944	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	394	06:33:11.390	00:00:00.511.999	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon

Dir...	Id	Time Stamp	Time Span	Protocol	Layer	SAP	Service	Primitive	PDU
✓	382	06:33:11.145	00:00:00.266.657	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	383	06:33:11.165	00:00:00.287.143	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	384	06:33:11.185	00:00:00.307.199	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
✓	385	06:33:11.206	00:00:00.328.085	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	386	06:33:11.227	00:00:00.348.570	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	387	06:33:11.247	00:00:00.369.057	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	388	06:33:11.268	00:00:00.389.543	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	389	06:33:11.288	00:00:00.409.599	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon
✓	390	06:33:11.309	00:00:00.430.486	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	391	06:33:11.329	00:00:00.450.972	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	392	06:33:11.349	00:00:00.471.457	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	393	06:33:11.370	00:00:00.491.944	Wlan	Mac Layer	MAC Frame	Management	Req	Probe Re
✓	394	06:33:11.390	00:00:00.511.999	Wlan	Mac Layer	MAC Frame	Management	Req	Beacon

Message Tree X

ID=384 TS=2024-11-04 06:33:11.185 RFN=0 MDOB=wlan_all 8.2

Use RegEx regu 3/3

689

690

691

692

693

694

695

696

697

Omitted

Opti6GHzOperationInfo = He6GHzOperationInfo (1)

HE 6 GHz Operation Info

Primary Channel Index = (3)

Control

ChannelWidth = 20 MHz (0)

Duplicate Beacon = (1)

RegulatoryInfo = Very low power AP (2)

Reserved = (0)

Channel Center Freq Segment 0 = (5)

Channel Center Freq Segment 1 = (0)

Minimum Rate (Mbps) = (0)

Message Tree X

ID=384 TS=2024-11-04 06:33:11.185 RFN=0 MDOB=wlan_all 8.2

Use RegEx regu 3/3

442

443

444

445

446

447

448

449

450

451

452

453

454

Max TX Power Count = (0)

Interpretation = Regulatory Client EIRP (2)

Category = Default (0)

MTP = TPE_EIRP (0)

EIRP Max Tx Power List

Max TX Power For 20 MHz

Id=enabled (1)

Max Tx Power = (60)

10.10 FREQUENCY STABILITY.

10.10.1 160 MHz BW

Note

1. All modes of operation were investigated and the worst case configuration results are reported.
2. Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Startup after the EUT is energized

OPERATING BAND:	UNII Band 5
OPERATING FREQUENCY:	6,025,000,000 Hz
CHANNEL:	15
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6025057.41	57.41
100%		-30	6025049.91	49.91
100%		-20	6025054.93	54.93
100%		-10	6025062.20	62.20
100%		0	6025053.42	53.42
100%		+10	6025049.04	49.04
100%		+30	6025045.15	45.15
100%		+40	6025055.54	55.54
100%		+50	6025064.68	64.68
High	4.450	+20	6025043.79	43.79
Low	3.70	+20	6025050.35	50.35

OPERATING BAND:	UNII Band 6
OPERATING FREQUENCY:	6,505,000,000 Hz
CHANNEL:	111
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6505052.80	52.80
100%		-30	6505047.64	47.64
100%		-20	6505046.34	46.34
100%		-10	6505056.96	56.96
100%		0	6505057.54	57.54
100%		+10	6505040.76	40.76
100%		+30	6505044.09	44.09
100%		+40	6505069.87	69.87
100%		+50	6505060.75	60.75
High	4.450	+20	6505051.89	51.89
Low	3.70	+20	6505044.97	44.97

OPERATING BAND:	UNII Band 7
OPERATING FREQUENCY:	6,665,000,000 Hz
CHANNEL:	143
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6665053.61	53.61
100%		-30	6665043.24	43.24
100%		-20	6665053.59	53.59
100%		-10	6665044.28	44.28
100%		0	6665050.35	50.35
100%		+10	6665048.33	48.33
100%		+30	6665056.69	56.69
100%		+40	6665067.83	67.83
100%		+50	6665042.13	42.13
High	4.450	+20	6665051.26	51.26
Low	3.70	+20	6665044.93	44.93

OPERATING BAND:	UNII Band 8
OPERATING FREQUENCY:	6,825,000,000 Hz
CHANNEL:	175
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6825054.37	54.37
100%		-30	6825048.84	48.84
100%		-20	6825069.92	69.92
100%		-10	6825045.19	45.19
100%		0	6825057.05	57.05
100%		+10	6825067.82	67.82
100%		+30	6825058.95	58.95
100%		+40	6825054.40	54.40
100%		+50	6825055.21	55.21
High	4.450	+20	6825057.71	57.71
Low	3.70	+20	6825068.12	68.12

2 minutes after the EUT is energized

OPERATING BAND:	UNII Band 5
OPERATING FREQUENCY:	6,025,000,000 Hz
CHANNEL:	15
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6025063.67	63.67
100%		-30	6025043.84	43.84
100%		-20	6025048.58	48.58
100%		-10	6025064.74	64.74
100%		0	6025064.40	64.40
100%		+10	6025061.98	61.98
100%		+30	6025041.70	41.70
100%		+40	6025040.73	40.73
100%		+50	6025050.41	50.41
High	4.450	+20	6025061.08	61.08
Low	3.70	+20	6025058.12	58.12

OPERATING BAND:	UNII Band 6
OPERATING FREQUENCY:	6,505,000,000 Hz
CHANNEL:	111
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6505069.19	69.19
100%		-30	6505043.14	43.14
100%		-20	6505040.57	40.57
100%		-10	6505058.34	58.34
100%		0	6505059.94	59.94
100%		+10	6505066.75	66.75
100%		+30	6505053.39	53.39
100%		+40	6505063.39	63.39
100%		+50	6505064.95	64.95
High	4.450	+20	6505067.79	67.79
Low	3.70	+20	6505055.85	55.85

OPERATING BAND:	UNII Band 7
OPERATING FREQUENCY:	6,665,000,000 Hz
CHANNEL:	143
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6665046.15	46.15
100%		-30	6665042.43	42.43
100%		-20	6665065.97	65.97
100%		-10	6665053.07	53.07
100%		0	6665053.67	53.67
100%		+10	6665049.50	49.50
100%		+30	6665057.66	57.66
100%		+40	6665052.02	52.02
100%		+50	6665064.81	64.81
High	4.450	+20	6665069.28	69.28
Low	3.70	+20	6665040.05	40.05

OPERATING BAND:	UNII Band 8
OPERATING FREQUENCY:	6,825,000,000 Hz
CHANNEL:	175
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6825059.57	59.57
100%		-30	6825067.34	67.34
100%		-20	6825069.27	69.27
100%		-10	6825051.31	51.31
100%		0	6825065.25	65.25
100%		+10	6825041.40	41.40
100%		+30	6825052.26	52.26
100%		+40	6825057.08	57.08
100%		+50	6825068.43	68.43
High	4.450	+20	6825047.29	47.29
Low	3.70	+20	6825054.88	54.88

5 minutes after the EUT is energized

OPERATING BAND:	UNII Band 5
OPERATING FREQUENCY:	6,025,000,000 Hz
CHANNEL:	15
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6025053.03	53.03
100%		-30	6025050.82	50.82
100%		-20	6025058.15	58.15
100%		-10	6025061.56	61.56
100%		0	6025043.00	43.00
100%		+10	6025057.45	57.45
100%		+30	6025043.48	43.48
100%		+40	6025067.72	67.72
100%		+50	6025048.70	48.70
High	4.450	+20	6025068.39	68.39
Low	3.70	+20	6025055.21	55.21

OPERATING BAND:	UNII Band 6
OPERATING FREQUENCY:	6,505,000,000 Hz
CHANNEL:	111
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6505051.68	51.68
100%		-30	6505047.77	47.77
100%		-20	6505047.97	47.97
100%		-10	6505053.58	53.58
100%		0	6505043.26	43.26
100%		+10	6505047.52	47.52
100%		+30	6505045.41	45.41
100%		+40	6505055.92	55.92
100%		+50	6505053.53	53.53
High	4.450	+20	6505058.51	58.51
Low	3.70	+20	6505062.07	62.07

OPERATING BAND:	UNII Band 7
OPERATING FREQUENCY:	6,665,000,000 Hz
CHANNEL:	143
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6665058.13	58.13
100%		-30	6665057.19	57.19
100%		-20	6665041.70	41.70
100%		-10	6665063.13	63.13
100%		0	6665047.68	47.68
100%		+10	6665062.89	62.89
100%		+30	6665056.17	56.17
100%		+40	6665050.70	50.70
100%		+50	6665052.76	52.76
High	4.450	+20	6665058.90	58.90
Low	3.70	+20	6665041.33	41.33

OPERATING BAND:	UNII Band 8
OPERATING FREQUENCY:	6,825,000,000 Hz
CHANNEL:	175
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6825047.32	47.32
100%		-30	6825059.82	59.82
100%		-20	6825067.07	67.07
100%		-10	6825047.47	47.47
100%		0	6825057.50	57.50
100%		+10	6825047.20	47.20
100%		+30	6825058.66	58.66
100%		+40	6825043.06	43.06
100%		+50	6825068.23	68.23
High	4.450	+20	6825065.56	65.56
Low	3.70	+20	6825059.39	59.39

10 minutes after the EUT is energized

OPERATING BAND:	UNII Band 5
OPERATING FREQUENCY:	6,025,000,000 Hz
CHANNEL:	15
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6025060.22	60.22
100%		-30	6025055.46	55.46
100%		-20	6025040.68	40.68
100%		-10	6025044.91	44.91
100%		0	6025060.99	60.99
100%		+10	6025053.88	53.88
100%		+30	6025058.20	58.20
100%		+40	6025058.99	58.99
100%		+50	6025066.49	66.49
High	4.450	+20	6025062.63	62.63
Low	3.70	+20	6025067.94	67.94

OPERATING BAND:	UNII Band 6
OPERATING FREQUENCY:	6,505,000,000 Hz
CHANNEL:	111
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6505048.87	48.87
100%		-30	6505045.12	45.12
100%		-20	6505059.94	59.94
100%		-10	6505059.54	59.54
100%		0	6505045.26	45.26
100%		+10	6505049.86	49.86
100%		+30	6505040.89	40.89
100%		+40	6505042.96	42.96
100%		+50	6505058.12	58.12
High	4.450	+20	6505040.01	40.01
Low	3.70	+20	6505045.40	45.40

OPERATING BAND:	UNII Band 7
OPERATING FREQUENCY:	6,665,000,000 Hz
CHANNEL:	143
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6665049.99	49.99
100%		-30	6665046.24	46.24
100%		-20	6665051.88	51.88
100%		-10	6665043.75	43.75
100%		0	6665040.30	40.30
100%		+10	6665062.00	62.00
100%		+30	6665055.59	55.59
100%		+40	6665069.58	69.58
100%		+50	6665056.39	56.39
High	4.450	+20	6665067.50	67.50
Low	3.70	+20	6665066.35	66.35

OPERATING BAND:	UNII Band 8
OPERATING FREQUENCY:	6,825,000,000 Hz
CHANNEL:	175
REFERENCE VOLTAGE:	3.88 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(VDC)	(°C)	(kHz)	Error (kHz)
100%	3.88	+20(Ref)	6825063.69	63.69
100%		-30	6825060.49	60.49
100%		-20	6825056.25	56.25
100%		-10	6825066.78	66.78
100%		0	6825046.63	46.63
100%		+10	6825042.13	42.13
100%		+30	6825045.73	45.73
100%		+40	6825065.35	65.35
100%		+50	6825068.52	68.52
High	4.450	+20	6825059.84	59.84
Low	3.70	+20	6825053.31	53.31

10.11 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz)

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L-A.G+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

10.12 RADIATED SPURIOUS EMISSIONS (Above 1 GHz)

(MIMO_CDD(Ant1+Ant2))

10.12.1 Standard Client

[SRU]

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.2 5935 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11870	55.56	0.00	3.16	V	58.72	73.98	15.26	PK
11870	43.57	0.00	3.16	V	46.73	53.98	7.25	AV
17805	48.84	0.00	3.64	V	52.48	73.98	21.50	PK
17805	36.70	0.00	3.64	V	40.34	53.98	13.64	AV
11870	52.27	0.00	3.16	H	55.43	73.98	18.55	PK
11870	38.52	0.00	3.16	H	41.68	53.98	12.30	AV
17805	49.17	0.00	3.64	H	52.81	73.98	21.17	PK
17805	36.58	0.00	3.64	H	40.22	53.98	13.76	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.1 5955 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11910	54.95	0.00	3.09	V	58.04	73.98	15.94	PK
11910	43.27	0.00	3.09	V	46.36	53.98	7.62	AV
17865	47.36	0.00	4.02	V	51.38	73.98	22.60	PK
17865	35.91	0.00	4.02	V	39.93	53.98	14.05	AV
11910	51.05	0.00	3.09	H	54.14	73.98	19.84	PK
11910	38.82	0.00	3.09	H	41.91	53.98	12.07	AV
17865	47.76	0.00	4.02	H	51.78	73.98	22.20	PK
17865	35.91	0.00	4.02	H	39.93	53.98	14.05	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.45 6175 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12350	53.65	0.00	3.14	V	56.79	88.20	31.41	PK
12350	41.63	0.00	3.14	V	44.77	68.20	23.43	AV
18525	50.28	0.00	1.33	V	51.61	73.98	22.37	PK
18525	39.94	0.00	1.33	V	41.27	53.98	12.71	AV
12350	50.77	0.00	3.14	H	53.91	88.20	34.29	PK
12350	39.64	0.00	3.14	H	42.78	68.20	25.42	AV
18525	50.70	0.00	1.33	H	52.03	73.98	21.95	PK
18525	40.03	0.00	1.33	H	41.36	53.98	12.62	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.93 6415 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12830	48.18	0.00	3.48	V	51.66	88.20	36.54	PK
12830	36.35	0.00	3.48	V	39.83	68.20	28.37	AV
19245	48.94	0.00	2.80	V	51.74	73.98	22.24	PK
19245	38.19	0.00	2.80	V	40.99	53.98	12.99	AV
12830	47.22	0.00	3.48	H	50.70	88.20	37.50	PK
12830	36.73	0.00	3.48	H	40.21	68.20	27.99	AV
19245	48.61	0.00	2.80	H	51.41	73.98	22.57	PK
19245	38.27	0.00	2.80	H	41.07	53.98	12.91	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.117 6535 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13070	49.11	0.00	3.21	V	52.32	88.20	35.88	PK
13070	37.31	0.00	3.21	V	40.52	68.20	27.68	AV
19605	48.51	0.00	5.08	V	53.59	73.98	20.39	PK
19605	37.36	0.00	5.08	V	42.44	53.98	11.54	AV
13070	49.43	0.00	3.21	H	52.64	88.20	35.56	PK
13070	37.57	0.00	3.21	H	40.78	68.20	27.42	AV
19605	49.19	0.00	5.08	H	54.27	73.98	19.71	PK
19605	37.20	0.00	5.08	H	42.28	53.98	11.70	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.149 6695 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13390	47.32	0.00	3.82	V	51.14	88.20	37.06	PK
13390	35.82	0.00	3.82	V	39.64	68.20	28.56	AV
20085	45.37	0.00	7.36	V	52.73	73.98	21.25	PK
20085	35.06	0.00	7.36	V	42.42	53.98	11.56	AV
13390	47.63	0.00	3.82	H	51.45	88.20	36.75	PK
13390	35.81	0.00	3.82	H	39.63	68.20	28.57	AV
20085	46.07	0.00	7.36	H	53.43	73.98	20.55	PK
20085	35.15	0.00	7.36	H	42.51	53.98	11.47	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 26T RU4				
CH.181 6855 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13710	50.05	0.00	3.66	V	53.71	88.20	34.49	PK
13710	40.01	0.00	3.66	V	43.67	68.20	24.53	AV
20565	43.31	0.00	7.97	V	51.28	73.98	22.70	PK
20565	32.53	0.00	7.97	V	40.50	53.98	13.48	AV
13710	49.42	0.00	3.66	H	53.08	88.20	35.12	PK
13710	39.28	0.00	3.66	H	42.94	68.20	25.26	AV
20565	43.02	0.00	7.97	H	50.99	73.98	22.99	PK
20565	31.42	0.00	7.97	H	39.39	53.98	14.59	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.2 5935 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11870	52.03	0.00	3.16	V	55.19	73.98	18.79	PK
11870	40.12	0.00	3.16	V	43.28	53.98	10.70	AV
17805	48.71	0.00	3.64	V	52.35	73.98	21.63	PK
17805	36.94	0.00	3.64	V	40.58	53.98	13.40	AV
11870	48.77	0.00	3.16	H	51.93	73.98	22.05	PK
11870	37.27	0.00	3.16	H	40.43	53.98	13.55	AV
17805	48.69	0.00	3.64	H	52.33	73.98	21.65	PK
17805	36.78	0.00	3.64	H	40.42	53.98	13.56	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.1 5955 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11910	51.43	0.00	3.09	V	54.52	73.98	19.46	PK
11910	39.71	0.00	3.09	V	42.80	53.98	11.18	AV
17865	48.01	0.00	4.02	V	52.03	73.98	21.95	PK
17865	36.05	0.00	4.02	V	40.07	53.98	13.91	AV
11910	48.24	0.00	3.09	H	51.33	73.98	22.65	PK
11910	37.23	0.00	3.09	H	40.32	53.98	13.66	AV
17865	48.15	0.00	4.02	H	52.17	73.98	21.81	PK
17865	35.94	0.00	4.02	H	39.96	53.98	14.02	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.45 6175 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12350	50.96	0.00	3.14	V	54.10	88.20	34.10	PK
12350	39.44	0.00	3.14	V	42.58	68.20	25.62	AV
18525	50.39	0.00	1.33	V	51.72	73.98	22.26	PK
18525	40.21	0.00	1.33	V	41.54	53.98	12.44	AV
12350	50.35	0.00	3.14	H	53.49	88.20	34.71	PK
12350	38.67	0.00	3.14	H	41.81	68.20	26.39	AV
18525	50.28	0.00	1.33	H	51.61	73.98	22.37	PK
18525	40.28	0.00	1.33	H	41.61	53.98	12.37	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.93 6415 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12830	47.60	0.00	3.48	V	51.08	88.20	37.12	PK
12830	36.13	0.00	3.48	V	39.61	68.20	28.59	AV
19245	49.27	0.00	2.80	V	52.07	73.98	21.91	PK
19245	38.29	0.00	2.80	V	41.09	53.98	12.89	AV
12830	47.70	0.00	3.48	H	51.18	88.20	37.02	PK
12830	36.45	0.00	3.48	H	39.93	68.20	28.27	AV
19245	49.33	0.00	2.80	H	52.13	73.98	21.85	PK
19245	38.52	0.00	2.80	H	41.32	53.98	12.66	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.117 6535 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13070	49.13	0.00	3.21	V	52.34	88.20	35.86	PK
13070	37.38	0.00	3.21	V	40.59	68.20	27.61	AV
19605	48.60	0.00	5.08	V	53.68	73.98	20.30	PK
19605	37.41	0.00	5.08	V	42.49	53.98	11.49	AV
13070	48.76	0.00	3.21	H	51.97	88.20	36.23	PK
13070	37.74	0.00	3.21	H	40.95	68.20	27.25	AV
19605	47.97	0.00	5.08	H	53.05	73.98	20.93	PK
19605	37.38	0.00	5.08	H	42.46	53.98	11.52	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.149 6695 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13390	47.17	0.00	3.82	V	50.99	88.20	37.21	PK
13390	35.67	0.00	3.82	V	39.49	68.20	28.71	AV
20085	46.02	0.00	7.36	V	53.38	73.98	20.60	PK
20085	35.11	0.00	7.36	V	42.47	53.98	11.51	AV
13390	47.98	0.00	3.82	H	51.80	88.20	36.40	PK
13390	35.68	0.00	3.82	H	39.50	68.20	28.70	AV
20085	46.50	0.00	7.36	H	53.86	73.98	20.12	PK
20085	35.35	0.00	7.36	H	42.71	53.98	11.27	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.181 6855 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13710	50.21	0.00	3.66	V	53.87	88.20	34.33	PK
13710	38.96	0.00	3.66	V	42.62	68.20	25.58	AV
20565	43.50	0.00	7.97	V	51.47	73.98	22.51	PK
20565	32.50	0.00	7.97	V	40.47	53.98	13.51	AV
13710	49.75	0.00	3.66	H	53.41	88.20	34.79	PK
13710	38.54	0.00	3.66	H	42.20	68.20	26.00	AV
20565	42.79	0.00	7.97	H	50.76	73.98	23.22	PK
20565	31.74	0.00	7.97	H	39.71	53.98	14.27	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.3 5965 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
11930	56.43	0.00	2.99	V	59.42	73.98	14.56	PK
11930	44.23	0.00	2.99	V	47.22	53.98	6.76	AV
17895	48.30	0.00	3.89	V	52.19	73.98	21.79	PK
17895	35.97	0.00	3.89	V	39.86	53.98	14.12	AV
11930	54.61	0.00	2.99	H	57.60	73.98	16.38	PK
11930	43.61	0.00	2.99	H	46.60	53.98	7.38	AV
17895	48.20	0.00	3.89	H	52.09	73.98	21.89	PK
17895	35.97	0.00	3.89	H	39.86	53.98	14.12	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.43 6165 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
12330	53.71	0.00	3.18	V	56.89	73.98	17.09	PK
12330	43.00	0.00	3.18	V	46.18	53.98	7.80	AV
18495	51.35	0.00	1.44	V	52.79	73.98	21.19	PK
18495	40.94	0.00	1.44	V	42.38	53.98	11.60	AV
12330	55.27	0.00	3.18	H	58.45	73.98	15.53	PK
12330	43.11	0.00	3.18	H	46.29	53.98	7.69	AV
18495	51.95	0.00	1.44	H	53.39	73.98	20.59	PK
18495	41.02	0.00	1.44	H	42.46	53.98	11.52	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.91 6405 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
12810	47.73	0.00	3.49	V	51.22	88.20	36.98	PK
12810	37.33	0.00	3.49	V	40.82	68.20	27.38	AV
19215	49.45	0.00	2.58	V	52.03	73.98	21.95	PK
19215	38.99	0.00	2.58	V	41.57	53.98	12.41	AV
12810	47.97	0.00	3.49	H	51.46	88.20	36.74	PK
12810	36.94	0.00	3.49	H	40.43	68.20	27.77	AV
19215	50.07	0.00	2.58	H	52.65	73.98	21.33	PK
19215	39.77	0.00	2.58	H	42.35	53.98	11.63	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.123 6565 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13130	48.38	0.00	3.31	V	51.69	88.20	36.51	PK
13130	38.11	0.00	3.31	V	41.42	68.20	26.78	AV
19695	46.63	0.00	5.28	V	51.91	73.98	22.07	PK
19695	36.15	0.00	5.28	V	41.43	53.98	12.55	AV
13130	48.74	0.00	3.31	H	52.05	88.20	36.15	PK
13130	37.72	0.00	3.31	H	41.03	68.20	27.17	AV
19695	47.25	0.00	5.28	H	52.53	73.98	21.45	PK
19695	35.88	0.00	5.28	H	41.16	53.98	12.82	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.147 6685 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13370	47.29	0.00	3.77	V	51.06	88.20	37.14	PK
13370	35.76	0.00	3.77	V	39.53	68.20	28.67	AV
20055	45.21	0.00	7.40	V	52.61	73.98	21.37	PK
20055	35.10	0.00	7.40	V	42.50	53.98	11.48	AV
13370	46.94	0.00	3.77	H	50.71	88.20	37.49	PK
13370	35.90	0.00	3.77	H	39.67	68.20	28.53	AV
20055	46.13	0.00	7.40	H	53.53	73.98	20.45	PK
20055	35.36	0.00	7.40	H	42.76	53.98	11.22	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 26T RU9				
CH.179 6845 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13690	51.25	0.00	3.53	V	54.78	88.20	33.42	PK
13690	40.21	0.00	3.53	V	43.74	68.20	24.46	AV
20535	43.39	0.00	7.97	V	51.36	73.98	22.62	PK
20535	32.22	0.00	7.97	V	40.19	53.98	13.79	AV
13690	51.97	0.00	3.53	H	55.50	88.20	32.70	PK
13690	41.92	0.00	3.53	H	45.45	68.20	22.75	AV
20535	42.32	0.00	7.97	H	50.29	73.98	23.69	PK
20535	31.62	0.00	7.97	H	39.59	53.98	14.39	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.3 5965 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11930	49.33	0.00	2.99	V	52.32	73.98	21.66	PK
11930	38.05	0.12	2.99	V	41.17	53.98	12.81	AV
17895	47.61	0.00	3.89	V	51.50	73.98	22.48	PK
17895	35.90	0.12	3.89	V	39.92	53.98	14.06	AV
11930	48.67	0.00	2.99	H	51.66	73.98	22.32	PK
11930	37.78	0.12	2.99	H	40.90	53.98	13.08	AV
17895	47.87	0.00	3.89	H	51.76	73.98	22.22	PK
17895	35.77	0.12	3.89	H	39.79	53.98	14.19	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.43 6165 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12330	50.42	0.00	3.18	V	53.60	73.98	20.38	PK
12330	38.33	0.12	3.18	V	41.63	53.98	12.35	AV
18495	52.53	0.00	1.44	V	53.97	73.98	20.01	PK
18495	40.74	0.12	1.44	V	42.30	53.98	11.68	AV
12330	49.80	0.00	3.18	H	52.98	73.98	21.00	PK
12330	38.60	0.12	3.18	H	41.90	53.98	12.08	AV
18495	51.51	0.00	1.44	H	52.95	73.98	21.03	PK
18495	41.00	0.12	1.44	H	42.56	53.98	11.42	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.91 6405 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12810	47.51	0.00	3.49	V	51.00	88.20	37.20	PK
12810	36.41	0.12	3.49	V	40.02	68.20	28.18	AV
19215	48.83	0.00	2.58	V	51.41	73.98	22.57	PK
19215	38.80	0.12	2.58	V	41.50	53.98	12.48	AV
12810	47.65	0.00	3.49	H	51.14	88.20	37.06	PK
12810	36.24	0.12	3.49	H	39.85	68.20	28.35	AV
19215	50.10	0.00	2.58	H	52.68	73.98	21.30	PK
19215	39.19	0.12	2.58	H	41.89	53.98	12.09	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.123 6565 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13130	48.89	0.00	3.31	V	52.20	88.20	36.00	PK
13130	37.22	0.12	3.31	V	40.66	68.20	27.54	AV
19695	46.71	0.00	5.28	V	51.99	73.98	21.99	PK
19695	36.15	0.12	5.28	V	41.55	53.98	12.43	AV
13130	48.64	0.00	3.31	H	51.95	88.20	36.25	PK
13130	37.20	0.12	3.31	H	40.64	68.20	27.56	AV
19695	46.23	0.00	5.28	H	51.51	73.98	22.47	PK
19695	35.97	0.12	5.28	H	41.37	53.98	12.61	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.147 6685 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13370	47.32	0.00	3.77	V	51.09	88.20	37.11	PK
13370	35.58	0.12	3.77	V	39.47	68.20	28.73	AV
20055	45.90	0.00	7.40	V	53.30	73.98	20.68	PK
20055	34.98	0.12	7.40	V	42.50	53.98	11.48	AV
13370	46.62	0.00	3.77	H	50.39	88.20	37.81	PK
13370	35.55	0.12	3.77	H	39.44	68.20	28.76	AV
20055	45.96	0.00	7.40	H	53.36	73.98	20.62	PK
20055	35.38	0.12	7.40	H	42.90	53.98	11.08	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.179 6845 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13690	50.14	0.00	3.53	V	53.67	88.20	34.53	PK
13690	38.24	0.12	3.53	V	41.90	68.20	26.30	AV
20535	42.85	0.00	7.97	V	50.82	73.98	23.16	PK
20535	32.05	0.12	7.97	V	40.14	53.98	13.84	AV
13690	50.00	0.00	3.53	H	53.53	88.20	34.67	PK
13690	38.41	0.12	3.53	H	42.07	68.20	26.13	AV
20535	42.58	0.00	7.97	H	50.55	73.98	23.43	PK
20535	31.49	0.12	7.97	H	39.58	53.98	14.40	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.7 5985 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
11970	56.61	0.00	3.16	V	59.77	73.98	14.21	PK
11970	44.84	0.00	3.16	V	48.00	53.98	5.98	AV
17955	47.32	0.00	3.64	V	50.96	73.98	23.02	PK
17955	35.60	0.00	3.64	V	39.24	53.98	14.74	AV
11970	55.04	0.00	3.16	H	58.20	73.98	15.78	PK
11970	43.74	0.00	3.16	H	46.90	53.98	7.08	AV
17955	46.95	0.00	3.64	H	50.59	73.98	23.39	PK
17955	35.74	0.00	3.64	H	39.38	53.98	14.60	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.39 6145 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
12290	54.44	0.00	3.26	V	57.70	73.98	16.28	PK
12290	42.53	0.00	3.26	V	45.79	53.98	8.19	AV
18435	51.32	0.00	1.34	V	52.66	73.98	21.32	PK
18435	40.82	0.00	1.34	V	42.16	53.98	11.82	AV
12290	55.18	0.00	3.26	H	58.44	73.98	15.54	PK
12290	43.28	0.00	3.26	H	46.54	53.98	7.44	AV
18435	51.61	0.00	1.34	H	52.95	73.98	21.03	PK
18435	41.10	0.00	1.34	H	42.44	53.98	11.54	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.87 6385 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dB V]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dB V/m]	Limit [dB V/m]	Margin [dB]	Measurement Type
12770	47.00	0.00	3.27	V	50.27	88.20	37.93	PK
12770	37.30	0.00	3.27	V	40.57	68.20	27.63	AV
19155	52.36	0.00	2.13	V	54.49	73.98	19.49	PK
19155	42.15	0.00	2.13	V	44.28	53.98	9.70	AV
12770	47.84	0.00	3.27	H	51.11	88.20	37.09	PK
12770	36.28	0.00	3.27	H	39.55	68.20	28.65	AV
19155	52.64	0.00	2.13	H	54.77	73.98	19.21	PK
19155	42.81	0.00	2.13	H	44.94	53.98	9.04	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.135 6625 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13250	48.14	0.00	3.64	V	51.78	73.98	22.20	PK
13250	36.67	0.00	3.64	V	40.31	53.98	13.67	AV
19875	46.30	0.00	6.28	V	52.58	73.98	21.40	PK
19875	35.10	0.00	6.28	V	41.38	53.98	12.60	AV
13250	47.92	0.00	3.64	H	51.56	73.98	22.42	PK
13250	36.57	0.00	3.64	H	40.21	53.98	13.77	AV
19875	46.52	0.00	6.28	H	52.80	73.98	21.18	PK
19875	35.21	0.00	6.28	H	41.49	53.98	12.49	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.151 6705 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13410	48.01	0.00	3.79	V	51.80	88.20	36.40	PK
13410	36.85	0.00	3.79	V	40.64	68.20	27.56	AV
20115	45.54	0.00	7.50	V	53.04	73.98	20.94	PK
20115	34.76	0.00	7.50	V	42.26	53.98	11.72	AV
13410	48.02	0.00	3.79	H	51.81	88.20	36.39	PK
13410	36.94	0.00	3.79	H	40.73	68.20	27.47	AV
20115	45.34	0.00	7.50	H	52.84	73.98	21.14	PK
20115	35.38	0.00	7.50	H	42.88	53.98	11.10	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 26T RU19				
CH.167 6785 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13570	49.76	0.00	3.59	V	53.35	88.20	34.85	PK
13570	39.46	0.00	3.59	V	43.05	68.20	25.15	AV
20355	46.05	0.00	7.97	V	54.02	73.98	19.96	PK
20355	34.95	0.00	7.97	V	42.92	53.98	11.06	AV
13570	50.16	0.00	3.59	H	53.75	88.20	34.45	PK
13570	39.92	0.00	3.59	H	43.51	68.20	24.69	AV
20355	45.36	0.00	7.97	H	53.33	73.98	20.65	PK
20355	34.86	0.00	7.97	H	42.83	53.98	11.15	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.7 5985 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11970	48.07	0.00	3.16	V	51.23	73.98	22.75	PK
11970	36.81	0.12	3.16	V	40.09	53.98	13.89	AV
17955	47.74	0.00	3.64	V	51.38	73.98	22.60	PK
17955	35.31	0.12	3.64	V	39.07	53.98	14.91	AV
11970	47.77	0.00	3.16	H	50.93	73.98	23.05	PK
11970	36.68	0.12	3.16	H	39.96	53.98	14.02	AV
17955	46.69	0.00	3.64	H	50.33	73.98	23.65	PK
17955	35.21	0.12	3.64	H	38.97	53.98	15.01	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.39 6145 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12290	49.24	0.00	3.26	V	52.50	73.98	21.48	PK
12290	37.92	0.12	3.26	V	41.30	53.98	12.68	AV
18435	51.66	0.00	1.34	V	53.00	73.98	20.98	PK
18435	40.96	0.12	1.34	V	42.42	53.98	11.56	AV
12290	50.58	0.00	3.26	H	53.84	73.98	20.14	PK
12290	38.26	0.12	3.26	H	41.64	53.98	12.34	AV
18435	52.01	0.00	1.34	H	53.35	73.98	20.63	PK
18435	41.06	0.12	1.34	H	42.52	53.98	11.46	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.87 6385 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12770	48.50	0.00	3.27	V	51.77	88.20	36.43	PK
12770	36.01	0.12	3.27	V	39.40	68.20	28.80	AV
19155	52.61	0.00	2.13	V	54.74	73.98	19.24	PK
19155	41.67	0.12	2.13	V	43.92	53.98	10.06	AV
12770	47.25	0.00	3.27	H	50.52	88.20	37.68	PK
12770	36.16	0.12	3.27	H	39.55	68.20	28.65	AV
19155	53.12	0.00	2.13	H	55.25	73.98	18.73	PK
19155	42.09	0.12	2.13	H	44.34	53.98	9.64	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.135 6625 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13250	48.61	0.00	3.64	V	52.25	73.98	21.73	PK
13250	36.18	0.12	3.64	V	39.94	53.98	14.04	AV
19875	46.15	0.00	6.28	V	52.43	73.98	21.55	PK
19875	35.70	0.12	6.28	V	42.10	53.98	11.88	AV
13250	48.48	0.00	3.64	H	52.12	73.98	21.86	PK
13250	36.03	0.12	3.64	H	39.79	53.98	14.19	AV
19875	45.78	0.00	6.28	H	52.06	73.98	21.92	PK
19875	35.50	0.12	6.28	H	41.90	53.98	12.08	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.151 6705 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13410	48.06	0.00	3.79	V	51.85	88.20	36.35	PK
13410	36.93	0.12	3.79	V	40.85	68.20	27.35	AV
20115	45.14	0.00	7.50	V	52.64	73.98	21.34	PK
20115	34.93	0.12	7.50	V	42.55	53.98	11.43	AV
13410	47.80	0.00	3.79	H	51.59	88.20	36.61	PK
13410	36.72	0.12	3.79	H	40.64	68.20	27.56	AV
20115	46.14	0.00	7.50	H	53.64	73.98	20.34	PK
20115	35.42	0.12	7.50	H	43.04	53.98	10.94	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.167 6785 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13570	49.73	0.00	3.59	V	53.32	88.20	34.88	PK
13570	38.31	0.12	3.59	V	42.02	68.20	26.18	AV
20355	44.65	0.00	7.97	V	52.62	73.98	21.36	PK
20355	34.27	0.12	7.97	V	42.36	53.98	11.62	AV
13570	49.81	0.00	3.59	H	53.40	88.20	34.80	PK
13570	38.45	0.12	3.59	H	42.16	68.20	26.04	AV
20355	45.77	0.00	7.97	H	53.74	73.98	20.24	PK
20355	33.79	0.12	7.97	H	41.88	53.98	12.10	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 26T RU19				
CH.15 6025 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12050	54.30	0.00	3.12	V	57.42	73.98	16.56	PK
12050	41.45	0.00	3.12	V	44.57	53.98	9.41	AV
18075	50.17	0.00	2.62	V	52.79	73.98	21.19	PK
18075	39.24	0.00	2.62	V	41.86	53.98	12.12	AV
12050	47.14	0.00	3.12	H	50.26	73.98	23.72	PK
12050	36.33	0.00	3.12	H	39.45	53.98	14.53	AV
18075	50.67	0.00	2.62	H	53.29	73.98	20.69	PK
18075	39.55	0.00	2.62	H	42.17	53.98	11.81	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 26T RU19				
CH.47 6185 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12370	50.99	0.00	3.07	V	54.06	73.98	19.92	PK
12370	38.97	0.00	3.07	V	42.04	53.98	11.94	AV
18555	51.34	0.00	0.93	V	52.27	73.98	21.71	PK
18555	39.94	0.00	0.93	V	40.87	53.98	13.11	AV
12370	50.12	0.00	3.07	H	53.19	73.98	20.79	PK
12370	38.02	0.00	3.07	H	41.09	53.98	12.89	AV
18555	50.84	0.00	0.93	H	51.77	73.98	22.21	PK
18555	40.41	0.00	0.93	H	41.34	53.98	12.64	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 26T RU19				
CH.79 6345 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12690	48.06	0.00	3.52	V	51.58	73.98	22.40	PK
12690	36.13	0.00	3.52	V	39.65	53.98	14.33	AV
19035	54.86	0.00	1.31	V	56.17	73.98	17.81	PK
19035	44.85	0.00	1.31	V	46.16	53.98	7.82	AV
12690	47.99	0.00	3.52	H	51.51	73.98	22.47	PK
12690	36.06	0.00	3.52	H	39.58	53.98	14.40	AV
19035	55.52	0.00	1.31	H	56.83	73.98	17.15	PK
19035	45.68	0.00	1.31	H	46.99	53.98	6.99	AV

Band : UNII 7				Operation Mode : 802.11be_EHT160(80L) MCS0 26T RU19				
CH.143 6665 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13330	47.12	0.00	3.65	V	50.77	73.98	23.21	PK
13330	35.93	0.00	3.65	V	39.58	53.98	14.40	AV
19995	45.78	0.00	6.83	V	52.61	73.98	21.37	PK
19995	35.05	0.00	6.83	V	41.88	53.98	12.10	AV
13330	47.71	0.00	3.65	H	51.36	73.98	22.62	PK
13330	36.09	0.00	3.65	H	39.74	53.98	14.24	AV
19995	45.94	0.00	6.83	H	52.77	73.98	21.21	PK
19995	35.42	0.00	6.83	H	42.25	53.98	11.73	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.15 6025 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12050	47.21	0.00	3.12	V	50.33	73.98	23.65	PK
12050	35.77	0.00	3.12	V	38.89	53.98	15.09	AV
18075	49.86	0.00	2.62	V	52.48	73.98	21.50	PK
18075	39.57	0.00	2.62	V	42.19	53.98	11.79	AV
12050	47.16	0.00	3.12	H	50.28	73.98	23.70	PK
12050	35.71	0.00	3.12	H	38.83	53.98	15.15	AV
18075	50.18	0.00	2.62	H	52.80	73.98	21.18	PK
18075	39.77	0.00	2.62	H	42.39	53.98	11.59	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.47 6185 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12370	49.97	0.00	3.07	V	53.04	73.98	20.94	PK
12370	37.75	0.00	3.07	V	40.82	53.98	13.16	AV
18555	49.79	0.00	0.93	V	50.72	73.98	23.26	PK
18555	39.98	0.00	0.93	V	40.91	53.98	13.07	AV
12370	49.73	0.00	3.07	H	52.80	73.98	21.18	PK
12370	37.91	0.00	3.07	H	40.98	53.98	13.00	AV
18555	50.18	0.00	0.93	H	51.11	73.98	22.87	PK
18555	40.45	0.00	0.93	H	41.38	53.98	12.60	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.79 6345 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12690	47.23	0.00	3.52	V	50.75	73.98	23.23	PK
12690	35.93	0.00	3.52	V	39.45	53.98	14.53	AV
19035	55.13	0.00	1.31	V	56.44	73.98	17.54	PK
19035	45.21	0.00	1.31	V	46.52	53.98	7.46	AV
12690	47.68	0.00	3.52	H	51.20	73.98	22.78	PK
12690	35.83	0.00	3.52	H	39.35	53.98	14.63	AV
19035	56.58	0.00	1.31	H	57.89	73.98	16.09	PK
19035	45.15	0.00	1.31	H	46.46	53.98	7.52	AV

Band : UNII 7				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.143 6665 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13330	47.12	0.00	3.65	V	50.77	73.98	23.21	PK
13330	35.53	0.00	3.65	V	39.18	53.98	14.80	AV
19995	45.81	0.00	6.83	V	52.64	73.98	21.34	PK
19995	35.09	0.00	6.83	V	41.92	53.98	12.06	AV
13330	47.52	0.00	3.65	H	51.17	73.98	22.81	PK
13330	35.42	0.00	3.65	H	39.07	53.98	14.91	AV
19995	46.76	0.00	6.83	H	53.59	73.98	20.39	PK
19995	35.25	0.00	6.83	H	42.08	53.98	11.90	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.31 6105 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12210	48.56	0.00	3.37	V	51.93	73.98	22.05	PK
12210	37.59	0.00	3.37	V	40.96	53.98	13.02	AV
18315	51.45	0.00	1.63	V	53.08	73.98	20.90	PK
18315	40.89	0.00	1.63	V	42.52	53.98	11.46	AV
12210	49.29	0.00	3.37	H	52.66	73.98	21.32	PK
12210	37.60	0.00	3.37	H	40.97	53.98	13.01	AV
18315	51.25	0.00	1.63	H	52.88	73.98	21.10	PK
18315	41.07	0.00	1.63	H	42.70	53.98	11.28	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.63 6265 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12530	48.27	0.00	2.90	V	51.17	73.98	22.81	PK
12530	37.11	0.00	2.90	V	40.01	53.98	13.97	AV
18795	52.78	0.00	-0.13	V	52.65	73.98	21.33	PK
18795	42.72	0.00	-0.13	V	42.59	53.98	11.39	AV
12530	48.55	0.00	2.90	H	51.45	73.98	22.53	PK
12530	36.93	0.00	2.90	H	39.83	53.98	14.15	AV
18795	52.85	0.00	-0.13	H	52.72	73.98	21.26	PK
18795	42.69	0.00	-0.13	H	42.56	53.98	11.42	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320 MCS0 996x4T RU69				
CH.31 6105 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12210	48.57	0.00	3.37	V	51.94	73.98	22.04	PK
12210	37.52	0.00	3.37	V	40.89	53.98	13.09	AV
18315	51.52	0.00	1.63	V	53.15	73.98	20.83	PK
18315	40.78	0.00	1.63	V	42.41	53.98	11.57	AV
12210	49.17	0.00	3.37	H	52.54	73.98	21.44	PK
12210	37.48	0.00	3.37	H	40.85	53.98	13.13	AV
18315	51.43	0.00	1.63	H	53.06	73.98	20.92	PK
18315	40.84	0.00	1.63	H	42.47	53.98	11.51	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320 MCS0 996x4T RU69				
CH.63 6265 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12530	47.81	0.00	2.90	V	50.71	73.98	23.27	PK
12530	36.22	0.00	2.90	V	39.12	53.98	14.86	AV
18795	52.78	0.00	-0.13	V	52.65	73.98	21.33	PK
18795	42.38	0.00	-0.13	V	42.25	53.98	11.73	AV
12530	48.45	0.00	2.90	H	51.35	73.98	22.63	PK
12530	36.36	0.00	2.90	H	39.26	53.98	14.72	AV
18795	52.87	0.00	-0.13	H	52.74	73.98	21.24	PK
18795	42.01	0.00	-0.13	H	41.88	53.98	12.10	AV

[MRU]

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.2 5935 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11870	53.56	0.00	3.16	V	56.72	73.98	17.26	PK
11870	40.79	0.00	3.16	V	43.95	53.98	10.03	AV
17805	48.19	0.00	3.64	V	51.83	73.98	22.15	PK
17805	36.56	0.00	3.64	V	40.20	53.98	13.78	AV
11870	49.14	0.00	3.16	H	52.30	73.98	21.68	PK
11870	37.43	0.00	3.16	H	40.59	53.98	13.39	AV
17805	48.72	0.00	3.64	H	52.36	73.98	21.62	PK
17805	36.55	0.00	3.64	H	40.19	53.98	13.79	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.1 5955 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11910	53.19	0.00	3.09	V	56.28	73.98	17.70	PK
11910	40.74	0.00	3.09	V	43.83	53.98	10.15	AV
17865	48.03	0.00	4.02	V	52.05	73.98	21.93	PK
17865	35.91	0.00	4.02	V	39.93	53.98	14.05	AV
11910	49.38	0.00	3.09	H	52.47	73.98	21.51	PK
11910	37.49	0.00	3.09	H	40.58	53.98	13.40	AV
17865	48.02	0.00	4.02	H	52.04	73.98	21.94	PK
17865	35.93	0.00	4.02	H	39.95	53.98	14.03	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.45 6175 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12350	52.92	0.00	3.14	V	56.06	88.20	32.14	PK
12350	39.61	0.00	3.14	V	42.75	68.20	25.45	AV
18525	49.99	0.00	1.33	V	51.32	73.98	22.66	PK
18525	39.81	0.00	1.33	V	41.14	53.98	12.84	AV
12350	49.78	0.00	3.14	H	52.92	88.20	35.28	PK
12350	38.58	0.00	3.14	H	41.72	68.20	26.48	AV
18525	51.17	0.00	1.33	H	52.50	73.98	21.48	PK
18525	40.00	0.00	1.33	H	41.33	53.98	12.65	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.93 6415 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12830	47.20	0.00	3.48	V	50.68	88.20	37.52	PK
12830	35.98	0.00	3.48	V	39.46	68.20	28.74	AV
19245	48.41	0.00	2.80	V	51.21	73.98	22.77	PK
19245	38.09	0.00	2.80	V	40.89	53.98	13.09	AV
12830	46.94	0.00	3.48	H	50.42	88.20	37.78	PK
12830	36.24	0.00	3.48	H	39.72	68.20	28.48	AV
19245	49.10	0.00	2.80	H	51.90	73.98	22.08	PK
19245	38.12	0.00	2.80	H	40.92	53.98	13.06	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.117 6535 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13070	48.34	0.00	3.21	V	51.55	88.20	36.65	PK
13070	37.24	0.00	3.21	V	40.45	68.20	27.75	AV
19605	48.28	0.00	5.08	V	53.36	73.98	20.62	PK
19605	37.31	0.00	5.08	V	42.39	53.98	11.59	AV
13070	48.17	0.00	3.21	H	51.38	88.20	36.82	PK
13070	37.41	0.00	3.21	H	40.62	68.20	27.58	AV
19605	47.22	0.00	5.08	H	52.30	73.98	21.68	PK
19605	37.06	0.00	5.08	H	42.14	53.98	11.84	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.149 6695 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13390	46.99	0.00	3.82	V	50.81	88.20	37.39	PK
13390	35.99	0.00	3.82	V	39.81	68.20	28.39	AV
20085	46.70	0.00	7.36	V	54.06	73.98	19.92	PK
20085	34.89	0.00	7.36	V	42.25	53.98	11.73	AV
13390	47.26	0.00	3.82	H	51.08	88.20	37.12	PK
13390	35.83	0.00	3.82	H	39.65	68.20	28.55	AV
20085	45.69	0.00	7.36	H	53.05	73.98	20.93	PK
20085	35.22	0.00	7.36	H	42.58	53.98	11.40	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 52+26T RU71				
CH.181 6855 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13710	49.80	0.00	3.66	V	53.46	88.20	34.74	PK
13710	38.75	0.00	3.66	V	42.41	68.20	25.79	AV
20565	42.81	0.00	7.97	V	50.78	73.98	23.20	PK
20565	32.38	0.00	7.97	V	40.35	53.98	13.63	AV
13710	48.80	0.00	3.66	H	52.46	88.20	35.74	PK
13710	38.62	0.00	3.66	H	42.28	68.20	25.92	AV
20565	41.87	0.00	7.97	H	49.84	73.98	24.14	PK
20565	31.60	0.00	7.97	H	39.57	53.98	14.41	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.2 5935 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11870	51.81	0.00	3.16	V	54.97	73.98	19.01	PK
11870	39.65	0.00	3.16	V	42.81	53.98	11.17	AV
17805	48.83	0.00	3.64	V	52.47	73.98	21.51	PK
17805	36.79	0.00	3.64	V	40.43	53.98	13.55	AV
11870	48.69	0.00	3.16	H	51.85	73.98	22.13	PK
11870	37.40	0.00	3.16	H	40.56	53.98	13.42	AV
17805	48.66	0.00	3.64	H	52.30	73.98	21.68	PK
17805	36.53	0.00	3.64	H	40.17	53.98	13.81	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.1 5955 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11910	51.24	0.00	3.09	V	54.33	73.98	19.65	PK
11910	39.33	0.00	3.09	V	42.42	53.98	11.56	AV
17865	47.38	0.00	4.02	V	51.40	73.98	22.58	PK
17865	35.95	0.00	4.02	V	39.97	53.98	14.01	AV
11910	47.92	0.00	3.09	H	51.01	73.98	22.97	PK
11910	37.45	0.00	3.09	H	40.54	53.98	13.44	AV
17865	47.78	0.00	4.02	H	51.80	73.98	22.18	PK
17865	35.88	0.00	4.02	H	39.90	53.98	14.08	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.45 6175 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12350	50.67	0.00	3.14	V	53.81	88.20	34.39	PK
12350	38.93	0.00	3.14	V	42.07	68.20	26.13	AV
18525	49.91	0.00	1.33	V	51.24	73.98	22.74	PK
18525	39.91	0.00	1.33	V	41.24	53.98	12.74	AV
12350	49.64	0.00	3.14	H	52.78	88.20	35.42	PK
12350	38.27	0.00	3.14	H	41.41	68.20	26.79	AV
18525	50.62	0.00	1.33	H	51.95	73.98	22.03	PK
18525	40.08	0.00	1.33	H	41.41	53.98	12.57	AV

Band : UNII 5				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.93 6415 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12830	47.73	0.00	3.48	V	51.21	88.20	36.99	PK
12830	36.04	0.00	3.48	V	39.52	68.20	28.68	AV
19245	48.31	0.00	2.80	V	51.11	73.98	22.87	PK
19245	38.06	0.00	2.80	V	40.86	53.98	13.12	AV
12830	47.36	0.00	3.48	H	50.84	88.20	37.36	PK
12830	36.28	0.00	3.48	H	39.76	68.20	28.44	AV
19245	48.34	0.00	2.80	H	51.14	73.98	22.84	PK
19245	38.28	0.00	2.80	H	41.08	53.98	12.90	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.117 6535 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13070	48.46	0.00	3.21	V	51.67	88.20	36.53	PK
13070	37.25	0.00	3.21	V	40.46	68.20	27.74	AV
19605	47.90	0.00	5.08	V	52.98	73.98	21.00	PK
19605	37.42	0.00	5.08	V	42.50	53.98	11.48	AV
13070	48.95	0.00	3.21	H	52.16	88.20	36.04	PK
13070	37.40	0.00	3.21	H	40.61	68.20	27.59	AV
19605	48.35	0.00	5.08	H	53.43	73.98	20.55	PK
19605	37.20	0.00	5.08	H	42.28	53.98	11.70	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.149 6695 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13390	47.15	0.00	3.82	V	50.97	88.20	37.23	PK
13390	35.86	0.00	3.82	V	39.68	68.20	28.52	AV
20085	46.12	0.00	7.36	V	53.48	73.98	20.50	PK
20085	34.99	0.00	7.36	V	42.35	53.98	11.63	AV
13390	47.65	0.00	3.82	H	51.47	88.20	36.73	PK
13390	35.93	0.00	3.82	H	39.75	68.20	28.45	AV
20085	46.02	0.00	7.36	H	53.38	73.98	20.60	PK
20085	35.29	0.00	7.36	H	42.65	53.98	11.33	AV

Band : UNII 7				Operation Mode : 802.11be_EHT20 MCS0 106+26T RU82				
CH.181 6855 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13710	49.61	0.00	3.66	V	53.27	88.20	34.93	PK
13710	38.55	0.00	3.66	V	42.21	68.20	25.99	AV
20565	43.32	0.00	7.97	V	51.29	73.98	22.69	PK
20565	32.43	0.00	7.97	V	40.40	53.98	13.58	AV
13710	49.63	0.00	3.66	H	53.29	88.20	34.91	PK
13710	38.38	0.00	3.66	H	42.04	68.20	26.16	AV
20565	42.30	0.00	7.97	H	50.27	73.98	23.71	PK
20565	31.65	0.00	7.97	H	39.62	53.98	14.36	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.3 5965 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11930	53.10	0.00	2.99	V	56.09	73.98	17.89	PK
11930	40.61	0.00	2.99	V	43.60	53.98	10.38	AV
17895	47.68	0.00	3.89	V	51.57	73.98	22.41	PK
17895	36.05	0.00	3.89	V	39.94	53.98	14.04	AV
11930	48.18	0.00	2.99	H	51.17	73.98	22.81	PK
11930	37.19	0.00	2.99	H	40.18	53.98	13.80	AV
17895	47.65	0.00	3.89	H	51.54	73.98	22.44	PK
17895	35.87	0.00	3.89	H	39.76	53.98	14.22	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.43 6165 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12330	51.76	0.00	3.18	V	54.94	73.98	19.04	PK
12330	40.15	0.00	3.18	V	43.33	53.98	10.65	AV
18495	51.54	0.00	1.44	V	52.98	73.98	21.00	PK
18495	41.04	0.00	1.44	V	42.48	53.98	11.50	AV
12330	49.62	0.00	3.18	H	52.80	73.98	21.18	PK
12330	38.26	0.00	3.18	H	41.44	53.98	12.54	AV
18495	51.15	0.00	1.44	H	52.59	73.98	21.39	PK
18495	40.94	0.00	1.44	H	42.38	53.98	11.60	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.91 6405 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12810	47.54	0.00	3.49	V	51.03	88.20	37.17	PK
12810	36.25	0.00	3.49	V	39.74	68.20	28.46	AV
19215	49.53	0.00	2.58	V	52.11	73.98	21.87	PK
19215	39.02	0.00	2.58	V	41.60	53.98	12.38	AV
12810	47.61	0.00	3.49	H	51.10	88.20	37.10	PK
12810	36.43	0.00	3.49	H	39.92	68.20	28.28	AV
19215	49.88	0.00	2.58	H	52.46	73.98	21.52	PK
19215	39.47	0.00	2.58	H	42.05	53.98	11.93	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.123 6565 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13130	48.81	0.00	3.31	V	52.12	88.20	36.08	PK
13130	37.29	0.00	3.31	V	40.60	68.20	27.60	AV
19695	47.29	0.00	5.28	V	52.57	73.98	21.41	PK
19695	36.16	0.00	5.28	V	41.44	53.98	12.54	AV
13130	48.66	0.00	3.31	H	51.97	88.20	36.23	PK
13130	37.48	0.00	3.31	H	40.79	68.20	27.41	AV
19695	46.44	0.00	5.28	H	51.72	73.98	22.26	PK
19695	35.91	0.00	5.28	H	41.19	53.98	12.79	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.147 6685 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13370	47.32	0.00	3.77	V	51.09	88.20	37.11	PK
13370	35.75	0.00	3.77	V	39.52	68.20	28.68	AV
20055	46.08	0.00	7.40	V	53.48	73.98	20.50	PK
20055	35.00	0.00	7.40	V	42.40	53.98	11.58	AV
13370	47.44	0.00	3.77	H	51.21	88.20	36.99	PK
13370	35.71	0.00	3.77	H	39.48	68.20	28.72	AV
20055	45.90	0.00	7.40	H	53.30	73.98	20.68	PK
20055	35.55	0.00	7.40	H	42.95	53.98	11.03	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 52+26T RU72				
CH.179 6845 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13690	50.00	0.00	3.53	V	53.53	88.20	34.67	PK
13690	38.78	0.00	3.53	V	42.31	68.20	25.89	AV
20535	42.85	0.00	7.97	V	50.82	73.98	23.16	PK
20535	32.22	0.00	7.97	V	40.19	53.98	13.79	AV
13690	50.30	0.00	3.53	H	53.83	88.20	34.37	PK
13690	38.33	0.00	3.53	H	41.86	68.20	26.34	AV
20535	42.81	0.00	7.97	H	50.78	73.98	23.20	PK
20535	31.72	0.00	7.97	H	39.69	53.98	14.29	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.3 5965 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11930	51.73	0.00	2.99	V	54.72	73.98	19.26	PK
11930	39.43	0.00	2.99	V	42.42	53.98	11.56	AV
17895	47.38	0.00	3.89	V	51.27	73.98	22.71	PK
17895	36.11	0.00	3.89	V	40.00	53.98	13.98	AV
11930	48.07	0.00	2.99	H	51.06	73.98	22.92	PK
11930	36.62	0.00	2.99	H	39.61	53.98	14.37	AV
17895	47.57	0.00	3.89	H	51.46	73.98	22.52	PK
17895	35.89	0.00	3.89	H	39.78	53.98	14.20	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.43 6165 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12330	50.96	0.00	3.18	V	54.14	73.98	19.84	PK
12330	39.15	0.00	3.18	V	42.33	53.98	11.65	AV
18495	51.25	0.00	1.44	V	52.69	73.98	21.29	PK
18495	40.71	0.00	1.44	V	42.15	53.98	11.83	AV
12330	49.49	0.00	3.18	H	52.67	73.98	21.31	PK
12330	38.05	0.00	3.18	H	41.23	53.98	12.75	AV
18495	51.13	0.00	1.44	H	52.57	73.98	21.41	PK
18495	41.08	0.00	1.44	H	42.52	53.98	11.46	AV

Band : UNII 5				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.91 6405 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12810	47.16	0.00	3.49	V	50.65	88.20	37.55	PK
12810	36.23	0.00	3.49	V	39.72	68.20	28.48	AV
19215	49.75	0.00	2.58	V	52.33	73.98	21.65	PK
19215	38.94	0.00	2.58	V	41.52	53.98	12.46	AV
12810	47.61	0.00	3.49	H	51.10	88.20	37.10	PK
12810	36.40	0.00	3.49	H	39.89	68.20	28.31	AV
19215	50.46	0.00	2.58	H	53.04	73.98	20.94	PK
19215	39.49	0.00	2.58	H	42.07	53.98	11.91	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.123 6565 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13130	49.50	0.00	3.31	V	52.81	88.20	35.39	PK
13130	37.24	0.00	3.31	V	40.55	68.20	27.65	AV
19695	46.98	0.00	5.28	V	52.26	73.98	21.72	PK
19695	36.10	0.00	5.28	V	41.38	53.98	12.60	AV
13130	48.79	0.00	3.31	H	52.10	88.20	36.10	PK
13130	37.49	0.00	3.31	H	40.80	68.20	27.40	AV
19695	47.66	0.00	5.28	H	52.94	73.98	21.04	PK
19695	35.75	0.00	5.28	H	41.03	53.98	12.95	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.147 6685 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13370	47.31	0.00	3.77	V	51.08	88.20	37.12	PK
13370	35.63	0.00	3.77	V	39.40	68.20	28.80	AV
20055	46.26	0.00	7.40	V	53.66	73.98	20.32	PK
20055	34.96	0.00	7.40	V	42.36	53.98	11.62	AV
13370	47.79	0.00	3.77	H	51.56	88.20	36.64	PK
13370	35.73	0.00	3.77	H	39.50	68.20	28.70	AV
20055	45.63	0.00	7.40	H	53.03	73.98	20.95	PK
20055	35.41	0.00	7.40	H	42.81	53.98	11.17	AV

Band : UNII 7				Operation Mode : 802.11be_EHT40 MCS0 106+26T RU83				
CH.179 6845 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13690	49.67	0.00	3.53	V	53.20	88.20	35.00	PK
13690	38.66	0.00	3.53	V	42.19	68.20	26.01	AV
20535	43.77	0.00	7.97	V	51.74	73.98	22.24	PK
20535	32.28	0.00	7.97	V	40.25	53.98	13.73	AV
13690	49.83	0.00	3.53	H	53.36	88.20	34.84	PK
13690	38.42	0.00	3.53	H	41.95	68.20	26.25	AV
20535	43.12	0.00	7.97	H	51.09	73.98	22.89	PK
20535	31.72	0.00	7.97	H	39.69	53.98	14.29	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.7 5985 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11970	53.92	0.00	3.16	V	57.08	73.98	16.90	PK
11970	41.21	0.00	3.16	V	44.37	53.98	9.61	AV
17955	47.74	0.00	3.64	V	51.38	73.98	22.60	PK
17955	35.59	0.00	3.64	V	39.23	53.98	14.75	AV
11970	51.80	0.00	3.16	H	54.96	73.98	19.02	PK
11970	40.59	0.00	3.16	H	43.75	53.98	10.23	AV
17955	47.27	0.00	3.64	H	50.91	73.98	23.07	PK
17955	35.55	0.00	3.64	H	39.19	53.98	14.79	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.39 6145 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12290	51.31	0.00	3.26	V	54.57	73.98	19.41	PK
12290	39.81	0.00	3.26	V	43.07	53.98	10.91	AV
18435	51.33	0.00	1.34	V	52.67	73.98	21.31	PK
18435	40.89	0.00	1.34	V	42.23	53.98	11.75	AV
12290	51.62	0.00	3.26	H	54.88	73.98	19.10	PK
12290	40.49	0.00	3.26	H	43.75	53.98	10.23	AV
18435	51.77	0.00	1.34	H	53.11	73.98	20.87	PK
18435	41.34	0.00	1.34	H	42.68	53.98	11.30	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.87 6385 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12770	47.66	0.00	3.27	V	50.93	88.20	37.27	PK
12770	36.29	0.00	3.27	V	39.56	68.20	28.64	AV
19155	52.44	0.00	2.13	V	54.57	73.98	19.41	PK
19155	42.04	0.00	2.13	V	44.17	53.98	9.81	AV
12770	47.17	0.00	3.27	H	50.44	88.20	37.76	PK
12770	36.30	0.00	3.27	H	39.57	68.20	28.63	AV
19155	52.20	0.00	2.13	H	54.33	73.98	19.65	PK
19155	42.60	0.00	2.13	H	44.73	53.98	9.25	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.135 6625 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13250	48.59	0.00	3.64	V	52.23	73.98	21.75	PK
13250	36.76	0.00	3.64	V	40.40	53.98	13.58	AV
19875	46.28	0.00	6.28	V	52.56	73.98	21.42	PK
19875	35.26	0.00	6.28	V	41.54	53.98	12.44	AV
13250	48.07	0.00	3.64	H	51.71	73.98	22.27	PK
13250	36.82	0.00	3.64	H	40.46	53.98	13.52	AV
19875	46.14	0.00	6.28	H	52.42	73.98	21.56	PK
19875	35.32	0.00	6.28	H	41.60	53.98	12.38	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.151 6705 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13410	48.47	0.00	3.79	V	52.26	88.20	35.94	PK
13410	37.08	0.00	3.79	V	40.87	68.20	27.33	AV
20115	45.71	0.00	7.50	V	53.21	73.98	20.77	PK
20115	34.87	0.00	7.50	V	42.37	53.98	11.61	AV
13410	48.29	0.00	3.79	H	52.08	88.20	36.12	PK
13410	36.84	0.00	3.79	H	40.63	68.20	27.57	AV
20115	46.44	0.00	7.50	H	53.94	73.98	20.04	PK
20115	35.26	0.00	7.50	H	42.76	53.98	11.22	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 52+26T RU75				
CH.167 6785 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13570	49.44	0.00	3.59	V	53.03	88.20	35.17	PK
13570	38.65	0.00	3.59	V	42.24	68.20	25.96	AV
20355	46.04	0.00	7.97	V	54.01	73.98	19.97	PK
20355	34.84	0.00	7.97	V	42.81	53.98	11.17	AV
13570	49.49	0.00	3.59	H	53.08	88.20	35.12	PK
13570	38.32	0.00	3.59	H	41.91	68.20	26.29	AV
20355	45.56	0.00	7.97	H	53.53	73.98	20.45	PK
20355	34.92	0.00	7.97	H	42.89	53.98	11.09	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.7 5985 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11970	49.58	0.00	3.16	V	52.74	73.98	21.24	PK
11970	37.29	0.09	3.16	V	40.54	53.98	13.44	AV
17955	47.69	0.00	3.64	V	51.33	73.98	22.65	PK
17955	35.78	0.09	3.64	V	39.51	53.98	14.47	AV
11970	48.60	0.00	3.16	H	51.76	73.98	22.22	PK
11970	37.86	0.09	3.16	H	41.11	53.98	12.87	AV
17955	47.34	0.00	3.64	H	50.98	73.98	23.00	PK
17955	35.57	0.09	3.64	H	39.30	53.98	14.68	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.39 6145 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12290	49.65	0.00	3.26	V	52.91	73.98	21.07	PK
12290	38.13	0.09	3.26	V	41.48	53.98	12.50	AV
18435	51.68	0.00	1.34	V	53.02	73.98	20.96	PK
18435	40.89	0.09	1.34	V	42.32	53.98	11.66	AV
12290	49.99	0.00	3.26	H	53.25	73.98	20.73	PK
12290	38.65	0.09	3.26	H	42.00	53.98	11.98	AV
18435	51.63	0.00	1.34	H	52.97	73.98	21.01	PK
18435	41.00	0.09	1.34	H	42.43	53.98	11.55	AV

Band : UNII 5				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.87 6385 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12770	47.86	0.00	3.27	V	51.13	88.20	37.07	PK
12770	36.31	0.09	3.27	V	39.67	68.20	28.53	AV
19155	51.91	0.00	2.13	V	54.04	73.98	19.94	PK
19155	41.94	0.09	2.13	V	44.16	53.98	9.82	AV
12770	47.97	0.00	3.27	H	51.24	88.20	36.96	PK
12770	36.26	0.09	3.27	H	39.62	68.20	28.58	AV
19155	53.59	0.00	2.13	H	55.72	73.98	18.26	PK
19155	42.65	0.09	2.13	H	44.87	53.98	9.11	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.135 6625 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13250	48.61	0.00	3.64	V	52.25	73.98	21.73	PK
13250	36.58	0.09	3.64	V	40.31	53.98	13.67	AV
19875	46.31	0.00	6.28	V	52.59	73.98	21.39	PK
19875	35.08	0.09	6.28	V	41.45	53.98	12.53	AV
13250	48.16	0.00	3.64	H	51.80	73.98	22.18	PK
13250	36.65	0.09	3.64	H	40.38	53.98	13.60	AV
19875	45.82	0.00	6.28	H	52.10	73.98	21.88	PK
19875	35.45	0.09	6.28	H	41.82	53.98	12.16	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.151 6705 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13410	48.92	0.00	3.79	V	52.71	88.20	35.49	PK
13410	36.88	0.09	3.79	V	40.76	68.20	27.44	AV
20115	46.47	0.00	7.50	V	53.97	73.98	20.01	PK
20115	34.99	0.09	7.50	V	42.58	53.98	11.40	AV
13410	48.59	0.00	3.79	H	52.38	88.20	35.82	PK
13410	36.97	0.09	3.79	H	40.85	68.20	27.35	AV
20115	46.03	0.00	7.50	H	53.53	73.98	20.45	PK
20115	35.35	0.09	7.50	H	42.94	53.98	11.04	AV

Band : UNII 7				Operation Mode : 802.11be_EHT80 MCS0 484+242T RU91				
CH.167 6785 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13570	49.51	0.00	3.59	V	53.10	88.20	35.10	PK
13570	38.35	0.09	3.59	V	42.03	68.20	26.17	AV
20355	45.60	0.00	7.97	V	53.57	73.98	20.41	PK
20355	34.89	0.09	7.97	V	42.95	53.98	11.03	AV
13570	49.63	0.00	3.59	H	53.22	88.20	34.98	PK
13570	38.34	0.09	3.59	H	42.02	68.20	26.18	AV
20355	45.80	0.00	7.97	H	53.77	73.98	20.21	PK
20355	34.93	0.09	7.97	H	42.99	53.98	10.99	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 52+26T RU75				
CH.15 6025 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12050	47.21	0.00	3.12	V	50.33	73.98	23.65	PK
12050	35.87	0.00	3.12	V	38.99	53.98	14.99	AV
18075	49.96	0.00	2.62	V	52.58	73.98	21.40	PK
18075	39.18	0.00	2.62	V	41.80	53.98	12.18	AV
12050	47.49	0.00	3.12	H	50.61	73.98	23.37	PK
12050	35.83	0.00	3.12	H	38.95	53.98	15.03	AV
18075	50.75	0.00	2.62	H	53.37	73.98	20.61	PK
18075	39.76	0.00	2.62	H	42.38	53.98	11.60	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 52+26T RU75				
CH.47 6185 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12370	49.74	0.00	3.07	V	52.81	73.98	21.17	PK
12370	37.89	0.00	3.07	V	40.96	53.98	13.02	AV
18555	50.99	0.00	0.93	V	51.92	73.98	22.06	PK
18555	40.23	0.00	0.93	V	41.16	53.98	12.82	AV
12370	49.14	0.00	3.07	H	52.21	73.98	21.77	PK
12370	38.02	0.00	3.07	H	41.09	53.98	12.89	AV
18555	51.06	0.00	0.93	H	51.99	73.98	21.99	PK
18555	40.42	0.00	0.93	H	41.35	53.98	12.63	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160(80L) MCS0 52+26T RU75				
CH.79 6345 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12690	47.48	0.00	3.52	V	51.00	73.98	22.98	PK
12690	35.82	0.00	3.52	V	39.34	53.98	14.64	AV
19035	55.09	0.00	1.31	V	56.40	73.98	17.58	PK
19035	45.39	0.00	1.31	V	46.70	53.98	7.28	AV
12690	47.29	0.00	3.52	H	50.81	73.98	23.17	PK
12690	36.02	0.00	3.52	H	39.54	53.98	14.44	AV
19035	55.92	0.00	1.31	H	57.23	73.98	16.75	PK
19035	45.86	0.00	1.31	H	47.17	53.98	6.81	AV

Band : UNII 7				Operation Mode : 802.11be_EHT160(80L) MCS0 52+26T RU75				
CH.143 6665 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13330	47.34	0.00	3.65	V	50.99	73.98	22.99	PK
13330	35.88	0.00	3.65	V	39.53	53.98	14.45	AV
19995	45.62	0.00	6.83	V	52.45	73.98	21.53	PK
19995	34.87	0.00	6.83	V	41.70	53.98	12.28	AV
13330	47.57	0.00	3.65	H	51.22	73.98	22.76	PK
13330	36.13	0.00	3.65	H	39.78	53.98	14.20	AV
19995	46.71	0.00	6.83	H	53.54	73.98	20.44	PK
19995	35.53	0.00	6.83	H	42.36	53.98	11.62	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996+484+242T RU99				
CH.15 6025 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12050	47.60	0.00	3.12	V	50.72	73.98	23.26	PK
12050	35.93	0.00	3.12	V	39.05	53.98	14.93	AV
18075	49.68	0.00	2.62	V	52.30	73.98	21.68	PK
18075	39.25	0.00	2.62	V	41.87	53.98	12.11	AV
12050	47.20	0.00	3.12	H	50.32	73.98	23.66	PK
12050	35.80	0.00	3.12	H	38.92	53.98	15.06	AV
18075	50.05	0.00	2.62	H	52.67	73.98	21.31	PK
18075	39.71	0.00	2.62	H	42.33	53.98	11.65	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996+484+242T RU99				
CH.47 6185 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12370	49.19	0.00	3.07	V	52.26	73.98	21.72	PK
12370	37.91	0.00	3.07	V	40.98	53.98	13.00	AV
18555	50.28	0.00	0.93	V	51.21	73.98	22.77	PK
18555	40.07	0.00	0.93	V	41.00	53.98	12.98	AV
12370	49.47	0.00	3.07	H	52.54	73.98	21.44	PK
12370	37.90	0.00	3.07	H	40.97	53.98	13.01	AV
18555	50.61	0.00	0.93	H	51.54	73.98	22.44	PK
18555	40.27	0.00	0.93	H	41.20	53.98	12.78	AV

Band : UNII 5				Operation Mode : 802.11be_EHT160 MCS0 996+484+242T RU99				
CH.79 6345 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12690	47.49	0.00	3.52	V	51.01	73.98	22.97	PK
12690	35.82	0.00	3.52	V	39.34	53.98	14.64	AV
19035	55.34	0.00	1.31	V	56.65	73.98	17.33	PK
19035	45.03	0.00	1.31	V	46.34	53.98	7.64	AV
12690	47.17	0.00	3.52	H	50.69	73.98	23.29	PK
12690	36.01	0.00	3.52	H	39.53	53.98	14.45	AV
19035	55.53	0.00	1.31	H	56.84	73.98	17.14	PK
19035	45.74	0.00	1.31	H	47.05	53.98	6.93	AV

Band : UNII 7				Operation Mode : 802.11be_EHT160 MCS0 996+484+242T RU99				
CH.143 6665 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13330	47.03	0.00	3.65	V	50.68	73.98	23.30	PK
13330	35.99	0.00	3.65	V	39.64	53.98	14.34	AV
19995	46.08	0.00	6.83	V	52.91	73.98	21.07	PK
19995	34.90	0.00	6.83	V	41.73	53.98	12.25	AV
13330	47.09	0.00	3.65	H	50.74	73.98	23.24	PK
13330	36.14	0.00	3.65	H	39.79	53.98	14.19	AV
19995	46.35	0.00	6.83	H	53.18	73.98	20.80	PK
19995	35.34	0.00	6.83	H	42.17	53.98	11.81	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 52+26T RU75				
CH.31 6105 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12210	48.66	0.00	3.37	V	52.03	73.98	21.95	PK
12210	37.73	0.00	3.37	V	41.10	53.98	12.88	AV
18315	51.32	0.00	1.63	V	52.95	73.98	21.03	PK
18315	40.78	0.00	1.63	V	42.41	53.98	11.57	AV
12210	49.12	0.00	3.37	H	52.49	73.98	21.49	PK
12210	37.73	0.00	3.37	H	41.10	53.98	12.88	AV
18315	52.35	0.00	1.63	H	53.98	73.98	20.00	PK
18315	41.06	0.00	1.63	H	42.69	53.98	11.29	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 52+26T RU75				
CH.63 6265 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12530	48.46	0.00	2.90	V	51.36	73.98	22.62	PK
12530	37.03	0.00	2.90	V	39.93	53.98	14.05	AV
18795	53.19	0.00	-0.13	V	53.06	73.98	20.92	PK
18795	42.90	0.00	-0.13	V	42.77	53.98	11.21	AV
12530	48.34	0.00	2.90	H	51.24	73.98	22.74	PK
12530	36.89	0.00	2.90	H	39.79	53.98	14.19	AV
18795	53.00	0.00	-0.13	H	52.87	73.98	21.11	PK
18795	42.54	0.00	-0.13	H	42.41	53.98	11.57	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 996x3+484T RU1106				
CH.31 6105 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12210	48.49	0.00	3.37	V	51.86	73.98	22.12	PK
12210	37.84	0.00	3.37	V	41.21	53.98	12.77	AV
18315	51.24	0.00	1.63	V	52.87	73.98	21.11	PK
18315	40.70	0.00	1.63	V	42.33	53.98	11.65	AV
12210	48.73	0.00	3.37	H	52.10	73.98	21.88	PK
12210	37.61	0.00	3.37	H	40.98	53.98	13.00	AV
18315	51.35	0.00	1.63	H	52.98	73.98	21.00	PK
18315	41.17	0.00	1.63	H	42.80	53.98	11.18	AV

Band : UNII 5				Operation Mode : 802.11be_EHT320(80LL) MCS0 996x3+484T RU1106				
CH.63 6265 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12530	48.21	0.00	2.90	V	51.11	73.98	22.87	PK
12530	37.14	0.00	2.90	V	40.04	53.98	13.94	AV
18795	53.56	0.00	-0.13	V	53.43	73.98	20.55	PK
18795	42.76	0.00	-0.13	V	42.63	53.98	11.35	AV
12530	48.69	0.00	2.90	H	51.59	73.98	22.39	PK
12530	37.02	0.00	2.90	H	39.92	53.98	14.06	AV
18795	53.54	0.00	-0.13	H	53.41	73.98	20.57	PK
18795	42.57	0.00	-0.13	H	42.44	53.98	11.54	AV

10.12.2 Indoor Cilent

[SRU]

Band : UNII 6				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.97 6435 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12870	47.77	0.00	3.33	V	51.10	88.20	37.10	PK
12870	36.62	0.00	3.33	V	39.95	68.20	28.25	AV
19305	48.79	0.00	3.36	V	52.15	73.98	21.83	PK
19305	36.83	0.00	3.36	V	40.19	53.98	13.79	AV
12870	48.63	0.00	3.33	H	51.96	88.20	36.24	PK
12870	36.68	0.00	3.33	H	40.01	68.20	28.19	AV
19305	47.59	0.00	3.36	H	50.95	73.98	23.03	PK
19305	36.76	0.00	3.36	H	40.12	53.98	13.86	AV

Band : UNII 6				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.105 6475 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12950	48.63	0.00	3.19	V	51.82	88.20	36.38	PK
12950	37.17	0.00	3.19	V	40.36	68.20	27.84	AV
19425	48.72	0.00	3.97	V	52.69	73.98	21.29	PK
19425	38.49	0.00	3.97	V	42.46	53.98	11.52	AV
12950	48.80	0.00	3.19	H	51.99	88.20	36.21	PK
12950	37.43	0.00	3.19	H	40.62	68.20	27.58	AV
19425	49.12	0.00	3.97	H	53.09	73.98	20.89	PK
19425	38.31	0.00	3.97	H	42.28	53.98	11.70	AV

Band : UNII 6				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.113 6515 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13030	48.50	0.00	3.14	V	51.64	88.20	36.56	PK
13030	37.01	0.00	3.14	V	40.15	68.20	28.05	AV
19545	49.66	0.00	4.75	V	54.41	73.98	19.57	PK
19545	38.26	0.00	4.75	V	43.01	53.98	10.97	AV
13030	49.41	0.00	3.14	H	52.55	88.20	35.65	PK
13030	37.37	0.00	3.14	H	40.51	68.20	27.69	AV
19545	49.47	0.00	4.75	H	54.22	73.98	19.76	PK
19545	38.38	0.00	4.75	H	43.13	53.98	10.85	AV

Band : UNII 8				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.185 6875 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13750	49.02	0.00	3.78	V	52.80	88.20	35.40	PK
13750	37.66	0.00	3.78	V	41.44	68.20	26.76	AV
20625	44.35	0.00	8.11	V	52.46	73.98	21.52	PK
20625	33.43	0.00	8.11	V	41.54	53.98	12.44	AV
13750	49.03	0.00	3.78	H	52.81	88.20	35.39	PK
13750	37.71	0.00	3.78	H	41.49	68.20	26.71	AV
20625	43.51	0.00	8.11	H	51.62	73.98	22.36	PK
20625	32.67	0.00	8.11	H	40.78	53.98	13.20	AV

Band : UNII 8				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.209 6995 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13990	49.31	0.00	3.82	V	53.13	88.20	35.07	PK
13990	37.74	0.00	3.82	V	41.56	68.20	26.64	AV
20985	46.54	0.00	7.82	V	54.36	73.98	19.62	PK
20985	35.39	0.00	7.82	V	43.21	53.98	10.77	AV
13990	49.15	0.00	3.82	H	52.97	88.20	35.23	PK
13990	37.71	0.00	3.82	H	41.53	68.20	26.67	AV
20985	46.57	0.00	7.82	H	54.39	73.98	19.59	PK
20985	35.35	0.00	7.82	H	43.17	53.98	10.81	AV

Band : UNII 8				Operation Mode : 802.11be_EHT20 MCS0 242T RU61				
CH.233 7115 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
14230	49.45	0.00	4.88	V	54.33	88.20	33.87	PK
14230	38.58	0.00	4.88	V	43.46	68.20	24.74	AV
21345	44.95	0.00	7.05	V	52.00	73.98	21.98	PK
21345	34.59	0.00	7.05	V	41.64	53.98	12.34	AV
14230	50.06	0.00	4.88	H	54.94	88.20	33.26	PK
14230	38.46	0.00	4.88	H	43.34	68.20	24.86	AV
21345	45.72	0.00	7.05	H	52.77	73.98	21.21	PK
21345	34.63	0.00	7.05	H	41.68	53.98	12.30	AV

Band : UNII 6				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.99 6445 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12890	47.78	0.00	3.40	V	51.18	88.20	37.02	PK
12890	36.73	0.12	3.40	V	40.26	68.20	27.94	AV
19335	47.70	0.00	3.48	V	51.18	73.98	22.80	PK
19335	37.44	0.12	3.48	V	41.04	53.98	12.94	AV
12890	48.28	0.00	3.40	H	51.68	88.20	36.52	PK
12890	36.46	0.12	3.40	H	39.99	68.20	28.21	AV
19335	48.02	0.00	3.48	H	51.50	73.98	22.48	PK
19335	37.30	0.12	3.48	H	40.90	53.98	13.08	AV

Band : UNII 6				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.107 6485 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12970	48.72	0.00	3.15	V	51.87	88.20	36.33	PK
12970	37.09	0.12	3.15	V	40.36	68.20	27.84	AV
19455	49.17	0.00	4.25	V	53.42	73.98	20.56	PK
19455	38.59	0.12	4.25	V	42.96	53.98	11.02	AV
12970	48.61	0.00	3.15	H	51.76	88.20	36.44	PK
12970	36.99	0.12	3.15	H	40.26	68.20	27.94	AV
19455	48.83	0.00	4.25	H	53.08	73.98	20.90	PK
19455	38.60	0.12	4.25	H	42.97	53.98	11.01	AV

Band : UNII 6				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.115 6525 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13050	48.86	0.00	3.14	V	52.00	88.20	36.20	PK
13050	37.47	0.12	3.14	V	40.74	68.20	27.46	AV
19575	48.80	0.00	4.84	V	53.64	73.98	20.34	PK
19575	37.98	0.12	4.84	V	42.94	53.98	11.04	AV
13050	48.73	0.00	3.14	H	51.87	88.20	36.33	PK
13050	37.45	0.12	3.14	H	40.72	68.20	27.48	AV
19575	48.78	0.00	4.84	H	53.62	73.98	20.36	PK
19575	38.03	0.12	4.84	H	42.99	53.98	10.99	AV

Band : UNII 8				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.187 6885 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13770	48.60	0.00	3.87	V	52.47	88.20	35.73	PK
13770	37.70	0.12	3.87	V	41.69	68.20	26.51	AV
20655	44.88	0.00	7.82	V	52.70	73.98	21.28	PK
20655	34.89	0.12	7.82	V	42.83	53.98	11.15	AV
13770	49.81	0.00	3.87	H	53.68	88.20	34.52	PK
13770	37.57	0.12	3.87	H	41.56	68.20	26.64	AV
20655	44.72	0.00	7.82	H	52.54	73.98	21.44	PK
20655	34.45	0.12	7.82	H	42.39	53.98	11.59	AV

Band : UNII 8				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.211 7005 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
14010	48.98	0.00	4.51	V	53.49	88.20	34.71	PK
14010	37.35	0.12	4.51	V	41.99	68.20	26.21	AV
21015	46.55	0.00	7.89	V	54.44	73.98	19.54	PK
21015	35.87	0.12	7.89	V	43.88	53.98	10.10	AV
14010	48.58	0.00	4.51	H	53.09	88.20	35.11	PK
14010	37.44	0.12	4.51	H	42.08	68.20	26.12	AV
21015	46.35	0.00	7.89	H	54.24	73.98	19.74	PK
21015	36.07	0.12	7.89	H	44.08	53.98	9.90	AV

Band : UNII 8				Operation Mode : 802.11be_EHT40 MCS0 484T RU65				
CH.227 7085 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
14170	49.62	0.00	4.69	V	54.31	88.20	33.89	PK
14170	38.53	0.12	4.69	V	43.35	68.20	24.85	AV
21255	46.53	0.00	7.12	V	53.65	73.98	20.33	PK
21255	35.82	0.12	7.12	V	43.06	53.98	10.92	AV
14170	49.88	0.00	4.69	H	54.57	88.20	33.63	PK
14170	38.36	0.12	4.69	H	43.18	68.20	25.02	AV
21255	46.92	0.00	7.12	H	54.04	73.98	19.94	PK
21255	36.35	0.12	7.12	H	43.59	53.98	10.39	AV

Band : UNII 6				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.103 6465 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12930	48.24	0.00	3.21	V	51.45	88.20	36.75	PK
12930	37.22	0.12	3.21	V	40.55	68.20	27.65	AV
19395	48.89	0.00	3.70	V	52.59	73.98	21.39	PK
19395	38.48	0.12	3.70	V	42.30	53.98	11.68	AV
12930	48.65	0.00	3.21	H	51.86	88.20	36.34	PK
12930	37.12	0.12	3.21	H	40.45	68.20	27.75	AV
19395	49.11	0.00	3.70	H	52.81	73.98	21.17	PK
19395	38.39	0.12	3.70	H	42.21	53.98	11.77	AV

Band : UNII 6				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.119 6545 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13090	48.94	0.00	3.21	V	52.15	88.20	36.05	PK
13090	37.39	0.12	3.21	V	40.72	68.20	27.48	AV
19635	48.12	0.00	5.30	V	53.42	73.98	20.56	PK
19635	37.46	0.12	5.30	V	42.88	53.98	11.10	AV
13090	48.79	0.00	3.21	H	52.00	88.20	36.20	PK
13090	37.30	0.12	3.21	H	40.63	68.20	27.57	AV
19635	48.23	0.00	5.30	H	53.53	73.98	20.45	PK
19635	37.33	0.12	5.30	H	42.75	53.98	11.23	AV

Band : UNII 8				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.183 6865 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13730	49.70	0.00	3.64	V	53.34	88.20	34.86	PK
13730	38.03	0.12	3.64	V	41.79	68.20	26.41	AV
20595	44.46	0.00	8.01	V	52.47	73.98	21.51	PK
20595	33.62	0.12	8.01	V	41.75	53.98	12.23	AV
13730	50.13	0.00	3.64	H	53.77	88.20	34.43	PK
13730	38.13	0.12	3.64	H	41.89	68.20	26.31	AV
20595	44.39	0.00	8.01	H	52.40	73.98	21.58	PK
20595	33.21	0.12	8.01	H	41.34	53.98	12.64	AV

Band : UNII 8				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.199 6945 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13890	48.57	0.00	4.23	V	52.80	88.20	35.40	PK
13890	37.02	0.12	4.23	V	41.37	68.20	26.83	AV
20835	47.32	0.00	8.26	V	55.58	73.98	18.40	PK
20835	36.89	0.12	8.26	V	45.27	53.98	8.71	AV
13890	48.68	0.00	4.23	H	52.91	88.20	35.29	PK
13890	37.04	0.12	4.23	H	41.39	68.20	26.81	AV
20835	47.36	0.00	8.26	H	55.62	73.98	18.36	PK
20835	36.97	0.12	8.26	H	45.35	53.98	8.63	AV

Band : UNII 8				Operation Mode : 802.11be_EHT80 MCS0 996T RU67				
CH.215 7025 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
14050	49.46	0.00	4.57	V	54.03	88.20	34.17	PK
14050	38.01	0.12	4.57	V	42.70	68.20	25.50	AV
21075	46.42	0.00	7.59	V	54.01	73.98	19.97	PK
21075	35.92	0.12	7.59	V	43.63	53.98	10.35	AV
14050	49.17	0.00	4.57	H	53.74	88.20	34.46	PK
14050	37.92	0.12	4.57	H	42.61	68.20	25.59	AV
21075	47.25	0.00	7.59	H	54.84	73.98	19.14	PK
21075	36.50	0.12	7.59	H	44.21	53.98	9.77	AV

Band : UNII 6				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.111 6505 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13010	48.50	0.00	3.21	V	51.71	88.20	36.49	PK
13010	37.36	0.00	3.21	V	40.57	68.20	27.63	AV
19515	48.57	0.00	4.57	V	53.14	73.98	20.84	PK
19515	38.15	0.00	4.57	V	42.72	53.98	11.26	AV
13010	48.79	0.00	3.21	H	52.00	88.20	36.20	PK
13010	37.43	0.00	3.21	H	40.64	68.20	27.56	AV
19515	49.00	0.00	4.57	H	53.57	73.98	20.41	PK
19515	38.13	0.00	4.57	H	42.70	53.98	11.28	AV

Band : UNII 8				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.175 6825 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13650	49.77	0.00	3.48	V	53.25	88.20	34.95	PK
13650	38.22	0.00	3.48	V	41.70	68.20	26.50	AV
20475	42.60	0.00	8.00	V	50.60	73.98	23.38	PK
20475	32.33	0.00	8.00	V	40.33	53.98	13.65	AV
13650	50.19	0.00	3.48	H	53.67	88.20	34.53	PK
13650	38.15	0.00	3.48	H	41.63	68.20	26.57	AV
20475	43.32	0.00	8.00	H	51.32	73.98	22.66	PK
20475	31.93	0.00	8.00	H	39.93	53.98	14.05	AV

Band : UNII 8				Operation Mode : 802.11be_EHT160 MCS0 996x2T RU68				
CH.207 6985 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13970	49.69	0.00	4.45	V	54.14	88.20	34.06	PK
13970	37.34	0.00	4.45	V	41.79	68.20	26.41	AV
20955	47.37	0.00	7.99	V	55.36	73.98	18.62	PK
20955	35.94	0.00	7.99	V	43.93	53.98	10.05	AV
13970	48.72	0.00	4.45	H	53.17	88.20	35.03	PK
13970	37.46	0.00	4.45	H	41.91	68.20	26.29	AV
20955	46.76	0.00	7.99	H	54.75	73.98	19.23	PK
20955	36.10	0.00	7.99	H	44.09	53.98	9.89	AV

Band : UNII 6				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.95 6425 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
12850	48.46	0.00	3.37	V	51.83	88.20	36.37	PK
12850	36.57	0.00	3.37	V	39.94	68.20	28.26	AV
19275	49.32	0.00	3.03	V	52.35	73.98	21.63	PK
19275	38.20	0.00	3.03	V	41.23	53.98	12.75	AV
12850	48.17	0.00	3.37	H	51.54	88.20	36.66	PK
12850	36.53	0.00	3.37	H	39.90	68.20	28.30	AV
19275	49.22	0.00	3.03	H	52.25	73.98	21.73	PK
19275	38.44	0.00	3.03	H	41.47	53.98	12.51	AV

Band : UNII 6				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.127 6585 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13170	48.98	0.00	3.51	V	52.49	73.98	21.49	PK
13170	37.20	0.00	3.51	V	40.71	53.98	13.27	AV
19755	46.35	0.00	5.58	V	51.93	73.98	22.05	PK
19755	35.64	0.00	5.58	V	41.22	53.98	12.76	AV
13170	48.61	0.00	3.51	H	52.12	73.98	21.86	PK
13170	37.21	0.00	3.51	H	40.72	53.98	13.26	AV
19755	45.83	0.00	5.58	H	51.41	73.98	22.57	PK
19755	35.30	0.00	5.58	H	40.88	53.98	13.10	AV

Band : UNII 8				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.159 6745 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13490	49.15	0.00	3.77	V	52.92	88.20	35.28	PK
13490	37.95	0.00	3.77	V	41.72	68.20	26.48	AV
20235	46.17	0.00	7.84	V	54.01	73.98	19.97	PK
20235	35.02	0.00	7.84	V	42.86	53.98	11.12	AV
13490	49.44	0.00	3.77	H	53.21	88.20	34.99	PK
13490	37.82	0.00	3.77	H	41.59	68.20	26.61	AV
20235	45.77	0.00	7.84	H	53.61	73.98	20.37	PK
20235	35.23	0.00	7.84	H	43.07	53.98	10.91	AV

Band : UNII 8				Operation Mode : 802.11be_EHT320(80LL) MCS0 26T RU19				
CH.191 6905 MHz				Transfer Rate : MCS0				
Frequency [MHz]	Measured value [dBμV]	D.C.F [dB]	CL+AF+DF-AG [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13810	48.90	0.00	4.17	V	53.07	88.20	35.13	PK
13810	37.61	0.00	4.17	V	41.78	68.20	26.42	AV
20715	47.28	0.00	8.25	V	55.53	73.98	18.45	PK
20715	36.90	0.00	8.25	V	45.15	53.98	8.83	AV
13810	48.85	0.00	4.17	H	53.02	88.20	35.18	PK
13810	37.74	0.00	4.17	H	41.91	68.20	26.29	AV
20715	48.18	0.00	8.25	H	56.43	73.98	17.55	PK
20715	37.21	0.00	8.25	H	45.46	53.98	8.52	AV

Note:


All Modes of operation were investigated and the worst case configuration results are reported.
In order to simplify the report, We only have attached RSE result of worst case.

Test Plots


[MIMO_CDD(Ant1+Ant2)]

[Standard Client]

Average result (802.11be(EHT80), Ch.7 2nd Harmonic, X-V, 26T, RU19)

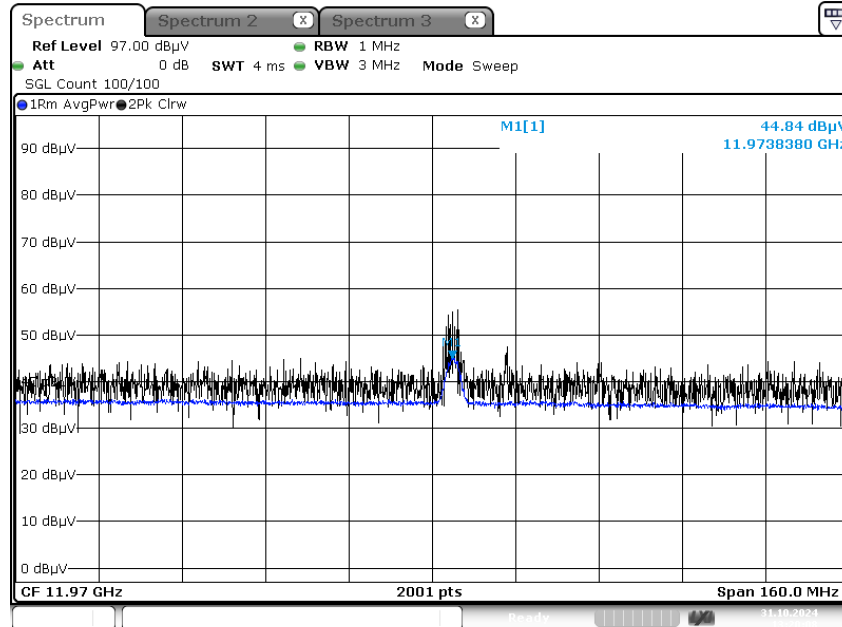

Peak result (802.11be(EHT80), Ch.7 2nd Harmonic, X-V, 26T, RU19)

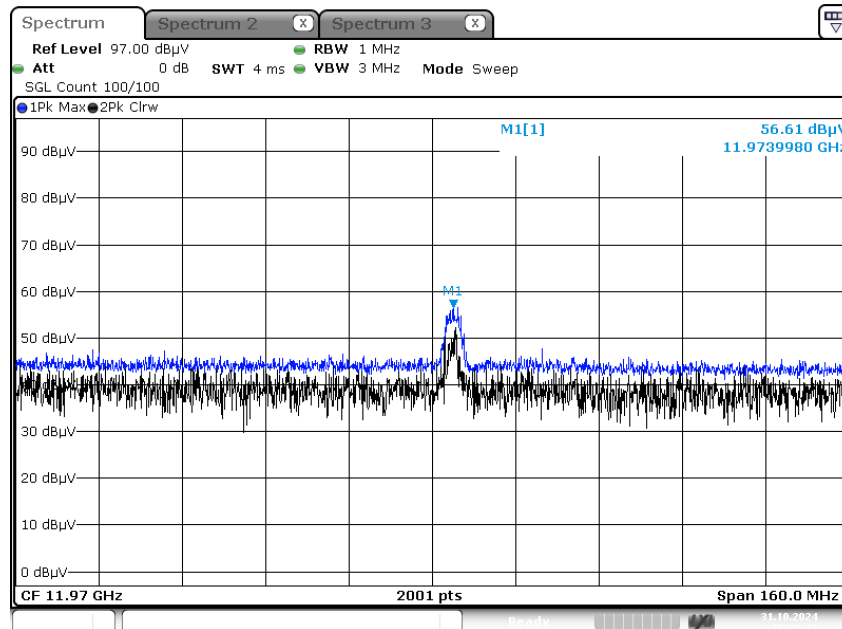

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.13 RADIATED RESTRICTED BAND EDGE

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

[MIMO_CDD(Ant1+Ant2)]

Standard Client:	UNII 5
Indoor Client	UNII 8

10.13.1 Standard Client

[SRU]

802.11a(6 Mbps)

Channel	CH 2	Freq	5935 MHz	ANT. POL	Total	Limit	Margin	Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT					
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
#5924.5	76.96	0.00	-	H	76.96	88.23	11.27	PK
#5924.5	65.34	0.28	-	H	65.62	68.23	2.61	AV
#5923.5	70.12	0.00	-	H	70.12	88.23	18.11	PK
#5923.5	58.96	0.28	-	H	59.24	68.23	8.99	AV
5460 - 5923	72.63	0.00	-	H	72.63	88.23	15.60	PK
5460 - 5923	55.83	0.28	-	H	56.11	68.23	12.12	AV
5350 - 5460	56.70	0.00	-	H	56.70	73.98	17.28	PK
5350 - 5460	44.46	0.28	-	H	44.74	53.98	9.24	AV

802.11be(MCS0)

EHT20

26T

Channel	CH 2	Freq	5935 MHz	RU offset		0			Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin		
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]		
#5924.5	78.43	0.00	-	H	78.43	88.23	9.80		PK
#5924.5	65.95	0.00	-	H	65.95	68.23	2.28		AV
#5923.5	70.38	0.00	-	H	70.38	88.23	17.85		PK
#5923.5	56.05	0.00	-	H	56.05	68.23	12.18		AV
5460 - 5923	77.15	0.00	-	H	77.15	88.23	11.08		PK
5460 - 5923	52.76	0.00	-	H	52.76	68.23	15.47		AV
5350 - 5460	56.18	0.00	-	H	56.18	73.98	17.80		PK
5350 - 5460	44.33	0.00	-	H	44.33	53.98	9.65		AV

802.11be(MCS0)		EHT20		52T				
Channel	CH 2	Freq	5935 MHz	RU offset		37		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	79.14	0.00	-	H	79.14	88.23	9.09	PK
#5924.5	65.45	0.00	-	H	65.45	68.23	2.78	AV
#5923.5	68.99	0.00	-	H	68.99	88.23	19.24	PK
#5923.5	55.99	0.00	-	H	55.99	68.23	12.24	AV
5460 - 5923	75.79	0.00	-	H	75.79	88.23	12.44	PK
5460 - 5923	52.84	0.00	-	H	52.84	68.23	15.39	AV
5350 - 5460	56.37	0.00	-	H	56.37	73.98	17.61	PK
5350 - 5460	44.37	0.00	-	H	44.37	53.98	9.61	AV

802.11be(MCS0)		EHT20		106T				
Channel	CH 2	Freq	5935 MHz	RU offset		53		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	77.29	0.00	-	H	77.29	88.23	10.94	PK
#5924.5	64.75	0.00	-	H	64.75	68.23	3.48	AV
#5923.5	66.82	0.00	-	H	66.82	88.23	21.41	PK
#5923.5	55.28	0.00	-	H	55.28	68.23	12.95	AV
5460 - 5923	73.43	0.00	-	H	73.43	88.23	14.80	PK
5460 - 5923	52.51	0.00	-	H	52.51	68.23	15.72	AV
5350 - 5460	56.22	0.00	-	H	56.22	73.98	17.76	PK
5350 - 5460	44.39	0.00	-	H	44.39	53.98	9.59	AV

802.11be(MCS0)		EHT20		242T				
Channel	CH 2	Freq	5935 MHz	RU offset		61		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	76.84	0.00	-	H	76.84	88.23	11.39	PK
#5924.5	65.98	0.00	-	H	65.98	68.23	2.25	AV
#5923.5	68.17	0.00	-	H	68.17	88.23	20.06	PK
#5923.5	56.40	0.00	-	H	56.40	68.23	11.83	AV
5460 - 5923	74.44	0.00	-	H	74.44	88.23	13.79	PK
5460 - 5923	53.76	0.00	-	H	53.76	68.23	14.47	AV
5350 - 5460	56.16	0.00	-	H	56.16	73.98	17.82	PK
5350 - 5460	44.42	0.00	-	H	44.42	53.98	9.56	AV

802.11be(MCS0)		EHT20		SU				
Channel	CH 2	Freq	5935 MHz	RU offset				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	77.86	0.00	-	H	77.86	88.23	10.37	PK
#5924.5	65.95	0.00	-	H	65.95	68.23	2.28	AV
#5923.5	69.78	0.00	-	H	69.78	88.23	18.45	PK
#5923.5	57.83	0.00	-	H	57.83	68.23	10.40	AV
5460 - 5923	74.55	0.00	-	H	74.55	88.23	13.68	PK
5460 - 5923	54.52	0.00	-	H	54.52	68.23	13.71	AV
5350 - 5460	55.88	0.00	-	H	55.88	73.98	18.10	PK
5350 - 5460	44.43	0.00	-	H	44.43	53.98	9.55	AV

802.11be(MCS0)		EHT40		26T				
Channel	CH 3	Freq	5965 MHz	RU offset		0		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.17	0.00	-	H	56.17	73.98	17.81	PK
5350 - 5460	44.57	0.00	-	H	44.57	53.98	9.41	AV
5460 - 5925	58.59	0.00	-	H	58.59	88.23	29.64	PK
5460 - 5925	47.18	0.00	-	H	47.18	68.23	21.05	AV

802.11be(MCS0)		EHT40		52T				
Channel	CH 3	Freq	5965 MHz	RU offset		37		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.57	0.00	-	H	56.57	73.98	17.41	PK
5350 - 5460	44.54	0.00	-	H	44.54	53.98	9.44	AV
5460 - 5925	59.43	0.00	-	H	59.43	88.23	28.80	PK
5460 - 5925	47.49	0.00	-	H	47.49	68.23	20.74	AV

802.11be(MCS0)		EHT40		106T				
Channel	CH 3	Freq	5965 MHz	RU offset		53		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.64	0.00	-	H	56.64	73.98	17.34	PK
5350 - 5460	44.55	0.00	-	H	44.55	53.98	9.43	AV
5460 - 5925	59.15	0.00	-	H	59.15	88.23	29.08	PK
5460 - 5925	47.61	0.00	-	H	47.61	68.23	20.62	AV

802.11be(MCS0)		EHT40		242T				
Channel	CH 3	Freq	5965 MHz	RU offset		61		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.26	0.00	-	H	56.26	73.98	17.72	PK
5350 - 5460	44.60	0.00	-	H	44.60	53.98	9.38	AV
5460 - 5925	65.82	0.00	-	H	65.82	88.23	22.41	PK
5460 - 5925	52.02	0.00	-	H	52.02	68.23	16.21	AV

802.11be(MCS0)		EHT40		484T				
Channel	CH 3	Freq	5965 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.66	0.00	-	H	56.66	73.98	17.32	PK
5350 - 5460	44.53	0.12	-	H	44.65	53.98	9.33	AV
5460 - 5925	72.05	0.00	-	H	72.05	88.23	16.18	PK
5460 - 5925	56.90	0.12	-	H	57.02	68.23	11.21	AV

802.11be(MCS0)		EHT40		SU				
Channel	CH 3	Freq	5965 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.48	0.00	-	H	56.48	73.98	17.50	PK
5350 - 5460	44.60	0.00	-	H	44.60	53.98	9.38	AV
5460 - 5925	68.22	0.00	-	H	68.22	88.23	20.01	PK
5460 - 5925	55.62	0.00	-	H	55.62	68.23	12.61	AV

802.11be(MCS0)		EHT80		26T				
Channel	CH 7	Freq	5985 MHz	RU offset		0		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.90	0.00	-	H	56.90	73.98	17.08	PK
5350 - 5460	44.87	0.00	-	H	44.87	53.98	9.11	AV
5460 - 5925	64.81	0.00	-	H	64.81	88.23	23.42	PK
5460 - 5925	50.95	0.00	-	H	50.95	68.23	17.28	AV

802.11be(MCS0)		EHT80		52T				
Channel	CH 7	Freq	5985 MHz	RU offset		37		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.67	0.00	-	H	56.67	73.98	17.31	PK
5350 - 5460	44.94	0.00	-	H	44.94	53.98	9.04	AV
5460 - 5925	65.55	0.00	-	H	65.55	88.23	22.68	PK
5460 - 5925	49.26	0.00	-	H	49.26	68.23	18.97	AV

802.11be(MCS0)		EHT80		106T				
Channel	CH 7	Freq	5985 MHz	RU offset		53		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.82	0.00	-	H	56.82	73.98	17.16	PK
5350 - 5460	44.85	0.00	-	H	44.85	53.98	9.13	AV
5460 - 5925	68.55	0.00	-	H	68.55	88.23	19.68	PK
5460 - 5925	53.14	0.00	-	H	53.14	68.23	15.09	AV

802.11be(MCS0)		EHT80		242T				
Channel	CH 7	Freq	5985 MHz	RU offset		61		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.63	0.00	-	H	57.63	73.98	16.35	PK
5350 - 5460	44.88	0.00	-	H	44.88	53.98	9.10	AV
5460 - 5925	68.28	0.00	-	H	68.28	88.23	19.95	PK
5460 - 5925	52.19	0.00	-	H	52.19	68.23	16.04	AV

802.11be(MCS0)		EHT80		484T				
Channel	CH 7	Freq	5985 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.90	0.00	-	H	56.90	73.98	17.08	PK
5350 - 5460	44.74	0.12	-	H	44.86	53.98	9.12	AV
5460 - 5925	72.67	0.00	-	H	72.67	88.23	15.56	PK
5460 - 5925	56.99	0.12	-	H	57.11	68.23	11.12	AV

802.11be(MCS0)		EHT80		996T				
Channel	CH 7	Freq	5985 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.99	0.00	-	H	56.99	73.98	16.99	PK
5350 - 5460	44.72	0.12	-	H	44.84	53.98	9.14	AV
5460 - 5925	69.97	0.00	-	H	69.97	88.23	18.26	PK
5460 - 5925	58.58	0.12	-	H	58.70	68.23	9.53	AV

802.11be(MCS0)		EHT80		SU				
Channel	CH 7	Freq	5985 MHz					
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.82	0.00	-	H	56.82	73.98	17.16	PK
5350 - 5460	44.67	0.00	-	H	44.67	53.98	9.31	AV
5460 - 5925	72.68	0.00	-	H	72.68	88.23	15.55	PK
5460 - 5925	58.69	0.00	-	H	58.69	68.23	9.54	AV

802.11be(MCS0)		EHT160(80L)		26T				
Channel	CH 15	Freq	6025 MHz	RU offset		0		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.53	0.00	-	H	56.53	73.98	17.45	PK
5350 - 5460	44.54	0.00	-	H	44.54	53.98	9.44	AV
5460 - 5925	75.95	0.00	-	H	75.95	88.23	12.28	PK
5460 - 5925	50.71	0.00	-	H	50.71	68.23	17.52	AV

802.11be(MCS0)		EHT160(80L)		52T				
Channel	CH 15	Freq	6025 MHz	RU offset		37		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.40	0.00	-	H	56.40	73.98	17.58	PK
5350 - 5460	44.56	0.00	-	H	44.56	53.98	9.42	AV
5460 - 5925	64.41	0.00	-	H	64.41	88.23	23.82	PK
5460 - 5925	49.31	0.00	-	H	49.31	68.23	18.92	AV

802.11be(MCS0)		EHT160(80L)		106T				
Channel	CH 15	Freq	6025 MHz	RU offset		53		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.73	0.00	-	H	56.73	73.98	17.25	PK
5350 - 5460	44.54	0.00	-	H	44.54	53.98	9.44	AV
5460 - 5925	70.89	0.00	-	H	70.89	88.23	17.34	PK
5460 - 5925	48.11	0.00	-	H	48.11	68.23	20.12	AV

802.11be(MCS0)		EHT160(80L)		242T				
Channel	CH 15	Freq	6025 MHz	RU offset		61		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.78	0.00	-	H	56.78	73.98	17.20	PK
5350 - 5460	44.98	0.00	-	H	44.98	53.98	9.00	AV
5460 - 5925	73.32	0.00	-	H	73.32	88.23	14.91	PK
5460 - 5925	50.56	0.00	-	H	50.56	68.23	17.67	AV

802.11be(MCS0)		EHT160(80L)		484T				
Channel	CH 15	Freq	6025 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.03	0.00	-	H	57.03	73.98	16.95	PK
5350 - 5460	44.51	0.12	-	H	44.63	53.98	9.35	AV
5460 - 5925	70.39	0.00	-	H	70.39	88.23	17.84	PK
5460 - 5925	55.59	0.12	-	H	55.71	68.23	12.52	AV

802.11be(MCS0)		EHT160(80L)		996T				
Channel	CH 15	Freq	6025 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.55	0.00	-	H	56.55	73.98	17.43	PK
5350 - 5460	44.53	0.12	-	H	44.65	53.98	9.33	AV
5460 - 5925	68.73	0.00	-	H	68.73	88.23	19.50	PK
5460 - 5925	55.28	0.12	-	H	55.40	68.23	12.83	AV

802.11be(MCS0)		EHT160		2x996T				
Channel	CH 15	Freq	6025 MHz	RU offset		68		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.34	0.00	-	H	56.34	73.98	17.64	PK
5350 - 5460	44.56	0.12	-	H	44.68	53.98	9.30	AV
5460 - 5925	71.40	0.00	-	H	71.40	88.23	16.83	PK
5460 - 5925	55.07	0.12	-	H	55.19	68.23	13.04	AV

802.11be(MCS0)		EHT160		SU				
Channel	CH 15	Freq	6025 MHz	RU offset				
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.25	0.00	-	H	56.25	73.98	17.73	PK
5350 - 5460	44.59	0.00	-	H	44.59	53.98	9.39	AV
5460 - 5925	69.02	0.00	-	H	69.02	88.23	19.21	PK
5460 - 5925	52.23	0.00	-	H	52.23	68.23	16.00	AV

802.11be(MCS0)		EHT320(80LL)		26T				
Channel	CH 31	Freq	6105 MHz	RU offset		0		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.56	0.00	-	H	57.56	73.98	16.42	PK
5350 - 5460	44.83	0.00	-	H	44.83	53.98	9.15	AV
5460 - 5925	77.77	0.00	-	H	77.77	88.23	10.46	PK
5460 - 5925	54.97	0.00	-	H	54.97	68.23	13.26	AV

802.11be(MCS0)		EHT320(80LL)		52T				
Channel	CH 31	Freq	6105 MHz	RU offset		37		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.35	0.00	-	H	56.35	73.98	17.63	PK
5350 - 5460	44.91	0.00	-	H	44.91	53.98	9.07	AV
5460 - 5925	66.67	0.00	-	H	66.67	88.23	21.56	PK
5460 - 5925	53.21	0.00	-	H	53.21	68.23	15.02	AV

802.11be(MCS0)		EHT320(80LL)		106T				
Channel	CH 31	Freq	6105 MHz	RU offset		53		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.01	0.00	-	H	57.01	73.98	16.97	PK
5350 - 5460	44.78	0.00	-	H	44.78	53.98	9.20	AV
5460 - 5925	73.41	0.00	-	H	73.41	88.23	14.82	PK
5460 - 5925	52.33	0.00	-	H	52.33	68.23	15.90	AV

802.11be(MCS0)		EHT320(80LL)		242T				
Channel	CH 31	Freq	6105 MHz	RU offset		61		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.01	0.00	-	H	57.01	73.98	16.97	PK
5350 - 5460	44.84	0.00	-	H	44.84	53.98	9.14	AV
5460 - 5925	74.42	0.00	-	H	74.42	88.23	13.81	PK
5460 - 5925	52.36	0.00	-	H	52.36	68.23	15.87	AV

802.11be(MCS0)		EHT320(80LL)		484T				
Channel	CH 31	Freq	6105 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.68	0.00	-	H	57.68	73.98	16.30	PK
5350 - 5460	45.00	0.11	-	H	45.11	53.98	8.87	AV
5460 - 5925	77.92	0.00	-	H	77.92	88.23	10.31	PK
5460 - 5925	54.65	0.11	-	H	54.76	68.23	13.47	AV

802.11be(MCS0)		EHT320(80LL)		996T				
Channel	CH 31	Freq	6105 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.27	0.00	-	H	56.27	73.98	17.71	PK
5350 - 5460	44.72	0.12	-	H	44.84	53.98	9.14	AV
5460 - 5925	67.79	0.00	-	H	67.79	88.23	20.44	PK
5460 - 5925	53.97	0.12	-	H	54.09	68.23	14.14	AV

802.11be(MCS0)		EHT320(160L)		2x996T				
Channel	CH 31	Freq	6105 MHz	RU offset		68		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.76	0.00	-	H	56.76	73.98	17.22	PK
5350 - 5460	44.59	0.12	-	H	44.71	53.98	9.27	AV
5460 - 5925	67.45	0.00	-	H	67.45	88.23	20.78	PK
5460 - 5925	52.80	0.12	-	H	52.92	68.23	15.31	AV

802.11be(MCS0)		EHT320		4x996T				
Channel	CH 31	Freq	6105 MHz	RU offset		69		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.77	0.00	-	H	56.77	73.98	17.21	PK
5350 - 5460	44.71	0.21	-	H	44.92	53.98	9.06	AV
5460 - 5925	69.19	0.00	-	H	69.19	88.23	19.04	PK
5460 - 5925	52.64	0.21	-	H	52.85	68.23	15.38	AV

802.11be(MCS0)		EHT320		SU				
Channel	CH 31	Freq	6105 MHz	RU offset		69		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.68	0.00	-	H	56.68	73.98	17.30	PK
5350 - 5460	44.80	0.00	-	H	44.80	53.98	9.18	AV
5460 - 5925	65.68	0.00	-	H	65.68	88.23	22.55	PK
5460 - 5925	52.24	0.00	-	H	52.24	68.23	15.99	AV

802.11be(MCS0)		EHT20		52T+26T				
Channel	CH 2	Freq	5935 MHz	MRU offset		70		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	79.66	0.00	-	H	79.66	88.23	8.57	PK
#5924.5	65.15	0.00	-	H	65.15	68.23	3.08	AV
#5923.5	74.62	0.00	-	H	74.62	88.23	13.61	PK
#5923.5	60.01	0.00	-	H	60.01	68.23	8.22	AV
5460 - 5923	77.62	0.00	-	H	77.62	88.23	10.61	PK
5460 - 5923	54.21	0.00	-	H	54.21	68.23	14.02	AV
5350 - 5460	56.65	0.00	-	H	56.65	73.98	17.33	PK
5350 - 5460	43.63	0.00	-	H	43.63	53.98	10.35	AV

802.11be(MCS0)		EHT20		106T+26T				
Channel	CH 2	Freq	5935 MHz	MRU offset		82		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#5924.5	77.45	0.00	-	H	77.45	88.23	10.78	PK
#5924.5	64.91	0.00	-	H	64.91	68.23	3.32	AV
#5923.5	67.91	0.00	-	H	67.91	88.23	20.32	PK
#5923.5	55.47	0.00	-	H	55.47	68.23	12.76	AV
5460 - 5923	71.94	0.00	-	H	71.94	88.23	16.29	PK
5460 - 5923	50.87	0.00	-	H	50.87	68.23	17.36	AV
5350 - 5460	56.06	0.00	-	H	56.06	73.98	17.92	PK
5350 - 5460	44.52	0.00	-	H	44.52	53.98	9.46	AV

802.11be(MCS0)		EHT40		52T+26T				
Channel	CH 3	Freq	5965 MHz	MRU offset		70		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.26	0.00	-	H	56.26	73.98	17.72	PK
5350 - 5460	47.30	0.00	-	H	47.30	53.98	6.68	AV
5460 - 5925	59.00	0.00	-	H	59.00	88.23	29.23	PK
5460 - 5925	49.97	0.00	-	H	49.97	68.23	18.26	AV

802.11be(MCS0)		EHT40		106T+26T				
Channel	CH 3	Freq	5965 MHz	MRU offset		82		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.62	0.00	-	H	56.62	73.98	17.36	PK
5350 - 5460	44.54	0.00	-	H	44.54	53.98	9.44	AV
5460 - 5925	59.56	0.00	-	H	59.56	88.23	28.67	PK
5460 - 5925	47.28	0.00	-	H	47.28	68.23	20.95	AV

802.11be(MCS0)		EHT80		52T + 26T				
Channel	CH 7	Freq	5985 MHz	MRU offset		70		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.76	0.00	-	H	56.76	73.98	17.22	PK
5350 - 5460	44.69	0.00	-	H	44.69	53.98	9.29	AV
5460 - 5925	69.17	0.00	-	H	69.17	88.23	19.06	PK
5460 - 5925	48.11	0.00	-	H	48.11	68.23	20.12	AV

802.11be(MCS0)		EHT80		106T + 26T				
Channel	CH 7	Freq	5985 MHz	MRU offset		82		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.03	0.00	-	H	56.03	73.98	17.95	PK
5350 - 5460	44.66	0.00	-	H	44.66	53.98	9.32	AV
5460 - 5925	64.12	0.00	-	H	64.12	88.23	24.11	PK
5460 - 5925	48.17	0.00	-	H	48.17	68.23	20.06	AV

802.11be(MCS0)		EHT80		484T + 242T				
Channel	CH 7	Freq	5985 MHz	MRU offset		93		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.98	0.00	-	H	56.98	73.98	17.00	PK
5350 - 5460	44.67	0.09	-	H	44.76	53.98	9.22	AV
5460 - 5925	73.97	0.00	-	H	73.97	88.23	14.26	PK
5460 - 5925	59.45	0.09	-	H	59.54	68.23	8.69	AV

802.11be(MCS0)		EHT160(80L)		52T + 26T				
Channel	CH 15	Freq	6025 MHz	MRU offset		70		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.53	0.00	-	H	56.53	73.98	17.45	PK
5350 - 5460	44.76	0.00	-	H	44.76	53.98	9.22	AV
5460 - 5925	76.80	0.00	-	H	76.80	88.23	11.43	PK
5460 - 5925	48.74	0.00	-	H	48.74	68.23	19.49	AV

802.11be(MCS0)		EHT160(80L)		106T + 26T				
Channel	CH 15	Freq	6025 MHz	MRU offset		82		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.25	0.00	-	H	56.25	73.98	17.73	PK
5350 - 5460	44.73	0.00	-	H	44.73	53.98	9.25	AV
5460 - 5925	74.01	0.00	-	H	74.01	88.23	14.22	PK
5460 - 5925	48.16	0.00	-	H	48.16	68.23	20.07	AV

802.11be(MCS0)		EHT160(80L)		484T + 242T				
Channel	CH 15	Freq	6025 MHz	MRU offset		93		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.81	0.00	-	H	56.81	73.98	17.17	PK
5350 - 5460	44.72	0.09	-	H	44.81	53.98	9.17	AV
5460 - 5925	72.73	0.00	-	H	72.73	88.23	15.50	PK
5460 - 5925	58.10	0.09	-	H	58.19	68.23	10.04	AV

802.11be(MCS0)		EHT160(OFDMA)		996T + 484T				
Channel	CH 15	Freq	6025 MHz	MRU offset		1095		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.38	0.00	-	H	56.38	73.98	17.60	PK
5350 - 5460	44.80	0.09	-	H	44.89	53.98	9.09	AV
5460 - 5925	72.96	0.00	-	H	72.96	88.23	15.27	PK
5460 - 5925	57.32	0.09	-	H	57.41	68.23	10.82	AV

802.11be(MCS0)		EHT160(Non-OFDMA)		996T + 484T + 242T				
Channel	CH 15	Freq	6025 MHz	MRU offset		1099		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.10	0.00	-	H	56.10	73.98	17.88	PK
5350 - 5460	44.74	0.00	-	H	44.74	53.98	9.24	AV
5460 - 5925	69.12	0.00	-	H	69.12	88.23	19.11	PK
5460 - 5925	55.15	0.00	-	H	55.15	68.23	13.08	AV

802.11be(MCS0)		EHT320(80LL)		52T+26T				
Channel	CH 31	Freq	6105 MHz	MRU offset		70		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.57	0.00	-	H	57.57	73.98	16.41	PK
5350 - 5460	45.19	0.00	-	H	45.19	53.98	8.79	AV
5460 - 5925	79.23	0.00	-	H	79.23	88.23	9.00	PK
5460 - 5925	53.06	0.00	-	H	53.06	68.23	15.17	AV

802.11be(MCS0)		EHT320(80LL)		106T+26T				
Channel	CH 31	Freq	6105 MHz	MRU offset		82		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	57.64	0.00	-	H	57.64	73.98	16.34	PK
5350 - 5460	44.87	0.00	-	H	44.87	53.98	9.11	AV
5460 - 5925	76.16	0.00	-	H	76.16	88.23	12.07	PK
5460 - 5925	52.14	0.00	-	H	52.14	68.23	16.09	AV

802.11be(MCS0)		EHT320(80LL)		484T+242T				
Channel	CH 31	Freq	6105 MHz	MRU offset		93		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	58.06	0.00	-	H	58.06	73.98	15.92	PK
5350 - 5460	45.13	0.09	-	H	45.22	53.98	8.76	AV
5460 - 5925	75.43	0.00	-	H	75.43	88.23	12.80	PK
5460 - 5925	55.85	0.09	-	H	55.94	68.23	12.29	AV

802.11be(MCS0)		EHT320(160L)		996T+484T				
Channel	CH 31	Freq	6105 MHz	MRU offset		1095		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.52	0.00	-	H	56.52	73.98	17.46	PK
5350 - 5460	45.20	0.09	-	H	45.29	53.98	8.69	AV
5460 - 5925	73.44	0.00	-	H	73.44	88.23	14.79	PK
5460 - 5925	55.58	0.09	-	H	55.67	68.23	12.56	AV

802.11be(MCS0)		EHT320(OFDMA)		2x996T+484T				
Channel	CH 31	Freq	6105 MHz	MRU offset		1101		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.69	0.00	-	H	56.69	73.98	17.29	PK
5350 - 5460	44.87	0.15	-	H	45.02	53.98	8.96	AV
5460 - 5925	71.13	0.00	-	H	71.13	88.23	17.10	PK
5460 - 5925	51.24	0.15	-	H	51.39	68.23	16.84	AV

802.11be(MCS0)		EHT320(OFDMA)		3x996T				
Channel	CH 31	Freq	6105 MHz	MRU offset		11104		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.38	0.00	-	H	56.38	73.98	17.60	PK
5350 - 5460	44.89	0.17	-	H	45.06	53.98	8.92	AV
5460 - 5925	70.60	0.00	-	H	70.60	88.23	17.63	PK
5460 - 5925	52.90	0.17	-	H	53.07	68.23	15.16	AV

802.11be(MCS0)		EHT320(OFDMA)		3x996T+484T				
Channel	CH 31	Freq	6105 MHz	MRU offset		11106		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350 - 5460	56.47	0.00	-	H	56.47	73.98	17.51	PK
5350 - 5460	44.91	0.22	-	H	45.13	53.98	8.85	AV
5460 - 5925	68.49	0.00	-	H	68.49	88.23	19.74	PK
5460 - 5925	52.41	0.22	-	H	52.63	68.23	15.60	AV

10.13.2 Indoor Client

[SRU]

802.11a(6 Mbps)

Channel	Ch.233	Freq	7115 MHz	ANT. POL	Total	Limit	Margin	Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT					
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
#7125 - 7250	73.01	0.00	-	H	73.01	88.23	15.22	PK
#7125 - 7250	62.95	0.28	-	H	63.23	68.23	5.00	AV
7250 - 7750	51.68	0.00	-	H	51.68	73.98	22.30	PK
7250 - 7750	39.70	0.28	-	H	39.98	53.98	14.00	AV

802.11be(MCS0)

EHT20

26T

Channel	Ch.233	Freq	7115 MHz	RU offset		8			Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin		
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]		
#7125 - 7250	70.00	0.00	-	H	70.00	88.23	18.23		PK
#7125 - 7250	58.41	0.00	-	H	58.41	68.23	9.82		AV
7250 - 7750	51.90	0.00	-	H	51.90	73.98	22.08		PK
7250 - 7750	39.72	0.00	-	H	39.72	53.98	14.26		AV

802.11be(MCS0)

EHT20

52T

Channel	Ch.233	Freq	7115 MHz	RU offset		40			Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin		
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]		
#7125 - 7250	72.44	0.00	-	H	72.44	88.23	15.79		PK
#7125 - 7250	58.44	0.00	-	H	58.44	68.23	9.79		AV
7250 - 7750	39.73	0.00	-	H	39.73	73.98	34.25		PK
7250 - 7750	39.84	0.00	-	H	39.84	53.98	14.14		AV

802.11be(MCS0)

EHT20

106T

Channel	Ch.233	Freq	7115 MHz	RU offset		54			Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin		
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]		
#7125 - 7250	75.41	0.00	-	H	75.41	88.23	12.82		PK
#7125 - 7250	61.30	0.00	-	H	61.30	68.23	6.93		AV
7250 - 7750	51.84	0.00	-	H	51.84	73.98	22.14		PK
7250 - 7750	39.70	0.00	-	H	39.70	53.98	14.28		AV

802.11be(MCS0)

EHT20

242T

Channel	Ch.233	Freq	7115 MHz	RU offset		61			Measurement Type
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin		
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]		
#7125 - 7250	71.79	0.00	-	H	71.79	88.23	16.44		PK
#7125 - 7250	60.81	0.00	-	H	60.81	68.23	7.42		AV
7250 - 7750	52.04	0.00	-	H	52.04	73.98	21.94		PK
7250 - 7750	39.72	0.00	-	H	39.72	53.98	14.26		AV

802.11be(MCS0)		EHT20		SU				
Channel	Ch.233	Freq	7115 MHz					
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#7125 - 7250	76.35	0.00	-	H	76.35	88.23	11.88	PK
#7125 - 7250	63.71	0.28	-	H	63.99	68.23	4.24	AV
7250 - 7750	51.47	0.00	-	H	51.47	73.98	22.51	PK
7250 - 7750	39.76	0.28	-	H	40.04	53.98	13.94	AV

802.11be(MCS0)		EHT40		26T				
Channel	Ch.227	Freq	7085 MHz	RU offset		17		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.04	0.00	-	H	50.04	88.23	38.19	PK
7125 - 7250	38.79	0.00	-	H	38.79	68.23	29.44	AV
7250 - 7750	51.32	0.00	-	H	51.32	73.98	22.66	PK
7250 - 7750	39.79	0.00	-	H	39.79	53.98	14.19	AV

802.11be(MCS0)		EHT40		52T				
Channel	Ch.227	Freq	7085 MHz	RU offset		44		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.31	0.00	-	H	50.31	88.23	37.92	PK
7125 - 7250	38.84	0.00	-	H	38.84	68.23	29.39	AV
7250 - 7750	51.32	0.00	-	H	51.32	73.98	22.66	PK
7250 - 7750	39.70	0.00	-	H	39.70	53.98	14.28	AV

802.11be(MCS0)		EHT40		106T				
Channel	Ch.227	Freq	7085 MHz	RU offset		56		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.76	0.00	-	H	50.76	88.23	37.47	PK
7125 - 7250	38.91	0.00	-	H	38.91	68.23	29.32	AV
7250 - 7750	50.91	0.00	-	H	50.91	73.98	23.07	PK
7250 - 7750	39.73	0.00	-	H	39.73	53.98	14.25	AV

802.11be(MCS0)		EHT40		242T				
Channel	Ch.227	Freq	7085 MHz	RU offset		62		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.30	0.00	-	H	50.30	88.23	37.93	PK
7125 - 7250	38.98	0.00	-	H	38.98	68.23	29.25	AV
7250 - 7750	51.03	0.00	-	H	51.03	73.98	22.95	PK
7250 - 7750	39.69	0.00	-	H	39.69	53.98	14.29	AV

802.11be(MCS0)		EHT40		484T				
Channel	Ch.227	Freq	7085 MHz	RU offset		65		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	61.20	0.00	-	H	61.20	88.23	27.03	PK
7125 - 7250	47.85	0.12	-	H	47.97	68.23	20.26	AV
7250 - 7750	51.37	0.00	-	H	51.37	73.98	22.61	PK
7250 - 7750	39.69	0.12	-	H	39.81	53.98	14.17	AV

802.11be(MCS0)		EHT40		SU				
Channel	Ch.227	Freq	7085 MHz					
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	59.55	0.00	-	H	59.55	88.23	28.68	PK
7125 - 7250	47.00	0.00	-	H	47.00	68.23	21.23	AV
7250 - 7750	51.75	0.00	-	H	51.75	73.98	22.23	PK
7250 - 7750	40.38	0.00	-	H	40.38	53.98	13.60	AV

802.11be(MCS0)		EHT80		26T				
Channel	Ch.215	Freq	7025 MHz	RU offset		36		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.13	0.00	-	H	51.13	88.23	37.10	PK
7125 - 7250	39.41	0.00	-	H	39.41	68.23	28.82	AV
7250 - 7750	52.73	0.00	-	H	52.73	73.98	21.25	PK
7250 - 7750	40.59	0.00	-	H	40.59	53.98	13.39	AV

802.11be(MCS0)		EHT80		52T				
Channel	Ch.215	Freq	7025 MHz	RU offset		52		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.90	0.00	-	H	50.90	88.23	37.33	PK
7125 - 7250	39.45	0.00	-	H	39.45	68.23	28.78	AV
7250 - 7750	52.43	0.00	-	H	52.43	73.98	21.55	PK
7250 - 7750	40.54	0.00	-	H	40.54	53.98	13.44	AV

802.11be(MCS0)		EHT80		106T				
Channel	Ch.215	Freq	7025 MHz	RU offset		60		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.06	0.00	-	H	51.06	88.23	37.17	PK
7125 - 7250	39.52	0.00	-	H	39.52	68.23	28.71	AV
7250 - 7750	51.98	0.00	-	H	51.98	73.98	22.00	PK
7250 - 7750	40.58	0.00	-	H	40.58	53.98	13.40	AV

802.11be(MCS0)		EHT80		242T				
Channel	Ch.215	Freq	7025 MHz	RU offset		64		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.22	0.00	-	H	51.22	88.23	37.01	PK
7125 - 7250	39.70	0.00	-	H	39.70	68.23	28.53	AV
7250 - 7750	52.66	0.00	-	H	52.66	73.98	21.32	PK
7250 - 7750	40.54	0.00	-	H	40.54	53.98	13.44	AV

802.11be(MCS0)		EHT80		484T				
Channel	Ch.215	Freq	7025 MHz	RU offset		66		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.49	0.00	-	H	51.49	88.23	36.74	PK
7125 - 7250	39.87	0.12	-	H	39.99	68.23	28.24	AV
7250 - 7750	52.46	0.00	-	H	52.46	73.98	21.52	PK
7250 - 7750	40.44	0.12	-	H	40.56	53.98	13.42	AV

802.11be(MCS0)		EHT80		996T				
Channel	Ch.215	Freq	7025 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	62.86	0.00	-	H	62.86	88.23	25.37	PK
7125 - 7250	47.92	0.12	-	H	48.04	68.23	20.19	AV
7250 - 7750	52.84	0.00	-	H	52.84	73.98	21.14	PK
7250 - 7750	40.49	0.12	-	H	40.61	53.98	13.37	AV

802.11be(MCS0)		EHT80		SU				
Channel	Ch.215	Freq	7025 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	57.79	0.00	-	H	57.79	88.23	30.44	PK
7125 - 7250	45.04	0.00	-	H	45.04	68.23	23.19	AV
7250 - 7750	52.32	0.00	-	H	52.32	73.98	21.66	PK
7250 - 7750	40.49	0.00	-	H	40.49	53.98	13.49	AV

802.11be(MCS0)		EHT160(80U)		26T				
Channel	CH 207	Freq	6985 MHz	RU offset		36		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.56	0.00	-	H	51.56	88.23	36.67	PK
7125 - 7250	39.50	0.00	-	H	39.50	68.23	28.73	AV
7250 - 7750	52.80	0.00	-	H	52.80	73.98	21.18	PK
7250 - 7750	40.75	0.00	-	H	40.75	53.98	13.23	AV

802.11be(MCS0)		EHT160(80U)		52T				
Channel	CH 207	Freq	6985 MHz	RU offset		52		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	53.50	0.00	-	H	53.50	88.23	34.73	PK
7125 - 7250	39.55	0.00	-	H	39.55	68.23	28.68	AV
7250 - 7750	52.92	0.00	-	H	52.92	73.98	21.06	PK
7250 - 7750	40.65	0.00	-	H	40.65	53.98	13.33	AV

802.11be(MCS0)		EHT160(80U)		106T				
Channel	CH 207	Freq	6985 MHz	RU offset		60		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.19	0.00	-	H	51.19	88.23	37.04	PK
7125 - 7250	39.57	0.00	-	H	39.57	68.23	28.66	AV
7250 - 7750	52.50	0.00	-	H	52.50	73.98	21.48	PK
7250 - 7750	40.63	0.00	-	H	40.63	53.98	13.35	AV

802.11be(MCS0)		EHT160(80U)		242T				
Channel	CH 207	Freq	6985 MHz	RU offset		64		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	58.03	0.00	-	H	58.03	88.23	30.20	PK
7125 - 7250	40.22	0.00	-	H	40.22	68.23	28.01	AV
7250 - 7750	52.48	0.00	-	H	52.48	73.98	21.50	PK
7250 - 7750	40.55	0.00	-	H	40.55	53.98	13.43	AV

802.11be(MCS0)		EHT160(80U)		484T				
Channel	CH 207	Freq	6985 MHz	RU offset		66		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	59.87	0.00	-	H	59.87	88.23	28.36	PK
7125 - 7250	40.55	0.00	-	H	40.55	68.23	27.68	AV
7250 - 7750	52.79	0.00	-	H	52.79	73.98	21.19	PK
7250 - 7750	40.54	0.00	-	H	40.54	53.98	13.44	AV

802.11be(MCS0)		EHT160(80U)		996T				
Channel	CH 207	Freq	6985 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	64.18	0.00	-	H	64.18	88.23	24.05	PK
7125 - 7250	48.56	0.12	-	H	48.68	68.23	19.55	AV
7250 - 7750	52.98	0.00	-	H	52.98	73.98	21.00	PK
7250 - 7750	40.60	0.12	-	H	40.72	53.98	13.26	AV

802.11be(MCS0)		EHT160		2x996T				
Channel	CH 207	Freq	6985 MHz	RU offset		68		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	73.32	0.00	-	H	73.32	88.23	14.91	PK
7125 - 7250	53.05	0.12	-	H	53.17	68.23	15.06	AV
7250 - 7750	54.38	0.00	-	H	54.38	73.98	19.60	PK
7250 - 7750	40.62	0.12	-	H	40.74	53.98	13.24	AV

802.11be(MCS0)		EHT160		SU				
Channel	CH 207	Freq	6985 MHz	RU offset		68		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	61.65	0.00	-	H	61.65	88.23	26.58	PK
7125 - 7250	45.08	0.00	-	H	45.08	68.23	23.15	AV
7250 - 7750	52.29	0.00	-	H	52.29	73.98	21.69	PK
7250 - 7750	40.44	0.00	-	H	40.44	53.98	13.54	AV

802.11be(MCS0)		EHT320(80HH)		26T				
Channel	CH 191	Freq	6905 MHz	RU offset		36		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.91	0.00	-	H	50.91	88.23	37.32	PK
7125 - 7250	39.60	0.00	-	H	39.60	68.23	28.63	AV
7250 - 7750	52.64	0.00	-	H	52.64	73.98	21.34	PK
7250 - 7750	40.68	0.00	-	H	40.68	53.98	13.30	AV

802.11be(MCS0)		EHT320(80HH)		52T				
Channel	CH 191	Freq	6905 MHz	RU offset		52		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.75	0.00	-	H	51.75	88.23	36.48	PK
7125 - 7250	40.21	0.00	-	H	40.21	68.23	28.02	AV
7250 - 7750	55.99	0.00	-	H	55.99	73.98	17.99	PK
7250 - 7750	40.66	0.00	-	H	40.66	53.98	13.32	AV

802.11be(MCS0)		EHT320(80HH)		106T				
Channel	CH 191	Freq	6905 MHz	RU offset		60		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.37	0.00	-	H	51.37	88.23	36.86	PK
7125 - 7250	40.72	0.00	-	H	40.72	68.23	27.51	AV
7250 - 7750	53.02	0.00	-	H	53.02	73.98	20.96	PK
7250 - 7750	40.61	0.00	-	H	40.61	53.98	13.37	AV

802.11be(MCS0)		EHT320(80HH)		242T				
Channel	CH 191	Freq	6905 MHz	RU offset		64		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	58.15	0.00	-	H	58.15	88.23	30.08	PK
7125 - 7250	41.85	0.00	-	H	41.85	68.23	26.38	AV
7250 - 7750	63.90	0.00	-	H	63.90	73.98	10.08	PK
7250 - 7750	40.56	0.00	-	H	40.56	53.98	13.42	AV

802.11be(MCS0)		EHT320(80HH)		484T				
Channel	CH 191	Freq	6905 MHz	RU offset		66		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	62.80	0.00	-	H	62.80	88.23	25.43	PK
7125 - 7250	42.25	0.11	-	H	42.36	68.23	25.87	AV
7250 - 7750	63.75	0.00	-	H	63.75	73.98	10.23	PK
7250 - 7750	40.83	0.11	-	H	40.94	53.98	13.04	AV

802.11be(MCS0)		EHT320(80HH)		996T				
Channel	CH 191	Freq	6905 MHz	RU offset		67		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	63.81	0.00	-	H	63.81	88.23	24.42	PK
7125 - 7250	41.21	0.12	-	H	41.33	68.23	26.90	AV
7250 - 7750	59.82	0.00	-	H	59.82	73.98	14.16	PK
7250 - 7750	41.74	0.12	-	H	41.86	53.98	12.12	AV

802.11be(MCS0)		EHT320(160U)		2x996T				
Channel	CH 191	Freq	6905 MHz	RU offset		68		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	69.45	0.00	-	H	69.45	88.23	18.78	PK
7125 - 7250	52.12	0.12	-	H	52.24	68.23	15.99	AV
7250 - 7750	54.07	0.00	-	H	54.07	73.98	19.91	PK
7250 - 7750	42.45	0.12	-	H	42.57	53.98	11.41	AV

802.11be(MCS0)		EHT320		4x996T				
Channel	CH 191	Freq	6905 MHz	RU offset		69		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	70.35	0.00	-	H	70.35	88.23	17.88	PK
7125 - 7250	52.33	0.21	-	H	52.54	68.23	15.69	AV
7250 - 7750	61.90	0.00	-	H	61.90	73.98	12.08	PK
7250 - 7750	44.55	0.21	-	H	44.76	53.98	9.22	AV

802.11be(MCS0)		EHT320		SU				
Channel	CH 191	Freq	6905 MHz	ANT. POL	Total	Limit	Margin	Measurement
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT					Type
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
7125 - 7250	62.97	0.00	-	H	62.97	88.23	25.26	PK
7125 - 7250	49.17	0.00	-	H	49.17	68.23	19.06	AV
7250 - 7750	58.96	0.00	-	H	58.96	73.98	15.02	PK
7250 - 7750	47.04	0.00	-	H	47.04	53.98	6.94	AV

802.11be(MCS0)		EHT20		52T+26T				
Channel	Ch.233	Freq	7115 MHz	MRU offset		72		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#7125 - 7250	60.94	0.00	-	H	60.94	88.23	27.29	PK
#7125 - 7250	47.92	0.00	-	H	47.92	68.23	20.31	AV
7250 - 7750	51.62	0.00	-	H	51.62	73.98	22.36	PK
7250 - 7750	39.83	0.00	-	H	39.83	53.98	14.15	AV

802.11be(MCS0)		EHT20		106T+26T				
Channel	Ch.233	Freq	7115 MHz	MRU offset		83		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
#7125 - 7250	74.05	0.00	-	H	74.05	88.23	14.18	PK
#7125 - 7250	60.72	0.00	-	H	60.72	68.23	7.51	AV
7250 - 7750	51.72	0.00	-	H	51.72	73.98	22.26	PK
7250 - 7750	39.75	0.00	-	H	39.75	53.98	14.23	AV

802.11be(MCS0)		EHT40		52T+26T				
Channel	Ch.227	Freq	7085 MHz	MRU offset		75		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	49.91	0.00	-	H	49.91	88.23	38.32	PK
7125 - 7250	38.76	0.00	-	H	38.76	68.23	29.47	AV
7250 - 7750	51.78	0.00	-	H	51.78	73.98	22.20	PK
7250 - 7750	39.76	0.00	-	H	39.76	53.98	14.22	AV

802.11be(MCS0)		EHT40		106T+26T				
Channel	Ch.227	Freq	7085 MHz	MRU offset		85		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.11	0.00	-	H	50.11	88.23	38.12	PK
7125 - 7250	38.84	0.00	-	H	38.84	68.23	29.39	AV
7250 - 7750	51.56	0.00	-	H	51.56	73.98	22.42	PK
7250 - 7750	39.81	0.00	-	H	39.81	53.98	14.17	AV

802.11be(MCS0)		EHT80		52T + 26T				
Channel	Ch.215	Freq	7025 MHz	MRU offset		81		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.71	0.00	-	H	50.71	88.23	37.52	PK
7125 - 7250	38.86	0.00	-	H	38.86	68.23	29.37	AV
7250 - 7750	51.19	0.00	-	H	51.19	73.98	22.79	PK
7250 - 7750	39.88	0.00	-	H	39.88	53.98	14.10	AV

802.11be(MCS0)		EHT80		106T + 26T				
Channel	Ch.215	Freq	7025 MHz	MRU offset		89		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.15	0.00	-	H	50.15	88.23	38.08	PK
7125 - 7250	38.88	0.00	-	H	38.88	68.23	29.35	AV
7250 - 7750	51.76	0.00	-	H	51.76	73.98	22.22	PK
7250 - 7750	39.84	0.00	-	H	39.84	53.98	14.14	AV

802.11be(MCS0)		EHT80		484T + 242T				
Channel	Ch.215	Freq	7025 MHz	MRU offset		90		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.91	0.00	-	H	50.91	88.23	37.32	PK
7125 - 7250	39.34	0.09	-	H	39.43	68.23	28.80	AV
7250 - 7750	51.93	0.00	-	H	51.93	73.98	22.05	PK
7250 - 7750	39.77	0.09	-	H	39.86	53.98	14.12	AV

802.11be(MCS0)		EHT160(80U)		52T + 26T				
Channel	CH 207	Freq	6985 MHz	MRU offset		81		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.76	0.00	-	H	50.76	88.23	37.47	PK
7125 - 7250	39.31	0.00	-	H	39.31	68.23	28.92	AV
7250 - 7750	51.91	0.00	-	H	51.91	73.98	22.07	PK
7250 - 7750	40.38	0.00	-	H	40.38	53.98	13.60	AV

802.11be(MCS0)		EHT160(80U)		106T + 26T				
Channel	CH 207	Freq	6985 MHz	MRU offset		89		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	50.65	0.00	-	H	50.65	88.23	37.58	PK
7125 - 7250	39.37	0.00	-	H	39.37	68.23	28.86	AV
7250 - 7750	51.91	0.00	-	H	51.91	73.98	22.07	PK
7250 - 7750	40.29	0.00	-	H	40.29	53.98	13.69	AV

802.11be(MCS0)		EHT160(80U)		484T + 242T				
Channel	CH 207	Freq	6985 MHz	MRU offset		90		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	57.29	0.00	-	H	57.29	88.23	30.94	PK
7125 - 7250	39.77	0.09	-	H	39.86	68.23	28.37	AV
7250 - 7750	51.46	0.00	-	H	51.46	73.98	22.52	PK
7250 - 7750	40.28	0.09	-	H	40.37	53.98	13.61	AV

802.11be(MCS0)		EHT160(OFDMA)		996T + 484T				
Channel	CH 207	Freq	6985 MHz	MRU offset		94		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	69.94	0.00	-	H	69.94	88.23	18.29	PK
7125 - 7250	51.02	0.09	-	H	51.11	68.23	17.12	AV
7250 - 7750	56.42	0.00	-	H	56.42	73.98	17.56	PK
7250 - 7750	40.65	0.09	-	H	40.74	53.98	13.24	AV

802.11be(MCS0)		EHT320(80HH)		52T+26T				
Channel	CH 191	Freq	6905 MHz	MRU offset		81		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	51.49	0.00	-	H	51.49	88.23	36.74	PK
7125 - 7250	39.94	0.00	-	H	39.94	68.23	28.29	AV
7250 - 7750	51.61	0.00	-	H	51.61	73.98	22.37	PK
7250 - 7750	40.38	0.00	-	H	40.38	53.98	13.60	AV

802.11be(MCS0)		EHT320(80HH)		106T+26T				
Channel	CH 191	Freq	6905 MHz	MRU offset		89		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	52.22	0.00	-	H	52.22	88.23	36.01	PK
7125 - 7250	40.48	0.00	-	H	40.48	68.23	27.75	AV
7250 - 7750	51.64	0.00	-	H	51.64	73.98	22.34	PK
7250 - 7750	40.41	0.00	-	H	40.41	53.98	13.57	AV

802.11be(MCS0)		EHT320(80HH)		484T+242T				
Channel	CH 191	Freq	6905 MHz	MRU offset		90		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	57.79	0.00	-	H	57.79	88.23	30.44	PK
7125 - 7250	41.63	0.09	-	H	41.72	68.23	26.51	AV
7250 - 7750	52.08	0.00	-	H	52.08	73.98	21.90	PK
7250 - 7750	40.90	0.09	-	H	40.99	53.98	12.99	AV

802.11be(MCS0)		EHT320(160U)		996T+484T				
Channel	CH 191	Freq	6905 MHz	MRU offset		94		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	68.94	0.00	-	H	68.94	88.23	19.29	PK
7125 - 7250	53.43	0.09	-	H	53.52	68.23	14.71	AV
7250 - 7750	66.13	0.00	-	H	66.13	73.98	7.85	PK
7250 - 7750	42.51	0.09	-	H	42.60	53.98	11.38	AV

802.11be(MCS0)		EHT320(OFDMA)		2x996T+484T				
Channel	CH 191	Freq	6905 MHz	MRU offset		10102		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	69.72	0.00	-	H	69.72	88.23	18.51	PK
7125 - 7250	48.95	0.15	-	H	49.10	68.23	19.13	AV
7250 - 7750	59.01	0.00	-	H	59.01	73.98	14.97	PK
7250 - 7750	42.89	0.15	-	H	43.04	53.98	10.94	AV

802.11be(MCS0)		EHT320(OFDMA)		3x996T				
Channel	CH 191	Freq	6905 MHz	MRU offset		104		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	66.47	0.00	-	H	66.47	88.23	21.76	PK
7125 - 7250	48.52	0.17	-	H	48.69	68.23	19.54	AV
7250 - 7750	56.23	0.00	-	H	56.23	73.98	17.75	PK
7250 - 7750	42.67	0.17	-	H	42.84	53.98	11.14	AV

802.11be(MCS0)		EHT320(OFDMA)		3x996T+484T				
Channel	CH 191	Freq	6905 MHz	MRU offset		105		
Frequency	Measured Value	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
7125 - 7250	71.40	0.00	-	H	71.40	88.23	16.83	PK
7125 - 7250	52.24	0.22	-	H	52.46	68.23	15.77	AV
7250 - 7750	64.33	0.00	-	H	64.33	73.98	9.65	PK
7250 - 7750	44.16	0.22	-	H	44.38	53.98	9.60	AV

Note:


All Modes of operation were investigated and the worst case configuration results are reported.
In order to simplify the report, We only have attached Bandedge result of worst case.

Test Plots

[MIMO_CDD(Ant1+Ant2)]


[Standard Client]

Average result (802.11be(EHT20), Ch.2, 242T RU61) – X-H
(Integration method Used)

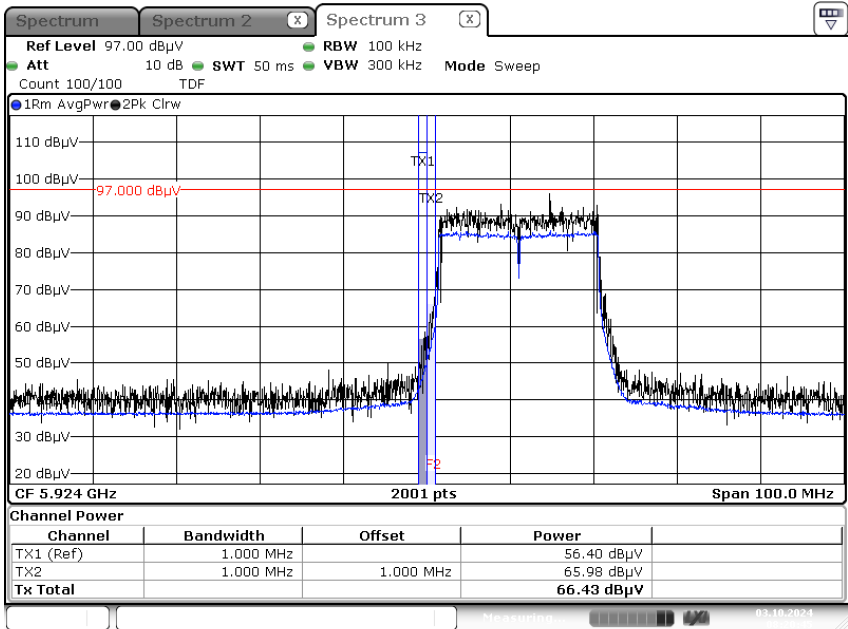


Date: 3.OCT.2024 08:20:46

Peak result (802.11be(EHT20), Ch.2, 242T RU61) – X-H
(Integration method Used)

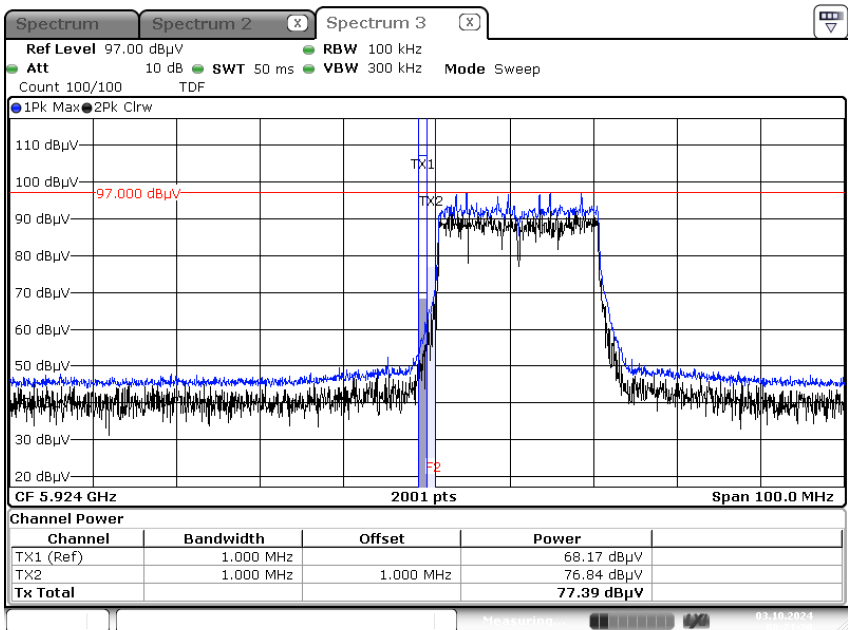


Date: 3.OCT.2024 08:21:21

Average result (802.11be(EHT20), Ch.2, 242T RU61) – X-H

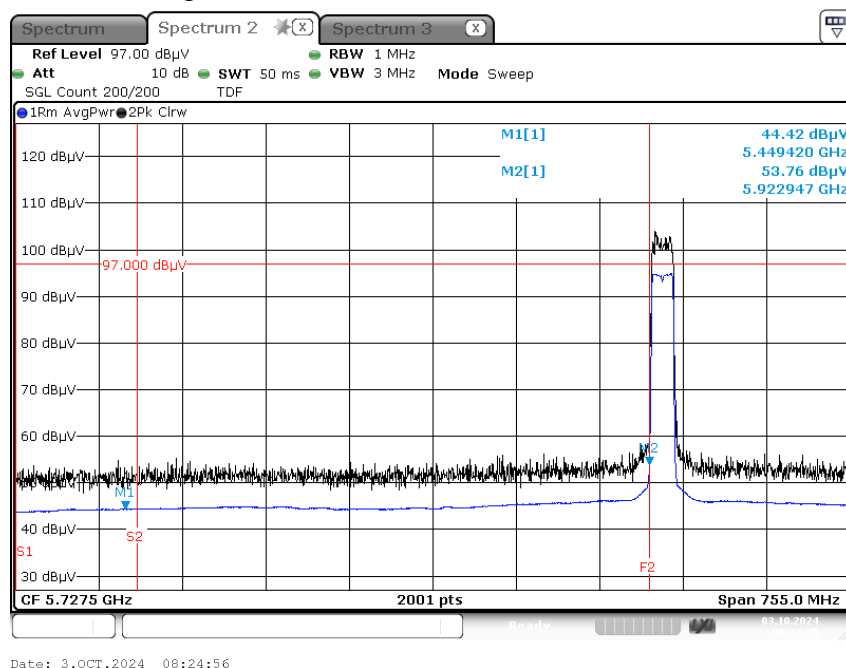


Peak result (802.11be(EHT20), Ch.2, 242T RU61) – X-H

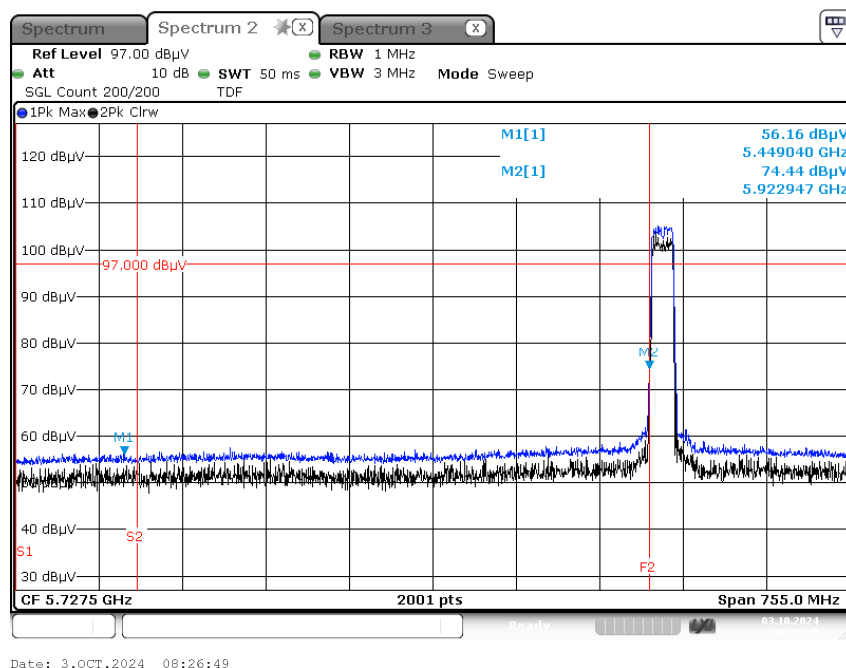

Average result (802.11be(EHT20), Ch.233, SU) – X-H


(Integration method Used)

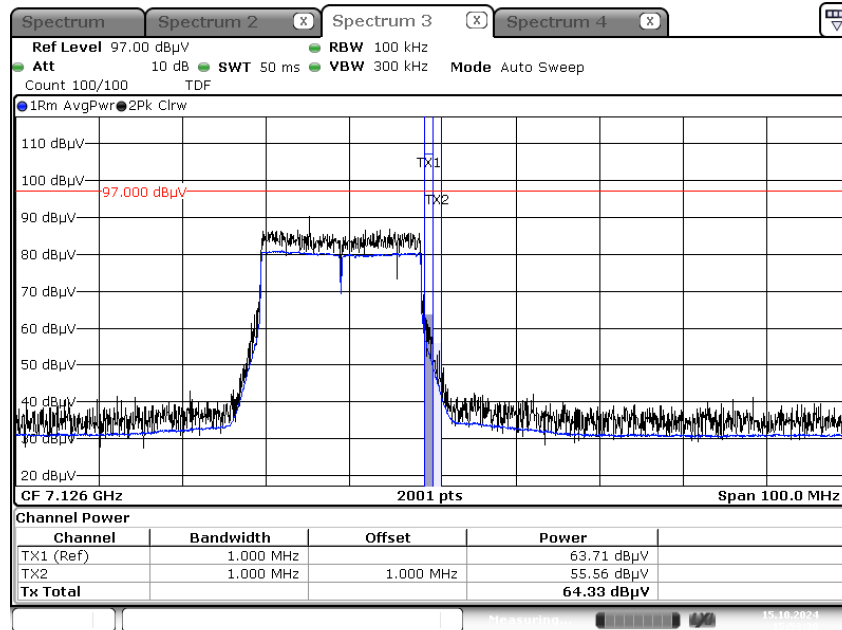

Date: 15.OCT.2024 15:53:30


Peak result (802.11be(EHT20), Ch.233, SU) – X-H

(Integration method Used)

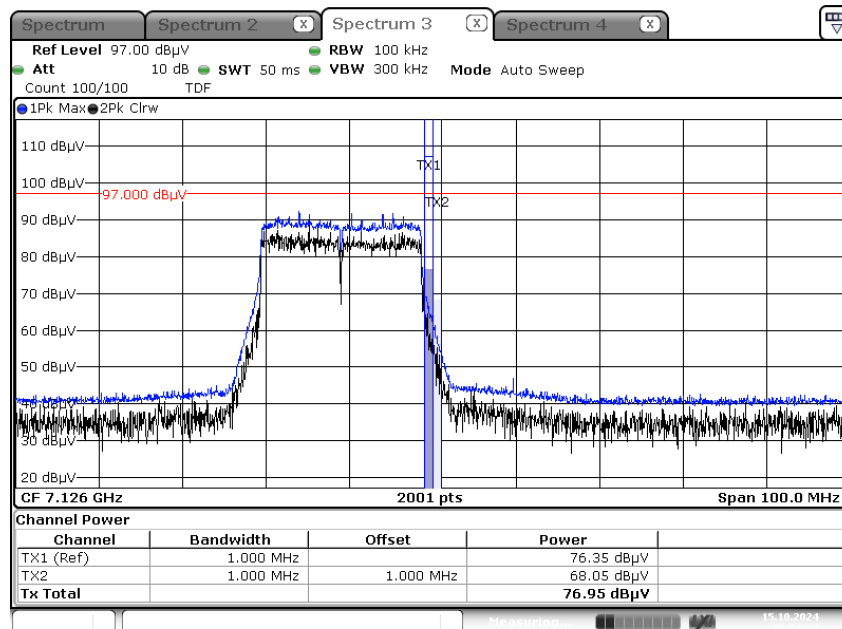


Date: 15.OCT.2024 15:51:44

Average result (802.11be(EHT20), Ch.233, SU) – X-H

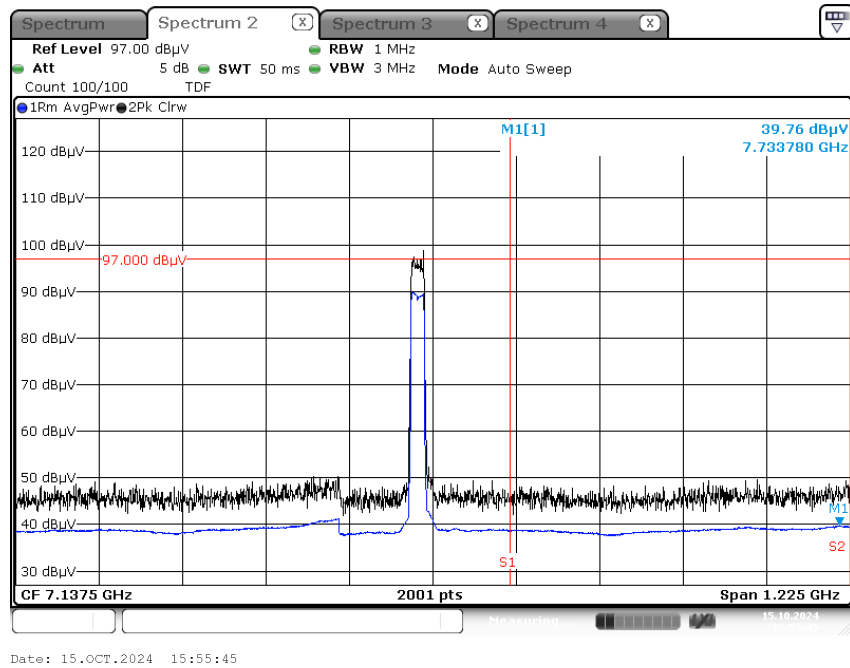

Peak result (802.11be(EHT20), Ch.233, SU) – X-H

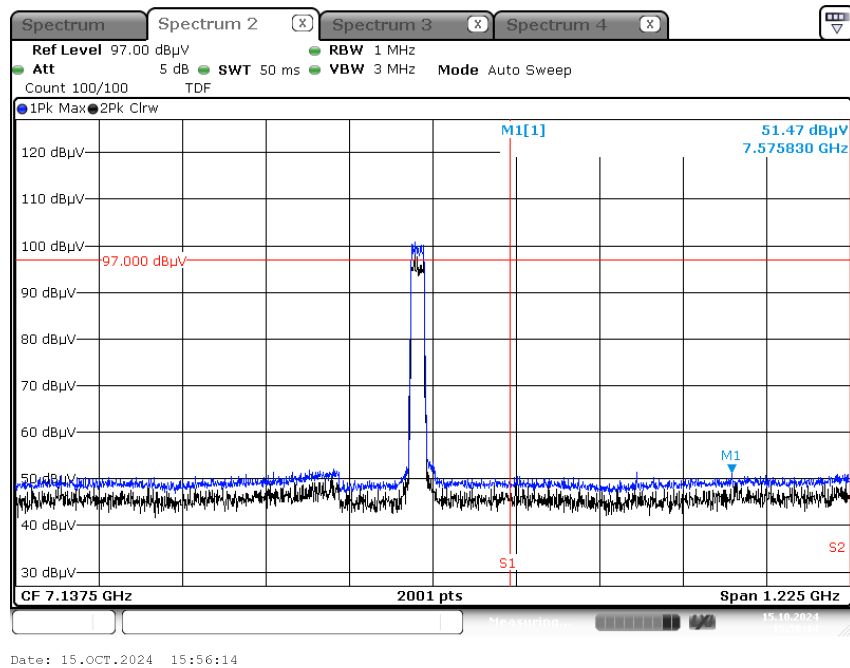
Note:

Only the worst case plots for Radiated Restricted Band Edge.

10.14 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 1

Test Report

Common Information

EUT: SM-S931B/DS
Operating Conditions: 6G WLAN Mode
Comment:

Full Spectrum

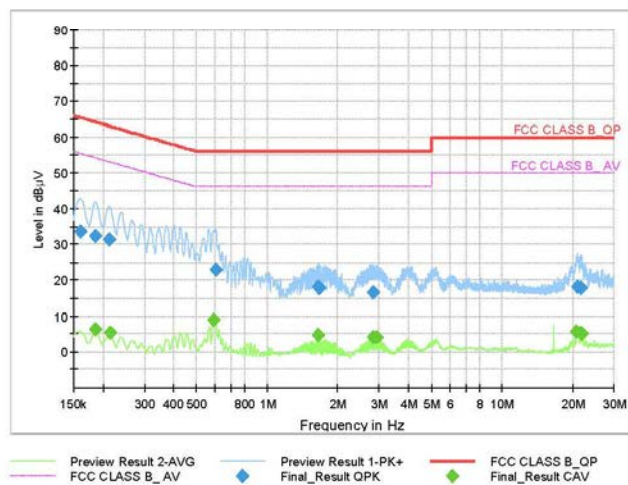

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1613	33.59	65.40	31.81	9.000	L1	9.6
0.1860	32.33	64.21	31.88	9.000	L1	9.6
0.2130	31.25	63.09	31.84	9.000	L1	9.6
0.6058	23.03	56.00	32.97	9.000	L1	9.7
1.6520	18.26	56.00	37.74	9.000	N	9.7
1.6565	17.81	56.00	38.19	9.000	N	9.7
2.8265	16.64	56.00	39.36	9.000	N	9.8
20.8243	18.11	60.00	41.89	9.000	N	10.6
21.7670	17.95	60.00	42.05	9.000	N	10.6

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1860	6.36	54.21	47.85	9.000	N	9.6
0.2153	5.24	53.00	47.76	9.000	N	9.6
0.5945	8.83	46.00	37.17	9.000	N	9.6
1.6520	4.72	46.00	41.28	9.000	N	9.7
2.8265	4.12	46.00	41.88	9.000	N	9.8
2.9323	4.18	46.00	41.82	9.000	N	9.8
20.8130	5.73	50.00	44.27	9.000	N	10.6
21.7670	5.23	50.00	44.77	9.000	N	10.6
21.7715	5.14	50.00	44.86	9.000	N	10.6

2024-10-01

오후 2:31:27

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	07/17/2025	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	07/02/2025	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	08/23/2025	Annual
Power Meter	N1911A	Agilent	MY45100523	02/28/2025	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/22/2025	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/21/2025	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2025	Annual
DC Power Supply	E3632A	Agilent	KR01009150	04/18/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/20/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Radio Communication Tester	CMX500	Rohde & Schwarz	100325	10/14/2025	Annual
Attenuator(3 dB)	18B-03	Api tech.	1	05/02/2025	Annual
Step Attenuator	8495B	Agilent	MY42141593	02/28/2025	Annual
4 WAY POWER DIVIDER	4456-4	Narda	01640	05/02/2025	Annual
Wireless AP	GT-AXE11000	ASUS	M6IAJF201782 (FCC ID : MSQ-RTAXJF00)	N/A	N/A
BE19000 Tri-Band Wi-Fi 7 Router	Archer BE800	Tp-Link	Y2350N50000581 (FCC ID : 2AX-J4BE800)	N/A	N/A

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller (Antenna mast & Turn Table)	CO3000	Innco system	CO3000/ 15421/57580623/G	N/A	N/A
Antenna Position Tower	MA4640	Innco system	9320422	04/05/2025	Biennial
Turn Table	N/A	Innco system	5930623	N/A	N/A
Loop Antenna	FMZB 1513	Schwarzbeck	1513-175	01/16/2025	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-1135	08/19/2026	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1151	07/14/2025	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM2009001	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/02/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900- 6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100-5900- 6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
Band Reject Filter	WRCJV5100/5850-40/50- 8EEK	Wainwright Instruments	1	02/14/2025	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S5L1	03/12/2025	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S5L2	03/12/2025	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S5L3	03/12/2025	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S5L4	03/12/2025	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S5L5	03/12/2025	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S5L6	03/12/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	101510	03/28/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2411-FC005-P