Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

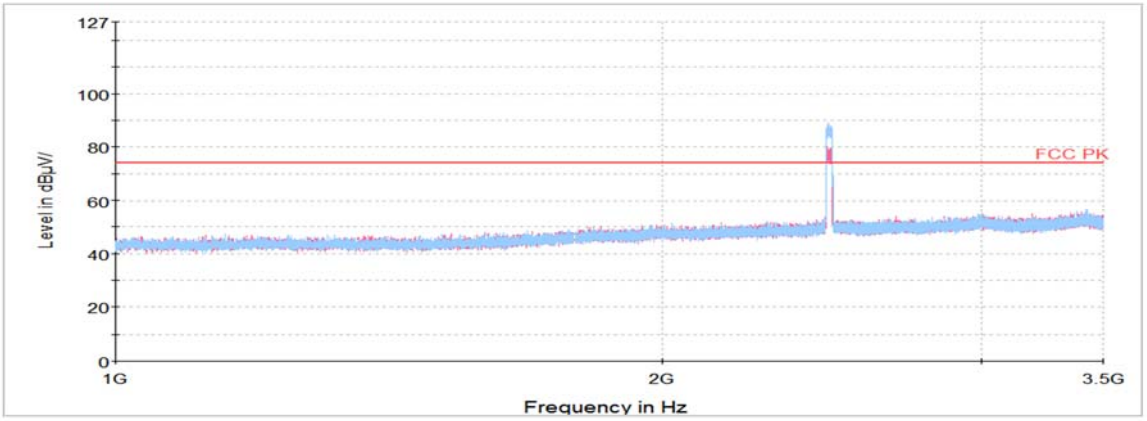

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

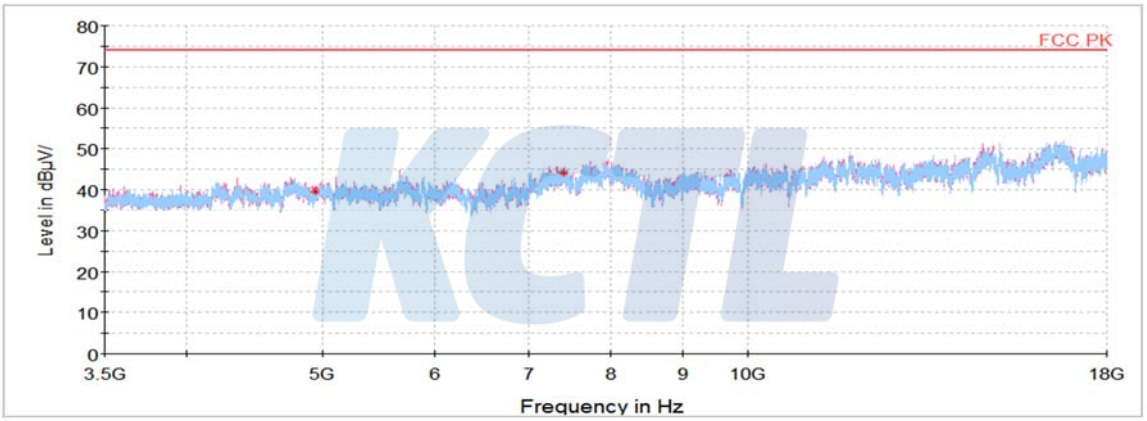

MIMO

802.11g_2 412 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 389.98[1)]	H	57.25	31.88	-29.04	-	60.09	74.00	13.91
4 824.48[1)]	V	61.94	33.93	-53.59	-	42.28	74.00	31.72
7 237.38	V	61.68	35.40	-52.97	-	44.11	74.00	29.89
Average Data								
2 389.98[1)]	H	47.29	31.88	-29.04	0.39	50.52	54.00	3.48

Average data

Blank

Horizontal/Vertical for Band-edge

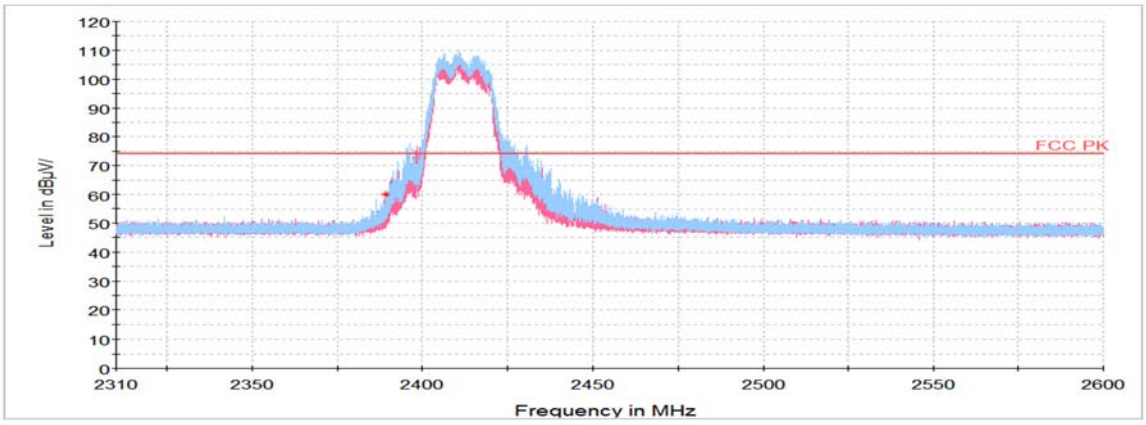

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

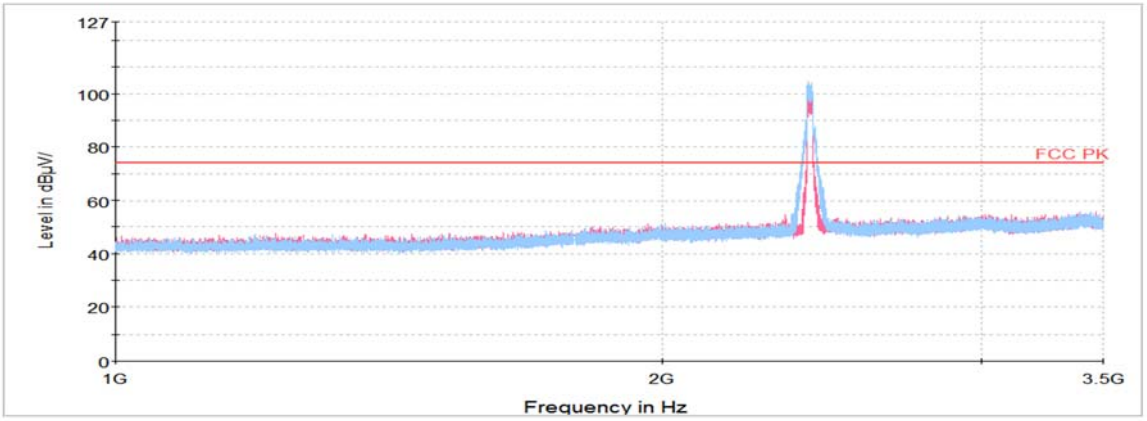

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

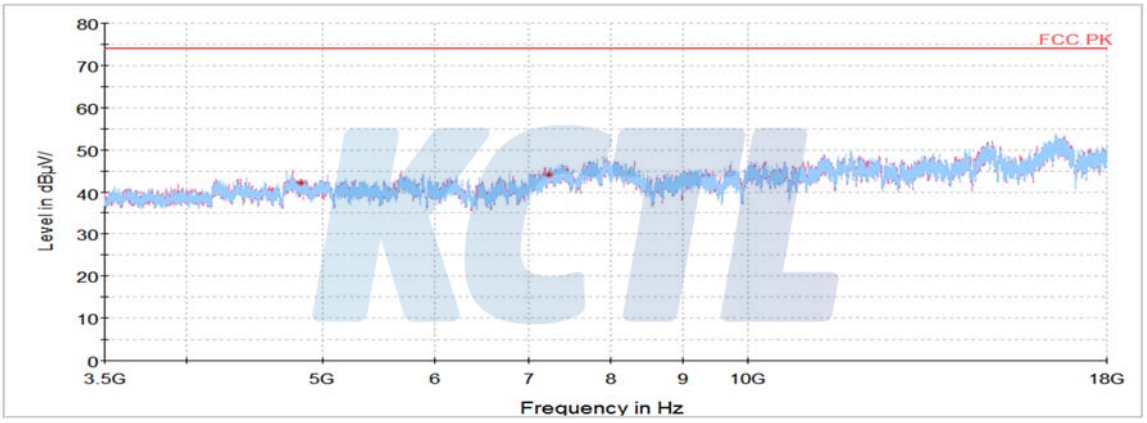

802.11g_2 437 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
4 874.78[1)]	H	62.66	33.95	-55.02	-	41.59	74.00	32.41
7 310.78[1)]	V	61.92	35.40	-52.69	-	44.63	74.00	29.37
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

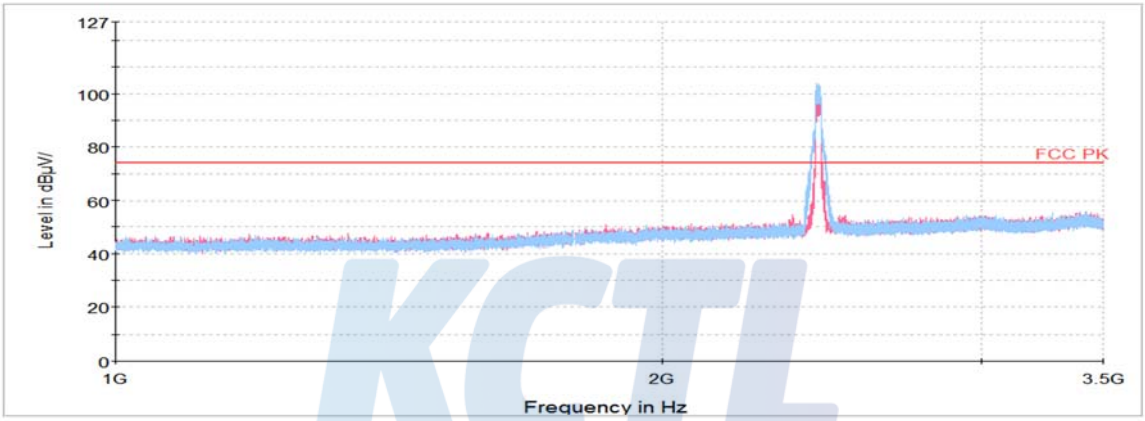

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

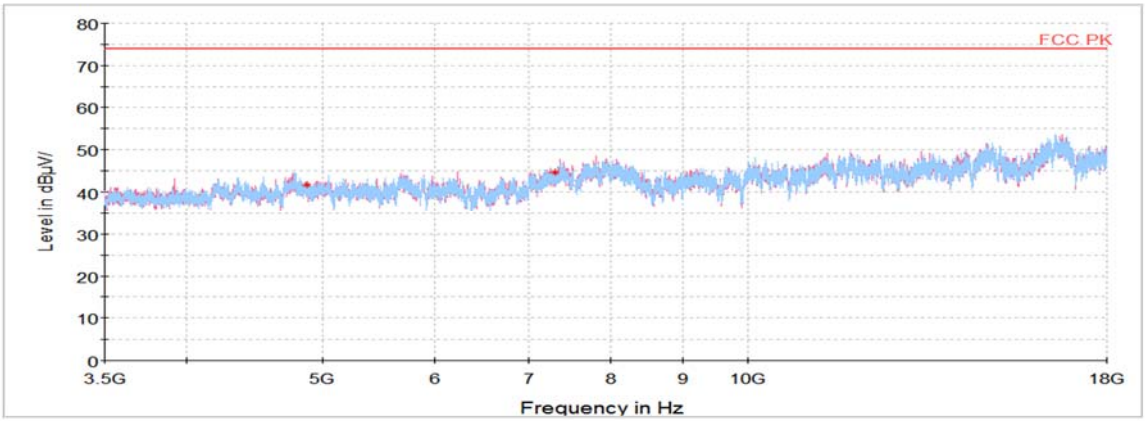

802.11g_2 462 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.51[1)]	H	62.13	32.07	-29.21	-	64.99	74.00	9.01
4 925.53[1)]	V	61.95	33.97	-55.28	-	40.64	74.00	33.36
7 387.36[1)]	V	63.35	35.40	-52.40	-	46.35	74.00	27.65
Average Data								
2 483.51[1)]	H	48.09	32.07	-29.21	0.39	51.34	54.00	2.66

Average data

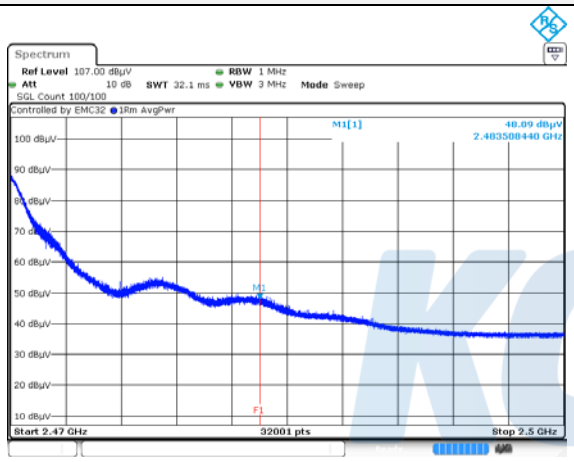

Blank

Horizontal/Vertical for Band-edge

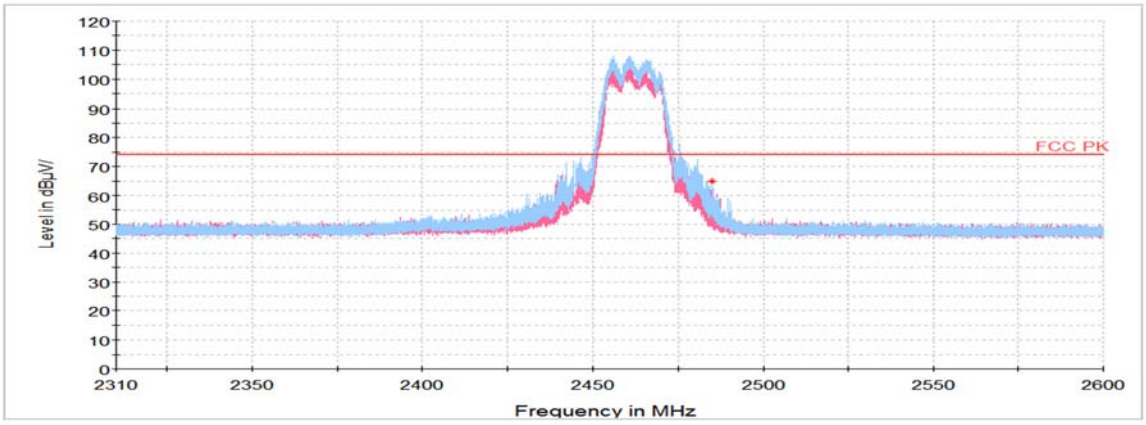

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

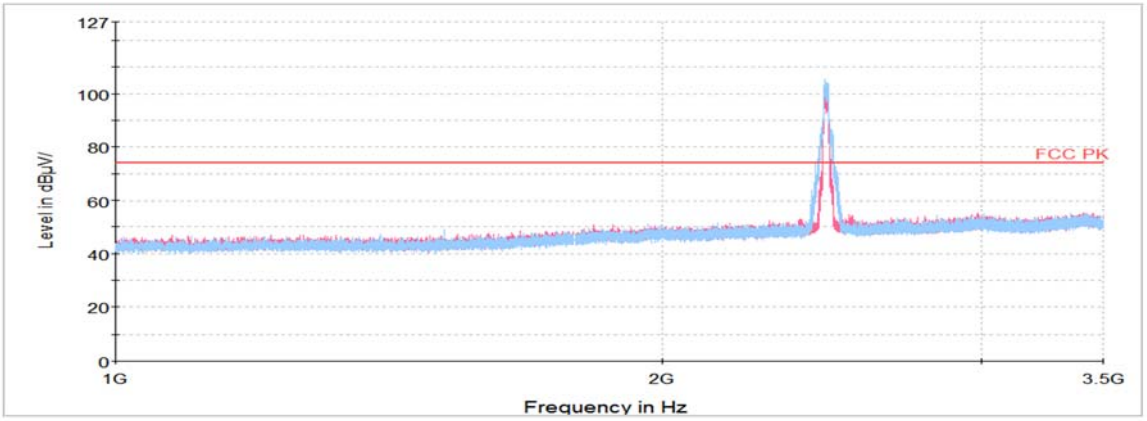

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

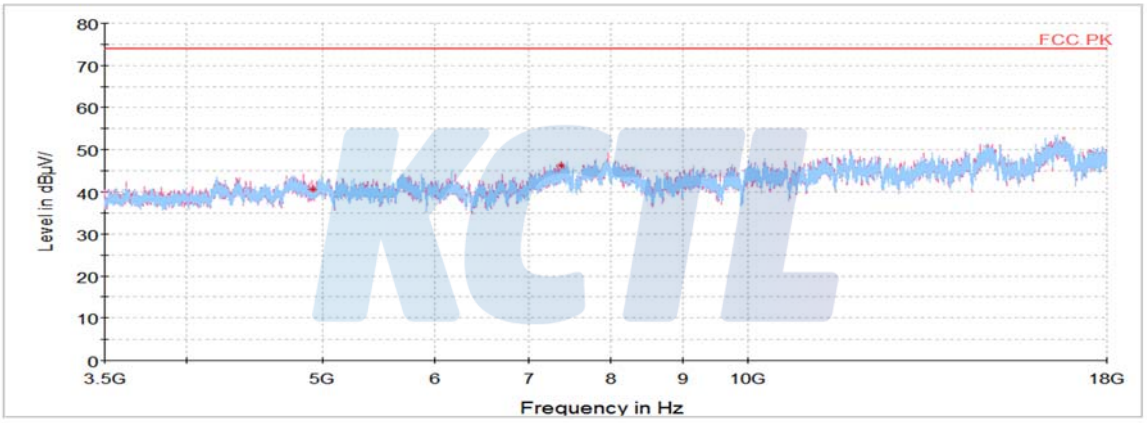

802.11g_2 467 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.52[1)]	H	49.02	32.07	-29.21	-	51.88	74.00	22.12
4 934.59[1)]	H	62.57	33.97	-55.12	-	41.42	74.00	32.58
7 402.31[1)]	H	62.39	35.40	-52.35	-	45.44	74.00	28.56
Average Data								
2 483.52[1)]	H	40.08	32.07	-29.21	0.39	43.33	54.00	10.67

Average data

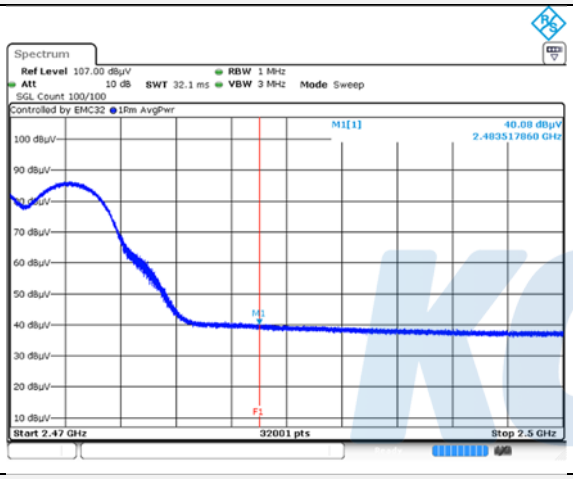

Blank

Horizontal/Vertical for Band-edge

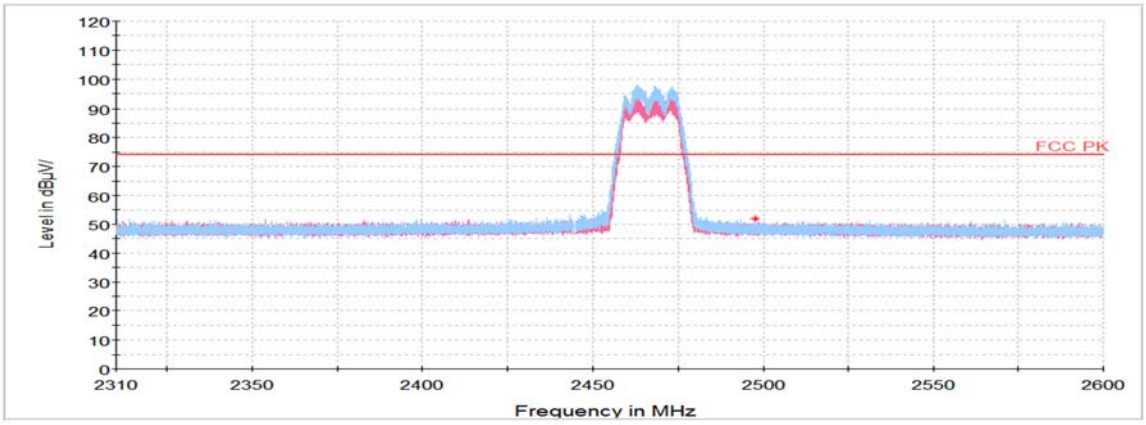

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

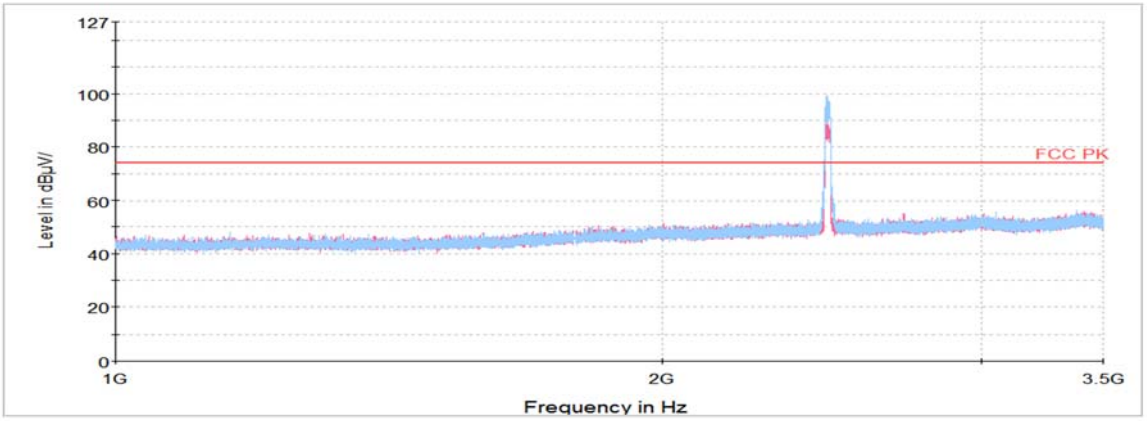

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

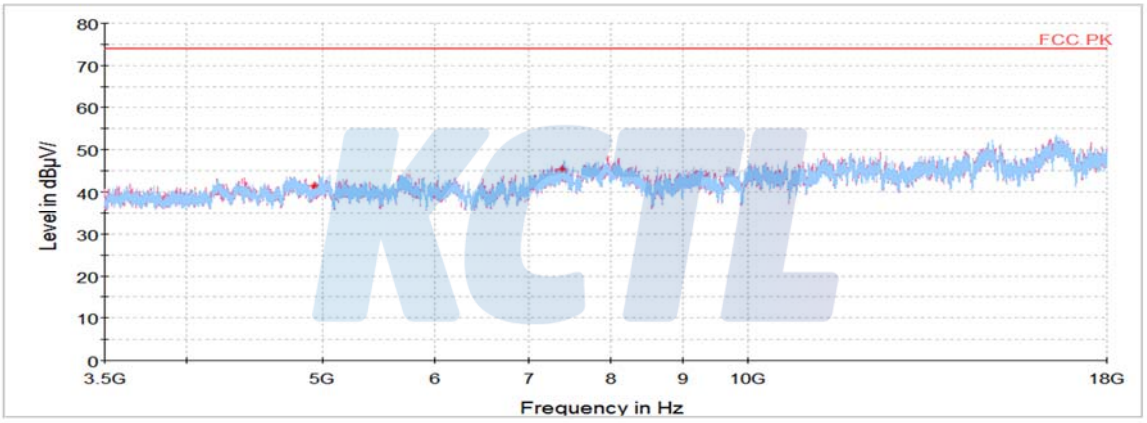

802.11g_2 472 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.54[1)]	H	53.63	32.07	-29.21	-	56.49	74.00	17.51
4 943.20[1)]	H	63.07	33.98	-54.96	-	42.09	74.00	31.91
7 416.81[1)]	V	61.80	35.40	-52.29	-	44.91	74.00	29.09
Average Data								
2 483.54[1)]	H	40.92	32.07	-29.21	0.39	44.17	54.00	9.83

Average data

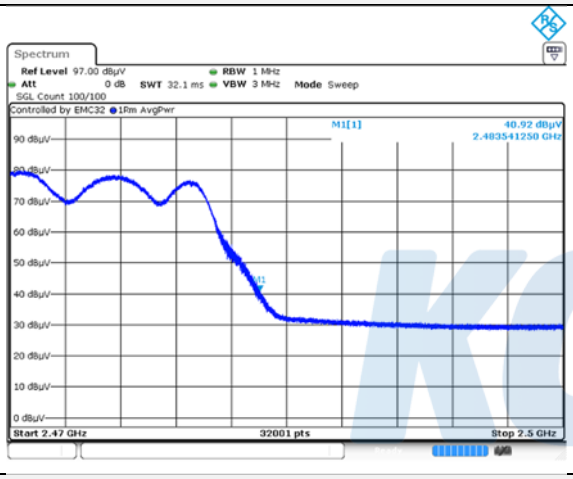

Blank

Horizontal/Vertical for Band-edge

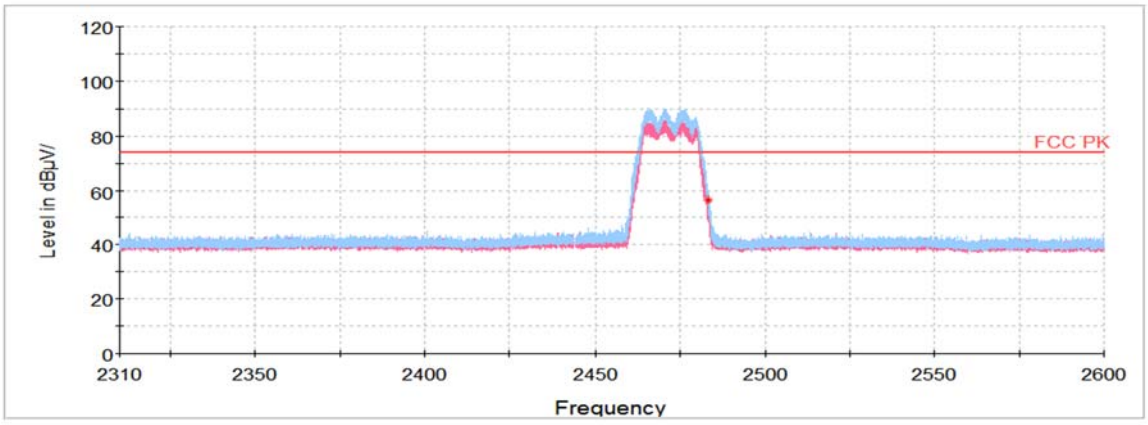

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

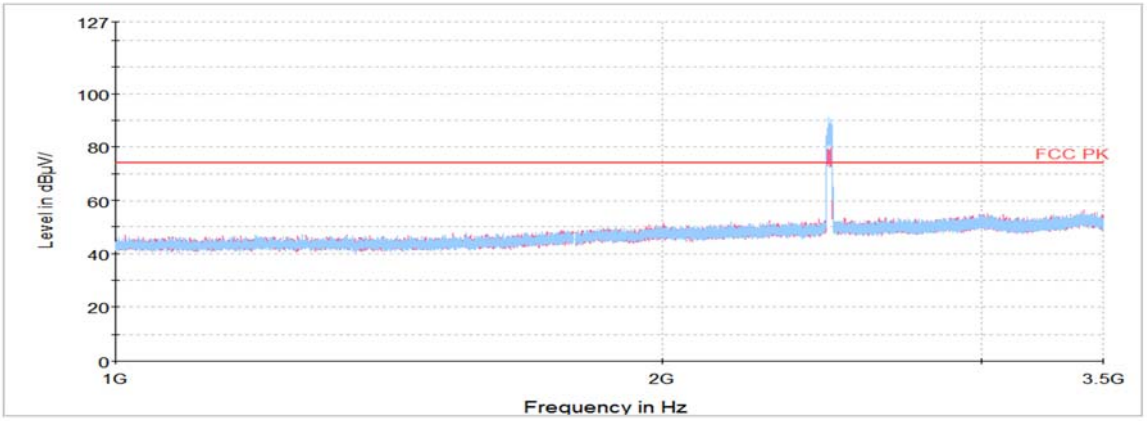

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

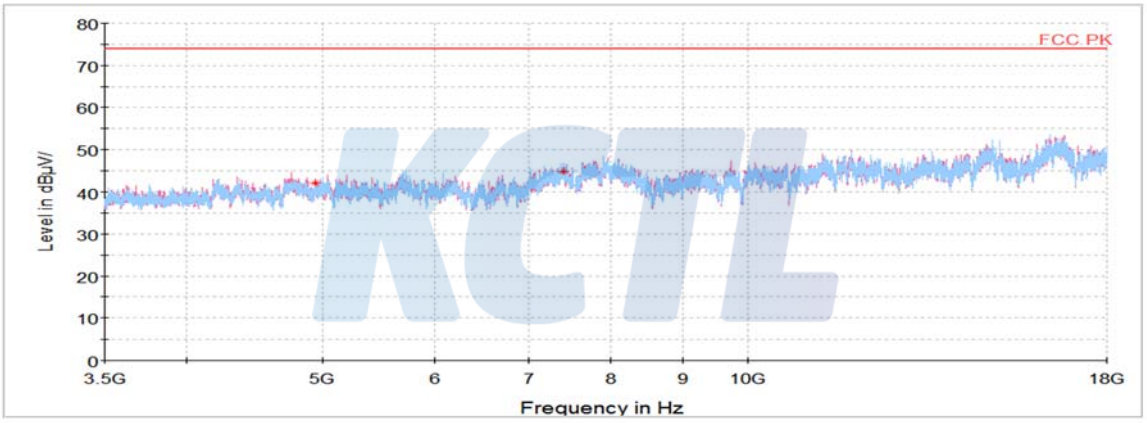

802.11n HT20_2 412 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 389.90[1)]	H	56.16	31.88	-29.04	-	59.00	74.00	15.00
4 824.94[1)]	H	61.73	33.93	-53.61	-	42.05	74.00	31.95
7 235.56	H	62.35	35.40	-52.97	-	44.78	74.00	29.22
Average Data								
2 389.90[1)]	H	47.33	31.88	-29.04	0.38	50.55	54.00	3.45

Average data

Blank

Horizontal/Vertical for Band-edge

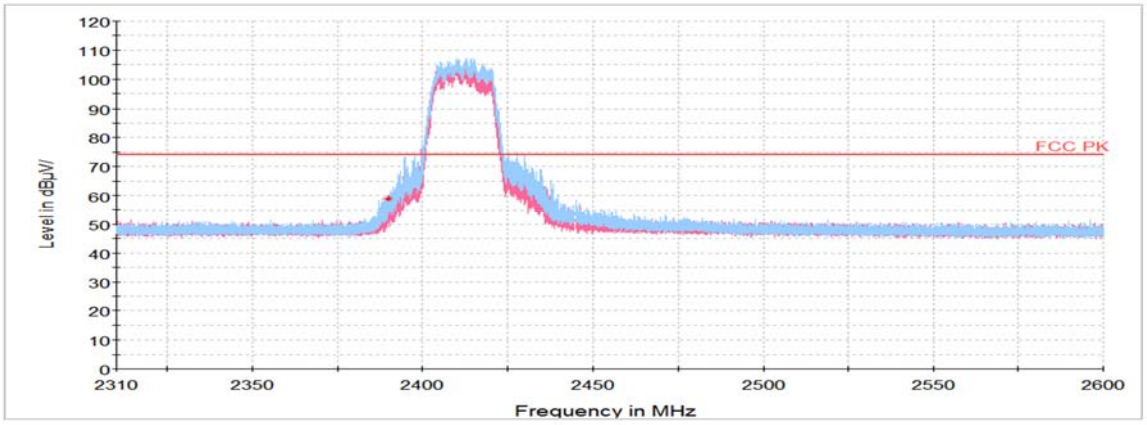

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

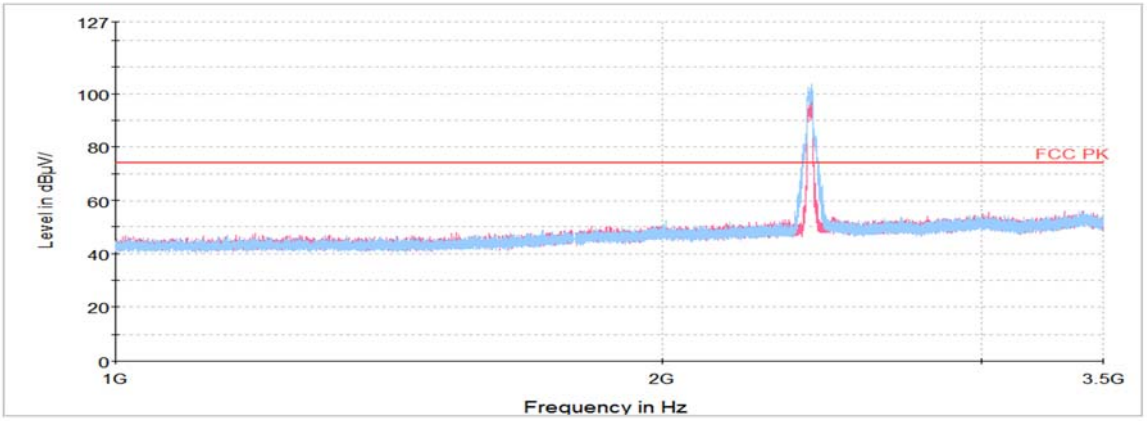

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

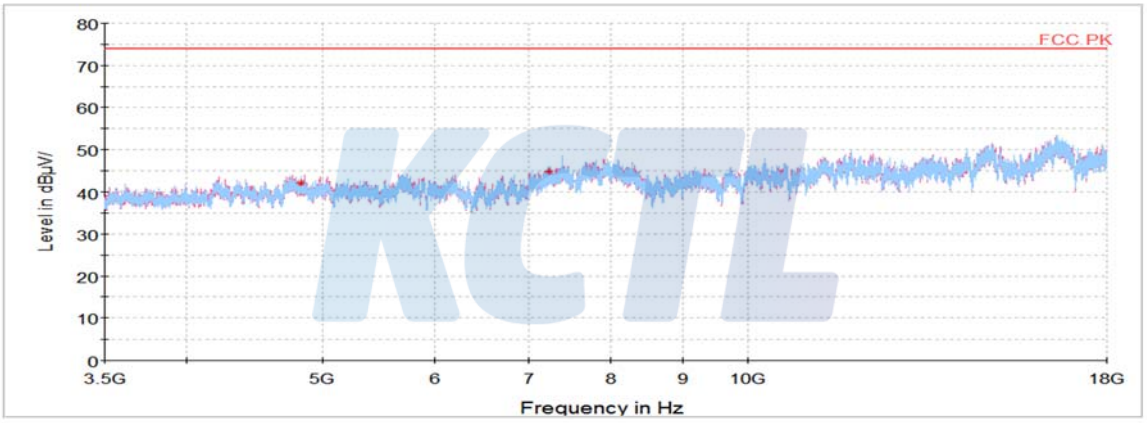

802.11n HT20_2 437 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
4 874.33[1)]	H	62.61	33.95	-55.01	-	41.55	74.00	32.45
7 312.14[1)]	V	60.97	35.40	-52.68	-	43.69	74.00	30.31
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

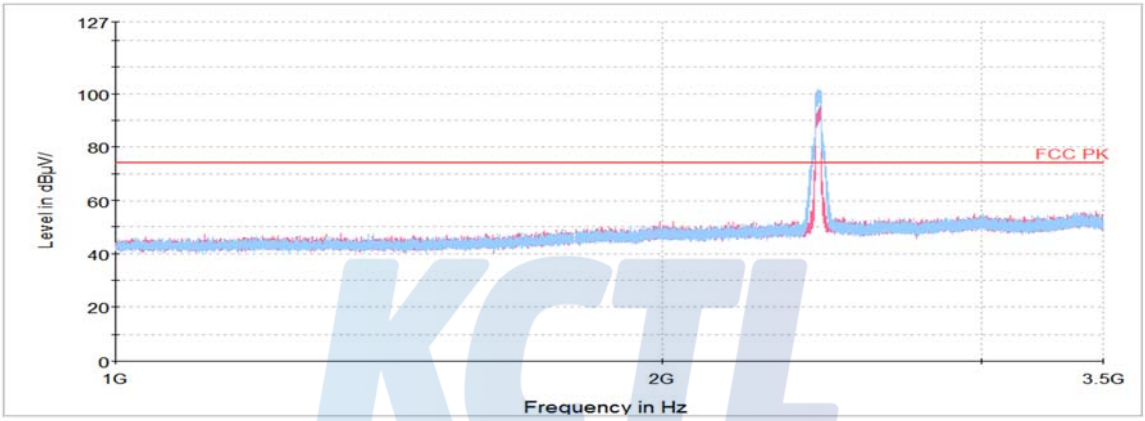

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

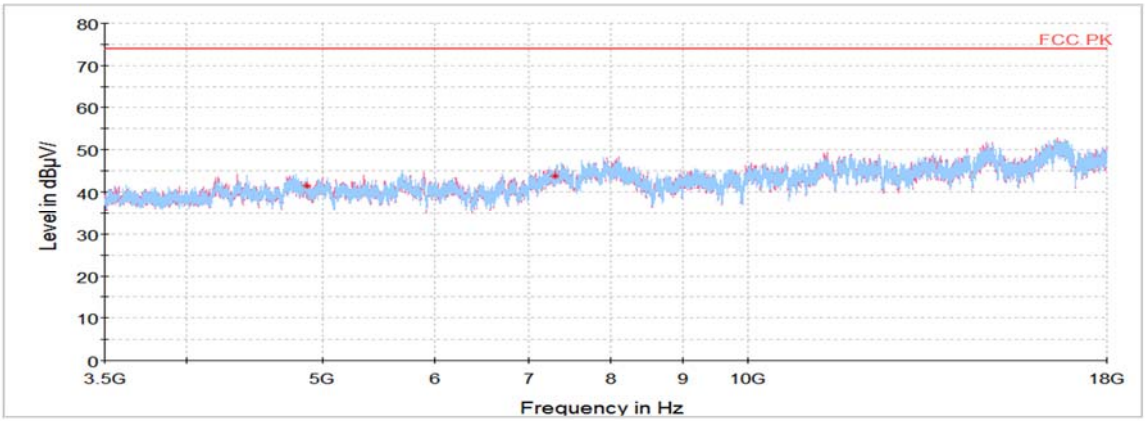

802.11n HT20_2 462 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.53[1)]	H	59.15	32.07	-29.21	-	62.01	74.00	11.99
4 925.98[1)]	H	61.64	33.97	-55.27	-	40.34	74.00	33.66
7 386.91[1)]	V	62.45	35.40	-52.40	-	45.45	74.00	28.55
Average Data								
2 483.53[1)]	H	46.71	32.07	-29.21	0.38	49.95	54.00	4.05

Average data

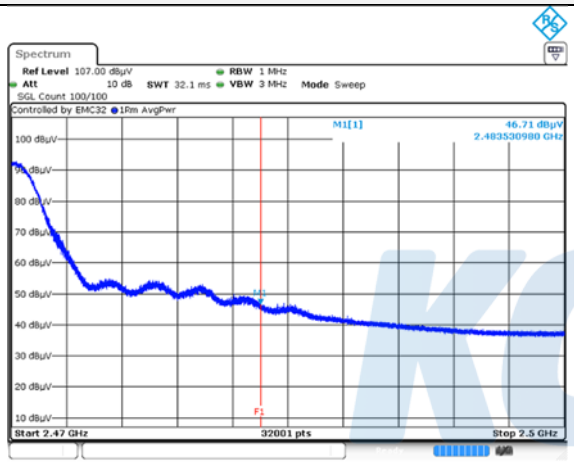

Blank

Horizontal/Vertical for Band-edge

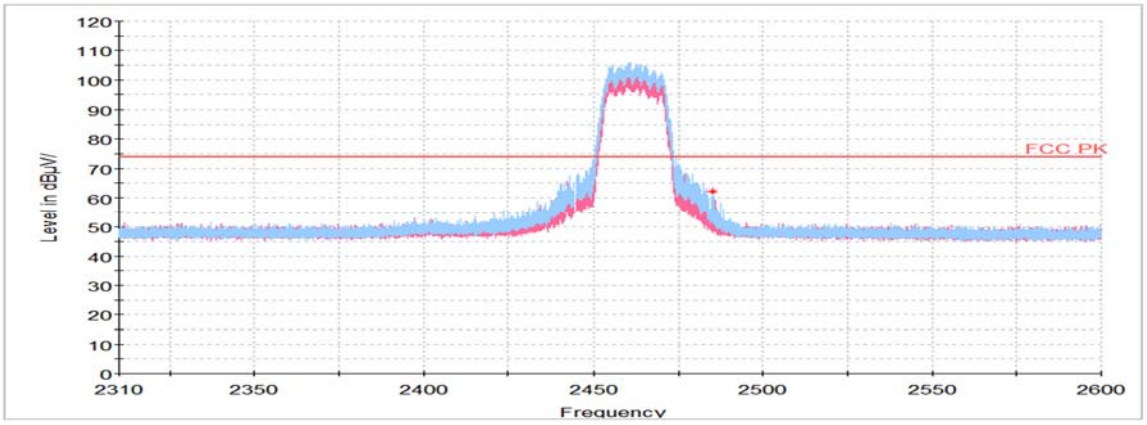

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

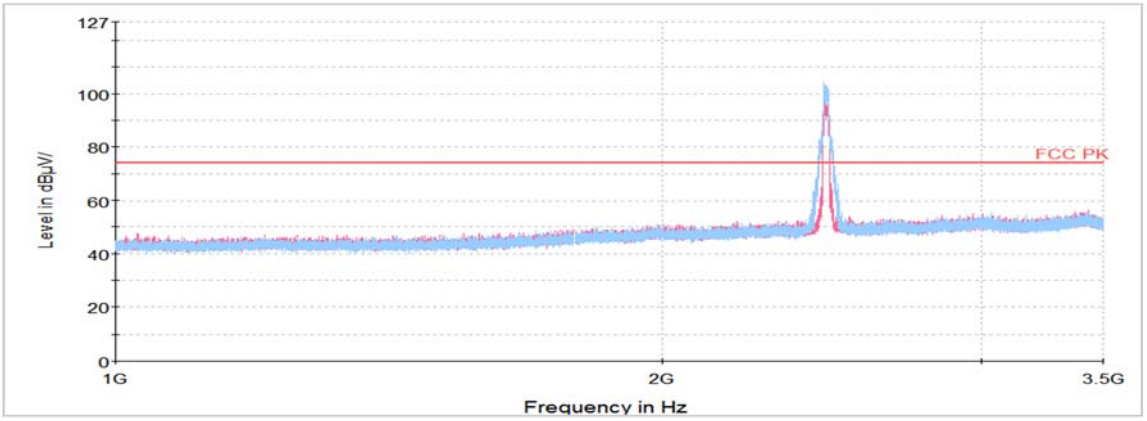

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

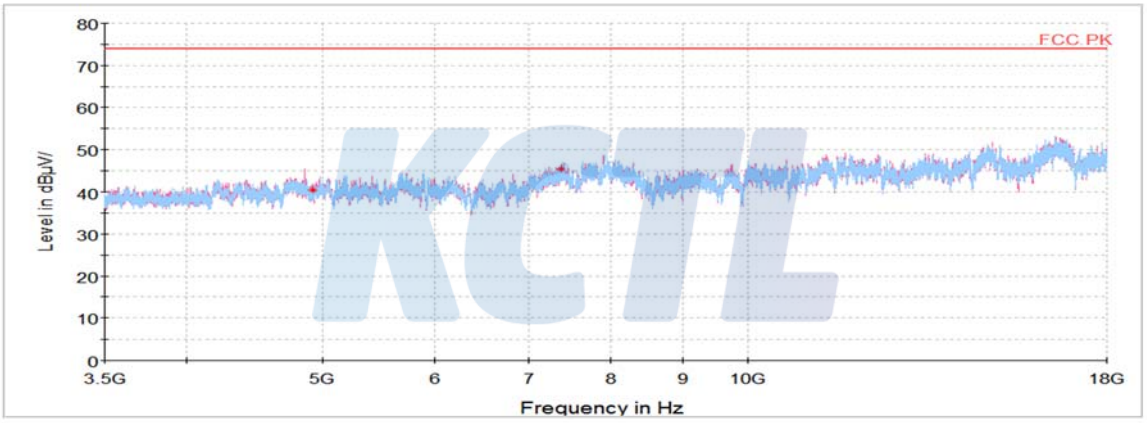

802.11n HT20_2 467 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.55[1)]	H	48.95	32.07	-29.21	-	51.81	74.00	22.19
4 934.59[1)]	V	61.96	33.97	-55.12	-	40.81	74.00	33.19
7 401.41[1)]	V	62.54	35.40	-52.35	-	45.59	74.00	28.41
Average Data								
2 483.55[1)]	H	40.06	32.07	-29.21	0.38	43.30	54.00	10.70

Average data

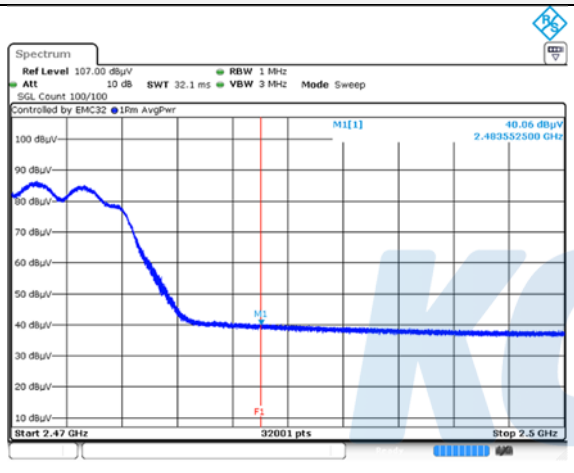

Blank

Horizontal/Vertical for Band-edge

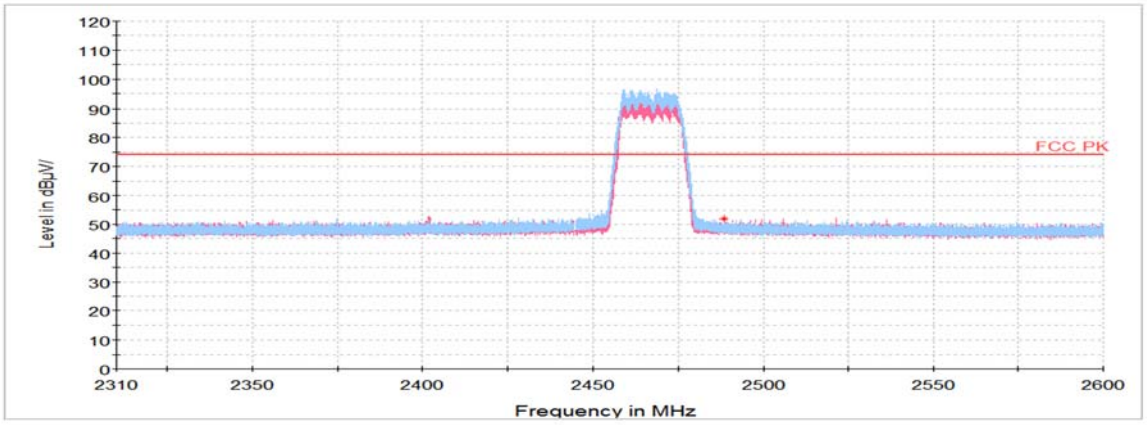

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

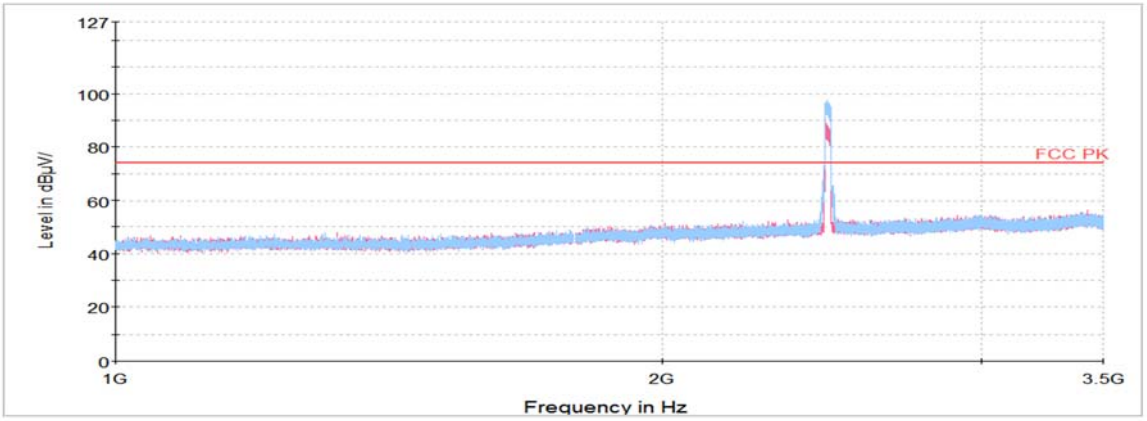

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

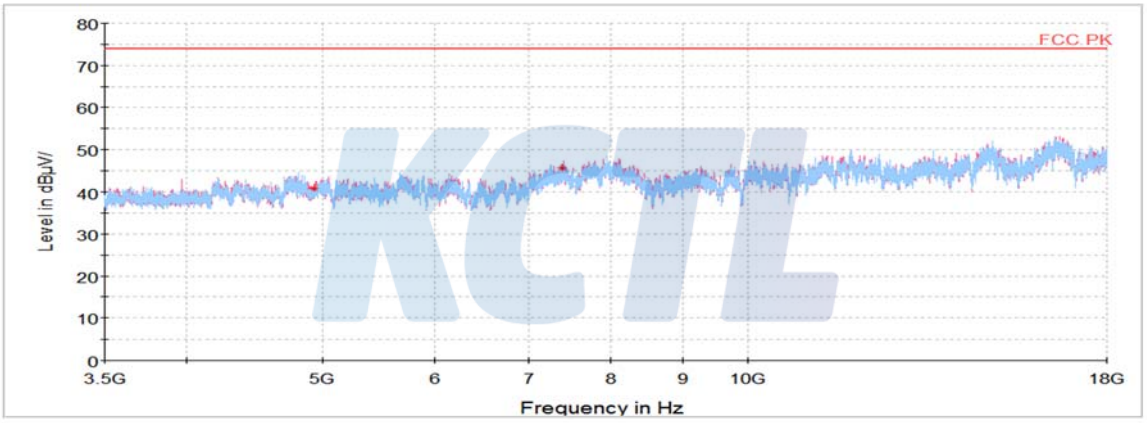

802.11n HT20_2 472 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.50[1)]	H	53.63	32.07	-29.21	-	56.49	74.00	17.51
4 944.11[1)]	V	62.04	33.98	-54.95	-	41.07	74.00	32.93
7 416.81[1)]	H	62.43	35.40	-52.29	-	45.54	74.00	28.46
Average Data								
2 483.50[1)]	H	41.34	32.07	-29.21	0.38	44.58	54.00	9.42

Average data

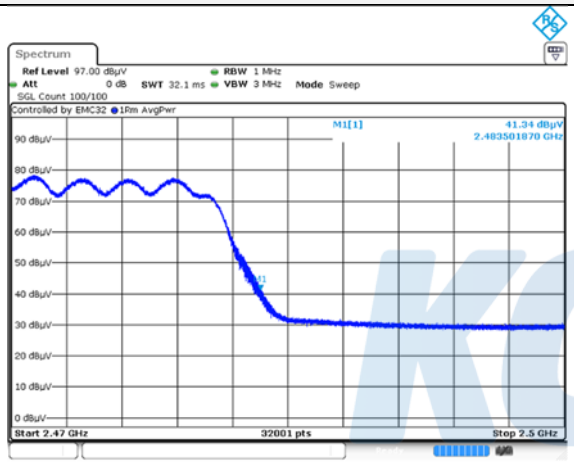

Blank

Horizontal/Vertical for Band-edge

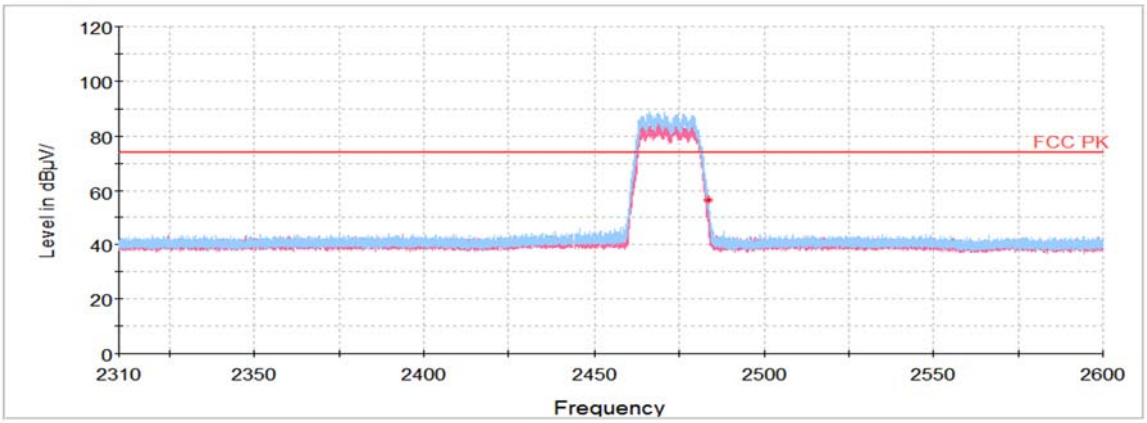

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

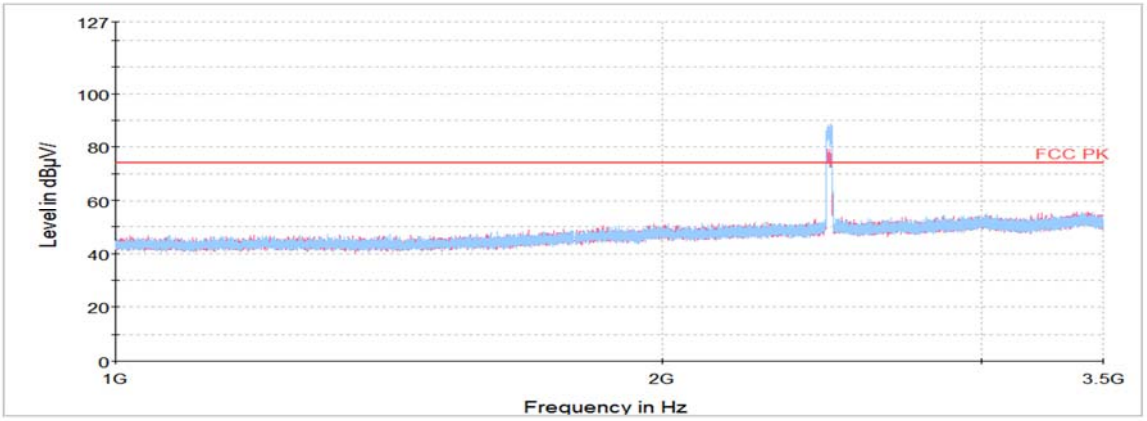

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

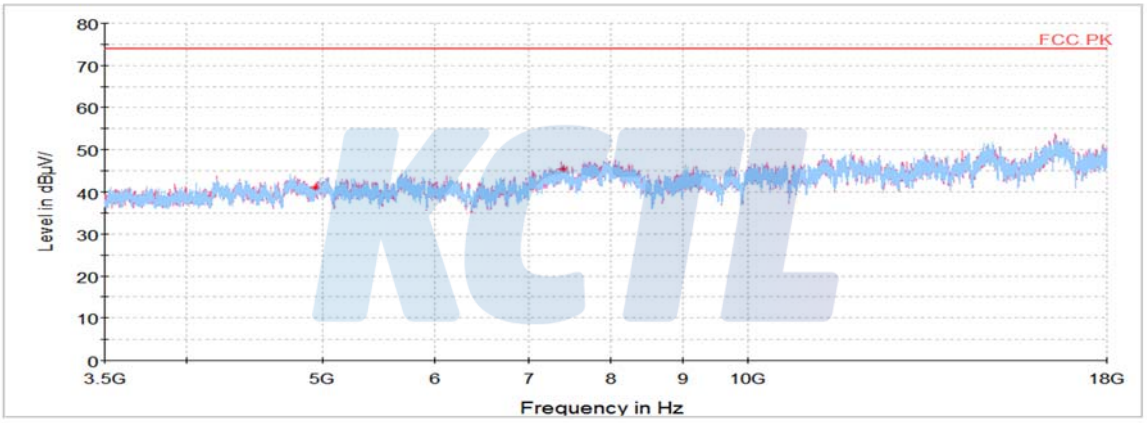

802.11ac VHT20_2 412 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 389.88[1)]	H	59.27	31.88	-29.04	-	62.11	74.00	11.89
4 824.94[1)]	H	61.73	33.93	-53.61	-	42.05	74.00	31.95
7 235.56	V	63.07	35.40	-52.97	-	45.50	74.00	28.50
Average Data								
2 389.88[1)]	H	46.41	31.88	-29.04	0.76	50.01	54.00	3.99

Average data

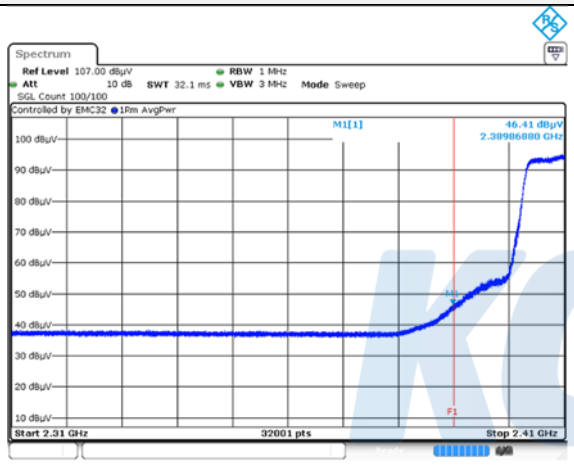

Blank

Horizontal/Vertical for Band-edge

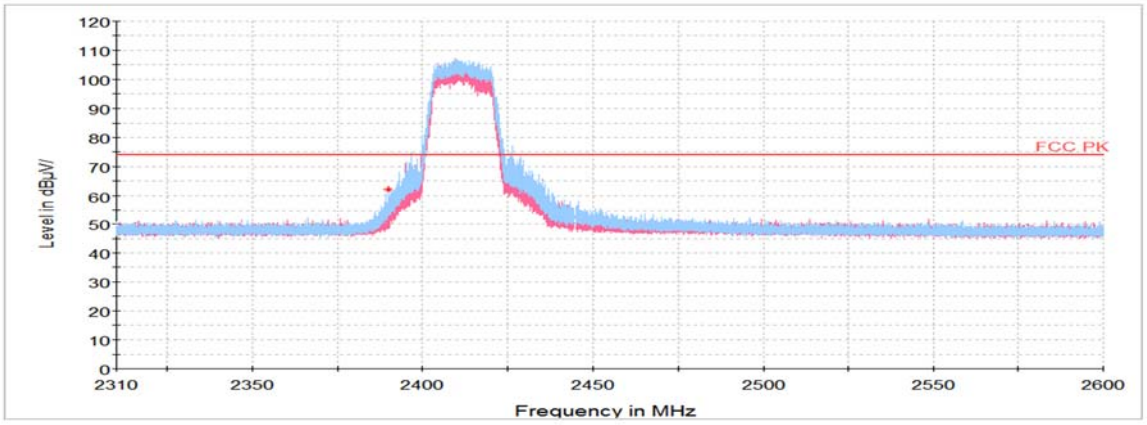

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

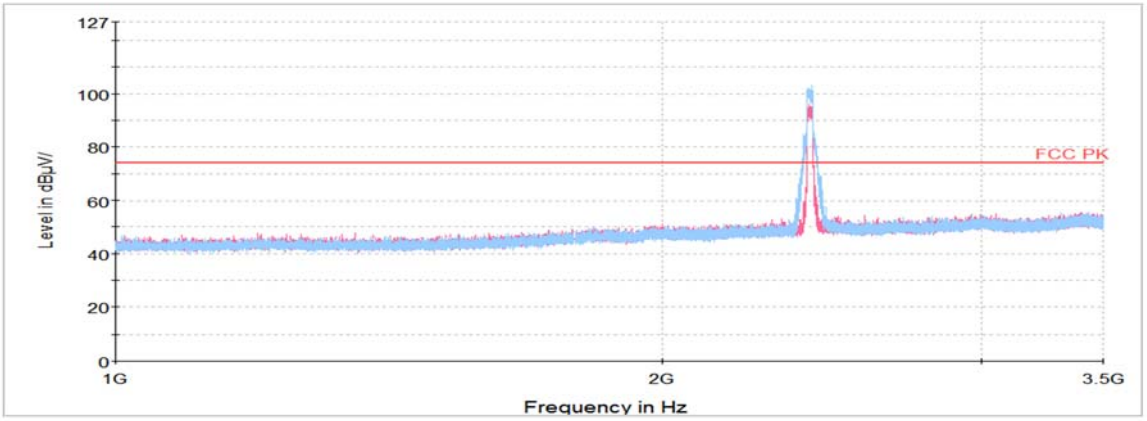

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

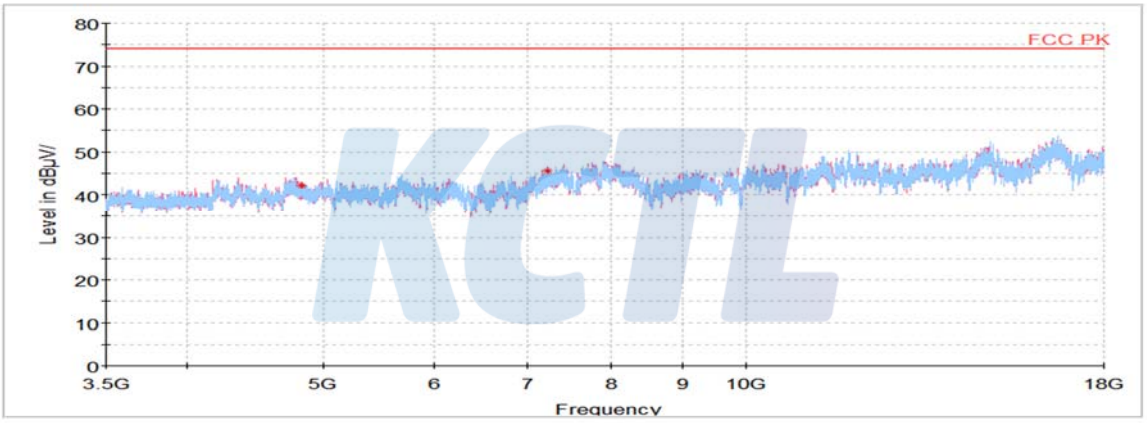

802.11ac VHT20_2 437 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
4 874.33[1)]	H	61.71	33.95	-55.01	-	40.65	74.00	33.35
7 312.14[1)]	H	60.80	35.40	-52.68	-	43.52	74.00	30.48
Average Data								
No spurious emissions were detected within 20 ㏈ of the limit.								

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

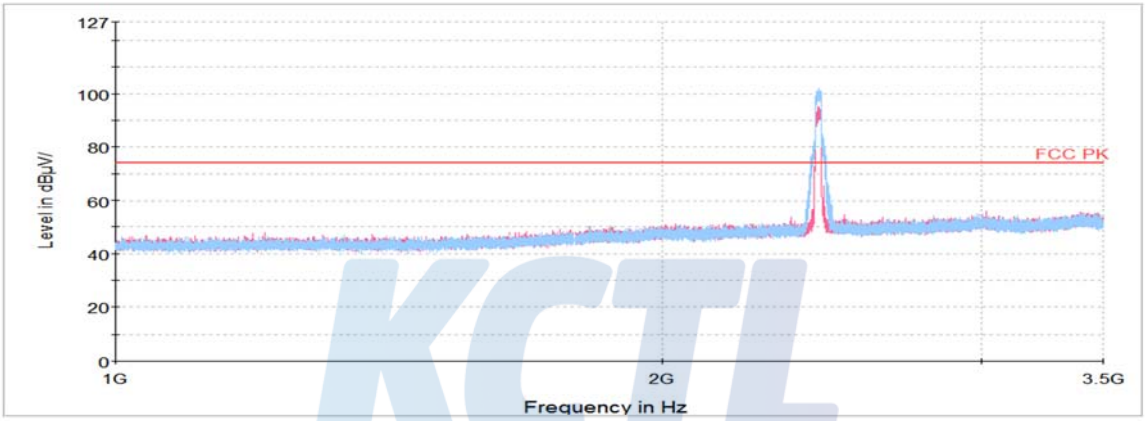

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

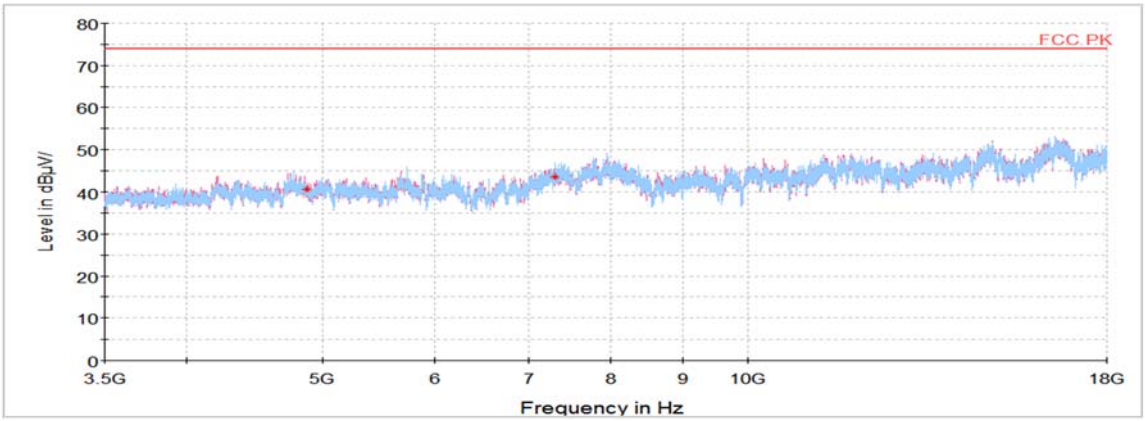

802.11ac VHT20_2 462 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.51[1)]	H	58.20	32.07	-29.21	-	61.06	74.00	12.94
4 923.27[1)]	V	62.64	33.97	-55.32	-	41.29	74.00	32.71
7 386.00[1)]	H	61.85	35.40	-52.41	-	44.84	74.00	29.16
Average Data								
2 483.51[1)]	H	46.40	32.07	-29.21	0.76	50.02	54.00	3.98

Average data

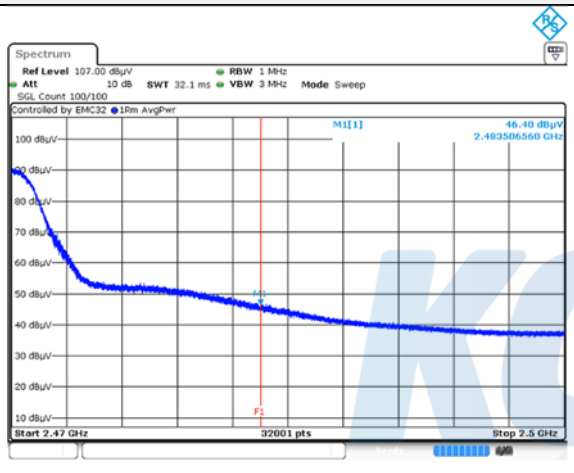

Blank

Horizontal/Vertical for Band-edge

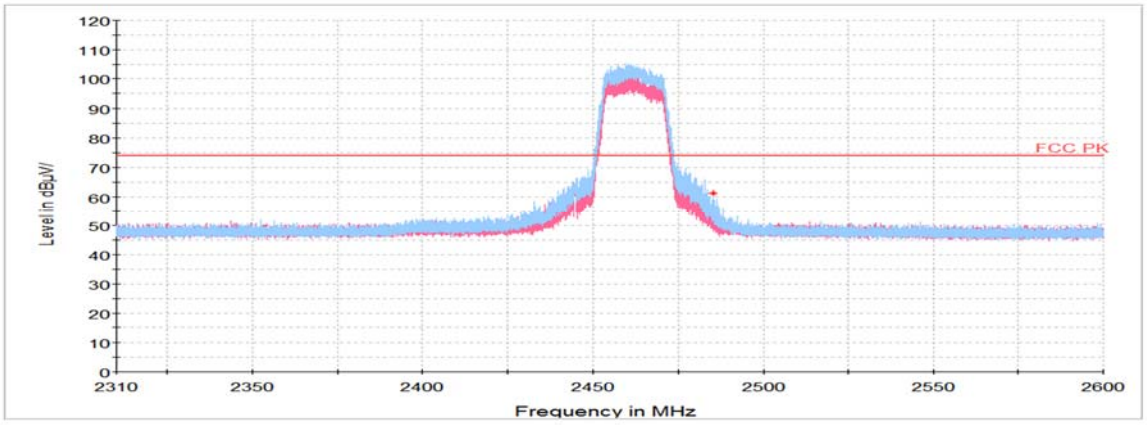

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

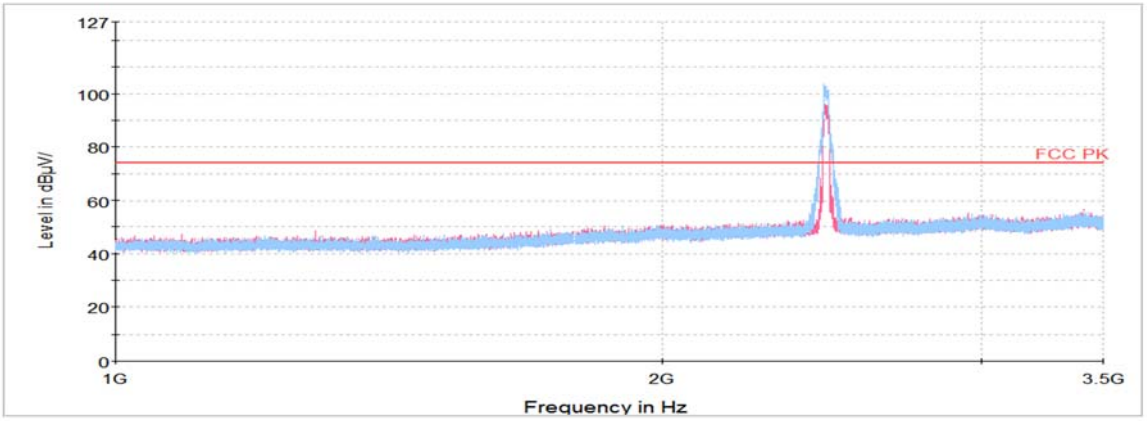

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

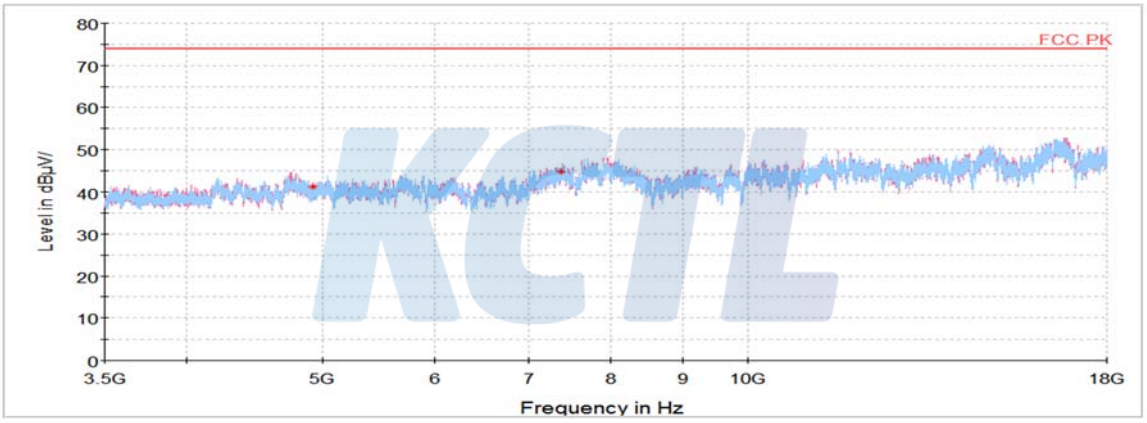

802.11ac VHT20_2 467 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.50[1)]	H	48.23	32.07	-29.21	-	51.09	74.00	22.91
4 935.05[1)]	V	62.12	33.97	-55.11	-	40.98	74.00	33.02
7 401.41[1)]	V	61.97	35.40	-52.35	-	45.02	74.00	28.98
Average Data								
2 483.50[1)]	H	39.85	32.07	-29.21	0.76	43.47	54.00	10.53

Average data

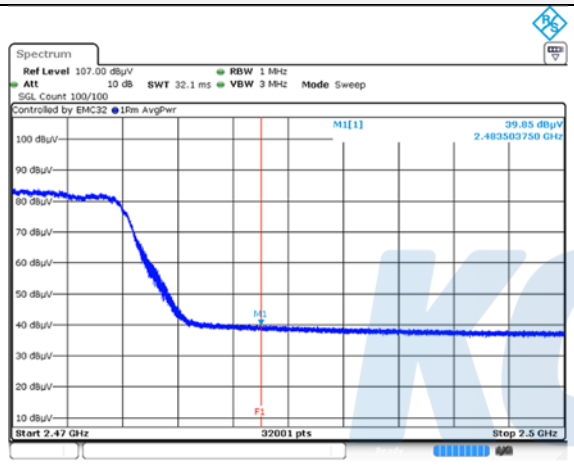

Blank

Horizontal/Vertical for Band-edge

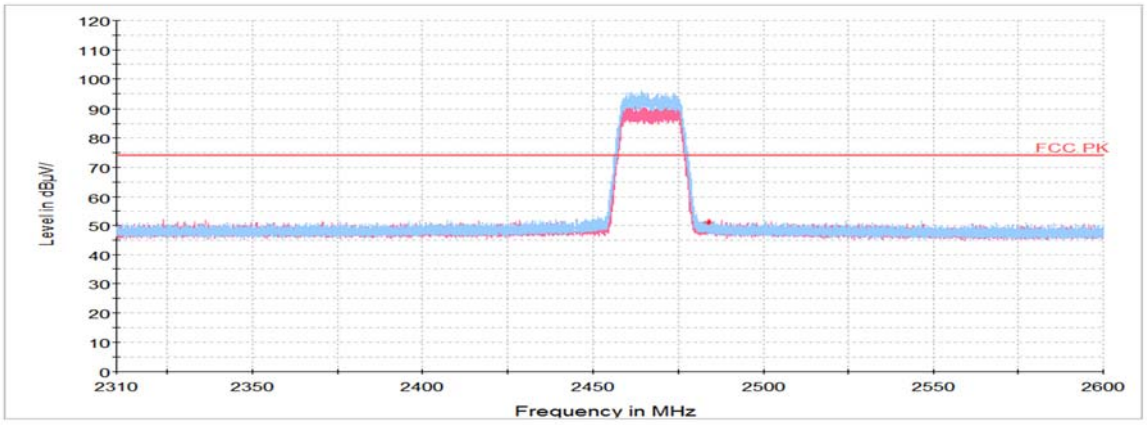

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

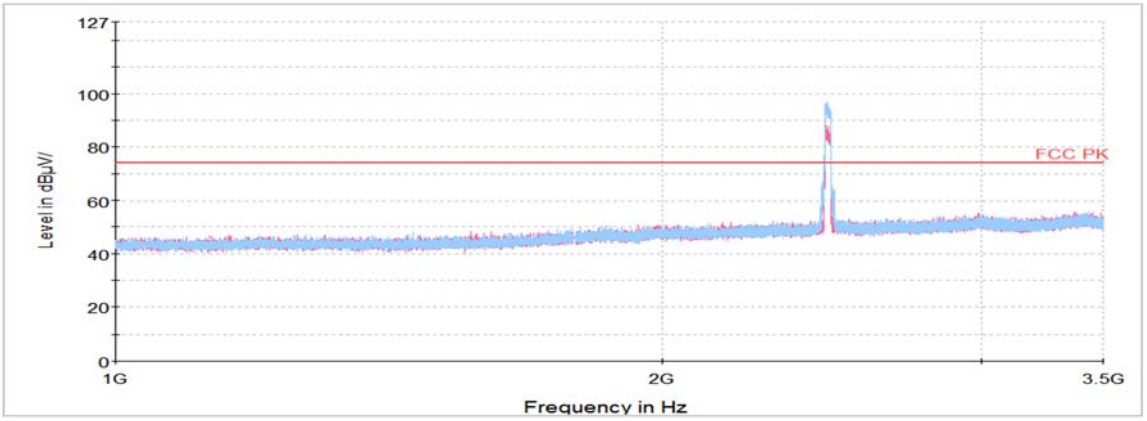

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

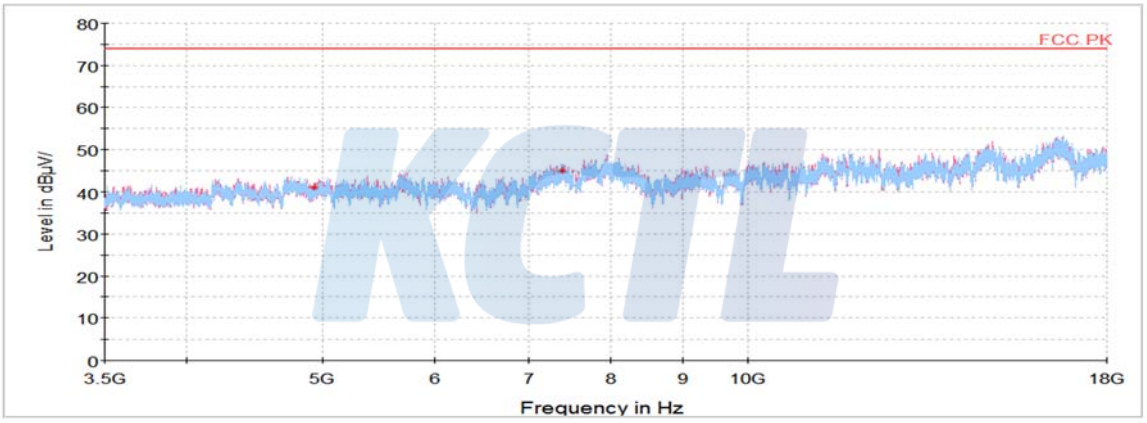

802.11ac VHT20_2 472 ㎒

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(㎒)	(V/H)	(dB(㎶))	(dB)	(dB)	(dB)	(dB(㎶/m))	(dB(㎶/m))	(dB)
Peak data								
2 483.51[1)]	H	55.25	32.07	-29.21	-	58.11	74.00	15.89
4 945.47[1)]	V	62.97	33.98	-54.92	-	42.03	74.00	31.97
7 416.36[1)]	V	62.37	35.40	-52.29	-	45.48	74.00	28.52
Average Data								
2 483.51[1)]	H	41.54	32.07	-29.21	0.76	45.16	54.00	8.84

Average data

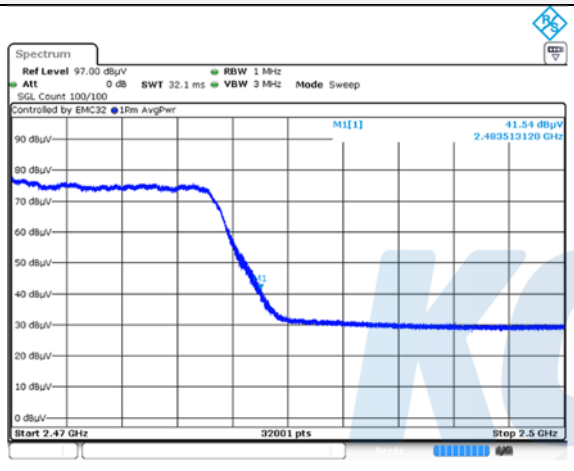

Blank

Horizontal/Vertical for Band-edge

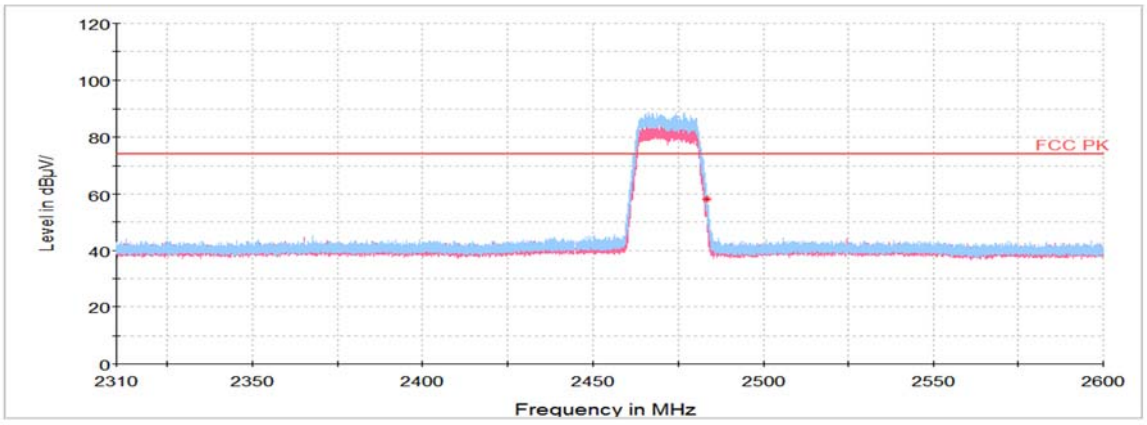

Horizontal/Vertical for 1 ㎓ ~ 3.5 ㎓

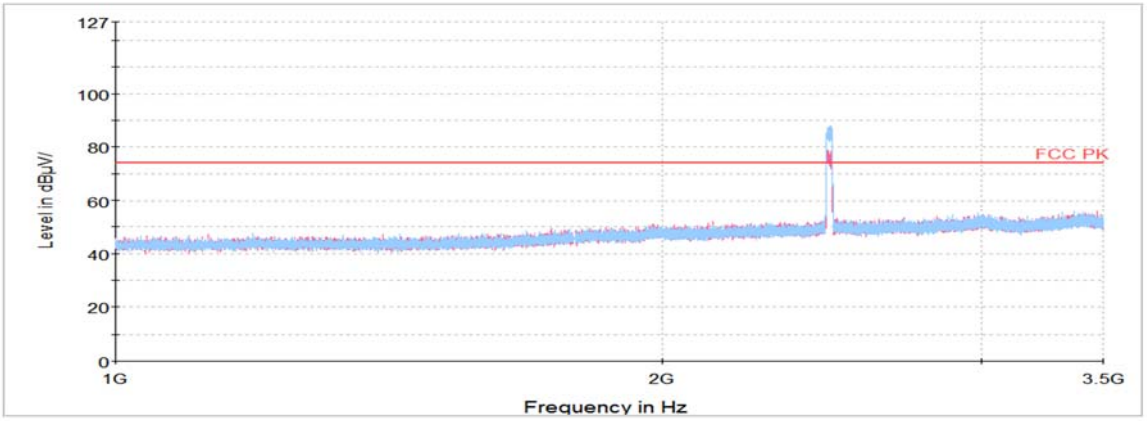

Horizontal/Vertical for 3.5 ㎓ ~ 18 ㎓

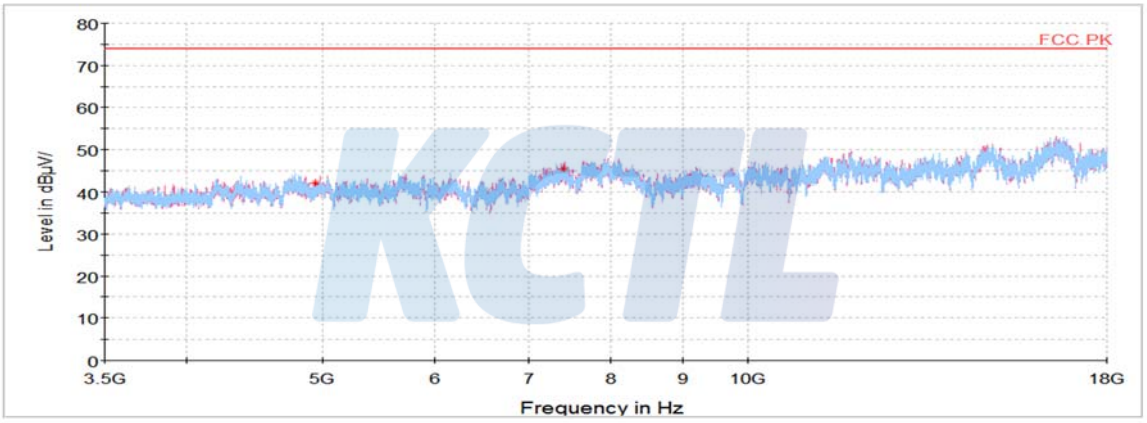

Test results (Above 18 ㎓) – Worst case: MIMO_802.11b mode / 2 437 ㎒

Horizontal/Vertical for 18 ㎓ ~ 26.5 ㎓

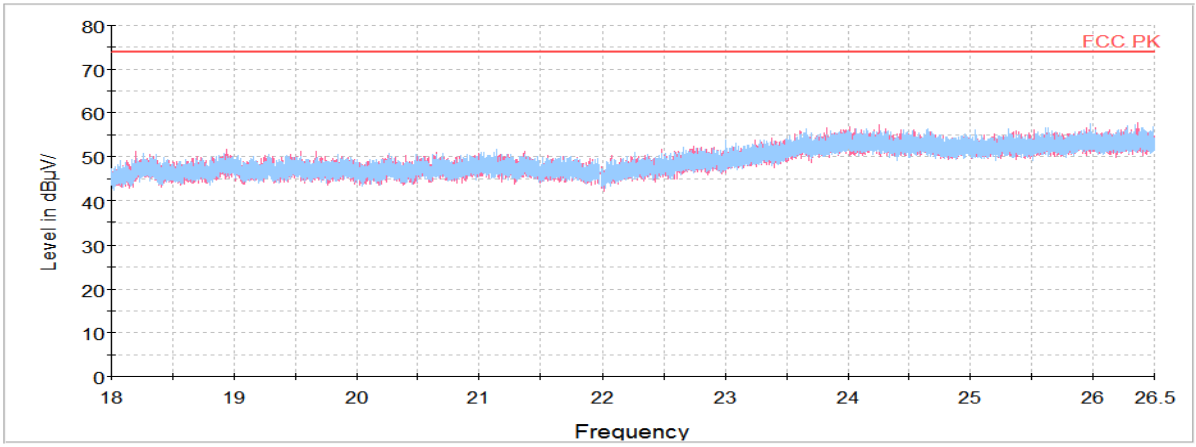

7.5. Conducted Spurious Emission

Test setup



Limit

According to §15.247(d), In any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted powr averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).
Limit : 20 ㏈c

Test procedure

ANSI C63.10 - Section 11.11.3, 14.3.3

Test settings

Establish an emission level by using the following procedure:

1) Set the center frequency and span to encompass frequency range to be measured.
2) Set the RBW = 100 ㎑
3) Set the VBW ≥ [3 x RBW]
4) Detector = peak
5) Sweep time = auto couple
6) Trace mode = max hold
7) Allow trace to fully stabilize.
8) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

This test report shall not be reproduced, except in full, without the written approval

Test results

SISO_ANT 1

802.11b	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
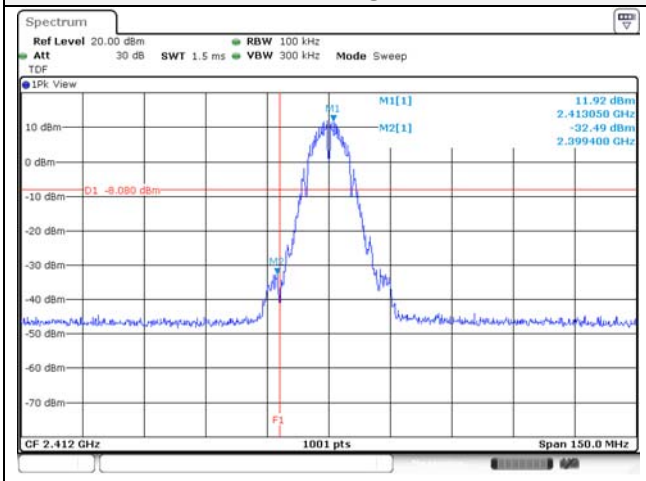	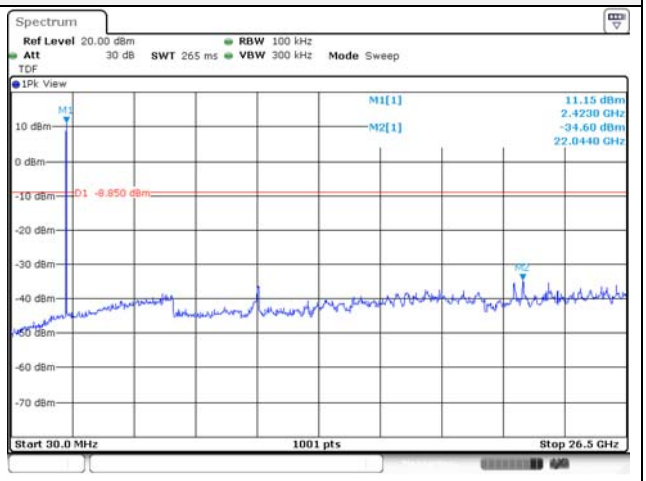
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	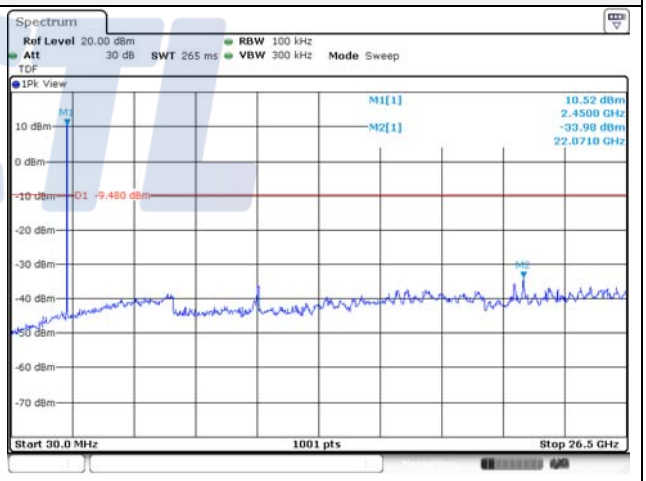
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
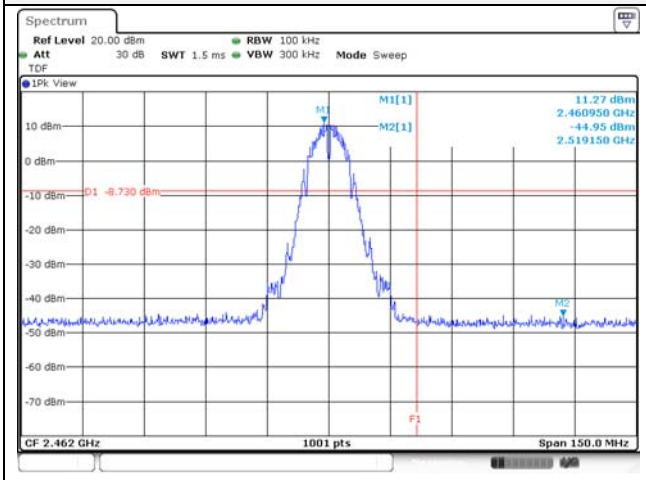	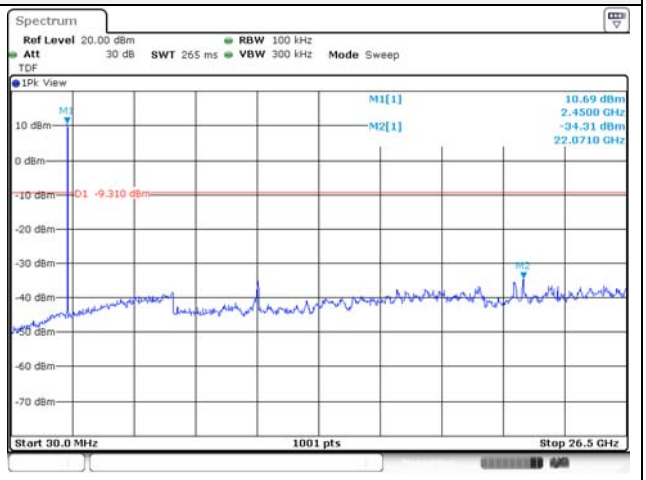

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
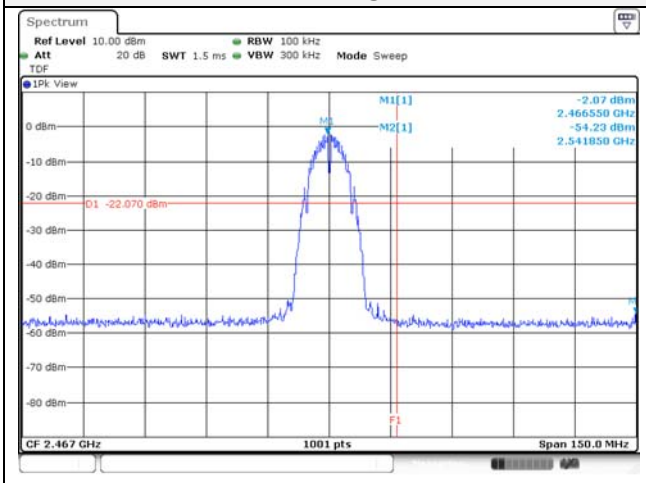	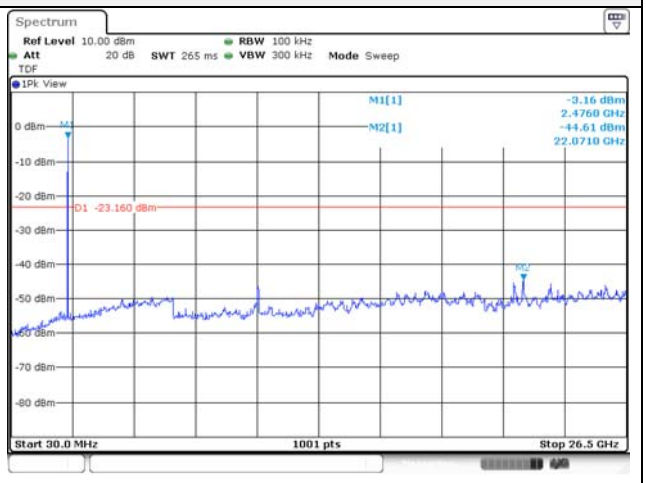
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
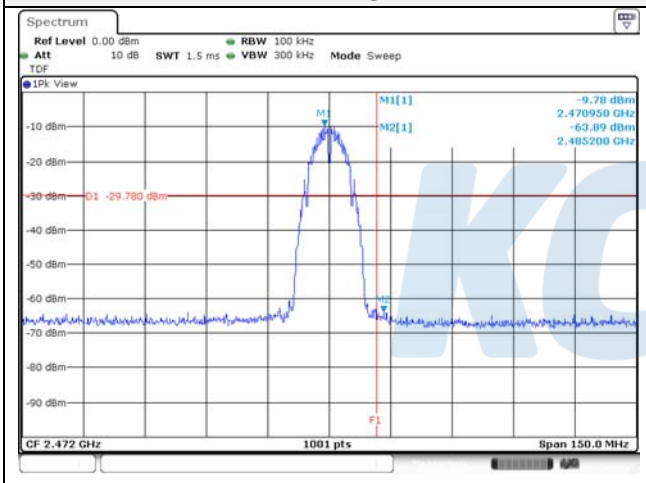	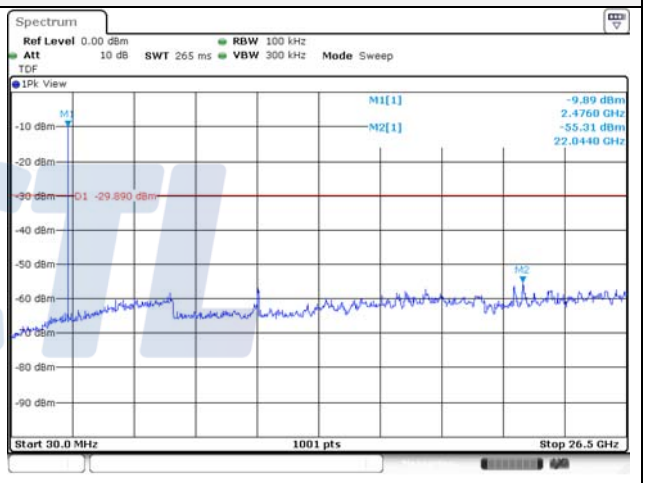

802.11g	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
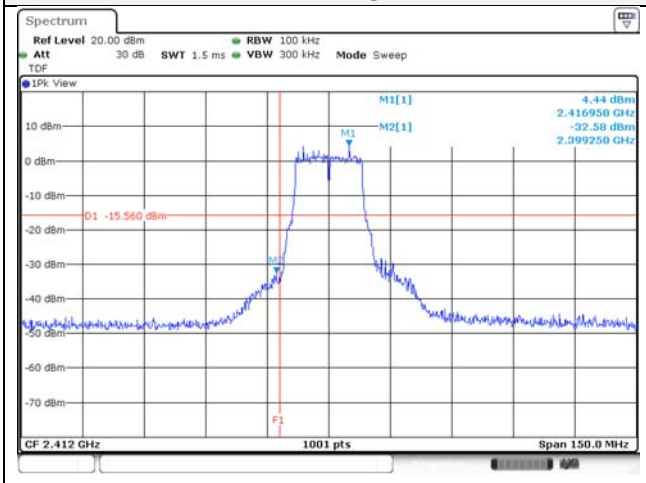	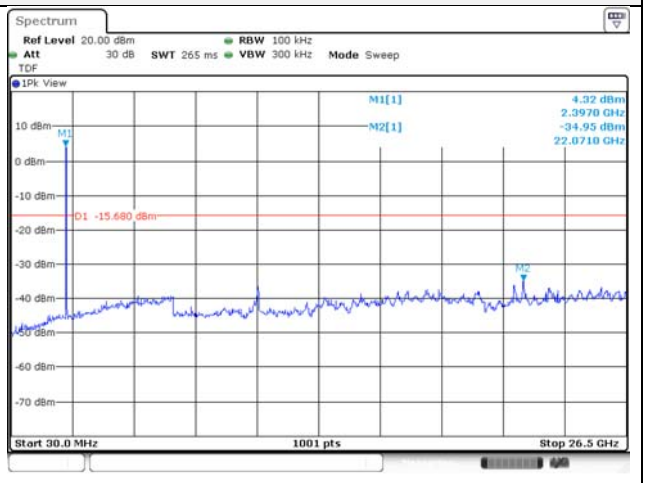
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	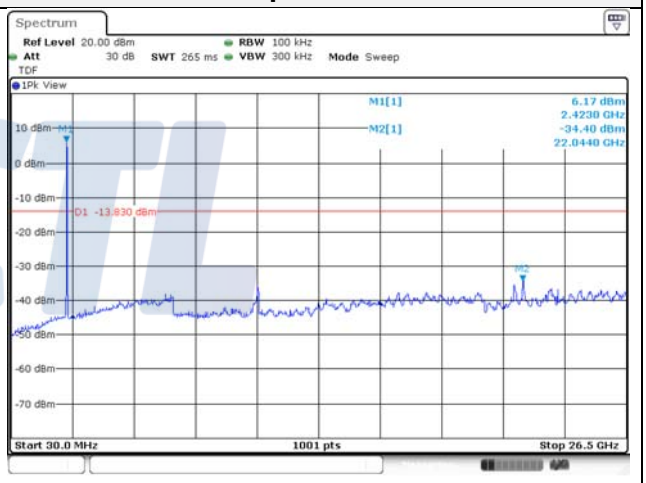
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
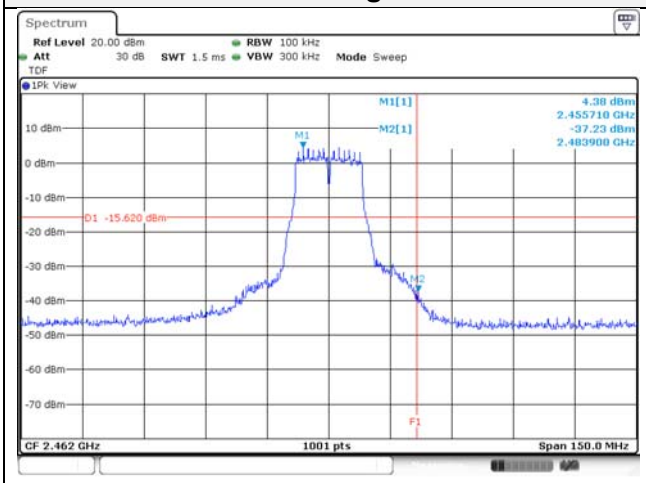	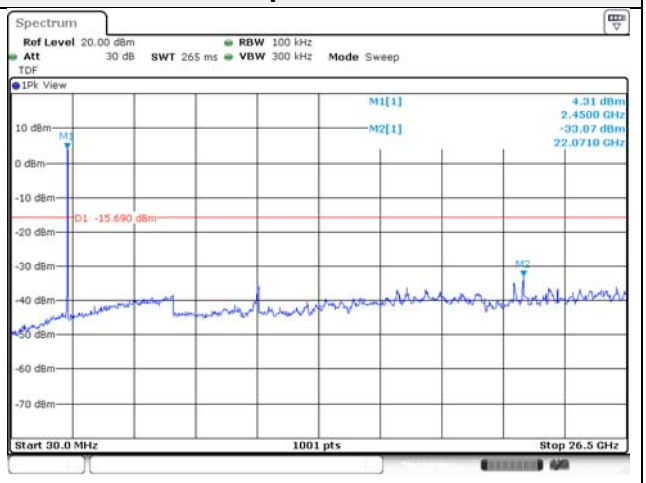

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
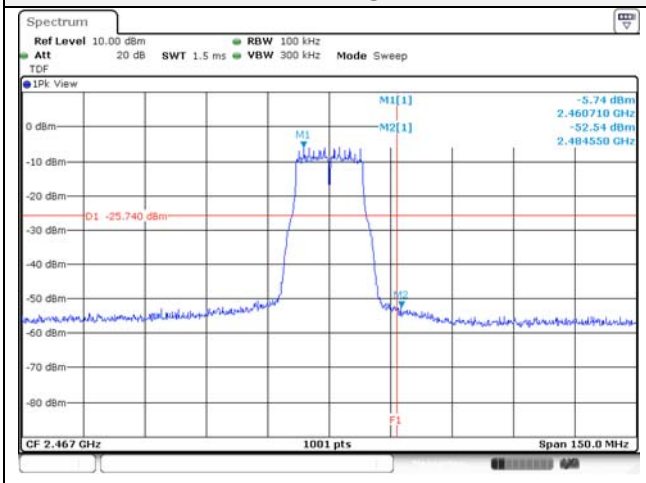	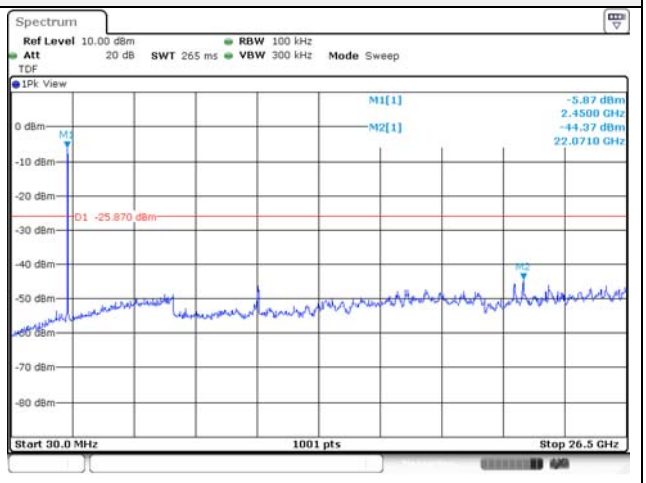
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
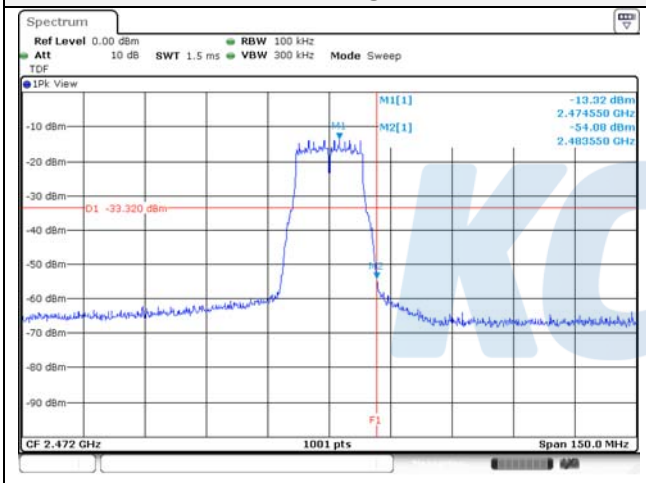	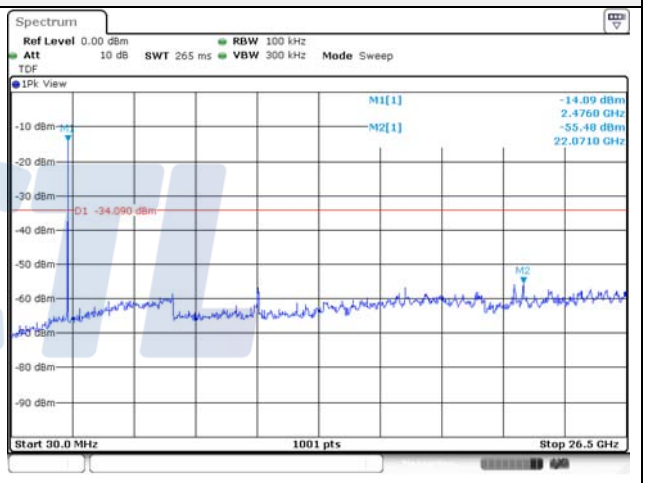

This test report shall not be reproduced, except in full, without the written approval

802.11n HT20

Conducted band-edge / 2 412 ㎒

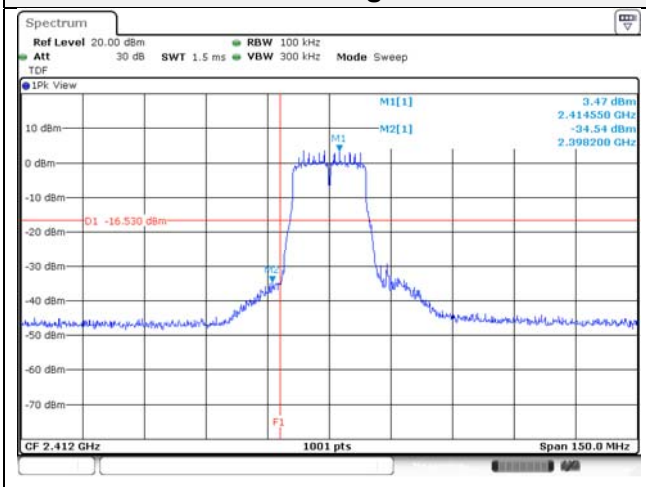

Conducted spurious / 2 412 ㎒

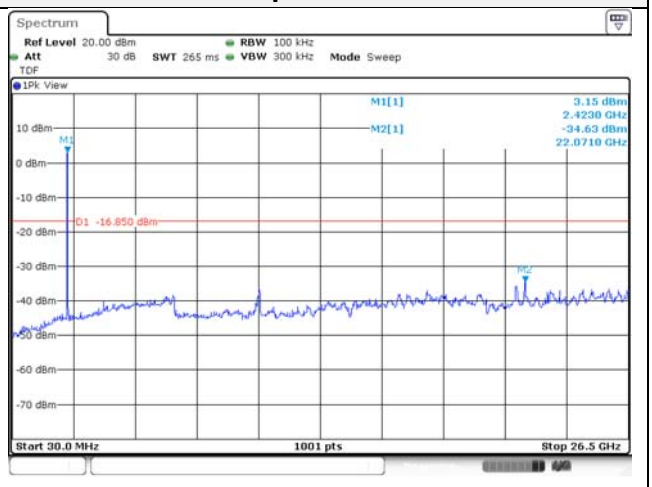

Conducted band-edge / 2 437 ㎒

Blank

Conducted spurious / 2 437 ㎒

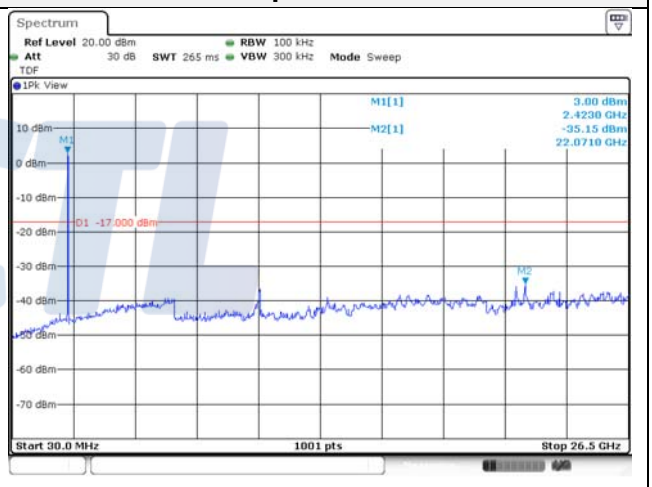

Conducted band-edge / 2 462 ㎒

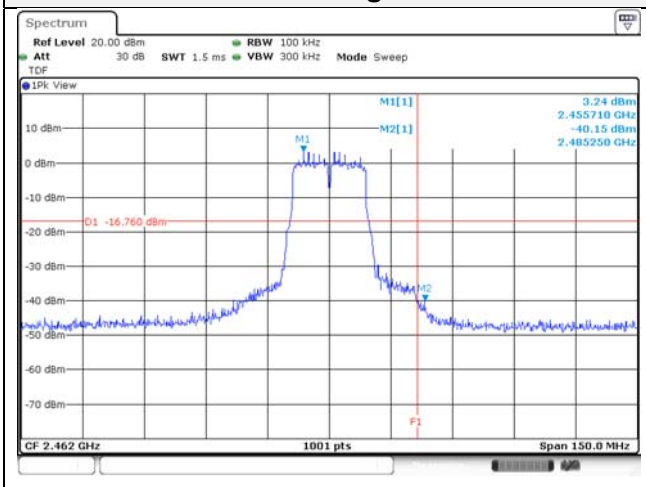

Conducted spurious / 2 462 ㎒

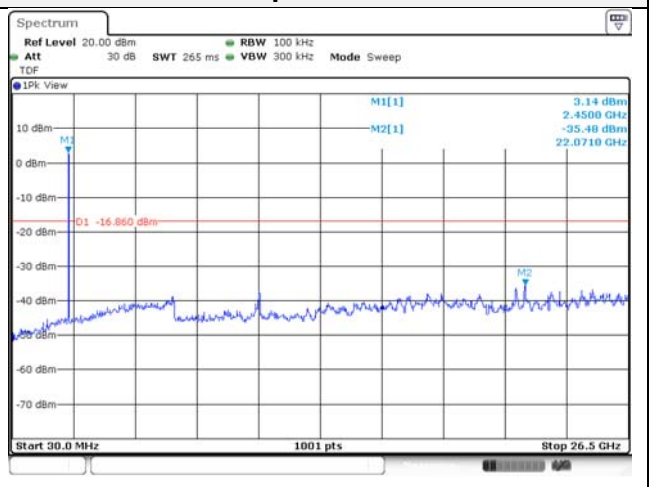

This test report shall not be reproduced, except in full, without the written approval

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
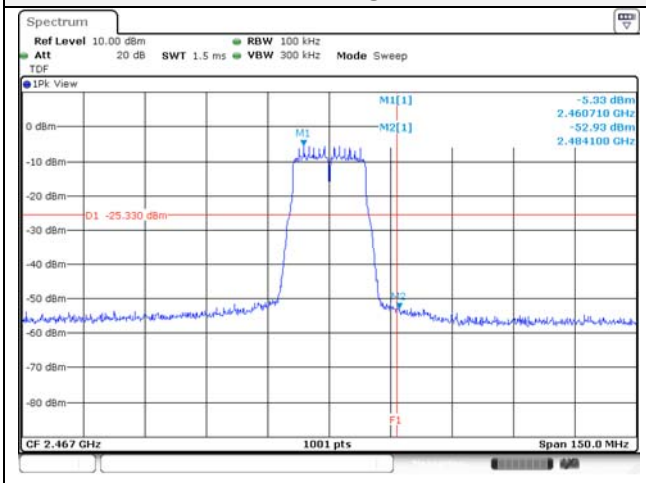	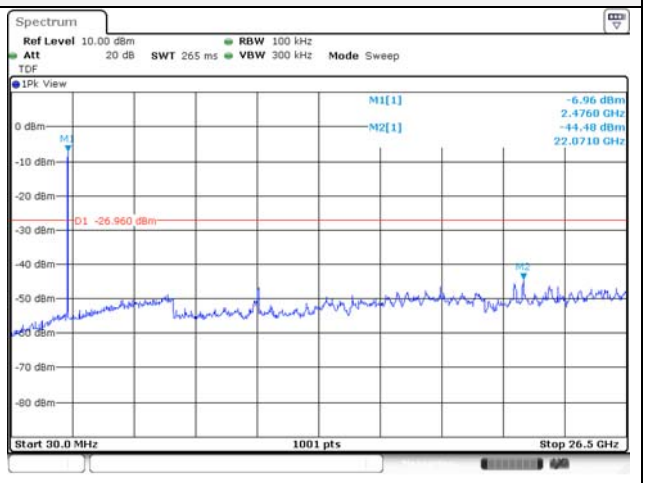
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
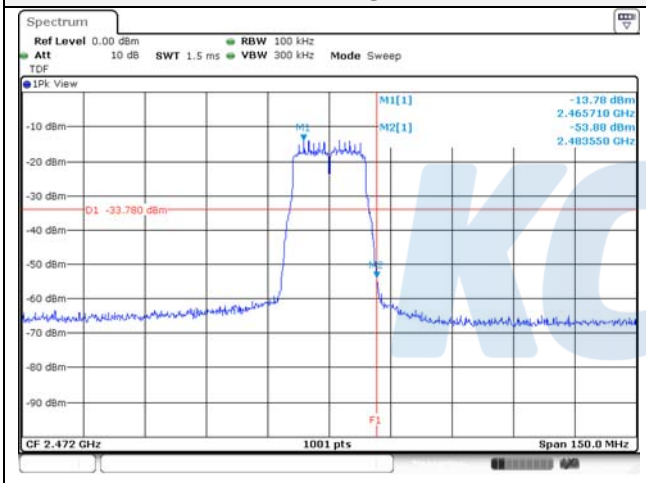	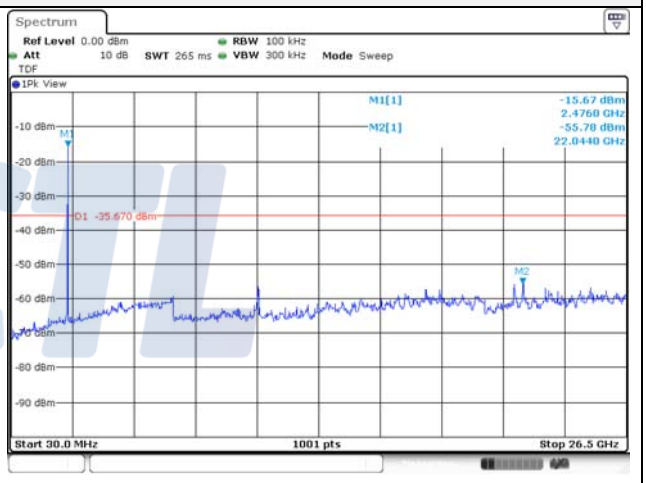

802.11ac VHT20

Conducted band-edge / 2 412 ㎒

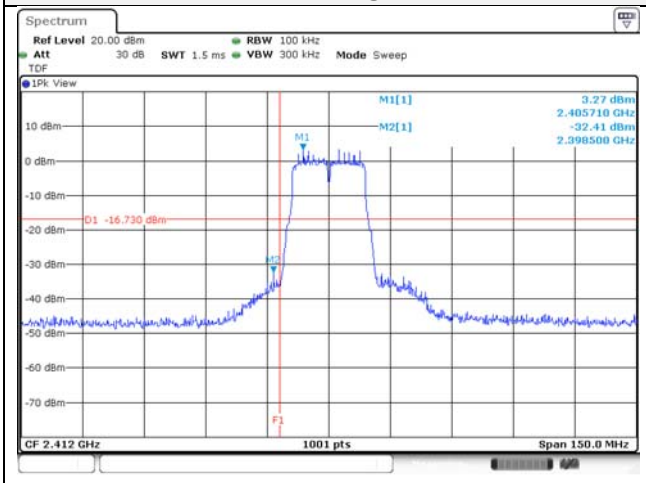

Conducted spurious / 2 412 ㎒

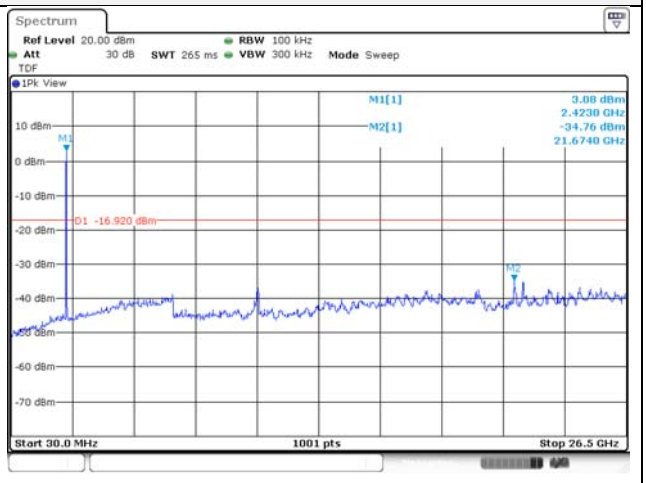

Conducted band-edge / 2 437 ㎒

Blank

Conducted spurious / 2 437 ㎒

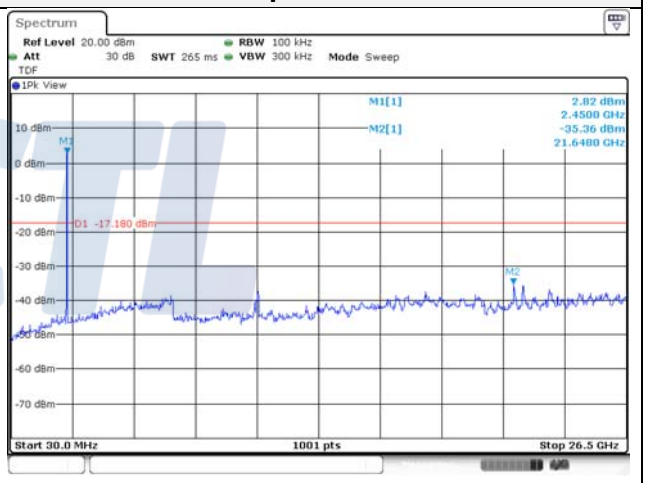

Conducted band-edge / 2 462 ㎒

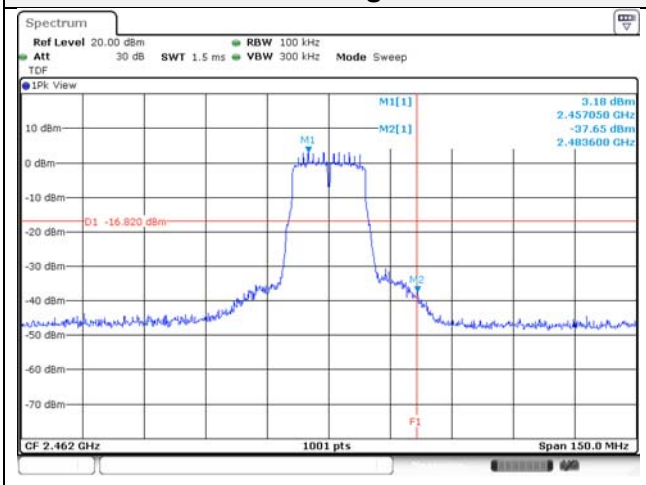

Conducted spurious / 2 462 ㎒

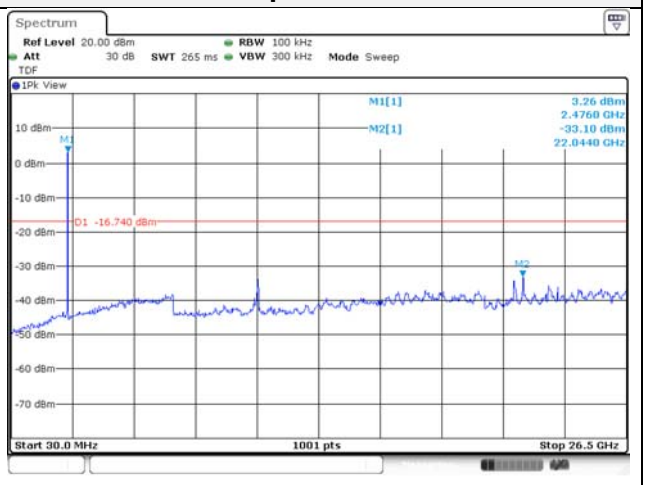

This test report shall not be reproduced, except in full, without the written approval

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
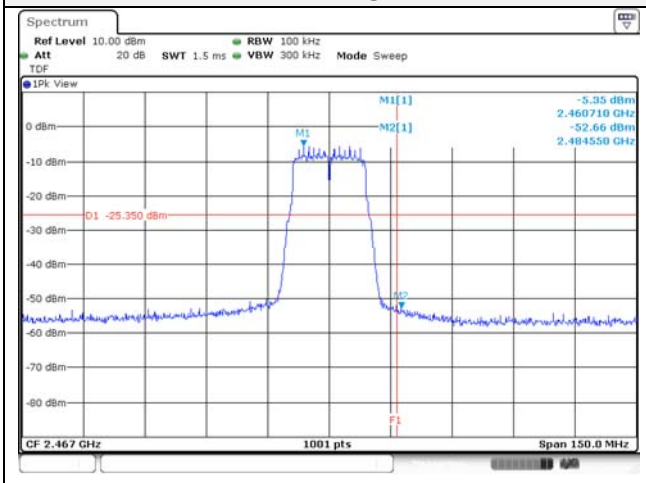	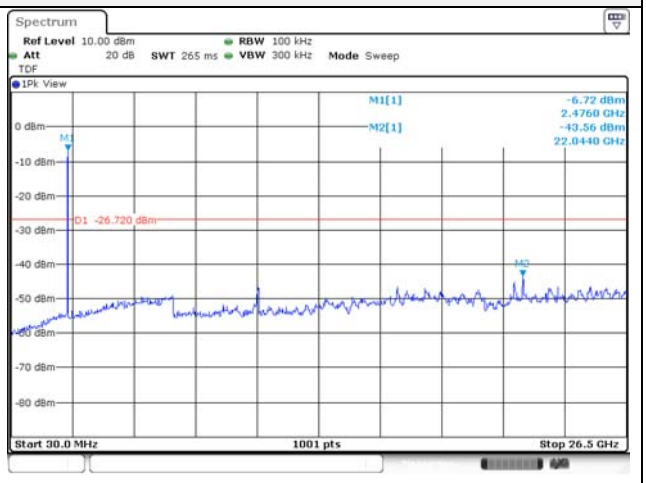
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
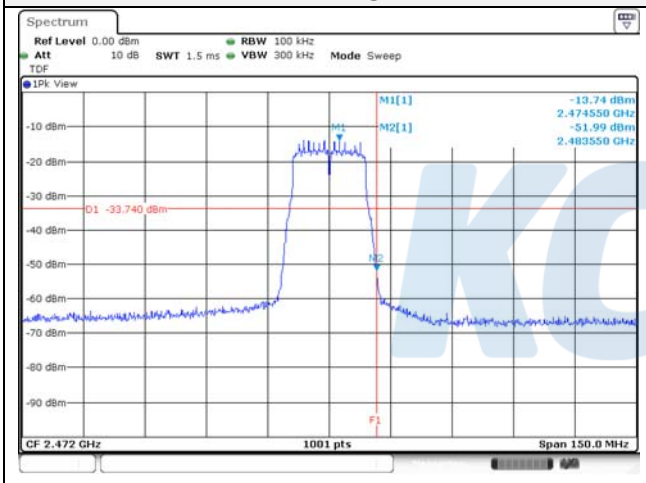	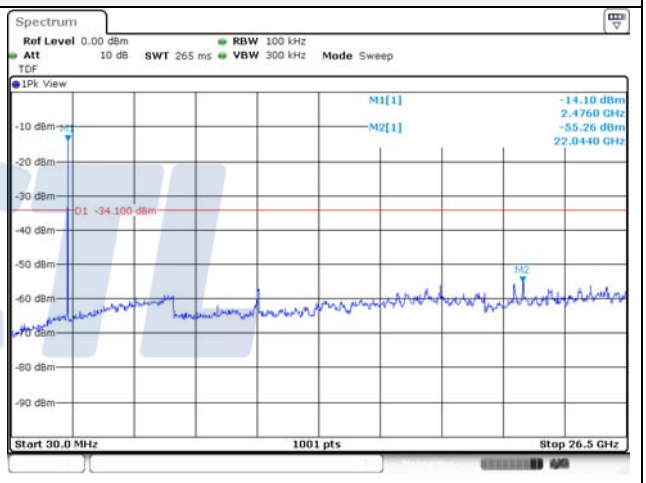

SISO_ANT 2

802.11b	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
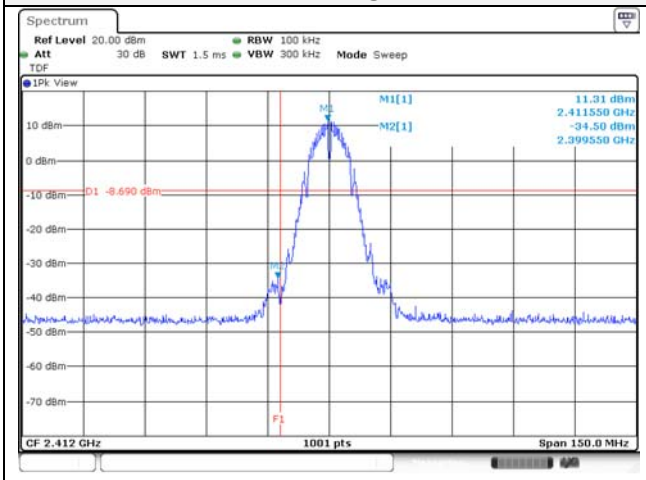	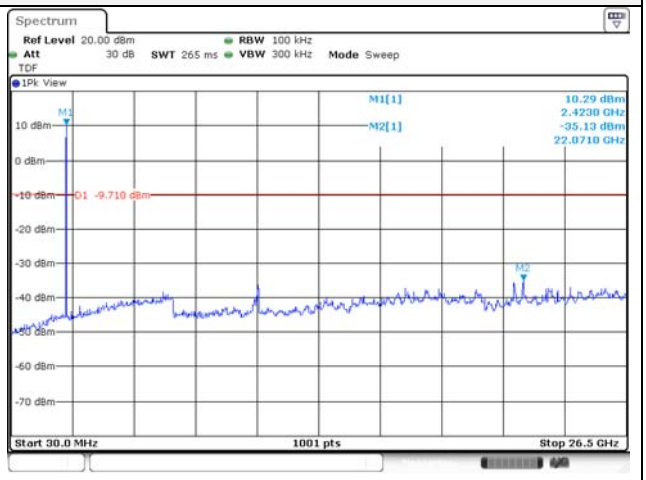
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	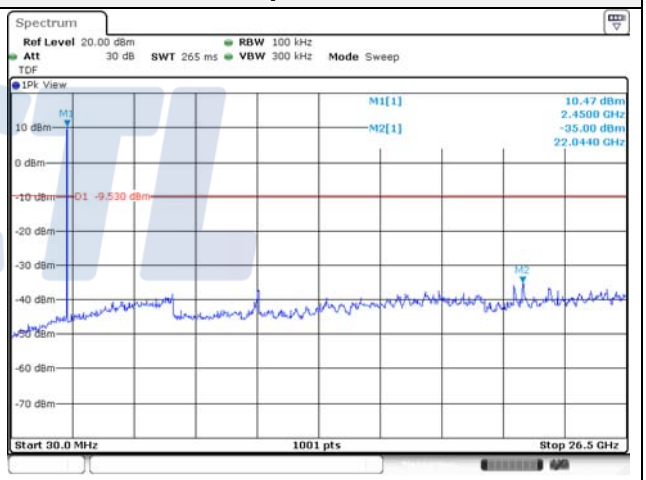
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
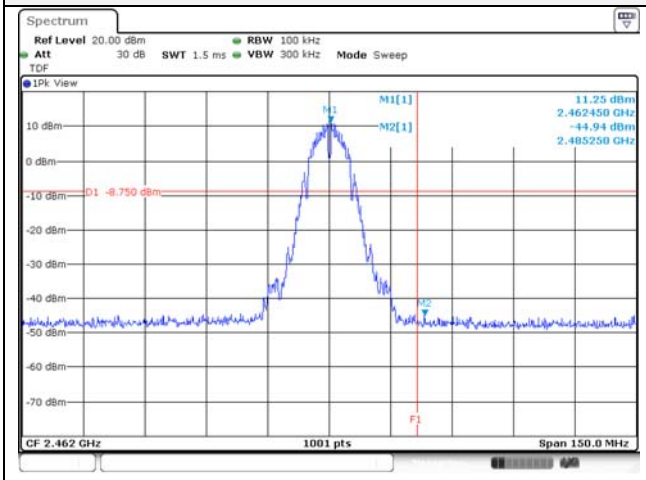	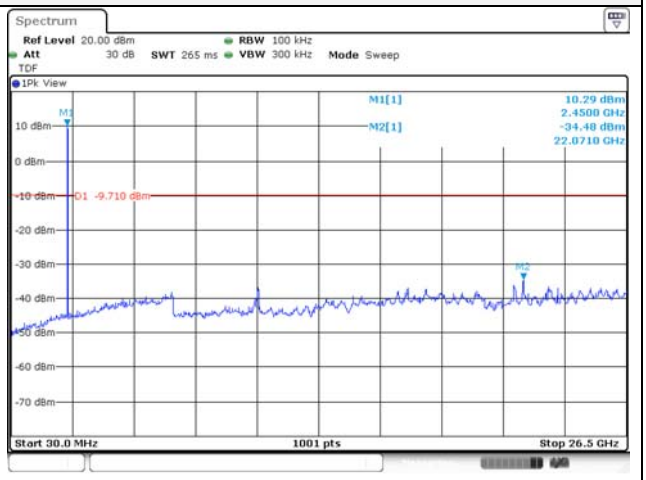

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
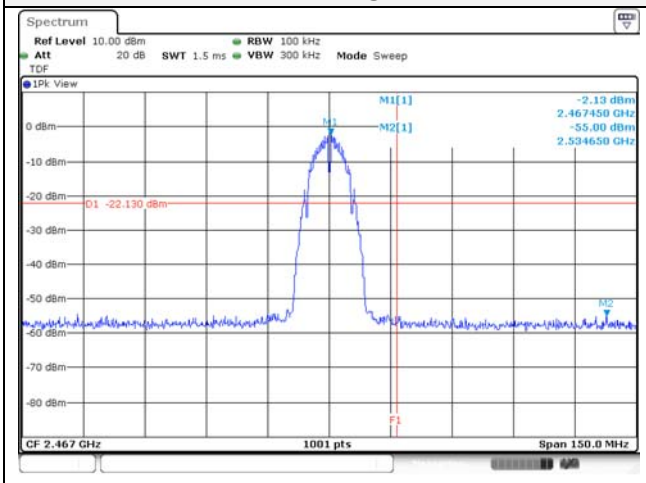	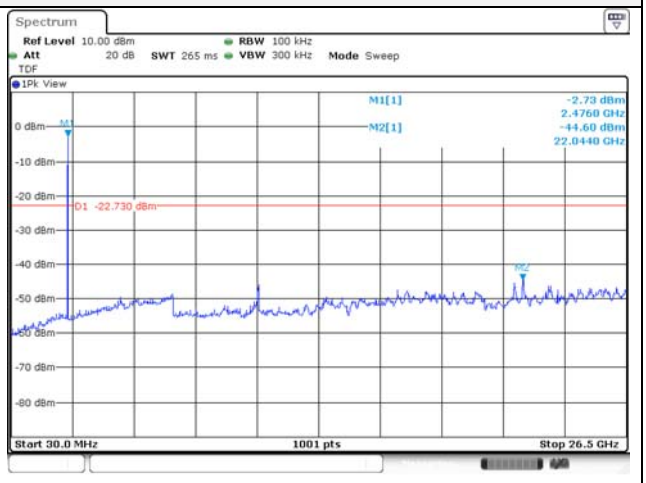
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
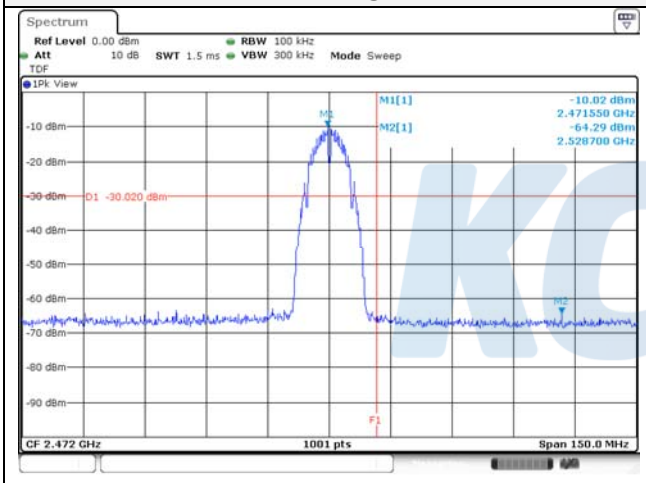	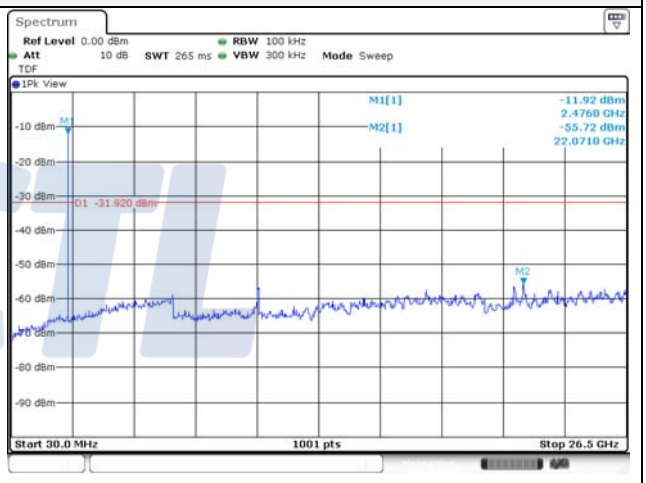

802.11g	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
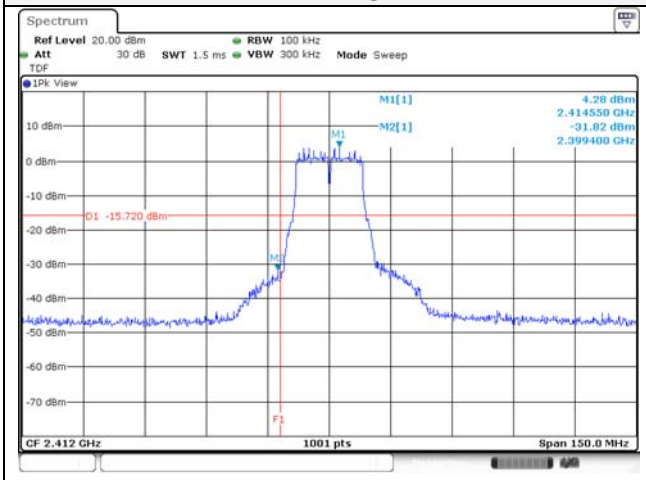	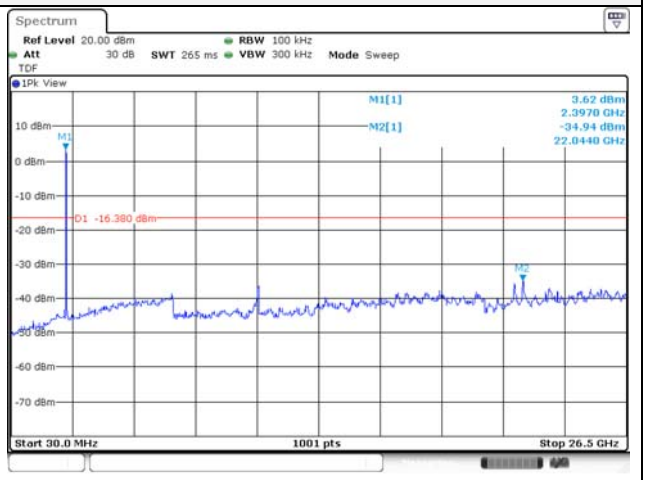
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	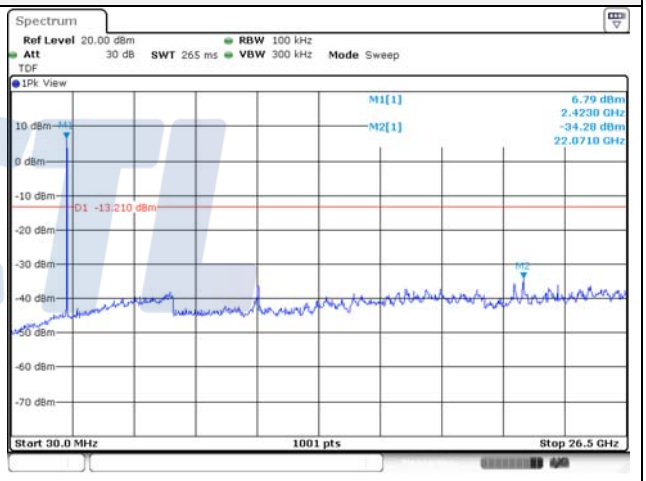
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
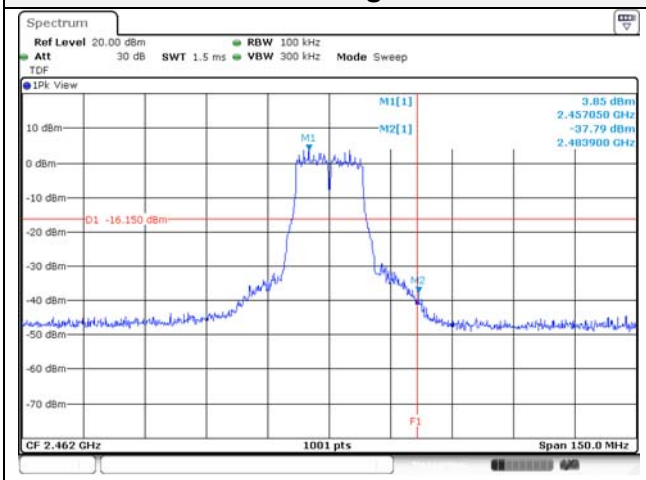	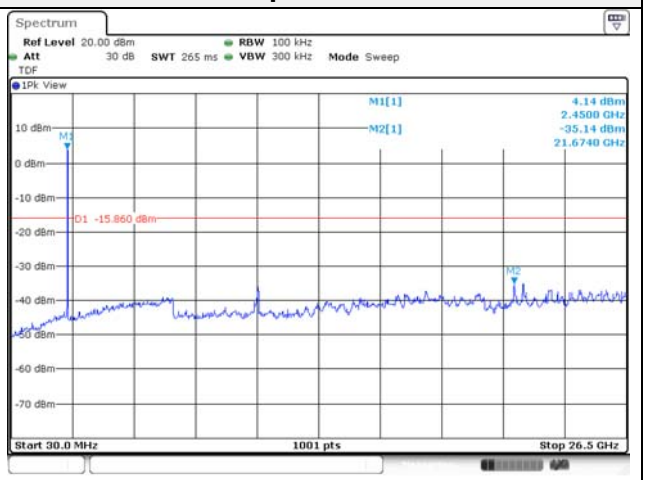

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
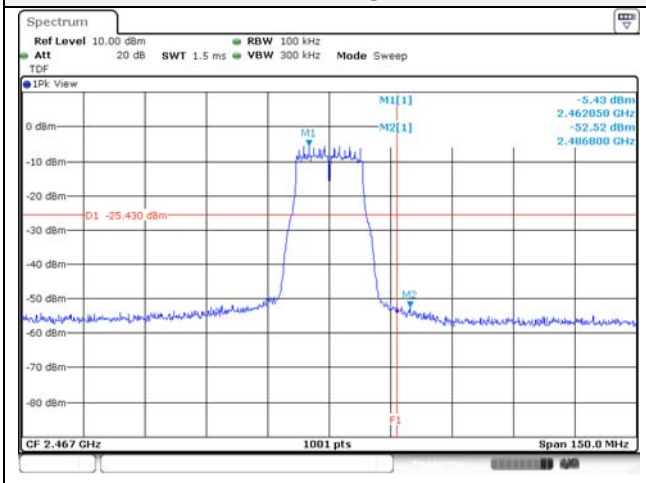	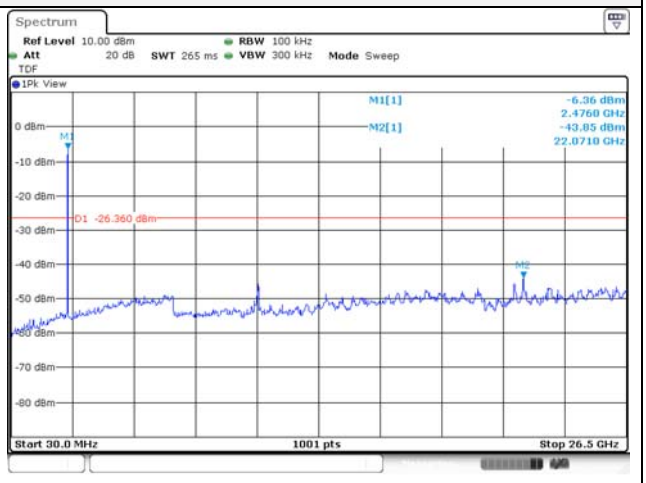
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
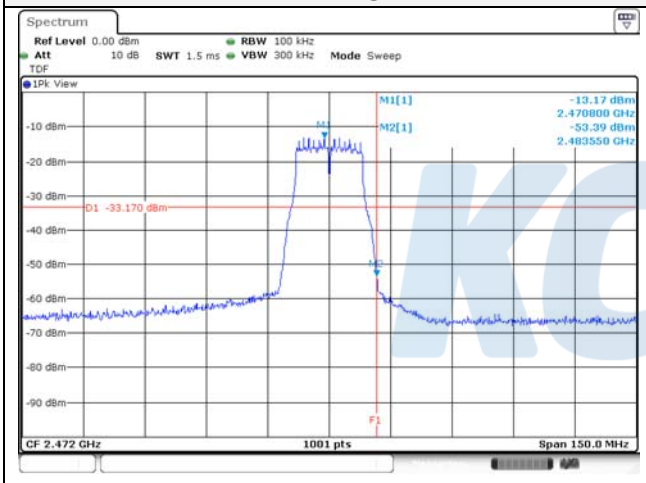	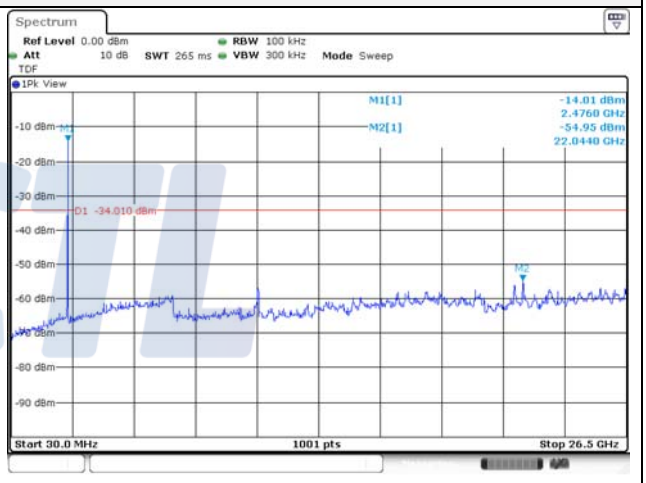

802.11n HT20	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
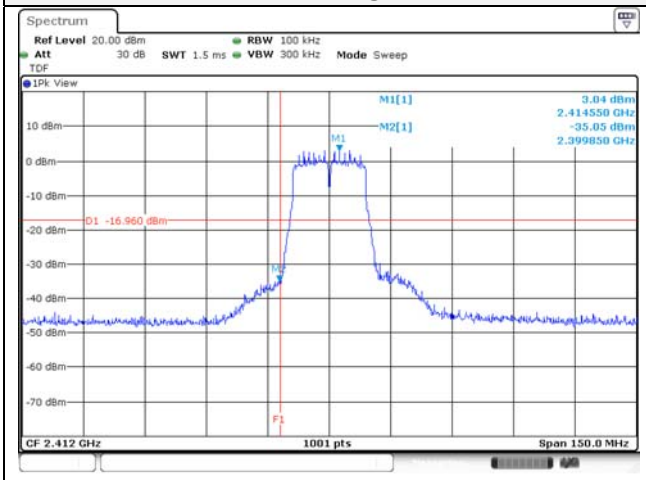	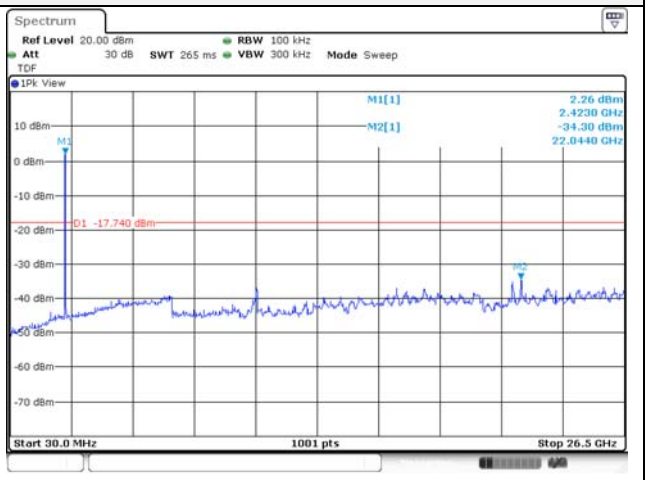
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	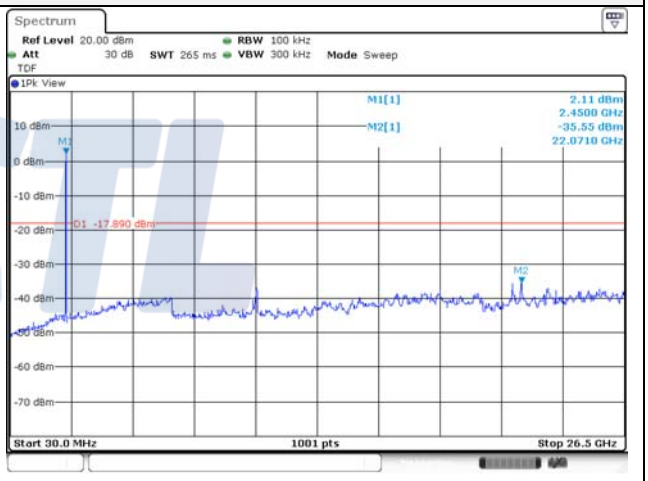
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
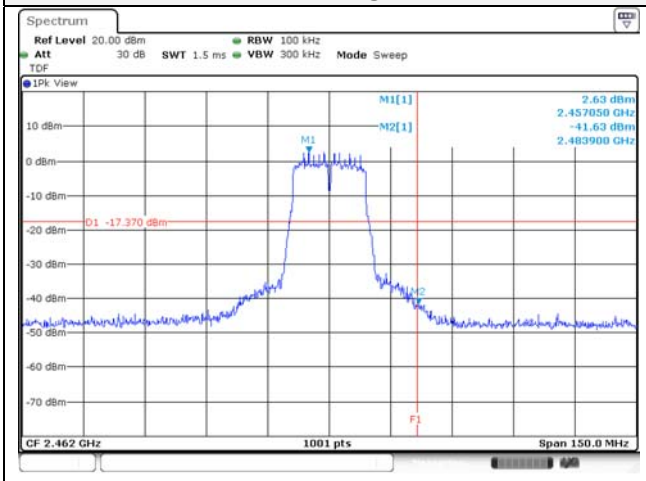	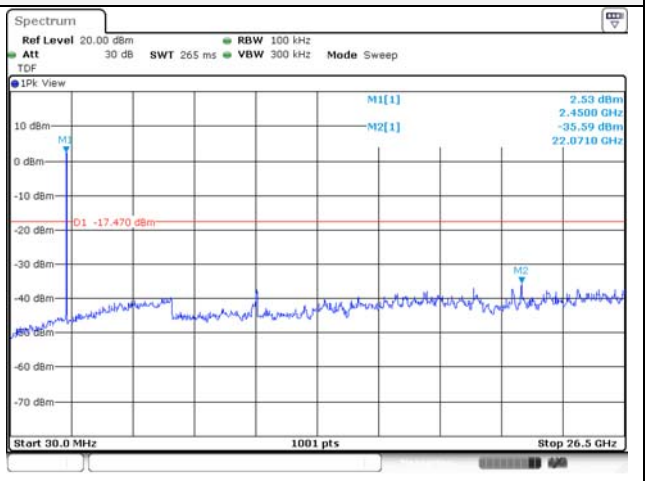

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
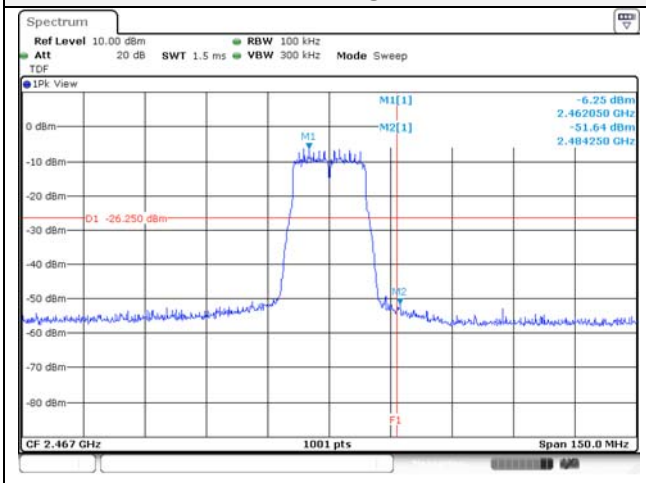	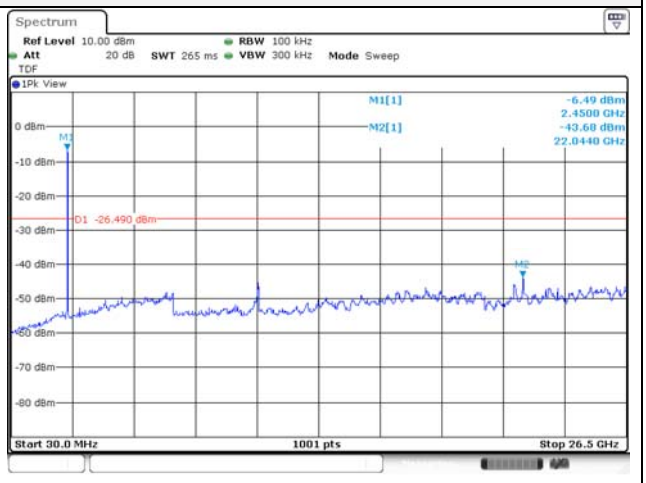
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
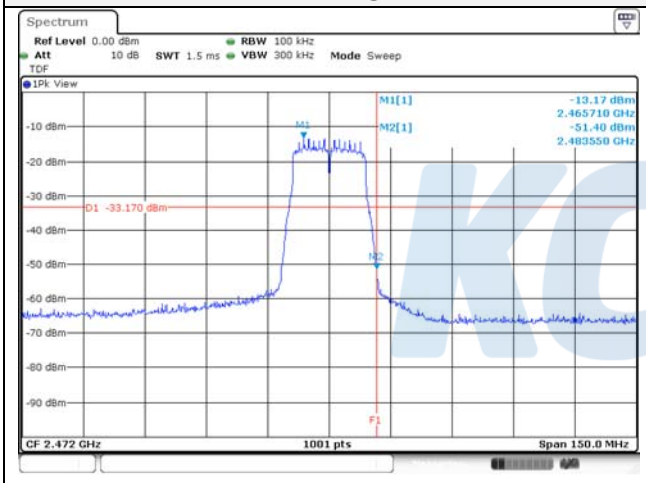	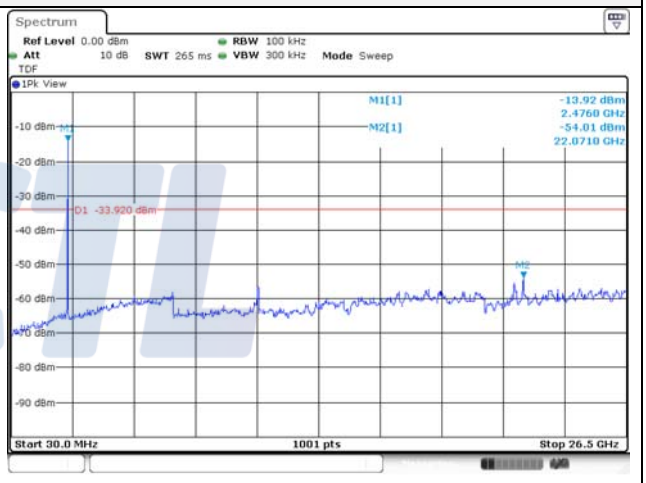

802.11ac VHT20	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
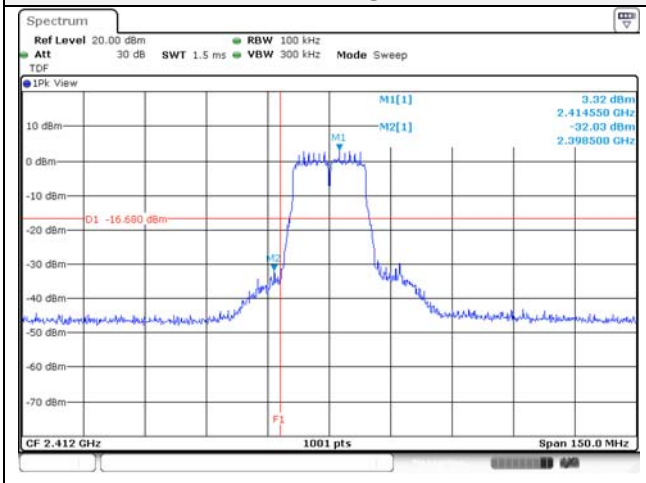	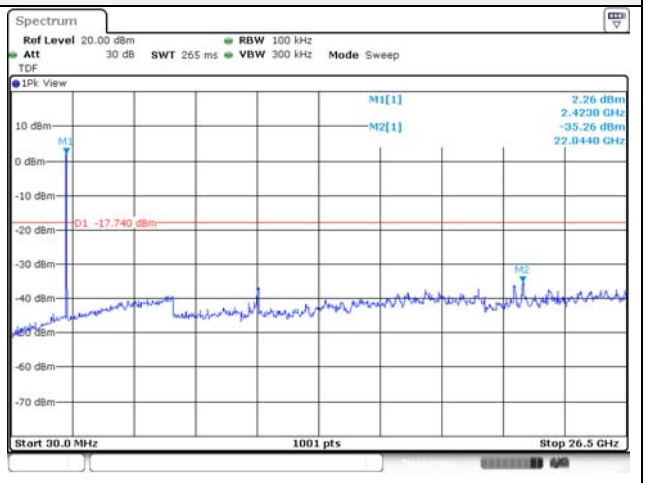
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	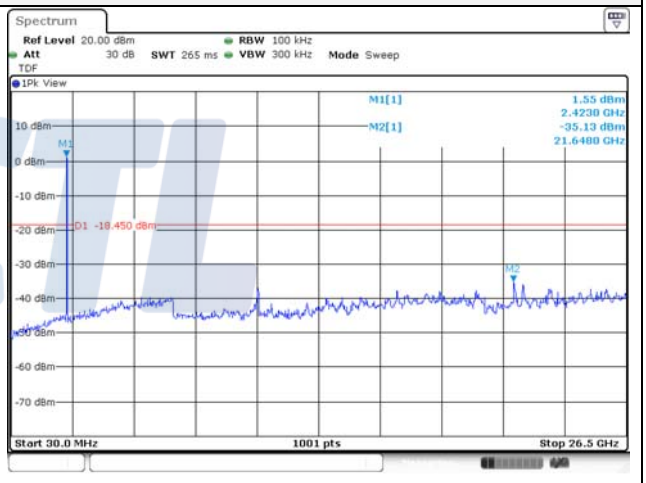
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
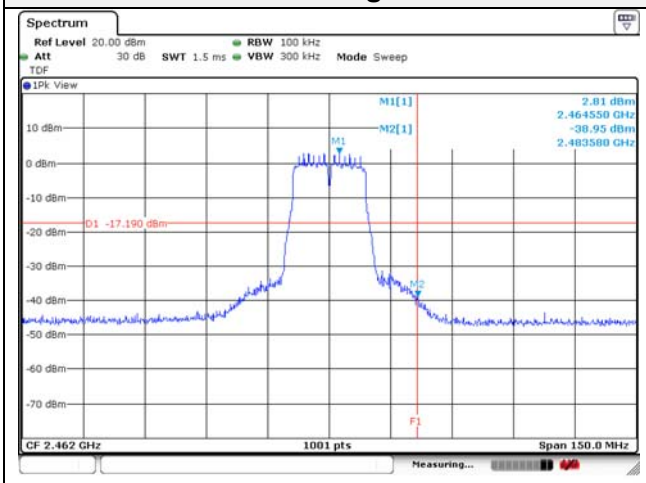	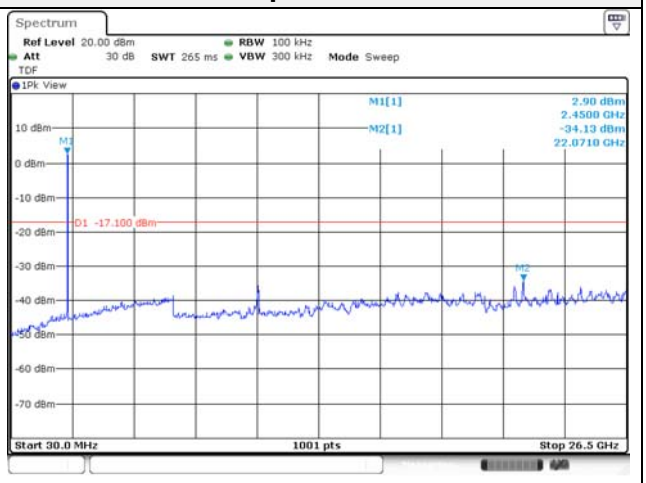

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
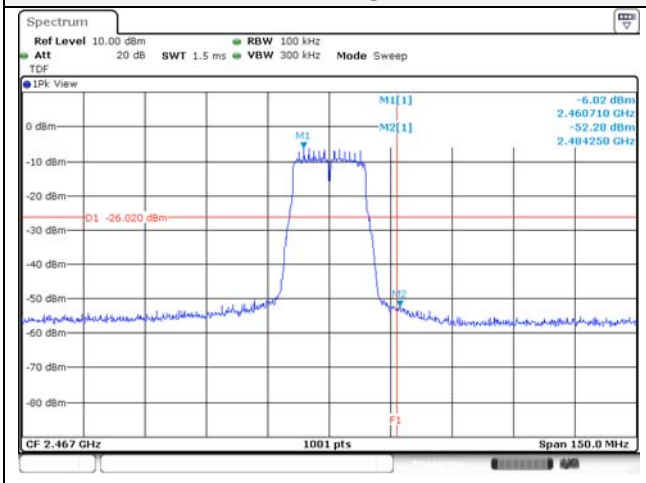	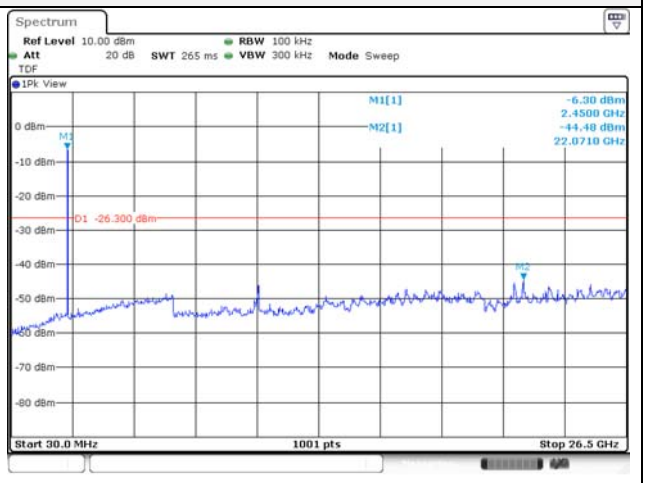
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
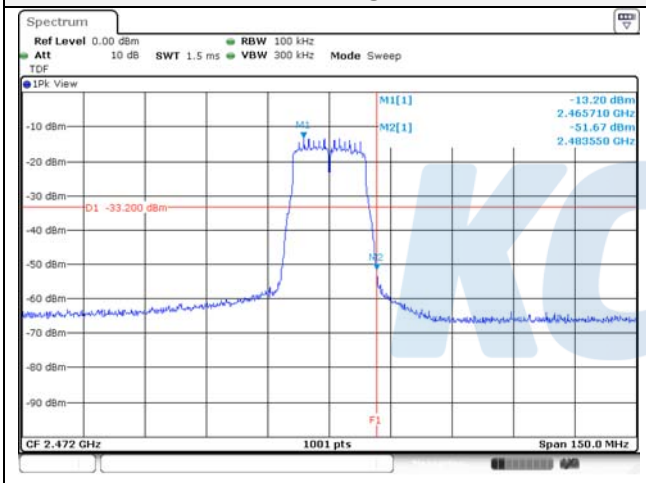	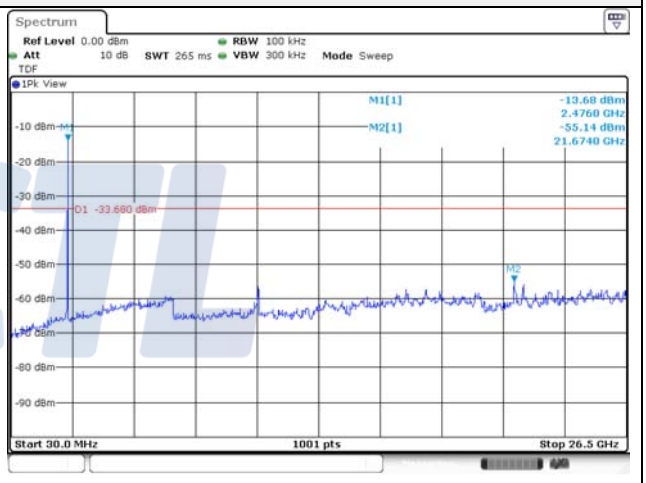

MIMO_ANT 1

802.11g	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
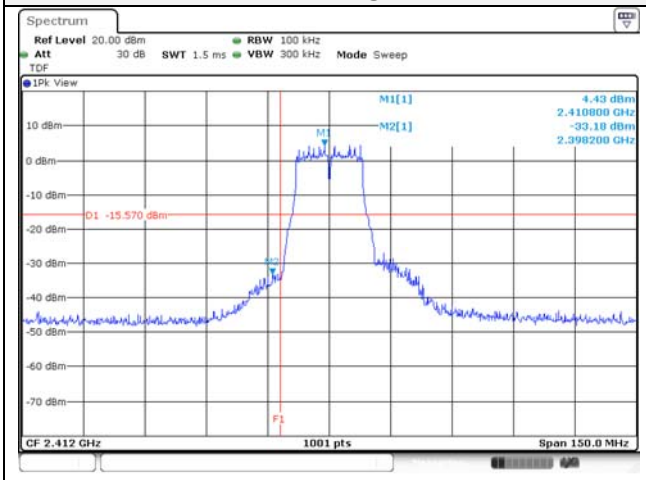	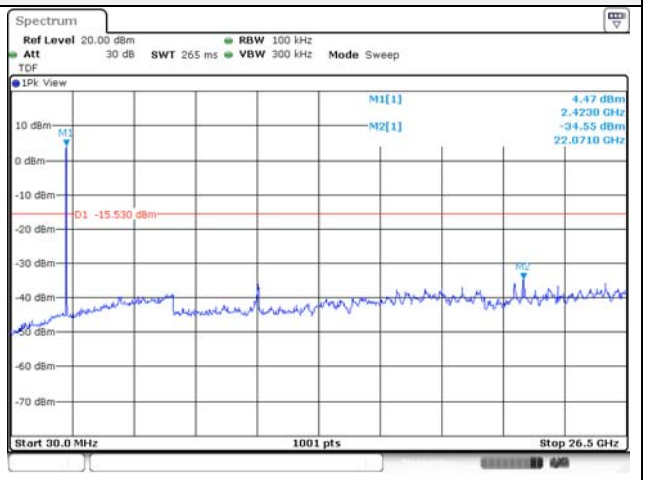
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	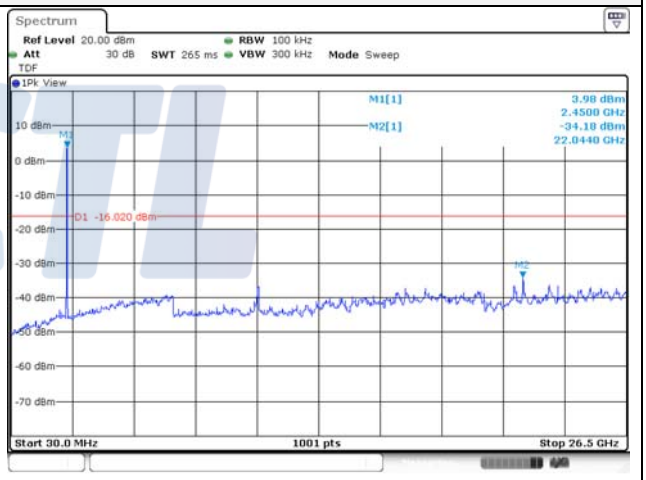
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
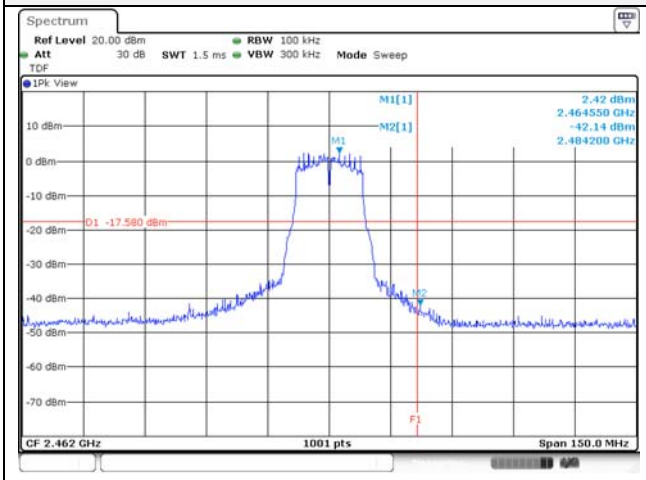	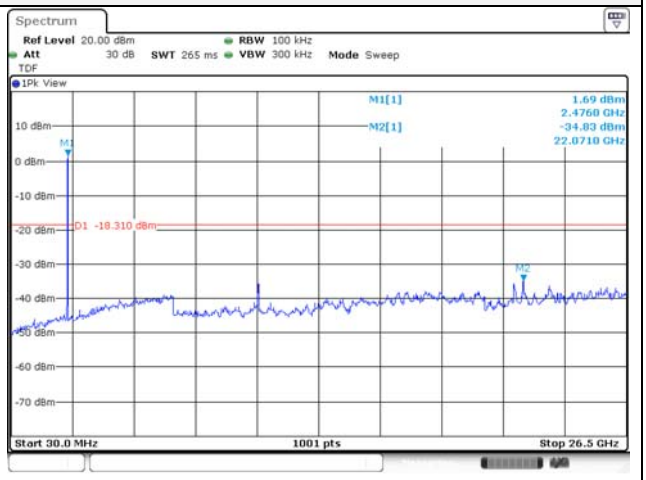

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
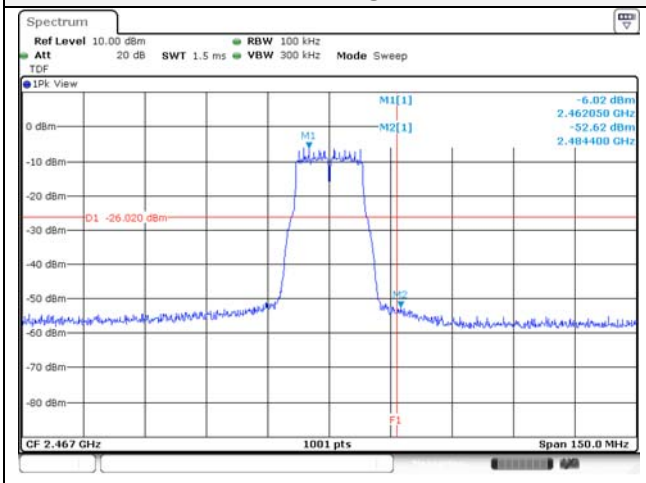	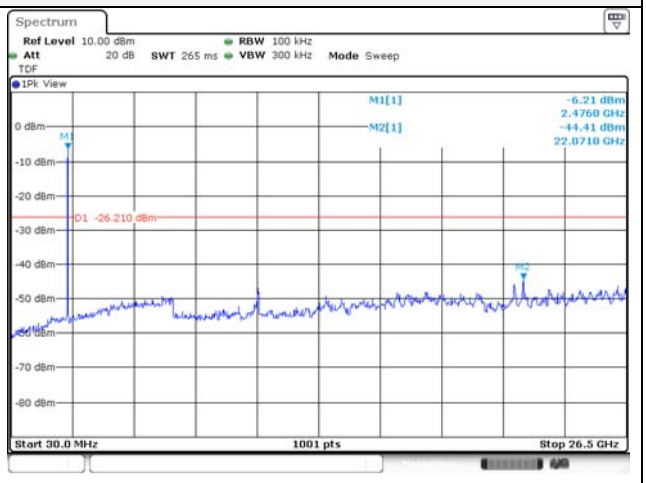
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**
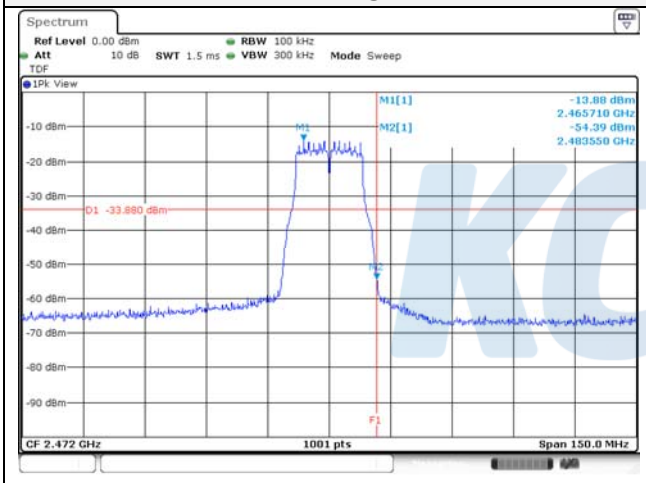	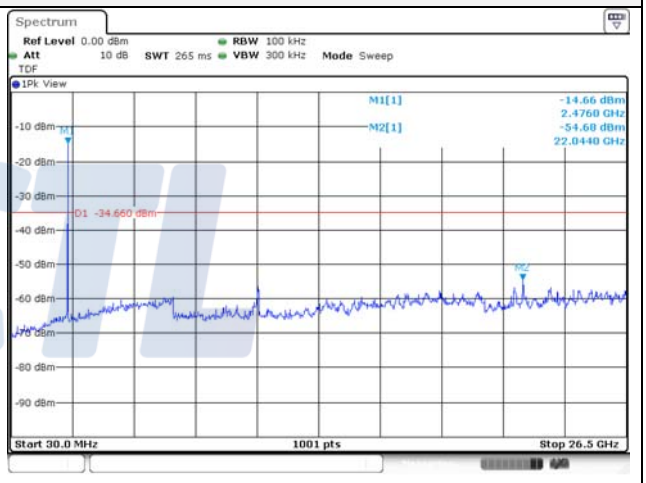

802.11n HT20	
Conducted band-edge / 2 412 ㎒	**Conducted spurious / 2 412 ㎒**
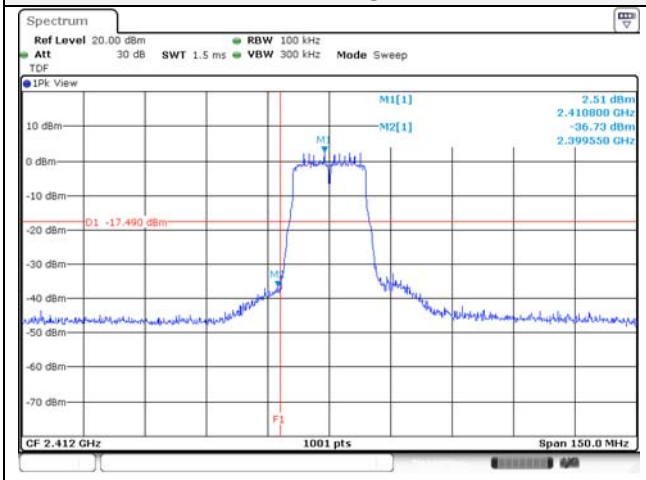	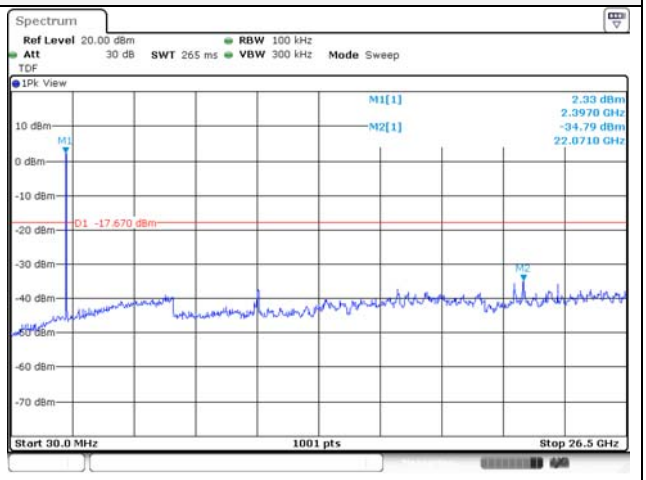
Conducted band-edge / 2 437 ㎒	**Conducted spurious / 2 437 ㎒**
Blank	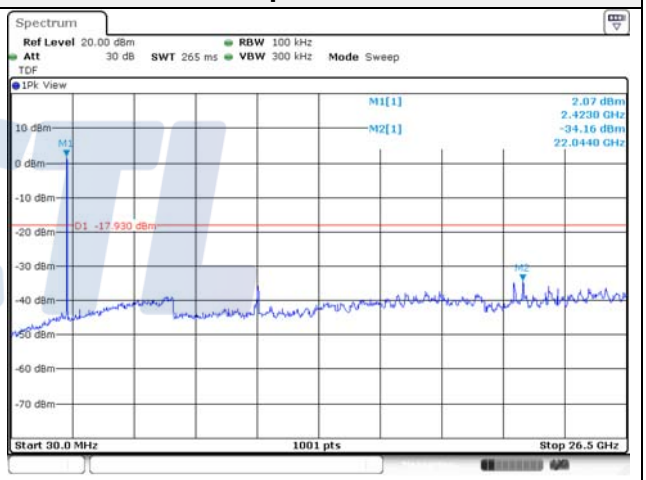
Conducted band-edge / 2 462 ㎒	**Conducted spurious / 2 462 ㎒**
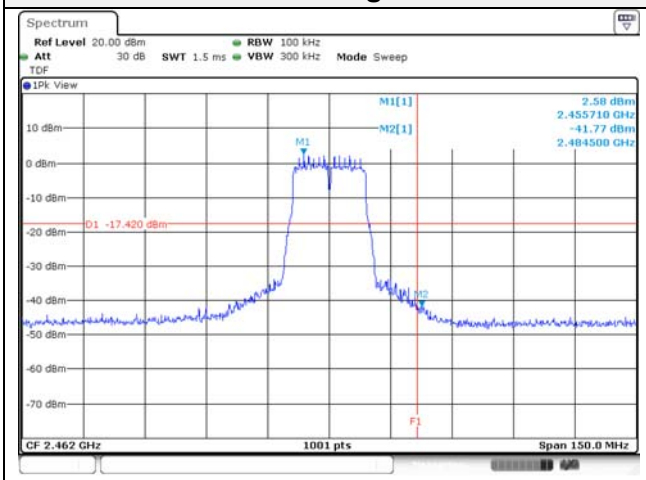	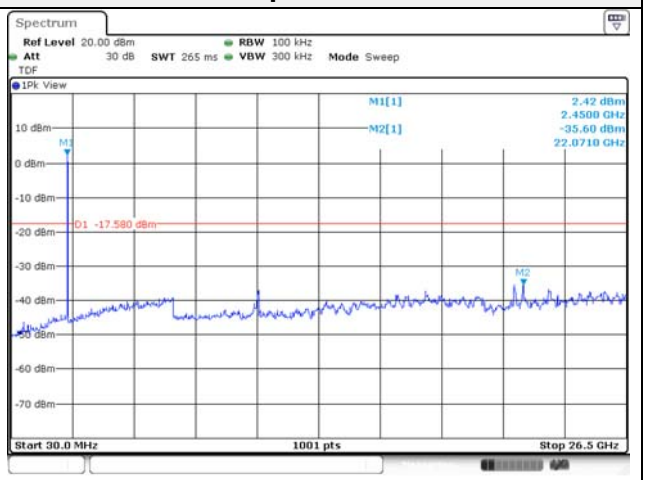

Conducted band-edge / 2 467 ㎒	Conducted spurious / 2 467 ㎒
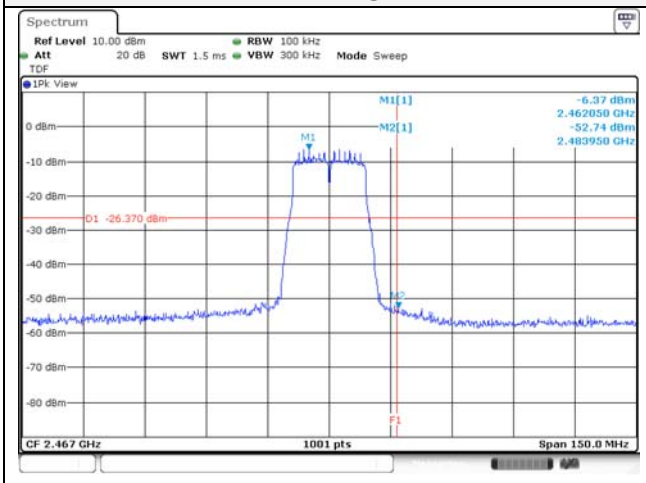	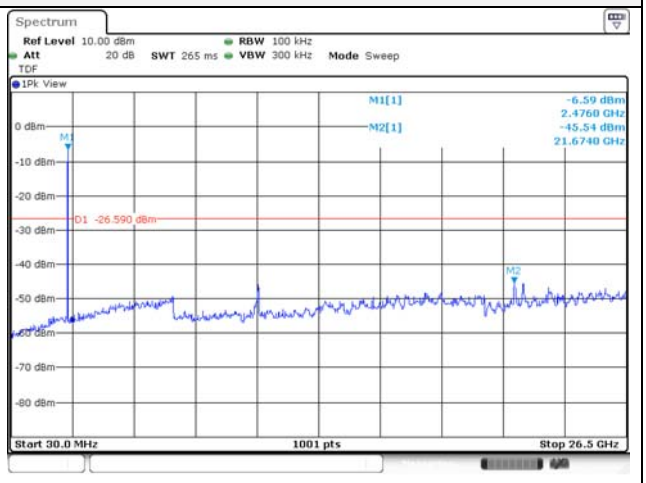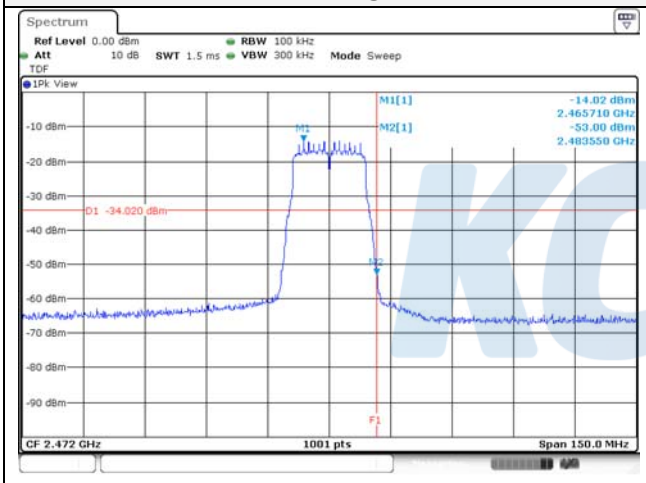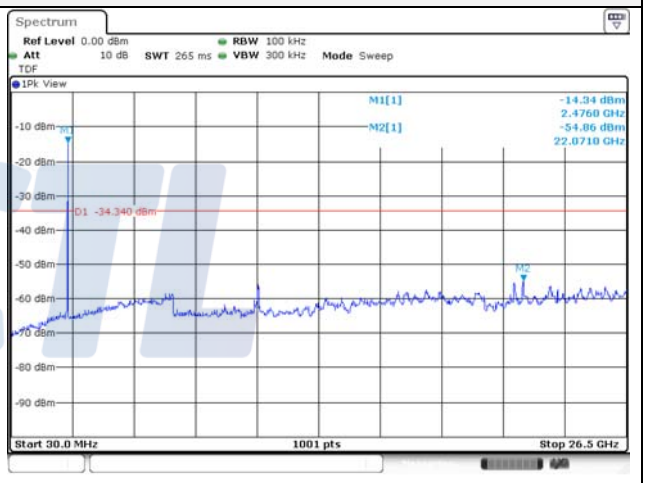
Conducted band-edge / 2 472 ㎒	**Conducted spurious / 2 472 ㎒**