



FCC RADIO TEST REPORT

FCC ID : A4RGGH2X
Equipment : Phone
Model Name : GGH2X, GC15S
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA 94043 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27D,
Part 90(R), Part 90(S)

The product was received on Jan. 29, 2024 and testing was performed from Feb. 05, 2024 to Apr. 15, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	7
1.1 Product Feature of Equipment Under Test.....	7
1.2 Modification of EUT	9
1.3 Testing Location	10
1.4 Applicable Standards.....	10
2 Test Configuration of Equipment Under Test	11
2.1 Test Mode.....	11
2.2 Connection Diagram of Test System.....	12
2.3 Support Unit used in test configuration and system	13
2.4 Measurement Results Explanation Example.....	13
2.5 Frequency List of Low/Middle/High Channels	14
3 Conducted Test Items.....	24
3.1 Measuring Instruments	24
3.2 Conducted Output Power and ERP/EIRP	25
3.3 Peak-to-Average Ratio	27
3.4 Occupied Bandwidth.....	28
3.5 Conducted Band Edge	29
3.6 Emission Mask.....	33
3.7 Conducted Spurious Emission	35
3.8 Frequency Stability	36
4 Radiated Test Items	37
4.1 Measuring Instruments	37
4.2 Radiated Spurious Emission Measurement	39
5 List of Measuring Equipment.....	41
6 Measurement Uncertainty	42
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG3D2001C	01	Initial issue of report	May 17, 2024
FG3D2001C	02	Revise Appendix A and Antenna information. This report is an updated version, replacing the report issued on May 17, 2024.	May 24, 2024
FG3D2001C	03	Revise Antenna information. This report is an updated version, replacing the report issued on May 24, 2024.	May 29, 2024
FG3D2001C	04	Revise Appendix A. This report is an updated version, replacing the report issued on May 29, 2024.	Jun. 03, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(5) §90.635	Effective Radiated Power (n5) (n26)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (n12) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n25) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66) (n70)		
	§27.50 (a)(3)	Effective Isotropic Radiated Power (n30)		
	§27.50 (j)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77) (n78)		
	§90.542 (a)(7)	Effective Radiated Power (n14)		
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n25) (n26) (n66) (n71) (n70)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
	§2.1051 §27.53 (l)(2)	Conducted Band Edge Measurement (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77) (n78)		
	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement (n30)		
	§2.1051 §90.543 (e)(2)	Conducted Band Edge Measuremen (n14)		



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.6	§2.1051 §90.210 (n)	Emission Mask (n14)	Pass	-
	§2.1051 §90.691	Emission masks (n26)		
3.7	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h) §90.691	Conducted Spurious Emission (n2) (n5) (n12) (n25) (n26) (n66) (n71) (n70)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
	§2.1051 §27.53 (l)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77) (n78)		
	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission (n30)		
	§2.1051 §90.543 (e)(3)	Conducted Spurious Emission (n14)		
3.8	§2.1055 §22.355 §24.235 §27.54 §90.539 (e) §90.213	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h) §90.691	Radiated Spurious Emission (n2) (n5) (n12) (n25) (n26) (n66) (n71) (n70)	Pass	5.14 dB under the limit at 6917.00 MHz
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		
	§2.1053 §27.53 (l)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77) (n78)		
	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission (n30)		
	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission (n14)		

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The GGH2X and GC15S are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test samples are all model GGH2X.

Reviewed by: William Chen**Report Producer: Ming Chen**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, UWB, NFC, WPC Rx, NTN and GNSS.
Antenna Type WWAN: <Ant. 0>: ILA Antenna <Ant. 1>: ILA Antenna <Ant. 2>: ILA Antenna <Ant. 5>: Loop Antenna <Ant. 6>: IFA Antenna

EUT Information List	
S/N	Performed Test Item
41251FDKD0007Y 41251FDKD0009G 1FDG65014553000B41M0009U 1FDG65014550000B41A0001W	Conducted Measurement EIRP/ERP
41251FDKD0008E	Radiated Spurious Emission

Support band and evaluated information	
Supported band	n2, n5, n7, n12, n14, n25, n26, n30, n38, n41, n66, n70, n71, n77, n78
Evaluated and Tested band	n2, n5, n7, n12, n14, n25, n26, n30, n38, n41, n66, n70, n71, n77, n78
Band covered information	RSE frequency band range covers another band when the power is worse as follows: ■ n26 cover n5 (Part 22H) ■ n25 cover n2 (Part 24) ■ n41 cover n38 (Part 27) ■ n77 cover n78 (Part 27)



Antenna information <Open mode>						
Band	Ant0	Ant1	Ant2	Ant5	Main Ant. #	Sub Ant. #
n5	-3.83	-6.97			0	1
n12	-6.83	-7.62			0	1
n14	-3.19	-6.13			0	1
n26	-3.83	-6.54			0	1
n71	-6.97	-8.63			0	1
n2		-4.07	-0.59		2	1
ENDC n2	-1.07			-9.50	0	5
n7		-5.00	0.91		2	1
n25		-3.89	-0.60		2	1
ENDC n25	-1.07			-9.50	0	5
n30		-5.21	-0.58		2	1
n38		-5.22	0.45		2	1
n41		-5.00	0.91		2	1
MIMO Sub n41	-2.10			-7.60	0	5
n66		-2.63	-2.23		2	1
ENDC n66	-0.67			-8.70	0	5
n70		-3.60	-0.70		2	1

Antenna information <Close mode>						
Band	Ant0	Ant1	Ant2	Ant5	Main Ant. #	Sub Ant. #
n5	-4.67	-7.44			0	1
n12	-6.92	-12.01			0	1
n14	-6.01	-8.87			0	1
n26	-4.67	-7.45			0	1
n71	-7.83	-13.55			0	1
n2		-8.53	-1.06		2	1
ENDC n2	-4.36			-9.10	0	5
n7		-8.19	-2.60		2	1
n25		-8.53	-1.07		2	1
ENDC n25	-3.58			-9.10	0	5
n30		-6.92	-0.27		2	1
n38		-8.19	-2.60		2	1
n41		-8.19	-2.60		2	1
MIMO Sub n41	-2.93			-7.00	0	5
n66		-3.37	-2.47		2	1
ENDC n66	-2.84			-11.00	0	5
n70		-6.00	-1.30		2	1

Antenna information <Open mode>						
Band	Ant1	Ant2	Ant5	Ant6	Main Ant. #	Sub Ant. #
n77	-4.84			-2.32	6	1
MIMO Sub n77		-3.01	-6.10		2	5
n78	-4.91			-3.26	6	1
MIMO Sub n78		-3.01	-6.10		2	5

Antenna information <Close mode>						
Band	Ant1	Ant2	Ant5	Ant6	Main Ant. #	Sub Ant. #
n77	-4.50			-3.75	6	1
MIMO Sub n77		-5.91	-7.30		2	5
n78	-2.12			-3.75	6	1
MIMO Sub n78		-5.30	-6.60		2	5

Remark:

1. For Test Items, Main Ant. means Tx0 and Sub Ant. means Tx1.
2. After preliminary scan, the main antenna Ant 0 for Low band and main antenna Ant 2 for Mid/high band are selected as the worst mode to be reported for conducted test.
3. The antenna gain for open mode is higher than close mode except n2/n25/n30/n41/n77/n78 marked in bold in the table. The worse antenna gain is used to determine compliance.
4. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	George Chen and Ching Chen
Temperature (°C)	20.3~25
Relative Humidity (%)	47.2~57.8

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH22-HY (TAF Code: 3786)
Test Engineer	Ken Kuo, Lucifer Jiang and Bank LIN
Temperature (°C)	20.5~24.5
Relative Humidity (%)	45~56
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27D, Part 90(R), Part 90(S)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (open and close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Z Plane with Earphone (close) as worst plane.

Modulation Type	Modulation	Modulation Type	Modulation
A	DFT-s-OFDM pi/2 BPSK	N/A	N/A
B	DFT-s-OFDM QPSK	F	CP-OFDM QPSK
C	DFT-s-OFDM 16QAM	G	CP-OFDM 16QAM
D	DFT-s-OFDM 64QAM	H	CP-OFDM 64QAM
E	DFT-s-OFDM 256QAM	I	CP-OFDM 256QAM


Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B, C, D, E	All	1, Half, Full	L, M, H
EIRP	A, B, C, D, E	All	1, Half, Full	L, M, H
PAR	A, B, C, D, E	20 MHz or less	Outer_Full	M
Bandwidth	A, F, G, H, I	All	Outer_Full	M
CBE	A, B, C, D, E, F	10MHz	Outer_1RB	L, H
		All	Outer_Full	
CSE	B	Minimum	Inner_1RB	L, M, H
Frequency Stability	A	20 MHz or less	Outer_Full	M
RSE	A or B	20 MHz or less	Inner_1RB	L, M, H

Remark:


1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. For 5G NR test combination are EN-DC 2A_n5A, EN-DC 5A_n2A, EN-DC 5A_n66A and EN-DC 7A_n71A.
4. During the RSE preliminary test, the standalone mode and charging modes (Adapter mode and WPT mode) were verified. It is determined that the adapter mode is the worst case for the official test.
5. All the radiated test cases were performed with USB Cable 1.


2.2 Connection Diagram of Test System

<EUT with Adapter>

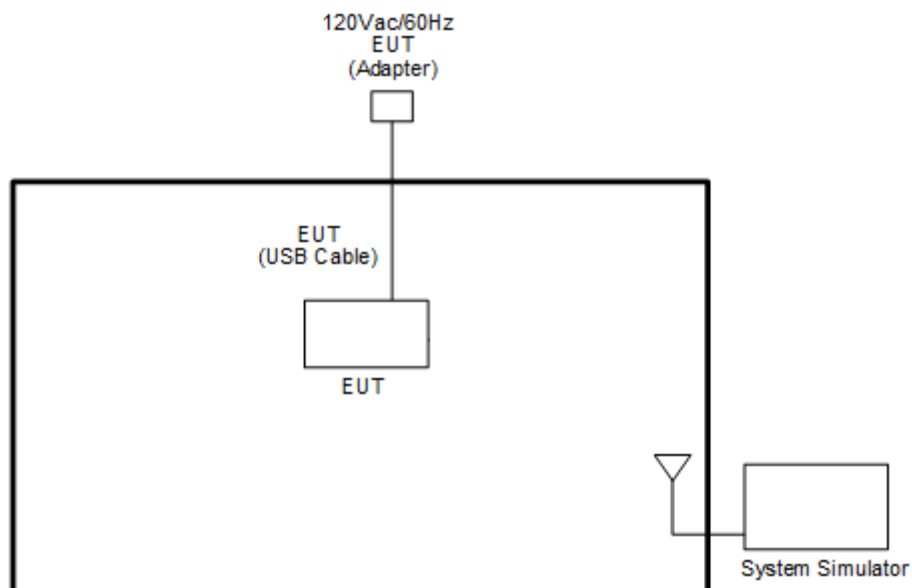

<EUT with Earphone>

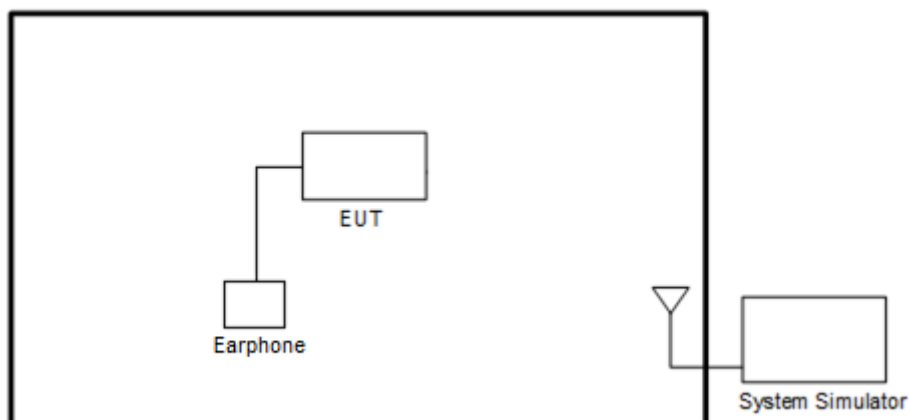
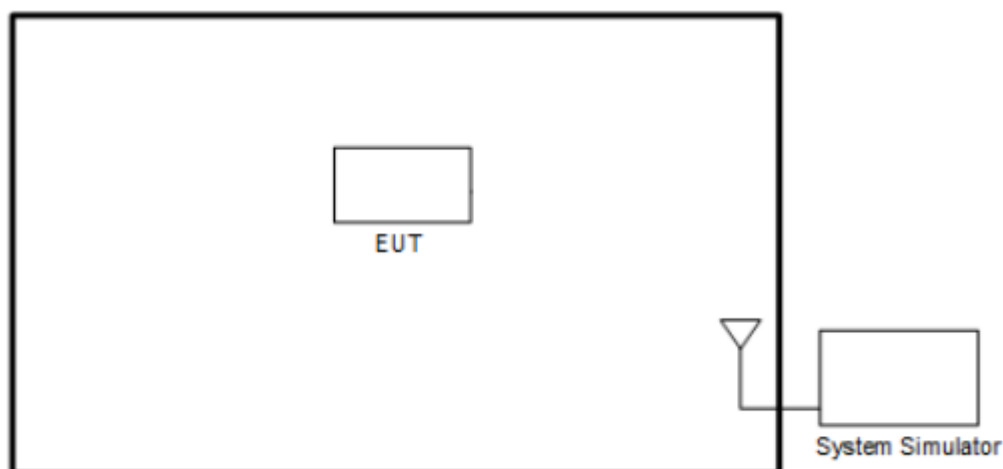
<EUT without Accessory>

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	N/A	N/A	N/A	Unshielded, 1.1m	N/A

2.4 Measurement Results Explanation Example
For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376000	376578
	Frequency	1870	1880	1890
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR n14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	158600	-
	Frequency	-	793	-
5	Channel	158100	158600	159100
	Frequency	790.5	793	795.5



5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List (Part22H)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n26 Channel and Frequency List (Part90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	163800	-
	Frequency	-	819	-
5	Channel	163300	163800	164300
	Frequency	816.5	819	821.5



5G NR n26 Straddle Channel and Frequency List (Part 90S)				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	-	164800	-
	Frequency	-	824	-
15	Channel	-	164800	-
	Frequency	-	824	-
10	Channel	-	164800	-
	Frequency	-	824	-
5	Channel	-	164800	-
	Frequency	-	824	-

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
25	Channel	516500	519000	521500
	Frequency	2582.5	2595	2607.5
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
25	Channel	344500	349000	353500
	Frequency	1722.5	1745	1767.5
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR n70 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	-	340500	-
	Frequency	-	1702.5	-
10	Channel	340000	340500	341000
	Frequency	1700	1702.5	1705
5	Channel	339500	340500	341500
	Frequency	1697.5	1702.5	1707.5

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5



5G NR Band n77 (Part270) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3965
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G NR n78 (Part27O) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	650000	-
	Frequency	-	3750	-
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	6750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795



5G NR Band n77 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98



5G NR n78 (Part27Q) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

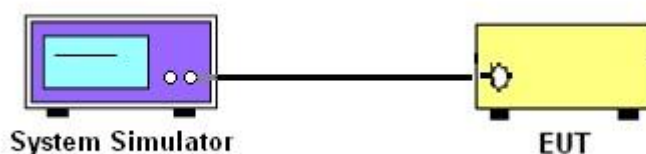

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge, Emission Mask and Conducted Spurious Emission

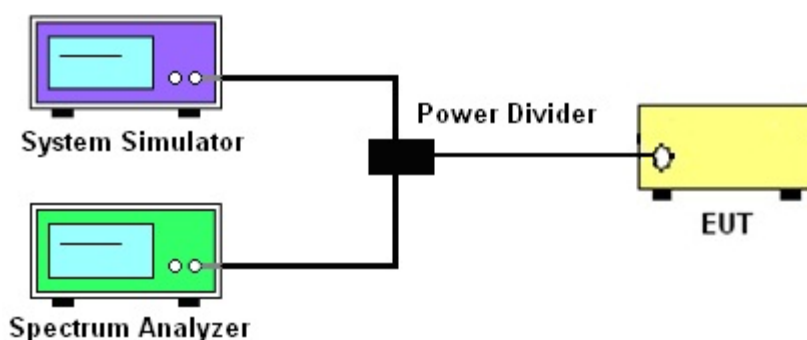

3.1.4 Frequency Stability

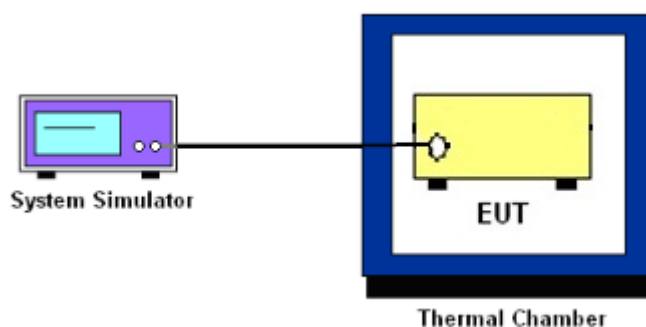

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26 (Part 22H)

The power of mobile transmitters must not exceed 100 Watts for 5G NR n26 (Part 90S)

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n14, n71

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25, n7, n38, n41

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n77, n78

The EIRP of mobile transmitters must not exceed 250mW/5MHz for 5G NR n30

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Remark:

- For MIMO mode, the directional gain calculation is following F)2)d) of KDB 662911 D01 v02r01.

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by $G_1, G_2, \dots, G_N$ dBi

- If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

- If all transmit signals are *completely uncorrelated*, then

Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dBi

			TxD Mode
			Correlated
5G NR	Ant 2	Ant 0	NSS = 1
n41	(dBi)	(dBi)	(dBi)
Ant. 2+0	0.91	-2.10	2.55

			TxD Mode
			Correlated
5G NR	Ant 6	Ant 2	NSS = 1
n77	(dBi)	(dBi)	(dBi)
Ant. 6+2	-2.32	-3.01	0.36

			TxD Mode
			Correlated
5G NR	Ant 6	Ant 2	NSS = 1
n78	(dBi)	(dBi)	(dBi)
Ant. 6+2	-3.26	-3.01	-0.12

Directional gain for Ant. 6+2 correlated of TxD mode derived from formula which is

$$10 \times \log \{ \{ [10^{(-2.32 \text{ dBi} / 20)} + 10^{(-3.01 \text{ dBi} / 20)}]^2 \} / 2 \}$$

= 0.36 dBi

3.2.2 Test Procedures

- The transmitter output port was connected to the system simulator.
- Set EUT at maximum power through the system simulator.
- Select lowest, middle, and highest channels for each band and different modulation.
- Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698-746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, 1755-1780 MHz, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

- (i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz.
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz.
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

27.53 (l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.



3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)

For 5G NR n7, n38, n41

The other 40 dB, and 55 dB have additionally applied same calculation above.

8. For MIMO mode, add additional MIMO factor $10\log(\text{NTX}=2) = 3.01\text{dB}$ into the spectrum analyzer offset.



3.6 Emission Mask

3.6.1 Description of Emissions Mask Measurement

For 5G NR n14

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

For 5G NR n26

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.



3.6.2 Test Procedures

For 5G NR n14

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For 5G NR n26

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge , RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. Make the measurement with the spectrum analyzer's RBW = 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GH, VBW = 3 * RBW.
5. Set spectrum analyzer with RMS detector.
6. Taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n30
The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
For 5G NR n7, n38, n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
9. For MIMO mode, add additional MIMO factor $10\log(NTX=2) = 3.01$ dB into the spectrum analyzer offset.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

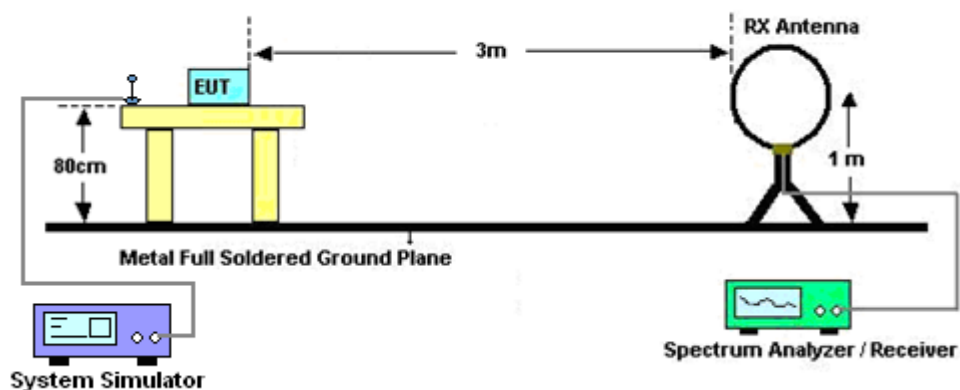


For radiated test from 30MHz to 1GHz

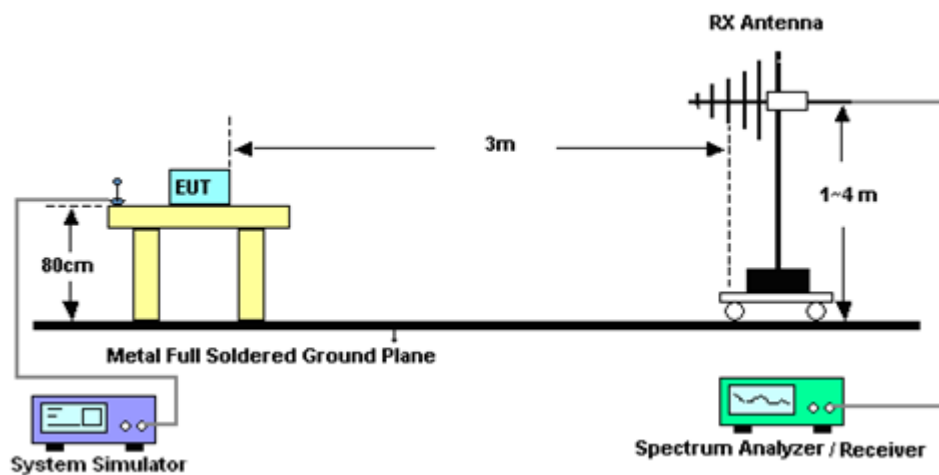

For radiated test above 1GHz

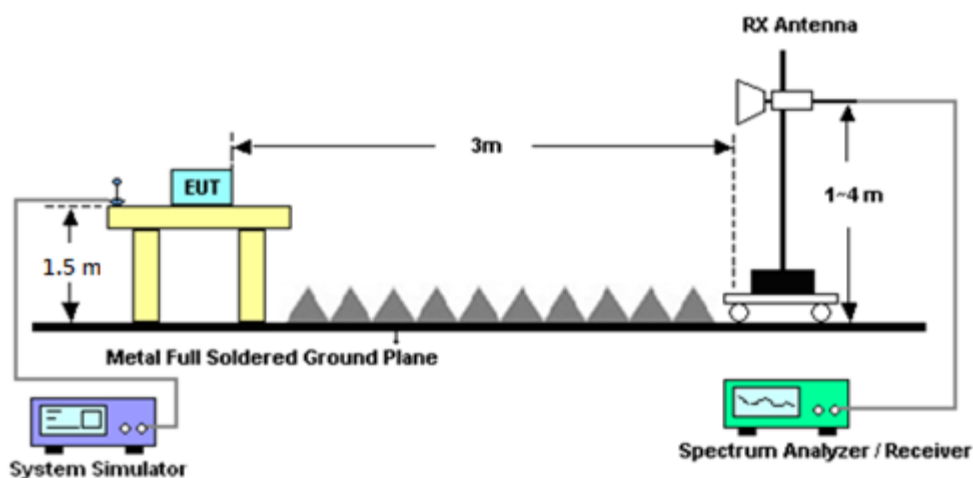

For radiated test above 18GHz

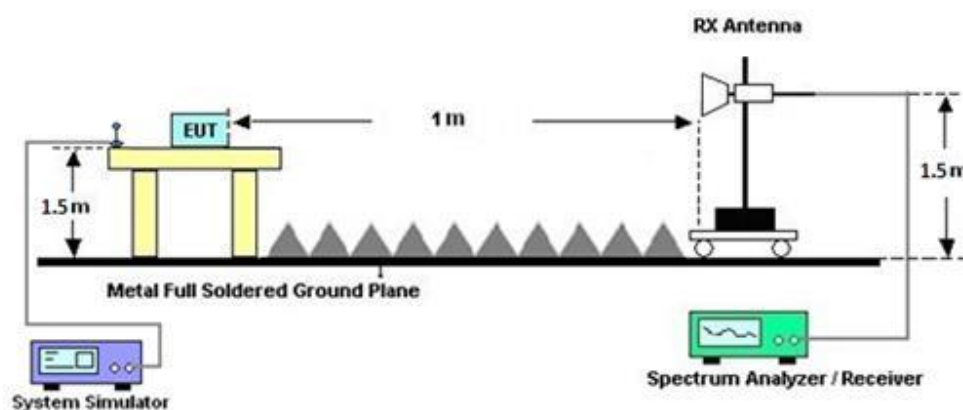

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB

For 5G NR n7, n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For 5G NR n30

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

For 5G NR n14

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Feb. 23, 2024~ Mar. 28, 2024	Sep. 11, 2024	Radiation (03CH22-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Oct. 15, 2023	Feb. 23, 2024~ Mar. 28, 2024	Oct. 14, 2024	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 15, 2023	Feb. 23, 2024~ Mar. 28, 2024	Jul. 14, 2024	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A18E N	1GHz~18GHz	Jul. 12, 2023	Feb. 23, 2024~ Mar. 28, 2024	Jul. 11, 2024	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Feb. 23, 2024~ Mar. 28, 2024	Jul. 09, 2024	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 28, 2023	Feb. 23, 2024~ Mar. 28, 2024	Sep. 27, 2024	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Sep. 06, 2023	Feb. 23, 2024~ Mar. 28, 2024	Sep. 05, 2024	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY62170278	10Hz~44GHz	Aug. 31, 2023	Feb. 23, 2024~ Mar. 28, 2024	Aug. 30, 2024	Radiation (03CH22-HY)
Hygrometer	TECEPEL	DTM-303A	TP211559	N/A	Nov. 16, 2023	Feb. 23, 2024~ Mar. 28, 2024	Nov. 15, 2024	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 23, 2024~ Mar. 28, 2024	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Feb. 23, 2024~ Mar. 28, 2024	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Feb. 23, 2024~ Mar. 28, 2024	N/A	Radiation (03CH22-HY)
Software	Audix	E3 6.09824_2019 122	RK-002347	N/A	N/A	Feb. 23, 2024~ Mar. 28, 2024	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804390/2,80 4611/2,80461 5/2	N/A	Oct. 24, 2023	Feb. 23, 2024~ Mar. 28, 2024	Oct. 23, 2024	Radiation (03CH22-HY)
Filter	Wainwright	WLK4-1000- 1530-8000- 40SS	SN29	1.53GHz Low Pass Filter	May 23, 2023	Feb. 23, 2024~ Mar. 28, 2024	May 22, 2024	Radiation (03CH22-HY)
Filter	Wainwright	WHKX8- 5872.5-6750- 18000-40ST	SN25	6.75GHz High Pass Filter	Nov. 13, 2023	Feb. 23, 2024~ Mar. 28, 2024	Nov. 12, 2024	Radiation (03CH22-HY)
Filter	Wainwright	WHKX12-900- 1000-15000- 60SS	SN8	1GHz High Pass Filter	Nov. 02, 2023	Feb. 23, 2024~ Mar. 28, 2024	Nov. 01, 2024	Radiation (03CH22-HY)
Filter	Wainwright	WHKX12- 2700-3000- 18000-60ST	SN7	N/A	Dec. 01, 2023	Feb. 23, 2024~ Mar. 28, 2024	Nov. 30, 2024	Radiation (03CH22-HY)
DC Power Supply	GW Instek	GPE2323	GET910884	0V~64V ;0A~6A	Nov. 16, 2023	Feb. 05, 2024~ Apr. 15, 2024	Nov. 15, 2024	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101048	10Hz~44GHz	May 03, 2023	Feb. 05, 2024~ Apr. 15, 2024	May 02, 2024	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSW43	101456	RBW 50MHz	Feb. 19, 2024	Apr. 09, 2024~ Apr. 13, 2024	Feb. 18, 2025	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SH-241	92003713	-30℃ ~90℃	May 17, 2023	Feb. 05, 2024~ Apr. 15, 2024	May 16, 2024	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jul. 10, 2023	Feb. 05, 2024~ Apr. 15, 2024	Jul. 09, 2024	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.03 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.42 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.91 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

<TX0 Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.47	24.38	24.35	23.93	0.2472		
5	1	23		24.52	24.41	24.41				
5	12	6		24.50	24.37	24.39				
5	1	0		24.01	23.96	23.84				
5	1	24		24.04	23.99	23.93				
5	25	0		24.02	23.93	23.90				
5	1	1	QPSK	24.46	24.39	24.40				
5	1	23		24.47	24.41	24.44				
5	12	6		24.46	24.38	24.35				
5	1	0		23.52	23.35	23.36				
5	1	24		23.50	23.41	23.39				
5	25	0		23.56	23.39	23.36				
5	1	1	16-QAM	23.33	23.42	23.29	22.83	0.1919		
5	1	1	64-QAM	21.95	21.99	21.87				
5	1	1	256-QAM	19.98	19.96	19.90				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.35	24.31	24.38	23.91	0.246		
10	1	50		24.43	24.43	24.38				
10	25	12		24.31	24.37	24.41				
10	1	0		23.80	23.81	23.86				
10	1	51		23.91	23.88	23.90				
10	50	0		23.86	23.90	23.82				
10	1	1	QPSK	24.36	24.29	24.38				
10	1	50		24.36	24.47	24.50				
10	25	12		24.31	24.43	24.38				
10	1	0		23.26	23.29	23.37				
10	1	51		23.35	23.51	23.29				
10	50	0		23.34	23.36	23.34				
10	1	1	16-QAM	23.36	23.38	23.39	22.8	0.1905		
10	1	1	64-QAM	21.98	21.92	21.80				
10	1	1	256-QAM	19.63	19.58	19.77				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.45	24.21	24.19	23.88	0.2443		
15	1	77		24.42	24.22	24.25				
15	36	18		24.34	24.26	24.26				
15	1	0		23.90	23.74	23.77				
15	1	78		23.91	23.78	23.74				
15	75	0		23.87	23.75	23.71				
15	1	1	QPSK	24.47	24.20	24.22				
15	1	77		24.42	24.25	24.27				
15	36	18		24.46	24.26	24.20				
15	1	0		23.33	23.22	23.21				
15	1	78		23.45	23.27	23.18				
15	75	0		23.47	23.24	23.19				
15	1	1	16-QAM	23.26	23.15	23.21	22.67	0.1849		
15	1	1	64-QAM	21.80	21.73	21.73				
15	1	1	256-QAM	20.14	19.68	19.58				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.18	24.26	24.25	23.74	0.2366		
20	1	104		24.24	24.33	24.29				
20	50	25		24.19	24.23	24.24				
20	1	0		23.73	23.80	23.76				
20	1	105		23.75	23.79	23.77				
20	100	0		23.75	23.70	23.80				
20	1	1	QPSK	24.24	24.18	24.21				
20	1	104		24.27	24.29	24.27				
20	50	25		24.26	24.22	24.21				
20	1	0		23.22	23.29	23.20				
20	1	105		23.23	23.26	23.33				
20	100	0		23.31	23.32	23.29				
20	1	1	16-QAM	23.30	23.18	23.20	22.71	0.1866		
20	1	1	64-QAM	21.68	21.90	21.79				
20	1	1	256-QAM	19.72	19.70	19.71				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.24	24.35	24.22	23.86	0.2432		
25	1	131		24.38	24.35	24.38				
25	64	32		24.24	24.38	24.27				
25	1	0		23.80	23.80	23.82				
25	1	132		23.87	23.95	23.93				
25	128	0		23.81	23.84	23.76				
25	1	1	QPSK	24.29	24.33	24.24				
25	1	131		24.33	24.45	24.33				
25	64	32		24.30	24.31	24.33				
25	1	0		23.27	23.26	23.27				
25	1	132		23.32	23.48	23.33				
25	128	0		23.31	23.34	23.28				
25	1	1	16-QAM	23.20	23.13	23.25	22.66	0.1845		
25	1	1	64-QAM	21.84	21.87	21.75				
25	1	1	256-QAM	20.01	19.96	19.88				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.33	24.28	24.26	23.85	0.2427		
30	1	158		24.38	24.36	24.42				
30	80	40		24.31	24.36	24.28				
30	1	0		23.89	23.73	23.76				
30	1	159		23.96	23.87	23.94				
30	160	0		23.84	23.84	23.83				
30	1	1	QPSK	24.33	24.25	24.26				
30	1	158		24.36	24.31	24.44				
30	80	40		24.25	24.34	24.34				
30	1	0		23.19	23.19	23.27				
30	1	159		23.49	23.35	23.40				
30	160	0		23.29	23.35	23.34				
30	1	1	16-QAM	23.30	23.36	23.36	22.77	0.1892		
30	1	1	64-QAM	21.84	21.74	22.00				
30	1	1	256-QAM	19.98	19.77	19.85				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -0.59 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.29	24.23	24.26	23.92	0.2466		
40	1	214		24.33	24.45	24.39				
40	108	54		24.33	24.34	24.36				
40	1	0		23.77	23.77	23.84				
40	1	215		23.89	24.02	23.87				
40	216	0		23.83	23.80	23.82				
40	1	1	QPSK	24.31	24.30	24.23				
40	1	214		24.38	24.51	24.41				
40	108	54		24.31	24.34	24.32				
40	1	0		23.32	23.18	23.23				
40	1	215		23.34	23.35	23.34				
40	216	0		23.33	23.37	23.31				
40	1	1	16-QAM	23.36	23.44	23.23	22.85	0.1928		
40	1	1	64-QAM	21.88	21.93	21.85				
40	1	1	256-QAM	19.66	19.84	19.95				
Limit	EIRP < 2W			Result			Pass			



NR n5 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.15	24.21	23.97	18.23	0.0665		
5	1	23		24.11	24.11	23.84				
5	12	6		24.12	24.10	23.80				
5	1	0		23.48	23.67	23.72				
5	1	24		23.34	23.70	23.42				
5	25	0		23.50	23.68	23.30				
5	1	1	QPSK	24.06	24.15	23.93				
5	1	23		24.19	24.02	23.84				
5	12	6		24.07	23.43	23.81				
5	1	0		23.13	23.14	22.86				
5	1	24		23.11	23.17	22.84				
5	25	0		23.13	23.22	22.92				
5	1	1	16-QAM	23.40	23.38	22.91	17.42	0.0552		
5	1	1	64-QAM	21.74	22.12	21.52				
5	1	1	256-QAM	19.74	19.91	19.67				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.46	24.55	24.27	18.57	0.0719		
10	1	50		24.38	24.52	24.16				
10	25	12		24.38	24.47	24.31				
10	1	0		23.98	23.91	23.94				
10	1	51		23.94	23.94	23.84				
10	50	0		23.93	23.92	23.88				
10	1	1	QPSK	24.26	24.54	24.24				
10	1	50		24.22	24.46	24.19				
10	25	12		24.21	24.46	24.19				
10	1	0		23.32	23.47	23.34				
10	1	51		23.36	23.48	23.24				
10	50	0		23.32	23.47	23.34				
10	1	1	16-QAM	23.29	23.53	23.28	17.55	0.0569		
10	1	1	64-QAM	21.66	21.99	21.94				
10	1	1	256-QAM	19.82	20.11	19.89				
Limit	ERP < 7W			Result			Pass			



NR n5 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.51	24.55	24.38	18.57	0.0719		
15	1	77		24.48	24.50	24.26				
15	36	18		24.47	24.43	24.35				
15	1	0		24.04	24.00	24.06				
15	1	78		24.08	23.93	23.83				
15	75	0		24.01	23.99	23.94				
15	1	1	QPSK	24.54	24.45	24.36				
15	1	77		24.41	24.44	24.27				
15	36	18		24.48	24.48	24.32				
15	1	0		23.53	23.56	23.55				
15	1	78		23.45	23.40	23.35				
15	75	0		23.48	23.50	23.46				
15	1	1	16-QAM	23.54	23.50	22.75	17.56	0.057		
15	1	1	64-QAM	22.08	22.20	21.98				
15	1	1	256-QAM	20.10	20.24	20.16				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.53	24.50	24.41	18.56	0.0718		
20	1	104		24.35	24.39	24.29				
20	50	25		24.41	24.38	24.34				
20	1	0		24.06	24.00	24.02				
20	1	105		23.98	23.97	23.90				
20	100	0		23.91	23.98	23.94				
20	1	1	QPSK	24.34	24.54	24.54				
20	1	104		24.33	24.42	24.36				
20	50	25		24.38	24.46	24.30				
20	1	0		23.49	23.55	23.57				
20	1	105		23.34	23.41	23.39				
20	100	0		23.42	23.51	23.46				
20	1	1	16-QAM	23.41	23.47	23.40	17.49	0.0561		
20	1	1	64-QAM	21.88	21.98	22.00				
20	1	1	256-QAM	19.90	20.13	19.89				
Limit	ERP < 7W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	23.67	23.63	23.65	24.72	0.2965		
5	1	23		23.70	23.55	23.60				
5	12	6		23.70	23.62	23.63				
5	1	0		23.22	23.11	23.07				
5	1	24		23.11	23.10	23.02				
5	25	0		23.17	23.11	23.13				
5	1	1	QPSK	23.81	23.63	23.65				
5	1	23		23.65	23.60	23.62				
5	12	6		23.74	23.61	23.64				
5	1	0		22.73	22.62	22.70				
5	1	24		22.64	22.45	22.62				
5	25	0		22.67	22.64	22.65				
5	1	1	16-QAM	22.62	22.74	22.69	23.65	0.2317		
5	1	1	64-QAM	21.15	21.27	21.40				
5	1	1	256-QAM	19.31	19.12	19.19				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.75	23.70	23.64	24.66	0.2924		
10	1	50		23.68	23.69	23.66				
10	25	12		23.61	23.65	23.53				
10	1	0		23.11	23.16	23.17				
10	1	51		23.26	23.12	23.05				
10	50	0		23.12	23.10	23.12				
10	1	1	QPSK	23.63	23.71	23.63				
10	1	50		23.71	23.63	23.63				
10	25	12		23.56	23.60	23.71				
10	1	0		22.62	22.63	22.64				
10	1	51		22.66	22.64	22.63				
10	50	0		22.57	22.65	22.67				
10	1	1	16-QAM	22.61	22.71	22.63	23.62	0.2301		
10	1	1	64-QAM	21.19	21.23	20.93				
10	1	1	256-QAM	19.17	19.12	19.00				
Limit	EIRP < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.65	23.61	23.65	24.62	0.2897		
15	1	77		23.66	23.61	23.64				
15	36	18		23.63	23.60	23.68				
15	1	0		23.10	23.15	23.15				
15	1	78		23.13	23.18	23.07				
15	75	0		23.13	23.18	23.14				
15	1	1	QPSK	23.71	23.58	23.68				
15	1	77		23.66	23.65	23.69				
15	36	18		23.60	23.60	23.66				
15	1	0		22.61	22.53	22.64				
15	1	78		22.70	22.52	22.66				
15	75	0		22.54	22.58	22.61				
15	1	1	16-QAM	22.84	22.71	22.53	23.75	0.2371		
15	1	1	64-QAM	21.12	21.18	21.11				
15	1	1	256-QAM	19.02	19.12	19.01				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	23.63	23.65	23.68	24.63	0.2904		
20	1	104		23.58	23.63	23.64				
20	50	25		23.66	23.66	23.60				
20	1	0		23.11	23.12	23.20				
20	1	105		23.18	23.10	23.11				
20	100	0		23.12	23.07	23.09				
20	1	1	QPSK	23.62	23.72	23.72				
20	1	104		23.60	23.55	23.65				
20	50	25		23.69	23.62	23.65				
20	1	0		22.62	22.61	22.65				
20	1	105		22.67	22.54	22.58				
20	100	0		22.74	22.65	22.62				
20	1	1	16-QAM	22.72	22.81	22.59	23.72	0.2355		
20	1	1	64-QAM	21.12	21.12	21.11				
20	1	1	256-QAM	19.27	19.08	19.00				
Limit	EIRP < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	23.67	23.51	23.63	24.65	0.2917		
25	1	131		23.60	23.62	23.60				
25	64	32		23.74	23.61	23.66				
25	1	0		23.19	23.08	23.11				
25	1	132		23.10	23.07	23.11				
25	128	0		23.19	23.11	23.11				
25	1	1	QPSK	23.69	23.62	23.64				
25	1	131		23.56	23.57	23.64				
25	64	32		23.72	23.65	23.64				
25	1	0		22.75	22.70	22.55				
25	1	132		22.59	22.64	22.60				
25	128	0		22.72	22.64	22.67				
25	1	1	16-QAM	22.64	22.85	22.72	23.76	0.2377		
25	1	1	64-QAM	21.34	21.16	21.27				
25	1	1	256-QAM	19.13	19.17	19.16				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.72	23.64	23.66	24.66	0.2924		
30	1	158		23.64	23.72	23.65				
30	80	40		23.64	23.72	23.70				
30	1	0		23.19	23.22	23.13				
30	1	159		23.12	23.16	23.16				
30	160	0		23.11	23.15	23.18				
30	1	1	QPSK	23.69	23.67	23.67				
30	1	158		23.60	23.75	23.71				
30	80	40		23.70	23.74	23.64				
30	1	0		22.81	22.72	22.63				
30	1	159		22.74	22.70	22.67				
30	160	0		22.64	22.71	22.65				
30	1	1	16-QAM	22.69	22.84	22.59	23.75	0.2371		
30	1	1	64-QAM	21.16	21.16	21.52				
30	1	1	256-QAM	18.95	19.07	19.11				
Limit	EIRP < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	23.70	23.55	23.76	24.73	0.2972		
40	1	214		23.67	23.66	23.65				
40	108	54		23.68	23.62	23.76				
40	1	0		23.20	23.10	23.17				
40	1	215		23.15	23.20	23.19				
40	216	0		23.15	23.08	23.27				
40	1	1	QPSK	23.82	23.66	23.82				
40	1	214		23.73	23.74	23.68				
40	108	54		23.74	23.64	23.75				
40	1	0		22.73	22.60	22.73				
40	1	215		22.67	22.60	22.74				
40	216	0		22.66	22.71	22.78				
40	1	1	16-QAM	22.50	22.59	22.66	23.57	0.2275		
40	1	1	64-QAM	21.16	21.28	21.55				
40	1	1	256-QAM	19.35	19.19	19.33				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	23.75	23.73	23.66	24.76	0.2992		
50	1	268		23.74	23.61	23.67				
50	135	67		23.63	23.68	23.63				
50	1	0		23.20	23.25	23.20				
50	1	269		23.28	23.19	23.17				
50	270	0		23.17	23.20	23.19				
50	1	1	QPSK	23.85	23.74	23.67				
50	1	268		23.71	23.64	23.63				
50	135	67		23.67	23.70	23.62				
50	1	0		22.68	22.78	22.65				
50	1	269		22.74	22.62	22.79				
50	270	0		22.60	22.65	22.66				
50	1	1	16-QAM	22.72	22.49	22.76	23.67	0.2328		
50	1	1	64-QAM	21.45	21.24	21.09				
50	1	1	256-QAM	19.29	19.48	19.25				
Limit	EIRP < 2W			Result			Pass			



NR n12 Maximum Average Power [dBm] (GT - LC = -6.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.57	24.66	24.67	15.78	0.0378		
5	1	23		24.58	24.71	24.73				
5	12	6		24.64	24.64	24.67				
5	1	0		24.04	24.11	24.09				
5	1	24		24.12	24.20	24.16				
5	25	0		24.07	24.15	24.17				
5	1	1	QPSK	24.60	24.66	24.65				
5	1	23		24.60	24.68	24.68				
5	12	6		24.62	24.63	24.76				
5	1	0		23.52	23.64	23.67				
5	1	24		23.64	23.68	23.66				
5	25	0		23.59	23.67	23.68				
5	1	1	16-QAM	23.64	23.70	23.73	14.75	0.0299		
5	1	1	64-QAM	21.96	21.98	22.08				
5	1	1	256-QAM	20.23	20.09	19.85				
Limit	ERP < 3W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = -6.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.63	24.67	24.74	15.76	0.0377		
10	1	50		24.63	24.71	24.68				
10	25	12		24.58	24.69	24.71				
10	1	0		24.04	24.15	24.17				
10	1	51		24.10	24.19	24.22				
10	50	0		24.06	24.22	24.16				
10	1	1	QPSK	24.56	24.66	24.73				
10	1	50		24.56	24.70	24.67				
10	25	12		24.61	24.70	24.72				
10	1	0		23.50	23.67	23.78				
10	1	51		23.64	23.68	23.67				
10	50	0		23.62	23.70	23.65				
10	1	1	16-QAM	23.69	23.77	23.67	14.79	0.0301		
10	1	1	64-QAM	22.08	22.28	22.05				
10	1	1	256-QAM	20.07	20.15	20.28				
Limit	ERP < 3W			Result			Pass			



NR n12 Maximum Average Power [dBm] (GT - LC = -6.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.67	24.67	24.69	15.77	0.0378		
15	1	77		24.67	24.74	24.73				
15	36	18		24.74	24.71	24.72				
15	1	0		24.01	24.15	24.11				
15	1	78		24.09	24.25	24.22				
15	75	0		24.17	24.21	24.12				
15	1	1	QPSK	24.64	24.72	24.66				
15	1	77		24.72	24.70	24.73				
15	36	18		24.75	24.71	24.71				
15	1	0		23.62	23.62	23.61				
15	1	78		23.71	23.81	23.71				
15	75	0		23.67	23.69	23.70				
15	1	1	16-QAM	23.73	23.63	23.74	14.76	0.0299		
15	1	1	64-QAM	22.38	22.29	22.20				
15	1	1	256-QAM	19.98	20.00	19.95				
Limit	ERP < 3W			Result			Pass			



NR n14 Maximum Average Power [dBm] (GT - LC = -3.19 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.55	24.50	24.47	19.25	0.0841		
5	1	23		24.51	24.48	24.49				
5	12	6		24.49	24.46	24.47				
5	1	0		24.13	23.98	24.09				
5	1	24		23.98	23.99	24.05				
5	25	0		23.98	23.96	23.99				
5	1	1	QPSK	24.59	24.48	24.56			19.25	0.0841
5	1	23		24.45	24.45	24.50				
5	12	6		24.48	24.48	24.55				
5	1	0		23.57	23.52	23.51				
5	1	24		23.53	23.55	23.52				
5	25	0		23.51	23.45	23.48				
5	1	1	16-QAM	23.36	23.35	23.45	18.11	0.0647		
5	1	1	64-QAM	21.85	22.02	22.30				
5	1	1	256-QAM	20.03	19.97	20.13				
Limit	ERP < 3W			Result			Pass			

NR n14 Maximum Average Power [dBm] (GT - LC = -3.19 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	24.53	-	19.19	0.083		
10	1	50		-	24.44	-				
10	25	12		-	24.49	-				
10	1	0		-	23.99	-				
10	1	51		-	23.95	-				
10	50	0		-	23.94	-				
10	1	1	QPSK	-	24.51	-				
10	1	50		-	24.48	-				
10	25	12		-	24.47	-				
10	1	0		-	23.51	-				
10	1	51		-	23.42	-				
10	50	0		-	23.49	-				
10	1	1	16-QAM	-	23.55	-	18.21	0.0662		
10	1	1	64-QAM	-	22.18	-				
10	1	1	256-QAM	-	20.11	-				
Limit	ERP < 3W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.09	24.07	24.03	23.52	0.2249		
5	1	23		24.06	24.01	24.05				
5	12	6		23.98	24.02	24.02				
5	1	0		23.67	23.60	23.54				
5	1	24		23.61	23.59	23.52				
5	25	0		23.56	23.51	23.52				
5	1	1	QPSK	24.12	24.03	24.07				
5	1	23		24.01	24.10	24.10				
5	12	6		24.08	24.05	24.04				
5	1	0		23.00	23.07	23.03				
5	1	24		23.02	23.18	23.04				
5	25	0		23.02	23.06	23.04				
5	1	1	16-QAM	23.19	22.98	22.99	22.59	0.1816		
5	1	1	64-QAM	21.57	21.57	21.62				
5	1	1	256-QAM	19.54	19.66	19.68				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.07	23.97	24.06	23.55	0.2265		
10	1	50		24.15	24.04	24.03				
10	25	12		24.06	24.06	24.02				
10	1	0		23.57	23.47	23.52				
10	1	51		23.64	23.56	23.52				
10	50	0		23.51	23.45	23.46				
10	1	1	QPSK	24.07	24.08	23.96				
10	1	50		24.01	24.00	23.94				
10	25	12		24.01	23.97	23.97				
10	1	0		22.97	23.00	23.01				
10	1	51		23.02	23.04	22.98				
10	50	0		23.05	23.05	23.04				
10	1	1	16-QAM	22.99	23.13	22.88	22.53	0.1791		
10	1	1	64-QAM	21.67	21.59	21.69				
10	1	1	256-QAM	19.34	19.65	19.57				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.03	23.94	23.96	23.5	0.2239		
15	1	77		24.01	24.01	24.01				
15	36	18		24.05	24.04	24.02				
15	1	0		23.57	23.49	23.54				
15	1	78		23.54	23.52	23.57				
15	75	0		23.57	23.53	23.51				
15	1	1	QPSK	24.07	24.00	24.08				
15	1	77		24.06	24.07	24.03				
15	36	18		24.10	24.00	24.07				
15	1	0		23.06	22.96	23.01				
15	1	78		23.05	23.05	23.12				
15	75	0		23.05	22.98	23.04				
15	1	1	16-QAM	23.01	23.06	23.07	22.47	0.1766		
15	1	1	64-QAM	21.50	21.65	21.85				
15	1	1	256-QAM	19.52	19.46	19.63				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.01	24.02	24.04	23.56	0.227		
20	1	104		24.16	24.16	24.03				
20	50	25		24.02	23.99	24.02				
20	1	0		23.48	23.54	22.94				
20	1	105		23.57	23.74	23.60				
20	100	0		23.57	23.53	23.57				
20	1	1	QPSK	24.11	23.97	23.97				
20	1	104		23.92	24.10	24.00				
20	50	25		23.96	24.04	23.98				
20	1	0		23.04	23.02	22.94				
20	1	105		23.14	23.16	23.11				
20	100	0		22.98	22.98	22.85				
20	1	1	16-QAM	23.05	22.67	23.06	22.46	0.1762		
20	1	1	64-QAM	21.69	21.35	21.37				
20	1	1	256-QAM	19.44	19.64	19.42				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.09	24.00	24.00	23.53	0.2254		
25	1	131		24.12	24.05	24.07				
25	64	32		23.98	24.07	23.98				
25	1	0		23.52	23.54	22.57				
25	1	132		23.53	23.54	23.56				
25	128	0		23.57	23.55	23.50				
25	1	1	QPSK	24.01	24.05	24.07				
25	1	131		24.13	23.66	24.02				
25	64	32		23.93	23.96	24.06				
25	1	0		23.00	23.02	22.92				
25	1	132		23.15	22.91	23.09				
25	128	0		23.07	22.90	23.06				
25	1	1	16-QAM	22.97	23.09	23.10	22.5	0.1778		
25	1	1	64-QAM	21.40	21.72	21.18				
25	1	1	256-QAM	19.70	19.23	19.59				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.03	24.00	24.01	23.59	0.2286		
30	1	158		24.13	24.15	24.05				
30	80	40		24.03	23.97	23.31				
30	1	0		23.58	23.49	23.39				
30	1	159		23.66	23.62	23.58				
30	160	0		23.60	23.55	23.59				
30	1	1	QPSK	24.07	24.05	23.95				
30	1	158		24.19	24.14	23.95				
30	80	40		24.02	24.06	24.10				
30	1	0		22.99	22.89	22.92				
30	1	159		23.08	23.07	23.05				
30	160	0		23.16	23.10	23.07				
30	1	1	16-QAM	22.99	22.95	22.97	22.39	0.1734		
30	1	1	64-QAM	21.72	21.68	21.45				
30	1	1	256-QAM	19.46	19.52	19.57				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
35	1	1	PI/2 BPSK	24.38	24.30	24.37	23.97	0.2495		
35	1	186		24.57	24.39	24.35				
35	90	45		24.32	24.33	24.34				
35	1	0		23.90	23.78	23.96				
35	1	187		24.01	23.94	23.83				
35	180	0		23.80	23.78	23.87				
35	1	1	QPSK	24.31	24.29	24.38				
35	1	186		24.45	24.40	24.35				
35	90	45		24.31	24.32	24.38				
35	1	0		23.33	23.34	23.37				
35	1	187		23.36	23.36	23.34				
35	180	0		23.32	23.32	23.32				
35	1	1	16-QAM	23.51	23.33	23.37	22.91	0.1954		
35	1	1	64-QAM	22.00	21.72	21.88				
35	1	1	256-QAM	20.00	19.75	19.94				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -0.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	23.96	23.99	23.99	23.55	0.2265		
40	1	214		24.06	24.15	24.07				
40	108	54		24.05	24.01	24.11				
40	1	0		23.62	23.44	23.43				
40	1	215		23.50	23.61	23.60				
40	216	0		23.57	23.34	23.47				
40	1	1	QPSK	23.97	23.81	24.02				
40	1	214		24.03	24.09	24.06				
40	108	54		23.83	23.88	23.81				
40	1	0		22.94	22.93	22.99				
40	1	215		23.03	23.06	23.16				
40	216	0		23.11	23.07	23.02				
40	1	1	16-QAM	22.78	22.76	23.01	22.41	0.1742		
40	1	1	64-QAM	21.50	21.70	21.25				
40	1	1	256-QAM	19.63	19.59	3.90				
Limit	EIRP < 2W			Result			Pass			



NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	23.97	24.24	24.01	18.26	0.067		
5	1	23		24.01	24.09	23.97				
5	12	6		24.00	24.14	24.00				
5	1	0		24.04	23.87	23.66				
5	1	24		23.93	23.64	23.47				
5	25	0		23.71	23.69	23.49				
5	1	1	QPSK	24.02	24.17	23.96				
5	1	23		24.23	24.18	23.96				
5	12	6		24.09	24.09	23.99				
5	1	0		23.03	23.24	23.07				
5	1	24		23.11	23.20	22.97				
5	25	0		23.00	23.15	22.94				
5	1	1	16-QAM	23.17	23.19	23.14	17.21	0.0526		
	1	1	64-QAM	21.63	21.81	21.44				
5	1	1	256-QAM	19.60	20.01	19.73				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.23	24.46	24.07	18.48	0.0705		
10	1	50		24.29	24.21	23.88				
10	25	12		24.23	24.27	23.97				
10	1	0		23.85	24.06	23.72				
10	1	51		23.94	23.77	23.49				
10	50	0		23.83	23.83	23.51				
10	1	1	QPSK	24.24	24.35	24.06				
10	1	50		24.22	24.19	23.99				
10	25	12		24.22	24.30	24.04				
10	1	0		23.14	23.41	23.09				
10	1	51		23.39	23.19	22.90				
10	50	0		23.29	23.31	22.92				
10	1	1	16-QAM	23.31	23.63	23.18	17.65	0.0582		
10	1	1	64-QAM	21.75	22.07	21.85				
10	1	1	256-QAM	20.02	20.01	19.77				
Limit	ERP < 7W			Result			Pass			



NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.37	24.20	24.08	18.39	0.069		
15	1	77		24.29	24.07	23.86				
15	36	18		24.35	24.16	24.10				
15	1	0		24.20	23.97	23.86				
15	1	78		24.08	23.63	23.47				
15	75	0		23.99	23.61	23.57				
15	1	1	QPSK	24.14	24.10	24.15				
15	1	77		24.09	24.00	23.89				
15	36	18		24.22	24.08	24.08				
15	1	0		23.22	23.12	23.22				
15	1	78		23.23	23.06	22.88				
15	75	0		23.26	23.19	23.15				
15	1	1	16-QAM	23.17	23.09	23.15	17.19	0.0524		
15	1	1	64-QAM	21.59	21.71	21.61				
15	1	1	256-QAM	19.80	19.74	19.83				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.14	24.13	24.06	18.2	0.0661		
20	1	104		24.15	24.10	23.96				
20	50	25		24.11	24.17	24.12				
20	1	0		23.89	23.72	23.54				
20	1	105		23.73	23.63	23.41				
20	100	0		23.75	23.74	23.55				
20	1	1	QPSK	24.02	24.12	24.07				
20	1	104		24.04	24.07	23.94				
20	50	25		24.09	24.18	24.15				
20	1	0		23.09	23.16	23.03				
20	1	105		23.07	23.08	22.91				
20	100	0		23.07	23.27	23.13				
20	1	1	16-QAM	22.96	23.26	23.15	17.28	0.0535		
20	1	1	64-QAM	21.72	21.70	21.61				
20	1	1	256-QAM	19.81	19.75	19.71				
Limit	ERP < 7W			Result			Pass			



NR n30 Maximum Average Power [dBm] (GT - LC = -0.27 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	22.71	22.72	22.77	22.55	0.1799		
5	1	23		22.70	22.71	22.79				
5	12	6		22.63	22.74	22.75				
5	1	0		22.22	22.31	22.24				
5	1	24		22.13	22.19	22.29				
5	25	0		22.13	22.18	22.30				
5	1	1	QPSK	22.68	22.67	22.81				
5	1	23		22.62	22.65	22.81				
5	12	6		22.71	22.82	22.78				
5	1	0		21.76	21.75	21.79				
5	1	24		21.71	21.63	21.72				
5	25	0		21.59	21.76	21.78				
5	1	1	16-QAM	21.88	21.93	21.98	21.71	0.1483		
5	1	1	64-QAM	20.01	20.28	20.31				
5	1	1	256-QAM	18.04	18.57	18.28				
Limit	EIRP < 250 W/5MHz			Result			Pass			

NR n30 Maximum Average Power [dBm] (GT - LC = -0.27 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	22.80	-	22.56	0.1803		
10	1	50		-	22.83	-				
10	25	12		-	22.83	-				
10	1	0		-	22.29	-				
10	1	51		-	22.27	-				
10	50	0		-	22.26	-				
10	1	1	QPSK	-	22.82	-				
10	1	50		-	22.72	-				
10	25	12		-	22.80	-				
10	1	0		-	21.82	-				
10	1	51		-	21.62	-				
10	50	0		-	21.79	-				
10	1	1	16-QAM	-	21.71	-	21.44	0.1393		
10	1	1	64-QAM	-	20.38	-				
10	1	1	256-QAM	-	18.43	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.



NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	23.91	23.88	24.00	24.52	0.2831		
10	1	22		23.90	24.00	24.07				
10	12	6		23.90	23.95	24.02				
10	1	0		23.37	23.35	23.47				
10	1	23		23.39	23.49	23.51				
10	24	0		23.38	23.42	23.49				
10	1	1	QPSK	23.94	23.91	23.93				
10	1	22		23.95	23.99	23.96				
10	12	6		23.89	23.93	23.98				
10	1	0		22.85	22.96	22.90				
10	1	23		22.85	23.09	22.99				
10	24	0		22.92	22.93	22.99				
10	1	1	16-QAM	23.03	23.05	23.02	23.5	0.2239		
10	1	1	64-QAM	21.33	21.29	21.39				
10	1	1	256-QAM	19.36	19.31	19.43				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	23.89	23.88	23.90	24.46	0.2793		
15	1	36		23.92	23.96	23.99				
15	18	9		23.94	23.91	23.91				
15	1	0		23.43	23.36	23.38				
15	1	37		23.45	23.48	23.50				
15	36	0		23.47	23.40	23.40				
15	1	1	QPSK	23.91	23.87	23.88				
15	1	36		23.93	24.01	24.01				
15	18	9		23.95	23.92	23.91				
15	1	0		22.96	22.89	22.90				
15	1	37		22.98	23.02	22.98				
15	36	0		22.93	22.89	22.87				
15	1	1	16-QAM	23.06	23.03	22.84	23.51	0.2244		
15	1	1	64-QAM	21.28	21.29	21.40				
15	1	1	256-QAM	19.36	19.36	19.52				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.01	23.98	23.98	24.55	0.2851		
20	1	49		23.92	24.04	24.04				
20	25	12		23.95	23.96	23.91				
20	1	0		23.58	23.41	23.44				
20	1	50		23.44	23.51	23.53				
20	50	0		23.49	23.45	23.46				
20	1	1	QPSK	23.88	23.97	23.91				
20	1	49		23.85	24.10	24.01				
20	25	12		23.92	23.92	23.92				
20	1	0		22.96	22.96	22.87				
20	1	50		22.90	23.02	22.98				
20	50	0		22.97	22.96	22.90				
20	1	1	16-QAM	22.97	23.11	22.91	23.56	0.227		
20	1	1	64-QAM	21.32	21.37	21.28				
20	1	1	256-QAM	19.31	19.36	19.51				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	23.91	24.00	23.93	24.53	0.2838		
25	1	63		23.95	24.04	24.08				
25	32	16		23.93	23.94	23.95				
25	1	0		23.56	23.49	23.41				
25	1	64		23.48	23.52	23.51				
25	64	0		23.47	23.43	23.44				
25	1	1	QPSK	23.98	23.98	23.89				
25	1	63		23.94	24.07	24.04				
25	32	16		23.95	23.96	23.97				
25	1	0		23.00	22.95	22.85				
25	1	64		23.01	23.02	23.00				
25	64	0		22.94	22.94	22.91				
25	1	1	16-QAM	23.00	22.99	22.92	23.45	0.2213		
25	1	1	64-QAM	21.44	21.47	21.38				
25	1	1	256-QAM	19.37	19.55	13.64				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	23.88	23.95	23.93	24.6	0.2884		
30	1	76		23.96	24.00	24.15				
30	36	18		23.96	23.96	23.97				
30	1	0		23.44	23.49	23.41				
30	1	77		23.51	23.59	23.57				
30	75	0		23.43	23.47	23.43				
30	1	1	QPSK	23.94	23.99	23.88				
30	1	76		24.04	24.10	24.10				
30	36	18		23.98	23.97	23.99				
30	1	0		22.95	23.00	22.85				
30	1	77		23.07	23.12	23.09				
30	75	0		23.00	22.96	22.95				
30	1	1	16-QAM	23.00	23.20	22.89	23.65	0.2317		
30	1	1	64-QAM	21.48	21.50	21.23				
30	1	1	256-QAM	19.58	19.60	19.42				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = 0.45 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	23.96	24.00	23.94	24.6	0.2884		
40	1	104		24.09	24.10	24.15				
40	50	25		23.92	23.93	24.01				
40	1	0		23.52	23.54	23.50				
40	1	105		23.59	23.65	23.68				
40	100	0		23.45	23.49	23.54				
40	1	1	QPSK	23.98	24.01	23.94				
40	1	104		24.08	24.15	24.09				
40	50	25		23.93	23.92	24.00				
40	1	0		22.94	22.96	22.97				
40	1	105		23.07	23.07	23.20				
40	100	0		22.90	22.94	23.05				
40	1	1	16-QAM	23.05	23.01	23.03	23.5	0.2239		
40	1	1	64-QAM	21.44	21.43	21.54				
40	1	1	256-QAM	19.59	19.33	19.51				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.73	25.73	25.83	26.74	0.4721		
10	1	22		25.73	25.77	25.82				
10	12	6		25.70	25.69	25.76				
10	1	0		25.43	25.15	25.31				
10	1	23		25.29	25.25	25.30				
10	24	0		24.75	24.70	24.76				
10	1	1	QPSK	25.65	25.69	25.79				
10	1	22		25.67	25.77	25.70				
10	12	6		25.73	25.71	25.72				
10	1	0		24.70	24.66	24.82				
10	1	23		24.69	24.72	24.71				
10	24	0		24.60	24.56	24.64				
10	1	1	16-QAM	24.83	24.62	24.89	25.8	0.3802		
10	1	1	64-QAM	23.27	23.16	23.33				
10	1	1	256-QAM	21.22	21.12	21.29				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.75	25.76	25.84	26.76	0.4742		
15	1	36		25.63	25.85	25.83				
15	18	9		25.69	25.64	25.75				
15	1	0		25.23	25.16	25.34				
15	1	37		25.10	25.31	25.25				
15	36	0		24.70	24.70	24.75				
15	1	1	QPSK	25.67	25.71	25.78				
15	1	36		25.59	25.85	25.72				
15	18	9		25.70	25.71	25.76				
15	1	0		24.67	24.70	24.80				
15	1	37		24.64	24.82	24.73				
15	36	0		24.61	24.57	24.68				
15	1	1	16-QAM	24.70	24.88	24.77	25.79	0.3793		
15	1	1	64-QAM	23.29	23.25	23.34				
15	1	1	256-QAM	21.05	21.19	21.32				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.57	25.78	25.80	26.76	0.4742		
20	1	49		25.56	25.80	25.83				
20	25	12		25.57	25.67	25.79				
20	1	0		25.11	25.25	25.28				
20	1	50		25.12	25.30	25.26				
20	50	0		24.60	24.68	24.79				
20	1	1	QPSK	25.65	25.77	25.85				
20	1	49		25.61	25.80	25.75				
20	25	12		25.62	25.69	25.81				
20	1	0		24.61	24.79	24.74				
20	1	50		24.62	24.82	24.73				
20	50	0		24.51	24.59	24.72				
20	1	1	16-QAM	24.60	24.85	24.82	25.76	0.3767		
20	1	1	64-QAM	23.19	23.36	23.11				
20	1	1	256-QAM	21.18	21.20	21.25				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.70	25.79	25.82	26.74	0.4721		
30	1	76		25.64	25.83	25.74				
30	36	18		25.62	25.71	25.77				
30	1	0		25.22	25.26	25.31				
30	1	77		25.14	25.30	25.26				
30	75	0		24.62	24.68	24.78				
30	1	1	QPSK	25.68	25.76	25.79				
30	1	76		25.59	25.81	25.71				
30	36	18		25.59	25.73	25.77				
30	1	0		24.69	24.77	24.74				
30	1	77		24.62	24.80	24.71				
30	75	0		24.49	24.59	24.64				
30	1	1	16-QAM	24.74	24.74	24.81	25.72	0.3733		
30	1	1	64-QAM	23.31	23.13	23.08				
30	1	1	256-QAM	21.21	21.32	21.08				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.75	25.78	25.68	26.8	0.4786		
40	1	104		25.64	25.87	25.82				
40	50	25		25.65	25.70	25.71				
40	1	0		25.38	25.28	25.25				
40	1	105		25.20	25.41	25.31				
40	100	0		24.64	24.74	24.72				
40	1	1	QPSK	25.67	25.79	25.72				
40	1	104		25.58	25.89	25.82				
40	50	25		25.67	25.72	25.73				
40	1	0		24.69	24.74	24.72				
40	1	105		24.63	24.84	24.83				
40	100	0		24.50	24.58	24.62				
40	1	1	16-QAM	24.66	24.94	24.79	25.85	0.3846		
40	1	1	64-QAM	23.15	23.16	23.28				
40	1	1	256-QAM	21.23	21.23	21.12				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.79	25.74	25.69	26.88	0.4875		
50	1	131		25.67	25.91	25.82				
50	64	32		25.70	25.67	25.74				
50	1	0		25.32	25.22	25.25				
50	1	132		25.15	25.42	25.35				
50	128	0		24.71	24.66	24.77				
50	1	1	QPSK	25.71	25.77	25.71				
50	1	131		25.61	25.97	25.77				
50	64	32		25.66	25.68	25.71				
50	1	0		24.69	24.75	24.66				
50	1	132		24.61	24.88	24.78				
50	128	0		24.56	24.58	24.64				
50	1	1	16-QAM	24.85	24.67	24.83	25.76	0.3767		
50	1	1	64-QAM	23.23	23.26	23.18				
50	1	1	256-QAM	21.19	21.21	21.25				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.80	25.79	25.59	26.87	0.4864		
60	1	160		25.70	25.96	25.85				
60	81	40		25.65	25.70	25.75				
60	1	0		25.30	25.31	25.09				
60	1	161		25.18	25.47	25.28				
60	162	0		24.67	24.74	24.70				
60	1	1	QPSK	25.73	25.77	25.65				
60	1	160		25.62	25.88	25.82				
60	81	40		25.61	25.66	25.71				
60	1	0		24.75	24.75	24.60				
60	1	161		24.66	24.92	24.82				
60	162	0		24.53	24.60	24.61				
60	1	1	16-QAM	24.64	24.82	24.52	25.73	0.3741		
60	1	1	64-QAM	23.23	23.21	23.00				
60	1	1	256-QAM	21.37	21.12	21.12				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	25.80	25.77	25.73	26.85	0.4842		
70	1	187		25.74	25.90	25.94				
70	90	45		25.61	25.63	25.74				
70	1	0		25.27	25.27	25.32				
70	1	188		25.20	25.34	25.48				
70	180	0		24.60	24.69	24.76				
70	1	1	QPSK	25.85	25.81	25.79				
70	1	187		25.76	25.93	25.91				
70	90	45		25.61	25.65	25.71				
70	1	0		24.78	24.75	24.74				
70	1	188		24.71	24.88	24.93				
70	180	0		24.51	24.55	24.64				
70	1	1	16-QAM	24.89	24.75	24.73	25.8	0.3802		
70	1	1	64-QAM	23.29	23.31	23.23				
70	1	1	256-QAM	21.26	21.41	21.17				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.81	25.76	25.76	26.89	0.4887		
80	1	215		25.72	25.89	25.98				
80	108	54		25.62	25.66	25.73				
80	1	0		25.40	25.28	25.24				
80	1	216		25.28	25.39	25.47				
80	216	0		24.68	24.72	24.76				
80	1	1	QPSK	25.80	25.76	25.70				
80	1	215		25.76	25.88	25.94				
80	108	54		25.65	25.67	25.73				
80	1	0		24.85	24.75	24.73				
80	1	216		24.74	24.92	24.91				
80	216	0		24.57	24.63	24.68				
80	1	1	16-QAM	24.79	24.91	24.68	25.82	0.3819		
80	1	1	64-QAM	23.32	23.16	23.18				
80	1	1	256-QAM	21.23	21.26	21.28				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	25.99	25.86	25.85	27.01	0.5023		
90	1	243		25.93	25.98	26.03				
90	120	60		25.74	25.74	25.77				
90	1	0		25.54	25.34	25.33				
90	1	244		25.41	25.62	25.53				
90	243	0		24.78	24.81	24.79				
90	1	1	QPSK	25.99	25.84	25.82				
90	1	243		25.95	26.10	25.99				
90	120	60		25.76	25.78	25.78				
90	1	0		24.98	24.86	24.87				
90	1	244		24.91	25.10	25.09				
90	243	0		24.73	24.73	24.72				
90	1	1	16-QAM	25.01	24.68	24.77	25.92	0.3908		
90	1	1	64-QAM	23.48	23.33	23.39				
90	1	1	256-QAM	21.55	21.17	16.53				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = 0.91 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	26.06	25.95	25.84	27.13	0.5164		
100	1	271		25.96	26.14	26.14				
100	135	67		25.70	25.77	25.84				
100	1	0		25.65	25.47	25.32				
100	1	272		25.49	25.68	25.67				
100	270	0		24.76	24.84	24.92				
100	1	1	QPSK	26.06	26.00	25.86				
100	1	271		25.97	26.22	26.19				
100	135	67		25.72	25.78	25.85				
100	1	0		25.02	24.97	24.82				
100	1	272		24.92	25.18	25.18				
100	270	0		24.65	24.73	24.82				
100	1	1	16-QAM	24.95	25.11	24.86	26.02	0.3999		
100	1	1	64-QAM	23.47	23.47	23.25				
100	1	1	256-QAM	21.62	21.37	21.42				
Limit	EIRP < 2W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.33	24.41	24.43	22.26	0.1683		
5	1	23		24.42	24.43	24.49				
5	12	6		24.39	24.35	24.41				
5	1	0		23.86	23.90	23.88				
5	1	24		23.83	23.88	23.90				
5	25	0		23.80	23.95	23.99				
5	1	1	QPSK	24.38	24.44	24.37				
5	1	23		24.43	24.46	24.33				
5	12	6		24.39	24.43	24.45				
5	1	0		23.39	23.45	23.41				
5	1	24		23.35	23.49	23.40				
5	25	0		23.36	23.44	23.43				
5	1	1	16-QAM	23.37	23.40	23.49	21.26	0.1337		
5	1	1	64-QAM	21.83	22.02	21.93				
5	1	1	256-QAM	19.86	19.96	20.08				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.44	24.36	24.49	22.29	0.1694		
10	1	50		24.41	24.50	24.39				
10	25	12		24.49	24.43	24.48				
10	1	0		23.97	23.96	23.94				
10	1	51		23.88	23.99	23.96				
10	50	0		23.99	24.02	23.95				
10	1	1	QPSK	24.52	24.47	24.43				
10	1	50		24.45	24.37	24.43				
10	25	12		24.52	24.45	24.42				
10	1	0		23.44	23.40	23.42				
10	1	51		23.44	23.45	23.48				
10	50	0		23.51	23.44	23.49				
10	1	1	16-QAM	23.53	23.35	23.53	21.3	0.1349		
10	1	1	64-QAM	22.07	22.06	21.97				
10	1	1	256-QAM	20.14	19.96	20.13				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.44	24.39	24.28	22.24	0.1675		
15	1	77		24.41	24.45	24.36				
15	36	18		24.44	24.41	24.34				
15	1	0		23.90	23.91	23.89				
15	1	78		23.90	23.92	23.82				
15	75	0		23.92	23.91	23.78				
15	1	1	QPSK	24.45	24.47	24.33				
15	1	77		24.39	24.44	24.35				
15	36	18		24.43	24.38	24.31				
15	1	0		23.44	23.44	23.40				
15	1	78		23.38	23.42	23.36				
15	75	0		23.44	23.47	23.37				
15	1	1	16-QAM	23.35	23.46	23.40	21.23	0.1327		
15	1	1	64-QAM	21.95	21.80	21.92				
15	1	1	256-QAM	19.97	19.89	19.91				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.42	24.42	24.34	22.21	0.1663		
20	1	104		24.34	24.39	24.37				
20	50	25		24.34	24.34	24.32				
20	1	0		23.91	23.91	23.87				
20	1	105		23.86	23.88	23.88				
20	100	0		23.84	23.91	23.90				
20	1	1	QPSK	24.37	24.32	24.32				
20	1	104		24.31	24.40	24.31				
20	50	25		24.39	24.44	24.42				
20	1	0		23.38	23.37	23.30				
20	1	105		23.35	23.37	23.33				
20	100	0		23.37	23.42	23.36				
20	1	1	16-QAM	23.35	23.58	23.46	21.35	0.1365		
20	1	1	64-QAM	21.87	21.93	21.89				
20	1	1	256-QAM	19.95	19.99	19.90				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.41	24.42	24.40	22.25	0.1679		
25	1	131		24.34	24.36	24.40				
25	64	32		24.30	24.40	24.41				
25	1	0		23.98	23.95	23.89				
25	1	132		23.90	23.92	23.89				
25	128	0		23.91	23.93	23.94				
25	1	1	QPSK	24.37	24.45	24.48				
25	1	131		24.35	24.38	24.44				
25	64	32		24.35	24.41	24.40				
25	1	0		23.37	23.47	23.33				
25	1	132		23.36	23.35	23.46				
25	128	0		23.35	23.42	23.41				
25	1	1	16-QAM	23.03	23.50	23.40	21.27	0.134		
25	1	1	64-QAM	21.85	22.01	22.06				
25	1	1	256-QAM	19.85	20.07	19.84				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.42	24.44	24.45	22.25	0.1679		
30	1	158		24.41	24.28	24.37				
30	80	40		24.39	24.40	24.43				
30	1	0		24.00	23.99	23.98				
30	1	159		23.92	23.84	23.93				
30	160	0		23.86	23.91	23.97				
30	1	1	QPSK	24.44	24.44	24.48				
30	1	158		24.29	24.34	24.40				
30	80	40		24.48	24.42	24.44				
30	1	0		23.46	23.40	23.45				
30	1	159		23.31	23.31	23.44				
30	160	0		23.38	23.41	23.44				
30	1	1	16-QAM	23.55	23.38	23.51	21.32	0.1355		
30	1	1	64-QAM	22.11	22.06	22.06				
30	1	1	256-QAM	19.91	19.97	19.90				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.23 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.40	24.47	24.36	22.24	0.1675		
40	1	214		24.40	24.31	24.37				
40	108	54		24.33	24.42	24.34				
40	1	0		23.94	23.95	23.87				
40	1	215		23.84	23.89	23.87				
40	216	0		23.87	23.96	23.79				
40	1	1	QPSK	24.33	24.41	24.41				
40	1	214		24.26	24.24	24.37				
40	108	54		24.29	24.42	24.36				
40	1	0		23.45	23.43	23.35				
40	1	215		23.36	23.34	23.37				
40	216	0		23.31	23.43	23.32				
40	1	1	16-QAM	23.30	23.53	23.36	21.3	0.1349		
40	1	1	64-QAM	21.92	22.06	21.84				
40	1	1	256-QAM	19.98	19.75	20.07				
Limit	EIRP < 1W			Result			Pass			



NR n70 Maximum Average Power [dBm] (GT - LC = -0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.24	24.17	24.23	21.45	0.1396		
5	1	23		24.22	24.15	24.20				
5	12	6		24.21	24.19	24.24				
5	1	0		23.94	23.78	23.79				
5	1	24		23.82	23.71	23.71				
5	25	0		23.81	23.73	23.74				
5	1	1	QPSK	24.19	24.25	24.23				
5	1	23		24.19	24.22	24.30				
5	12	6		24.22	24.18	24.29				
5	1	0		23.21	23.11	23.27				
5	1	24		23.21	23.08	23.36				
5	25	0		23.25	23.15	23.27				
5	1	1	16-QAM	23.24	23.22	23.60	20.75	0.1189		
5	1	1	64-QAM	21.92	21.64	21.73				
5	1	1	256-QAM	19.84	19.97	19.75				
Limit	EIRP < 1W			Result			Pass			

NR n70 Maximum Average Power [dBm] (GT - LC = -0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.18	24.14	24.27	21.43	0.139		
10	1	50		24.19	24.19	24.23				
10	25	12		24.20	24.19	24.22				
10	1	0		23.82	23.70	23.82				
10	1	51		23.76	23.74	23.69				
10	50	0		23.82	23.68	23.76				
10	1	1	QPSK	24.17	24.16	24.28				
10	1	50		24.20	24.13	24.26				
10	25	12		24.20	24.19	24.23				
10	1	0		23.23	23.15	23.25				
10	1	51		23.22	23.17	23.13				
10	50	0		23.18	23.25	23.29				
10	1	1	16-QAM	23.15	22.75	23.37	20.52	0.1127		
10	1	1	64-QAM	21.79	21.71	22.11				
10	1	1	256-QAM	19.92	19.80	20.06				
Limit	EIRP < 1W			Result			Pass			



NR n70 Maximum Average Power [dBm] (GT - LC = -0.7 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	-	24.24	-	21.39	0.1377		
15	1	77		-	24.20	-				
15	36	18		-	24.24	-				
15	1	0		-	23.99	-				
15	1	78		-	23.88	-				
15	75	0		-	23.80	-				
15	1	1	QPSK	-	24.18	-			20.37	0.1089
15	1	77		-	24.18	-				
15	36	18		-	24.22	-				
15	1	0		-	23.27	-				
15	1	78		-	23.22	-				
15	75	0		-	23.21	-				
15	1	1	16-QAM	-	23.22	-	20.37	0.1089		
15	1	1	64-QAM	-	21.83	-				
15	1	1	256-QAM	-	19.73	-				
Limit	EIRP < 1W			Result			Pass			



NR n71 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.59	24.53	24.62	15.5	0.0355		
5	1	23		24.51	24.60	24.52				
5	12	6		24.55	24.53	24.55				
5	1	0		23.99	24.01	23.98				
5	1	24		24.10	24.04	24.01				
5	25	0		24.07	24.05	24.07				
5	1	1	QPSK	24.61	24.52	24.55				
5	1	23		24.51	24.51	24.57				
5	12	6		24.56	24.52	24.54				
5	1	0		23.54	23.45	23.51				
5	1	24		23.55	23.44	23.55				
5	25	0		23.55	23.50	23.53				
5	1	1	16-QAM	23.72	23.41	23.41	14.6	0.0288		
5	1	1	64-QAM	21.91	21.86	22.07				
5	1	1	256-QAM	20.03	20.09	20.00				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.56	24.46	24.54	15.44	0.035		
10	1	50		24.51	24.53	24.47				
10	25	12		24.53	24.52	24.55				
10	1	0		24.03	24.01	23.97				
10	1	51		23.97	23.99	23.97				
10	50	0		24.07	24.01	23.99				
10	1	1	QPSK	24.55	24.50	24.51				
10	1	50		24.48	24.56	24.45				
10	25	12		24.56	24.48	24.56				
10	1	0		23.54	23.40	23.53				
10	1	51		23.52	23.55	23.39				
10	50	0		23.55	23.50	23.52				
10	1	1	16-QAM	23.43	23.39	23.53	14.41	0.0276		
10	1	1	64-QAM	22.06	22.09	22.13				
10	1	1	256-QAM	19.98	19.98	20.09				
Limit	ERP < 3W			Result			Pass			



NR n71 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.32	24.36	24.30	15.28	0.0337		
15	1	77		24.30	24.36	24.27				
15	36	18		24.31	24.39	24.32				
15	1	0		23.78	23.81	23.85				
15	1	78		23.77	23.90	23.81				
15	75	0		23.79	23.84	23.90				
15	1	1	QPSK	24.31	24.35	24.36				
15	1	77		24.28	24.37	24.33				
15	36	18		24.25	24.39	24.40				
15	1	0		23.35	23.35	23.34				
15	1	78		23.28	23.39	23.34				
15	75	0		23.29	23.38	23.36				
15	1	1	16-QAM	23.43	23.37	23.46	14.34	0.0272		
15	1	1	64-QAM	21.85	21.92	21.83				
15	1	1	256-QAM	19.77	19.88	19.82				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.30	24.36	24.29	15.28	0.0337		
20	1	104		24.27	24.35	24.30				
20	50	25		24.26	24.35	24.39				
20	1	0		23.74	23.74	23.84				
20	1	105		23.78	23.84	23.85				
20	100	0		23.74	23.84	23.87				
20	1	1	QPSK	24.27	24.30	24.40				
20	1	104		24.28	24.34	24.35				
20	50	25		24.28	24.35	24.37				
20	1	0		23.26	23.30	23.34				
20	1	105		23.26	23.33	23.30				
20	100	0		23.31	23.35	23.42				
20	1	1	16-QAM	23.18	23.17	23.42	14.3	0.0269		
20	1	1	64-QAM	21.70	21.38	21.77				
20	1	1	256-QAM	19.88	19.68	19.92				
Limit	ERP < 3W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	26.96	27.00	27.03	24.78	0.3006		
10	1	22		26.96	27.00	27.06				
10	12	6		26.92	27.00	27.04				
10	1	0		23.45	23.51	23.49				
10	1	23		23.43	23.49	23.52				
10	24	0		26.43	26.52	26.51				
10	1	1	QPSK	27.02	26.97	27.03				
10	1	22		26.96	27.01	27.10				
10	12	6		26.95	26.97	27.02				
10	1	0		23.47	23.53	23.53				
10	1	23		23.45	23.53	23.55				
10	24	0		25.94	25.96	26.02				
10	1	1	16-QAM	26.17	26.07	26.20	23.88	0.2443		
10	1	1	64-QAM	24.36	24.45	24.58				
10	1	1	256-QAM	22.44	22.47	22.76				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	26.93	27.00	26.97	24.71	0.2958		
15	1	36		26.93	27.03	27.01				
15	18	9		26.92	27.00	27.00				
15	1	0		23.48	23.48	23.49				
15	1	37		23.50	23.52	23.50				
15	36	0		26.44	26.50	26.51				
15	1	1	QPSK	26.96	26.95	26.98				
15	1	36		26.99	26.99	26.94				
15	18	9		26.93	26.99	26.98				
15	1	0		23.45	23.49	23.50				
15	1	37		23.50	23.55	23.51				
15	36	0		25.95	25.97	25.99				
15	1	1	16-QAM	26.07	26.01	25.91	23.75	0.2371		
15	1	1	64-QAM	24.27	24.46	24.39				
15	1	1	256-QAM	22.50	22.56	22.44				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	26.92	27.02	26.96	24.72	0.2965		
20	1	49		27.02	27.04	27.02				
20	25	12		26.91	26.98	27.03				
20	1	0		23.42	23.49	23.42				
20	1	50		23.50	23.54	23.46				
20	50	0		26.45	26.49	26.52				
20	1	1	QPSK	26.86	27.01	26.95				
20	1	49		26.92	27.02	26.96				
20	25	12		26.92	26.98	27.03				
20	1	0		23.40	23.58	23.46				
20	1	50		23.48	23.62	23.49				
20	50	0		25.94	26.02	26.02				
20	1	1	16-QAM	26.04	26.14	26.09	23.82	0.241		
20	1	1	64-QAM	24.47	24.40	24.36				
20	1	1	256-QAM	22.48	22.63	22.48				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	26.95	27.00	27.01	24.75	0.2985		
25	1	63		26.99	27.06	27.06				
25	32	16		26.94	27.02	27.05				
25	1	0		23.47	23.48	23.51				
25	1	64		23.48	23.54	23.53				
25	64	0		26.45	26.56	26.56				
25	1	1	QPSK	26.89	26.94	27.04				
25	1	63		26.91	27.01	27.07				
25	32	16		26.92	27.00	27.05				
25	1	0		23.49	23.55	23.49				
25	1	64		23.53	23.60	23.54				
25	64	0		25.95	26.04	26.07				
25	1	1	16-QAM	25.86	25.97	26.09	23.77	0.2382		
25	1	1	64-QAM	24.46	24.46	24.51				
25	1	1	256-QAM	22.51	22.54	22.61				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	26.92	26.99	26.96	24.76	0.2992		
30	1	76		26.99	27.08	27.00				
30	36	18		26.94	27.02	26.93				
30	1	0		23.49	23.53	23.48				
30	1	77		23.55	23.60	23.50				
30	75	0		26.48	26.52	26.48				
30	1	1	QPSK	26.97	27.05	26.99				
30	1	76		27.04	27.08	27.02				
30	36	18		26.93	27.06	26.95				
30	1	0		23.42	23.50	23.49				
30	1	77		23.47	23.54	23.50				
30	75	0		25.98	26.03	25.98				
30	1	1	16-QAM	26.01	25.97	26.19	23.87	0.2438		
30	1	1	64-QAM	24.21	24.31	24.43				
30	1	1	256-QAM	22.51	22.54	22.42				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.91	26.99	26.99	24.76	0.2992		
40	1	104		26.98	27.04	27.05				
40	50	25		26.91	27.02	26.97				
40	1	0		23.39	23.51	23.52				
40	1	105		23.50	23.51	23.59				
40	100	0		26.47	26.51	26.49				
40	1	1	QPSK	26.89	27.01	26.96				
40	1	104		26.95	27.05	27.08				
40	50	25		26.93	27.01	26.97				
40	1	0		23.44	23.57	23.49				
40	1	105		23.52	23.63	23.60				
40	100	0		25.96	26.00	25.98				
40	1	1	16-QAM	25.79	26.10	26.04	23.78	0.2388		
40	1	1	64-QAM	24.38	24.56	24.48				
40	1	1	256-QAM	22.42	22.57	22.48				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.96	27.07	27.05	24.76	0.2992		
50	1	131		27.04	27.08	27.00				
50	64	32		26.95	27.05	26.94				
50	1	0		23.46	23.52	23.48				
50	1	132		23.56	23.55	23.51				
50	128	0		26.48	26.56	26.44				
50	1	1	QPSK	26.91	27.00	26.90				
50	1	131		27.01	27.08	26.96				
50	64	32		27.01	27.04	26.92				
50	1	0		23.52	23.52	23.49				
50	1	132		23.56	23.61	23.49				
50	128	0		25.98	26.08	25.96				
50	1	1	16-QAM	25.95	26.19	25.98	23.87	0.2438		
50	1	1	64-QAM	24.50	24.51	24.42				
50	1	1	256-QAM	22.58	22.51	22.44				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	26.92	27.03	27.01	24.75	0.2985		
60	1	160		27.01	27.04	27.05				
60	81	40		26.98	27.04	26.99				
60	1	0		23.40	23.52	23.47				
60	1	161		23.54	23.59	23.54				
60	162	0		26.48	26.54	26.52				
60	1	1	QPSK	26.92	27.02	26.99				
60	1	160		27.01	27.07	27.02				
60	81	40		26.97	27.04	27.02				
60	1	0		23.43	23.59	23.52				
60	1	161		23.56	23.67	23.62				
60	162	0		25.96	26.04	26.05				
60	1	1	16-QAM	25.93	25.94	26.08	23.76	0.2377		
60	1	1	64-QAM	24.52	24.57	24.58				
60	1	1	256-QAM	22.41	22.61	22.61				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	26.98	27.02	27.12	24.9	0.309		
70	1	187		27.18	27.10	27.19				
70	90	45		27.03	27.08	27.12				
70	1	0		23.52	23.53	23.65				
70	1	188		23.68	23.57	23.70				
70	180	0		26.57	26.60	26.65				
70	1	1	QPSK	27.01	27.09	27.09				
70	1	187		27.22	27.14	27.19				
70	90	45		27.04	27.07	27.13				
70	1	0		23.55	23.58	23.70				
70	1	188		23.76	23.64	23.73				
70	180	0		26.03	26.07	26.12				
70	1	1	16-QAM	26.13	26.15	26.12	23.83	0.2415		
70	1	1	64-QAM	24.47	24.62	24.63				
70	1	1	256-QAM	22.45	22.59	22.70				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	27.03	27.02	27.08	24.91	0.3097		
80	1	215		27.23	27.08	27.14				
80	108	54		27.00	27.03	27.03				
80	1	0		23.54	23.52	23.59				
80	1	216		23.75	23.61	23.67				
80	216	0		26.56	26.55	26.58				
80	1	1	QPSK	27.00	26.95	27.12				
80	1	215		27.18	27.05	27.19				
80	108	54		27.01	27.03	27.03				
80	1	0		23.53	23.55	23.64				
80	1	216		23.71	23.60	23.65				
80	216	0		26.05	26.00	26.05				
80	1	1	16-QAM	25.76	26.11	26.19	23.87	0.2438		
80	1	1	64-QAM	24.53	24.56	24.75				
80	1	1	256-QAM	22.52	22.54	22.58				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	27.02	27.06	27.14	25	0.3162		
90	1	243		27.32	27.20	27.22				
90	120	60		26.98	27.03	27.02				
90	1	0		23.48	23.55	23.61				
90	1	244		23.76	23.70	23.64				
90	243	0		26.50	26.53	26.58				
90	1	1	QPSK	26.97	27.06	27.17				
90	1	243		27.30	27.16	27.15				
90	120	60		26.99	27.01	27.03				
90	1	0		23.55	23.62	23.66				
90	1	244		23.89	23.78	23.72				
90	243	0		26.01	26.04	26.05				
90	1	1	16-QAM	26.15	26.25	26.11	23.93	0.2472		
90	1	1	64-QAM	24.54	24.61	24.59				
90	1	1	256-QAM	22.58	22.54	22.66				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	27.00	27.11	27.20	25.09	0.3228		
100	1	271		27.40	27.33	27.30				
100	135	67		26.98	27.05	27.09				
100	1	0		23.56	23.64	23.71				
100	1	272		23.98	23.79	23.85				
100	270	0		26.55	26.57	26.63				
100	1	1	QPSK	27.05	27.09	27.15				
100	1	271		27.41	27.31	27.32				
100	135	67		26.96	27.06	27.10				
100	1	0		23.58	23.59	23.70				
100	1	272		23.96	23.80	23.88				
100	270	0		26.03	26.07	26.12				
100	1	1	16-QAM	26.11	26.08	26.28	23.96	0.2489		
100	1	1	64-QAM	24.46	24.67	24.72				
100	1	1	256-QAM	22.61	22.64	22.64				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	26.53	26.67	26.57	23.41	0.2193		
10	1	22		26.54	26.66	26.59				
10	12	6		26.53	26.66	26.58				
10	1	0		23.05	23.16	23.11				
10	1	23		23.08	23.20	23.10				
10	24	0		26.06	26.14	25.98				
10	1	1	QPSK	26.53	26.64	26.61				
10	1	22		26.55	26.64	26.59				
10	12	6		26.54	26.66	26.54				
10	1	0		23.13	23.24	23.08				
10	1	23		23.17	23.25	23.06				
10	24	0		25.57	25.66	25.57				
10	1	1	16-QAM	25.50	25.75	25.55	22.49	0.1774		
10	1	1	64-QAM	24.11	24.15	24.13				
10	1	1	256-QAM	21.95	22.23	21.96				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	26.55	26.61	26.62	23.44	0.2208		
15	1	36		26.55	26.59	26.64				
15	18	9		26.59	26.62	26.69				
15	1	0		23.11	23.10	23.14				
15	1	37		23.15	23.11	23.18				
15	36	0		26.07	26.15	26.15				
15	1	1	QPSK	26.54	26.66	26.65				
15	1	36		26.58	26.66	26.66				
15	18	9		26.56	26.65	26.70				
15	1	0		23.04	23.17	23.17				
15	1	37		23.09	23.14	23.22				
15	36	0		25.59	25.64	25.69				
15	1	1	16-QAM	25.60	25.77	25.64	22.51	0.1782		
15	1	1	64-QAM	24.19	24.20	24.05				
15	1	1	256-QAM	22.11	22.07	22.09				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	26.63	26.62	26.56	23.46	0.2218		
20	1	49		26.72	26.63	26.62				
20	25	12		26.65	26.63	26.61				
20	1	0		23.16	23.17	23.10				
20	1	50		23.20	23.17	23.17				
20	50	0		26.12	26.16	26.13				
20	1	1	QPSK	26.61	26.70	26.54				
20	1	49		26.64	26.67	26.61				
20	25	12		26.65	26.63	26.63				
20	1	0		23.11	23.24	23.09				
20	1	50		23.12	23.20	23.17				
20	50	0		25.64	25.59	25.64				
20	1	1	16-QAM	25.46	25.64	25.60	22.38	0.173		
20	1	1	64-QAM	24.09	24.07	24.18				
20	1	1	256-QAM	22.05	22.07	22.07				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	26.69	26.68	26.59	23.46	0.2218		
25	1	63		26.72	26.67	26.65				
25	32	16		26.67	26.67	26.57				
25	1	0		23.23	23.19	23.04				
25	1	64		23.22	23.17	23.12				
25	64	0		26.12	26.15	26.10				
25	1	1	QPSK	26.68	26.69	26.53				
25	1	63		26.68	26.67	26.61				
25	32	16		26.66	26.67	26.59				
25	1	0		23.21	23.22	23.10				
25	1	64		23.25	23.18	23.17				
25	64	0		25.68	25.65	25.58				
25	1	1	16-QAM	25.62	25.60	25.61	22.36	0.1722		
25	1	1	64-QAM	24.21	24.32	24.15				
25	1	1	256-QAM	22.07	22.08	22.00				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	26.55	26.67	26.69	23.51	0.2244		
30	1	76		26.58	26.70	26.77				
30	36	18		26.58	26.66	26.70				
30	1	0		23.04	23.16	23.18				
30	1	77		23.11	23.20	23.21				
30	75	0		26.07	26.19	26.22				
30	1	1	QPSK	26.53	26.65	26.65				
30	1	76		26.62	26.65	26.69				
30	36	18		26.58	26.65	26.70				
30	1	0		23.10	23.22	23.22				
30	1	77		23.13	23.25	23.27				
30	75	0		25.57	25.66	25.74				
30	1	1	16-QAM	25.69	25.71	25.68	22.45	0.1758		
30	1	1	64-QAM	23.93	24.08	24.33				
30	1	1	256-QAM	21.82	22.18	22.34				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.62	26.67	26.66	23.44	0.2208		
40	1	104		26.66	26.70	26.68				
40	50	25		26.63	26.64	26.63				
40	1	0		23.15	23.15	23.12				
40	1	105		23.20	23.13	23.20				
40	100	0		26.13	26.15	26.12				
40	1	1	QPSK	26.60	26.60	26.64				
40	1	104		26.64	26.66	26.68				
40	50	25		26.64	26.64	26.62				
40	1	0		23.12	23.19	23.18				
40	1	105		23.18	23.18	23.18				
40	100	0		25.63	25.65	25.68				
40	1	1	16-QAM	25.57	25.48	25.68	22.42	0.1746		
40	1	1	64-QAM	24.19	24.14	24.20				
40	1	1	256-QAM	22.26	21.98	22.34				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.83	26.87	26.82	23.98	0.25		
50	1	131		26.97	27.15	27.17				
50	64	32		26.87	26.93	26.90				
50	1	0		23.24	23.33	23.30				
50	1	132		23.49	23.69	23.72				
50	128	0		26.37	26.48	26.45				
50	1	1	QPSK	26.74	26.93	26.83				
50	1	131		27.04	27.24	27.19				
50	64	32		26.86	26.94	26.94				
50	1	0		23.29	23.35	23.33				
50	1	132		23.51	23.68	23.72				
50	128	0		25.88	25.99	25.93				
50	1	1	16-QAM	25.93	26.00	26.02	22.76	0.1888		
50	1	1	64-QAM	24.40	24.47	24.38				
50	1	1	256-QAM	22.36	22.40	22.45				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	26.91	26.92	26.93	24.07	0.2553		
60	1	160		27.15	27.26	27.33				
60	81	40		26.96	27.04	26.98				
60	1	0		23.40	23.44	23.42				
60	1	161		23.65	23.78	23.81				
60	162	0		26.48	26.55	26.49				
60	1	1	QPSK	26.88	27.00	26.87				
60	1	160		27.11	27.31	27.28				
60	81	40		26.97	27.02	27.00				
60	1	0		23.42	23.46	23.37				
60	1	161		23.60	23.78	23.81				
60	162	0		25.96	26.02	26.01				
60	1	1	16-QAM	25.90	25.88	25.92	22.66	0.1845		
60	1	1	64-QAM	24.40	24.42	24.49				
60	1	1	256-QAM	22.39	22.47	22.37				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	26.98	26.98	27.03	24.16	0.2606		
70	1	187		27.27	27.42	27.41				
70	90	45		27.04	27.05	27.09				
70	1	0		23.47	23.47	23.56				
70	1	188		23.81	23.87	23.99				
70	180	0		26.57	26.59	26.63				
70	1	1	QPSK	27.00	26.99	27.02				
70	1	187		27.30	27.34	27.42				
70	90	45		27.04	27.05	27.10				
70	1	0		23.50	23.47	23.55				
70	1	188		23.78	23.82	23.96				
70	180	0		26.05	26.08	26.11				
70	1	1	16-QAM	26.01	25.91	26.07	22.81	0.191		
70	1	1	64-QAM	24.49	24.52	24.65				
70	1	1	256-QAM	22.61	15.37	22.64				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	27.27	27.35	27.33	24.48	0.2805		
80	1	215		27.63	27.72	27.74				
80	108	54		27.30	27.34	27.32				
80	1	0		23.63	23.77	23.80				
80	1	216		23.94	24.16	24.22				
80	216	0		26.86	26.87	26.85				
80	1	1	QPSK	27.31	27.28	27.31				
80	1	215		27.66	27.68	27.70				
80	108	54		27.34	27.30	27.33				
80	1	0		23.81	23.81	23.82				
80	1	216		24.15	24.19	24.22				
80	216	0		26.35	26.36	26.35				
80	1	1	16-QAM	26.29	26.35	26.32	23.09	0.2037		
80	1	1	64-QAM	24.84	24.77	24.68				
80	1	1	256-QAM	22.90	22.71	22.72				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	27.37	27.37	27.38	24.58	0.2871		
90	1	243		27.76	27.83	27.84				
90	120	60		27.33	27.35	27.33				
90	1	0		23.77	23.89	23.82				
90	1	244		24.26	24.34	24.28				
90	243	0		26.91	26.90	26.89				
90	1	1	QPSK	27.33	27.35	27.33				
90	1	243		27.77	27.82	27.79				
90	120	60		27.35	27.33	27.32				
90	1	0		23.87	23.92	23.90				
90	1	244		24.29	24.40	24.33				
90	243	0		26.37	26.42	26.38				
90	1	1	16-QAM	26.59	26.38	26.31	23.33	0.2153		
90	1	1	64-QAM	24.86	24.87	24.93				
90	1	1	256-QAM	22.75	22.75	22.76				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	27.44	-	24.68	0.2938		
100	1	271		-	27.94	-				
100	135	67		-	27.38	-				
100	1	0		-	23.92	-				
100	1	272		-	24.40	-				
100	270	0		-	26.94	-				
100	1	1	QPSK	-	27.42	-				
100	1	271		-	27.92	-				
100	135	67		-	27.37	-				
100	1	0		-	23.91	-				
100	1	272		-	24.38	-				
100	270	0		-	26.43	-				
100	1	1	16-QAM	-	26.38	-	23.12	0.2051		
100	1	1	64-QAM	-	25.01	-				
100	1	1	256-QAM	-	22.92	-				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	27.11	27.06	27.09	24.84	0.3048		
10	1	22		27.07	27.16	27.03				
10	12	6		27.01	27.06	27.03				
10	1	0		23.56	23.53	23.60				
10	1	23		23.60	23.60	23.50				
10	24	0		26.56	26.58	26.54				
10	1	1	QPSK	27.10	27.14	27.06				
10	1	22		26.97	27.14	27.03				
10	12	6		27.02	27.08	26.97				
10	1	0		23.59	23.64	23.62				
10	1	23		23.53	23.61	23.52				
10	24	0		26.02	26.07	26.10				
10	1	1	16-QAM	26.12	26.05	26.40	24.08	0.2559		
10	1	1	64-QAM	24.79	24.60	24.70				
10	1	1	256-QAM	22.61	22.54	22.64				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	27.11	27.08	27.10	24.85	0.3055		
15	1	36		27.05	27.12	27.02				
15	18	9		27.07	27.10	26.99				
15	1	0		23.61	23.61	23.53				
15	1	37		23.54	23.62	23.51				
15	36	0		26.59	26.59	26.54				
15	1	1	QPSK	27.17	27.08	27.06				
15	1	36		27.08	27.04	26.97				
15	18	9		27.03	27.05	27.02				
15	1	0		23.68	23.62	23.70				
15	1	37		23.62	23.67	23.57				
15	36	0		26.03	26.06	25.99				
15	1	1	16-QAM	26.18	26.10	26.13	23.86	0.2432		
15	1	1	64-QAM	24.62	24.31	24.61				
15	1	1	256-QAM	22.69	22.58	22.58				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	27.12	27.08	27.20	24.88	0.3076		
20	1	49		27.03	27.13	27.11				
20	25	12		27.02	27.07	27.15				
20	1	0		23.58	23.57	23.69				
20	1	50		23.52	23.57	23.59				
20	50	0		26.58	26.61	26.65				
20	1	1	QPSK	27.11	27.13	27.18				
20	1	49		26.97	27.14	27.03				
20	25	12		27.07	27.15	27.14				
20	1	0		23.59	23.60	23.74				
20	1	50		23.49	23.56	23.66				
20	50	0		26.06	26.11	26.14				
20	1	1	16-QAM	25.90	26.15	26.14	23.83	0.2415		
20	1	1	64-QAM	24.66	24.78	24.51				
20	1	1	256-QAM	22.60	22.69	22.70				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	27.21	27.22	27.24	24.95	0.3126		
25	1	63		27.09	27.16	27.05				
25	32	16		27.17	27.21	27.15				
25	1	0		23.71	23.70	23.80				
25	1	64		23.60	23.65	23.62				
25	64	0		26.69	26.69	26.72				
25	1	1	QPSK	27.24	27.16	27.27				
25	1	63		27.11	27.15	27.12				
25	32	16		27.18	27.22	27.17				
25	1	0		23.84	23.70	23.78				
25	1	64		23.69	23.67	23.61				
25	64	0		26.23	26.17	26.16				
25	1	1	16-QAM	26.23	26.06	26.34	24.02	0.2523		
25	1	1	64-QAM	24.79	24.92	24.81				
25	1	1	256-QAM	22.82	22.73	22.72				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	27.27	27.26	27.28	24.96	0.3133		
30	1	76		27.08	27.24	27.12				
30	36	18		27.20	27.23	27.20				
30	1	0		23.80	23.75	23.79				
30	1	77		23.67	23.65	23.64				
30	75	0		26.70	26.73	26.70				
30	1	1	QPSK	27.22	27.28	27.25				
30	1	76		27.02	27.22	27.11				
30	36	18		27.21	27.21	27.21				
30	1	0		23.74	23.84	23.89				
30	1	77		23.59	23.74	23.70				
30	75	0		26.15	26.22	26.22				
30	1	1	16-QAM	26.31	26.16	26.28	23.99	0.2506		
30	1	1	64-QAM	24.86	24.72	24.87				
30	1	1	256-QAM	22.69	22.80	22.80				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	27.34	27.27	27.30	25.02	0.3177		
40	1	104		27.09	27.13	27.07				
40	50	25		27.22	27.20	27.17				
40	1	0		23.80	23.73	23.77				
40	1	105		23.54	23.60	23.56				
40	100	0		26.68	26.71	26.69				
40	1	1	QPSK	27.31	27.28	27.26				
40	1	104		27.07	27.17	27.04				
40	50	25		27.19	27.18	27.19				
40	1	0		23.83	23.78	23.85				
40	1	105		23.58	23.65	23.61				
40	100	0		26.18	26.21	26.21				
40	1	1	16-QAM	26.22	26.36	26.35	24.04	0.2535		
40	1	1	64-QAM	24.90	24.72	24.95				
40	1	1	256-QAM	22.83	22.86	22.83				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	27.35	27.33	27.35	25.05	0.3199		
50	1	131		27.05	27.16	27.10				
50	64	32		27.17	27.23	27.18				
50	1	0		23.84	23.88	23.79				
50	1	132		23.57	23.71	23.57				
50	128	0		26.67	26.73	26.69				
50	1	1	QPSK	27.36	27.37	27.37				
50	1	131		27.09	27.18	27.12				
50	64	32		27.15	27.23	27.17				
50	1	0		23.96	23.81	23.86				
50	1	132		23.63	23.71	23.58				
50	128	0		26.16	26.22	26.18				
50	1	1	16-QAM	26.34	26.28	26.30	24.02	0.2523		
50	1	1	64-QAM	24.90	24.85	24.97				
50	1	1	256-QAM	22.96	23.00	22.86				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	27.41	27.38	27.33	25.09	0.3228		
60	1	160		27.13	27.10	27.04				
60	81	40		27.15	27.22	27.18				
60	1	0		23.93	23.89	23.86				
60	1	161		23.61	23.63	23.56				
60	162	0		26.69	26.76	26.69				
60	1	1	QPSK	27.36	27.41	27.35				
60	1	160		27.05	27.16	27.04				
60	81	40		27.16	27.22	27.19				
60	1	0		23.92	23.92	23.87				
60	1	161		23.58	23.67	23.57				
60	162	0		26.21	26.28	26.18				
60	1	1	16-QAM	26.47	26.34	26.28	24.15	0.26		
60	1	1	64-QAM	24.94	25.02	24.72				
60	1	1	256-QAM	22.91	22.89	22.94				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	27.61	27.51	27.45	25.29	0.3381		
70	1	187		27.15	27.19	27.12				
70	90	45		27.21	27.24	27.20				
70	1	0		23.94	24.02	23.93				
70	1	188		23.64	23.65	23.56				
70	180	0		26.70	26.78	26.73				
70	1	1	QPSK	27.51	27.45	27.40				
70	1	187		27.15	27.12	27.04				
70	90	45		27.20	27.25	27.19				
70	1	0		23.96	23.97	23.89				
70	1	188		23.57	23.60	23.55				
70	180	0		26.21	26.29	26.25				
70	1	1	16-QAM	26.39	26.43	26.48	24.16	0.2606		
70	1	1	64-QAM	25.02	25.07	24.98				
70	1	1	256-QAM	23.05	22.91	23.01				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	27.62	27.58	27.51	25.31	0.3396		
80	1	215		27.14	27.14	27.07				
80	108	54		27.21	27.25	27.22				
80	1	0		24.09	24.10	24.05				
80	1	216		23.66	23.66	23.61				
80	216	0		26.78	26.76	26.75				
80	1	1	QPSK	27.63	27.56	27.50				
80	1	215		27.19	27.15	27.09				
80	108	54		27.25	27.25	27.23				
80	1	0		24.16	24.04	24.07				
80	1	216		23.77	23.66	23.64				
80	216	0		26.27	26.24	26.25				
80	1	1	16-QAM	26.70	26.64	26.47	24.38	0.2742		
80	1	1	64-QAM	25.07	25.20	25.08				
80	1	1	256-QAM	23.20	23.18	22.88				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	27.59	27.61	27.66	25.34	0.342		
90	1	243		27.16	27.14	27.14				
90	120	60		27.22	27.27	27.28				
90	1	0		24.12	24.14	24.14				
90	1	244		23.67	23.67	23.65				
90	243	0		26.78	26.79	26.78				
90	1	1	QPSK	27.57	27.65	27.64				
90	1	243		27.13	27.17	27.17				
90	120	60		27.23	27.25	27.26				
90	1	0		24.14	24.17	24.10				
90	1	244		23.71	23.75	23.64				
90	243	0		26.24	26.27	26.27				
90	1	1	16-QAM	26.61	26.64	26.75	24.43	0.2773		
90	1	1	64-QAM	25.36	25.04	25.13				
90	1	1	256-QAM	23.14	23.24	23.23				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -2.32 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	27.66	-	-	-		
100	1	271		-	27.20	-				
100	135	67		-	27.26	-				
100	1	0		-	24.22	-				
100	1	272		-	23.72	-				
100	270	0		-	26.83	-				
100	1	1	QPSK	-	27.67	-				
100	1	271		-	27.22	-				
100	135	67		-	27.27	-				
100	1	0		-	24.20	-				
100	1	272		-	23.72	-				
100	270	0		-	26.32	-				
100	1	1	16-QAM	-	26.68	-	-	-		
100	1	1	64-QAM	-	25.16	-				
100	1	1	256-QAM	-	23.13	-				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	27.42	27.44	27.53	24.27	0.2673		
10	1	22		27.36	27.38	27.46				
10	12	6		27.36	27.37	27.45				
10	1	0		23.94	23.91	24.01				
10	1	23		23.91	23.93	23.98				
10	24	0		26.89	26.89	26.96				
10	1	1	QPSK	27.45	27.37	27.53				
10	1	22		27.36	27.33	27.49				
10	12	6		27.39	27.37	27.47				
10	1	0		24.03	23.86	23.98				
10	1	23		23.95	23.78	23.99				
10	24	0		26.37	26.41	26.47				
10	1	1	16-QAM	26.39	26.48	26.40	23.22	0.2099		
10	1	1	64-QAM	24.88	24.91	24.92				
10	1	1	256-QAM	22.89	22.97	23.01				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	27.47	27.45	27.56	24.3	0.2692		
15	1	36		27.41	27.39	27.46				
15	18	9		27.44	27.38	27.47				
15	1	0		24.02	23.96	24.04				
15	1	37		23.94	23.90	23.96				
15	36	0		26.95	26.93	26.97				
15	1	1	QPSK	27.42	27.42	27.54				
15	1	36		27.39	27.34	27.47				
15	18	9		27.44	27.39	27.47				
15	1	0		23.98	23.94	24.02				
15	1	37		23.93	23.88	23.95				
15	36	0		26.46	26.40	26.48				
15	1	1	16-QAM	26.50	26.46	26.49	23.24	0.2109		
15	1	1	64-QAM	25.04	24.85	25.10				
15	1	1	256-QAM	22.99	22.95	23.09				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	27.44	27.48	27.53	24.27	0.2673		
20	1	49		27.41	27.38	27.46				
20	25	12		27.48	27.44	27.49				
20	1	0		24.00	23.96	23.99				
20	1	50		23.94	23.91	23.94				
20	50	0		26.97	26.92	26.98				
20	1	1	QPSK	27.51	27.42	27.53				
20	1	49		27.48	27.35	27.44				
20	25	12		27.47	27.40	27.49				
20	1	0		24.01	23.89	24.02				
20	1	50		23.95	23.93	23.93				
20	50	0		26.43	26.40	26.46				
20	1	1	16-QAM	26.56	26.49	26.61	23.35	0.2163		
20	1	1	64-QAM	25.01	24.90	25.03				
20	1	1	256-QAM	23.05	22.98	23.12				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	27.53	27.49	27.56	24.33	0.271		
25	1	63		27.47	27.45	27.43				
25	32	16		27.53	27.45	27.50				
25	1	0		24.07	24.02	24.08				
25	1	64		24.02	23.93	23.98				
25	64	0		26.97	26.96	27.03				
25	1	1	QPSK	27.59	27.47	27.58				
25	1	63		27.50	27.41	27.46				
25	32	16		27.51	27.43	27.51				
25	1	0		24.09	24.03	24.07				
25	1	64		23.89	23.95	23.99				
25	64	0		26.49	26.44	26.50				
25	1	1	16-QAM	26.63	26.48	26.50	23.37	0.2173		
25	1	1	64-QAM	25.09	25.09	25.05				
25	1	1	256-QAM	23.04	22.98	23.06				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	27.57	27.53	27.63	24.37	0.2735		
30	1	76		27.44	27.46	27.51				
30	36	18		27.46	27.53	27.56				
30	1	0		24.09	24.09	24.07				
30	1	77		23.87	23.97	23.99				
30	75	0		26.97	27.00	27.07				
30	1	1	QPSK	27.57	27.55	27.63				
30	1	76		27.43	27.45	27.57				
30	36	18		27.45	27.46	27.55				
30	1	0		24.06	24.05	24.13				
30	1	77		23.84	24.00	24.04				
30	75	0		26.47	26.48	26.59				
30	1	1	16-QAM	26.58	26.69	26.57	23.43	0.2203		
30	1	1	64-QAM	24.92	25.05	25.13				
30	1	1	256-QAM	23.03	22.99	23.04				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	27.65	27.60	27.56	24.39	0.2748		
40	1	104		27.43	27.47	27.49				
40	50	25		27.50	27.47	27.52				
40	1	0		24.10	24.09	24.03				
40	1	105		23.89	23.98	23.96				
40	100	0		27.02	26.98	27.00				
40	1	1	QPSK	27.54	27.60	27.56				
40	1	104		27.37	27.50	27.45				
40	50	25		27.50	27.47	27.50				
40	1	0		24.12	24.21	24.11				
40	1	105		23.90	24.06	24.03				
40	100	0		26.50	26.51	26.52				
40	1	1	16-QAM	26.68	26.55	26.60	23.42	0.2198		
40	1	1	64-QAM	25.00	25.17	24.99				
40	1	1	256-QAM	23.04	23.20	23.04				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	27.61	27.68	27.62	24.42	0.2767		
50	1	131		27.35	27.50	27.46				
50	64	32		27.43	27.50	27.50				
50	1	0		24.11	24.15	24.11				
50	1	132		23.84	23.99	23.95				
50	128	0		26.94	27.04	27.01				
50	1	1	QPSK	27.56	27.62	27.55				
50	1	131		27.32	27.44	27.42				
50	64	32		27.46	27.49	27.51				
50	1	0		24.06	24.16	24.12				
50	1	132		23.83	24.01	24.01				
50	128	0		26.43	26.51	26.50				
50	1	1	16-QAM	26.65	26.81	26.56	23.55	0.2265		
50	1	1	64-QAM	24.98	25.27	25.08				
50	1	1	256-QAM	23.11	23.07	23.16				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	27.67	27.72	27.66	24.46	0.2793		
60	1	160		27.36	27.50	27.44				
60	81	40		27.47	27.51	27.54				
60	1	0		24.15	24.22	24.14				
60	1	161		23.86	23.95	23.96				
60	162	0		26.96	27.04	27.06				
60	1	1	QPSK	27.66	27.69	27.70				
60	1	160		27.35	27.49	27.47				
60	81	40		27.47	27.51	27.53				
60	1	0		24.16	24.22	24.26				
60	1	161		23.84	24.01	24.06				
60	162	0		26.45	26.53	26.54				
60	1	1	16-QAM	26.61	26.70	26.57	23.44	0.2208		
60	1	1	64-QAM	25.20	25.11	25.16				
60	1	1	256-QAM	23.13	23.19	22.97				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	27.74	27.80	27.80	24.6	0.2884		
70	1	187		27.41	27.51	27.52				
70	90	45		27.47	27.56	27.58				
70	1	0		24.26	24.33	24.30				
70	1	188		23.90	24.04	24.01				
70	180	0		26.98	27.11	27.13				
70	1	1	QPSK	27.78	27.86	27.80				
70	1	187		27.47	27.58	27.52				
70	90	45		27.45	27.55	27.58				
70	1	0		24.29	24.33	24.29				
70	1	188		23.97	24.03	24.01				
70	180	0		26.49	26.57	26.63				
70	1	1	16-QAM	26.71	26.76	26.89	23.63	0.2307		
70	1	1	64-QAM	25.44	25.38	25.24				
70	1	1	256-QAM	23.11	23.19	23.23				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	27.89	27.90	27.98	24.72	0.2965		
80	1	215		27.50	27.53	27.58				
80	108	54		27.52	27.56	27.64				
80	1	0		24.38	24.38	24.46				
80	1	216		23.97	23.99	24.08				
80	216	0		27.03	27.12	27.20				
80	1	1	QPSK	27.85	27.87	27.98				
80	1	215		27.43	27.52	27.60				
80	108	54		27.51	27.58	27.64				
80	1	0		24.44	24.44	24.54				
80	1	216		24.06	24.07	24.18				
80	216	0		26.54	26.60	26.68				
80	1	1	16-QAM	26.89	27.08	26.92	23.82	0.241		
80	1	1	64-QAM	25.31	25.41	25.49				
80	1	1	256-QAM	23.30	23.35	23.45				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	27.99	28.05	28.14	24.9	0.309		
90	1	243		27.57	27.61	27.63				
90	120	60		27.61	27.67	27.69				
90	1	0		24.50	24.55	24.63				
90	1	244		24.09	24.11	24.16				
90	243	0		27.15	27.22	27.24				
90	1	1	QPSK	28.02	28.04	28.16				
90	1	243		27.59	27.62	27.68				
90	120	60		27.61	27.64	27.67				
90	1	0		24.55	24.62	24.71				
90	1	244		24.11	24.21	24.24				
90	243	0		26.65	26.71	26.73				
90	1	1	16-QAM	26.97	27.09	27.14	23.88	0.2443		
90	1	1	64-QAM	25.59	25.67	25.63				
90	1	1	256-QAM	23.45	23.70	23.77				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -3.26 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	28.16	-	24.9	0.309		
100	1	271		-	27.70	-				
100	135	67		-	27.68	-				
100	1	0		-	24.65	-				
100	1	272		-	24.16	-				
100	270	0		-	27.20	-				
100	1	1	QPSK	-	28.12	-				
100	1	271		-	27.63	-				
100	135	67		-	27.67	-				
100	1	0		-	24.64	-				
100	1	272		-	24.16	-				
100	270	0		-	26.73	-				
100	1	1	16-QAM	-	27.18	-	23.92	0.2466		
100	1	1	64-QAM	-	25.75	-				
100	1	1	256-QAM	-	23.56	-				
Limit	EIRP < 1W			Result			Pass			



Part90s NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	23.92	23.95	24.00	18.09	0.0644		
5	1	23		24.03	24.02	24.06				
5	12	6		24.00	24.02	24.06				
5	1	0		23.37	23.53	23.53				
5	1	24		23.60	23.55	23.58				
5	25	0		23.42	23.49	23.61				
5	1	1	QPSK	23.92	24.02	24.05				
5	1	23		23.97	24.04	24.07				
5	12	6		23.96	23.99	24.04				
5	1	0		22.90	22.98	22.98				
5	1	24		22.97	23.07	23.08				
5	25	0		22.93	22.97	22.99				
5	1	1	16-QAM	22.92	23.06	23.03	17.08	0.0511		
5	1	1	64-QAM	21.76	21.44	21.55				
5	1	1	256-QAM	19.50	19.66	19.48				
Limit	Power < 100W			Result			Pass			

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	23.92	-	18.17	0.0656		
10	1	50		-	24.15	-				
10	25	12		-	23.98	-				
10	1	0		-	23.43	-				
10	1	51		-	23.52	-				
10	50	0		-	23.52	-				
10	1	1	QPSK	-	23.97	-				
10	1	50		-	24.09	-				
10	25	12		-	24.03	-				
10	1	0		-	22.93	-				
10	1	51		-	23.13	-				
10	50	0		-	23.00	-				
10	1	1	16-QAM	-	22.97	-	16.99	0.05		
10	1	1	64-QAM	-	21.59	-				
10	1	1	256-QAM	-	19.49	-				
Limit	Power < 100W			Result			Pass			



NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	-	24.09	-	18.18	0.0658		
5	1	23		-	24.11	-				
5	12	6		-	24.01	-				
5	1	0		-	23.49	-				
5	1	24		-	23.54	-				
5	25	0		-	23.56	-				
5	1	1	QPSK	-	24.09	-				
5	1	23		-	24.16	-				
5	12	6		-	24.11	-				
5	1	0		-	23.01	-				
5	1	24		-	23.05	-				
5	25	0		-	23.07	-				
5	1	1	16-QAM	-	22.92	-	16.94	0.0494		
5	1	1	64-QAM	-	21.42	-				
5	1	1	256-QAM	-	19.64	-				
Limit	Reporting only			Result			N/A			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.04	-	18.35	0.0684		
10	1	50		-	24.21	-				
10	25	12		-	24.14	-				
10	1	0		-	23.52	-				
10	1	51		-	23.59	-				
10	50	0		-	23.58	-				
10	1	1	QPSK	-	24.26	-				
10	1	50		-	24.33	-				
10	25	12		-	24.28	-				
10	1	0		-	23.14	-				
10	1	51		-	23.24	-				
10	50	0		-	23.23	-				
10	1	1	16-QAM	-	23.10	-	17.12	0.0515		
10	1	1	64-QAM	-	21.71	-				
10	1	1	256-QAM	-	19.78	-				
Limit	Reporting only			Result			N/A			



NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	24.22	-	18.38	0.0689		
15	1	77		-	24.36	-				
15	36	18		-	24.19	-				
15	1	0		-	23.65	-				
15	1	78		-	23.82	-				
15	75	0		-	23.74	-				
15	1	1	QPSK	-	24.12	-				
15	1	77		-	24.27	-				
15	36	18		-	24.19	-				
15	1	0		-	23.18	-				
15	1	78		-	23.34	-				
15	75	0		-	23.24	-				
15	1	1	16-QAM	-	23.12	-	17.14	0.0518		
15	1	1	64-QAM	-	21.54	-				
15	1	1	256-QAM	-	19.74	-				
Limit	Reporting only			Result			N/A			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -3.83 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.14	-	18.28	0.0673		
20	1	104		-	24.21	-				
20	50	25		-	24.17	-				
20	1	0		-	23.62	-				
20	1	105		-	23.90	-				
20	100	0		-	23.74	-				
20	1	1	QPSK	-	24.13	-				
20	1	104		-	24.26	-				
20	50	25		-	24.19	-				
20	1	0		-	23.11	-				
20	1	105		-	23.28	-				
20	100	0		-	23.28	-				
20	1	1	16-QAM	-	22.85	-	16.87	0.0486		
20	1	1	64-QAM	-	21.65	-				
20	1	1	256-QAM	-	19.58	-				
Limit	Reporting only			Result			N/A			



<TX1 Antenna>

NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.59	24.62	24.54	20.59	0.1146		
5	1	23		24.62	24.63	24.59				
5	12	6		24.63	24.61	24.53				
5	1	0		24.18	24.13	24.04				
5	1	24		24.16	24.12	24.12				
5	25	0		24.09	24.13	24.05				
5	1	1	QPSK	24.59	24.61	24.58				
5	1	23		24.66	24.63	24.62				
5	12	6		24.66	24.63	24.62				
5	1	0		23.50	23.58	23.60				
5	1	24		23.62	23.53	23.64				
5	25	0		23.59	23.51	23.54				
5	1	1	16-QAM	23.70	23.65	23.50	19.63	0.0918		
5	1	1	64-QAM	22.15	22.08	22.11				
5	1	1	256-QAM	20.35	20.05	19.97				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.61	24.55	24.59	20.67	0.1167		
10	1	50		24.71	24.66	24.63				
10	25	12		24.62	24.61	24.66				
10	1	0		24.23	24.08	24.15				
10	1	51		24.31	24.16	24.21				
10	50	0		24.14	24.11	24.08				
10	1	1	QPSK	24.66	24.54	24.62				
10	1	50		24.74	24.67	24.66				
10	25	12		24.61	24.67	24.63				
10	1	0		23.61	23.45	23.61				
10	1	51		23.68	23.64	23.62				
10	50	0		23.64	23.63	23.58				
10	1	1	16-QAM	23.69	23.61	23.56	19.62	0.0916		
10	1	1	64-QAM	22.35	21.76	21.99				
10	1	1	256-QAM	20.04	20.28	20.28				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.67	24.63	24.64	20.65	0.1161		
15	1	77		24.70	24.72	24.72				
15	36	18		24.70	24.66	24.65				
15	1	0		24.43	24.21	24.15				
15	1	78		24.37	24.21	24.21				
15	75	0		24.32	24.21	24.14				
15	1	1	QPSK	24.68	24.71	24.65				
15	1	77		24.70	24.72	24.66				
15	36	18		24.60	24.68	24.67				
15	1	0		23.73	23.66	23.57				
15	1	78		23.74	23.67	23.62				
15	75	0		23.64	23.66	23.69				
15	1	1	16-QAM	23.93	23.62	23.66	19.86	0.0968		
15	1	1	64-QAM	22.25	22.47	22.47				
15	1	1	256-QAM	20.30	20.01	20.23				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.64	24.73	24.64	20.79	0.1199		
20	1	104		24.79	24.78	24.74				
20	50	25		24.75	24.73	24.78				
20	1	0		24.16	24.40	24.19				
20	1	105		24.26	24.37	24.31				
20	100	0		24.19	24.32	24.31				
20	1	1	QPSK	24.69	24.60	24.64				
20	1	104		24.76	24.73	24.86				
20	50	25		24.74	24.76	24.76				
20	1	0		23.64	23.75	23.61				
20	1	105		23.77	23.72	23.70				
20	100	0		23.79	23.80	23.75				
20	1	1	16-QAM	23.72	23.55	23.75	19.68	0.0929		
20	1	1	64-QAM	22.22	22.38	22.11				
20	1	1	256-QAM	20.26	20.51	20.33				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.69	24.78	24.75	20.78	0.1197		
25	1	131		24.74	24.82	24.85				
25	64	32		24.75	24.72	24.78				
25	1	0		24.31	24.29	24.27				
25	1	132		24.31	24.31	24.37				
25	128	0		24.23	24.30	24.24				
25	1	1	QPSK	24.69	24.69	24.76				
25	1	131		24.83	24.83	24.83				
25	64	32		24.75	24.75	24.83				
25	1	0		23.72	23.70	23.80				
25	1	132		23.74	23.83	23.85				
25	128	0		23.77	23.76	23.78				
25	1	1	16-QAM	23.85	23.72	23.76	19.78	0.0951		
25	1	1	64-QAM	22.22	22.36	22.18				
25	1	1	256-QAM	20.23	20.21	20.37				
Limit	EIRP < 2W			Result			Pass			

NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.81	24.73	24.76	20.87	0.1222		
30	1	158		24.83	24.89	24.94				
30	80	40		24.83	24.81	24.80				
30	1	0		24.37	24.24	24.32				
30	1	159		24.42	24.31	24.46				
30	160	0		24.28	24.39	24.30				
30	1	1	QPSK	24.81	24.66	24.77				
30	1	158		24.90	24.81	24.80				
30	80	40		24.83	24.79	24.77				
30	1	0		23.79	23.69	23.64				
30	1	159		23.78	23.83	23.87				
30	160	0		23.83	23.84	23.71				
30	1	1	16-QAM	23.83	23.49	23.98	19.91	0.0979		
30	1	1	64-QAM	22.37	22.19	22.27				
30	1	1	256-QAM	20.35	20.20	20.34				
Limit	EIRP < 2W			Result			Pass			



NR n2 Maximum Average Power [dBm] (GT - LC = -4.07 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.83	24.82	24.83	20.94	0.1242		
40	1	214		24.83	24.96	24.94				
40	108	54		24.83	24.90	24.90				
40	1	0		24.38	24.32	24.30				
40	1	215		24.31	24.42	24.51				
40	216	0		24.36	24.36	24.36				
40	1	1	QPSK	24.83	24.81	24.86				
40	1	214		24.89	24.95	25.01				
40	108	54		24.86	24.91	24.95				
40	1	0		23.90	23.89	23.81				
40	1	215		23.90	23.92	23.95				
40	216	0		23.92	23.88	23.90				
40	1	1	16-QAM	23.72	23.98	23.95	19.91	0.0979		
40	1	1	64-QAM	22.25	22.25	22.23				
40	1	1	256-QAM	20.38	20.31	22.48				
Limit	EIRP < 2W			Result			Pass			



NR n5 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	25.49	25.65	25.33	16.59	0.0456		
5	1	23		25.45	25.71	25.26				
5	12	6		25.40	25.67	25.28				
5	1	0		25.26	25.26	25.08				
5	1	24		25.26	25.33	24.89				
5	25	0		25.06	25.19	24.89				
5	1	1	QPSK	25.45	25.69	25.27				
5	1	23		25.40	25.61	25.17				
5	12	6		25.35	25.61	25.23				
5	1	0		24.48	24.60	24.26				
5	1	24		24.49	24.68	24.30				
5	25	0		24.43	24.61	24.36				
5	1	1	16-QAM	24.52	24.62	24.17	15.5	0.0355		
5	1	1	64-QAM	23.01	23.29	22.59				
5	1	1	256-QAM	21.11	21.27	21.02				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	25.50	25.60	25.39	16.58	0.0455		
10	1	50		25.60	25.66	25.38				
10	25	12		25.51	25.55	25.22				
10	1	0		25.17	25.18	25.09				
10	1	51		25.14	25.15	25.02				
10	50	0		25.07	25.13	24.91				
10	1	1	QPSK	25.63	25.60	25.39				
10	1	50		25.70	25.59	25.25				
10	25	12		25.58	25.51	25.27				
10	1	0		24.56	24.52	24.46				
10	1	51		24.71	24.58	24.36				
10	50	0		24.64	24.59	24.38				
10	1	1	16-QAM	24.51	24.72	24.57	15.6	0.0363		
10	1	1	64-QAM	22.86	23.30	23.05				
10	1	1	256-QAM	21.00	21.58	20.93				
Limit	ERP < 7W			Result			Pass			



NR n5 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.69	25.44	25.25	16.33	0.043		
15	1	77		24.68	25.45	25.31				
15	36	18		24.56	25.42	25.32				
15	1	0		24.34	25.08	25.02				
15	1	78		24.21	25.03	24.84				
15	75	0		24.13	25.06	24.85				
15	1	1	QPSK	24.55	25.38	25.34				
15	1	77		24.62	25.37	25.32				
15	36	18		24.59	25.37	25.32				
15	1	0		23.54	24.38	24.47				
15	1	78		23.66	24.42	24.45				
15	75	0		23.57	24.45	24.39				
15	1	1	16-QAM	23.66	24.41	24.31	15.29	0.0338		
15	1	1	64-QAM	22.12	23.01	22.67				
15	1	1	256-QAM	21.16	21.15	21.04				
Limit	ERP < 7W			Result			Pass			

NR n5 Maximum Average Power [dBm] (GT - LC = -6.97 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	25.47	25.40	25.20	16.37	0.0434		
20	1	104		25.49	25.42	25.26				
20	50	25		25.40	25.42	25.23				
20	1	0		25.30	25.15	24.89				
20	1	105		25.21	25.04	24.79				
20	100	0		25.09	24.96	24.77				
20	1	1	QPSK	25.47	25.42	25.20				
20	1	104		25.34	25.43	25.27				
20	50	25		25.27	25.35	25.30				
20	1	0		24.46	24.36	24.11				
20	1	105		24.45	24.47	24.31				
20	100	0		24.43	24.42	24.30				
20	1	1	16-QAM	24.53	24.45	24.20	15.41	0.0348		
20	1	1	64-QAM	23.26	23.05	22.60				
20	1	1	256-QAM	20.49	20.36	21.09				
Limit	ERP < 7W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.89	24.75	24.81	19.95	0.0989		
5	1	23		24.81	24.68	24.76				
5	12	6		24.87	24.72	24.76				
5	1	0		24.54	24.28	24.38				
5	1	24		24.40	24.26	24.32				
5	25	0		24.48	24.23	24.26				
5	1	1	QPSK	24.95	24.71	24.82				
5	1	23		24.92	24.63	24.84				
5	12	6		24.91	24.71	24.81				
5	1	0		23.85	23.69	23.74				
5	1	24		23.82	23.67	23.67				
5	25	0		23.82	23.68	23.79				
5	1	1	16-QAM	23.86	23.89	24.06	19.06	0.0805		
5	1	1	64-QAM	22.39	22.20	22.05				
5	1	1	256-QAM	20.33	20.44	20.58				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.88	24.77	24.85	19.96	0.0991		
10	1	50		24.96	24.65	24.78				
10	25	12		24.82	24.67	24.78				
10	1	0		24.54	24.20	24.40				
10	1	51		24.51	24.14	24.33				
10	50	0		24.30	24.13	24.40				
10	1	1	QPSK	24.95	24.75	24.73				
10	1	50		24.96	24.67	24.81				
10	25	12		24.87	24.63	24.78				
10	1	0		23.87	23.70	23.77				
10	1	51		23.93	23.67	23.74				
10	50	0		23.85	23.76	23.80				
10	1	1	16-QAM	23.91	23.91	23.75	18.91	0.0778		
10	1	1	64-QAM	22.71	22.51	22.18				
10	1	1	256-QAM	20.38	20.43	20.27				
Limit	EIRP < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.66	24.90	24.74	19.95	0.0989		
15	1	77		24.74	24.92	24.92				
15	36	18		24.72	24.93	24.87				
15	1	0		24.30	24.49	24.37				
15	1	78		24.17	24.43	24.38				
15	75	0		24.16	24.40	24.32				
15	1	1	QPSK	24.69	24.86	24.80				
15	1	77		24.71	24.95	24.74				
15	36	18		24.67	24.88	24.87				
15	1	0		23.74	23.88	23.78				
15	1	78		23.73	23.79	23.81				
15	75	0		23.67	23.89	23.82				
15	1	1	16-QAM	23.58	23.92	23.75	18.92	0.078		
15	1	1	64-QAM	21.93	22.24	22.32				
15	1	1	256-QAM	20.23	20.60	20.01				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.91	24.73	24.83	19.97	0.0993		
20	1	104		24.91	24.63	24.87				
20	50	25		24.97	24.65	24.89				
20	1	0		24.44	24.19	24.37				
20	1	105		24.39	24.08	24.36				
20	100	0		24.40	24.14	24.28				
20	1	1	QPSK	24.90	24.70	24.88				
20	1	104		24.87	24.61	24.81				
20	50	25		24.92	24.69	24.85				
20	1	0		23.98	23.70	23.95				
20	1	105		23.84	23.61	23.87				
20	100	0		23.98	23.66	23.79				
20	1	1	16-QAM	23.90	23.69	23.82	18.9	0.0776		
20	1	1	64-QAM	22.51	22.31	22.31				
20	1	1	256-QAM	20.42	20.26	20.28				
Limit	EIRP < 2W			Result			Pass			



NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.80	24.95	24.94	19.96	0.0991		
25	1	131		24.71	24.92	24.96				
25	64	32		24.78	24.95	24.80				
25	1	0		24.35	24.47	24.30				
25	1	132		24.17	24.34	24.34				
25	128	0		24.25	24.42	24.34				
25	1	1	QPSK	24.73	24.93	24.86				
25	1	131		24.73	24.82	24.85				
25	64	32		24.78	24.94	24.84				
25	1	0		23.73	23.91	23.85				
25	1	132		23.73	23.86	23.87				
25	128	0		23.80	23.95	23.81				
25	1	1	16-QAM	23.75	24.18	23.86	19.18	0.0828		
25	1	1	64-QAM	22.41	22.45	22.34				
25	1	1	256-QAM	20.65	20.41	20.30				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.00	24.95	24.86	20.05	0.1012		
30	1	158		25.05	24.86	24.91				
30	80	40		24.98	24.94	24.89				
30	1	0		24.46	24.43	24.39				
30	1	159		24.50	24.35	24.40				
30	160	0		24.47	24.40	24.33				
30	1	1	QPSK	25.05	25.00	24.95				
30	1	158		25.01	24.96	24.93				
30	80	40		24.91	25.00	24.84				
30	1	0		23.93	23.83	23.84				
30	1	159		23.87	23.91	23.79				
30	160	0		23.94	23.89	23.79				
30	1	1	16-QAM	24.06	24.04	23.86	19.06	0.0805		
30	1	1	64-QAM	22.46	22.33	22.31				
30	1	1	256-QAM	20.43	20.32	20.23				
Limit	EIRP < 2W			Result			Pass			



FCC RADIO TEST REPORT

Report No. : FG3D2001C

NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.80	24.73	24.98	20.07	0.1016		
40	1	214		24.80	24.67	24.96				
40	108	54		24.78	24.76	25.01				
40	1	0		24.53	24.22	24.52				
40	1	215		24.28	24.17	24.45				
40	216	0		24.30	24.16	24.51				
40	1	1	QPSK	24.87	24.81	25.07				
40	1	214		24.70	24.69	24.94				
40	108	54		24.77	24.77	24.99				
40	1	0		23.84	23.78	24.07				
40	1	215		23.74	23.71	23.90				
40	216	0		23.76	23.72	24.06				
40	1	1	16-QAM	23.91	23.88	24.06	19.06	0.0805		
40	1	1	64-QAM	22.69	22.21	22.48				
40	1	1	256-QAM	20.45	20.51	20.46				
Limit	EIRP < 2W			Result			Pass			

NR n7 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	24.84	25.07	24.98	20.07	0.1016		
50	1	268		24.76	24.92	24.93				
50	135	67		24.77	24.92	24.90				
50	1	0		24.49	24.55	24.53				
50	1	269		24.24	24.47	24.46				
50	270	0		24.20	24.46	24.36				
50	1	1	QPSK	24.84	24.96	24.98				
50	1	268		24.78	24.94	25.03				
50	135	67		24.77	25.07	24.94				
50	1	0		23.80	24.03	24.00				
50	1	269		23.78	23.89	23.95				
50	270	0		23.69	23.98	23.95				
50	1	1	16-QAM	23.78	23.93	23.99	18.99	0.0793		
50	1	1	64-QAM	22.17	22.57	22.46				
50	1	1	256-QAM	20.57	20.48	20.55				
Limit	EIRP < 2W			Result			Pass			



NR n12 Maximum Average Power [dBm] (GT - LC = -7.62 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	25.36	26.12	25.89	16.35	0.0432		
5	1	23		25.37	25.95	25.95				
5	12	6		25.38	26.01	25.88				
5	1	0		25.09	25.53	25.54				
5	1	24		24.94	25.55	25.47				
5	25	0		24.95	25.50	25.43				
5	1	1	QPSK	25.39	26.11	25.86				
5	1	23		25.40	26.11	26.01				
5	12	6		25.37	26.06	25.91				
5	1	0		24.38	25.10	24.88				
5	1	24		24.38	25.17	25.01				
5	25	0		24.43	25.00	24.99				
5	1	1	16-QAM	24.38	25.08	25.01	15.31	0.034		
5	1	1	64-QAM	23.10	23.48	23.36				
5	1	1	256-QAM	21.90	21.01	21.51				
Limit	ERP < 3W			Result			Pass			

NR n12 Maximum Average Power [dBm] (GT - LC = -7.62 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	26.13	25.55	25.54	16.36	0.0433		
10	1	50		26.03	25.49	25.47				
10	25	12		26.07	25.55	25.50				
10	1	0		25.59	24.96	25.02				
10	1	51		25.59	24.93	24.95				
10	50	0		25.60	25.03	25.01				
10	1	1	QPSK	26.10	25.61	25.61				
10	1	50		26.09	25.48	25.49				
10	25	12		26.07	25.51	25.48				
10	1	0		25.09	24.59	24.61				
10	1	51		25.03	24.50	24.45				
10	50	0		25.11	24.55	24.51				
10	1	1	16-QAM	25.10	24.66	24.63	15.33	0.0341		
10	1	1	64-QAM	23.61	22.75	22.94				
10	1	1	256-QAM	21.53	20.99	5.67				
Limit	ERP < 3W			Result			Pass			



NR n12 Maximum Average Power [dBm] (GT - LC = -7.62 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	25.52	25.54	25.48	15.77	0.0378		
15	1	77		25.40	25.42	25.44				
15	36	18		25.49	25.48	25.48				
15	1	0		24.84	25.05	25.13				
15	1	78		24.91	24.99	24.96				
15	75	0		25.17	25.01	24.96				
15	1	1	QPSK	25.47	25.50	25.49				
15	1	77		25.43	25.43	25.54				
15	36	18		25.44	25.48	25.42				
15	1	0		24.50	24.50	24.46				
15	1	78		24.39	24.38	24.39				
15	75	0		24.46	24.47	24.41				
15	1	1	16-QAM	24.52	24.27	24.55	14.78	0.0301		
15	1	1	64-QAM	22.84	22.96	22.82				
15	1	1	256-QAM	21.86	21.18	21.27				
Limit	ERP < 3W			Result			Pass			



NR n14 Maximum Average Power [dBm] (GT - LC = -6.13 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	25.15	25.86	25.86	17.66	0.0583		
5	1	23		25.13	25.87	25.87				
5	12	6		25.17	25.89	25.87				
5	1	0		24.66	25.37	25.44				
5	1	24		24.55	25.34	25.43				
5	25	0		24.64	25.35	25.41				
5	1	1	QPSK	25.14	25.94	25.94				
5	1	23		25.19	25.80	25.85				
5	12	6		25.10	25.87	25.84				
5	1	0		24.16	24.90	24.95				
5	1	24		24.09	24.83	24.96				
5	25	0		24.11	24.87	24.85				
5	1	1	16-QAM	24.16	24.91	25.15	16.87	0.0486		
5	1	1	64-QAM	22.83	23.63	23.19				
5	1	1	256-QAM	21.36	21.24	21.50				
Limit	ERP < 3W			Result			Pass			

NR n14 Maximum Average Power [dBm] (GT - LC = -6.13 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	-	25.92	-	17.64	0.0581		
10	1	50		-	25.88	-				
10	25	12		-	25.86	-				
10	1	0		-	25.36	-				
10	1	51		-	25.36	-				
10	50	0		-	25.40	-				
10	1	1	QPSK	-	25.88	-				
10	1	50		-	25.82	-				
10	25	12		-	25.88	-				
10	1	0		-	24.93	-				
10	1	51		-	24.88	-				
10	50	0		-	24.90	-				
10	1	1	16-QAM	-	24.85	-	16.57	0.0454		
10	1	1	64-QAM	-	23.35	-				
10	1	1	256-QAM	-	21.43	-				
Limit	ERP < 3W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	24.84	24.75	24.78	20.97	0.125		
5	1	23		24.81	24.80	24.79				
5	12	6		24.81	24.72	24.74				
5	1	0		24.40	24.26	24.36				
5	1	24		24.39	24.24	24.34				
5	25	0		24.32	24.15	24.24				
5	1	1	QPSK	24.86	24.75	24.71				
5	1	23		24.79	24.71	24.78				
5	12	6		24.80	24.71	24.71				
5	1	0		23.82	23.77	23.72				
5	1	24		23.89	23.79	23.61				
5	25	0		23.81	23.71	23.75				
5	1	1	16-QAM	23.88	23.87	23.71	19.99	0.0998		
5	1	1	64-QAM	22.45	22.20	22.04				
5	1	1	256-QAM	20.19	20.23	20.43				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.75	24.75	24.75	21.05	0.1274		
10	1	50		24.91	24.71	24.71				
10	25	12		24.76	24.75	24.66				
10	1	0		24.30	24.21	24.32				
10	1	51		24.32	24.20	24.29				
10	50	0		24.27	24.19	24.29				
10	1	1	QPSK	24.86	24.75	24.70				
10	1	50		24.94	24.78	24.75				
10	25	12		24.84	24.74	24.70				
10	1	0		23.74	23.75	23.66				
10	1	51		23.80	23.77	23.73				
10	50	0		23.86	23.79	23.72				
10	1	1	16-QAM	23.85	23.98	23.76	20.09	0.1021		
10	1	1	64-QAM	22.17	22.41	22.18				
10	1	1	256-QAM	20.39	20.41	20.33				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.75	24.64	24.72	20.86	0.1219		
15	1	77		24.75	24.69	24.70				
15	36	18		24.73	24.71	24.72				
15	1	0		24.30	24.23	24.28				
15	1	78		24.35	24.28	24.28				
15	75	0		24.29	24.24	24.28				
15	1	1	QPSK	24.75	24.63	24.68				
15	1	77		24.69	24.67	24.74				
15	36	18		24.75	24.73	24.66				
15	1	0		23.76	23.64	23.67				
15	1	78		23.67	23.66	23.70				
15	75	0		23.74	23.70	23.63				
15	1	1	16-QAM	23.70	23.74	23.91	20.02	0.1005		
15	1	1	64-QAM	22.37	22.63	22.16				
15	1	1	256-QAM	20.37	8.91	20.34				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.75	24.65	24.73	20.92	0.1236		
20	1	104		24.76	24.79	24.75				
20	50	25		24.78	24.69	24.73				
20	1	0		24.29	24.23	24.30				
20	1	105		24.36	24.31	24.28				
20	100	0		24.35	24.17	24.21				
20	1	1	QPSK	24.78	24.63	24.73				
20	1	104		24.72	24.73	24.76				
20	50	25		24.81	24.70	24.76				
20	1	0		23.82	23.65	23.61				
20	1	105		23.84	23.74	23.78				
20	100	0		23.76	23.68	23.72				
20	1	1	16-QAM	23.71	23.76	23.60	19.87	0.0971		
20	1	1	64-QAM	22.07	22.47	22.07				
20	1	1	256-QAM	20.06	20.35	20.23				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.73	24.69	24.64	20.93	0.1239		
25	1	131		24.82	24.72	24.70				
25	64	32		24.77	24.77	24.70				
25	1	0		24.26	24.19	24.21				
25	1	132		24.28	24.22	24.25				
25	128	0		24.26	24.24	24.26				
25	1	1	QPSK	24.73	24.66	24.69				
25	1	131		24.78	24.74	24.76				
25	64	32		24.73	24.68	24.69				
25	1	0		23.76	23.65	23.73				
25	1	132		23.76	23.67	23.77				
25	128	0		23.78	23.80	23.70				
25	1	1	16-QAM	23.64	23.84	23.60	19.95	0.0989		
25	1	1	64-QAM	22.34	22.42	22.15				
25	1	1	256-QAM	20.52	20.23	20.21				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.74	24.72	24.63	20.94	0.1242		
30	1	158		24.81	24.73	24.78				
30	80	40		24.75	24.66	24.74				
30	1	0		24.28	24.17	24.17				
30	1	159		24.40	24.22	24.27				
30	160	0		24.24	24.18	24.19				
30	1	1	QPSK	24.76	24.72	24.60				
30	1	158		24.83	24.81	24.75				
30	80	40		24.71	24.70	24.71				
30	1	0		23.79	23.66	23.51				
30	1	159		23.77	23.74	23.73				
30	160	0		23.75	23.72	23.65				
30	1	1	16-QAM	23.79	23.59	23.72	19.9	0.0977		
30	1	1	64-QAM	22.48	22.54	22.08				
30	1	1	256-QAM	20.33	20.10	20.05				
Limit	EIRP < 2W			Result			Pass			



NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
35	1	1	PI/2 BPSK	24.68	24.52	24.58	20.84	0.1213		
35	1	186		24.68	24.67	24.52				
35	90	45		24.60	24.54	24.58				
35	1	0		24.18	23.98	24.13				
35	1	187		24.20	24.21	24.10				
35	180	0		24.09	24.10	24.04				
35	1	1	QPSK	24.73	24.58	24.64				
35	1	186		24.72	24.65	24.68				
35	90	45		24.57	24.52	24.59				
35	1	0		23.73	23.59	23.56				
35	1	187		23.66	23.74	23.51				
35	180	0		23.58	23.61	23.59				
35	1	1	16-QAM	23.65	23.50	23.71	19.82	0.0959		
35	1	1	64-QAM	22.10	22.15	22.19				
35	1	1	256-QAM	20.29	20.03	20.34				
Limit	EIRP < 2W			Result			Pass			

NR n25 Maximum Average Power [dBm] (GT - LC = -3.89 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.77	24.68	24.61	20.96	0.1247		
40	1	214		24.72	24.75	24.73				
40	108	54		24.79	24.71	24.66				
40	1	0		24.29	24.21	24.15				
40	1	215		24.28	24.34	24.27				
40	216	0		24.27	24.20	24.21				
40	1	1	QPSK	24.76	24.71	24.68				
40	1	214		24.76	24.81	24.85				
40	108	54		24.77	24.69	24.69				
40	1	0		23.74	23.63	23.64				
40	1	215		23.75	23.77	23.87				
40	216	0		23.80	23.74	23.71				
40	1	1	16-QAM	23.71	23.56	23.66	19.82	0.0959		
40	1	1	64-QAM	22.38	22.12	22.23				
40	1	1	256-QAM	20.23	20.28	20.14				
Limit	EIRP < 2W			Result			Pass			



NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.70	24.45	24.86	16.17	0.0414		
5	1	23		24.81	24.38	24.74				
5	12	6		24.70	24.33	24.80				
5	1	0		24.37	24.16	24.39				
5	1	24		24.29	24.07	24.36				
5	25	0		24.32	23.95	24.30				
5	1	1	QPSK	24.77	24.35	24.85				
5	1	23		24.83	24.35	24.79				
5	12	6		24.74	24.33	24.77				
5	1	0		23.72	23.41	23.74				
5	1	24		23.73	23.43	23.71				
5	25	0		23.76	23.40	23.75				
5	1	1	16-QAM	23.85	23.41	23.93	15.24	0.0334		
5	1	1	64-QAM	22.43	22.01	22.30				
5	1	1	256-QAM	20.52	20.68	20.61				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	25.06	25.05	24.87	16.47	0.0444		
10	1	50		25.15	25.06	24.67				
10	25	12		24.99	25.04	24.85				
10	1	0		24.72	24.62	24.45				
10	1	51		24.61	24.56	24.36				
10	50	0		24.56	24.61	24.28				
10	1	1	QPSK	25.04	25.09	24.91				
10	1	50		25.16	25.02	24.78				
10	25	12		24.99	24.99	24.82				
10	1	0		24.05	24.07	23.90				
10	1	51		24.04	24.11	23.72				
10	50	0		24.02	24.06	23.75				
10	1	1	16-QAM	24.11	24.13	23.96	15.44	0.035		
10	1	1	64-QAM	22.74	22.87	22.41				
10	1	1	256-QAM	20.89	20.83	20.48				
Limit	ERP < 7W			Result			Pass			



NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.47	25.04	24.85	16.35	0.0432		
15	1	77		24.39	24.97	24.73				
15	36	18		24.34	24.98	24.88				
15	1	0		24.04	24.65	24.54				
15	1	78		24.10	24.61	24.34				
15	75	0		23.99	24.57	24.43				
15	1	1	QPSK	24.39	24.91	24.74				
15	1	77		24.36	24.94	24.75				
15	36	18		24.34	24.92	24.80				
15	1	0		23.47	24.01	23.92				
15	1	78		23.55	23.98	23.85				
15	75	0		23.50	23.90	23.98				
15	1	1	16-QAM	23.42	23.95	23.79	15.26	0.0336		
15	1	1	64-QAM	22.13	22.35	22.42				
15	1	1	256-QAM	20.55	20.57	20.54				
Limit	ERP < 7W			Result			Pass			

NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.96	24.96	24.84	16.27	0.0424		
20	1	104		24.94	24.90	24.78				
20	50	25		24.96	24.89	24.86				
20	1	0		24.62	24.56	24.31				
20	1	105		24.59	24.59	24.24				
20	100	0		24.49	24.45	24.35				
20	1	1	QPSK	24.92	24.93	24.73				
20	1	104		24.83	24.93	24.78				
20	50	25		24.93	24.91	24.92				
20	1	0		23.88	23.88	23.79				
20	1	105		23.90	23.88	23.74				
20	100	0		23.95	23.87	23.79				
20	1	1	16-QAM	24.05	24.04	23.75	15.36	0.0344		
20	1	1	64-QAM	22.43	22.40	22.45				
20	1	1	256-QAM	20.51	20.58	20.37				
Limit	ERP < 7W			Result			Pass			



NR n30 Maximum Average Power [dBm] (GT - LC = -5.21 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	23.31	23.29	23.30	18.12	0.0649		
5	1	23		23.23	23.24	23.32				
5	12	6		23.24	23.23	23.23				
5	1	0		22.84	22.79	22.79				
5	1	24		22.82	22.75	22.80				
5	25	0		22.86	22.73	22.80				
5	1	1	QPSK	23.33	23.24	23.24				
5	1	23		23.27	23.21	23.19				
5	12	6		23.24	23.23	23.24				
5	1	0		22.30	22.29	22.24				
5	1	24		22.21	22.24	22.28				
5	25	0		22.26	22.26	22.27				
5	1	1	16-QAM	22.26	22.24	22.41	17.2	0.0525		
5	1	1	64-QAM	20.79	20.98	20.74				
5	1	1	256-QAM	18.71	18.80	18.79				
Limit	EIRP < 250 W/5MHz			Result			Pass			

NR n30 Maximum Average Power [dBm] (GT - LC = -5.21 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	-	23.26	-	18.09	0.0644		
10	1	50		-	23.22	-				
10	25	12		-	23.30	-				
10	1	0		-	22.89	-				
10	1	51		-	22.74	-				
10	50	0		-	22.75	-				
10	1	1	QPSK	-	23.29	-				
10	1	50		-	23.15	-				
10	25	12		-	23.24	-				
10	1	0		-	22.29	-				
10	1	51		-	22.14	-				
10	50	0		-	22.19	-				
10	1	1	16-QAM	-	22.25	-	17.04	0.0506		
10	1	1	64-QAM	-	20.78	-				
10	1	1	256-QAM	-	18.93	-				
Limit	EIRP < 250 W/5MHz			Result			Pass			

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.



NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.96	24.90	24.81	19.81	0.0957		
10	1	22		25.03	24.93	24.88				
10	12	6		24.95	24.91	24.83				
10	1	0		24.56	24.39	24.24				
10	1	23		24.55	24.51	24.35				
10	24	0		24.53	24.39	24.34				
10	1	1	QPSK	24.89	24.84	24.82				
10	1	22		24.95	24.87	24.88				
10	12	6		24.95	24.86	24.85				
10	1	0		23.90	23.84	23.78				
10	1	23		24.04	23.89	23.87				
10	24	0		23.98	23.88	23.82				
10	1	1	16-QAM	24.13	23.74	23.86	18.91	0.0778		
10	1	1	64-QAM	22.55	22.40	22.21				
10	1	1	256-QAM	20.48	20.45	20.29				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.03	24.90	24.80	19.86	0.0968		
15	1	36		25.04	24.90	24.86				
15	18	9		24.96	24.90	24.76				
15	1	0		24.48	24.37	24.31				
15	1	37		24.55	24.47	24.40				
15	36	0		24.49	24.37	24.26				
15	1	1	QPSK	25.04	24.86	24.75				
15	1	36		25.08	24.90	24.83				
15	18	9		25.00	24.91	24.77				
15	1	0		23.91	23.84	23.68				
15	1	37		24.01	23.89	23.76				
15	36	0		24.01	23.89	23.76				
15	1	1	16-QAM	23.94	24.06	23.77	18.84	0.0766		
15	1	1	64-QAM	22.40	22.36	22.36				
15	1	1	256-QAM	20.51	20.42	20.30				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.96	24.95	24.86	19.77	0.0948		
20	1	49		24.92	24.94	24.90				
20	25	12		24.97	24.88	24.81				
20	1	0		24.53	24.48	24.34				
20	1	50		24.48	24.42	24.40				
20	50	0		24.44	24.38	24.31				
20	1	1	QPSK	24.99	24.91	24.89				
20	1	49		24.98	24.88	24.96				
20	25	12		24.98	24.90	24.76				
20	1	0		23.94	23.92	23.84				
20	1	50		23.91	23.95	23.88				
20	50	0		24.01	23.89	23.81				
20	1	1	16-QAM	24.10	23.98	23.78	18.88	0.0773		
20	1	1	64-QAM	22.76	22.43	22.37				
20	1	1	256-QAM	20.37	20.26	20.41				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	24.97	25.03	24.92	19.81	0.0957		
25	1	63		24.93	24.97	24.94				
25	32	16		24.97	24.85	24.79				
25	1	0		24.54	24.49	24.34				
25	1	64		24.47	24.44	24.48				
25	64	0		24.50	24.41	24.34				
25	1	1	QPSK	24.97	24.96	24.85				
25	1	63		24.94	24.92	24.89				
25	32	16		24.98	24.88	24.80				
25	1	0		23.95	24.01	23.83				
25	1	64		23.93	23.95	23.87				
25	64	0		23.95	23.90	23.86				
25	1	1	16-QAM	23.96	23.92	23.79	18.74	0.0748		
25	1	1	64-QAM	22.43	22.49	22.42				
25	1	1	256-QAM	20.56	20.41	20.36				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.98	24.99	24.84	19.78	0.0951		
30	1	76		24.98	24.88	24.93				
30	36	18		25.00	24.86	24.82				
30	1	0		24.60	24.49	24.36				
30	1	77		24.59	24.46	24.45				
30	75	0		24.50	24.42	24.37				
30	1	1	QPSK	24.88	24.93	24.87				
30	1	76		24.96	24.87	24.94				
30	36	18		24.99	24.89	24.83				
30	1	0		23.99	23.88	23.76				
30	1	77		24.00	23.91	23.89				
30	75	0		23.99	23.94	23.81				
30	1	1	16-QAM	23.94	23.93	23.94	18.72	0.0745		
30	1	1	64-QAM	22.49	22.39	22.29				
30	1	1	256-QAM	20.30	20.34	20.31				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = -5.22 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.93	24.94	25.00	19.78	0.0951		
40	1	104		24.90	24.93	24.92				
40	50	25		24.84	24.88	24.88				
40	1	0		24.41	24.52	24.43				
40	1	105		24.39	24.48	24.55				
40	100	0		24.36	24.37	24.46				
40	1	1	QPSK	24.88	24.94	24.95				
40	1	104		24.91	24.95	24.98				
40	50	25		24.86	24.89	24.91				
40	1	0		23.91	23.99	23.89				
40	1	105		23.87	23.97	24.00				
40	100	0		23.80	23.88	23.91				
40	1	1	16-QAM	23.84	23.86	23.89	18.67	0.0736		
40	1	1	64-QAM	22.33	22.67	22.33				
40	1	1	256-QAM	20.36	20.54	20.56				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	26.84	26.67	26.44	21.84	0.1528		
10	1	22		26.82	26.71	26.37				
10	12	6		26.78	26.67	26.35				
10	1	0		26.36	26.19	25.87				
10	1	23		26.29	26.18	25.86				
10	24	0		25.81	25.62	25.36				
10	1	1	QPSK	26.74	26.66	26.40				
10	1	22		26.77	26.73	26.39				
10	12	6		26.81	26.69	26.33				
10	1	0		25.72	25.60	25.37				
10	1	23		25.80	25.68	25.32				
10	24	0		25.70	25.52	25.25				
10	1	1	16-QAM	25.93	25.72	25.43	20.93	0.1239		
10	1	1	64-QAM	24.25	24.23	23.97				
10	1	1	256-QAM	22.28	22.13	21.83				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	26.88	26.72	26.41	21.88	0.1542		
15	1	36		26.79	26.71	26.37				
15	18	9		26.79	26.62	26.31				
15	1	0		26.34	26.16	25.96				
15	1	37		26.26	26.19	25.88				
15	36	0		25.84	25.64	25.33				
15	1	1	QPSK	26.76	26.73	26.37				
15	1	36		26.78	26.72	26.32				
15	18	9		26.82	26.64	26.36				
15	1	0		25.76	25.65	25.30				
15	1	37		25.78	25.71	25.26				
15	36	0		25.73	25.54	25.25				
15	1	1	16-QAM	25.92	25.82	25.21	20.92	0.1236		
15	1	1	64-QAM	24.42	24.17	23.96				
15	1	1	256-QAM	22.37	22.17	21.96				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	26.83	26.75	26.34	21.83	0.1524		
20	1	49		26.81	26.72	26.40				
20	25	12		26.78	26.65	26.38				
20	1	0		26.41	26.24	25.86				
20	1	50		26.35	26.16	25.88				
20	50	0		25.77	25.60	25.34				
20	1	1	QPSK	26.77	26.78	26.28				
20	1	49		26.71	26.69	26.29				
20	25	12		26.75	26.61	26.36				
20	1	0		25.82	25.75	25.25				
20	1	50		25.78	25.67	25.33				
20	50	0		25.64	25.50	25.26				
20	1	1	16-QAM	25.91	25.71	25.27	20.91	0.1233		
20	1	1	64-QAM	24.35	24.27	23.83				
20	1	1	256-QAM	22.16	22.21	21.69				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	26.90	26.73	26.34	21.9	0.1549		
30	1	76		26.73	26.62	26.29				
30	36	18		26.73	26.61	26.24				
30	1	0		26.33	26.21	25.86				
30	1	77		26.27	26.14	25.84				
30	75	0		25.71	25.63	25.27				
30	1	1	QPSK	26.82	26.69	26.27				
30	1	76		26.82	26.66	26.30				
30	36	18		26.73	26.62	26.29				
30	1	0		25.77	25.71	25.26				
30	1	77		25.81	25.65	25.29				
30	75	0		25.65	25.53	25.12				
30	1	1	16-QAM	25.80	25.64	25.35	20.8	0.1202		
30	1	1	64-QAM	24.29	24.12	23.81				
30	1	1	256-QAM	22.37	22.16	21.88				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.87	26.73	26.33	21.87	0.1538		
40	1	104		26.80	26.72	26.42				
40	50	25		26.78	26.65	26.27				
40	1	0		26.38	26.26	25.87				
40	1	105		26.31	26.21	25.91				
40	100	0		25.72	25.62	25.29				
40	1	1	QPSK	26.82	26.70	26.29				
40	1	104		26.75	26.76	26.38				
40	50	25		26.75	26.67	26.30				
40	1	0		25.83	25.69	25.30				
40	1	105		25.77	25.71	25.34				
40	100	0		25.65	25.51	25.15				
40	1	1	16-QAM	25.75	25.72	25.37	20.75	0.1189		
40	1	1	64-QAM	24.27	24.20	23.82				
40	1	1	256-QAM	22.43	22.35	21.71				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.86	26.71	26.45	21.86	0.1535		
50	1	131		26.77	26.80	26.35				
50	64	32		26.81	26.62	26.30				
50	1	0		26.37	26.26	25.97				
50	1	132		26.25	26.28	25.88				
50	128	0		25.81	25.59	25.31				
50	1	1	QPSK	26.83	26.67	26.39				
50	1	131		26.77	26.78	26.31				
50	64	32		26.82	26.64	26.31				
50	1	0		25.84	25.66	25.38				
50	1	132		25.74	25.74	25.31				
50	128	0		25.68	25.51	25.20				
50	1	1	16-QAM	25.99	25.59	25.35	20.99	0.1256		
50	1	1	64-QAM	24.44	24.17	23.77				
50	1	1	256-QAM	22.36	22.22	21.85				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	26.84	26.69	26.38	21.84	0.1528		
60	1	160		26.73	26.84	26.46				
60	81	40		26.70	26.58	26.40				
60	1	0		26.46	26.27	25.91				
60	1	161		26.29	26.34	25.97				
60	162	0		25.70	25.62	25.36				
60	1	1	QPSK	26.74	26.67	26.39				
60	1	160		26.74	26.81	26.40				
60	81	40		26.68	26.62	26.34				
60	1	0		25.78	25.69	25.35				
60	1	161		25.69	25.83	25.43				
60	162	0		25.56	25.56	25.29				
60	1	1	16-QAM	25.83	25.61	25.49	20.83	0.1211		
60	1	1	64-QAM	24.34	24.27	23.92				
60	1	1	256-QAM	22.35	22.15	21.69				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	26.83	26.72	26.49	21.83	0.1524		
70	1	187		26.71	26.79	26.58				
70	90	45		26.62	26.54	26.42				
70	1	0		26.35	26.19	25.95				
70	1	188		26.21	26.33	26.09				
70	180	0		25.66	25.58	25.45				
70	1	1	QPSK	26.78	26.68	26.49				
70	1	187		26.73	26.81	26.51				
70	90	45		26.67	26.62	26.38				
70	1	0		25.78	25.67	25.46				
70	1	188		25.74	25.78	25.54				
70	180	0		25.58	25.51	25.33				
70	1	1	16-QAM	25.87	25.59	25.63	20.87	0.1222		
70	1	1	64-QAM	24.28	24.26	23.99				
70	1	1	256-QAM	22.29	22.03	22.03				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	26.89	26.63	26.43	21.89	0.1545		
80	1	215		26.83	26.84	26.53				
80	108	54		26.73	26.56	26.32				
80	1	0		26.52	26.09	25.92				
80	1	216		26.42	26.33	26.04				
80	216	0		25.75	25.61	25.38				
80	1	1	QPSK	26.88	26.67	26.42				
80	1	215		26.84	26.82	26.58				
80	108	54		26.71	26.58	26.40				
80	1	0		25.84	25.57	25.35				
80	1	216		25.79	25.78	25.52				
80	216	0		25.63	25.53	25.33				
80	1	1	16-QAM	25.88	25.75	25.50	20.88	0.1225		
80	1	1	64-QAM	24.20	24.11	23.78				
80	1	1	256-QAM	22.28	21.95	21.95				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	26.97	26.69	26.54	21.97	0.1574		
90	1	243		26.94	26.73	26.56				
90	120	60		26.78	26.60	26.44				
90	1	0		26.53	26.15	26.00				
90	1	244		26.37	26.45	26.13				
90	243	0		25.78	25.64	25.44				
90	1	1	QPSK	26.95	26.62	26.44				
90	1	243		26.84	26.95	26.66				
90	120	60		26.74	26.61	26.45				
90	1	0		25.88	25.61	25.45				
90	1	244		25.95	25.90	25.52				
90	243	0		25.69	25.56	25.29				
90	1	1	16-QAM	26.01	25.62	25.54	21.01	0.1262		
90	1	1	64-QAM	24.34	24.33	23.89				
90	1	1	256-QAM	22.46	22.14	21.98				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	27.05	26.82	26.54	22.05	0.1603		
100	1	271		26.92	27.05	26.65				
100	135	67		26.73	26.65	26.50				
100	1	0		26.60	26.29	26.03				
100	1	272		26.41	26.49	26.21				
100	270	0		25.78	25.65	25.51				
100	1	1	QPSK	27.05	26.84	26.47				
100	1	271		26.92	27.03	26.65				
100	135	67		26.70	26.60	26.51				
100	1	0		26.00	25.82	25.55				
100	1	272		25.94	26.01	25.63				
100	270	0		25.65	25.56	25.38				
100	1	1	16-QAM	26.03	25.87	25.46	21.03	0.1268		
100	1	1	64-QAM	24.50	24.33	24.01				
100	1	1	256-QAM	22.39	22.37	22.05				
Limit	EIRP < 2W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
5	1	1	PI/2 BPSK	25.07	25.04	24.98	22.51	0.1782		
5	1	23		25.12	25.10	24.98				
5	12	6		25.09	25.04	24.95				
5	1	0		24.62	24.58	24.43				
5	1	24		24.58	24.60	24.50				
5	25	0		24.54	24.60	24.46				
5	1	1	QPSK	25.08	25.14	24.93				
5	1	23		25.06	25.12	24.99				
5	12	6		25.09	25.11	24.95				
5	1	0		24.09	23.99	23.90				
5	1	24		24.11	24.08	23.90				
5	25	0		24.08	24.09	23.93				
5	1	1	16-QAM	24.11	23.97	23.78	21.48	0.1406		
5	1	1	64-QAM	22.37	22.67	22.59				
5	1	1	256-QAM	20.38	20.47	20.45				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.02	24.98	24.95	22.5	0.1778		
10	1	50		25.09	25.13	24.96				
10	25	12		25.10	25.01	24.93				
10	1	0		24.54	24.48	24.44				
10	1	51		24.61	24.58	24.48				
10	50	0		24.59	24.51	24.42				
10	1	1	QPSK	25.07	24.96	24.96				
10	1	50		25.09	25.11	24.97				
10	25	12		25.13	25.05	25.04				
10	1	0		24.06	23.99	23.91				
10	1	51		24.08	24.02	23.91				
10	50	0		24.10	24.02	23.96				
10	1	1	16-QAM	23.96	24.05	24.18	21.55	0.1429		
10	1	1	64-QAM	22.68	22.50	22.45				
10	1	1	256-QAM	20.52	20.43	20.42				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.03	25.00	24.95	22.5	0.1778		
15	1	77		25.09	25.07	24.93				
15	36	18		25.05	25.07	24.93				
15	1	0		24.55	24.60	24.48				
15	1	78		24.56	24.57	24.49				
15	75	0		24.56	24.51	24.49				
15	1	1	QPSK	25.04	25.06	24.92				
15	1	77		25.04	25.13	24.99				
15	36	18		25.12	25.02	24.95				
15	1	0		23.98	24.06	23.91				
15	1	78		23.95	24.12	24.02				
15	75	0		24.12	24.03	23.93				
15	1	1	16-QAM	24.50	24.09	24.24	21.87	0.1538		
15	1	1	64-QAM	22.52	22.88	22.30				
15	1	1	256-QAM	20.55	20.62	20.46				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.02	25.07	24.92	22.57	0.1807		
20	1	104		25.10	25.11	25.00				
20	50	25		25.06	25.08	25.03				
20	1	0		24.52	24.57	24.39				
20	1	105		24.62	24.58	24.52				
20	100	0		24.60	24.56	24.50				
20	1	1	QPSK	25.01	25.02	24.92				
20	1	104		25.15	25.20	25.05				
20	50	25		25.09	25.06	24.93				
20	1	0		23.98	24.04	23.88				
20	1	105		24.13	24.06	24.02				
20	100	0		24.03	24.05	24.02				
20	1	1	16-QAM	24.02	24.08	23.87	21.45	0.1396		
20	1	1	64-QAM	22.62	22.89	22.54				
20	1	1	256-QAM	20.37	20.48	20.42				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	25.07	25.09	25.02	22.55	0.1799		
25	1	131		25.18	25.11	25.11				
25	64	32		25.11	25.14	25.06				
25	1	0		24.53	24.55	24.52				
25	1	132		24.65	24.62	24.62				
25	128	0		24.62	24.53	24.58				
25	1	1	QPSK	25.13	25.12	24.94				
25	1	131		25.12	25.16	25.08				
25	64	32		25.12	25.10	25.10				
25	1	0		24.04	24.06	23.95				
25	1	132		24.14	24.13	24.08				
25	128	0		24.06	24.10	24.08				
25	1	1	16-QAM	24.16	24.22	23.95	21.59	0.1442		
25	1	1	64-QAM	22.68	22.54	22.71				
25	1	1	256-QAM	20.47	20.58	20.58				
Limit	EIRP < 1W			Result			Pass			

NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.01	25.07	25.00	22.61	0.1824		
30	1	158		25.22	25.10	25.12				
30	80	40		25.11	25.09	25.02				
30	1	0		24.58	24.59	24.47				
30	1	159		24.63	24.59	24.59				
30	160	0		24.59	24.66	24.53				
30	1	1	QPSK	25.09	25.08	25.02				
30	1	158		25.24	25.13	25.13				
30	80	40		25.14	25.13	25.00				
30	1	0		24.06	24.04	23.97				
30	1	159		24.26	24.12	24.14				
30	160	0		24.12	24.16	24.04				
30	1	1	16-QAM	24.10	24.16	23.94	21.53	0.1422		
30	1	1	64-QAM	22.68	22.59	22.71				
30	1	1	256-QAM	20.04	20.54	20.50				
Limit	EIRP < 1W			Result			Pass			



NR n66 Maximum Average Power [dBm] (GT - LC = -2.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.02	25.02	24.96	22.61	0.1824		
40	1	214		25.18	25.16	25.13				
40	108	54		25.07	25.11	25.01				
40	1	0		24.53	24.50	24.45				
40	1	215		24.70	24.68	24.61				
40	216	0		24.60	24.62	24.54				
40	1	1	QPSK	25.03	25.08	24.89				
40	1	214		25.24	25.12	25.07				
40	108	54		25.09	25.09	25.04				
40	1	0		24.02	24.08	23.83				
40	1	215		24.14	24.19	24.17				
40	216	0		24.11	24.06	23.98				
40	1	1	16-QAM	24.02	24.16	24.13	21.53	0.1422		
40	1	1	64-QAM	22.53	22.55	22.47				
40	1	1	256-QAM	20.46	20.30	20.22				
Limit	EIRP < 1W			Result			Pass			



NR n70 Maximum Average Power [dBm] (GT - LC = -3.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	24.68	24.71	24.65	18.98	0.0791		
5	1	23		24.64	24.73	24.67				
5	12	6		24.65	24.71	24.59				
5	1	0		24.19	24.22	24.09				
5	1	24		24.15	24.28	24.28				
5	25	0		24.12	24.21	24.23				
5	1	1	QPSK	24.61	24.70	24.62				
5	1	23		24.60	24.66	24.68				
5	12	6		24.63	24.68	24.70				
5	1	0		23.71	23.71	23.66				
5	1	24		23.67	23.70	23.64				
5	25	0		23.68	23.69	23.71				
5	1	1	16-QAM	23.62	23.72	23.68	17.97	0.0627		
5	1	1	64-QAM	22.23	22.23	22.16				
5	1	1	256-QAM	20.38	20.34	20.25				
Limit	EIRP < 1W			Result			Pass			

NR n70 Maximum Average Power [dBm] (GT - LC = -3.6 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	24.70	24.70	24.65	18.97	0.0789		
10	1	50		24.69	24.72	24.72				
10	25	12		24.67	24.69	24.62				
10	1	0		24.23	24.19	24.13				
10	1	51		24.20	24.23	24.19				
10	50	0		24.19	24.21	24.18				
10	1	1	QPSK	24.65	24.65	24.67				
10	1	50		24.70	24.72	24.71				
10	25	12		24.67	24.70	24.68				
10	1	0		23.65	23.66	23.65				
10	1	51		23.67	23.73	23.70				
10	50	0		23.75	23.70	23.67				
10	1	1	16-QAM	23.92	23.61	23.57	18.17	0.0656		
10	1	1	64-QAM	22.12	22.24	22.41				
10	1	1	256-QAM	20.10	20.13	20.34				
Limit	EIRP < 1W			Result			Pass			



NR n70 Maximum Average Power [dBm] (GT - LC = -3.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)
15	1	1	PI/2 BPSK	24.71	-	-	-	-
15	1	77		24.82	-	-		
15	36	18		24.77	-	-		
15	1	0		24.45	-	-		
15	1	78		24.32	-	-		
15	75	0		24.27	-	-		
15	1	1	QPSK	24.71	-	-	-	-
15	1	77		24.76	-	-		
15	36	18		24.74	-	-		
15	1	0		23.66	-	-		
15	1	78		23.77	-	-		
15	75	0		23.76	-	-		
15	1	1	16-QAM	23.73	-	-	-	-
15	1	1	64-QAM	22.78	-	-		
15	1	1	256-QAM	20.20	-	-		
Limit	EIRP < 1W			Result			Pass	



NR n71 Maximum Average Power [dBm] (GT - LC = -8.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
5	1	1	PI/2 BPSK	25.58	25.63	25.65	14.97	0.0314		
5	1	23		25.50	25.68	25.56				
5	12	6		25.56	25.65	25.58				
5	1	0		25.05	25.18	25.15				
5	1	24		25.05	25.15	25.04				
5	25	0		25.10	25.18	25.12				
5	1	1	QPSK	25.59	25.61	25.75				
5	1	23		25.59	25.73	25.61				
5	12	6		25.54	25.71	25.60				
5	1	0		24.62	24.58	24.63				
5	1	24		24.65	24.68	24.59				
5	25	0		24.53	24.71	24.63				
5	1	1	16-QAM	24.73	24.81	24.73	14.03	0.0253		
5	1	1	64-QAM	23.00	22.94	23.21				
5	1	1	256-QAM	21.25	21.30	21.11				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = -8.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
10	1	1	PI/2 BPSK	25.56	25.61	25.71	15.04	0.0319		
10	1	50		25.55	25.67	25.61				
10	25	12		25.56	25.64	25.69				
10	1	0		25.13	24.99	25.21				
10	1	51		25.10	25.17	25.06				
10	50	0		25.10	25.16	25.17				
10	1	1	QPSK	25.55	25.60	25.82				
10	1	50		25.62	25.68	25.64				
10	25	12		25.55	25.67	25.68				
10	1	0		24.55	24.53	24.73				
10	1	51		24.60	24.66	24.57				
10	50	0		24.54	24.68	24.58				
10	1	1	16-QAM	24.59	24.66	24.80	14.02	0.0252		
10	1	1	64-QAM	23.13	23.19	23.39				
10	1	1	256-QAM	21.01	21.10	21.34				
Limit	ERP < 3W			Result			Pass			



NR n71 Maximum Average Power [dBm] (GT - LC = -8.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
15	1	1	PI/2 BPSK	24.79	25.56	25.75	15.02	0.0318		
15	1	77		24.96	25.74	25.62				
15	36	18		24.89	25.66	25.69				
15	1	0		24.49	25.09	25.18				
15	1	78		24.47	25.22	25.06				
15	75	0		24.33	25.17	25.20				
15	1	1	QPSK	24.83	25.60	25.72				
15	1	77		24.99	25.80	25.67				
15	36	18		24.91	25.68	25.72				
15	1	0		23.87	24.50	24.68				
15	1	78		23.94	24.75	24.57				
15	75	0		23.93	24.67	24.72				
15	1	1	16-QAM	23.89	24.54	24.83	14.05	0.0254		
15	1	1	64-QAM	22.35	23.24	23.35				
15	1	1	256-QAM	20.97	21.13	21.13				
Limit	ERP < 3W			Result			Pass			

NR n71 Maximum Average Power [dBm] (GT - LC = -8.63 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP(W)		
20	1	1	PI/2 BPSK	24.81	25.63	25.71	15.04	0.0319		
20	1	104		25.04	25.69	25.63				
20	50	25		24.84	25.70	25.82				
20	1	0		24.48	25.08	25.31				
20	1	105		24.61	25.28	25.15				
20	100	0		24.35	25.27	25.23				
20	1	1	QPSK	24.82	25.55	25.74				
20	1	104		24.97	25.69	25.70				
20	50	25		24.88	25.69	25.75				
20	1	0		23.77	24.57	24.80				
20	1	105		23.94	24.73	24.73				
20	100	0		23.90	24.70	24.79				
20	1	1	16-QAM	23.80	24.64	24.59	13.86	0.0243		
20	1	1	64-QAM	22.39	23.04	23.35				
20	1	1	256-QAM	20.42	21.25	21.31				
Limit	ERP < 3W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.66	25.66	25.67	21.28	0.1343		
10	1	22		25.56	25.73	25.61				
10	12	6		25.60	25.65	25.64				
10	1	0		22.17	22.16	22.17				
10	1	23		22.07	22.32	22.13				
10	24	0		25.09	25.17	25.16				
10	1	1	QPSK	25.59	25.65	25.70				
10	1	22		25.51	25.78	25.63				
10	12	6		25.57	25.69	25.67				
10	1	0		22.13	22.15	22.16				
10	1	23		22.04	22.28	22.16				
10	24	0		24.59	24.70	24.65				
10	1	1	16-QAM	24.68	24.69	24.68	20.19	0.1045		
10	1	1	64-QAM	23.04	23.21	23.18				
10	1	1	256-QAM	21.14	21.29	21.19				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.80	25.80	25.85	21.43	0.139		
15	1	36		25.76	25.93	25.73				
15	18	9		25.74	25.85	25.78				
15	1	0		22.33	22.31	22.33				
15	1	37		22.24	22.39	22.22				
15	36	0		25.26	25.32	25.29				
15	1	1	QPSK	25.82	25.79	25.86				
15	1	36		25.75	25.88	25.79				
15	18	9		25.76	25.85	25.75				
15	1	0		22.42	22.32	22.36				
15	1	37		22.35	22.39	22.24				
15	36	0		24.79	24.81	24.80				
15	1	1	16-QAM	24.81	24.79	24.83	20.33	0.1079		
15	1	1	64-QAM	23.05	23.23	23.38				
15	1	1	256-QAM	21.34	21.34	21.31				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.84	25.79	25.89	21.48	0.1406		
20	1	49		25.82	25.98	25.82				
20	25	12		25.79	25.82	25.75				
20	1	0		22.35	22.27	22.42				
20	1	50		22.29	22.46	22.35				
20	50	0		25.31	25.36	25.35				
20	1	1	QPSK	25.96	25.73	25.82				
20	1	49		25.82	25.82	25.80				
20	25	12		25.78	25.77	25.86				
20	1	0		22.47	22.37	22.35				
20	1	50		22.35	22.51	22.24				
20	50	0		24.81	24.84	24.90				
20	1	1	16-QAM	24.92	24.65	24.95	20.45	0.1109		
20	1	1	64-QAM	23.56	23.19	23.47				
20	1	1	256-QAM	21.44	21.32	21.54				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	25.86	25.86	25.92	21.53	0.1422		
25	1	63		25.84	26.03	25.86				
25	32	16		25.81	25.88	25.89				
25	1	0		22.44	22.31	22.42				
25	1	64		22.33	22.47	22.41				
25	64	0		25.34	25.36	25.40				
25	1	1	QPSK	25.96	25.84	25.95				
25	1	63		25.83	25.98	25.81				
25	32	16		25.82	25.84	25.89				
25	1	0		22.50	22.31	22.40				
25	1	64		22.38	22.58	22.40				
25	64	0		24.84	24.88	24.88				
25	1	1	16-QAM	24.92	24.85	24.93	20.43	0.1104		
25	1	1	64-QAM	23.38	23.36	23.34				
25	1	1	256-QAM	21.30	21.30	21.37				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.77	25.75	25.90	21.47	0.1403		
30	1	76		25.94	25.96	25.68				
30	36	18		25.74	25.87	25.82				
30	1	0		22.29	22.29	22.36				
30	1	77		22.41	22.46	22.15				
30	75	0		25.26	25.29	25.31				
30	1	1	QPSK	25.75	25.79	25.89				
30	1	76		25.85	25.97	25.66				
30	36	18		25.74	25.87	25.81				
30	1	0		22.29	22.31	22.47				
30	1	77		22.44	22.51	22.25				
30	75	0		24.78	24.91	24.73				
30	1	1	16-QAM	24.78	24.73	25.08	20.58	0.1143		
30	1	1	64-QAM	23.38	23.57	23.39				
30	1	1	256-QAM	21.34	21.17	21.31				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.92	25.82	25.92	21.65	0.1462		
40	1	104		26.00	25.95	25.92				
40	50	25		25.88	25.88	25.95				
40	1	0		22.39	22.38	22.36				
40	1	105		22.62	22.50	22.44				
40	100	0		25.44	25.40	25.42				
40	1	1	QPSK	25.96	25.87	25.88				
40	1	104		26.15	25.96	25.91				
40	50	25		25.90	25.88	25.94				
40	1	0		22.49	22.35	22.52				
40	1	105		22.68	22.47	22.53				
40	100	0		24.95	24.89	24.93				
40	1	1	16-QAM	24.94	24.90	25.18	20.68	0.1169		
40	1	1	64-QAM	23.48	23.46	23.39				
40	1	1	256-QAM	21.50	21.42	21.42				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.68	25.79	25.82	21.43	0.139		
50	1	131		25.90	25.86	25.53				
50	64	32		25.75	25.80	25.80				
50	1	0		22.21	22.27	22.35				
50	1	132		22.54	22.30	22.14				
50	128	0		25.28	25.25	25.31				
50	1	1	QPSK	25.70	25.80	25.84				
50	1	131		25.93	25.80	25.62				
50	64	32		25.74	25.78	25.79				
50	1	0		22.23	22.26	22.39				
50	1	132		22.41	22.32	22.20				
50	128	0		24.79	24.84	24.77				
50	1	1	16-QAM	24.72	24.74	24.86	20.36	0.1086		
50	1	1	64-QAM	23.08	23.31	23.33				
50	1	1	256-QAM	21.17	21.31	21.37				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.88	25.78	25.72	21.38	0.1374		
60	1	160		25.78	25.80	25.75				
60	81	40		25.85	25.85	25.83				
60	1	0		22.24	22.37	22.29				
60	1	161		22.27	22.32	22.34				
60	162	0		25.32	25.32	25.32				
60	1	1	QPSK	25.72	25.81	25.70				
60	1	160		25.79	25.79	25.62				
60	81	40		25.74	25.74	25.82				
60	1	0		22.36	22.35	22.15				
60	1	161		22.30	22.21	22.23				
60	162	0		24.84	24.70	24.81				
60	1	1	16-QAM	24.71	24.88	24.91	20.41	0.1099		
60	1	1	64-QAM	23.22	23.36	23.22				
60	1	1	256-QAM	21.38	21.11	21.12				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	25.78	25.81	25.77	21.42	0.1387		
70	1	187		25.88	25.79	25.91				
70	90	45		25.79	25.76	25.84				
70	1	0		22.28	22.41	22.17				
70	1	188		22.42	22.38	22.42				
70	180	0		25.35	25.29	25.30				
70	1	1	QPSK	25.71	25.92	25.71				
70	1	187		25.87	25.87	25.85				
70	90	45		25.79	25.80	25.72				
70	1	0		22.26	22.50	22.36				
70	1	188		22.36	22.39	22.43				
70	180	0		24.76	24.78	24.70				
70	1	1	16-QAM	24.67	24.87	24.51	20.37	0.1089		
70	1	1	64-QAM	23.24	23.40	23.30				
70	1	1	256-QAM	21.34	21.23	21.27				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.80	25.94	25.84	21.44	0.1393		
80	1	215		25.79	25.82	25.75				
80	108	54		25.78	25.74	25.68				
80	1	0		22.29	22.47	22.46				
80	1	216		22.28	22.35	22.31				
80	216	0		25.22	25.28	25.25				
80	1	1	QPSK	25.81	25.88	25.89				
80	1	215		25.80	25.77	25.77				
80	108	54		25.79	25.78	25.74				
80	1	0		22.41	22.49	22.32				
80	1	216		22.38	22.35	22.30				
80	216	0		24.75	24.78	24.77				
80	1	1	16-QAM	24.90	25.00	24.88	20.5	0.1122		
80	1	1	64-QAM	23.38	23.32	23.20				
80	1	1	256-QAM	21.40	21.49	21.59				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	25.78	25.96	25.94	21.58	0.1439		
90	1	243		26.08	25.85	25.67				
90	120	60		25.74	25.72	25.73				
90	1	0		22.31	22.48	22.49				
90	1	244		22.63	22.40	22.18				
90	243	0		25.24	25.29	25.27				
90	1	1	QPSK	25.69	25.84	25.96				
90	1	243		26.02	25.82	25.68				
90	120	60		25.72	25.75	25.73				
90	1	0		22.33	22.40	22.56				
90	1	244		22.63	22.33	22.25				
90	243	0		24.75	24.75	24.78				
90	1	1	16-QAM	24.70	25.02	24.83	20.52	0.1127		
90	1	1	64-QAM	23.34	23.47	23.39				
90	1	1	256-QAM	21.28	21.54	21.48				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	25.92	26.02	25.78	21.52	0.1419		
100	1	271		26.02	25.99	25.93				
100	135	67		25.76	25.78	25.76				
100	1	0		22.43	22.49	22.33				
100	1	272		22.64	22.49	22.42				
100	270	0		25.29	25.34	25.38				
100	1	1	QPSK	25.82	25.94	25.83				
100	1	271		25.96	25.97	25.97				
100	135	67		25.78	25.77	25.76				
100	1	0		22.45	22.50	22.40				
100	1	272		22.57	22.51	22.52				
100	270	0		24.81	24.84	24.83				
100	1	1	16-QAM	24.90	24.90	24.94	20.44	0.1107		
100	1	1	64-QAM	23.42	23.50	23.39				
100	1	1	256-QAM	21.41	21.48	21.25				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.55	25.77	25.66	23.65	0.2317		
10	1	22		25.58	25.69	25.70				
10	12	6		25.59	25.70	25.66				
10	1	0		22.13	22.22	22.13				
10	1	23		22.14	22.16	22.20				
10	24	0		25.10	25.19	25.17				
10	1	1	QPSK	25.71	25.73	25.69				
10	1	22		25.66	25.65	25.74				
10	12	6		25.60	25.75	25.68				
10	1	0		22.19	22.29	22.16				
10	1	23		22.13	22.17	22.29				
10	24	0		24.64	24.72	24.70				
10	1	1	16-QAM	24.70	24.80	24.57	22.68	0.1854		
10	1	1	64-QAM	23.14	23.32	23.14				
10	1	1	256-QAM	21.09	21.35	21.03				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.48	25.41	25.52	23.47	0.2223		
15	1	36		25.55	25.38	25.49				
15	18	9		25.51	25.44	25.50				
15	1	0		21.94	21.91	22.04				
15	1	37		22.06	21.94	21.94				
15	36	0		24.99	24.91	25.02				
15	1	1	QPSK	25.54	25.32	25.47				
15	1	36		25.59	25.36	25.43				
15	18	9		25.41	25.36	25.48				
15	1	0		21.99	21.93	22.07				
15	1	37		22.06	21.97	21.98				
15	36	0		24.51	24.41	24.54				
15	1	1	16-QAM	24.67	24.51	24.44	22.55	0.1799		
15	1	1	64-QAM	23.13	22.87	23.19				
15	1	1	256-QAM	21.08	20.89	21.06				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.51	25.46	25.56	23.59	0.2286		
20	1	49		25.71	25.47	25.49				
20	25	12		25.61	25.44	25.46				
20	1	0		22.01	22.03	22.24				
20	1	50		22.20	22.10	22.05				
20	50	0		25.08	24.95	25.04				
20	1	1	QPSK	25.55	25.53	25.54				
20	1	49		25.66	25.53	25.48				
20	25	12		25.61	25.47	25.54				
20	1	0		22.09	22.11	22.12				
20	1	50		22.30	22.13	22.01				
20	50	0		24.58	24.50	24.54				
20	1	1	16-QAM	24.63	24.44	24.59	22.51	0.1782		
20	1	1	64-QAM	23.14	23.01	22.97				
20	1	1	256-QAM	21.05	21.06	21.14				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	25.60	25.46	25.57	23.63	0.2307		
25	1	63		25.75	25.51	25.39				
25	32	16		25.65	25.43	25.48				
25	1	0		22.07	21.97	22.13				
25	1	64		22.19	22.05	21.97				
25	64	0		25.18	24.93	25.03				
25	1	1	QPSK	25.45	25.50	25.62				
25	1	63		25.61	25.51	25.46				
25	32	16		25.67	25.33	25.51				
25	1	0		22.10	22.09	22.20				
25	1	64		22.18	22.13	22.06				
25	64	0		24.64	24.45	24.46				
25	1	1	16-QAM	24.55	24.39	24.60	22.48	0.177		
25	1	1	64-QAM	23.18	22.93	23.12				
25	1	1	256-QAM	21.03	20.92	21.00				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.42	25.51	25.57	23.52	0.2249		
30	1	76		25.53	25.56	25.47				
30	36	18		25.58	25.40	25.57				
30	1	0		22.04	22.05	22.11				
30	1	77		22.11	22.12	22.02				
30	75	0		25.04	24.98	25.08				
30	1	1	QPSK	25.46	25.47	25.64				
30	1	76		25.52	25.49	25.59				
30	36	18		25.60	25.38	25.61				
30	1	0		22.05	21.99	22.14				
30	1	77		22.08	22.06	22.08				
30	75	0		24.59	24.42	24.57				
30	1	1	16-QAM	24.59	24.44	24.67	22.55	0.1799		
30	1	1	64-QAM	23.27	23.05	23.29				
30	1	1	256-QAM	21.06	20.97	20.99				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.53	25.60	25.51	23.54	0.2259		
40	1	104		25.50	25.64	25.50				
40	50	25		25.66	25.46	25.56				
40	1	0		22.04	22.13	22.06				
40	1	105		22.07	22.15	22.04				
40	100	0		25.12	25.03	25.01				
40	1	1	QPSK	25.50	25.58	25.52				
40	1	104		25.48	25.60	25.51				
40	50	25		25.66	25.45	25.54				
40	1	0		22.06	22.07	22.03				
40	1	105		22.06	22.14	22.00				
40	100	0		24.62	24.51	24.56				
40	1	1	16-QAM	24.62	24.62	24.58	22.5	0.1778		
40	1	1	64-QAM	23.00	23.12	22.88				
40	1	1	256-QAM	21.11	21.18	21.18				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.53	25.63	25.37	23.58	0.228		
50	1	131		25.37	25.70	25.46				
50	64	32		25.54	25.48	25.58				
50	1	0		22.04	22.17	21.96				
50	1	132		21.94	22.16	22.08				
50	128	0		25.04	25.07	25.02				
50	1	1	QPSK	25.49	25.53	25.47				
50	1	131		25.38	25.61	25.54				
50	64	32		25.55	25.39	25.51				
50	1	0		22.04	22.08	22.02				
50	1	132		21.90	22.16	22.01				
50	128	0		24.53	24.49	24.53				
50	1	1	16-QAM	24.59	24.47	24.53	22.47	0.1766		
50	1	1	64-QAM	23.25	22.93	22.91				
50	1	1	256-QAM	20.99	20.97	20.93				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.53	25.61	25.36	23.52	0.2249		
60	1	160		25.46	25.52	25.51				
60	81	40		25.43	25.40	25.57				
60	1	0		22.01	22.10	21.92				
60	1	161		21.99	22.11	22.03				
60	162	0		24.98	24.95	25.05				
60	1	1	QPSK	25.41	25.64	25.34				
60	1	160		25.35	25.51	25.58				
60	81	40		25.48	25.40	25.54				
60	1	0		21.91	22.07	22.00				
60	1	161		22.06	22.13	22.04				
60	162	0		24.48	24.46	24.46				
60	1	1	16-QAM	24.47	24.79	24.49	22.67	0.1849		
60	1	1	64-QAM	22.61	22.89	22.95				
60	1	1	256-QAM	20.95	21.02	21.05				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	25.57	25.69	25.59	23.57	0.2275		
70	1	187		25.55	25.55	25.46				
70	90	45		25.42	25.46	25.45				
70	1	0		22.03	22.17	22.08				
70	1	188		22.00	22.10	22.03				
70	180	0		24.92	25.01	25.03				
70	1	1	QPSK	25.54	25.56	25.48				
70	1	187		25.58	25.60	25.53				
70	90	45		25.42	25.44	25.50				
70	1	0		22.14	22.13	22.10				
70	1	188		22.16	22.21	22.04				
70	180	0		24.42	24.46	24.51				
70	1	1	16-QAM	24.53	24.72	24.81	22.69	0.1858		
70	1	1	64-QAM	23.04	23.19	23.16				
70	1	1	256-QAM	21.03	21.13	21.10				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.65	25.79	25.72	23.67	0.2328		
80	1	215		25.67	25.62	25.55				
80	108	54		25.54	25.55	25.50				
80	1	0		22.15	22.29	22.26				
80	1	216		22.19	22.28	22.03				
80	216	0		25.10	25.17	25.06				
80	1	1	QPSK	25.65	25.75	25.71				
80	1	215		25.72	25.66	25.54				
80	108	54		25.55	25.56	25.44				
80	1	0		22.17	22.31	22.24				
80	1	216		22.22	22.29	22.07				
80	216	0		24.61	24.63	24.55				
80	1	1	16-QAM	24.66	25.01	24.80	22.89	0.1945		
80	1	1	64-QAM	23.28	23.35	23.38				
80	1	1	256-QAM	21.04	21.23	21.35				
Limit	EIRP < 1W			Result			Pass			



Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	25.78	25.79	25.81	23.69	0.2339		
90	1	243		25.65	25.71	25.71				
90	120	60		25.54	25.59	25.64				
90	1	0		22.32	22.28	22.29				
90	1	244		22.24	22.21	22.20				
90	243	0		25.14	25.16	25.19				
90	1	1	QPSK	25.76	25.74	25.79				
90	1	243		25.67	25.65	25.73				
90	120	60		25.55	25.58	25.65				
90	1	0		22.32	22.36	22.36				
90	1	244		22.15	22.29	22.28				
90	243	0		24.63	24.65	24.70				
90	1	1	16-QAM	24.92	24.84	24.86	22.8	0.1905		
90	1	1	64-QAM	23.38	23.25	23.32				
90	1	1	256-QAM	21.33	21.35	21.31				
Limit	EIRP < 1W			Result			Pass			

Part 270 NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	25.84	-	23.72	0.2355		
100	1	271		-	25.78	-				
100	135	67		-	25.62	-				
100	1	0		-	22.35	-				
100	1	272		-	22.34	-				
100	270	0		-	25.21	-				
100	1	1	QPSK	-	25.84	-				
100	1	271		-	25.82	-				
100	135	67		-	25.61	-				
100	1	0		-	22.36	-				
100	1	272		-	22.30	-				
100	270	0		-	24.69	-				
100	1	1	16-QAM	-	24.72	-	22.6	0.182		
100	1	1	64-QAM	-	23.45	-				
100	1	1	256-QAM	-	21.26	-				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	26.18	26.02	26.12	21.71	0.1483		
10	1	22		26.19	26.04	26.07				
10	12	6		26.16	26.03	26.07				
10	1	0		22.61	22.54	22.57				
10	1	23		22.66	22.54	22.56				
10	24	0		25.63	25.51	25.57				
10	1	1	QPSK	26.09	26.05	26.11				
10	1	22		26.21	26.09	26.09				
10	12	6		26.13	26.03	26.06				
10	1	0		22.61	22.48	22.71				
10	1	23		22.65	22.63	22.60				
10	24	0		25.11	25.05	25.11				
10	1	1	16-QAM	25.16	25.03	25.12	20.66	0.1164		
10	1	1	64-QAM	23.74	23.74	23.74				
10	1	1	256-QAM	21.68	21.47	21.71				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	26.24	26.11	26.07	21.81	0.1517		
15	1	36		26.31	26.19	26.07				
15	18	9		26.26	26.11	26.11				
15	1	0		22.79	22.54	22.74				
15	1	37		22.80	22.69	22.65				
15	36	0		25.79	25.65	25.15				
15	1	1	QPSK	26.23	26.10	26.21				
15	1	36		26.30	26.21	26.08				
15	18	9		26.29	26.17	26.11				
15	1	0		22.80	22.68	22.66				
15	1	37		22.92	22.82	22.63				
15	36	0		25.25	25.11	25.12				
15	1	1	16-QAM	25.30	24.88	25.06	20.8	0.1202		
15	1	1	64-QAM	23.70	23.77	23.57				
15	1	1	256-QAM	21.74	21.53	21.70				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	26.42	26.09	26.16	21.92	0.1556		
20	1	49		26.32	26.22	26.09				
20	25	12		26.42	26.14	26.03				
20	1	0		22.80	22.60	22.78				
20	1	50		22.85	22.75	22.63				
20	50	0		25.97	25.64	25.63				
20	1	1	QPSK	26.38	26.06	26.20				
20	1	49		26.26	26.23	26.06				
20	25	12		26.42	26.12	26.14				
20	1	0		22.89	22.59	22.78				
20	1	50		22.80	22.78	22.61				
20	50	0		25.40	25.13	25.13				
20	1	1	16-QAM	25.45	25.25	25.31	20.95	0.1245		
20	1	1	64-QAM	23.80	23.50	23.67				
20	1	1	256-QAM	21.96	21.53	21.81				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	26.41	26.17	26.24	21.94	0.1563		
25	1	63		26.33	26.27	26.05				
25	32	16		26.44	26.16	26.14				
25	1	0		22.90	22.64	22.75				
25	1	64		22.84	22.78	22.59				
25	64	0		25.40	25.70	25.13				
25	1	1	QPSK	26.41	26.13	26.24				
25	1	63		26.37	26.29	26.08				
25	32	16		26.43	26.17	26.12				
25	1	0		22.93	22.66	22.76				
25	1	64		22.85	22.83	22.58				
25	64	0		25.44	25.21	25.08				
25	1	1	16-QAM	25.60	25.21	25.17	21.1	0.1288		
25	1	1	64-QAM	23.91	23.79	23.76				
25	1	1	256-QAM	21.75	21.67	21.72				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	26.28	26.14	26.46	21.96	0.157		
30	1	76		26.18	26.33	26.18				
30	36	18		26.27	26.18	26.29				
30	1	0		22.76	22.65	22.85				
30	1	77		22.72	22.85	22.66				
30	75	0		25.73	25.67	25.81				
30	1	1	QPSK	26.31	26.18	26.39				
30	1	76		26.17	26.27	26.16				
30	36	18		26.28	26.16	26.31				
30	1	0		22.73	22.74	23.02				
30	1	77		22.67	22.90	22.70				
30	75	0		25.27	25.21	25.30				
30	1	1	16-QAM	25.39	25.19	25.48	20.98	0.1253		
30	1	1	64-QAM	23.80	23.35	24.01				
30	1	1	256-QAM	21.73	21.71	21.87				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.36	26.20	26.36	21.89	0.1545		
40	1	104		26.18	26.33	26.23				
40	50	25		26.36	26.16	26.30				
40	1	0		22.94	22.74	22.82				
40	1	105		22.75	22.88	22.69				
40	100	0		25.93	25.70	25.79				
40	1	1	QPSK	26.39	26.17	26.33				
40	1	104		26.19	26.31	26.08				
40	50	25		26.34	26.15	26.26				
40	1	0		22.93	22.83	22.85				
40	1	105		22.72	22.89	22.69				
40	100	0		25.33	25.22	25.26				
40	1	1	16-QAM	25.36	25.24	25.29	20.86	0.1219		
40	1	1	64-QAM	23.98	23.80	23.75				
40	1	1	256-QAM	21.90	21.60	21.79				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.16	26.11	25.98	21.69	0.1476		
50	1	131		26.03	26.19	26.03				
50	64	32		26.03	25.99	26.02				
50	1	0		22.64	22.56	22.51				
50	1	132		22.58	22.69	22.56				
50	128	0		25.52	25.57	25.51				
50	1	1	QPSK	26.11	26.11	25.97				
50	1	131		26.05	26.17	25.98				
50	64	32		26.02	26.02	26.03				
50	1	0		22.74	22.65	22.61				
50	1	132		22.61	22.67	22.58				
50	128	0		25.02	25.04	25.01				
50	1	1	16-QAM	25.14	25.07	25.20	20.7	0.1175		
50	1	1	64-QAM	23.77	23.58	23.39				
50	1	1	256-QAM	21.54	21.53	21.38				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	26.19	26.12	25.96	21.74	0.1493		
60	1	160		26.16	26.12	26.03				
60	81	40		26.07	26.08	26.16				
60	1	0		22.73	22.68	22.54				
60	1	161		22.73	22.68	22.58				
60	162	0		25.61	25.61	25.60				
60	1	1	QPSK	26.24	26.17	26.01				
60	1	160		26.16	26.13	26.00				
60	81	40		26.09	26.07	26.24				
60	1	0		22.76	22.73	22.63				
60	1	161		22.75	22.71	22.68				
60	162	0		25.11	25.08	25.06				
60	1	1	16-QAM	25.27	25.23	24.78	20.77	0.1194		
60	1	1	64-QAM	23.83	24.05	23.48				
60	1	1	256-QAM	21.78	21.58	21.53				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	26.21	26.19	26.09	21.85	0.1531		
70	1	187		26.28	26.20	25.89				
70	90	45		25.92	26.00	26.15				
70	1	0		22.83	22.75	22.63				
70	1	188		22.89	22.65	22.47				
70	180	0		25.50	25.59	25.66				
70	1	1	QPSK	26.22	26.22	26.13				
70	1	187		26.35	26.13	25.96				
70	90	45		25.98	26.07	26.05				
70	1	0		22.74	22.85	22.62				
70	1	188		22.88	22.66	22.47				
70	180	0		25.05	25.04	25.10				
70	1	1	16-QAM	25.17	25.19	25.36	20.86	0.1219		
70	1	1	64-QAM	23.76	23.70	23.56				
70	1	1	256-QAM	21.64	21.79	21.39				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	26.23	26.29	26.21	21.79	0.151		
80	1	215		26.22	26.14	26.04				
80	108	54		26.00	25.99	26.01				
80	1	0		22.73	22.79	22.72				
80	1	216		22.73	22.62	22.58				
80	216	0		25.58	25.58	25.54				
80	1	1	QPSK	26.22	26.21	26.15				
80	1	215		26.24	26.11	25.96				
80	108	54		26.01	26.03	26.05				
80	1	0		22.79	22.83	22.69				
80	1	216		22.78	22.68	22.53				
80	216	0		25.09	25.12	25.04				
80	1	1	16-QAM	25.42	25.25	25.22	20.92	0.1236		
80	1	1	64-QAM	23.87	24.01	23.81				
80	1	1	256-QAM	21.73	21.78	21.79				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	26.21	26.30	26.38	21.88	0.1542		
90	1	243		26.20	26.09	26.01				
90	120	60		25.91	26.02	26.13				
90	1	0		22.72	22.79	22.95				
90	1	244		22.72	22.58	22.61				
90	243	0		25.56	25.58	25.65				
90	1	1	QPSK	26.20	26.31	26.38				
90	1	243		26.21	26.12	25.98				
90	120	60		25.90	26.03	26.11				
90	1	0		22.80	22.85	22.86				
90	1	244		22.79	22.66	22.53				
90	243	0		25.04	25.09	25.14				
90	1	1	16-QAM	25.40	25.39	25.43	20.93	0.1239		
90	1	1	64-QAM	23.73	23.84	23.80				
90	1	1	256-QAM	21.75	21.81	21.95				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n77 Maximum Average Power [dBm] (GT - LC = -4.5 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	26.35	-	-	-		
100	1	271		-	26.17	-				
100	135	67		-	26.03	-				
100	1	0		-	22.89	-				
100	1	272		-	22.71	-				
100	270	0		-	25.61	-				
100	1	1	QPSK	-	26.32	-				
100	1	271		-	26.17	-				
100	135	67		-	26.06	-				
100	1	0		-	22.88	-				
100	1	272		-	22.70	-				
100	270	0		-	25.14	-				
100	1	1	16-QAM	-	25.26	-	-	-		
100	1	1	64-QAM	-	23.81	-				
100	1	1	256-QAM	-	21.88	-				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	26.04	25.90	26.02	23.99	0.2506		
10	1	22		26.06	25.93	25.94				
10	12	6		26.02	25.89	25.96				
10	1	0		22.53	22.38	22.49				
10	1	23		22.57	22.51	22.43				
10	24	0		25.51	25.41	25.50				
10	1	1	QPSK	26.04	25.88	25.98				
10	1	22		26.11	25.92	25.96				
10	12	6		26.07	25.90	25.96				
10	1	0		22.53	22.35	22.54				
10	1	23		22.55	22.45	22.49				
10	24	0		25.00	24.89	24.95				
10	1	1	16-QAM	25.11	24.89	24.89	22.99	0.1991		
10	1	1	64-QAM	23.48	23.39	23.57				
10	1	1	256-QAM	21.35	21.36	21.48				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	26.00	25.95	25.88	23.88	0.2443		
15	1	36		25.83	25.88	25.91				
15	18	9		25.89	25.92	25.85				
15	1	0		22.53	22.47	22.29				
15	1	37		22.43	22.48	22.46				
15	36	0		25.43	25.46	25.42				
15	1	1	QPSK	25.92	25.96	25.95				
15	1	36		25.84	25.85	25.96				
15	18	9		25.91	25.99	25.91				
15	1	0		22.51	22.53	22.46				
15	1	37		22.46	22.47	22.56				
15	36	0		24.88	24.99	24.84				
15	1	1	16-QAM	25.12	25.04	25.19	23.07	0.2028		
15	1	1	64-QAM	23.27	23.53	23.44				
15	1	1	256-QAM	21.46	21.34	21.43				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	26.03	25.99	25.87	23.91	0.246		
20	1	49		25.99	25.87	25.94				
20	25	12		25.91	25.95	25.96				
20	1	0		22.52	22.49	22.39				
20	1	50		22.46	22.34	22.42				
20	50	0		25.47	25.49	25.41				
20	1	1	QPSK	26.00	25.95	25.88				
20	1	49		25.96	25.90	25.93				
20	25	12		25.95	25.96	25.94				
20	1	0		22.57	22.57	22.41				
20	1	50		22.48	22.39	22.51				
20	50	0		24.96	24.95	24.95				
20	1	1	16-QAM	25.09	25.10	24.87	22.98	0.1986		
20	1	1	64-QAM	23.57	23.77	23.70				
20	1	1	256-QAM	21.53	21.54	21.38				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
25	1	1	PI/2 BPSK	26.03	26.00	25.84	23.91	0.246		
25	1	63		26.02	25.87	25.89				
25	32	16		25.96	25.98	25.89				
25	1	0		22.49	22.55	22.39				
25	1	64		22.50	22.40	22.43				
25	64	0		25.49	25.46	25.41				
25	1	1	QPSK	25.98	25.96	25.89				
25	1	63		25.99	25.84	25.95				
25	32	16		26.00	25.96	25.89				
25	1	0		22.54	22.56	22.28				
25	1	64		22.51	22.40	22.41				
25	64	0		24.98	25.00	24.89				
25	1	1	16-QAM	25.09	25.23	24.94	23.11	0.2046		
25	1	1	64-QAM	23.54	23.36	23.26				
25	1	1	256-QAM	21.50	21.55	21.37				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.96	25.97	25.83	23.9	0.2455		
30	1	76		25.87	25.84	25.96				
30	36	18		25.83	25.96	25.91				
30	1	0		22.55	22.48	22.33				
30	1	77		22.46	22.39	22.51				
30	75	0		25.43	25.50	25.38				
30	1	1	QPSK	26.02	25.98	25.74				
30	1	76		25.98	25.88	25.92				
30	36	18		25.88	25.95	25.92				
30	1	0		22.52	22.48	22.24				
30	1	77		22.41	22.37	22.52				
30	75	0		24.90	24.95	24.90				
30	1	1	16-QAM	25.08	25.14	24.80	23.02	0.2004		
30	1	1	64-QAM	23.50	23.29	23.25				
30	1	1	256-QAM	21.62	21.35	21.35				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	26.00	25.98	25.88	23.93	0.2472		
40	1	104		26.05	25.85	25.95				
40	50	25		25.98	26.03	25.81				
40	1	0		22.48	22.50	22.40				
40	1	105		22.53	22.35	22.53				
40	100	0		25.46	25.47	25.34				
40	1	1	QPSK	26.02	25.98	25.83				
40	1	104		26.05	25.87	25.92				
40	50	25		25.90	25.97	25.82				
40	1	0		22.57	22.48	22.33				
40	1	105		22.59	22.36	22.46				
40	100	0		24.97	24.96	24.87				
40	1	1	16-QAM	25.07	25.04	25.02	22.95	0.1972		
40	1	1	64-QAM	23.52	23.32	23.43				
40	1	1	256-QAM	21.56	21.37	21.31				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	26.04	25.93	25.98	23.92	0.2466		
50	1	131		25.97	25.89	25.79				
50	64	32		25.84	25.92	25.76				
50	1	0		22.51	22.44	22.52				
50	1	132		22.38	22.35	22.24				
50	128	0		25.42	25.39	25.36				
50	1	1	QPSK	25.96	25.91	25.98				
50	1	131		25.81	25.82	25.76				
50	64	32		25.86	25.92	25.76				
50	1	0		22.54	22.48	22.49				
50	1	132		22.45	22.33	22.25				
50	128	0		24.93	24.94	24.82				
50	1	1	16-QAM	25.07	25.01	25.00	22.95	0.1972		
50	1	1	64-QAM	23.55	23.26	23.38				
50	1	1	256-QAM	21.54	21.43	21.44				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	26.04	26.05	26.02	23.95	0.2483		
60	1	160		25.96	25.94	25.88				
60	81	40		25.94	25.91	25.84				
60	1	0		22.60	22.44	22.60				
60	1	161		22.48	22.39	22.40				
60	162	0		25.43	25.42	25.36				
60	1	1	QPSK	26.07	25.96	26.07				
60	1	160		25.97	25.84	25.92				
60	81	40		25.91	25.93	25.84				
60	1	0		22.64	22.55	22.53				
60	1	161		22.53	22.46	22.43				
60	162	0		24.95	24.95	24.89				
60	1	1	16-QAM	25.12	25.00	25.39	23.27	0.2123		
60	1	1	64-QAM	23.47	23.52	23.55				
60	1	1	256-QAM	21.36	21.53	21.43				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	26.14	26.03	25.73	24.02	0.2523		
70	1	187		25.80	25.98	25.71				
70	90	45		25.85	25.94	25.72				
70	1	0		22.66	22.45	22.24				
70	1	188		22.39	22.48	22.18				
70	180	0		25.45	25.38	25.20				
70	1	1	QPSK	26.11	25.99	25.75				
70	1	187		25.74	25.95	25.94				
70	90	45		25.91	25.85	25.85				
70	1	0		22.54	22.62	22.26				
70	1	188		22.29	22.57	22.43				
70	180	0		24.91	24.94	24.84				
70	1	1	16-QAM	25.19	24.95	24.79	23.07	0.2028		
70	1	1	64-QAM	23.33	23.42	23.62				
70	1	1	256-QAM	21.64	21.35	21.31				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	26.02	25.97	26.00	23.92	0.2466		
80	1	215		25.92	26.00	26.04				
80	108	54		25.91	25.89	25.90				
80	1	0		22.53	22.47	22.54				
80	1	216		22.44	22.53	22.63				
80	216	0		25.38	25.32	25.46				
80	1	1	QPSK	26.04	25.91	25.97				
80	1	215		25.92	25.96	26.03				
80	108	54		25.89	25.93	25.90				
80	1	0		22.59	22.46	22.51				
80	1	216		22.53	22.35	22.56				
80	216	0		24.88	24.92	24.97				
80	1	1	16-QAM	25.10	24.96	24.76	22.98	0.1986		
80	1	1	64-QAM	23.51	23.70	23.23				
80	1	1	256-QAM	21.54	21.51	21.53				
Limit	EIRP < 1W			Result			Pass			



Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	26.12	26.08	26.04	24.06	0.2547		
90	1	243		26.02	26.08	26.18				
90	120	60		25.97	25.96	25.98				
90	1	0		22.64	22.62	22.55				
90	1	244		22.52	22.65	22.69				
90	243	0		25.41	25.44	25.47				
90	1	1	QPSK	26.18	26.02	25.96				
90	1	243		25.99	26.07	26.16				
90	120	60		25.94	25.93	25.99				
90	1	0		22.68	22.63	22.52				
90	1	244		22.54	22.65	22.74				
90	243	0		24.92	24.96	25.00				
90	1	1	16-QAM	25.25	25.13	25.00	23.13	0.2056		
90	1	1	64-QAM	23.89	23.52	23.56				
90	1	1	256-QAM	21.63	21.52	21.59				
Limit	EIRP < 1W			Result			Pass			

Part 27Q NR n78 Maximum Average Power [dBm] (GT - LC = -2.12 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	-	26.13	-	24.07	0.2553		
100	1	271		-	26.13	-				
100	135	67		-	25.94	-				
100	1	0		-	22.66	-				
100	1	272		-	22.65	-				
100	270	0		-	25.48	-				
100	1	1	QPSK	-	26.19	-				
100	1	271		-	26.15	-				
100	135	67		-	25.97	-				
100	1	0		-	22.78	-				
100	1	272		-	22.79	-				
100	270	0		-	24.97	-				
100	1	1	16-QAM	-	25.17	-	23.05	0.2018		
100	1	1	64-QAM	-	23.77	-				
100	1	1	256-QAM	-	21.69	-				
Limit	EIRP < 1W			Result			Pass			



Part90s NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	24.69	24.76	24.75	16.16	0.0413		
5	1	23		24.85	24.80	24.83				
5	12	6		24.76	24.75	24.74				
5	1	0		24.21	24.23	24.20				
5	1	24		24.31	24.27	24.28				
5	25	0		24.24	24.28	24.28				
5	1	1	QPSK	24.72	24.67	24.80				
5	1	23		24.73	24.79	24.82				
5	12	6		24.75	24.81	24.81				
5	1	0		23.71	23.67	23.75				
5	1	24		23.77	23.75	23.79				
5	25	0		23.73	23.80	23.73				
5	1	1	16-QAM	23.82	23.74	23.85	15.16	0.0328		
5	1	1	64-QAM	22.14	22.19	22.36				
5	1	1	256-QAM	20.30	20.33	20.25				
Limit	Power < 100W			Result			Pass			

Part90s NR n26 Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.68	-	16.12	0.0409		
10	1	50		-	24.80	-				
10	25	12		-	24.80	-				
10	1	0		-	24.14	-				
10	1	51		-	24.31	-				
10	50	0		-	24.27	-				
10	1	1	QPSK	-	24.71	-				
10	1	50		-	24.81	-				
10	25	12		-	24.79	-				
10	1	0		-	23.73	-				
10	1	51		-	23.71	-				
10	50	0		-	23.75	-				
10	1	1	16-QAM	-	23.73	-	15.04	0.0319		
10	1	1	64-QAM	-	22.33	-				
10	1	1	256-QAM	-	20.02	-				
Limit	Power < 100W			Result			Pass			



NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
5	1	1	PI/2 BPSK	-	24.78	-	16.15	0.0412		
5	1	23		-	24.81	-				
5	12	6		-	24.84	-				
5	1	0		-	24.28	-				
5	1	24		-	24.28	-				
5	25	0		-	24.32	-				
5	1	1	QPSK	-	24.77	-				
5	1	23		-	24.82	-				
5	12	6		-	24.80	-				
5	1	0		-	23.80	-				
5	1	24		-	23.75	-				
5	25	0		-	23.75	-				
5	1	1	16-QAM	-	23.61	-	14.92	0.031		
5	1	1	64-QAM	-	22.34	-				
5	1	1	256-QAM	-	20.24	-				
Limit	Reporting only			Result			N/A			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
10	1	1	PI/2 BPSK	-	24.79	-	16.15	0.0412		
10	1	50		-	24.82	-				
10	25	12		-	24.81	-				
10	1	0		-	24.32	-				
10	1	51		-	24.29	-				
10	50	0		-	24.24	-				
10	1	1	QPSK	-	24.75	-				
10	1	50		-	24.84	-				
10	25	12		-	24.78	-				
10	1	0		-	23.75	-				
10	1	51		-	23.79	-				
10	50	0		-	23.78	-				
10	1	1	16-QAM	-	23.77	-	15.08	0.0322		
10	1	1	64-QAM	-	22.39	-				
10	1	1	256-QAM	-	20.18	-				
Limit	Reporting only			Result			N/A			



NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
15	1	1	PI/2 BPSK	-	24.76	-	16.22	0.0419		
15	1	77		-	24.86	-				
15	36	18		-	24.82	-				
15	1	0		-	24.17	-				
15	1	78		-	24.32	-				
15	75	0		-	24.34	-				
15	1	1	QPSK	-	24.74	-				
15	1	77		-	24.91	-				
15	36	18		-	24.81	-				
15	1	0		-	23.73	-				
15	1	78		-	23.89	-				
15	75	0		-	23.83	-				
15	1	1	16-QAM	-	23.82	-	15.13	0.0326		
15	1	1	64-QAM	-	22.30	-				
15	1	1	256-QAM	-	20.10	-				
Limit	Reporting only			Result			N/A			

NR n26 Straddle Channel Maximum Average Power [dBm] (GT - LC = -6.54 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP		
20	1	1	PI/2 BPSK	-	24.67	-	16.1	0.0407		
20	1	104		-	24.79	-				
20	50	25		-	24.76	-				
20	1	0		-	24.35	-				
20	1	105		-	24.29	-				
20	100	0		-	24.18	-				
20	1	1	QPSK	-	24.02	-				
20	1	104		-	24.07	-				
20	50	25		-	24.06	-				
20	1	0		-	23.66	-				
20	1	105		-	23.84	-				
20	100	0		-	23.00	-				
20	1	1	16-QAM	-	22.99	-	14.3	0.0269		
20	1	1	64-QAM	-	21.40	-				
20	1	1	256-QAM	-	19.61	-				
Limit	Reporting only			Result			N/A			



<TxD Mode>

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
10	1	1	BPSK	25.07	24.91	24.74	24.54	24.62	24.53	27.82	27.78	27.65	30.39	1.094		
10	1	22		25.13	24.93	24.73	24.46	24.53	24.42	27.82	27.74	27.59				
10	12	6		25.15	24.99	24.67	24.48	24.64	24.46	27.84	27.83	27.58				
10	1	1	QPSK	24.66	24.43	24.29	24.00	24.12	24.00	27.35	27.29	27.16			30.13	1.0304
10	1	22		24.53	24.56	24.08	23.99	24.11	23.94	27.28	27.35	27.02				
10	12	6		24.73	24.50	24.05	24.00	24.12	23.89	27.39	27.32	26.98				
10	1	1	16-QAM	24.85	24.28	24.31	24.12	24.30	24.10	27.51	27.30	27.22	30.13	1.0304		
10	1	22		24.94	24.26	24.20	24.16	24.31	24.01	27.58	27.30	27.12				
10	12	6		24.59	24.44	24.07	23.99	24.14	23.93	27.31	27.30	27.01				
Limit	Power < 2W			Result									Pass			

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
15	1	1	BPSK	25.21	24.84	24.63	24.59	24.66	24.59	27.92	27.76	27.62	30.47	1.1143		
15	1	36		25.16	24.96	24.72	24.59	24.62	24.53	27.89	27.80	27.64				
15	18	9		25.22	24.91	24.68	24.52	24.61	24.69	27.89	27.77	27.70				
15	1	1	QPSK	24.61	24.40	24.15	24.09	24.04	24.15	27.37	27.23	27.16			29.98	0.9954
15	1	36		24.62	24.53	24.13	24.04	24.09	23.99	27.35	27.33	27.07				
15	18	9		24.65	24.46	24.20	24.04	24.17	24.18	27.37	27.33	27.20				
15	1	1	16-QAM	24.71	24.32	24.38	24.10	23.84	23.93	27.43	27.10	27.17	29.98	0.9954		
15	1	36		24.71	24.53	24.04	24.02	23.94	24.14	27.39	27.26	27.10				
15	18	9		24.63	24.55	24.29	24.11	24.11	24.17	27.39	27.35	27.24				
Limit	Power < 2W			Result									Pass			



NR n41 Maximum Average Power [dBm], DG = 2.55 dBi														
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	BPSK	25.09	24.80	24.71	24.40	24.68	24.82	27.77	27.75	27.78	30.38	1.0914
20	1	49		25.12	24.98	24.76	24.49	24.64	24.55	27.83	27.82	27.67		
20	25	12		25.12	24.93	24.72	24.40	24.64	24.62	27.79	27.80	27.68		
20	1	1	QPSK	24.56	24.49	24.14	23.89	24.17	24.14	27.25	27.34	27.15		
20	1	49		24.55	24.59	24.21	23.90	24.19	24.02	27.25	27.40	27.13		
20	25	12		24.63	24.44	24.20	23.89	24.15	24.13	27.29	27.31	27.18		
20	1	1	16-QAM	24.72	24.35	24.33	24.17	24.27	24.01	27.46	27.32	27.18	30.01	1.0023
20	1	49		24.55	24.44	24.51	23.82	24.30	23.88	27.21	27.38	27.22		
20	25	12		24.66	24.42	24.23	23.95	24.13	24.15	27.33	27.29	27.20		
Limit	Power < 2W			Result									Pass	



NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
30	1	1	BPSK	25.08	24.92	24.65	24.55	24.70	24.73	27.83	27.82	27.70	30.44	1.1066		
30	1	76		25.05	25.01	24.71	24.50	24.72	24.63	27.79	27.88	27.68				
30	36	18		25.19	24.97	24.76	24.55	24.68	24.75	27.89	27.84	27.77				
30	1	1	QPSK	24.69	24.29	24.24	23.97	24.01	24.14	27.36	27.16	27.20			30.01	1.0023
30	1	76		24.47	24.44	24.36	23.97	24.21	24.21	27.24	27.34	27.30				
30	36	18		24.66	24.48	24.26	24.01	24.18	24.20	27.36	27.34	27.24				
30	1	1	16-QAM	24.54	24.36	24.22	23.87	24.00	24.15	27.23	27.19	27.20	30.01	1.0023		
30	1	76		24.50	24.62	24.37	24.11	24.28	24.27	27.32	27.46	27.33				
30	36	18		24.67	24.49	24.21	24.05	24.20	24.23	27.38	27.36	27.23				
Limit	Power < 2W			Result									Pass			

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
40	1	1	BPSK	25.13	25.03	24.82	24.54	24.58	24.63	27.86	27.82	27.74	30.41	1.099		
40	1	104		24.92	24.82	24.63	24.40	24.60	24.51	27.68	27.72	27.58				
40	50	25		25.12	24.95	24.75	24.36	24.63	24.68	27.77	27.80	27.73				
40	1	1	QPSK	24.66	24.43	24.32	23.88	24.05	24.18	27.30	27.25	27.26			29.97	0.9931
40	1	104		24.48	24.48	24.28	23.84	24.18	24.21	27.18	27.34	27.26				
40	50	25		24.64	24.42	24.26	23.90	24.18	24.17	27.30	27.31	27.23				
40	1	1	16-QAM	24.66	24.37	24.43	23.86	23.93	24.27	27.29	27.17	27.36	29.97	0.9931		
40	1	104		24.69	24.27	24.35	24.12	23.97	24.24	27.42	27.13	27.31				
40	50	25		24.58	24.49	24.24	23.91	24.16	24.20	27.27	27.34	27.23				
Limit	Power < 2W			Result									Pass			



NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
50	1	1	BPSK	25.16	24.38	24.83	24.61	24.78	24.72	27.90	27.59	27.79	30.45	1.1092		
50	1	131		25.10	24.86	24.84	24.57	24.74	24.78	27.85	27.81	27.82				
50	64	32		25.11	24.98	24.78	24.57	24.67	24.75	27.86	27.84	27.78				
50	1	1	QPSK	24.74	24.62	24.26	23.96	24.01	24.11	27.38	27.34	27.20			30.12	1.028
50	1	131		24.59	24.42	24.38	23.92	24.18	24.17	27.28	27.31	27.29				
50	64	32		24.65	24.49	24.29	24.01	24.17	24.21	27.35	27.34	27.26				
50	1	1	16-QAM	24.51	24.63	24.18	24.03	24.48	24.40	27.29	27.57	27.30	30.12	1.028		
50	1	131		24.54	24.17	24.24	24.23	24.05	24.29	27.40	27.12	27.28				
50	64	32		24.65	24.49	24.33	24.03	24.13	24.27	27.36	27.32	27.31				
Limit	Power < 2W			Result									Pass			

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
60	1	1	BPSK	25.24	25.14	24.87	24.53	24.64	24.73	27.91	27.91	27.81	30.46	1.1117		
60	1	160		25.02	24.65	24.63	24.31	24.77	24.68	27.69	27.72	27.67				
60	81	40		25.13	24.96	24.69	24.40	24.64	24.57	27.79	27.81	27.64				
60	1	1	QPSK	24.64	24.69	24.26	23.98	24.14	24.17	27.33	27.43	27.23			30.16	1.0375
60	1	160		24.55	24.27	24.37	23.99	24.15	24.07	27.29	27.22	27.23				
60	81	40		24.57	24.48	24.26	23.89	24.14	24.10	27.25	27.32	27.19				
60	1	1	16-QAM	24.49	24.67	24.17	23.64	24.52	24.00	27.10	27.61	27.10	30.16	1.0375		
60	1	160		24.64	24.34	24.12	24.14	24.36	23.82	27.41	27.36	26.98				
60	81	40		24.59	24.47	24.28	23.94	24.19	24.17	27.29	27.34	27.24				
Limit	Power < 2W			Result									Pass			



NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
70	1	1	BPSK	25.17	25.11	25.00	24.60	24.66	24.84	27.90	27.90	27.93	30.48	1.1169		
70	1	187		25.15	24.83	24.70	24.62	24.74	24.51	27.90	27.80	27.62				
70	90	45		25.09	24.95	24.75	24.48	24.62	24.50	27.81	27.80	27.64				
70	1	1	QPSK	24.67	24.65	24.34	23.92	24.17	24.21	27.32	27.43	27.29			30.06	1.0139
70	1	187		24.70	24.42	24.19	24.12	24.27	23.99	27.43	27.36	27.10				
70	90	45		24.60	24.48	24.27	24.00	24.16	23.99	27.32	27.33	27.14				
70	1	1	16-QAM	24.78	24.75	24.78	24.03	24.24	24.18	27.43	27.51	27.50	30.06	1.0139		
70	1	187		24.75	24.42	24.63	24.15	24.32	23.99	27.47	27.38	27.33				
70	90	45		24.65	24.47	24.24	24.00	24.18	24.00	27.35	27.34	27.13				
Limit	Power < 2W			Result									Pass			

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
80	1	1	BPSK	24.78	25.23	25.19	24.18	24.67	24.70	27.50	27.97	27.96	30.52	1.1272		
80	1	215		24.85	24.83	24.75	24.50	24.67	24.63	27.69	27.76	27.70				
80	108	54		25.03	24.99	24.79	24.41	24.65	24.60	27.74	27.83	27.71				
80	1	1	QPSK	24.76	24.72	24.62	24.06	24.16	24.21	27.43	27.46	27.43			30.1	1.0233
80	1	215		24.42	24.33	24.43	24.04	24.20	24.16	27.24	27.28	27.31				
80	108	54		24.53	24.48	24.26	23.93	24.18	24.12	27.25	27.34	27.20				
80	1	1	16-QAM	24.67	24.70	24.65	23.73	24.27	24.42	27.24	27.50	27.55	30.1	1.0233		
80	1	215		24.54	24.01	24.38	23.71	24.14	24.16	27.16	27.09	27.28				
80	108	54		24.56	24.48	24.27	23.89	24.13	24.09	27.25	27.32	27.19				
Limit	Power < 2W			Result									Pass			



NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
90	1	1	BPSK	25.22	24.65	25.03	24.56	24.15	24.88	27.91	27.42	27.97	30.52	1.1272		
90	1	243		24.96	24.89	24.96	24.63	24.73	24.63	27.81	27.82	27.81				
90	120	60		25.05	24.99	24.81	24.49	24.64	24.75	27.79	27.83	27.79				
90	1	1	QPSK	24.74	24.88	24.60	24.08	24.17	24.32	27.43	27.55	27.47			30.19	1.0447
90	1	243		24.44	24.51	24.55	24.15	24.21	24.31	27.31	27.37	27.44				
90	120	60		24.56	24.48	24.30	23.98	24.11	24.23	27.29	27.31	27.28				
90	1	1	16-QAM	24.84	24.85	24.88	24.03	24.34	24.37	27.46	27.61	27.64	30.19	1.0447		
90	1	243		24.50	24.55	24.35	24.01	24.38	24.34	27.27	27.48	27.36				
90	120	60		24.56	24.52	24.35	23.95	24.15	24.27	27.28	27.35	27.32				
Limit	Power < 2W			Result									Pass			

NR n41 Maximum Average Power [dBm], DG = 2.55 dBi																
BW	RB	RB	Mod	Antenna 2			Antenna 0			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
100	1	1	BPSK	25.31	25.26	25.01	24.70	24.81	24.95	28.03	28.05	27.99	30.6	1.1482		
100	1	271		24.86	25.02	24.91	24.61	24.86	24.74	27.75	27.95	27.84				
100	135	67		25.03	25.00	24.79	24.37	24.65	24.67	27.72	27.84	27.74				
100	1	1	QPSK	24.82	24.81	24.60	24.08	24.23	24.36	27.48	27.54	27.49			30.2	1.0471
100	1	271		24.28	24.54	24.35	24.05	24.39	24.20	27.18	27.48	27.29				
100	135	67		24.54	24.51	24.31	23.89	24.15	24.20	27.24	27.34	27.27				
100	1	1	16-QAM	24.91	24.91	24.66	24.35	24.24	24.36	27.65	27.60	27.52	30.2	1.0471		
100	1	271		24.07	24.46	24.55	23.83	24.22	24.33	26.96	27.35	27.45				
100	135	67		24.59	24.55	24.30	23.89	24.19	24.23	27.26	27.38	27.28				
Limit	Power < 2W			Result									Pass			



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	BPSK	25.40	24.99	25.06	25.55	25.87	25.91	28.49	28.46	28.52	28.9	0.7762
10	1	22		25.29	25.06	24.96	25.54	25.86	25.77	28.43	28.49	28.39		
10	12	6		25.32	25.02	24.93	25.70	25.91	25.76	28.52	28.50	28.38		
10	1	1	QPSK	25.30	25.08	24.95	25.74	25.91	25.76	28.54	28.53	28.38		
10	1	22		25.26	25.05	24.89	25.68	25.83	25.70	28.49	28.47	28.32		
10	12	6		25.30	25.07	25.04	25.65	25.77	25.54	28.49	28.44	28.31		
10	1	1	16-QAM	24.22	23.71	24.07	24.56	24.95	24.73	27.40	27.38	27.42	28.05	0.6383
10	1	22		24.46	23.97	24.05	24.88	24.37	24.51	27.69	27.18	27.30		
10	12	6		24.38	24.08	24.01	24.74	24.88	24.86	27.57	27.51	27.47		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
15	1	1	BPSK	25.38	25.10	25.09	25.76	25.84	25.82	28.58	28.50	28.48	28.97	0.7889		
15	1	36		25.31	25.10	25.14	25.74	25.94	25.81	28.54	28.55	28.50				
15	18	9		25.32	25.11	25.09	25.77	25.79	25.81	28.56	28.47	28.48				
15	1	1	QPSK	25.43	24.98	25.20	25.77	25.74	25.62	28.61	28.39	28.43			28.07	0.6412
15	1	36		25.28	25.05	25.19	25.62	25.85	25.82	28.46	28.48	28.53				
15	18	9		25.30	25.14	25.14	25.63	25.83	25.79	28.48	28.51	28.49				
15	1	1	16-QAM	24.45	23.97	24.42	24.60	24.87	24.75	27.54	27.45	27.60	0.6412			
15	1	36		24.42	23.95	23.95	24.67	25.10	24.64	27.56	27.57	27.32				
15	18	9		24.46	24.08	24.09	24.92	24.83	24.86	27.71	27.48	27.50				
Limit	EIRP < 1W			Result									Pass			



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	BPSK	25.48	25.15	25.18	25.59	26.10	25.92	28.55	28.66	28.58	29.06	0.8054
20	1	49		25.35	25.13	25.22	25.70	25.87	25.91	28.54	28.53	28.59		
20	25	12		25.39	25.13	25.15	25.77	25.88	25.75	28.59	28.53	28.47		
20	1	1	QPSK	25.53	25.04	25.02	25.84	25.91	25.58	28.70	28.51	28.32		
20	1	49		25.46	25.10	25.21	25.63	25.86	25.89	28.56	28.51	28.57		
20	25	12		25.43	25.13	25.12	25.73	25.84	25.69	28.59	28.51	28.42		
20	1	1	16-QAM	24.58	24.21	24.08	25.01	24.85	24.57	27.81	27.55	27.34	28.23	0.6653
20	1	49		24.50	24.26	24.37	24.60	24.45	25.30	27.56	27.37	27.87		
20	25	12		24.42	24.15	24.19	24.78	24.82	24.72	27.61	27.51	27.47		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
25	1	1	BPSK	25.44	25.10	25.17	25.80	25.54	26.07	28.63	28.34	28.65	29.04	0.8017
25	1	63		25.51	25.15	25.15	25.75	25.87	25.73	28.64	28.54	28.46		
25	32	16		25.49	25.13	25.16	25.83	25.86	25.73	28.67	28.52	28.46		
25	1	1	QPSK	25.45	25.19	25.13	25.84	25.88	25.69	28.66	28.56	28.43		
25	1	63		25.52	25.27	25.21	25.82	25.80	25.83	28.68	28.55	28.54		
25	32	16		25.50	25.16	25.14	25.81	25.85	25.69	28.67	28.53	28.43		
25	1	1	16-QAM	24.37	23.97	24.25	24.78	24.67	24.70	27.59	27.34	27.49	28.05	0.6383
25	1	63		24.34	24.09	24.10	24.76	24.82	24.52	27.57	27.48	27.33		
25	32	16		24.47	24.22	24.16	24.88	24.92	24.70	27.69	27.59	27.45		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	BPSK	25.28	24.97	25.28	25.66	25.95	25.93	28.48	28.50	28.63	29.06	0.8054
30	1	76		25.41	25.18	25.09	25.88	25.93	26.21	28.66	28.58	28.70		
30	36	18		25.38	25.16	25.26	25.68	25.84	25.86	28.54	28.52	28.58		
30	1	1	QPSK	25.44	25.15	25.16	25.66	25.65	25.76	28.56	28.42	28.48		
30	1	76		25.44	25.19	25.17	25.52	25.77	25.81	28.49	28.50	28.51		
30	36	18		25.36	25.19	25.20	25.64	25.88	25.78	28.51	28.56	28.51		
30	1	1	16-QAM	24.13	24.00	24.16	24.40	25.02	24.77	27.28	27.55	27.49	27.94	0.6223
30	1	76		24.02	24.24	24.12	24.61	24.74	24.82	27.34	27.51	27.49		
30	36	18		24.35	24.19	24.25	24.71	24.87	24.87	27.54	27.55	27.58		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
40	1	1	BPSK	25.52	25.16	25.15	25.86	25.95	25.54	28.70	28.58	28.36	29.06	0.8054		
40	1	104		25.32	25.35	25.20	25.50	25.64	25.65	28.42	28.51	28.44				
40	50	25		25.42	25.13	25.17	25.73	25.80	25.75	28.59	28.49	28.48				
40	1	1	QPSK	25.52	25.04	25.26	25.66	25.76	25.85	28.60	28.43	28.58			28.16	0.6546
40	1	104		25.52	25.29	25.05	25.56	25.77	25.40	28.55	28.55	28.24				
40	50	25		25.47	25.18	25.16	25.73	25.84	25.77	28.61	28.53	28.49				
40	1	1	16-QAM	23.95	23.76	24.24	25.29	24.63	24.46	27.68	27.23	27.36	28.16	0.6546		
40	1	104		24.13	24.29	23.84	24.79	25.23	24.60	27.48	27.80	27.25				
40	50	25		24.40	24.10	23.99	24.71	24.85	24.86	27.57	27.50	27.46				
Limit	EIRP < 1W			Result									Pass			



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	BPSK	25.58	24.92	25.30	25.86	25.73	25.97	28.73	28.35	28.66	29.09	0.811
50	1	131		25.13	25.35	25.15	25.62	25.90	25.83	28.39	28.64	28.51		
50	64	32		25.32	25.11	25.22	25.64	25.84	25.95	28.49	28.50	28.61		
50	1	1	QPSK	25.35	24.95	25.16	25.68	25.65	25.99	28.53	28.32	28.61		
50	1	131		25.06	25.29	25.23	25.83	25.69	25.94	28.47	28.50	28.61		
50	64	32		25.30	25.05	25.13	25.67	25.84	25.82	28.50	28.47	28.50		
50	1	1	16-QAM	24.26	23.75	24.29	24.61	24.78	24.92	27.45	27.31	27.63	28.01	0.6324
50	1	131		24.02	24.07	24.01	25.15	25.14	25.11	27.63	27.65	27.61		
50	64	32		24.25	24.10	24.14	24.65	24.88	24.80	27.46	27.52	27.49		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 1			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	BPSK	25.60	24.95	25.36	25.79	25.79	25.65	28.71	28.40	28.52	29.07	0.8072
60	1	160		25.17	25.38	25.04	25.58	25.91	25.79	28.39	28.66	28.44		
60	81	40		25.37	25.14	25.11	25.72	25.87	25.79	28.56	28.53	28.47		
60	1	1	QPSK	25.32	24.74	25.41	25.77	25.60	25.46	28.56	28.20	28.45		
60	1	160		25.31	25.32	25.05	25.96	25.88	26.11	28.66	28.62	28.62		
60	81	40		25.37	25.17	25.10	25.75	25.86	25.76	28.57	28.54	28.45		
60	1	1	16-QAM	24.43	24.05	24.31	24.75	24.90	24.70	27.60	27.51	27.52	28	0.631
60	1	160		23.98	24.35	23.97	24.72	24.89	24.61	27.38	27.64	27.31		
60	81	40		24.43	24.14	24.18	24.75	24.84	24.76	27.60	27.51	27.49		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	BPSK	25.52	24.83	25.45	26.09	25.97	25.81	28.82	28.45	28.64	29.18	0.8279
70	1	187		25.12	25.40	25.17	25.62	25.77	25.62	28.39	28.60	28.41		
70	90	45		25.33	25.12	25.08	25.65	25.84	25.65	28.50	28.51	28.38		
70	1	1	QPSK	25.56	24.78	25.42	25.82	25.99	25.70	28.70	28.44	28.57		
70	1	187		25.13	25.50	25.06	25.54	25.82	25.65	28.35	28.67	28.38		
70	90	45		25.35	25.08	25.11	25.62	25.78	25.64	28.50	28.45	28.39		
70	1	1	16-QAM	24.38	23.59	24.27	24.55	24.72	24.73	27.48	27.20	27.52	27.96	0.6252
70	1	187		23.65	24.27	24.25	25.04	24.89	24.89	27.41	27.60	27.59		
70	90	45		24.34	24.13	24.13	24.59	24.82	24.73	27.48	27.50	27.45		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	BPSK	25.45	24.91	25.55	26.03	25.97	26.02	28.76	28.48	28.80	29.16	0.8241
80	1	215		25.18	25.42	25.23	25.55	25.78	25.84	28.38	28.61	28.56		
80	108	54		25.37	25.14	25.17	25.73	25.82	25.82	28.56	28.50	28.52		
80	1	1	QPSK	25.60	24.79	25.39	25.67	25.78	25.92	28.65	28.32	28.67		
80	1	215		25.26	25.35	25.12	25.89	25.82	25.77	28.60	28.60	28.47		
80	108	54		25.38	25.07	25.20	25.77	25.78	25.77	28.59	28.45	28.50		
80	1	1	16-QAM	24.41	23.68	24.70	24.85	24.32	25.07	27.65	27.02	27.90	28.26	0.6699
80	1	215		24.24	24.29	24.36	24.75	24.52	24.78	27.51	27.42	27.59		
80	108	54		24.39	24.13	24.16	24.73	24.82	24.76	27.57	27.50	27.48		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
90	1	1	BPSK	25.63	25.02	25.51	25.86	25.79	26.12	28.76	28.43	28.84	29.2	0.8318		
90	1	243		25.11	25.48	25.25	25.71	25.78	25.85	28.43	28.64	28.57				
90	120	60		25.28	25.15	25.30	25.67	25.83	25.80	28.49	28.51	28.57				
90	1	1	QPSK	25.58	24.92	25.59	25.93	25.78	25.97	28.77	28.38	28.79			28.07	0.6412
90	1	243		25.00	25.36	25.36	25.84	25.91	26.03	28.45	28.65	28.72				
90	120	60		25.28	25.12	25.26	25.62	25.79	25.79	28.46	28.48	28.54				
90	1	1	16-QAM	24.20	24.00	24.80	24.67	24.79	24.60	27.45	27.42	27.71	28.07	0.6412		
90	1	243		23.85	24.11	24.66	24.53	24.70	24.41	27.21	27.43	27.55				
90	120	60		24.27	24.13	24.33	24.63	24.86	24.83	27.46	27.52	27.60				
Limit	EIRP < 1W			Result									Pass			

Part270 NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
100	1	1	BPSK	25.65	25.11	25.61	25.97	25.75	26.06	28.82	28.45	28.85	29.28	0.8472		
100	1	271		24.91	25.49	25.35	25.91	25.97	25.89	28.45	28.75	28.64				
100	135	67		25.30	25.09	25.29	25.72	25.81	25.74	28.53	28.48	28.53				
100	1	1	QPSK	25.64	25.17	25.73	25.91	25.89	26.08	28.79	28.56	28.92			28.38	0.6887
100	1	271		25.04	25.60	25.30	25.82	26.04	25.86	28.46	28.84	28.60				
100	135	67		25.26	25.13	25.27	25.67	25.79	25.69	28.48	28.48	28.50				
100	1	1	16-QAM	24.74	24.25	24.57	25.18	25.13	24.93	27.98	27.72	27.76	28.38	0.6887		
100	1	271		24.14	24.73	24.39	25.19	25.28	25.09	27.71	28.02	27.76				
100	135	67		24.35	24.18	24.31	24.71	24.81	24.72	27.54	27.52	27.53				
Limit	EIRP < 1W			Result									Pass			



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	QPSK	25.37	25.18	24.70	25.67	25.71	25.55	28.53	28.46	28.16	28.41	0.6934
10	1	22		25.19	24.97	24.60	25.36	25.40	25.55	28.29	28.20	28.11		
10	12	6		25.24	25.04	24.67	25.33	25.52	25.34	28.30	28.30	28.03		
10	1	1		25.24	25.08	24.75	25.32	25.39	25.39	28.29	28.25	28.09		
10	1	22		25.12	24.90	24.58	25.39	25.43	25.52	28.27	28.18	28.09		
10	12	6		25.17	25.06	24.64	25.39	25.58	25.39	28.29	28.34	28.04		
10	1	1	16-QAM	23.64	24.05	23.65	24.45	24.65	24.28	27.07	27.37	26.99	27.31	0.5383
10	1	22	64-QAM	24.21	24.20	23.41	24.46	24.58	24.60	27.35	27.40	27.06		
10	12	6	256-QAM	24.27	23.98	23.69	24.56	24.67	24.43	27.43	27.35	27.09		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	QPSK	25.25	25.31	25.00	25.63	25.74	25.75	28.45	28.54	28.40	28.42	0.695
15	1	36		25.10	25.00	24.81	25.32	25.77	25.77	28.22	28.41	28.33		
15	18	9		25.21	25.18	24.89	25.49	25.60	25.69	28.36	28.41	28.32		
15	1	1		25.30	25.10	24.90	25.50	25.65	25.69	28.41	28.39	28.32		
15	1	36		25.19	25.07	24.77	25.56	25.54	25.63	28.39	28.32	28.23		
15	18	9		25.20	25.17	24.90	25.43	25.56	25.67	28.33	28.38	28.31		
15	1	1	16-QAM	24.10	24.37	23.80	24.37	24.48	25.06	27.25	27.44	27.49	27.37	0.5458
15	1	36	64-QAM	23.67	24.43	23.48	24.45	24.05	25.05	27.09	27.25	27.35		
15	18	9	256-QAM	24.24	24.18	23.91	24.46	24.50	24.77	27.36	27.35	27.37		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	QPSK	25.43	25.19	24.97	25.78	25.60	25.36	28.62	28.41	28.18	28.54	0.7145
20	1	49		25.22	24.99	24.71	25.49	25.72	25.90	28.37	28.38	28.36		
20	25	12		25.29	25.18	24.85	25.63	25.56	25.60	28.47	28.38	28.25		
20	1	1		25.39	25.17	24.96	25.89	25.70	25.50	28.66	28.45	28.25		
20	1	49		25.31	25.03	24.69	25.57	25.51	25.64	28.45	28.29	28.20		
20	25	12		25.28	25.11	24.87	25.66	25.56	25.56	28.48	28.35	28.24		
20	1	1	16-QAM	24.26	24.36	23.85	24.45	24.85	24.31	27.37	27.62	27.10	27.57	0.5715
20	1	49	64-QAM	24.51	24.08	23.79	24.85	24.59	24.70	27.69	27.35	27.28		
20	25	12	256-QAM	24.21	24.14	23.89	24.63	24.56	24.44	27.44	27.37	27.18		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
25	1	1	QPSK	25.42	25.28	25.06	25.83	25.60	25.36	28.64	28.45	28.22	28.52	0.7112
25	1	63		25.30	25.11	24.70	25.69	25.55	25.61	28.51	28.35	28.19		
25	32	16		25.33	25.15	24.84	25.66	25.54	25.47	28.51	28.36	28.18		
25	1	1		25.39	25.17	24.82	25.70	25.76	25.53	28.56	28.49	28.20		
25	1	63		25.37	24.94	24.64	25.63	25.63	25.66	28.51	28.31	28.19		
25	32	16		25.26	25.13	24.87	25.59	25.55	25.49	28.44	28.36	28.20		
25	1	1	16-QAM	24.09	24.10	24.25	24.72	24.84	24.80	27.43	27.50	27.54	27.51	0.5636
25	1	63	64-QAM	24.38	24.43	23.93	24.84	24.46	24.77	27.63	27.46	27.38		
25	32	16	256-QAM	24.26	24.12	23.78	24.66	24.53	24.45	27.47	27.34	27.14		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	25.33	25.39	25.07	25.48	25.74	25.76	28.42	28.58	28.44	28.46	0.7015
30	1	76		25.16	25.03	24.86	25.56	25.67	25.68	28.37	28.37	28.30		
30	36	18		25.26	25.26	25.11	25.48	25.72	25.73	28.38	28.51	28.44		
30	1	1		25.33	25.29	24.98	25.48	25.77	25.61	28.42	28.55	28.32		
30	1	76		25.19	25.07	24.77	25.39	25.65	25.70	28.30	28.38	28.27		
30	36	18		25.26	25.21	25.09	25.49	25.70	25.67	28.39	28.47	28.40		
30	1	1	16-QAM	24.28	24.24	23.88	24.64	24.52	24.37	27.47	27.39	27.14	27.67	0.5848
30	1	76	64-QAM	24.60	23.39	23.61	24.96	24.14	24.92	27.79	26.79	27.32		
30	36	18	256-QAM	24.25	24.27	24.06	24.53	24.67	24.73	27.40	27.48	27.42		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	25.47	25.30	24.92	25.58	25.48	25.52	28.54	28.40	28.24	28.43	0.6966
40	1	104		25.48	25.00	24.54	25.50	25.55	25.54	28.50	28.29	28.08		
40	50	25		25.39	25.24	24.92	25.65	25.63	25.60	28.53	28.45	28.28		
40	1	1		25.29	25.33	25.08	25.77	25.39	25.85	28.55	28.37	28.49		
40	1	104		25.22	24.93	24.71	25.52	25.51	25.91	28.38	28.24	28.36		
40	50	25		25.29	25.19	25.07	25.64	25.62	25.63	28.48	28.42	28.37		
40	1	1	16-QAM	24.44	24.25	23.87	24.55	24.53	24.59	27.51	27.40	27.26	27.4	0.5495
40	1	104	64-QAM	24.29	23.88	23.60	24.72	24.32	24.34	27.52	27.12	27.00		
40	50	25	256-QAM	24.33	24.16	23.96	24.67	24.60	24.50	27.51	27.40	27.25		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	25.42	25.37	25.17	25.63	25.67	25.81	28.54	28.53	28.51	28.43	0.6966
50	1	131		24.92	24.97	24.84	25.43	25.68	25.67	28.19	28.35	28.29		
50	64	32		25.18	25.16	24.95	25.53	25.59	25.59	28.37	28.39	28.29		
50	1	1		25.38	25.31	25.30	25.69	25.68	25.60	28.55	28.51	28.46		
50	1	131		25.24	25.01	24.86	25.33	25.46	25.76	28.30	28.25	28.34		
50	64	32		25.25	25.15	25.02	25.46	25.53	25.59	28.37	28.35	28.32		
50	1	1	16-QAM	24.21	24.40	23.96	24.71	24.56	24.73	27.48	27.49	27.37	27.37	0.5458
50	1	131	64-QAM	23.91	23.69	23.85	24.22	24.52	24.60	27.08	27.14	27.25		
50	64	32	256-QAM	24.16	24.18	23.97	24.54	24.62	24.62	27.36	27.42	27.32		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	QPSK	25.41	25.39	25.38	25.53	25.55	25.71	28.48	28.48	28.56	28.45	0.6998
60	1	160		25.22	25.03	24.87	25.80	25.42	25.77	28.53	28.24	28.35		
60	81	40		25.31	25.13	24.92	25.56	25.55	25.47	28.45	28.36	28.21		
60	1	1		25.47	25.35	25.25	25.48	25.58	25.84	28.49	28.48	28.57		
60	1	160		25.19	24.94	24.70	25.67	25.81	25.62	28.45	28.41	28.19		
60	81	40		25.24	25.13	24.94	25.57	25.55	25.56	28.42	28.36	28.27		
60	1	1	16-QAM	24.49	24.43	24.14	24.67	24.30	24.36	27.59	27.38	27.26	27.47	0.5585
60	1	160	64-QAM	23.86	23.71	23.78	24.89	24.53	24.50	27.42	27.15	27.17		
60	81	40	256-QAM	24.30	24.12	23.94	24.57	24.59	24.49	27.45	27.37	27.23		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	QPSK	25.52	25.39	25.34	25.62	25.64	25.55	28.58	28.53	28.46	28.46	0.7015
70	1	187		24.89	25.10	24.75	25.49	25.52	25.76	28.21	28.33	28.29		
70	90	45		25.19	25.18	24.96	25.49	25.58	25.48	28.35	28.39	28.24		
70	1	1		25.48	25.26	25.36	25.65	25.74	25.71	28.58	28.52	28.55		
70	1	187		24.94	25.00	24.73	25.63	25.59	25.70	28.31	28.32	28.25		
70	90	45		25.18	25.16	24.99	25.45	25.58	25.42	28.33	28.39	28.22		
70	1	1	16-QAM	24.57	24.06	24.00	24.73	24.44	24.20	27.66	27.26	27.11	27.54	0.5675
70	1	187	64-QAM	23.66	23.98	23.84	24.60	24.84	24.76	27.17	27.44	27.33		
70	90	45	256-QAM	24.18	24.15	24.01	24.49	24.57	24.50	27.35	27.38	27.27		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	QPSK	25.41	23.01	25.47	25.94	23.60	25.74	28.69	26.33	28.62	28.57	0.7194
80	1	215		25.01	25.08	24.80	25.76	25.83	25.81	28.41	28.48	28.34		
80	108	54		25.23	25.20	25.14	25.60	25.64	25.65	28.43	28.44	28.41		
80	1	1		25.43	25.45	25.39	25.74	25.90	25.65	28.60	28.69	28.53		
80	1	215		25.03	25.07	24.73	25.66	25.64	25.83	28.37	28.37	28.33		
80	108	54		25.22	25.20	25.13	25.61	25.64	25.63	28.43	28.44	28.40		
80	1	1	16-QAM	24.48	24.47	24.85	24.77	24.85	25.09	27.64	27.67	27.98	27.86	0.6109
80	1	215	64-QAM	24.00	23.83	23.43	24.70	24.67	24.58	27.37	27.28	27.05		
80	108	54	256-QAM	24.27	24.19	24.15	24.66	24.64	24.61	27.48	27.43	27.40		
Limit	EIRP < 1W			Result									Pass	



Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
90	1	1	QPSK	25.64	25.56	25.35	25.99	25.75	25.76	28.83	28.67	28.57	28.71	0.743
90	1	243		25.01	24.88	24.94	25.83	25.75	25.82	28.45	28.35	28.41		
90	120	60		25.18	25.17	25.23	25.52	25.60	25.67	28.36	28.40	28.47		
90	1	1		25.45	25.55	25.42	25.79	25.71	25.83	28.63	28.64	28.64		
90	1	243		25.01	24.98	24.82	25.55	25.77	25.86	28.30	28.40	28.38		
90	120	60		25.15	25.19	25.20	25.52	25.59	25.65	28.35	28.40	28.44		
90	1	1	16-QAM	24.33	24.55	24.39	24.47	24.39	24.47	27.41	27.48	27.44	27.36	0.5445
90	1	243	64-QAM	23.60	23.55	23.85	24.71	24.63	24.63	27.20	27.13	27.27		
90	120	60	256-QAM	24.16	24.16	24.21	24.51	24.60	24.72	27.35	27.40	27.48		
Limit	EIRP < 1W			Result									Pass	

Part270 NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	QPSK	-	25.46	-	-	25.78	-	-	28.63	-	28.51	0.7096
100	1	271		-	24.90	-	-	25.85	-	-	28.41	-		
100	135	67		-	25.15	-	-	25.57	-	-	28.38	-		
100	1	1		-	25.49	-	-	25.68	-	-	28.60	-		
100	1	271		-	24.86	-	-	25.94	-	-	28.44	-		
100	135	67		-	25.14	-	-	25.57	-	-	28.37	-		
100	1	1	16-QAM	-	24.53	-	-	24.83	-	-	27.69	-	27.57	0.5715
100	1	271	64-QAM	-	23.98	-	-	24.69	-	-	27.36	-		
100	135	67	256-QAM	-	24.17	-	-	24.59	-	-	27.40	-		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
10	1	1	BPSK	25.97	25.89	26.03	25.83	25.90	26.21	28.91	28.91	29.13	29.49	0.8892		
10	1	22		25.98	25.86	26.02	25.86	25.88	25.97	28.93	28.88	29.01				
10	12	6		25.91	25.90	25.87	25.92	25.83	25.88	28.93	28.88	28.89				
10	1	1	QPSK	26.00	25.85	25.89	25.96	25.84	25.92	28.99	28.86	28.92			28.35	0.6839
10	1	22		25.98	25.88	25.93	26.02	25.93	25.96	29.01	28.92	28.96				
10	12	6		25.96	25.81	25.91	25.87	25.82	25.94	28.93	28.83	28.94				
10	1	1	16-QAM	24.93	24.83	24.84	24.90	24.69	24.78	27.93	27.77	27.82	28.35	0.6839		
10	1	22		25.02	24.81	25.07	24.75	24.75	24.89	27.90	27.79	27.99				
10	12	6		24.93	24.93	24.90	24.90	25.00	24.86	27.93	27.98	27.89				
Limit	EIRP < 1W			Result									Pass			

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	BPSK	25.97	25.90	25.83	25.93	25.93	26.26	28.96	28.93	29.06	29.42	0.875
15	1	36		25.95	25.88	25.84	26.07	25.88	25.87	29.02	28.89	28.87		
15	18	9		25.98	25.94	25.89	25.99	25.86	25.93	29.00	28.91	28.92		
15	1	1	QPSK	26.07	26.00	25.87	25.92	25.81	25.82	29.01	28.92	28.86		
15	1	36		25.93	25.95	26.06	25.93	25.89	25.86	28.94	28.93	28.97		
15	18	9		25.92	25.92	25.89	25.98	25.81	25.96	28.96	28.88	28.94		
15	1	1	16-QAM	24.93	24.76	24.66	24.89	24.39	24.79	27.92	27.59	27.74	28.42	0.695
15	1	36		24.91	25.17	24.76	24.93	24.93	24.74	27.93	28.06	27.76		
15	18	9		24.95	24.93	24.86	24.93	24.94	24.96	27.95	27.95	27.92		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	BPSK	26.00	25.97	25.72	25.88	25.90	25.82	28.95	28.95	28.78	29.36	0.863
20	1	49		25.77	25.92	25.87	26.02	25.68	25.76	28.91	28.81	28.83		
20	25	12		25.95	25.95	25.89	25.98	25.89	25.91	28.98	28.93	28.91		
20	1	1	QPSK	26.05	25.87	25.80	25.92	26.02	25.92	29.00	28.96	28.87		
20	1	49		25.93	25.94	25.95	25.83	25.83	25.77	28.89	28.90	28.87		
20	25	12		25.94	25.92	25.89	25.98	25.85	25.88	28.97	28.90	28.90		
20	1	1	16-QAM	24.62	25.13	24.77	24.77	24.93	24.73	27.71	28.04	27.76	28.43	0.6966
20	1	49		24.75	24.94	24.94	24.91	25.18	24.62	27.84	28.07	27.79		
20	25	12		24.94	24.93	24.87	24.94	24.90	24.89	27.95	27.93	27.89		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
25	1	1	BPSK	26.03	25.92	25.83	25.95	25.83	25.74	29.00	28.89	28.80	29.41	0.873
25	1	63		26.00	25.86	25.87	25.77	25.85	25.76	28.90	28.87	28.83		
25	32	16		26.01	25.90	25.86	26.06	25.88	25.89	29.05	28.90	28.89		
25	1	1	QPSK	25.99	25.89	25.79	25.86	25.92	25.95	28.94	28.92	28.88		
25	1	63		25.95	25.97	25.96	26.06	25.77	25.72	29.02	28.88	28.85		
25	32	16		26.00	25.92	25.85	26.05	25.87	25.84	29.04	28.91	28.86		
25	1	1	16-QAM	24.88	24.73	24.73	24.64	24.94	24.29	27.77	27.85	27.53	28.38	0.6887
25	1	63		24.99	24.58	24.76	25.02	24.34	24.17	28.02	27.47	27.49		
25	32	16		24.92	24.92	24.86	25.03	24.91	24.85	27.99	27.93	27.87		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	BPSK	26.06	25.97	25.94	26.05	25.94	26.02	29.07	28.97	28.99	29.43	0.877
30	1	76		25.92	25.95	25.99	25.89	25.83	25.94	28.92	28.90	28.98		
30	36	18		25.97	25.93	25.91	25.95	25.86	26.00	28.97	28.91	28.97		
30	1	1	QPSK	25.98	25.96	25.90	25.75	25.99	25.93	28.88	28.99	28.93		
30	1	76		26.01	25.93	26.08	25.94	25.93	26.00	28.99	28.94	29.05		
30	36	18		25.99	25.93	25.93	25.92	25.91	26.00	28.97	28.93	28.98		
30	1	1	16-QAM	25.14	24.93	24.86	24.67	25.19	24.95	27.92	28.07	27.92	28.47	0.7031
30	1	76		24.94	24.27	25.11	24.81	24.86	25.09	27.89	27.59	28.11		
30	36	18		25.09	24.97	24.91	24.90	24.89	24.93	28.01	27.94	27.93		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	BPSK	26.02	25.95	25.87	26.16	25.76	25.83	29.10	28.87	28.86	29.47	0.8851
40	1	104		26.12	26.01	25.89	25.82	25.97	25.89	28.98	29.00	28.90		
40	50	25		26.06	25.97	25.80	25.95	25.96	25.89	29.02	28.98	28.86		
40	1	1	QPSK	26.07	26.13	25.91	26.00	26.07	25.96	29.05	29.11	28.95		
40	1	104		25.98	25.91	26.05	25.95	25.89	25.97	28.98	28.91	29.02		
40	50	25		26.01	25.97	25.88	25.99	25.88	25.84	29.01	28.94	28.87		
40	1	1	16-QAM	25.01	25.01	25.05	24.83	24.64	24.92	27.93	27.84	28.00	28.37	0.6871
40	1	104		25.10	24.90	25.09	24.89	24.76	24.46	28.01	27.84	27.80		
40	50	25		24.94	24.93	24.90	24.98	24.89	24.85	27.97	27.92	27.89		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
50	1	1	BPSK	26.00	25.96	25.97	25.92	25.97	26.04	28.97	28.98	29.02	29.51	0.8933		
50	1	131		25.87	25.78	25.83	25.59	25.83	25.68	28.74	28.82	28.77				
50	64	32		25.95	25.94	25.90	25.93	25.85	25.88	28.95	28.91	28.90				
50	1	1	QPSK	26.13	25.97	25.82	26.15	25.87	25.98	29.15	28.93	28.91			28.61	0.7261
50	1	131		25.79	25.87	25.79	26.01	25.77	25.75	28.91	28.83	28.78				
50	64	32		25.96	26.01	25.88	25.89	25.94	25.84	28.94	28.99	28.87				
50	1	1	16-QAM	24.79	25.10	25.33	25.02	25.20	25.14	27.92	28.16	28.25	28.61	0.7261		
50	1	131		24.69	24.86	25.00	24.76	24.88	24.84	27.74	27.88	27.93				
50	64	32		24.96	24.96	24.83	24.91	24.90	24.87	27.95	27.94	27.86				
Limit	EIRP < 1W			Result									Pass			

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
60	1	1	BPSK	26.04	26.04	25.93	26.09	26.03	26.07	29.08	29.05	29.01	29.54	0.8995		
60	1	160		25.91	25.87	25.96	25.84	26.05	25.92	28.89	28.97	28.95				
60	81	40		26.01	25.95	25.87	25.94	25.96	25.92	28.99	28.97	28.91				
60	1	1	QPSK	26.13	26.04	25.95	26.20	26.01	25.95	29.18	29.04	28.96			28.49	0.7063
60	1	160		25.84	26.09	26.04	26.06	26.00	25.98	28.96	29.06	29.02				
60	81	40		26.02	25.97	25.92	25.91	25.96	25.92	28.98	28.98	28.93				
60	1	1	16-QAM	24.86	25.23	24.95	24.88	25.01	25.10	27.88	28.13	28.04	28.49	0.7063		
60	1	160		24.52	25.12	24.80	24.84	25.09	24.95	27.69	28.12	27.89				
60	81	40		24.99	24.98	24.97	24.94	24.88	24.94	27.98	27.94	27.97				
Limit	EIRP < 1W			Result									Pass			



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
70	1	1	BPSK	26.29	26.01	26.12	26.05	26.00	26.04	29.18	29.02	29.09	29.54	0.8995		
70	1	187		25.87	25.96	26.15	25.83	26.08	26.00	28.86	29.03	29.09				
70	90	45		25.94	25.96	25.95	25.88	25.90	25.99	28.92	28.94	28.98				
70	1	1	QPSK	26.14	25.97	26.00	25.99	26.04	25.93	29.08	29.02	28.98			28.44	0.6982
70	1	187		25.85	25.95	26.14	25.93	25.93	25.96	28.90	28.95	29.06				
70	90	45		25.96	25.92	25.91	25.84	25.88	25.97	28.91	28.91	28.95				
70	1	1	16-QAM	25.26	24.88	25.21	24.87	25.02	24.86	28.08	27.96	28.05	28.44	0.6982		
70	1	187		24.97	24.84	25.24	25.07	24.88	24.84	28.03	27.87	28.05				
70	90	45		24.94	24.90	25.01	24.85	24.86	25.02	27.91	27.89	28.03				
Limit	EIRP < 1W			Result									Pass			

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
80	1	1	BPSK	26.13	26.12	25.99	25.99	26.03	26.11	29.07	29.09	29.06	29.53	0.8974		
80	1	215		25.91	26.00	26.05	25.99	26.03	25.86	28.96	29.03	28.97				
80	108	54		25.95	25.92	25.95	25.90	25.91	25.91	28.94	28.93	28.94				
80	1	1	QPSK	26.09	26.09	26.04	25.98	26.22	26.08	29.05	29.17	29.07			28.62	0.7278
80	1	215		25.92	26.04	25.95	26.00	25.95	26.00	28.97	29.01	28.99				
80	108	54		25.94	25.99	25.94	25.89	25.93	25.86	28.93	28.97	28.91				
80	1	1	16-QAM	24.99	25.07	25.08	25.49	25.22	24.84	28.26	28.16	27.97	0.7278			
80	1	215		24.68	24.91	25.15	24.68	24.71	24.42	27.69	27.82	27.81				
80	108	54		24.97	24.98	24.94	24.92	24.93	24.88	27.96	27.97	27.92				
Limit	EIRP < 1W			Result									Pass			



Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi																
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP		
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)		
90	1	1	BPSK	26.25	26.20	26.01	26.03	26.07	26.03	29.15	29.15	29.03	29.52	0.8954		
90	1	243		25.91	26.06	26.20	25.92	25.98	25.98	28.93	29.03	29.10				
90	120	60		25.88	25.96	25.97	25.79	25.92	25.98	28.85	28.95	28.99				
90	1	1	QPSK	26.26	26.13	25.98	25.89	26.16	26.22	29.09	29.16	29.11			28.51	0.7096
90	1	243		26.02	26.02	26.18	25.94	26.02	26.05	28.99	29.03	29.13				
90	120	60		25.89	25.93	25.95	25.82	25.91	25.97	28.87	28.93	28.97				
90	1	1	16-QAM	24.60	24.99	25.04	24.67	24.98	25.24	27.65	28.00	28.15	28.51	0.7096		
90	1	243		24.52	24.81	25.16	24.56	25.10	24.85	27.55	27.97	28.02				
90	120	60		24.88	24.95	25.00	24.83	24.94	24.98	27.87	27.96	28.00				
Limit	EIRP < 1W			Result									Pass			

Part27Q NR n77 Maximum Average Power [dBm], DG = 0.36 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	BPSK	-	26.20	-	-	26.11	-	-	29.17	-	29.53	0.8974
100	1	271		-	26.10	-	-	26.01	-	-	29.07	-		
100	135	67		-	25.92	-	-	25.92	-	-	28.93	-		
100	1	1	QPSK	-	26.10	-	-	25.98	-	-	29.05	-		
100	1	271		-	26.10	-	-	26.00	-	-	29.06	-		
100	135	67		-	25.91	-	-	25.90	-	-	28.92	-		
100	1	1	16-QAM	-	25.12	-	-	25.19	-	-	28.17	-	28.53	0.7129
100	1	271		-	24.83	-	-	24.83	-	-	27.84	-		
100	135	67		-	24.92	-	-	24.91	-	-	27.93	-		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
10	1	1	QPSK	25.75	25.77	25.80	26.03	25.92	26.14	28.90	28.86	28.98	28.86	0.7691
10	1	22		25.70	25.81	25.88	25.67	25.80	25.78	28.70	28.82	28.84		
10	12	6		25.83	25.68	25.79	25.83	25.77	25.88	28.84	28.74	28.85		
10	1	1		25.79	25.80	25.70	25.83	25.85	25.81	28.82	28.84	28.77		
10	1	22		25.74	25.69	25.80	25.95	25.87	25.73	28.86	28.79	28.78		
10	12	6		25.83	25.77	25.77	25.80	25.77	25.78	28.83	28.78	28.79		
10	1	1	16-QAM	24.45	24.54	24.73	24.65	24.81	24.94	27.56	27.69	27.85	27.73	0.5929
10	1	22	64-QAM	25.04	24.61	24.69	24.54	24.60	24.88	27.81	27.62	27.80		
10	12	6	256-QAM	24.89	24.74	24.90	24.79	24.72	24.77	27.85	27.74	27.85		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
15	1	1	QPSK	25.89	25.90	25.86	25.99	25.66	25.85	28.95	28.79	28.87	28.83	0.7638
15	1	36		25.76	25.79	25.80	25.89	25.79	25.84	28.84	28.80	28.83		
15	18	9		25.81	25.76	25.73	25.80	25.69	25.77	28.82	28.74	28.76		
15	1	1		25.79	25.66	25.70	25.95	25.71	25.75	28.88	28.70	28.74		
15	1	36		25.82	25.78	25.70	25.88	25.83	25.80	28.86	28.82	28.76		
15	18	9		25.78	25.79	25.74	25.88	25.71	25.69	28.84	28.76	28.73		
15	1	1	16-QAM	24.31	24.77	24.27	24.50	24.57	24.45	27.42	27.68	27.37	27.75	0.5957
15	1	36	64-QAM	24.21	24.71	24.75	24.37	24.67	24.85	27.30	27.70	27.81		
15	18	9	256-QAM	24.83	24.75	24.84	24.89	24.64	24.79	27.87	27.71	27.83		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
20	1	1	QPSK	25.83	25.78	25.64	25.88	25.79	25.86	28.87	28.80	28.76	28.84	0.7656
20	1	49		25.85	25.65	25.72	25.78	25.64	25.72	28.83	28.66	28.73		
20	25	12		25.79	25.75	25.74	25.84	25.74	25.76	28.83	28.76	28.76		
20	1	1		25.77	25.74	25.59	25.74	25.69	25.72	28.77	28.73	28.67		
20	1	49		25.86	25.76	25.69	26.04	25.87	25.68	28.96	28.83	28.70		
20	25	12		25.77	25.73	25.70	25.85	25.74	25.74	28.82	28.75	28.73		
20	1	1	16-QAM	24.78	24.57	24.56	24.91	24.73	24.65	27.86	27.66	27.62	27.8	0.6026
20	1	49	64-QAM	24.94	25.05	24.83	24.38	24.76	24.79	27.68	27.92	27.82		
20	25	12	256-QAM	24.91	24.77	24.74	24.89	24.70	24.79	27.91	27.75	27.78		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
25	1	1	QPSK	25.84	25.80	25.62	25.74	25.83	25.67	28.80	28.83	28.66	28.74	0.7482
25	1	63		25.72	25.82	25.65	25.71	25.74	25.55	28.73	28.79	28.61		
25	32	16		25.80	25.76	25.66	25.89	25.72	25.73	28.86	28.75	28.71		
25	1	1		25.80	25.76	25.72	25.80	25.74	25.67	28.81	28.76	28.71		
25	1	63		25.74	25.82	25.80	25.86	25.77	25.71	28.81	28.81	28.77		
25	32	16		25.78	25.75	25.67	25.88	25.70	25.66	28.84	28.74	28.68		
25	1	1	16-QAM	24.74	24.81	24.70	24.95	24.74	24.78	27.86	27.79	27.75	27.9	0.6166
25	1	63	64-QAM	25.06	24.79	24.82	24.95	24.73	24.59	28.02	27.77	27.72		
25	32	16	256-QAM	24.83	24.75	24.71	24.90	24.78	24.71	27.88	27.78	27.72		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	25.92	25.87	25.69	25.73	25.88	25.94	28.84	28.89	28.83	28.77	0.7534
30	1	76		25.68	25.76	25.88	25.62	25.84	25.87	28.66	28.81	28.89		
30	36	18		25.75	25.79	25.73	25.73	25.80	25.85	28.75	28.81	28.80		
30	1	1		25.70	25.71	25.75	25.74	25.73	25.82	28.73	28.73	28.80		
30	1	76		25.78	25.87	25.89	25.60	25.81	25.86	28.70	28.85	28.89		
30	36	18		25.76	25.76	25.75	25.77	25.77	25.85	28.78	28.78	28.81		
30	1	1	16-QAM	24.79	24.88	24.77	24.40	24.74	24.88	27.61	27.82	27.84	27.72	0.5916
30	1	76	64-QAM	24.63	24.76	24.57	24.48	24.56	24.55	27.57	27.67	27.57		
30	36	18	256-QAM	24.78	24.80	24.73	24.77	24.80	24.85	27.79	27.81	27.80		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	25.81	25.89	25.67	25.88	25.82	25.64	28.86	28.87	28.67	28.85	0.7674
40	1	104		25.66	25.93	25.54	25.52	25.99	25.60	28.60	28.97	28.58		
40	50	25		25.81	25.74	25.63	25.85	25.81	25.67	28.84	28.79	28.66		
40	1	1		25.78	25.77	25.66	25.81	25.83	25.61	28.81	28.81	28.65		
40	1	104		25.70	25.76	25.59	25.76	25.69	25.67	28.74	28.74	28.64		
40	50	25		25.83	25.71	25.59	25.82	25.71	25.71	28.84	28.72	28.66		
40	1	1	16-QAM	24.66	24.70	24.84	24.71	24.70	24.67	27.70	27.71	27.77	27.71	0.5902
40	1	104	64-QAM	24.73	24.74	24.36	24.54	24.90	24.55	27.65	27.83	27.47		
40	50	25	256-QAM	24.79	24.80	24.59	24.82	24.72	24.66	27.82	27.77	27.64		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	26.00	25.78	25.76	25.78	26.03	25.83	28.90	28.92	28.81	28.8	0.7586
50	1	131		25.80	25.81	25.56	25.58	25.94	25.40	28.70	28.89	28.49		
50	64	32		25.74	25.75	25.65	25.72	25.71	25.65	28.74	28.74	28.66		
50	1	1		25.78	25.69	25.68	25.69	25.70	25.49	28.75	28.71	28.60		
50	1	131		25.63	25.70	25.74	25.75	25.76	25.67	28.70	28.74	28.72		
50	64	32		25.76	25.66	25.61	25.68	25.70	25.60	28.73	28.69	28.62		
50	1	1	16-QAM	24.81	24.61	24.90	24.78	24.79	24.74	27.81	27.71	27.83	27.71	0.5902
50	1	131	64-QAM	24.76	24.37	24.64	24.34	24.84	24.44	27.57	27.62	27.55		
50	64	32	256-QAM	24.74	24.63	24.62	24.65	24.69	24.66	27.71	27.67	27.65		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	QPSK	25.62	25.79	25.88	25.62	25.77	25.78	28.63	28.79	28.84	28.73	0.7464
60	1	160		25.52	25.78	25.66	25.95	25.67	25.88	28.75	28.74	28.78		
60	81	40		25.75	25.75	25.70	25.81	25.76	25.73	28.79	28.77	28.73		
60	1	1		25.74	25.74	25.73	25.65	25.63	25.73	28.71	28.70	28.74		
60	1	160		25.59	25.70	25.72	25.73	25.81	25.96	28.67	28.77	28.85		
60	81	40		25.71	25.73	25.66	25.80	25.69	25.70	28.77	28.72	28.69		
60	1	1	16-QAM	24.86	24.78	24.72	24.74	24.61	24.66	27.81	27.71	27.70	27.7	0.5888
60	1	160	64-QAM	24.58	24.87	24.76	24.66	24.75	24.62	27.63	27.82	27.70		
60	81	40	256-QAM	24.74	24.74	24.67	24.78	24.79	24.66	27.77	27.78	27.68		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	QPSK	24.72	25.89	25.79	24.58	25.85	25.91	27.66	28.88	28.86	28.78	0.7551
70	1	187		25.62	25.61	25.87	25.71	25.79	25.90	28.68	28.71	28.90		
70	90	45		25.71	25.69	25.72	25.61	25.69	25.78	28.67	28.70	28.76		
70	1	1		25.88	25.77	25.81	25.85	25.86	25.80	28.88	28.83	28.82		
70	1	187		25.59	25.73	25.77	25.66	25.77	25.71	28.64	28.76	28.75		
70	90	45		25.68	25.69	25.71	25.59	25.72	25.75	28.65	28.72	28.74		
70	1	1	16-QAM	25.14	24.64	24.72	24.67	24.63	24.77	27.92	27.65	27.76	27.8	0.6026
70	1	187	64-QAM	24.21	24.54	25.00	24.70	24.60	24.66	27.47	27.58	27.84		
70	90	45	256-QAM	24.70	24.66	24.71	24.63	24.66	24.79	27.68	27.67	27.76		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	QPSK	25.85	26.01	25.83	25.83	25.70	25.83	28.85	28.87	28.84	28.8	0.7586
80	1	215		25.74	25.70	25.78	25.77	25.83	25.69	28.77	28.78	28.75		
80	108	54		25.68	25.67	25.70	25.64	25.71	25.68	28.67	28.70	28.70		
80	1	1		25.86	25.92	25.77	25.76	25.90	25.92	28.82	28.92	28.86		
80	1	215		25.61	25.71	25.79	25.65	25.89	25.65	28.64	28.81	28.73		
80	108	54		25.67	25.71	25.71	25.68	25.68	25.67	28.69	28.71	28.70		
80	1	1	16-QAM	24.84	24.66	24.49	24.44	25.06	24.88	27.65	27.87	27.70	27.75	0.5957
80	1	215	64-QAM	24.66	24.50	24.32	24.45	25.11	24.22	27.57	27.83	27.28		
80	108	54	256-QAM	24.67	24.68	24.68	24.72	24.67	24.64	27.71	27.69	27.67		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
90	1	1	QPSK	25.96	25.87	25.87	25.88	25.94	25.83	28.93	28.92	28.86	28.81	0.7603
90	1	243		25.65	25.71	25.85	25.83	25.69	25.82	28.75	28.71	28.85		
90	120	60		25.65	25.67	25.73	25.62	25.69	25.78	28.65	28.69	28.77		
90	1	1		25.84	25.90	25.72	25.86	25.80	25.83	28.86	28.86	28.79		
90	1	243		25.63	25.85	25.72	25.66	25.72	25.75	28.66	28.80	28.75		
90	120	60		25.60	25.66	25.68	25.57	25.70	25.74	28.60	28.69	28.72		
90	1	1	16-QAM	24.84	25.04	24.70	24.80	24.61	24.94	27.83	27.84	27.83	27.72	0.5916
90	1	243	64-QAM	24.51	24.87	24.67	24.77	24.37	24.60	27.65	27.64	27.65		
90	120	60	256-QAM	24.63	24.65	24.72	24.62	24.69	24.76	27.64	27.68	27.75		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n78 Maximum Average Power [dBm], DG = -0.12 dBi														
BW	RB	RB	Mod	Antenna 6			Antenna 2			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	QPSK	-	25.90	-	-	25.93	-	-	28.93	-	28.81	0.7603
100	1	271		-	25.79	-	-	25.79	-	-	28.80	-		
100	135	67		-	25.64	-	-	25.68	-	-	28.67	-		
100	1	1		-	25.90	-	-	25.94	-	-	28.93	-		
100	1	271		-	25.87	-	-	25.77	-	-	28.83	-		
100	135	67		-	25.66	-	-	25.65	-	-	28.67	-		
100	1	1	16-QAM	-	24.79	-	-	24.84	-	-	27.83	-	27.71	0.5902
100	1	271	64-QAM	-	24.74	-	-	24.71	-	-	27.74	-		
100	135	67	256-QAM	-	24.68	-	-	24.70	-	-	27.70	-		
Limit	EIRP < 1W			Result									Pass	


**FR1 n5****Peak-to-Average Ratio**

Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.30	5.62	6.46	6.60	PASS
Mode	FR1 n5 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.50				PASS




FR1 n5 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

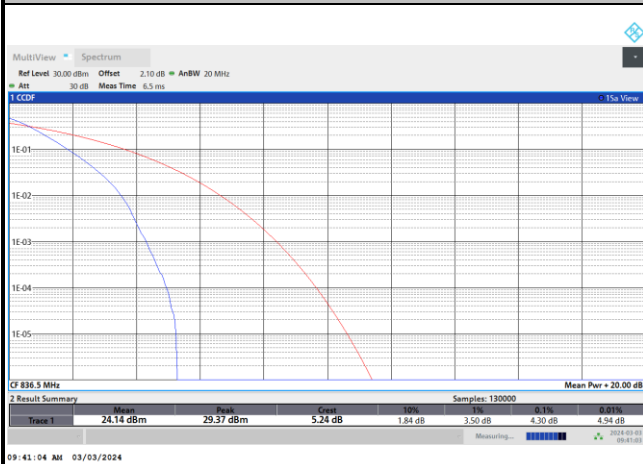


QPSK

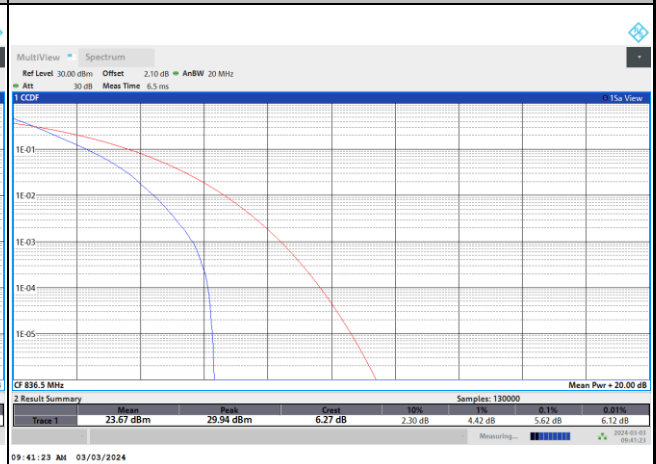


16QAM

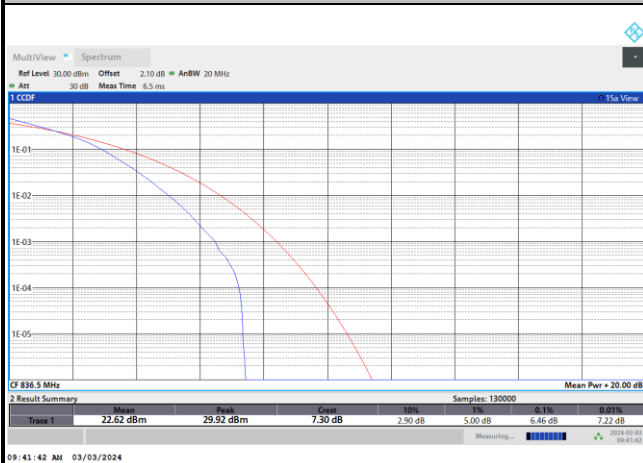

64QAM

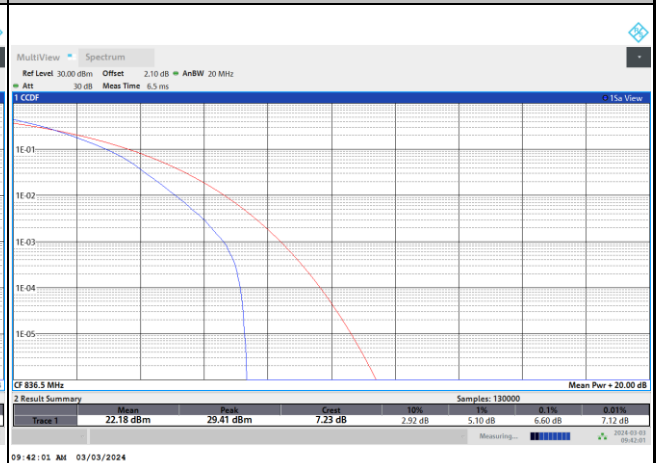

256QAM

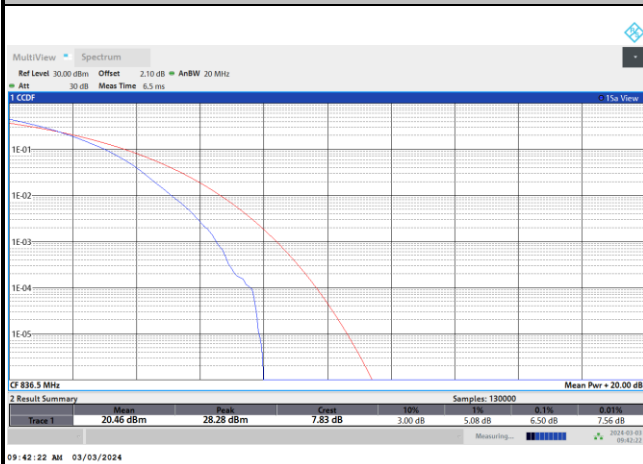

**26dB Bandwidth**


Mode	FR1 n5 : 26dB BW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	5.33		10.01		14.71		19.57	

Mode	FR1 n5 : 26dB BW(MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	5.48	5.42	10.55	11.12	15.41	15.98	21.39	21.31
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	5.41	5.29	10.39	10.37	15.40	15.36	21.40	21.29




FR1 n5 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

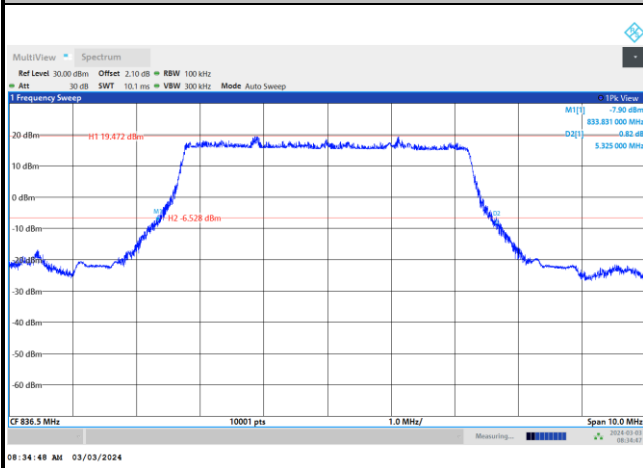


FR1 n5 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

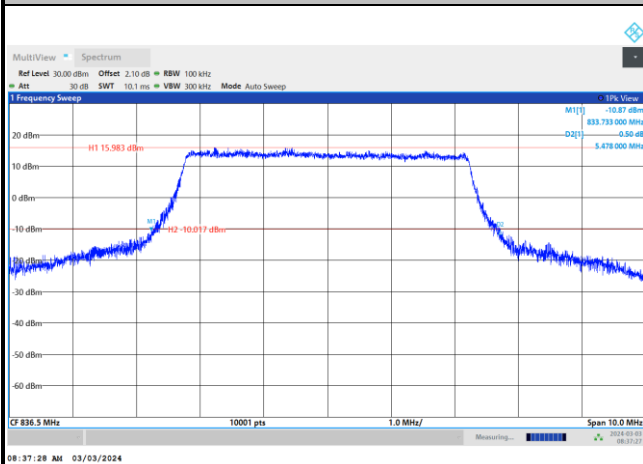


16QAM

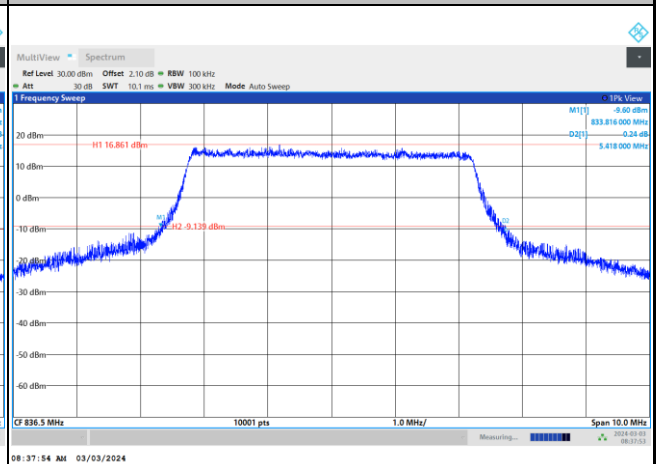

64QAM

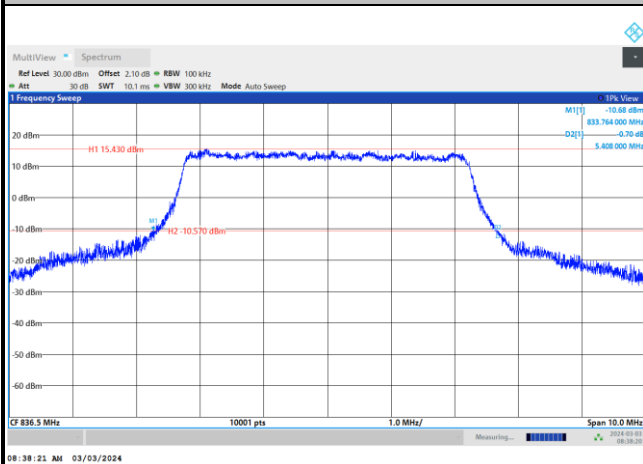


256QAM

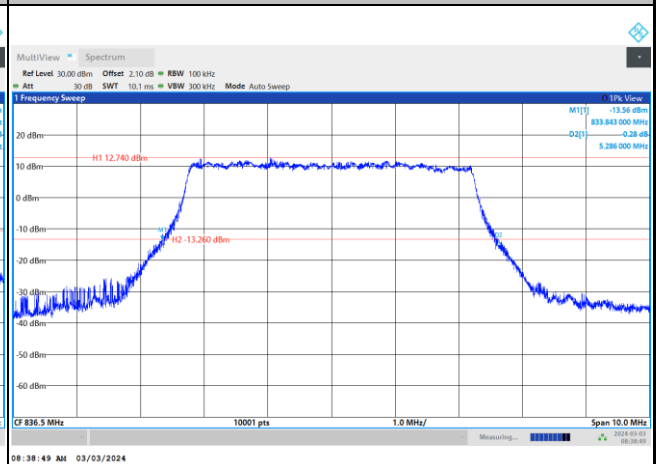


FR1 n5 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

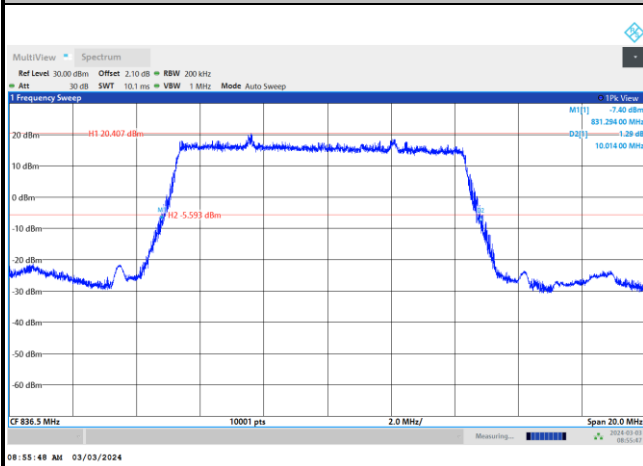


FR1 n5 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

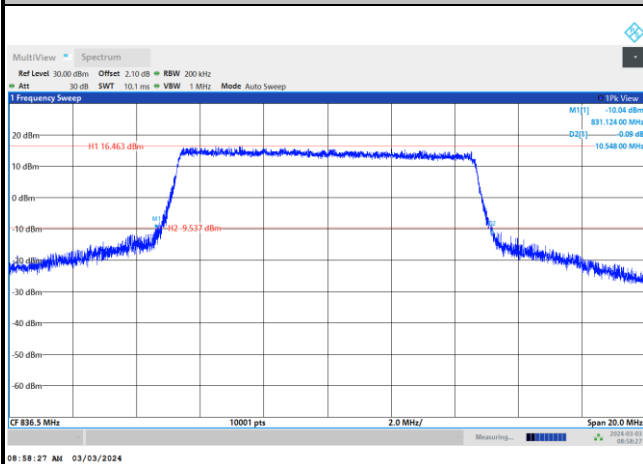

16QAM

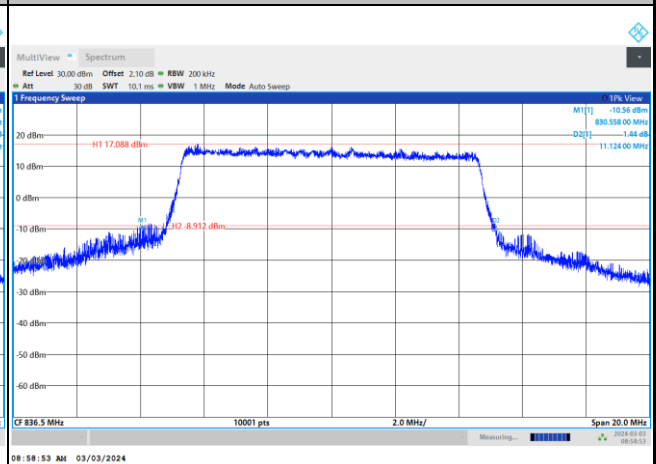

64QAM

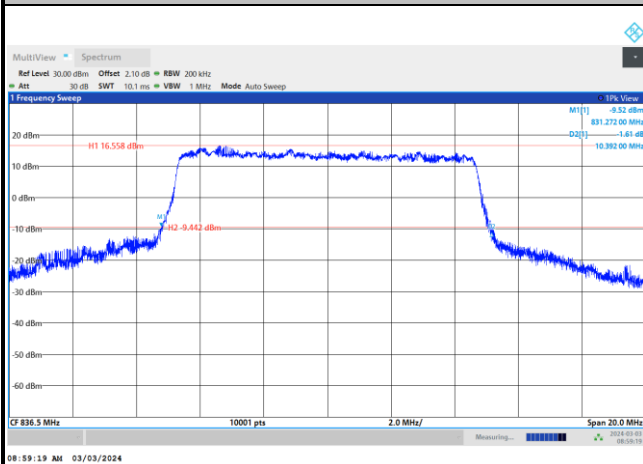

256QAM

