

TEST REPORT

Report Number: 15175342- E8V2

Applicant : APPLE, INC
1 APPLE PARK WAY
CUPERTINO, CA 95014, U.S.A.

Model : A3212

Brand : APPLE

FCC ID : BCG-E8725A

EUT Description : SMARTPHONE

Test Standard(s) : FCC 47 CFR Part 2, Part 96

Date Of Issue:
2024-11-18

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-11-18	Initial Review	--
V2	2024-11-21	Addressed TCB questions by updating section 6.2, 6.4, 10.1.1	Binod Sitaula

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. SUMMARY OF TEST RESULTS.....	6
3. TEST METHODOLOGY	7
4. FACILITIES AND ACCREDITATION	7
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
5.1. METROLOGICAL TRACEABILITY	8
5.2. DECISION RULES.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
5.4. SAMPLE CALCULATION	8
6. EQUIPMENT UNDER TEST	9
6.1. DESCRIPTION OF EUT	9
6.2. MAXIMUM OUTPUT POWER	9
6.3. SOFTWARE AND FIRMWARE.....	14
6.4. MAXIMUM ANTENNA GAIN.....	14
6.5. WORST-CASE CONFIGURATION AND MODE	15
6.6. DESCRIPTION OF TEST SETUP	16
7. TEST AND MEASUREMENT EQUIPMENT	18
8. RF OUTPUT POWER MEASUREMENTS	19
8.1. LTE BAND 48 AND 5G NR n48	20
8.2. LTE ULCA BAND 48	27
9. CONDUCTED TEST RESULTS	29
9.1. OCCUPIED BANDWIDTH	29
9.1.1. LTE BAND 48 AND 5G NR n48	32
9.1.2. LTE ULCA BAND 48	34
9.2. EMISSION MASK AND ADJACENT CHANNEL POWER.....	36
9.2.1. LTE BAND 48 AND 5G NR n48	38
9.2.2. LTE ULCA BAND 48	66
9.3. OUT OF BAND EMISSIONS.....	70
9.3.1. LTE BAND 48 AND 5G NR n48	71
9.3.2. LTE ULCA BAND 48	74
9.4. FREQUENCY STABILITY.....	75
9.4.1. LTE BAND 48 AND 5G NR n48	76

9.4.2.	LTE ULCA BAND 48	78
9.5.	PEAK-TO-AVERAGE POWER RATIO	79
9.5.1.	LTE BAND 48 AND 5G NR n48	80
9.5.2.	LTE ULCA BAND 48	81
10.	RADIATED TEST RESULTS.....	82
10.1.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 4	86
10.1.1.	LTE BAND 48 AND 5G NR n48	86
10.1.2.	QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	88
10.2.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 7	89
10.2.1.	LTE BAND 48 AND 5G NR n48	89
10.2.2.	QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	91
10.3.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 8	92
10.3.1.	LTE BAND 48 AND 5G NR n48	92
10.3.2.	QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	94
10.4.	FIELD STRENGTH OF SPURIOUS RADIATION, ANT 9	95
10.4.1.	LTE BAND 48 AND 5G NR n48	95
10.4.2.	QPSK LTE ULCA BAND 48 (20.0MHZ + 20.0MHZ BANDWIDTH).....	97
11.	SETUP PHOTOS	98


1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	APPLE, INC 1 APPLE PARK WAY CUPERTINO, CA 95014, U.S.A.
Model	A3212
Brand	APPLE
FCC ID	BCG-E8725A
EUT Description	SMARTPHONE
Serial Number	RADIATED: LD23Q31PQ4, L52G6VJWHY CONDUCTED: C07H9K000JE0000J57, C07H9K000HZ0000J57, C07H9K000JQ0000J57
Sample Receipt Date	2024-05-16
Date Tested	2024-05-15 to 2024-10-19
Applicable Standards	FCC 47 CFR Part 2, Part 96
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document.

Approved & Released By: 	Reviewed By: 	Prepared By: 
Mengistu Mekuria Staff Laboratory Engineer UL Verification Services Inc.	Binod Sitaula Laboratory Engineer Associate UL Verification Services Inc.	Tewodros Woldemichael Laboratory Engineer UL Verification Services Inc.

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for correctly integrating customer-provided data with measurements performed by UL Verification Services Inc.

Below is a list of the data provided by the customer:

1. Antenna gain (see section 6.4.

2. Requirement Description	Band	Requirement Clause Number (FCC)	Result	Remarks
Equivalent Isotropic Radiated Power	48	96.41 (b)	Complies	

Requirement Description	Requirement Clause Number (FCC)	Result	Remarks
Occupied Bandwidth	2.1049	Complies	
Band Edge and Emission Mask	2.1051, 96.41(e)	Complies	
Out of Band Emissions	2.1051, 96.41(e)	Complies	
Frequency Stability	2.1055	Complies	
Peak-to-Average Ratio	96.41 (g)	Complies	
Field Strength of Spurious Radiation	2.1053, 96.41(e)	Complies	

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC 47 CFR Part 2, Part 96
- [FCC KDB 971168 D01](#) : Power Meas License Digital Systems
- [FCC KDB 971168 D02](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01](#) : Determining ERP and EIRP

4. FACILITIES AND ACCREDITATION

UL Verification Services Inc. is accredited by A2LA, certification #0751.05, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 1: 47173 Benicia Street, Fremont, CA 94538, USA	US0104	2324A	550739
☒	Building 2: 47266 Benicia Street, Fremont, CA 94538, USA			
☒	Building 3: 843 Auburn Court, Fremont, CA 94538, USA			
☒	Building 4: 47658 Kato Rd, Fremont, CA 94538, USA			
☒	Building 5: 47670 Kato Rd, Fremont, CA 94538, USA			

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Conducted Antenna Port Emission Measurement	1.940
Power Spectral Density	2.466
Time Domain Measurements Using SA	3.39
RF Power Measurement Direct Method Using Power Meter	0.450 Peak; 1.300 Ave.
Radio Frequency (Spectrum Analyzer)	141.16 Hz
Occupied Bandwidth	1.22%
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.78 db
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.40 db
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.87 db
Worst Case Radiated Disturbance, 30 to 1000 MHz	6.01 db
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.73 db
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.51 db
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.29 db

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
 $36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The Apple iPhone is a smartphone with cellular GSM, GPRS, EGPRS, WCDMA, LTE, 5G NR1, IEEE 802.11a/b/g/n/ac/ax, Bluetooth (BT), Global Positioning System (GPS), Near-Field Communication (NFC) and Mobile Satellite Service (MSS) technologies. The rechargeable battery is not user accessible. This device is not user-serviceable and requires special tools to disassemble.

6.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers as follows:

LTE BAND 48

LOW CHANNEL

Part 96								
EIRP Limit (W)/ 10MHz		0.20						
Antenna Gain (dBi) Ant(9)		-1.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	3552.5	3697.5	23.70	22.40	0.174	4460	4M46G7W
	16QAM			23.70	22.40	0.174	4477	4M48D7W
10.0	QPSK	3555.0	3695.0	23.70	22.40	0.174	8971	8M97G7W
	16QAM			23.70	22.40	0.174	8909	8M91D7W
15.0	QPSK	3557.5	3692.5	23.70	22.40	0.174	13422	13M4G7W
	16QAM			23.70	22.40	0.174	13403	13M4D7W
20.0	QPSK	3560.0	3690.0	23.70	22.40	0.174	17877	17M9G7W
	16QAM			23.70	22.40	0.174	17981	18M0D7W

MIDDLE CHANNEL

Part 96								
EIRP Limit (W)/ 10MHz		0.20						
Antenna Gain (dBi) Ant(9)		-0.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	3552.5	3697.5	22.90	22.40	0.174	4460	4M46G7W
	16QAM			22.90	22.40	0.174	4477	4M48D7W
10.0	QPSK	3555.0	3695.0	22.90	22.40	0.174	8971	8M97G7W
	16QAM			22.90	22.40	0.174	8909	8M91D7W
15.0	QPSK	3557.5	3692.5	22.90	22.40	0.174	13422	13M4G7W
	16QAM			22.90	22.40	0.174	13403	13M4D7W
20.0	QPSK	3560.0	3690.0	22.90	22.40	0.174	17877	17M9G7W
	16QAM			22.90	22.40	0.174	17981	18M0D7W

HIGH CHANNEL

Part 96								
EIRP Limit (W)/ 10MHz			0.20					
Antenna Gain (dBi)_Ant(9)			-0.10					
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	3552.5	3697.5	22.50	22.40	0.174	4460	4M46G7W
	16QAM			22.50	22.40	0.174	4477	4M48D7W
10.0	QPSK	3555.0	3695.0	22.50	22.40	0.174	8971	8M97G7W
	16QAM			22.50	22.40	0.174	8909	8M91D7W
15.0	QPSK	3557.5	3692.5	22.50	22.40	0.174	13422	13M4G7W
	16QAM			22.50	22.40	0.174	13403	13M4D7W
20.0	QPSK	3560.0	3690.0	22.50	22.40	0.174	17877	17M9G7W
	16QAM			22.50	22.40	0.174	17981	18M0D7W

5G NR n48

LOW CHANNEL

Part 96								
EIRP Limit (W)			0.20					
Antenna Gain (dBi)_Ant(9)			-1.30					
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
10.0	BPSK	3555.0	3695.0	23.70	22.40	0.174	8604	8M60G7W
	QPSK			23.70	22.40	0.174	8591	8M59G7W
	16QAM			23.70	22.40	0.174	8580	8M58D7W
15.0	BPSK	3557.5	3692.5	23.70	22.40	0.174	12846	12M8G7W
	QPSK			23.70	22.40	0.174	12847	12M8G7W
	16QAM			23.70	22.40	0.174	12849	12M8D7W
20.0	BPSK	3560.0	3690.0	23.70	22.40	0.174	17841	17M8G7W
	QPSK			23.70	22.40	0.174	17855	17M9G7W
	16QAM			23.70	22.40	0.174	17872	17M9D7W
30.0	BPSK	3565.0	3685.0	23.70	22.40	0.174	26904	26M9G7W
	QPSK			23.70	22.40	0.174	26834	26M8G7W
	16QAM			23.70	22.40	0.174	26849	26M8D7W
40.0	BPSK	3570.0	3680.0	23.70	22.40	0.174	35801	35M8G7W
	QPSK			23.70	22.40	0.174	35774	35M8G7W
	16QAM			23.70	22.40	0.174	35754	35M8D7W

MIDDLE CHANNEL

Part 96								
EIRP Limit (W)		0.20						
Antenna Gain (dBi) Ant(9)		-0.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
10.0	BPSK	3555.0	3695.0	22.90	22.40	0.174	8604	8M60G7W
	QPSK			22.90	22.40	0.174	8591	8M59G7W
	16QAM			22.90	22.40	0.174	8580	8M58D7W
15.0	BPSK	3557.5	3692.5	22.90	22.40	0.174	12846	12M8G7W
	QPSK			22.90	22.40	0.174	12847	12M8G7W
	16QAM			22.90	22.40	0.174	12849	12M8D7W
20.0	BPSK	3560.0	3690.0	22.90	22.40	0.174	17841	17M8G7W
	QPSK			22.90	22.40	0.174	17855	17M9G7W
	16QAM			22.90	22.40	0.174	17872	17M9D7W
30.0	BPSK	3565.0	3685.0	22.90	22.40	0.174	26904	26M9G7W
	QPSK			22.90	22.40	0.174	26834	26M8G7W
	16QAM			22.90	22.40	0.174	26849	26M8D7W
40.0	BPSK	3570.0	3680.0	22.90	22.40	0.174	35801	35M8G7W
	QPSK			22.90	22.40	0.174	35774	35M8G7W
	16QAM			22.90	22.40	0.174	35754	35M8D7W

HIGH CHANNEL

Part 96								
EIRP Limit (W)		0.20						
Antenna Gain (dBi) Ant(9)		-0.10						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
10.0	BPSK	3555.0	3695.0	22.50	22.40	0.174	8604	8M60G7W
	QPSK			22.50	22.40	0.174	8591	8M59G7W
	16QAM			22.50	22.40	0.174	8580	8M58D7W
15.0	BPSK	3557.5	3692.5	22.50	22.40	0.174	12846	12M8G7W
	QPSK			22.50	22.40	0.174	12847	12M8G7W
	16QAM			22.50	22.40	0.174	12849	12M8D7W
20.0	BPSK	3560.0	3690.0	22.50	22.40	0.174	17841	17M8G7W
	QPSK			22.50	22.40	0.174	17855	17M9G7W
	16QAM			22.50	22.40	0.174	17872	17M9D7W
30.0	BPSK	3565.0	3685.0	22.50	22.40	0.174	26904	26M9G7W
	QPSK			22.50	22.40	0.174	26834	26M8G7W
	16QAM			22.50	22.40	0.174	26849	26M8D7W
40.0	BPSK	3570.0	3680.0	22.50	22.40	0.174	35801	35M8G7W
	QPSK			22.50	22.40	0.174	35774	35M8G7W
	16QAM			22.50	22.40	0.174	35754	35M8D7W

LTE ULCA BAND 48

Part 96								
EIRP Limit (W)/ 10MHz		0.20						
Antenna Gain (dBi) Ant(9)		-0.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5+20	QPSK	3553.3	3690.0	22.80	22.30	0.170	23388	23M4G7W
	16QAM			22.87	22.37	0.173	23389	23M4D7W
20+5	QPSK	3560.0	3696.7	22.90	22.40	0.174	23413	23M4G7W
	16QAM			22.90	22.40	0.174	23498	23M5D7W
10+20	QPSK	3555.5	3690.0	22.90	22.40	0.174	28137	28M1G7W
	16QAM			22.80	22.30	0.170	28140	28M1D7W
20+10	QPSK	3560.0	3694.5	22.90	22.40	0.174	28153	28M2G7W
	16QAM			22.88	22.38	0.173	28080	28M1D7W
15+20	QPSK	3557.8	3690.0	22.87	22.37	0.173	33018	33M0G7W
	16QAM			22.90	22.40	0.174	33051	33M1D7W
20+15	QPSK	3560.0	3692.2	22.87	22.37	0.173	32967	33M0G7W
	16QAM			22.90	22.40	0.174	33015	33M0D7W
20+20	QPSK	3560.0	3690.0	22.90	22.40	0.174	37850	37M9G7W
	16QAM			22.89	22.39	0.173	37751	37M8D7W

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version: 1.0.23

6.4. MAXIMUM ANTENNA GAIN

The antenna(s) gain, as provided by the manufacturer' are as follows:

LTE, 5G NR, and ULCA Bands	Frequency Range (MHz)	ANT 4 Antenna Gain (dBi)	ANT 7 Antenna Gain (dBi)	ANT 8 Antenna Gain (dBi)	ANT 9 Antenna Gain (dBi)
LTE Band 48, 5G NR n48 (Low)	3550 – 3700	-2.6	-3.7	-4.7	-1.3
LTE Band 48, 5G NR n48 (Mid)	3550 – 3700	-3.4	-3.2	-4.5	-0.5
LTE Band 48, 5G NR n48 (High)	3550 – 3700	-4.4	-5.1	-4.2	-0.1

LTECA Bands	Frequency Range (MHz)	ANT 4 Antenna Gain (dBi)	ANT 7 Antenna Gain (dBi)	ANT 8 Antenna Gain (dBi)	ANT 9 Antenna Gain (dBi)
LTE ULCA48	3550 – 3700	-3.4	-3.2	-4.5	-0.5

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports the following LTE and 5G NRs:
Band 48, 5G NR n48.

For 5G NRs, conducted spurious emission tests were conducted on wider bandwidth with inner 1RB since this is the worst bandwidth and the highest output power.

BPSK modulation applied only for 5G NR frequencies and has the same tune up power as QPSK modulations.

DFT-s-OFDM and CP-OFDM waveforms were investigated, and DFT-s-OFDM was found to be the worst case.

The worst-case scenario for all measurements is based on an engineering evaluation made on different modulations. Then, QPSK and BPSK were observed as the worst mode to LTE bands and 5G NR bands respectively and set for all conducted and radiated. Output power measurements were measured on BPSK, QPSK, 16QAM, 64QAM, and 256QAM modulations. For testing purposes emissions on sections 8 and 9 were measured while QPSK/BPSK was set at or above target power for all bands. Conducted tests were performed on the worst-case antenna port because it has the highest conducted power. The worst-case antenna port is shown in the table below.

	Worst case Antenna Port for Conducted Power
LTE BAND 48	Ant7

The EUT was investigated in three orthogonal orientations X/Y/Z on all ANT4, ANT7, ANT8 and ANT 9 antennas to determine the worst-case orientation. The following table exhibit the worst-case orientation for different frequency bands. The full tests of the EUT have made upon the orientations that shown in the table below.

Frequency Bands	ANT1	ANT2	ANT3	ANT4	ANT7	ANT8	ANT9
3300 – 3980 MHz	N/A	N/A	N/A	X	Y	Z	X


Radiated spurious emissions were investigated from 9kHz to 30MHz, 30MHz-1GHz and above 18GHz. There were no emissions found with less than 20dB of margin from 9kHz to 30MHz, 30MHz-1GHz and above 18GHz.

For simultaneous transmission of multiple channels in the 2.4GHz/5GH WLAN, UWB, and Cellular bands, tests were conducted for various configurations having the highest power, least separation in frequencies and widest operation bandwidths. No noticeable new emission was found.


6.6. DESCRIPTION OF TEST SETUP

SUPPORT TEST EQUIPMENT						
Description		Manufacturer	Model	Serial Number		FCC ID/ DoC
Laptop		Apple	MacBook Pro	HRP082673		BCGA1708
AC/DC adapter		Apple	A1718	C4H64450HH3GN8RA6		--
I/O CABLES (RF CONDUCTED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	US 115V	Un-shielded	2.0	N/A
2	USB	1	DC	Un-shielded	1.0	N/A
3	RF In/Out	1	EUT	Un-shielded	0.6	N/A
4	RF In/Out	1	Communication Test Set	Un-shielded	1.2	N/A
5	RF In/Out	1	Barrel	N/A	N/A	N/A
I/O CABLES (RF RADIATED TEST)						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF In/Out	1	Antenna	Un-shielded	5.0	N/A

CONDUCTED SETUP

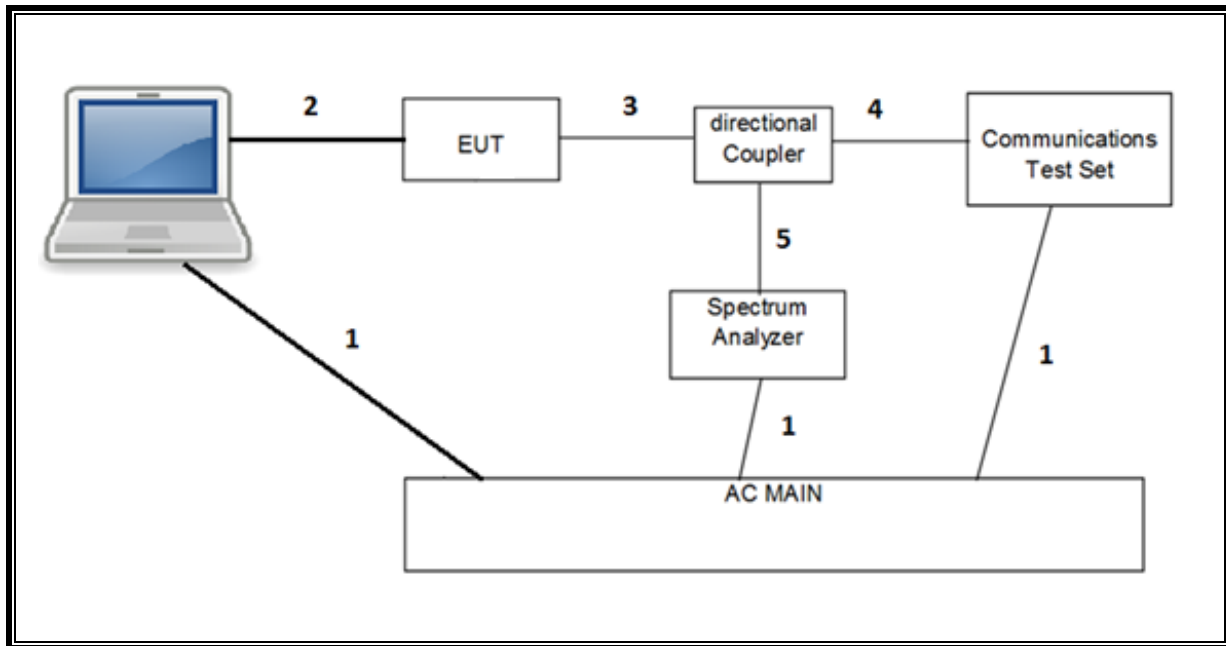

RADIATED SETUP

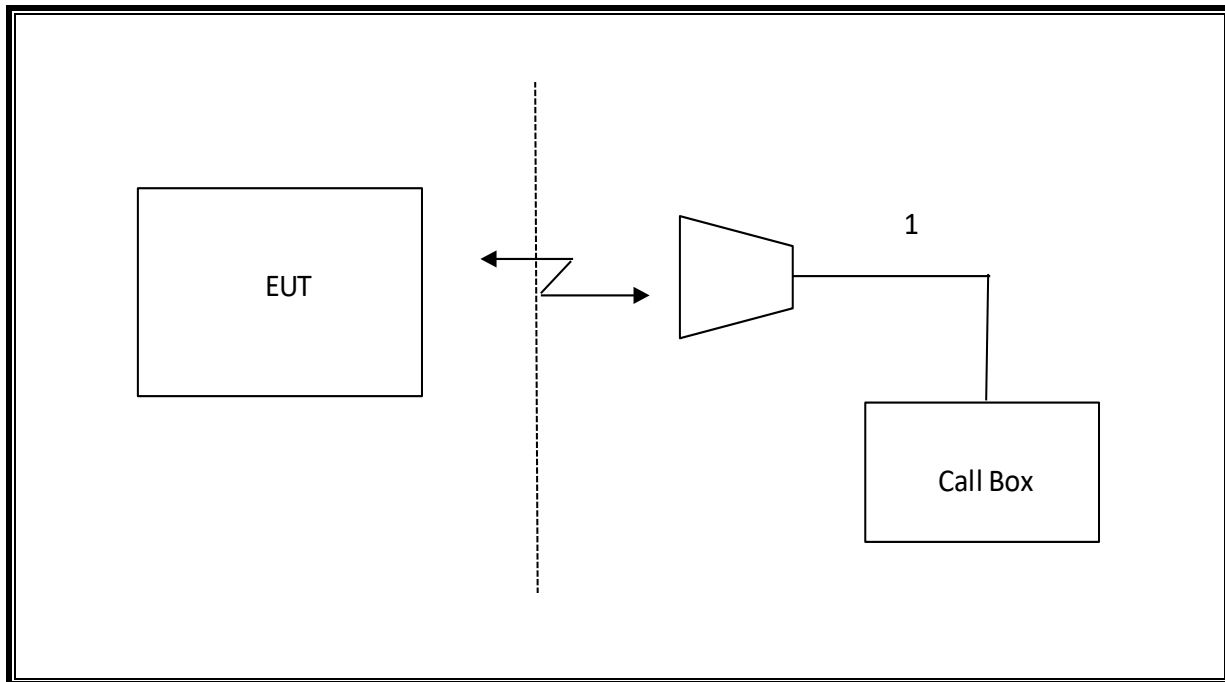

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	80430	2026-09-30
Antenna, Horn 1-18GHz	ETS Lindgren	3117	79834	2026-07-31
Antenna, Broadband Hybrid, 30MHz to 3000MHz	SUNAR	JB3	222009	2026-06-30
*Antenna, Passive Loop 30Hz - 1MHz	ELECTRO-METRICS	EM-6871	170014	2024-08-31
*Antenna, Passive Loop 100KHz - 30MHz	ELECTRO-METRICS	EM-6872	170016	2024-08-31
*RF Filter Box, 1-18GHz	UL-FR1	NA	217255	2024-10-31
RF Filter Box, 1-18GHz	UL-FR1	RATS 2	226781	2025-03-30
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	430250	2025-10-31
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169936	2025-02-28
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	169935	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	85943	2025-02-28
Directional Coupler	KRYTAR	152610	198816	2024-10-31
Directional Coupler	KRYTAR	152610	231664	2025-01-22
Power Meter, P-series single channel	Keysight	N1912A	90719	2025-01-31
Power Sensor, P - series, 50MHz to 18GHz, Wideband	Keysight	N1921A	81319	2025-01-31
Filter, HPF 1.2GHz	Wainwright Instruments GmbH	WHKX6-948-1.2/15G-40ST	99	2024-10-31
Spectrum Analyzer, PXA, 2Hz to 44GHz	Keysight	N9030B	231739	2025-01-31
Spectrum Analyzer, PXA, 2Hz to 44GHz	Keysight	N9030B	245120	2025-02-28
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	85212	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	222793	2025-02-28
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	222797	2025-02-28
Chamber, Environmental	Thermotron Corp.	SM-16C Mini-Max	179936	2025-07-30
Transmitting Antenna, Horn Antenna	TEKBOX Digital Solutions	TBMA4	226709	C.N.R.
Antenna, Horn 18 to 26.5GHz	A.R.A.	MWH-1826/B	199659	2024-12-31
Amplifier 18-26.5GHz, +5Vdc, -54dBm P1dB	AMPLICAL	AMP18G26.5-60	234683	2025-05-31
DC Power Supply	GWINSTEK	GPS18500	N/A	C.N.R.
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	V2023.11.21.0	
Power Measurement Software	UL	UL RF	V2023.08.14.0	
Radiated test software	UL	UL RF	Ver 9.5 2023-05-01	

NOTES:

- * Testing is completed before equipment expiration date.

8. RF OUTPUT POWER MEASUREMENTS

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS136.101 specification.

UE Power Class: 3 (23 +/- 2dBm). Band 41 UE Power Class: 2 (26 +/-2 dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS136.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS136.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

8.1. LTE BAND 48 AND 5G NR n48

LTE BAND 48

Test Engineer ID:	25780	Test Date:	2024-03-09
-------------------	-------	------------	------------

OUTPUT POWER FOR LTE BAND 48 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				55265	55990	56715	55260	55990	56715	55265	55990	56715	55260	55990	56715
5.0	QPSK	1	0	23.70	22.90	22.50	24.41	24.46	24.49	25.20	25.19	25.02	25.20	25.20	25.20
		1	12	23.67	22.85	22.48	24.50	24.46	24.47	25.18	25.16	25.07	25.14	25.17	25.18
		1	24	23.70	22.87	22.50	24.32	24.50	24.50	25.20	25.20	25.20	25.15	25.17	25.20
		2	0	23.65	22.77	22.50	25.00	25.00	24.96	25.60	25.59	25.60	25.70	25.70	25.67
		2	23	23.70	22.90	22.49	24.78	24.98	25.00	25.58	25.60	25.54	25.60	25.68	25.70
		12	0	23.68	22.86	22.49	24.00	23.99	23.98	24.69	24.69	24.70	24.70	24.64	24.70
		12	6	23.67	22.87	22.47	23.93	23.98	23.98	24.68	24.68	24.69	24.68	24.68	24.69
		12	11	23.67	22.87	22.46	23.94	23.99	23.99	24.68	24.69	24.69	24.68	24.69	24.69
		25	0	23.68	22.86	22.49	23.99	24.00	24.00	24.70	24.70	24.68	24.67	24.70	24.70
	16QAM	1	0	23.68	22.87	22.49	23.42	23.50	23.47	24.16	24.20	24.01	24.20	24.14	24.20
		1	12	23.66	22.82	22.47	23.50	23.48	23.48	24.13	24.10	24.13	24.05	24.19	24.13
		1	24	23.65	22.81	22.43	23.26	23.46	23.50	24.20	24.19	24.20	24.15	24.20	24.11
		2	0	23.65	22.77	22.50	23.94	23.98	23.72	24.36	24.60	24.68	24.68	24.70	24.70
		2	23	23.70	22.90	22.49	24.00	24.00	24.00	24.70	24.70	24.70	24.70	24.69	24.67
		12	0	23.68	22.87	22.49	22.98	22.98	23.00	23.70	23.70	23.68	23.70	23.70	23.67
		12	6	23.67	22.86	22.49	22.93	23.00	22.99	23.69	23.69	23.70	23.69	23.69	23.70
		12	11	23.68	22.85	22.49	22.94	23.00	22.99	23.70	23.70	23.60	23.67	23.66	23.69
		25	0	23.66	22.84	22.47	23.00	23.00	22.98	23.69	23.69	23.62	23.68	23.65	23.68
	64QAM	1	0	23.20	22.87	22.49	22.44	22.49	22.49	23.20	23.20	22.93	23.12	23.20	23.20
		1	12	23.16	22.83	22.48	22.50	22.46	22.46	23.17	23.12	23.06	23.16	23.20	23.14
		1	24	23.15	22.86	22.49	22.35	22.50	22.50	23.17	23.20	23.20	23.20	23.20	23.18
		2	0	23.70	22.78	22.50	23.00	22.56	23.00	23.70	23.70	23.23	23.70	23.70	23.68
		2	23	23.70	22.90	22.44	22.87	23.00	22.95	23.62	23.70	23.70	23.14	23.67	23.70
		12	0	22.70	22.68	22.49	22.00	21.98	21.99	22.70	22.69	22.70	22.70	22.70	22.68
		12	6	22.69	22.67	22.48	21.93	21.97	22.00	22.70	22.69	22.70	22.66	22.68	22.67
		12	11	22.70	22.66	22.47	21.94	21.98	22.00	22.68	22.68	22.70	22.67	22.69	22.66
		25	0	22.70	22.66	22.43	21.99	22.00	21.99	22.70	22.70	22.70	22.70	22.70	22.70
	256QAM	1	0	20.20	20.11	20.17	19.49	19.50	19.50	20.19	20.19	20.09	20.20	20.17	20.20
		1	12	20.17	20.07	20.17	19.50	19.47	19.45	20.17	20.11	20.16	20.17	20.20	20.16
		2	0	20.16	20.20	20.20	19.35	19.50	19.46	20.20	20.20	20.20	20.20	20.15	20.18
		2	23	20.70	20.63	20.70	20.00	20.00	19.67	20.66	20.70	20.70	20.47	20.70	20.70
		1	24	20.66	20.70	20.64	19.87	19.82	20.00	20.70	20.67	20.48	20.70	20.63	20.47
		12	0	20.67	20.70	20.69	20.00	20.00	20.00	20.70	20.69	20.69	20.70	20.70	20.69
		12	6	20.69	20.69	20.69	19.93	20.00	19.98	20.69	20.69	20.70	20.69	20.68	20.70
		12	11	20.70	20.69	20.68	19.94	19.98	19.97	20.69	20.70	20.65	20.66	20.70	20.68
		25	0	20.70	20.69	20.70	19.99	19.98	19.97	20.69	20.69	20.69	20.67	20.70	20.68

OUTPUT POWER FOR LTE BAND 48 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				55290	55990	56690	55290	55990	56690	55290	55990	56690	55290	55990	56690
10.0	QPSK	1	0	23.67	22.85	22.50	24.43	24.46	24.47	25.20	25.09	25.20	25.20	25.19	25.19
		1	24	23.70	22.90	22.49	24.50	24.50	24.50	25.18	25.19	25.18	25.19	25.20	25.20
		1	49	23.65	22.83	22.38	24.40	24.45	24.44	25.15	25.20	25.11	25.13	25.15	25.20
		2	0	23.67	22.83	22.49	25.00	25.00	24.99	25.60	25.59	25.60	25.70	25.70	25.70
		2	48	23.70	22.90	22.50	24.87	24.99	25.00	25.49	25.60	25.55	25.62	25.69	25.47
		25	0	23.64	22.88	22.50	24.00	23.97	23.96	24.65	24.56	24.68	24.66	24.66	24.60
		25	12	23.63	22.86	22.48	23.99	23.96	23.94	24.65	24.61	24.67	24.64	24.65	24.58
		25	24	23.63	22.86	22.41	23.93	23.97	23.94	24.64	24.70	24.67	24.64	24.64	24.64
		50	0	23.69	22.90	22.46	23.97	24.00	24.00	24.70	24.66	24.70	24.70	24.70	24.70
		1	0	23.63	22.87	22.46	23.47	23.48	23.49	24.17	24.02	24.20	24.13	24.20	24.20
	16QAM	1	24	23.69	22.90	22.50	23.50	23.50	23.50	24.20	24.20	24.16	24.20	24.18	24.18
		1	49	23.60	22.85	22.36	23.37	23.41	23.43	24.15	24.13	24.14	24.15	24.12	24.15
		2	0	23.67	22.83	22.49	23.83	24.00	24.00	24.70	24.49	24.70	24.70	24.70	24.70
		2	48	23.70	22.90	22.50	24.00	23.32	23.96	24.27	24.70	24.45	24.67	24.61	24.68
		25	0	23.65	22.87	22.50	23.00	22.98	22.98	23.67	23.57	23.70	23.67	23.68	23.62
		25	12	23.65	22.86	22.48	23.00	22.97	22.95	23.67	23.60	23.67	23.65	23.65	23.62
		25	24	23.65	22.87	22.40	22.95	22.97	22.96	23.65	23.70	23.67	23.64	23.65	23.66
		50	0	23.69	22.90	22.43	22.99	23.00	23.00	23.70	23.64	23.70	23.70	23.70	23.70
		1	0	23.18	22.90	22.50	22.50	22.47	22.50	23.14	23.04	23.20	23.20	23.20	23.16
		1	24	23.20	22.87	22.45	22.45	22.50	22.43	23.20	23.09	23.12	23.11	23.13	23.14
	64QAM	1	49	23.15	22.89	22.37	22.42	22.49	22.44	23.19	23.20	23.18	23.15	23.15	23.20
		2	0	23.70	22.87	22.50	23.00	22.64	22.89	23.70	23.30	23.70	23.70	23.70	23.70
		2	48	23.65	22.90	22.33	22.91	23.00	23.00	23.39	23.70	23.60	23.62	23.63	23.53
		25	0	22.64	22.68	22.50	22.00	21.96	21.97	22.66	22.56	22.69	22.66	22.69	22.64
		25	12	22.63	22.68	22.46	21.99	21.95	21.95	22.67	22.63	22.66	22.65	22.67	22.60
		25	24	22.64	22.67	22.38	21.93	21.98	21.94	22.64	22.70	22.63	22.65	22.67	22.65
		50	0	22.70	22.70	22.44	21.96	22.00	22.00	22.70	22.70	22.70	22.70	22.70	22.70
		1	0	20.20	20.20	20.18	19.50	19.50	19.50	20.19	20.09	20.20	20.20	20.20	20.20
		1	24	20.14	20.17	20.20	19.50	19.45	19.45	20.20	20.11	20.09	20.17	20.14	20.17
		1	49	20.09	20.16	20.13	19.39	19.48	19.47	20.20	20.20	20.09	20.16	20.16	20.18
	256QAM	2	0	20.70	20.54	20.70	19.74	19.94	20.00	20.70	20.70	20.70	20.70	20.70	20.65
		2	48	20.61	20.70	20.56	20.00	20.00	19.95	20.44	20.59	20.47	20.58	20.56	20.70
		25	0	20.65	20.64	20.70	20.00	19.98	19.97	20.65	20.58	20.69	20.66	20.70	20.59
		25	12	20.63	20.63	20.68	20.00	19.97	19.94	20.63	20.64	20.65	20.65	20.62	20.60
		25	24	20.64	20.63	20.61	19.94	19.96	19.95	20.64	20.67	20.65	20.64	20.62	20.65
		50	0	20.70	20.70	20.68	19.99	20.00	20.00	20.70	20.70	20.70	20.70	20.68	20.70

OUTPUT POWER FOR LTE BAND 48 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				55315	55940	56665	55315	55940	56665	55315	55940	56665	55315	55940	56665
15.0	QPSK	1	0	23.67	22.76	22.48	24.50	24.50	24.50	25.20	25.09	25.04	25.16	25.19	25.12
		1	37	23.70	22.89	22.50	24.47	24.46	24.50	25.03	25.10	25.20	25.20	25.20	25.20
		1	74	23.59	22.90	22.38	24.37	24.43	24.45	24.93	25.20	25.16	25.17	25.14	25.18
		2	0	23.70	22.71	22.50	25.00	24.91	24.97	25.60	25.36	25.60	25.70	25.53	25.70
		2	73	23.56	22.90	22.49	24.95	25.00	25.00	25.46	25.60	25.58	25.56	25.70	25.59
		36	0	23.70	22.87	22.47	24.00	23.99	23.99	24.70	24.57	24.64	24.69	24.68	24.58
		36	16	23.69	22.87	22.45	23.96	24.00	23.98	24.64	24.65	24.68	24.69	24.67	24.63
		36	35	23.64	22.86	22.38	23.89	23.98	23.97	24.54	24.70	24.68	24.67	24.67	24.70
		75	0	23.70	22.88	22.45	22.97	24.00	23.00	23.64	24.65	23.70	23.70	24.70	23.66
	16QAM	1	0	23.69	22.77	22.47	23.50	23.50	23.50	24.20	24.02	23.99	24.18	24.20	24.15
		1	37	23.70	22.88	22.42	23.49	23.47	23.46	24.08	24.09	24.20	24.20	24.11	24.20
		1	74	23.59	22.86	22.32	23.38	23.40	23.42	24.01	24.20	24.15	24.15	24.11	24.18
		2	0	23.70	22.71	22.50	24.00	23.51	23.71	24.70	24.47	24.70	24.70	24.67	24.70
		2	73	23.56	22.90	22.49	23.74	24.00	24.00	24.62	24.70	24.69	24.50	24.70	24.66
		36	0	23.67	22.85	22.47	23.00	22.99	23.00	23.70	23.56	23.63	23.70	23.70	23.58
		36	16	23.66	22.85	22.45	22.92	22.98	22.98	23.63	23.63	23.68	23.69	23.69	23.64
		36	35	23.63	22.84	22.39	22.87	22.98	22.97	23.57	23.70	23.68	23.68	23.67	23.70
		75	0	22.70	21.88	22.47	21.92	23.00	21.99	22.65	23.66	22.70	22.70	23.70	22.67
	64QAM	1	0	23.20	22.75	22.47	22.50	22.50	22.50	23.20	23.07	23.12	23.19	23.20	23.11
		1	37	23.17	22.87	22.38	22.45	22.45	22.48	23.03	23.05	23.20	23.20	23.08	23.16
		1	74	23.15	22.88	22.35	22.42	22.45	22.46	23.00	23.20	23.20	23.18	23.11	23.20
		2	0	23.63	22.64	22.50	23.00	22.17	22.76	23.63	23.44	23.61	23.66	23.54	23.70
		2	73	23.70	22.90	22.44	22.96	23.00	23.00	23.70	23.70	23.70	23.70	23.70	23.64
		36	0	22.70	22.70	22.46	22.00	21.97	21.99	22.70	22.59	22.64	22.70	22.66	22.62
		36	16	22.69	22.70	22.43	21.92	21.98	21.97	22.63	22.64	22.67	22.63	22.67	22.64
		36	35	22.62	22.67	22.35	21.86	21.98	21.97	22.56	22.70	22.66	22.62	22.68	22.70
		75	0	21.70	22.70	21.70	20.96	22.00	21.00	21.68	22.67	21.70	21.66	22.70	21.67
	256QAM	1	0	20.20	20.11	20.20	19.50	19.50	19.50	20.20	20.10	20.08	20.15	20.20	20.15
		1	37	20.17	20.15	20.13	19.42	19.43	19.44	19.99	20.06	20.16	20.16	20.12	20.15
		1	74	20.12	20.20	20.08	19.36	19.40	19.45	19.97	20.20	20.20	20.20	20.14	20.20
		2	0	20.68	20.57	20.57	19.79	19.96	19.41	20.68	20.57	20.51	20.70	20.70	20.38
		2	73	20.70	20.70	20.70	20.00	20.00	20.00	20.70	20.70	20.70	20.69	20.53	20.70
		36	0	20.67	20.66	20.69	20.00	19.98	19.99	20.68	20.58	20.67	20.68	20.68	20.63
		36	16	20.66	20.69	20.67	19.93	19.98	19.98	20.67	20.64	20.69	20.68	20.68	20.66
		36	35	20.60	20.69	20.59	19.86	19.98	19.96	20.60	20.70	20.68	20.66	20.67	20.70
		75	0	20.70	20.70	20.70	19.96	20.00	20.00	20.70	20.63	20.70	20.70	20.70	20.68

OUTPUT POWER FOR LTE BAND 48 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				55340	55940	56640	55340	55940	56640	55340	55940	56640	55340	55940	56640
20.0	QPSK	1	0	23.52	22.64	22.30	24.41	24.38	24.32	25.14	25.04	24.91	25.06	25.01	25.05
		1	49	23.70	22.90	22.50	24.50	24.50	24.50	25.20	25.20	25.20	25.20	25.20	25.20
		1	99	23.46	22.81	22.22	24.32	24.33	24.27	24.97	25.14	25.04	25.02	24.99	25.12
		2	0	23.70	22.69	22.39	25.00	24.99	24.83	25.60	25.60	25.60	25.70	25.63	25.68
		2	98	23.69	22.90	22.50	24.78	25.00	25.00	25.54	25.58	25.57	25.61	25.70	25.70
		50	0	23.67	22.80	22.46	24.00	23.93	23.96	24.70	24.60	24.55	24.67	24.65	24.60
		50	24	23.61	22.80	22.44	23.93	23.94	23.94	24.57	24.67	24.64	24.63	24.63	24.64
		50	49	23.62	22.80	22.43	23.94	23.94	23.92	24.60	24.70	24.61	24.63	24.63	24.62
		100	0	23.66	22.85	22.50	22.99	24.00	23.00	23.65	24.67	23.70	23.70	24.70	23.70
		1	0	23.52	22.60	22.34	23.42	23.37	23.36	24.17	23.97	23.95	24.03	24.11	24.07
		1	49	23.67	22.85	22.50	23.50	23.50	23.50	24.20	24.20	24.20	24.20	24.20	24.20
		1	99	23.38	22.67	22.22	23.26	23.26	23.33	24.02	24.13	24.07	24.03	23.98	24.06
	16QAM	2	0	23.70	22.69	22.39	23.94	23.97	23.82	24.66	24.60	24.56	24.70	24.65	24.62
		2	98	23.69	22.90	22.50	24.00	24.00	24.00	24.70	24.70	24.70	24.63	24.70	24.70
		50	0	23.67	22.79	22.47	22.98	22.95	22.96	23.70	23.56	23.59	23.66	23.67	23.60
		50	24	23.60	22.80	22.44	22.93	22.94	22.93	23.58	23.63	23.67	23.64	23.65	23.64
		50	49	23.62	22.80	22.44	22.94	22.94	22.93	23.61	23.70	23.58	23.65	23.64	23.61
		100	0	22.67	22.85	22.50	22.00	23.00	22.00	22.65	23.69	22.70	22.70	23.70	22.70
		1	0	23.02	22.63	22.40	22.44	22.39	22.38	23.20	23.13	22.99	23.20	23.13	23.14
		1	49	23.20	22.85	22.50	22.50	22.50	22.50	23.14	23.20	23.20	23.15	23.20	23.20
		1	99	23.00	22.69	22.32	22.35	22.32	22.31	22.93	23.17	23.08	23.07	23.04	23.18
		2	0	23.67	22.79	22.39	23.00	23.00	23.00	23.67	23.24	23.70	23.70	23.69	23.59
		2	98	23.70	22.90	22.50	22.87	22.98	22.75	23.70	23.70	23.31	23.70	23.70	23.70
		50	0	22.70	22.67	22.48	22.00	21.96	21.97	22.70	22.53	22.55	22.67	22.66	22.62
	64QAM	50	24	22.60	22.67	22.45	21.93	21.95	21.95	22.56	22.64	22.64	22.63	22.64	22.64
		50	49	22.61	22.65	22.45	21.94	21.96	21.94	22.62	22.70	22.63	22.63	22.63	22.62
		100	0	21.66	22.70	21.70	20.99	22.00	21.00	21.68	22.70	21.70	21.70	22.70	21.70
		1	0	20.17	19.95	20.06	19.49	19.36	19.40	20.20	20.08	19.95	20.06	20.10	20.14
		1	49	20.20	20.20	20.20	19.50	19.50	19.50	20.20	20.20	20.20	20.20	20.20	20.20
		1	99	20.04	20.01	20.00	19.35	19.32	19.38	20.02	20.17	20.09	20.03	20.04	20.14
		2	0	20.70	20.50	20.62	20.00	20.00	20.00	20.67	20.24	20.70	20.70	20.69	20.59
		2	98	20.57	20.70	20.70	19.87	19.98	19.75	20.70	20.70	20.31	20.70	20.70	20.70
		50	0	20.70	20.62	20.66	20.00	19.94	19.97	20.70	20.59	20.55	20.67	20.66	20.63
		50	24	20.62	20.62	20.64	19.93	19.94	19.94	20.57	20.62	20.65	20.64	20.64	20.64
		50	49	20.61	20.65	20.63	19.94	19.96	19.93	20.58	20.70	20.62	20.64	20.64	20.62
		100	0	20.67	20.70	20.70	19.99	20.00	20.00	20.64	20.67	20.70	20.70	20.70	20.70
	256QAM	1	0	20.17	19.95	20.06	19.49	19.36	19.40	20.20	20.08	19.95	20.06	20.10	20.14
		1	49	20.20	20.20	20.20	19.50	19.50	19.50	20.20	20.20	20.20	20.20	20.20	20.20
		1	99	20.04	20.01	20.00	19.35	19.32	19.38	20.02	20.17	20.09	20.03	20.04	20.14
		2	0	20.70	20.50	20.62	20.00	20.00	20.00	20.67	20.24	20.70	20.70	20.69	20.59
		2	98	20.57	20.70	20.70	19.87	19.98	19.75	20.70	20.70	20.31	20.70	20.70	20.70
		50	0	20.70	20.62	20.66	20.00	19.94	19.97	20.70	20.59	20.55	20.67	20.66	20.63
		50	24	20.62	20.62	20.64	19.93	19.94	19.94	20.57	20.62	20.65	20.64	20.64	20.64
		50	49	20.61	20.65	20.63	19.94	19.96	19.93	20.58	20.70	20.62	20.64	20.64	20.62
		100	0	20.67	20.70	20.70	19.99	20.00	20.00	20.64	20.67	20.70	20.70	20.70	20.70

5G NR n48

Test Engineer ID:	25780	Test Date:	2024-02-24
-------------------	-------	------------	------------

OUTPUT POWER FOR 5G NR n48 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				637000	641666	646333	637000	641666	646333	637000	641666	646333	637000	641666	646333
10.0	BPSK	1	0	23.70	22.90	22.38	24.00	24.00	24.00	24.60	24.60	24.60	24.70	24.70	24.61
		1	1	23.68	22.90	22.38	24.35	24.31	24.38	24.97	24.97	25.06	25.20	25.15	24.94
		1	22	23.70	22.90	22.50	24.32	24.27	24.34	24.89	24.81	24.94	25.11	25.11	25.08
		1	23	23.62	22.87	22.50	23.96	23.82	23.85	24.55	24.54	24.55	24.62	24.65	24.70
		12	6	23.70	22.90	22.50	25.00	24.91	24.91	25.44	25.48	25.60	25.70	25.52	25.56
		24	0	23.69	22.89	22.47	24.50	24.47	24.50	25.20	25.18	25.20	25.14	25.20	25.14
		1	0	23.70	22.84	22.47	23.79	23.87	23.76	24.14	24.24	24.26	23.78	24.24	24.39
		1	1	23.70	22.86	22.43	24.41	24.50	24.47	25.10	25.10	25.10	24.78	25.20	25.16
	QPSK	1	22	23.65	22.90	22.50	24.36	24.38	24.41	24.94	24.93	25.00	24.75	25.19	25.20
		1	23	23.65	22.90	22.50	23.78	23.64	23.62	24.10	24.10	24.15	23.79	24.33	24.27
		12	6	23.70	22.90	22.50	25.00	25.00	25.00	25.60	25.60	25.60	25.34	25.70	25.70
		24	0	23.70	22.86	22.45	24.00	24.00	23.96	24.70	24.68	24.70	24.70	23.68	23.66
		1	0	23.09	22.79	21.90	22.48	22.68	22.72	23.00	22.85	23.11	22.58	23.16	23.11
		1	1	23.70	22.90	22.50	23.99	23.84	24.17	23.82	24.02	23.92	23.67	24.12	23.95
		1	22	23.70	22.83	22.44	23.88	23.96	23.95	23.88	23.78	23.88	23.59	24.13	24.05
		1	23	23.11	22.90	22.50	22.51	22.54	22.33	22.88	23.08	23.03	22.47	23.16	23.24
	16QAM	12	6	23.70	22.90	22.50	24.74	24.76	24.79	24.62	24.61	24.77	24.38	24.74	24.73
		24	0	23.70	22.88	22.48	23.00	23.00	22.94	23.70	23.67	23.67	23.68	23.70	23.67
		1	0	22.53	22.70	22.11	22.23	22.30	22.50	22.65	22.79	22.61	22.18	22.66	22.60
		1	1	22.55	22.53	22.22	22.51	22.63	22.72	22.55	22.72	22.31	22.42	22.91	22.73
		1	22	22.70	22.68	22.44	22.52	22.99	22.73	22.42	22.58	22.15	22.11	22.79	22.76
		1	23	22.70	22.67	22.50	22.25	22.24	22.02	22.53	22.69	22.33	22.18	22.82	22.81
		12	6	22.67	22.90	22.50	23.15	23.31	23.20	23.04	23.11	22.90	22.84	23.17	23.20
		24	0	23.20	22.90	22.50	22.50	22.50	22.48	22.66	22.71	22.45	22.80	23.15	23.19
	64QAM	1	0	20.67	20.70	20.52	20.32	20.39	20.40	20.80	20.63	20.70	20.31	21.14	20.83
		1	1	20.61	20.53	20.70	20.80	20.92	20.98	20.59	20.92	20.53	20.41	21.00	20.52
		1	22	20.63	20.70	20.60	20.81	20.80	20.92	20.58	20.67	20.50	20.36	21.22	20.88
		1	23	20.70	20.57	20.70	20.34	20.55	20.40	20.83	20.66	20.62	20.32	21.19	20.81
		12	6	21.20	21.20	21.20	21.31	21.33	21.34	21.19	21.18	21.20	21.20	21.29	21.19
		24	0	21.18	21.20	21.20	20.50	20.50	20.48	21.17	21.16	21.15	21.15	21.20	21.18
	256QAM	1	0	20.67	20.70	20.52	20.32	20.39	20.40	20.80	20.63	20.70	20.31	21.14	20.83
		1	1	20.61	20.53	20.70	20.80	20.92	20.98	20.59	20.92	20.53	20.41	21.00	20.52
		1	22	20.63	20.70	20.60	20.81	20.80	20.92	20.58	20.67	20.50	20.36	21.22	20.88
		1	23	20.70	20.57	20.70	20.34	20.55	20.40	20.83	20.66	20.62	20.32	21.19	20.81
		12	6	21.20	21.20	21.20	21.31	21.33	21.34	21.19	21.18	21.20	21.20	21.29	21.19
		24	0	21.18	21.20	21.20	20.50	20.50	20.48	21.17	21.16	21.15	21.15	21.20	21.18

OUTPUT POWER FOR 5G NR n48 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				637166	641333	646166	637166	641333	646166	637166	641333	646166	637166	641333	646166
15.0	BPSK	1	0	23.09	22.75	22.35	24.00	24.00	23.95	24.60	24.44	24.43	24.70	24.70	24.52
		1	1	23.70	22.84	22.50	24.20	24.45	24.26	25.05	24.91	24.84	25.19	24.76	24.98
		1	36	23.38	22.90	22.45	23.94	24.50	24.17	24.83	25.00	25.09	24.91	24.73	25.15
		1	37	23.70	22.90	22.50	23.93	23.78	24.00	24.57	24.60	24.60	24.41	24.58	24.70
		18	9	23.70	22.90	22.50	24.88	24.78	24.92	25.37	25.56	25.58	25.60	25.64	25.60
		36	0	23.70	22.88	22.49	24.50	24.46	24.48	25.20	25.18	25.20	25.20	25.20	25.20
		1	0	23.70	22.83	22.16	23.61	23.61	23.83	24.16	24.04	23.99	24.20	24.24	24.46
		1	1	23.59	22.79	22.41	24.21	24.50	24.50	25.10	24.98	24.95	25.20	25.20	25.11
	QPSK	1	36	23.70	22.90	22.50	24.50	24.48	24.18	24.94	25.10	25.10	24.97	24.74	25.20
		1	37	23.42	22.90	22.50	23.52	23.54	23.66	24.03	24.19	24.21	24.02	24.14	24.26
		18	9	23.70	22.90	22.50	25.00	25.00	25.00	25.60	25.60	25.60	25.70	25.70	25.70
		36	0	23.69	22.83	22.48	24.00	24.00	23.97	24.68	24.70	24.69	24.68	24.70	24.70
		1	0	23.20	22.57	22.50	22.89	22.45	22.59	23.15	22.95	22.97	23.18	22.98	22.98
		1	1	23.70	22.57	22.22	23.69	24.03	23.78	24.04	23.88	23.90	24.06	23.73	23.99
		1	36	23.23	22.90	22.50	23.70	23.81	23.92	23.84	23.97	23.80	23.85	23.41	23.96
		1	37	23.03	22.90	22.46	22.39	22.39	22.57	22.76	23.16	23.08	23.00	22.87	23.04
	16QAM	18	9	23.70	22.90	22.50	24.80	24.78	24.71	24.70	24.73	24.84	24.84	24.72	24.87
		36	0	23.68	22.89	22.50	23.00	23.00	23.00	22.68	23.70	22.65	23.70	23.70	23.68
		1	0	22.70	22.28	22.29	22.26	21.92	22.15	22.56	22.76	22.40	22.76	22.72	22.70
		1	1	22.65	22.70	22.31	22.50	22.73	22.69	22.88	22.57	22.42	22.71	22.25	22.55
		1	36	22.35	22.53	22.50	22.35	22.71	22.44	22.68	22.74	22.33	22.65	21.98	22.78
		1	37	22.62	22.70	22.50	21.97	22.15	22.17	22.50	22.74	22.73	22.48	22.52	22.72
		18	9	23.20	22.90	22.50	23.24	23.19	23.33	23.20	23.19	23.17	23.24	23.22	23.32
		36	0	23.20	22.90	22.50	22.50	22.50	22.50	23.17	23.18	23.16	23.20	23.20	23.18
	64QAM	1	0	20.70	20.70	20.60	20.26	20.38	20.48	20.92	20.57	20.63	20.96	20.83	20.89
		1	1	20.70	20.70	20.41	20.58	20.89	20.65	20.79	20.80	20.42	20.89	20.21	20.94
		1	36	20.47	20.47	20.70	20.41	20.87	20.69	20.58	20.82	20.65	20.60	20.37	21.02
		1	37	20.44	20.66	20.70	20.16	20.26	20.47	20.68	20.98	20.95	20.67	20.68	21.01
		18	9	21.20	21.20	21.20	21.34	21.41	21.34	21.18	21.20	21.29	21.25	21.25	21.55
		36	0	21.20	21.20	21.20	20.50	20.50	20.48	21.16	21.18	21.20	21.20	21.20	21.20

OUTPUT POWER FOR 5G NR n48 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				637333	641333	646000	637333	641333	646000	637333	641333	646000	637333	641333	646000
20.0	BPSK	1	0	23.70	22.90	22.43	24.00	24.00	24.00	24.60	24.60	24.51	24.70	24.70	24.65
		1	1	23.70	22.87	22.50	24.42	24.48	24.48	25.00	24.52	24.75	25.20	25.09	24.68
		1	49	23.63	22.90	22.34	24.27	24.40	24.33	24.70	24.45	24.65	24.96	25.20	25.02
		1	50	23.62	22.82	22.50	23.78	23.88	24.00	24.56	24.59	24.60	24.34	24.67	24.70
		25	12	23.70	22.90	22.50	24.90	24.84	24.90	25.48	25.60	25.56	25.70	25.58	25.67
		50	0	23.70	22.90	22.48	24.50	24.50	24.50	25.20	25.20	25.20	25.20	25.20	25.14
	QPSK	1	0	23.39	22.90	22.50	23.71	23.99	23.68	24.42	24.21	24.20	23.74	24.63	24.05
		1	1	23.70	22.90	22.50	24.49	24.50	24.47	25.05	25.10	24.70	24.90	25.20	24.92
		1	49	23.33	22.86	22.11	24.37	24.49	24.45	25.10	24.53	25.10	24.73	25.15	25.20
		1	50	23.70	22.74	22.14	23.62	23.54	23.75	24.23	24.13	24.21	23.66	24.25	24.63
		25	12	23.70	22.90	22.50	25.00	25.00	25.00	25.60	25.60	25.60	25.45	25.70	25.70
		50	0	23.70	22.88	22.50	24.00	24.00	24.00	24.68	24.70	24.70	24.65	24.70	24.70
	16QAM	1	0	23.20	22.90	22.19	22.53	22.34	22.60	23.19	23.15	23.37	22.63	23.21	22.87
		1	1	23.70	22.90	22.44	23.90	23.91	24.28	24.05	23.34	23.72	23.75	24.00	23.81
		1	49	23.65	22.49	22.50	23.88	24.00	24.13	23.66	23.43	23.58	23.71	23.88	24.08
		1	50	22.88	22.82	22.50	22.74	22.57	22.65	23.10	22.85	23.13	22.53	22.95	23.23
		25	12	23.70	22.90	22.50	24.70	24.72	24.68	24.60	24.66	24.42	24.53	24.55	24.72
		50	0	23.68	22.90	22.48	23.00	23.00	23.00	23.68	23.67	23.70	23.68	23.70	23.70
	64QAM	1	0	22.66	22.70	22.50	22.20	22.20	22.25	22.91	22.76	22.33	22.33	22.59	22.61
		1	1	22.40	22.70	22.50	22.57	22.79	22.51	22.65	22.17	22.12	22.34	22.87	22.31
		1	49	22.70	22.62	22.48	22.65	22.66	22.60	22.38	21.86	22.16	22.41	22.41	22.50
		1	50	22.70	22.57	22.41	22.20	22.04	22.20	22.69	22.62	22.84	22.14	22.54	22.93
		25	12	23.10	22.90	22.50	23.22	23.36	23.15	23.20	23.25	23.20	22.96	22.98	23.24
		50	0	23.20	22.90	22.50	22.50	22.50	22.50	23.16	23.20	23.18	22.95	22.96	23.20
	256QAM	1	0	20.70	20.70	20.59	20.51	20.33	20.55	20.99	21.01	20.93	20.40	20.88	20.93
		1	1	20.56	20.53	20.67	20.77	20.91	20.91	20.75	20.29	20.20	20.73	20.51	20.57
		1	49	20.70	20.70	20.62	20.78	21.05	20.79	20.49	20.22	19.91	20.35	20.60	20.68
		1	50	20.26	20.55	20.70	20.26	20.51	20.30	20.79	20.99	20.99	20.42	20.89	21.01
		25	12	21.14	21.20	21.20	21.30	21.35	21.28	21.20	21.27	21.20	21.20	21.20	21.20
		50	0	21.20	21.20	21.20	20.50	20.50	20.50	21.15	21.20	21.18	21.20	21.18	21.19

OUTPUT POWER FOR 5G NR n48 (30.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				637666	641666	645666	637666	641666	645666	637666	641666	645666	637666	641666	645666
30.0	BPSK	1	0	23.70	22.78	21.96	24.00	23.94	23.81	24.60	24.33	24.37	24.70	24.70	24.31
		1	1	23.70	22.90	22.23	24.00	23.80	24.48	25.10	24.84	24.83	25.20	25.20	24.70
		1	76	23.47	22.88	22.50	23.87	24.09	24.50	24.85	24.92	25.10	25.11	25.20	25.20
		1	77	23.59	22.90	22.50	23.97	24.00	24.00	24.27	24.60	24.60	24.51	24.38	24.70
		36	18	23.70	22.90	22.50	24.97	24.92	24.88	25.55	25.55	25.60	25.70	25.70	25.64
		75	0	22.70	22.89	21.20	22.00	24.50	21.00	22.70	25.20	21.10	22.70	25.20	22.20
	QPSK	1	0	23.70	22.47	22.50	23.70	23.62	23.54	24.15	24.00	23.75	23.94	23.94	23.81
		1	1	23.67	22.68	22.01	24.50	23.99	24.35	25.10	24.92	24.69	24.95	25.05	24.65
		1	76	23.70	22.90	22.50	23.91	24.50	24.33	24.90	25.10	25.08	24.74	25.09	25.12
		1	77	23.60	22.90	22.40	23.77	23.78	23.64	23.89	24.04	24.17	23.64	23.51	24.22
		36	18	23.70	22.90	22.50	25.00	25.00	25.00	25.60	25.60	25.34	25.36	25.31	25.70
		75	0	22.65	22.86	21.20	22.00	24.00	21.00	22.70	24.70	21.10	22.70	24.70	22.20
	16QAM	1	0	23.15	22.90	22.17	22.64	22.31	22.25	22.91	22.90	22.46	22.64	22.57	22.56
		1	1	23.51	22.90	22.35	23.64	23.67	24.13	23.92	23.83	23.35	23.65	23.72	23.52
		1	76	23.70	22.81	22.50	23.54	23.60	23.89	23.75	23.96	23.75	23.75	23.52	24.09
		1	77	23.20	22.86	22.50	22.56	22.75	22.70	22.79	22.78	22.65	22.61	22.45	23.61
		36	18	23.70	22.90	22.50	24.79	24.69	24.61	24.67	24.57	24.27	24.40	24.21	24.70
		75	0	22.70	22.90	21.20	22.00	23.00	21.00	22.70	23.68	21.10	22.70	23.68	22.20
	64QAM	1	0	22.62	22.70	22.14	22.18	21.93	22.09	22.67	22.47	21.90	22.63	22.30	22.84
		1	1	22.46	22.70	22.23	22.24	22.33	22.47	22.65	22.68	21.86	22.46	22.06	22.70
		1	76	22.70	22.24	22.50	22.48	22.27	22.87	22.29	22.52	22.37	21.99	22.24	23.07
		1	77	22.70	22.07	22.50	21.87	22.38	22.23	22.41	22.34	21.96	21.96	22.03	22.96
		36	18	23.13	22.90	22.50	23.27	23.17	23.18	23.15	23.20	22.81	22.85	23.20	23.69
		75	0	22.67	22.90	21.20	22.00	22.50	21.00	22.70	23.18	21.10	22.70	23.15	22.20
	256QAM	1	0	20.70	20.67	20.42	20.36	20.36	20.49	20.77	20.43	20.02	20.41	20.40	21.14
		1	1	20.70	20.70	20.07	20.64	20.33	20.65	20.89	20.68	20.03	20.51	20.62	20.86
		1	76	20.64	20.44	20.70	20.42	20.50	20.82	20.44	20.74	20.34	20.41	20.27	21.07
		1	77	20.21	20.70	20.70	20.24	20.32	20.70	20.52	20.58	20.29	20.16	19.84	21.69
		36	18	21.19	21.20	21.20	21.29	21.21	21.23	21.20	21.20	21.18	21.20	21.20	21.69
		75	0	21.19	21.20	21.20	20.25	20.50	20.50	21.18	21.20	21.16	21.14	21.19	21.20

OUTPUT POWER FOR 5G NR n48 (40.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)											
				ANT 9			ANT 4			ANT 7			ANT 8		
				638000	641333	645333	638000	641333	645333	638000	641333	645333	638000	641333	645333
40.0	BPSK	1	0	3570.0	3620.0	3680.0	3570.0	3620.0	3680.0	3570.0	3620.0	3680.0	3570.0	3620.0	3680.0
		1	1	23.62	22.63	21.97	23.77	23.67	23.81	24.60	24.40	24.05	24.70	24.70	23.93
		1	104	23.55	22.58	22.03	24.10	24.29	24.07	24.86	24.48	24.52	25.16	25.20	24.59
		1	105	23.70	22.90	22.50	24.19	24.50	24.50	25.10	24.75	25.10	25.00	24.75	25.14
		50	25	23.70	22.90	22.50	24.00	23.95	24.00	24.53	24.60	24.60	24.28	24.51	24.70
		100	0	21.70	22.85	21.20	19.00	24.40	19.50	21.60	24.24	21.10	21.70	25.20	19.70
	QPSK	1	0	23.17	22.90	22.00	23.66	23.34	23.62	24.47	24.19	23.27	24.10	24.39	23.46
		1	1	23.65	22.51	22.08	24.50	24.24	24.15	25.01	24.65	24.40	25.20	25.15	24.66
		1	104	23.70	22.90	22.50	24.38	24.49	24.30	24.91	25.10	24.75	25.00	24.64	25.20
		1	105	23.70	22.70	22.50	23.63	24.00	23.81	24.58	24.26	23.74	24.04	23.84	24.05
		50	25	23.70	22.90	22.50	25.00	25.00	25.00	25.60	25.60	25.36	25.70	25.58	25.64
		100	0	21.70	22.89	21.20	19.00	24.00	19.50	21.70	24.70	21.20	21.70	24.68	19.70
	16QAM	1	0	22.79	22.61	21.90	22.59	22.37	22.62	23.44	23.04	22.08	23.02	22.93	22.12
		1	1	23.38	22.90	21.84	23.33	23.62	23.81	23.84	23.51	22.88	24.09	23.81	23.58
		1	104	23.70	22.39	22.50	23.85	24.22	24.31	23.71	23.45	24.08	23.67	23.47	24.03
		1	105	23.20	22.90	22.50	22.35	22.79	22.40	22.95	23.19	23.06	22.75	22.50	23.05
		50	25	23.70	22.90	22.50	24.76	24.69	24.68	24.54	24.57	24.26	24.75	24.67	24.81
		100	0	21.70	22.85	21.20	19.00	22.50	19.50	21.70	23.65	21.20	21.70	23.10	19.70
	64QAM	1	0	22.70	22.22	22.19	21.89	21.83	22.11	22.83	22.56	22.01	22.69	22.50	22.04
		1	1	22.64	22.48	22.17	22.09	22.67	22.52	22.83	22.11	21.71	22.78	22.55	22.56
		1	104	22.70	22.60	22.50	22.36	22.65	22.35	22.60	22.67	22.49	22.99	22.00	22.73
		1	105	22.49	22.70	22.50	22.23	22.30	22.35	22.40	22.91	22.38	22.40	22.50	22.75
		50	25	23.20	22.90	22.50	23.17	23.06	23.19	23.15	23.30	22.77	23.19	23.20	23.13
		100	0	21.70	22.90	21.20	19.00	20.50	19.50	21.70	23.18	21.20	21.70	23.16	19.70
	256QAM	1	0	20.70	20.70	20.12	20.14	20.14	20.41	20.76	20.90	20.41	20.76	20.75	20.02
		1	1	20.66	20.20	20.38	20.29	20.59	20.83	20.72	20.52	20.16	20.92	20.51	20.49
		1	104	20.70	20.70	20.70	20.40	21.04	20.96	20.72	20.97	20.62	20.77	20.39	20.86
		1	105	20.69	20.63	20.70	20.48	20.44	20.26	20.46	21.14	20.42	20.79	20.20	20.87
		50	25	21.20	21.20	21.20	21.24	21.29	21.31	21.20	21.40	21.20	21.20	21.20	21.25
		100	0	21.10	21.20	21.20	19.00	20.50	19.50	21.18	21.20	21.20	21.20	21.18	19.70

Test Engineer ID:	25780	Test Date:	2024-02-28
--------------------------	-------	-------------------	------------

Bandwidth	PCC	SCC1	PCC	PCC	SCC1	SCC1	Conducted Average (dBm)															
	Frequency	Frequency	RB	RB	RB	RB	ANT 9				ANT 4				ANT 7				ANT 8			
	(MHz)	(MHz)	Size	Offset	Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
5MHz / 20MHz	3553.3	3565.0	1	24	1	0	20.09	20.20	20.19	20.14	19.29	19.41	19.45	19.50	20.03	20.07	20.20	20.14	19.96	20.10	20.20	20.13
			25	0	100	0	13.66	13.65	13.65	13.70	12.94	12.92	12.96	13.00	13.70	13.69	13.67	13.68	13.68	13.69	13.70	13.60
			24	1	0	0	20.12	20.21	20.20	20.15	20.20	20.24	20.23	20.24	20.03	20.07	20.20	20.14	20.03	20.07	20.20	20.13
	3615.8	3627.5	1	24	1	0	21.66	21.68	21.70	20.63	20.99	20.96	21.00	19.94	21.84	21.70	21.66	20.58	21.59	21.65	21.70	20.70
			25	0	100	0	13.65	13.66	13.66	13.70	13.00	13.00	12.98	12.97	13.69	13.70	13.70	13.69	13.64	13.67	13.70	13.67
			1	24	1	0	20.06	20.20	20.17	20.18	19.48	19.47	19.50	19.43	20.05	20.10	20.10	20.20	20.03	20.08	20.20	20.09
	3678.3	3690.0	25	0	100	0	13.65	13.66	13.66	13.70	13.00	13.00	12.98	12.97	13.69	13.70	13.70	13.69	13.64	13.67	13.70	13.67

Bandwidth	PCC	SCC1	PCC	PCC	SCC1	SCC1	Conducted Average (dBm)																
	Frequency (MHz)	Frequency (MHz)	RB	RB	RB	RB	ANT 9				ANT 4				ANT 7				ANT 8				
			Size	Offset	Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	
20MHz / 5MHz	3560.0	3571.7	1	99	1	0	20.58	20.54	20.70	20.68	19.95	19.85	19.91	20.00	20.62	20.57	20.61	20.70	20.70	20.70	20.65	20.62	20.68
			100	0	25	0	13.66	13.70	13.68	13.64	13.00	12.99	12.99	12.99	13.70	13.69	13.67	13.67	13.70	13.65	13.61	13.61	
	3622.5	3634.2	1	99	1	0	22.90	22.90	22.90	20.70	22.99	22.96	23.00	20.00	23.59	23.68	23.70	20.70	23.60	23.41	23.61	23.61	
			100	0	25	0	21.68	21.70	21.68	20.61	20.90	21.00	21.00	21.00	21.64	21.64	21.70	20.61	21.67	21.64	20.70	20.69	
	3685.0	3696.7	1	99	1	0	20.53	20.59	20.62	20.70	19.86	19.83	20.00	19.91	20.56	20.56	20.64	20.70	20.61	20.49	20.70	20.65	
			100	0	25	0	13.66	13.67	13.70	13.63	12.94	13.00	12.97	12.97	13.68	13.70	13.63	13.62	13.64	13.68	13.70	13.68	

Bandwidth	PCC	SCC1	PCC		SCC1		Conducted Average (dBm)															
	Frequency (MHz)	Frequency (MHz)	RB	RB	RB	RB	ANT 9				ANT 4				ANT 7				ANT 8			
	Size	Offset	Size	Offset	Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
10MHz / 20MHz	3555.5	3569.9	1	49	1	0	19.56	19.59	19.67	19.70	18.80	18.81	19.00	18.93	19.63	19.53	19.70	19.62	19.63	19.53	19.68	19.70
			50	0	100	0	14.67	14.68	14.68	14.70	13.94	13.96	13.98	14.00	14.70	14.69	14.65	14.68	14.65	14.65	14.68	14.70
	3615.6	3630.0	1	49	1	0	22.90	22.80	22.80	20.39	23.49	23.50	23.90	19.59	24.18	24.20	23.70	20.94	24.20	24.20	23.70	20.70
			50	0	100	0	21.20	21.08	20.88	20.51	20.50	20.49	21.28	20.50	24.18	20.70	21.20	21.20	20.64	21.20	20.64	20.64
	3675.6	3690.0	1	49	1	0	19.70	19.63	19.58	19.52	18.83	18.87	19.00	18.97	19.55	19.58	19.70	19.66	19.55	19.58	19.70	19.68
			50	0	100	0	14.70	14.51	14.44	14.43	14.00	13.99	13.98	13.96	14.68	14.62	14.59	14.70	14.65	14.70	14.70	14.70

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC RB	SCC1 RB	Conducted Average (dBm)																			
							ANT 9				ANT 4				ANT 7				ANT 8							
							Size	Offset	Size	Offset	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
							1	99	1	0	19.60	19.55	19.62	19.70	19.00	18.82	18.89	18.98	19.46	19.52	19.61	19.70	19.60	19.47	19.63	19.70
20MHz / 10MHz	3560.0	3574.4	100	0	50	0	14.70	14.70	14.70	14.69	14.40	13.91	13.94	13.90	14.62	14.66	14.68	14.70	14.49	14.60	14.40	14.70				
	3620.1	3634.5	1	99	1	0	22.90	22.88	22.85	20.70	23.50	23.49	23.00	20.00	24.20	24.10	23.69	20.70	24.17	24.20	23.70	20.70				
			100	0	50	0	21.13	21.20	21.17	20.69	20.40	20.49	20.50	21.13	21.20	20.68	21.13	20.68	21.19	21.20	20.68	20.68				
	3680.1	3694.5	1	99	1	0	19.57	19.56	19.65	19.70	18.80	18.80	18.94	19.00	19.63	19.50	19.70	19.64	19.52	19.53	19.65	19.70				
			100	0	50	0	14.67	14.69	14.70	14.68	13.91	13.98	14.00	14.00	14.55	14.66	14.69	14.70	14.64	14.69	14.70	14.68				

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC Offset	SCC1 RB	SCC1 Offset	Conducted Average (dBm)															
							ANT 9				ANT 4				ANT 7				ANT 8			
							Size	Offset	Size	Offset	Size	Offset	Size	Offset	Size	Offset	Size	Offset	Size	Offset	Size	Offset
15MHz / 20MHz	3557.8	3574.9	1	74	1	0	19.60	19.53	19.70	19.50	18.77	18.88	19.00	18.96	19.62	19.54	19.70	19.68	19.56	19.60	19.70	19.69
			75	0	100	0	14.64	14.66	14.67	14.70	13.97	13.99	13.97	14.00	14.60	14.63	14.63	14.70	14.61	14.62	14.64	14.70
	3615.3	3632.4	1	74	1	0	22.87	22.90	22.70	20.70	24.00	23.96	22.99	20.00	24.70	24.68	23.69	20.70	24.51	24.70	23.68	20.62
			75	0	100	0	21.17	21.20	21.14	20.70	20.50	20.43	20.44	19.99	21.20	21.20	21.18	20.68	21.17	21.20	21.18	20.63
	3672.9	3690.0	74	1	0	0	19.49	19.50	19.70	19.62	18.91	18.84	19.00	19.56	19.70	19.68	19.56	19.66	19.70	19.56	19.66	19.70
			75	Δ	100	0	14.69	14.70	14.69	14.68	13.92	13.99	13.96	14.00	14.68	14.62	14.70	14.68	14.66	14.70	14.68	14.70

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB Size	PCC RB Offset	SCC1 RB Size	SCC1 RB Offset	Conducted Average (dBm)															
							ANT 9				ANT 4				ANT 7				ANT 8			
							QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
20MHz / 15MHz	3560.0	3577.1	1	99	1	0	19.56	19.60	19.67	19.70	18.91	18.86	19.00	18.99	19.54	19.57	19.62	19.70	19.46	19.48	19.59	19.70
			100	0	75	0	14.70	14.68	14.67	14.69	13.98	13.98	14.00	13.96	14.63	14.64	14.66	14.70	14.67	14.69	14.68	14.70
	3617.6	3634.7	1	99	1	0	22.85	22.90	22.70	20.70	23.90	24.00	23.00	20.00	24.68	24.70	23.70	20.70	24.65	24.70	23.70	20.70
			100	0	75	0	21.17	21.20	21.20	20.67	20.47	20.47	20.50	19.99	21.13	21.14	21.20	20.69	21.17	21.20	21.20	20.65
	3675.1	3692.2	1	99	1	0	19.59	19.60	19.67	19.70	18.86	18.92	18.88	19.00	19.50	19.48	19.56	19.70	19.62	19.62	19.67	19.70
			100	0	75	0	14.68	14.70	14.69	14.67	13.97	13.99	14.00	14.00	14.68	14.68	14.70	14.69	14.66	14.68	14.68	14.70

OUTPUT POWER FOR LTE BAND 48 (20.0MHz + 20.0MHz)

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB Size	PCC RB Offset	SCC1 RB Size	SCC1 RB Offset	Conducted Average (dBm)															
							ANT 9				ANT 4				ANT 7				ANT 8			
							QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM	QPSK	16QAM	64QAM	256QAM
20MHz/ 20MHz	3560.0	3579.8	1	99	1	0	21.11	21.06	21.20	20.68	20.43	20.42	20.49	19.98	21.13	21.11	21.20	20.67	21.09	21.11	21.20	20.68
			1	0	1	99	7.62	7.54	7.61	7.70	6.97	6.93	6.95	7.00	7.65	7.63	7.69	7.70	7.63	7.58	7.69	7.70
			100	0	100	0	14.68	14.69	14.69	14.70	14.00	13.99	13.99	14.00	14.66	14.65	14.67	14.70	14.68	14.69	14.70	14.70
			1	99	1	0	22.90	22.89	22.70	20.70	24.00	23.93	23.00	20.00	24.70	24.60	23.66	20.70	24.70	24.67	23.70	20.70
	3615.1	3634.9	1	0	1	99	14.19	14.11	14.19	14.20	13.46	13.41	13.47	13.50	14.17	14.13	14.18	14.20	14.11	14.09	14.13	14.20
			100	0	100	0	21.20	21.16	21.16	20.64	20.48	20.50	20.50	20.00	21.18	21.20	21.19	20.68	21.19	21.19	21.20	20.64
			1	99	1	0	21.12	21.06	21.20	20.70	20.43	20.47	20.48	19.98	21.12	21.09	21.20	20.68	21.13	21.06	21.20	20.70
			1	0	1	99	7.70	7.66	7.69	7.70	6.98	6.88	6.95	7.00	7.65	7.67	7.70	7.67	7.67	7.64	7.62	7.70
	3670.2	3690.0	1	0	1	99	7.70	7.66	7.69	7.70	6.98	6.88	6.95	7.00	7.65	7.67	7.70	7.67	7.67	7.64	7.62	7.70
			100	0	100	0	14.68	14.70	14.64	14.68	13.96	13.98	13.99	14.00	14.67	14.70	14.68	14.67	14.68	14.70	14.68	14.68
			1	0	1	99	7.70	7.66	7.69	7.70	6.98	6.88	6.95	7.00	7.65	7.67	7.70	7.67	7.67	7.64	7.62	7.70
			100	0	100	0	14.68	14.70	14.64	14.68	13.96	13.98	13.99	14.00	14.67	14.70	14.68	14.67	14.68	14.70	14.68	14.68

9. CONDUCTED TEST RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required and power is the same for low, middle, and high channel; therefore, only middle channel was tested. Worst-case plots (highest bandwidth) are reported only.

LTE BAND 48

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 48	5MHz, QPSK	25/0	3625.0	4.460	4.87
	5MHz, 16QAM			4.477	4.94
	10MHz, QPSK	50/0		8.971	9.58
	10MHz, 16QAM			8.909	9.75
	15MHz, QPSK	75/0		13.422	14.34
	15MHz, 16QAM			13.403	14.51
	20MHz, QPSK	100/0		17.877	18.78
	20MHz, 16QAM			17.981	18.64
	20MHz, QPSK	1/0		0.275	0.45

5G NR n48

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
5G NR n48 (FCC)	10MHz, BPSK	24/0	3625	8.604	9.46
	10MHz, QPSK			8.591	9.42
	10MHz, 16QAM			8.580	9.57
	15MHz, BPSK	36/0		12.846	13.73
	15MHz, QPSK			12.847	13.94
	15MHz, 16QAM			12.849	13.81
	20MHz, BPSK	50/0		17.841	19.01
	20MHz, QPSK			17.855	18.98
	20MHz, 16QAM			17.872	18.96
	30MHz, BPSK	75/0		26.904	28.22
	30MHz, QPSK			26.834	28.36
	30MHz, 16QAM			26.849	28.27
	40MHz, BPSK	100/0		35.801	37.41
	40MHz, QPSK			35.774	37.47
	40MHz, 16QAM			35.754	37.48
	100MHz, BPSK	1/0		0.479	0.86

LTE ULCA BAND 48

Band	Mode	RB Allocation/RB Offset	f (MHz)	99% BW (MHz)	- 26dB BW (MHz)
LTE BAND 48 (FCC)	5MHz + 20MHz BAND QPSK	25/0 + 100/0	3625	23.388	25.17
	5MHz + 20MHz BAND 16QAM			23.389	25.01
	20MHz + 5MHz BAND QPSK	100/0 + 25/0		23.413	25.11
	20MHz + 5MHz BAND 16QAM			23.498	26.19
	10MHz + 20MHz BAND QPSK	50/0 + 100/0		28.137	29.96
	10MHz + 20MHz BAND 16QAM			28.140	30.02
	20MHz + 10MHz BAND QPSK	100/0 + 50/0		28.153	30.11
	20MHz + 10MHz BAND 16QAM			28.080	30.09
	15MHz + 20MHz BAND QPSK	75/0 + 100/0		33.018	35.06
	15MHz + 20MHz BAND 16QAM			33.051	34.92
	20MHz + 15MHz BAND QPSK	100/0 + 75/0		32.967	38.10
	20MHz + 15MHz BAND 16QAM			33.015	35.41
	20MHz + 20MHz BAND QPSK	100/0 + 100/0		37.850	40.04
	20MHz + 20MHz BAND 16QAM			37.751	39.93


9.1.1. LTE BAND 48 AND 5G NR n48

LTE BAND 48




Intentionally Blank


5G NR n48

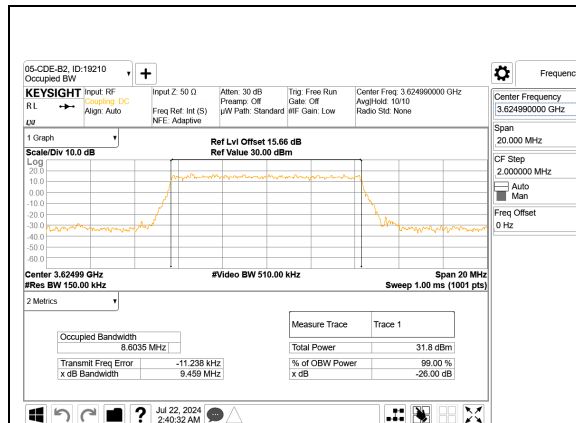


5G NR n48 10MHz BPSK Middle Channel RB24-0

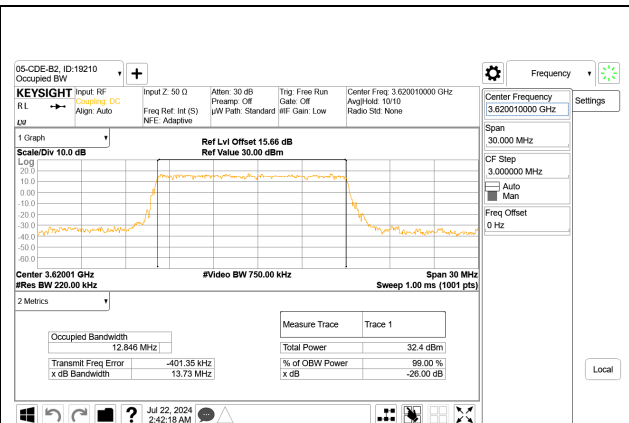


5G NR n48 15MHz BPSK Middle Channel RB36-0

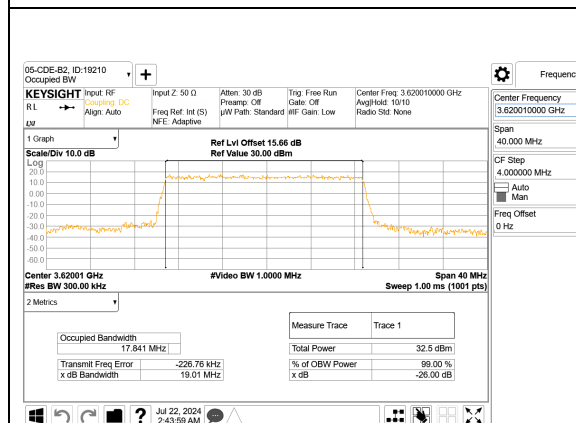


5G NR n48 20MHz BPSK Middle Channel RB50-0

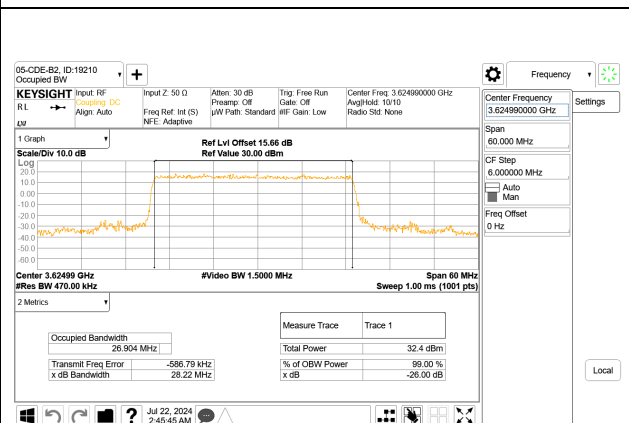

5G NR n48 30MHz BPSK Middle Channel RB75-0

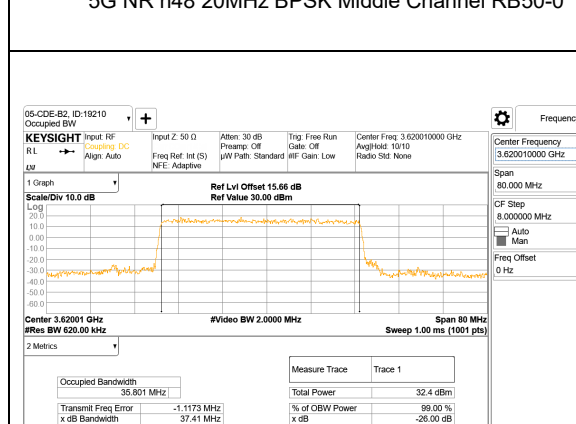


5G NR n48 40MHz BPSK Middle Channel RB100-0

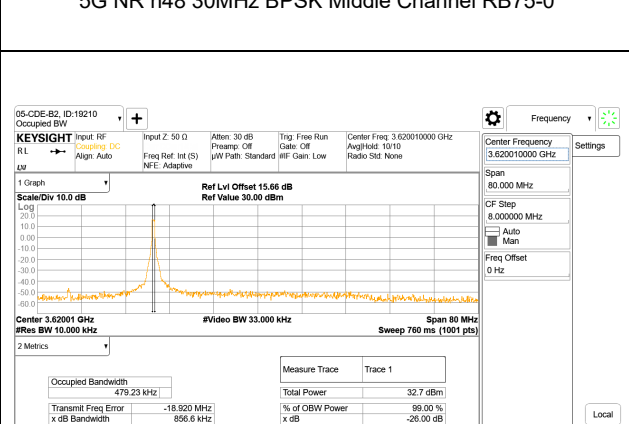


5G NR n48 40MHz BPSK Middle Channel RB1-0


9.1.2. LTE ULCA BAND 48

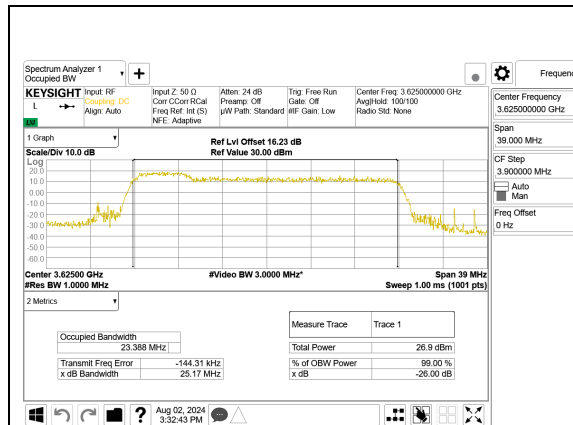


LTE B48 5MHz + 20MHz QPSK RB25-0 + RB100-0, ID:25780

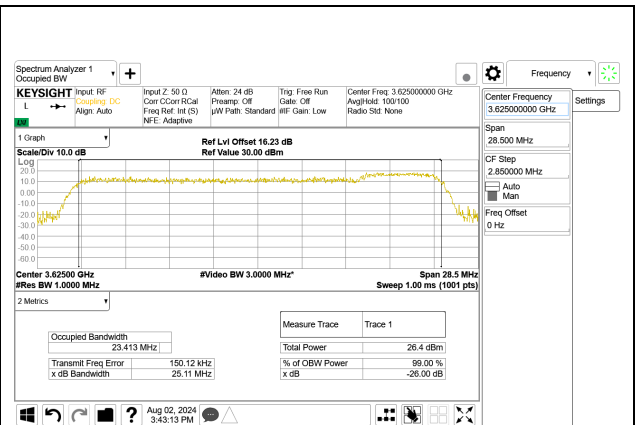


LTE B48 20MHz + 5MHz QPSK RB100-0 + RB25-0, ID:25780

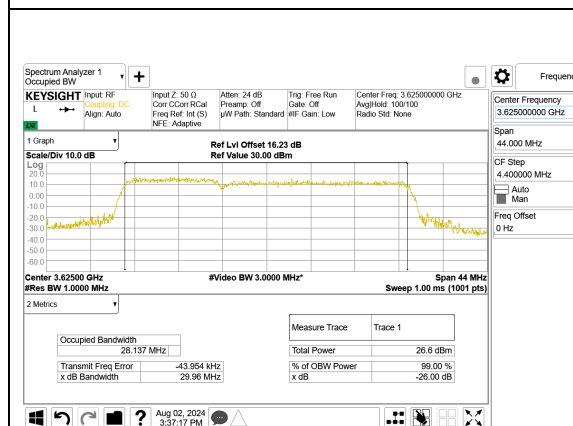


LTE B48 10MHz + 20MHz QPSK RB50-0 + RB100-0, ID:25780

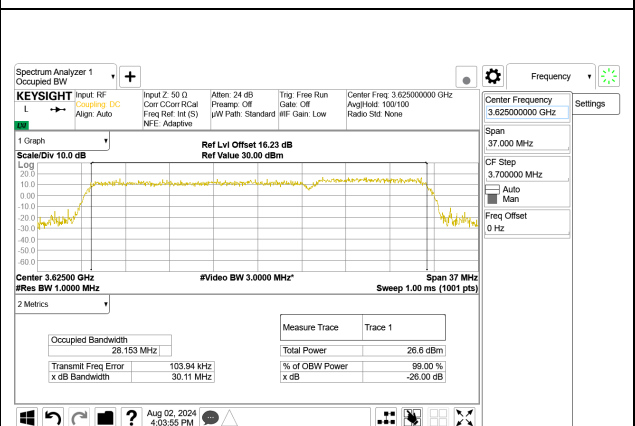


LTE B48 20MHz + 10MHz QPSK RB100-0 + RB50-0, ID:25780

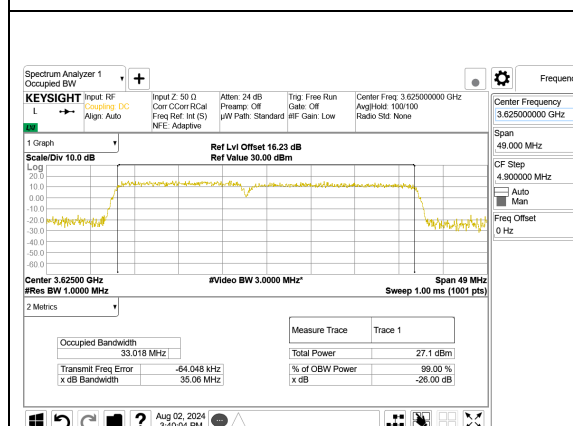

LTE B48 15MHz + 20MHz QPSK RB75-0 + RB100-0, ID:25780

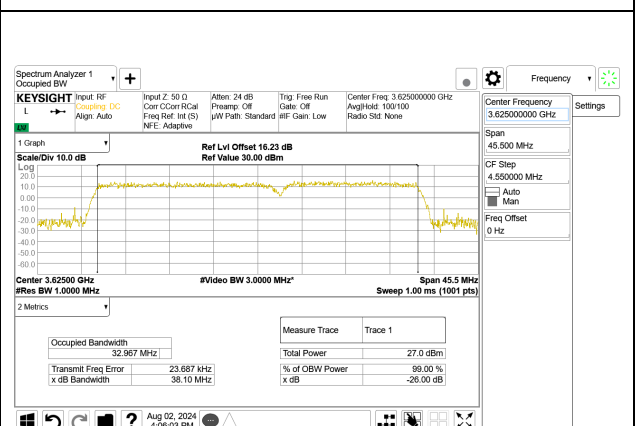

LTE B48 20MHz + 15MHz QPSK RB100-0 + RB75-0, ID:25780

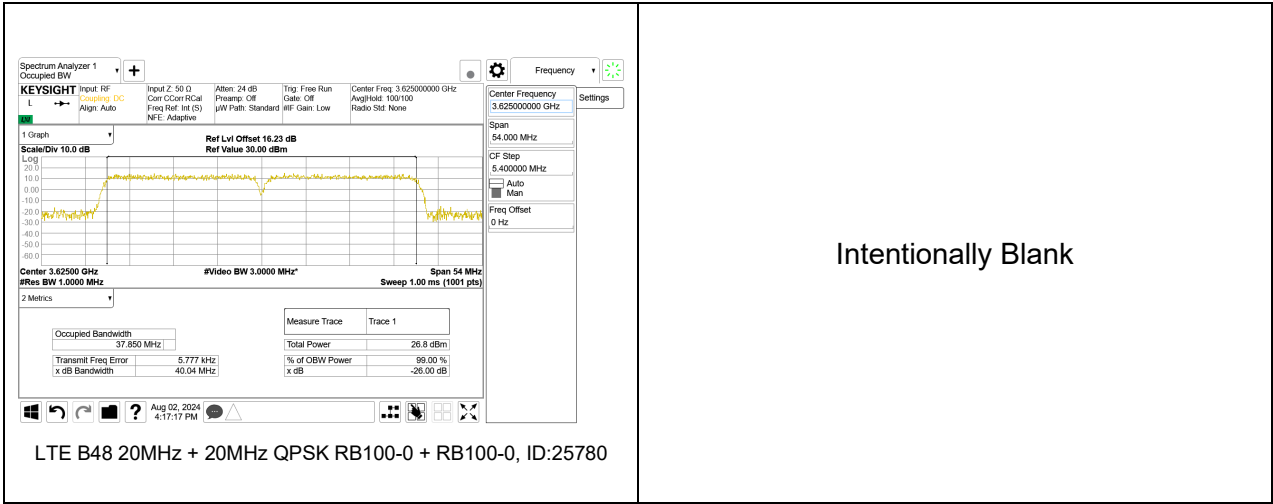

9.2. EMISSION MASK AND ADJACENT CHANNEL POWER

For Spectrum Emission Mask plots, the Keysight PXA N9030A is configured to sweep with a moving integration window, the width of which can be adjusted to different sizes across the sweep. The window width is configured to be greater than or equal to the required reference bandwidth. The center frequencies of the integration window for the different integration windows was set such that the upper and lower edges of the windows are aligned with the transition points in the reference bandwidths. This is achieved by setting the start / stop frequencies of the window with an offset equal to the reference bandwidth / 2 from the transition point.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

1. Set the spectrum analyzer span to include the block edge frequency.
2. Set a marker to point the corresponding band edge frequency in each test case.
3. Set display line at -13 dBm
4. Set resolution bandwidth to at least 1% of emission bandwidth.

TEST PROCEDURE (FCC LTE BAND 48)

(i) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full reference bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(ii) When measuring unwanted emissions to demonstrate compliance with the limits, the CBSD and End User Device nominal carrier frequency/channel shall be adjusted as close to the licensee's authorized frequency block edges, both upper and lower, as the design permits.

(iii) Compliance with emission limits shall be demonstrated using either average (RMS)-detected or peak-detected power measurement techniques.

RESULTS

LIMITS

FCC: §96.41

(e) 3.5 GHz Emissions and Interference Limits—


(1) General protection levels


(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.


9.2.1. LTE BAND 48 AND 5G NR n48

LTE BAND 48 EMISSION MASK

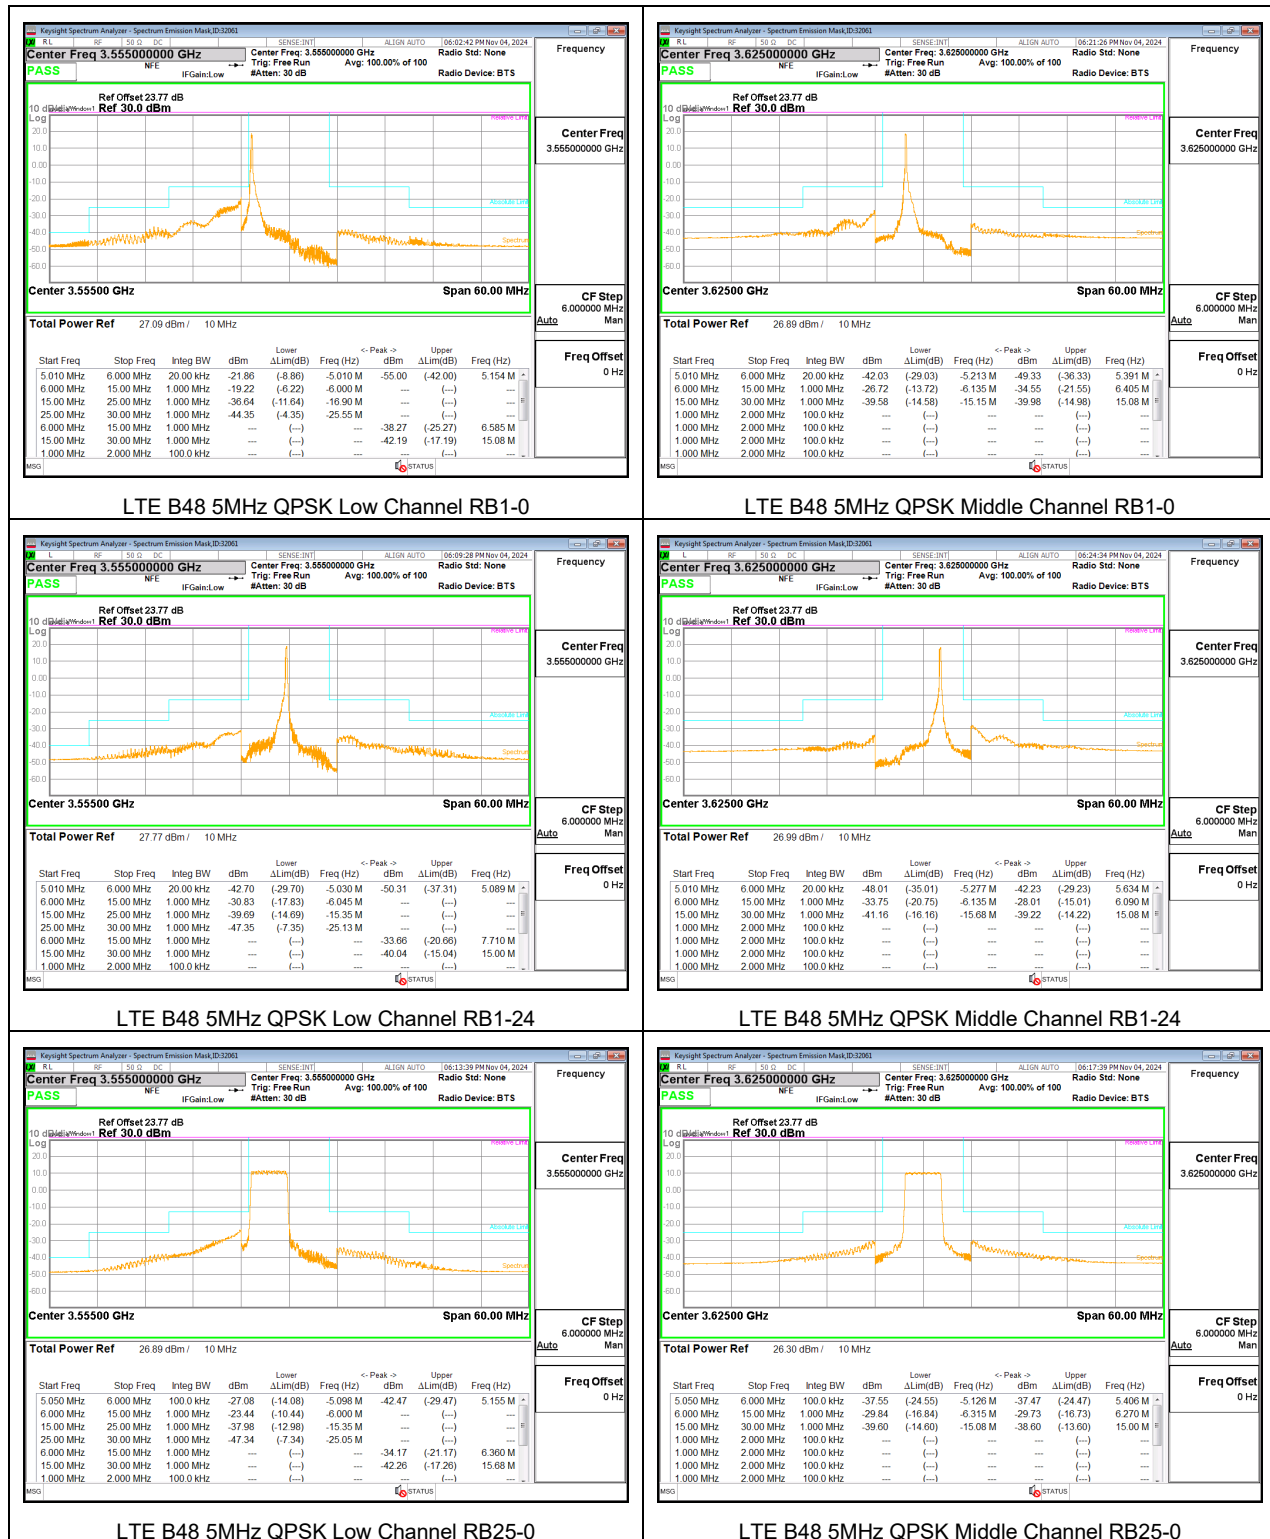


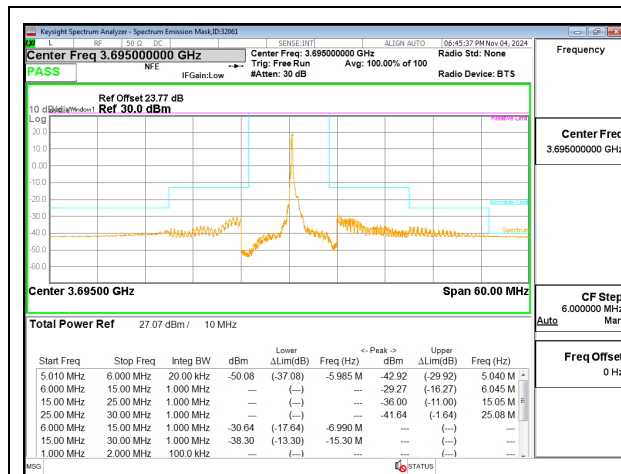


LTE B48 5MHz QPSK High Channel RB1-0

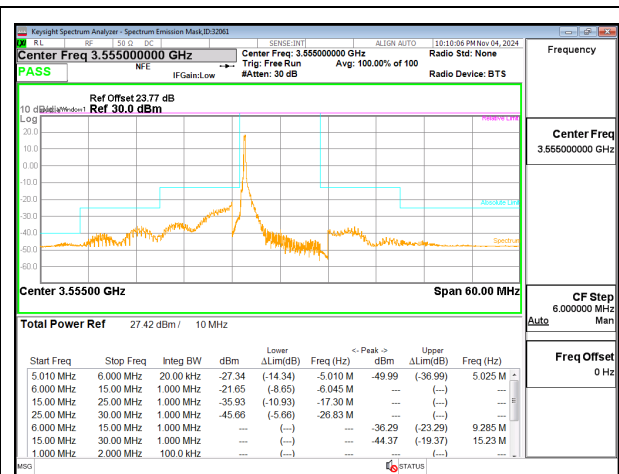


LTE B48 10MHz QPSK Low Channel RB1-0

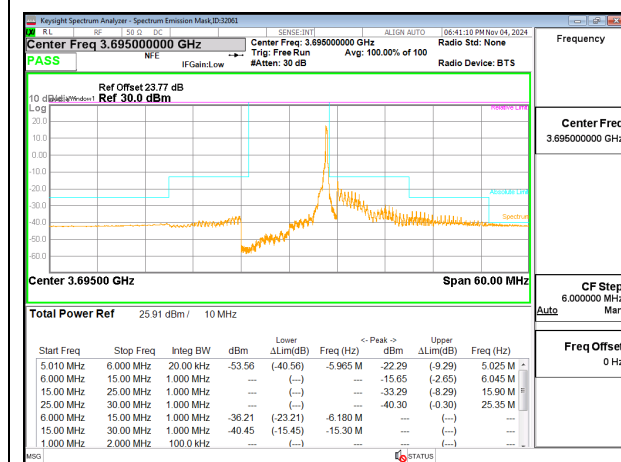


LTE B48 5MHz QPSK High Channel RB1-24

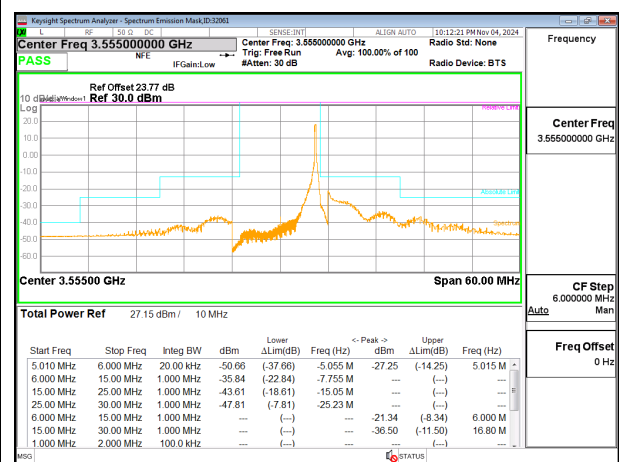


LTE B48 10MHz QPSK Low Channel RB1-49

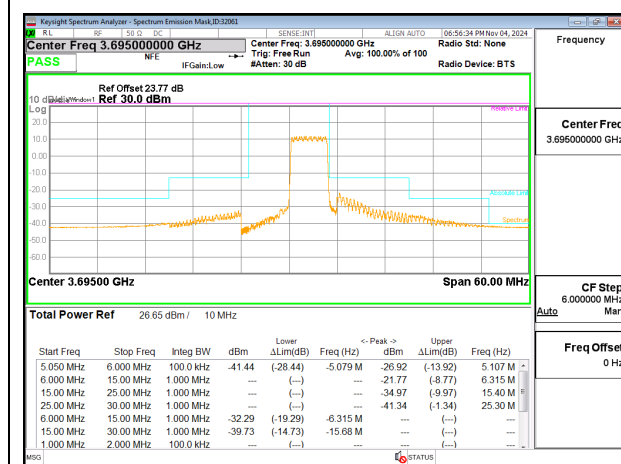


LTE B48 5MHz QPSK High Channel RB25-0

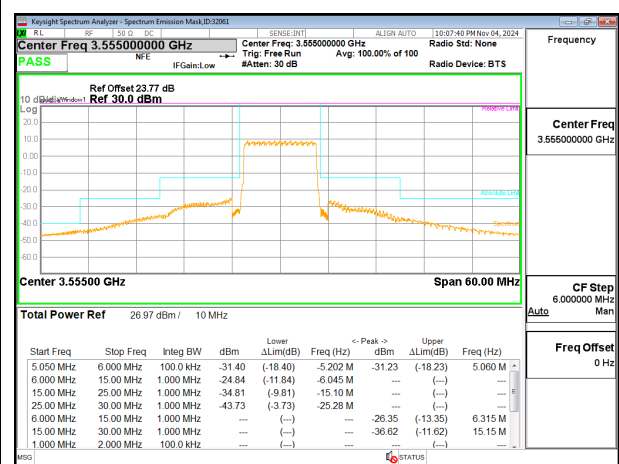


LTE B48 10MHz QPSK Low Channel RB50-0

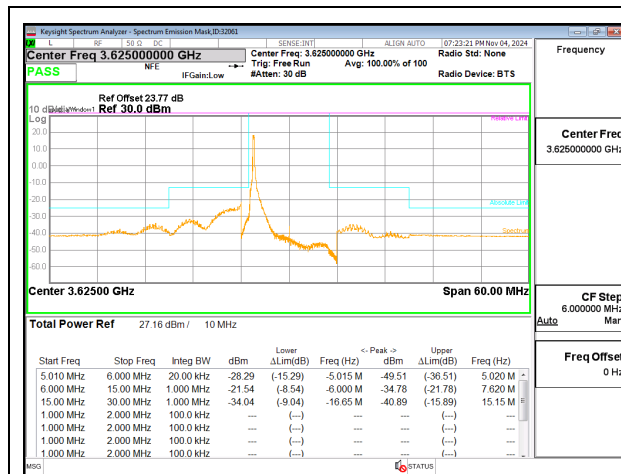


LTE B48 10MHz QPSK Middle Channel RB1-0

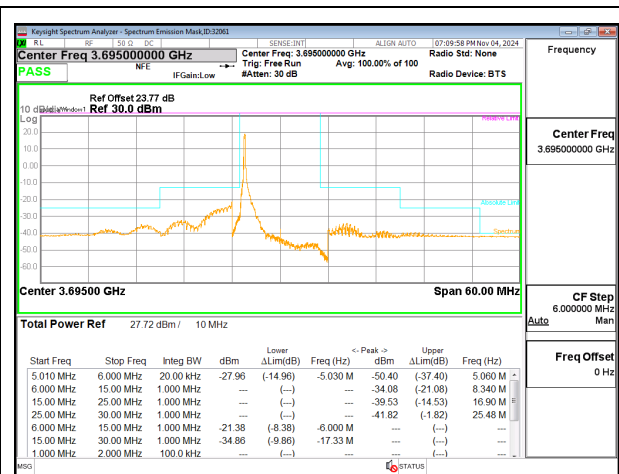


LTE B48 10MHz QPSK High Channel RB1-0

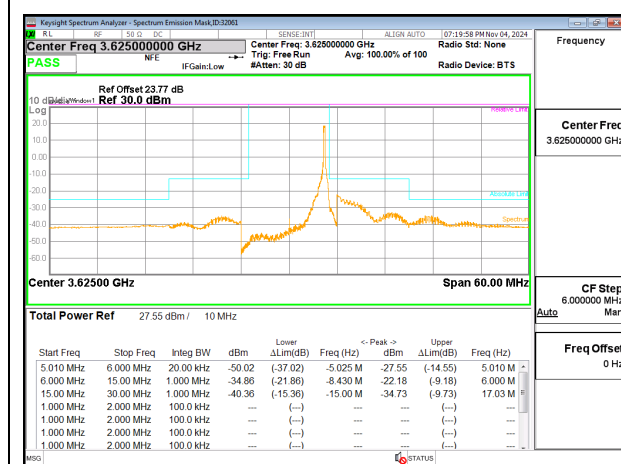


LTE B48 10MHz QPSK Middle Channel RB1-49

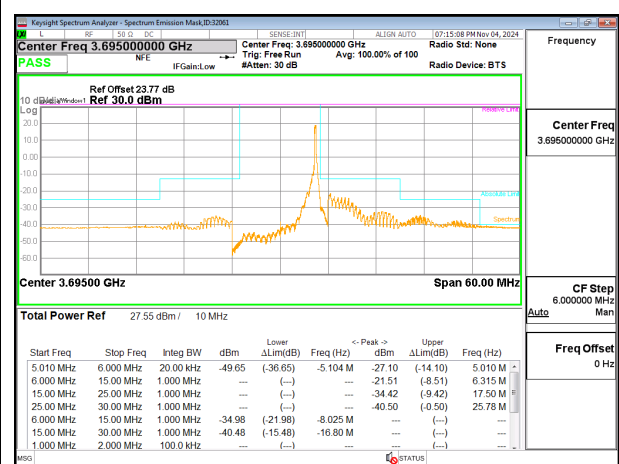


LTE B48 10MHz QPSK High Channel RB1-49

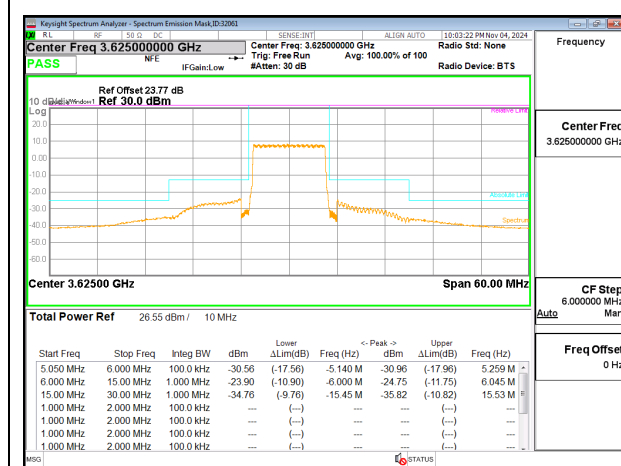


LTE B48 10MHz QPSK Middle Channel RB50-0

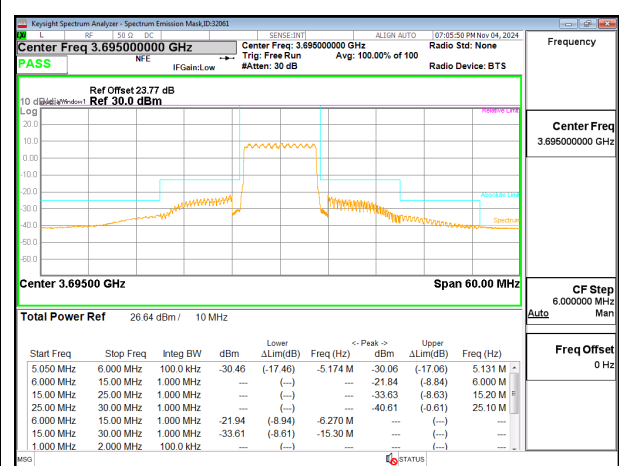


LTE B48 10MHz QPSK High Channel RB50-0

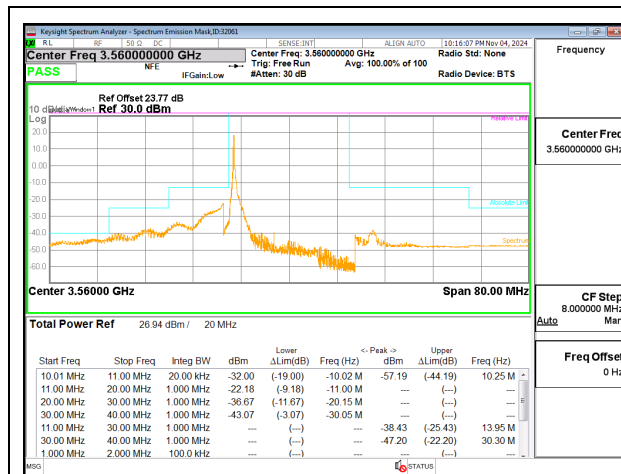


LTE B48 15MHz QPSK Low Channel RB1-0

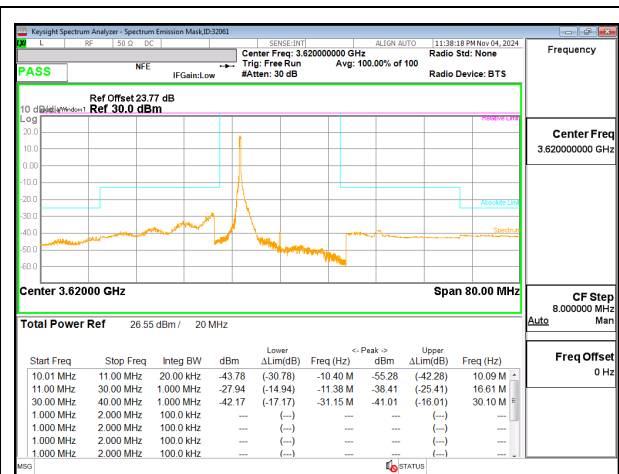


LTE B48 15MHz QPSK Middle Channel RB1-0

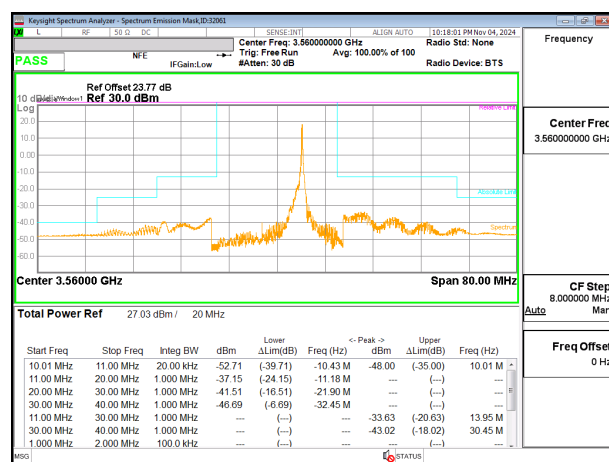

LTE B48 15MHz QPSK Low Channel RB1-74

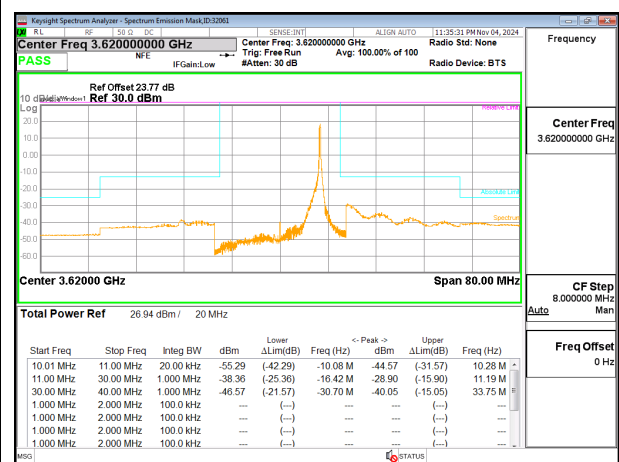


LTE B48 15MHz QPSK Middle Channel RB1-74

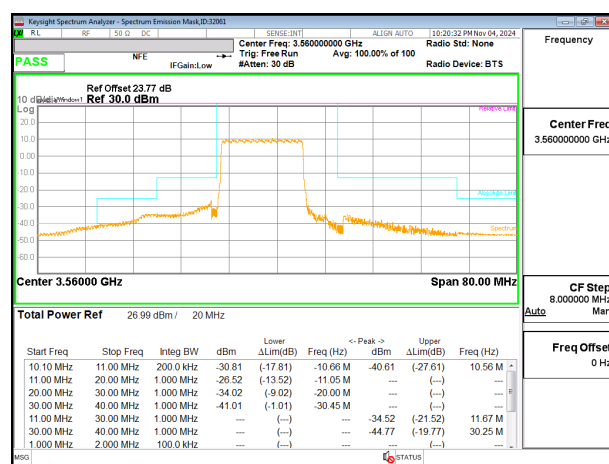


LTE B48 15MHz QPSK Low Channel RB75-0




LTE B48 15MHz QPSK Middle Channel RB75-0

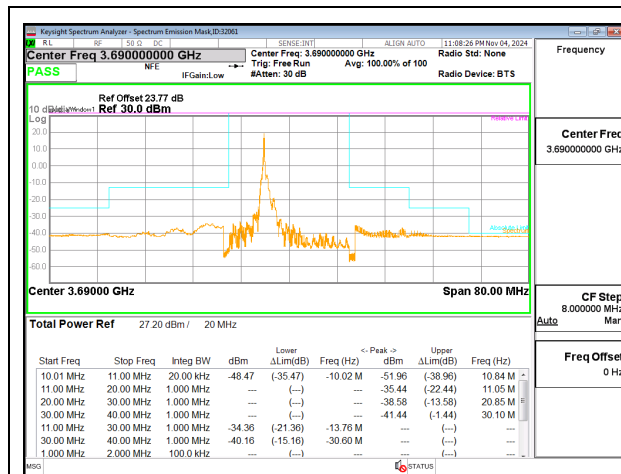


LTE B48 15MHz QPSK High Channel RB1-0

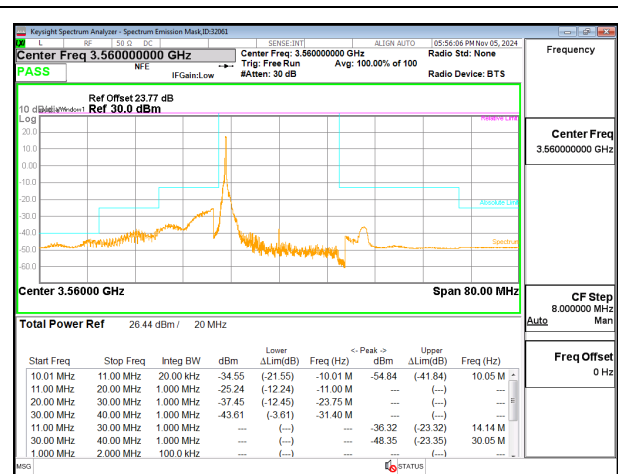


LTE B48 20MHz QPSK Low Channel RB1-0

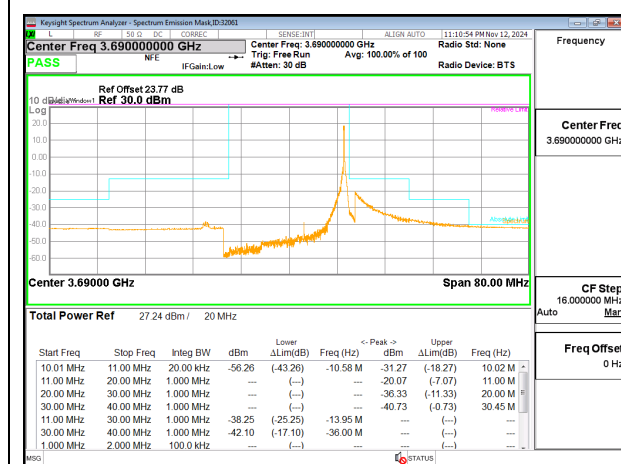


LTE B48 15MHz QPSK High Channel RB1-74

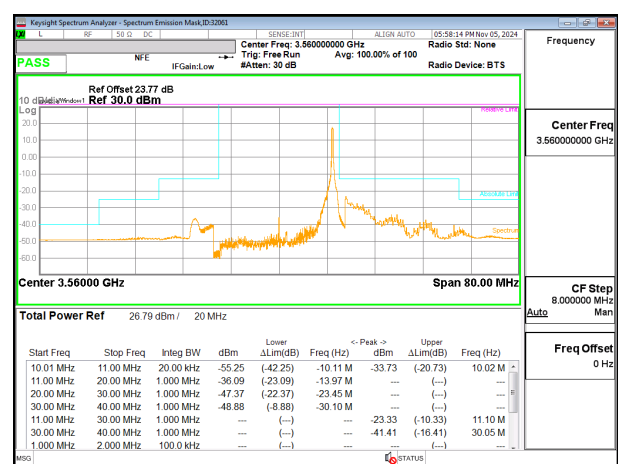


LTE B48 20MHz QPSK Low Channel RB1-99

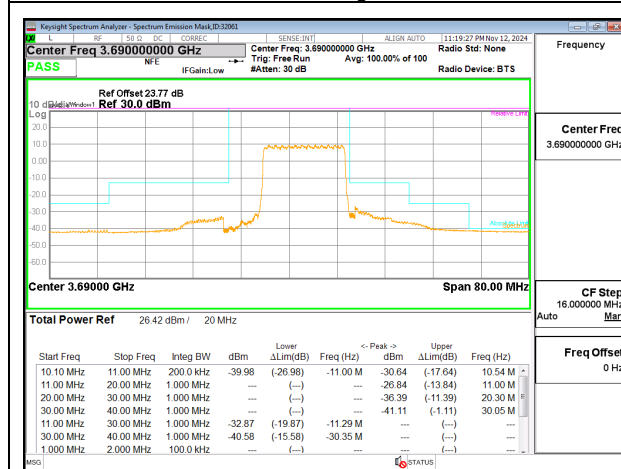


LTE B48 15MHz QPSK High Channel RB75-0

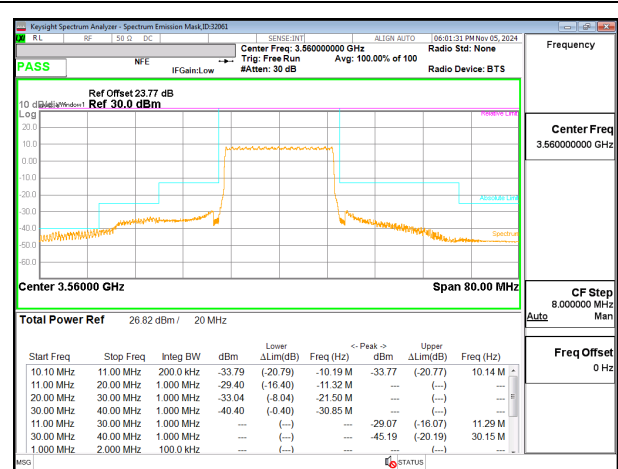


LTE B48 20MHz QPSK Low Channel RB100-0

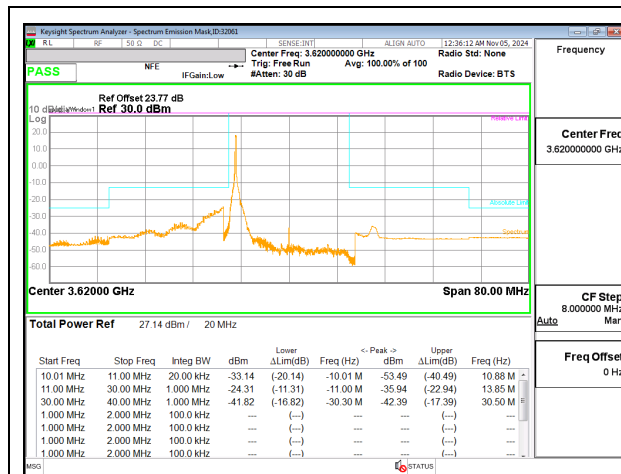


LTE B48 20MHz QPSK Middle Channel RB1-0

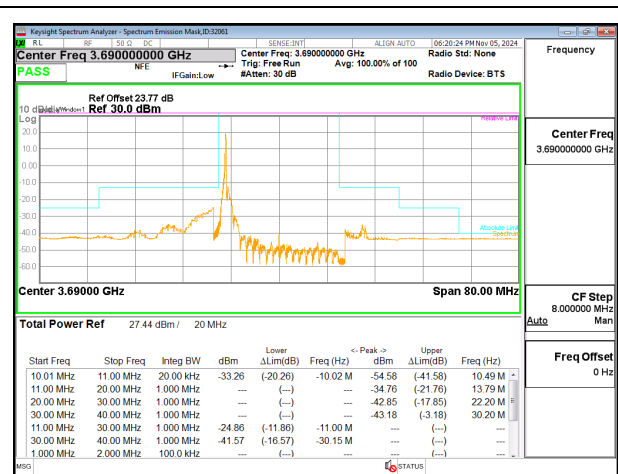


LTE B48 20MHz QPSK High Channel RB1-0

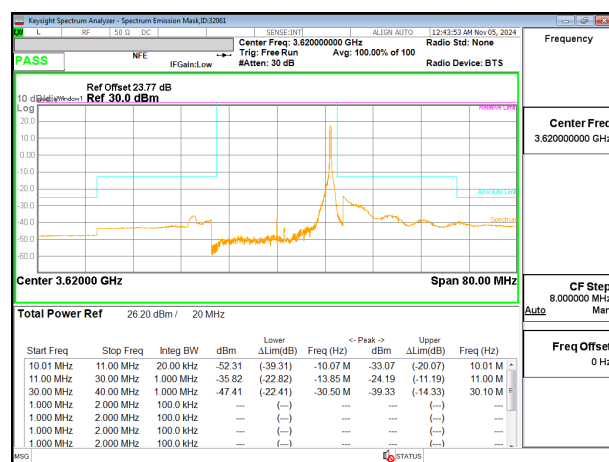


LTE B48 20MHz QPSK Middle Channel RB1-99

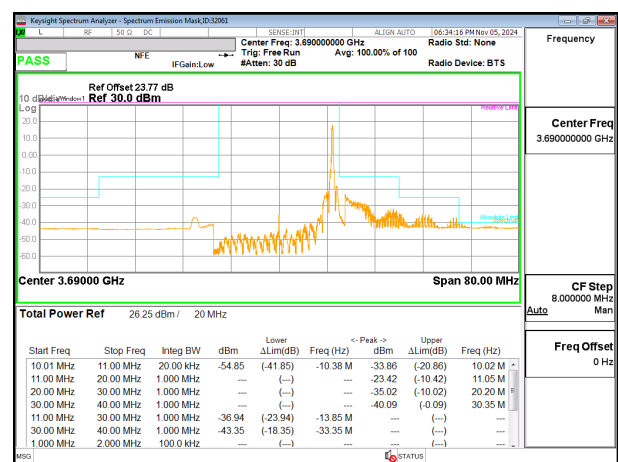

LTE B48 20MHz QPSK High Channel RB1-99

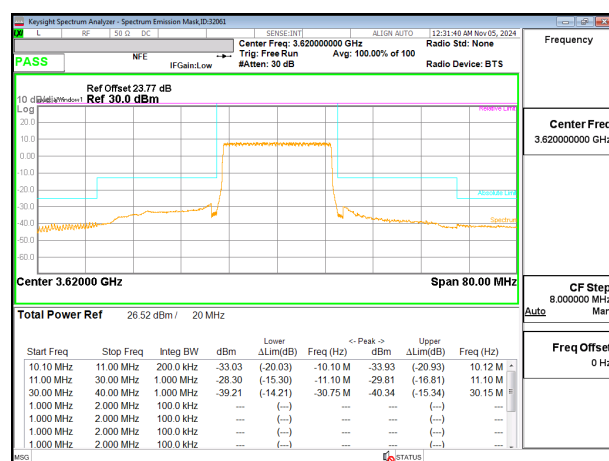


LTE B48 20MHz QPSK Middle Channel RB100-0

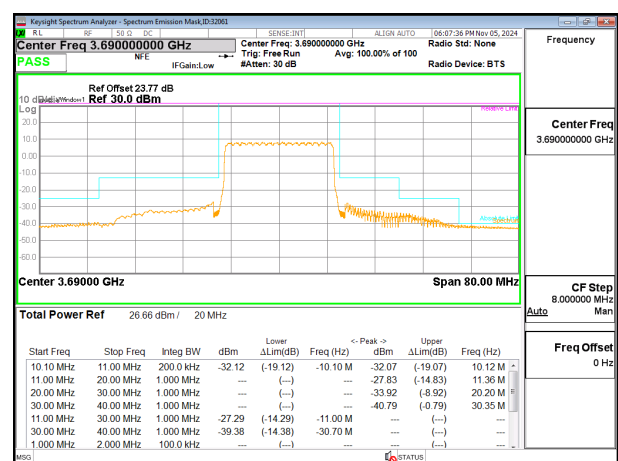


LTE B48 20MHz QPSK High Channel RB100-0


LTE BAND 48 ADJACENT CHANNEL POWER

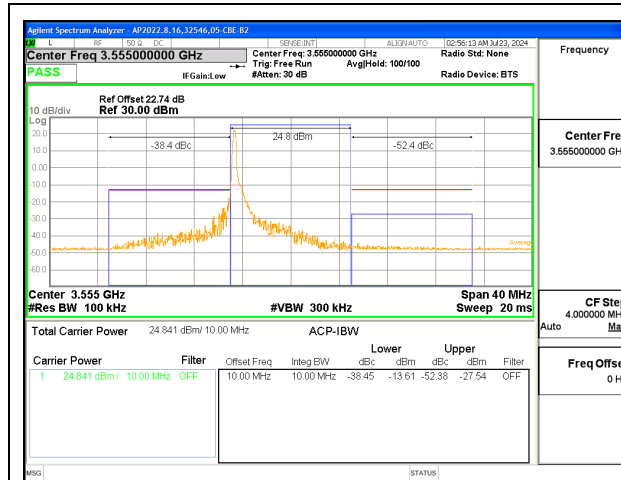


LTE B48 5MHz QPSK Low Channel RB1-0

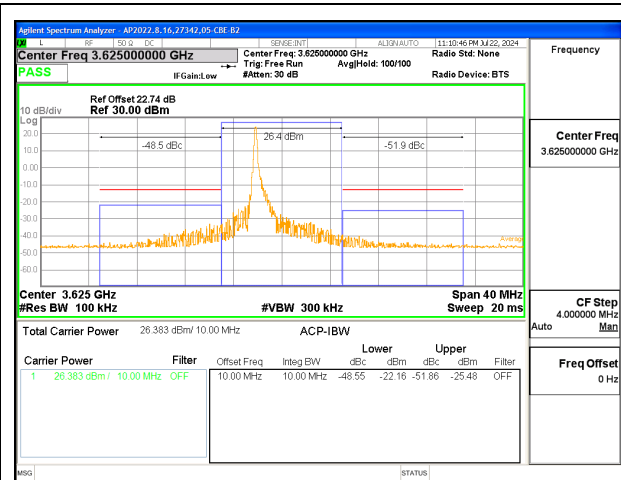


LTE B48 5MHz QPSK Middle Channel RB1-0

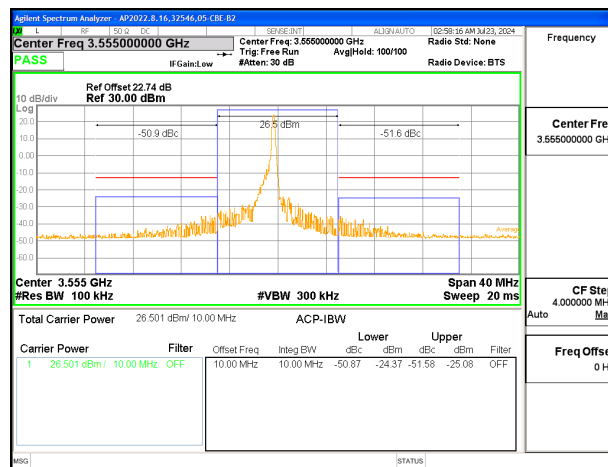


LTE B48 5MHz QPSK Low Channel RB1-24

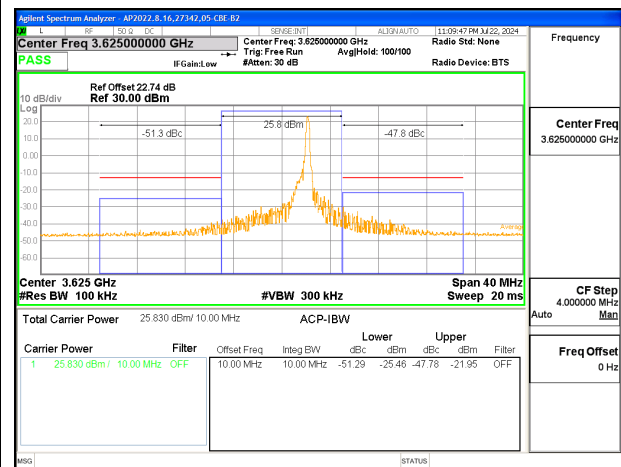


LTE B48 5MHz QPSK Middle Channel RB1-24

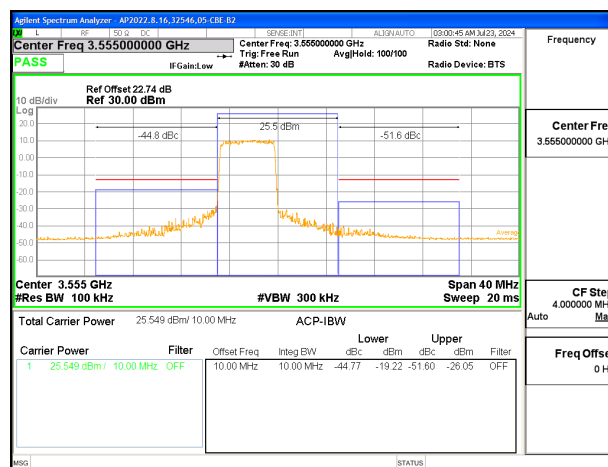


LTE B48 5MHz QPSK Low Channel RB25-0, ID:25780

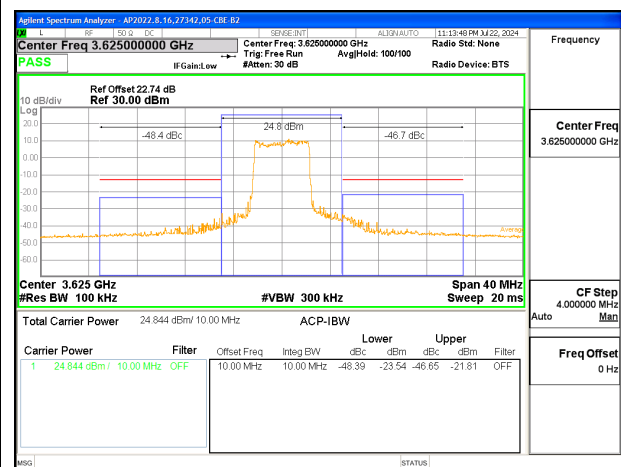


LTE B48 5MHz QPSK Middle Channel RB25-0

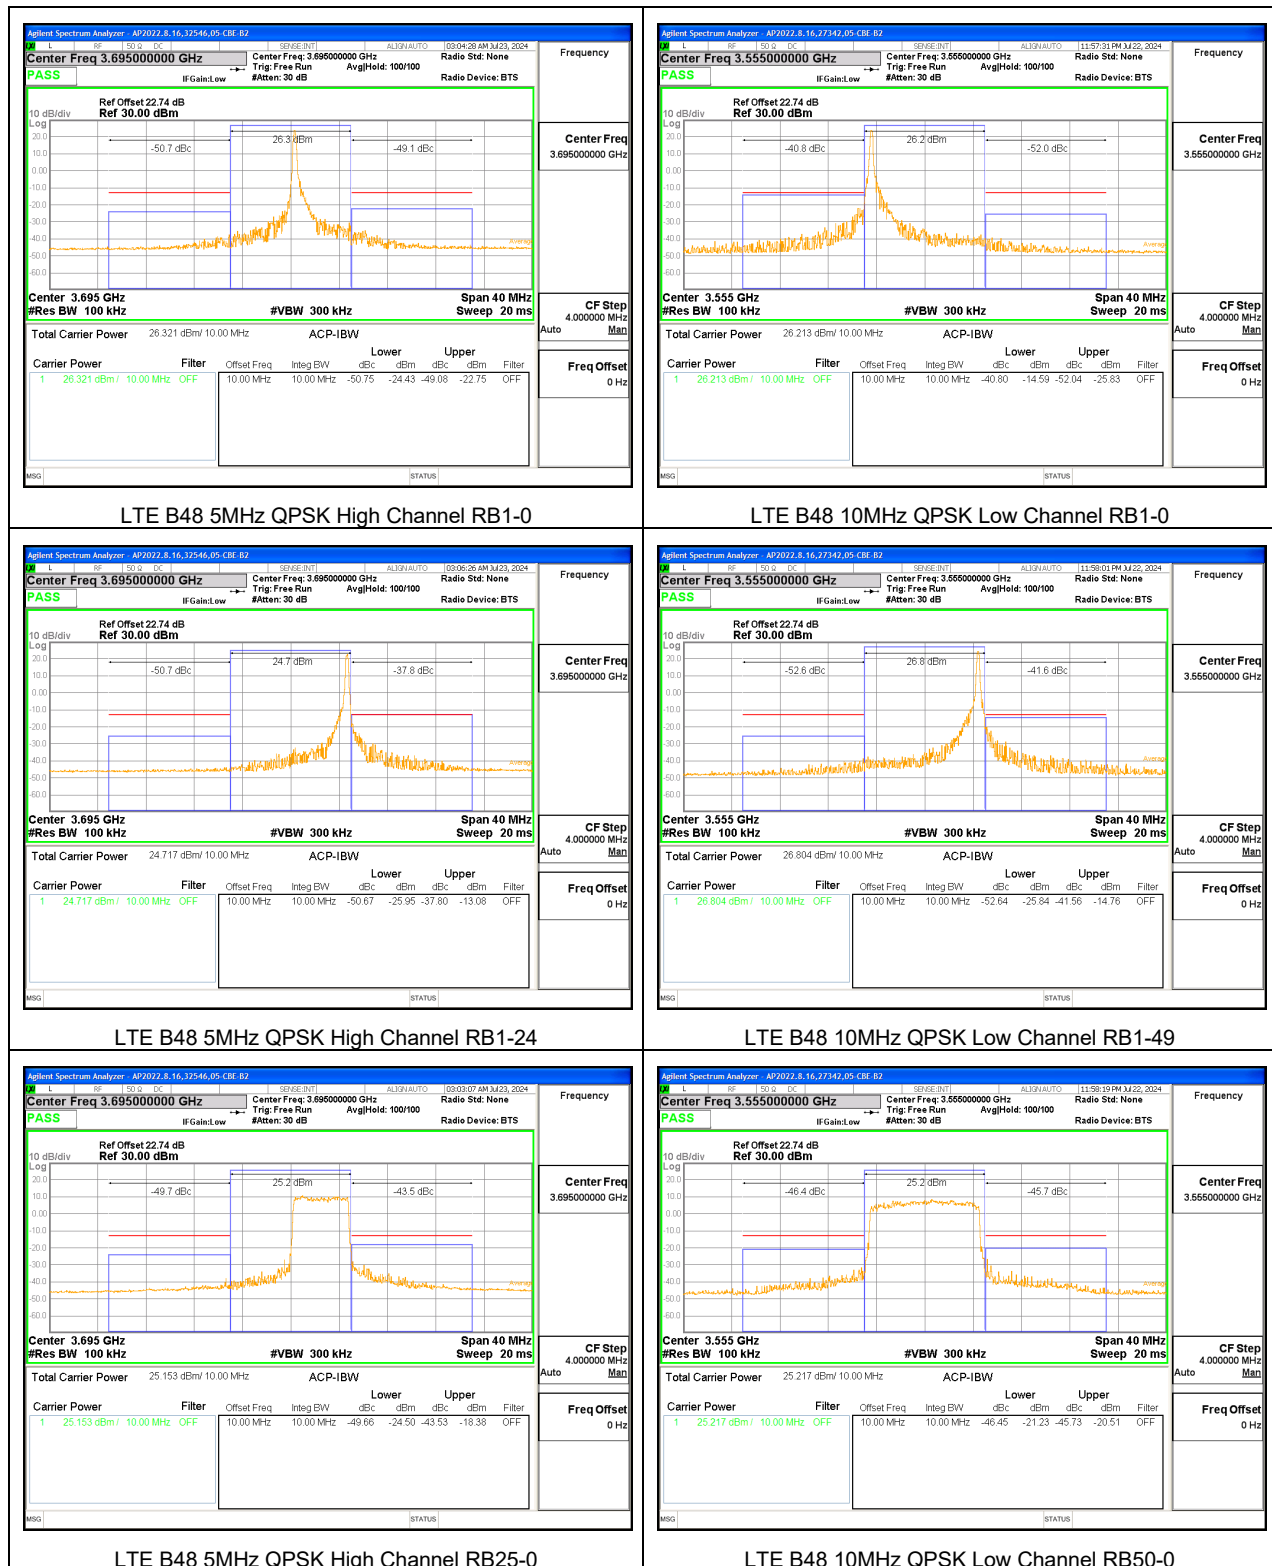


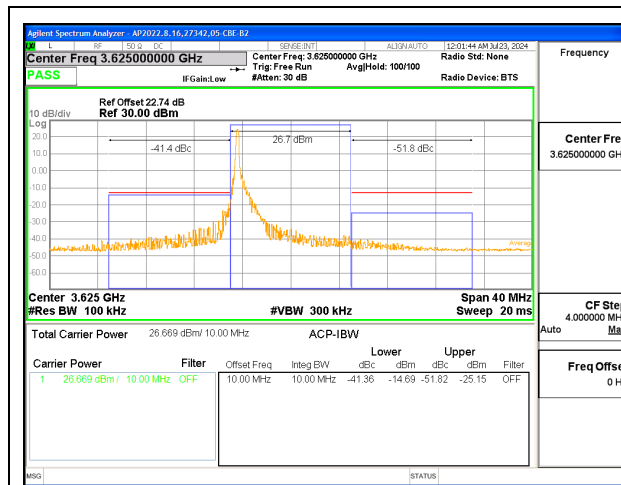


LTE B48 10MHz QPSK Middle Channel RB1-0

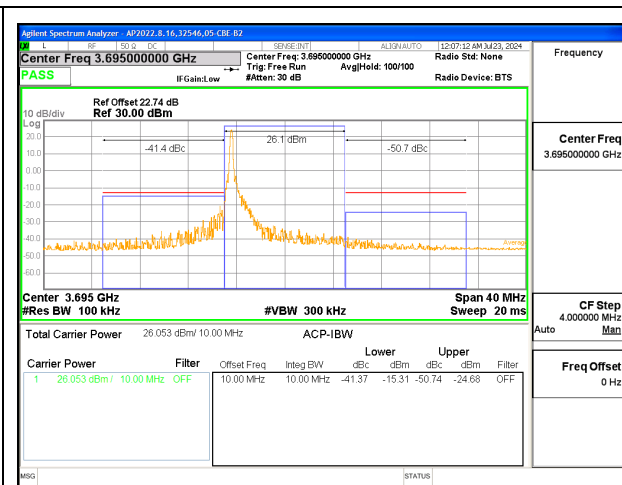


LTE B48 10MHz QPSK High Channel RB1-0

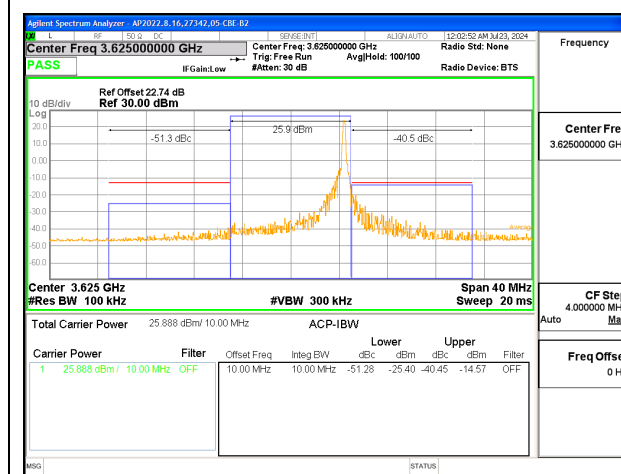


LTE B48 10MHz QPSK Middle Channel RB1-49

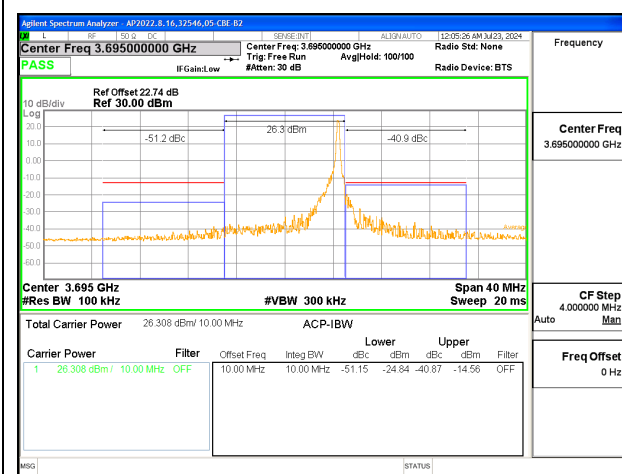

LTE B48 10MHz QPSK High Channel RB1-49

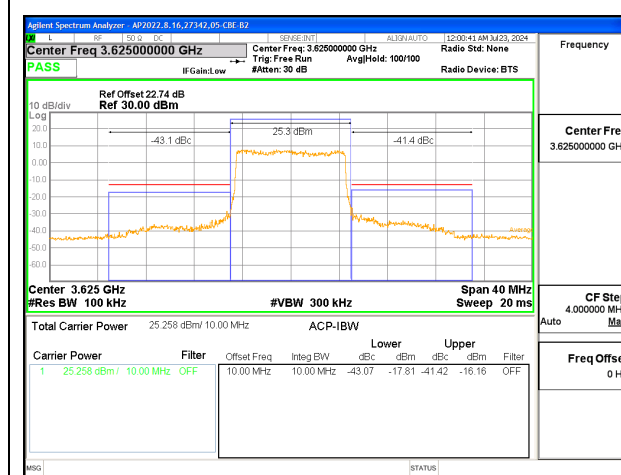

LTE B48 10MHz QPSK Middle Channel RB50-0

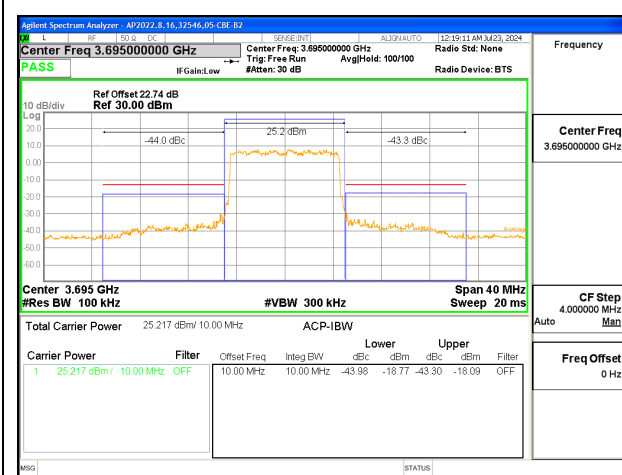

LTE B48 10MHz QPSK High Channel RB50-0

