



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
http://www.pctestlab.com



## CERTIFICATE OF COMPLIANCE FCC PART 15.247 Certification

**Applicant Name:**  
LG Electronics USA  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
October 13, 2006  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0610110888

<b>FCC ID:</b>	<b>BEJCU400</b>
<b>APPLICANT:</b>	<b>LG Electronics USA</b>

**Model(s):** CU400  
**EUT Type:** Dual-Band Dual-Mode GSM/WCDMA Phone w/ Bluetooth  
**Max. RF Output Power:** 1.180 mW (0.72 dBm) Conducted  
**Frequency Range:** 2400 – 2480MHz  
**FCC Classification:** FCC Part 15 Frequency Hopping Spread Spectrum Transceiver (DSS)  
**FCC Rule Part(s):** Part 15.247  
**Class II Permissive Change:** See Attachment

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2003.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*Grant Conditions: Listed output power is conducted.*

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
 Randy Ortanez  
 President




<b>FCC ID:</b> BEJCU400	 <b>FCC Part 15.247 BLUETOOTH SUPPLEMENTAL DATA</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0610110888	<b>Test Dates:</b> October 13, 2006	<b>EUT Type:</b> Dual-Band Dual-Mode GSM/WCDMA Phone with Bluetooth	Page 1 of 5

**Radiated Restricted Band Measurements**  
**§15.247 (d) / §15.205 & §15.209; RSS-210 (A8.5)**

Special attention is made for the EUT’s harmonic and spurious radiated emission in the restricted bands of operations. The EUT was tested from 9kHz and up to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW = 1MHz, VBW = 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits shown in Table 1 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 1. Radiated Limits**

<b>FCC ID:</b> BEJCU400	 <b>FCC Pt. 15.247 BLUETOOTH SUPPLEMENTAL DATA</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0610110888	<b>Test Dates:</b> October 13, 2006	<b>EUT Type:</b> Dual-Band Dual-Mode GSM/WCDMA Phone with Bluetooth	Page 2 of 5

**Radiated Restricted Band Measurements (Cont'd)**  
**§15.247 (d) / §15.205 & §15.209; RSS-210 (A8.5)**

Mode: Bluetooth  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78



**BlueTooth Restricted Band Data**

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
2484.70	-108.83	30.81	H	28.98	28.12	-25.00
2486.60	-109.43	30.82	H	28.39	26.27	-25.59
2487.20	-109.23	30.83	H	28.60	26.92	-25.38
2489.80	-108.73	30.83	H	29.10	28.51	-24.88
2490.30	-109.53	30.85	H	28.32	26.06	-25.66
2491.90	-109.33	30.86	H	28.53	26.70	-25.45

**Table 2. Radiated Restricted Band Measurements at 3-meters**


**NOTES:**

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
4. Above 1 GHz the limit is 500μV/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The peak emissions above 1 GHz are not more than 20 dB above the average limit.

FCC ID: BEJCU400	 PCTEST wireless	FCC Pt. 15.247 BLUETOOTH SUPPLEMENTAL DATA	 LG	Reviewed by: Quality Manager
Test Report S/N: 0610110888	Test Dates: October 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone with Bluetooth		Page 3 of 5

## Line-Conducted Test Data

### §15.207; RSS-Gen (7.2.2)

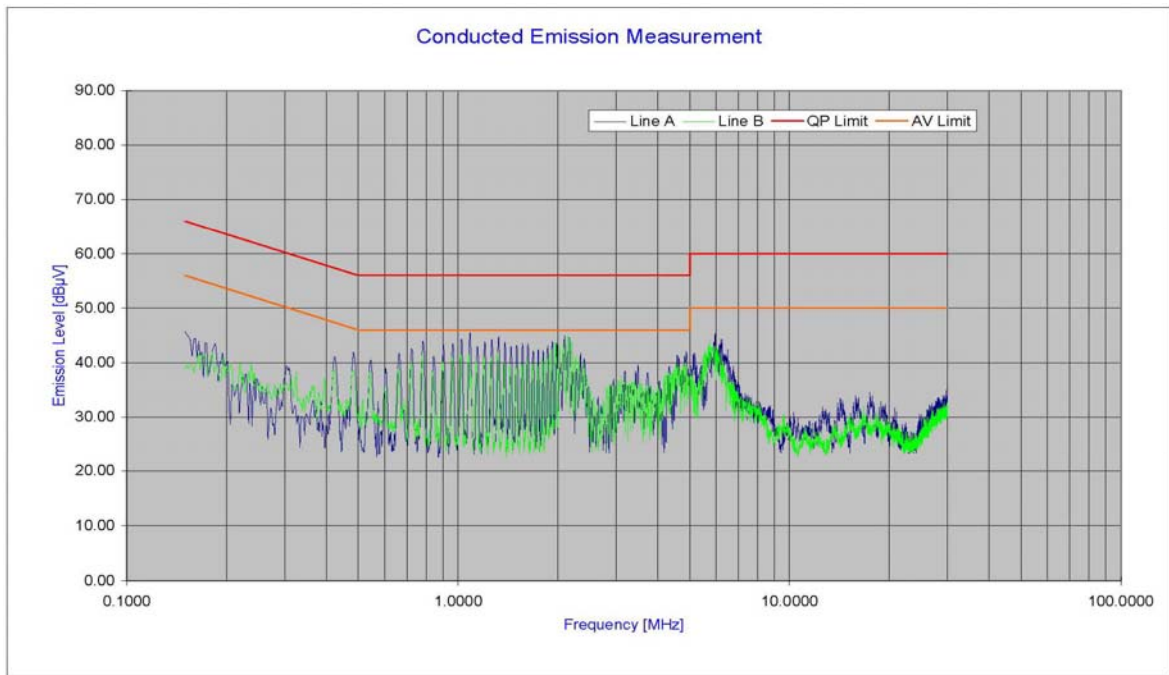

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBµV]	Limit [dBµV]	Margin [dB]	Average [dBµV]	Limit [dBµV]	Margin [dB]
1	A	1.080	7.31	43.43	56.00	-12.57	38.40	46.00	-7.60
2	A	2.097	7.40	43.90	56.00	-12.10	39.53	46.00	-6.47
3	A	1.319	7.34	43.79	56.00	-12.21	35.68	46.00	-10.32
4	A	2.156	7.40	44.47	56.00	-11.53	40.16	46.00	-5.84
5	A	1.020	7.32	43.64	56.00	-12.36	39.48	46.00	-6.52
6	A	1.259	7.33	42.95	56.00	-13.05	38.78	46.00	-7.22
7	A	0.780	7.36	43.05	56.00	-12.95	38.22	46.00	-7.78
8	A	1.916	7.38	42.76	56.00	-13.24	34.48	46.00	-11.52
9	A	1.378	7.34	42.33	56.00	-13.67	37.31	46.00	-8.69
10	A	1.198	7.32	42.35	56.00	-13.65	36.94	46.00	-9.06
11	B	2.149	7.40	43.68	56.00	-12.32	39.35	46.00	-6.65
12	B	2.089	7.40	42.94	56.00	-13.06	38.85	46.00	-7.15
13	B	1.971	7.39	41.59	56.00	-14.41	36.61	46.00	-9.39
14	B	1.911	7.38	41.41	56.00	-14.59	36.54	46.00	-9.46
15	B	1.315	7.34	40.41	56.00	-15.59	34.31	46.00	-11.69
16	B	1.017	7.32	40.47	56.00	-15.53	35.35	46.00	-10.65
17	B	1.077	7.32	40.11	56.00	-15.89	33.86	46.00	-12.14
18	B	1.851	7.38	40.10	56.00	-15.90	35.18	46.00	-10.82
19	B	0.778	7.36	39.89	56.00	-16.11	34.32	46.00	-11.68
20	B	0.957	7.33	39.25	56.00	-16.75	34.68	46.00	-11.32

#### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: None.

FCC ID: BEJCU400	PCTEST	FCC Pt. 15.247 BLUETOOTH SUPPLEMENTAL DATA	LG	Reviewed by: Quality Manager
Test Report S/N: 0610110888	Test Dates: October 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone with Bluetooth		Page 4 of 5

### BlueTooth Power Measurements

Frequency [MHz]	Channel No.	Conducted Power	
		[dBm]	[mW]
2402	0	-0.08	0.982
2441	39	0.292	1.070
2480	78	0.25	1.059

### BlueTooth Radiated Harmonics

**Note: Duty Cycle Correction Factor = 0 dB**

#### Channel 0



Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
4804.00	-111.01	38.8	H	34.80	54.95	-19.20
7206.00	-135.00	42.4	H	14.41	5.25	-62.89
9608.00	-135.00	45.2	H	17.20	7.24	-60.10
12010.00	-135.00	46.6	H	18.63	8.54	-35.37

#### Channel 39

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
4882.00	-109.56	38.95	H	36.39	65.99	-17.61
7323.00	-135.00	42.67	H	14.67	5.41	-39.33
9764.00	-135.00	45.36	H	17.36	7.38	-60.31
12205.00	-135.00	46.68	H	18.68	8.59	-35.32

#### Channel 78

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol. [H/V]	Field Strength [dB $\mu$ V/m]	Field Strength [ $\mu$ V/m]	Margin [dB]
4960.00	-110.05	39.19	H	36.14	64.12	-17.86
7440.00	-135.00	43.01	H	15.01	5.63	-38.99
9920.00	-135.00	45.67	H	17.67	7.65	-59.96
12400.00	-135.00	46.61	H	18.61	8.52	-35.39

FCC ID: BEJCU400	 PCTEST wireless	FCC Pt. 15.247 BLUETOOTH SUPPLEMENTAL DATA	 LG	Reviewed by: Quality Manager
Test Report S/N: 0610110888	Test Dates: October 13, 2006	EUT Type: Dual-Band Dual-Mode GSM/WCDMA Phone with Bluetooth		Page 5 of 5