



Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5755	32.70	38.00	500	Pass
5795	32.70	38.00	500	Pass

### 5755 MHz

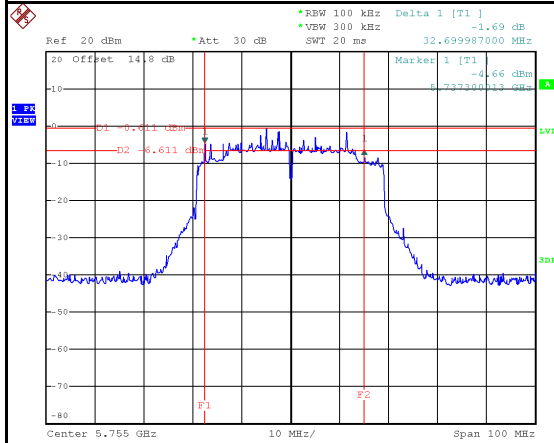


Date: 1.SEP.2023 12:20:36

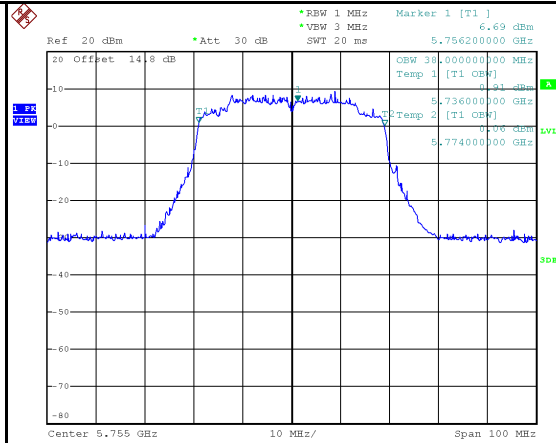


Date: 1.SEP.2023 12:19:48

### 5795 MHz

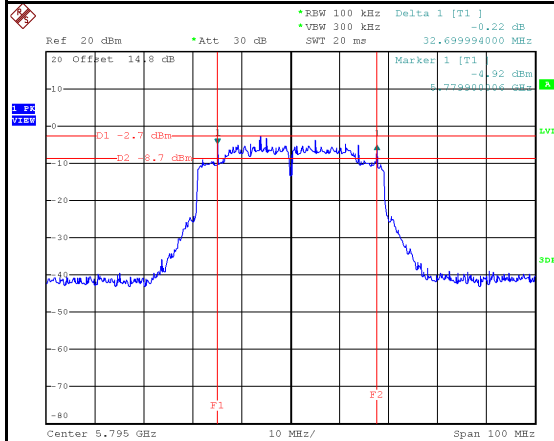


Date: 1.SEP.2023 12:22:38

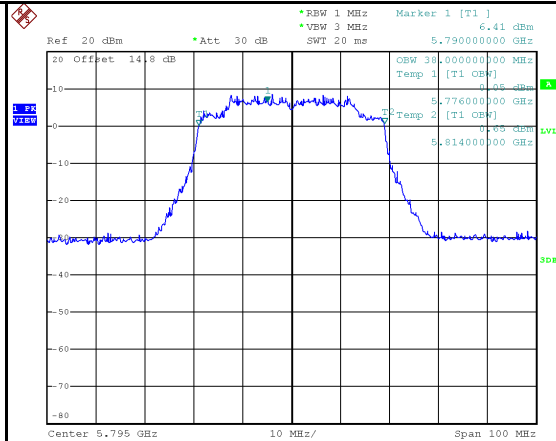


Date: 1.SEP.2023 12:21:43

Test Mode	IEEE 802.11ax (HE80)_Main Antenna
-----------	-----------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5210	88.60	76.80	No limit


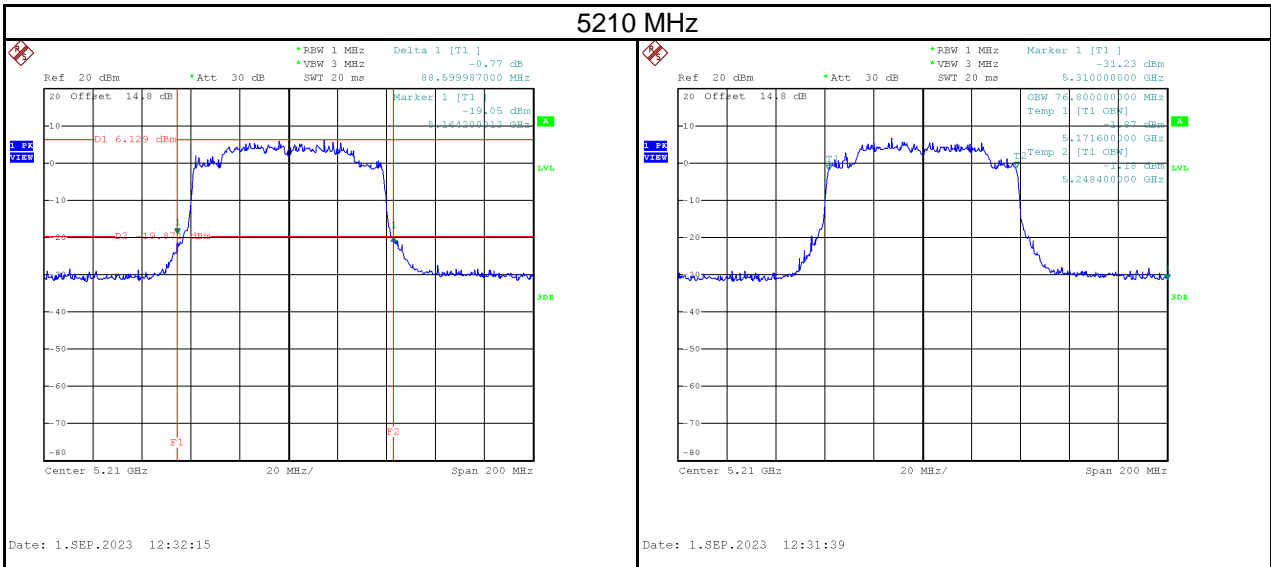


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5290	87.20	77.20	No limit


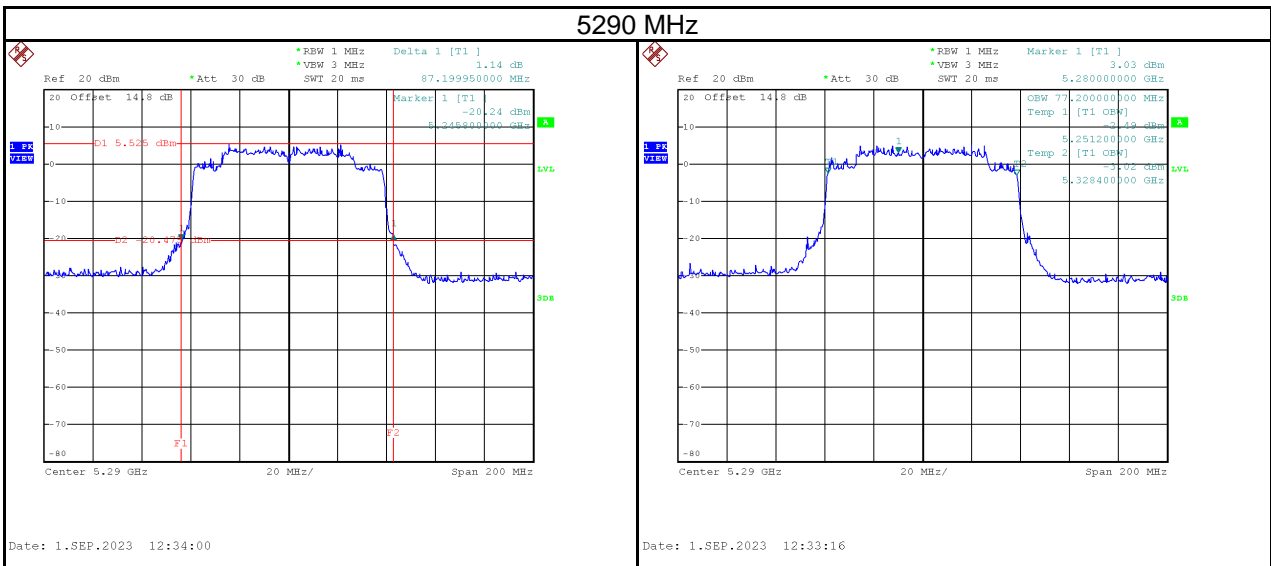


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5530	86.41	77.20	No limit
5610	88.20	77.20	No limit


### 5530 MHz

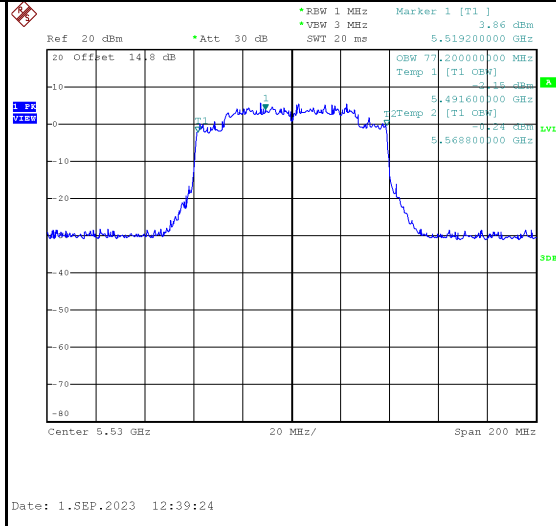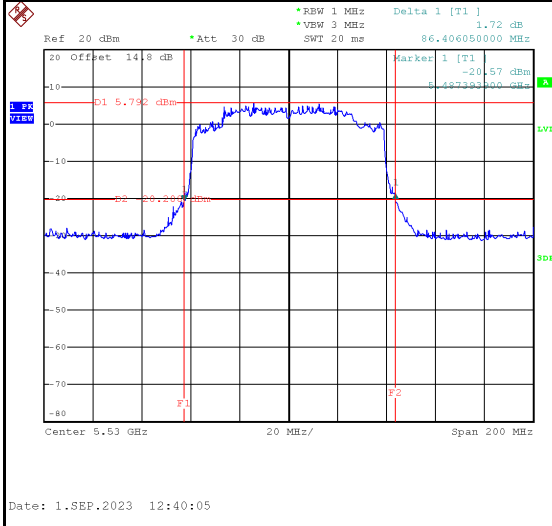

### 5610 MHz

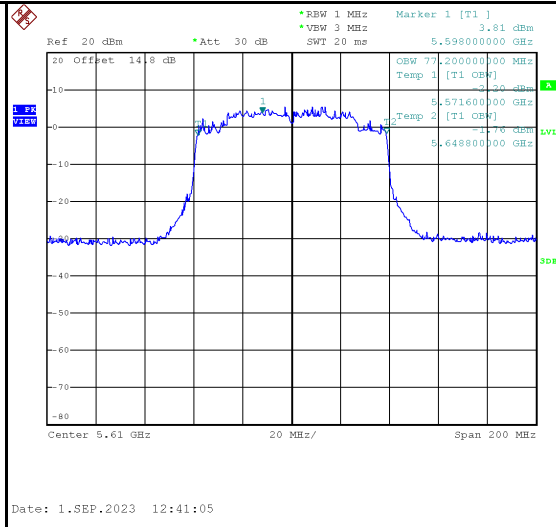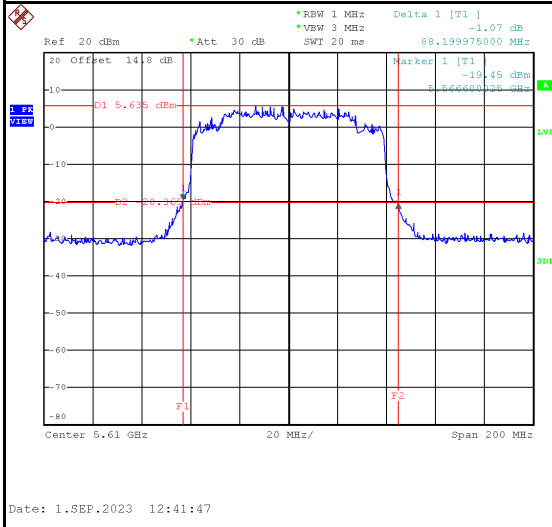


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5775	59.80	77.20	500	Pass

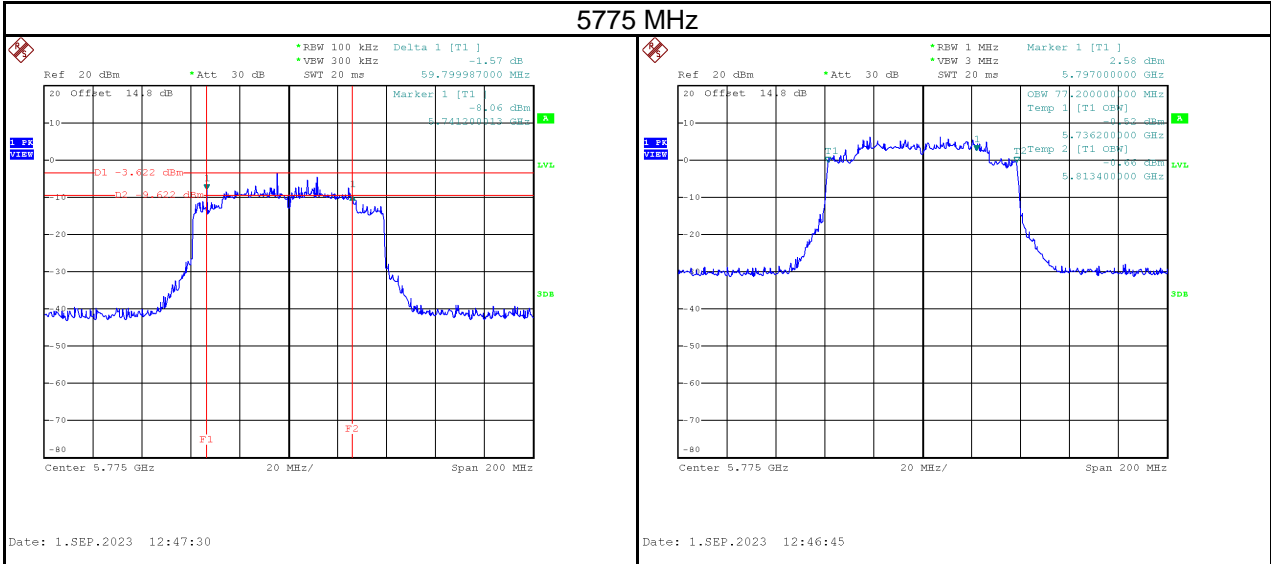


Test Mode	IEEE 802.11ax (HE160)_Main Antenna
-----------	------------------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5250	162.00	156.00	No limit

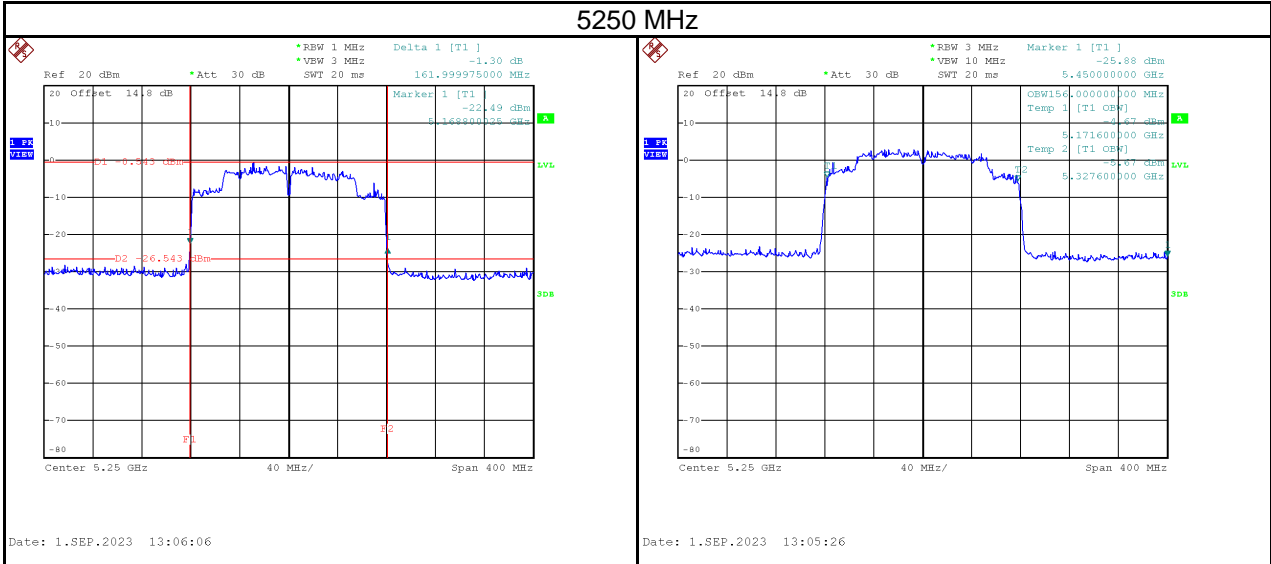

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5570	163.60	155.20	No limit

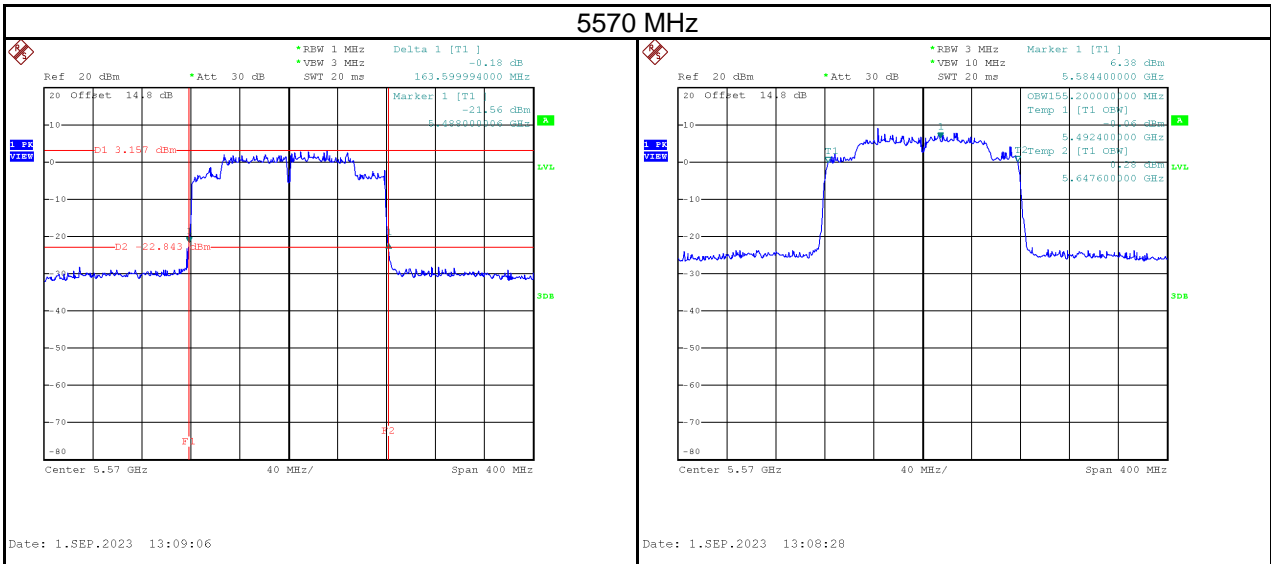

## APPENDIX E CONDUCTED OUTPUT POWER

Test Mode	IEEE 802.11a_Main Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.34	0.0136	24.00	0.2512	PASS
5200	11.26	0.0134	24.00	0.2512	PASS
5240	11.31	0.0135	24.00	0.2512	PASS
5260	11.13	0.0130	24.00	0.2512	PASS
5300	11.32	0.0136	24.00	0.2512	PASS
5320	11.27	0.0134	24.00	0.2512	PASS
5500	11.58	0.0144	24.00	0.2512	PASS
5580	11.53	0.0142	24.00	0.2512	PASS
5700	11.11	0.0129	24.00	0.2512	PASS
5745	11.34	0.0136	30.00	1.0000	PASS
5785	11.05	0.0127	30.00	1.0000	PASS
5825	11.37	0.0137	30.00	1.0000	PASS

Test Mode	IEEE 802.11a_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	--------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.19	0.0132	24.00	0.2512	PASS
5200	11.17	0.0131	24.00	0.2512	PASS
5240	11.07	0.0128	24.00	0.2512	PASS
5260	11.09	0.0129	24.00	0.2512	PASS
5300	11.06	0.0128	24.00	0.2512	PASS
5320	11.14	0.0130	24.00	0.2512	PASS
5500	11.49	0.0141	24.00	0.2512	PASS
5580	11.47	0.0140	24.00	0.2512	PASS
5700	11.15	0.0130	24.00	0.2512	PASS
5745	11.29	0.0135	30.00	1.0000	PASS
5785	11.23	0.0133	30.00	1.0000	PASS
5825	11.06	0.0128	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT20)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.59	0.0144	24.00	0.2512	PASS
5200	11.67	0.0147	24.00	0.2512	PASS
5240	11.63	0.0146	24.00	0.2512	PASS
5260	11.42	0.0139	24.00	0.2512	PASS
5300	11.56	0.0143	24.00	0.2512	PASS
5320	11.61	0.0145	24.00	0.2512	PASS
5500	11.51	0.0142	24.00	0.2512	PASS
5580	11.27	0.0134	24.00	0.2512	PASS
5700	11.34	0.0136	24.00	0.2512	PASS
5745	11.32	0.0136	30.00	1.0000	PASS
5785	11.41	0.0138	30.00	1.0000	PASS
5825	11.63	0.0146	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT20)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.41	0.0138	24.00	0.2512	PASS
5200	11.38	0.0137	24.00	0.2512	PASS
5240	11.31	0.0135	24.00	0.2512	PASS
5260	11.24	0.0133	24.00	0.2512	PASS
5300	11.19	0.0132	24.00	0.2512	PASS
5320	11.37	0.0137	24.00	0.2512	PASS
5500	11.29	0.0135	24.00	0.2512	PASS
5580	11.34	0.0136	24.00	0.2512	PASS
5700	11.08	0.0128	24.00	0.2512	PASS
5745	11.17	0.0131	30.00	1.0000	PASS
5785	11.02	0.0126	30.00	1.0000	PASS
5825	11.35	0.0136	30.00	1.0000	PASS



Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2023/8/30~9/1
-----------	---------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	14.51	0.0283	24.00	0.2512	PASS
5200	14.54	0.0284	24.00	0.2512	PASS
5240	14.48	0.0281	24.00	0.2512	PASS
5260	14.34	0.0272	24.00	0.2512	PASS
5300	14.39	0.0275	24.00	0.2512	PASS
5320	14.50	0.0282	24.00	0.2512	PASS
5500	14.41	0.0276	24.00	0.2512	PASS
5580	14.32	0.0270	24.00	0.2512	PASS
5700	14.22	0.0264	24.00	0.2512	PASS
5745	14.26	0.0266	30.00	1.0000	PASS
5785	14.23	0.0265	30.00	1.0000	PASS
5825	14.50	0.0282	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	11.75	0.0150	24.00	0.2512	PASS
5230	11.67	0.0147	24.00	0.2512	PASS
5270	11.53	0.0142	24.00	0.2512	PASS
5310	11.78	0.0151	24.00	0.2512	PASS
5510	11.52	0.0142	24.00	0.2512	PASS
5550	11.50	0.0141	24.00	0.2512	PASS
5670	11.53	0.0142	24.00	0.2512	PASS
5755	11.48	0.0141	30.00	1.0000	PASS
5795	11.37	0.0137	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	11.52	0.0142	24.00	0.2512	PASS
5230	11.42	0.0139	24.00	0.2512	PASS
5270	11.34	0.0136	24.00	0.2512	PASS
5310	11.34	0.0136	24.00	0.2512	PASS
5510	11.34	0.0136	24.00	0.2512	PASS
5550	11.41	0.0138	24.00	0.2512	PASS
5670	11.09	0.0129	24.00	0.2512	PASS
5755	11.26	0.0134	30.00	1.0000	PASS
5795	11.16	0.0131	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2023/2/18
-----------	---------------------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.65	0.0292	24.00	0.2512	PASS
5230	14.56	0.0286	24.00	0.2512	PASS
5270	14.45	0.0278	24.00	0.2512	PASS
5310	14.58	0.0287	24.00	0.2512	PASS
5510	14.44	0.0278	24.00	0.2512	PASS
5550	14.47	0.0280	24.00	0.2512	PASS
5670	14.33	0.0271	24.00	0.2512	PASS
5755	14.38	0.0274	30.00	1.0000	PASS
5795	14.28	0.0268	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_ Main Antenna	Tested Date	2023/8/30~9/1
-----------	-------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	11.64	0.0146	24.00	0.2512	PASS
5290	11.59	0.0144	24.00	0.2512	PASS
5530	11.56	0.0143	24.00	0.2512	PASS
5610	11.34	0.0136	24.00	0.2512	PASS
5775	11.56	0.0143	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	11.53	0.0142	24.00	0.2512	PASS
5290	11.37	0.0137	24.00	0.2512	PASS
5530	11.34	0.0136	24.00	0.2512	PASS
5610	11.39	0.0138	24.00	0.2512	PASS
5775	11.27	0.0134	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2023/8/30~9/1
-----------	-----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	14.60	0.0288	24.00	0.2512	PASS
5290	14.49	0.0281	24.00	0.2512	PASS
5530	14.46	0.0279	24.00	0.2512	PASS
5610	14.38	0.0274	24.00	0.2512	PASS
5775	14.43	0.0277	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT160) _Main Antenna	Tested Date	2023/8/30~9/1
-----------	--------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	7.36	0.0054	24.00	0.2512	PASS
5570	11.65	0.0146	24.00	0.2512	PASS

Test Mode	IEEE 802.11ac (VHT160) _Aux Antenna	Tested Date	2023/8/30~9/1
-----------	-------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	7.07	0.0051	24.00	0.2512	PASS
5570	11.30	0.0135	24.00	0.2512	PASS

Test Mode	IEEE 802.11ac (VHT160) _Total	Tested Date	2023/8/30~9/1
-----------	-------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	10.23	0.0105	24.00	0.2512	PASS
5570	14.49	0.0281	24.00	0.2512	PASS

Test Mode	IEEE 802.11ax (HE20) _Main Antenna	Tested Date	2023/8/30~9/1
-----------	------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.27	0.0134	24.00	0.2512	PASS
5200	11.31	0.0135	24.00	0.2512	PASS
5240	11.26	0.0134	24.00	0.2512	PASS
5260	11.18	0.0131	24.00	0.2512	PASS
5300	11.32	0.0136	24.00	0.2512	PASS
5320	11.23	0.0133	24.00	0.2512	PASS
5500	11.56	0.0143	24.00	0.2512	PASS
5580	11.49	0.0141	24.00	0.2512	PASS
5700	11.47	0.0140	24.00	0.2512	PASS
5745	11.52	0.0142	30.00	1.0000	PASS
5785	11.49	0.0141	30.00	1.0000	PASS
5825	11.28	0.0134	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE20) _Aux Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	11.06	0.0128	24.00	0.2512	PASS
5200	11.09	0.0129	24.00	0.2512	PASS
5240	10.99	0.0126	24.00	0.2512	PASS
5260	11.15	0.0130	24.00	0.2512	PASS
5300	10.92	0.0124	24.00	0.2512	PASS
5320	11.07	0.0128	24.00	0.2512	PASS
5500	11.47	0.0140	24.00	0.2512	PASS
5580	11.53	0.0142	24.00	0.2512	PASS
5700	11.24	0.0133	24.00	0.2512	PASS
5745	11.39	0.0138	30.00	1.0000	PASS
5785	11.22	0.0132	30.00	1.0000	PASS
5825	11.03	0.0127	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5180	14.18	0.0262	24.00	0.2512	PASS
5200	14.21	0.0264	24.00	0.2512	PASS
5240	14.14	0.0259	24.00	0.2512	PASS
5260	14.18	0.0262	24.00	0.2512	PASS
5300	14.13	0.0259	24.00	0.2512	PASS
5320	14.16	0.0261	24.00	0.2512	PASS
5500	14.53	0.0284	24.00	0.2512	PASS
5580	14.52	0.0283	24.00	0.2512	PASS
5700	14.37	0.0273	24.00	0.2512	PASS
5745	14.47	0.0280	30.00	1.0000	PASS
5785	14.37	0.0273	30.00	1.0000	PASS
5825	14.17	0.0261	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40) _Main Antenna	Tested Date	2023/8/30~9/1
-----------	------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	11.36	0.0137	24.00	0.2512	PASS
5230	11.39	0.0138	24.00	0.2512	PASS
5270	11.22	0.0132	24.00	0.2512	PASS
5310	11.32	0.0136	24.00	0.2512	PASS
5510	11.23	0.0133	24.00	0.2512	PASS
5550	11.27	0.0134	24.00	0.2512	PASS
5670	11.61	0.0145	24.00	0.2512	PASS
5755	11.61	0.0145	30.00	1.0000	PASS
5795	11.56	0.0143	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	11.12	0.0129	24.00	0.2512	PASS
5230	11.17	0.0131	24.00	0.2512	PASS
5270	11.09	0.0129	24.00	0.2512	PASS
5310	11.05	0.0127	24.00	0.2512	PASS
5510	11.08	0.0128	24.00	0.2512	PASS
5550	11.06	0.0128	24.00	0.2512	PASS
5670	11.19	0.0132	24.00	0.2512	PASS
5755	11.41	0.0138	30.00	1.0000	PASS
5795	11.32	0.0136	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5190	14.25	0.0266	24.00	0.2512	PASS
5230	14.29	0.0269	24.00	0.2512	PASS
5270	14.17	0.0261	24.00	0.2512	PASS
5310	14.20	0.0263	24.00	0.2512	PASS
5510	14.17	0.0261	24.00	0.2512	PASS
5550	14.18	0.0262	24.00	0.2512	PASS
5670	14.42	0.0276	24.00	0.2512	PASS
5755	14.52	0.0283	30.00	1.0000	PASS
5795	14.45	0.0279	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE80)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	11.43	0.0139	24.00	0.2512	PASS
5290	11.39	0.0138	24.00	0.2512	PASS
5530	11.32	0.0136	24.00	0.2512	PASS
5610	11.29	0.0135	24.00	0.2512	PASS
5775	11.61	0.0145	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE80)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	11.21	0.0132	24.00	0.2512	PASS
5290	11.09	0.0129	24.00	0.2512	PASS
5530	11.04	0.0127	24.00	0.2512	PASS
5610	11.17	0.0131	24.00	0.2512	PASS
5775	11.42	0.0139	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE80)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5210	14.33	0.0271	24.00	0.2512	PASS
5290	14.25	0.0266	24.00	0.2512	PASS
5530	14.19	0.0263	24.00	0.2512	PASS
5610	14.24	0.0266	24.00	0.2512	PASS
5775	14.53	0.0284	30.00	1.0000	PASS



Test Mode	IEEE 802.11ax (HE160)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	7.64	0.0058	24.00	0.2512	PASS
5570	11.43	0.0139	24.00	0.2512	PASS

Test Mode	IEEE 802.11ax (HE160)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	7.27	0.0053	24.00	0.2512	PASS
5570	11.24	0.0133	24.00	0.2512	PASS

Test Mode	IEEE 802.11ax (HE160)_Total	Tested Date	2023/8/30~9/1
-----------	-----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5250	10.47	0.0111	24.00	0.2512	PASS
5570	14.35	0.0272	24.00	0.2512	PASS

## For Straddle Channel:

Test Mode	IEEE 802.11a_Main Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.89	0.0097	24.00	0.2512	PASS
5720	2.19	0.0017	30.00	1.0000	PASS

Test Mode	IEEE 802.11a_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	--------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	9.94	0.0099	24.00	0.2512	PASS
5720	2.37	0.0017	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT20)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	10.22	0.0105	24.00	0.2512	PASS
5720	3.14	0.0021	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT20)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	10.26	0.0106	24.00	0.2512	PASS
5720	3.05	0.0020	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2023/8/30~9/1
-----------	---------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	13.25	0.0211	24.00	0.2512	PASS
5720	6.11	0.0041	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.19	0.0104	24.00	0.2512	PASS
5710	-2.42	0.0006	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	---------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.28	0.0107	24.00	0.2512	PASS
5710	-1.85	0.0007	30.00	1.0000	PASS

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2023/8/30~9/1
-----------	---------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.25	0.0211	24.00	0.2512	PASS
5710	0.88	0.0012	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	------------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	8.05	0.0064	24.00	0.2512	PASS
5690	-5.25	0.0003	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	8.95	0.0079	24.00	0.2512	PASS
5690	-3.97	0.0004	30.00	1.0000	PASS

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2023/8/30~9/1
-----------	-----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	11.53	0.0142	24.00	0.2512	PASS
5690	-1.55	0.0007	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE20)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	10.33	0.0108	24.00	0.2512	PASS
5720	3.38	0.0022	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE20)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	10.90	0.0123	24.00	0.2512	PASS
5720	4.12	0.0026	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5720	13.63	0.0231	24.00	0.2512	PASS
5720	6.78	0.0048	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.20	0.0105	24.00	0.2512	PASS
5710	-2.15	0.0006	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	10.62	0.0115	24.00	0.2512	PASS
5710	-1.21	0.0008	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5710	13.43	0.0220	24.00	0.2512	PASS
5710	1.36	0.0014	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE80)_Main Antenna	Tested Date	2023/8/30~9/1
-----------	-----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	10.65	0.0116	24.00	0.2512	PASS
5690	-5.40	0.0003	30.00	1.0000	PASS

Test Mode	IEEE 802.11ax (HE80)_Aux Antenna	Tested Date	2023/8/30~9/1
-----------	----------------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	11.14	0.0130	24.00	0.2512	PASS
5690	-4.11	0.0004	30.00	1.0000	PASS





Test Mode	IEEE 802.11ax (HE80)_Total	Tested Date	2023/8/30~9/1
-----------	----------------------------	-------------	---------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Result
5690	13.91	0.0246	24.00	0.2512	PASS
5690	-1.70	0.0007	30.00	1.0000	PASS





## APPENDIX F POWER SPECTRAL DENSITY

Test Mode	IEEE 802.11a_Main Antenna
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	1.25	0.10	1.35	16.97	Pass
5200	1.36	0.10	1.46	16.97	Pass
5240	1.25	0.10	1.35	16.97	Pass


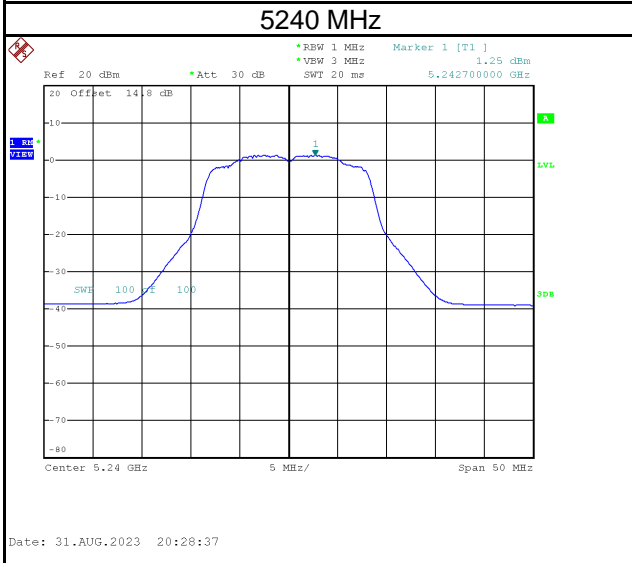
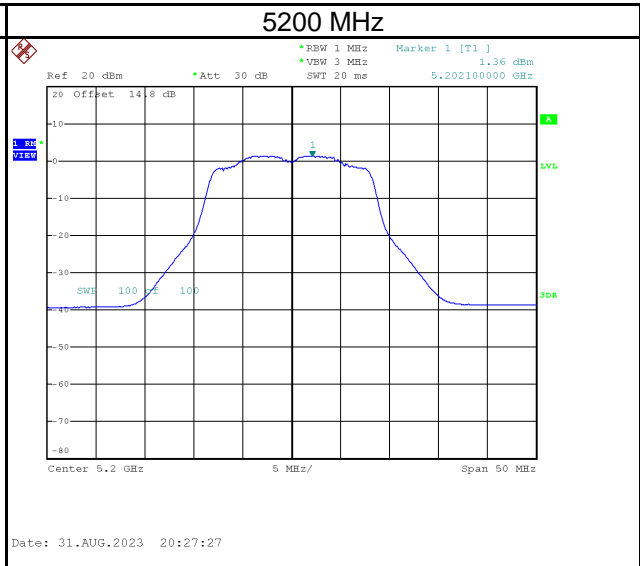
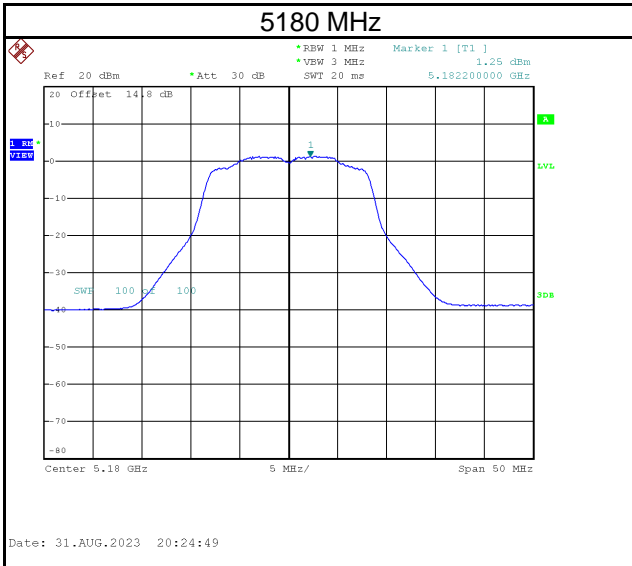


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.96	0.10	1.06	10.97	Pass
5300	0.30	0.10	0.40	10.97	Pass
5320	0.11	0.10	0.21	10.97	Pass

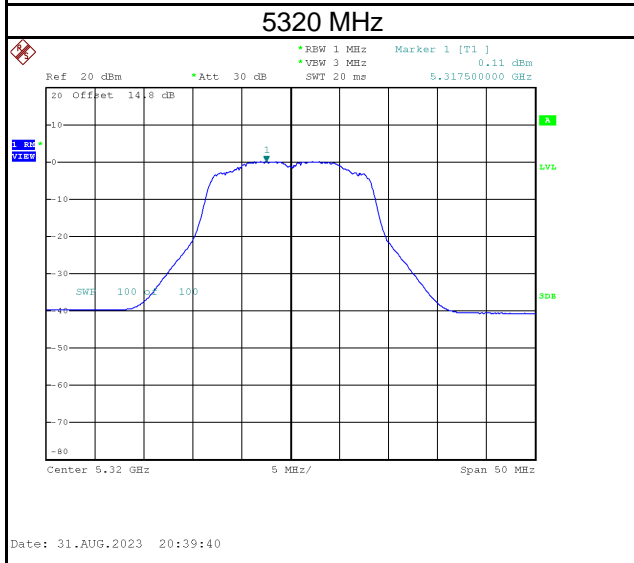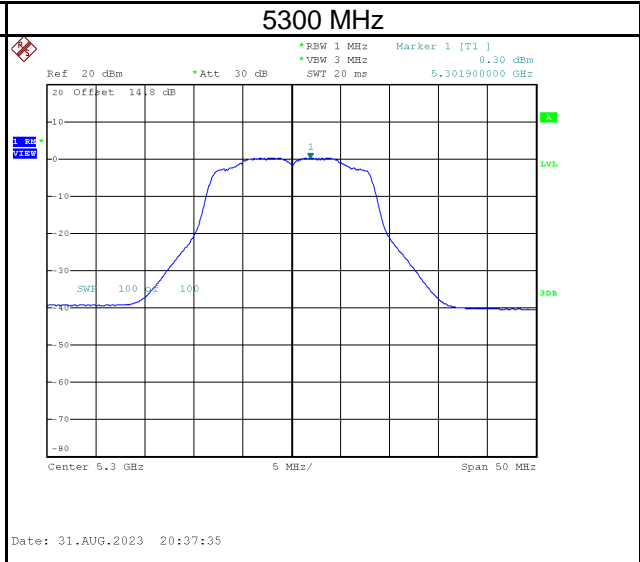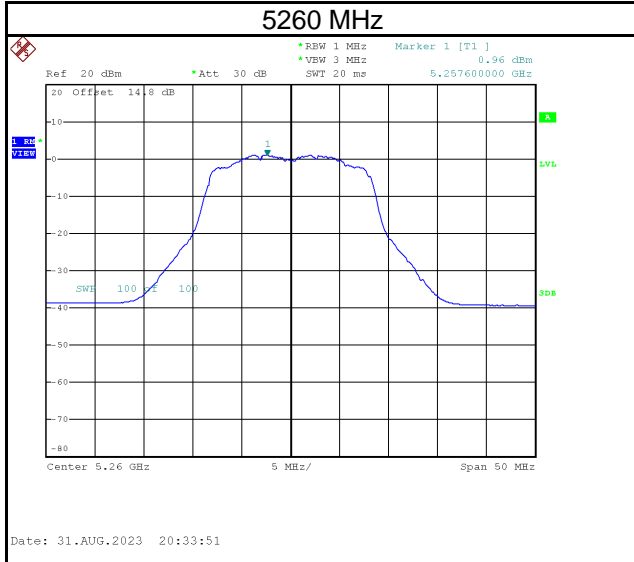





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	1.11	0.10	1.21	10.97	Pass
5580	1.54	0.10	1.64	10.97	Pass
5700	0.20	0.10	0.30	10.97	Pass

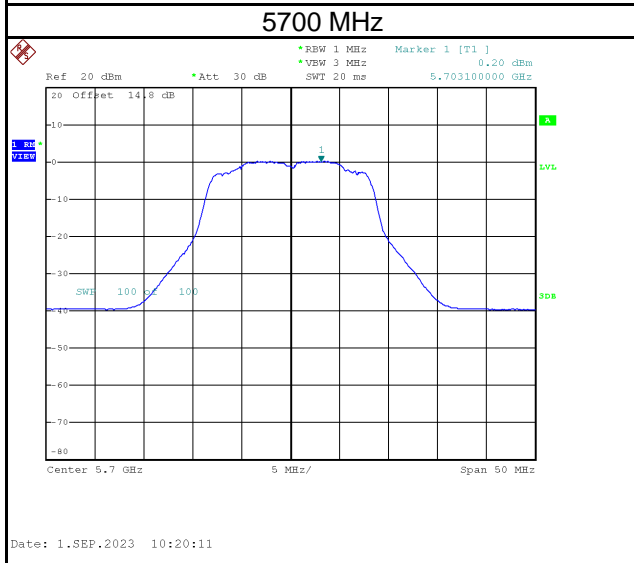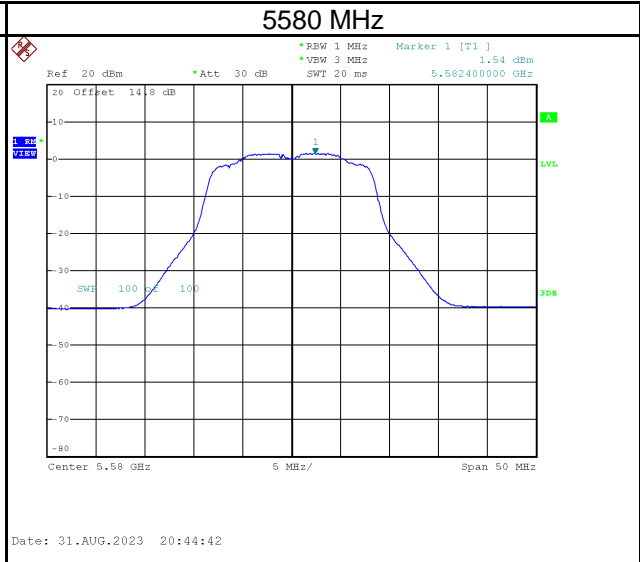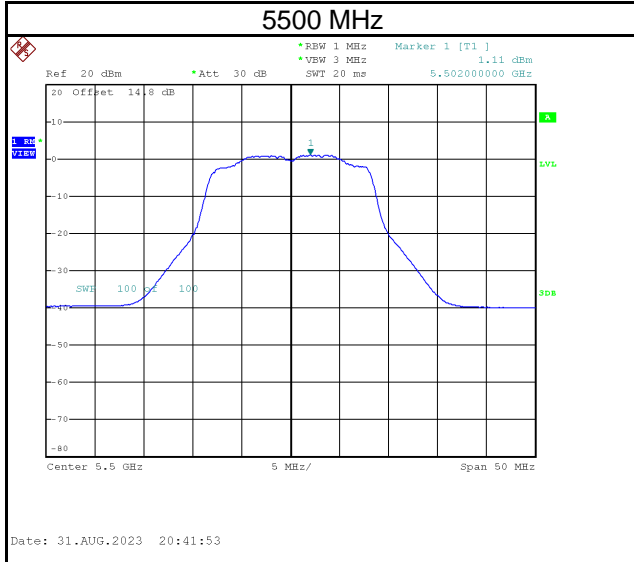





Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-1.81	5.18	0.10	5.28	29.97	Pass
5785	-2.06	4.93	0.10	5.03	29.97	Pass
5825	-2.42	4.57	0.10	4.67	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$



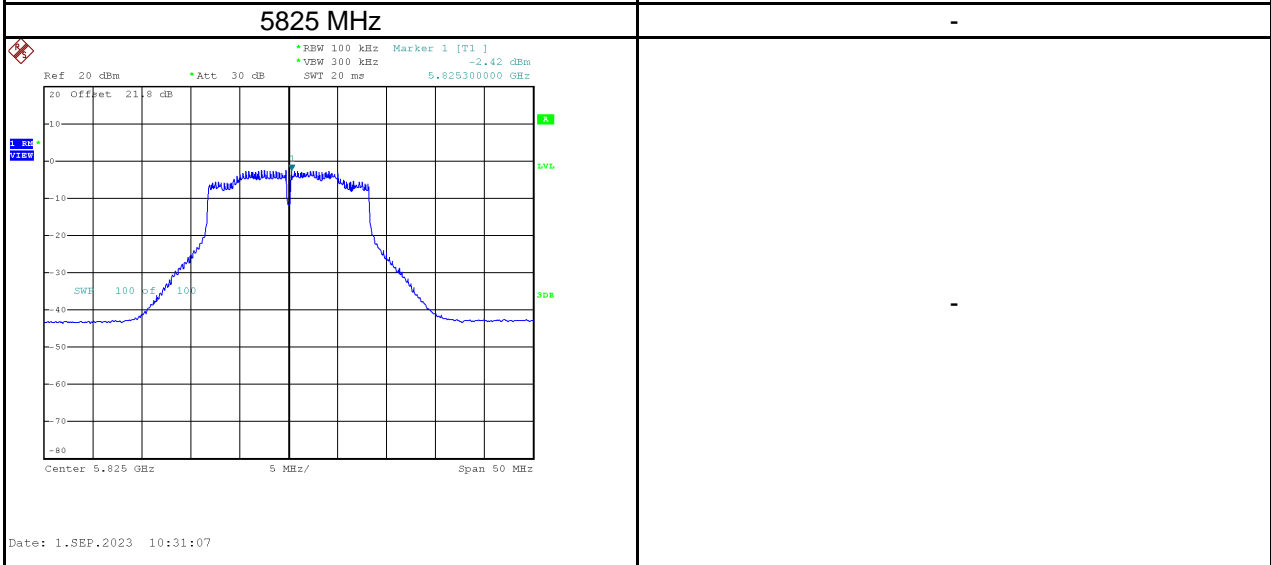
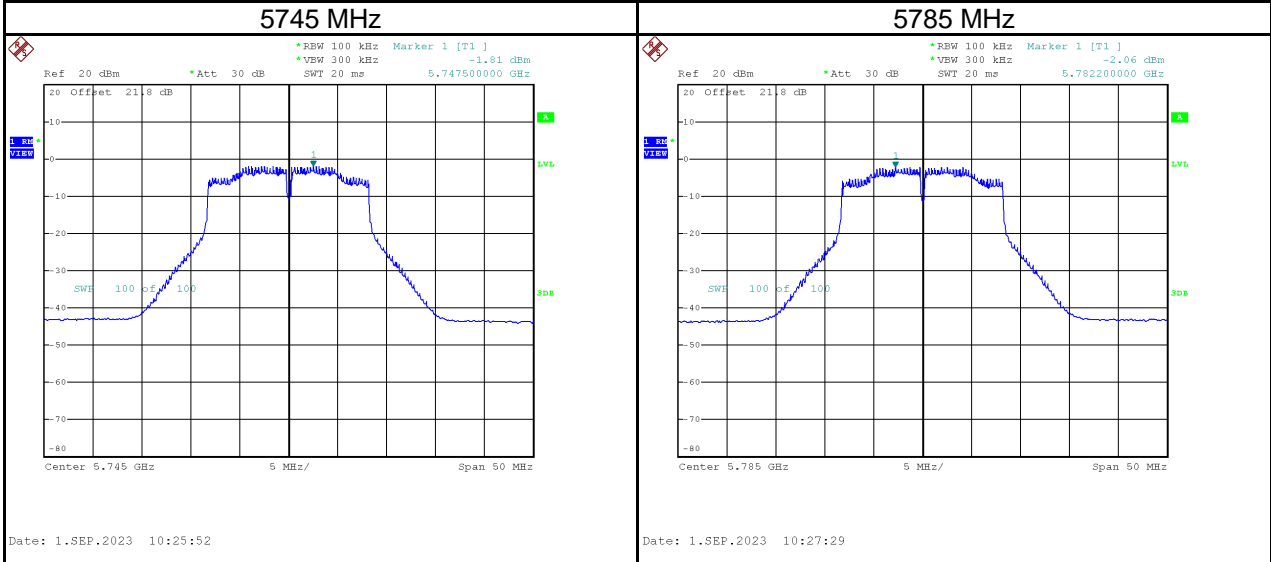


Test Mode	IEEE 802.11a_Aux Antenna
-----------	--------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	1.00	0.10	1.10	16.97	Pass
5200	0.97	0.10	1.07	16.97	Pass
5240	0.80	0.10	0.90	16.97	Pass

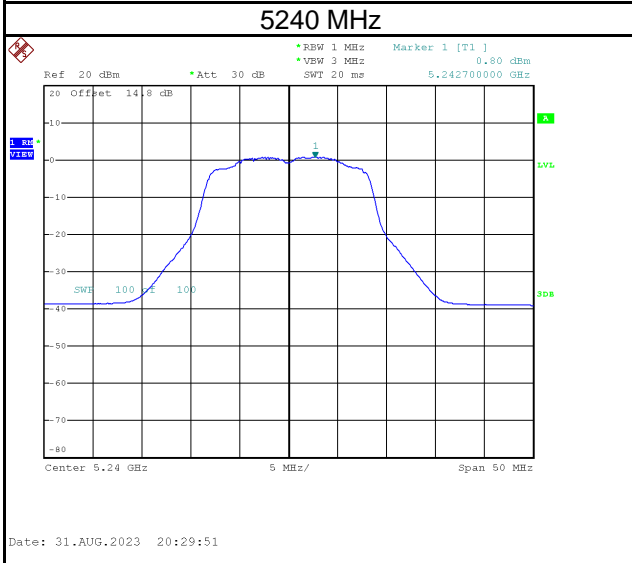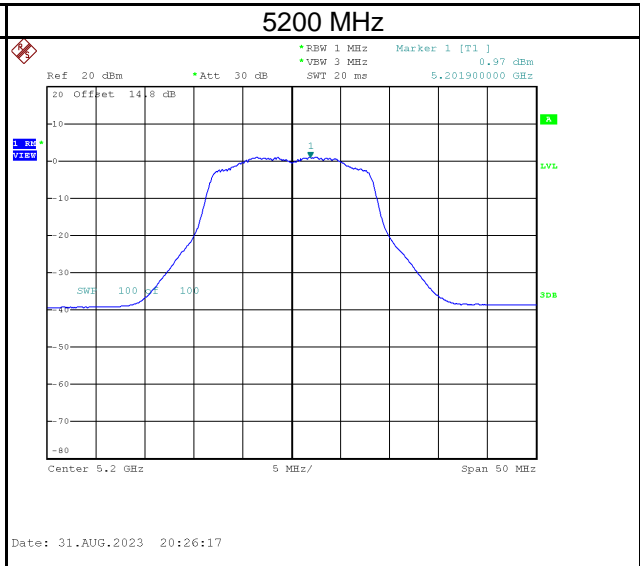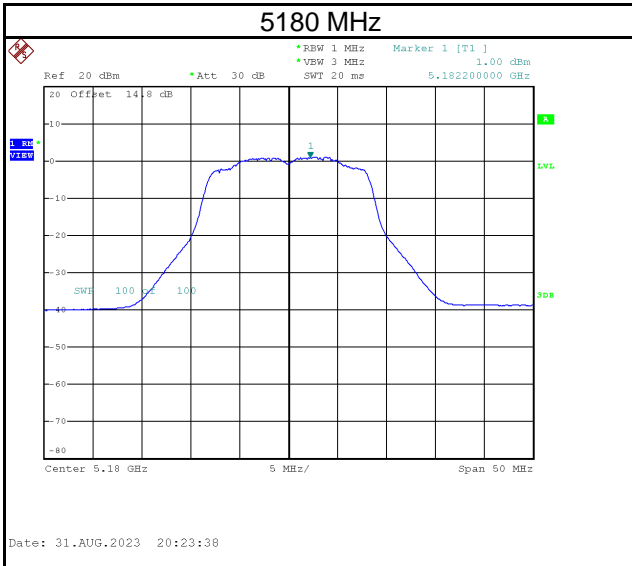

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.69	0.10	0.79	10.97	Pass
5300	0.17	0.10	0.27	10.97	Pass
5320	0.26	0.10	0.36	10.97	Pass

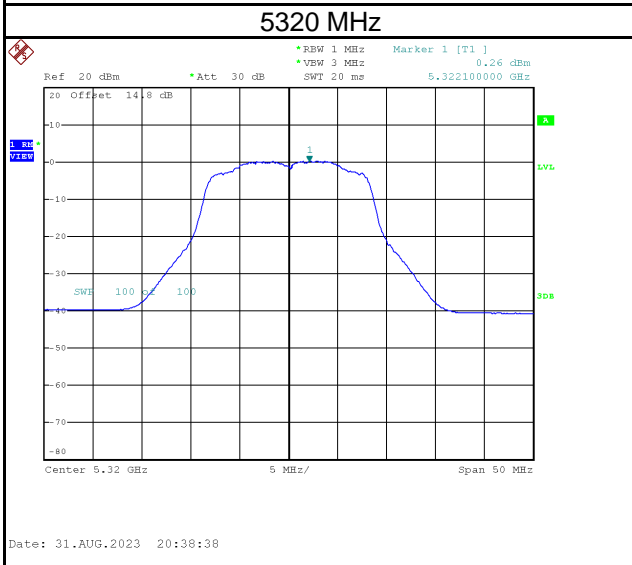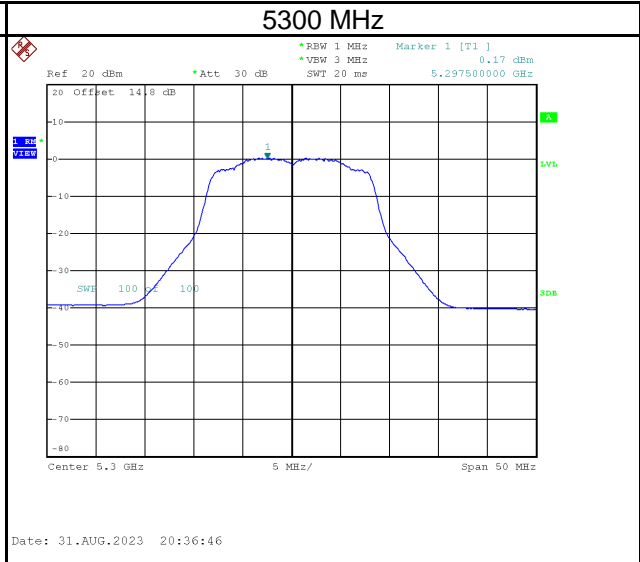
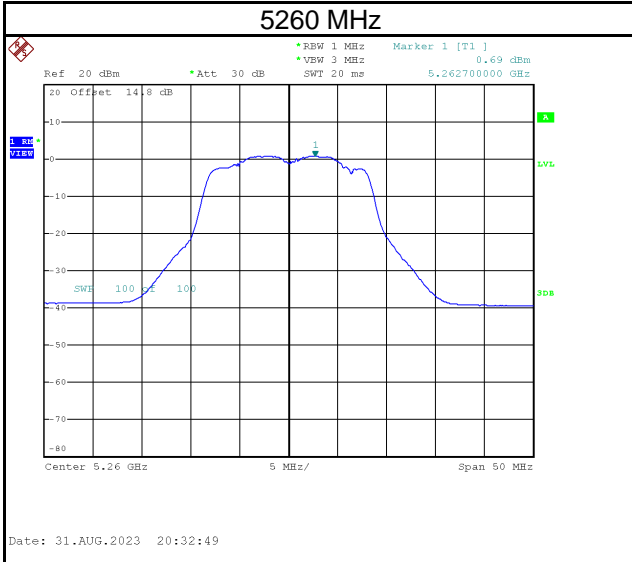


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	1.03	0.10	1.13	10.97	Pass
5580	1.52	0.10	1.62	10.97	Pass
5700	1.00	0.10	1.10	10.97	Pass

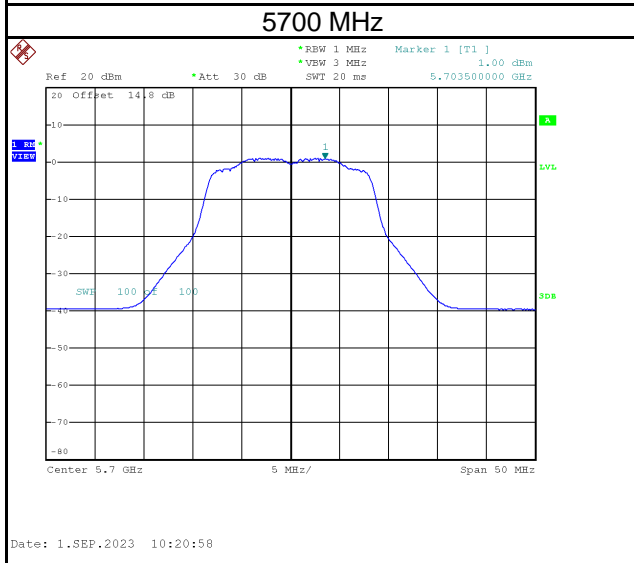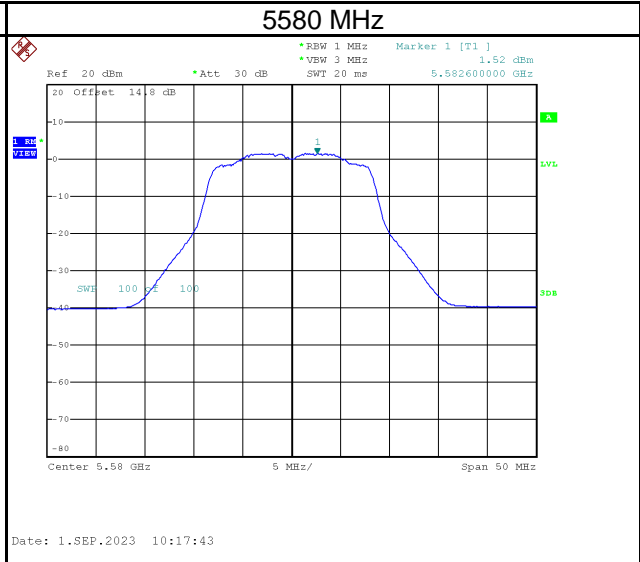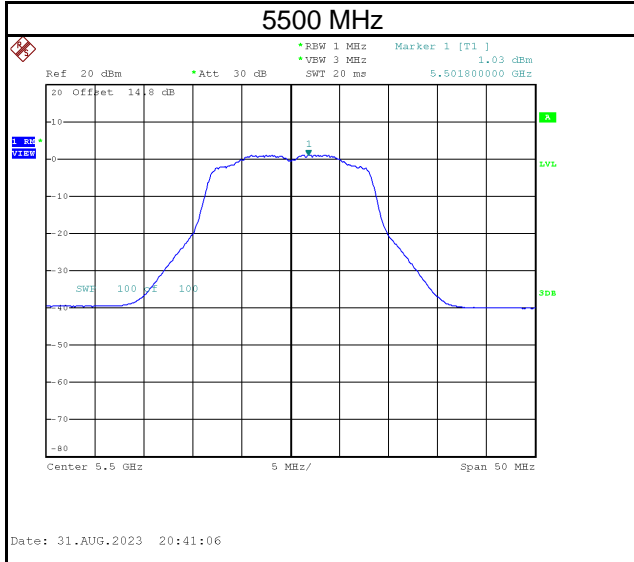





Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-1.30	5.69	0.10	5.79	29.97	Pass
5785	-1.39	5.60	0.10	5.70	29.97	Pass
5825	-2.19	4.80	0.10	4.90	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$



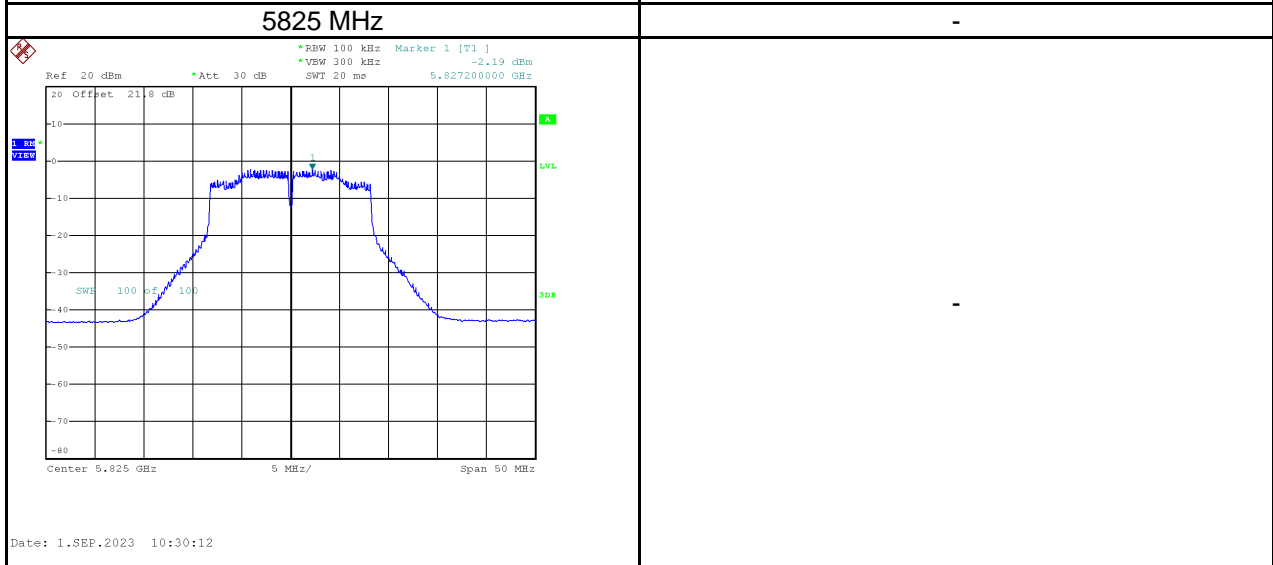
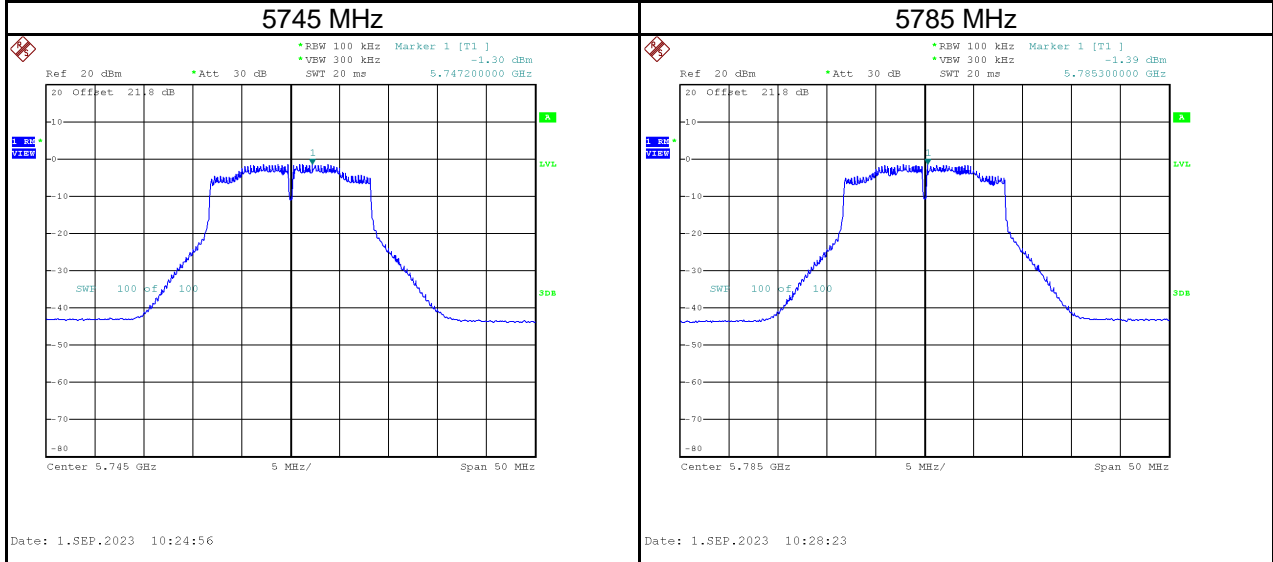


Test Mode	IEEE 802.11n (HT20)_Main Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	1.08	0.05	1.13	16.97	Pass
5200	1.15	0.05	1.20	16.97	Pass
5240	1.09	0.05	1.14	16.97	Pass

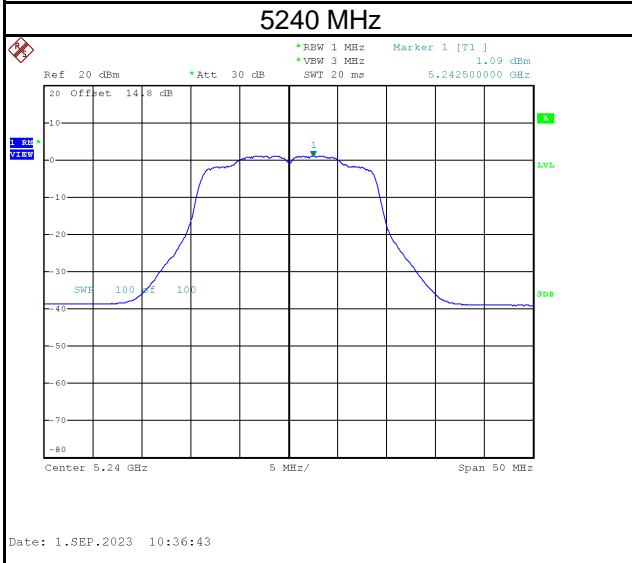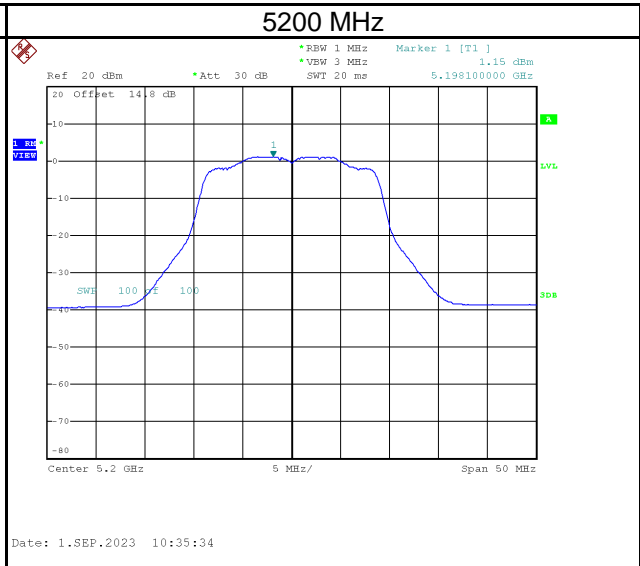
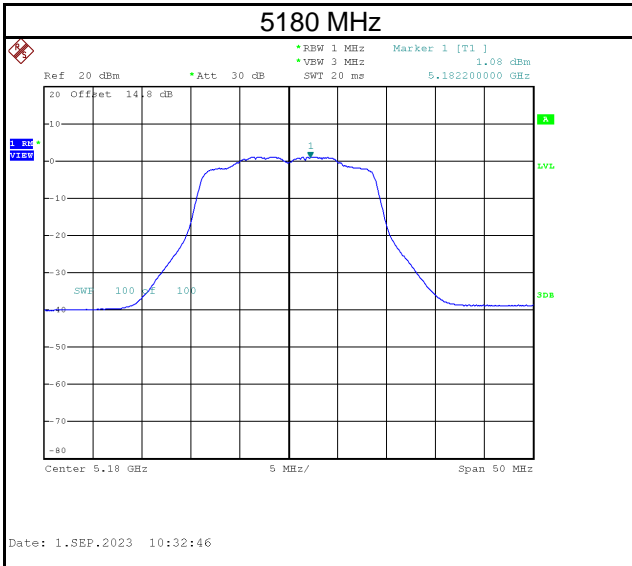


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.96	0.05	1.01	10.97	Pass
5300	0.43	0.05	0.48	10.97	Pass
5320	0.26	0.05	0.31	10.97	Pass

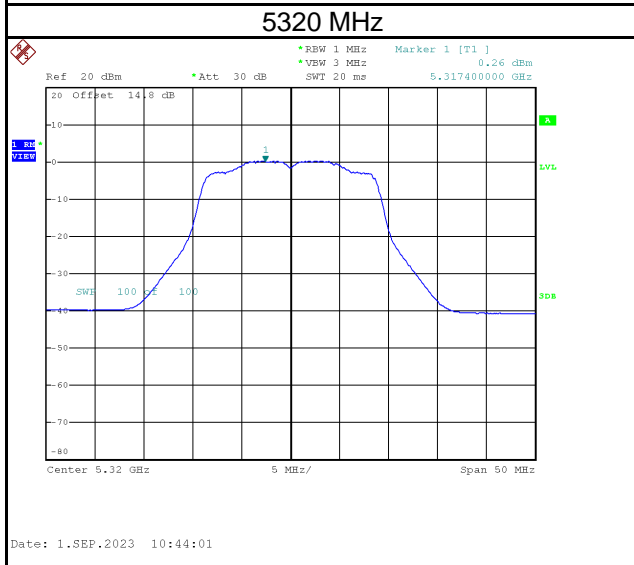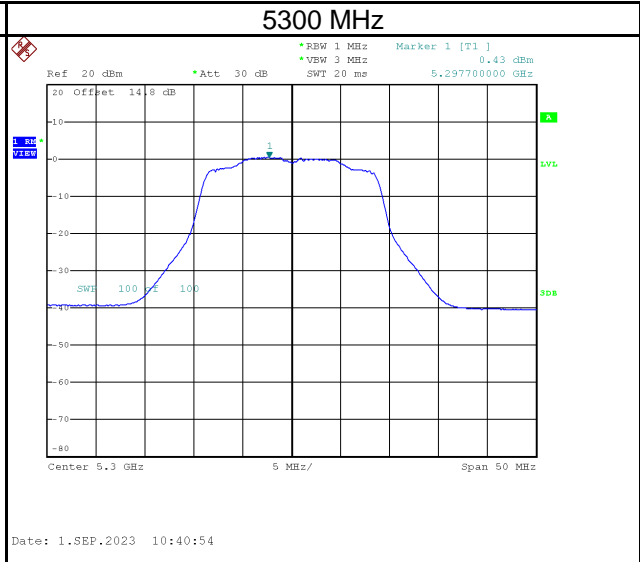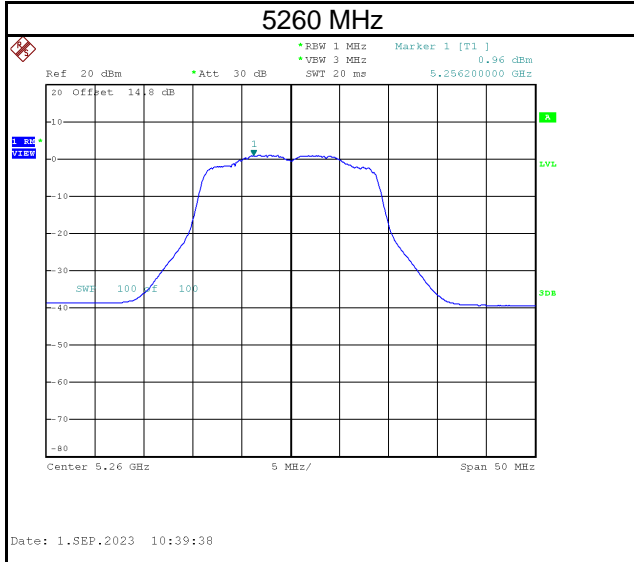




Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	0.81	0.05	0.86	10.97	Pass
5580	1.18	0.05	1.23	10.97	Pass
5700	0.62	0.05	0.67	10.97	Pass

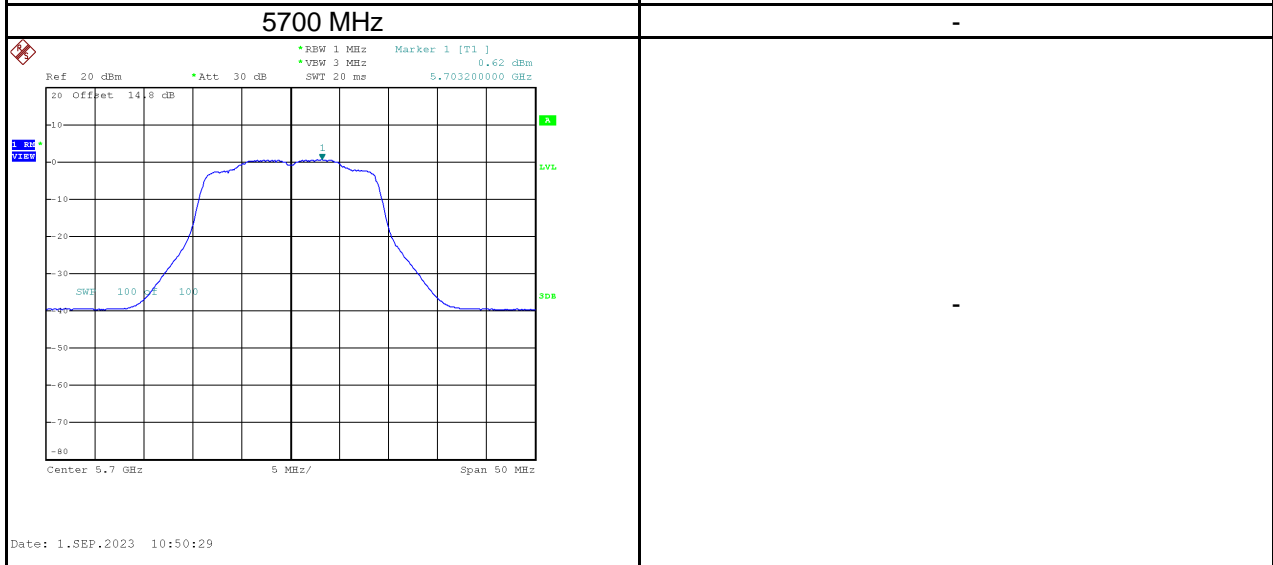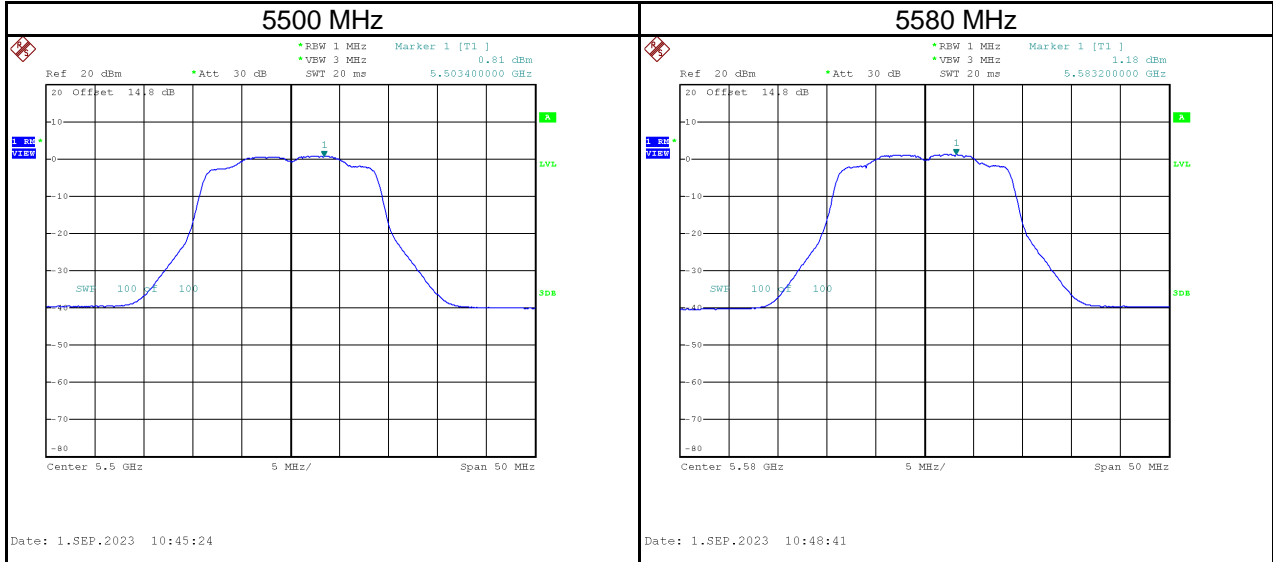





Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-1.39	5.60	0.05	5.65	29.97	Pass
5785	-2.02	4.97	0.05	5.02	29.97	Pass
5825	-2.01	4.98	0.05	5.03	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$


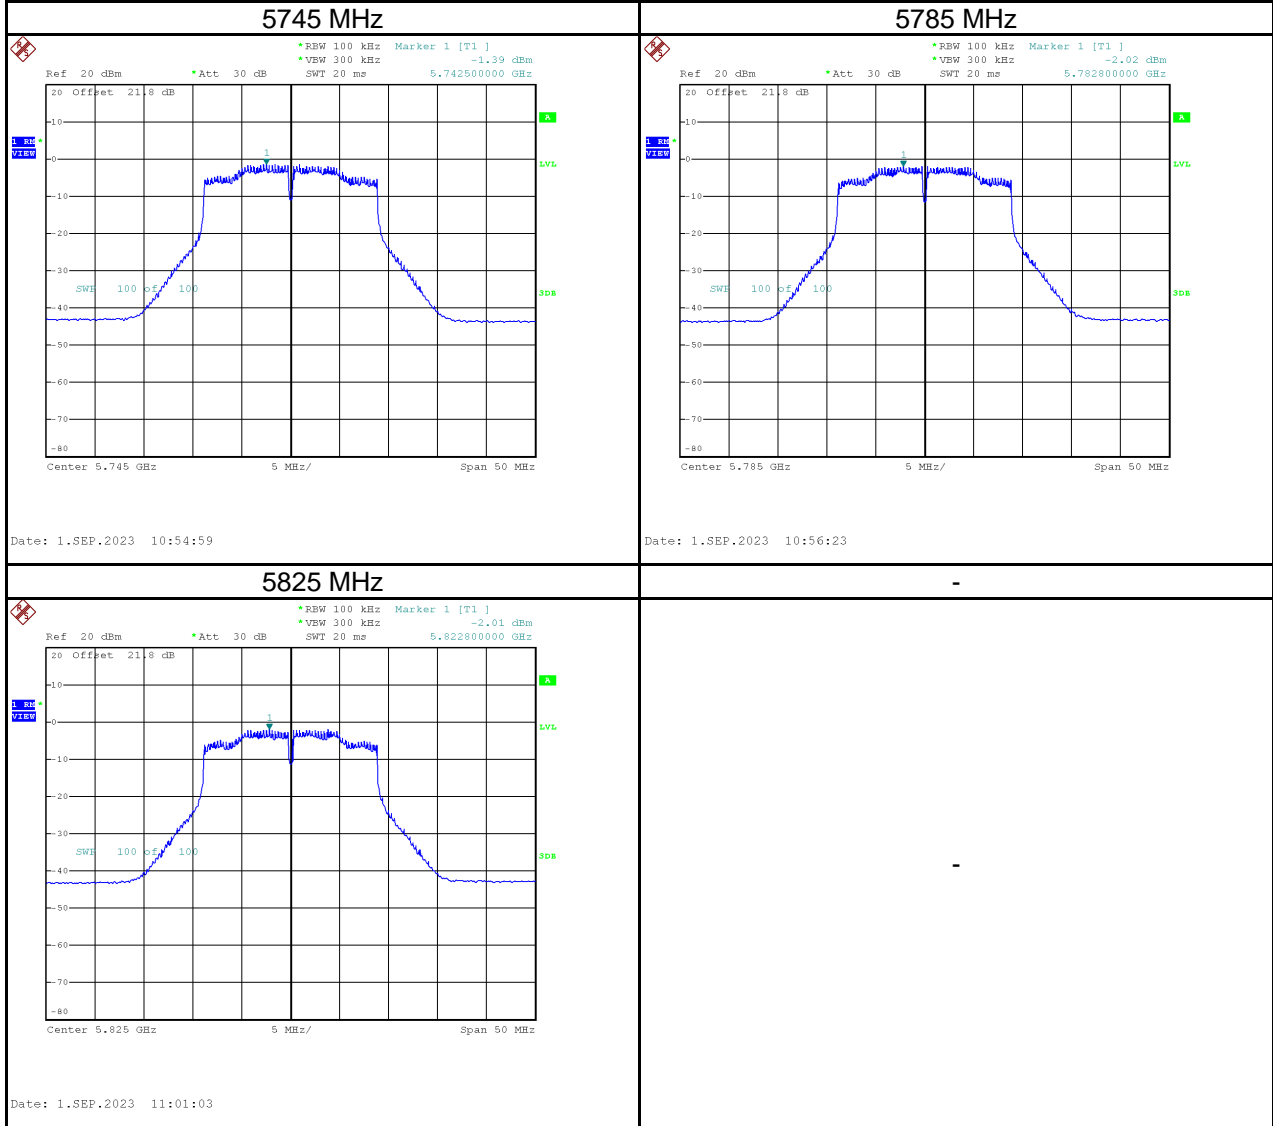


Test Mode	IEEE 802.11n (HT20)_Aux Antenna
-----------	---------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	1.31	0.05	1.36	16.97	Pass
5200	1.26	0.05	1.31	16.97	Pass
5240	1.03	0.05	1.08	16.97	Pass

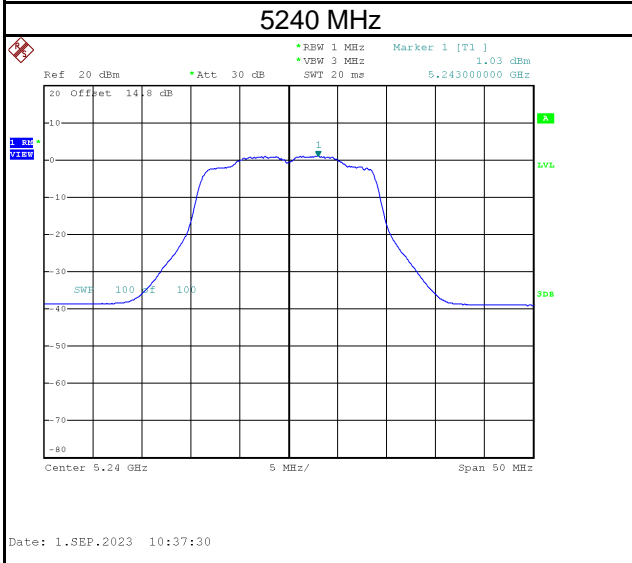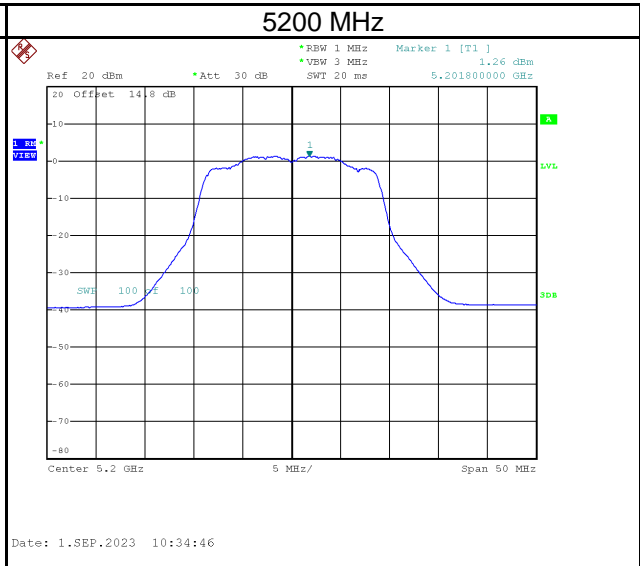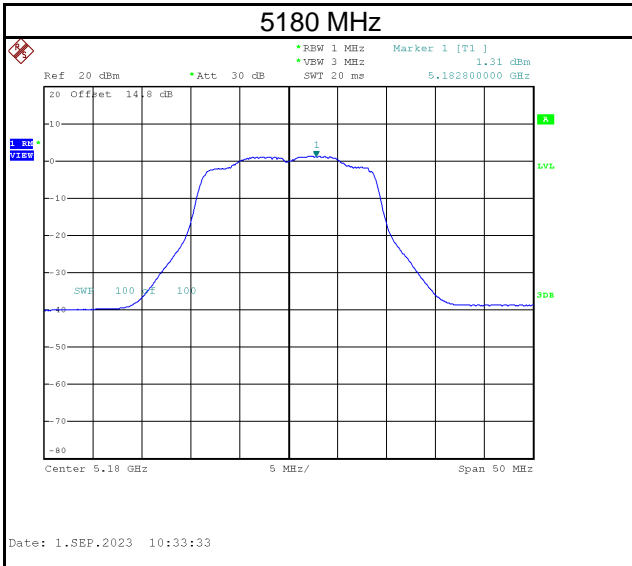

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.93	0.05	0.98	10.97	Pass
5300	0.56	0.05	0.61	10.97	Pass
5320	0.53	0.05	0.58	10.97	Pass

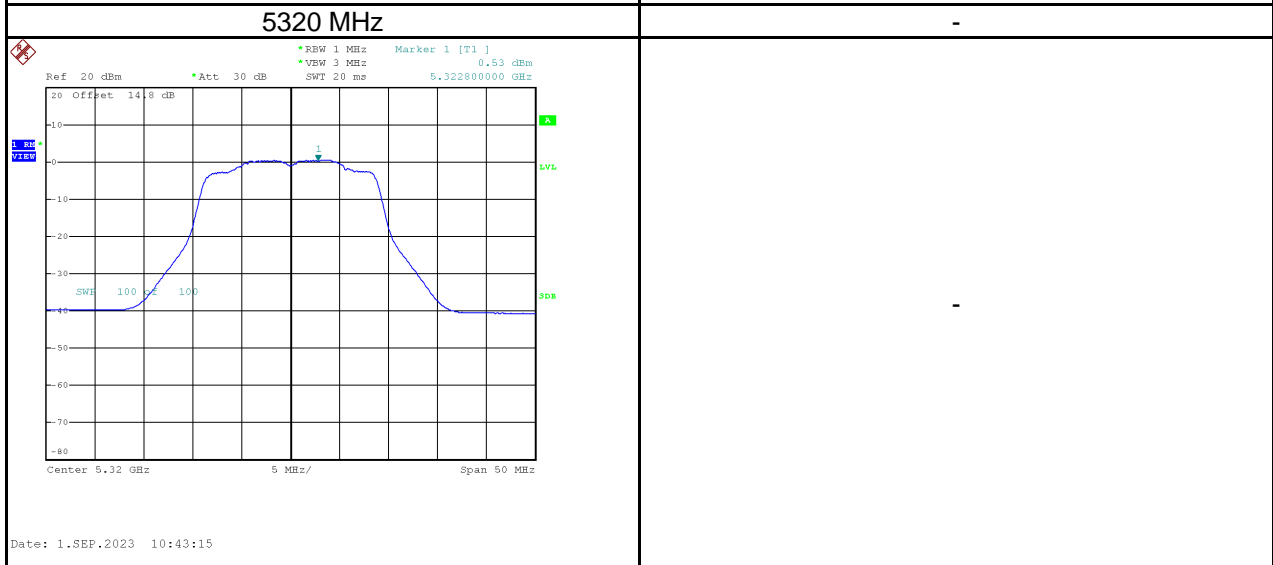
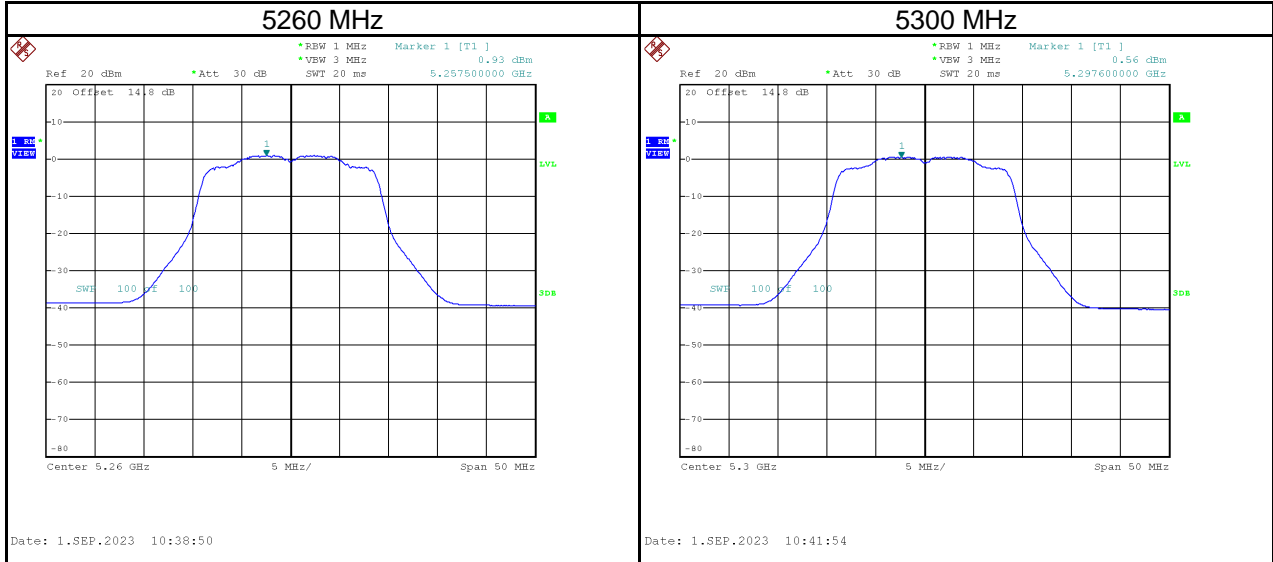


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	0.86	0.05	0.91	10.97	Pass
5580	1.21	0.05	1.26	10.97	Pass
5700	0.74	0.05	0.79	10.97	Pass

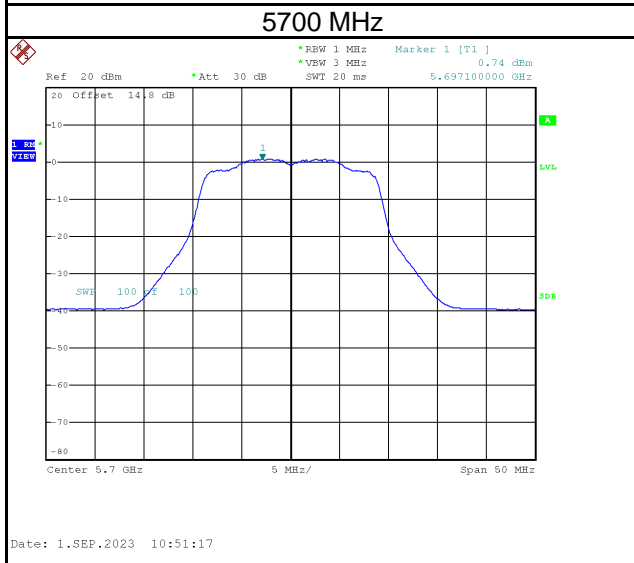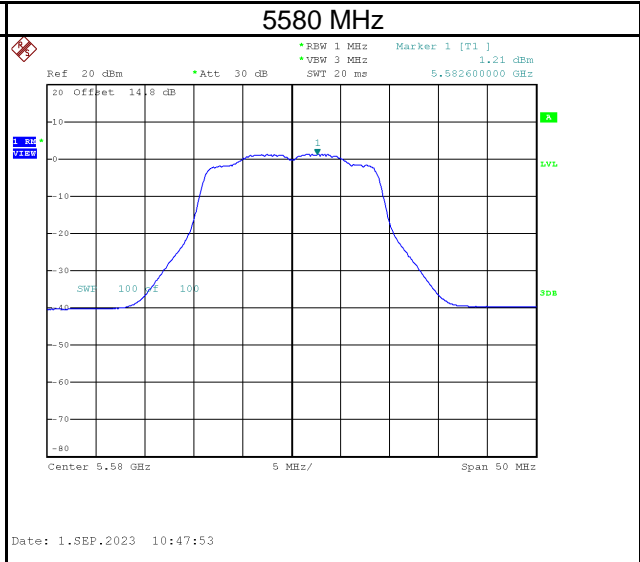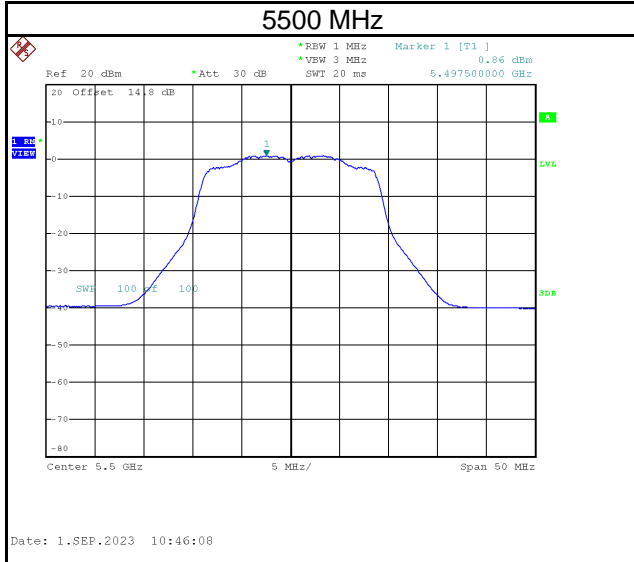

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-1.68	5.31	0.05	5.36	29.97	Pass
5785	-1.62	5.37	0.05	5.42	29.97	Pass
5825	-1.86	5.13	0.05	5.18	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

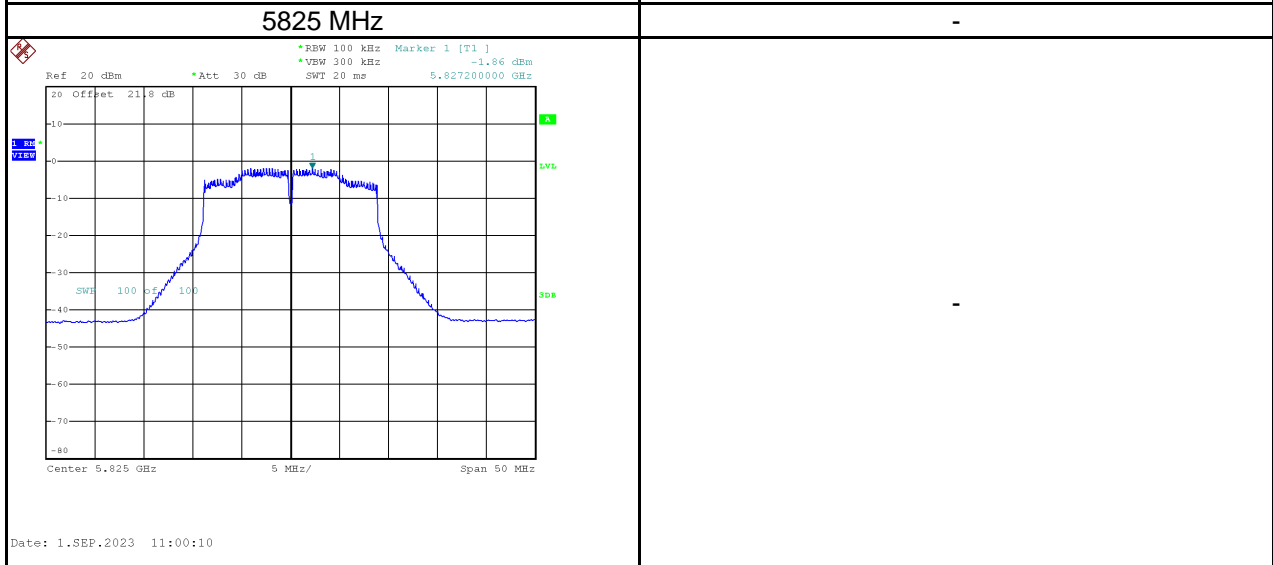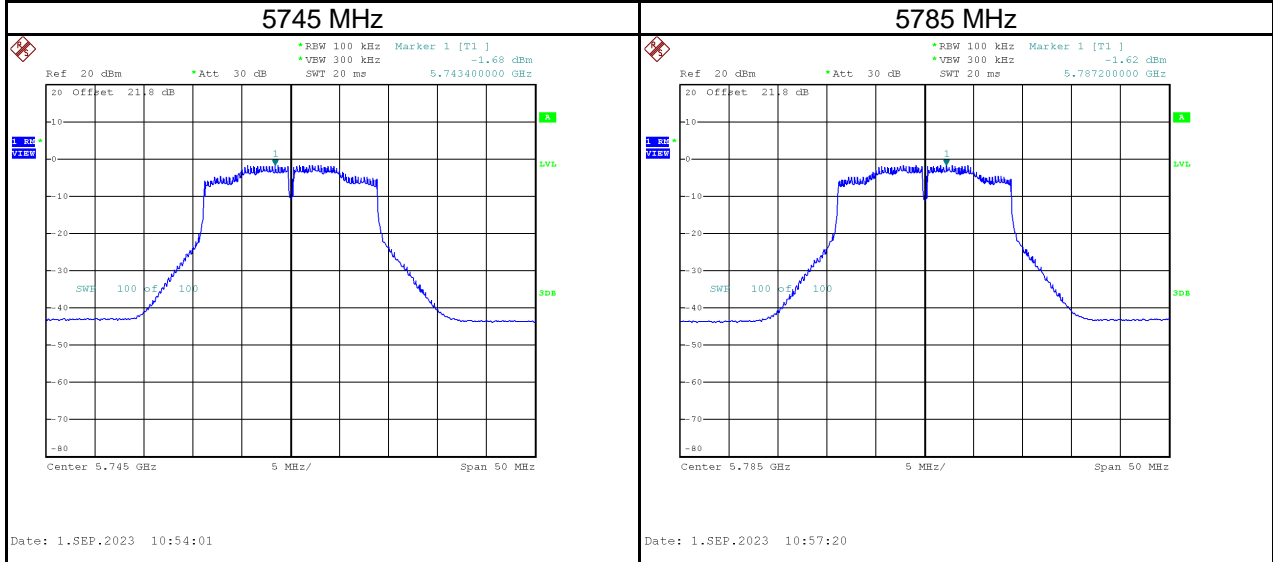

Test Mode	IEEE 802.11n (HT20)_Total
-----------	---------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	4.21	0.05	4.26	16.97	Pass
5200	4.22	0.05	4.27	16.97	Pass
5240	4.07	0.05	4.12	16.97	Pass
5260	3.96	0.05	4.01	10.97	Pass
5300	3.51	0.05	3.56	10.97	Pass
5320	3.41	0.05	3.46	10.97	Pass
5500	3.85	0.05	3.90	10.97	Pass
5580	4.21	0.05	4.26	10.97	Pass
5700	3.69	0.05	3.74	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	1.48	8.47	0.05	8.52	29.97	Pass
5785	1.19	8.18	0.05	8.24	29.97	Pass
5825	1.08	8.07	0.05	8.12	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11n (HT40)_Main Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-2.01	0.05	-1.96	16.97	Pass
5230	-2.37	0.05	-2.32	16.97	Pass




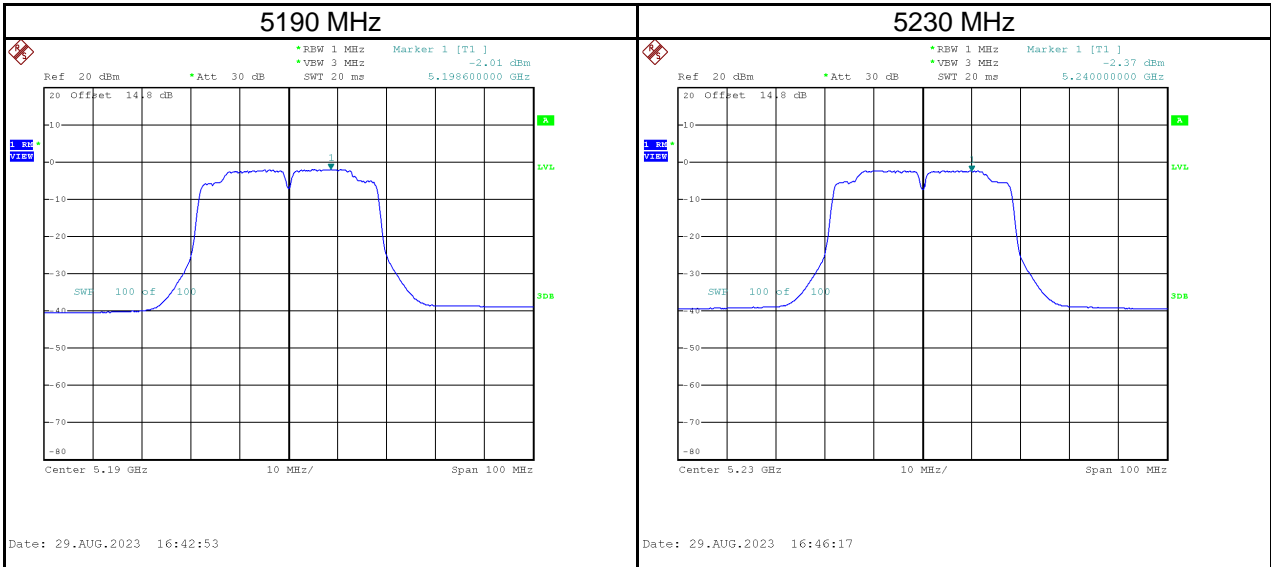


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-2.44	0.23	-2.39	10.97	Pass
5310	-3.40	0.23	-3.35	10.97	Pass

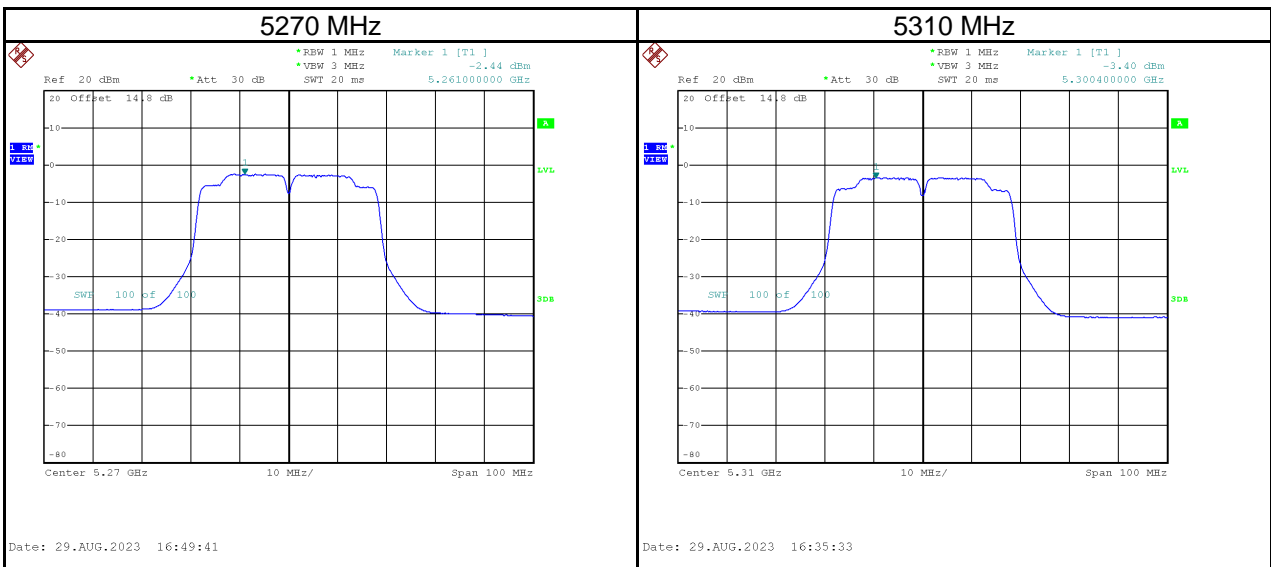




Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5510	-2.80	0.05	-2.75	10.97	Pass
5550	-2.69	0.05	-2.64	10.97	Pass
5670	-3.21	0.05	-3.16	10.97	Pass

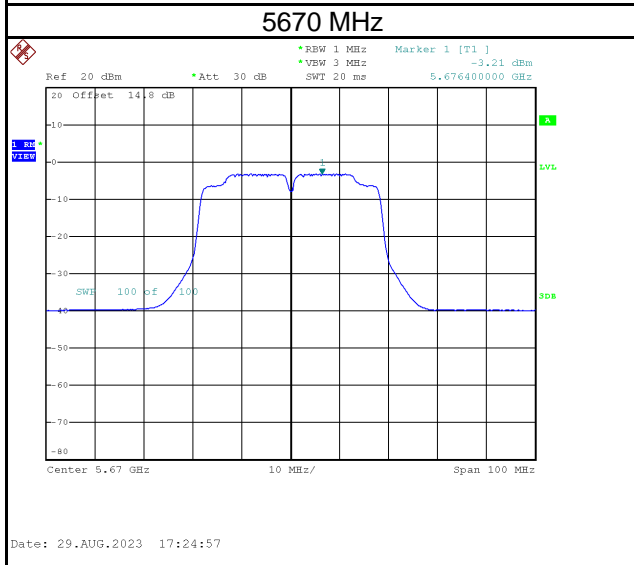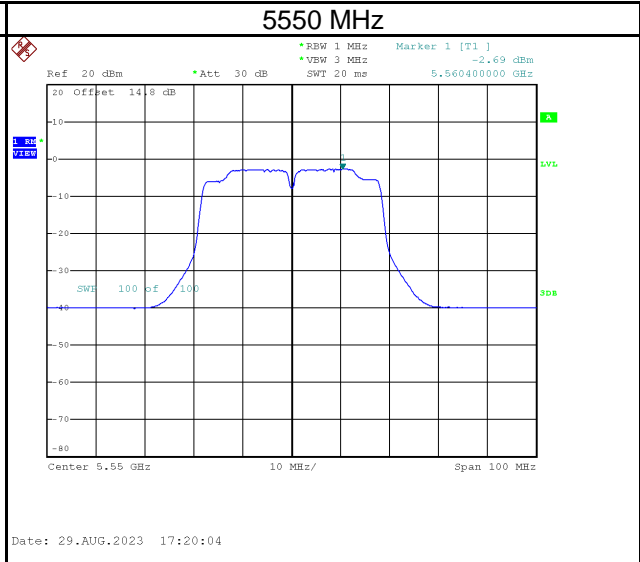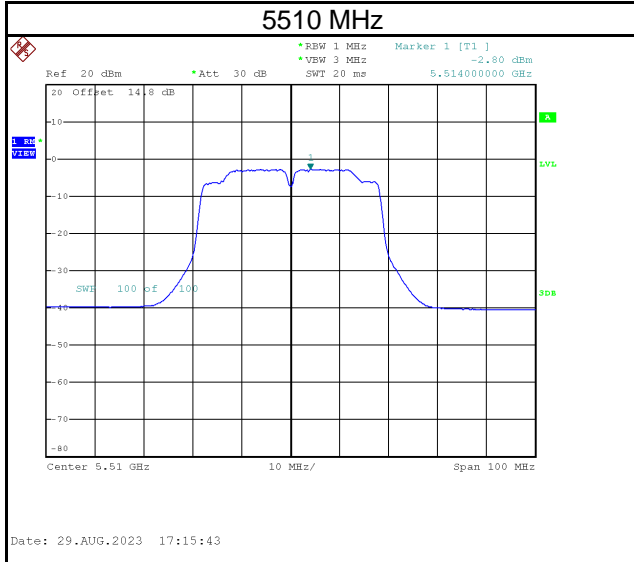


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-5.63	1.36	0.05	1.41	29.97	Pass
5795	-6.00	0.99	0.05	1.04	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

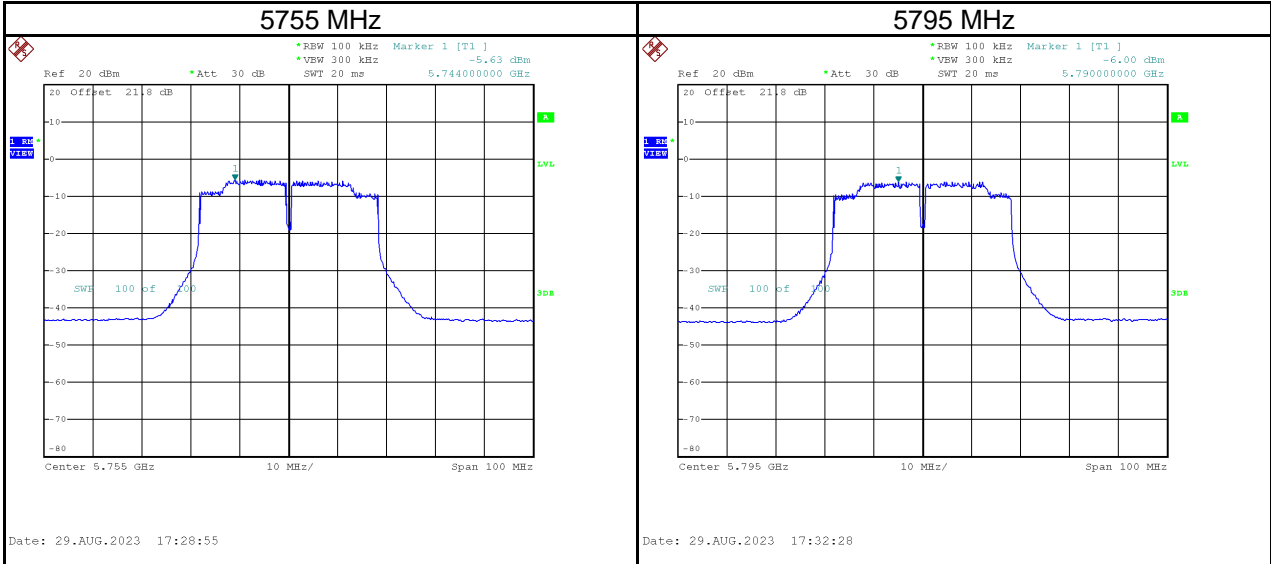


Test Mode	IEEE 802.11n (HT40)_Aux Antenna
-----------	---------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-2.27	0.05	-2.22	16.97	Pass
5230	-2.64	0.05	-2.59	16.97	Pass

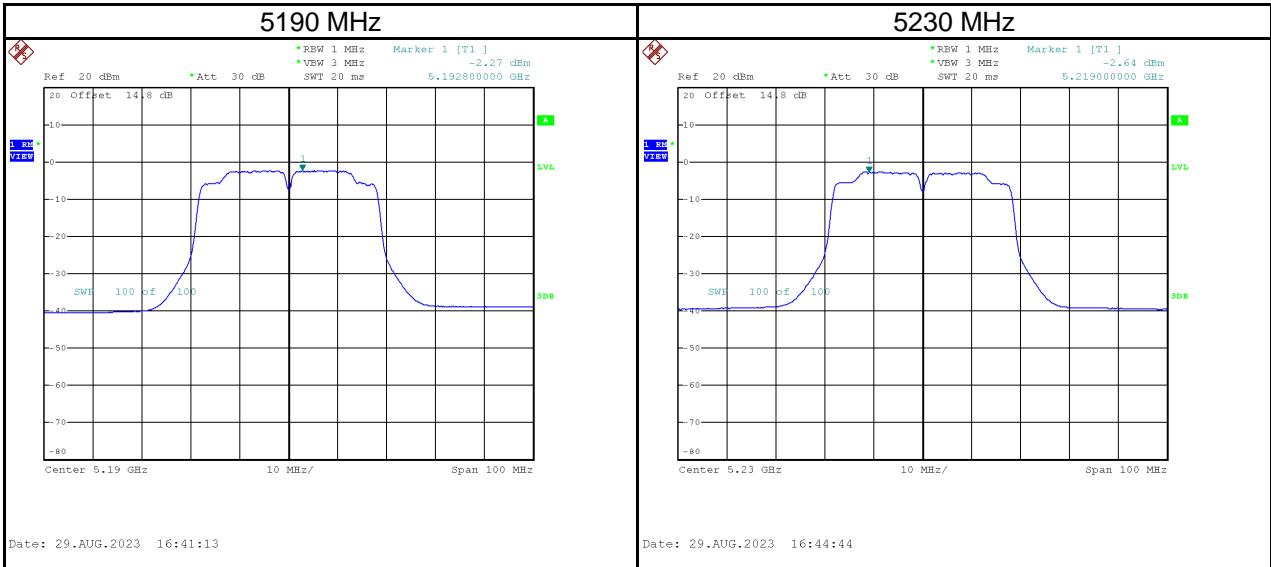

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-2.64	0.05	-2.59	10.97	Pass
5310	-3.52	0.05	-3.47	10.97	Pass

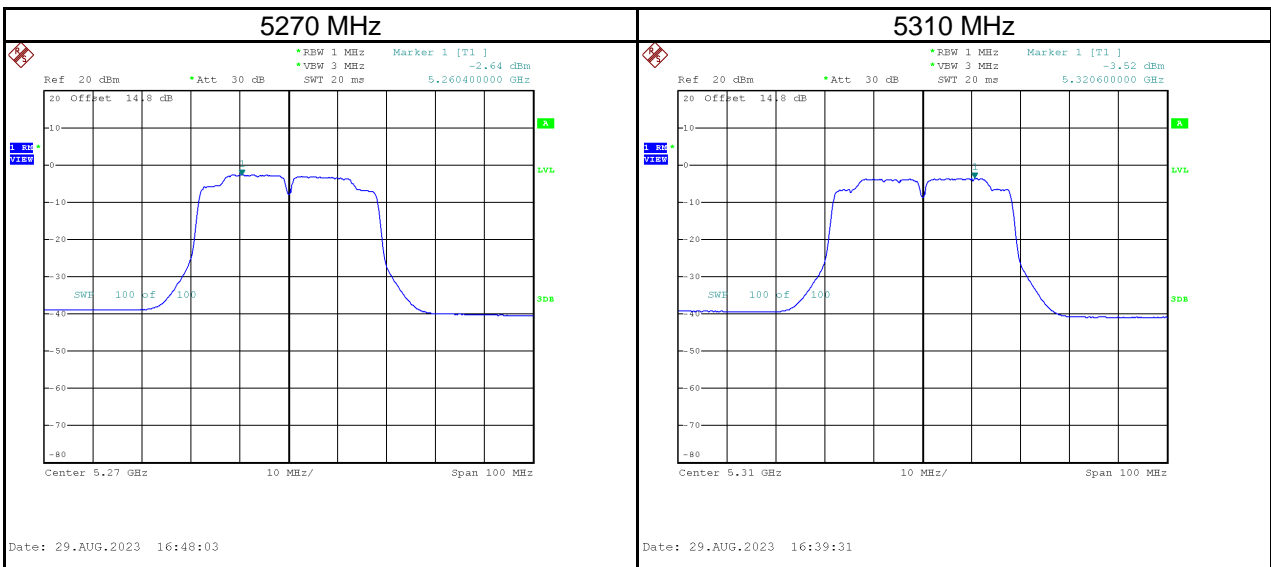


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5510	-2.95	0.05	-2.90	10.97	Pass
5550	-2.63	0.05	-2.58	10.97	Pass
5670	-3.26	0.05	-3.21	10.97	Pass

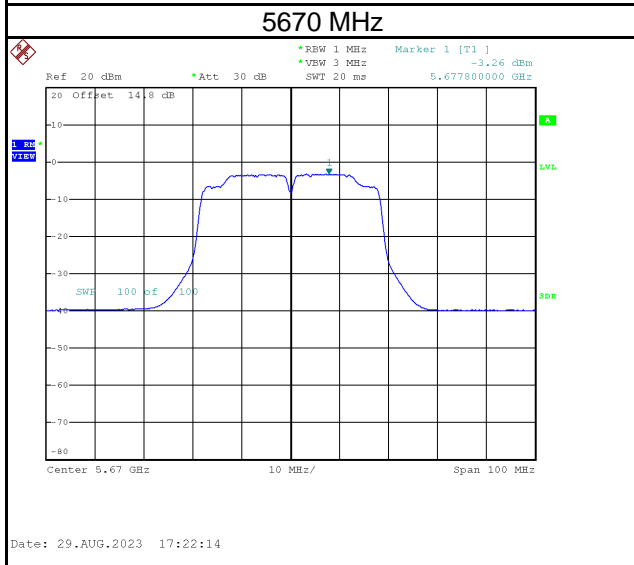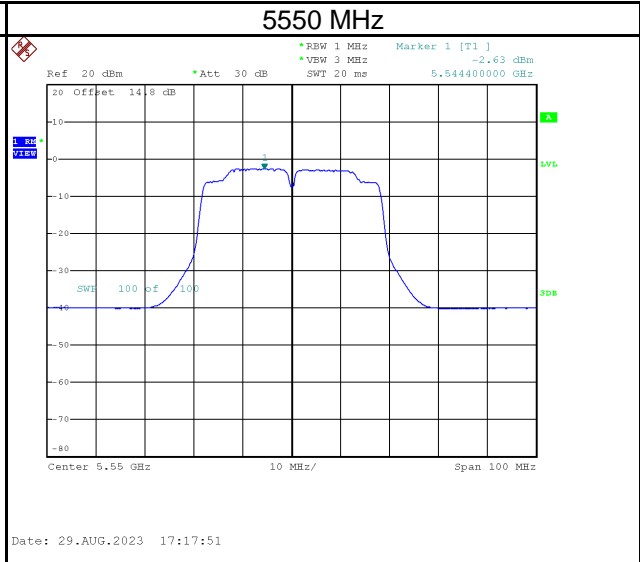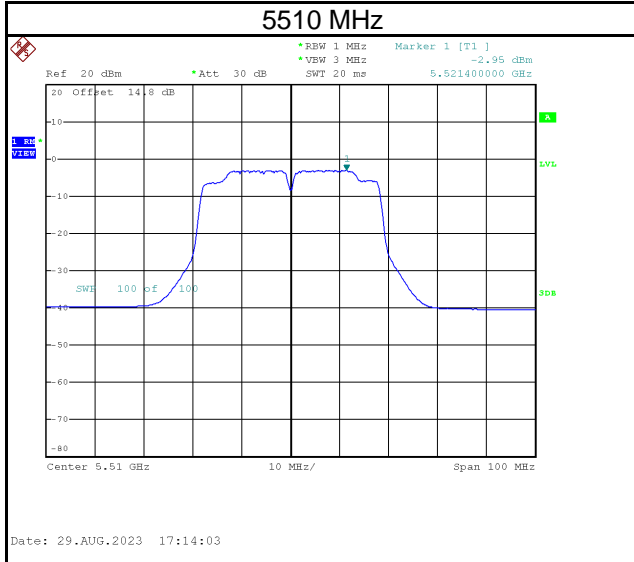

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-5.69	1.30	0.05	1.35	29.97	Pass
5795	-6.09	0.90	0.05	0.95	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

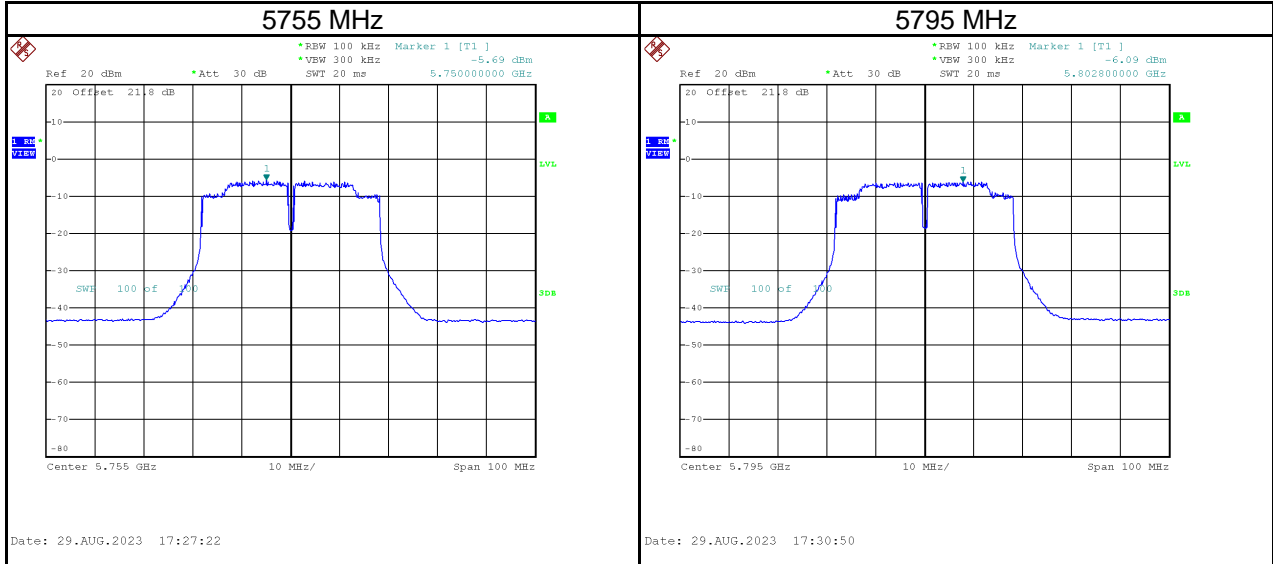

Test Mode | IEEE 802.11n (HT40)\_Total


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	0.87	0.05	0.93	16.97	Pass
5230	0.51	0.05	0.56	16.97	Pass
5270	0.47	0.05	0.53	10.97	Pass
5310	-0.45	0.05	-0.40	10.97	Pass
5510	0.14	0.05	0.19	10.97	Pass
5550	0.35	0.05	0.40	10.97	Pass
5670	-0.22	0.05	-0.17	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-2.65	4.34	0.05	4.39	29.97	Pass
5795	-3.03	3.96	0.05	4.01	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ac (VHT80)_Main Antenna
-----------	------------------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-6.14	1.11	-5.03	16.97	Pass

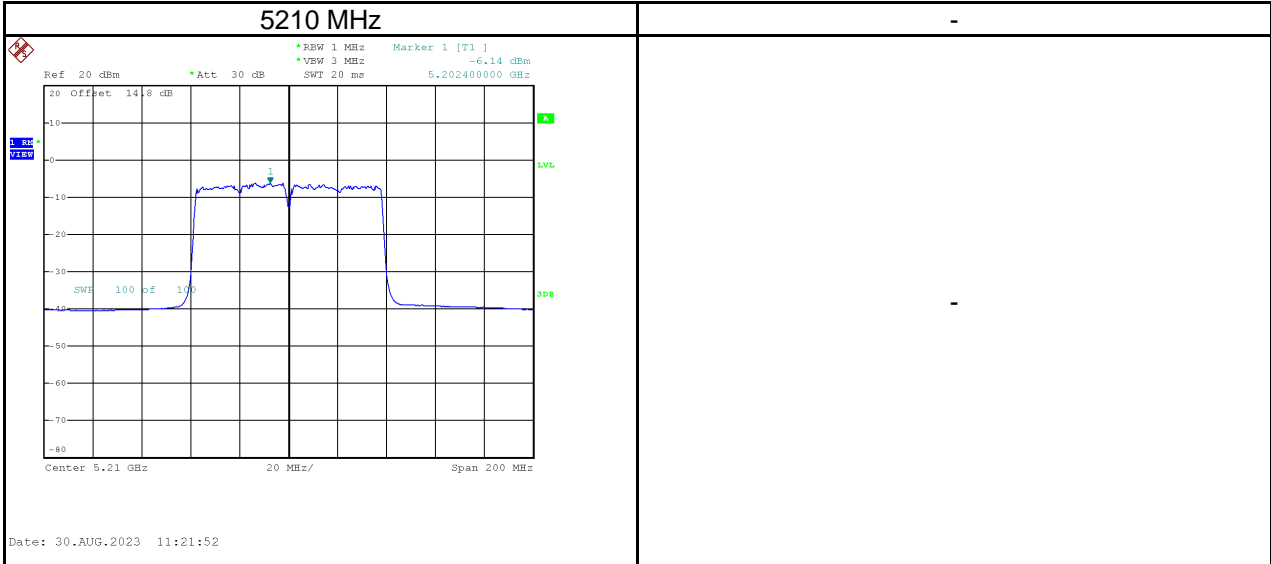

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-7.15	1.11	-6.04	10.97	Pass

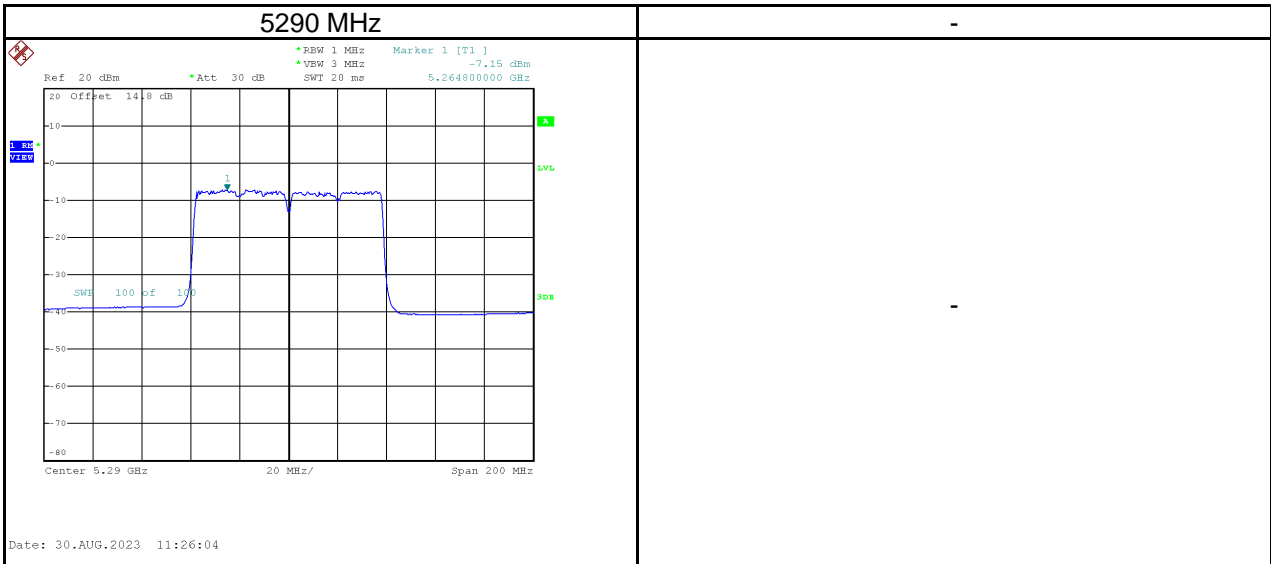


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5530	-6.34	1.11	-5.23	10.97	Pass
5610	-6.38	1.11	-5.27	10.97	Pass

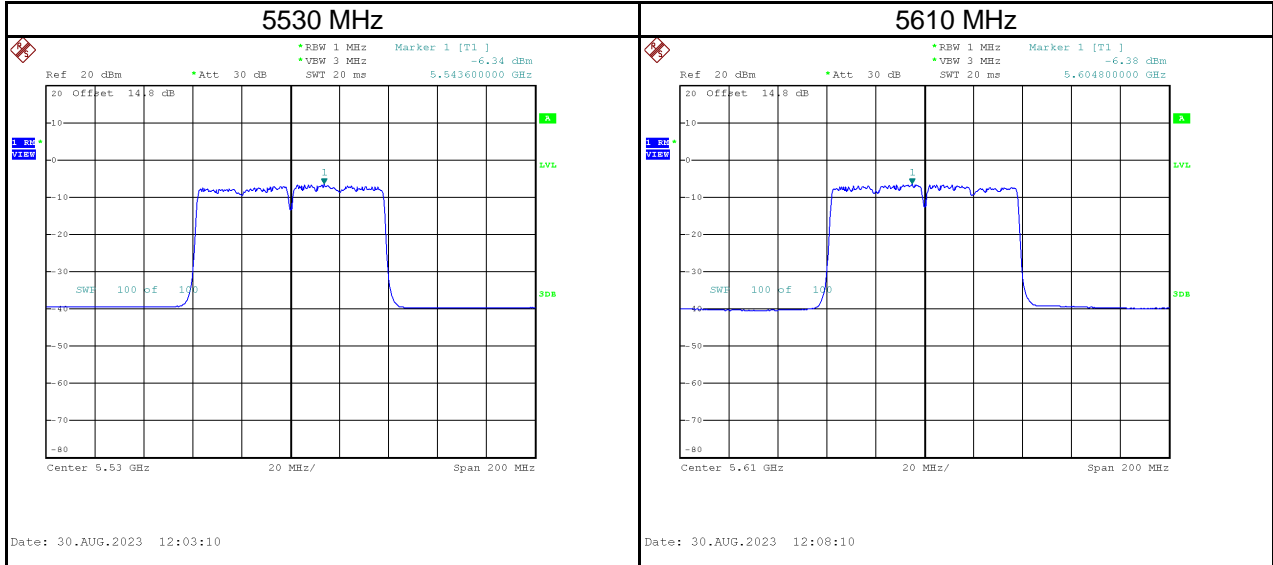


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-10.14	-3.15	1.11	-2.04	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

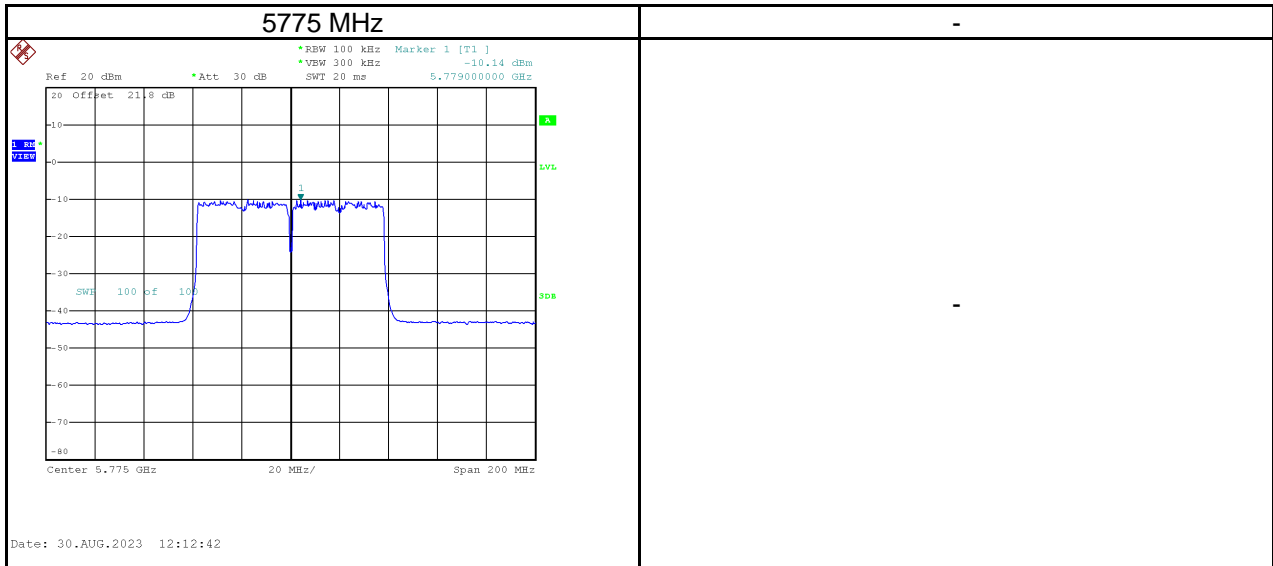


Test Mode	IEEE 802.11ac (VHT80)_Aux Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-6.56	1.11	-5.45	16.97	Pass

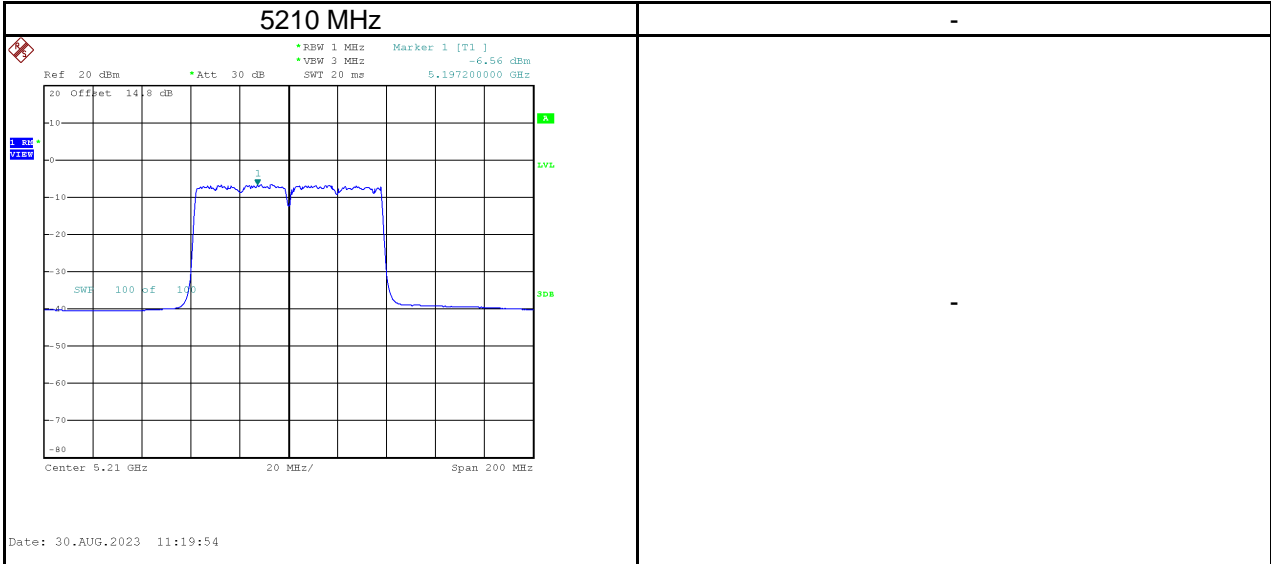


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-7.14	1.11	-6.03	10.97	Pass

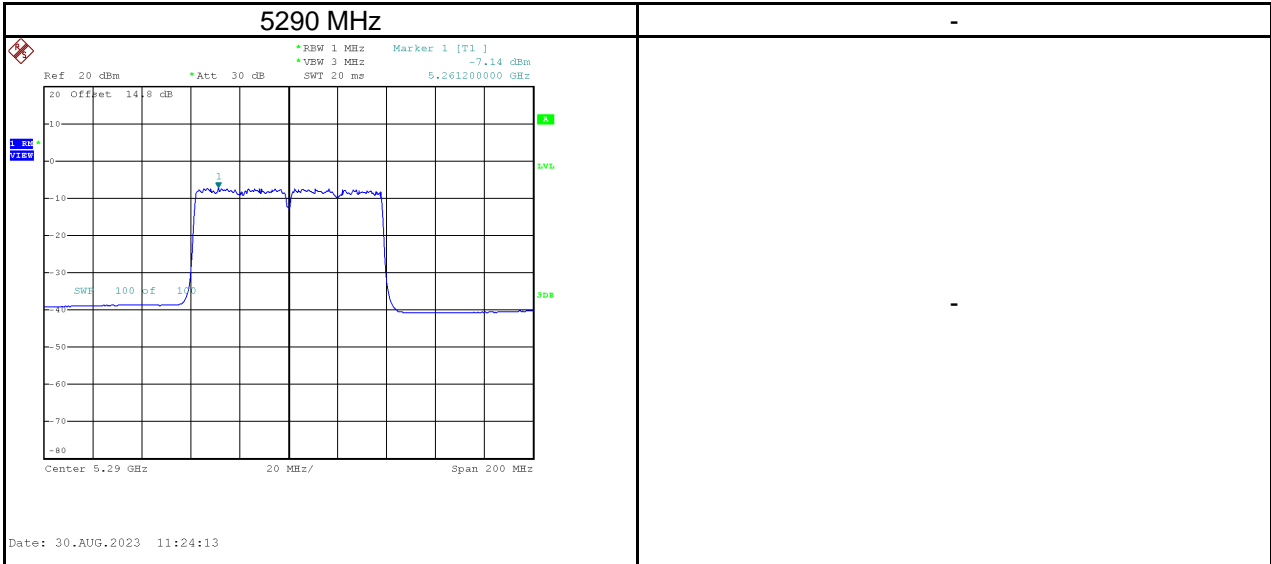




Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5530	-6.52	1.11	-5.41	10.97	Pass
5610	-6.63	1.11	-5.52	10.97	Pass

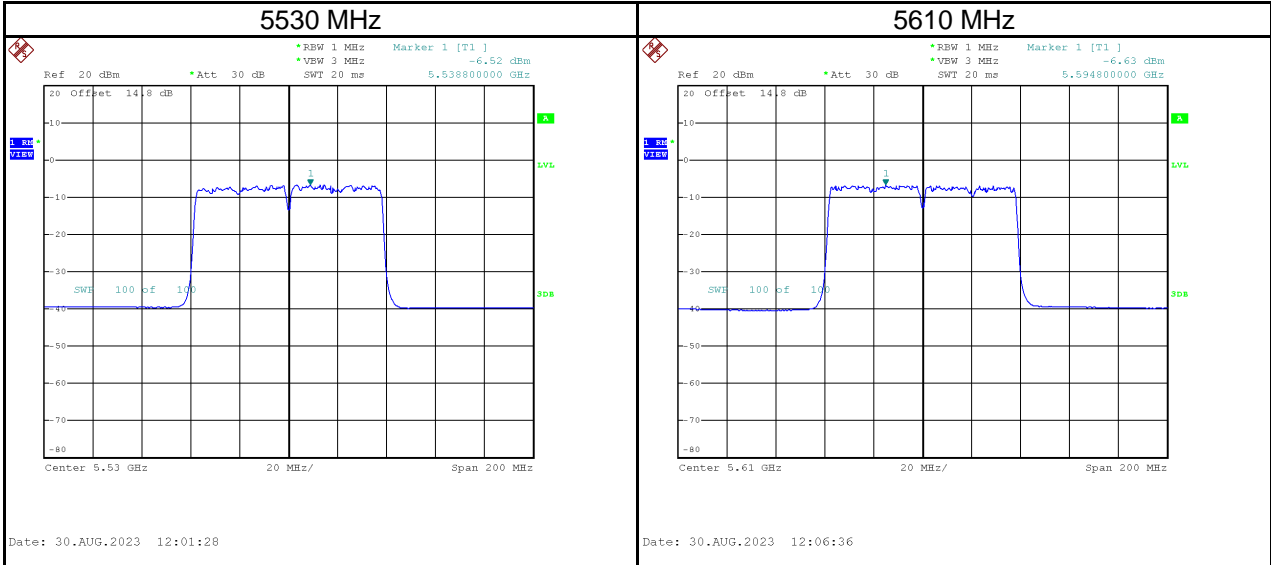

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-10.00	-3.01	1.11	-1.90	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

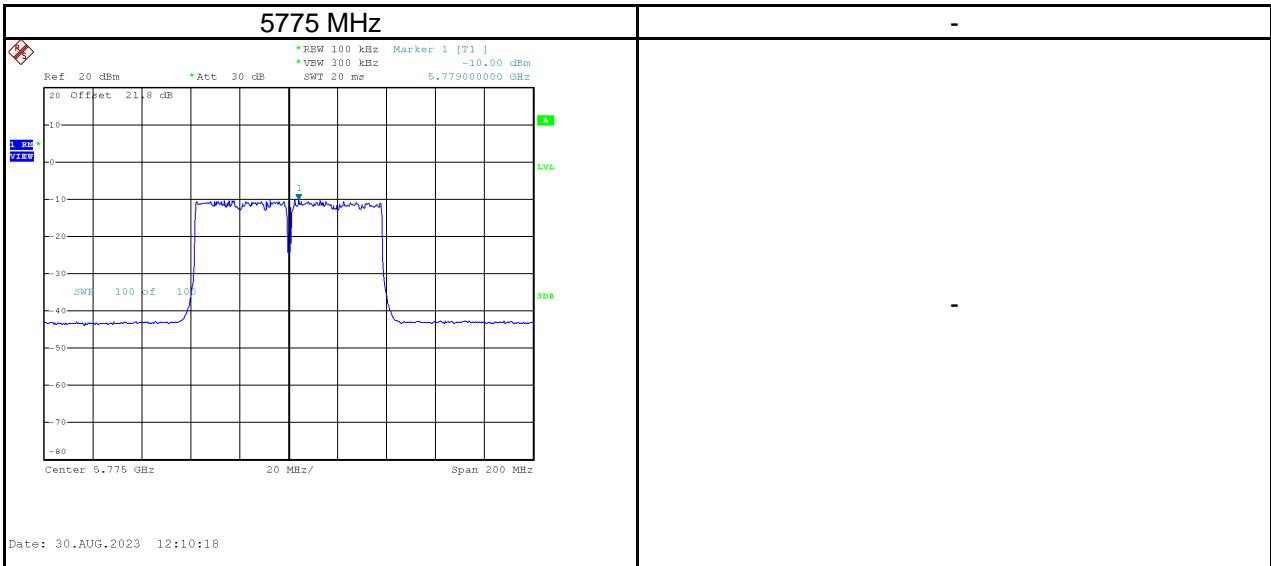

Test Mode	IEEE 802.11ac (VHT80)_Total
-----------	-----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-3.33	1.11	-2.23	16.97	Pass
5290	-4.13	1.11	-3.03	10.97	Pass
5530	-3.42	1.11	-2.31	10.97	Pass
5610	-3.49	1.11	-2.38	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-7.06	-0.07	1.11	1.04	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ac (VHT160)_Main Antenna
-----------	-------------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-12.72	0.73	-11.99	16.97	Pass

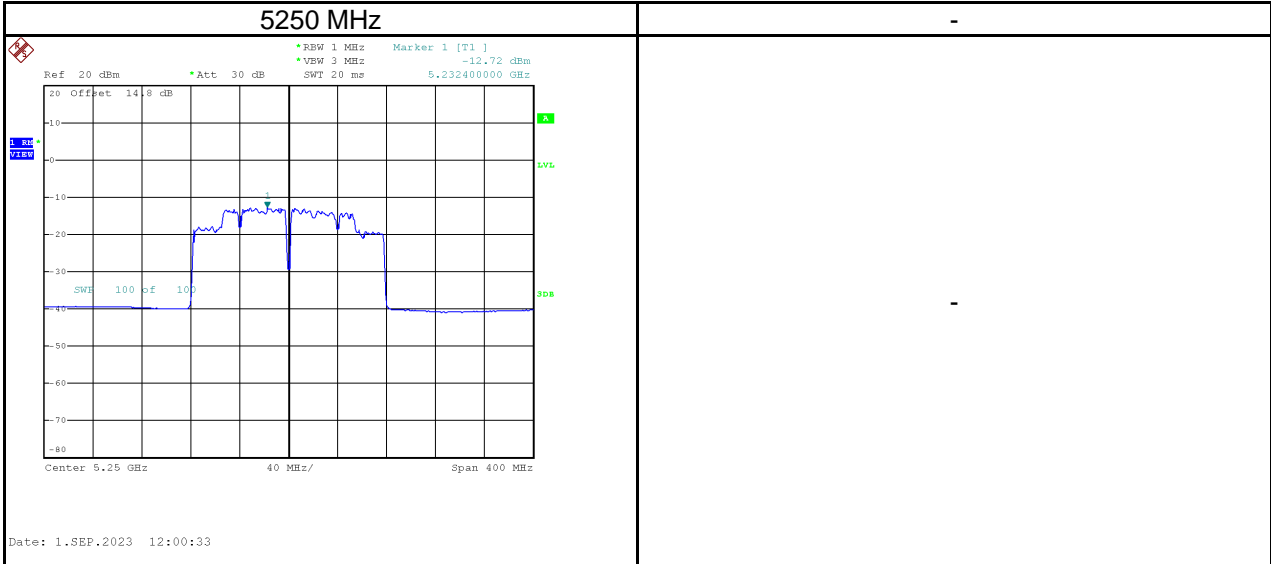


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5570	-8.55	0.73	-7.82	10.97	Pass

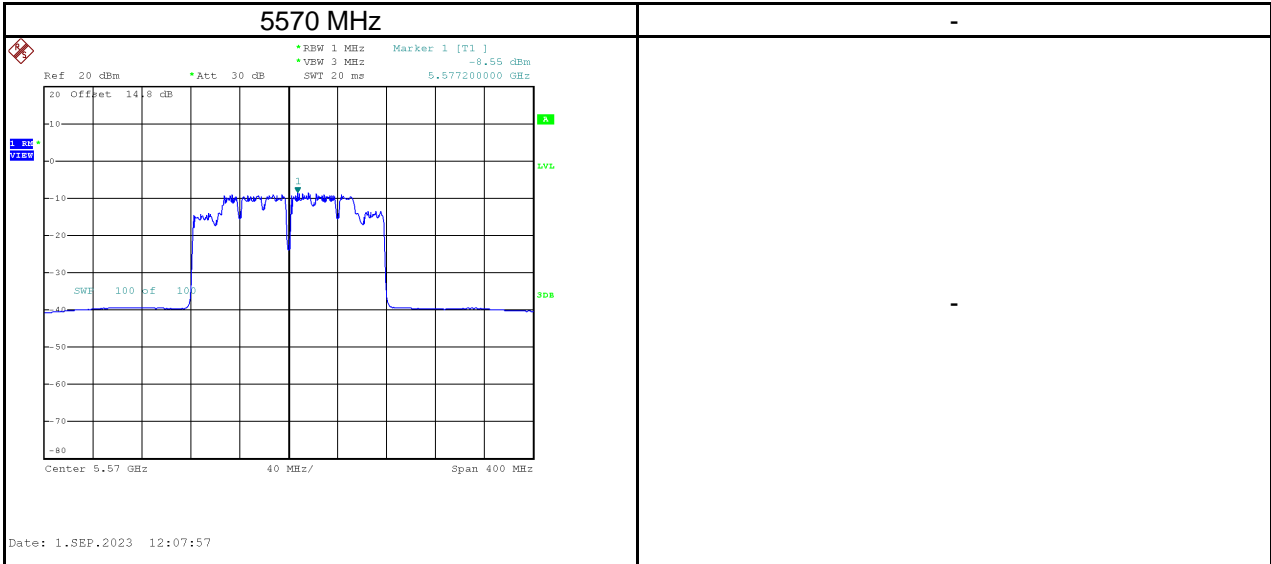


Test Mode	IEEE 802.11ac (VHT160)_Aux Antenna
-----------	------------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-12.99	0.73	-12.26	16.97	Pass

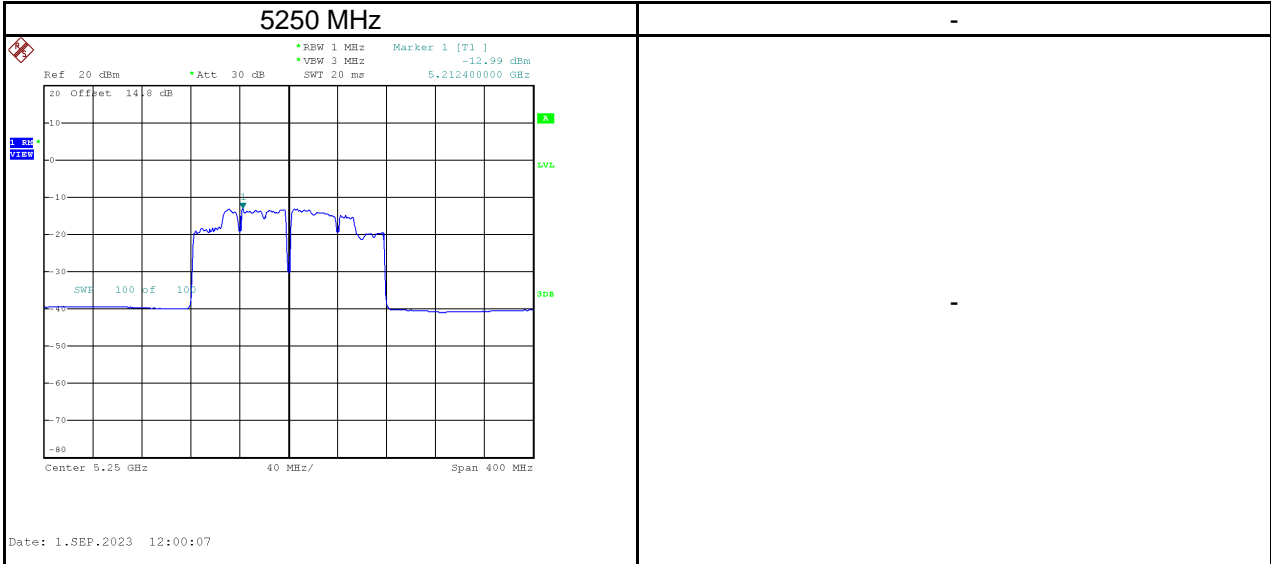

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5570	-8.75	0.73	-8.02	10.97	Pass




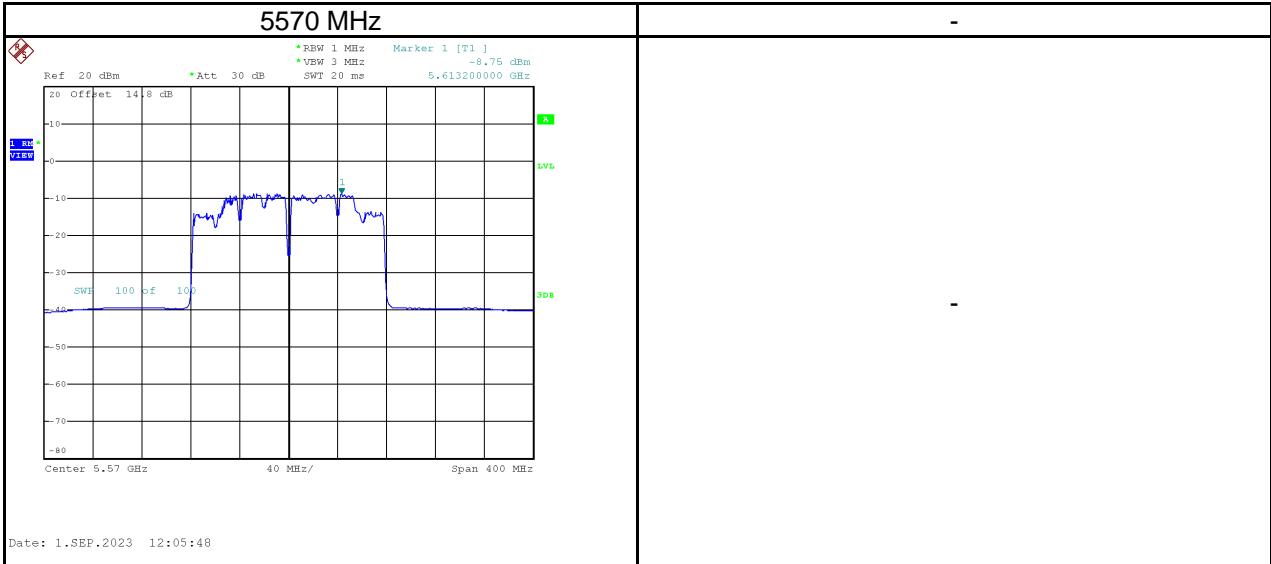


Test Mode	IEEE 802.11ac (VHT160)_Total
-----------	------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-9.84	0.73	-9.12	16.97	Pass
5570	-5.64	0.73	-4.91	10.97	Pass

Test Mode	IEEE 802.11ax (HE20)_Main Antenna
-----------	-----------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	0.73	0.03	0.76	16.97	Pass
5200	0.69	0.03	0.72	16.97	Pass
5240	0.53	0.03	0.56	16.97	Pass

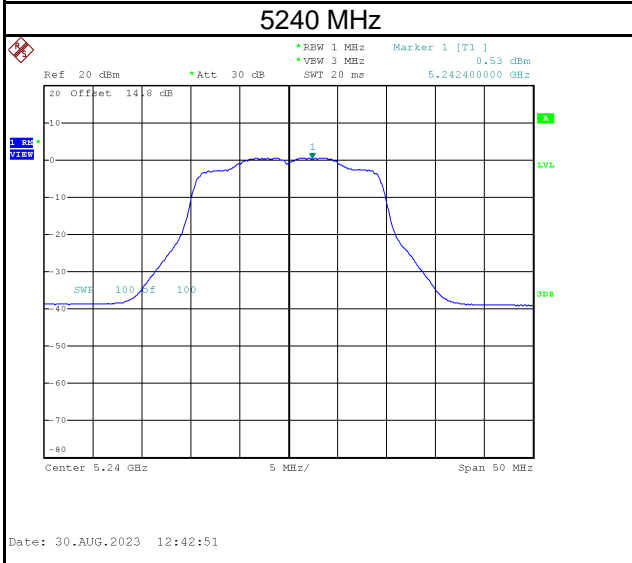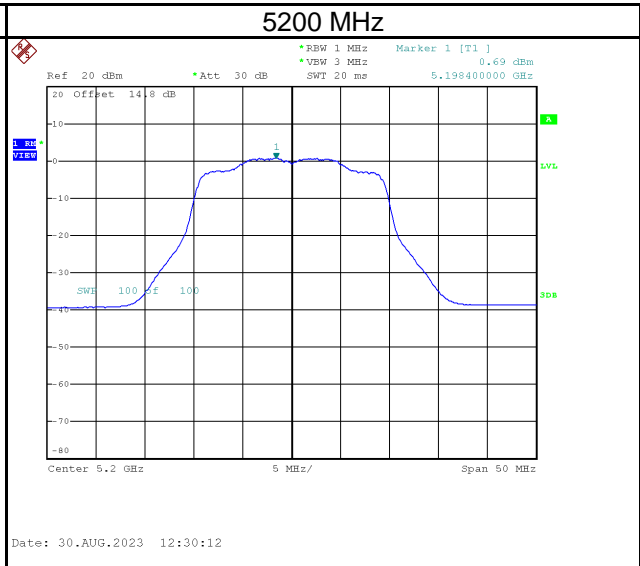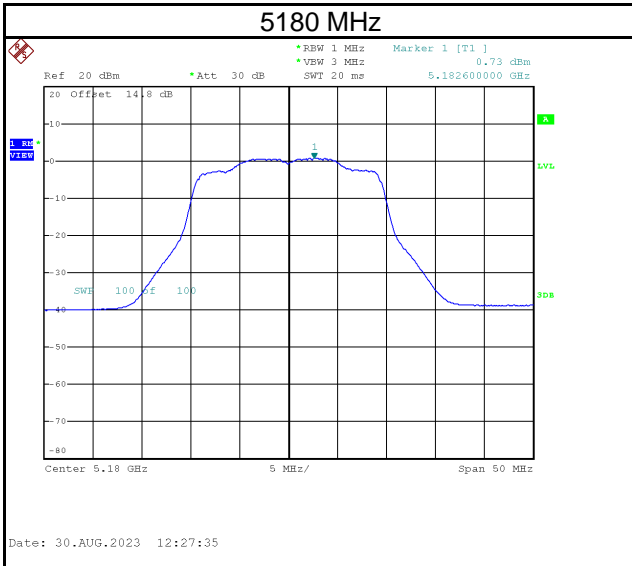

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.30	0.03	0.33	10.97	Pass
5300	-0.22	0.03	-0.19	10.97	Pass
5320	-0.48	0.03	-0.45	10.97	Pass

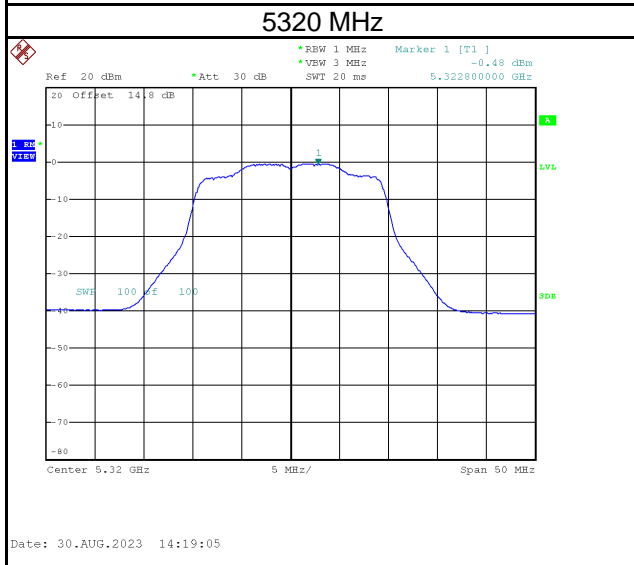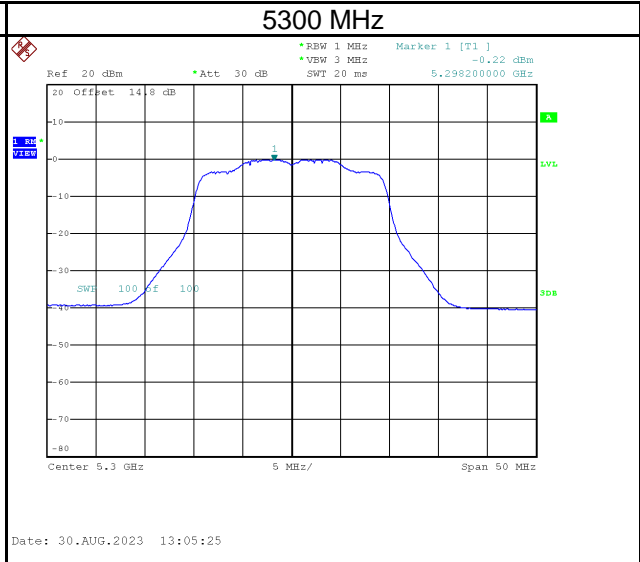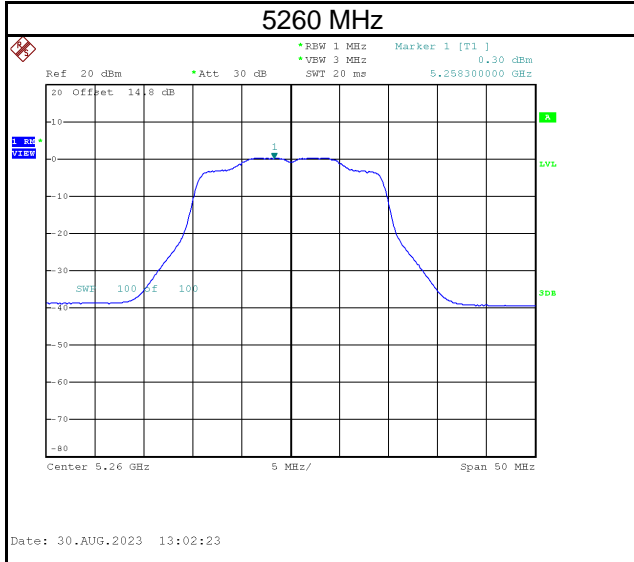



Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	0.21	0.03	0.24	10.97	Pass
5580	0.83	0.03	0.86	10.97	Pass
5700	0.37	0.03	0.40	10.97	Pass

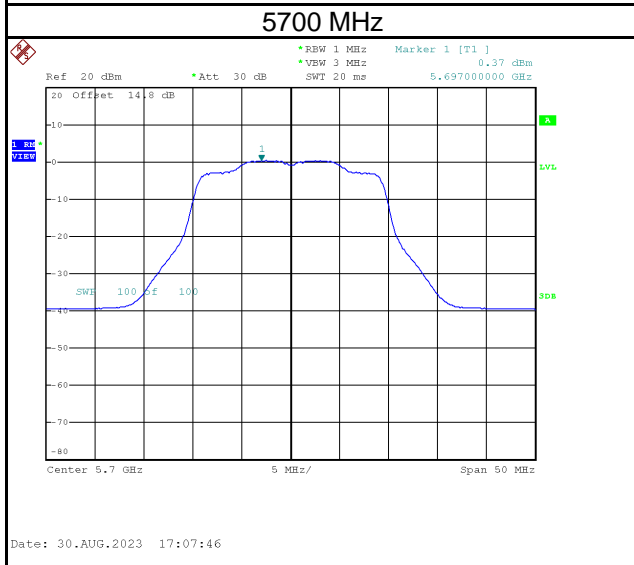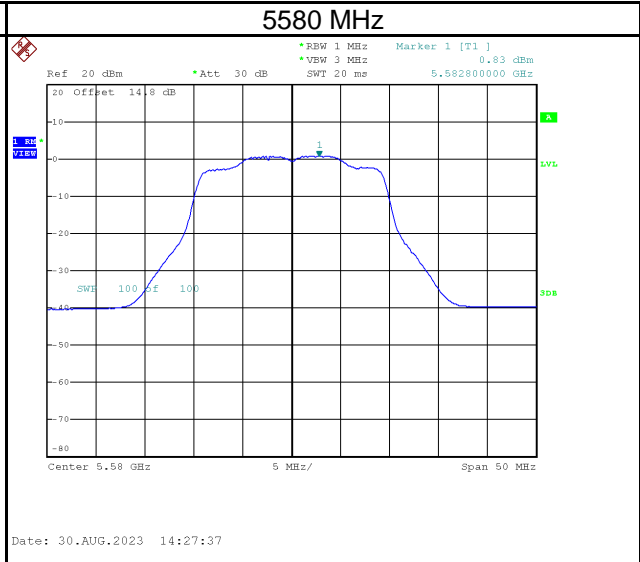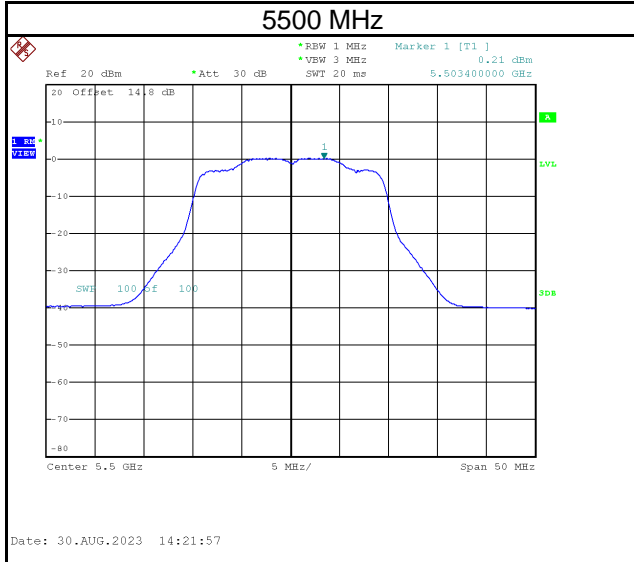







Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-2.68	4.31	0.03	4.34	29.97	Pass
5785	-2.79	4.20	0.03	4.23	29.97	Pass
5825	-3.30	3.69	0.03	3.72	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$



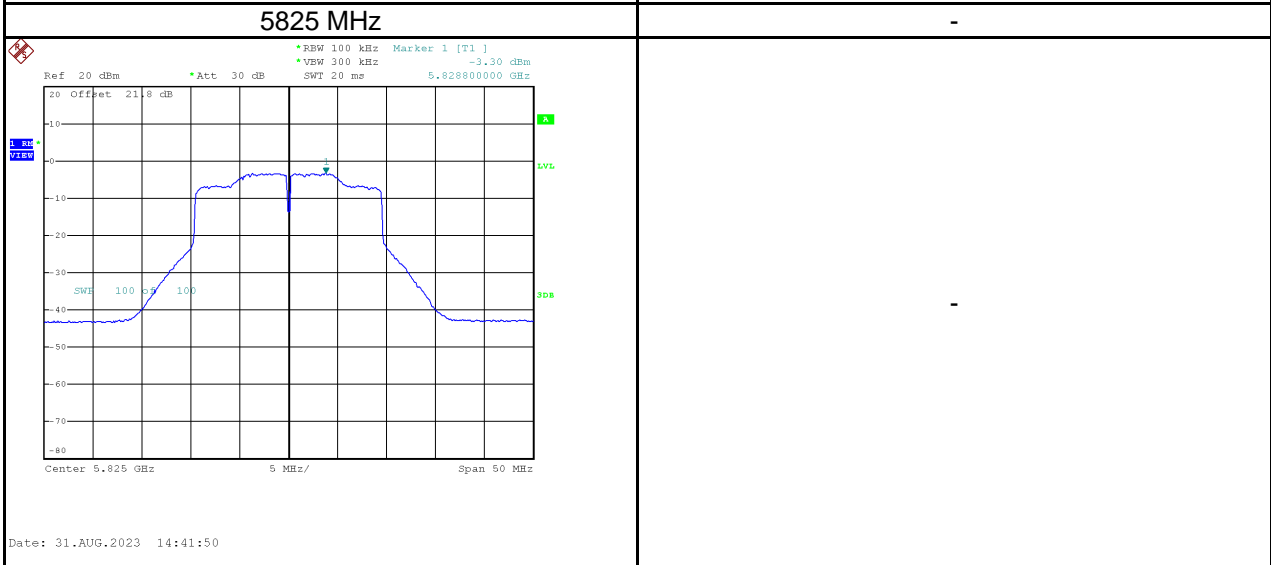
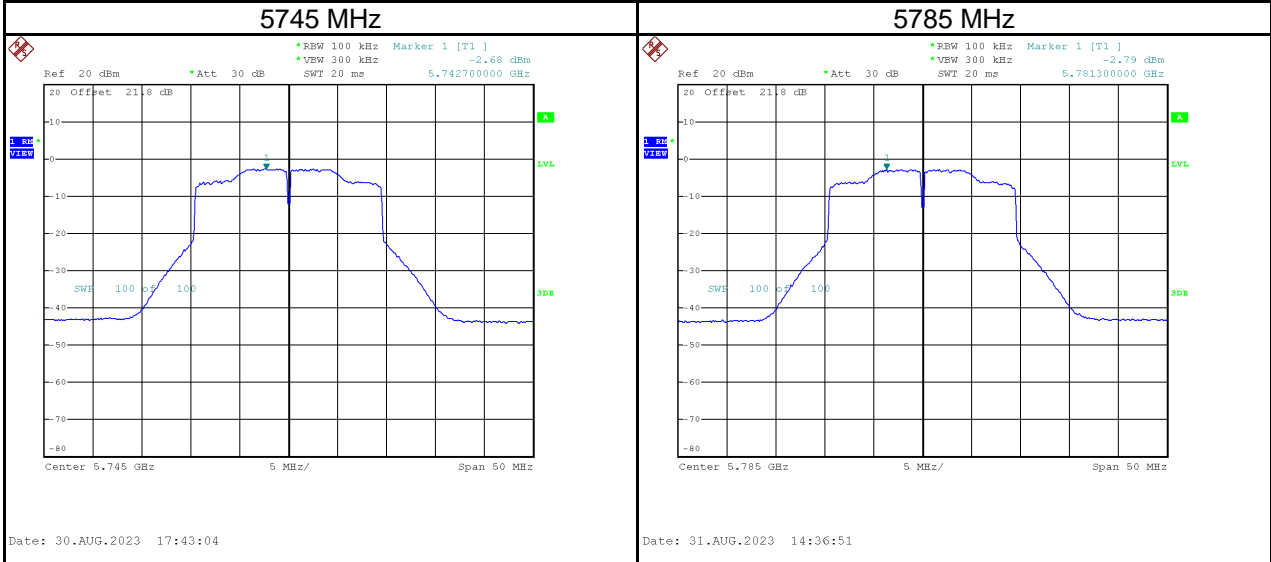


Test Mode	IEEE 802.11ax (HE20)_Aux Antenna
-----------	----------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	0.58	0.03	0.61	16.97	Pass
5200	0.66	0.03	0.69	16.97	Pass
5240	0.26	0.03	0.29	16.97	Pass

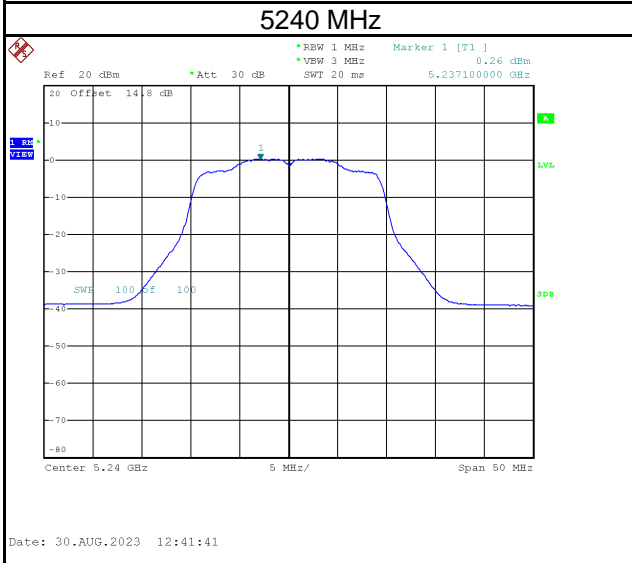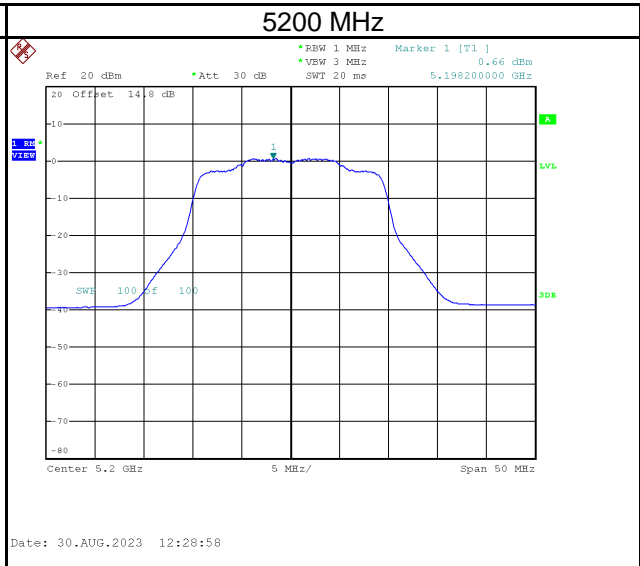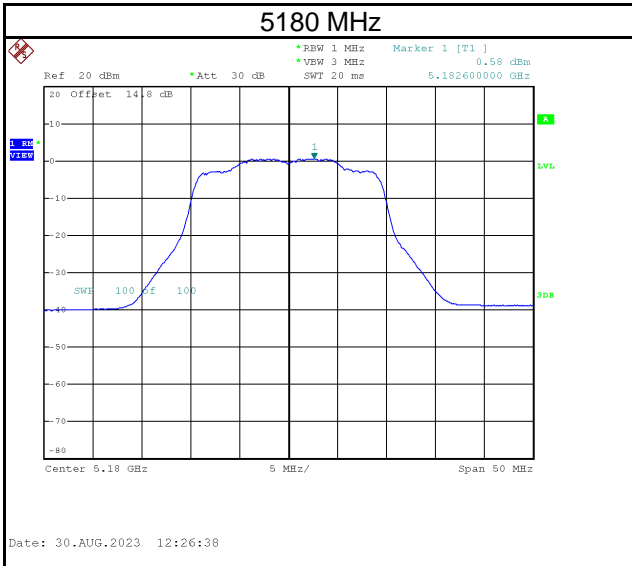

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5260	0.14	0.03	0.17	10.97	Pass
5300	-0.31	0.03	-0.28	10.97	Pass
5320	-0.61	0.03	-0.58	10.97	Pass

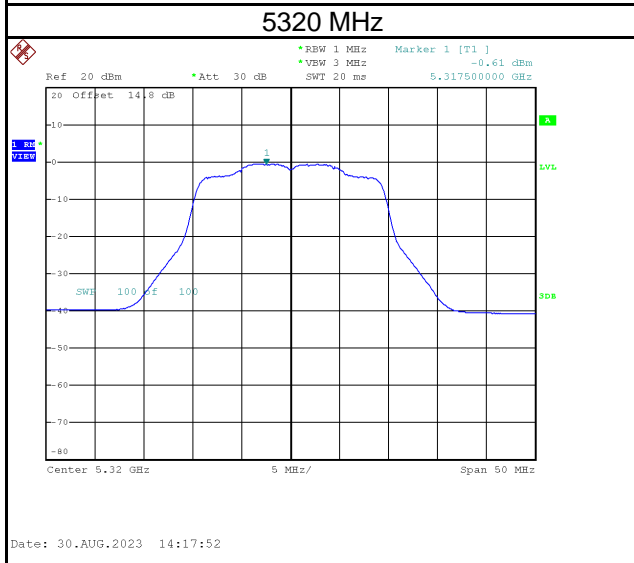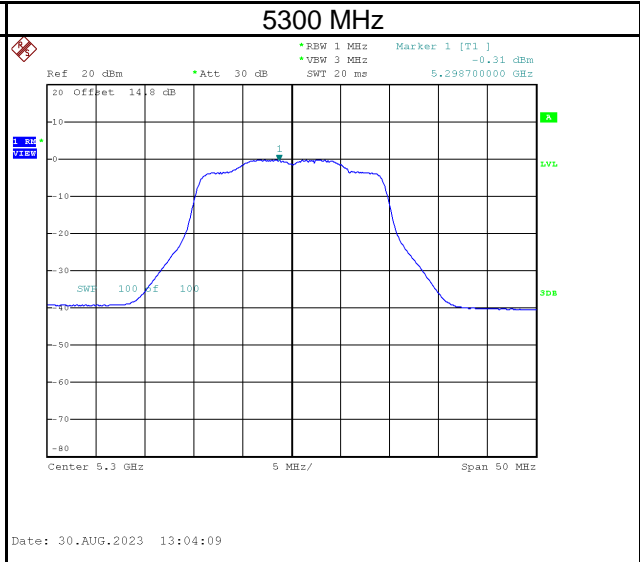
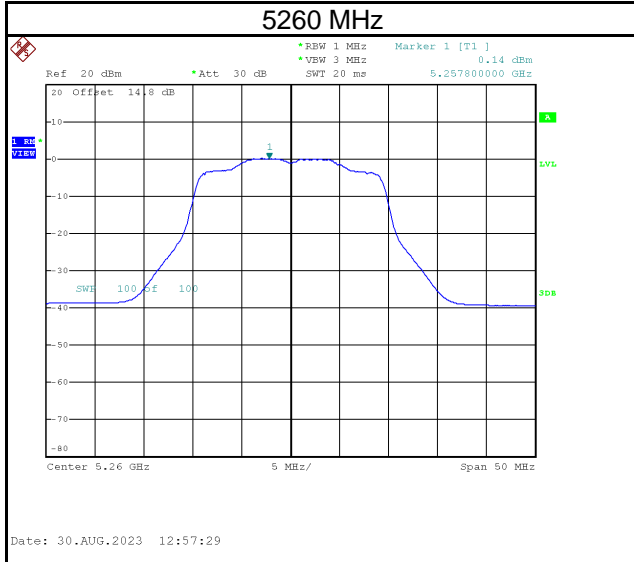


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5500	0.30	0.03	0.33	10.97	Pass
5580	0.73	0.03	0.76	10.97	Pass
5700	0.25	0.03	0.28	10.97	Pass

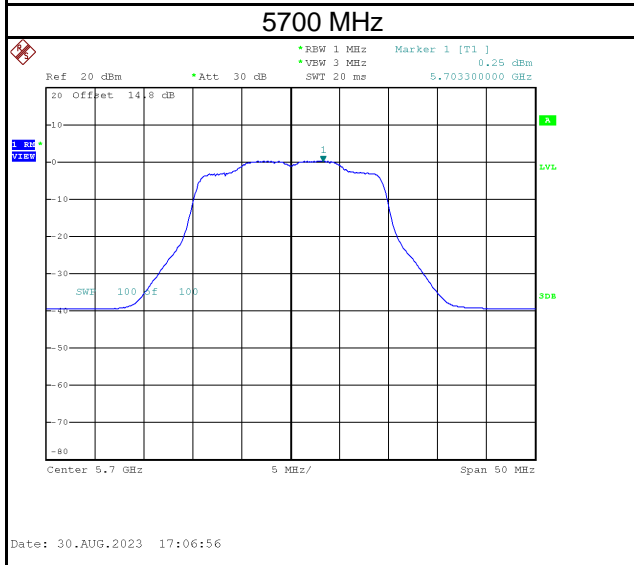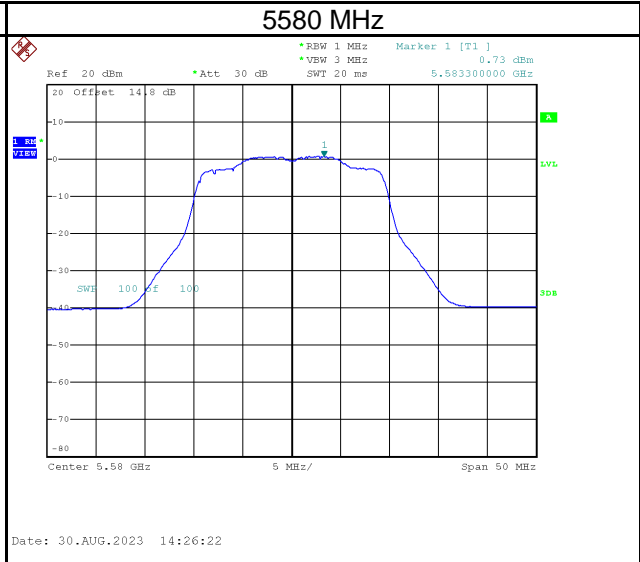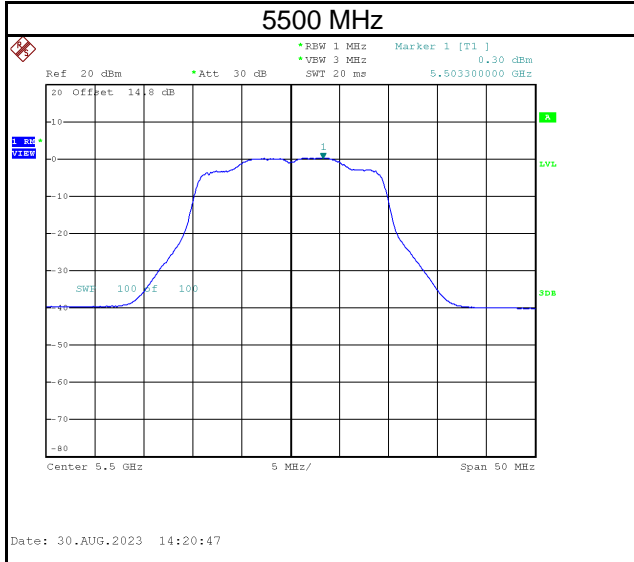

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	-2.59	4.40	0.03	4.43	29.97	Pass
5785	-2.58	4.41	0.03	4.44	29.97	Pass
5825	-3.43	3.56	0.03	3.59	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

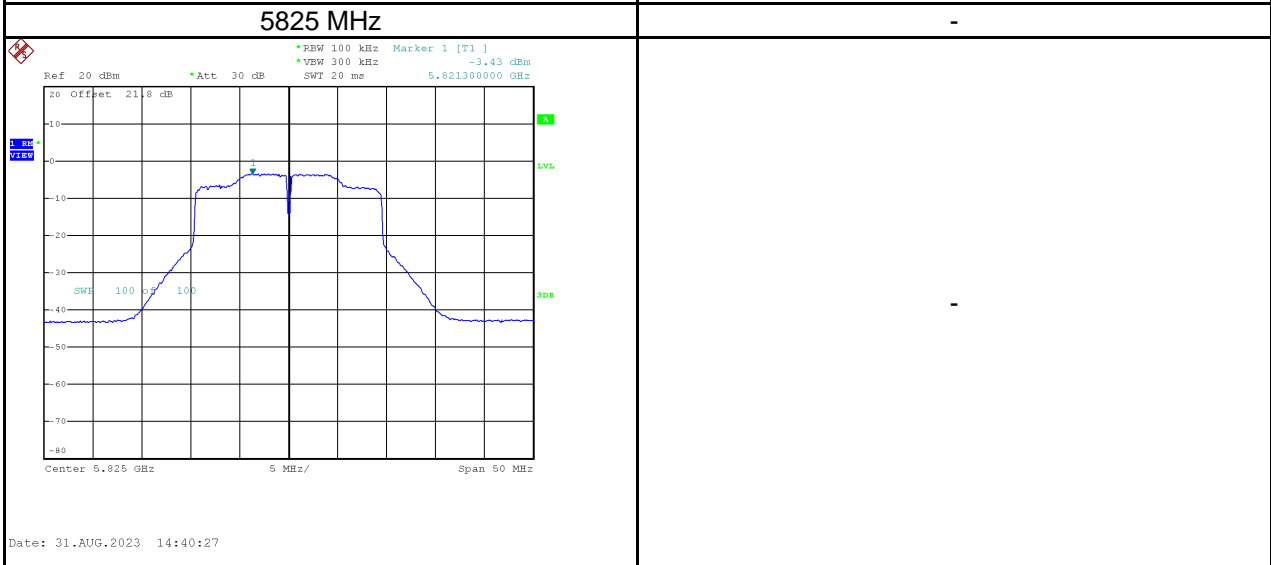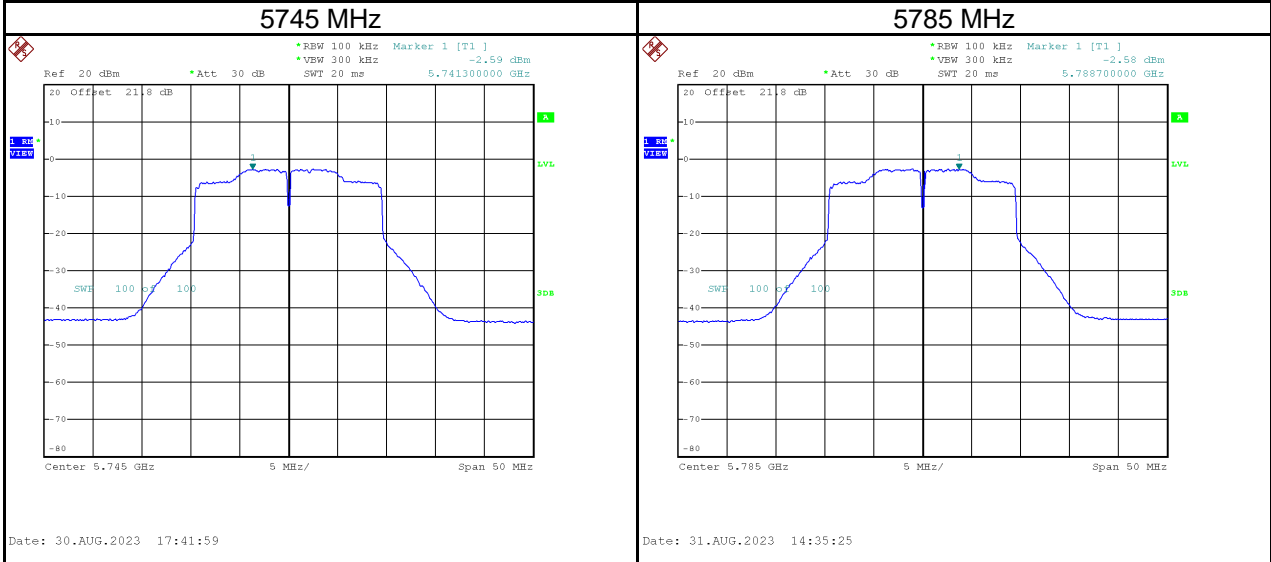

Test Mode	IEEE 802.11ax (HE20)_Total
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5180	3.67	0.03	3.70	16.97	Pass
5200	3.69	0.03	3.72	16.97	Pass
5240	3.41	0.03	3.44	16.97	Pass
5260	3.23	0.03	3.26	10.97	Pass
5300	2.75	0.03	2.78	10.97	Pass
5320	2.47	0.03	2.50	10.97	Pass
5500	3.27	0.03	3.30	10.97	Pass
5580	3.79	0.03	3.82	10.97	Pass
5700	3.32	0.03	3.35	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5745	0.38	7.37	0.03	7.40	29.97	Pass
5785	0.33	7.32	0.03	7.35	29.97	Pass
5825	-0.35	6.64	0.03	6.67	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ax (HE40)_Main Antenna
-----------	-----------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-1.58	0.02	-1.56	16.97	Pass
5230	-1.60	0.02	-1.58	16.97	Pass

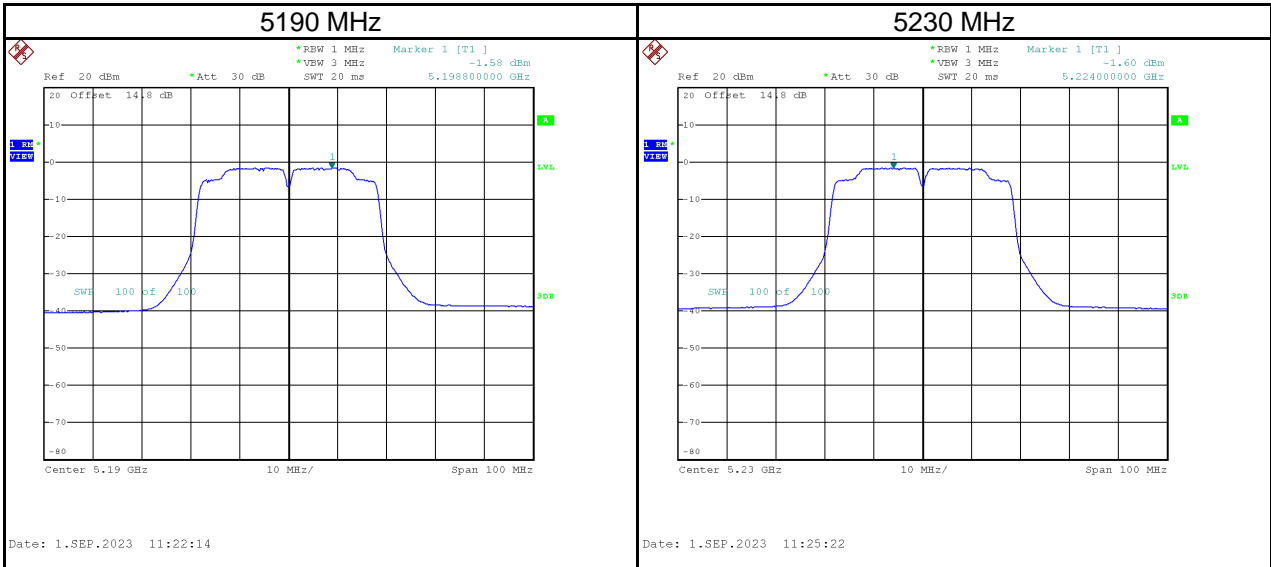

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-1.90	0.02	-1.88	10.97	Pass
5310	-2.44	0.02	-2.42	10.97	Pass

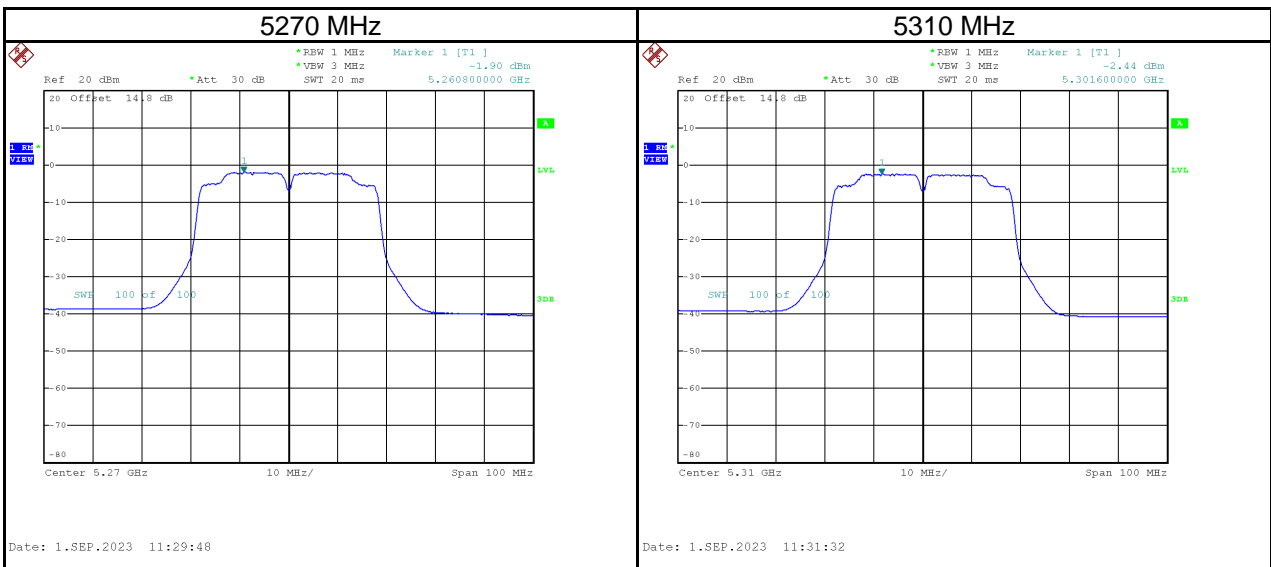


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5510	-2.98	0.02	-2.96	10.97	Pass
5550	-2.81	0.02	-2.79	10.97	Pass
5670	-2.77	0.02	-2.75	10.97	Pass

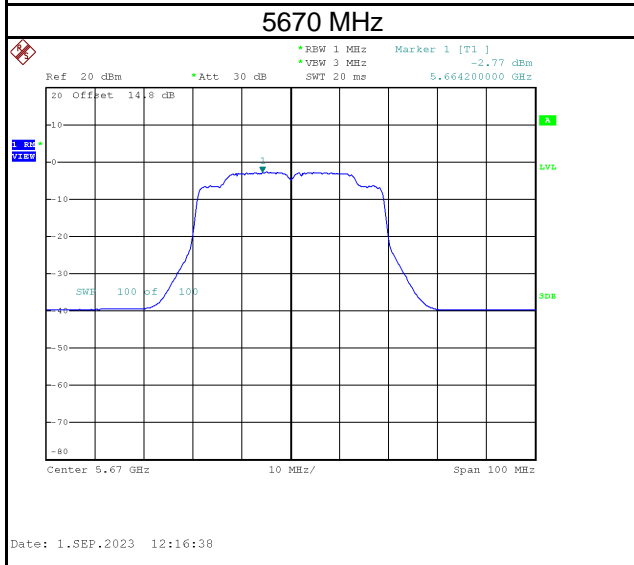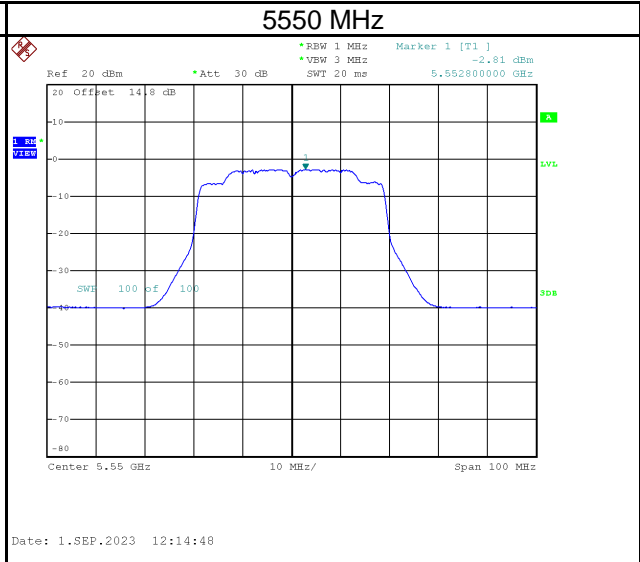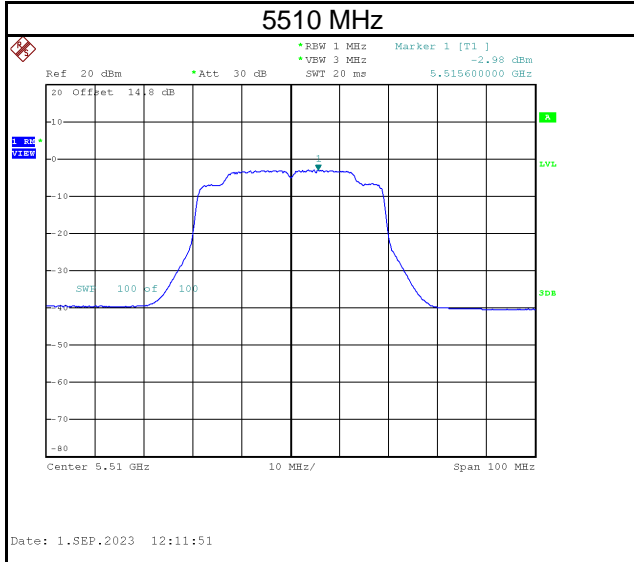




Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-5.45	1.54	0.02	1.56	29.97	Pass
5795	-5.72	1.27	0.02	1.29	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

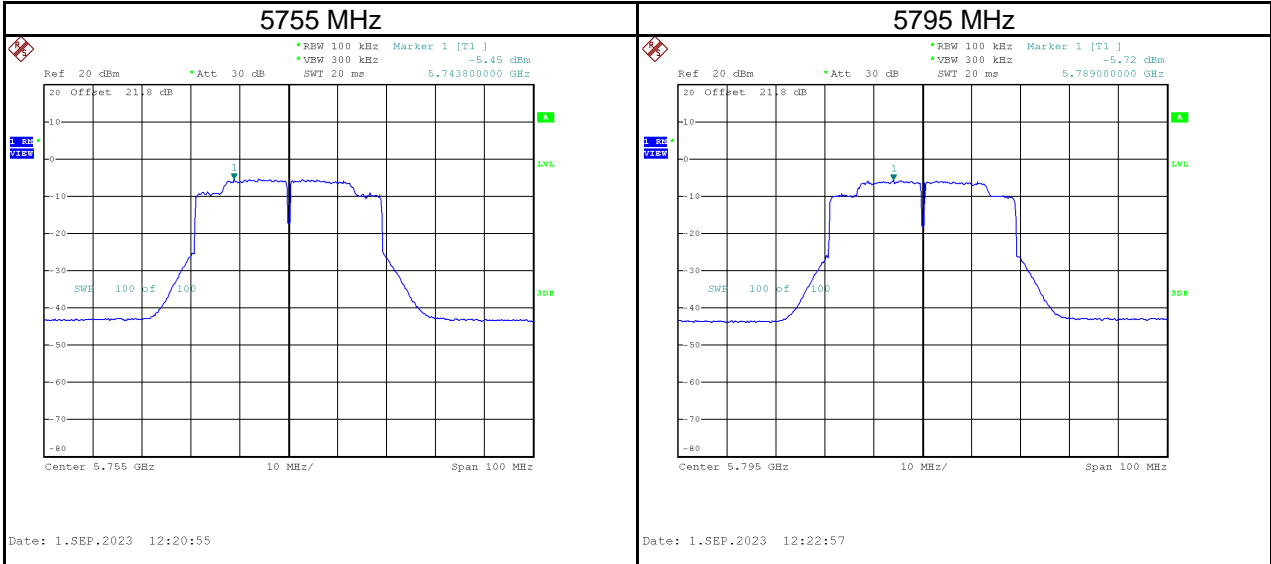


Test Mode	IEEE 802.11ax (HE40)_Aux Antenna
-----------	----------------------------------





Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	-2.34	0.02	-2.32	16.97	Pass
5230	-1.70	0.02	-1.68	16.97	Pass

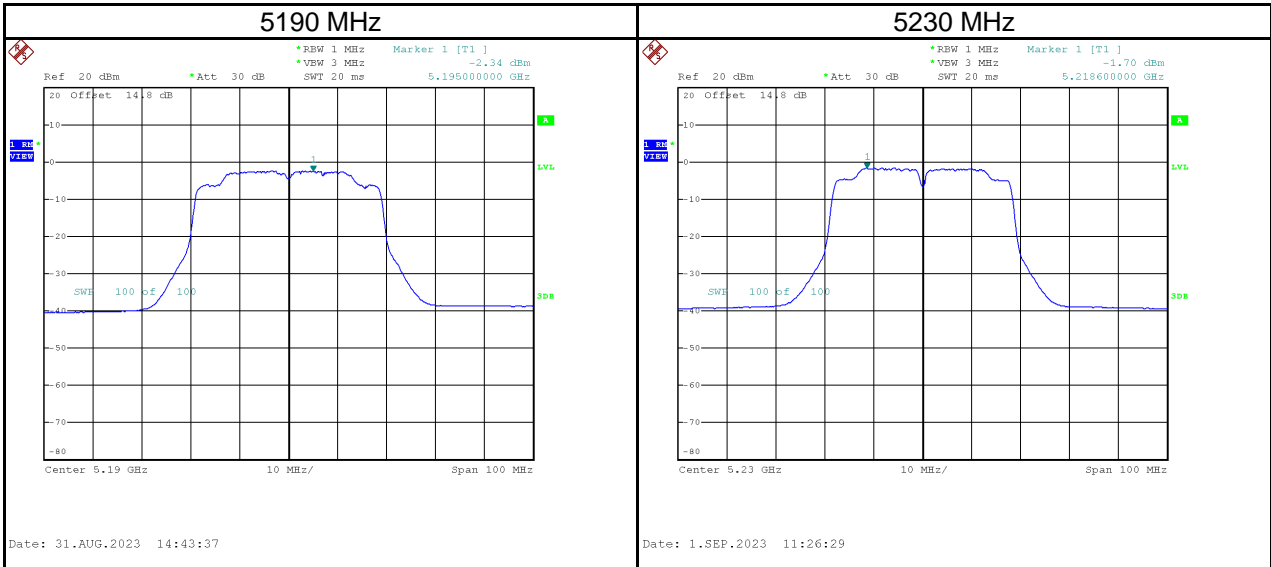

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5270	-1.68	0.02	-1.66	10.97	Pass
5310	-2.26	0.02	-2.24	10.97	Pass

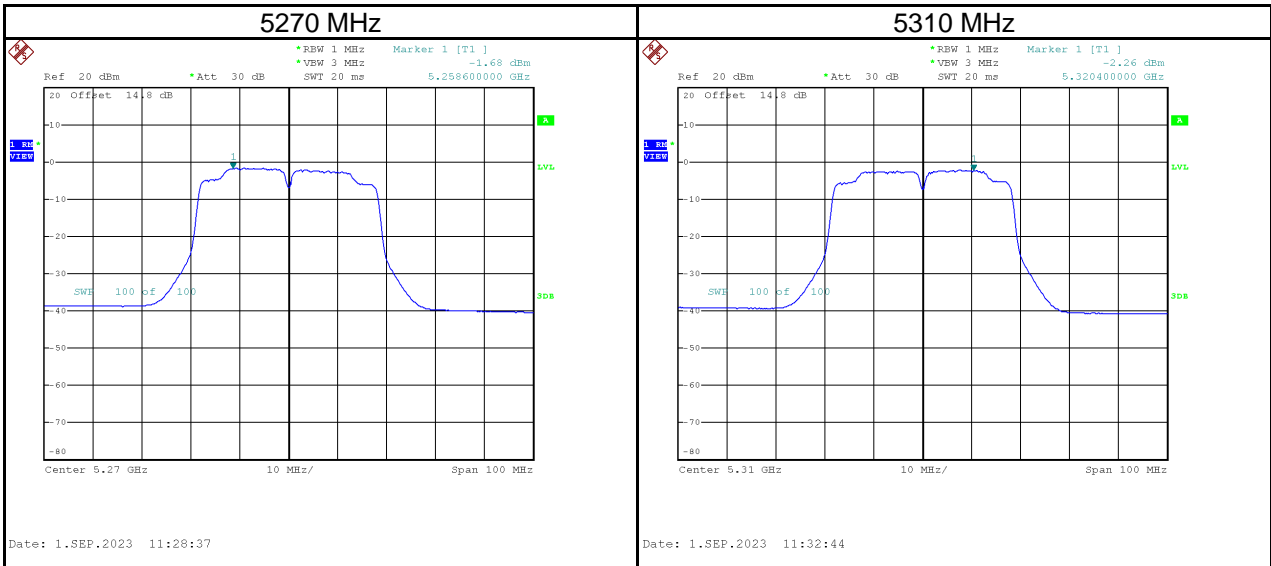


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5510	-2.81	0.02	-2.79	10.97	Pass
5550	-2.37	0.02	-2.35	10.97	Pass
5670	-2.60	0.02	-2.58	10.97	Pass

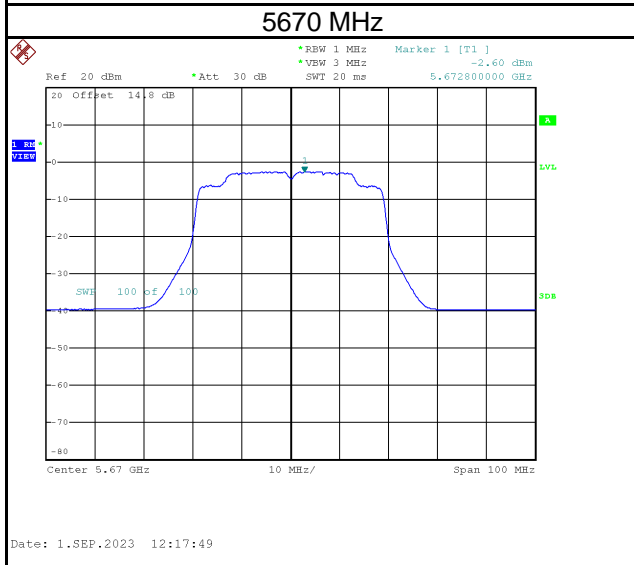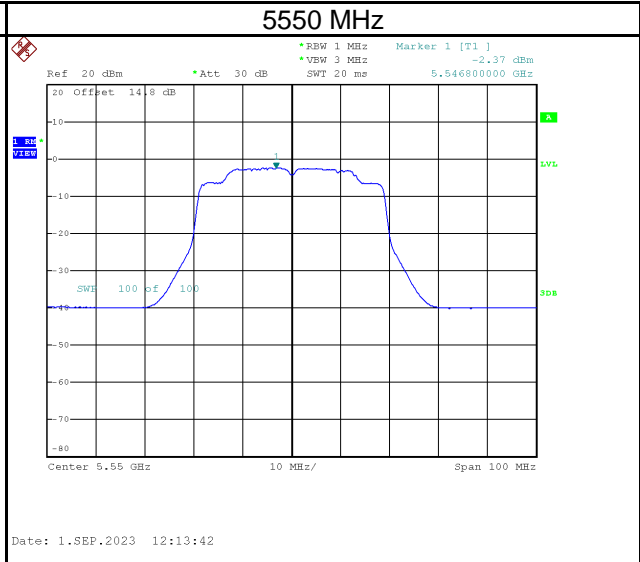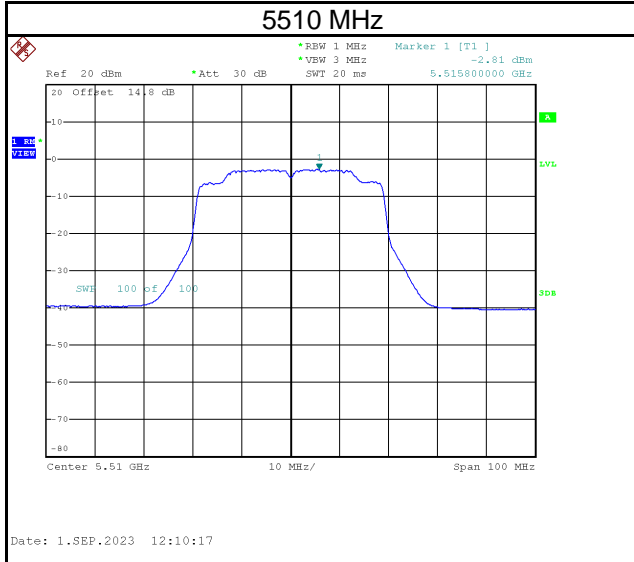

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-5.39	1.60	0.02	1.62	29.97	Pass
5795	-5.41	1.58	0.02	1.60	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

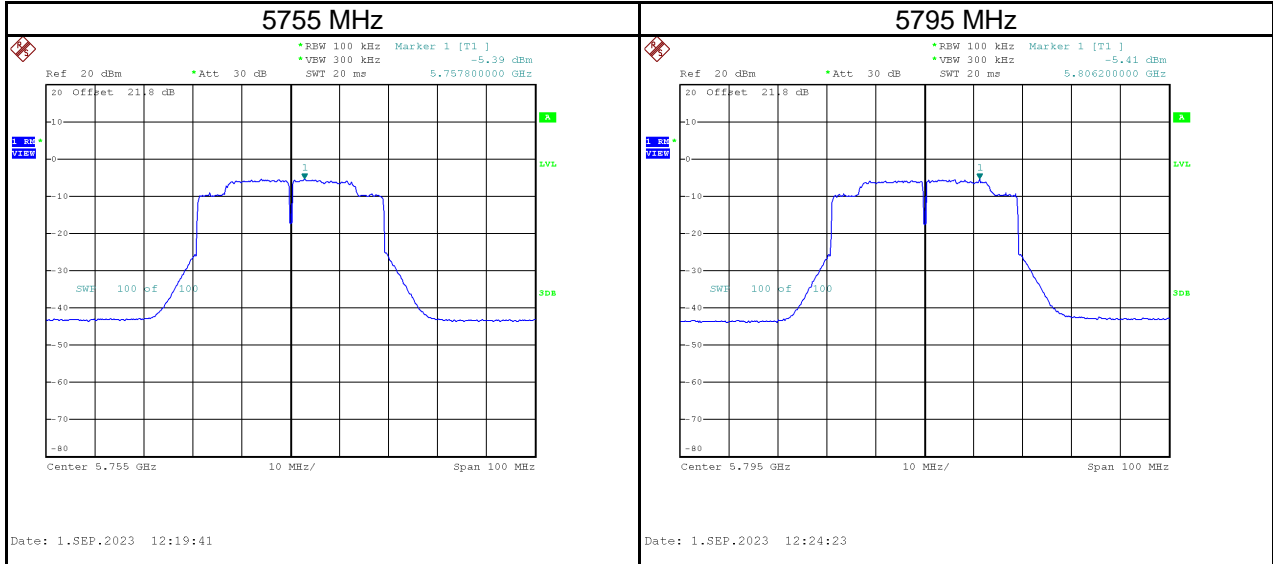

Test Mode | IEEE 802.11ax (HE40)\_Total


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5190	1.07	0.02	1.09	16.97	Pass
5230	1.36	0.02	1.38	16.97	Pass
5270	1.22	0.02	1.24	10.97	Pass
5310	0.66	0.02	0.68	10.97	Pass
5510	0.12	0.02	0.14	10.97	Pass
5550	0.43	0.02	0.45	10.97	Pass
5670	0.33	0.02	0.35	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5755	-2.41	4.58	0.02	4.60	29.97	Pass
5795	-2.55	4.44	0.02	4.46	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ax (HE80)_Main Antenna
-----------	-----------------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-5.08	1.11	-3.97	16.97	Pass

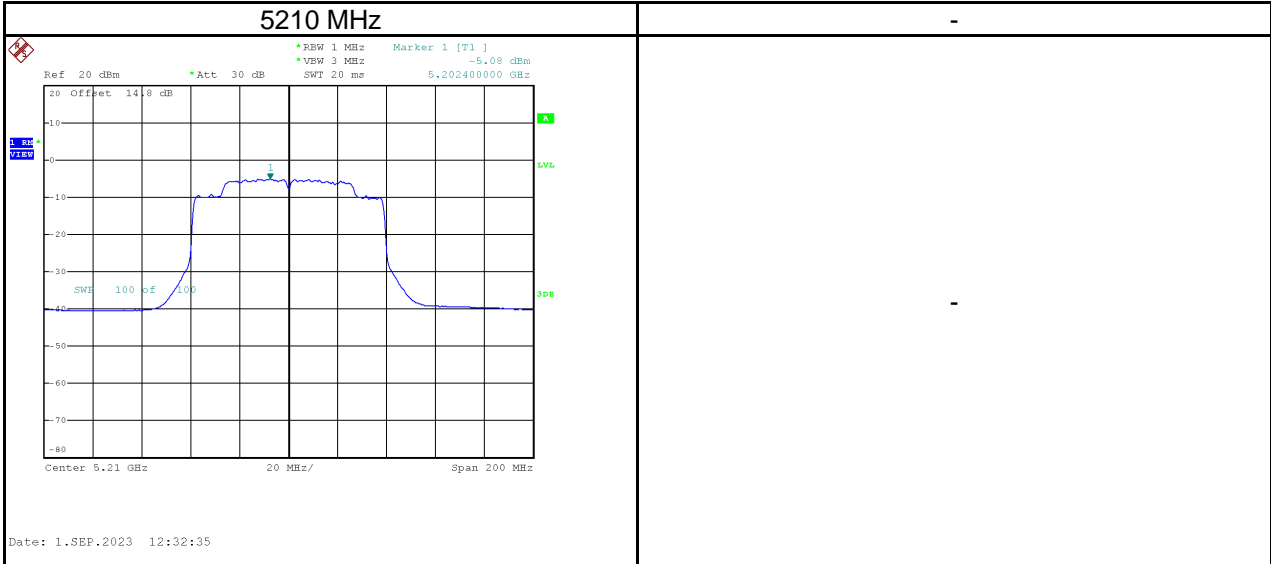

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-5.88	1.11	-4.77	10.97	Pass

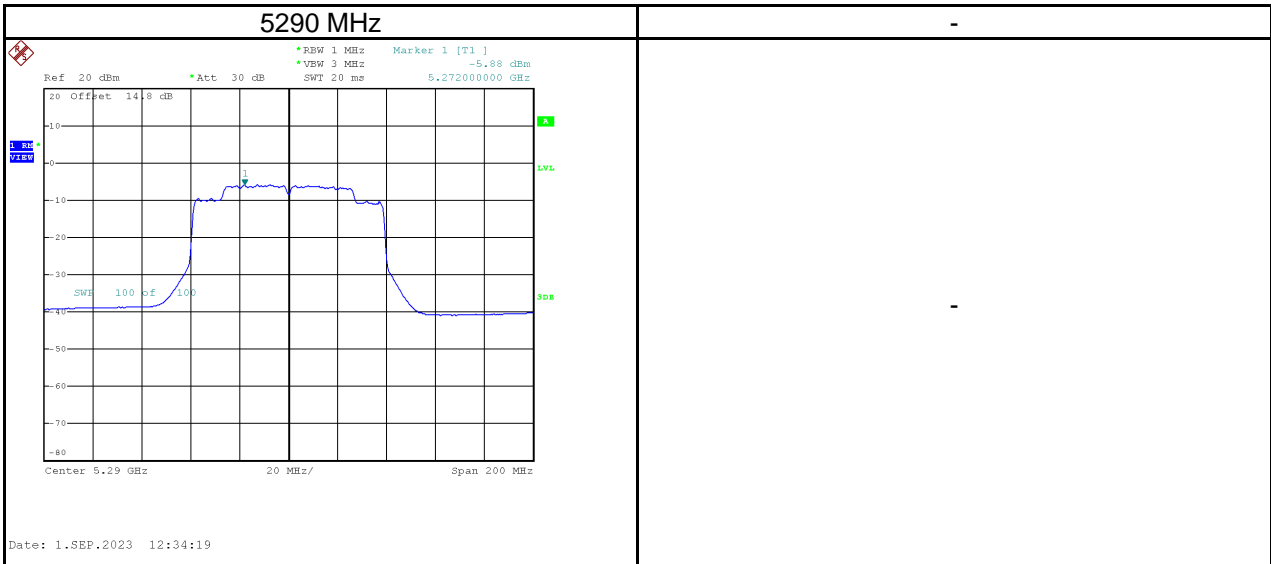


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5530	-5.62	1.11	-4.51	10.97	Pass
5610	-5.59	1.11	-4.48	10.97	Pass

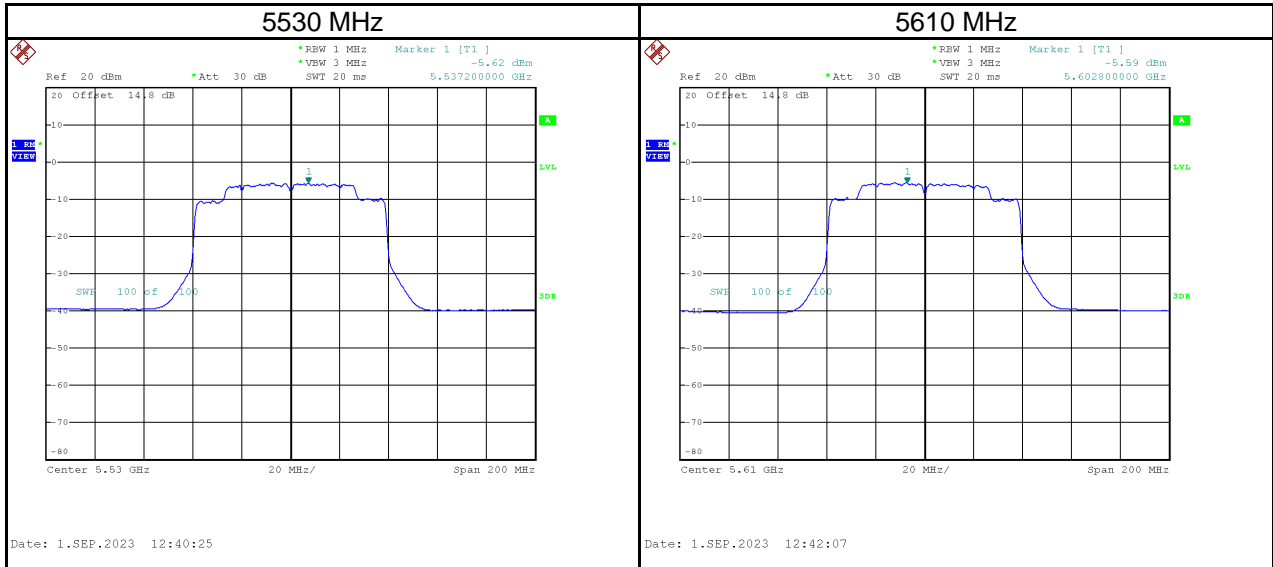


Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-8.34	-1.35	1.11	-0.24	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

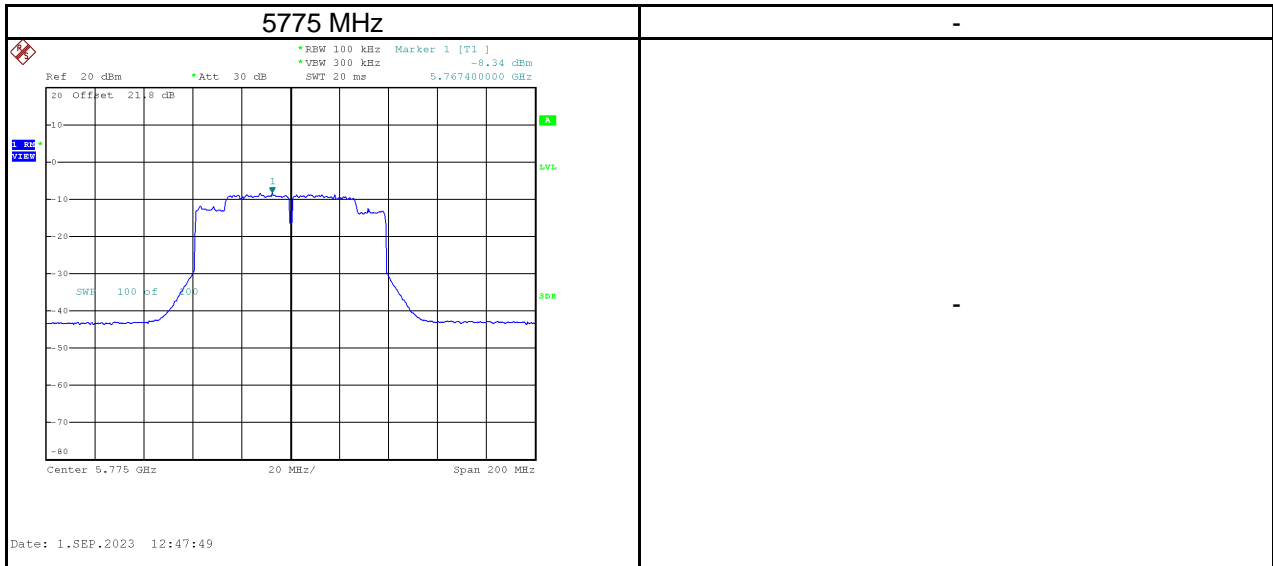


Test Mode	IEEE 802.11ax (HE80)_Aux Antenna
-----------	----------------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-4.97	1.11	-3.86	16.97	Pass

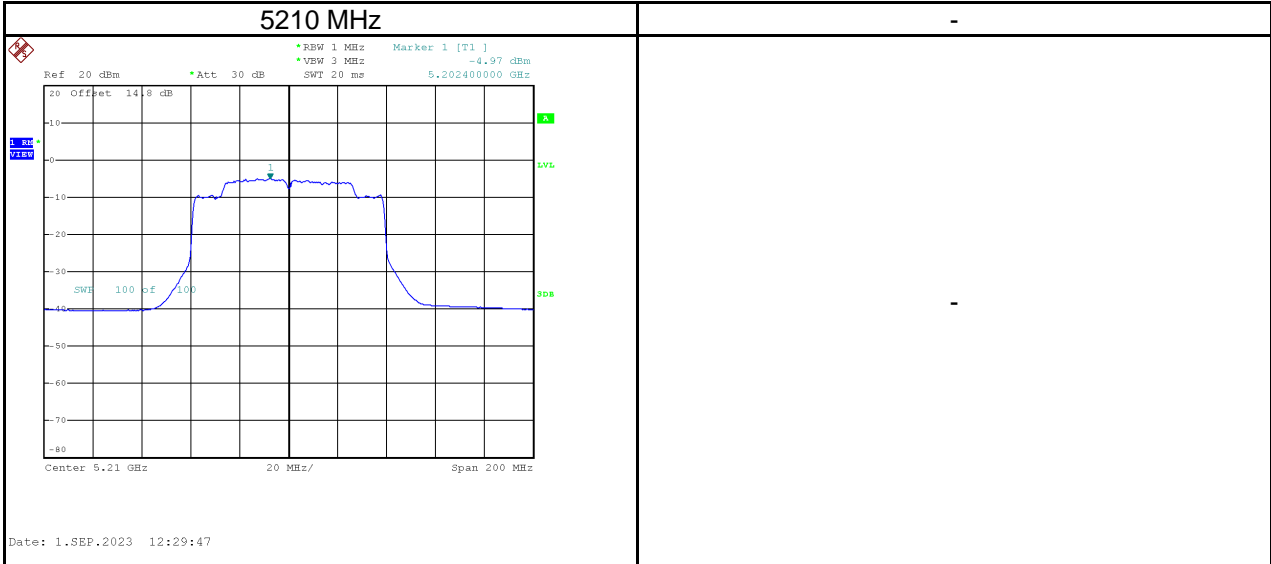

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5290	-5.83	1.11	-4.72	10.97	Pass

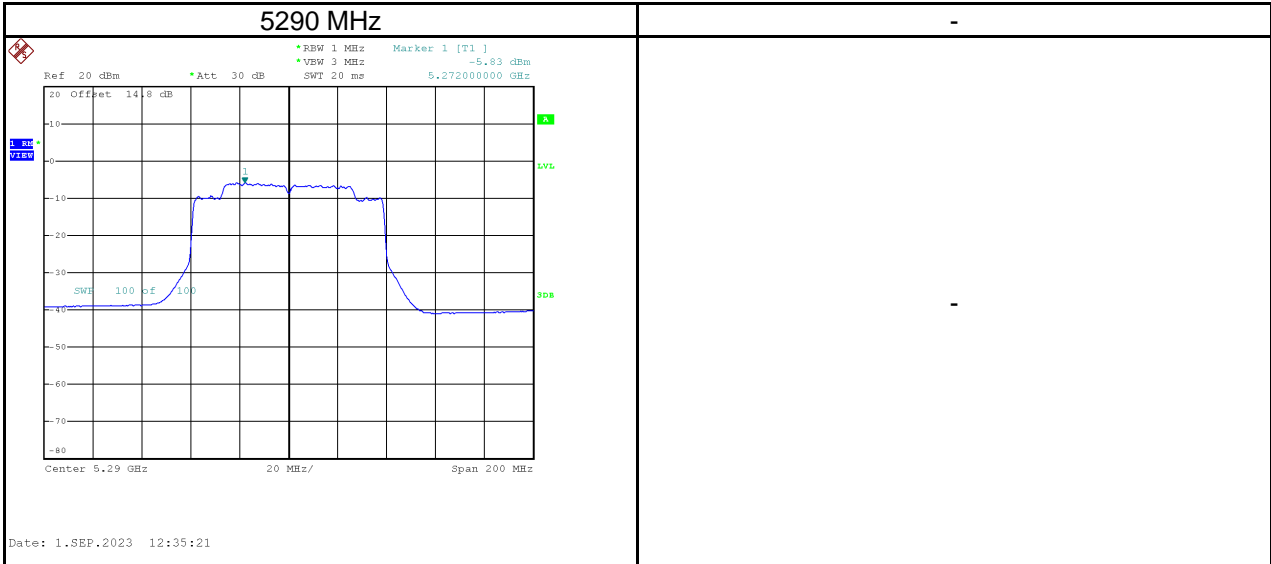


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5530	-5.15	1.11	-4.04	10.97	Pass
5610	-5.50	1.11	-4.39	10.97	Pass

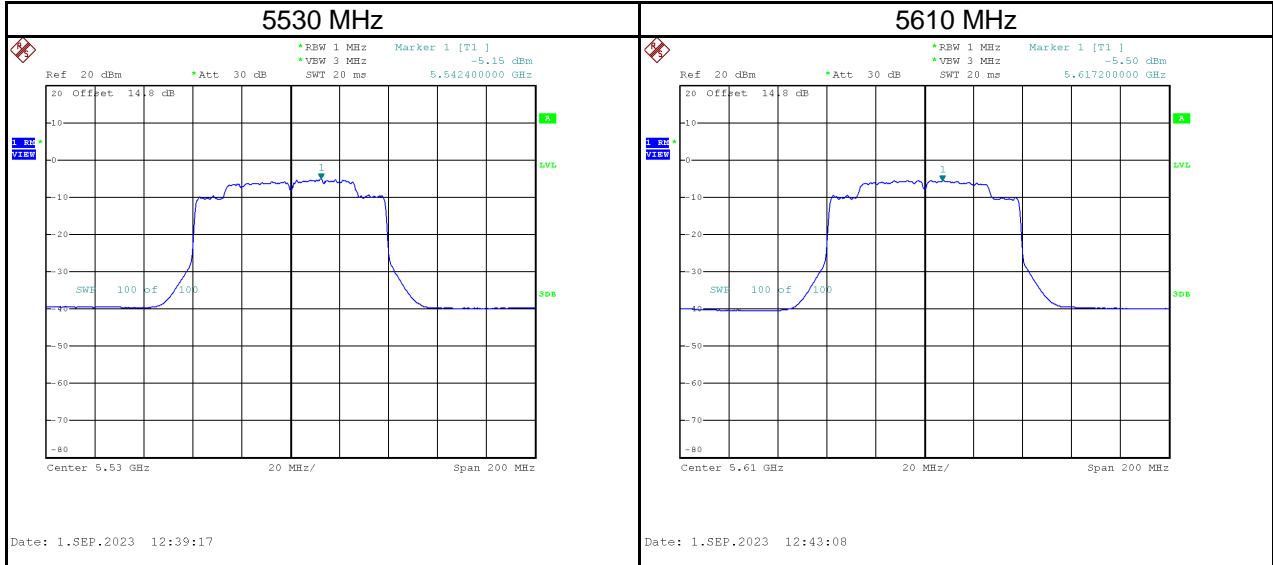

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-8.12	-1.13	1.11	-0.02	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

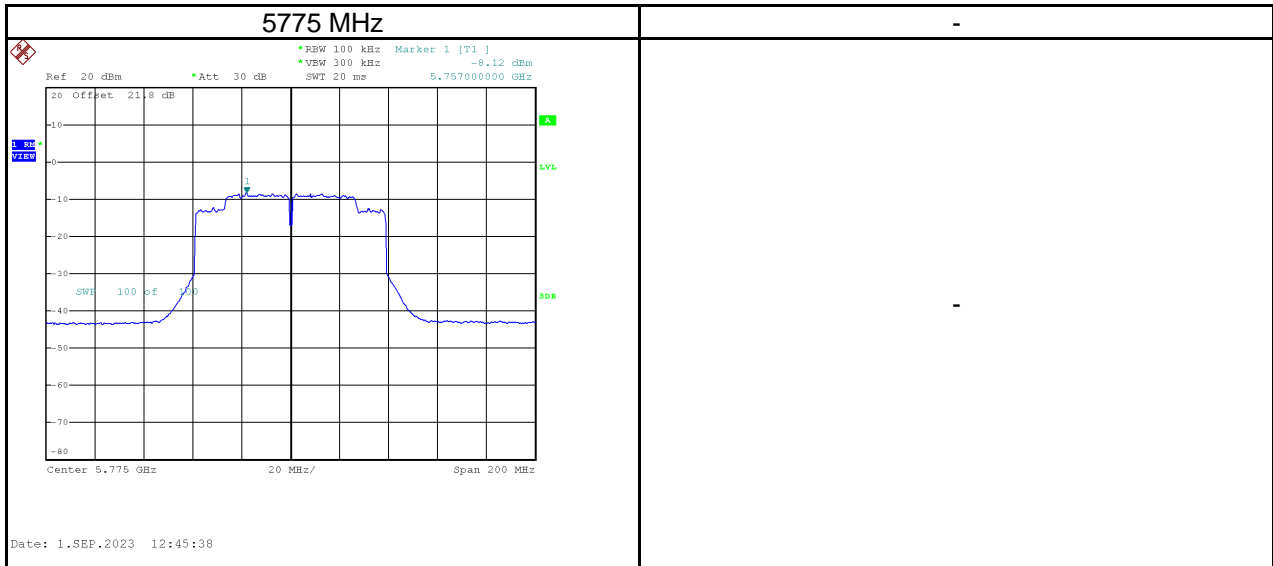



Test Mode	IEEE 802.11ax (HE80)_Total
-----------	----------------------------


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5210	-2.01	1.11	-0.91	16.97	Pass
5290	-2.84	1.11	-1.74	10.97	Pass
5530	-2.37	1.11	-1.26	10.97	Pass
5610	-2.53	1.11	-1.43	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/100 kHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5775	-5.22	1.77	1.11	2.88	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

Test Mode	IEEE 802.11ax (HE160)_Main Antenna
-----------	------------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-12.32	0.08	-12.24	16.97	Pass

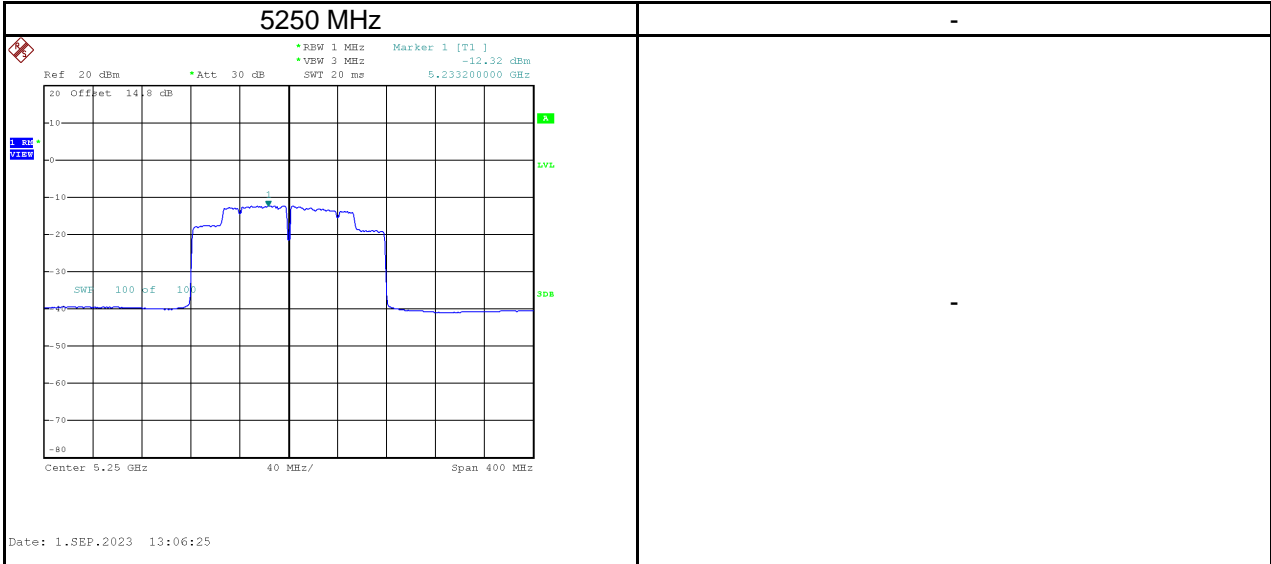


Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5570	-8.16	0.08	-8.08	10.97	Pass

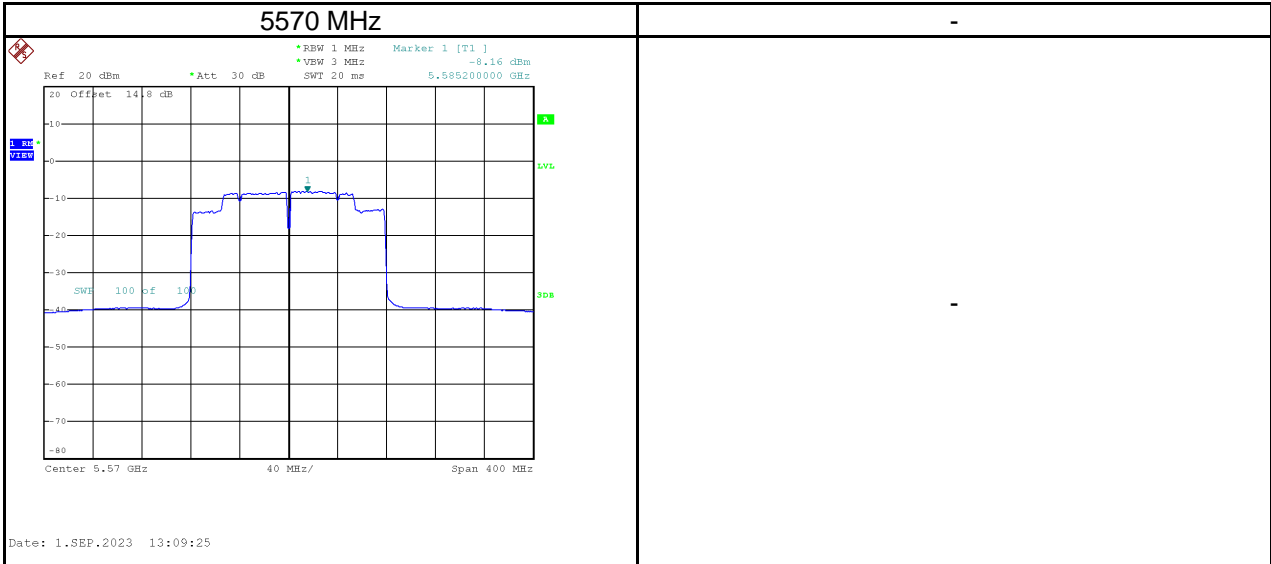


Test Mode	IEEE 802.11ax (HE160)_Aux Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-12.54	0.08	-12.46	16.97	Pass

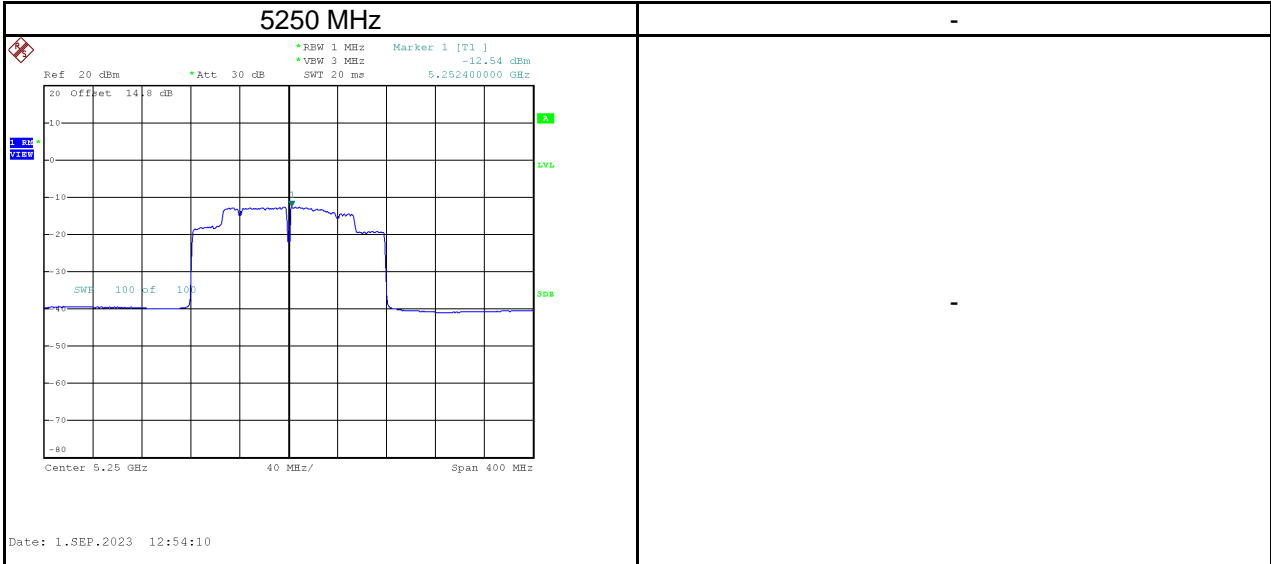

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5570	-8.23	0.08	-8.15	10.97	Pass

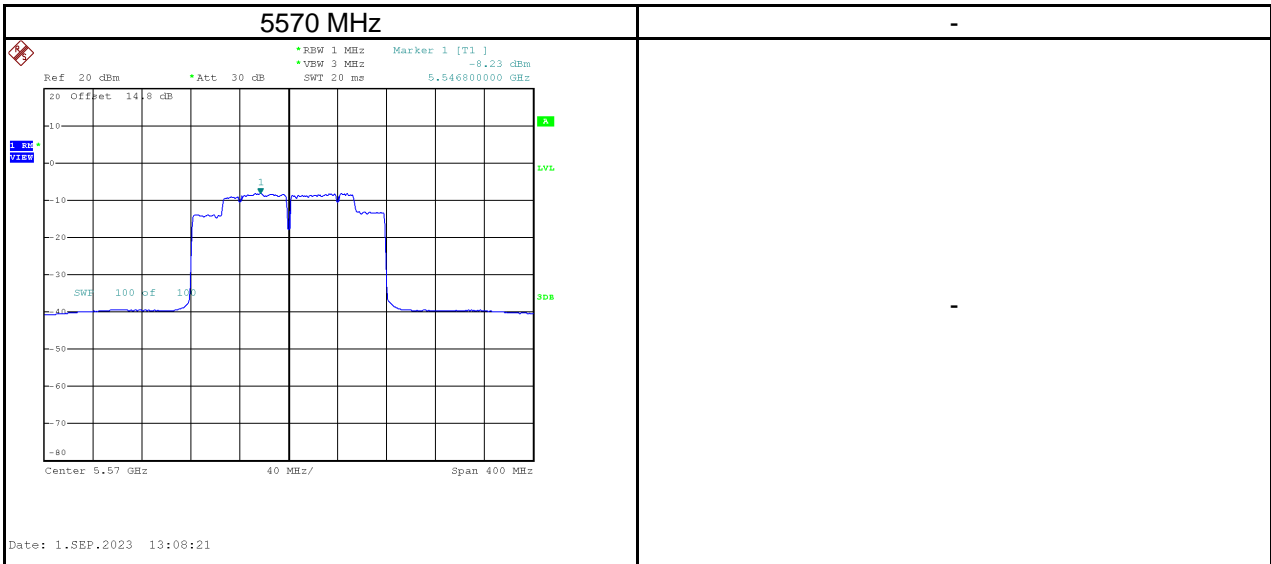

Test Mode	IEEE 802.11ax (HE160)_Total
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5250	-9.42	0.08	-9.34	16.97	Pass
5570	-5.18	0.08	0.31	10.97	Pass


For Straddle Channel:

Test Mode	IEEE 802.11a_Main Antenna
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	-1.03	0.10	-0.93	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	0.44	-2.57	0.10	-2.47	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

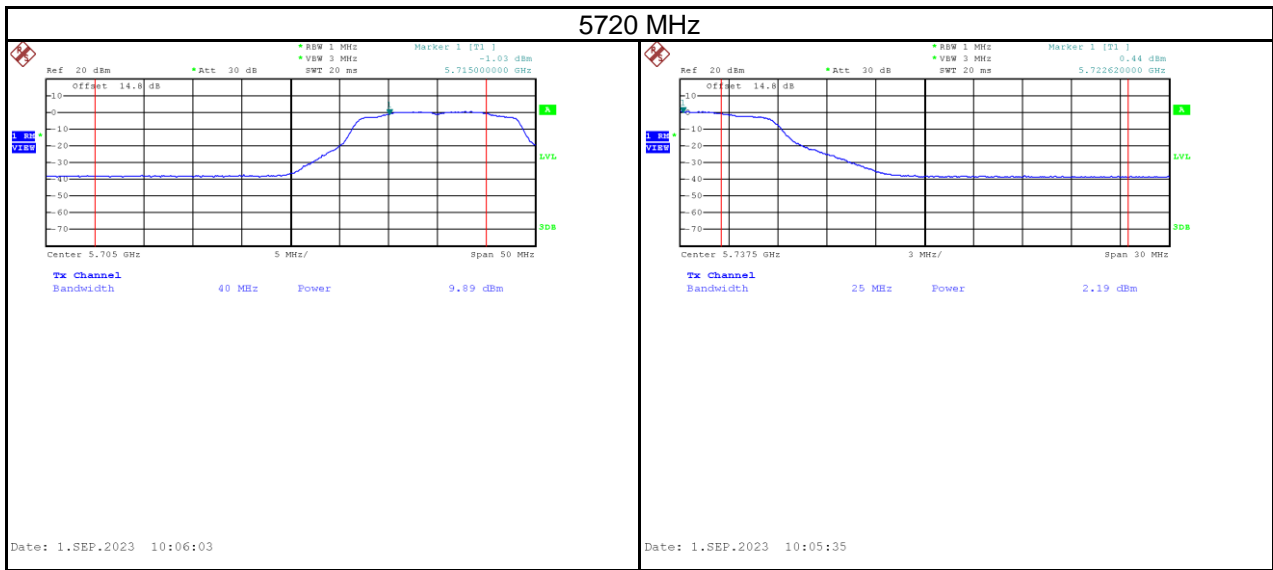


Test Mode	IEEE 802.11a_Aux Antenna
-----------	--------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	-0.95	0.10	-0.85	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	0.27	-2.74	0.10	-2.64	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

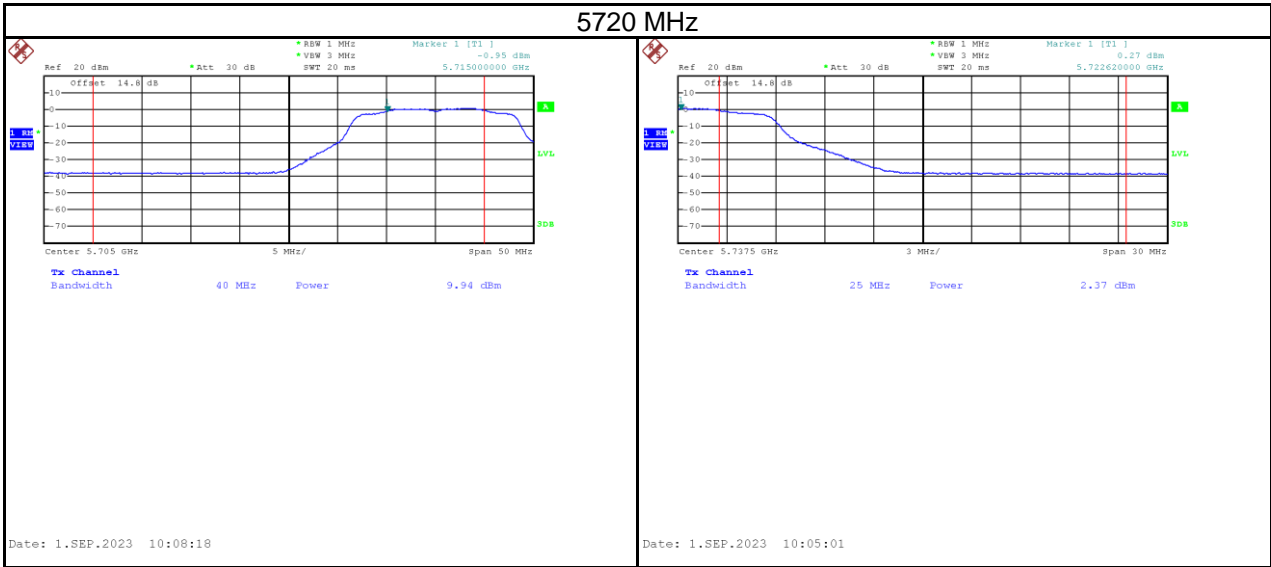


Test Mode	IEEE 802.11n (HT20)_Main Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	-0.67	0.05	-0.62	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	0.39	-2.62	0.05	-2.50	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

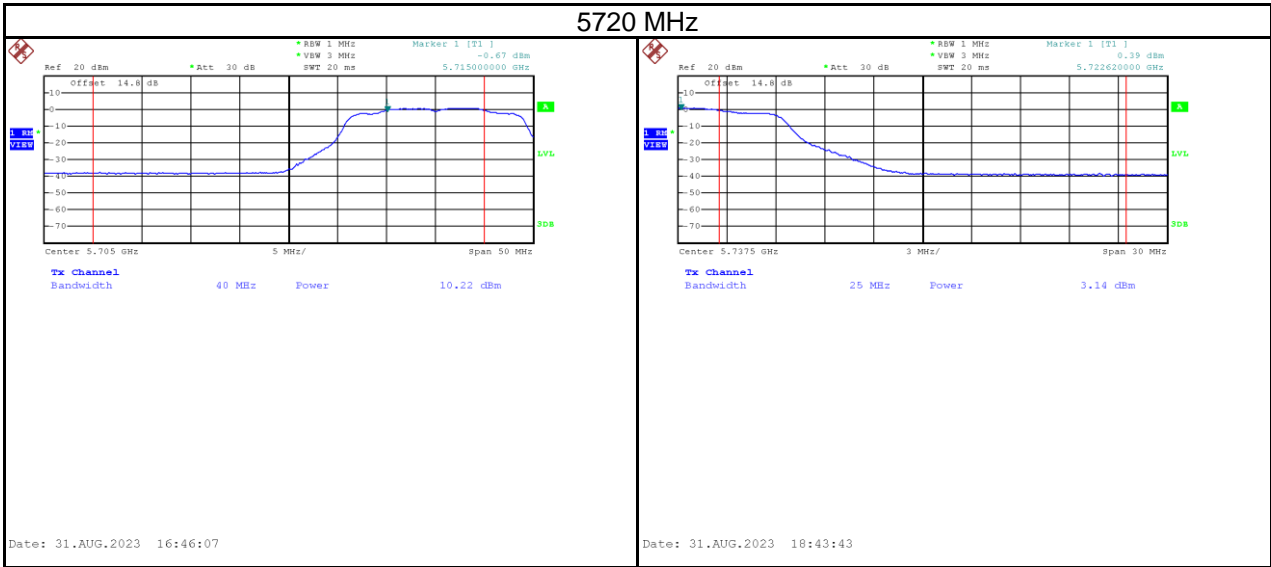


Test Mode	IEEE 802.11n (HT20)_Aux Antenna
-----------	---------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	-0.78	0.05	-0.73	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	0.76	-2.25	0.05	-2.20	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz}/\text{MHz})$

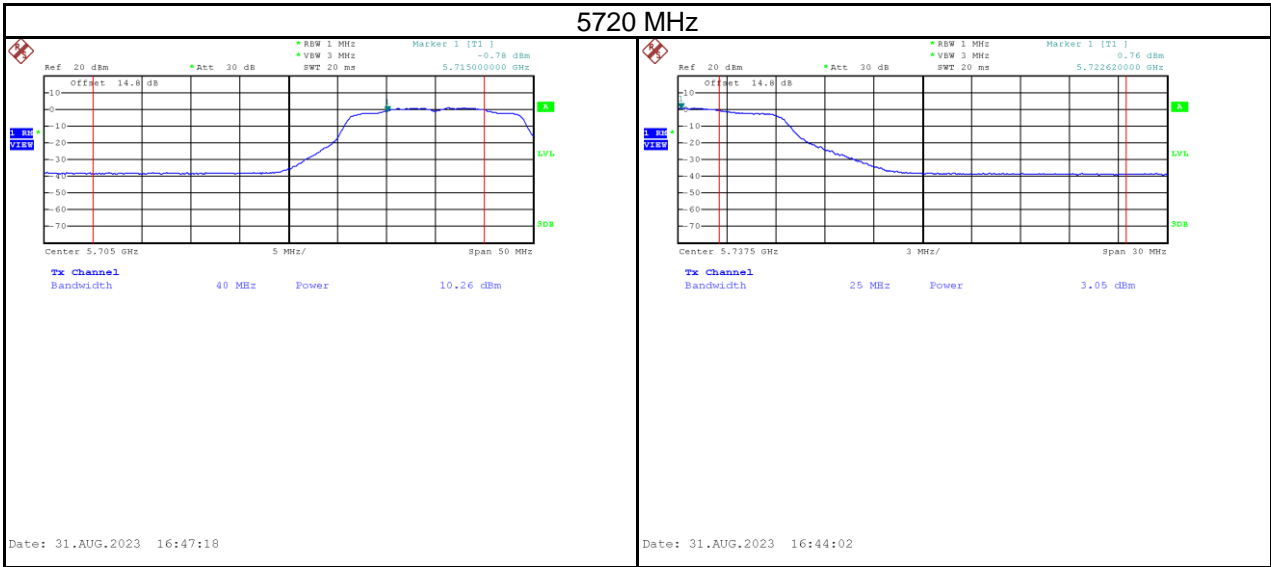

Test Mode	IEEE 802.11n (HT20)_Total
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	2.29	0.05	2.34	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	3.44	0.43	0.05	0.48	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz}/\text{MHz})$




Test Mode	IEEE 802.11n (HT40)_Main Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-3.81	0.05	-3.76	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-6.49	-9.50	0.05	-9.45	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

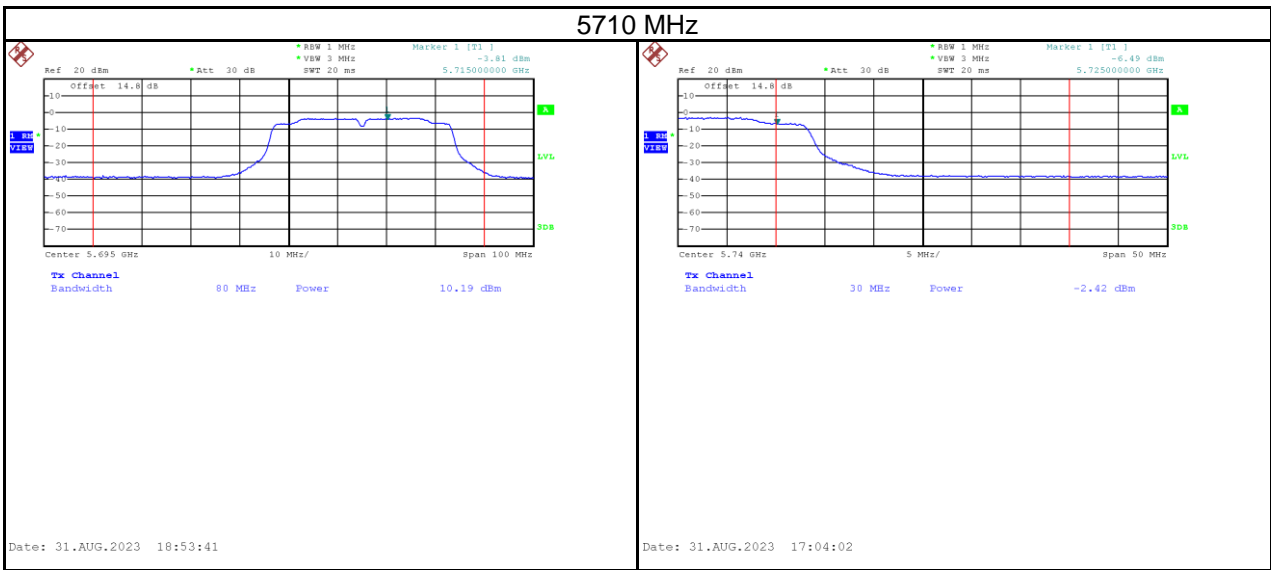


Test Mode	IEEE 802.11n (HT40)_Aux Antenna
-----------	---------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-3.82	0.05	-3.77	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-5.85	-8.86	0.05	-8.81	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / 1\text{MHz})$

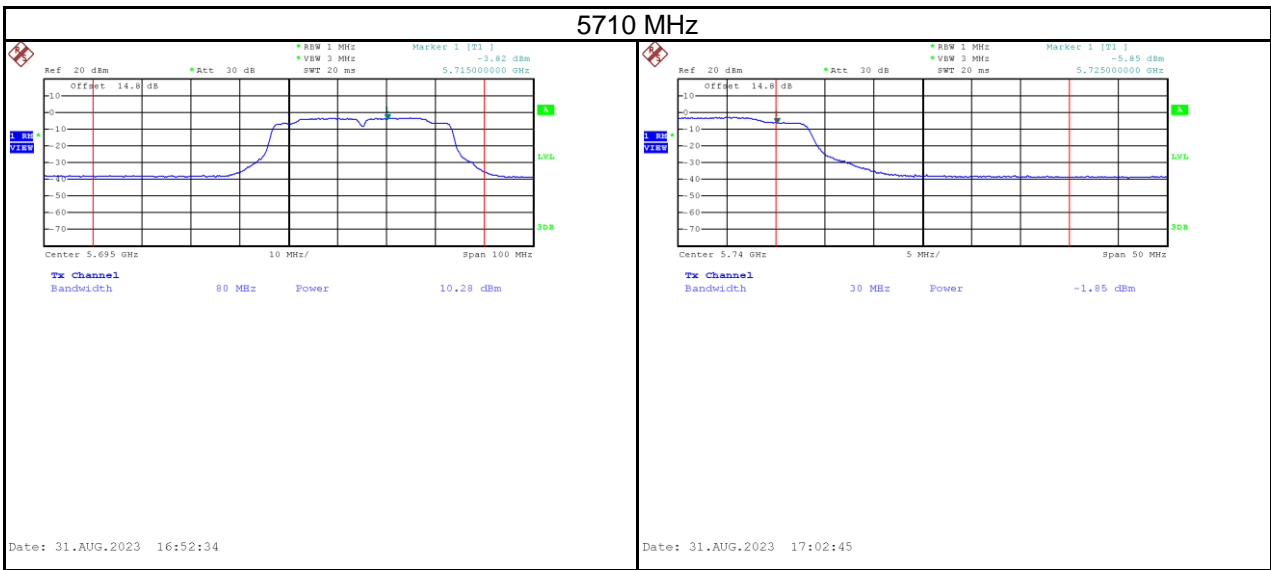

Test Mode	IEEE 802.11n (HT40)_Total
-----------	---------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-0.80	0.05	-0.75	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-3.15	-6.16	0.05	-6.11	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

Test Mode	IEEE 802.11ac (VHT80)_Main Antenna
-----------	------------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-9.81	1.11	-8.70	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-9.28	-12.29	1.11	-11.18	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

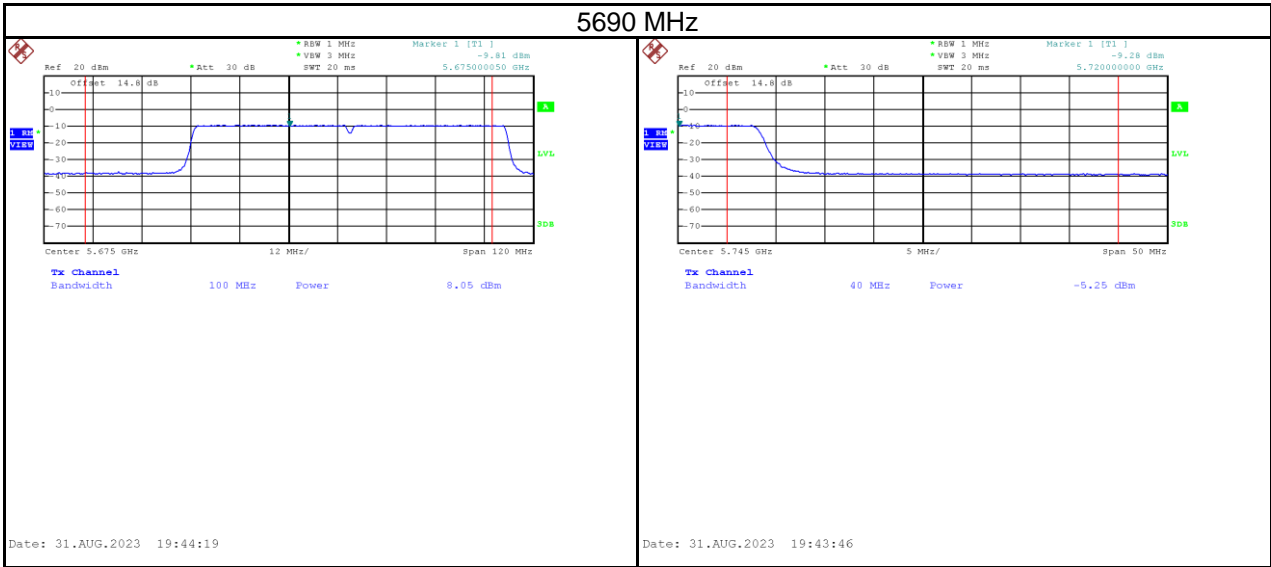


Test Mode	IEEE 802.11ac (VHT80)_Aux Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-8.56	1.11	-7.45	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-8.54	-11.55	1.11	-10.44	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

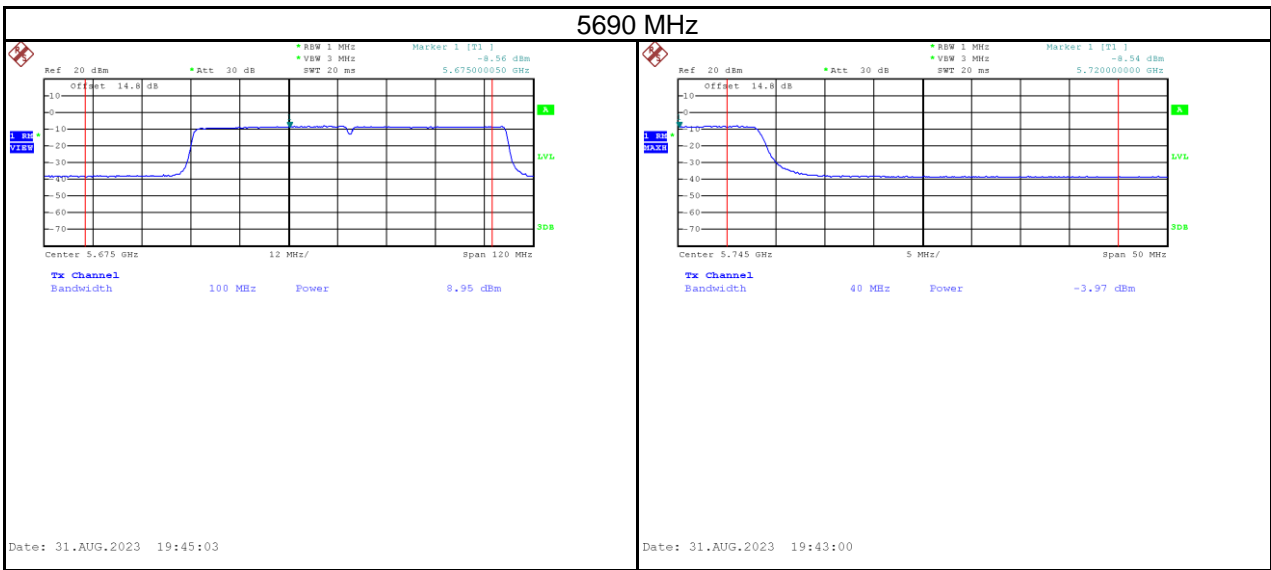

Test Mode	IEEE 802.11ac (VHT80)_Total
-----------	-----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-6.13	1.11	-5.05	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-5.88	-8.89	1.11	-7.78	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

Test Mode	IEEE 802.11ax (HE20)_Main Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	-0.67	0.03	-0.64	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	0.78	-2.23	0.03	-2.20	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

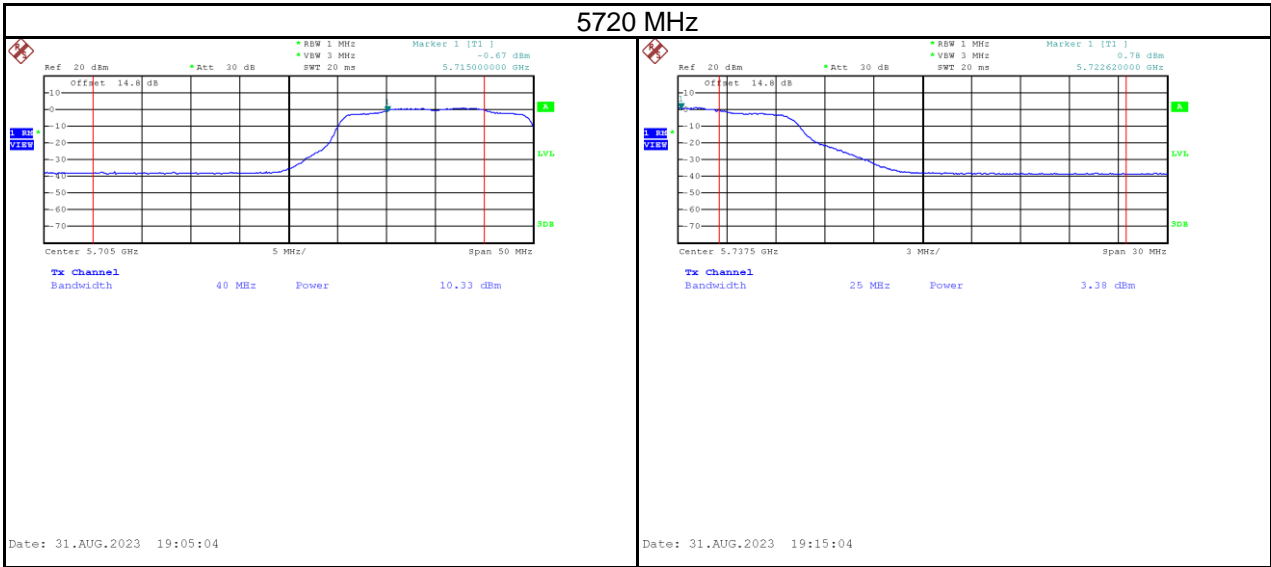


Test Mode	IEEE 802.11ax (HE20)_Aux Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	0.27	0.03	0.30	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	1.38	-1.63	0.03	-1.60	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

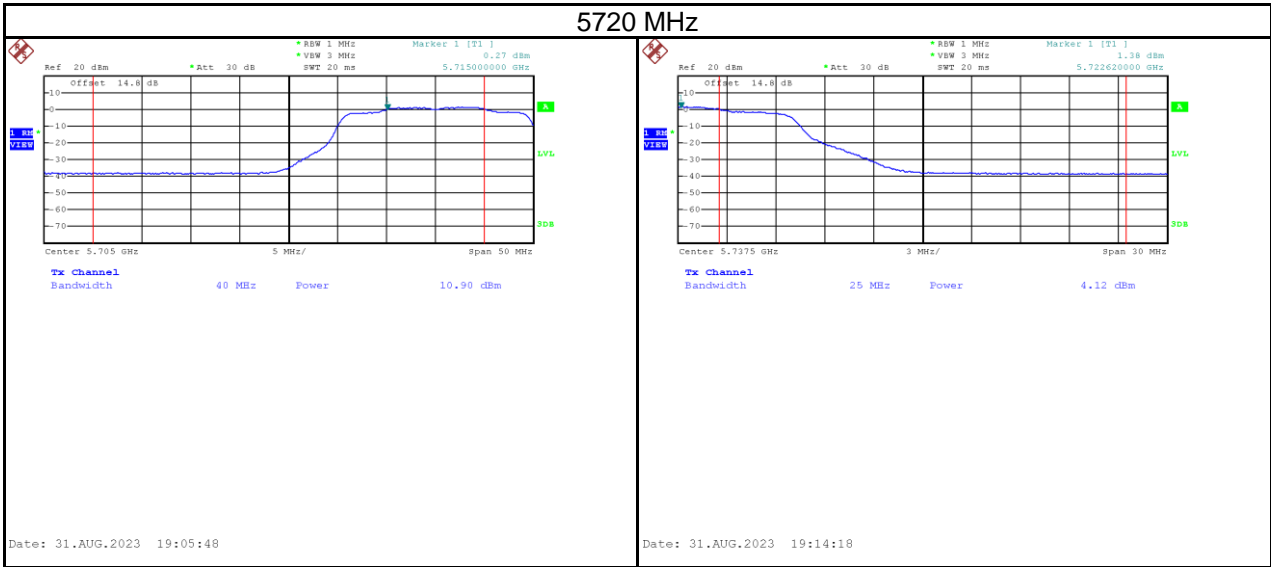

Test Mode	IEEE 802.11ax (HE20)_Total
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5720	2.84	0.03	2.87	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5720	4.10	1.09	0.03	1.12	29.97	Pass


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

Test Mode	IEEE 802.11ax (HE40)_Main Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-3.77	0.02	-3.75	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-3.77	-6.78	0.02	-6.76	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz MHz})$

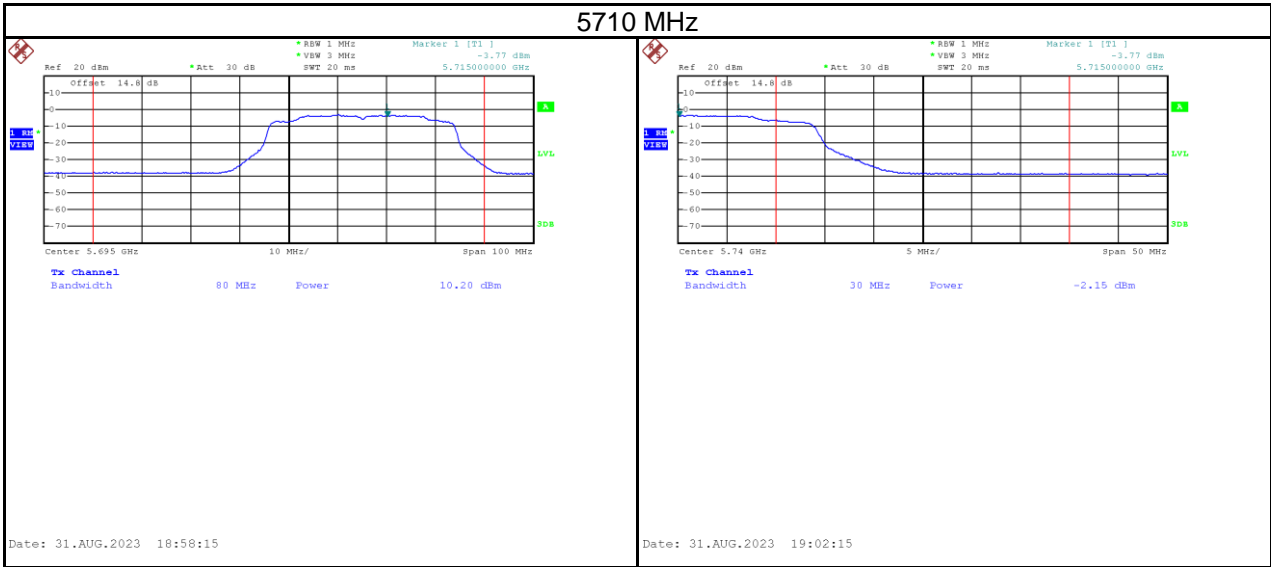


Test Mode	IEEE 802.11ax (HE40)_Aux Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-3.63	0.02	-3.61	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-3.41	-6.42	0.02	-6.40	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBmMHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

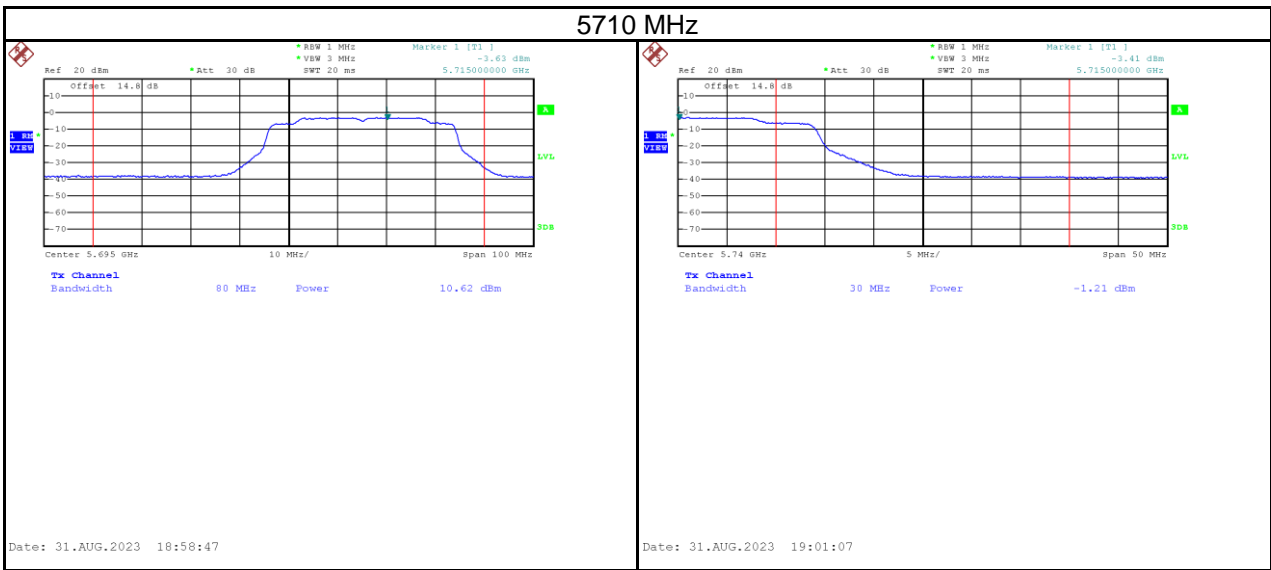

Test Mode	IEEE 802.11ax (HE40)_Total
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5710	-0.69	0.02	-0.67	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5710	-0.58	-3.59	0.02	-3.57	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBmMHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$




Test Mode	IEEE 802.11ax (HE80)_Main Antenna
-----------	-----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-6.35	0.10	-6.25	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-10.71	-13.72	0.10	-13.62	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

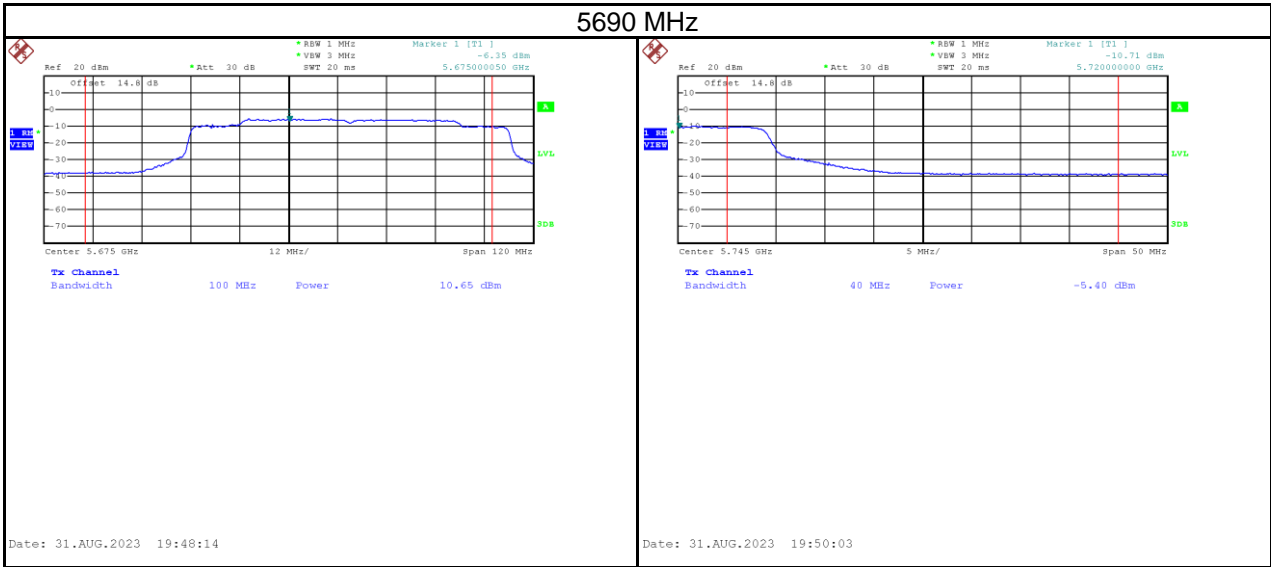


Test Mode	IEEE 802.11ax (HE80)_Aux Antenna
-----------	----------------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-4.97	0.10	-4.87	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-10.03	-13.04	0.10	-12.94	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

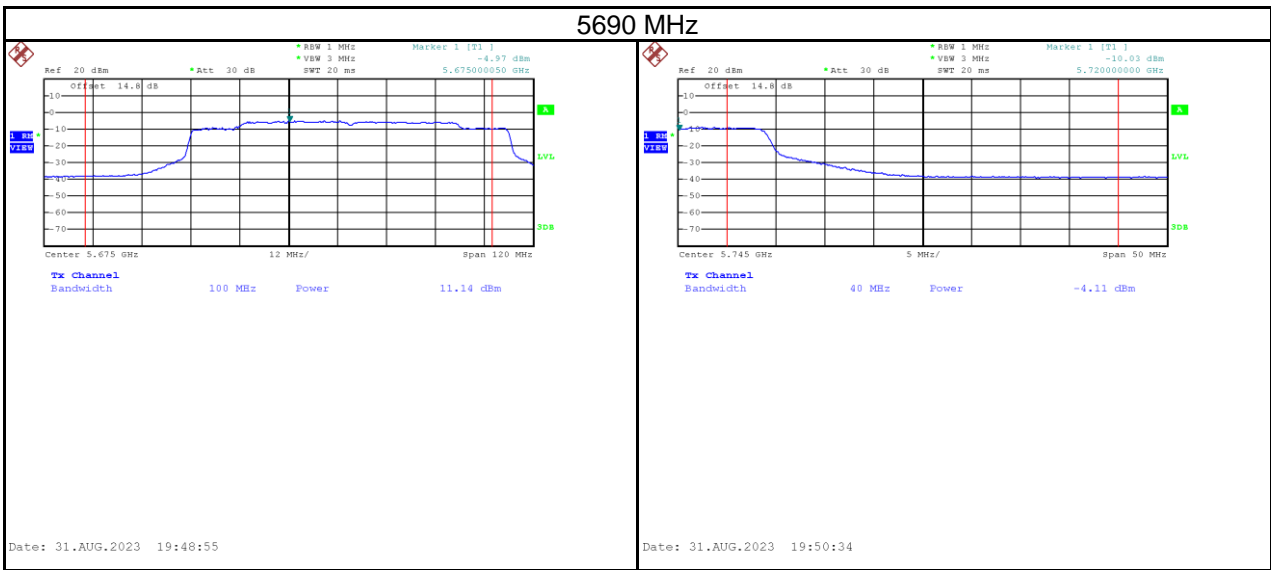

Test Mode	IEEE 802.11ax (HE80)_Total
-----------	----------------------------

Test Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Maximum Limit (dBm/MHz)	Result
5690	-2.60	0.10	-2.50	10.97	Pass

Test Frequency (MHz)	Power Density (dBm/MHz)	Power Density (dBm/500 kHz)	Duty Factor (dB)	Calculated Power Density (dBm/500 kHz)	Maximum Limit (dBm/500 kHz)	Result
5690	-7.35	-10.36	0.10	-10.26	29.97	Pass

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/MHz} + 10 \times \log_{10}(500\text{ KHz} / \text{MHz})$

**End of Test Report**