



## 5825 MHz

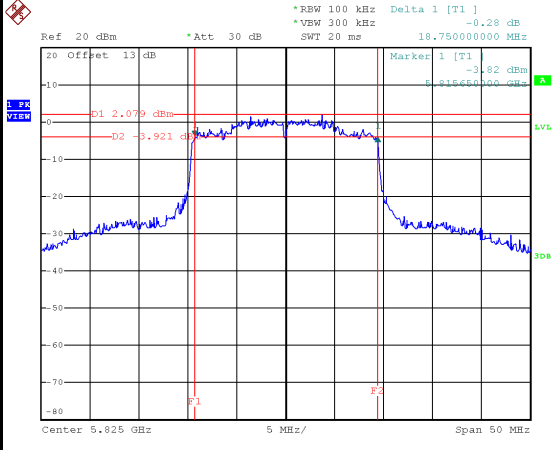



Date: 20.FEB.2023 18:52:35

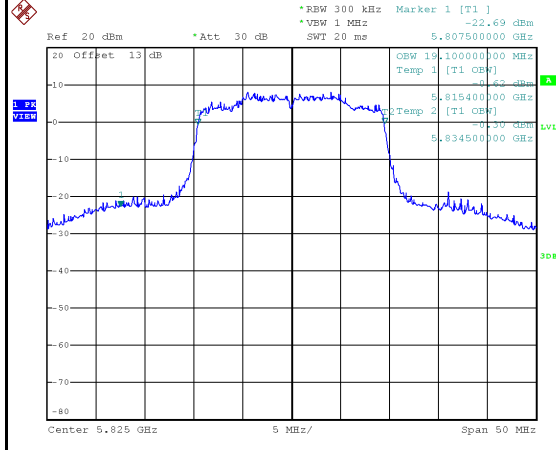



Date: 20.FEB.2023 18:52:05

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5190                 | 43.10                 | 38.00                         | No limit |
| 5230                 | 43.70                 | 38.00                         | No limit |

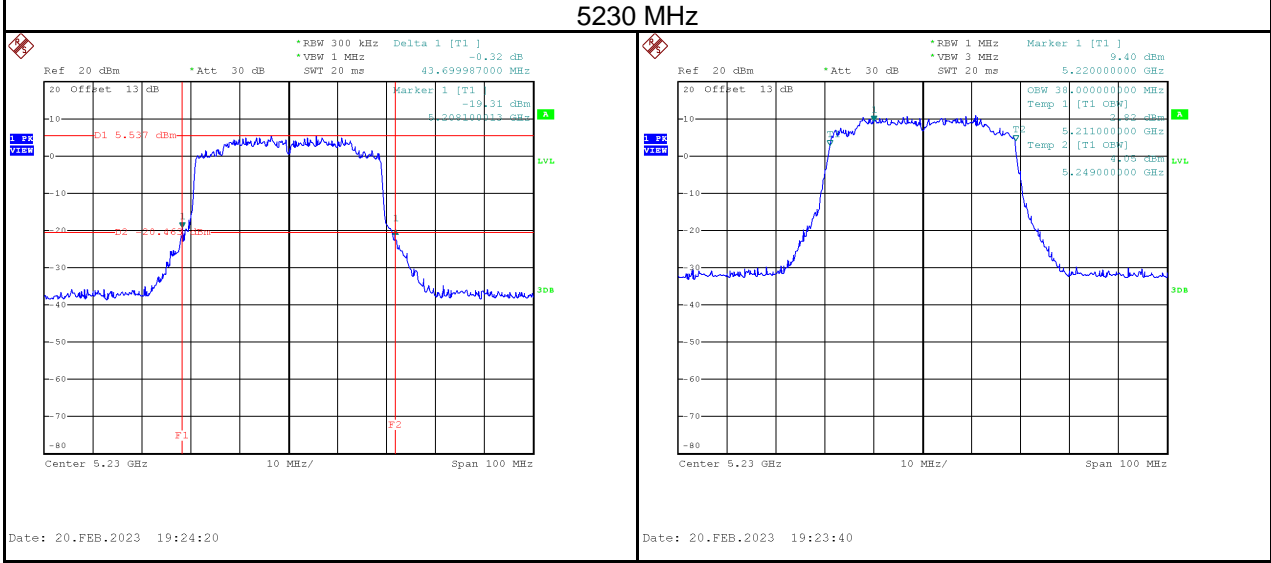
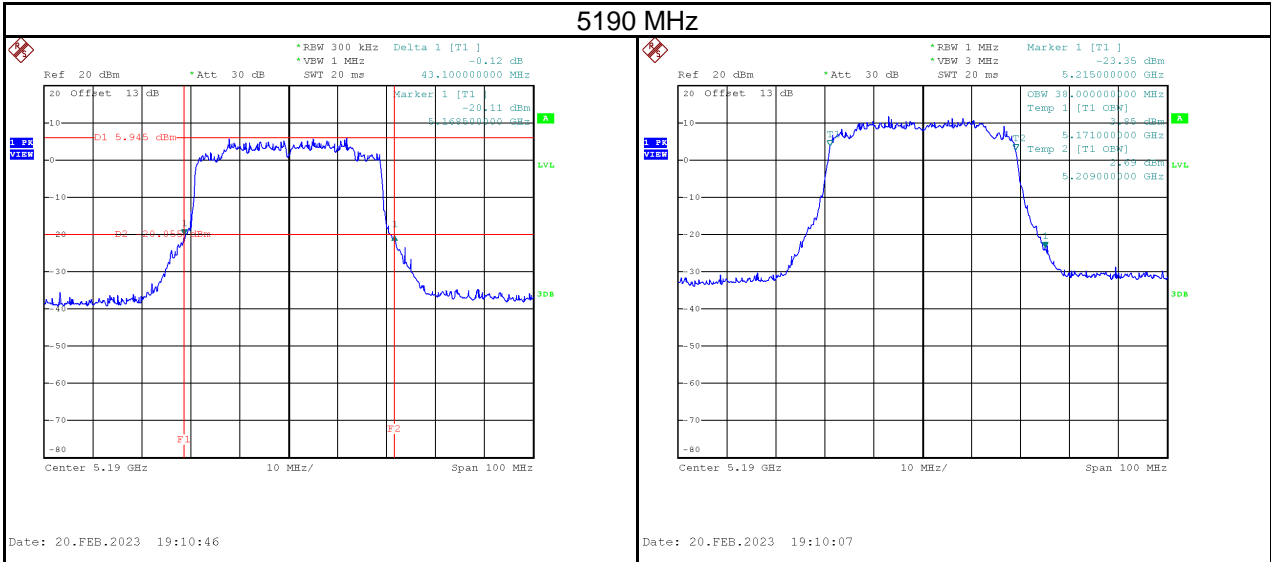


| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5270                 | 42.39                 | 37.80                         | No limit |
| 5310                 | 42.79                 | 38.00                         | No limit |

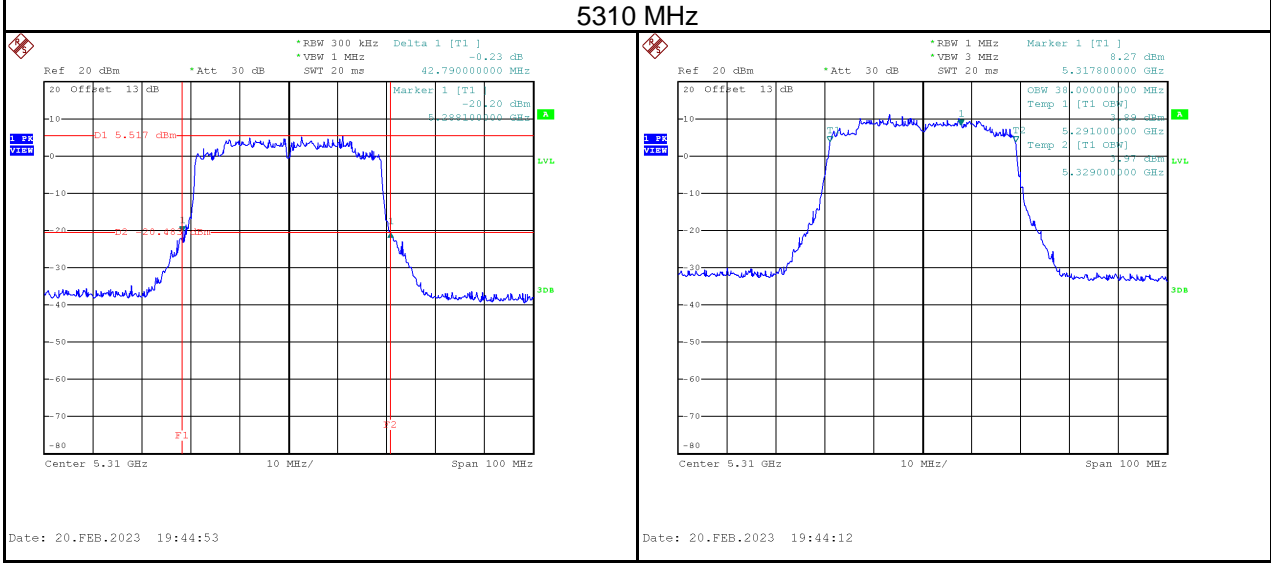
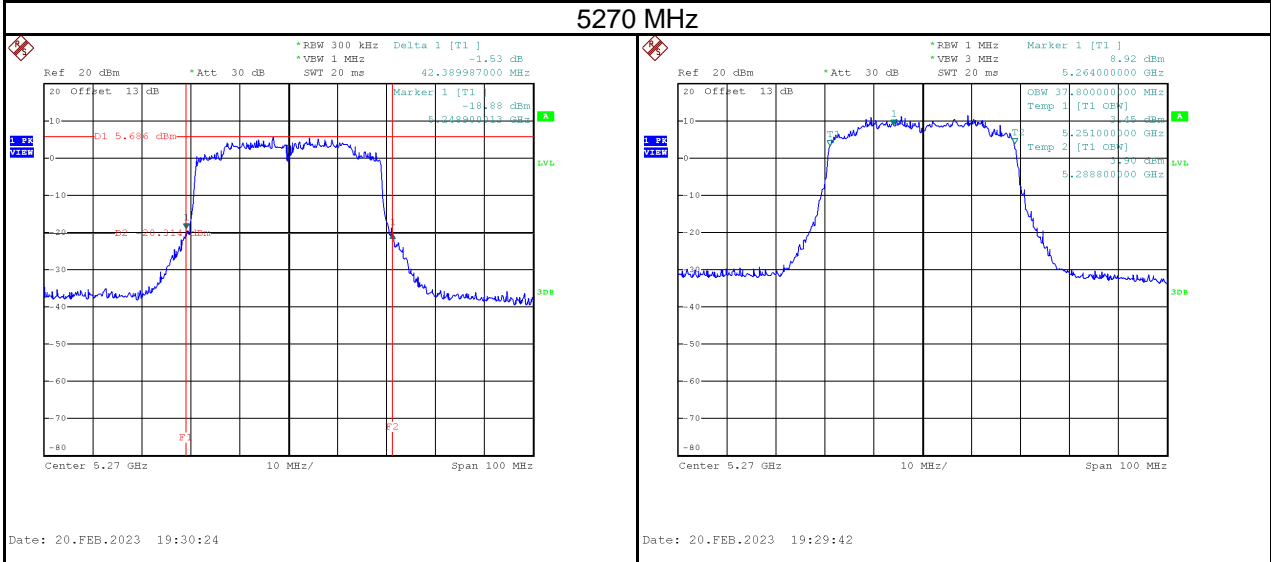


| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5510                 | 42.90                 | 38.00                         | No limit |
| 5550                 | 43.30                 | 37.80                         | No limit |
| 5670                 | 43.00                 | 38.00                         | No limit |


### 5510 MHz

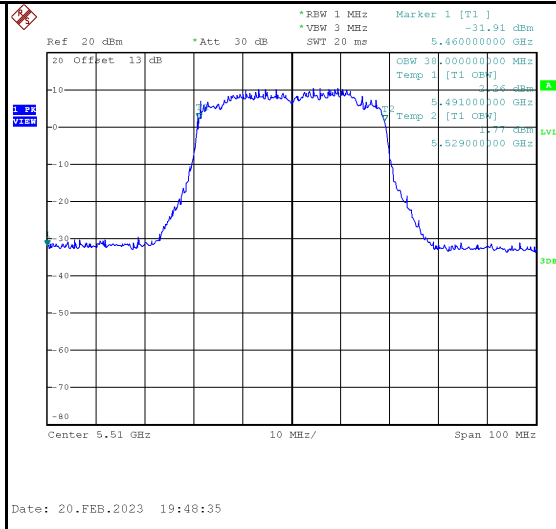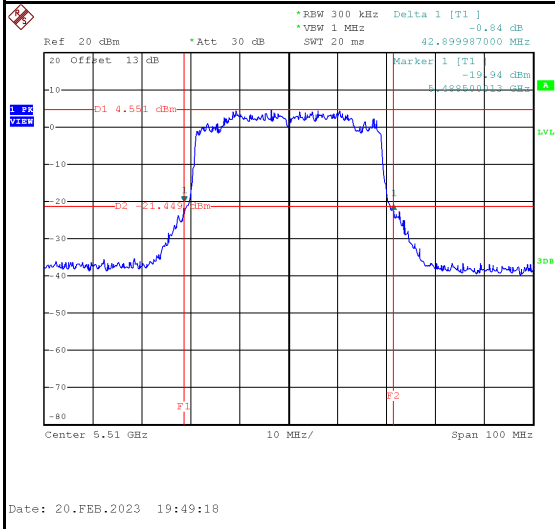


### 5550 MHz

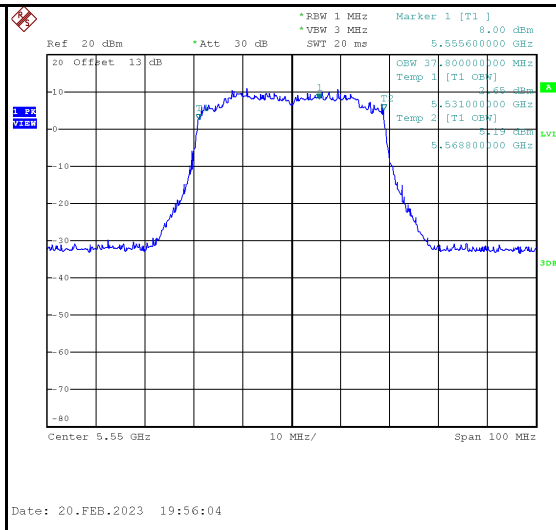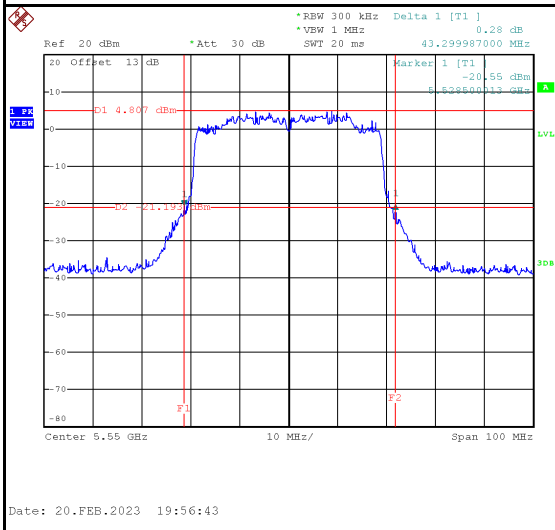

## 5670 MHz

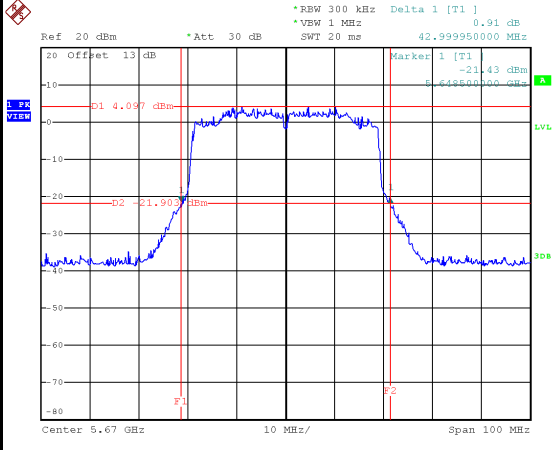


Date: 20.FEB.2023 20:16:07

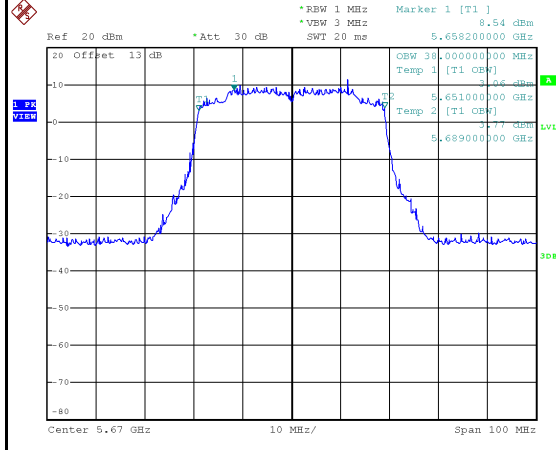


Date: 20.FEB.2023 20:15:24

| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Minimum 6 dB Bandwidth Limit (kHz) | Result |
|----------------------|----------------------|-------------------------------|------------------------------------|--------|
| 5755                 | 36.20                | 37.80                         | 500                                | Pass   |
| 5795                 | 36.39                | 37.80                         | 500                                | Pass   |

### 5755 MHz

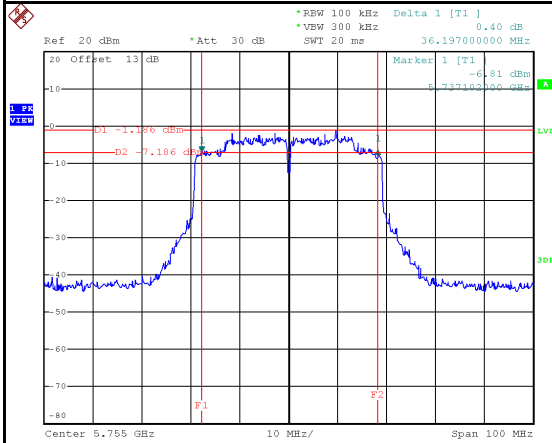


Date: 20.FEB.2023 20:24:05

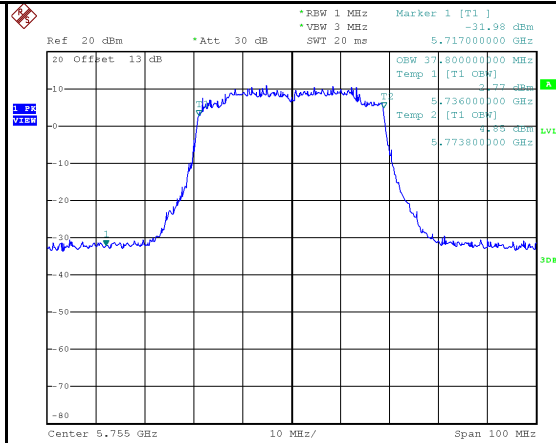


Date: 20.FEB.2023 20:23:21

### 5795 MHz

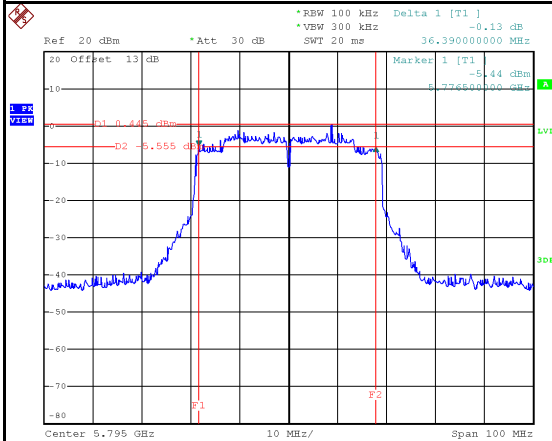


Date: 20.FEB.2023 20:32:16

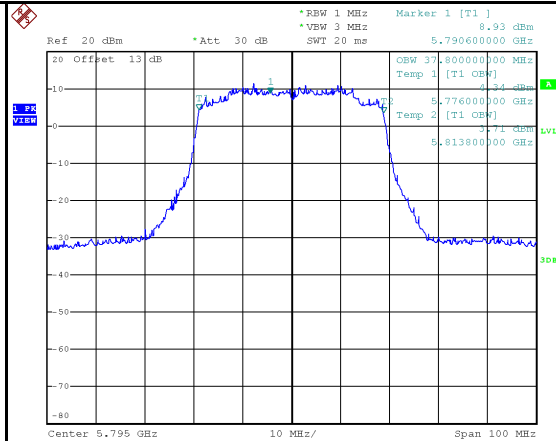


Date: 20.FEB.2023 20:31:35

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna |
|-----------|----------------------------------|



| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5210                 | 86.79                 | 76.80                         | No limit |

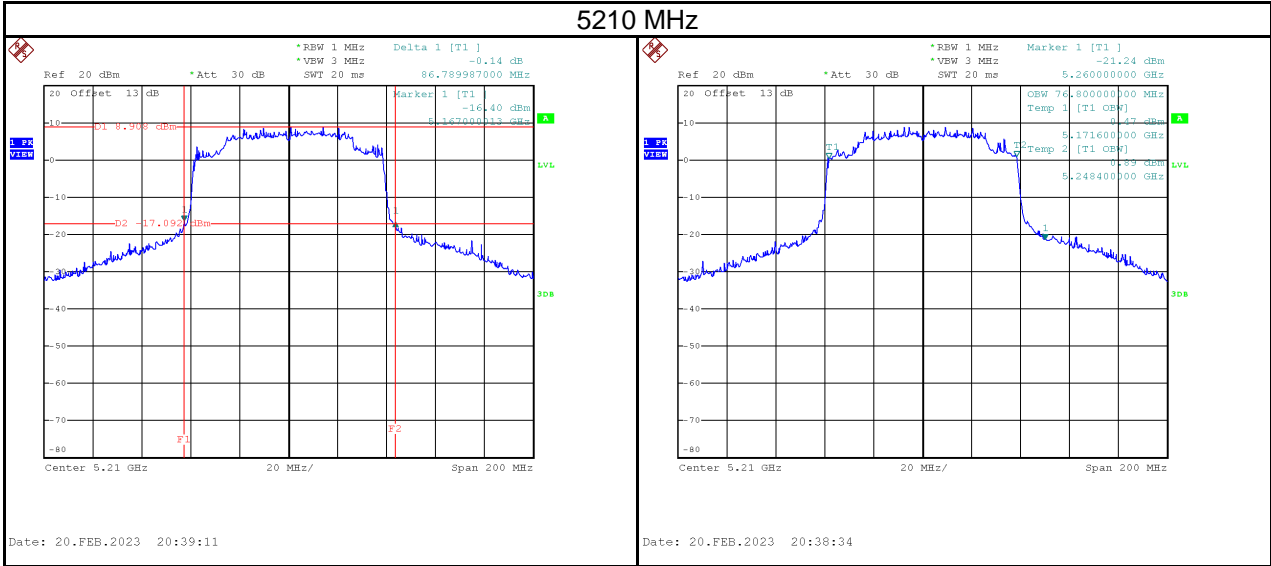


| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5290                 | 82.20                 | 76.40                         | No limit |

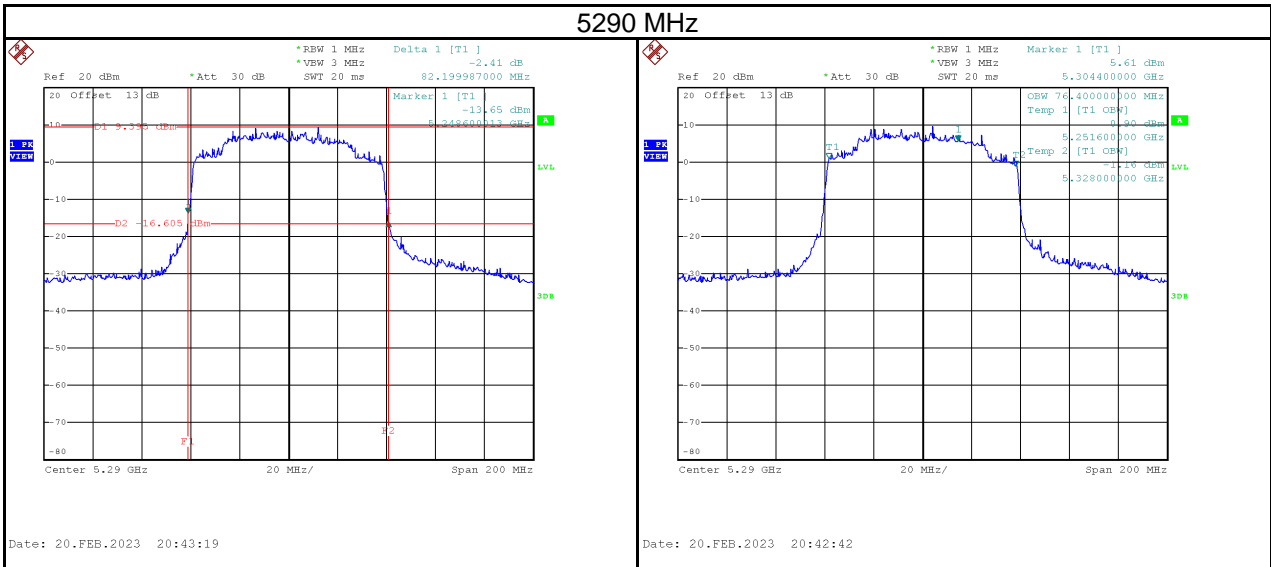

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5530                 | 84.80                 | 76.80                         | No limit |
| 5610                 | 83.19                 | 76.80                         | No limit |

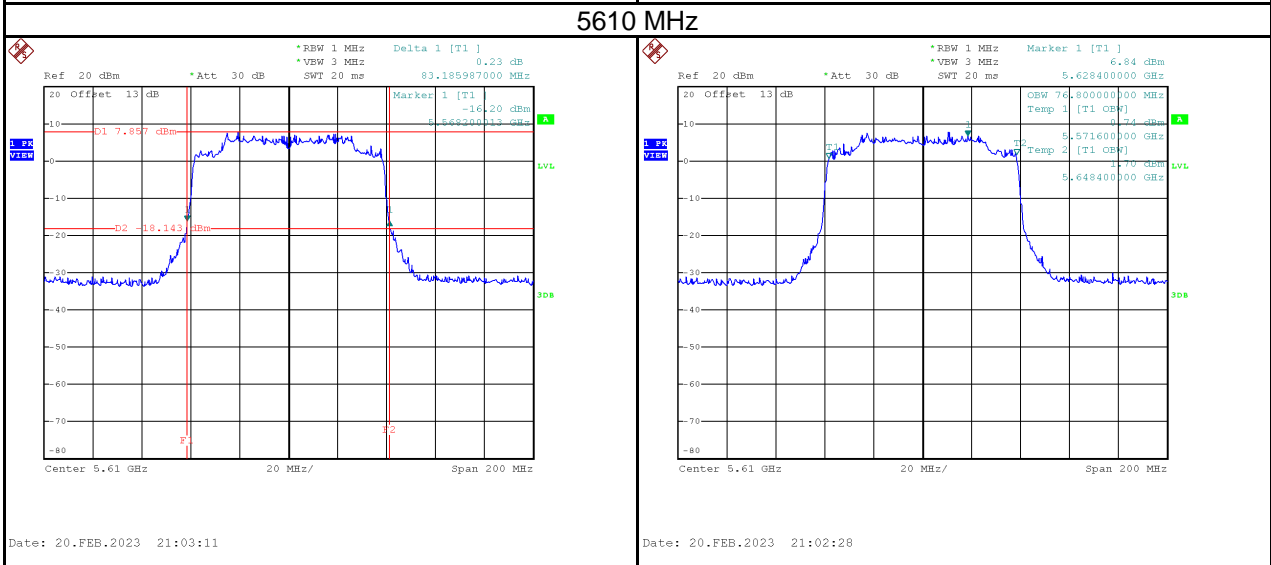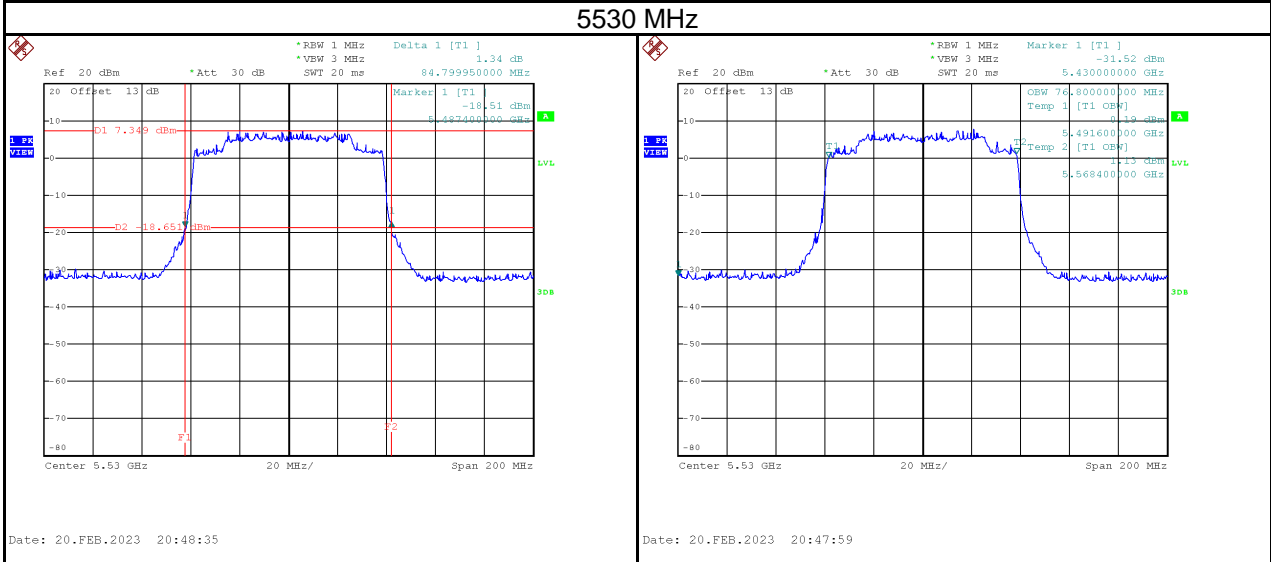


| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Minimum 6 dB Bandwidth Limit (kHz) | Result |
|----------------------|----------------------|-------------------------------|------------------------------------|--------|
| 5775                 | 76.40                | 77.20                         | 500                                | Pass   |

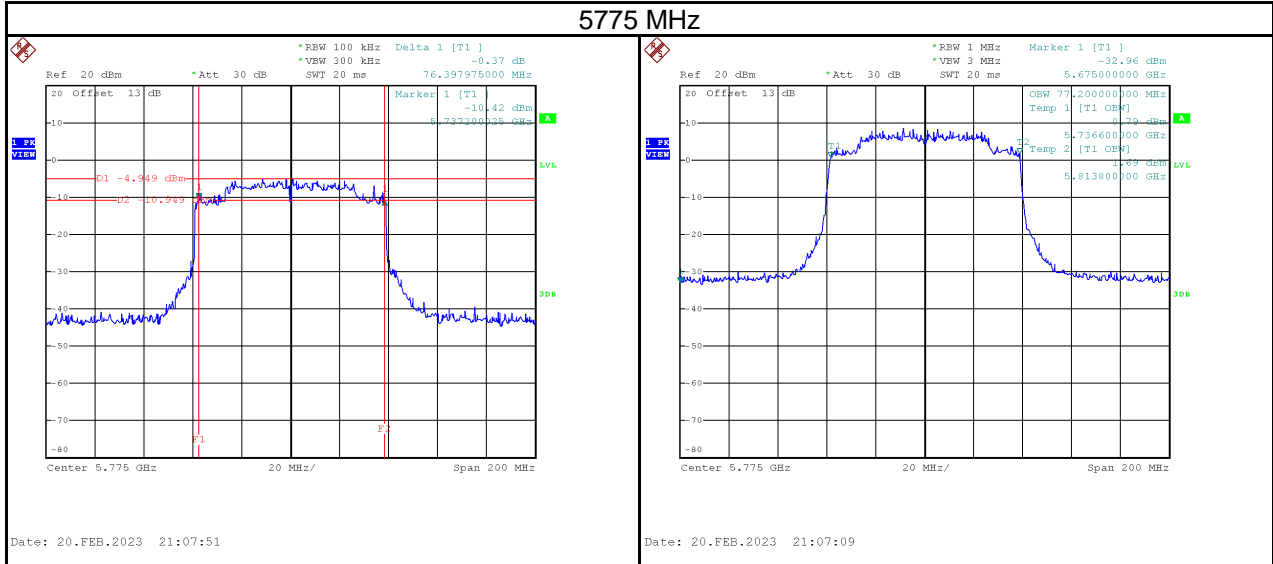


|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE160)_Aux Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5250                 | 162.40                | 154.40                        | No limit |

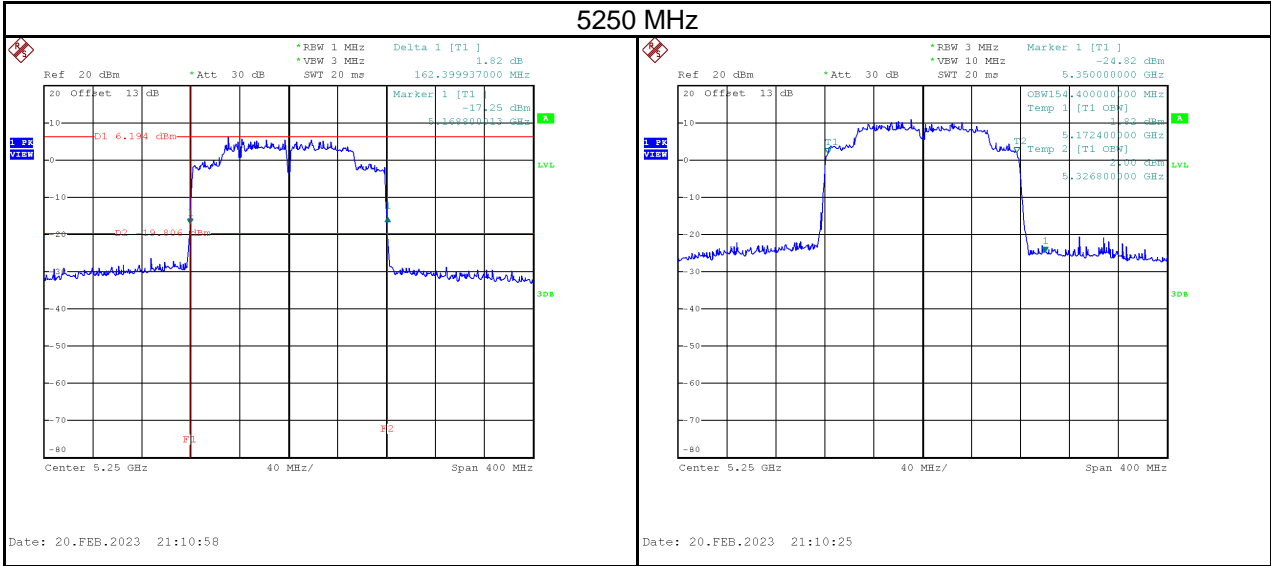


| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5570                 | 162.39                | 155.20                        | No limit |

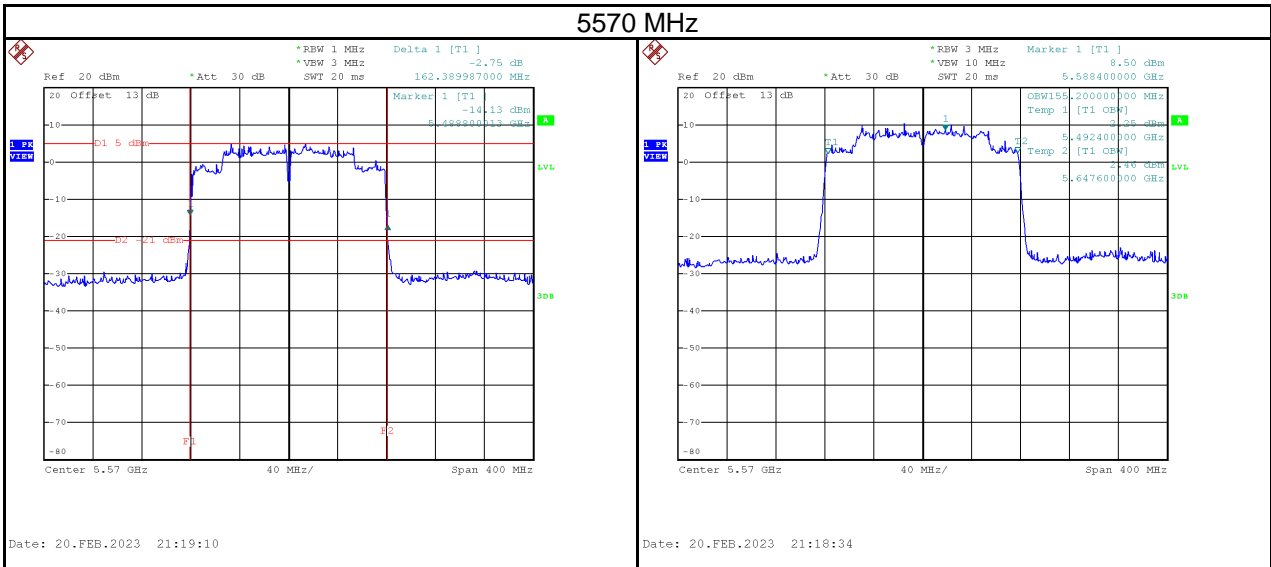


For Straddle Channel:

|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT20)_Aux Antenna |
|-----------|---------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5720                 | 23.79                 | 18.00                         | No limit |

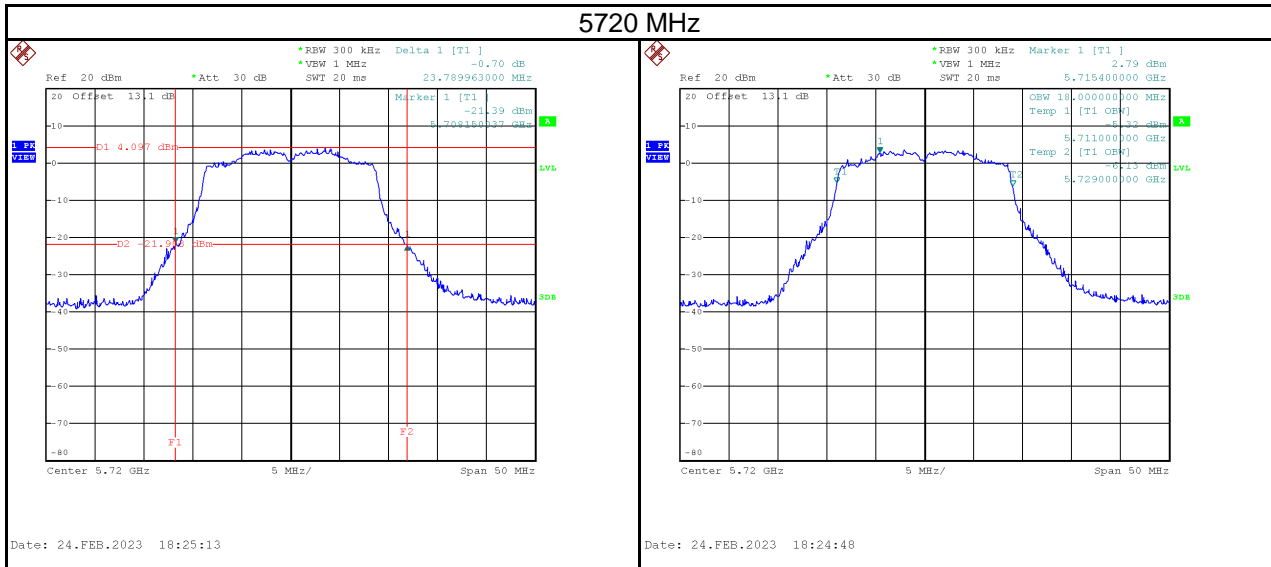


| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5720                 | 15.19                | 18.00                         | No limit |

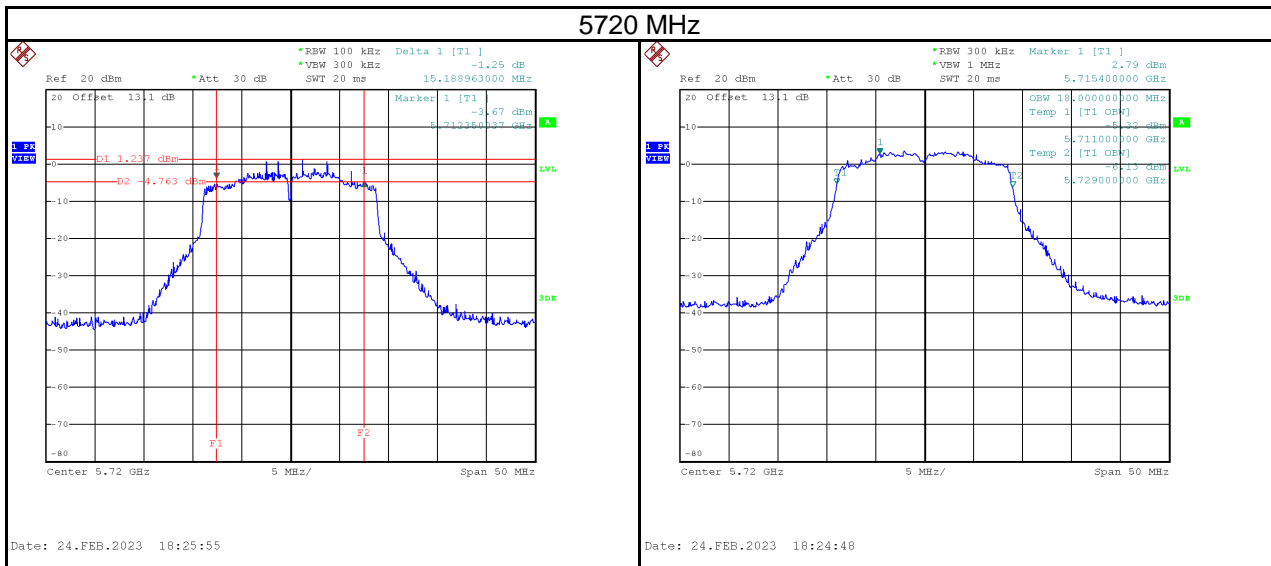


|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT40)_Aux Antenna |
|-----------|---------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5710                 | 45.99                 | 36.80                         | No limit |

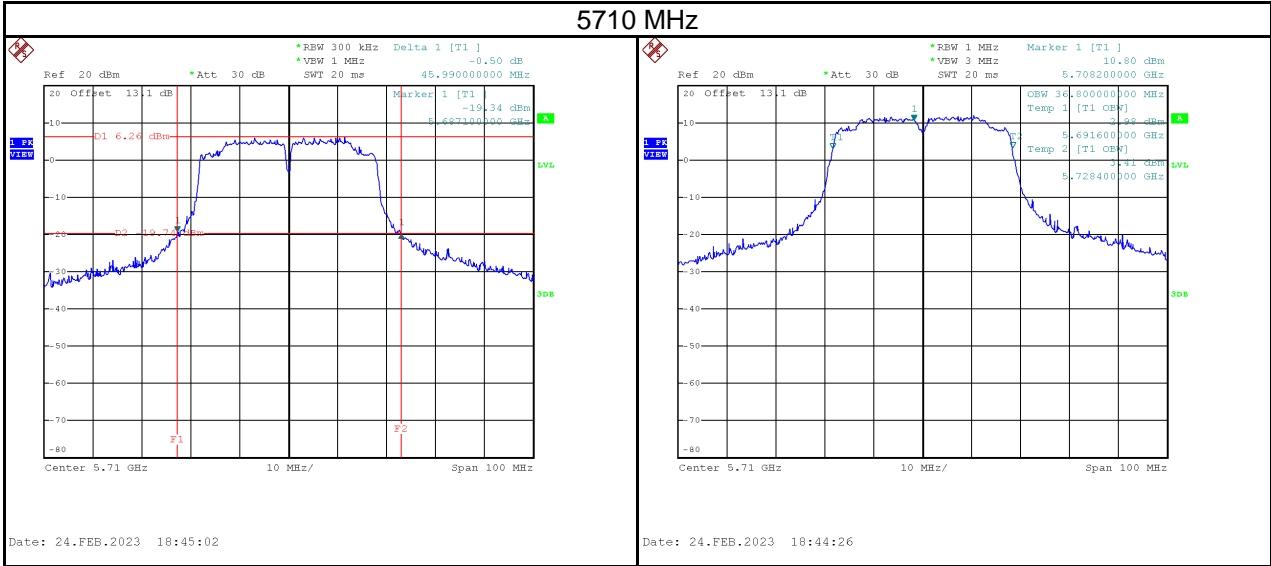


| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5710                 | 31.60                | 36.80                         | No limit |

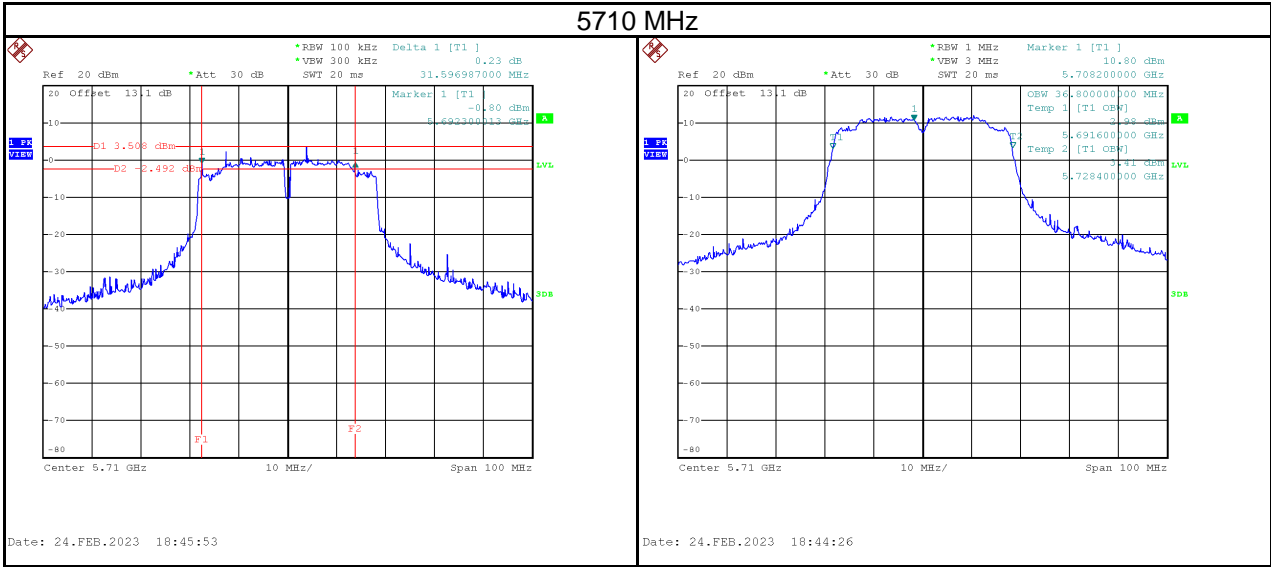


|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Aux Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5690                 | 89.40                 | 75.20                         | No limit |

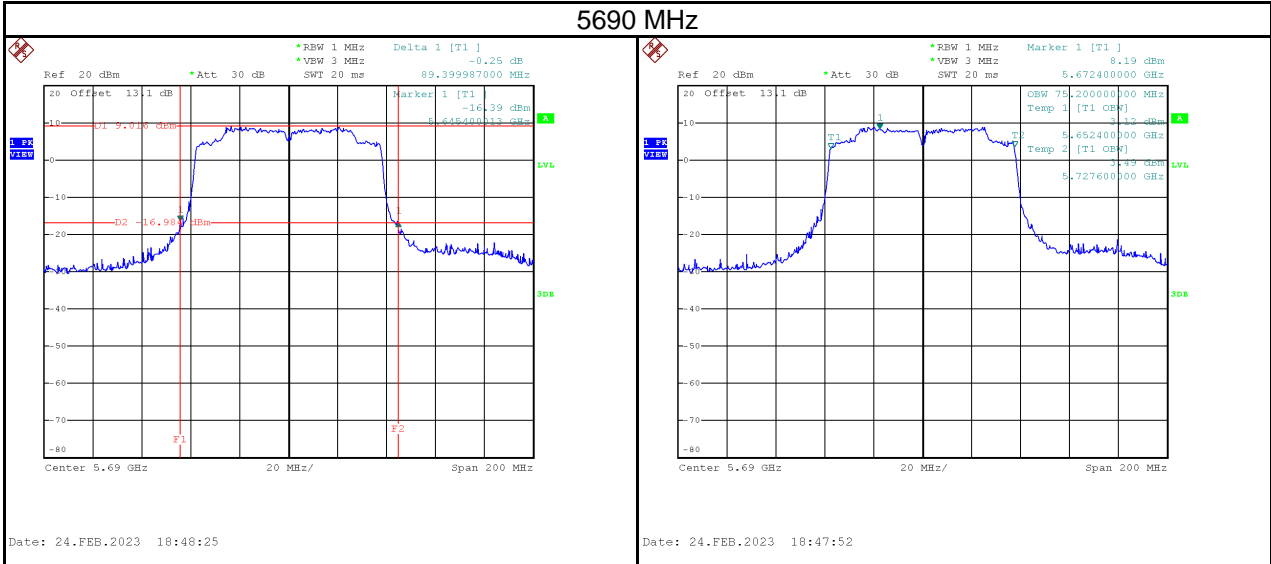


| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5690                 | 63.40                | 75.20                         | No limit |

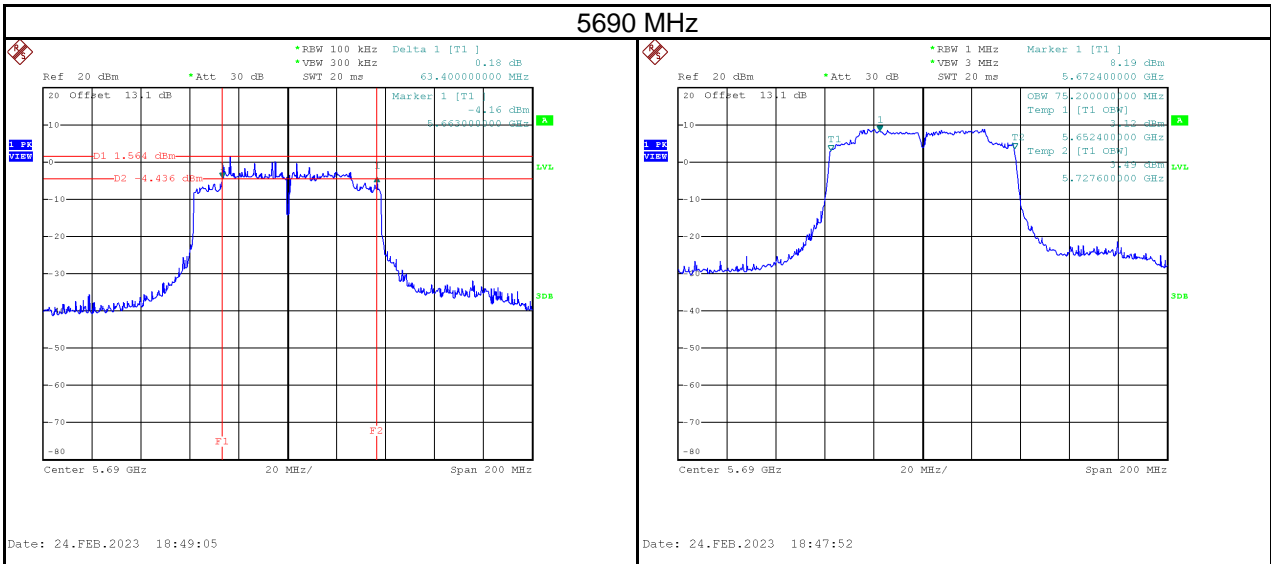


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5720                 | 23.89                 | 19.00                         | No limit |

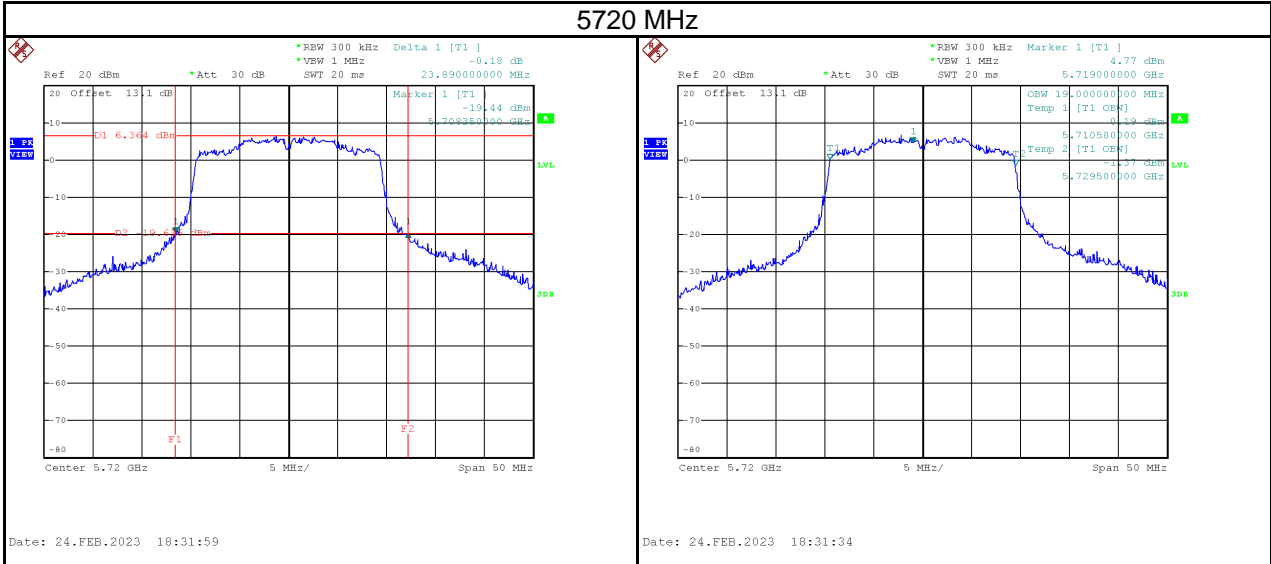


| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5720                 | 16.99                | 19.00                         | No limit |

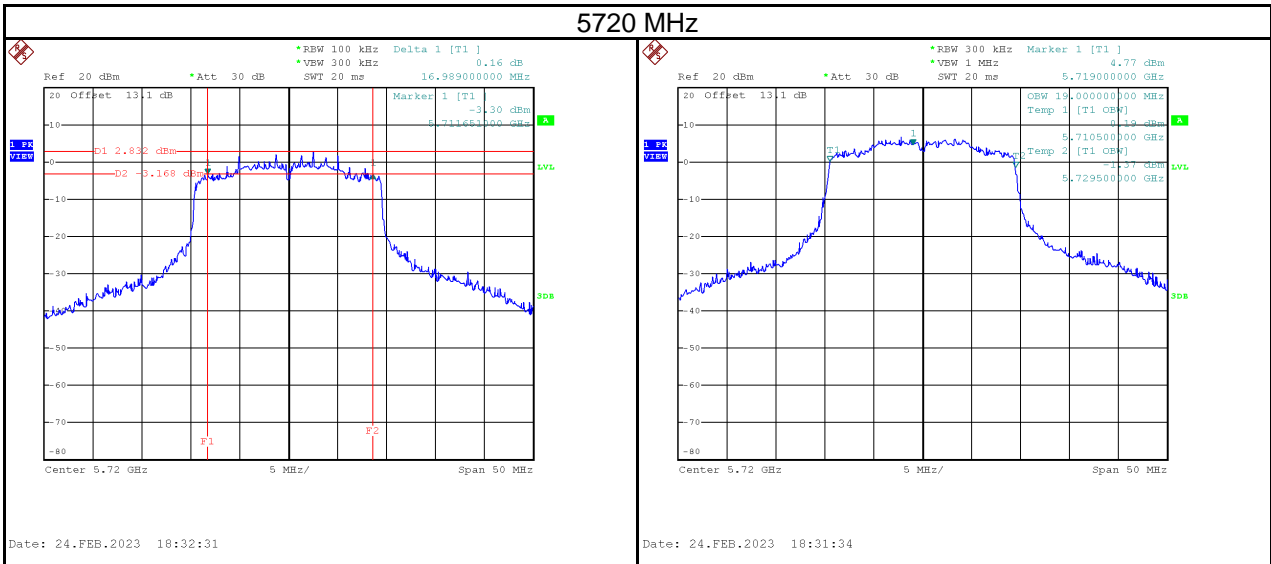


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5710                 | 43.10                 | 38.00                         | No limit |

### 5710 MHz

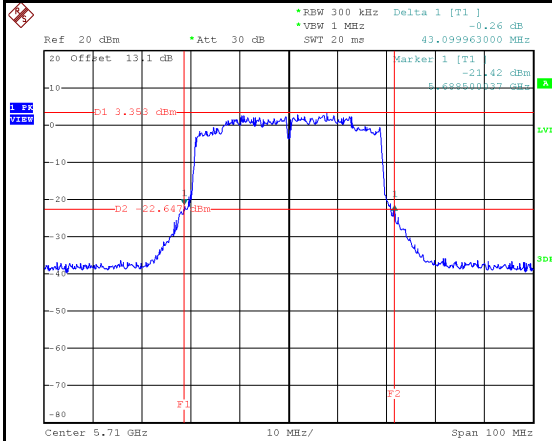


Date: 24.FEB.2023 18:34:35

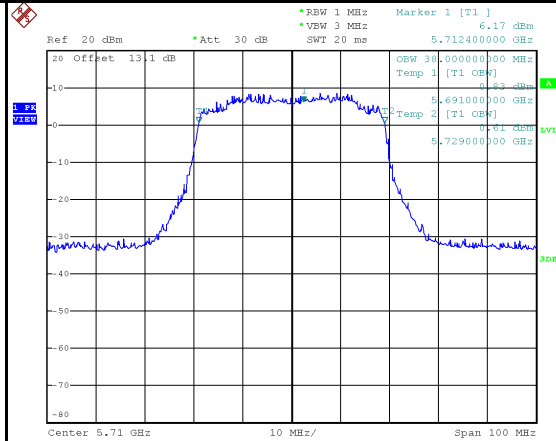


Date: 24.FEB.2023 18:33:58

| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5710                 | 36.60                | 38.00                         | No limit |

### 5710 MHz

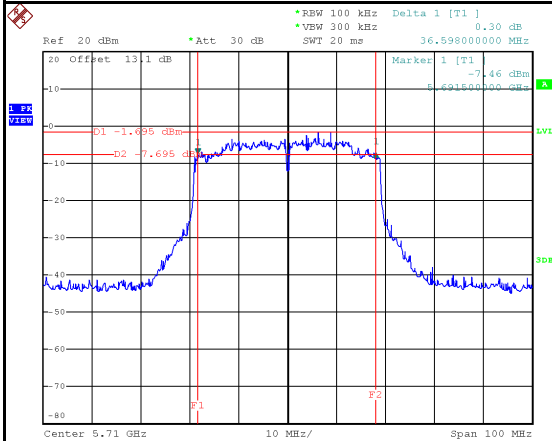


Date: 24.FEB.2023 18:35:18

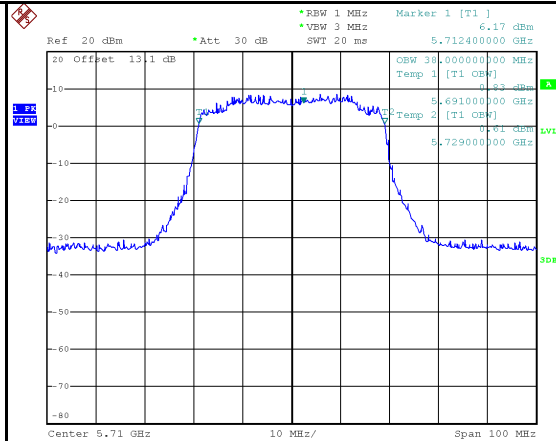


Date: 24.FEB.2023 18:33:58

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|-----------------------|-------------------------------|----------|
| 5690                 | 90.40                 | 77.20                         | No limit |

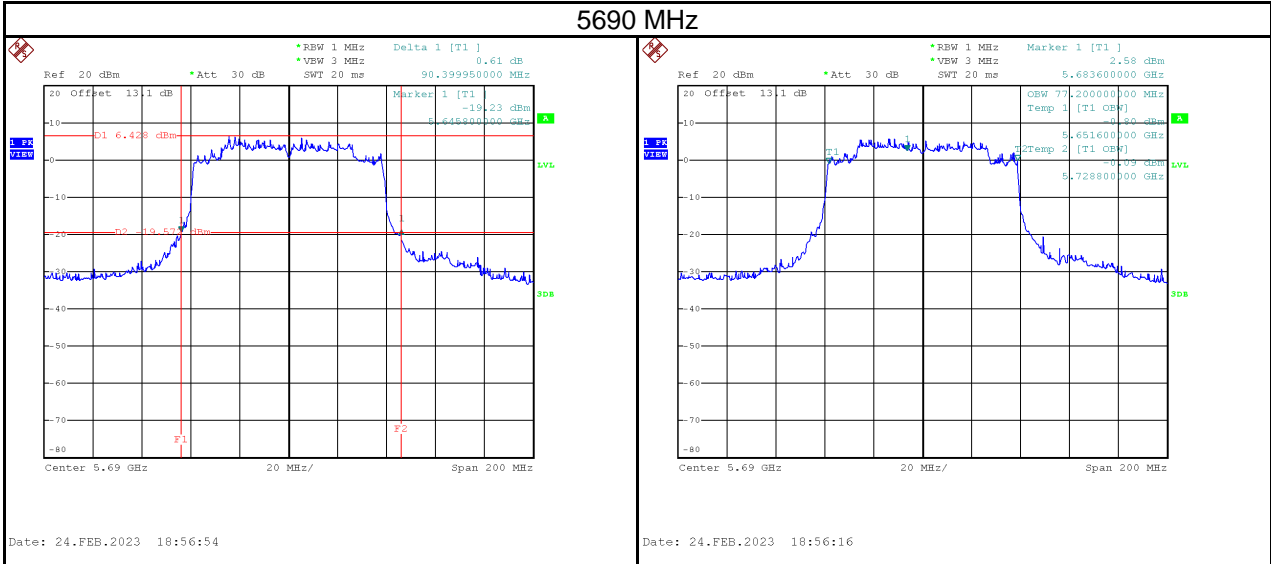

| Test Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | Limit    |
|----------------------|----------------------|-------------------------------|----------|
| 5690                 | 58.79                | 77.20                         | No limit |

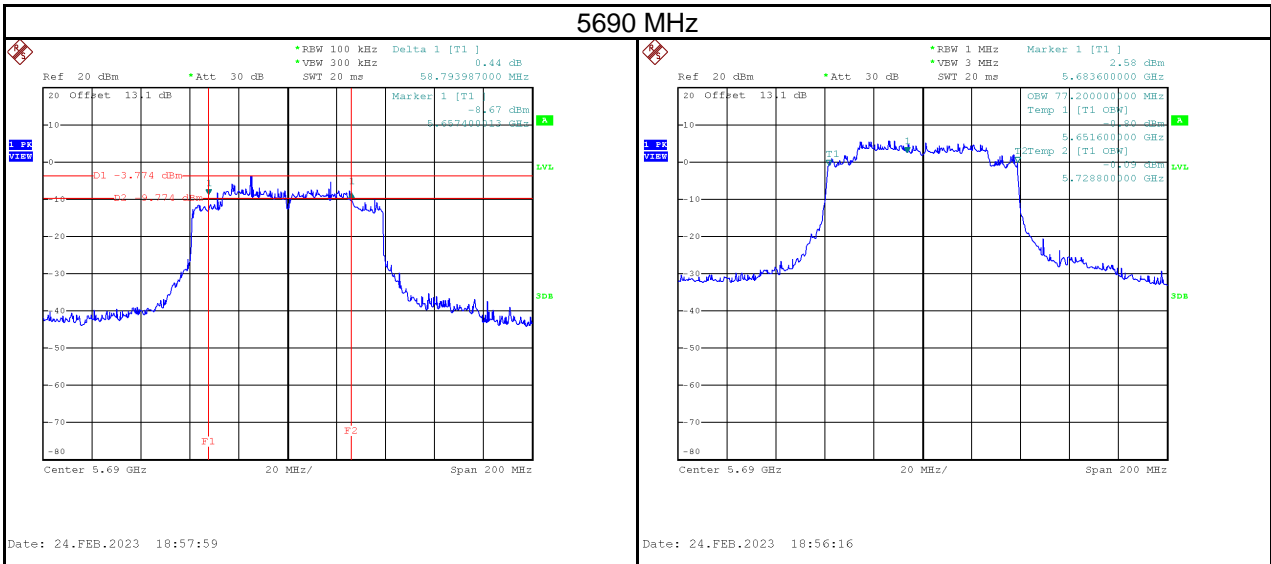

## APPENDIX E CONDUCTED OUTPUT POWER

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11a_Main Antenna | Tested Date | 2023/2/18 |
|-----------|---------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 17.41                 | 0.0551              | 24.00            | 0.2512         | Complies |
| 5200            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5240            | 17.43                 | 0.0553              | 24.00            | 0.2512         | Complies |
| 5260            | 17.42                 | 0.0552              | 24.00            | 0.2512         | Complies |
| 5300            | 17.48                 | 0.0560              | 24.00            | 0.2512         | Complies |
| 5320            | 17.42                 | 0.0552              | 24.00            | 0.2512         | Complies |
| 5500            | 16.41                 | 0.0438              | 24.00            | 0.2512         | Complies |
| 5580            | 16.45                 | 0.0442              | 24.00            | 0.2512         | Complies |
| 5700            | 16.44                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5745            | 17.46                 | 0.0557              | 30.00            | 1.0000         | Complies |
| 5785            | 17.48                 | 0.0560              | 30.00            | 1.0000         | Complies |
| 5825            | 17.45                 | 0.0556              | 30.00            | 1.0000         | Complies |

|           |                          |             |           |
|-----------|--------------------------|-------------|-----------|
| Test Mode | IEEE 802.11a_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|--------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 17.47                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5200            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5240            | 17.49                 | 0.0561              | 24.00            | 0.2512         | Complies |
| 5260            | 17.48                 | 0.0560              | 24.00            | 0.2512         | Complies |
| 5300            | 17.44                 | 0.0555              | 24.00            | 0.2512         | Complies |
| 5320            | 17.47                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5500            | 16.42                 | 0.0439              | 24.00            | 0.2512         | Complies |
| 5580            | 16.47                 | 0.0444              | 24.00            | 0.2512         | Complies |
| 5700            | 16.44                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5745            | 17.42                 | 0.0552              | 30.00            | 1.0000         | Complies |
| 5785            | 17.41                 | 0.0551              | 30.00            | 1.0000         | Complies |
| 5825            | 17.40                 | 0.0550              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.19                 | 0.0262              | 24.00            | 0.2512         | Complies |
| 5200            | 14.26                 | 0.0267              | 24.00            | 0.2512         | Complies |
| 5240            | 14.22                 | 0.0264              | 24.00            | 0.2512         | Complies |
| 5260            | 14.20                 | 0.0263              | 24.00            | 0.2512         | Complies |
| 5300            | 14.01                 | 0.0252              | 24.00            | 0.2512         | Complies |
| 5320            | 14.10                 | 0.0257              | 24.00            | 0.2512         | Complies |
| 5500            | 13.26                 | 0.0212              | 24.00            | 0.2512         | Complies |
| 5580            | 13.22                 | 0.0210              | 24.00            | 0.2512         | Complies |
| 5700            | 13.41                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5745            | 14.32                 | 0.0270              | 30.00            | 1.0000         | Complies |
| 5785            | 14.26                 | 0.0267              | 30.00            | 1.0000         | Complies |
| 5825            | 14.30                 | 0.0269              | 30.00            | 1.0000         | Complies |

|           |                                 |             |           |
|-----------|---------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|---------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.75                 | 0.0299              | 24.00            | 0.2512         | Complies |
| 5200            | 14.64                 | 0.0291              | 24.00            | 0.2512         | Complies |
| 5240            | 14.73                 | 0.0297              | 24.00            | 0.2512         | Complies |
| 5260            | 14.63                 | 0.0290              | 24.00            | 0.2512         | Complies |
| 5300            | 14.86                 | 0.0306              | 24.00            | 0.2512         | Complies |
| 5320            | 14.80                 | 0.0302              | 24.00            | 0.2512         | Complies |
| 5500            | 13.69                 | 0.0234              | 24.00            | 0.2512         | Complies |
| 5580            | 13.65                 | 0.0232              | 24.00            | 0.2512         | Complies |
| 5700            | 13.47                 | 0.0222              | 24.00            | 0.2512         | Complies |
| 5745            | 14.51                 | 0.0282              | 30.00            | 1.0000         | Complies |
| 5785            | 14.61                 | 0.0289              | 30.00            | 1.0000         | Complies |
| 5825            | 14.66                 | 0.0292              | 30.00            | 1.0000         | Complies |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Total | Tested Date | 2023/2/18 |
|-----------|---------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 17.49                 | 0.0561              | 24.00            | 0.2512         | Complies |
| 5200            | 17.46                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5240            | 17.49                 | 0.0561              | 24.00            | 0.2512         | Complies |
| 5260            | 17.43                 | 0.0553              | 24.00            | 0.2512         | Complies |
| 5300            | 17.47                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5320            | 17.47                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5500            | 16.49                 | 0.0446              | 24.00            | 0.2512         | Complies |
| 5580            | 16.45                 | 0.0442              | 24.00            | 0.2512         | Complies |
| 5700            | 16.45                 | 0.0442              | 24.00            | 0.2512         | Complies |
| 5745            | 17.43                 | 0.0553              | 30.00            | 1.0000         | Complies |
| 5785            | 17.45                 | 0.0556              | 30.00            | 1.0000         | Complies |
| 5825            | 17.49                 | 0.0562              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.20                 | 0.0263              | 24.00            | 0.2512         | Complies |
| 5230            | 14.02                 | 0.0252              | 24.00            | 0.2512         | Complies |
| 5270            | 14.21                 | 0.0264              | 24.00            | 0.2512         | Complies |
| 5310            | 14.22                 | 0.0264              | 24.00            | 0.2512         | Complies |
| 5510            | 13.22                 | 0.0210              | 24.00            | 0.2512         | Complies |
| 5550            | 13.32                 | 0.0215              | 24.00            | 0.2512         | Complies |
| 5670            | 13.35                 | 0.0216              | 24.00            | 0.2512         | Complies |
| 5755            | 14.39                 | 0.0275              | 30.00            | 1.0000         | Complies |
| 5795            | 14.12                 | 0.0258              | 30.00            | 1.0000         | Complies |

|           |                                 |             |           |
|-----------|---------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|---------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.70                 | 0.0295              | 24.00            | 0.2512         | Complies |
| 5230            | 14.86                 | 0.0306              | 24.00            | 0.2512         | Complies |
| 5270            | 14.73                 | 0.0297              | 24.00            | 0.2512         | Complies |
| 5310            | 14.70                 | 0.0295              | 24.00            | 0.2512         | Complies |
| 5510            | 13.65                 | 0.0232              | 24.00            | 0.2512         | Complies |
| 5550            | 13.59                 | 0.0229              | 24.00            | 0.2512         | Complies |
| 5670            | 13.60                 | 0.0229              | 24.00            | 0.2512         | Complies |
| 5755            | 14.45                 | 0.0279              | 30.00            | 1.0000         | Complies |
| 5795            | 14.68                 | 0.0294              | 30.00            | 1.0000         | Complies |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Total | Tested Date | 2023/2/18 |
|-----------|---------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 17.47                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5230            | 17.47                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5270            | 17.49                 | 0.0561              | 24.00            | 0.2512         | Complies |
| 5310            | 17.48                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5510            | 16.45                 | 0.0442              | 24.00            | 0.2512         | Complies |
| 5550            | 16.47                 | 0.0443              | 24.00            | 0.2512         | Complies |
| 5670            | 16.49                 | 0.0445              | 24.00            | 0.2512         | Complies |
| 5755            | 17.43                 | 0.0553              | 30.00            | 1.0000         | Complies |
| 5795            | 17.42                 | 0.0552              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.07                 | 0.0255              | 24.00            | 0.2512         | Complies |
| 5200            | 14.24                 | 0.0265              | 24.00            | 0.2512         | Complies |
| 5240            | 14.11                 | 0.0258              | 24.00            | 0.2512         | Complies |
| 5260            | 14.13                 | 0.0259              | 24.00            | 0.2512         | Complies |
| 5300            | 14.20                 | 0.0263              | 24.00            | 0.2512         | Complies |
| 5320            | 14.08                 | 0.0256              | 24.00            | 0.2512         | Complies |
| 5500            | 13.40                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5580            | 13.33                 | 0.0215              | 24.00            | 0.2512         | Complies |
| 5700            | 13.53                 | 0.0225              | 24.00            | 0.2512         | Complies |
| 5745            | 14.51                 | 0.0282              | 30.00            | 1.0000         | Complies |
| 5785            | 14.32                 | 0.0270              | 30.00            | 1.0000         | Complies |
| 5825            | 14.42                 | 0.0277              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_AuxAntenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.71                 | 0.0296              | 24.00            | 0.2512         | Complies |
| 5200            | 14.63                 | 0.0290              | 24.00            | 0.2512         | Complies |
| 5240            | 14.68                 | 0.0294              | 24.00            | 0.2512         | Complies |
| 5260            | 14.68                 | 0.0294              | 24.00            | 0.2512         | Complies |
| 5300            | 14.63                 | 0.0290              | 24.00            | 0.2512         | Complies |
| 5320            | 14.69                 | 0.0294              | 24.00            | 0.2512         | Complies |
| 5500            | 13.47                 | 0.0222              | 24.00            | 0.2512         | Complies |
| 5580            | 13.51                 | 0.0224              | 24.00            | 0.2512         | Complies |
| 5700            | 13.33                 | 0.0215              | 24.00            | 0.2512         | Complies |
| 5745            | 14.31                 | 0.0270              | 30.00            | 1.0000         | Complies |
| 5785            | 14.47                 | 0.0280              | 30.00            | 1.0000         | Complies |
| 5825            | 14.48                 | 0.0281              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 17.41                 | 0.0551              | 24.00            | 0.2512         | Complies |
| 5200            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5240            | 17.41                 | 0.0551              | 24.00            | 0.2512         | Complies |
| 5260            | 17.42                 | 0.0553              | 24.00            | 0.2512         | Complies |
| 5300            | 17.43                 | 0.0553              | 24.00            | 0.2512         | Complies |
| 5320            | 17.41                 | 0.0550              | 24.00            | 0.2512         | Complies |
| 5500            | 16.45                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5580            | 16.43                 | 0.0440              | 24.00            | 0.2512         | Complies |
| 5700            | 16.44                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5745            | 17.42                 | 0.0552              | 30.00            | 1.0000         | Complies |
| 5785            | 17.41                 | 0.0550              | 30.00            | 1.0000         | Complies |
| 5825            | 17.46                 | 0.0557              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.24                 | 0.0265              | 24.00            | 0.2512         | Complies |
| 5230            | 14.17                 | 0.0261              | 24.00            | 0.2512         | Complies |
| 5270            | 14.20                 | 0.0263              | 24.00            | 0.2512         | Complies |
| 5310            | 14.01                 | 0.0252              | 24.00            | 0.2512         | Complies |
| 5510            | 13.16                 | 0.0207              | 24.00            | 0.2512         | Complies |
| 5550            | 13.32                 | 0.0215              | 24.00            | 0.2512         | Complies |
| 5670            | 13.30                 | 0.0214              | 24.00            | 0.2512         | Complies |
| 5755            | 14.36                 | 0.0273              | 30.00            | 1.0000         | Complies |
| 5795            | 14.18                 | 0.0262              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.64                 | 0.0291              | 24.00            | 0.2512         | Complies |
| 5230            | 14.63                 | 0.0290              | 24.00            | 0.2512         | Complies |
| 5270            | 14.66                 | 0.0292              | 24.00            | 0.2512         | Complies |
| 5310            | 14.84                 | 0.0305              | 24.00            | 0.2512         | Complies |
| 5510            | 13.64                 | 0.0231              | 24.00            | 0.2512         | Complies |
| 5550            | 13.57                 | 0.0228              | 24.00            | 0.2512         | Complies |
| 5670            | 13.53                 | 0.0225              | 24.00            | 0.2512         | Complies |
| 5755            | 14.42                 | 0.0277              | 30.00            | 1.0000         | Complies |
| 5795            | 14.59                 | 0.0288              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 17.45                 | 0.0557              | 24.00            | 0.2512         | Complies |
| 5230            | 17.42                 | 0.0552              | 24.00            | 0.2512         | Complies |
| 5270            | 17.45                 | 0.0555              | 24.00            | 0.2512         | Complies |
| 5310            | 17.46                 | 0.0557              | 24.00            | 0.2512         | Complies |
| 5510            | 16.42                 | 0.0438              | 24.00            | 0.2512         | Complies |
| 5550            | 16.46                 | 0.0442              | 24.00            | 0.2512         | Complies |
| 5670            | 16.43                 | 0.0439              | 24.00            | 0.2512         | Complies |
| 5755            | 17.40                 | 0.0550              | 30.00            | 1.0000         | Complies |
| 5795            | 17.40                 | 0.0550              | 30.00            | 1.0000         | Complies |

|           |                                     |             |           |
|-----------|-------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_ Main Antenna | Tested Date | 2023/2/18 |
|-----------|-------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 14.32                 | 0.0270              | 24.00            | 0.2512         | Complies |
| 5290            | 14.16                 | 0.0261              | 24.00            | 0.2512         | Complies |
| 5530            | 13.23                 | 0.0210              | 24.00            | 0.2512         | Complies |
| 5610            | 13.30                 | 0.0214              | 24.00            | 0.2512         | Complies |
| 5775            | 14.33                 | 0.0271              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 14.64                 | 0.0291              | 24.00            | 0.2512         | Complies |
| 5290            | 14.66                 | 0.0292              | 24.00            | 0.2512         | Complies |
| 5530            | 13.60                 | 0.0229              | 24.00            | 0.2512         | Complies |
| 5610            | 13.56                 | 0.0227              | 24.00            | 0.2512         | Complies |
| 5775            | 14.61                 | 0.0289              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 17.49                 | 0.0561              | 24.00            | 0.2512         | Complies |
| 5290            | 17.43                 | 0.0553              | 24.00            | 0.2512         | Complies |
| 5530            | 16.43                 | 0.0439              | 24.00            | 0.2512         | Complies |
| 5610            | 16.44                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5775            | 17.48                 | 0.0560              | 30.00            | 1.0000         | Complies |

|           |                                      |             |           |
|-----------|--------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT160) _Main Antenna | Tested Date | 2023/2/18 |
|-----------|--------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 12.19                 | 0.0166              | 24.00            | 0.2512         | Complies |
| 5570            | 13.22                 | 0.0210              | 24.00            | 0.2512         | Complies |

|           |                                     |             |           |
|-----------|-------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT160) _Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 12.83                 | 0.0192              | 24.00            | 0.2512         | Complies |
| 5570            | 13.62                 | 0.0230              | 24.00            | 0.2512         | Complies |

|           |                               |             |           |
|-----------|-------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT160) _Total | Tested Date | 2023/2/18 |
|-----------|-------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 15.53                 | 0.0357              | 24.00            | 0.2512         | Complies |
| 5570            | 16.43                 | 0.0440              | 24.00            | 0.2512         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20) _Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.26                 | 0.0267              | 24.00            | 0.2512         | Complies |
| 5200            | 14.41                 | 0.0276              | 24.00            | 0.2512         | Complies |
| 5240            | 14.29                 | 0.0269              | 24.00            | 0.2512         | Complies |
| 5260            | 14.35                 | 0.0272              | 24.00            | 0.2512         | Complies |
| 5300            | 14.29                 | 0.0269              | 24.00            | 0.2512         | Complies |
| 5320            | 14.23                 | 0.0265              | 24.00            | 0.2512         | Complies |
| 5500            | 13.41                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5580            | 13.29                 | 0.0213              | 24.00            | 0.2512         | Complies |
| 5700            | 13.51                 | 0.0224              | 24.00            | 0.2512         | Complies |
| 5745            | 14.59                 | 0.0288              | 30.00            | 1.0000         | Complies |
| 5785            | 14.25                 | 0.0266              | 30.00            | 1.0000         | Complies |
| 5825            | 14.26                 | 0.0267              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20) _Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 14.61                 | 0.0289              | 24.00            | 0.2512         | Complies |
| 5200            | 14.50                 | 0.0282              | 24.00            | 0.2512         | Complies |
| 5240            | 14.57                 | 0.0286              | 24.00            | 0.2512         | Complies |
| 5260            | 14.58                 | 0.0287              | 24.00            | 0.2512         | Complies |
| 5300            | 14.67                 | 0.0293              | 24.00            | 0.2512         | Complies |
| 5320            | 14.64                 | 0.0291              | 24.00            | 0.2512         | Complies |
| 5500            | 13.53                 | 0.0225              | 24.00            | 0.2512         | Complies |
| 5580            | 13.57                 | 0.0228              | 24.00            | 0.2512         | Complies |
| 5700            | 13.29                 | 0.0213              | 24.00            | 0.2512         | Complies |
| 5745            | 14.31                 | 0.0270              | 30.00            | 1.0000         | Complies |
| 5785            | 14.37                 | 0.0274              | 30.00            | 1.0000         | Complies |
| 5825            | 14.37                 | 0.0274              | 30.00            | 1.0000         | Complies |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5180            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5200            | 17.47                 | 0.0558              | 24.00            | 0.2512         | Complies |
| 5240            | 17.44                 | 0.0555              | 24.00            | 0.2512         | Complies |
| 5260            | 17.48                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5300            | 17.49                 | 0.0562              | 24.00            | 0.2512         | Complies |
| 5320            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5500            | 16.48                 | 0.0445              | 24.00            | 0.2512         | Complies |
| 5580            | 16.44                 | 0.0441              | 24.00            | 0.2512         | Complies |
| 5700            | 16.41                 | 0.0438              | 24.00            | 0.2512         | Complies |
| 5745            | 17.46                 | 0.0558              | 30.00            | 1.0000         | Complies |
| 5785            | 17.32                 | 0.0540              | 30.00            | 1.0000         | Complies |
| 5825            | 17.33                 | 0.0540              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40) _Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.21                 | 0.0264              | 24.00            | 0.2512         | Complies |
| 5230            | 14.20                 | 0.0263              | 24.00            | 0.2512         | Complies |
| 5270            | 14.21                 | 0.0264              | 24.00            | 0.2512         | Complies |
| 5310            | 14.06                 | 0.0255              | 24.00            | 0.2512         | Complies |
| 5510            | 13.20                 | 0.0209              | 24.00            | 0.2512         | Complies |
| 5550            | 13.30                 | 0.0214              | 24.00            | 0.2512         | Complies |
| 5670            | 13.36                 | 0.0217              | 24.00            | 0.2512         | Complies |
| 5755            | 14.29                 | 0.0269              | 30.00            | 1.0000         | Complies |
| 5795            | 14.21                 | 0.0264              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 14.72                 | 0.0296              | 24.00            | 0.2512         | Complies |
| 5230            | 14.67                 | 0.0293              | 24.00            | 0.2512         | Complies |
| 5270            | 14.65                 | 0.0292              | 24.00            | 0.2512         | Complies |
| 5310            | 14.71                 | 0.0296              | 24.00            | 0.2512         | Complies |
| 5510            | 13.73                 | 0.0236              | 24.00            | 0.2512         | Complies |
| 5550            | 13.60                 | 0.0229              | 24.00            | 0.2512         | Complies |
| 5670            | 13.56                 | 0.0227              | 24.00            | 0.2512         | Complies |
| 5755            | 14.43                 | 0.0277              | 30.00            | 1.0000         | Complies |
| 5795            | 14.61                 | 0.0289              | 30.00            | 1.0000         | Complies |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5190            | 17.48                 | 0.0560              | 24.00            | 0.2512         | Complies |
| 5230            | 17.45                 | 0.0556              | 24.00            | 0.2512         | Complies |
| 5270            | 17.45                 | 0.0555              | 24.00            | 0.2512         | Complies |
| 5310            | 17.41                 | 0.0550              | 24.00            | 0.2512         | Complies |
| 5510            | 16.48                 | 0.0445              | 24.00            | 0.2512         | Complies |
| 5550            | 16.46                 | 0.0443              | 24.00            | 0.2512         | Complies |
| 5670            | 16.47                 | 0.0444              | 24.00            | 0.2512         | Complies |
| 5755            | 17.37                 | 0.0546              | 30.00            | 1.0000         | Complies |
| 5795            | 17.42                 | 0.0553              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 14.34                 | 0.0272              | 24.00            | 0.2512         | Complies |
| 5290            | 14.19                 | 0.0262              | 24.00            | 0.2512         | Complies |
| 5530            | 13.25                 | 0.0211              | 24.00            | 0.2512         | Complies |
| 5610            | 13.28                 | 0.0213              | 24.00            | 0.2512         | Complies |
| 5775            | 14.25                 | 0.0266              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 14.59                 | 0.0288              | 24.00            | 0.2512         | Complies |
| 5290            | 14.73                 | 0.0297              | 24.00            | 0.2512         | Complies |
| 5530            | 13.55                 | 0.0226              | 24.00            | 0.2512         | Complies |
| 5610            | 13.56                 | 0.0227              | 24.00            | 0.2512         | Complies |
| 5775            | 14.56                 | 0.0286              | 30.00            | 1.0000         | Complies |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5210            | 17.48                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5290            | 17.48                 | 0.0560              | 24.00            | 0.2512         | Complies |
| 5530            | 16.41                 | 0.0438              | 24.00            | 0.2512         | Complies |
| 5610            | 16.43                 | 0.0440              | 24.00            | 0.2512         | Complies |
| 5775            | 17.42                 | 0.0552              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE160)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 14.35                 | 0.0272              | 24.00            | 0.2512         | Complies |
| 5570            | 13.19                 | 0.0208              | 24.00            | 0.2512         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE160)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 14.57                 | 0.0286              | 24.00            | 0.2512         | Complies |
| 5570            | 13.63                 | 0.0231              | 24.00            | 0.2512         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE160)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5250            | 17.47                 | 0.0559              | 24.00            | 0.2512         | Complies |
| 5570            | 16.43                 | 0.0439              | 24.00            | 0.2512         | Complies |

## For Straddle Channel:

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.34                 | 0.0216              | 24.00            | 0.2512         | Complies |
| 5720            | -0.03                 | 0.0010              | 30.00            | 1.0000         | Complies |

|           |                                 |             |           |
|-----------|---------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|---------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.42                 | 0.0220              | 24.00            | 0.2512         | Complies |
| 5720            | 3.15                  | 0.0021              | 30.00            | 1.0000         | Complies |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Total | Tested Date | 2023/2/18 |
|-----------|---------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 16.39                 | 0.0436              | 24.00            | 0.2512         | Complies |
| 5720            | 4.86                  | 0.0031              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.18                 | 0.0208              | 24.00            | 0.2512         | Complies |
| 5710            | 0.36                  | 0.0011              | 30.00            | 1.0000         | Complies |

|           |                                 |             |           |
|-----------|---------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|---------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.51                 | 0.0224              | 24.00            | 0.2512         | Complies |
| 5710            | 3.53                  | 0.0023              | 30.00            | 1.0000         | Complies |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Total | Tested Date | 2023/2/18 |
|-----------|---------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 16.36                 | 0.0432              | 24.00            | 0.2512         | Complies |
| 5710            | 5.24                  | 0.0033              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.32                 | 0.0215              | 24.00            | 0.2512         | Complies |
| 5720            | -0.11                 | 0.0010              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.40                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5720            | 3.01                  | 0.0020              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 16.37                 | 0.0434              | 24.00            | 0.2512         | Complies |
| 5720            | 4.73                  | 0.0030              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.20                 | 0.0209              | 24.00            | 0.2512         | Complies |
| 5710            | 0.16                  | 0.0010              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.44                 | 0.0221              | 24.00            | 0.2512         | Complies |
| 5710            | 3.41                  | 0.0022              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 16.33                 | 0.0430              | 24.00            | 0.2512         | Complies |
| 5710            | 5.09                  | 0.0032              | 30.00            | 1.0000         | Complies |

|           |                                    |             |           |
|-----------|------------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|------------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 13.40                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5690            | -3.25                 | 0.0005              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 13.57                 | 0.0228              | 24.00            | 0.2512         | Complies |
| 5690            | -2.55                 | 0.0006              | 30.00            | 1.0000         | Complies |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Total | Tested Date | 2023/2/18 |
|-----------|-----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 16.50                 | 0.0446              | 24.00            | 0.2512         | Complies |
| 5690            | 0.12                  | 0.0010              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.40                 | 0.0219              | 24.00            | 0.2512         | Complies |
| 5720            | 1.67                  | 0.0015              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 13.42                 | 0.0220              | 24.00            | 0.2512         | Complies |
| 5720            | 2.38                  | 0.0017              | 30.00            | 1.0000         | Complies |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5720            | 16.42                 | 0.0439              | 24.00            | 0.2512         | Complies |
| 5720            | 5.05                  | 0.0032              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.19                 | 0.0208              | 24.00            | 0.2512         | Complies |
| 5710            | 1.16                  | 0.0013              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 13.64                 | 0.0231              | 24.00            | 0.2512         | Complies |
| 5710            | 4.41                  | 0.0028              | 30.00            | 1.0000         | Complies |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5710            | 16.43                 | 0.0440              | 24.00            | 0.2512         | Complies |
| 5710            | 6.09                  | 0.0041              | 30.00            | 1.0000         | Complies |

|           |                                   |             |           |
|-----------|-----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Main Antenna | Tested Date | 2023/2/18 |
|-----------|-----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 13.34                 | 0.0216              | 24.00            | 0.2512         | Complies |
| 5690            | -2.53                 | 0.0006              | 30.00            | 1.0000         | Complies |

|           |                                  |             |           |
|-----------|----------------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna | Tested Date | 2023/2/18 |
|-----------|----------------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 13.61                 | 0.0230              | 24.00            | 0.2512         | Complies |
| 5690            | -1.87                 | 0.0007              | 30.00            | 1.0000         | Complies |





|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Total | Tested Date | 2023/2/18 |
|-----------|----------------------------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result   |
|-----------------|-----------------------|---------------------|------------------|----------------|----------|
| 5690            | 16.49                 | 0.0445              | 24.00            | 0.2512         | Complies |
| 5690            | 0.82                  | 0.0012              | 30.00            | 1.0000         | Complies |





## APPENDIX F POWER SPECTRAL DENSITY

|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11a_Main Antenna |
|-----------|---------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 6.59                    | 0.08             | 6.67                               | 17.00                   | Pass   |
| 5200                 | 6.67                    | 0.08             | 6.75                               | 17.00                   | Pass   |
| 5240                 | 6.46                    | 0.08             | 6.54                               | 17.00                   | Pass   |

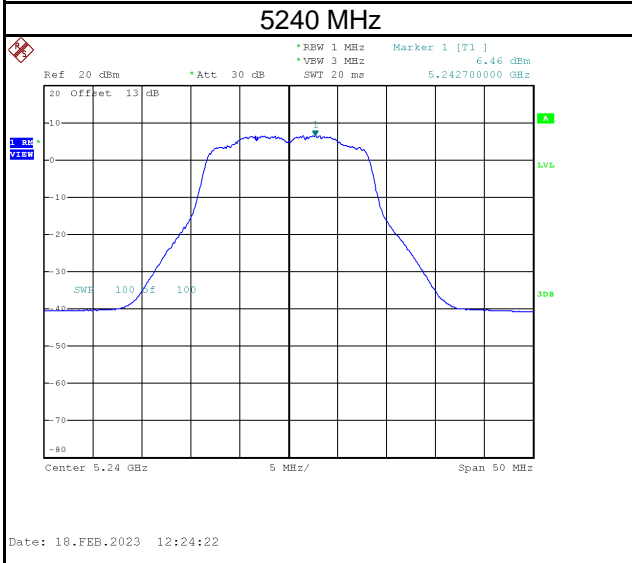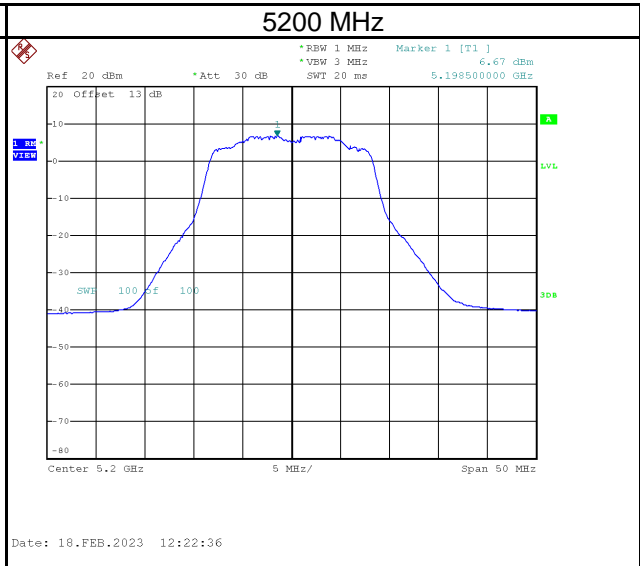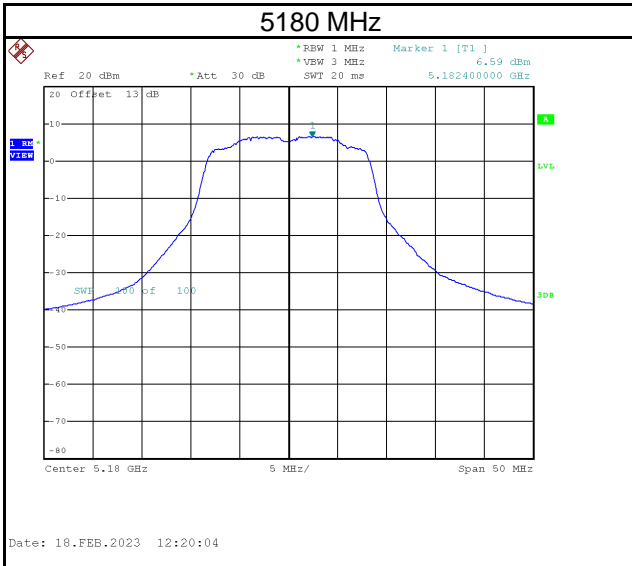

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 6.44                    | 0.08             | 6.52                               | 11.00                   | Pass   |
| 5300                 | 6.19                    | 0.08             | 6.27                               | 11.00                   | Pass   |
| 5320                 | 5.99                    | 0.08             | 6.07                               | 11.00                   | Pass   |

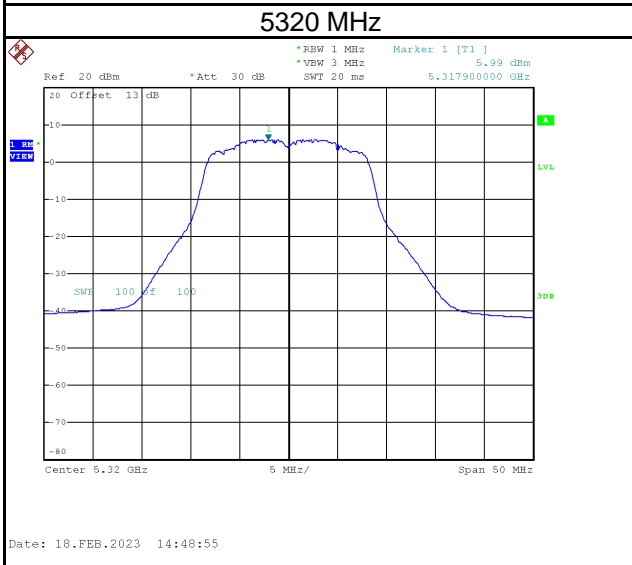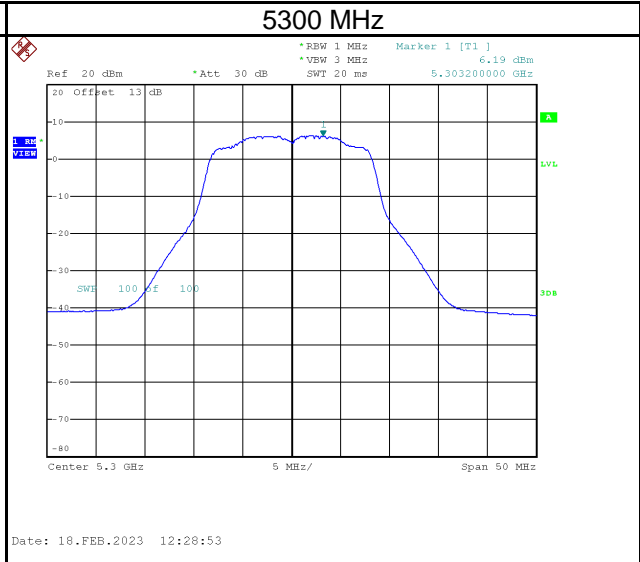
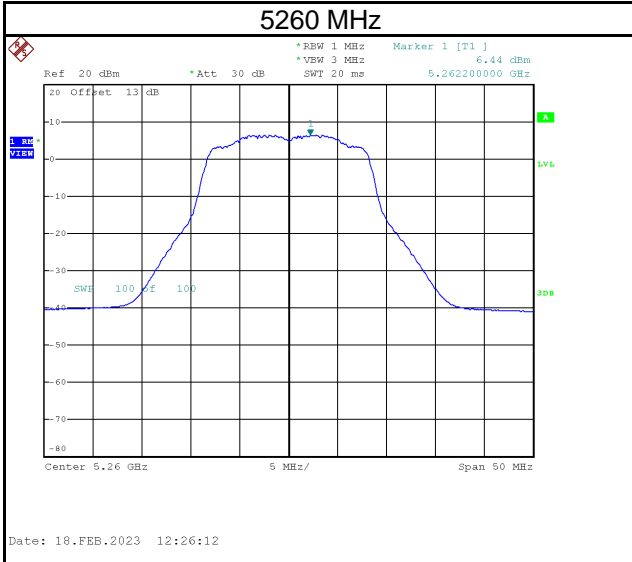


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 5.73                    | 0.08             | 5.81                               | 11.00                   | Pass   |
| 5580                 | 5.83                    | 0.08             | 5.91                               | 11.00                   | Pass   |
| 5700                 | 5.50                    | 0.08             | 5.58                               | 11.00                   | Pass   |

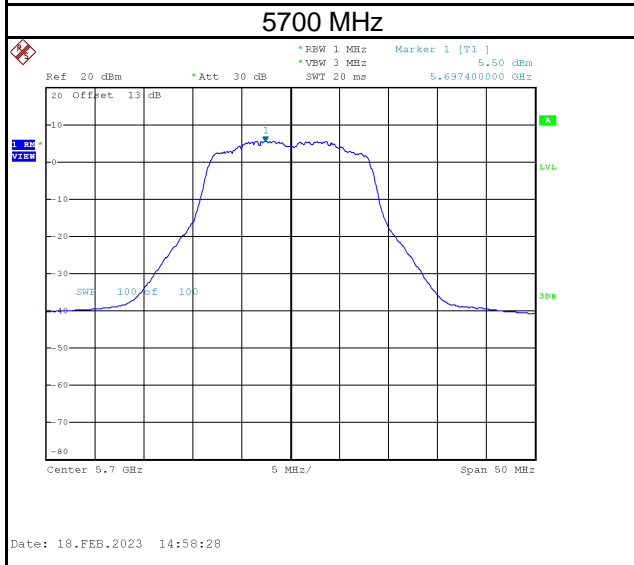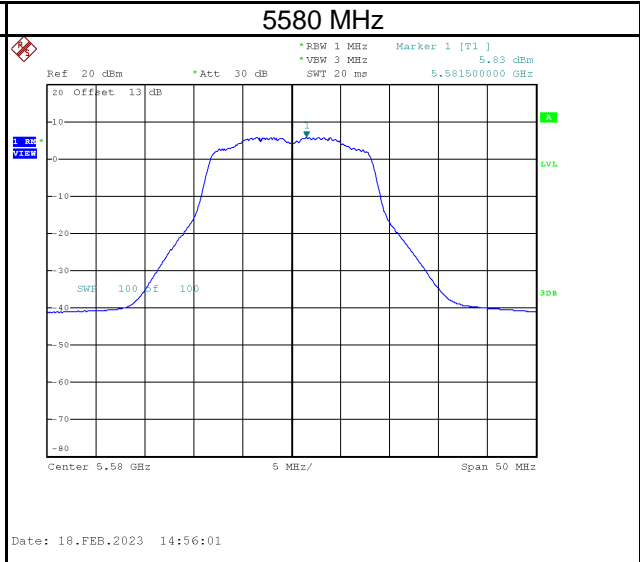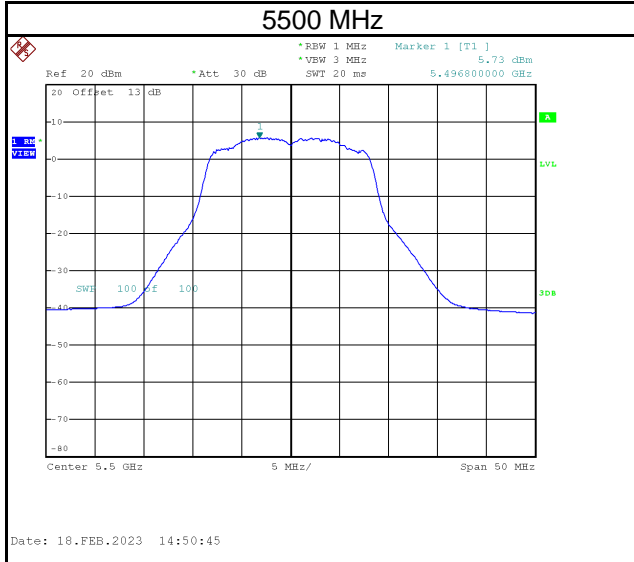





| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 4.25                        | 11.24                       | 0.08             | 11.32                                  | 30.00                       | Pass   |
| 5785                 | 3.99                        | 10.98                       | 0.08             | 11.06                                  | 30.00                       | Pass   |
| 5825                 | 3.81                        | 10.80                       | 0.08             | 10.88                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$



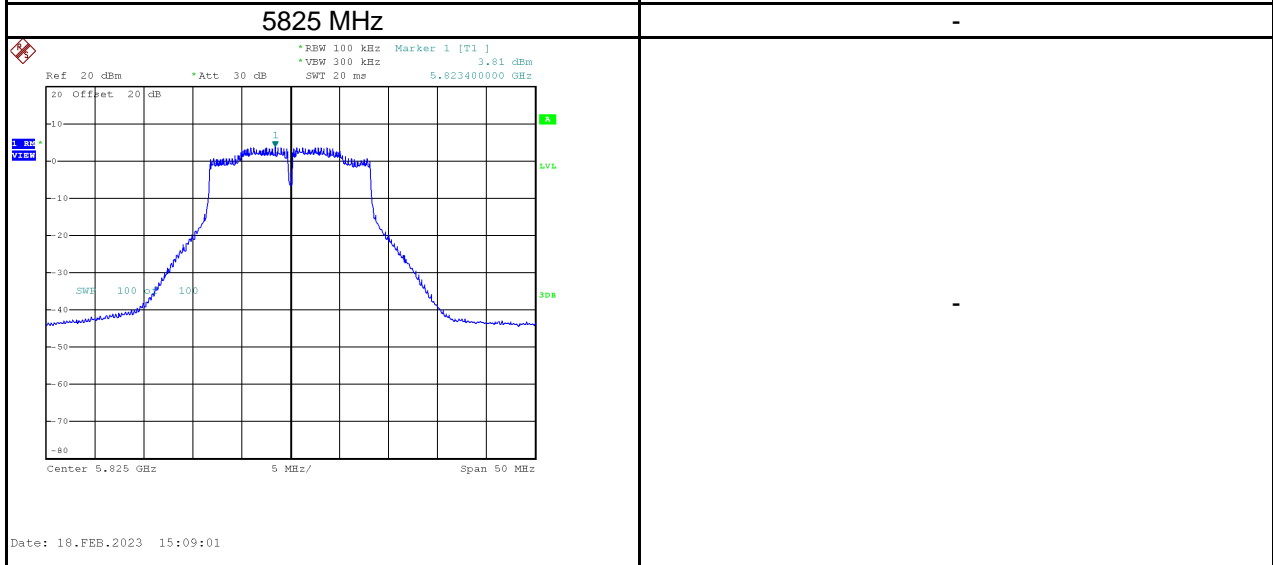
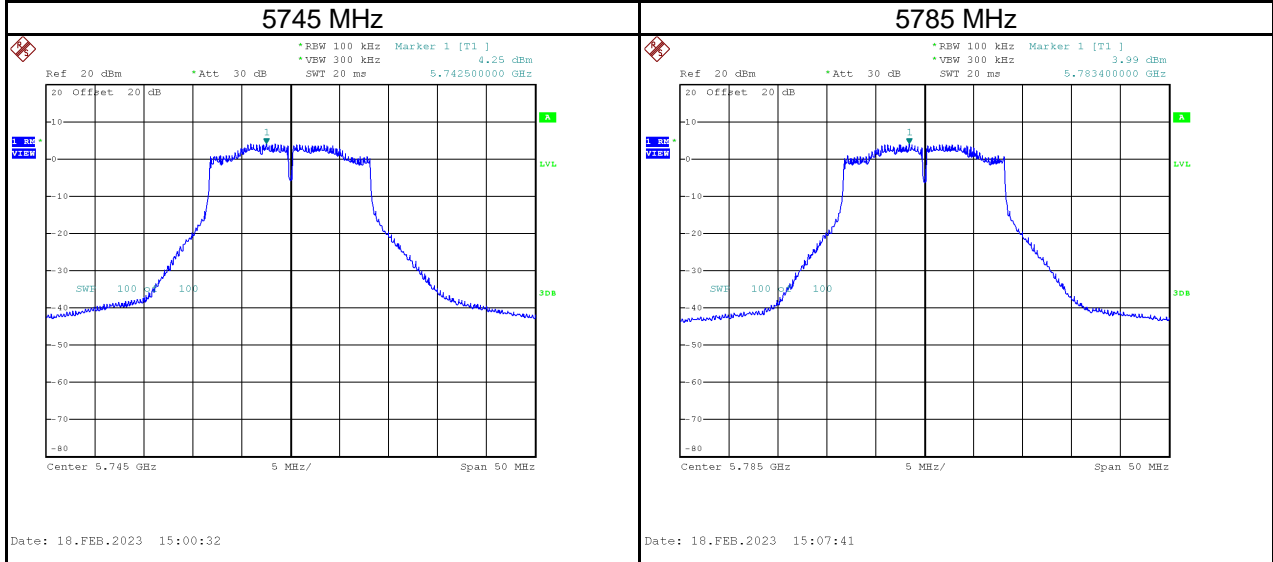


|           |                          |
|-----------|--------------------------|
| Test Mode | IEEE 802.11a_Aux Antenna |
|-----------|--------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 6.94                    | 0.08             | 7.02                               | 17.00                   | Pass   |
| 5200                 | 6.84                    | 0.08             | 6.92                               | 17.00                   | Pass   |
| 5240                 | 6.60                    | 0.08             | 6.68                               | 17.00                   | Pass   |

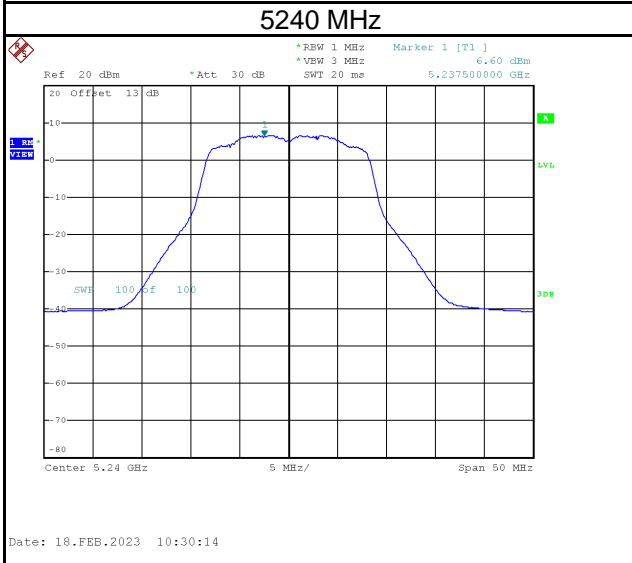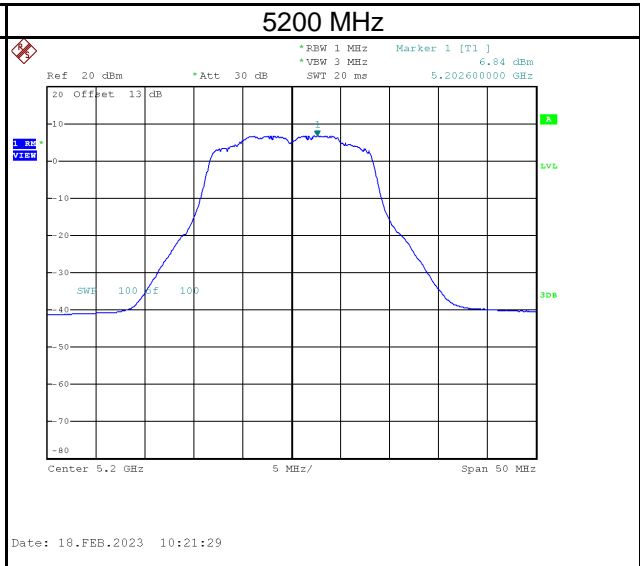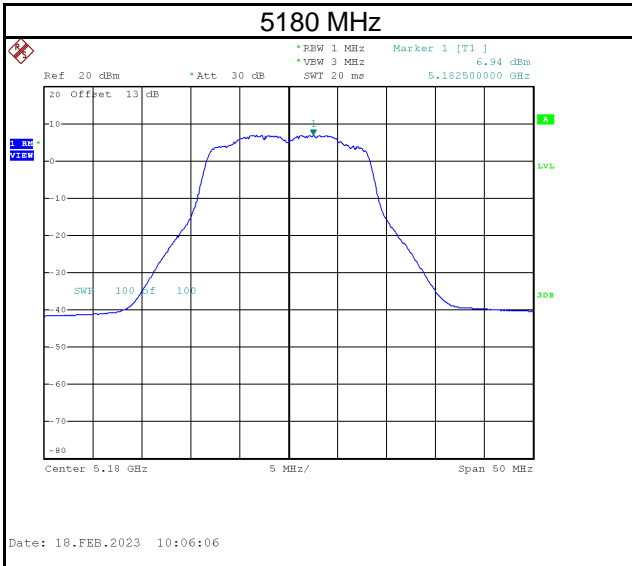

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 6.50                    | 0.08             | 6.58                               | 11.00                   | Pass   |
| 5300                 | 6.32                    | 0.08             | 6.40                               | 11.00                   | Pass   |
| 5320                 | 6.01                    | 0.08             | 6.09                               | 11.00                   | Pass   |


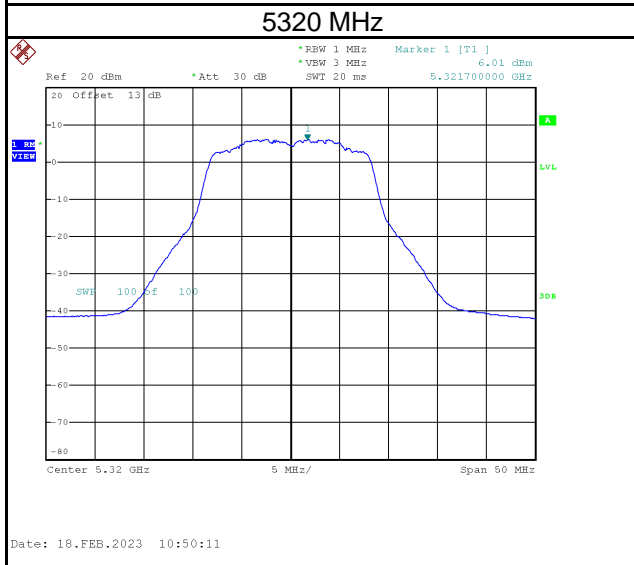
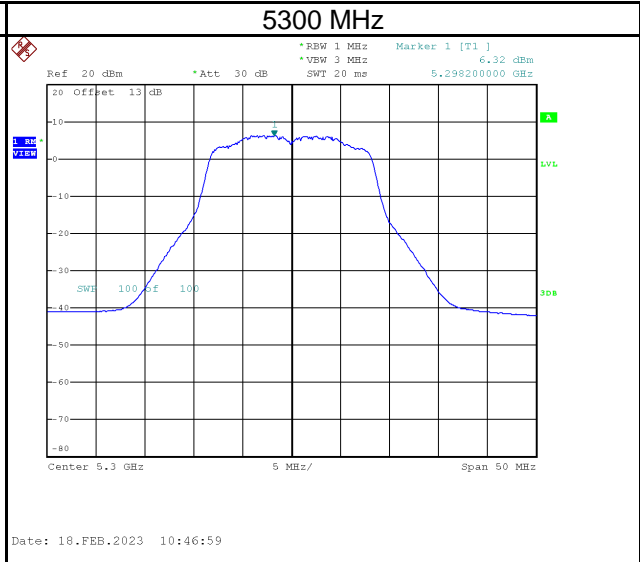
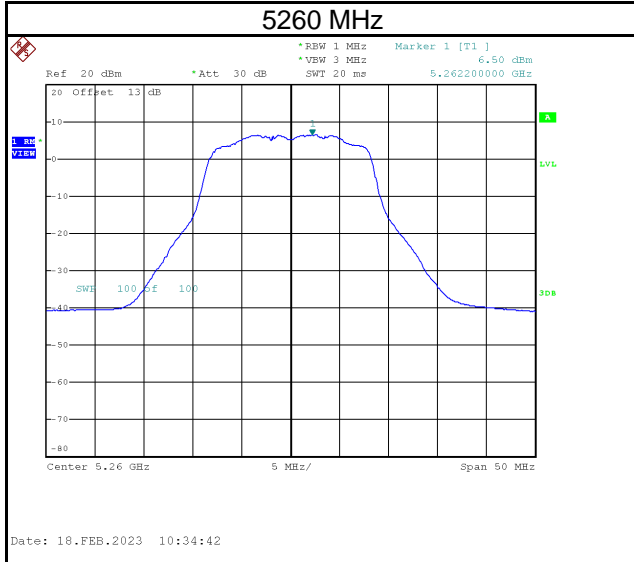


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 5.66                    | 0.08             | 5.74                               | 11.00                   | Pass   |
| 5580                 | 5.88                    | 0.08             | 5.96                               | 11.00                   | Pass   |
| 5700                 | 5.55                    | 0.08             | 5.63                               | 11.00                   | Pass   |

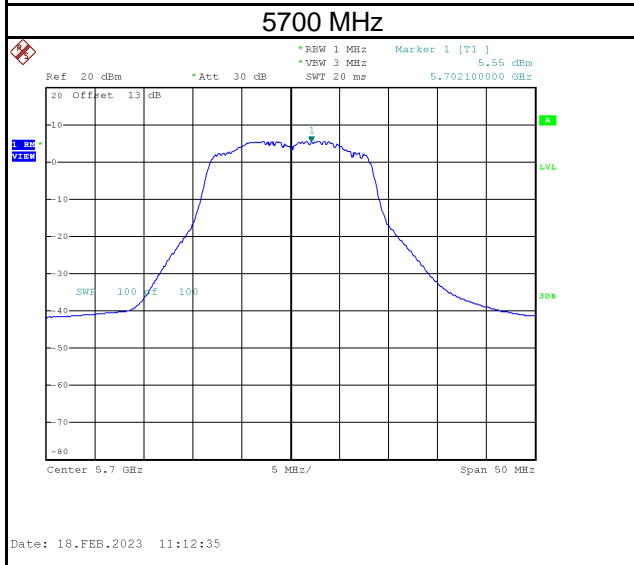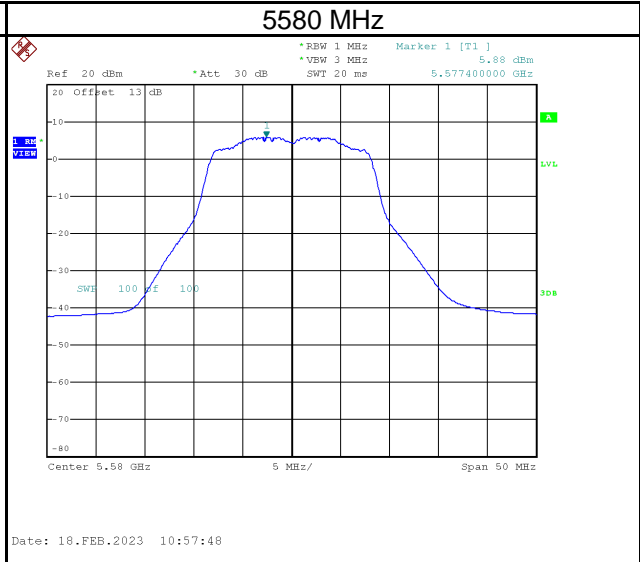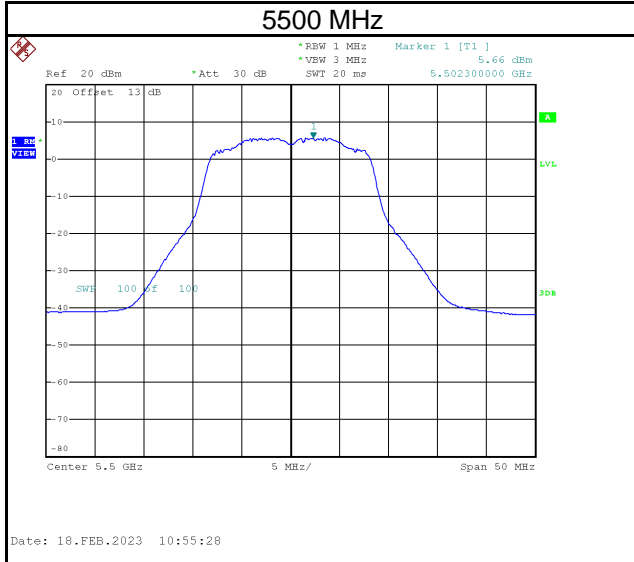





| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 3.92                        | 10.91                       | 0.08             | 10.99                                  | 30.00                       | Pass   |
| 5785                 | 4.01                        | 11.00                       | 0.08             | 11.08                                  | 30.00                       | Pass   |
| 5825                 | 3.81                        | 10.80                       | 0.08             | 10.88                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$


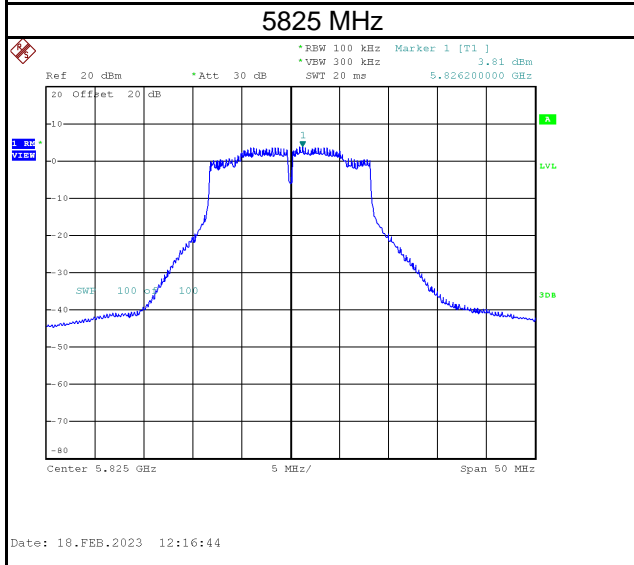
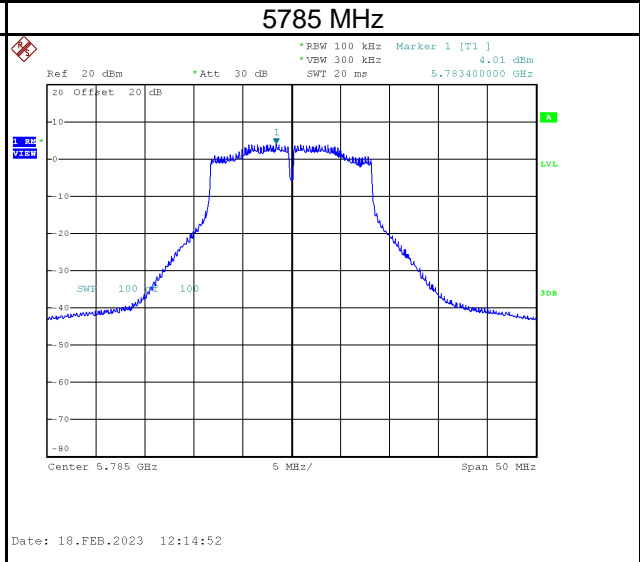
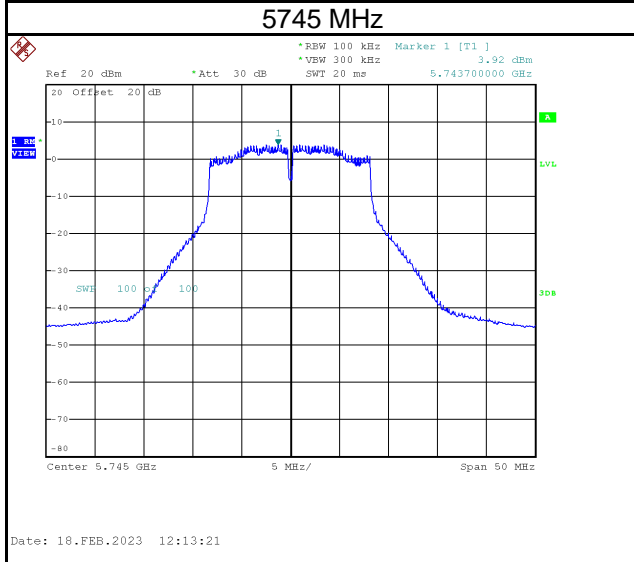


Test Mode | IEEE 802.11n (HT20)\_Main Antenna



| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 3.23                    | 0.09             | 3.32                               | 17.00                   | Pass   |
| 5200                 | 3.33                    | 0.09             | 3.42                               | 17.00                   | Pass   |
| 5240                 | 3.09                    | 0.09             | 3.18                               | 17.00                   | Pass   |

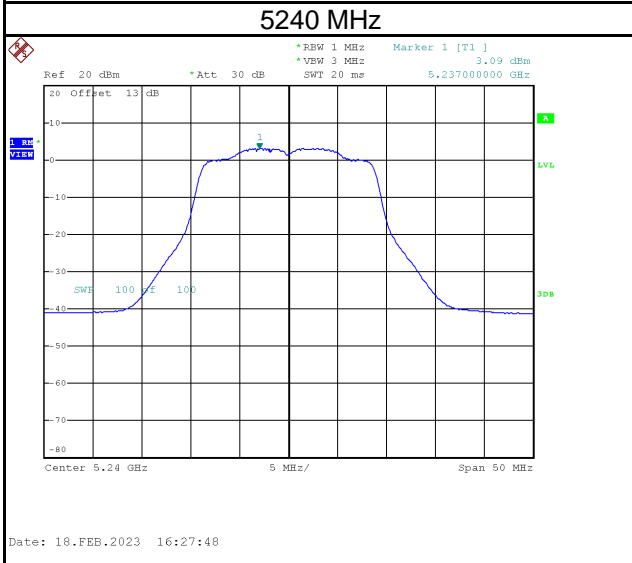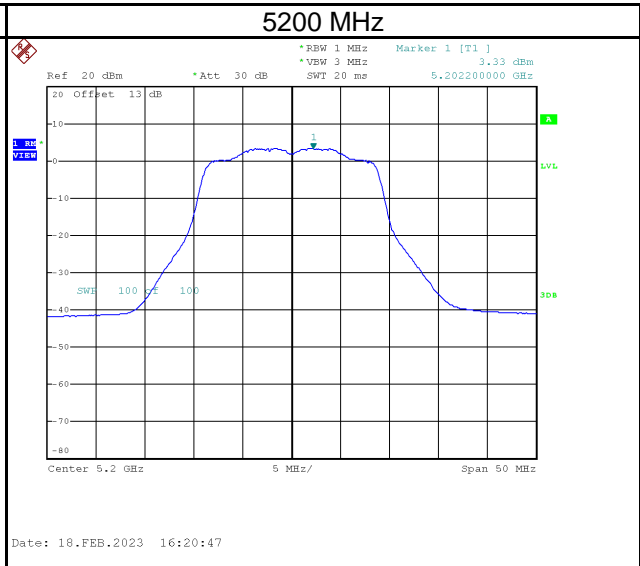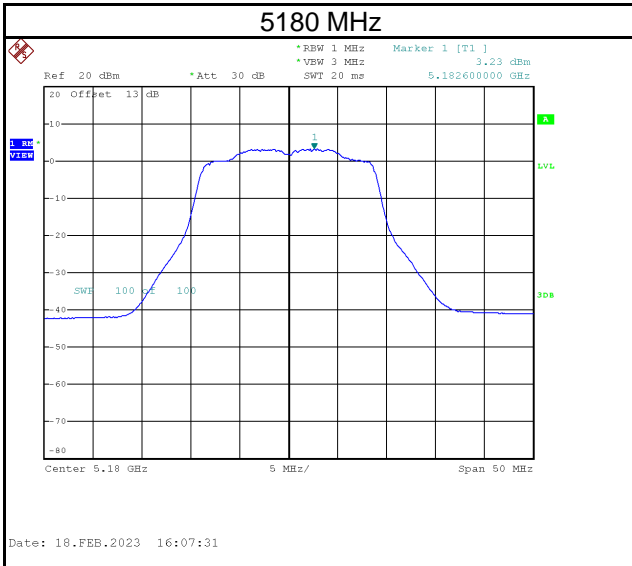

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 2.92                    | 0.09             | 3.01                               | 11.00                   | Pass   |
| 5300                 | 2.63                    | 0.09             | 2.72                               | 11.00                   | Pass   |
| 5320                 | 2.43                    | 0.09             | 2.52                               | 11.00                   | Pass   |

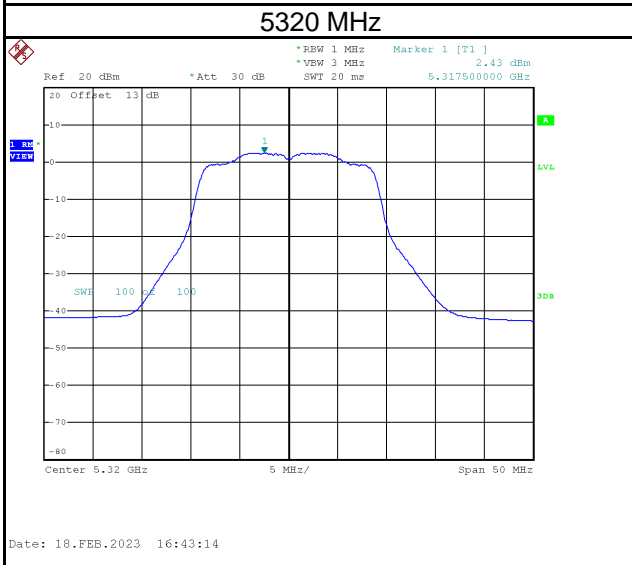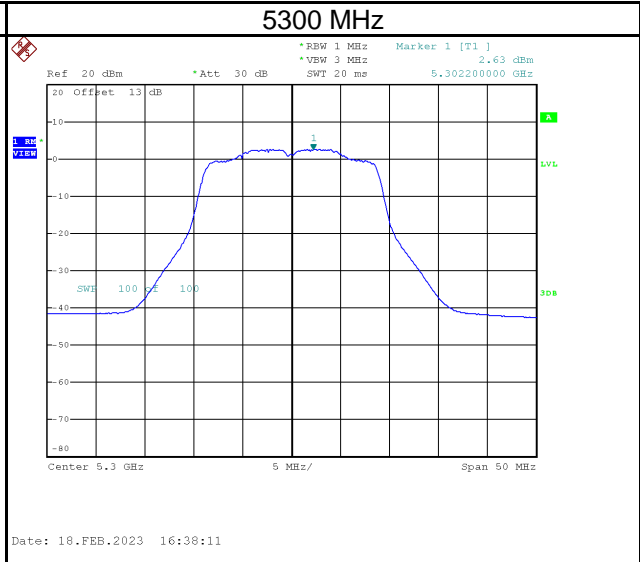
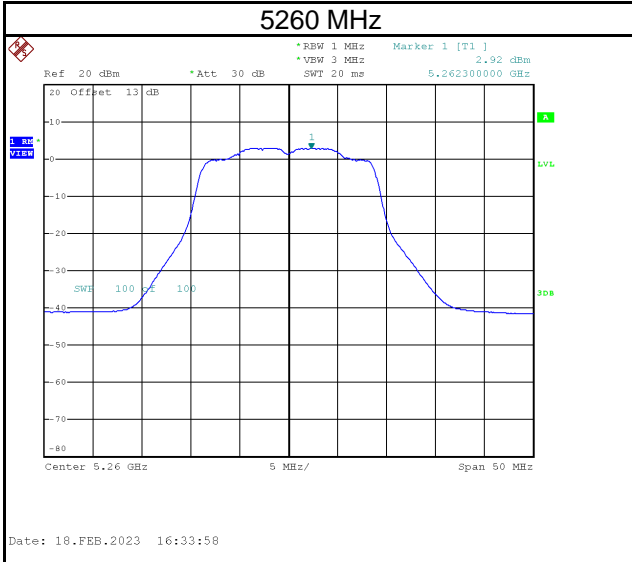


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 2.27                    | 0.09             | 2.36                               | 11.00                   | Pass   |
| 5580                 | 2.44                    | 0.09             | 2.53                               | 11.00                   | Pass   |
| 5700                 | 2.18                    | 0.09             | 2.27                               | 11.00                   | Pass   |

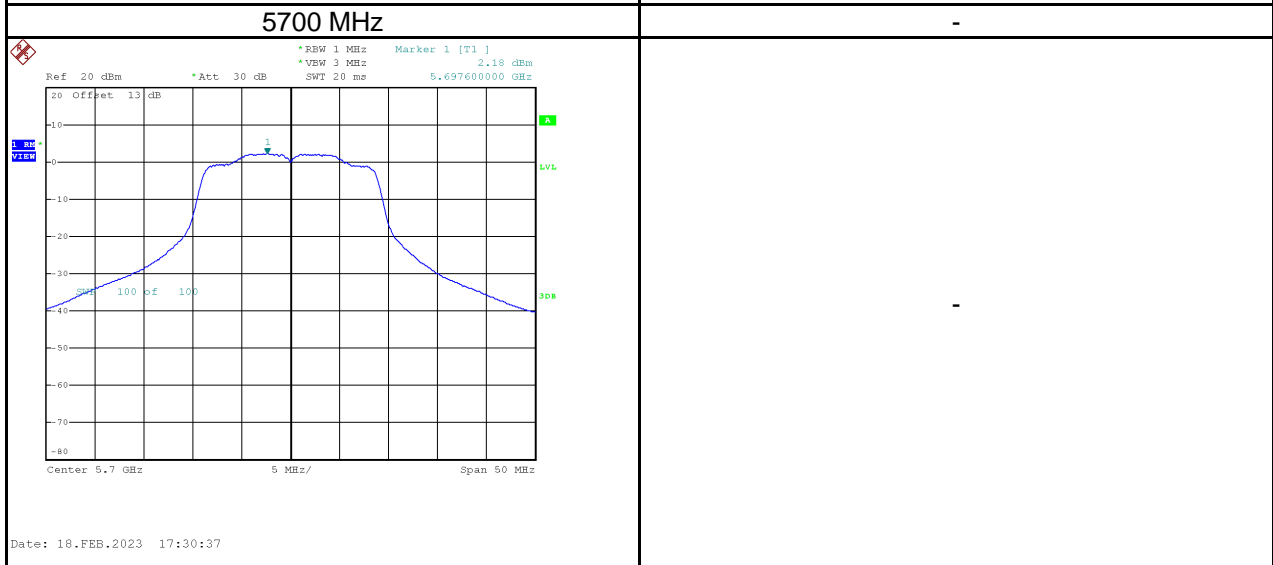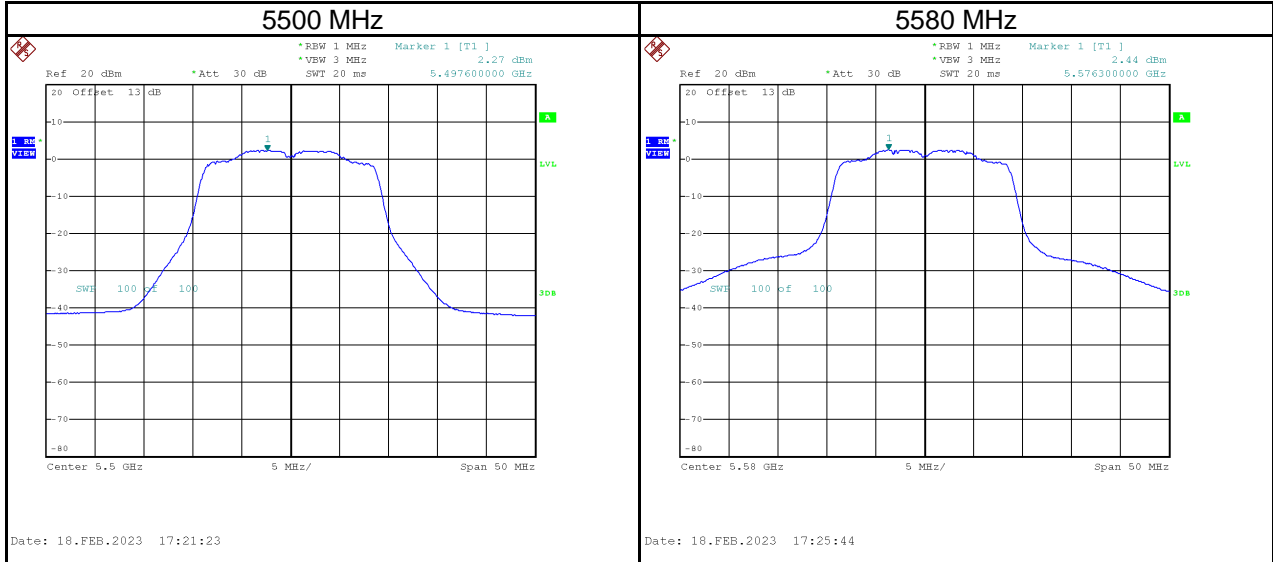





| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 0.88                        | 7.87                        | 0.09             | 7.96                                   | 30.00                       | Pass   |
| 5785                 | 0.47                        | 7.46                        | 0.09             | 7.55                                   | 30.00                       | Pass   |
| 5825                 | 0.44                        | 7.43                        | 0.09             | 7.52                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$



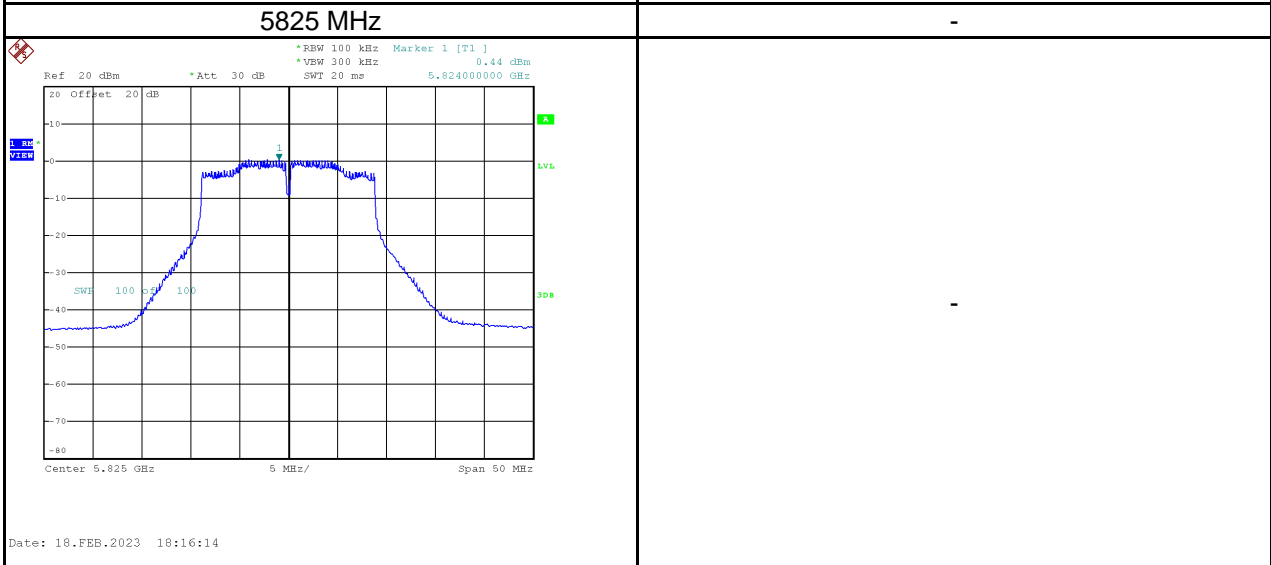
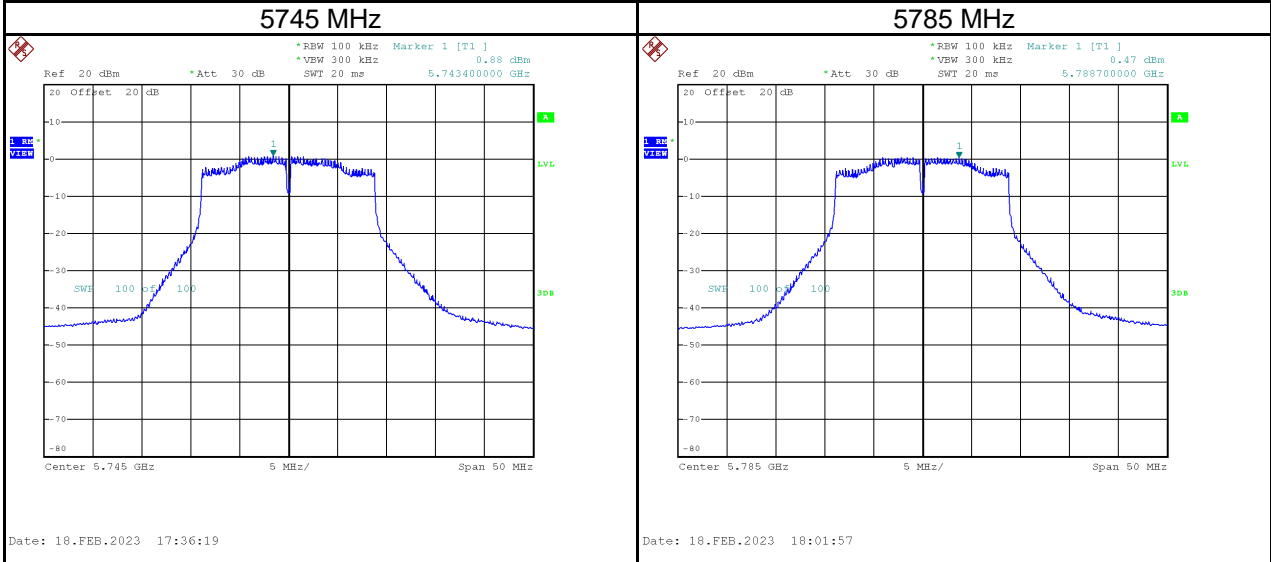


|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT20)_Aux Antenna |
|-----------|---------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 3.84                    | 0.09             | 3.93                               | 17.00                   | Pass   |
| 5200                 | 3.69                    | 0.09             | 3.78                               | 17.00                   | Pass   |
| 5240                 | 3.63                    | 0.09             | 3.72                               | 17.00                   | Pass   |

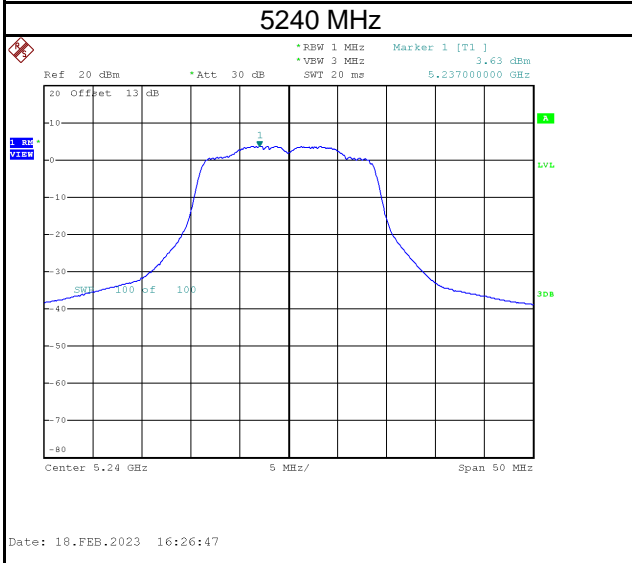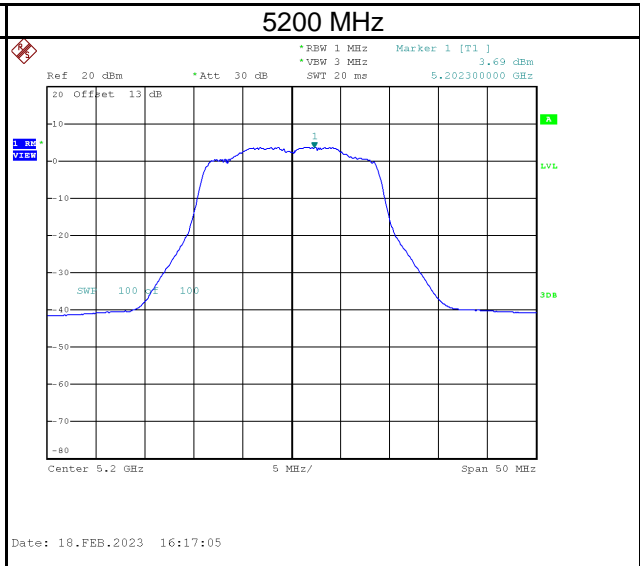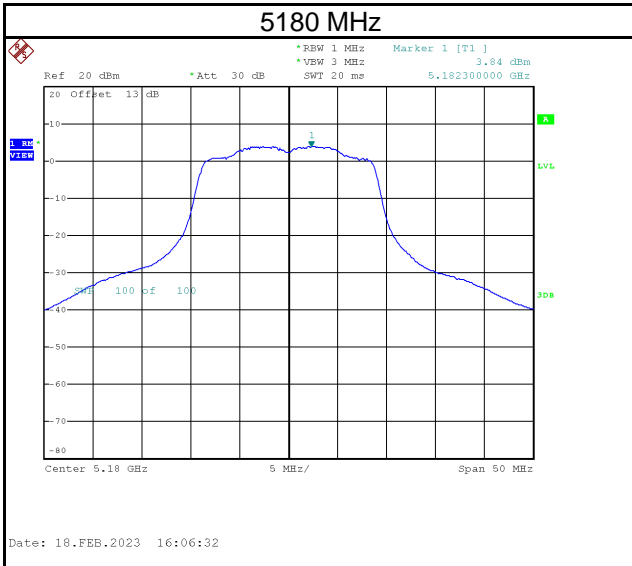

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 3.42                    | 0.09             | 3.51                               | 11.00                   | Pass   |
| 5300                 | 3.43                    | 0.09             | 3.52                               | 11.00                   | Pass   |
| 5320                 | 3.12                    | 0.09             | 3.21                               | 11.00                   | Pass   |

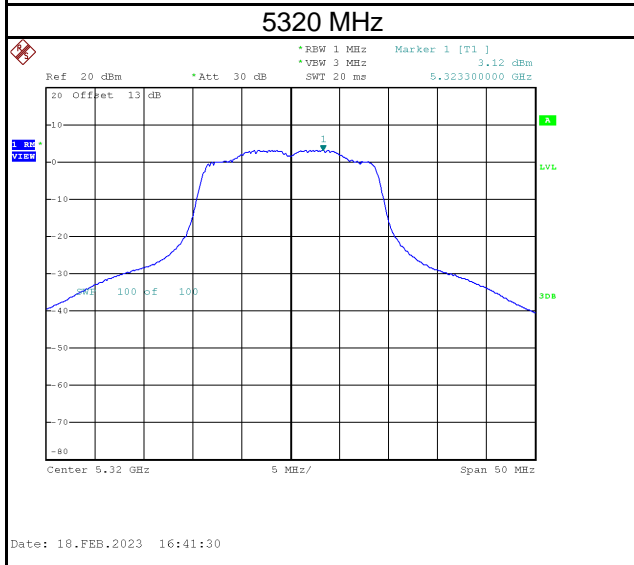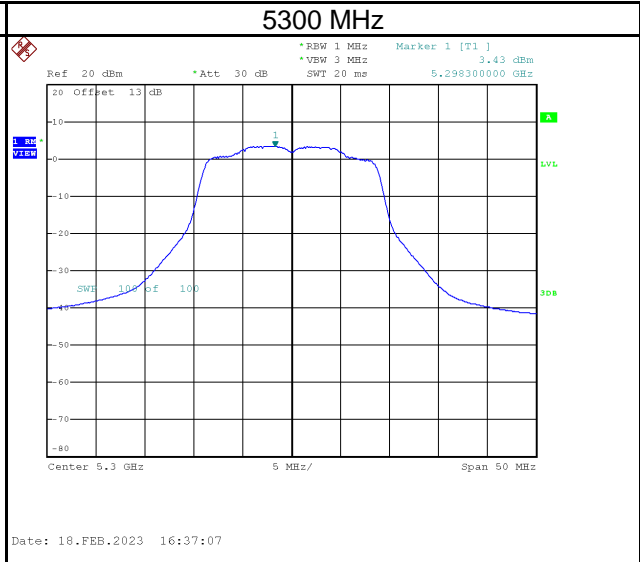
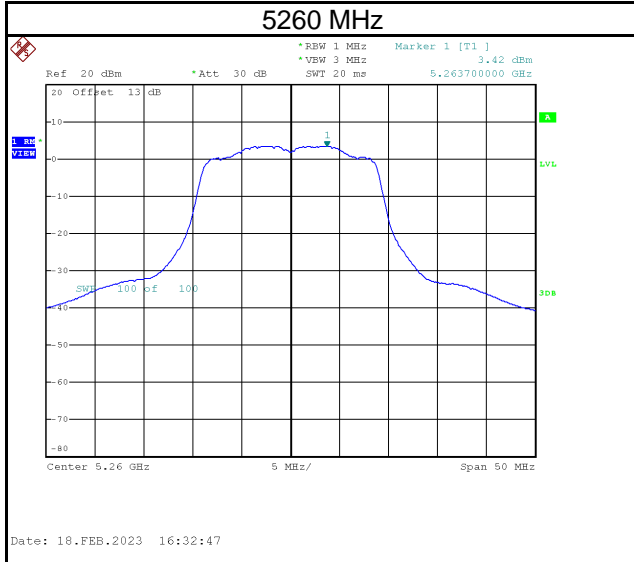


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 2.66                    | 0.09             | 2.75                               | 11.00                   | Pass   |
| 5580                 | 2.88                    | 0.09             | 2.97                               | 11.00                   | Pass   |
| 5700                 | 2.22                    | 0.09             | 2.31                               | 11.00                   | Pass   |

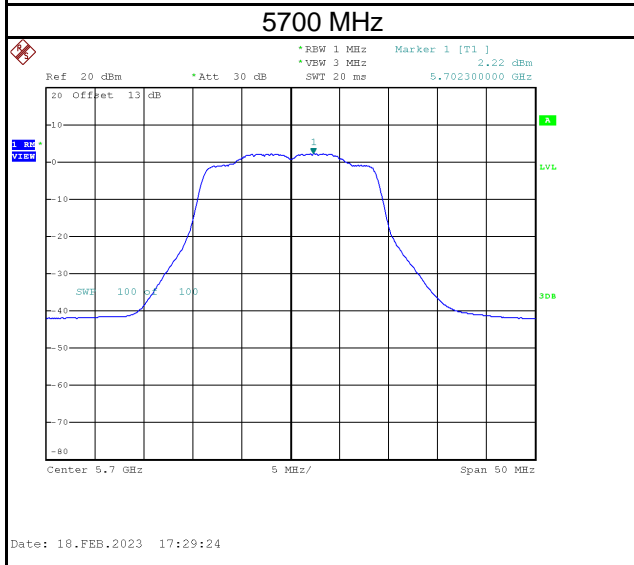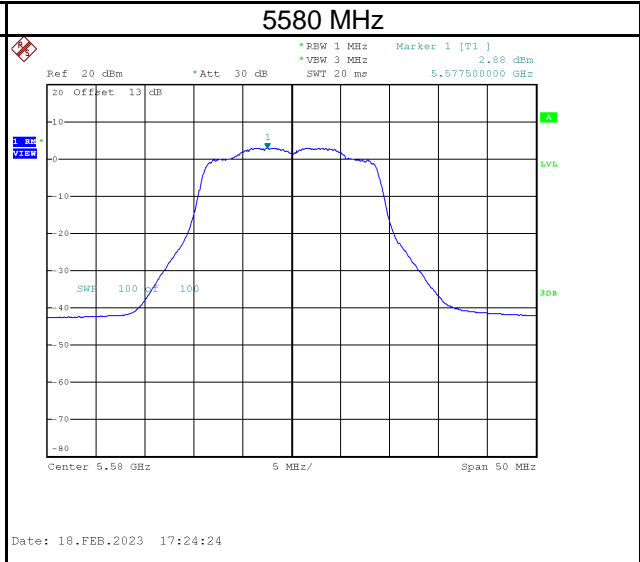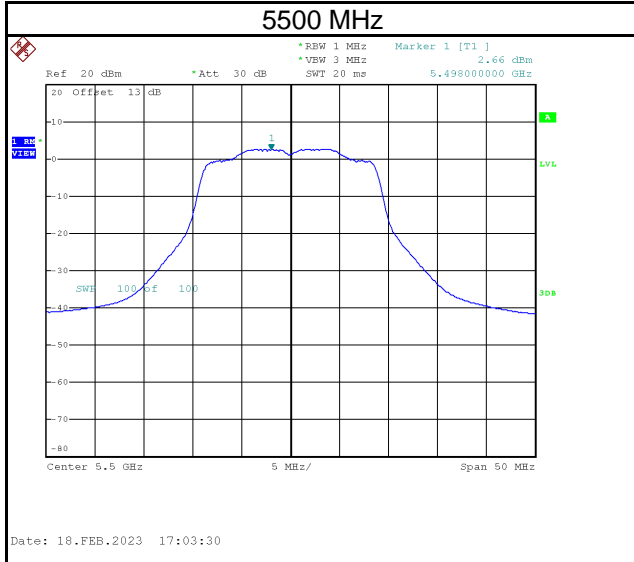

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 0.89                        | 7.88                        | 0.09             | 7.97                                   | 30.00                       | Pass   |
| 5785                 | 1.08                        | 8.07                        | 0.09             | 8.16                                   | 30.00                       | Pass   |
| 5825                 | 0.97                        | 7.96                        | 0.09             | 8.05                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

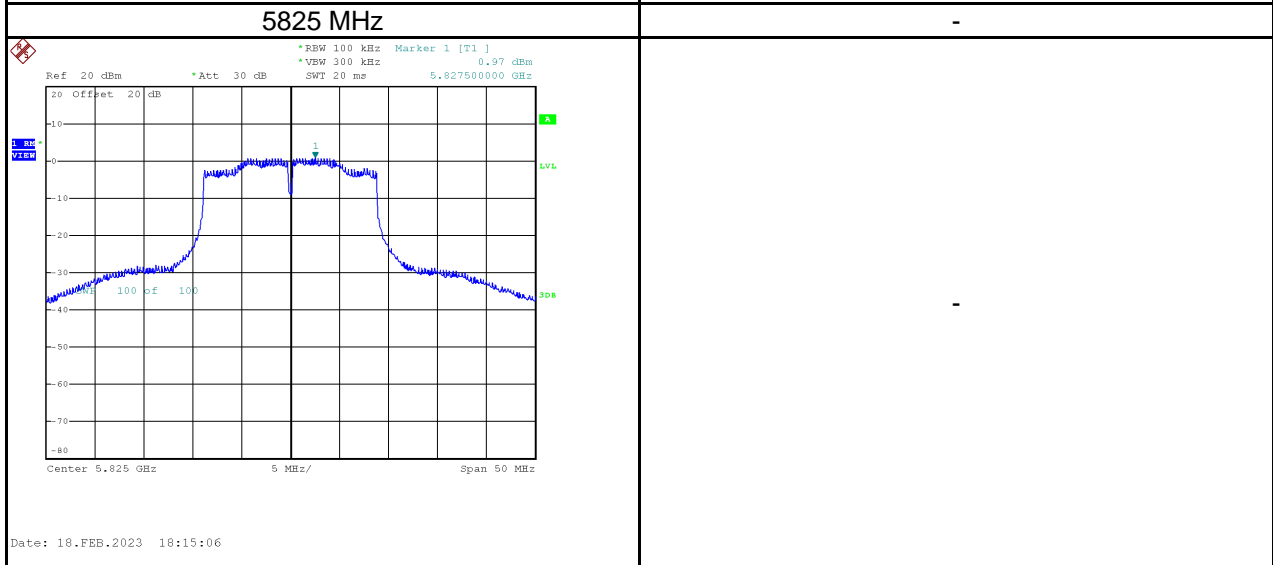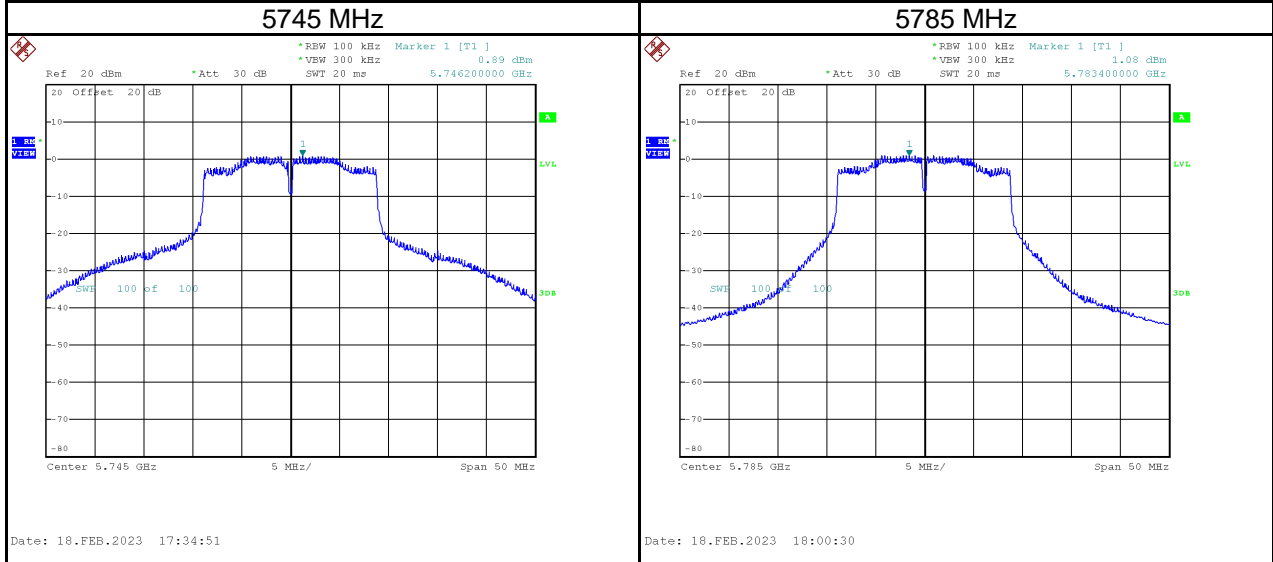

|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Total |
|-----------|---------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 6.56                    | 0.09             | 6.64                               | 17.00                   | Pass   |
| 5200                 | 6.52                    | 0.09             | 6.61                               | 17.00                   | Pass   |
| 5240                 | 6.38                    | 0.09             | 6.47                               | 17.00                   | Pass   |
| 5260                 | 6.19                    | 0.09             | 6.27                               | 11.00                   | Pass   |
| 5300                 | 6.06                    | 0.09             | 6.15                               | 11.00                   | Pass   |
| 5320                 | 5.80                    | 0.09             | 5.89                               | 11.00                   | Pass   |
| 5500                 | 5.48                    | 0.09             | 5.57                               | 11.00                   | Pass   |
| 5580                 | 5.68                    | 0.09             | 5.76                               | 11.00                   | Pass   |
| 5700                 | 5.21                    | 0.09             | 5.30                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 3.90                        | 10.89                       | 0.09             | 10.97                                  | 30.00                       | Pass   |
| 5785                 | 3.80                        | 10.79                       | 0.09             | 10.87                                  | 30.00                       | Pass   |
| 5825                 | 3.72                        | 10.71                       | 0.09             | 10.80                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11n (HT40)_Main Antenna |
|-----------|----------------------------------|



| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 0.02                    | 0.11             | 0.13                               | 17.00                   | Pass   |
| 5230                 | 0.84                    | 0.11             | 0.95                               | 17.00                   | Pass   |

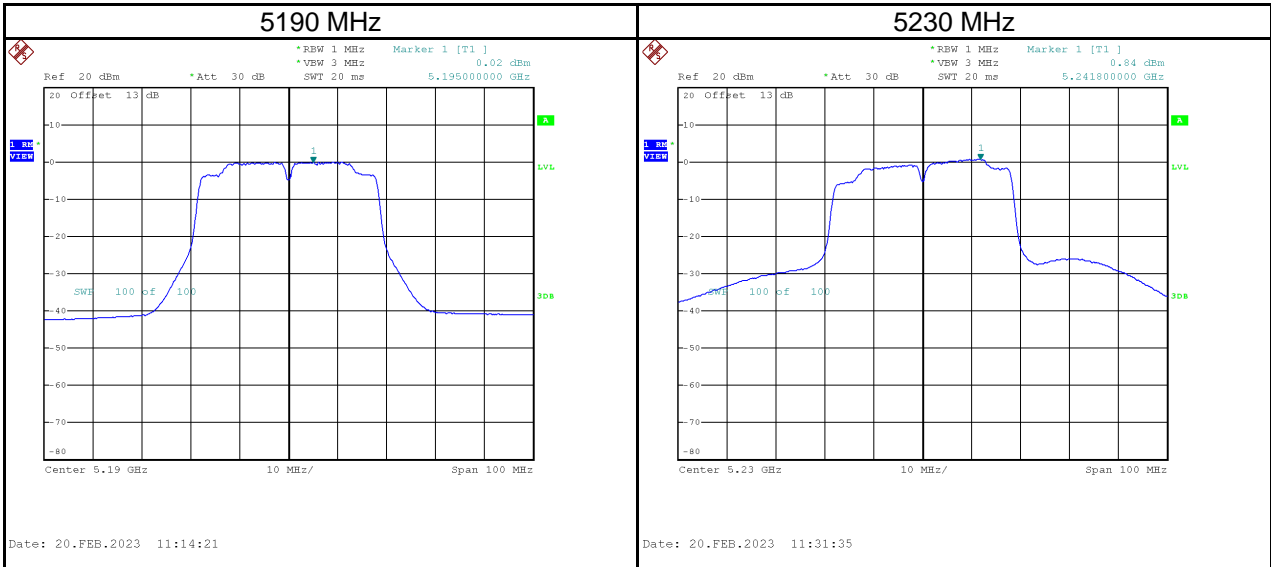

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5270                 | 0.73                    | 0.11             | 0.84                               | 11.00                   | Pass   |
| 5310                 | 0.59                    | 0.11             | 0.70                               | 11.00                   | Pass   |

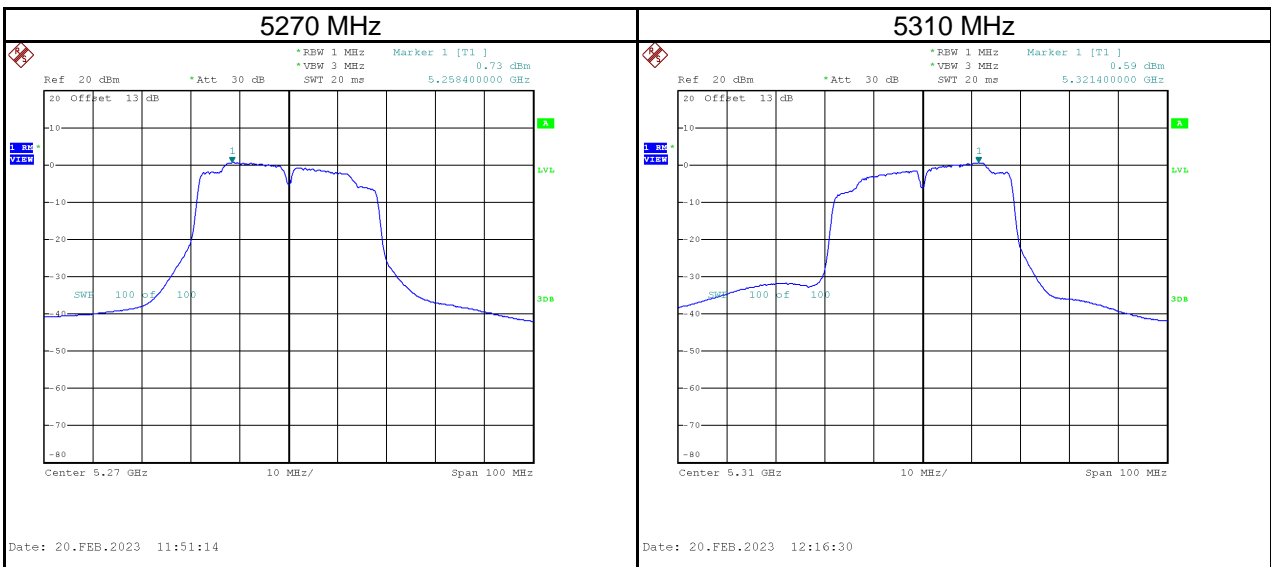


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5510                 | -1.09                   | 0.11             | -0.98                              | 11.00                   | Pass   |
| 5550                 | -0.78                   | 0.11             | -0.67                              | 11.00                   | Pass   |
| 5670                 | -1.02                   | 0.11             | -0.91                              | 11.00                   | Pass   |

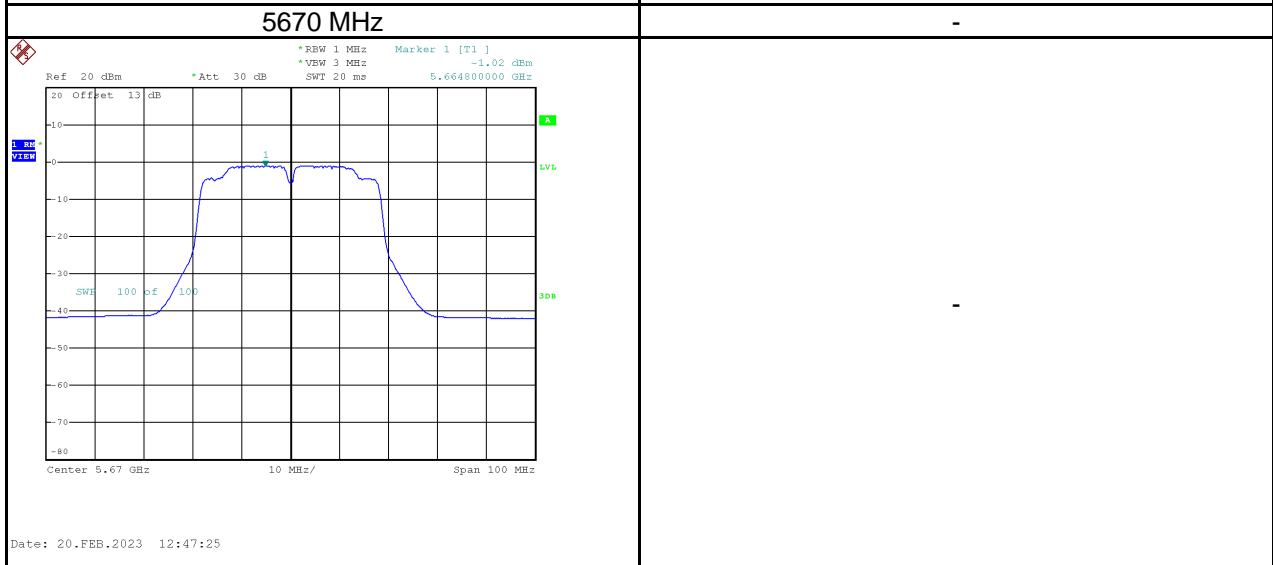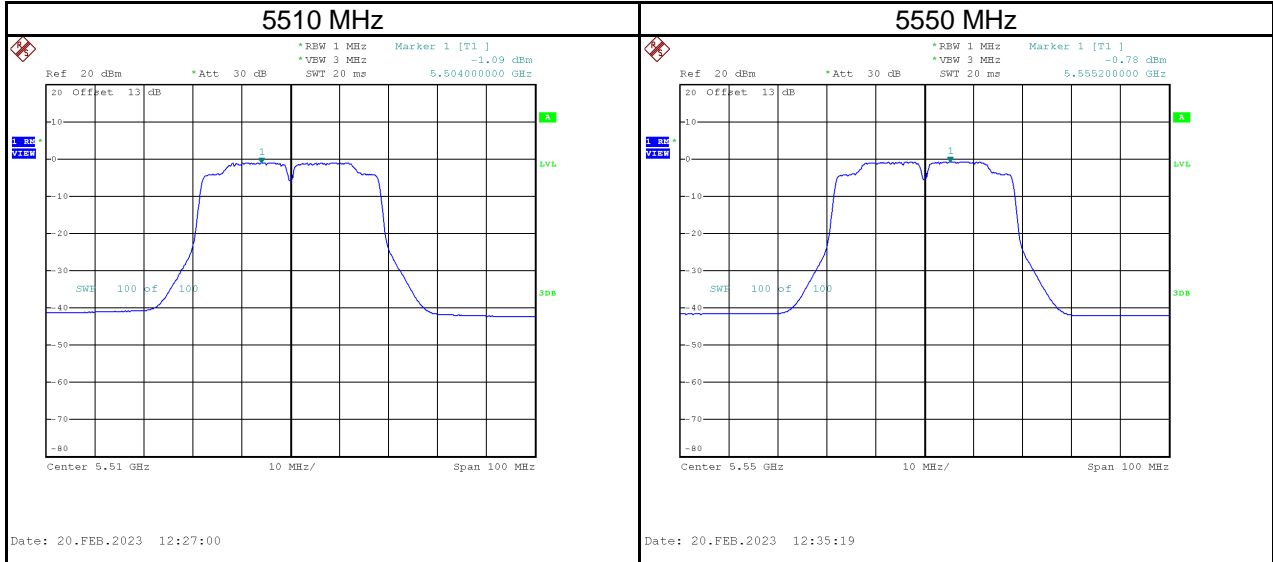


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | -2.08                       | 4.91                        | 0.11             | 5.02                                   | 30.00                       | Pass   |
| 5795                 | -3.03                       | 3.96                        | 0.11             | 4.07                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

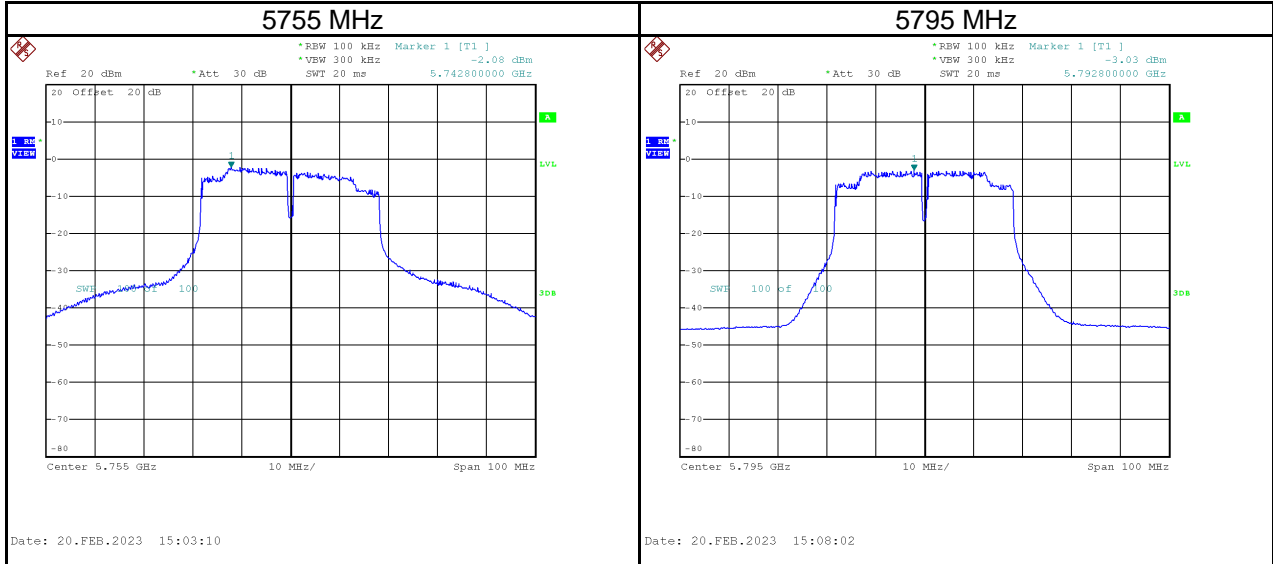


|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT40)_Aux Antenna |
|-----------|---------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 1.71                    | 0.11             | 1.82                               | 17.00                   | Pass   |
| 5230                 | 0.36                    | 0.11             | 0.47                               | 17.00                   | Pass   |

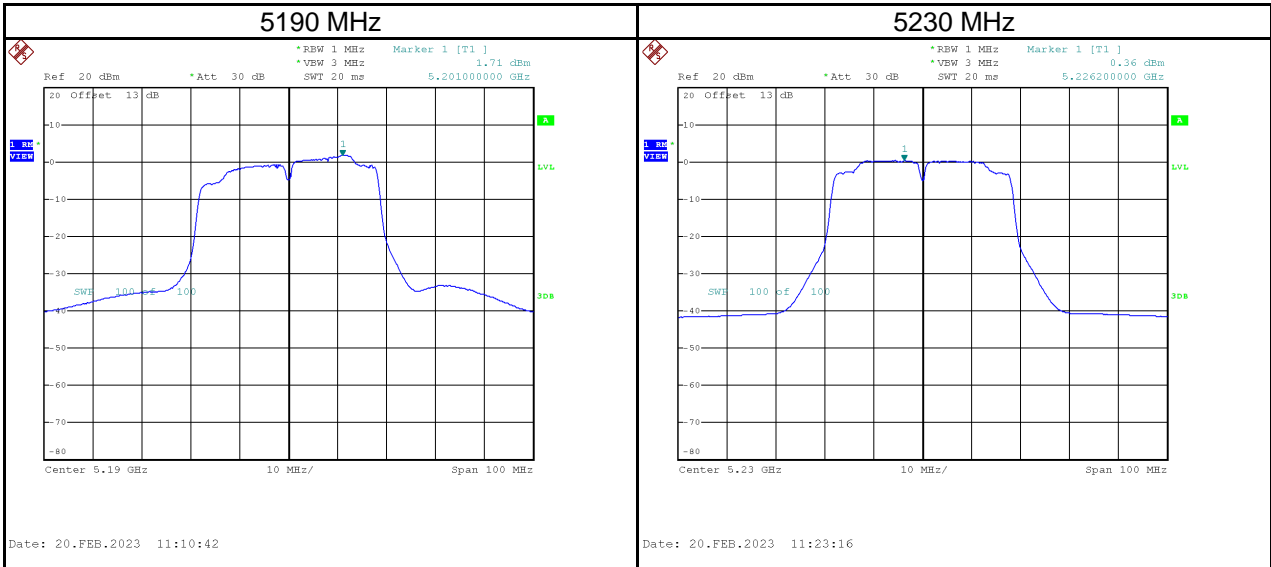

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5270                 | 0.21                    | 0.11             | 0.32                               | 11.00                   | Pass   |
| 5310                 | 0.02                    | 0.11             | 0.13                               | 11.00                   | Pass   |

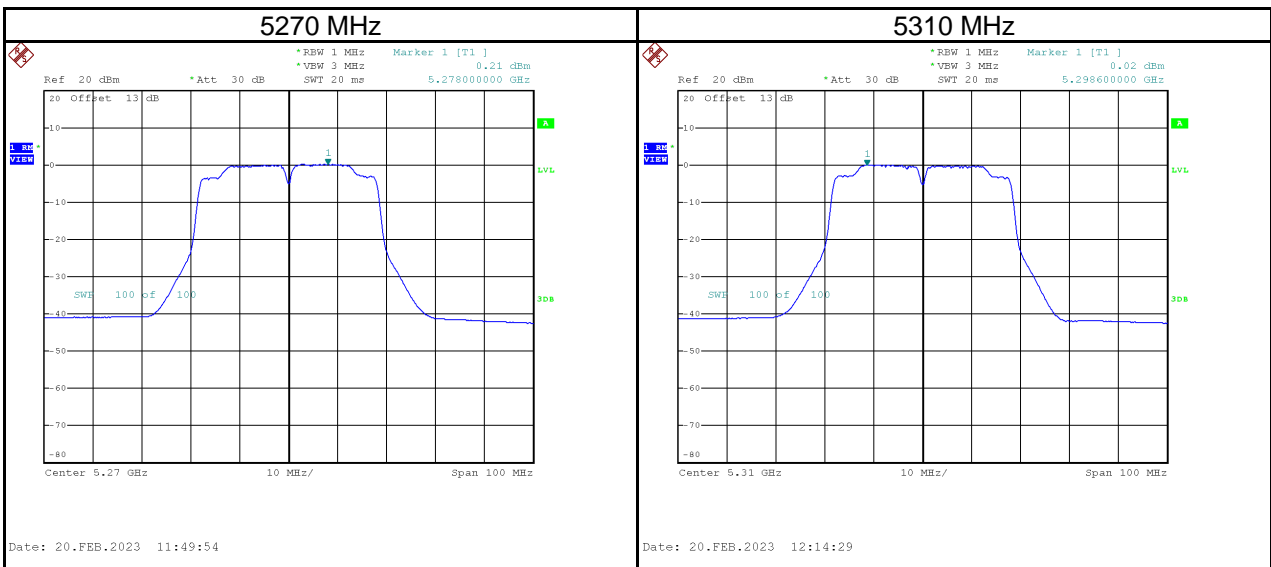


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5510                 | 0.31                    | 0.11             | 0.42                               | 11.00                   | Pass   |
| 5550                 | 0.77                    | 0.11             | 0.88                               | 11.00                   | Pass   |
| 5670                 | -0.79                   | 0.11             | -0.68                              | 11.00                   | Pass   |

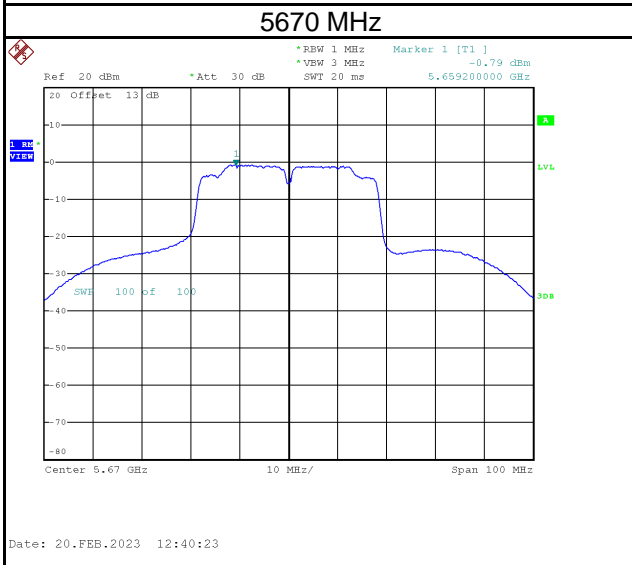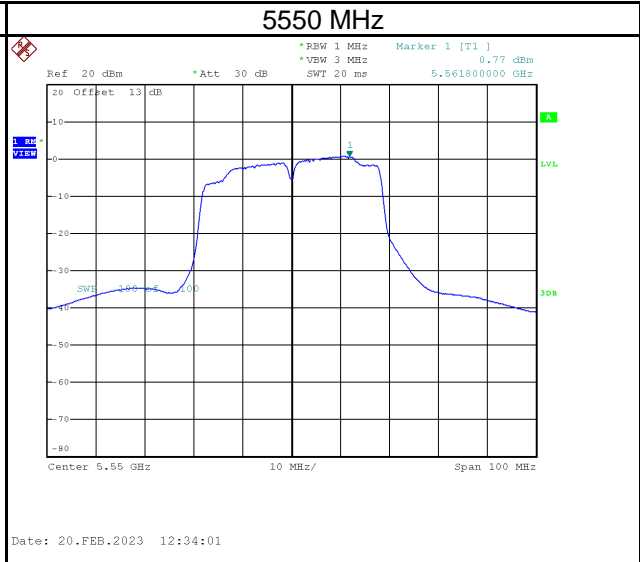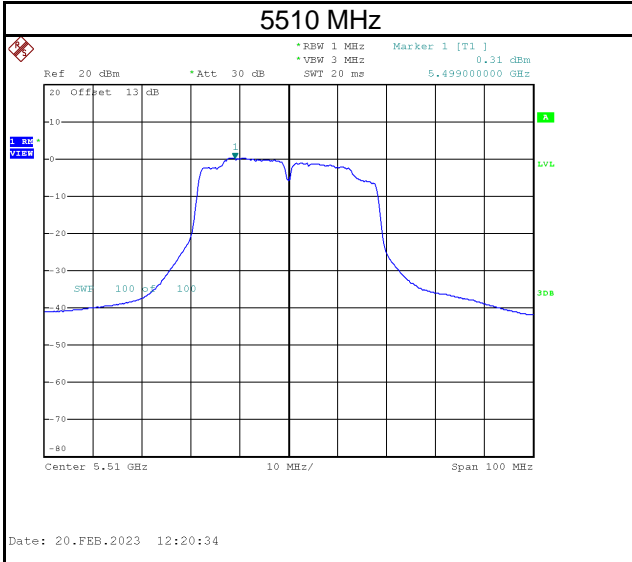

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | -2.75                       | 4.24                        | 0.11             | 4.35                                   | 30.00                       | Pass   |
| 5795                 | -1.02                       | 5.97                        | 0.11             | 6.08                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

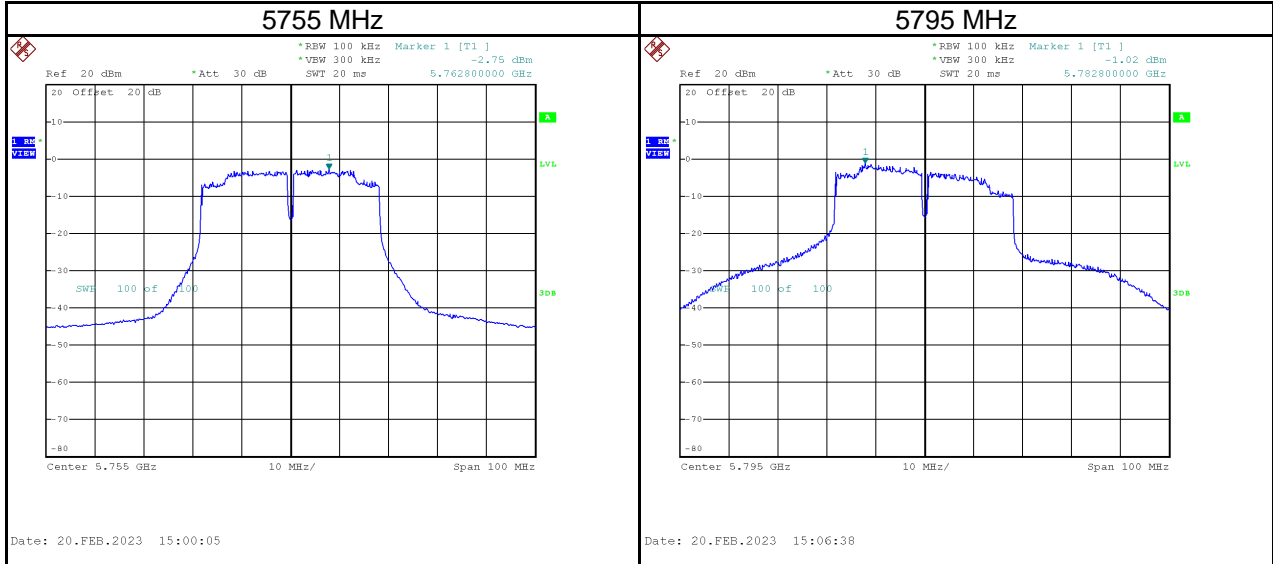

Test Mode | IEEE 802.11n (HT40)\_Total


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 3.96                    | 0.11             | 4.07                               | 17.00                   | Pass   |
| 5230                 | 3.62                    | 0.11             | 3.73                               | 17.00                   | Pass   |
| 5270                 | 3.49                    | 0.11             | 3.60                               | 11.00                   | Pass   |
| 5310                 | 3.32                    | 0.11             | 3.43                               | 11.00                   | Pass   |
| 5510                 | 2.68                    | 0.11             | 2.79                               | 11.00                   | Pass   |
| 5550                 | 3.07                    | 0.11             | 3.18                               | 11.00                   | Pass   |
| 5670                 | 2.11                    | 0.11             | 2.22                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | 0.61                        | 7.60                        | 0.11             | 7.71                                   | 30.00                       | Pass   |
| 5795                 | 1.10                        | 8.09                        | 0.11             | 8.20                                   | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

|           |                                    |
|-----------|------------------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Main Antenna |
|-----------|------------------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -2.95                   | 0.05             | -2.90                              | 17.00                   | Pass   |

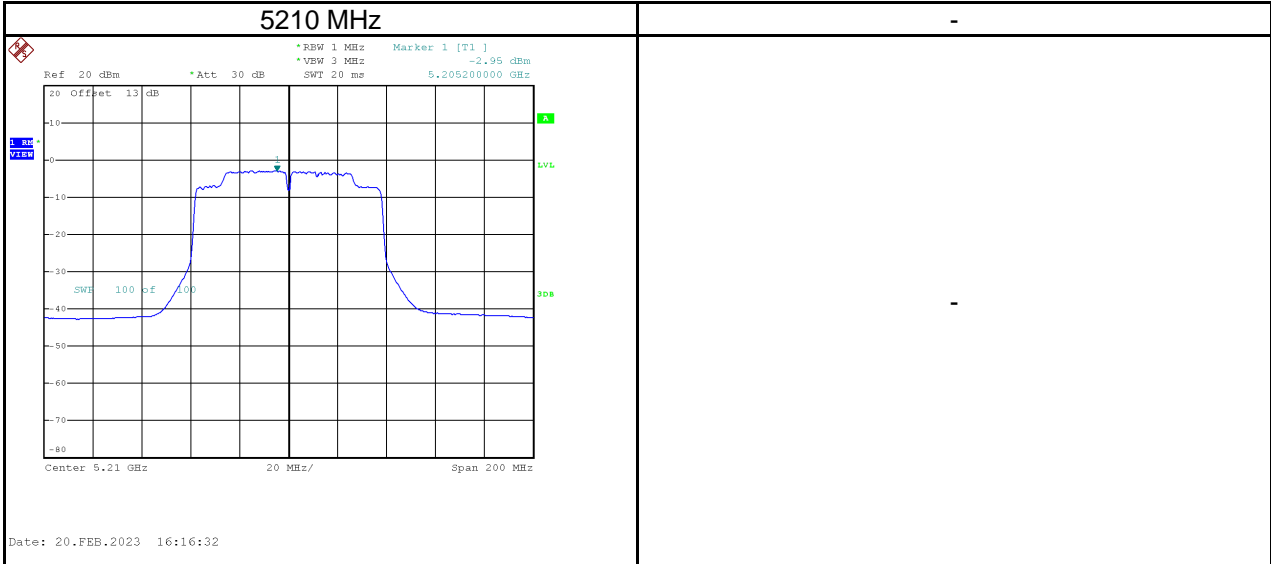

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5290                 | -3.60                   | 0.05             | -3.55                              | 11.00                   | Pass   |

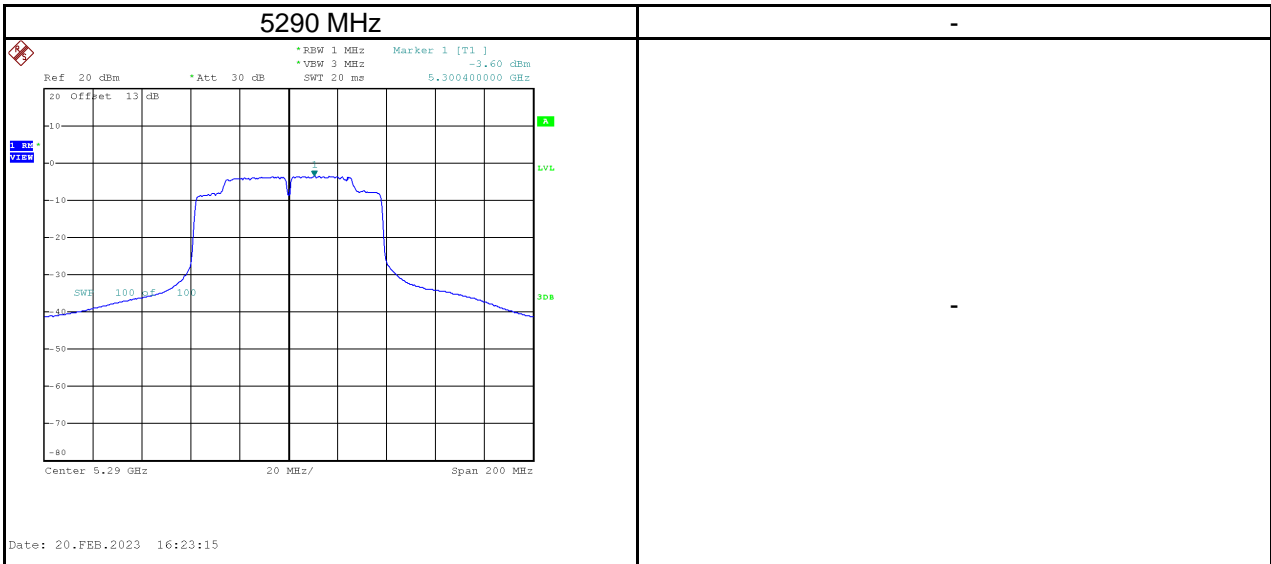


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5530                 | -3.89                   | 0.05             | -3.84                              | 11.00                   | Pass   |
| 5610                 | -3.63                   | 0.05             | -3.58                              | 11.00                   | Pass   |

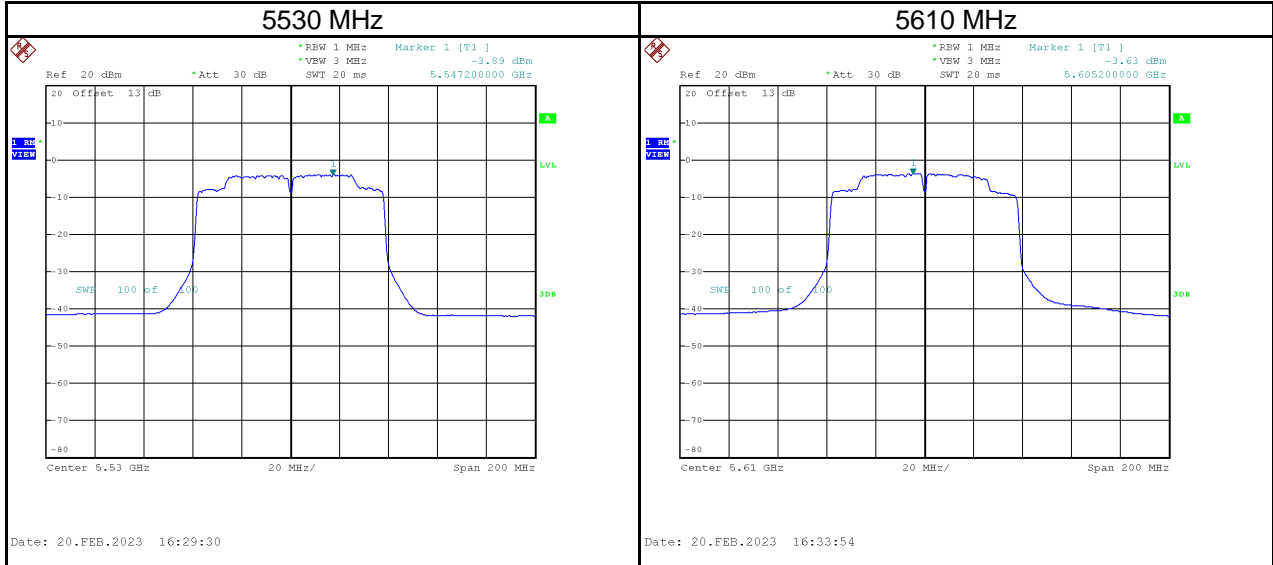


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -6.39                       | 0.60                        | 0.05             | 0.65                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

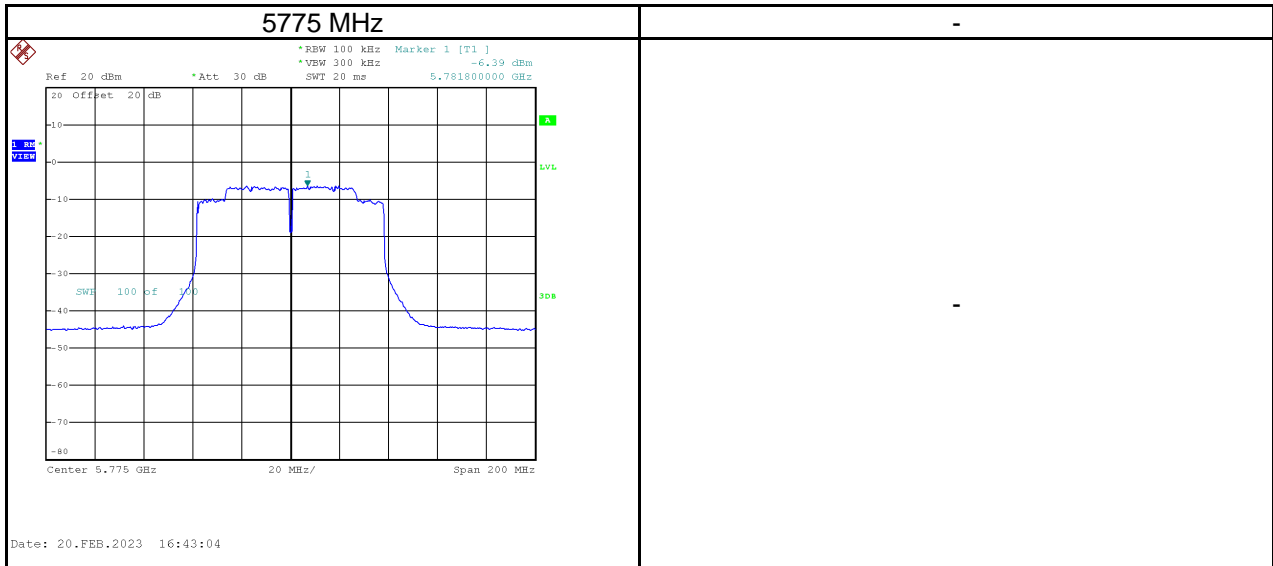


|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Aux Antenna |
|-----------|-----------------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -2.19                   | 0.05             | -2.14                              | 17.00                   | Pass   |

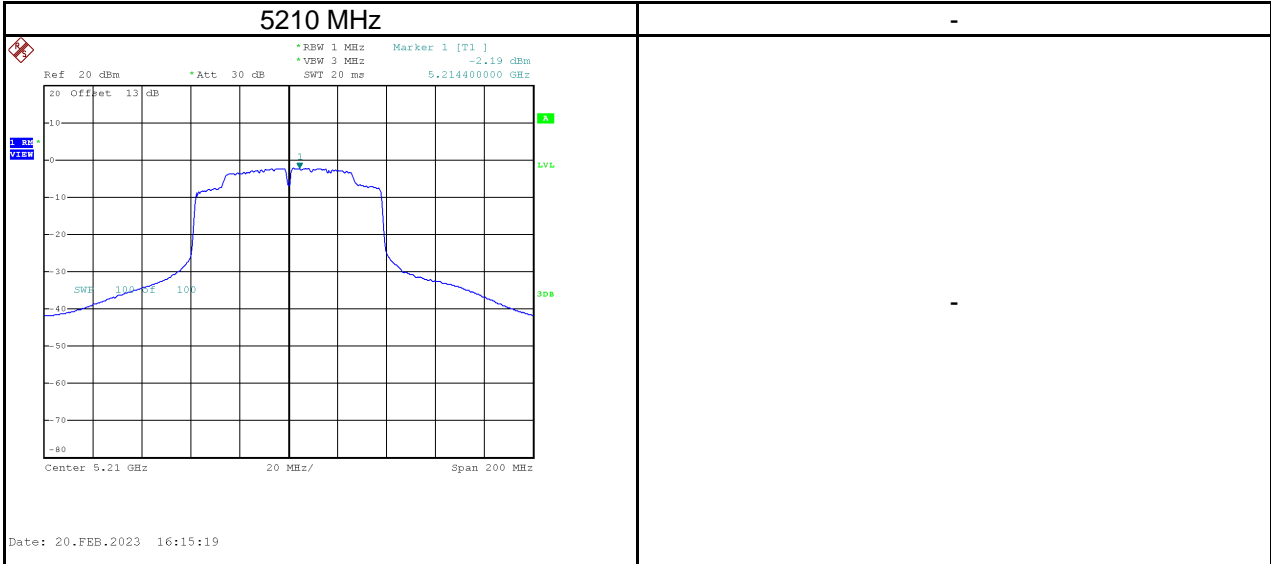

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5290                 | -2.86                   | 0.05             | -2.81                              | 11.00                   | Pass   |

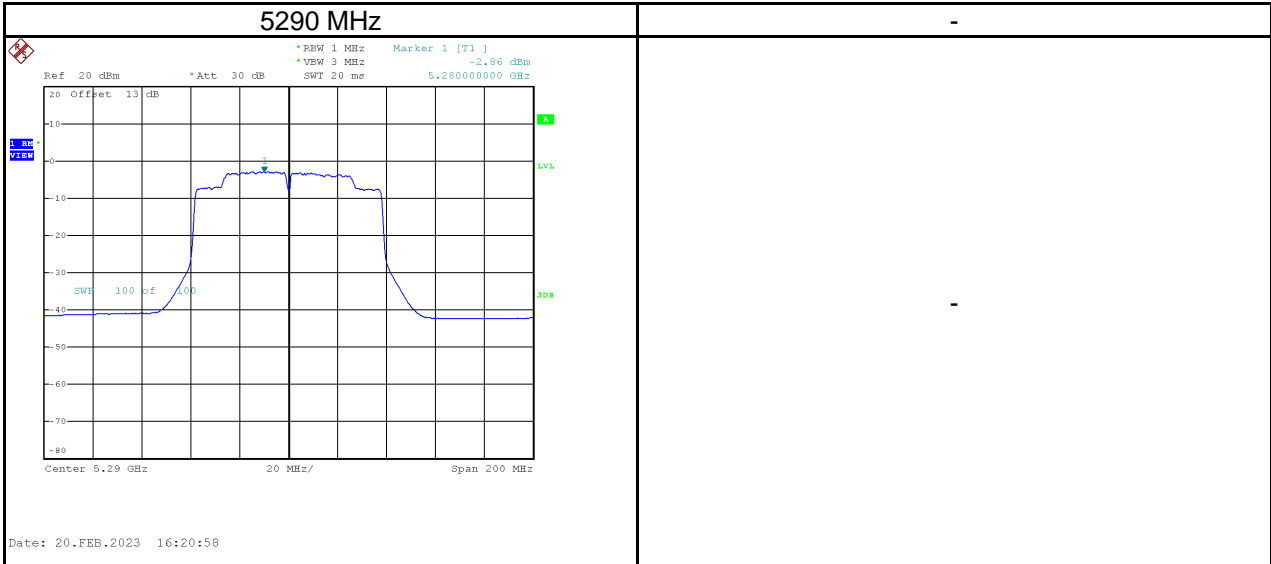


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5530                 | -3.70                   | 0.05             | -3.65                              | 11.00                   | Pass   |
| 5610                 | -3.74                   | 0.05             | -3.69                              | 11.00                   | Pass   |

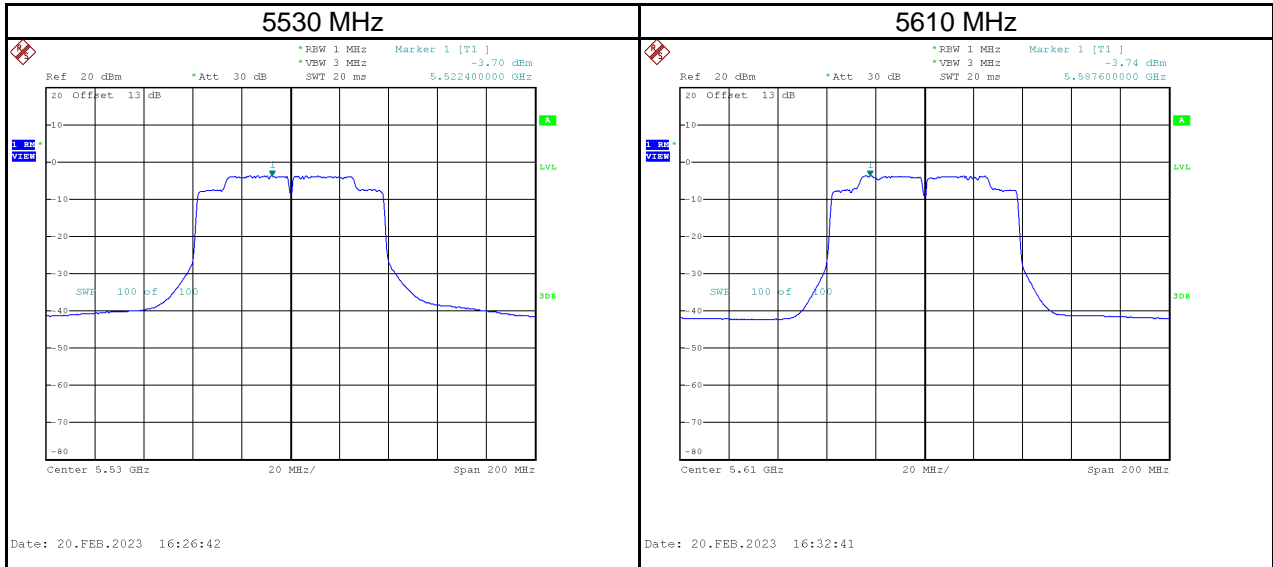

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -5.75                       | 1.24                        | 0.05             | 1.29                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

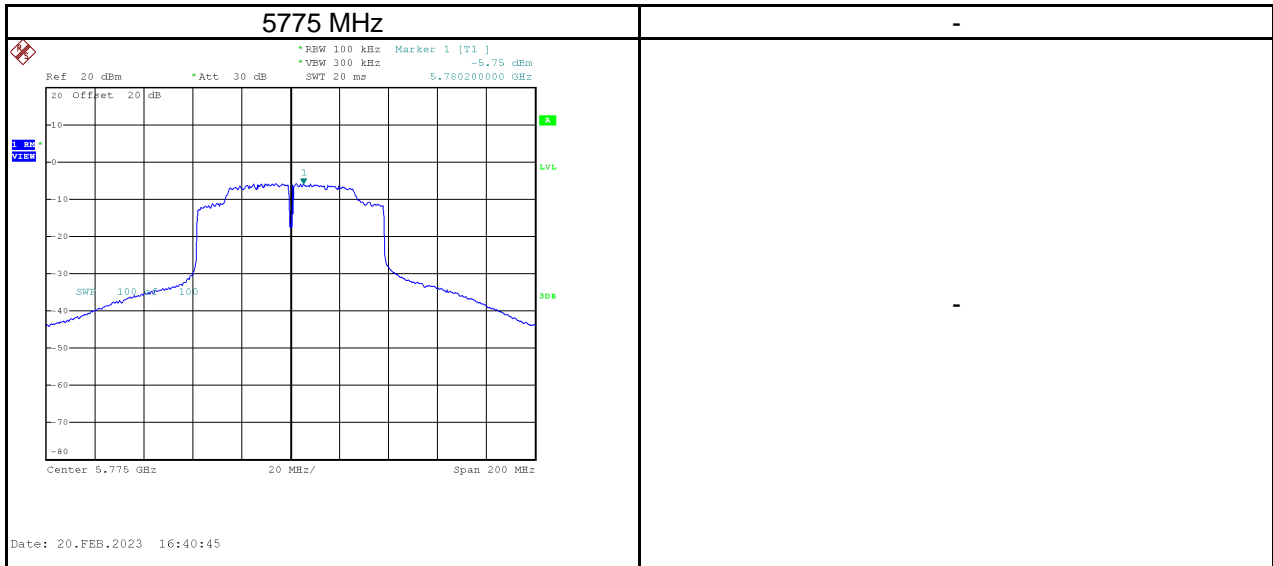

|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Total |
|-----------|-----------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 0.46                    | 0.05             | 0.50                               | 17.00                   | Pass   |
| 5290                 | -0.20                   | 0.05             | -0.16                              | 11.00                   | Pass   |
| 5530                 | -0.78                   | 0.05             | -0.74                              | 11.00                   | Pass   |
| 5610                 | -0.67                   | 0.05             | -0.63                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -3.05                       | 3.94                        | 0.05             | 3.99                                   | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                     |
|-----------|-------------------------------------|
| Test Mode | IEEE 802.11ac (VHT160)_Main Antenna |
|-----------|-------------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -5.93                   | 0.08             | -5.85                              | 17.00                   | Pass   |

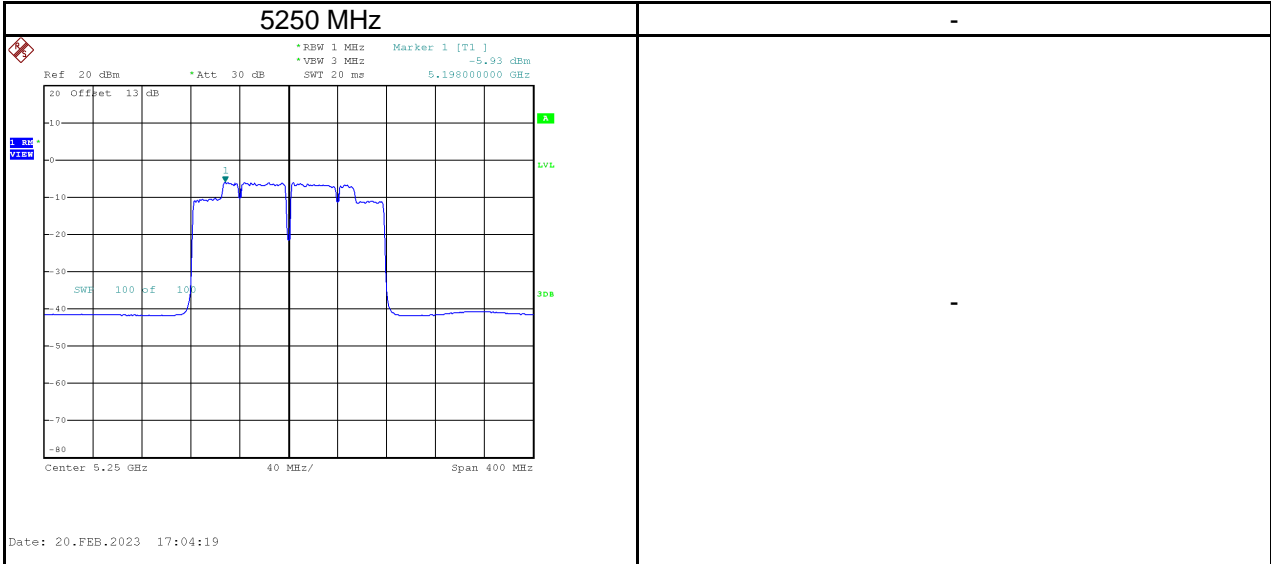


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5570                 | -6.64                   | 0.08             | -6.56                              | 11.00                   | Pass   |

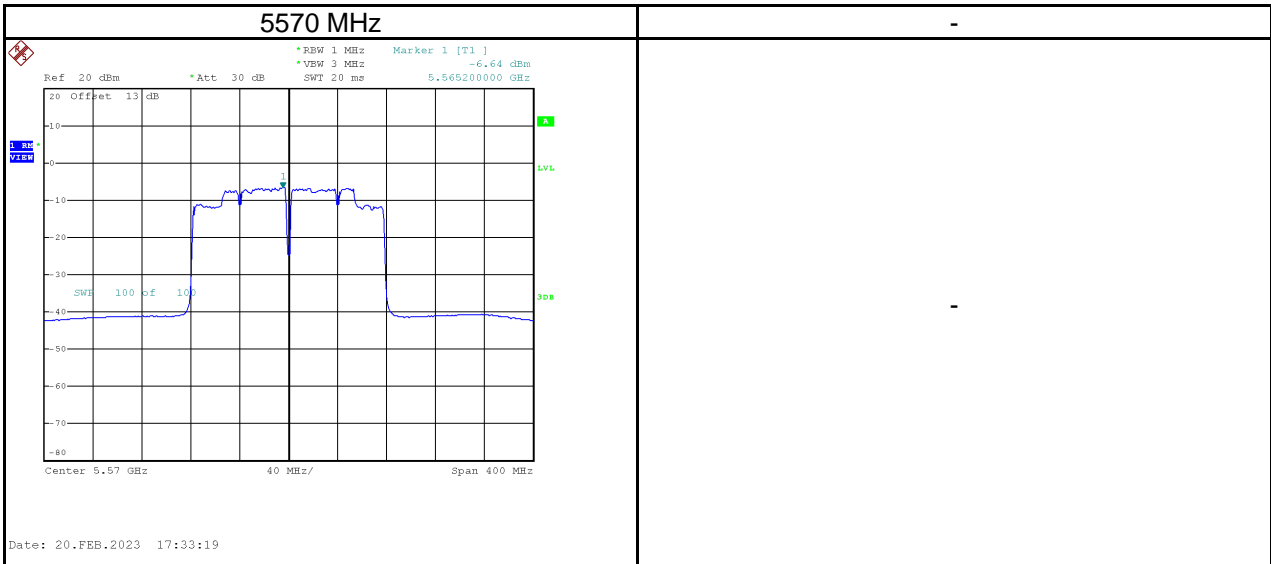


|           |                                    |
|-----------|------------------------------------|
| Test Mode | IEEE 802.11ac (VHT160)_Aux Antenna |
|-----------|------------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -5.64                   | 0.08             | -5.56                              | 17.00                   | Pass   |

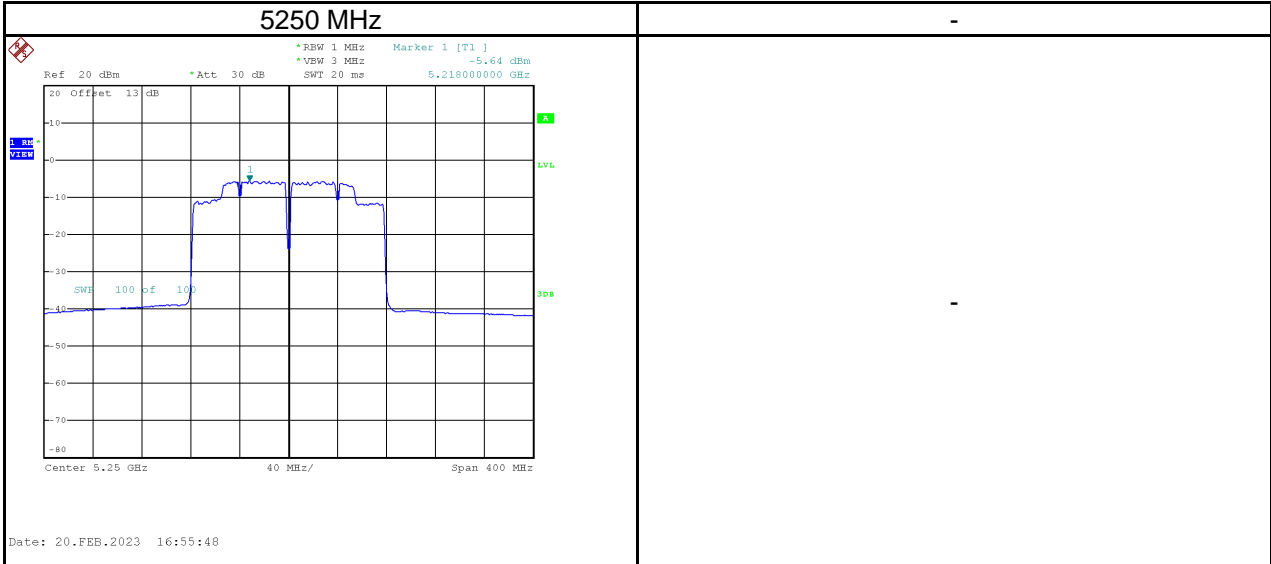

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5570                 | -5.89                   | 0.08             | -5.81                              | 11.00                   | Pass   |




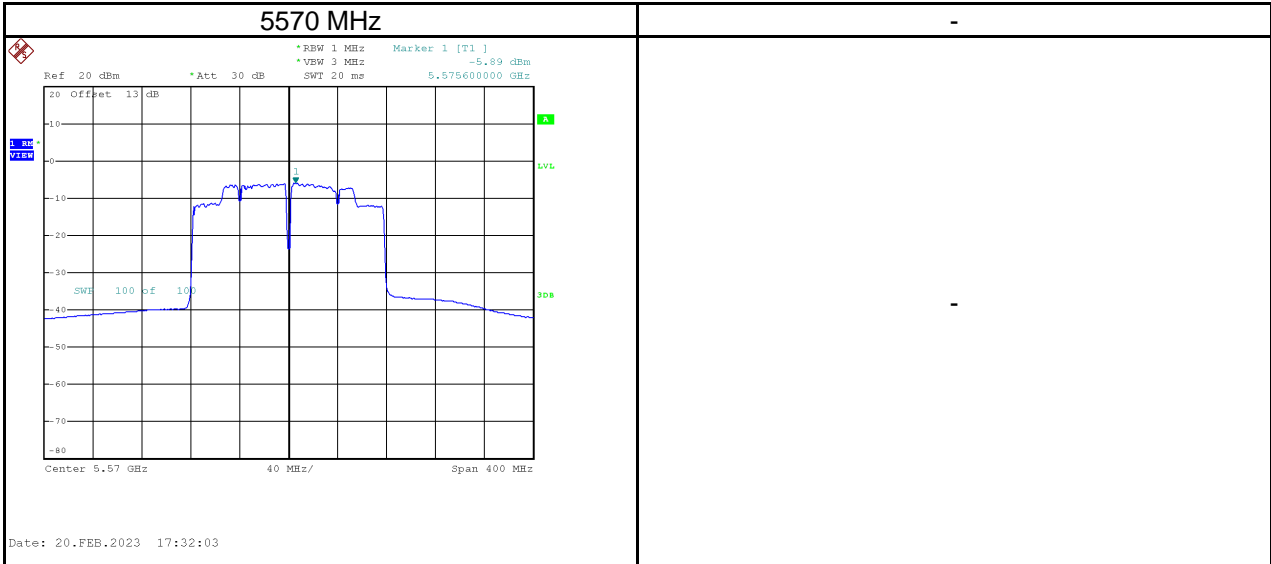


|           |                              |
|-----------|------------------------------|
| Test Mode | IEEE 802.11ac (VHT160)_Total |
|-----------|------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -2.77                   | 0.08             | -2.69                              | 17.00                   | Pass   |
| 5570                 | -3.24                   | 0.08             | -3.16                              | 11.00                   | Pass   |

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Main Antenna |
|-----------|-----------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 3.07                    | 0.02             | 3.09                               | 17.00                   | Pass   |
| 5200                 | 3.28                    | 0.02             | 3.30                               | 17.00                   | Pass   |
| 5240                 | 2.99                    | 0.02             | 3.01                               | 17.00                   | Pass   |

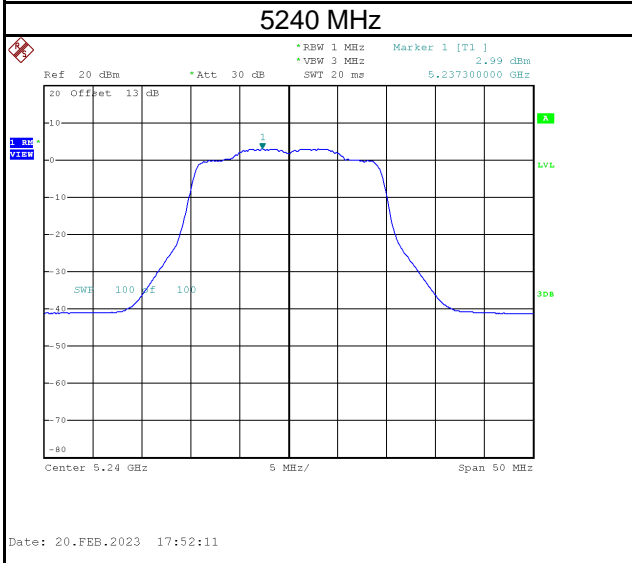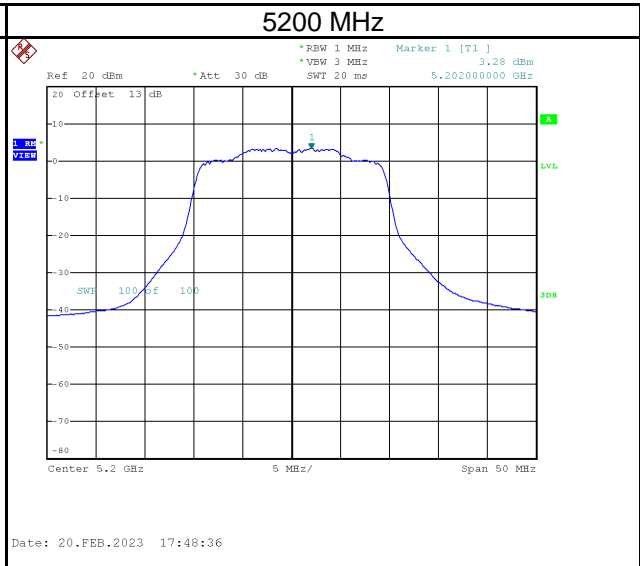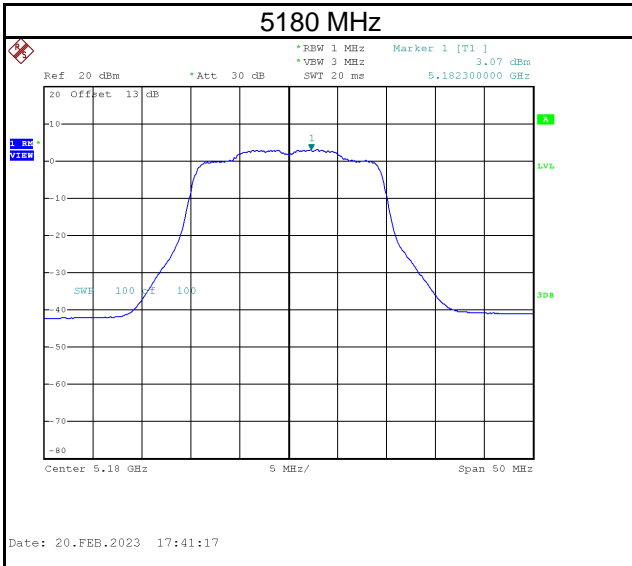

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 2.92                    | 0.02             | 2.94                               | 11.00                   | Pass   |
| 5300                 | 2.59                    | 0.02             | 2.61                               | 11.00                   | Pass   |
| 5320                 | 2.40                    | 0.02             | 2.42                               | 11.00                   | Pass   |

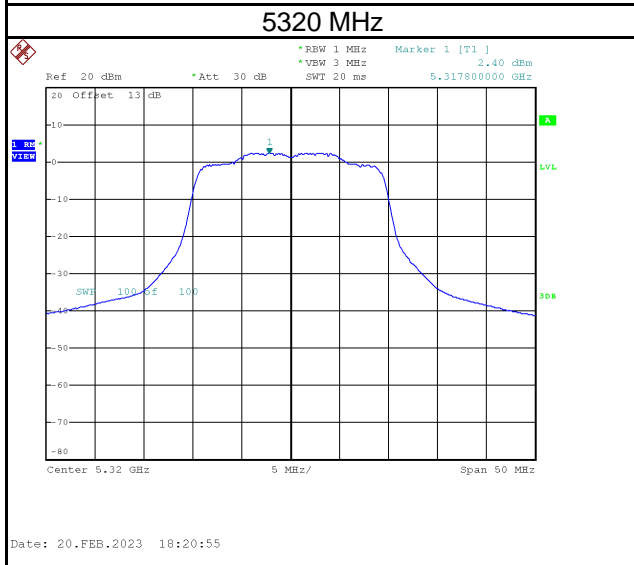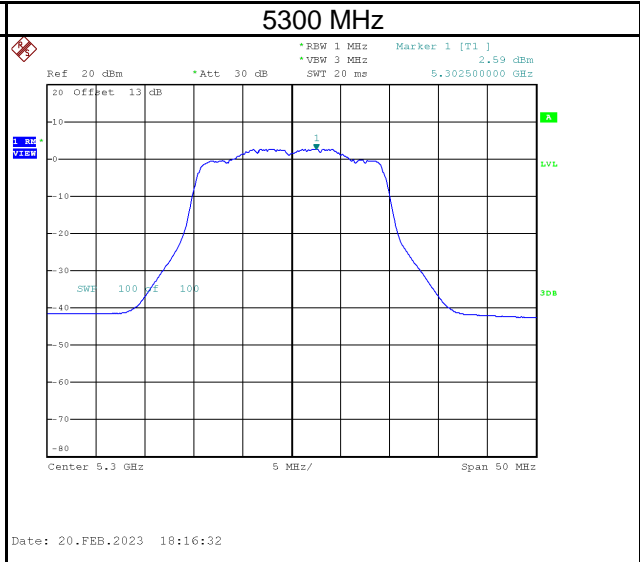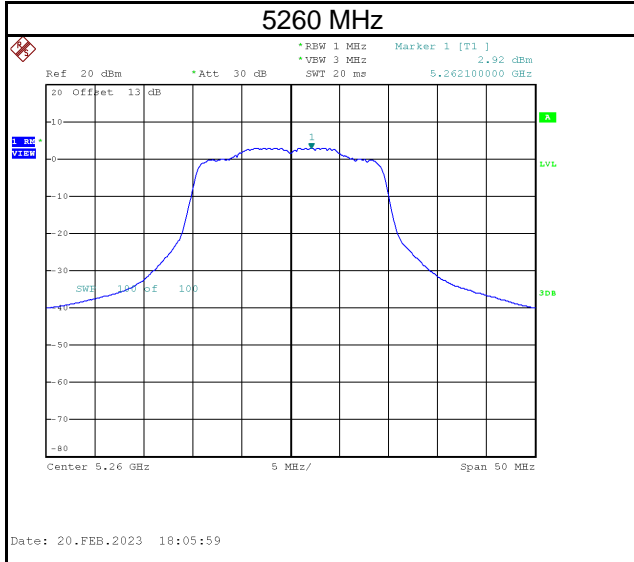


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 2.30                    | 0.02             | 2.32                               | 11.00                   | Pass   |
| 5580                 | 2.34                    | 0.02             | 2.36                               | 11.00                   | Pass   |
| 5700                 | 2.22                    | 0.02             | 2.24                               | 11.00                   | Pass   |

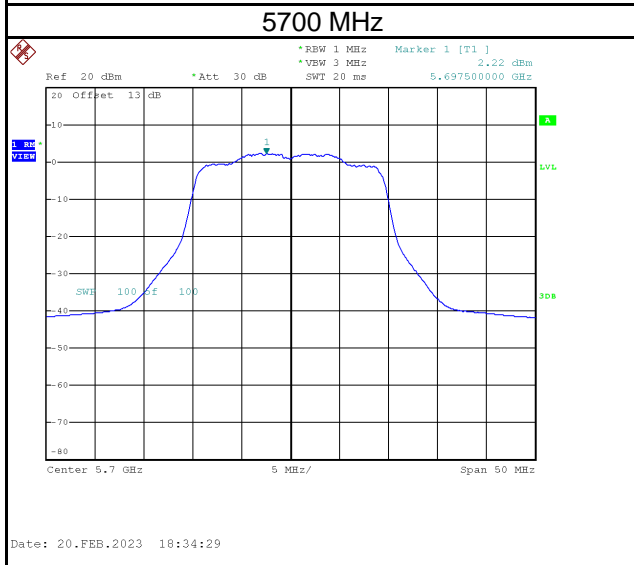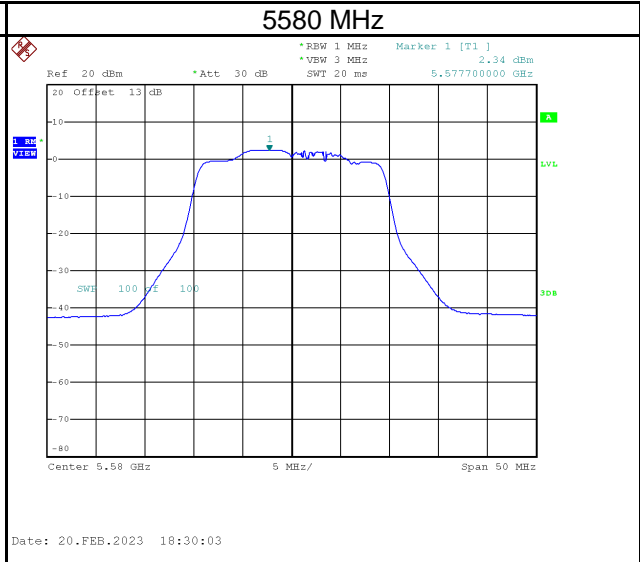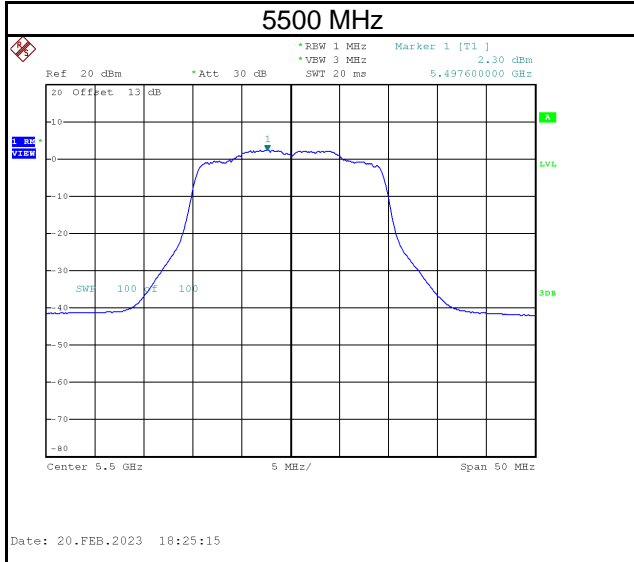





| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 0.05                        | 7.04                        | 0.02             | 7.06                                   | 30.00                       | Pass   |
| 5785                 | -0.07                       | 6.92                        | 0.02             | 6.94                                   | 30.00                       | Pass   |
| 5825                 | -0.23                       | 6.76                        | 0.02             | 6.78                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$




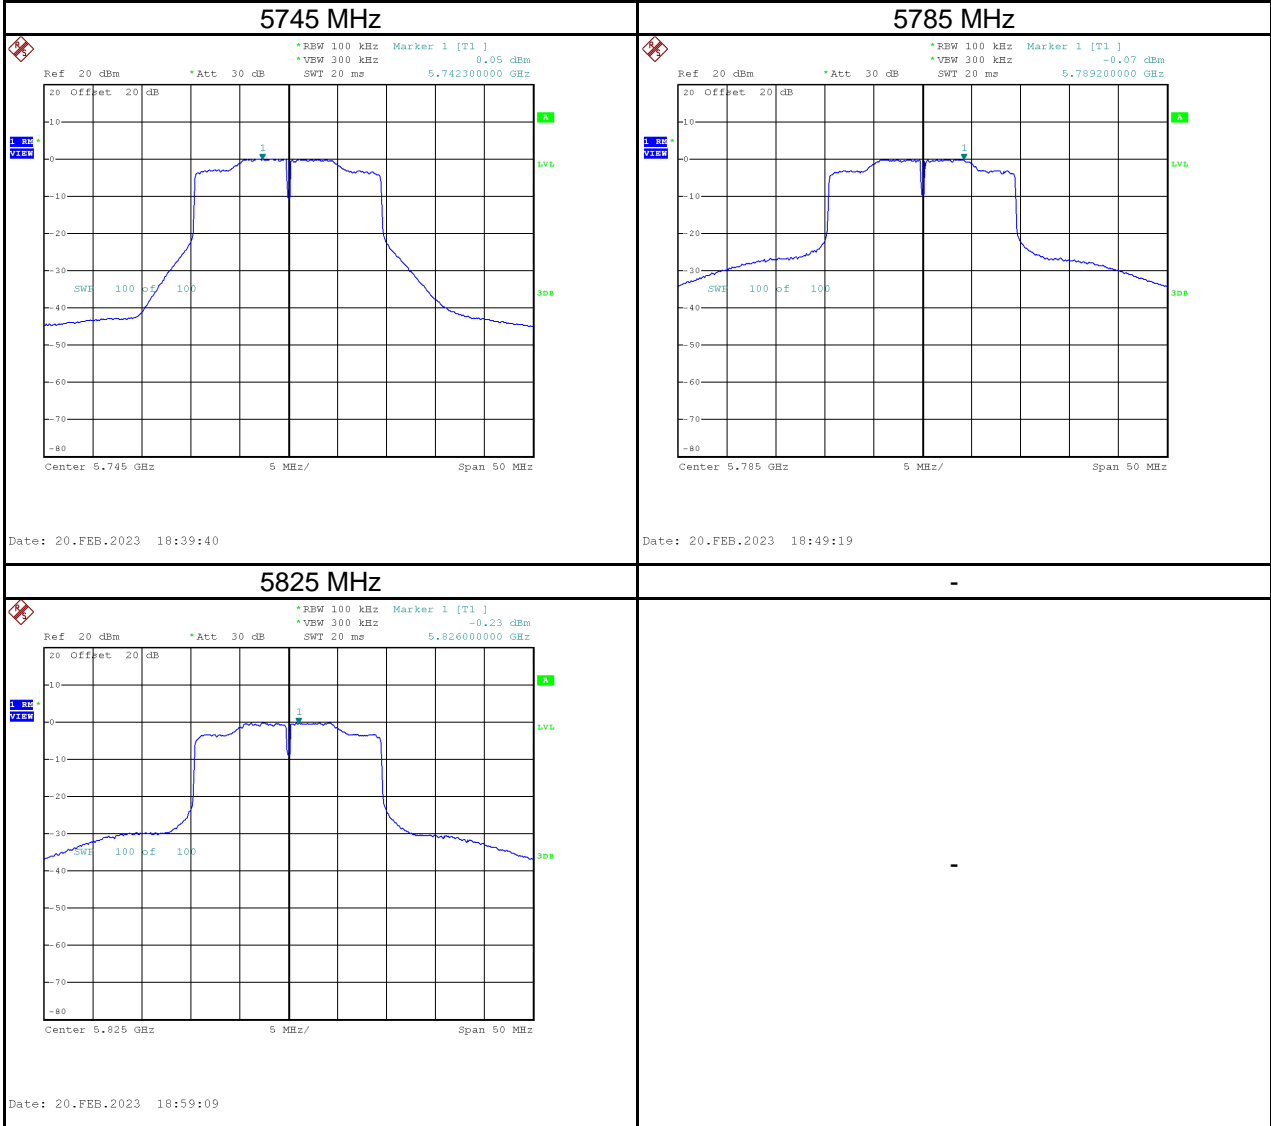


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Aux Antenna |
|-----------|----------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 3.39                    | 0.02             | 3.41                               | 17.00                   | Pass   |
| 5200                 | 3.39                    | 0.02             | 3.41                               | 17.00                   | Pass   |
| 5240                 | 3.32                    | 0.02             | 3.34                               | 17.00                   | Pass   |

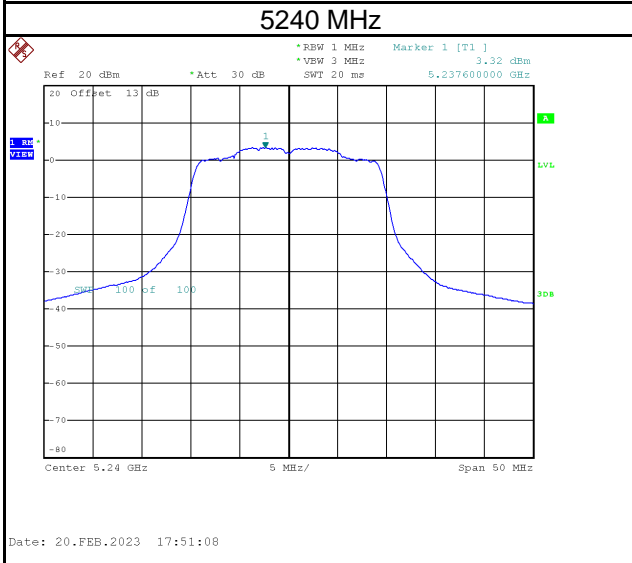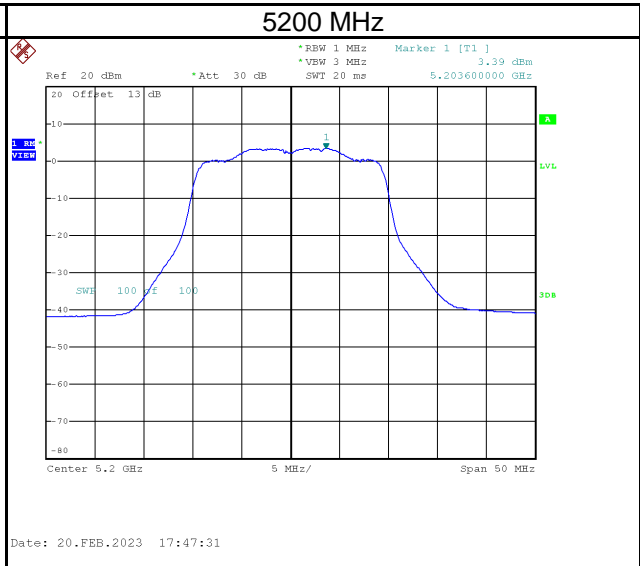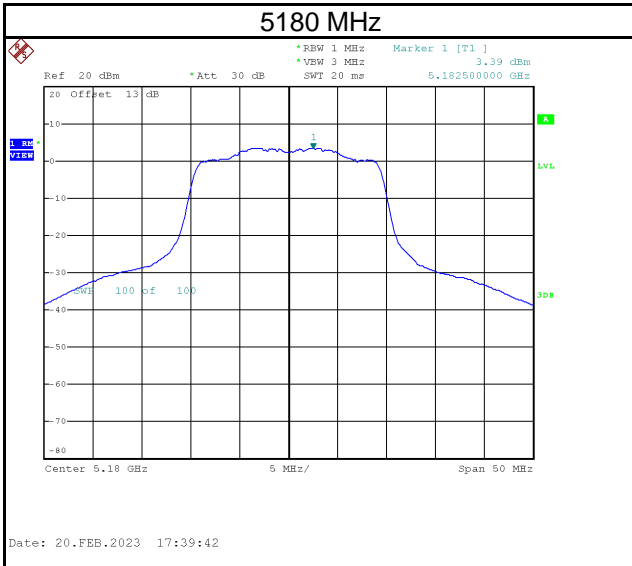

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5260                 | 3.16                    | 0.02             | 3.18                               | 11.00                   | Pass   |
| 5300                 | 3.13                    | 0.02             | 3.15                               | 11.00                   | Pass   |
| 5320                 | 2.77                    | 0.02             | 2.79                               | 11.00                   | Pass   |

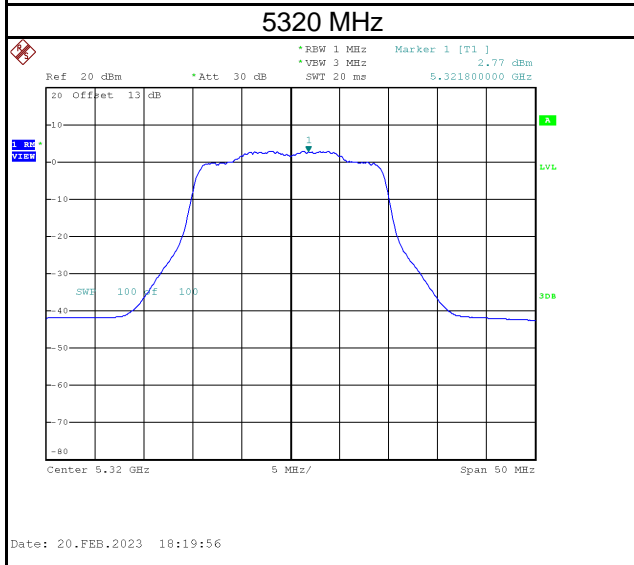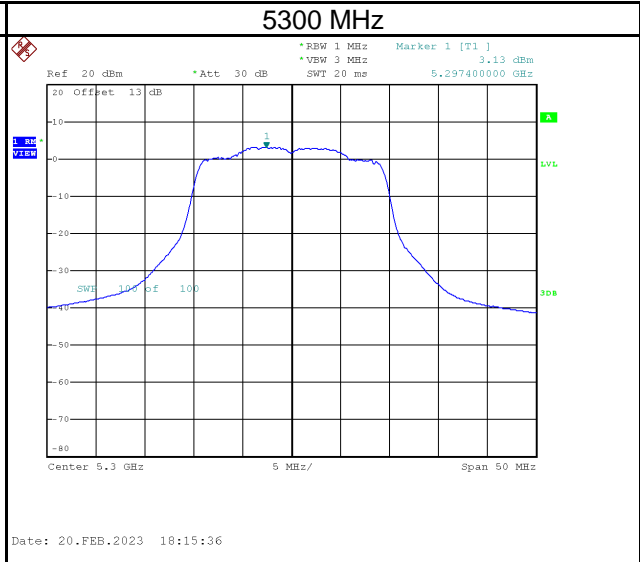
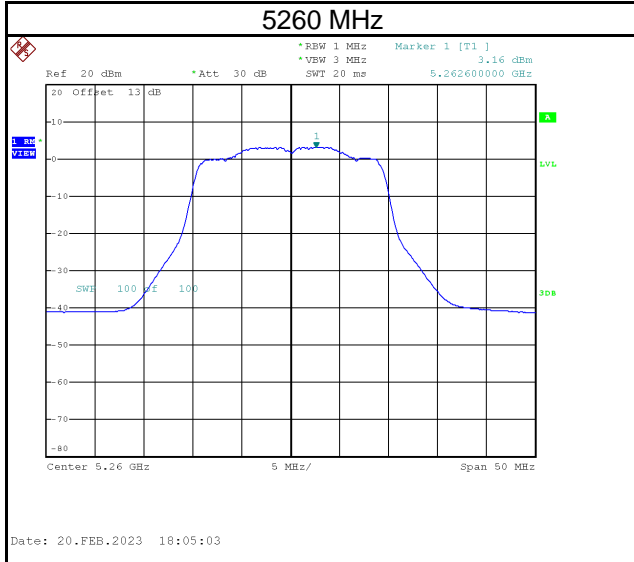


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5500                 | 2.31                    | 0.02             | 2.33                               | 11.00                   | Pass   |
| 5580                 | 2.65                    | 0.02             | 2.67                               | 11.00                   | Pass   |
| 5700                 | 1.91                    | 0.02             | 1.93                               | 11.00                   | Pass   |

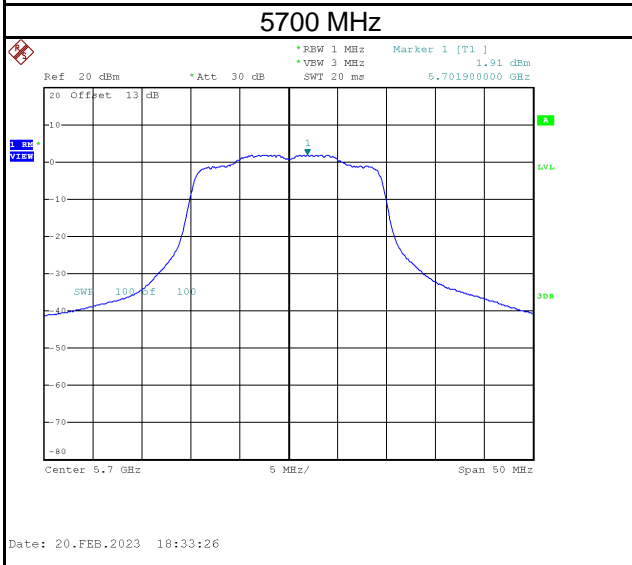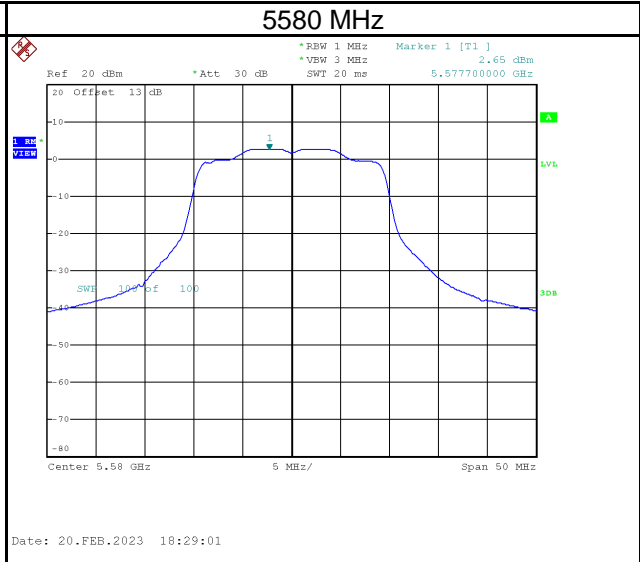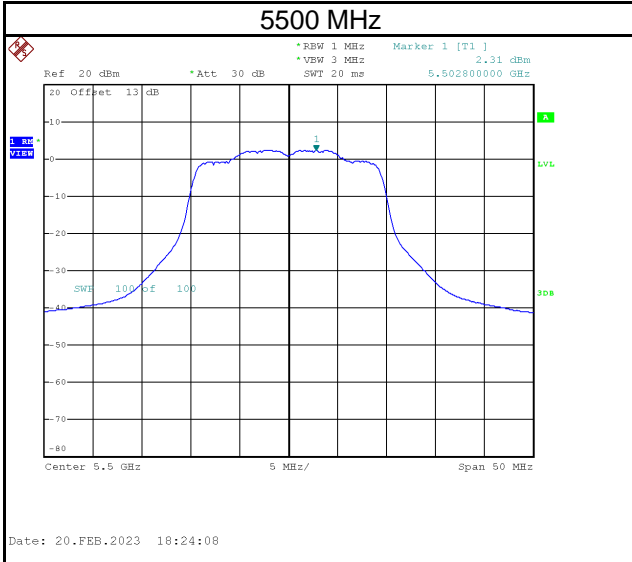

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | -0.22                       | 6.77                        | 0.02             | 6.79                                   | 30.00                       | Pass   |
| 5785                 | -0.01                       | 6.98                        | 0.02             | 7.00                                   | 30.00                       | Pass   |
| 5825                 | -0.23                       | 6.76                        | 0.02             | 6.78                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

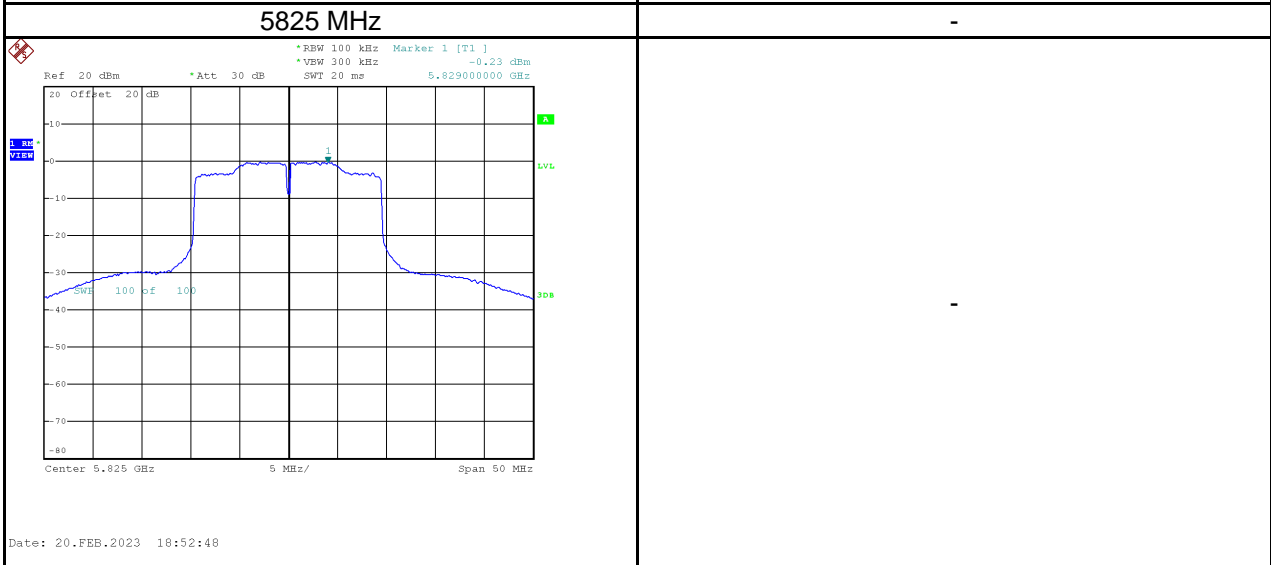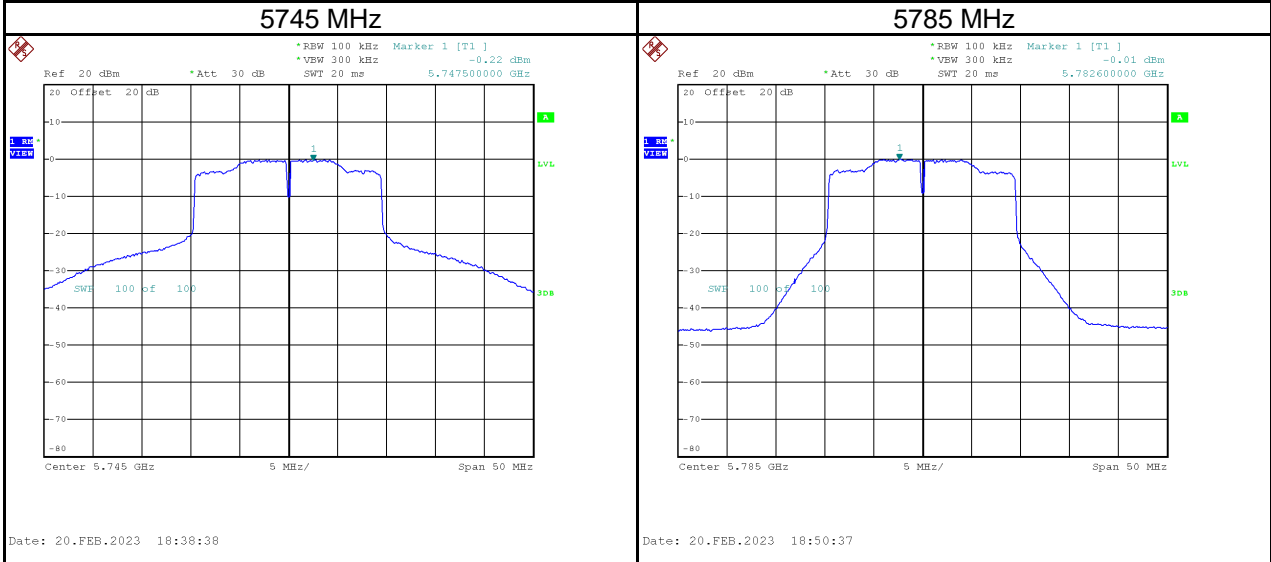

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Total |
|-----------|----------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 6.24                    | 0.02             | 6.27                               | 17.00                   | Pass   |
| 5200                 | 6.35                    | 0.02             | 6.37                               | 17.00                   | Pass   |
| 5240                 | 6.17                    | 0.02             | 6.19                               | 17.00                   | Pass   |
| 5260                 | 6.05                    | 0.02             | 6.07                               | 11.00                   | Pass   |
| 5300                 | 5.88                    | 0.02             | 5.90                               | 11.00                   | Pass   |
| 5320                 | 5.60                    | 0.02             | 5.62                               | 11.00                   | Pass   |
| 5500                 | 5.32                    | 0.02             | 5.34                               | 11.00                   | Pass   |
| 5580                 | 5.51                    | 0.02             | 5.53                               | 11.00                   | Pass   |
| 5700                 | 5.08                    | 0.02             | 5.10                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5745                 | 2.93                        | 9.92                        | 0.02             | 9.94                                   | 30.00                       | Pass   |
| 5785                 | 2.97                        | 9.96                        | 0.02             | 9.98                                   | 30.00                       | Pass   |
| 5825                 | 2.78                        | 9.77                        | 0.02             | 9.79                                   | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Main Antenna |
|-----------|-----------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 0.12                    | 0.04             | 0.16                               | 17.00                   | Pass   |
| 5230                 | 0.54                    | 0.04             | 0.58                               | 17.00                   | Pass   |

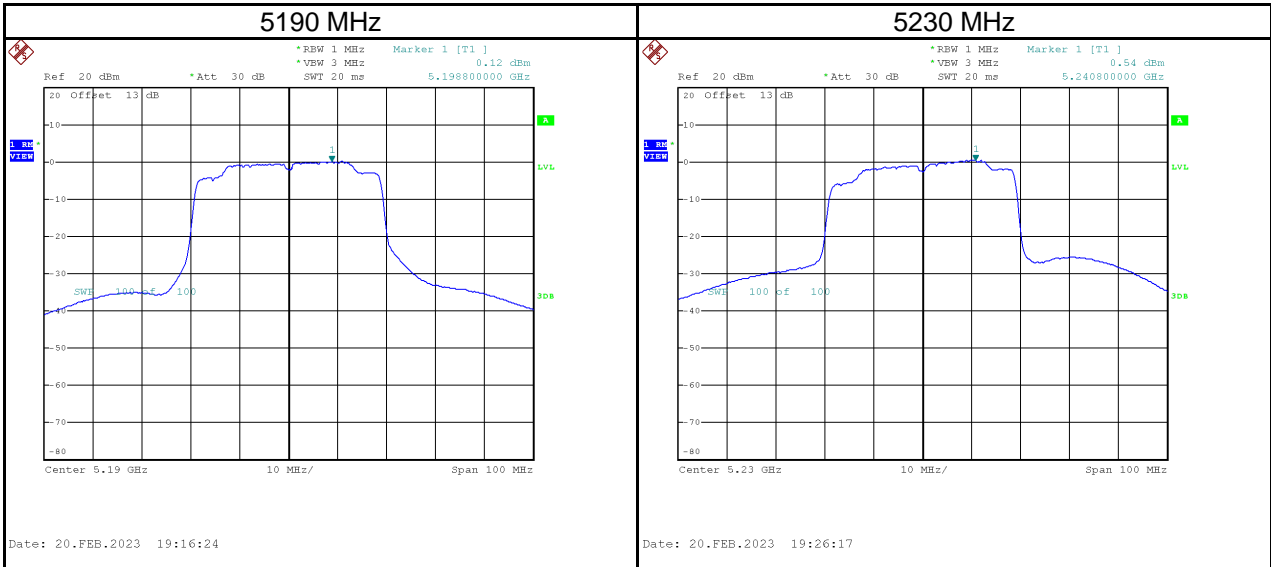

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5270                 | 0.48                    | 0.04             | 0.52                               | 11.00                   | Pass   |
| 5310                 | -0.99                   | 0.04             | -0.95                              | 11.00                   | Pass   |

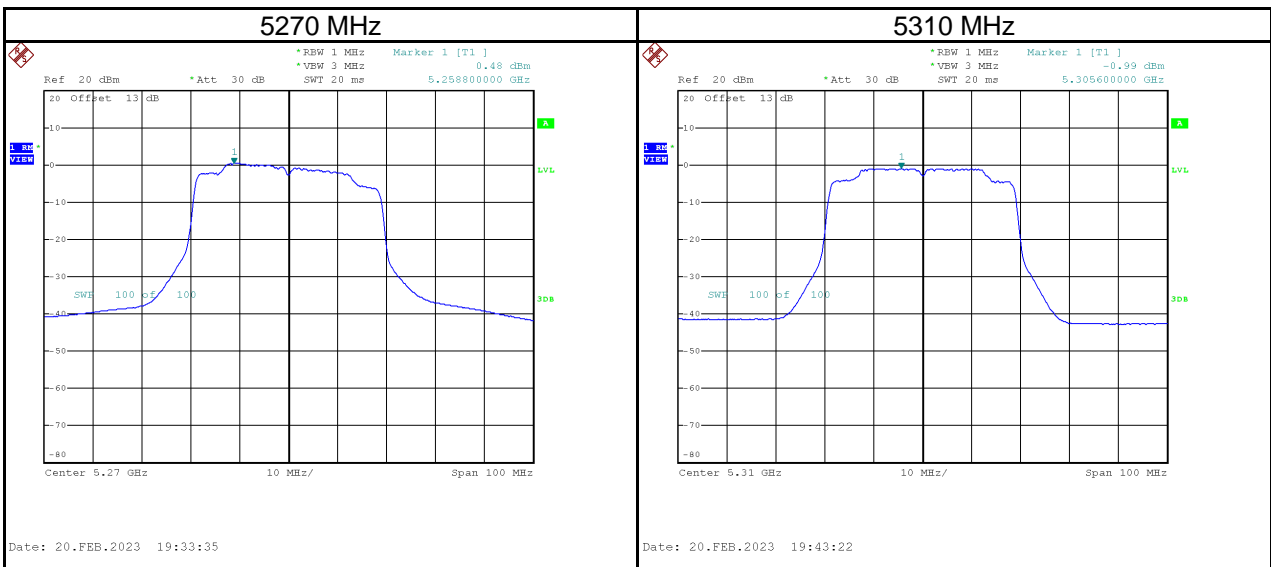


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5510                 | -1.14                   | 0.04             | -1.10                              | 11.00                   | Pass   |
| 5550                 | -0.08                   | 0.04             | -0.04                              | 11.00                   | Pass   |
| 5670                 | -0.51                   | 0.04             | -0.47                              | 11.00                   | Pass   |

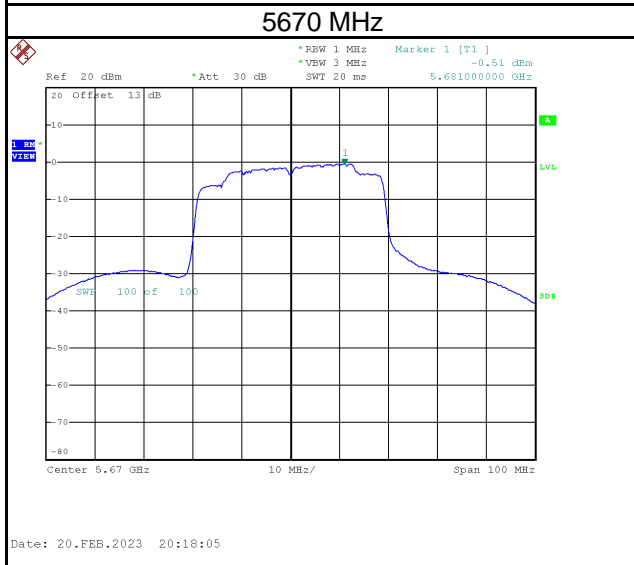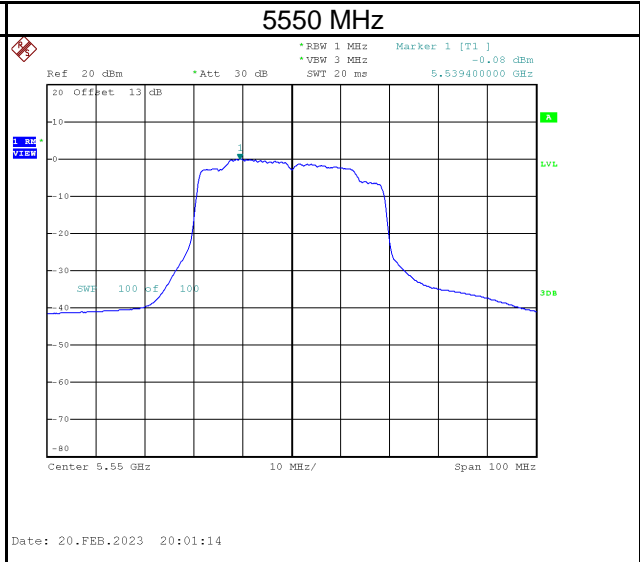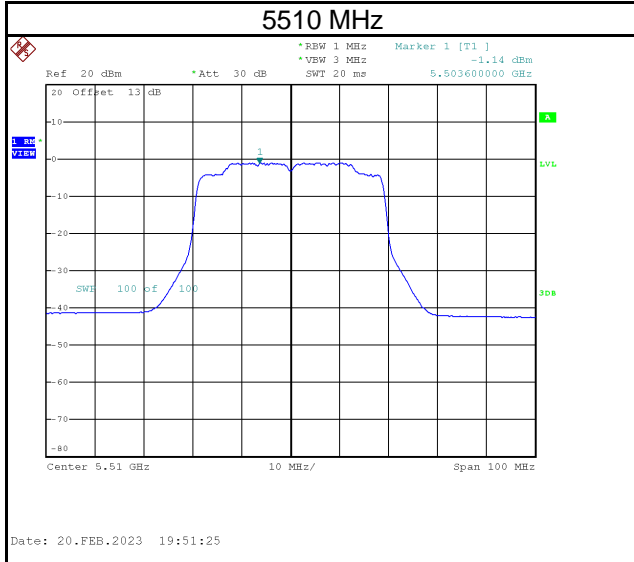


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | -2.56                       | 4.43                        | 0.04             | 4.47                                   | 30.00                       | Pass   |
| 5795                 | -2.26                       | 4.73                        | 0.04             | 4.77                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

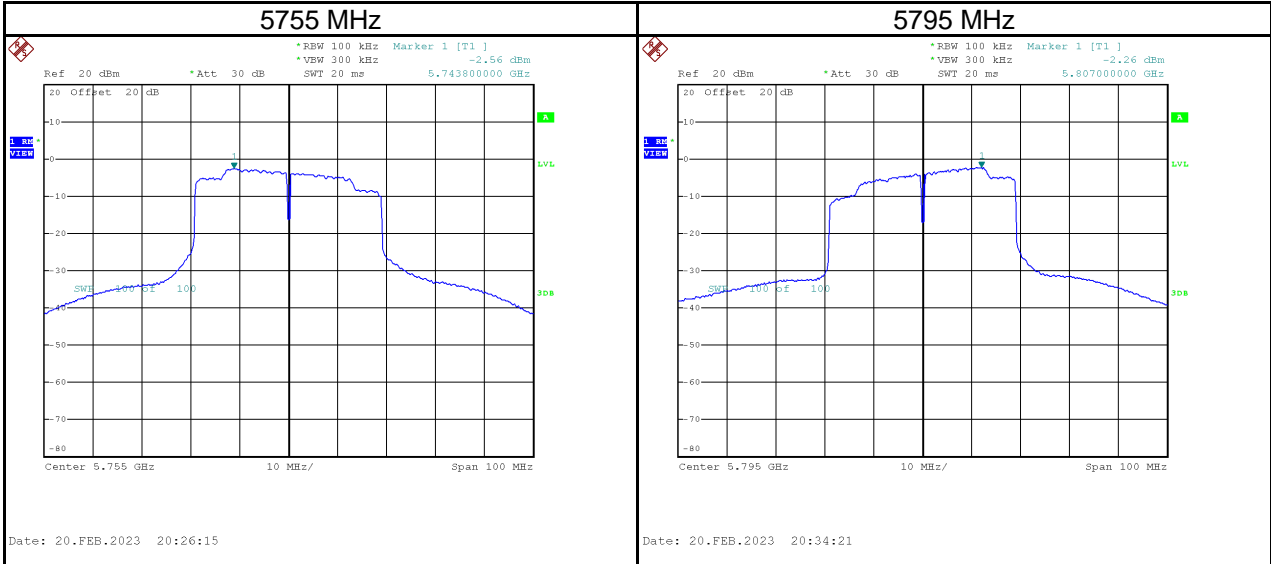


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna |
|-----------|----------------------------------|





| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 0.29                    | 0.04             | 0.33                               | 17.00                   | Pass   |
| 5230                 | -0.01                   | 0.04             | 0.03                               | 17.00                   | Pass   |

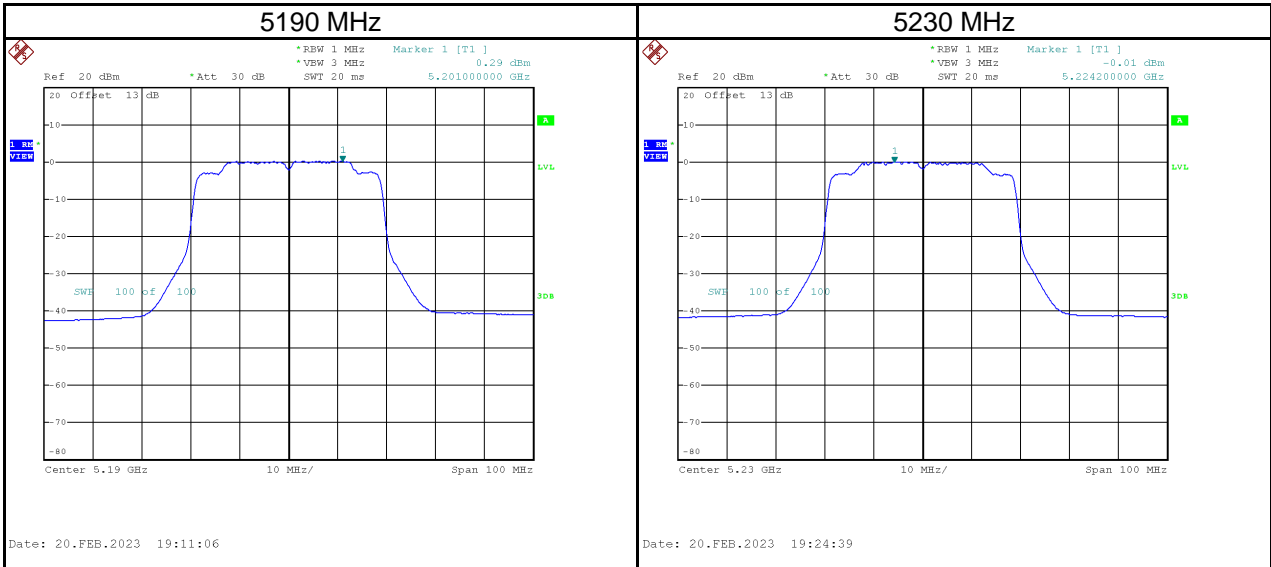

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5270                 | -0.03                   | 0.04             | 0.01                               | 11.00                   | Pass   |
| 5310                 | -0.29                   | 0.04             | -0.25                              | 11.00                   | Pass   |

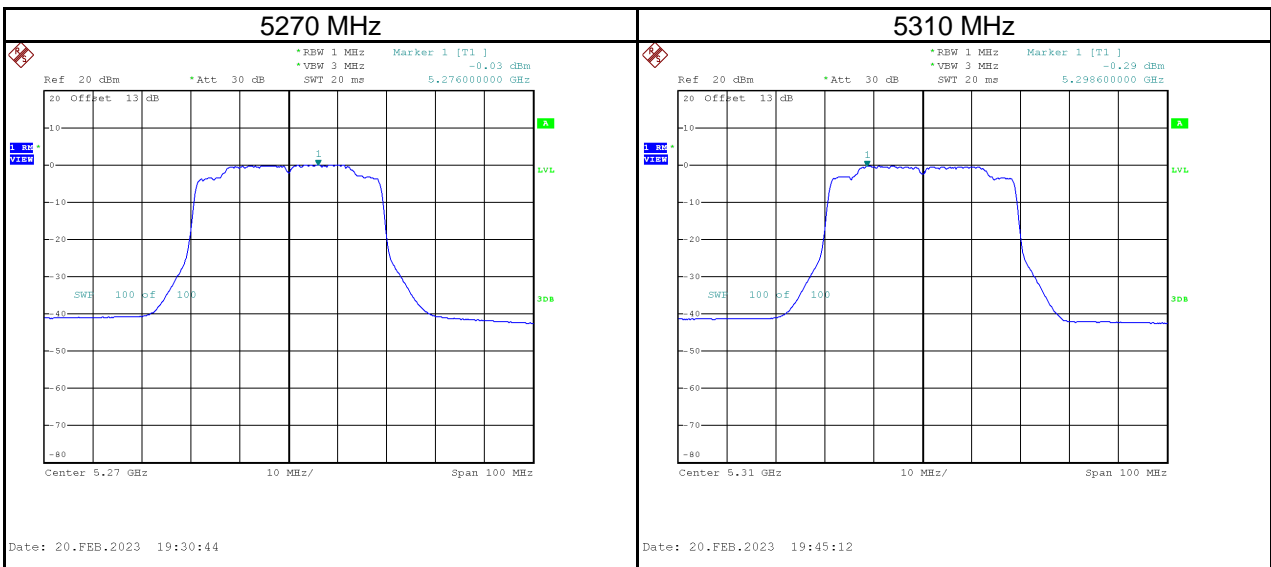


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5510                 | -0.68                   | 0.04             | -0.64                              | 11.00                   | Pass   |
| 5550                 | -0.75                   | 0.04             | -0.71                              | 11.00                   | Pass   |
| 5670                 | -1.09                   | 0.04             | -1.05                              | 11.00                   | Pass   |

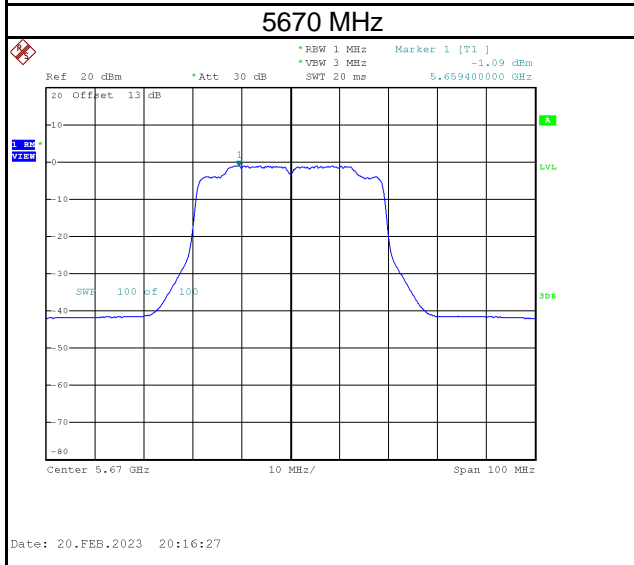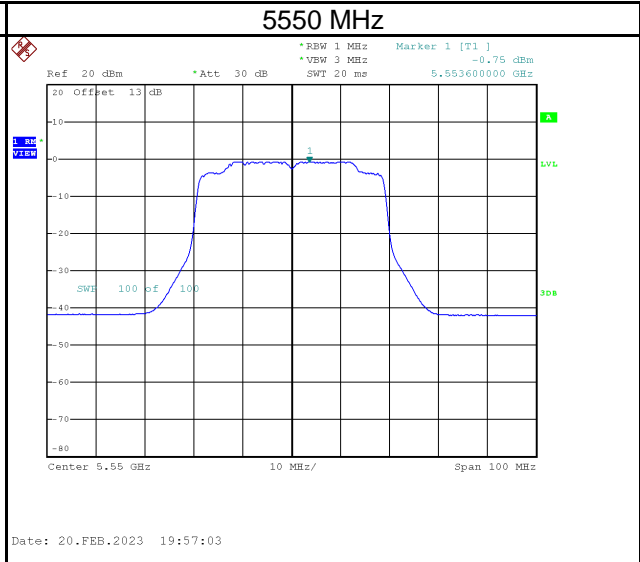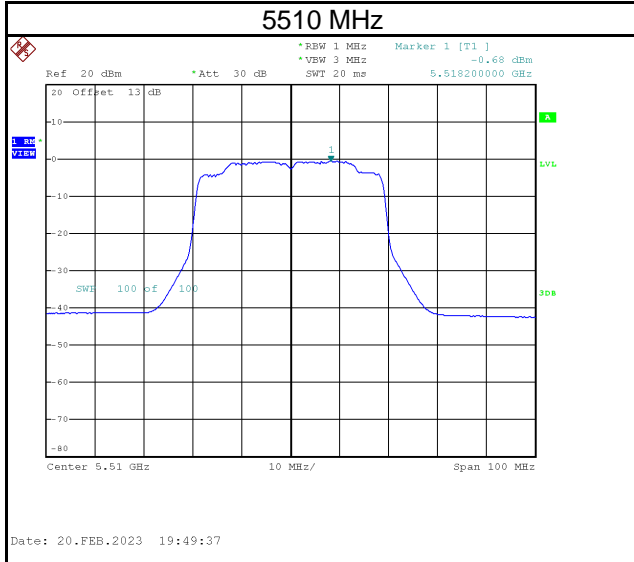

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | -9.62                       | -2.63                       | 0.04             | -2.59                                  | 30.00                       | Pass   |
| 5795                 | -3.17                       | 3.82                        | 0.04             | 3.86                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

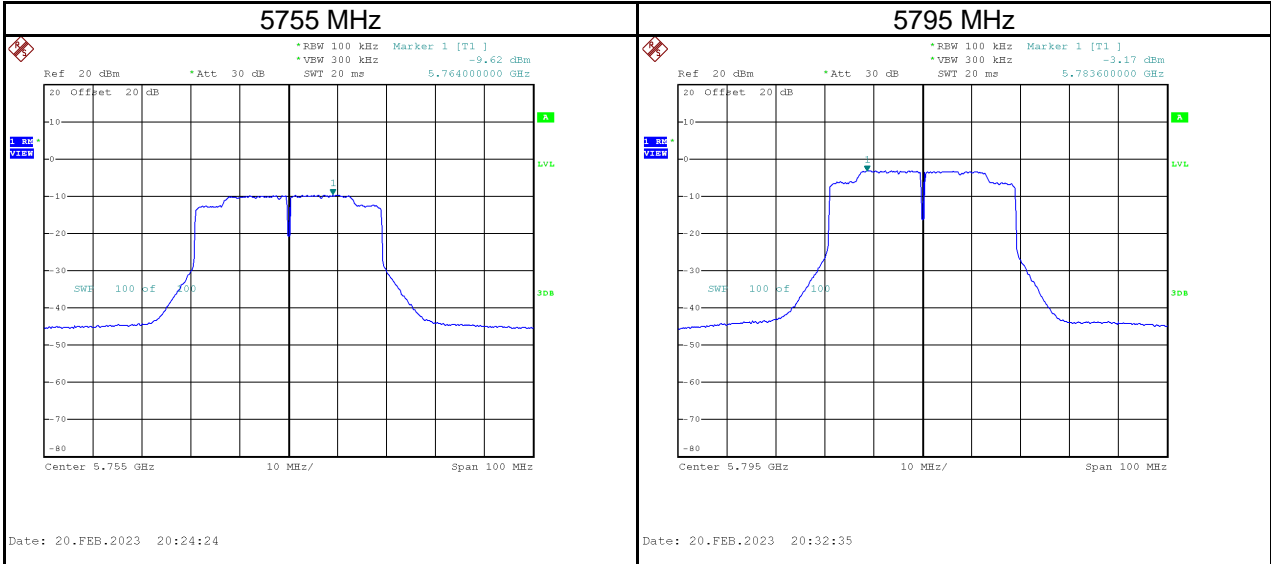

Test Mode | IEEE 802.11ax (HE40)\_Total


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 3.22                    | 0.04             | 3.26                               | 17.00                   | Pass   |
| 5230                 | 3.28                    | 0.04             | 3.33                               | 17.00                   | Pass   |
| 5270                 | 3.24                    | 0.04             | 3.28                               | 11.00                   | Pass   |
| 5310                 | 2.38                    | 0.04             | 2.43                               | 11.00                   | Pass   |
| 5510                 | 2.11                    | 0.04             | 2.15                               | 11.00                   | Pass   |
| 5550                 | 2.61                    | 0.04             | 2.65                               | 11.00                   | Pass   |
| 5670                 | 2.22                    | 0.04             | 2.26                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5755                 | -1.78                       | 5.21                        | 0.04             | 5.25                                   | 30.00                       | Pass   |
| 5795                 | 0.32                        | 7.31                        | 0.04             | 7.35                                   | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Main Antenna |
|-----------|-----------------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -2.83                   | 0.08             | -2.75                              | 17.00                   | Pass   |

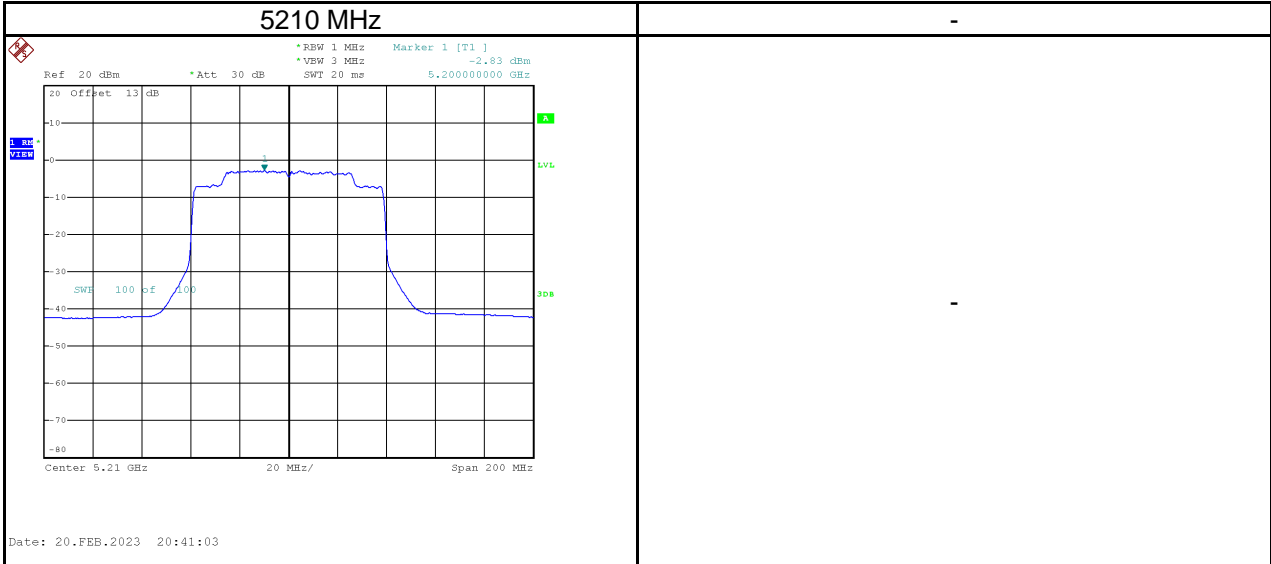

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5290                 | -3.61                   | 0.08             | -3.53                              | 11.00                   | Pass   |

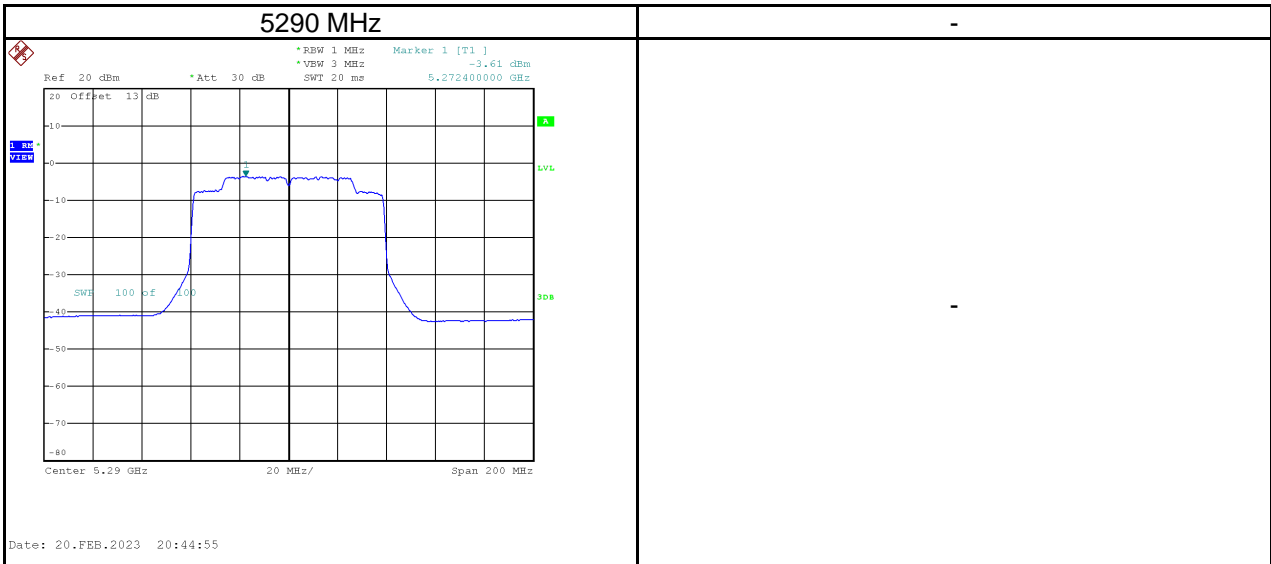


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5530                 | -3.50                   | 0.08             | -3.42                              | 11.00                   | Pass   |
| 5610                 | -3.86                   | 0.08             | -3.78                              | 11.00                   | Pass   |

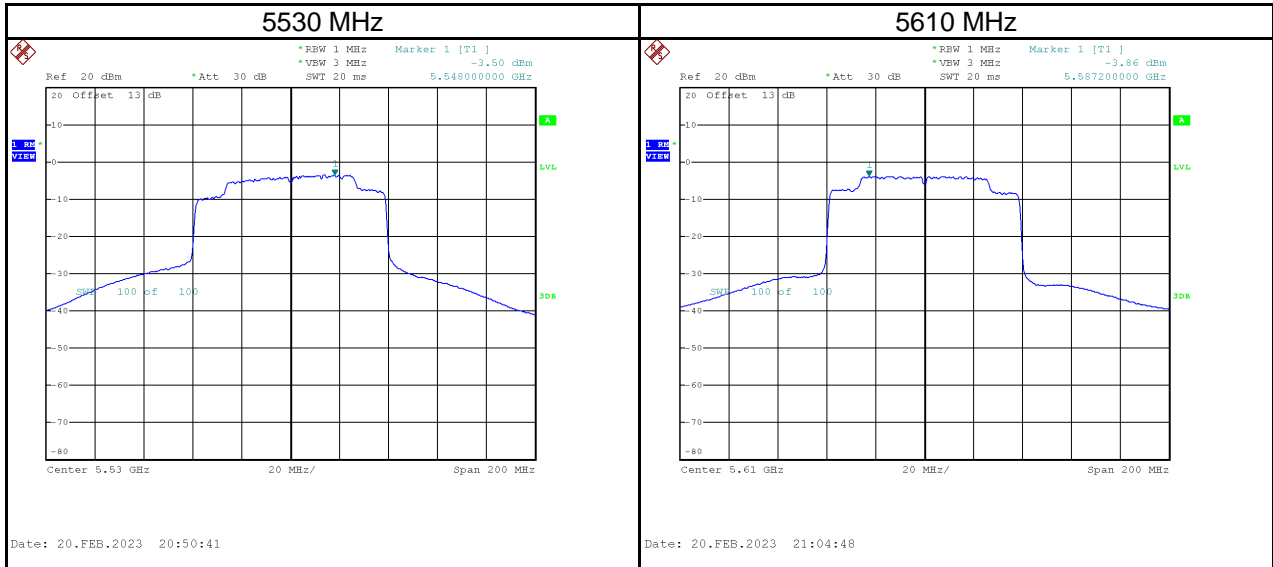


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -6.30                       | 0.69                        | 0.08             | 0.77                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

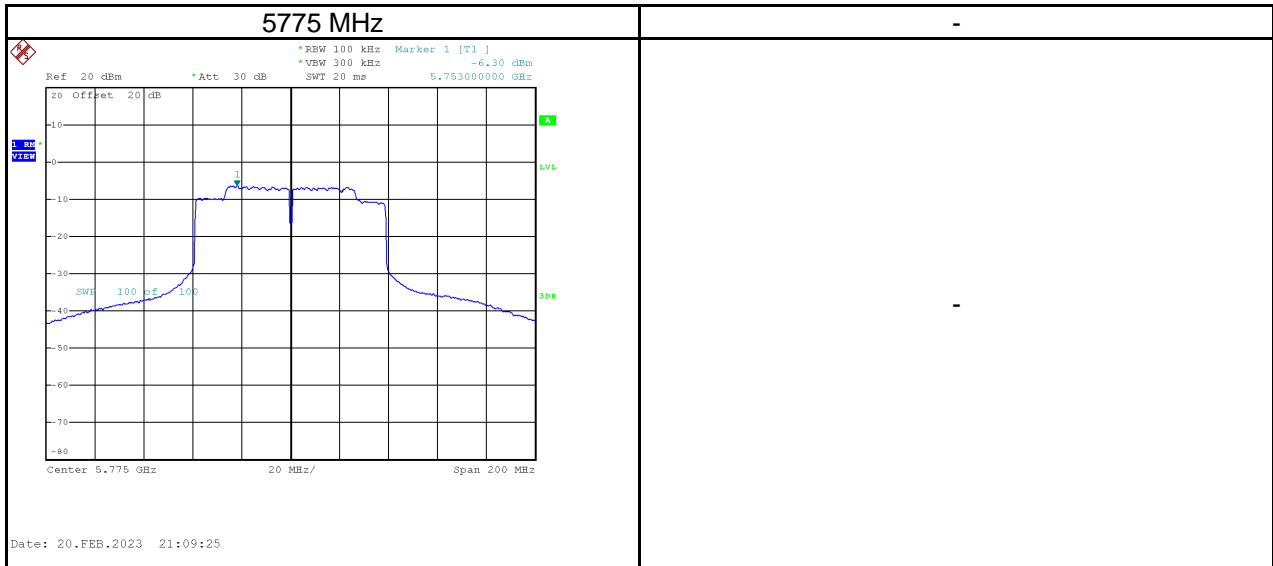


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna |
|-----------|----------------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -2.27                   | 0.08             | -2.19                              | 17.00                   | Pass   |

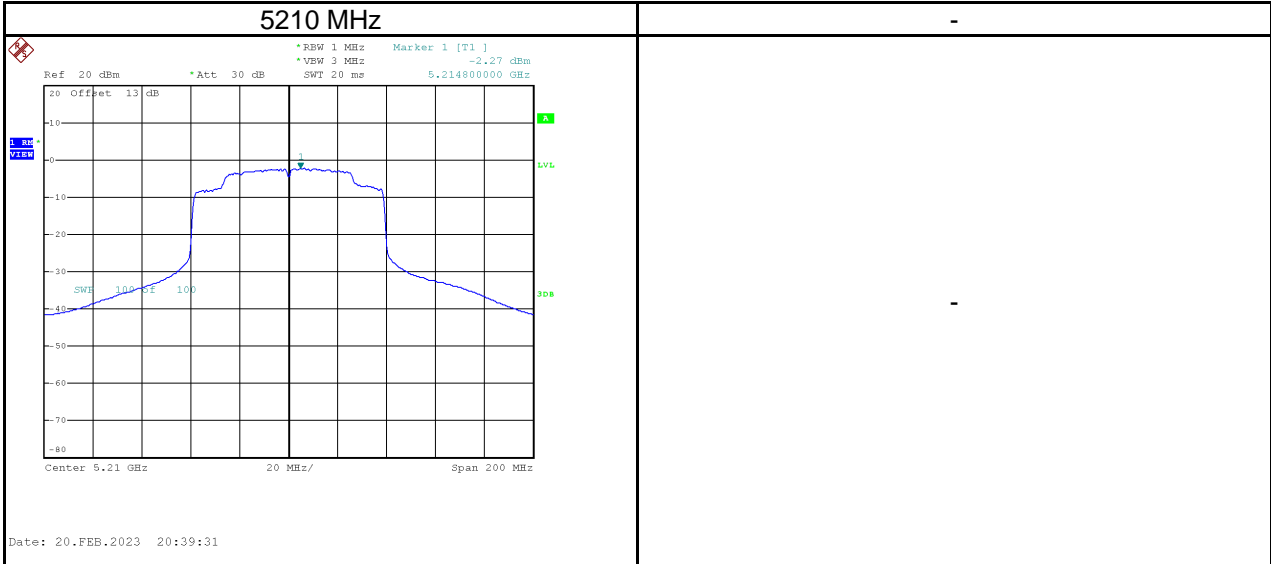

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5290                 | -2.39                   | 0.08             | -2.31                              | 11.00                   | Pass   |

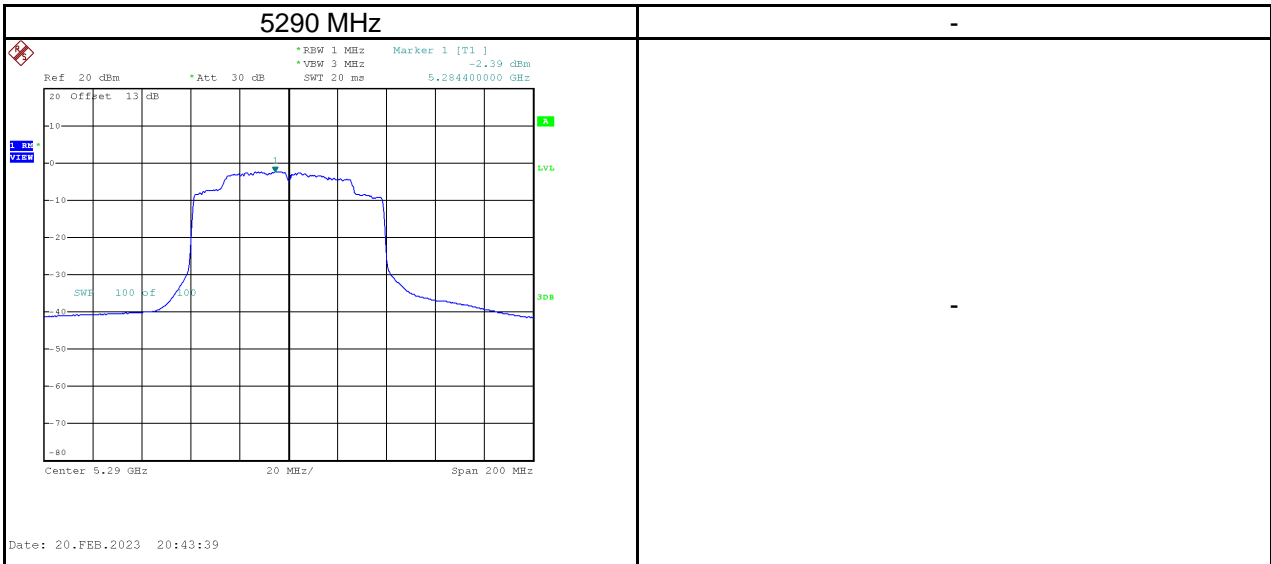


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5530                 | -3.78                   | 0.08             | -3.70                              | 11.00                   | Pass   |
| 5610                 | -3.65                   | 0.08             | -3.57                              | 11.00                   | Pass   |

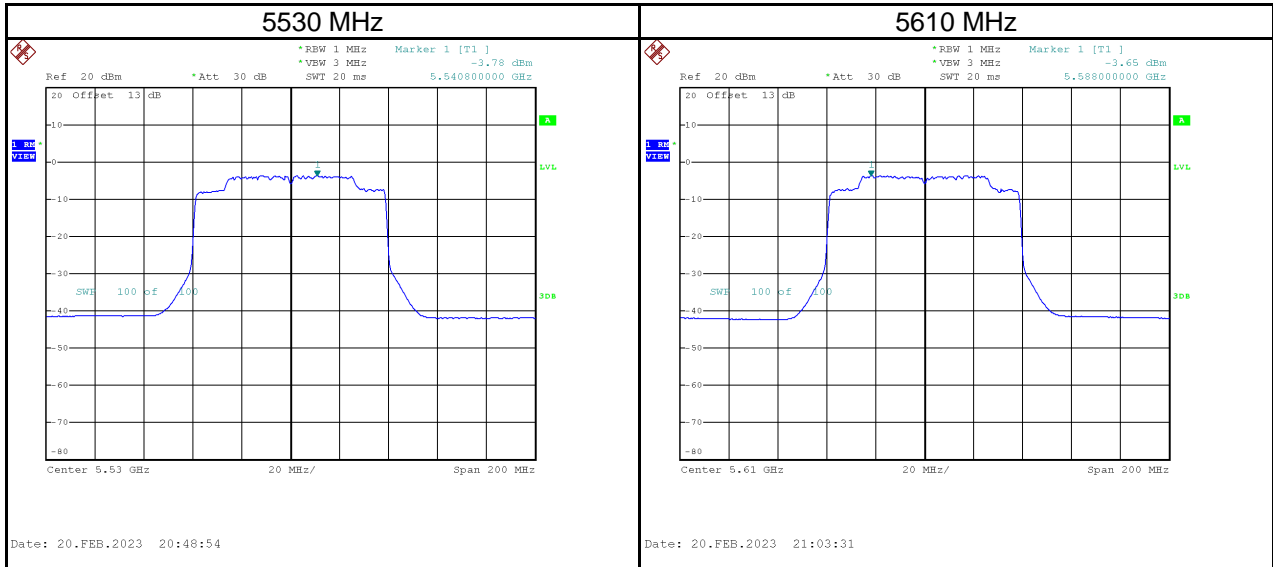

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -6.13                       | 0.86                        | 0.08             | 0.94                                   | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

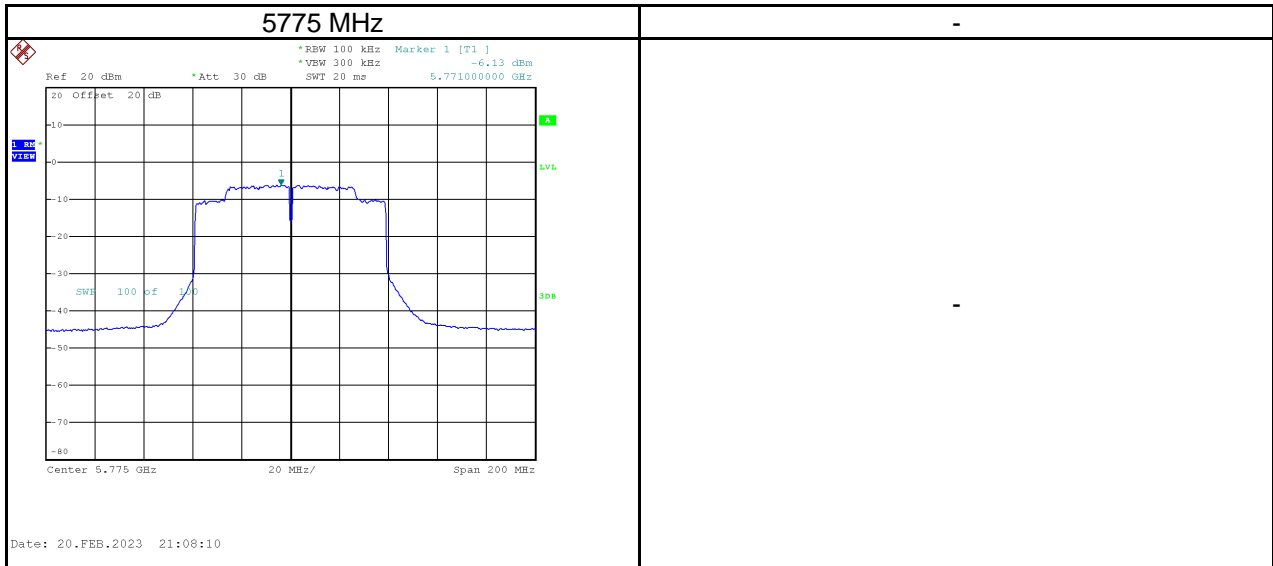

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Total |
|-----------|----------------------------|


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 0.47                    | 0.08             | 0.55                               | 17.00                   | Pass   |
| 5290                 | 0.05                    | 0.08             | 0.13                               | 11.00                   | Pass   |
| 5530                 | -0.63                   | 0.08             | -0.55                              | 11.00                   | Pass   |
| 5610                 | -0.74                   | 0.08             | -0.67                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5775                 | -3.20                       | 3.79                        | 0.08             | 3.86                                   | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                    |
|-----------|------------------------------------|
| Test Mode | IEEE 802.11ax (HE160)_Main Antenna |
|-----------|------------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -6.10                   | 0.10             | -6.00                              | 17.00                   | Pass   |

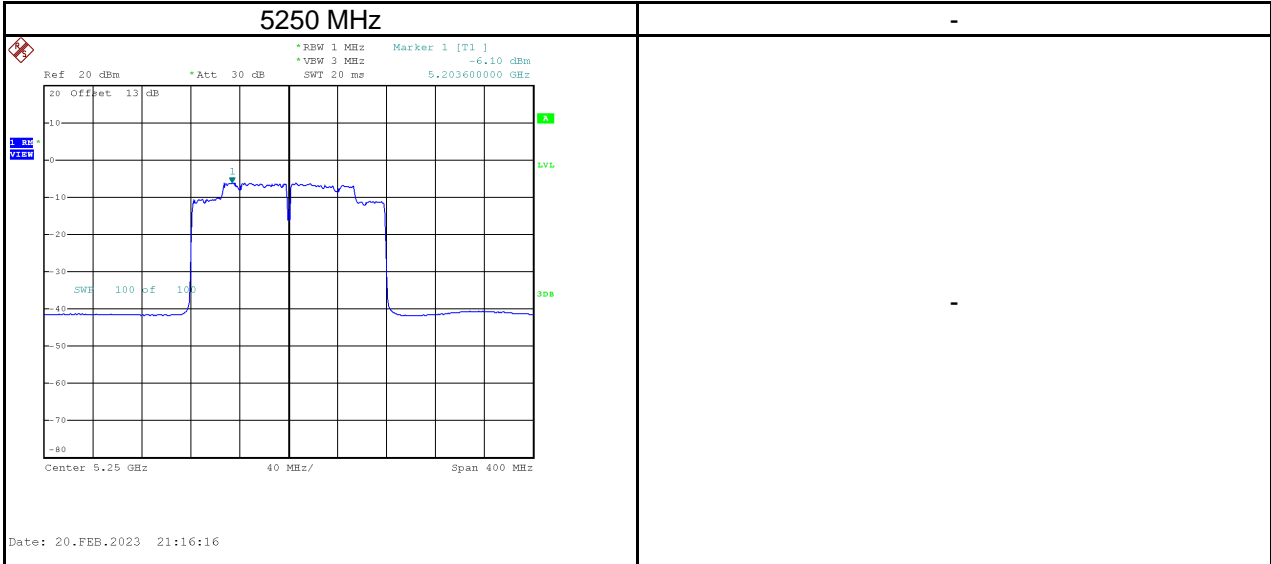


| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5570                 | -6.53                   | 0.10             | -6.43                              | 11.00                   | Pass   |

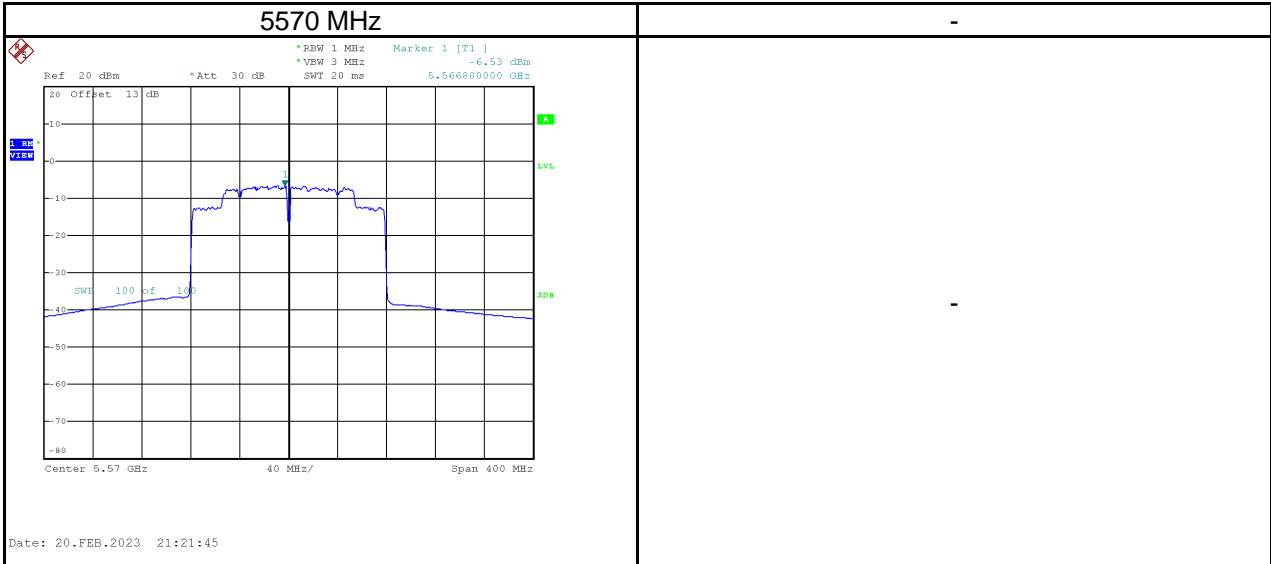


|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE160)_Aux Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -5.67                   | 0.10             | -5.57                              | 17.00                   | Pass   |

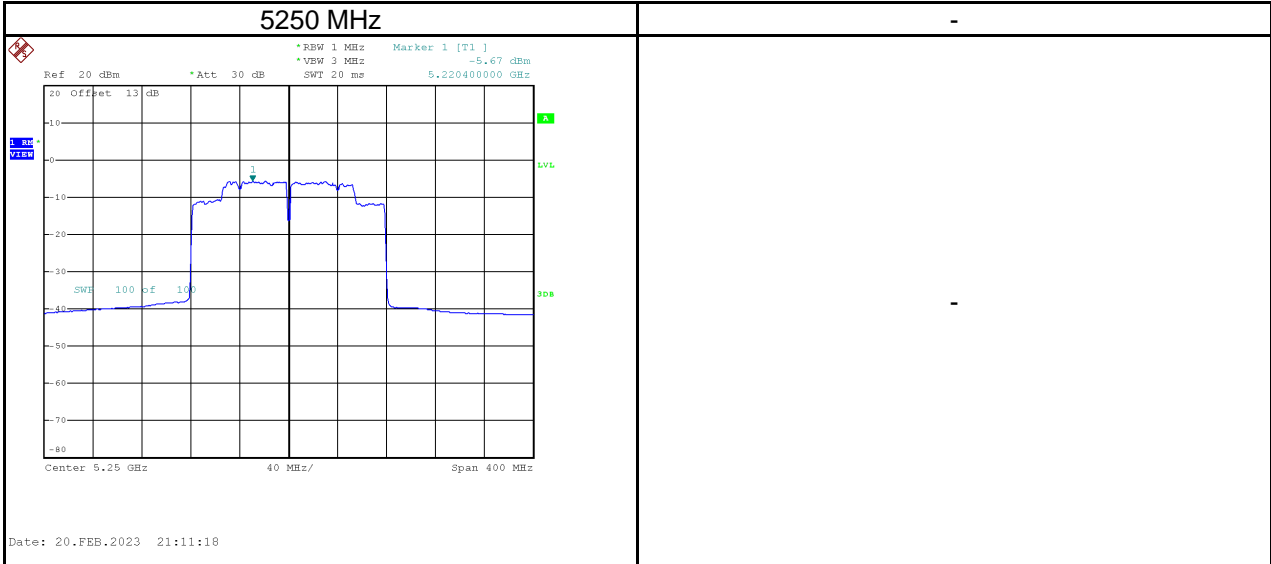

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5570                 | -6.41                   | 0.10             | -6.31                              | 11.00                   | Pass   |

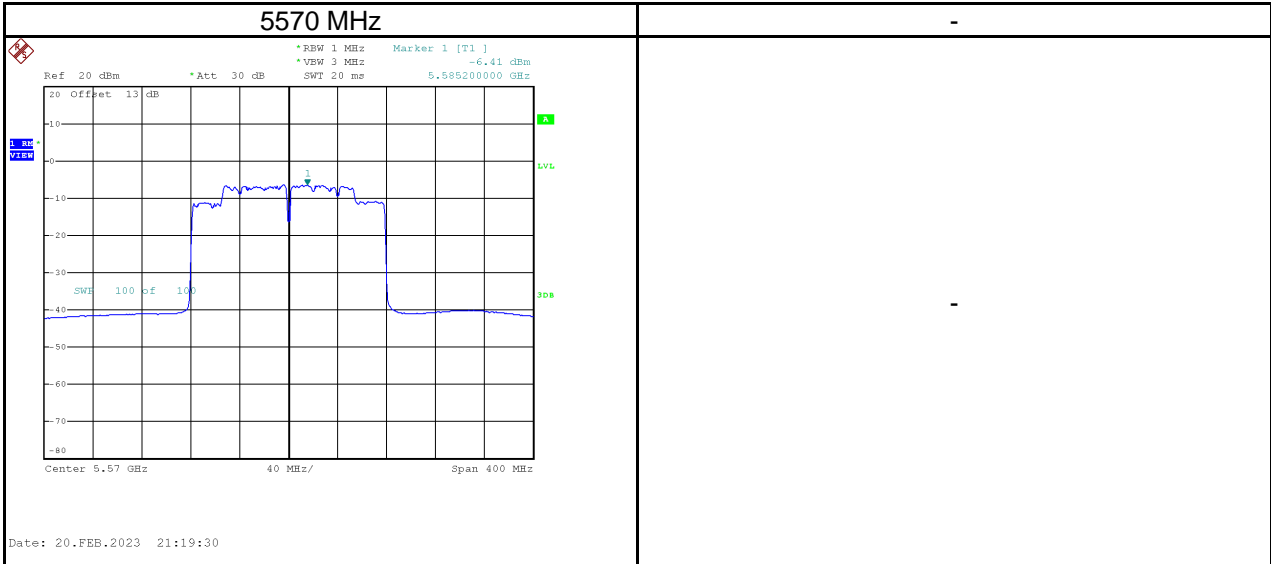

|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ax (HE160)_Total |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5250                 | -2.87                   | 0.10             | -2.77                              | 17.00                   | Pass   |
| 5570                 | -3.46                   | 0.10             | -3.36                              | 11.00                   | Pass   |


For Straddle Channel:

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11n (HT20)_Main Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 3.12                    | 0.09             | 3.21                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -4.55                       | -7.56                       | 0.09             | -7.47                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

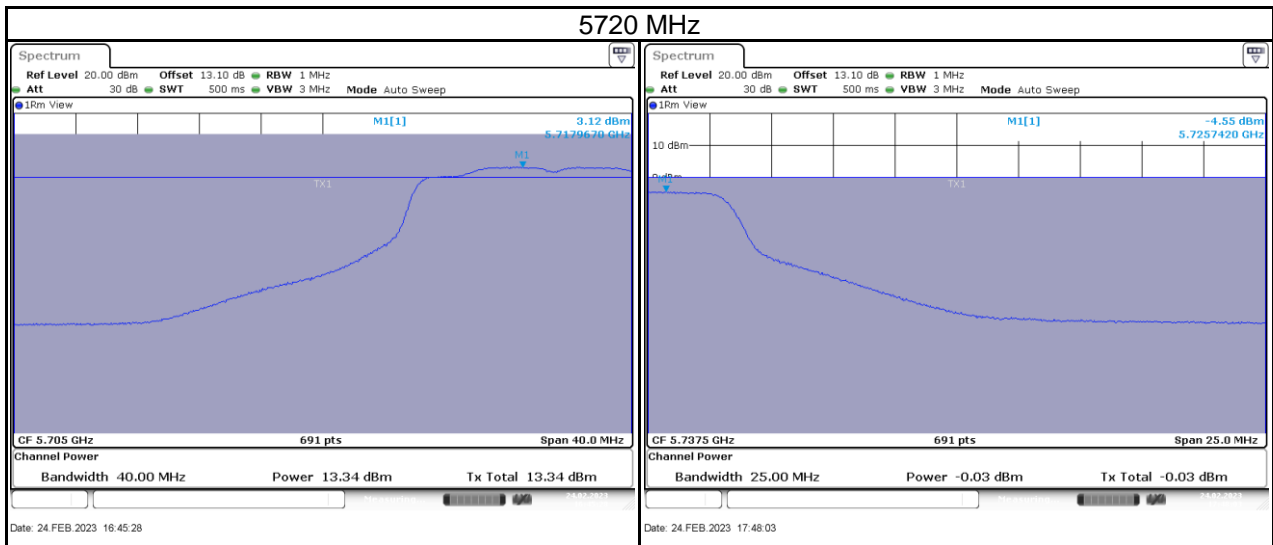


|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT20)_Aux Antenna |
|-----------|---------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 3.27                    | 0.09             | 3.36                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -1.56                       | -4.57                       | 0.09             | -4.48                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

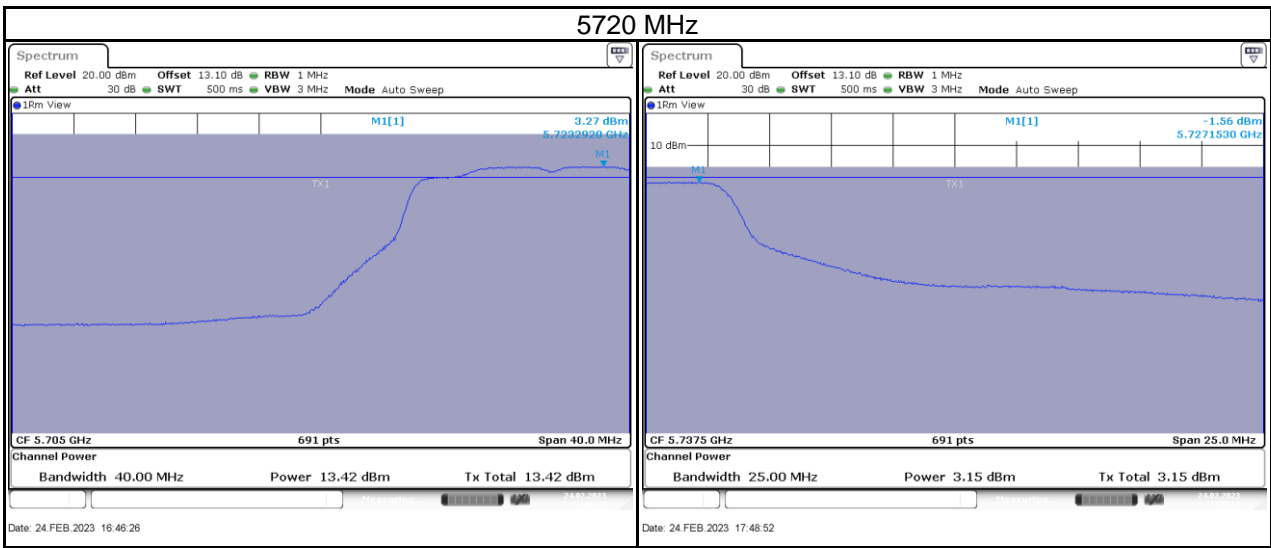

|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Total |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 6.21                    | 0.09             | 6.29                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -9.79                       | -2.80                       | 0.09             | -2.72                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11n (HT40)_Main Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | 0.26                    | 0.11             | 0.37                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -4.23                       | -7.24                       | 0.11             | -7.13                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

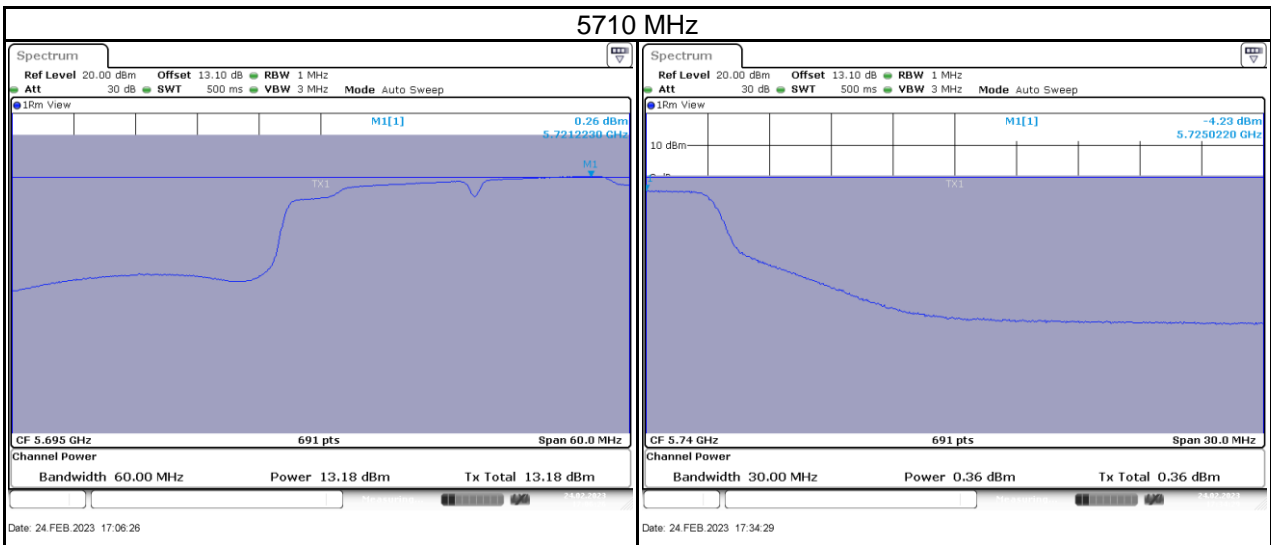


|           |                                 |
|-----------|---------------------------------|
| Test Mode | IEEE 802.11n (HT40)_Aux Antenna |
|-----------|---------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | -0.42                   | 0.11             | -0.31                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -1.13                       | -4.14                       | 0.11             | -4.03                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

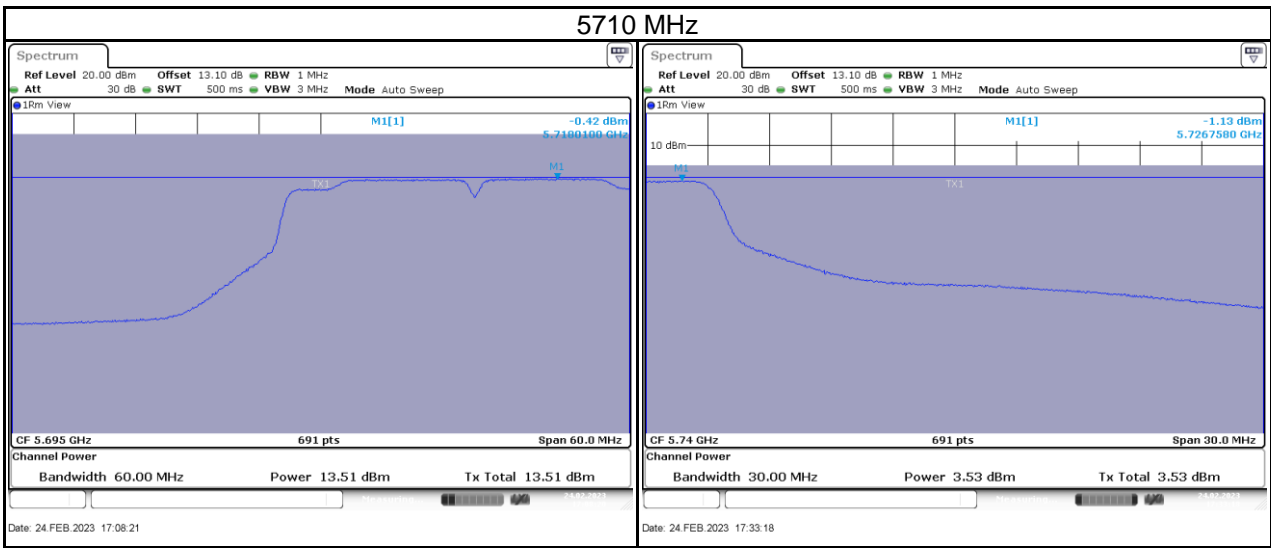

|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT40)_Total |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | 2.94                    | 0.11             | 3.05                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -9.40                       | -2.41                       | 0.11             | -2.30                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                    |
|-----------|------------------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Main Antenna |
|-----------|------------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -3.68                   | 0.05             | -3.63                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -7.81                       | -10.82                      | 0.05             | -10.77                                 | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

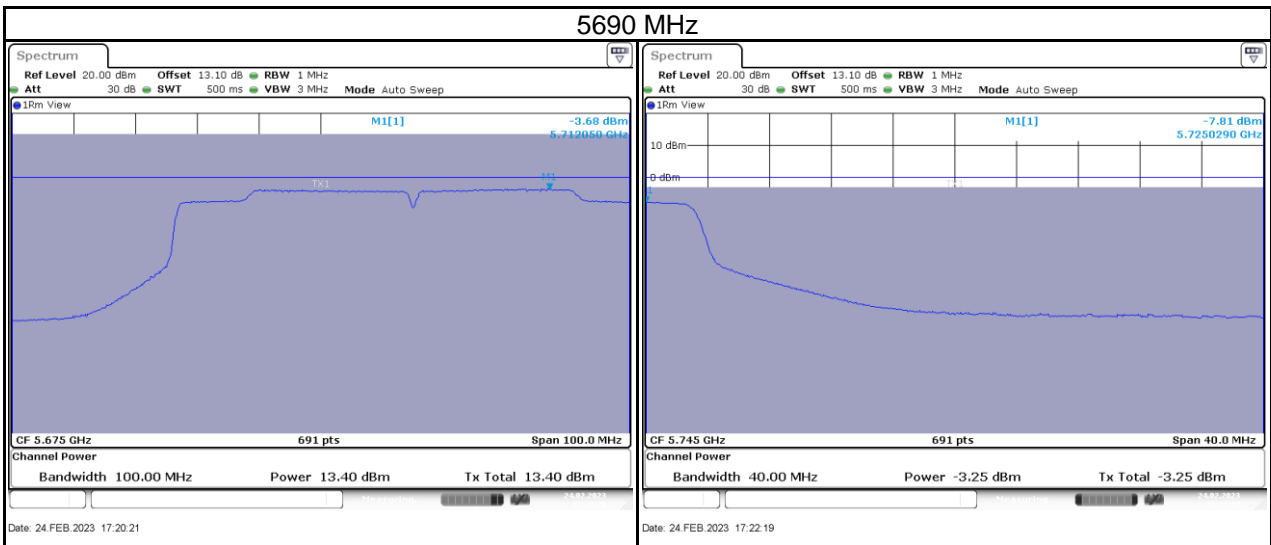


|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Aux Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -3.30                   | 0.05             | -3.25                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -7.31                       | -10.32                      | 0.05             | -10.27                                 | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

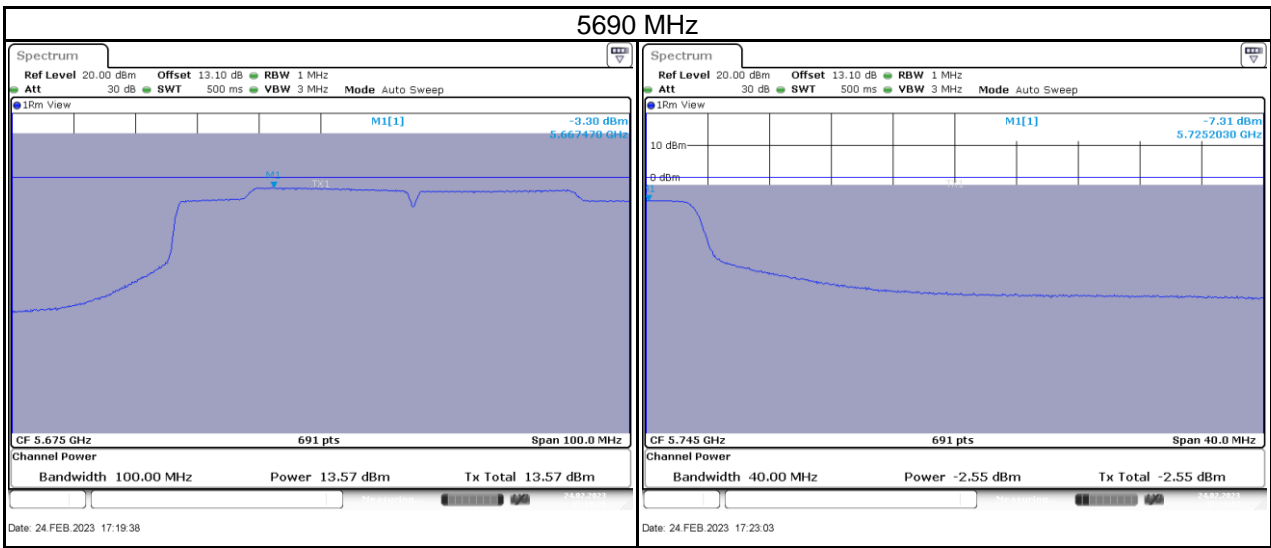

|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Total |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -0.48                   | 0.05             | -0.43                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -4.54                       | -7.55                       | 0.05             | -7.51                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Main Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 3.12                    | 0.02             | 3.14                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -3.71                       | -6.72                       | 0.02             | -6.70                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

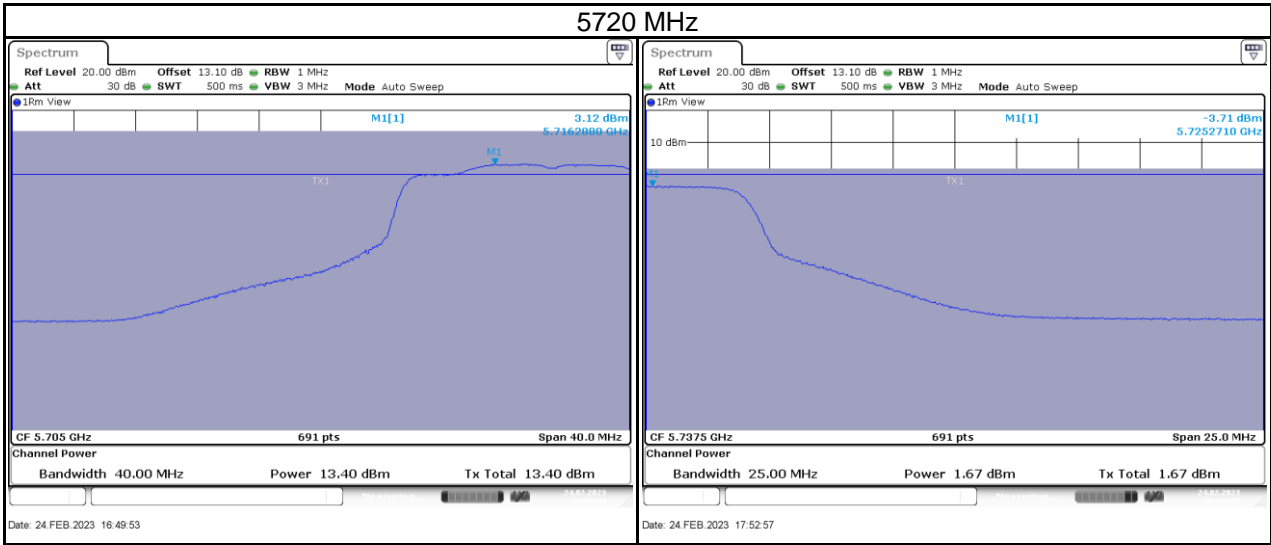


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 3.15                    | 0.02             | 3.17                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -3.06                       | -6.07                       | 0.02             | -6.05                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

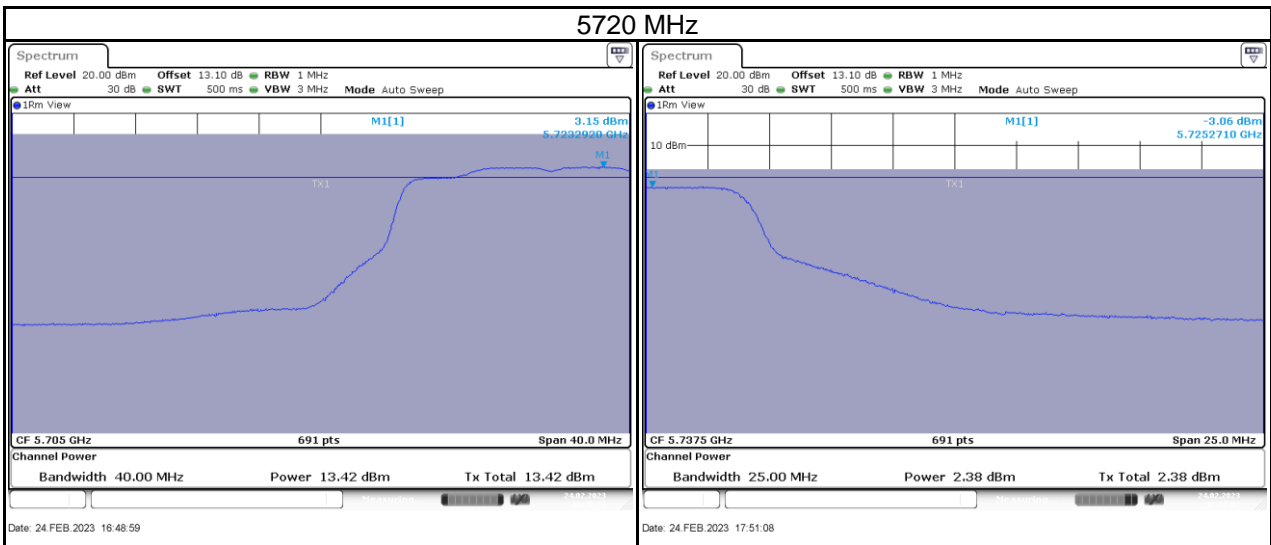

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Total |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5720                 | 6.15                    | 0.02             | 6.17                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5720                 | -10.36                      | -3.37                       | 0.02             | -3.35                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Main Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | 0.18                    | 0.04             | 0.22                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -4.27                       | -7.28                       | 0.04             | -7.24                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

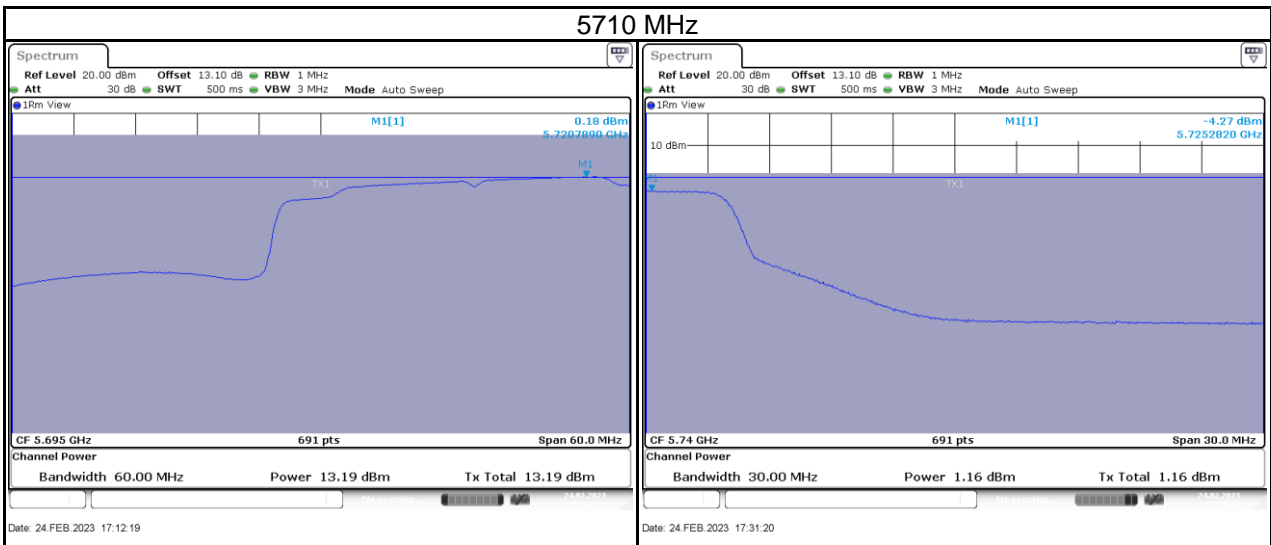


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | -0.50                   | 0.04             | -0.46                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -1.09                       | -4.10                       | 0.04             | -4.06                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

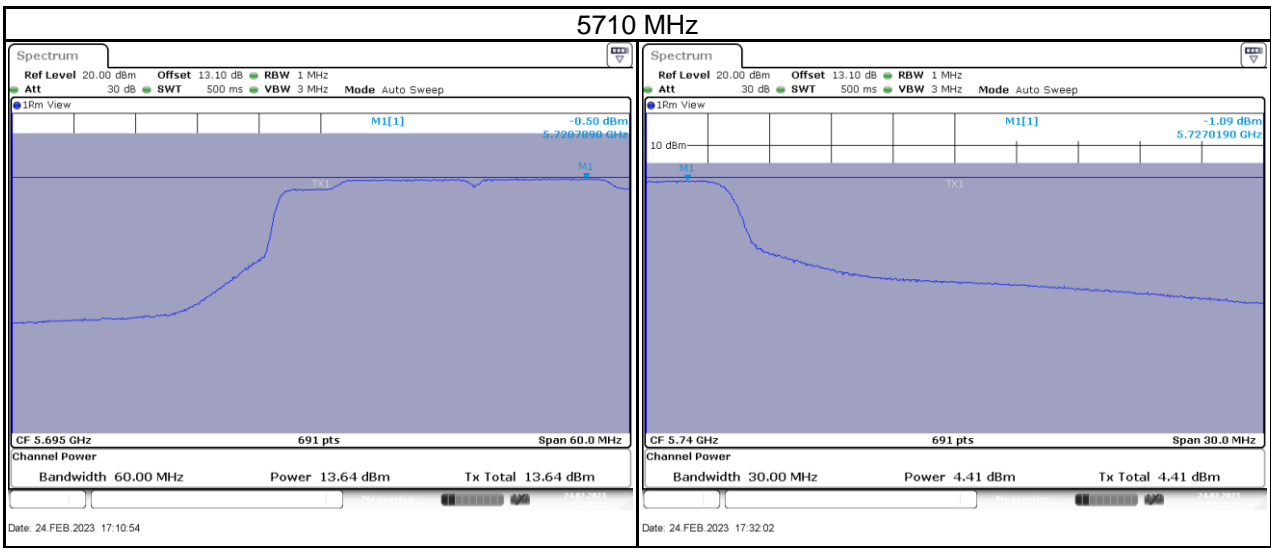

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Total |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5710                 | 2.86                    | 0.04             | 2.90                               | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5710                 | -9.38                       | -2.40                       | 0.04             | -2.35                                  | 30.00                       | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

|           |                                   |
|-----------|-----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Main Antenna |
|-----------|-----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -3.71                   | 0.08             | -3.63                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -7.93                       | -10.94                      | 0.08             | -10.86                                 | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

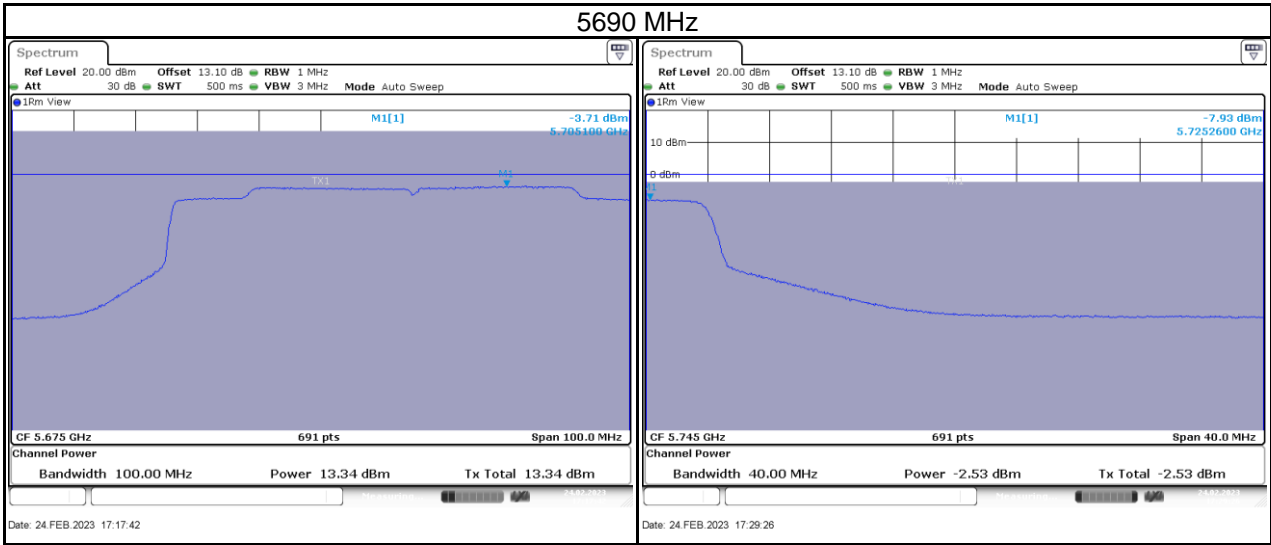


|           |                                  |
|-----------|----------------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Aux Antenna |
|-----------|----------------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -3.47                   | 0.08             | -3.39                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -7.50                       | -10.51                      | 0.08             | -10.43                                 | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

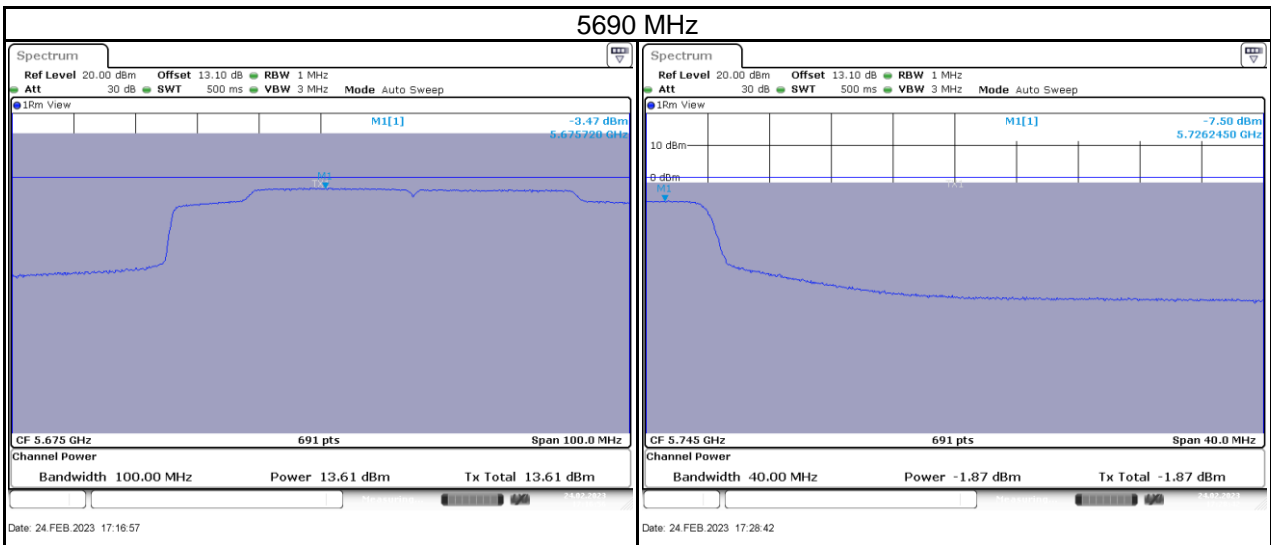

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Total |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5690                 | -0.58                   | 0.08             | -0.50                              | 11.00                   | Pass   |

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|--|-----------------------------|--------|
| 5690                 | -14.70                      | -7.71                       | 0.08             | -7.63                                  | 30.00                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

End of Test Report