



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2613

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 14:34:35

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

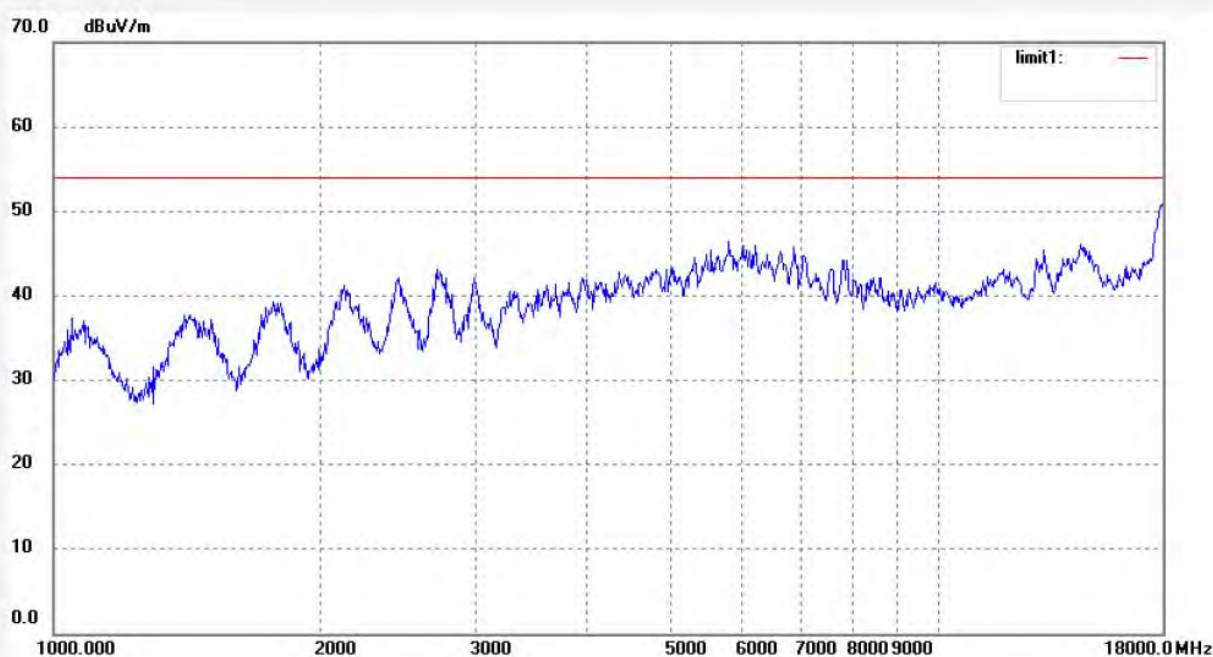

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2612

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012-10-13

Time: 14:30:52

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

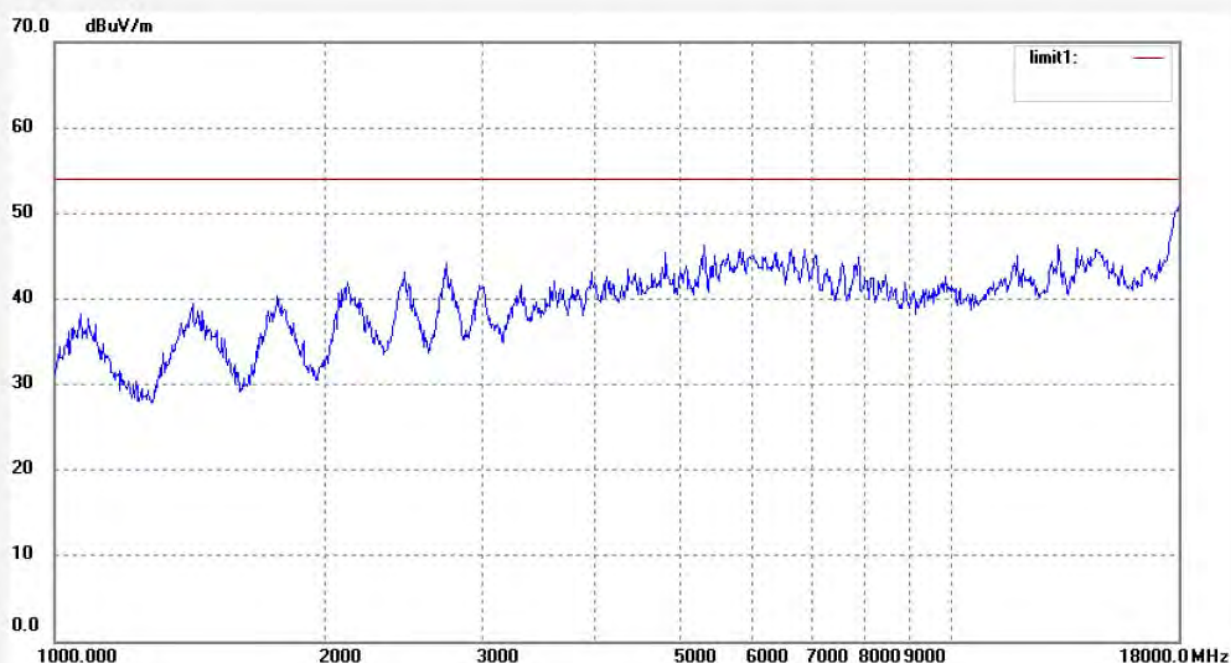

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2547

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 12/10/15/

Time: 12/30/57

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

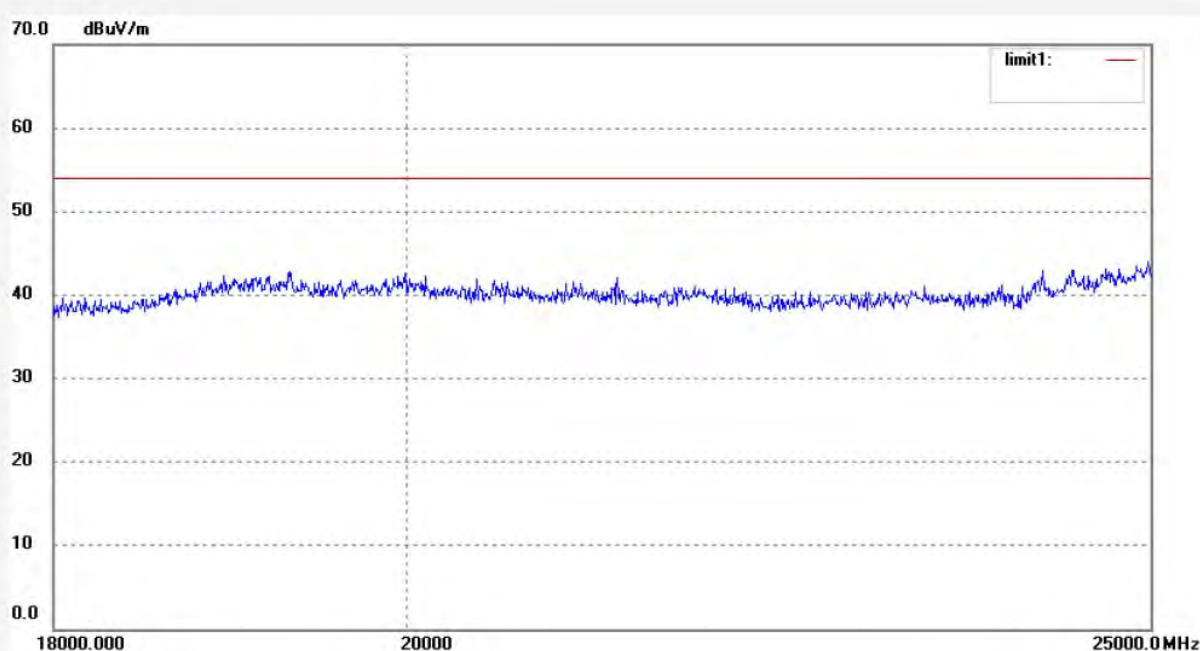

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #2548

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 6(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 12/10/15/

Time: 12/34/06

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

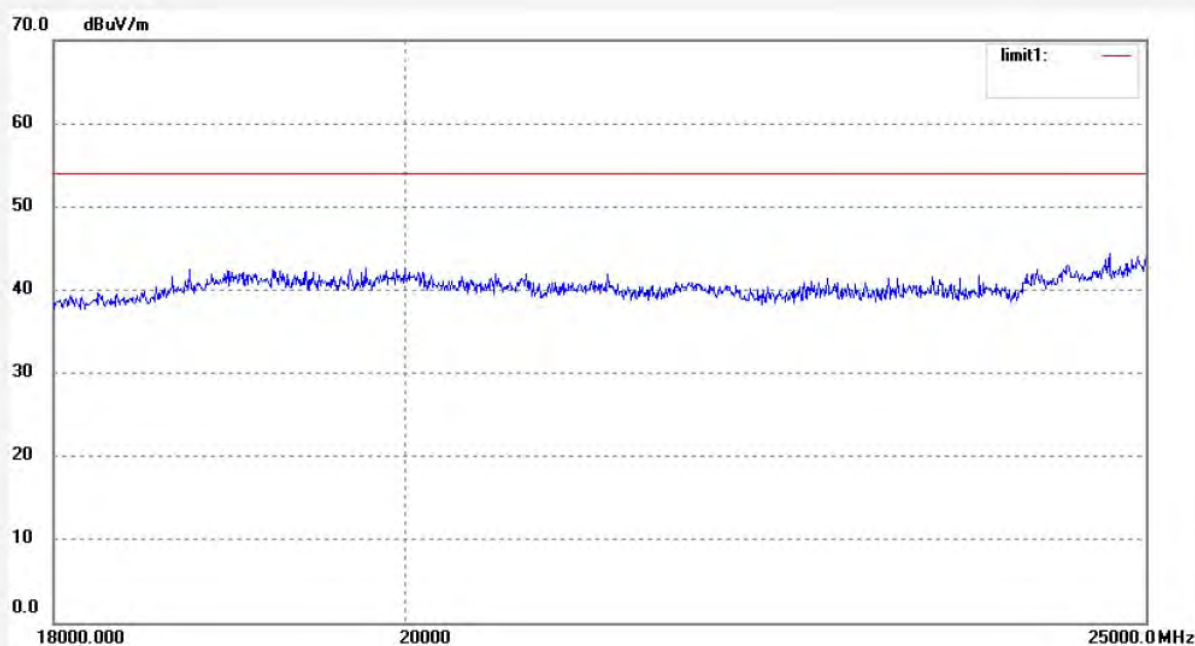

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2591

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 12:27:40

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

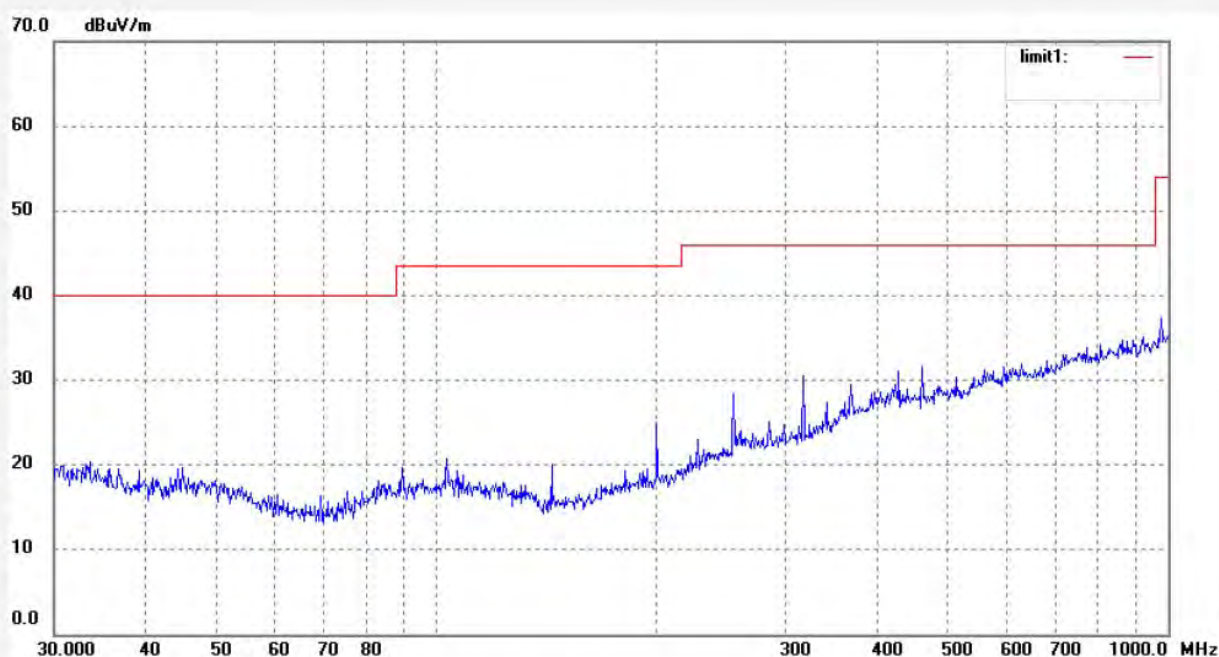

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2590

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012-10-13

Time: 12:22:55

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

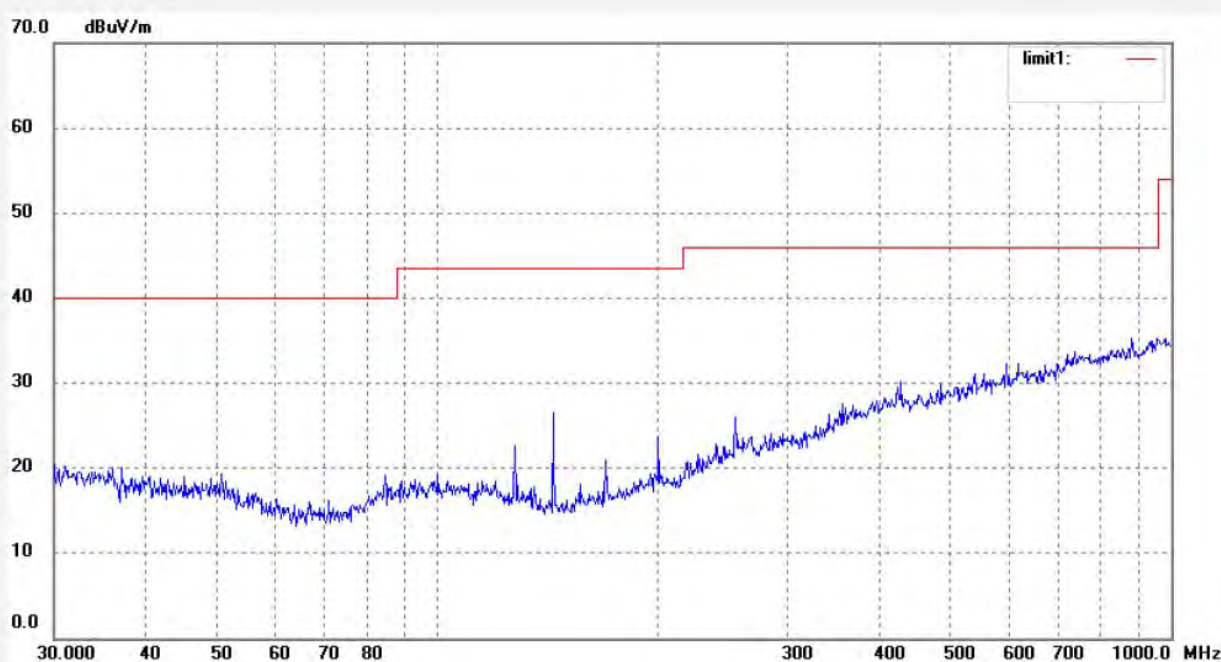

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2614

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 14:38:17

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

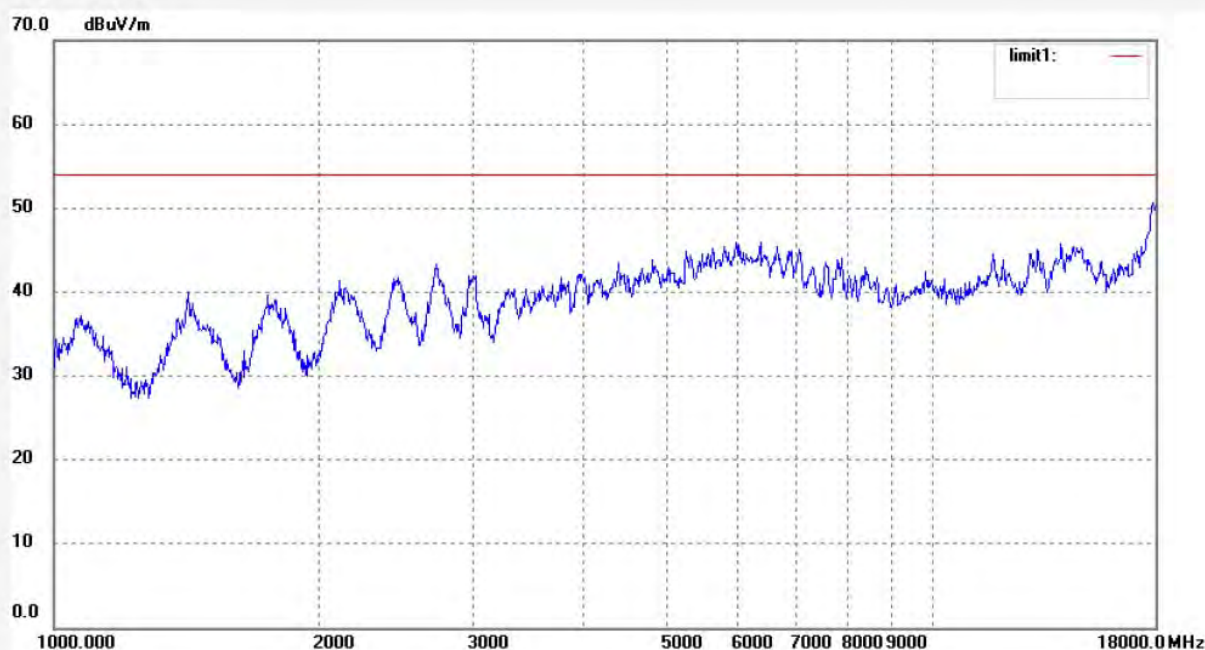

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2615
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 11(802.11n)
Model: PC7007
Manufacturer: Kintech

Polarization: Vertical
Power Source: DC 3.7V
Date: 2012-10-13
Time: 14:41:09
Engineer Signature:
Distance: 3m

Note: Report No.: ATE20122079

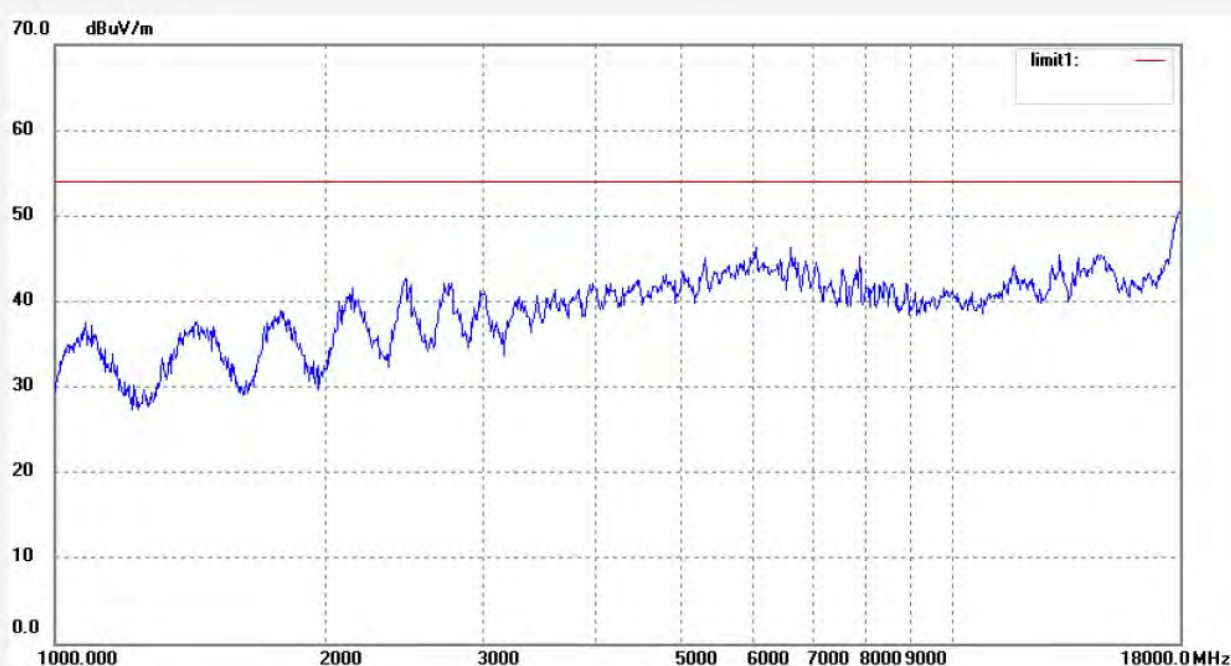

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2550	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 12/10/15/
Temp.(C)/Hum.(%) 23 C / 49 %	Time: 12/41/36
EUT: Tablet PC	Engineer Signature:
Mode: TX Channel 11(802.11n)	Distance: 3m
Model: PC7007	
Manufacturer: Kintech	

Note: Report No.:ATE20122079

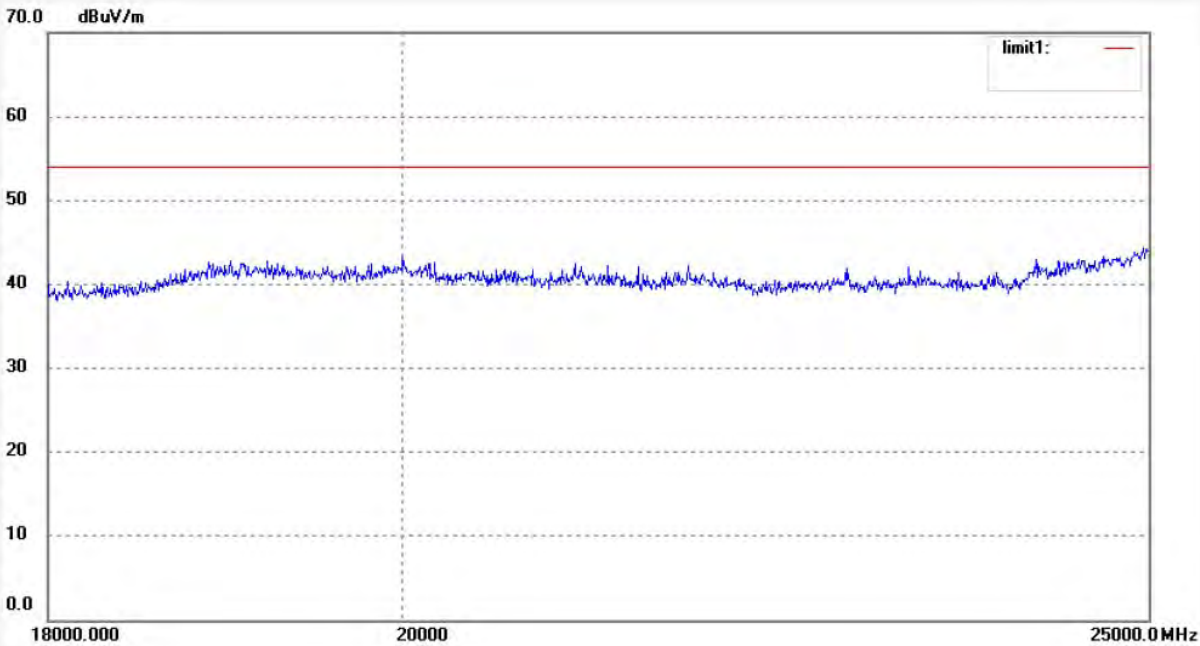

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #2549

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 12/10/15/

Time: 12/39/01

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

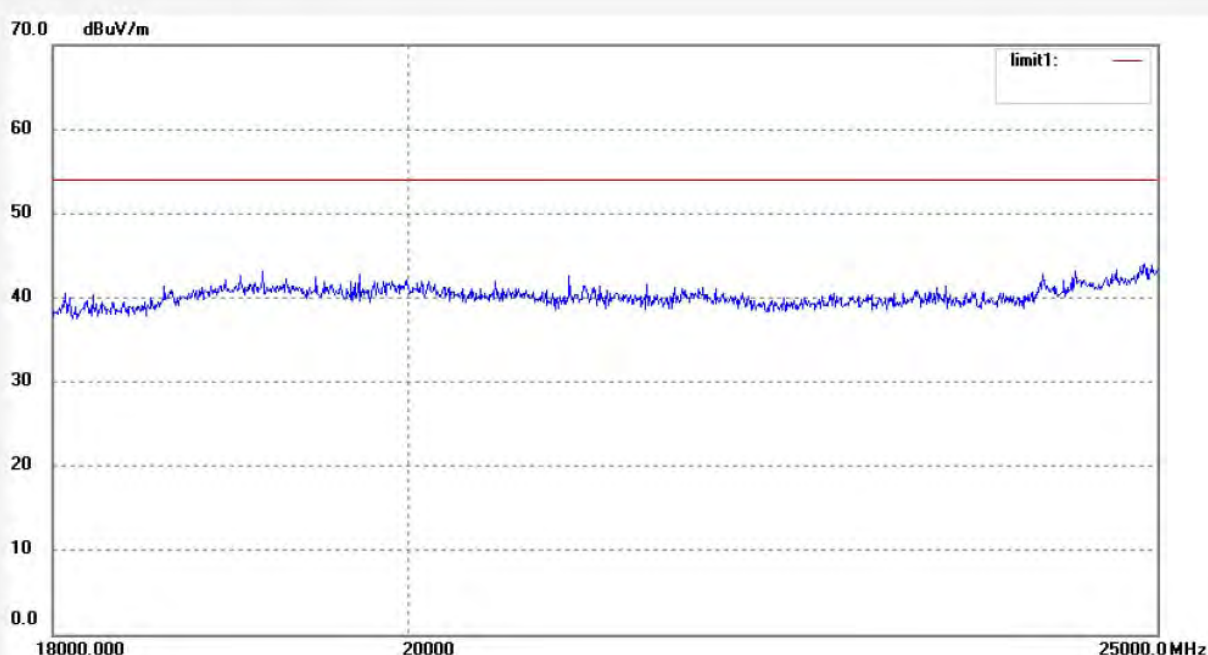

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2624

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:22:34

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

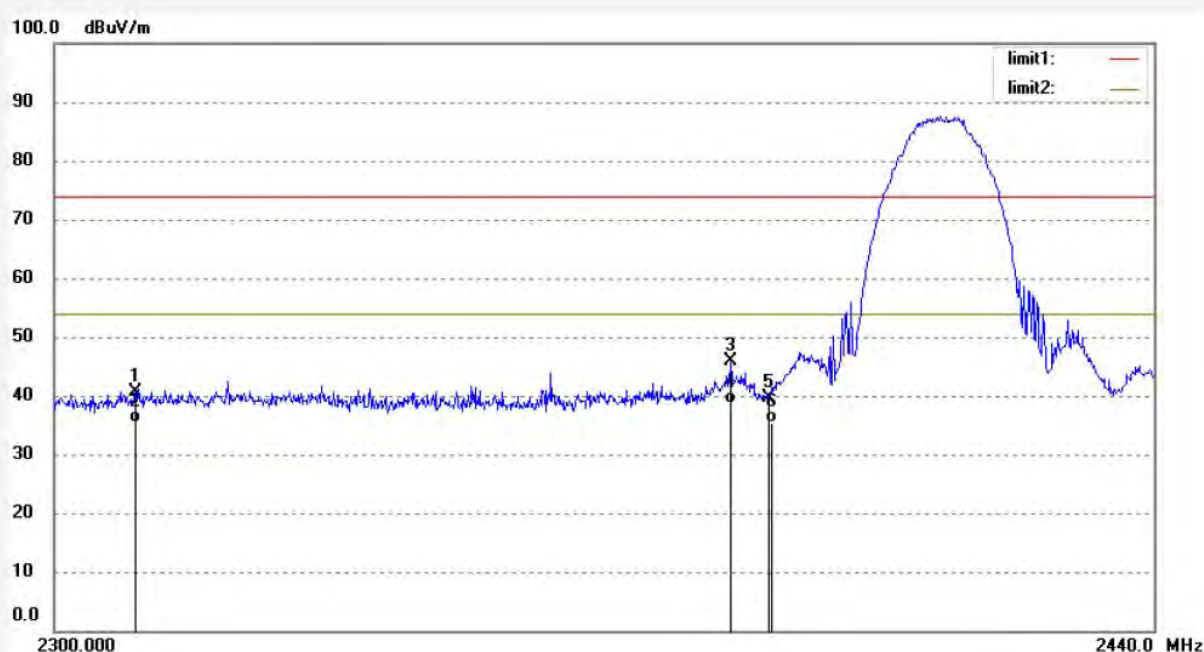

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	48.52	-7.81	40.71	74.00	-33.29	peak			
2	2310.000	43.23	-7.81	35.42	54.00	-18.58	AVG			
3	2385.151	53.33	-7.56	45.77	74.00	-28.23	peak			
4	2385.151	46.28	-7.56	38.72	54.00	-15.28	AVG			
5	2390.000	47.25	-7.53	39.72	74.00	-34.28	peak			
6	2390.000	42.79	-7.53	35.26	54.00	-18.74	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2623

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11b)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:17:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

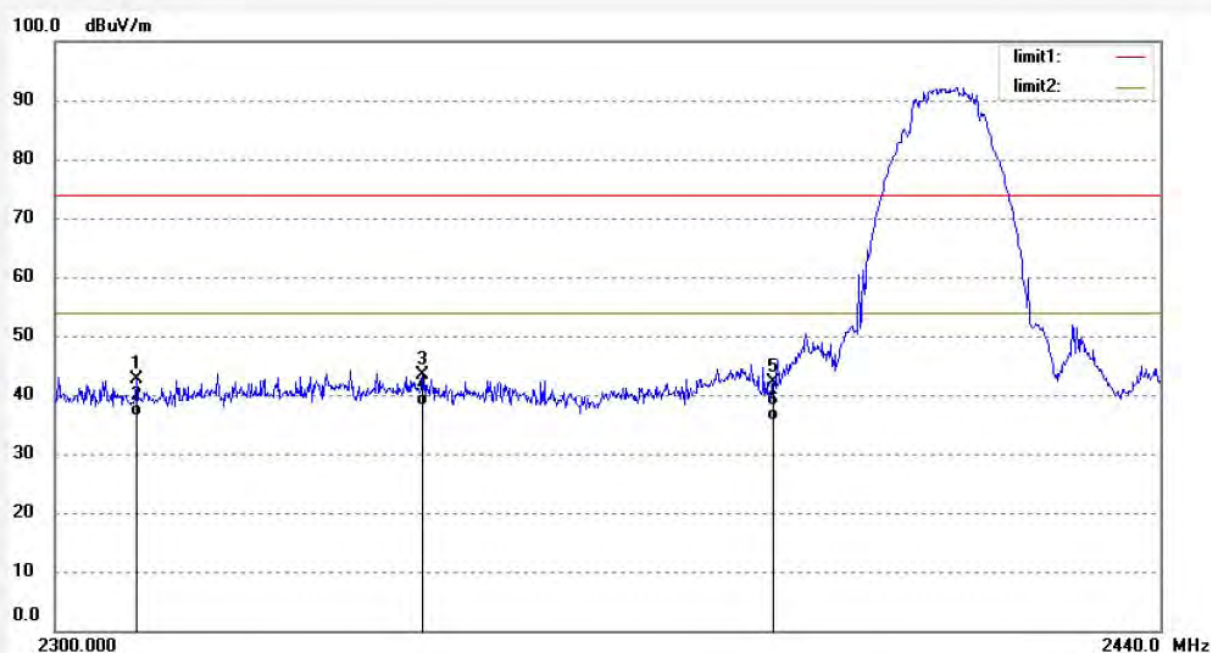

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	50.40	-7.81	42.59	74.00	-31.41	peak			
2	2310.000	44.28	-7.81	36.47	54.00	-17.53	AVG			
3	2345.658	51.12	-7.79	43.33	74.00	-30.67	peak			
4	2345.658	45.98	-7.79	38.19	54.00	-15.81	AVG			
5	2390.000	49.75	-7.53	42.22	74.00	-31.78	peak			
6	2390.000	43.18	-7.53	35.65	54.00	-18.35	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2625
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 11(802.11b)
Model: PC7007
Manufacturer: Kintech

Polarization: Horizontal
Power Source: DC 3.7V
Date: 2012-10-13
Time: 15:26:30
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

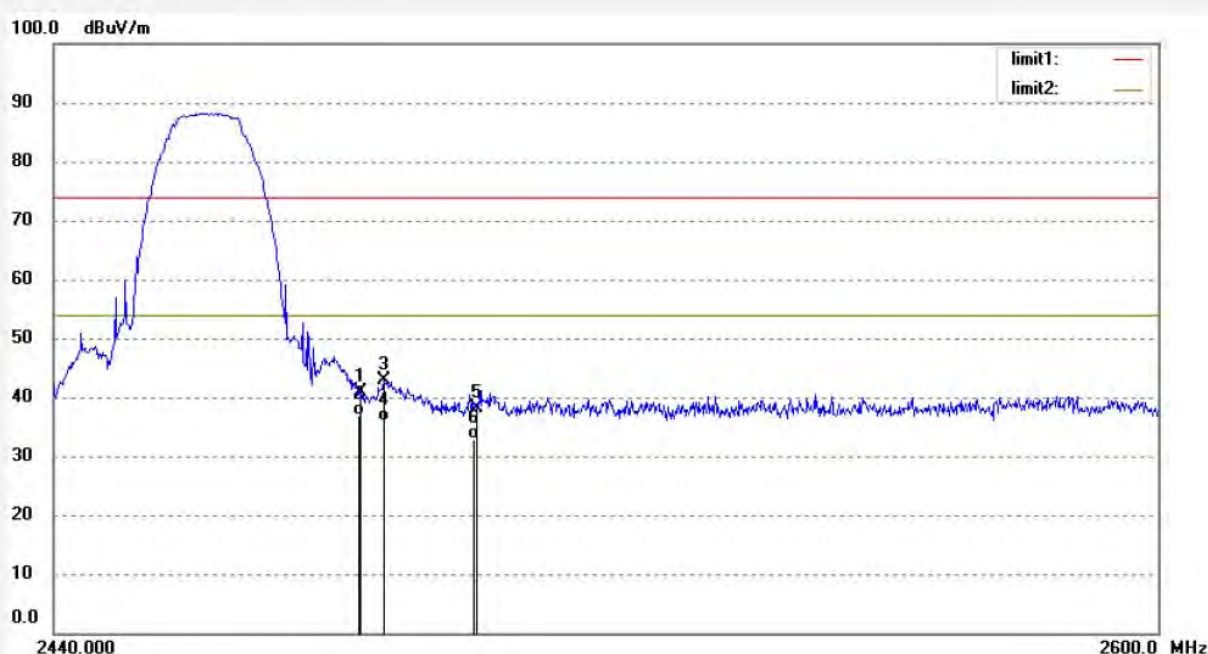

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.18	-7.37	40.81	74.00	-33.19	peak			
2	2483.500	44.28	-7.37	36.91	54.00	-17.09	AVG			
3	2486.874	50.28	-7.38	42.90	74.00	-31.10	peak			
4	2486.874	43.28	-7.38	35.90	54.00	-18.10	AVG			
5	2500.000	45.61	-7.40	38.21	74.00	-35.79	peak			
6	2500.000	40.22	-7.40	32.82	54.00	-21.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2626
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 11(802.11b)
Model: PC7007
Manufacturer: Kintech

Polarization: Vertical
Power Source: DC 3.7V
Date: 2012-10-13
Time: 15:30:08
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

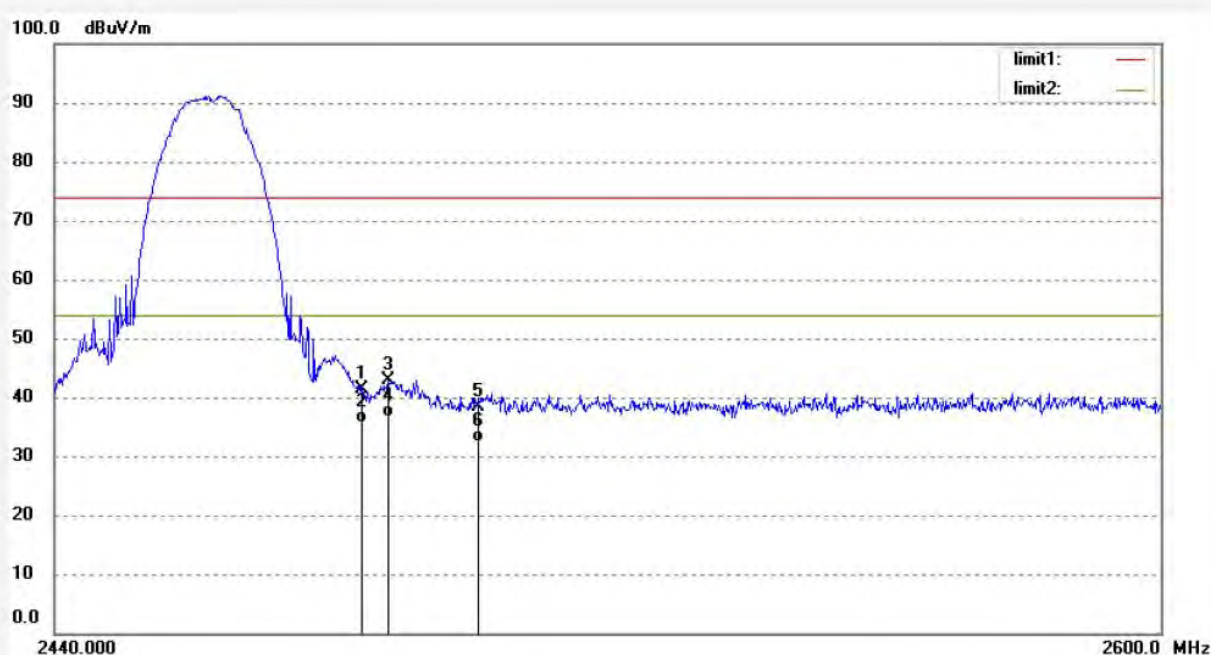

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	48.80	-7.37	41.43	74.00	-32.57	peak			
2	2483.500	43.07	-7.37	35.70	54.00	-18.30	AVG			
3	2487.349	50.18	-7.38	42.80	74.00	-31.20	peak			
4	2487.349	44.07	-7.38	36.69	54.00	-17.31	AVG			
5	2500.000	45.89	-7.40	38.49	74.00	-35.51	peak			
6	2500.000	39.66	-7.40	32.26	54.00	-21.74	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2628

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:40:27

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

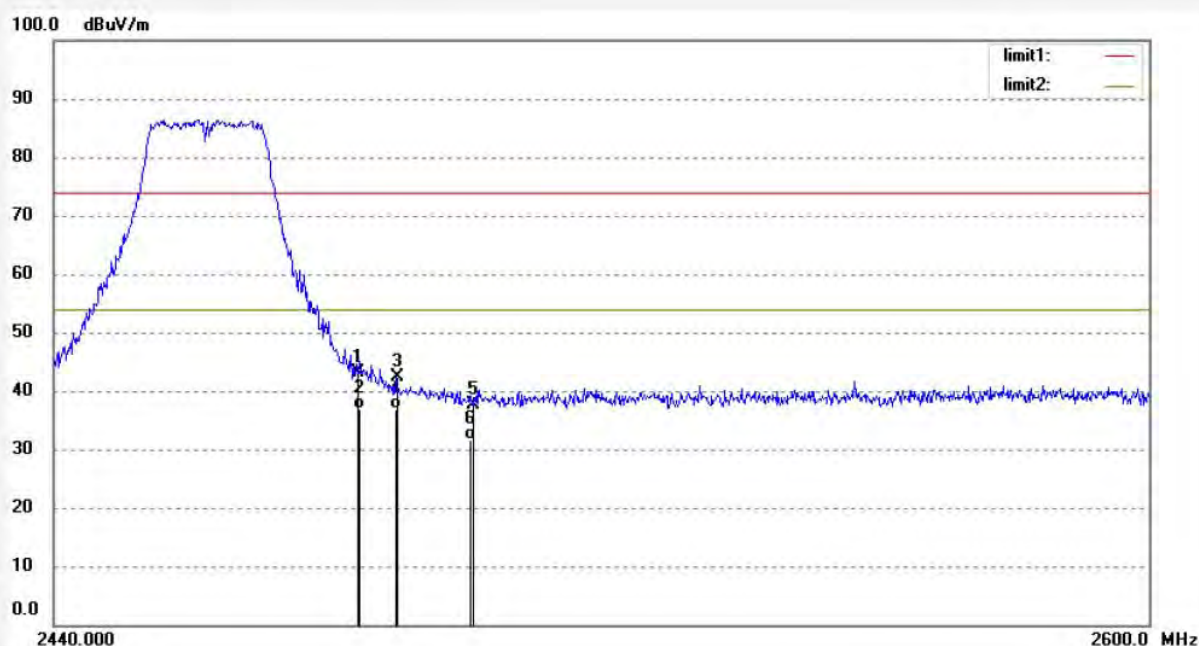

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.51	-7.37	43.14	74.00	-30.86	peak			
2	2483.500	44.24	-7.37	36.87	54.00	-17.13	AVG			
3	2488.933	49.80	-7.39	42.41	74.00	-31.59	peak			
4	2488.933	44.39	-7.39	37.00	54.00	-17.00	AVG			
5	2500.000	45.12	-7.40	37.72	74.00	-36.28	peak			
6	2500.000	39.15	-7.40	31.75	54.00	-22.25	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2627

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11g)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:35:38

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20122079

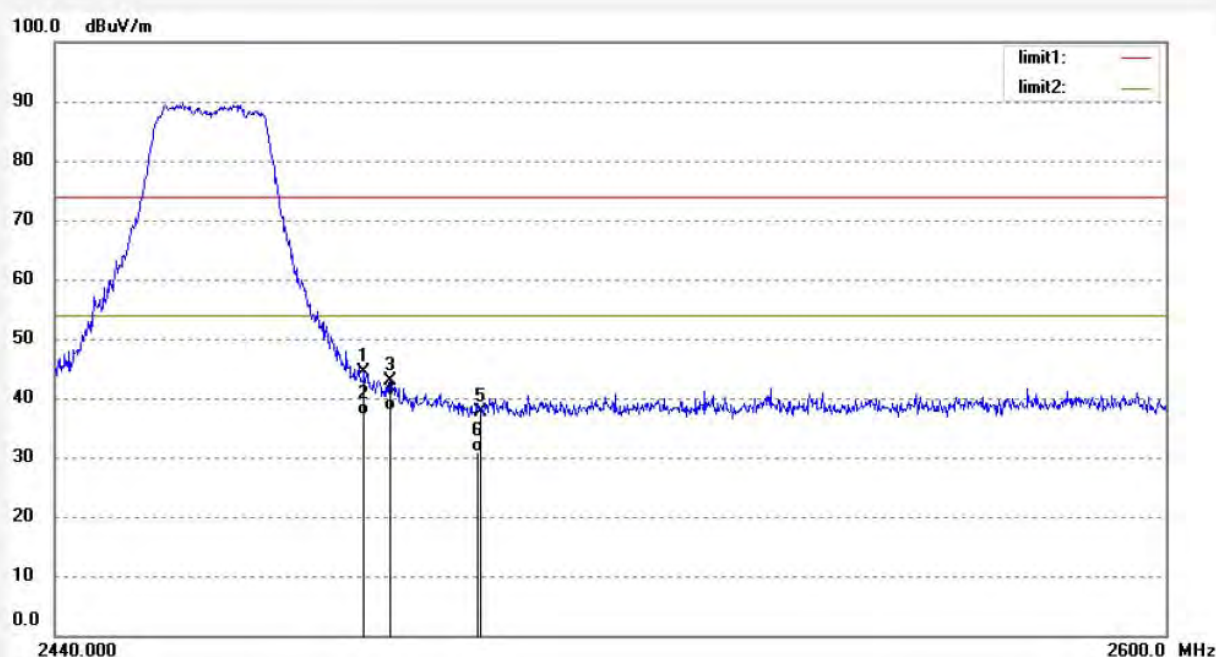

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.81	-7.37	44.44	74.00	-29.56	peak			
2	2483.500	44.39	-7.37	37.02	54.00	-16.98	AVG			
3	2487.191	50.29	-7.38	42.91	74.00	-31.09	peak			
4	2487.191	45.18	-7.38	37.80	54.00	-16.20	AVG			
5	2500.000	44.93	-7.40	37.53	74.00	-36.47	peak			
6	2500.000	38.17	-7.40	30.77	54.00	-23.23	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2629
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11g)
Model: PC7007
Manufacturer: Kintech

Polarization: Horizontal
Power Source: DC 3.7V
Date: 2012-10-13
Time: 15:42:16
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

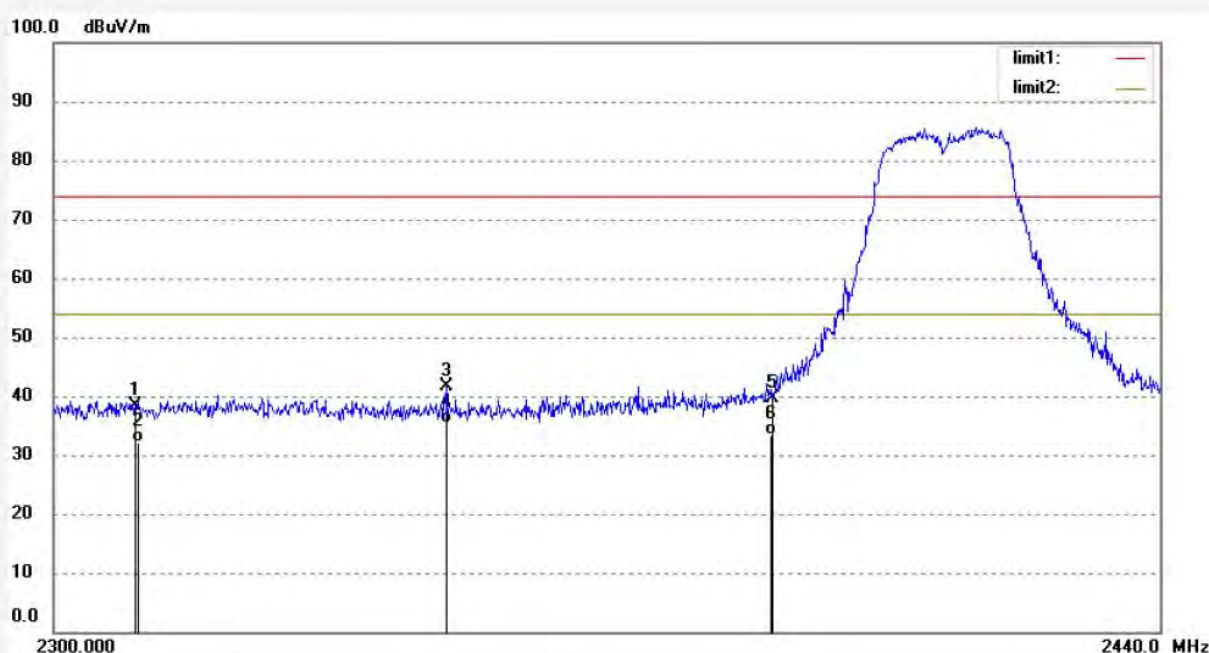

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.27	-7.81	38.46	74.00	-35.54	peak			
2	2310.000	40.00	-7.81	32.19	54.00	-21.81	AVG			
3	2348.715	49.39	-7.78	41.61	74.00	-32.39	peak			
4	2348.715	43.22	-7.78	35.44	54.00	-18.56	AVG			
5	2390.000	47.15	-7.53	39.62	74.00	-34.38	peak			
6	2390.000	40.97	-7.53	33.44	54.00	-20.56	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2630
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11g)
Model: PC7007
Manufacturer: Kintech

Polarization: Vertical
Power Source: DC 3.7V
Date: 2012-10-13
Time: 15:48:35
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

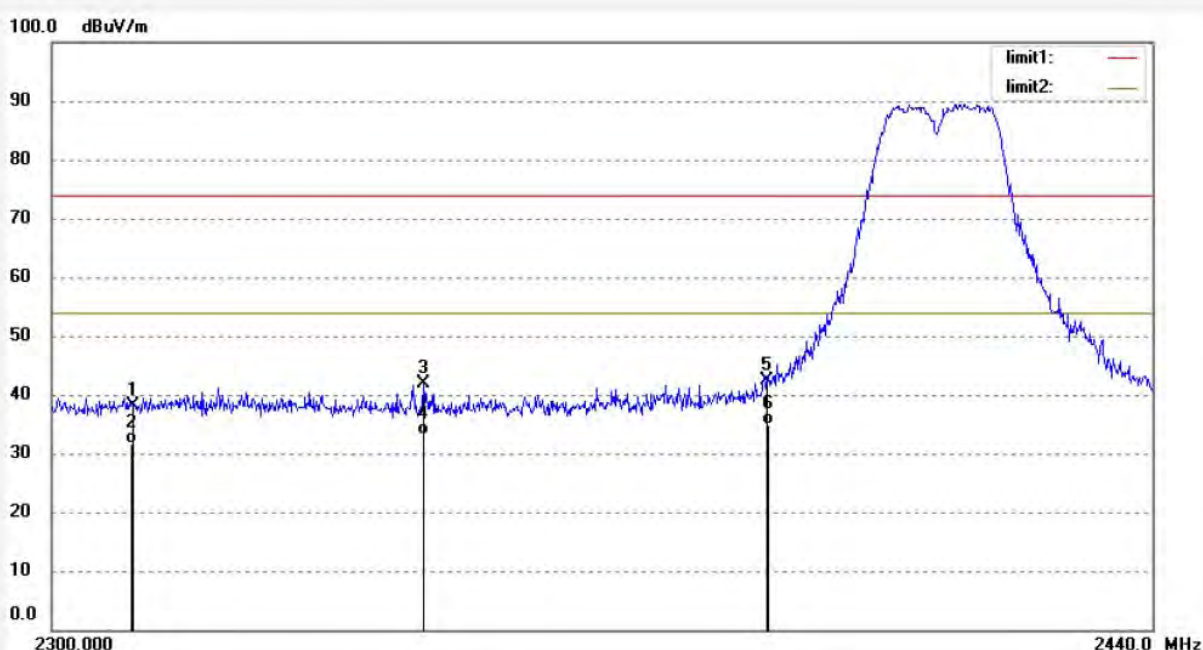

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.87	-7.81	38.06	74.00	-35.94	peak			
2	2310.000	39.33	-7.81	31.52	54.00	-22.48	AVG			
3	2346.352	49.72	-7.80	41.92	74.00	-32.08	peak			
4	2346.352	40.99	-7.80	33.19	54.00	-20.81	AVG			
5	2390.000	49.86	-7.53	42.33	74.00	-31.67	peak			
6	2390.000	42.35	-7.53	34.82	54.00	-19.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2632
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 1(802.11n)
Model: PC7007
Manufacturer: Kintech

Polarization: Horizontal
Power Source: DC 3.7V
Date: 2012-10-13
Time: 15:53:18
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

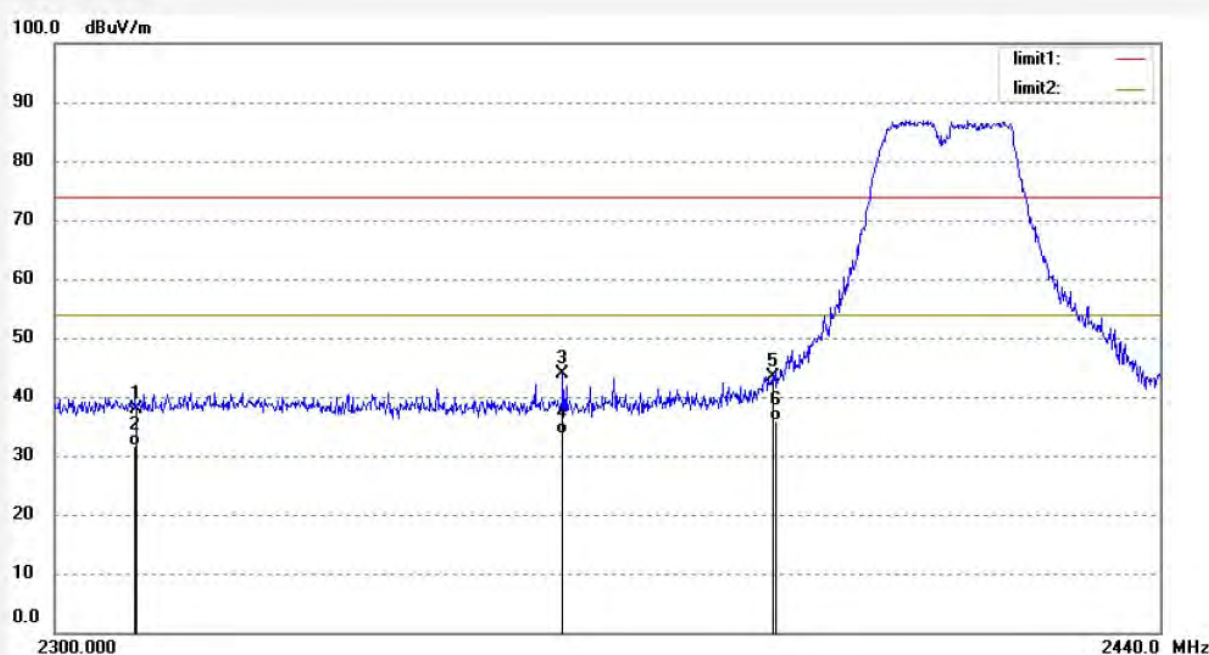

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.74	-7.81	37.93	74.00	-36.07	peak			
2	2310.000	39.39	-7.81	31.58	54.00	-22.42	AVG			
3	2363.362	51.59	-7.71	43.88	74.00	-30.12	peak			
4	2363.362	41.28	-7.71	33.57	54.00	-20.43	AVG			
5	2390.000	50.87	-7.53	43.34	74.00	-30.66	peak			
6	2390.000	43.31	-7.53	35.78	54.00	-18.22	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2631

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 1(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Vertical

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:51:47

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

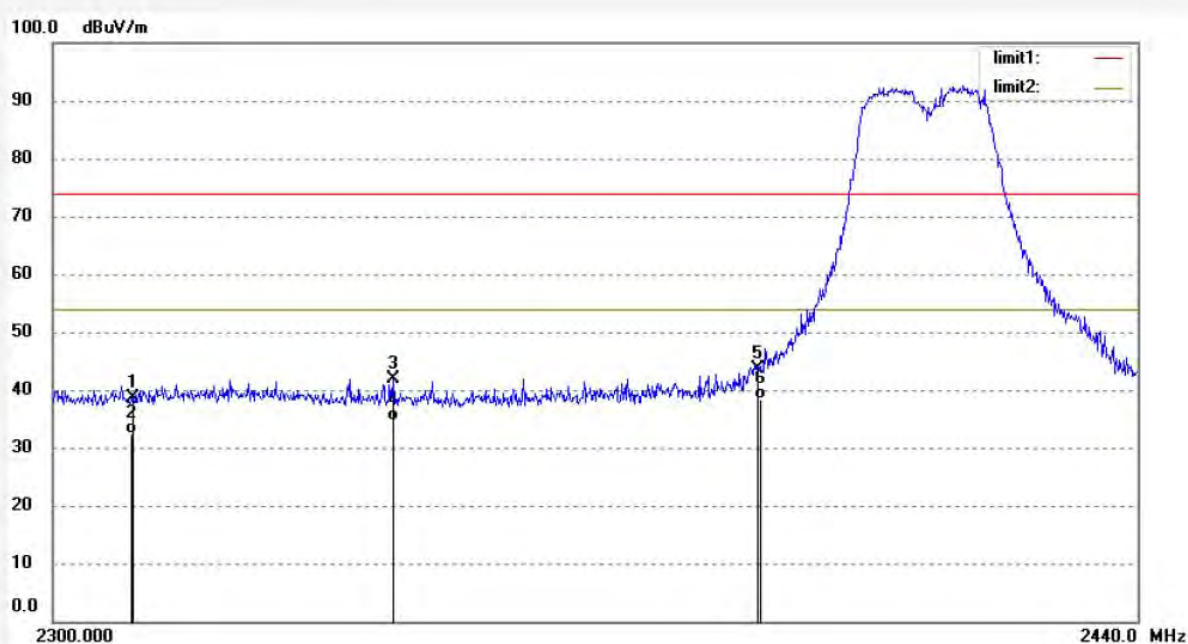

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.39	-7.81	38.58	74.00	-35.42	peak			
2	2310.000	40.22	-7.81	32.41	54.00	-21.59	AVG			
3	2343.021	49.73	-7.79	41.94	74.00	-32.06	peak			
4	2343.021	42.39	-7.79	34.60	54.00	-19.40	AVG			
5	2390.000	51.23	-7.53	43.70	74.00	-30.30	peak			
6	2390.000	45.97	-7.53	38.44	54.00	-15.56	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #2633

Standard: FCC 15C PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 49 %

EUT: Tablet PC

Mode: TX Channel 11(802.11n)

Model: PC7007

Manufacturer: Kintech

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2012-10-13

Time: 15:59:39

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20122079

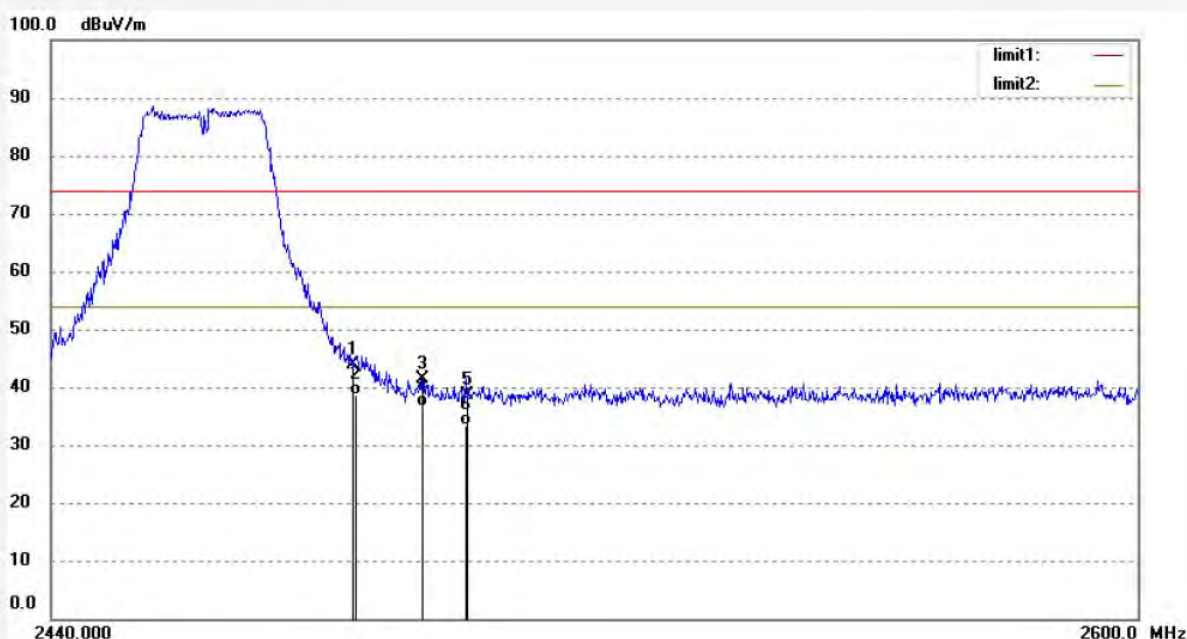

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.32	-7.37	43.95	74.00	-30.05	peak			
2	2483.500	45.91	-7.37	38.54	54.00	-15.46	AVG			
3	2493.530	48.86	-7.39	41.47	74.00	-32.53	peak			
4	2493.530	43.92	-7.39	36.53	54.00	-17.47	AVG			
5	2500.000	46.00	-7.40	38.60	74.00	-35.40	peak			
6	2500.000	40.71	-7.40	33.31	54.00	-20.69	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #2634
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 49 %
EUT: Tablet PC
Mode: TX Channel 11(802.11n)
Model: PC7007
Manufacturer: Kintech

Polarization: Vertical
Power Source: DC 3.7V
Date: 2012-10-13
Time: 16:04:17
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20122079

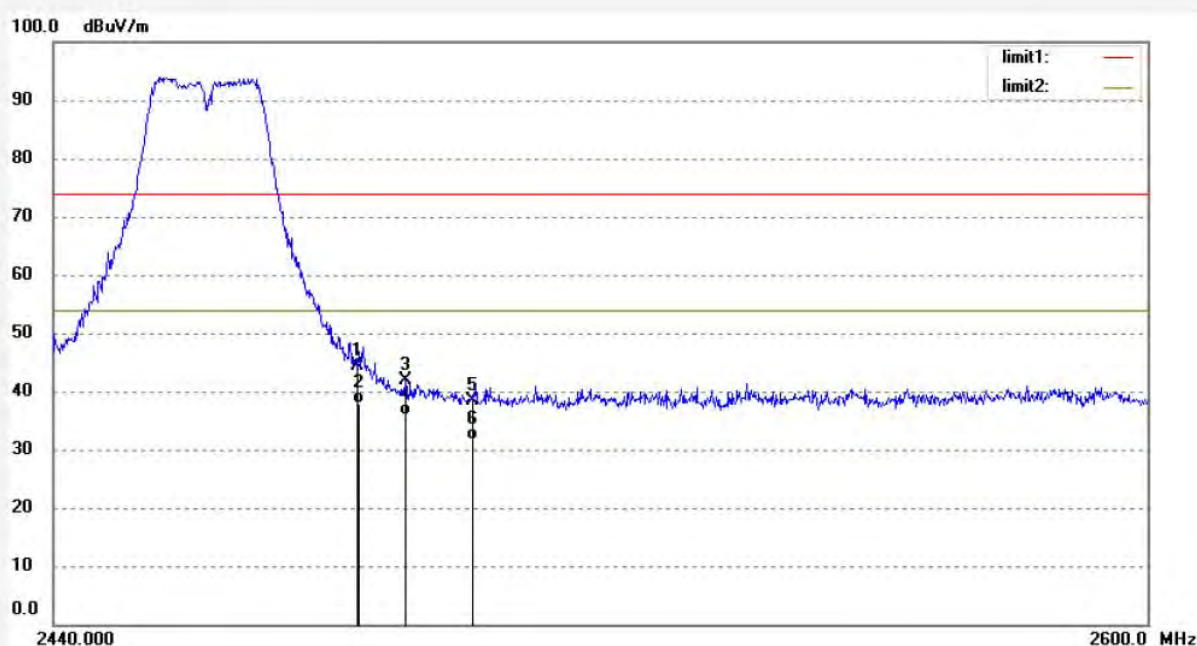

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	51.69	-7.37	44.32	74.00	-29.68	peak			
2	2483.500	45.18	-7.37	37.81	54.00	-16.19	AVG			
3	2490.359	49.23	-7.39	41.84	74.00	-32.16	peak			
4	2490.359	43.28	-7.39	35.89	54.00	-18.11	AVG			
5	2500.000	45.86	-7.40	38.46	74.00	-35.54	peak			
6	2500.000	39.08	-7.40	31.68	54.00	-22.32	AVG			