



NOTES

1. ALL DIMENSIONS IN mm.
2. TOLERANCES UNLESS OTHERWISE SPECIFIED: .X = ± 0.25 .XX = ± 0.15
3. MATERIAL: MATTE WHITE POLYESTER FILM, 0.002" - 0.004" (0.050-0.101 mm) THICK WITH PERMANENT ACRYLIC ADHESIVE.
4. GRAPHICS AND TEXT PRINTING COLOUR: BLACK
5. LABEL MUST BE PRINTED ON UL APPROVED STOCK AND COMPLETED LABEL MUST CONFORM TO ALL UL REQUIREMENTS SPECIFIED IN PGDQ2.
6. LABEL MANUFACTURER AND LABEL STOCK SUPPLIER MUST BE UL APPROVED
7. ALL MATERIALS USED AND SUPPLIED IN ACCORDANCE WITH THIS SPECIFICATION SHALL COMPLY WITH DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL. ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS DIRECTIVE)

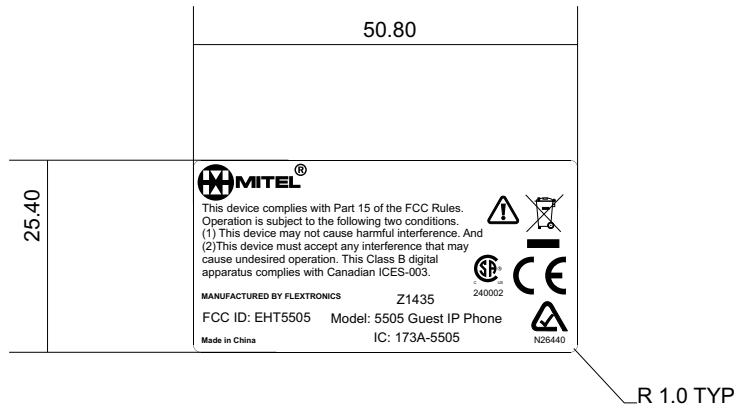

D	06-02-11	D. CHAN	T. LANGENBERG	ADDED MODEL NAME, RELOCATE CSA LOGO
REV.	DATE	DRAWN BY	CHECKED BY	DETAILS
FLEXTRONICS				DRAWING NO. MWTH-00014110-100
TITLE			LABEL, REGULATORY, MITEL 5505	SHEET FORMAT
				1 OF 1 REV NO. D

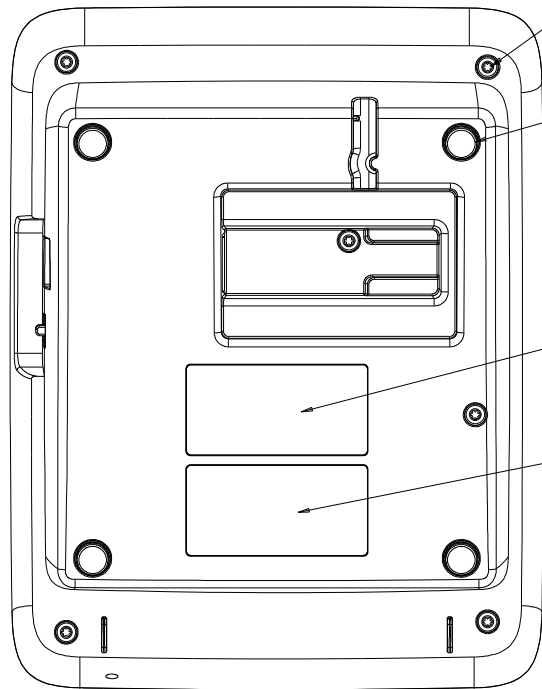

ITEM 170 (REF)
SCREW
(6 PLACES)
SEE NOTE 3


ITEM 150 (REF)
RUBBER FOOT
(4 PLACES)

180
REGULATORY LABEL

170
INFORMATION LABEL

STEP 4

- PLACE AND TIGHTEN 6 SCREWS IN BASE.
- PLACE STICK-ON RUBBER FOOT INTO 4 RECESSES IN BASE AND PRESS FIRMLY TO ENSURE GOOD ADHESION.
- PLACE REGULATORY LABEL.
- PLACE INFORMATION LABEL AFTER PRINTING THE FOLLOWING:
 1. PRODUCT CODE NUMBER AND DESCRIPTION
 2. SERIAL NUMBER (BAR CODE AND HUMAN READABLE)
 3. MAC ADDRESS (BAR CODE AND HUMAN READABLE)
 4. REVISION (REV XX)
 5. MANUFACTURING DATE CODE

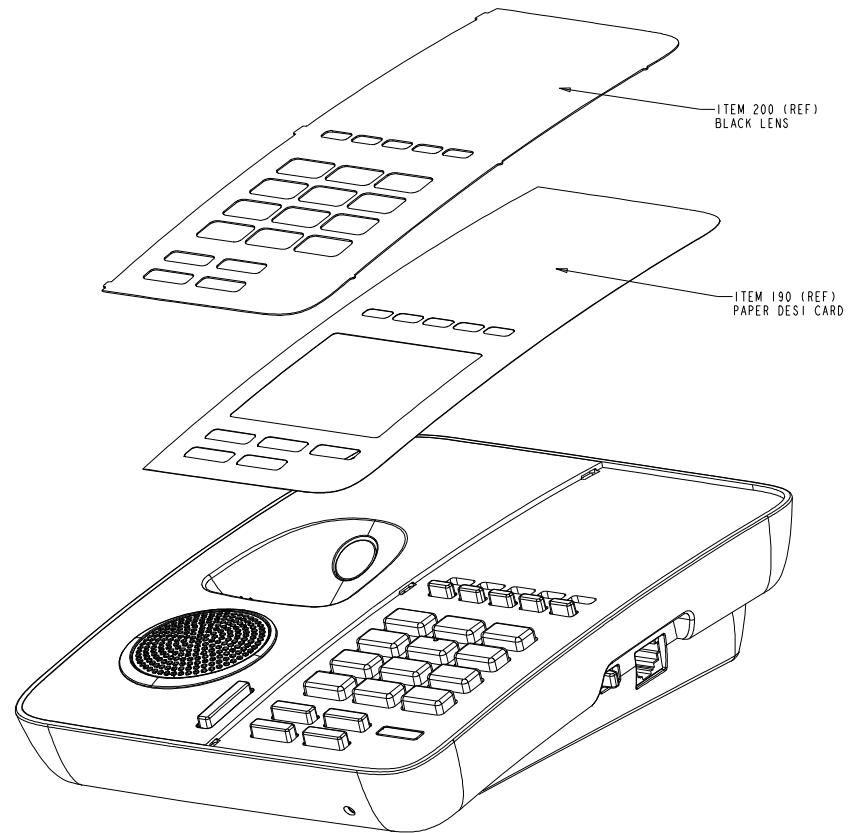

ITEM 200 (REF)
BLACK LENS

ITEM 190 (REF)
PAPER DESI CARD

STEP 5

- PLACE PAPER DESI CARD.
- PLACE LENS INTO SLOTS ON LEFT SIDE AND PRESS TABS INTO PLACE ON RIGHT SIDE.

FLEX Infrastructure		
SIZE D	DRAWING NUMBER MWTH-00014102-100 SHEET 4 OF 4	REV 02 PRO/E