





- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

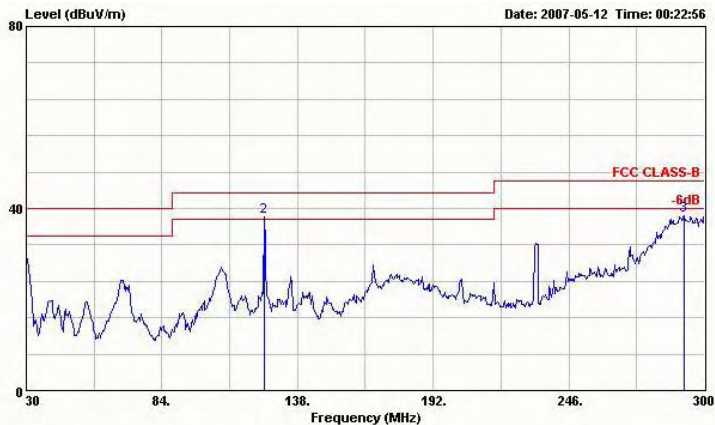

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.000	29.02	-10.98	40.00	44.90	16.38	0.63	32.89	---	---
2 @	124.770	38.10	-5.40	43.50	57.77	11.90	1.28	32.85	112	284
3 @	291.900	38.32	-7.68	46.00	56.78	12.35	2.01	32.82	---	---

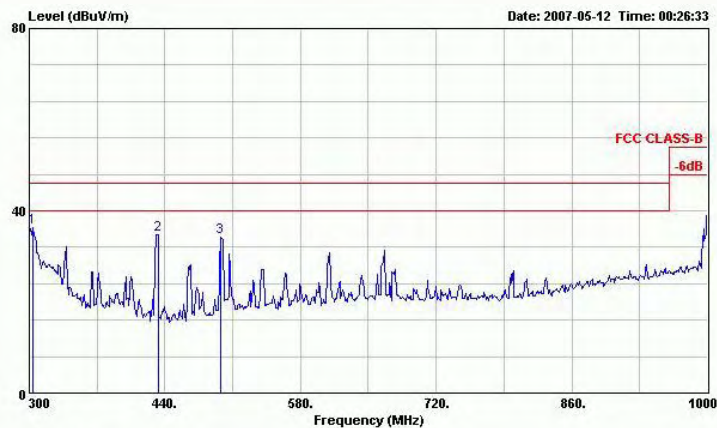


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	304.200	36.43	-9.57	46.00	54.73	12.48	2.04	32.81	---	---
2 @	433.000	34.84	-11.16	46.00	49.05	16.13	2.43	32.78	---	---
3 @	498.100	34.11	-11.89	46.00	47.27	16.89	2.60	32.64	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-E

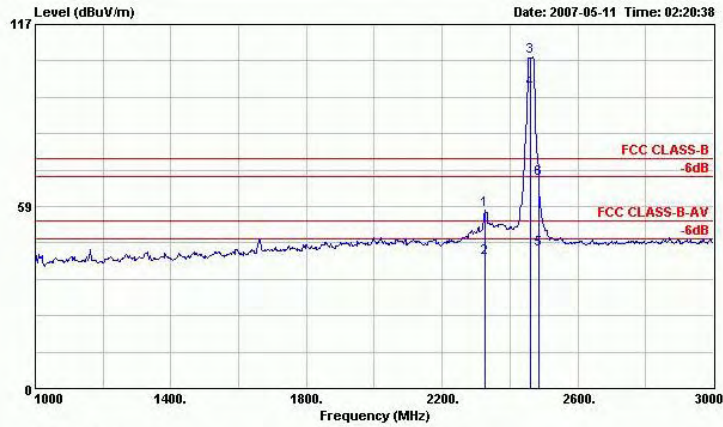

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 0	2326.000	57.25	-16.75	74.00	56.64	30.71	3.66	33.77	100	0 Peak
2 0	2326.000	41.79	-12.21	54.00	41.18	30.71	3.66	33.77	100	41 Average
3 0	2462.000	106.48			106.00	30.46	3.81	33.80	100	0 Peak
4 0	2462.000	96.04			95.56	30.46	3.81	33.79	100	41 Average
5 0	2483.500	44.76	-9.24	54.00	44.29	30.43	3.84	33.80	100	41 Average
6 0	2483.500	67.29	-6.71	74.00	66.82	30.43	3.84	33.80	100	0 Peak

Remark: #3 and #4 Fundamental Signal

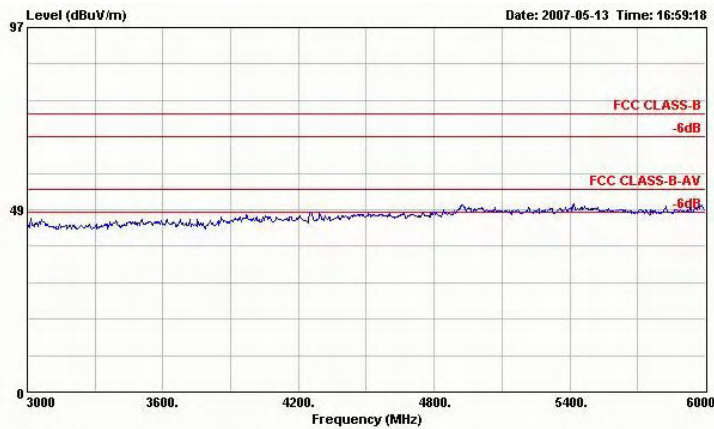


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6




FCC / IC TEST REPORT

Report No. : FR6D2906-E

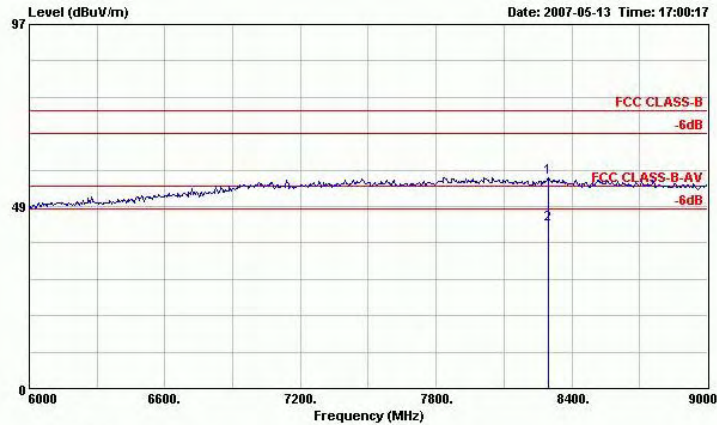

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	8298.000	56.26	-17.74	74.00	44.03	39.38	6.91	34.06	100	0 Peak
2 @	8298.000	43.65	-10.35	54.00	31.42	39.38	6.91	34.06	100	84 Average

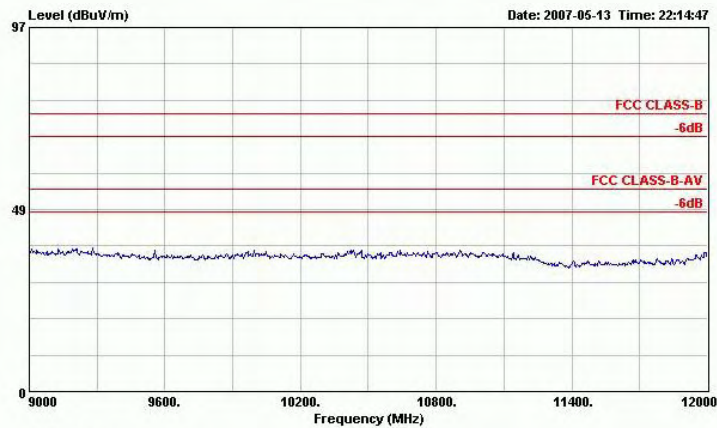


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6




FCC / IC TEST REPORT

Report No. : FR6D2906-E

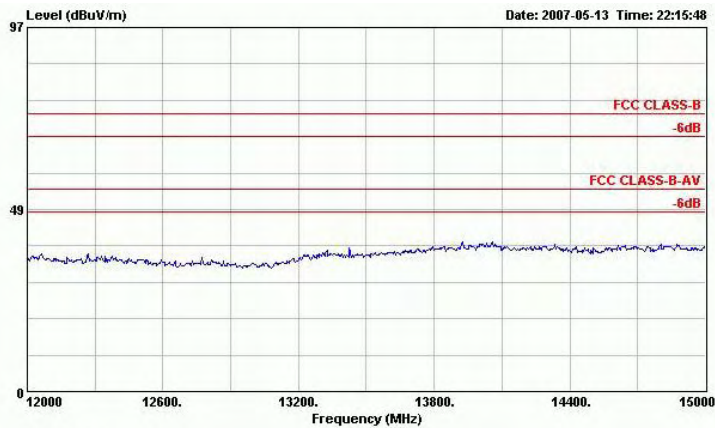

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6

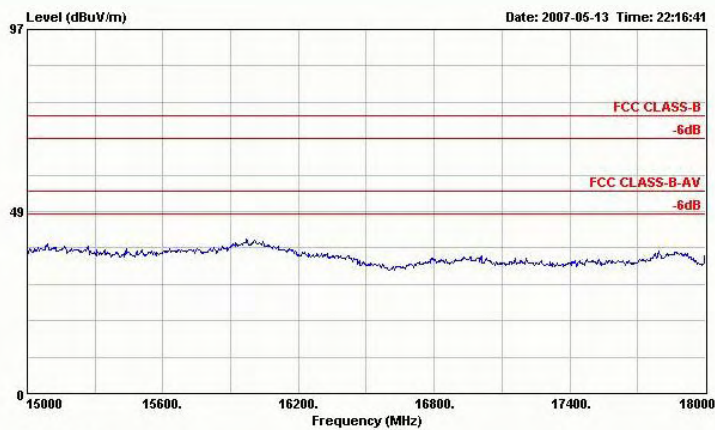


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6



FCC / IC TEST REPORT

Report No. : FR6D2906-E

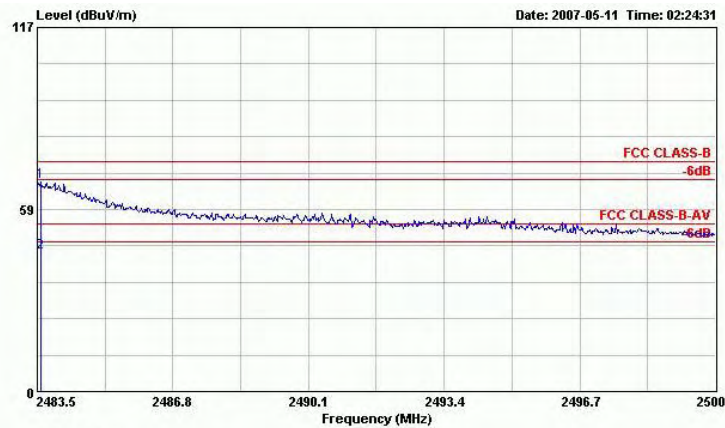

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11g Tx_Ch11;2462MHz
Data Rate: 6


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2483.600	67.29	-6.71	74.00	66.82	30.43	3.84	33.80	100	0 Peak
2 @	2483.600	44.76	-9.24	54.00	44.29	30.43	3.84	33.80	100	41 Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 8
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

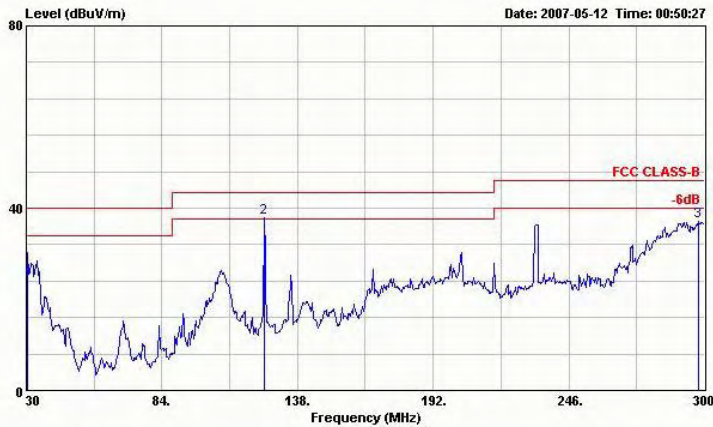

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.540	30.22	-9.78	40.00	46.15	16.36	0.64	32.93	---	---
2 @	124.770	37.85	-5.65	43.50	57.52	11.90	1.28	32.85	105	334
3 @	297.570	36.99	-9.01	46.00	55.46	12.32	2.02	32.81	---	---

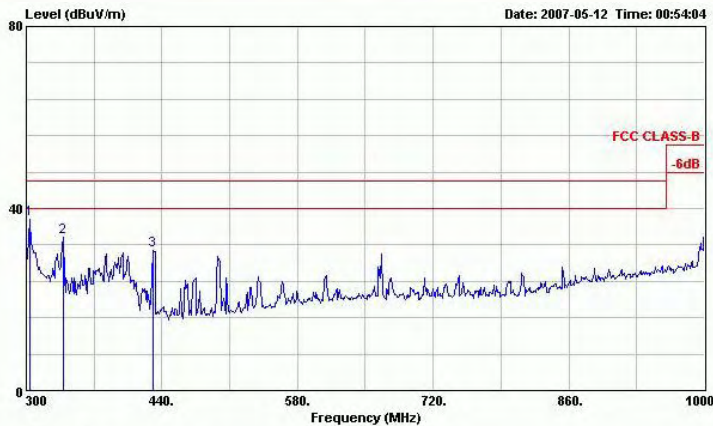


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	304.200	37.74	-8.26	46.00	56.04	12.48	2.04	32.81	---	---
2 @	337.800	33.61	-12.39	46.00	50.72	13.61	2.10	32.83	---	---
3 @	430.900	30.69	-15.31	46.00	44.94	16.11	2.43	32.78	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-E

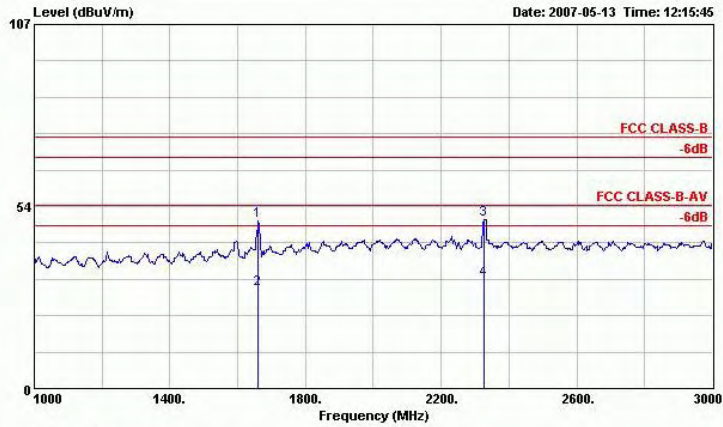

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor	Factor				
					dB	dB		cm	deg	
1 Q	1660.000	49.35	-24.65	74.00	51.51	28.57	2.97	33.70	100	0 Peak
2 Q	1660.000	29.08	-24.92	54.00	31.24	28.57	2.97	33.70	100	308 Average
3 Q	2326.000	49.75	-24.25	74.00	49.14	30.71	3.66	33.77	100	0 Peak
4 Q	2326.000	32.15	-21.85	54.00	31.54	30.71	3.66	33.77	100	350 Average

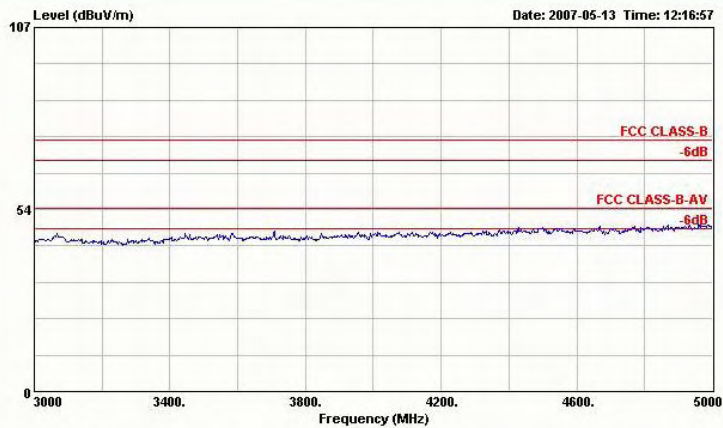


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6



FCC / IC TEST REPORT


Report No. : FR6D2906-E

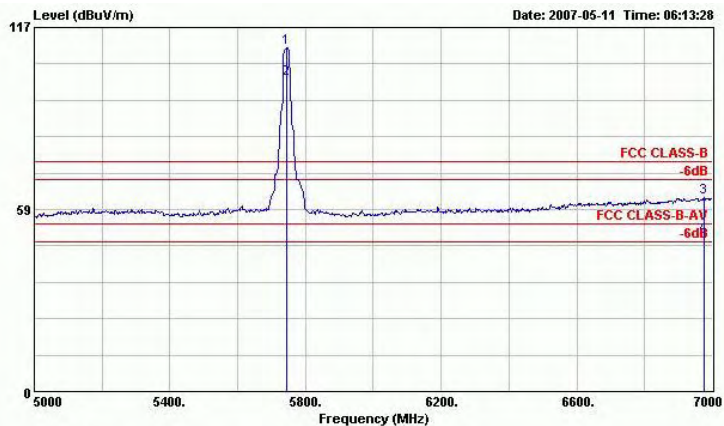

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	5745.000	110.49			104.52	34.00	6.02	34.05	100	0 Peak
2 Q	5745.000	100.62			94.65	34.00	6.02	34.05	134	350 Average
3 Q	6974.000	62.39	-11.61	74.00	51.06	37.50	6.35	32.52	100	0 Peak
4 Q	6974.000	50.12	-3.88	54.00	38.79	37.50	6.35	32.52	100	39 Average

Remark: #1 and #2 Fundamental Signal

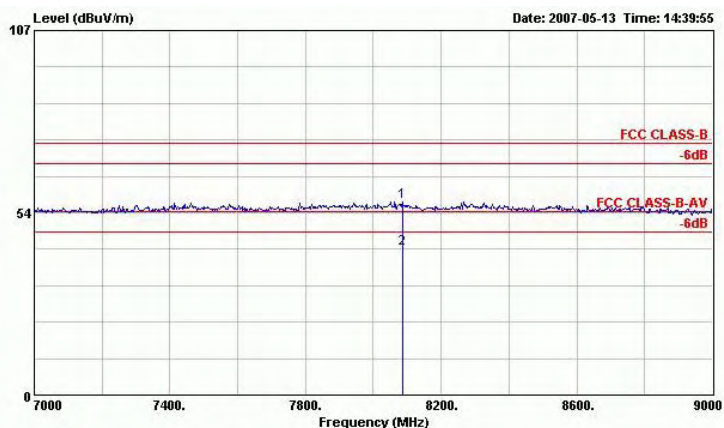


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	8086.000	56.77	-17.23	74.00	44.23	39.47	6.80	33.73	100	0 Peak
2 Q	8086.000	42.99	-11.01	54.00	30.45	39.47	6.80	33.73	100	269 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-E

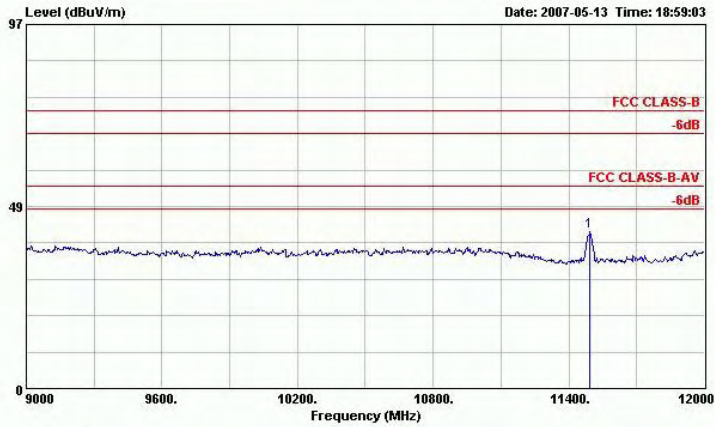

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
					dB	dB		cm	deg	
1 0	11493.000	41.65	-32.35	74.00	79.83	-11.73	7.84	34.30	100	0 Peak

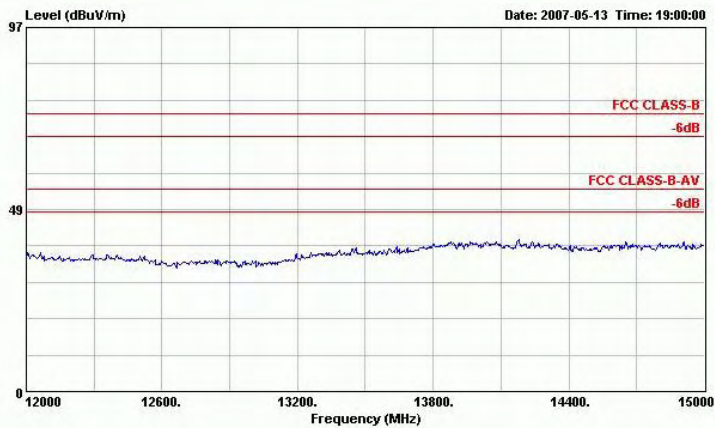


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6



FCC / IC TEST REPORT

Report No. : FR6D2906-E

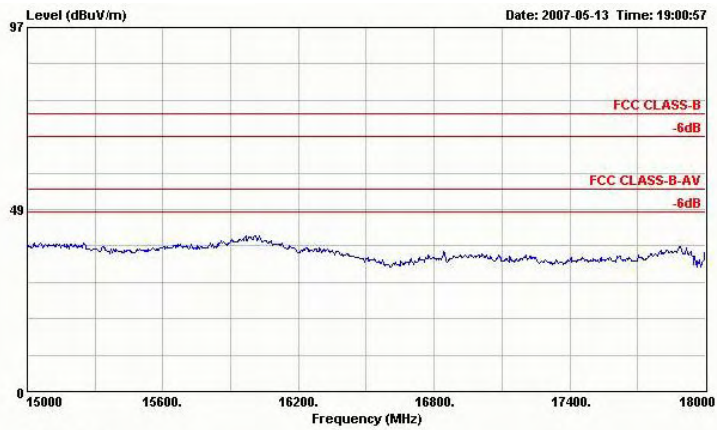



Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

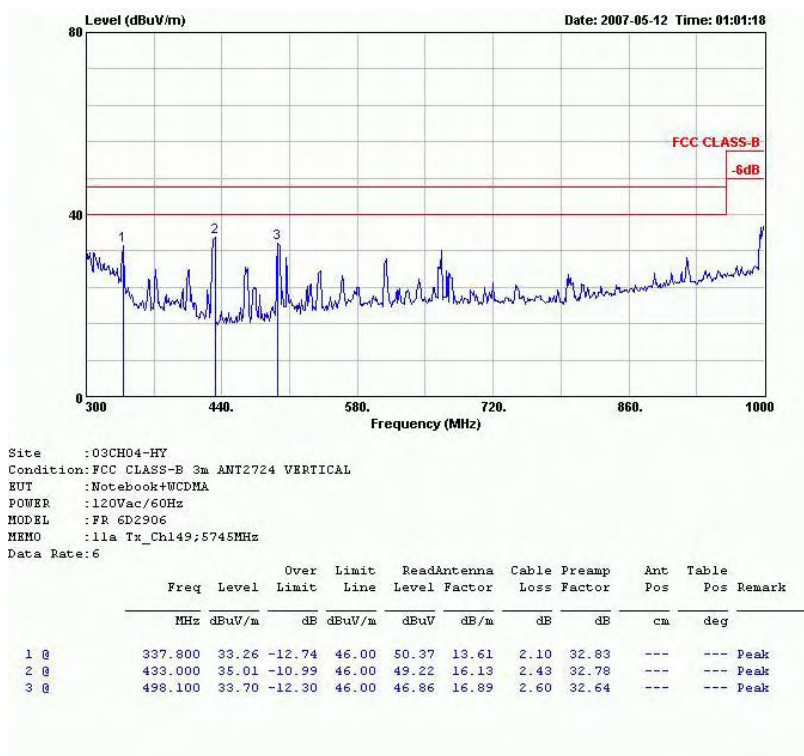

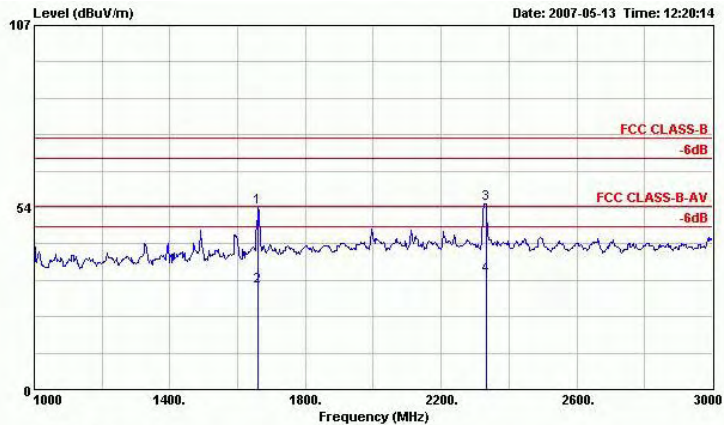


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6


	Freq	Level	Over	Limit	ReadAntenna	Cable	Presamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark
1 @	1660.000	53.60	-20.40	74.00	55.76	28.57	2.97	33.70	100	0 Peak
2 @	1660.000	30.15	-23.85	54.00	32.31	28.57	2.97	33.70	100	176 Average
3 @	2332.000	54.62	-19.38	74.00	53.99	30.71	3.69	33.77	100	0 Peak
4 @	2332.000	33.47	-20.53	54.00	32.84	30.71	3.69	33.77	100	197 Average

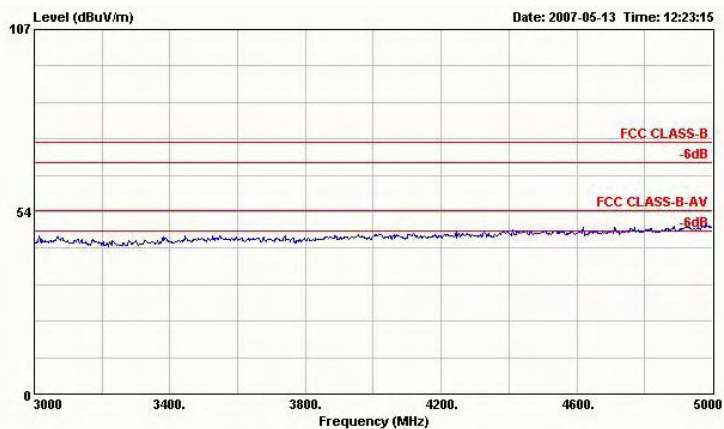


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate: 6

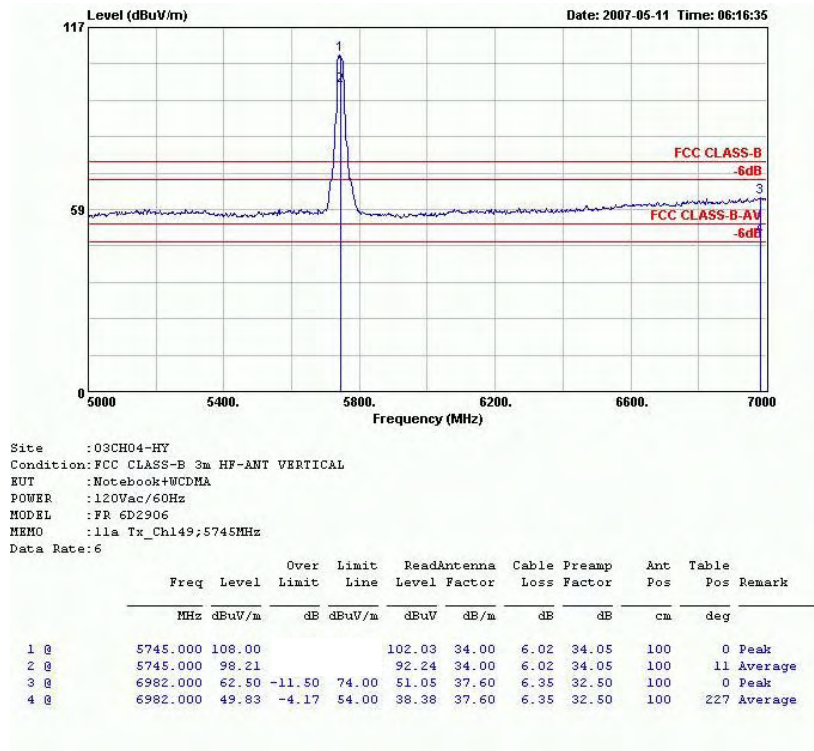


Remark: #1 and #2 Fundamental Signal

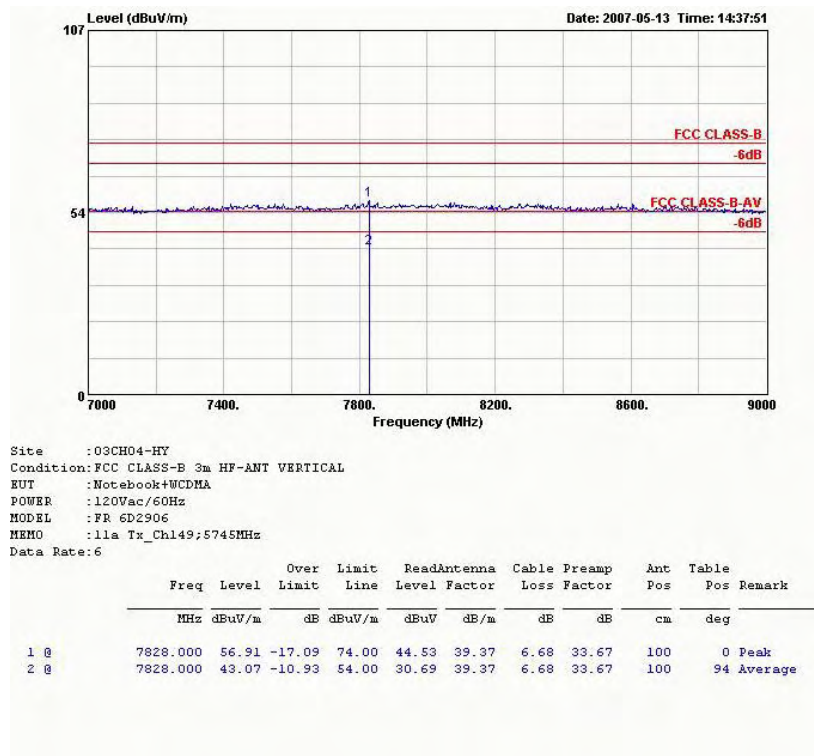

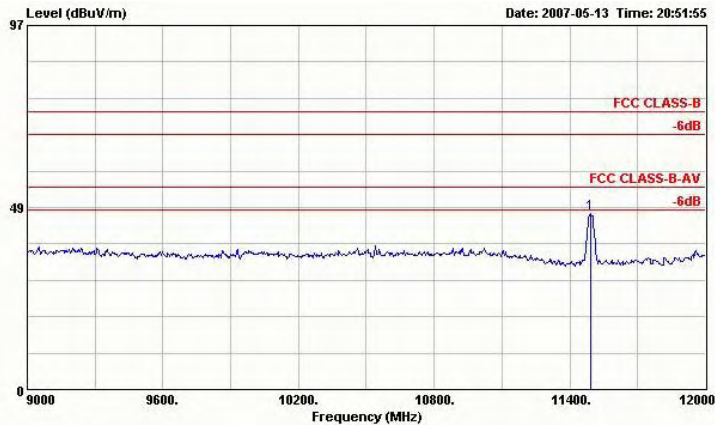


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					dBuV	dB/m	dB	dB	cm	deg
1 @	11490.000	46.80	-27.20	74.00	84.98	-11.73	7.84	34.30	100	0 Peak

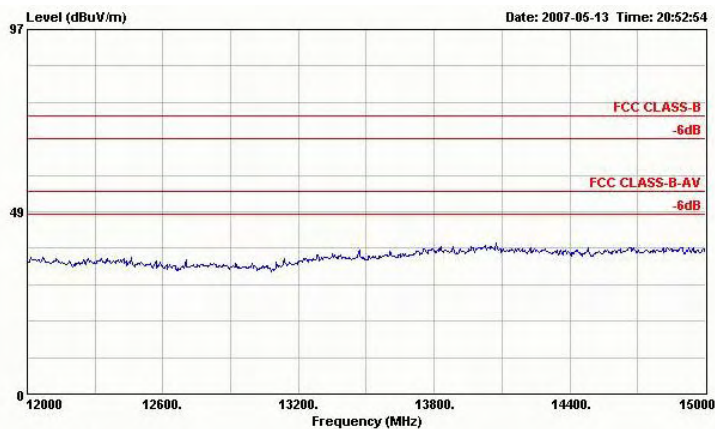

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch149;5745MHz
Data Rate:6

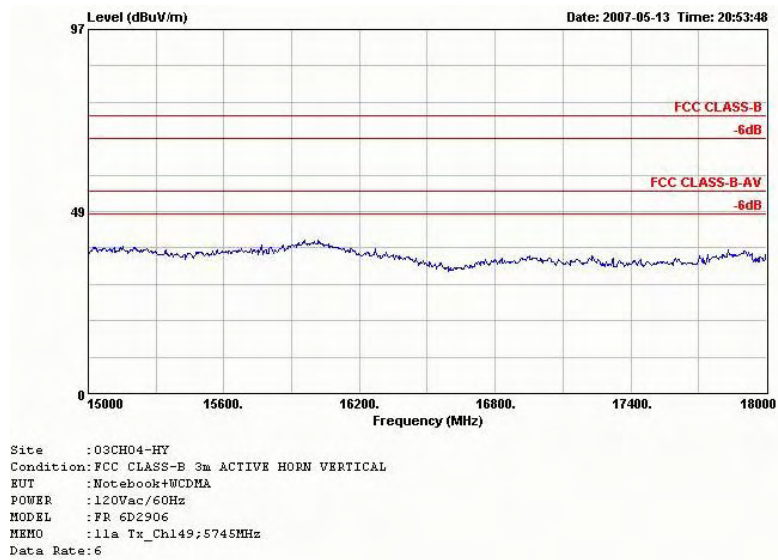


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 9
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

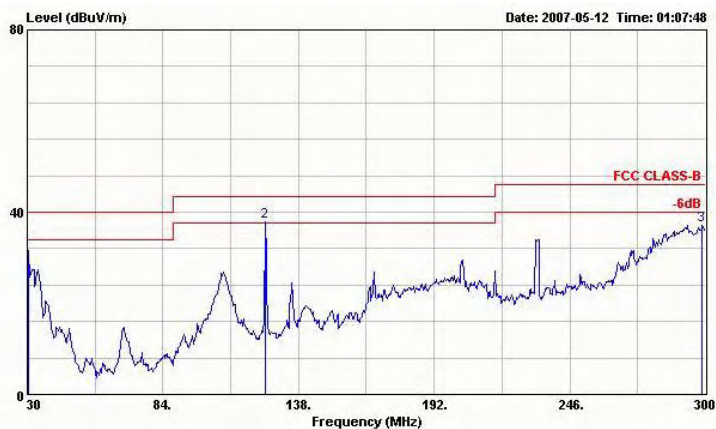

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx Ch152;5760MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.540	31.46	-8.54	40.00	47.39	16.36	0.64	32.93	---	---
2 @	124.770	37.99	-5.51	43.50	57.66	11.90	1.28	32.85	108	341
3 @	298.650	37.12	-8.88	46.00	55.59	12.32	2.03	32.81	---	---

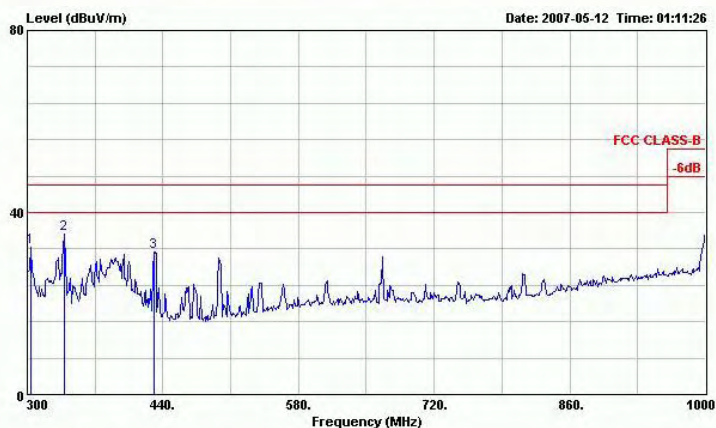


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx Ch152;5760MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	304.200	32.50	-13.50	46.00	50.80	12.48	2.04	32.81	---	---
2 @	337.800	35.31	-10.69	46.00	52.42	13.61	2.10	32.83	---	---
3 @	430.900	31.27	-14.73	46.00	45.52	16.11	2.43	32.78	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-E

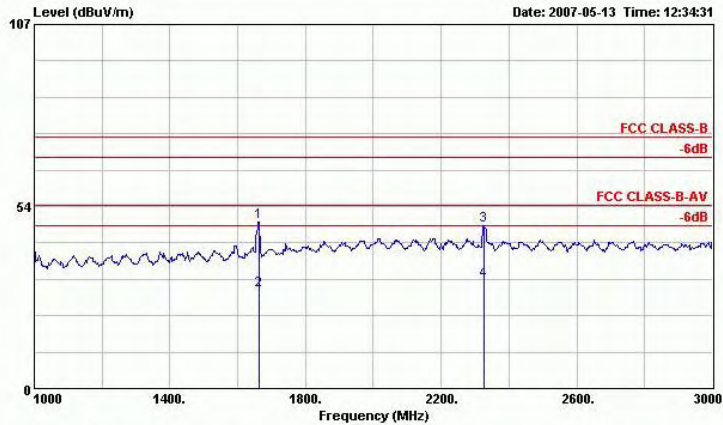

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor	Factor				
					dB	dB		cm	deg	
1 Q	1662.000	48.98	-25.02	74.00	51.14	28.57	2.97	33.70	100	0 Peak
2 Q	1662.000	28.79	-25.21	54.00	30.95	28.57	2.97	33.70	100	321 Average
3 Q	2326.000	47.81	-26.19	74.00	47.20	30.71	3.66	33.77	100	0 Peak
4 Q	2326.000	31.62	-22.38	54.00	31.01	30.71	3.66	33.77	100	328 Average

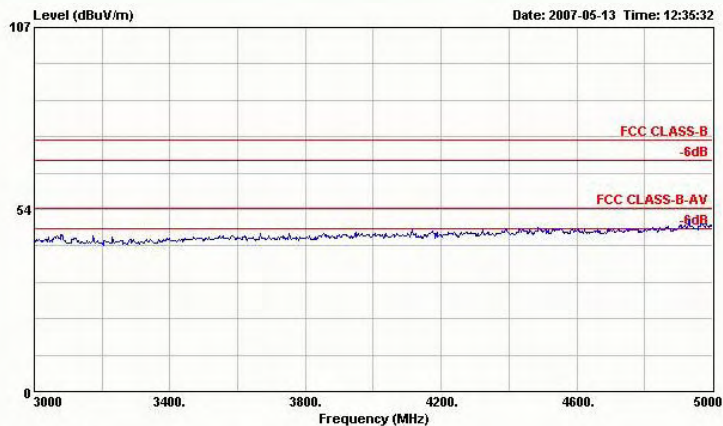


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12 (Turbo mode)



FCC / IC TEST REPORT


Report No. : FR6D2906-E

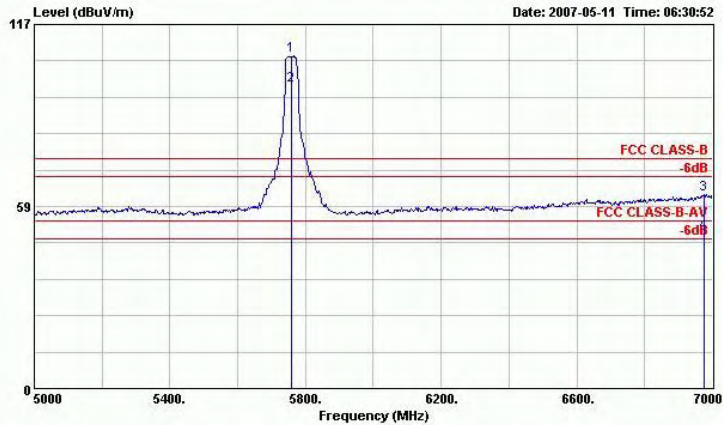

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S2;5760MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	5760.000	107.12			101.15	34.00	6.02	34.05	100	0 Peak
2 @	5760.000	97.42			91.45	34.00	6.02	34.05	114	349 Average
3 @	6974.000	62.22	-11.78	74.00	50.89	37.50	6.35	32.52	100	0 Peak
4 @	6974.000	50.16	-3.84	54.00	38.83	37.50	6.35	32.52	100	87 Average

Remark: #1 and #2 Fundamental Signal

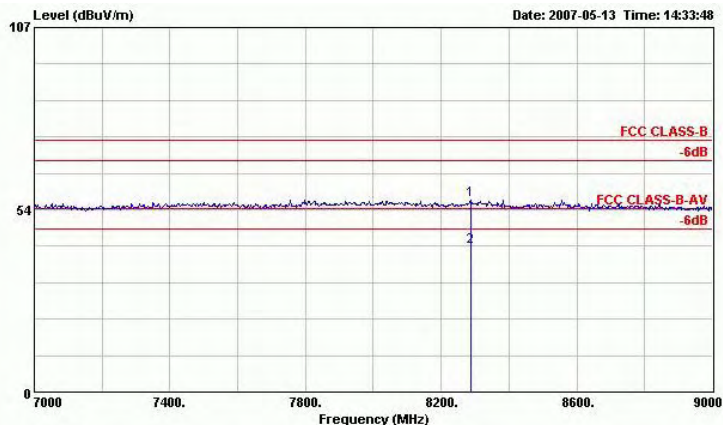


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S2;5760MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	8286.000	56.36	-17.64	74.00	44.13	39.38	6.91	34.06	100	0 Peak
2 @	8286.000	42.69	-11.31	54.00	30.46	39.38	6.91	34.06	100	316 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-E

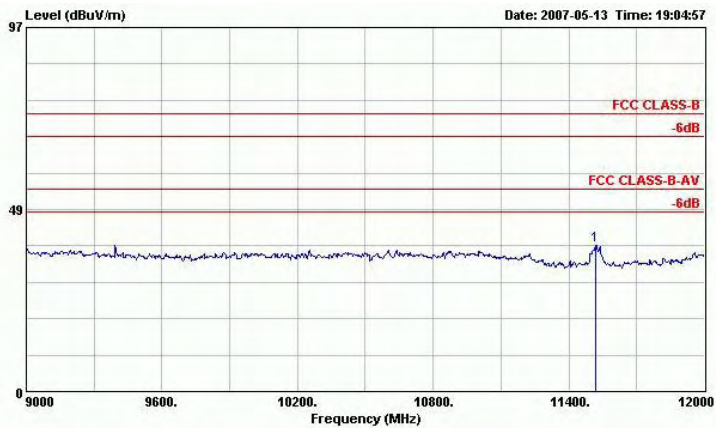

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S2;5760MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
					dB	dB	dB	cm	deg	
1 0	11517.000	39.06	-34.94	74.00	77.23	-11.71	7.85	34.30	100	0 Peak

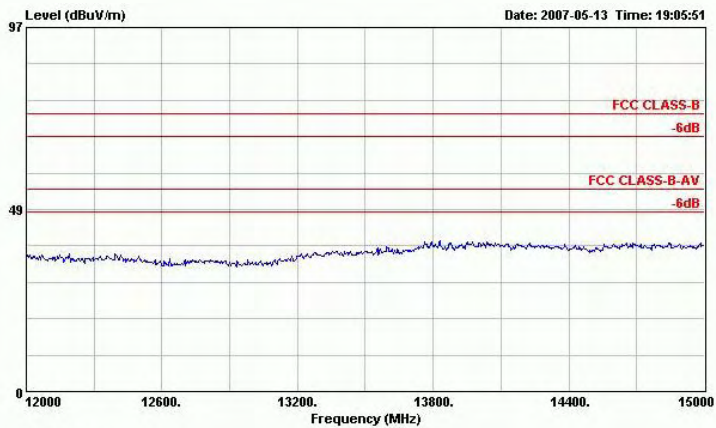


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S2;5760MHz
Data Rate: 12 (Turbo mode)



FCC / IC TEST REPORT

Report No. : FR6D2906-E

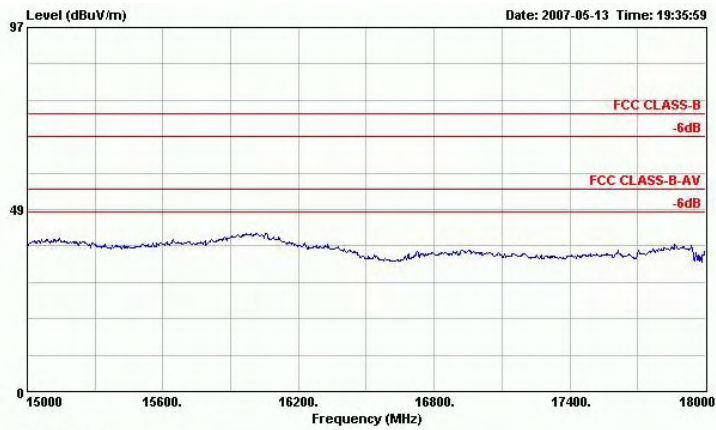


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S2;5760MHz
Data Rate: 12(Turbo mode)



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

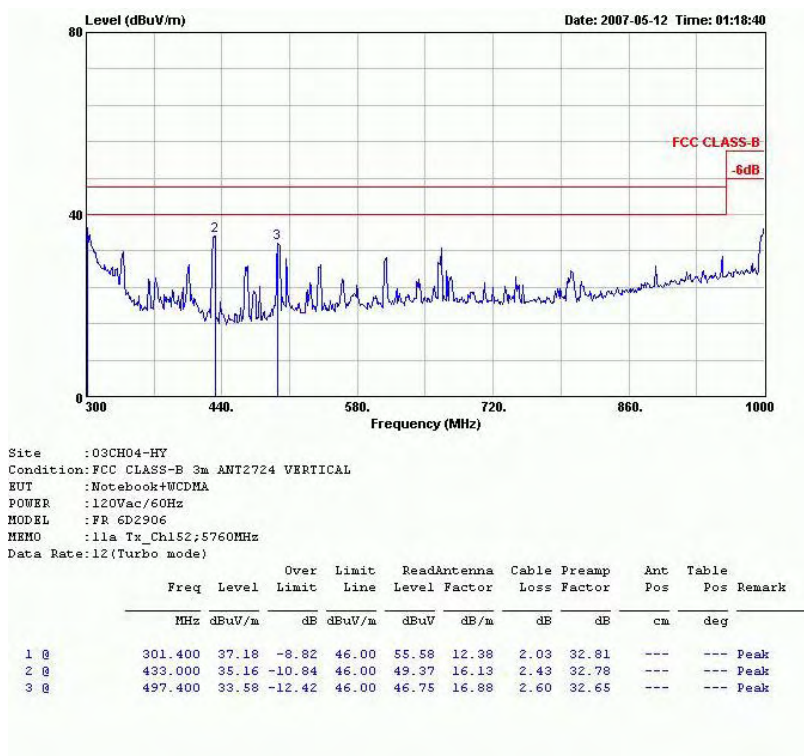




FCC / IC TEST REPORT

Report No. : FR6D2906-E

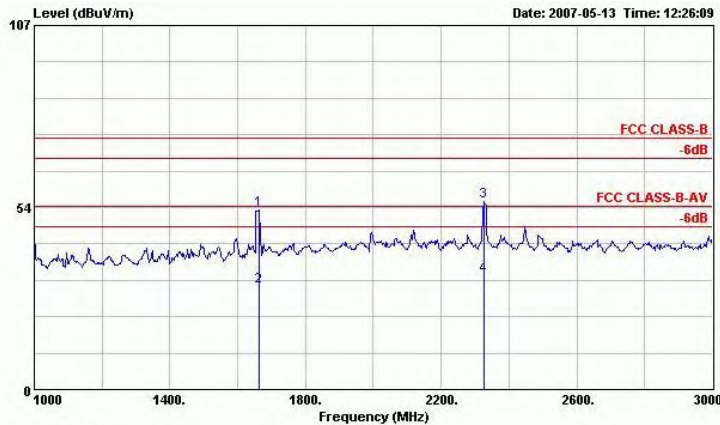


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12(Turbo mode)


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Remark
			dB	dBuV/m	dBuV				cm	deg
1	1662.000	52.75	-21.25	74.00	54.91	28.57	2.97	33.70	100	0 Peak
2	1662.000	30.17	-23.83	54.00	32.33	28.57	2.97	33.70	100	161 Average
3	2326.000	55.17	-18.83	74.00	54.56	30.71	3.66	33.77	100	0 Peak
4	2326.000	33.52	-20.48	54.00	32.91	30.71	3.66	33.77	100	157 Average

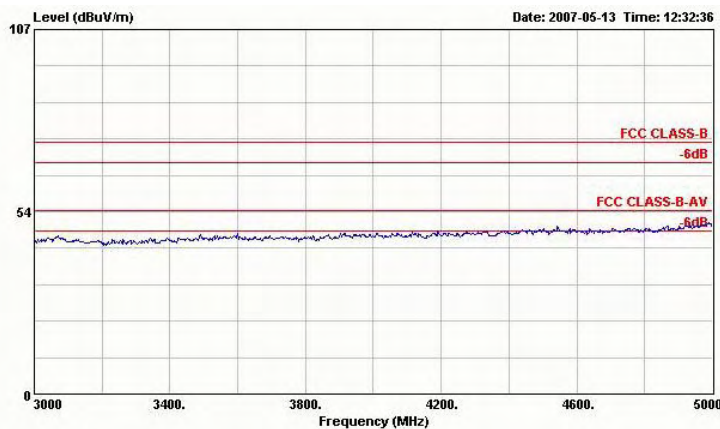


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12(Turbo mode)

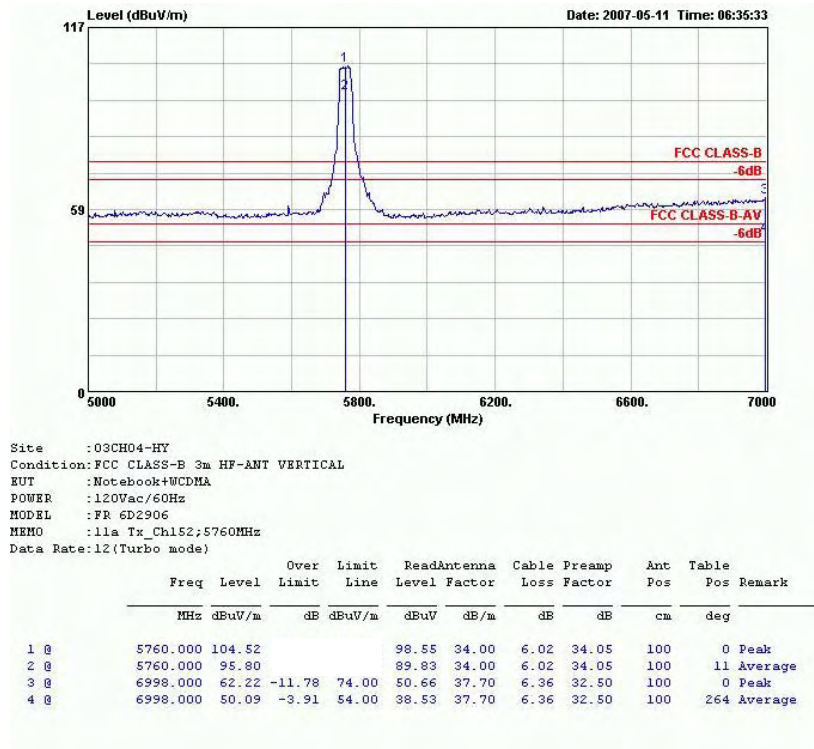


Remark: #1 and #2 Fundamental Signal

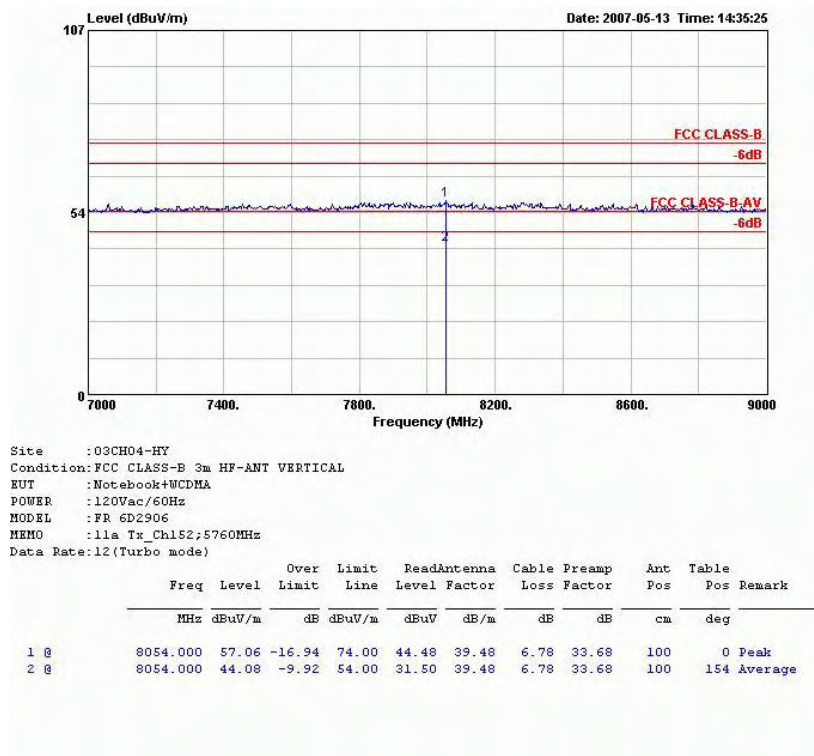

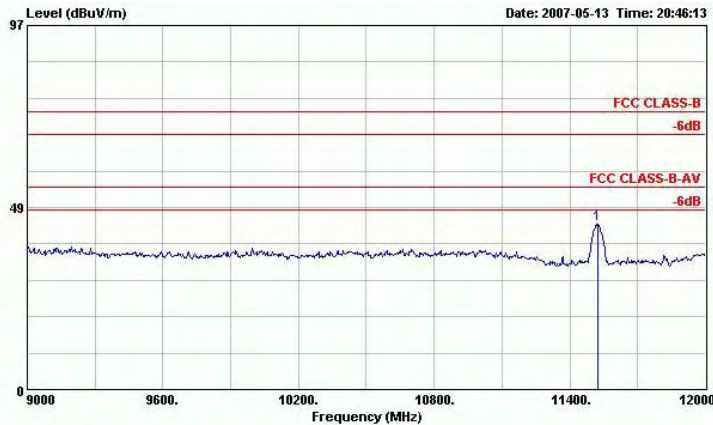


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
			dB		dBuV	dB/m			cm	deg
1 @	11526.000	44.14	-29.86	74.00	82.27	-11.67	7.85	34.31	100	0 Peak

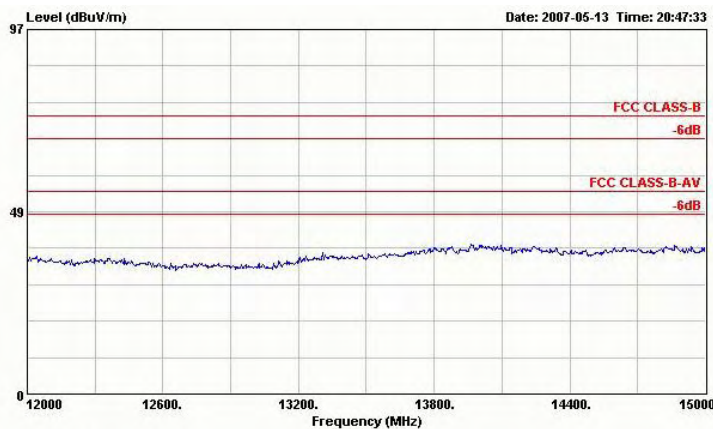

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch152;5760MHz
Data Rate: 12(Turbo mode)

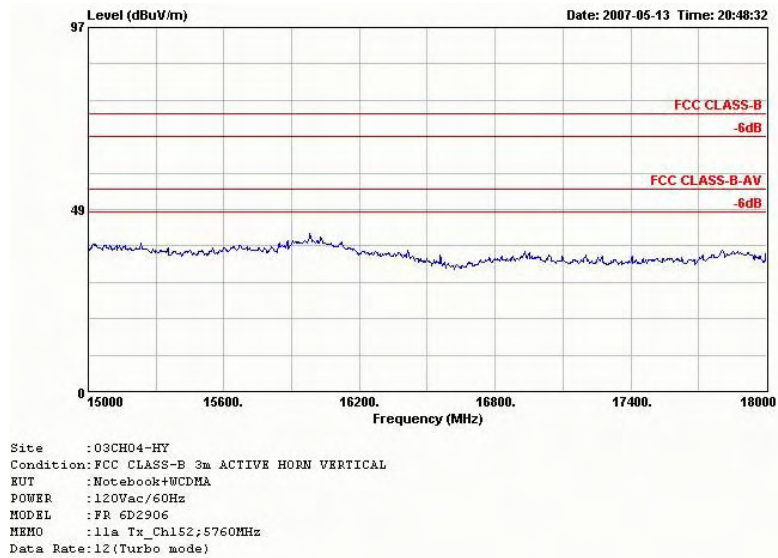


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 10
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

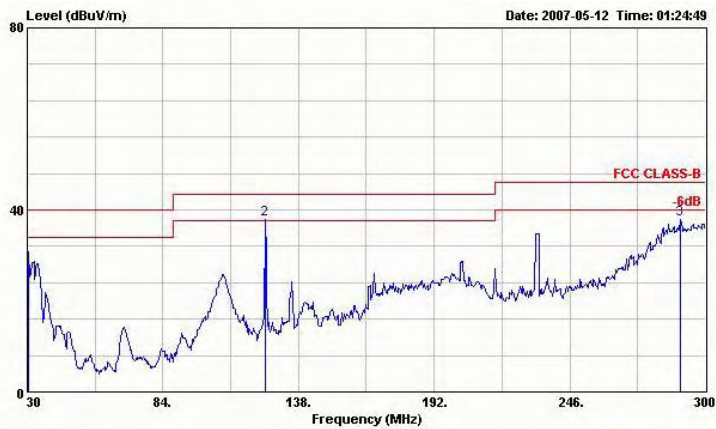

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.540	30.79	-9.21	40.00	46.72	16.36	0.64	32.93	---	Peak
2 @	124.770	37.96	-5.54	43.50	57.63	11.90	1.28	32.85	100	86 Peak
3 @	290.010	37.85	-8.15	46.00	56.31	12.36	2.00	32.82	---	Peak

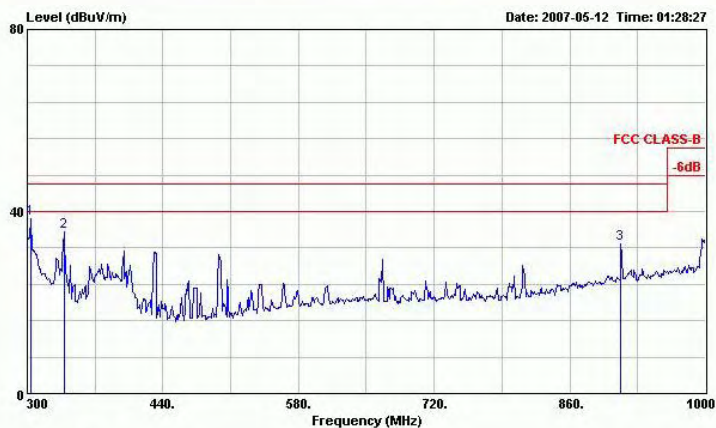


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	304.200	38.38	-7.62	46.00	56.68	12.48	2.04	32.81	---	Peak
2 @	337.800	35.60	-10.40	46.00	52.71	13.61	2.10	32.83	---	Peak
3 @	912.500	32.90	-13.10	46.00	36.90	23.83	3.59	31.43	---	Peak




FCC / IC TEST REPORT

Report No. : FR6D2906-E

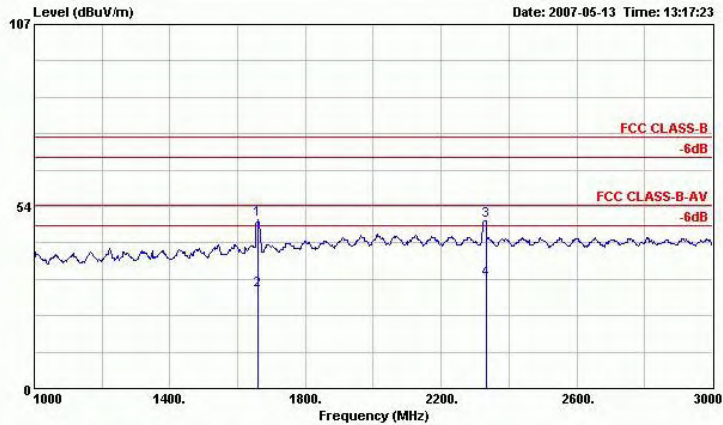

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
1 Q	1660.000	49.76	-24.24	74.00	51.92	28.57	2.97	33.70	100	0 Peak
2 Q	1660.000	29.01	-24.99	54.00	31.17	28.57	2.97	33.70	100	308 Average
3 Q	2332.000	49.17	-24.83	74.00	48.54	30.71	3.69	33.77	100	0 Peak
4 Q	2332.000	31.92	-22.08	54.00	31.29	30.71	3.69	33.77	100	336 Average

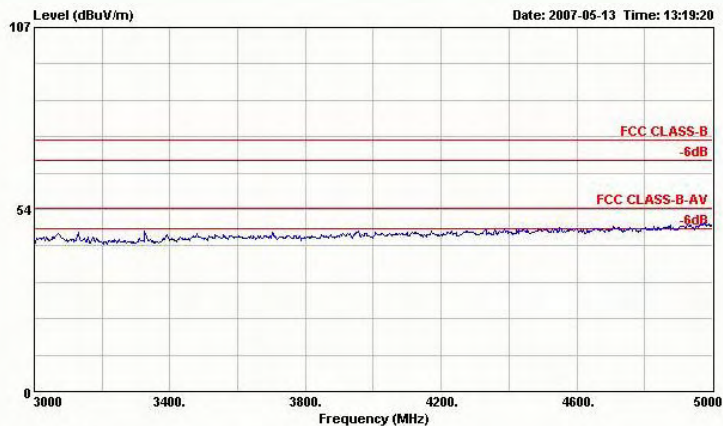


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6



FCC / IC TEST REPORT


Report No. : FR6D2906-E

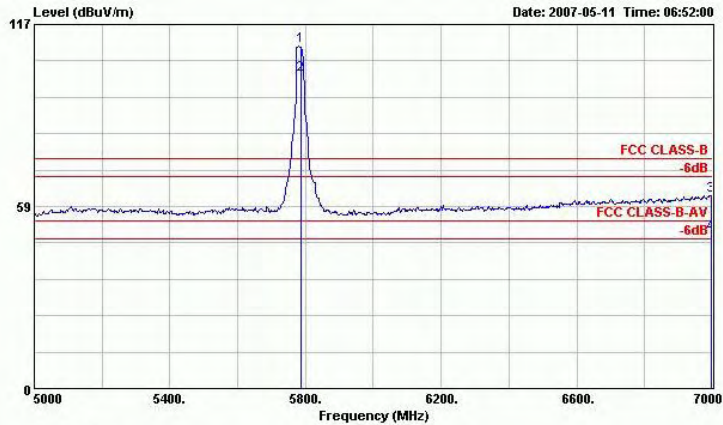

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S7;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	5785.000	110.22			104.25	33.99	6.02	34.05	100	0 Peak
2 Q	5785.000	100.93			94.96	33.99	6.02	34.04	100	2 Average
3 Q	6996.000	62.07	-11.93	74.00	50.51	37.70	6.36	32.50	100	0 Peak
4 Q	6996.000	49.65	-4.35	54.00	38.09	37.70	6.36	32.50	100	293 Average

Remark: #1 and #2 Fundamental Signal

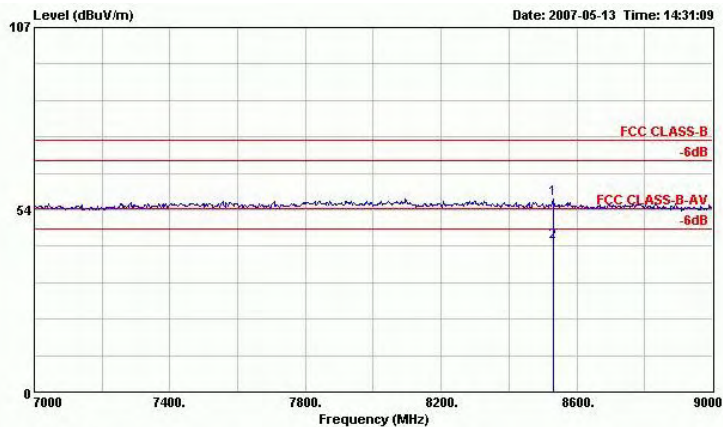


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S7;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	8532.000	56.63	-17.37	74.00	44.76	39.26	7.03	34.42	100	0 Peak
2 Q	8532.000	43.86	-10.14	54.00	31.99	39.26	7.03	34.42	100	107 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-E

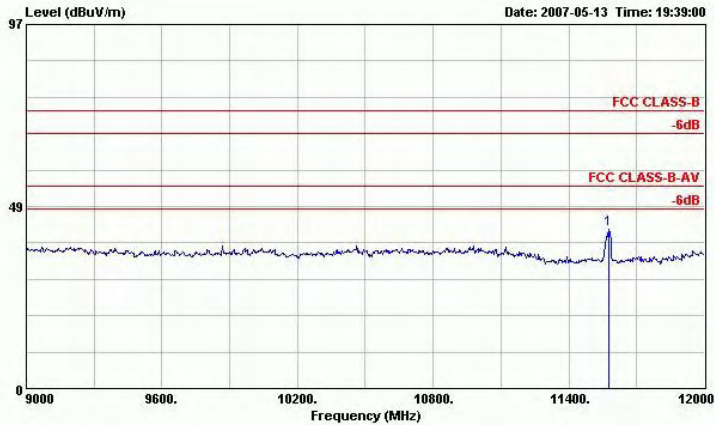

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S7;5785MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1 0	11577.000	42.31	-31.69	74.00	80.24	-11.45	7.85	34.33	---	--- Peak

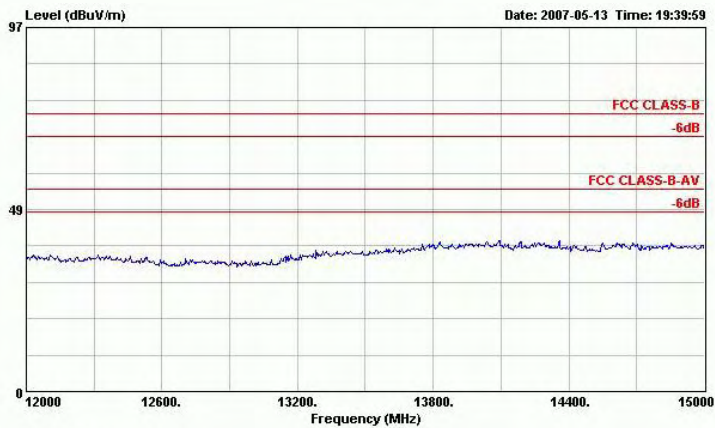


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch1S7;5785MHz
Data Rate: 6



FCC / IC TEST REPORT

Report No. : FR6D2906-E

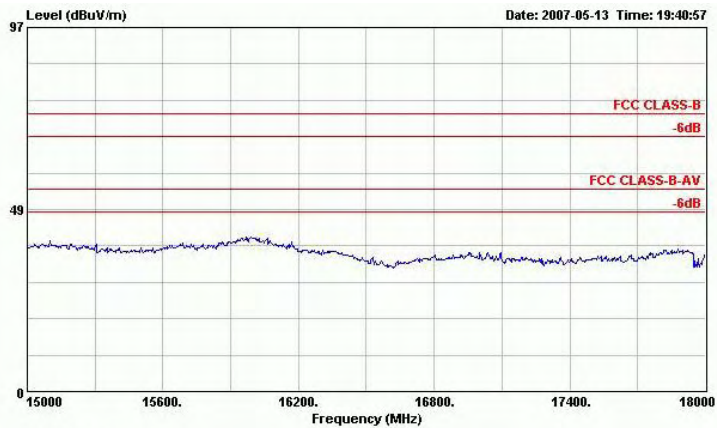


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

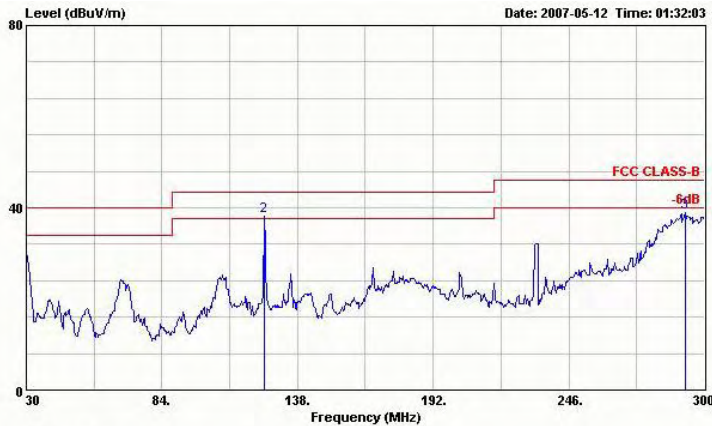


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157:5785MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.000	29.44	-10.56	40.00	45.32	16.38	0.63	32.89	---	Peak
2 @	124.770	38.19	-5.31	43.50	57.86	11.90	1.28	32.85	117	265 Peak
3 @	292.170	38.85	-7.15	46.00	57.31	12.35	2.01	32.82	---	Peak

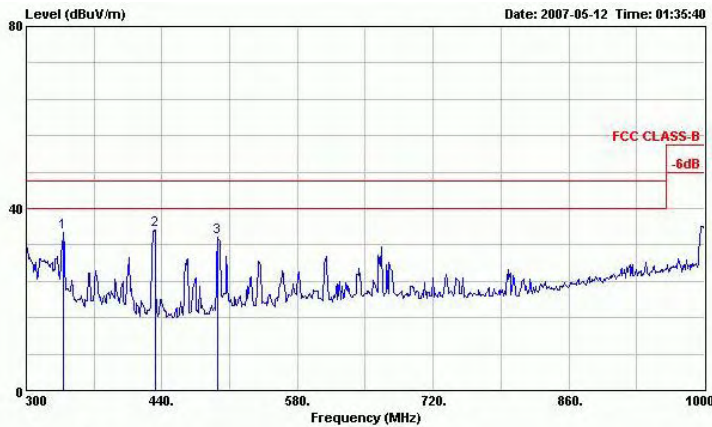


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157:5785MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	338.500	34.83	-11.17	46.00	51.90	13.65	2.11	32.83	---	Peak
2 @	493.000	35.34	-10.66	46.00	49.55	16.13	2.43	32.78	---	Peak
3 @	498.100	33.63	-12.37	46.00	46.79	16.89	2.60	32.64	---	Peak

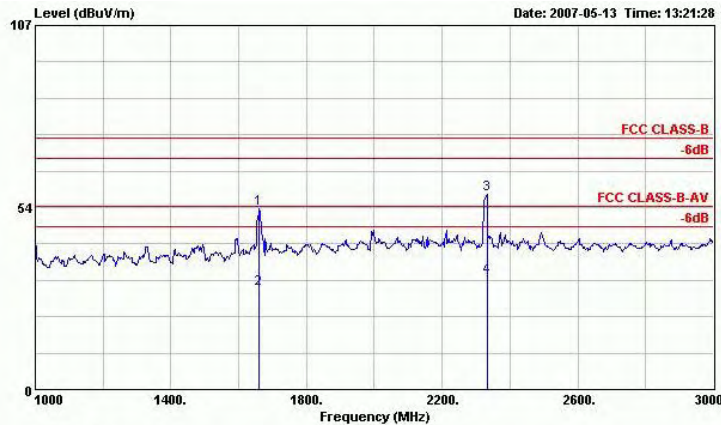


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6


	Freq	Level	Over	Limit	ReadAntenna	Cable	Presamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark
1	1660.000	53.02	-20.98	74.00	55.18	28.57	2.97	33.70	100	0 Peak
2	1660.000	29.67	-24.33	54.00	31.83	28.57	2.97	33.70	100	125 Average
3	2332.000	57.21	-16.79	74.00	56.58	30.71	3.69	33.77	100	0 Peak
4	2332.000	33.14	-20.86	54.00	32.51	30.71	3.69	33.77	100	176 Average

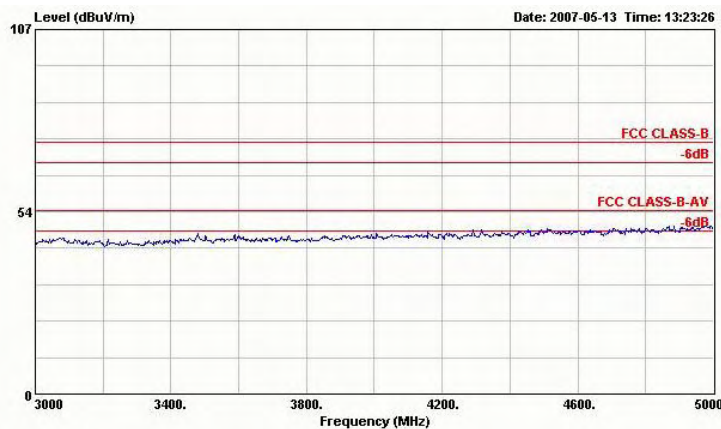


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate: 6

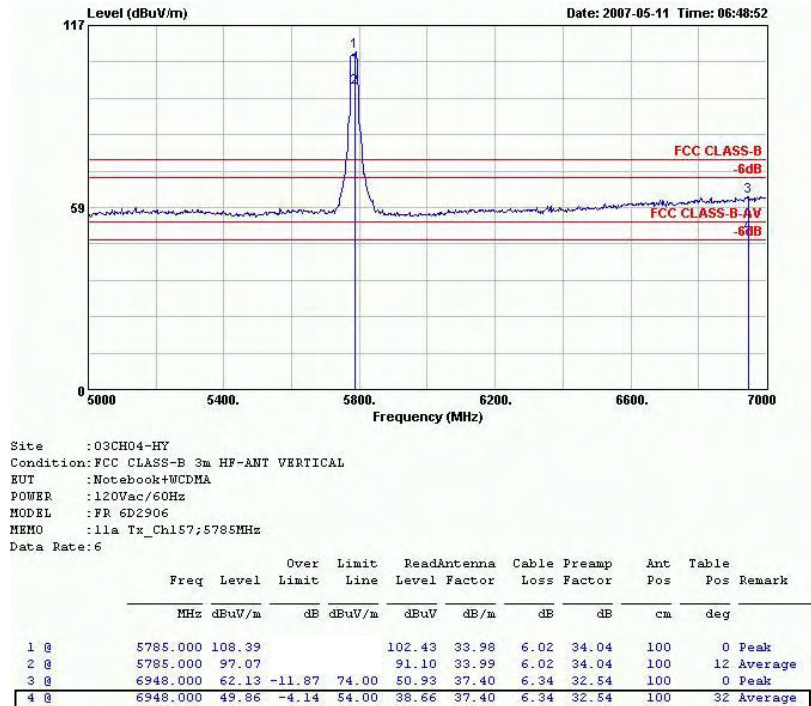


Remark: #1 and #2 Fundamental Signal

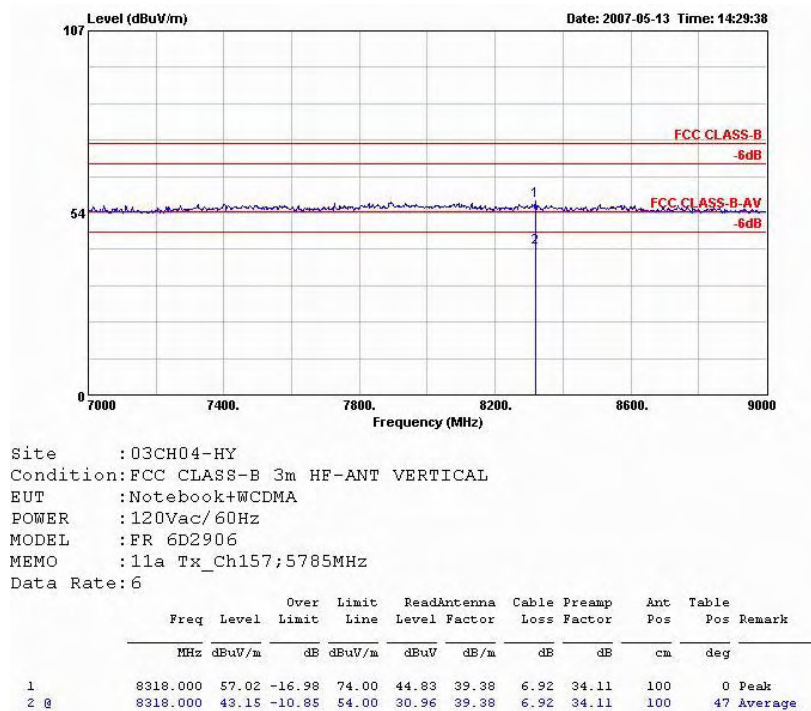

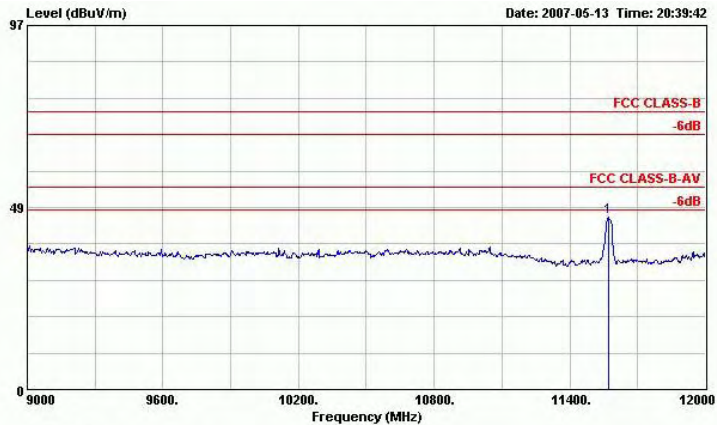

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					dB		dB		cm	deg
1 @	11574.000	45.95	-28.05	74.00	83.92	-11.49	7.85	34.33	100	0 Peak

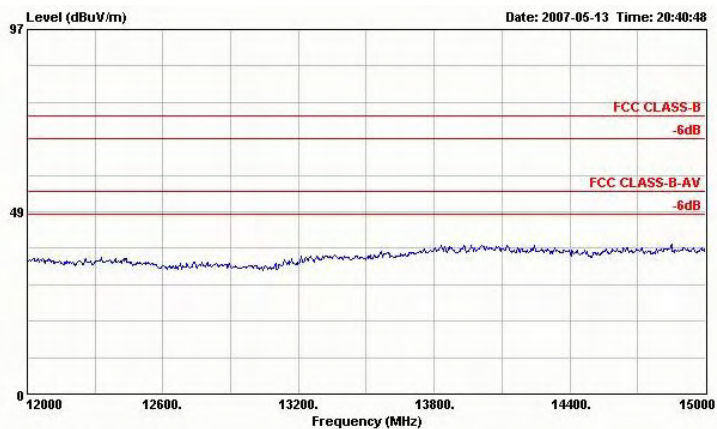


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch157;5785MHz
Data Rate:6



FCC / IC TEST REPORT

Report No. : FR6D2906-E

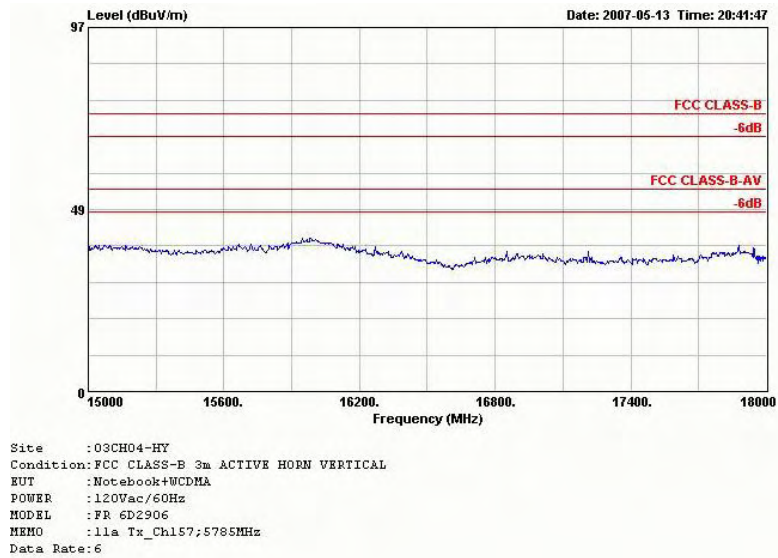


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 11
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

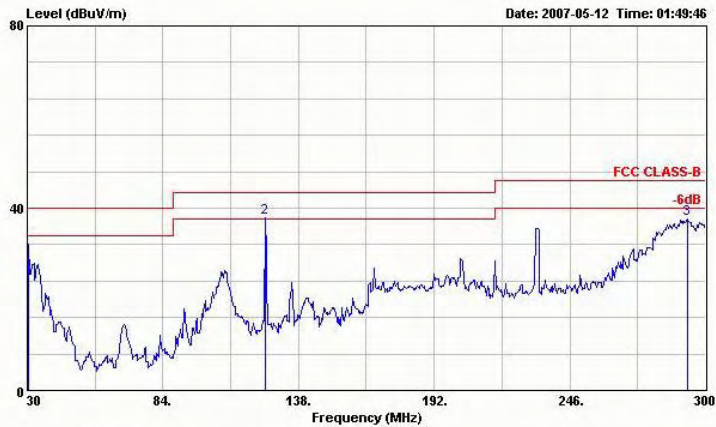

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx Ch160;5800MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	30.540	32.13	-7.87	40.00	48.06	16.36	0.64	32.93	---	---
2 @	124.770	37.92	-5.58	43.50	57.59	11.90	1.28	32.85	102	246
3 @	292.980	37.67	-8.33	46.00	56.13	12.35	2.01	32.82	---	---

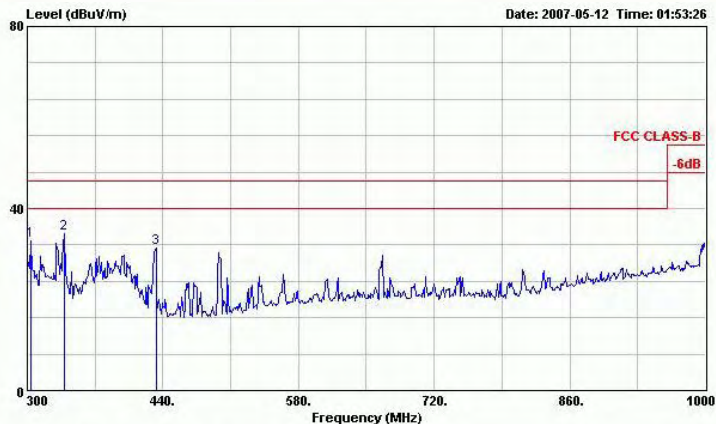


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx Ch160;5800MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	304.200	32.86	-13.14	46.00	51.16	12.48	2.04	32.81	---	---
2 @	337.800	34.59	-11.41	46.00	51.70	13.61	2.10	32.83	---	---
3 @	433.000	31.35	-14.65	46.00	45.56	16.13	2.43	32.78	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-E

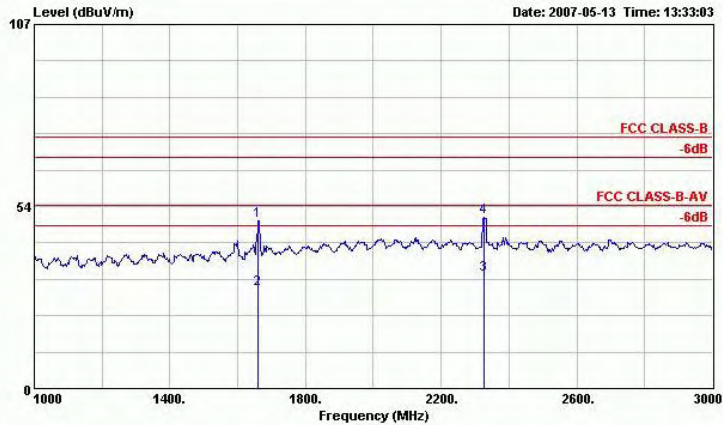

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
					dB	dB/m	dB	dB	cm	deg
1 Q	1660.000	49.29	-24.71	74.00	51.45	28.57	2.97	33.70	100	0 Peak
2 Q	1660.000	29.08	-24.92	54.00	31.24	28.57	2.97	33.70	100	334 Average
3 Q	2326.000	33.40	-20.60	54.00	32.79	30.71	3.66	33.77	100	341 Average
4 Q	2326.000	50.31	-23.69	74.00	49.70	30.71	3.66	33.77	100	0 Peak

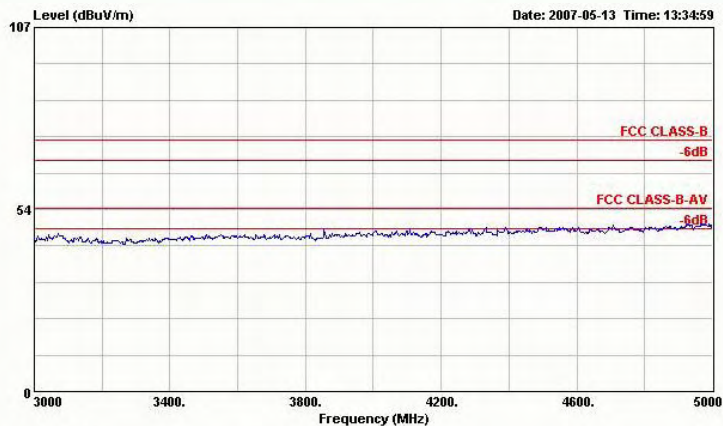


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)



FCC / IC TEST REPORT


Report No. : FR6D2906-E

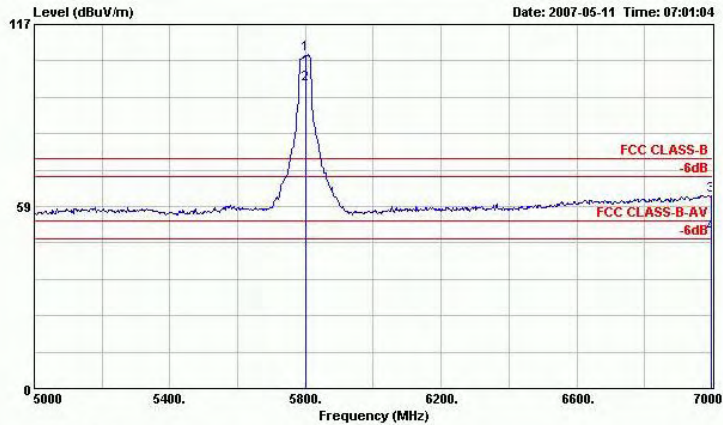

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	5800.000	107.42			101.46	33.98	6.02	34.04	100	0 Peak
2 Q	5800.000	97.90			91.94	33.98	6.02	34.04	100	2 Average
3 Q	6998.000	62.04	-11.96	74.00	50.48	37.70	6.36	32.50	100	0 Peak
4 Q	6998.000	49.76	-4.24	54.00	38.20	37.70	6.36	32.50	100	51 Average

Remark: #1 and #2 Fundamental Signal

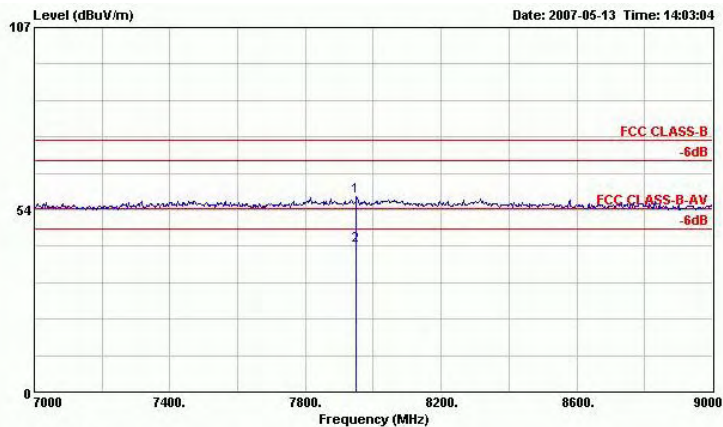


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	7950.000	57.42	-16.58	74.00	44.84	39.46	6.74	33.62	100	0 Peak
2 Q	7950.000	43.08	-10.92	54.00	30.50	39.46	6.74	33.62	100	331 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-E

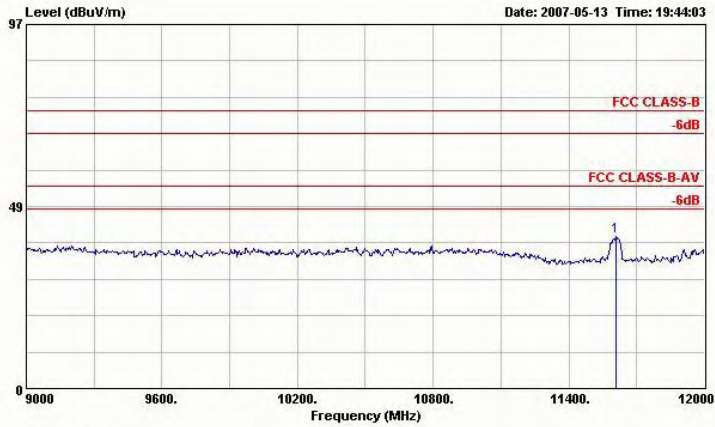

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
					dB	dB		cm	deg	
1 0	11610.000	40.64	-33.36	74.00	78.45	-11.32	7.85	34.34	100	0 Peak

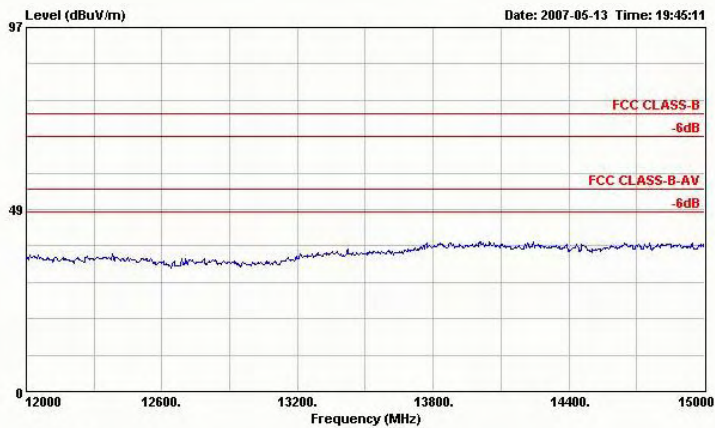


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)



FCC / IC TEST REPORT

Report No. : FR6D2906-E

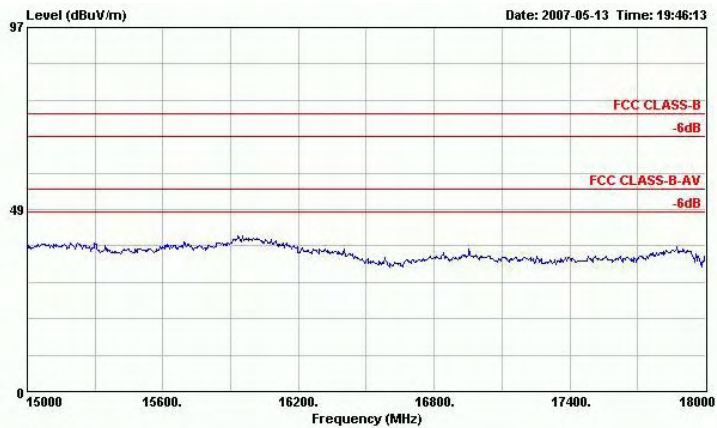

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12(Turbo mode)