





- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

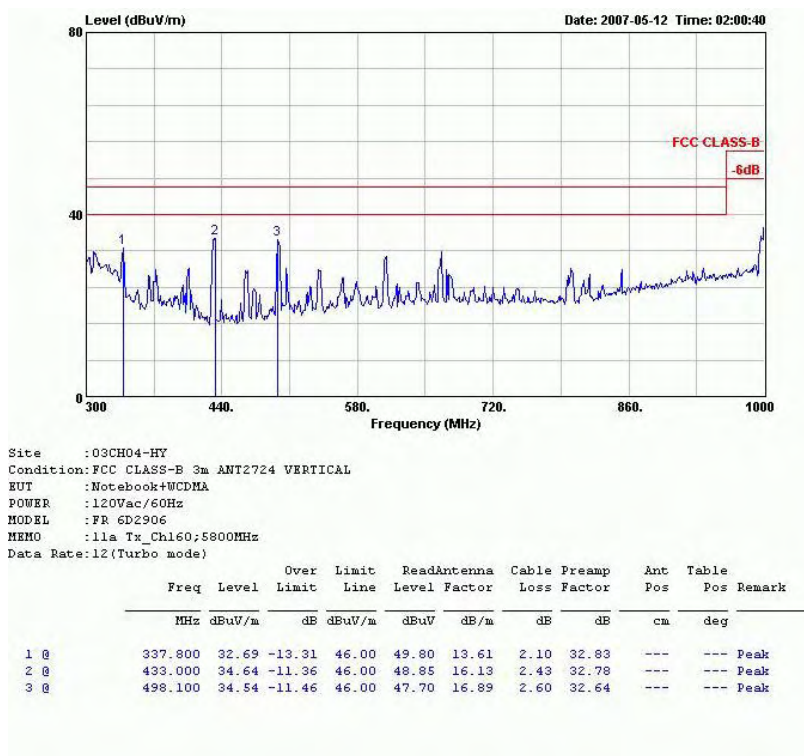

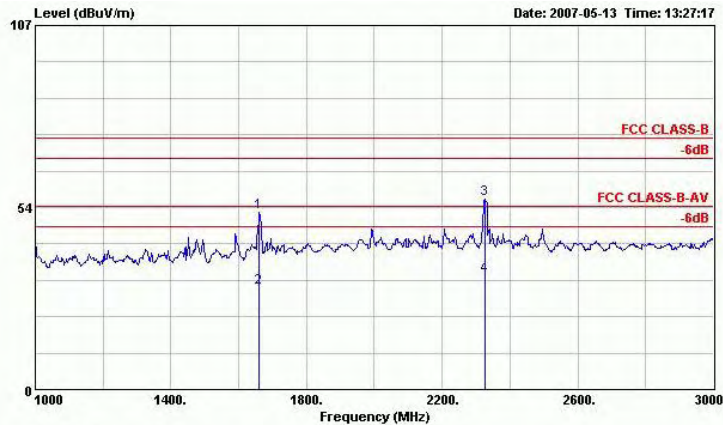


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Remark
			dB		dBuV				cm	deg
1	1660.000	52.25	-21.75	74.00	54.41	28.57	2.97	33.70	100	0 Peak
2	1660.000	29.97	-24.03	54.00	32.13	28.57	2.97	33.70	100	138 Average
3	2326.000	56.09	-17.91	74.00	55.48	30.71	3.66	33.77	100	0 Peak
4	2326.000	33.50	-20.50	54.00	32.89	30.71	3.66	33.77	100	205 Average

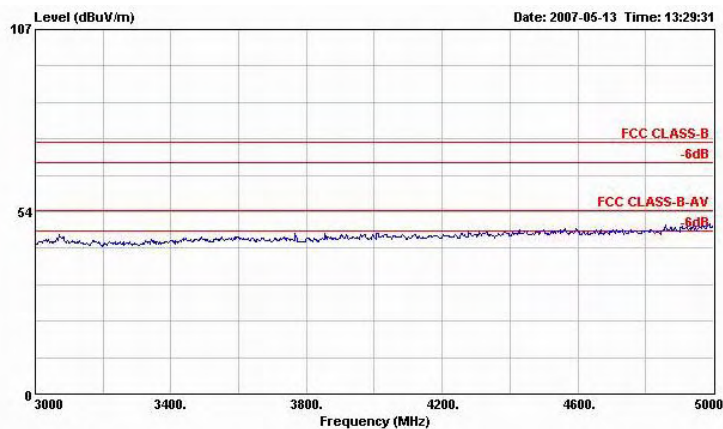

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12 (Turbo mode)

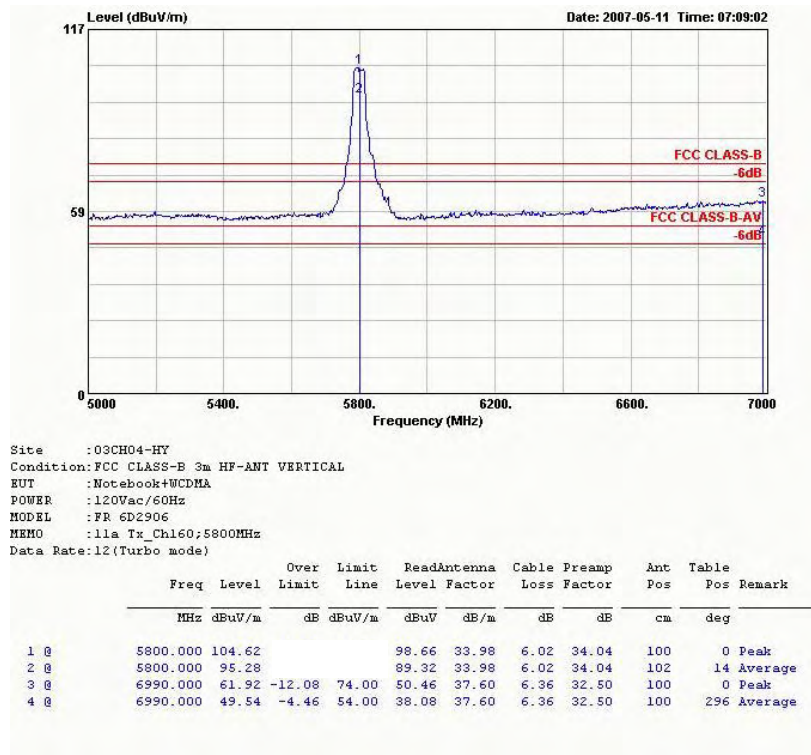


Remark: #1 and #2 Fundamental Signal






FCC / IC TEST REPORT

Report No. : FR6D2906-E

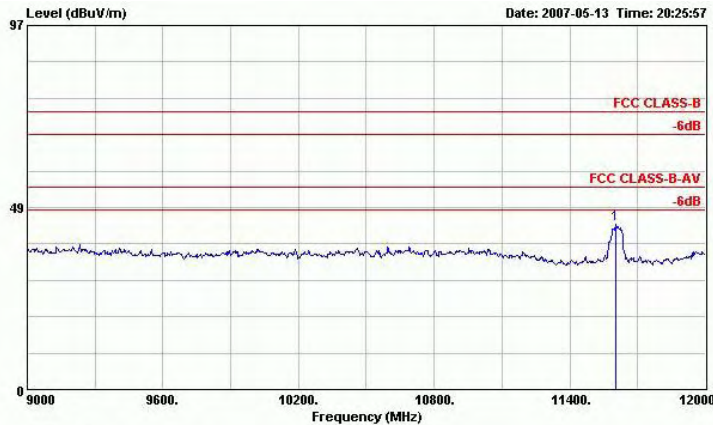


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12(Turbo mode)

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1 @	11601.000	44.14	-29.86	74.00	81.99	-11.36	7.85	34.34	100	0 Peak

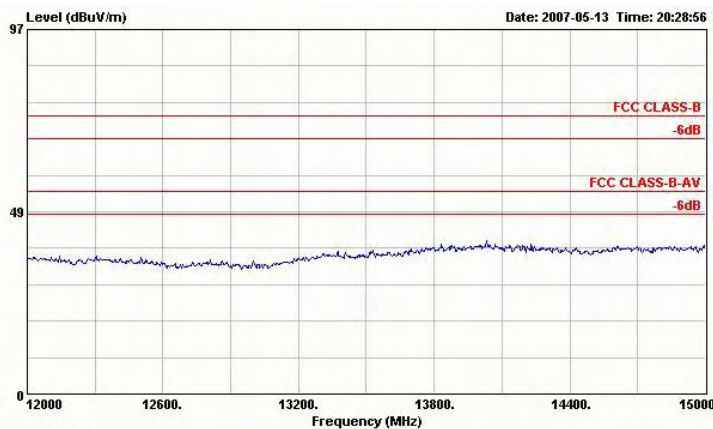

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch160;5800MHz
Data Rate: 12(Turbo mode)

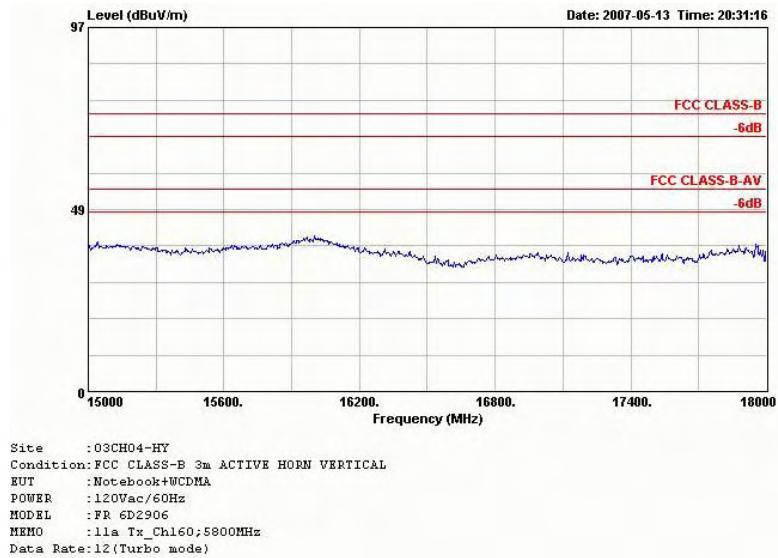


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 12
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

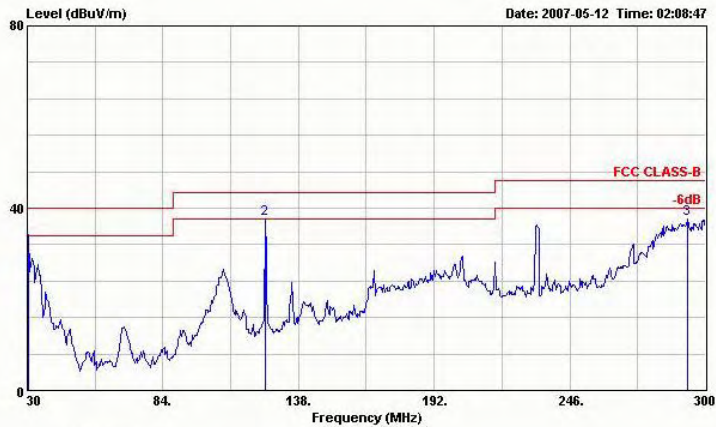

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					dBuV	dB/m	dB	dB	cm	deg
1	30.540	34.32	-5.68	40.00	50.25	16.36	0.64	32.93	109	308 Peak
2	124.770	37.73	-5.77	43.50	57.40	11.90	1.28	32.85	---	---
3	292.980	37.74	-8.26	46.00	56.20	12.35	2.01	32.82	---	---

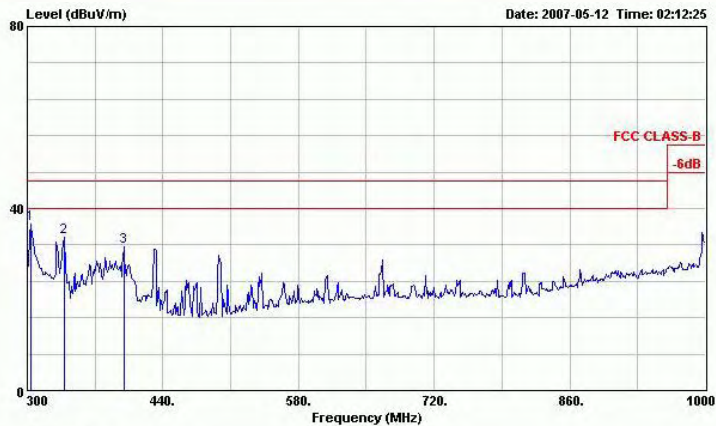


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate:6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					dBuV	dB/m	dB	dB	cm	deg
1	304.200	36.50	-9.50	46.00	54.80	12.48	2.04	32.81	---	---
2	337.800	33.65	-12.35	46.00	50.76	13.61	2.10	32.83	---	---
3	399.400	31.48	-14.52	46.00	46.26	15.75	2.33	32.86	---	---




FCC / IC TEST REPORT

Report No. : FR6D2906-E

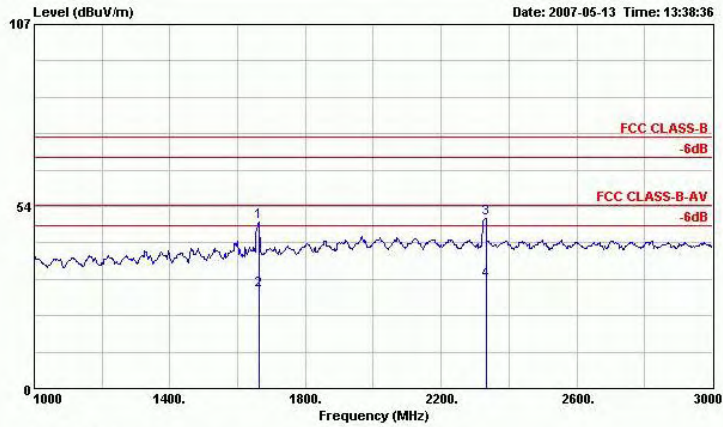

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor					
1 Q	1662.000	48.83	-25.17	74.00	50.99	28.57	2.97	33.70	100	0 Peak
2 Q	1662.000	28.69	-25.31	54.00	30.85	28.57	2.97	33.70	100	288 Average
3 Q	2332.000	50.10	-23.90	74.00	49.47	30.71	3.69	33.77	100	0 Peak
4 Q	2332.000	31.77	-22.23	54.00	31.14	30.71	3.69	33.77	100	329 Average

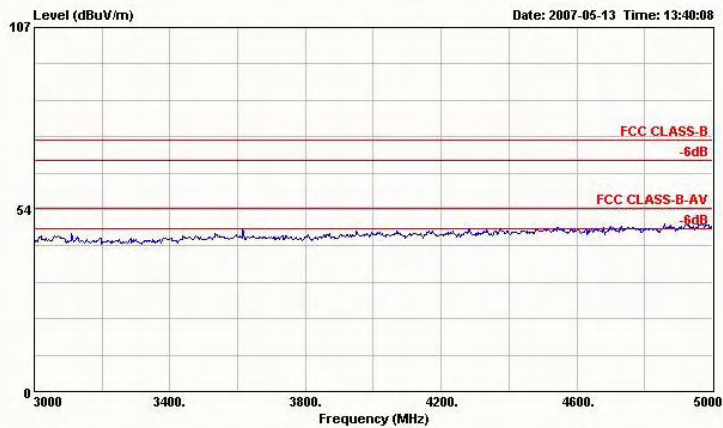


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6



FCC / IC TEST REPORT


Report No. : FR6D2906-E

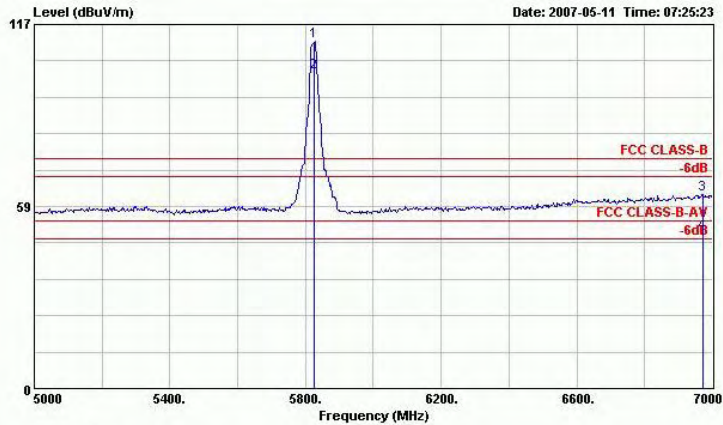

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	5825.000	111.57			105.61	33.97	6.02	34.04	100	0 Peak
2 Q	5825.000	101.79			95.83	33.97	6.02	34.04	106	4 Average
3 Q	6972.000	62.41	-11.59	74.00	51.08	37.50	6.35	32.52	100	0 Peak
4 Q	6972.000	49.92	-4.08	54.00	38.59	37.50	6.35	32.52	100	305 Average

Remark: #1 and #2 Fundamental Signal

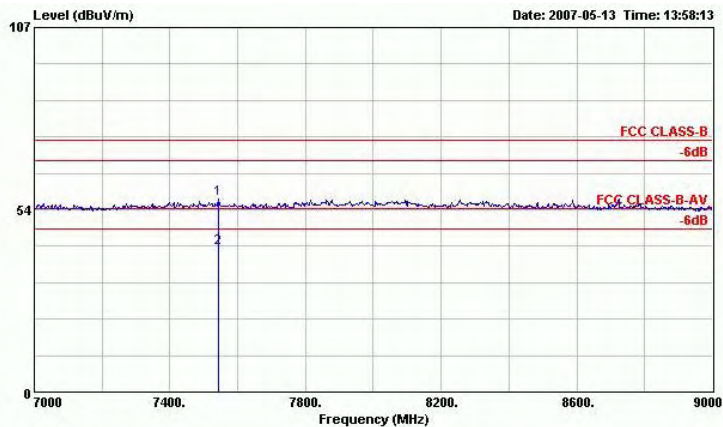


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 Q	7542.000	56.77	-17.23	74.00	44.83	39.14	6.58	33.78	100	0 Peak
2 Q	7542.000	42.18	-11.82	54.00	30.24	39.14	6.58	33.78	100	342 Average




FCC / IC TEST REPORT

Report No. : FR6D2906-E

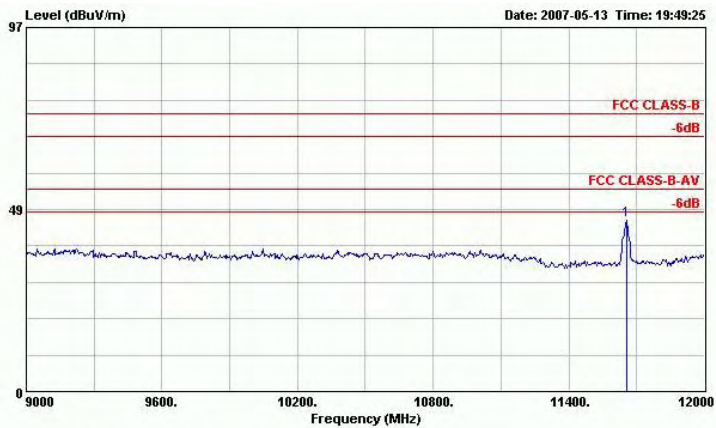

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm deg Remark
1 0	11658.000	45.75	-28.25	74.00	83.35	-11.10	7.86	34.36	100 0 Peak

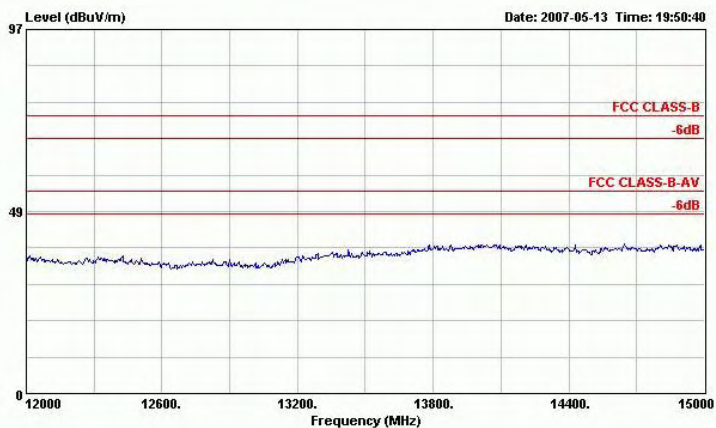

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : EJE-WB0049

IC ID : 337J-WB0049

Page No. : 236 of 296


Report Issued Date : May 15, 2007

Report Version : Rev. 01



FCC / IC TEST REPORT

Report No. : FR6D2906-E

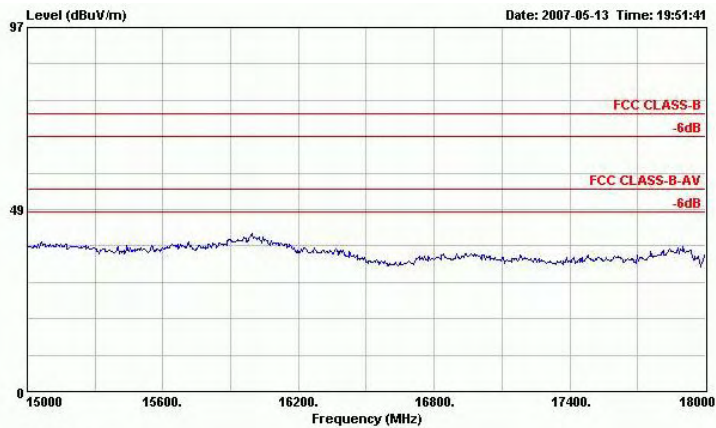


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165,5825MHz
Data Rate: 6



- Polarization : Vertical


The test that passed at minimum margin was marked by the frame in the following table.

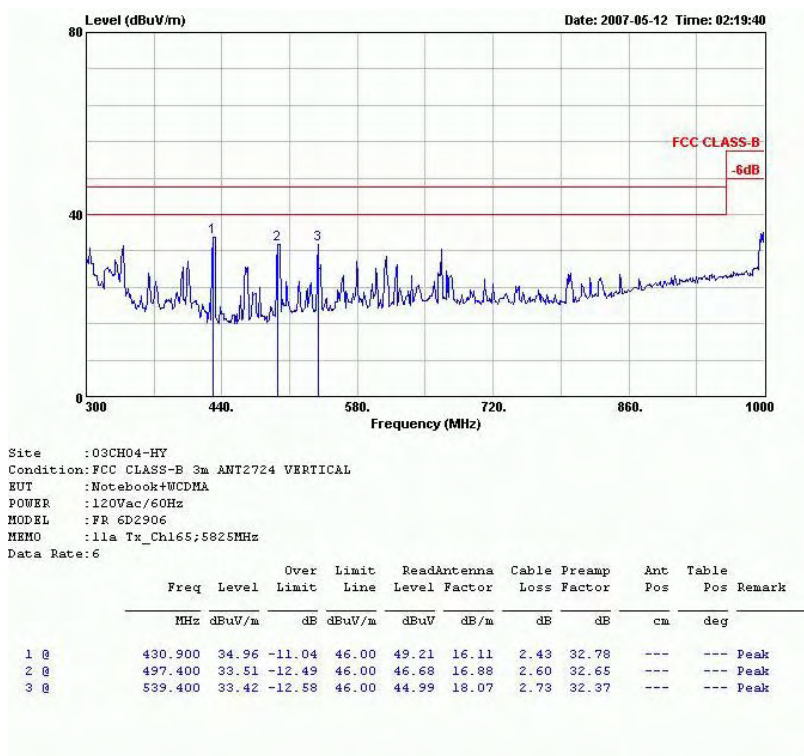




FCC / IC TEST REPORT

Report No. : FR6D2906-E

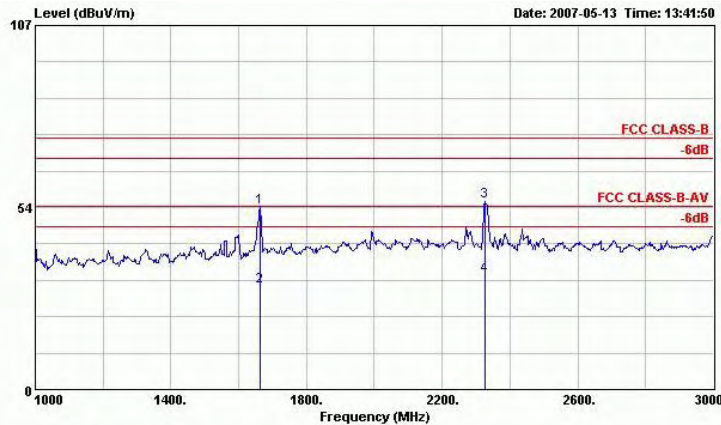


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6


	Freq	Level	Over	Limit	ReadAntenna	Cable	Presamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	1662.000	53.56	-20.44	74.00	55.72	28.57	2.97	33.70	100	0 Peak
2 @	1662.000	30.22	-23.78	54.00	32.38	28.57	2.97	33.70	100	119 Average
3 @	2326.000	55.31	-18.69	74.00	54.70	30.71	3.66	33.77	100	0 Peak
4 @	2326.000	33.42	-20.58	54.00	32.81	30.71	3.66	33.77	100	165 Average

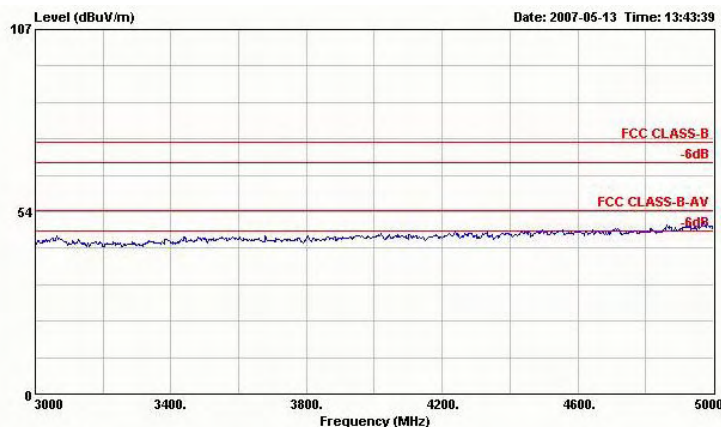


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

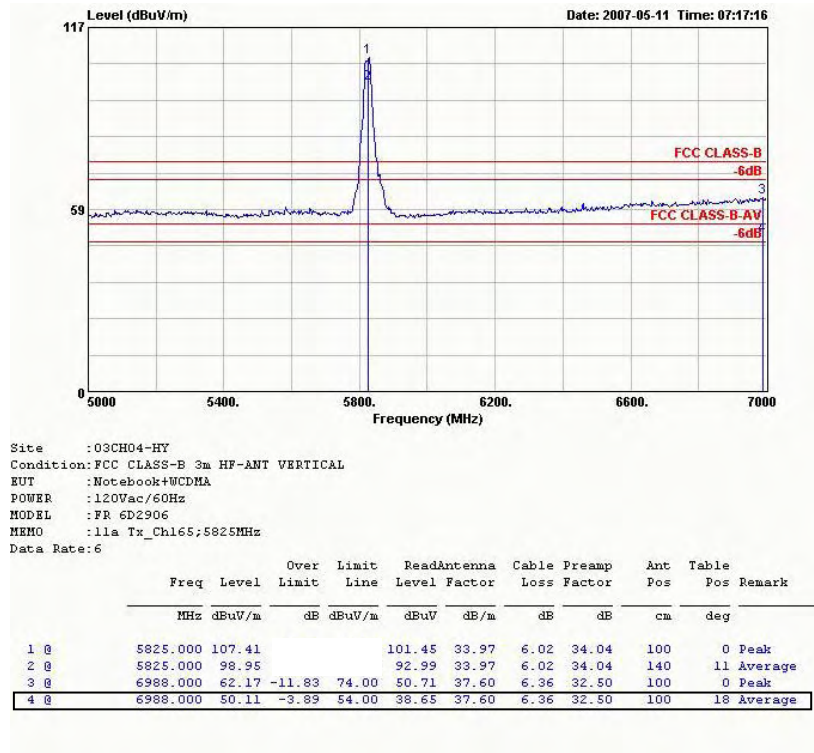


Remark: #1 and #2 Fundamental Signal

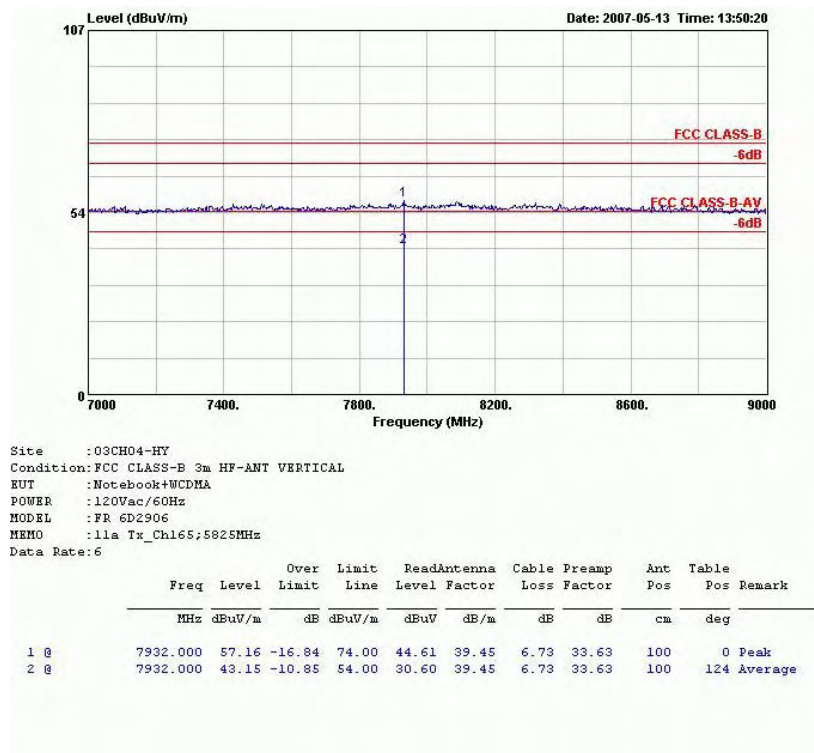

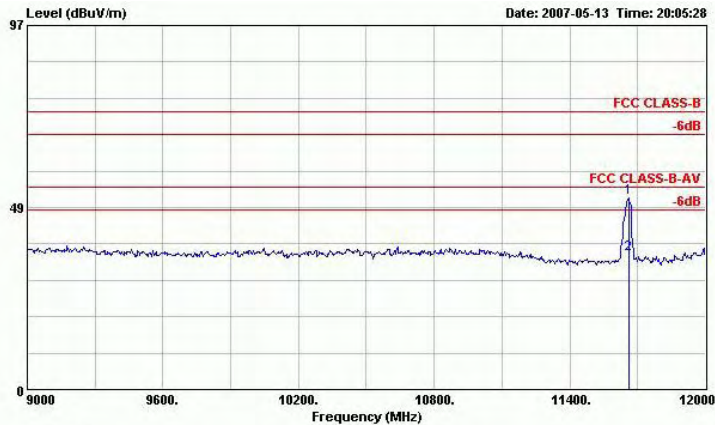


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					Factor			cm	deg	
1	11661.000	50.99	-23.01	74.00	88.59	-11.10	7.86	34.36	100	0 Peak
2	11661.000	36.11	-17.89	54.00	73.71	-11.10	7.86	34.36	100	355 Average

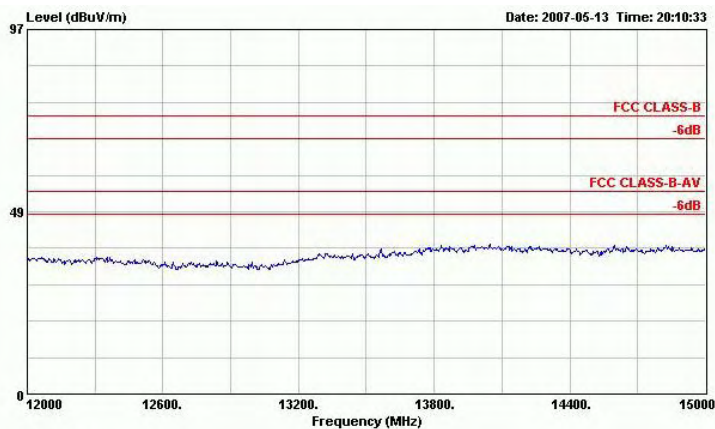

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : 11a Tx_Ch165;5825MHz
Data Rate: 6

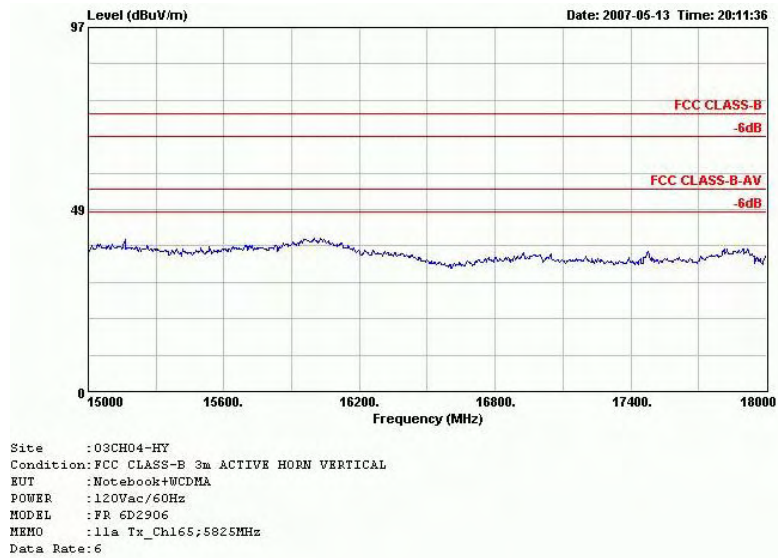


Remark : Frequency from 18GHz to 40GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 13
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

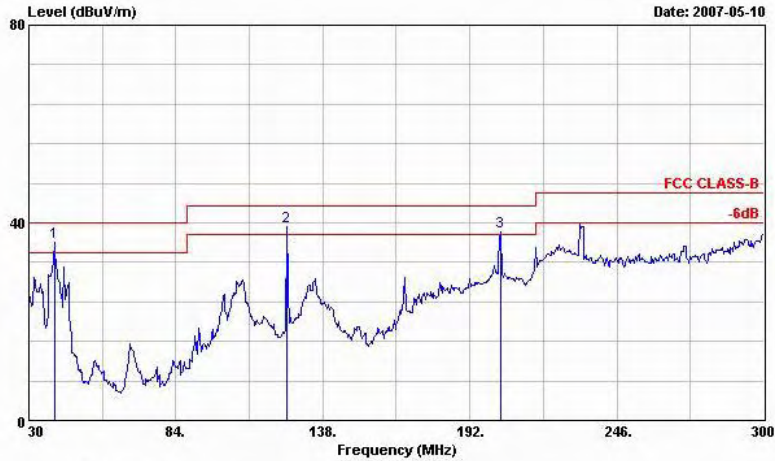

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1 @	39.450	36.17	-3.83	40.00	56.54	11.82	0.71	32.90	100	347 Peak
2 !	124.770	39.13	-4.37	43.50	58.80	11.90	1.28	32.85	---	---
3 !	203.340	38.25	-5.25	43.50	60.36	9.02	1.63	32.76	---	---

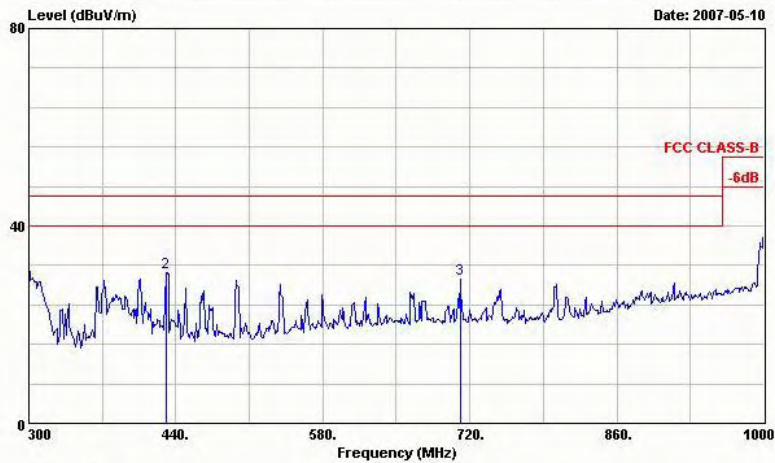


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Loss	Factor	Pos	Pos	Remark
					dBuV	dB/m	dB	dB	cm	deg
1	300.000	31.58	-14.42	46.00	50.05	12.31	2.03	32.81	---	---
2	430.900	30.56	-15.44	46.00	44.81	16.11	2.43	32.78	---	---
3	710.900	29.21	-16.79	46.00	37.94	20.11	3.16	31.99	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-E

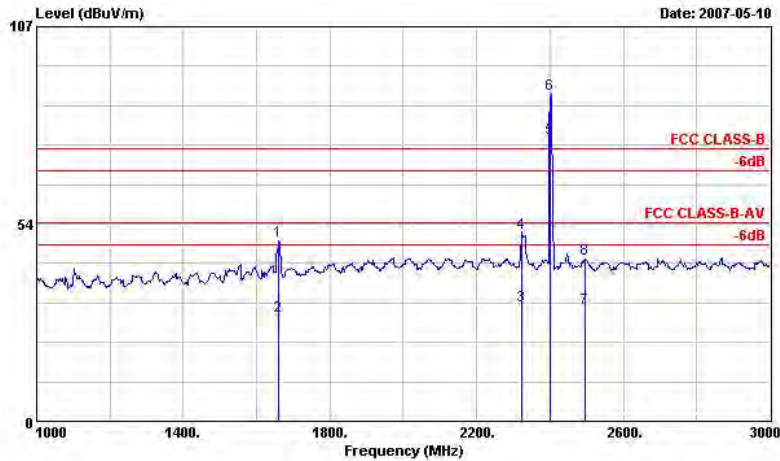

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1660.000	48.75	-25.25	74.00	50.91	28.57	2.97	33.70	100	0 Peak
2	1660.000	28.49	-25.51	54.00	30.65	28.57	2.97	33.70	100	94 Average
3	2324.000	31.25	-22.75	54.00	30.64	30.71	3.66	33.77	100	298 Average
4	2324.000	51.12	-22.88	74.00	50.51	30.71	3.66	33.77	100	0 Peak
5	2402.000	76.82			76.28	30.59	3.74	33.78	100	298 Average
6	2402.000	88.65			88.14	30.56	3.74	33.78	100	0 Peak
7	2494.000	30.77	-23.23	54.00	30.33	30.40	3.84	33.80	100	298 Average
8	2494.000	43.84	-30.16	74.00	43.40	30.40	3.84	33.80	100	0 Peak

Remark: #5 and #6 Fundamental Signal

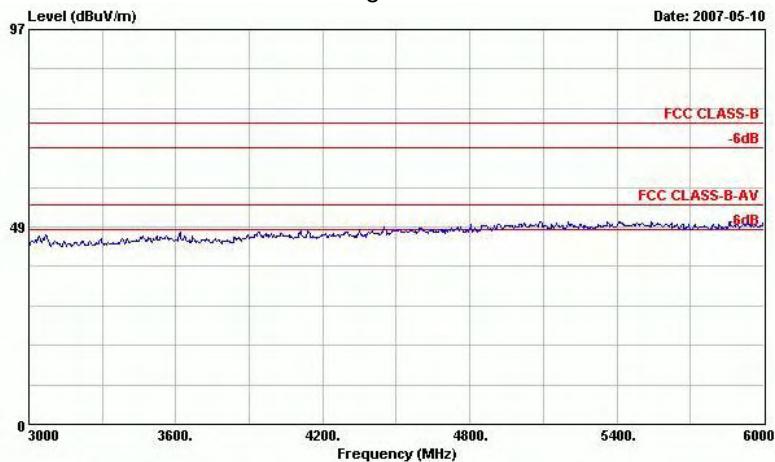


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DH5




FCC / IC TEST REPORT

Report No. : FR6D2906-E

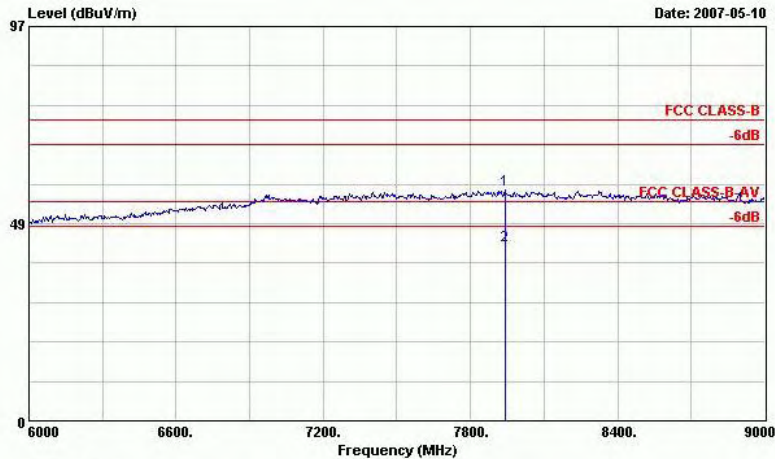

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : ET Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	Pos	Pos Remark
									cm	deg
1	7941.000	56.72	-17.28	74.00	44.17	39.45	6.73	33.63	100	0 Peak
2	7941.000	43.08	-10.92	54.00	30.53	39.45	6.73	33.63	100	56 Average

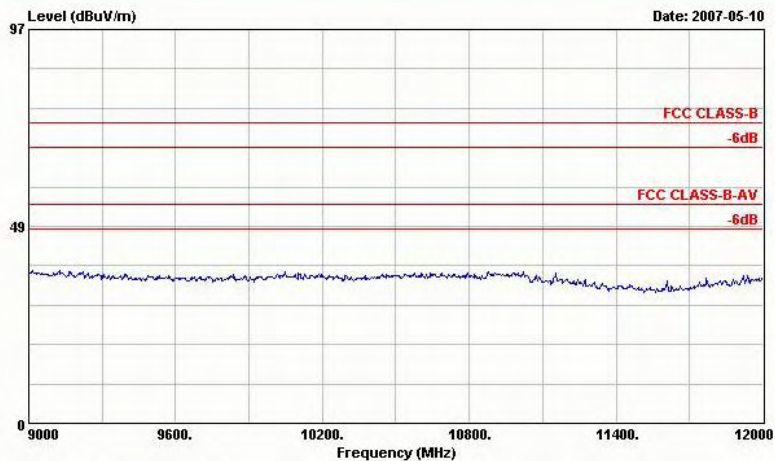


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : ET Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-E

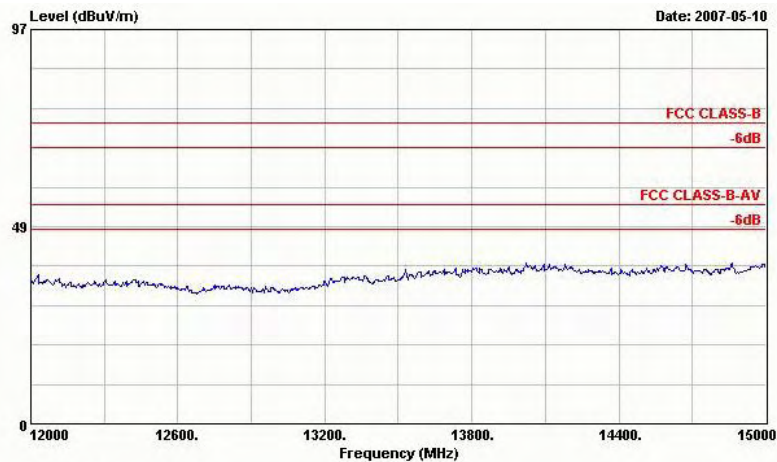

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : ET Tx_Ch00;2402MHz
Data Rate: DHS

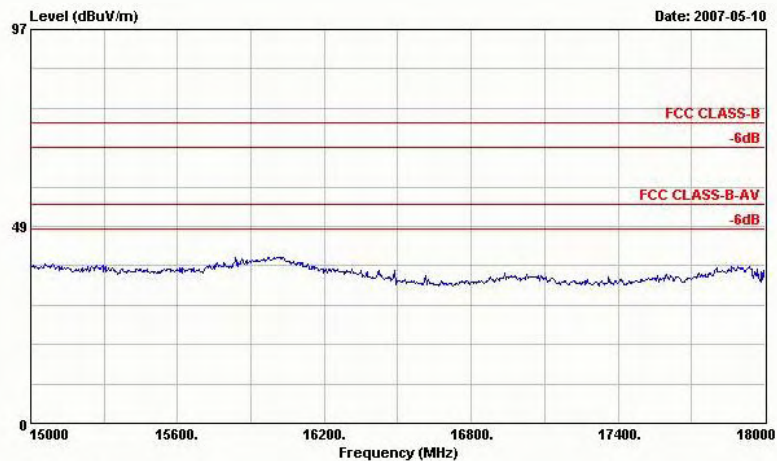


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : ET Tx_Ch00;2402MHz
Data Rate: DHS



FCC / IC TEST REPORT

Report No. : FR6D2906-E

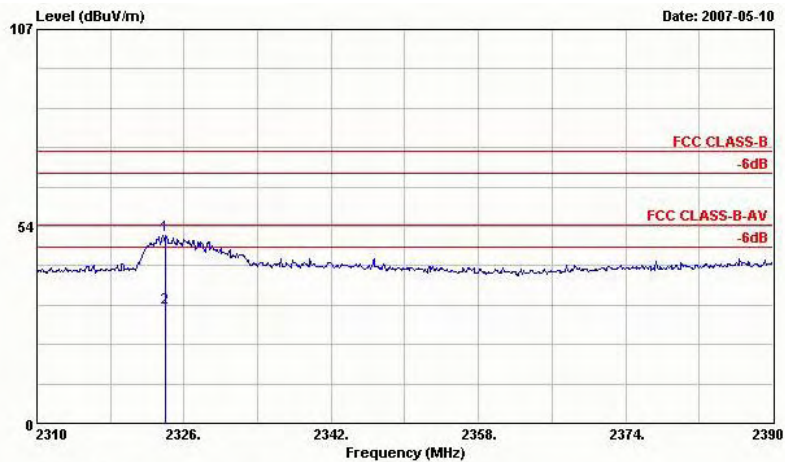


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00,2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
			dB	dBuV/m	dBuV		dB	dB	cm	deg
1	2324.000	51.12	-22.88	74.00	50.51	30.71	3.66	33.77	100	0 Peak
2	2324.000	31.25	-22.75	54.00	30.64	30.71	3.66	33.77	100	298 Average




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

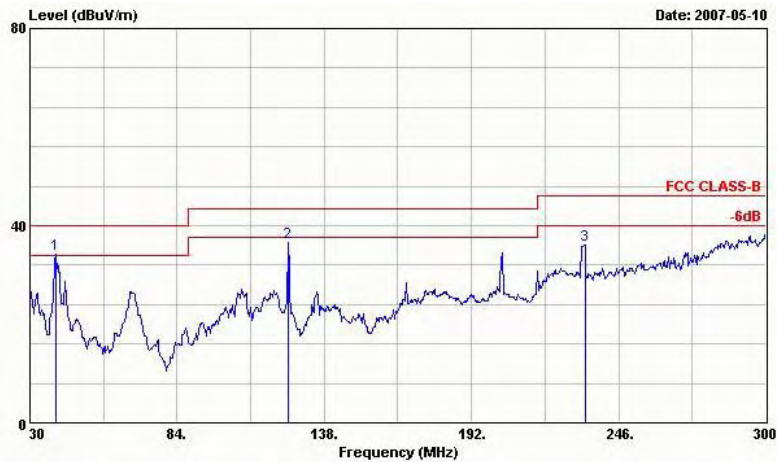

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	39.450	34.34	-5.66	40.00	54.71	11.82	0.71	32.90	107	148 Peak
2	124.770	36.57	-6.93	43.50	56.24	11.90	1.28	32.85	---	---
3	233.580	36.02	-9.98	46.00	55.74	11.31	1.80	32.84	---	---

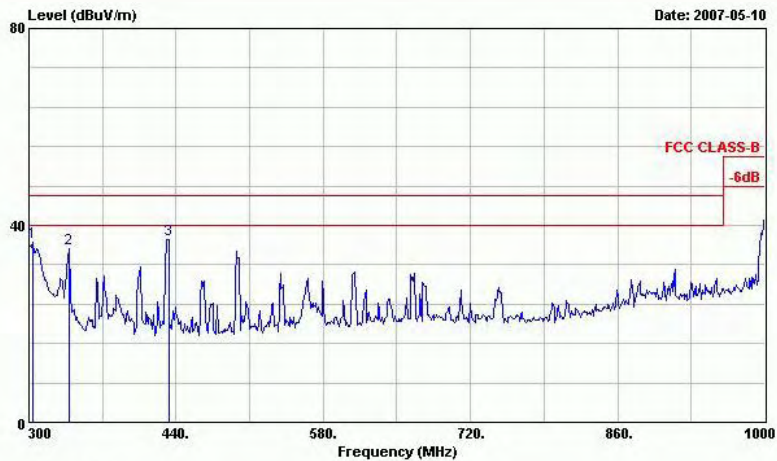


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	304.200	36.70	-9.30	46.00	55.00	12.48	2.04	32.81	---	---
2	337.800	35.16	-10.84	46.00	52.27	13.61	2.10	32.83	---	---
3	433.000	37.04	-8.96	46.00	51.25	16.13	2.43	32.78	---	---



FCC / IC TEST REPORT


Report No. : FR6D2906-E

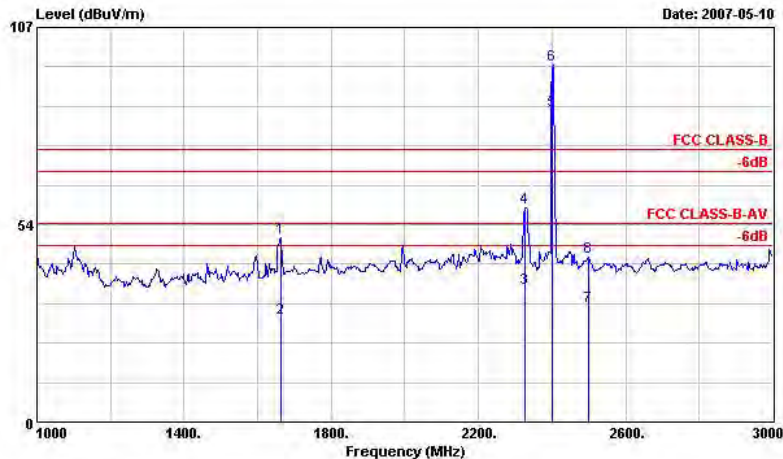

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1662.000	49.90	-24.10	74.00	52.06	28.57	2.97	33.70	100	0 Peak
2	1662.000	28.31	-25.69	54.00	30.47	28.57	2.97	33.70	100	271 Average
3	2326.000	36.12	-17.88	54.00	35.51	30.71	3.66	33.77	104	90 Average
4	2326.000	58.00	-16.00	74.00	57.39	30.71	3.66	33.77	100	0 Peak
5 @	2402.000	84.56			84.02	30.59	3.74	33.78	104	90 Average
6 @	2402.000	96.81			96.30	30.56	3.74	33.78	100	0 Peak
7	2500.000	31.29	-22.71	54.00	30.85	30.40	3.84	33.80	104	90 Average
8	2500.000	44.55	-29.45	74.00	44.11	30.40	3.84	33.80	100	0 Peak

Remark: #5 and #6 Fundamental Signal

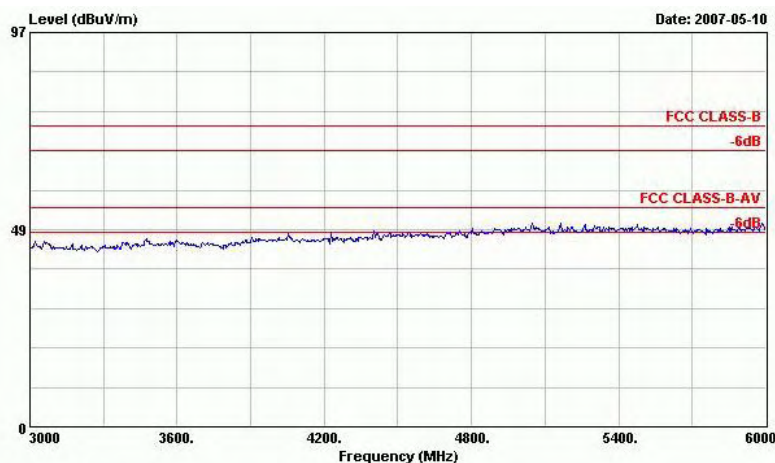


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-E

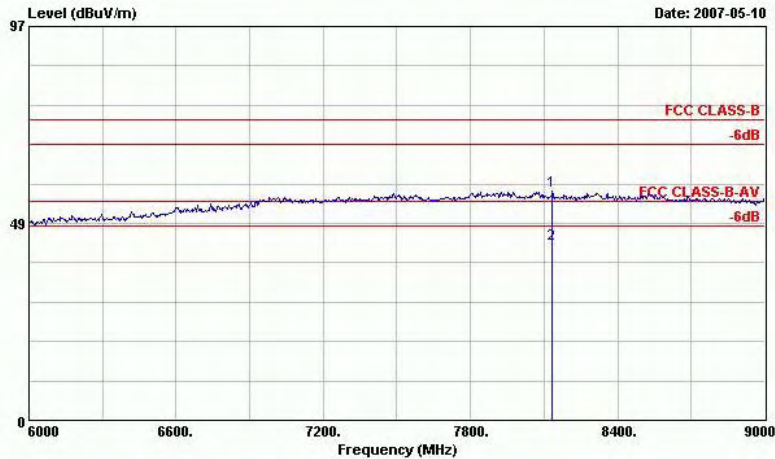

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor	Pos	Pos Remark
					Factor					
					dB		dB		cm	deg
1	8133.000	56.37	-17.63	74.00	43.91	39.44	6.82	33.81	100	0 Peak
2	8133.000	43.52	-10.48	54.00	31.06	39.44	6.82	33.81	103	296 Average

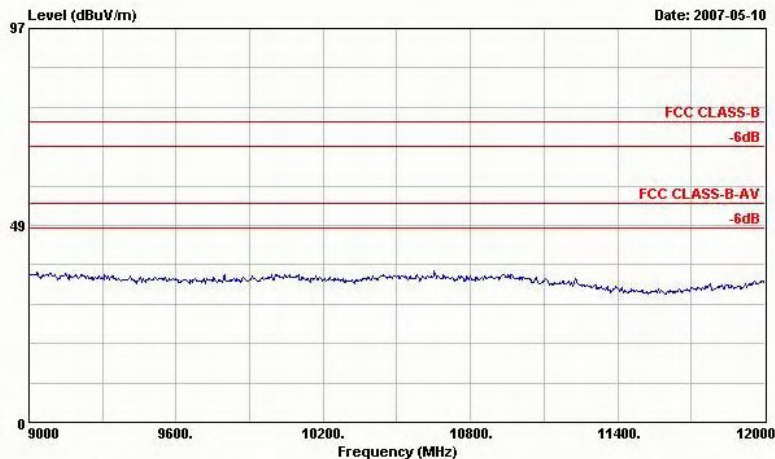


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS




FCC / IC TEST REPORT


Report No. : FR6D2906-E

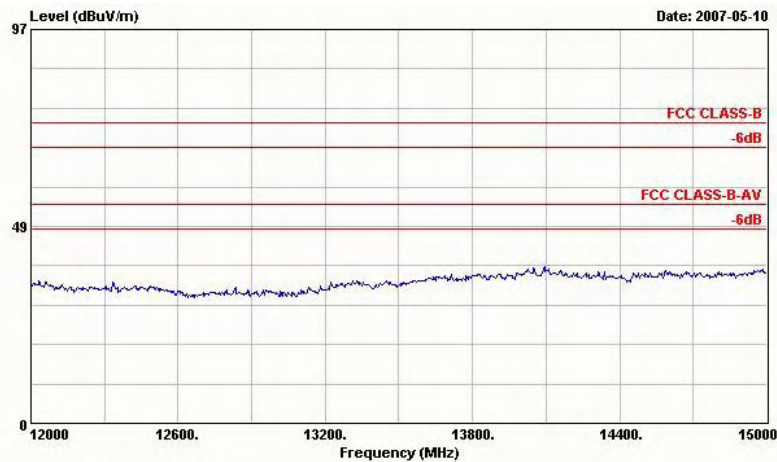

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

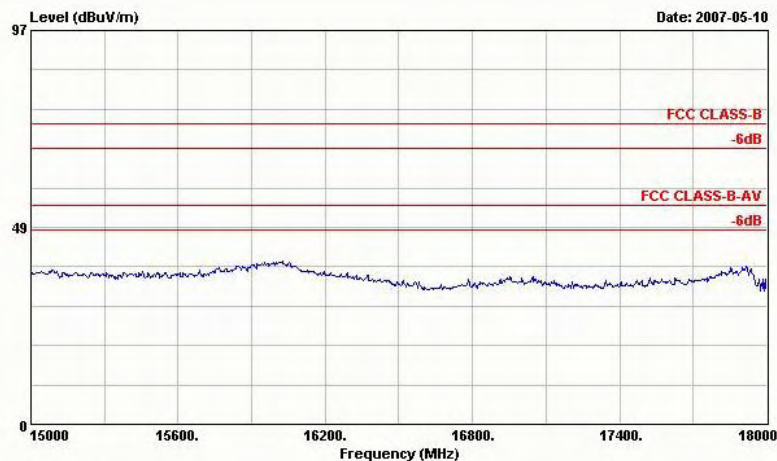

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00;2402MHz
Data Rate: DHS

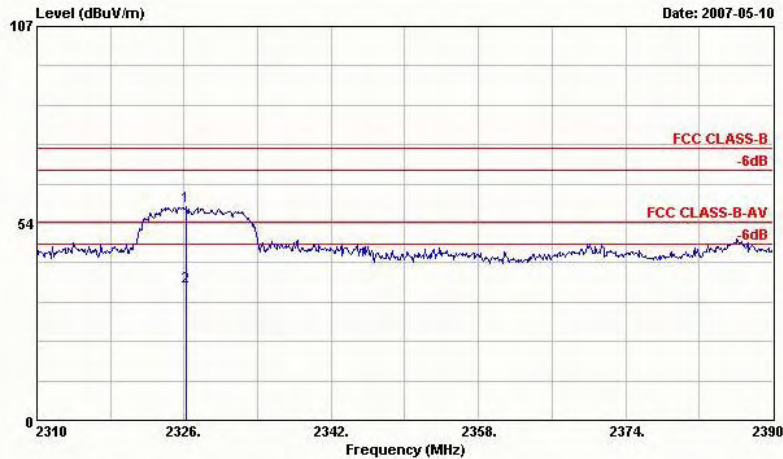

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch00,2402MHz
Data Rate: DHS


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Pos	Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2326.240	58.00	-16.00	74.00	57.39	30.71	3.66	33.77	100	0 Peak
2	2326.240	36.12	-17.88	54.00	35.51	30.71	3.66	33.77	104	90 Average

Remark : Frequency from 18GHz to 25GHz, the emission emitted by the EUT is too low to be measured.




- Test Mode : Mode 14
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

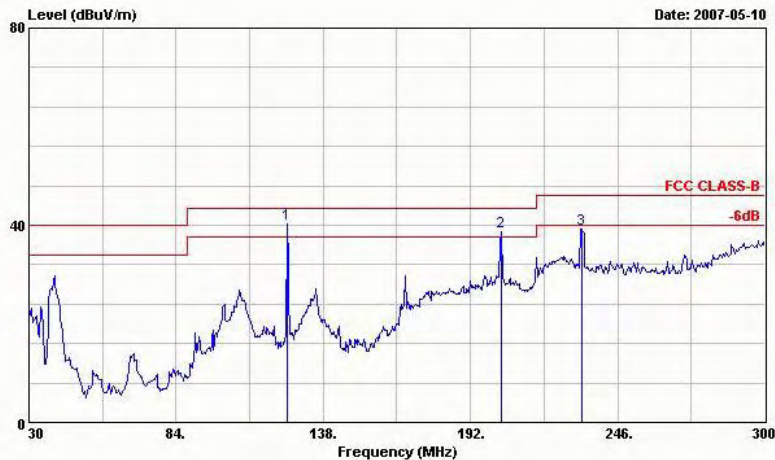

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	124.770	40.20	-3.30	43.50	59.87	11.90	1.28	32.85	105	223 Peak
2	203.340	38.56	-4.94	43.50	60.67	9.02	1.63	32.76	---	Peak
3	232.770	39.13	-6.87	46.00	58.93	11.24	1.80	32.84	---	Peak

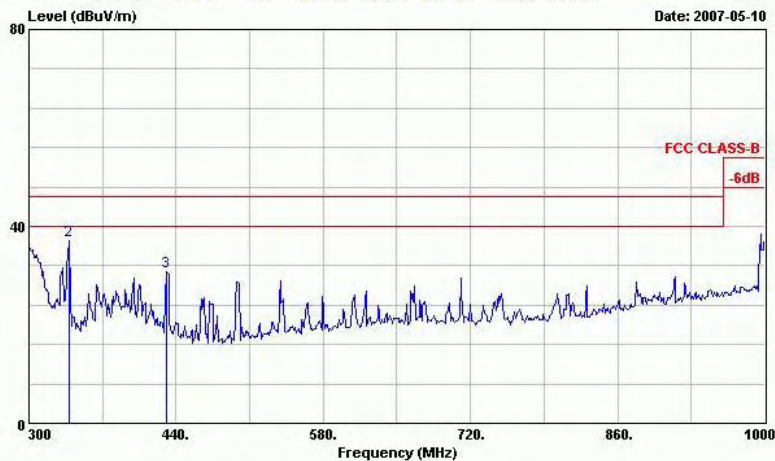


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	300.000	36.02	-9.98	46.00	54.49	12.31	2.03	32.81	---	Peak
2	337.800	36.98	-9.02	46.00	54.09	13.61	2.10	32.83	---	Peak
3	430.900	30.66	-15.34	46.00	44.91	16.11	2.43	32.78	---	Peak



FCC / IC TEST REPORT


Report No. : FR6D2906-E

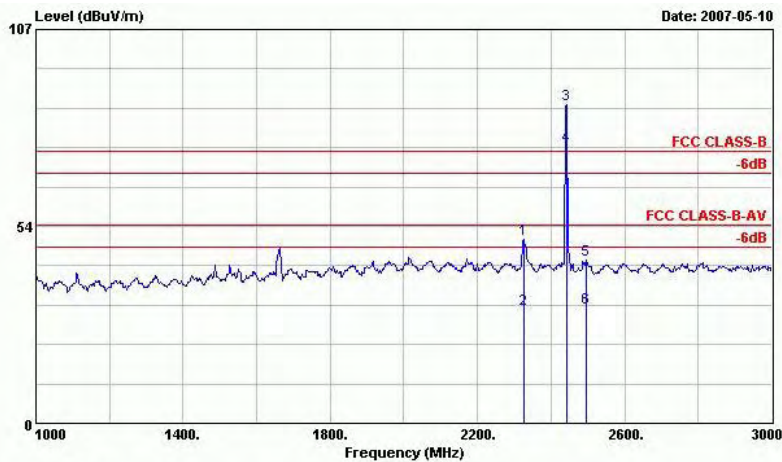


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	2326.000	49.92	-24.08	74.00	49.31	30.71	3.66	33.77	100	0 Peak
2 @	2326.000	30.91	-23.09	54.00	30.30	30.71	3.66	33.77	100	277 Average
3 @	2441.000	86.52			86.03	30.49	3.79	33.79	100	0 Peak
4 @	2441.000	75.46			74.97	30.49	3.79	33.79	100	277 Average
5 @	2494.000	44.38	-29.62	74.00	43.94	30.40	3.84	33.80	100	0 Peak
6 @	2494.000	31.25	-22.75	54.00	30.81	30.40	3.84	33.80	100	277 Average

Remark: #3 and #4 Fundamental Signal

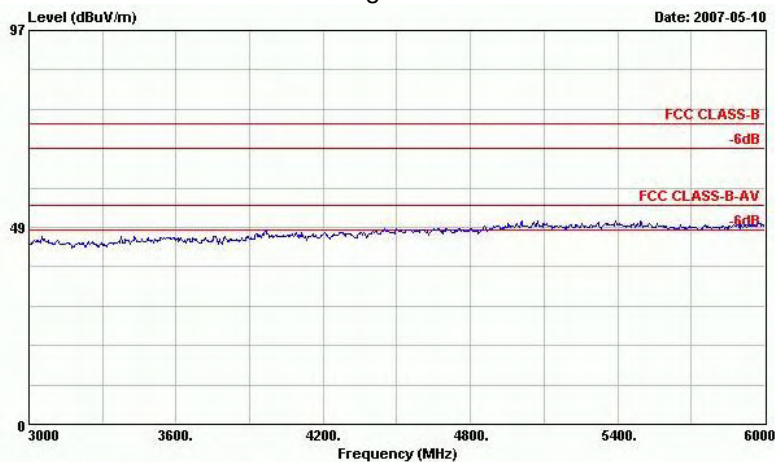


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

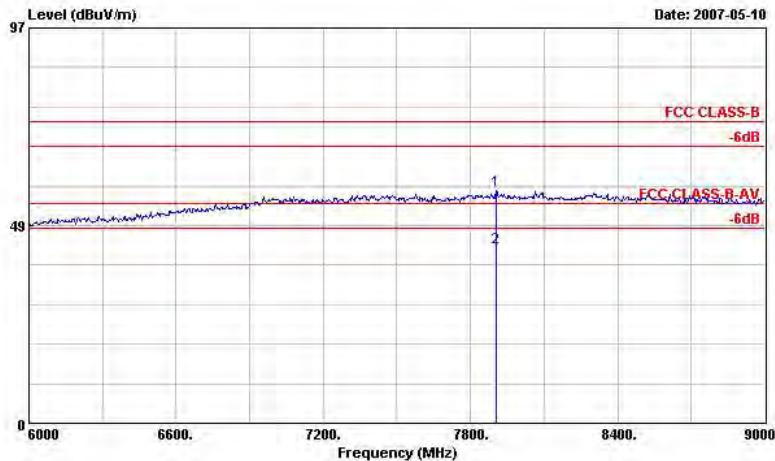

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Pos	Pos	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	7905.000	57.22	-16.78	74.00	44.72	39.42	6.72	33.64	100	0 Peak
2 g	7905.000	43.12	-10.88	54.00	30.62	39.42	6.72	33.64	106	334 Average

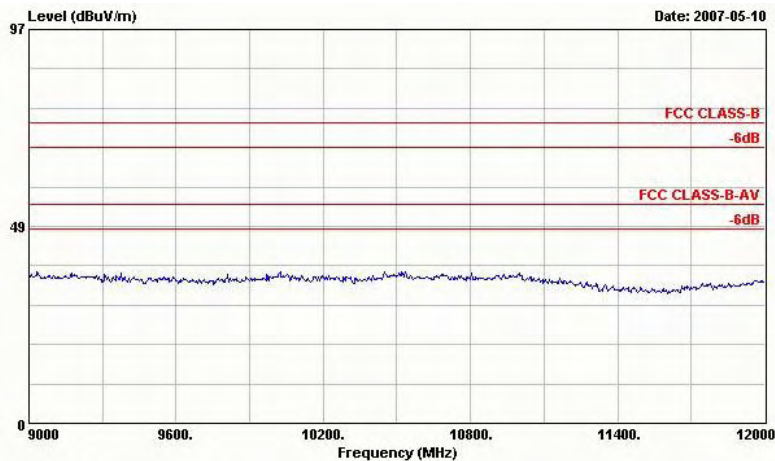


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DH5




FCC / IC TEST REPORT

Report No. : FR6D2906-E

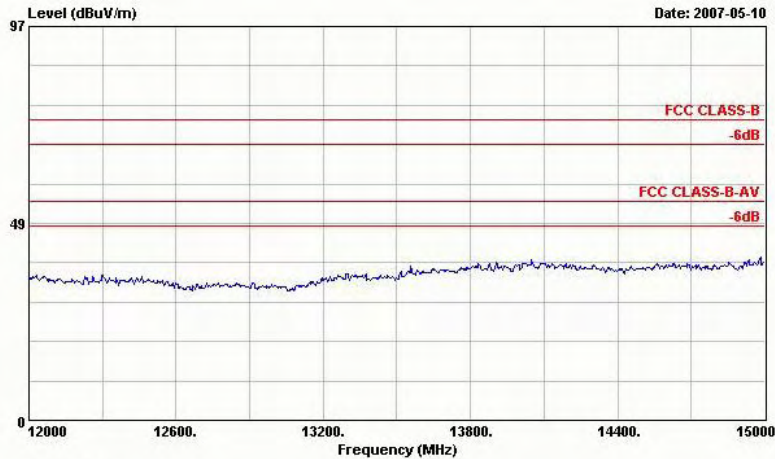

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

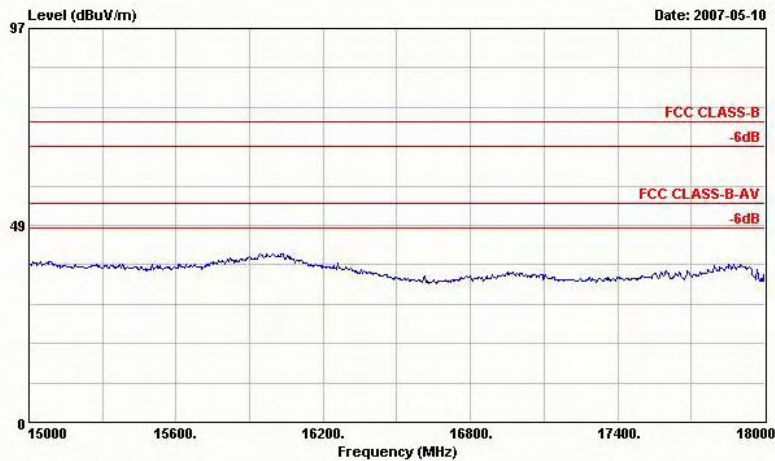


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-E

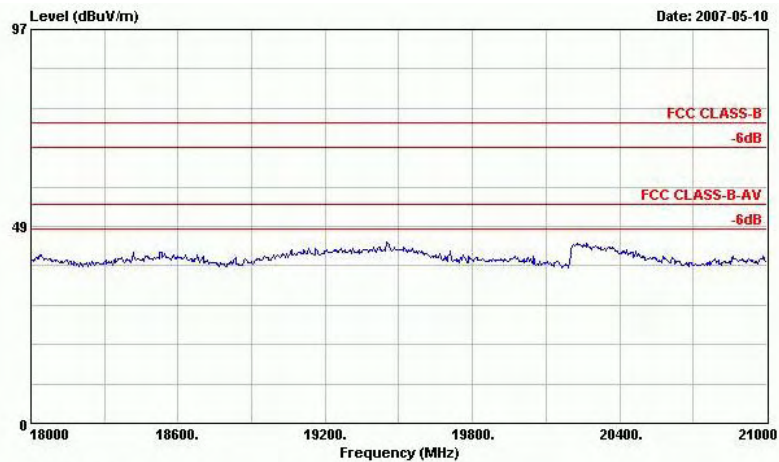

Site : 03CH04-HY
Condition: FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

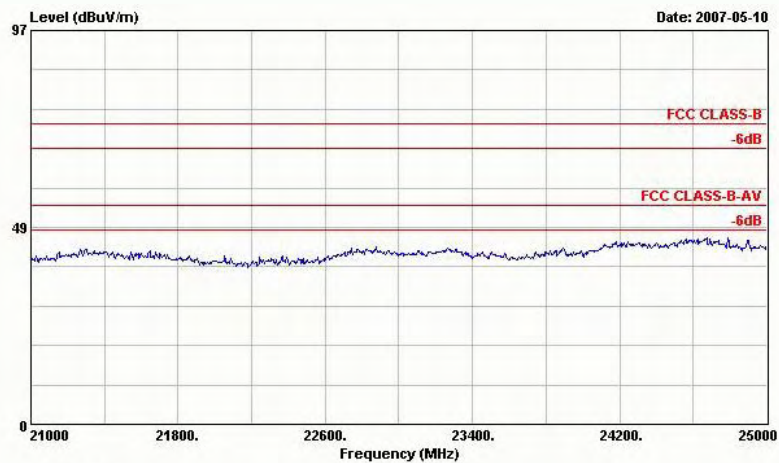


Site : 03CH04-HY
Condition: FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS




- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

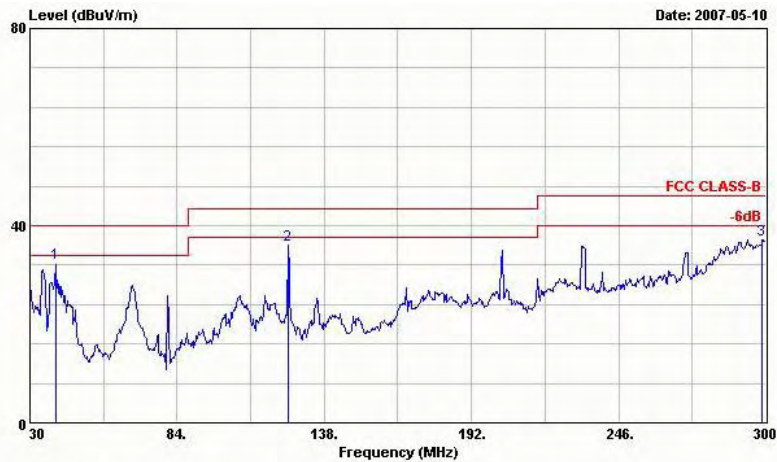


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	39.450	32.24	-7.76	40.00	52.61	11.82	0.71	32.90	---	--- Peak
2 @	124.770	36.09	-7.41	43.50	55.76	11.90	1.28	32.85	108	325 Peak
3 @	298.650	37.13	-8.87	46.00	55.60	12.32	2.03	32.81	---	--- Peak

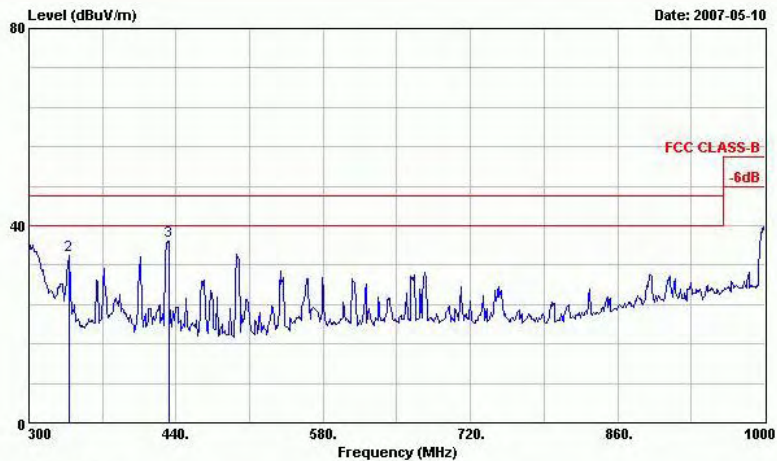

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ANT2724 VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	300.000	36.59	-9.41	46.00	55.06	12.31	2.03	32.81	---	--- Peak
2 @	337.800	33.84	-12.16	46.00	50.95	13.61	2.10	32.83	---	--- Peak
3 @	433.000	36.77	-9.23	46.00	50.98	16.13	2.43	32.78	---	--- Peak

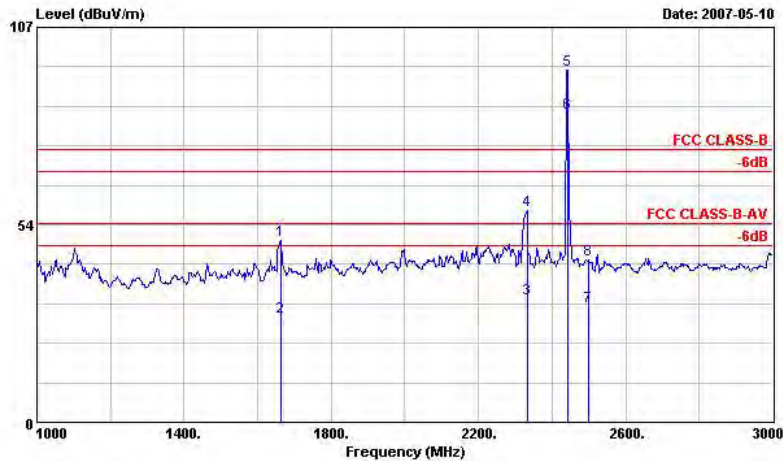

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1662.000	49.21	-24.79	74.00	51.37	28.57	2.97	33.70	100	0 Peak
2	1662.000	28.35	-25.65	54.00	30.51	28.57	2.97	33.70	100	273 Average
3	2332.000	33.44	-20.56	54.00	32.81	30.71	3.69	33.77	104	91 Average
4	2332.000	57.26	-16.74	74.00	56.63	30.71	3.69	33.77	100	0 Peak
5	2441.000	95.48			94.99	30.49	3.79	33.79	100	0 Peak
6	2441.000	83.94			83.40	30.59	3.74	33.78	104	91 Average
7	2500.000	31.33	-22.67	54.00	30.89	30.40	3.84	33.80	104	91 Average
8	2500.000	44.03	-29.97	74.00	43.59	30.40	3.84	33.80	100	0 Peak

Remark: #5 and #6 Fundamental Signal

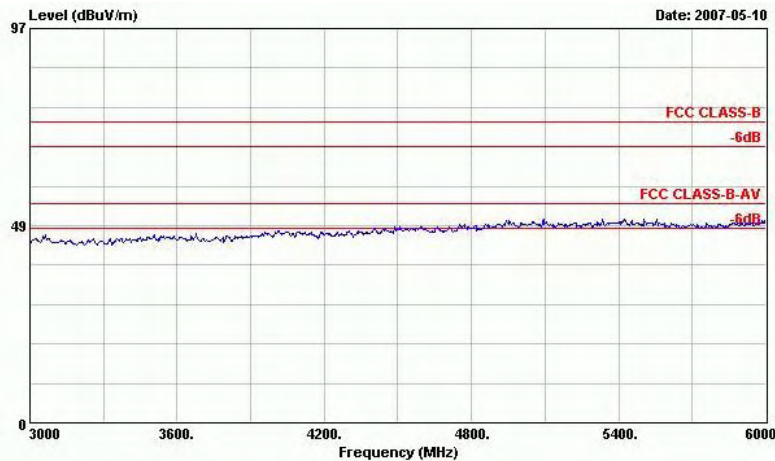


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-E

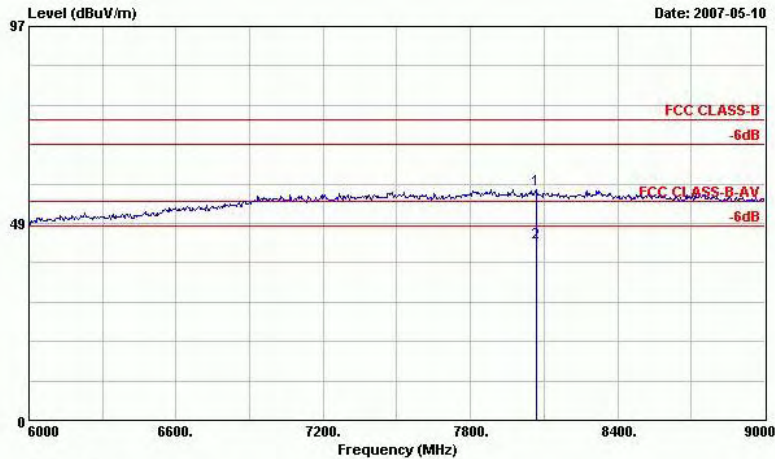

Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @	8070.000	56.65	-17.35	74.00	44.06	39.47	6.80	33.68	100	0 Peak
2 @	8070.000	43.57	-10.43	54.00	30.98	39.47	6.80	33.68	112	89 Average

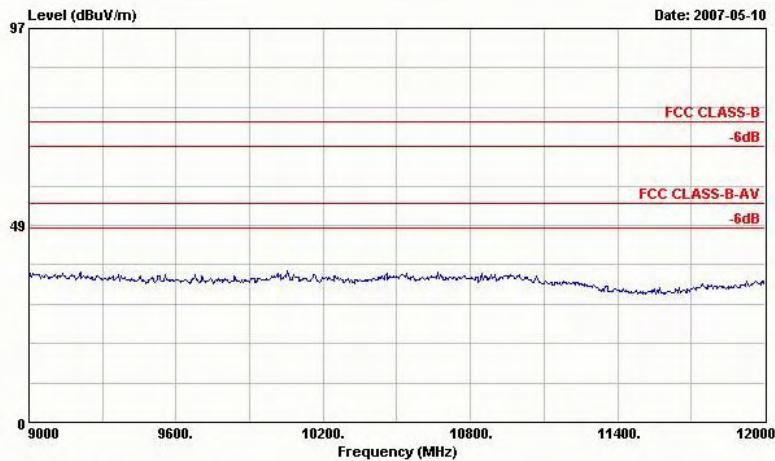


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS




FCC / IC TEST REPORT

Report No. : FR6D2906-E

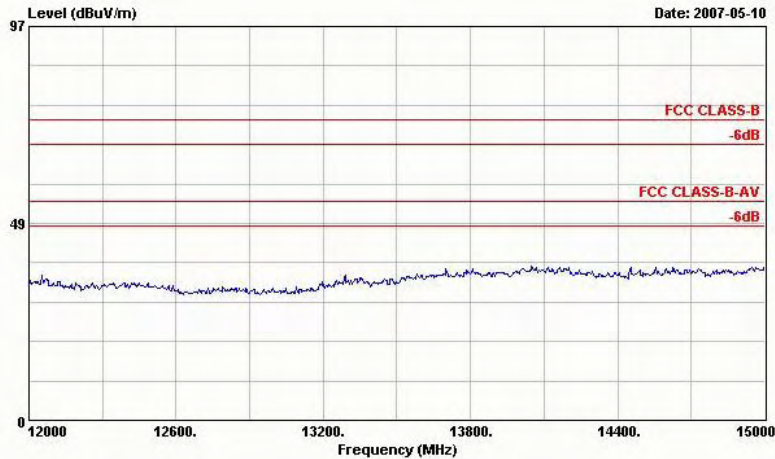

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS

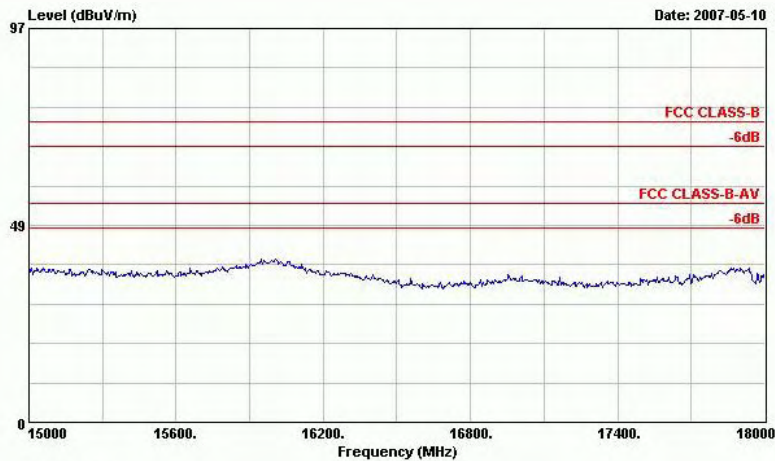


Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS



FCC / IC TEST REPORT

Report No. : FR6D2906-E

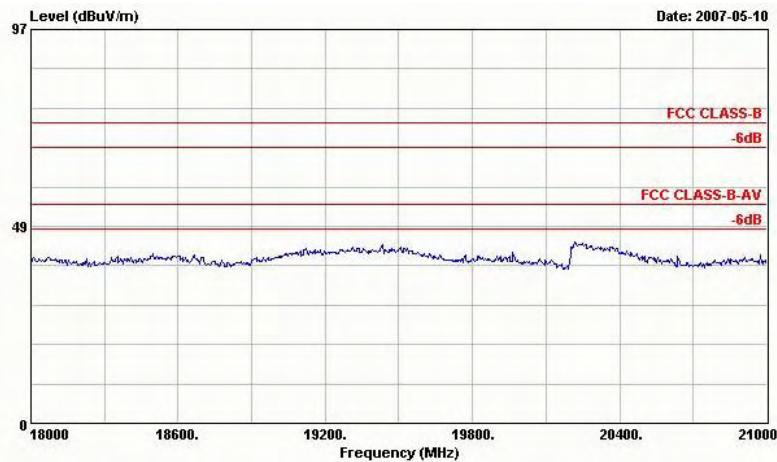

Site : 03CH04-HY
Condition: FCC CLASS-B 3m SHF-EHF HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS





Site : 03CH04-HY
Condition: FCC CLASS-B 3m SHF-EHF HORN VERTICAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch39;2441MHz
Data Rate: DHS




- Test Mode : Mode 15
- Polarization : Horizontal


The test that passed at minimum margin was marked by the frame in the following table.

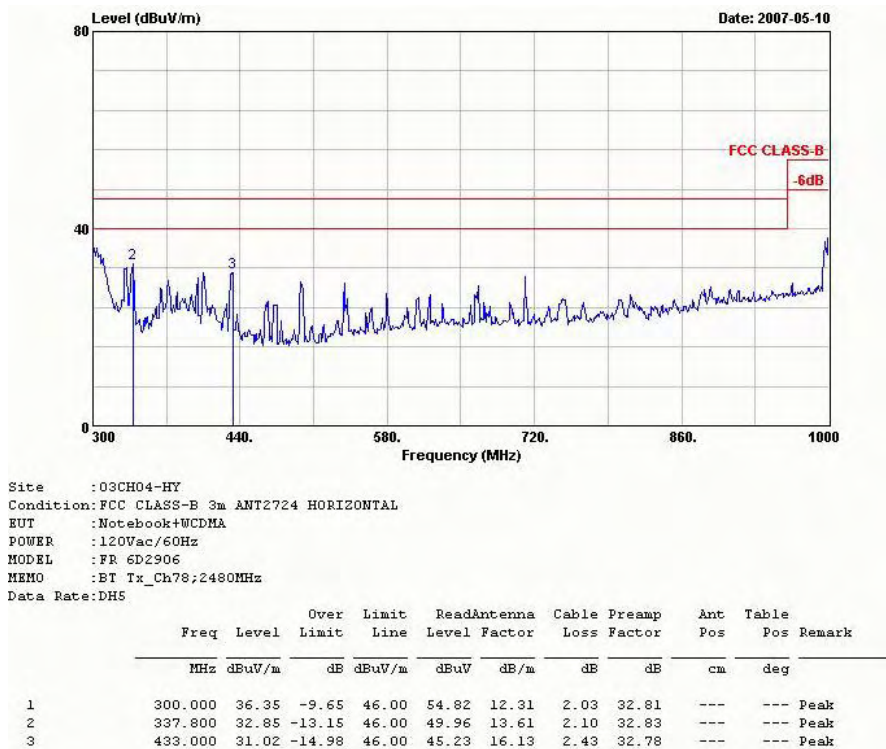

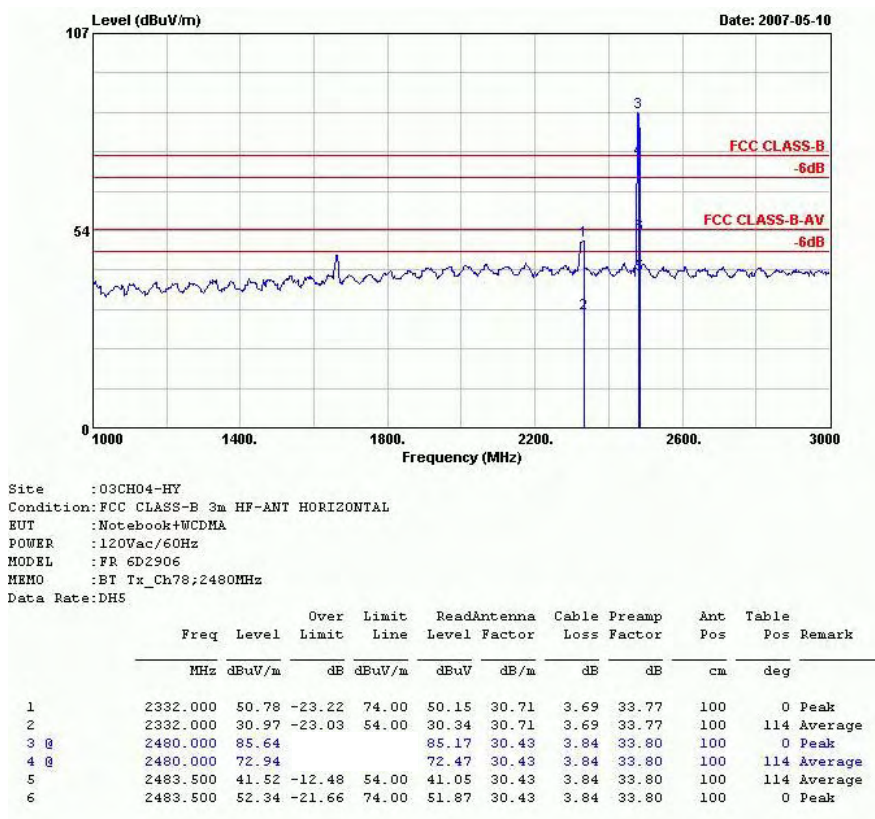


Remark: #3 and #4 Fundamental Signal

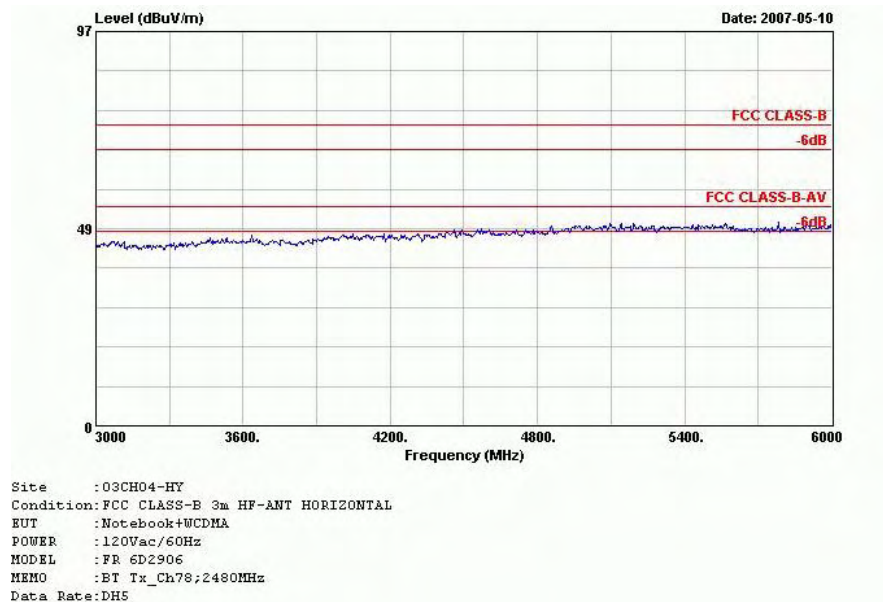

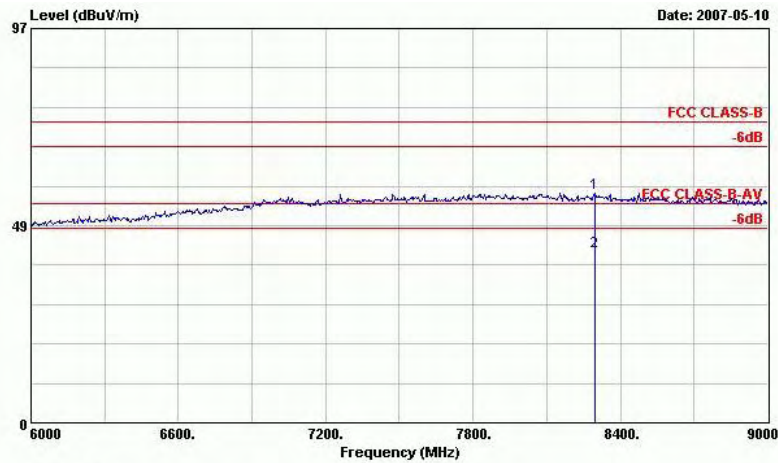


Site : 03CH04-HY
Condition: FCC CLASS-B 3m HF-ANT HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch78;2480MHz
Data Rate: DHS


	Freq	Level	Over		Limit	Line	ReadAntenna		Cable Preamp		Ant	Table	
			Limit	Level			Level	Factor	Loss	Factor		Pos	Pos Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	8298.000	56.53	-17.47	74.00	44.30	39.38	6.91	34.06			100		0 Peak
2	8298.000	42.19	-11.81	54.00	29.96	39.38	6.91	34.06			115		207 Average

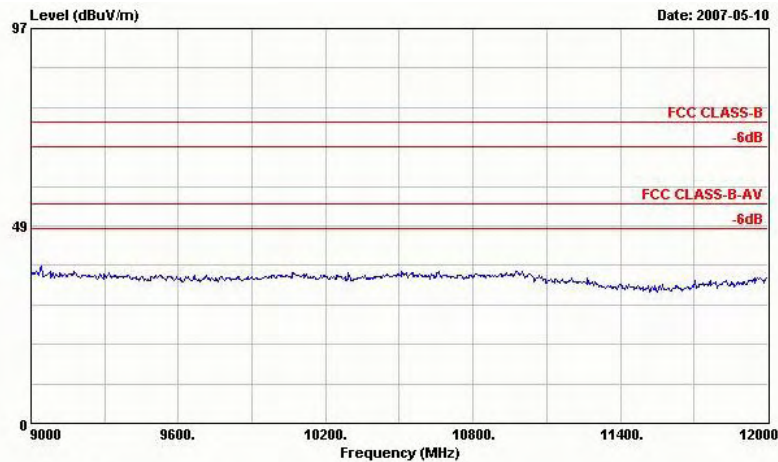

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch78;2480MHz
Data Rate: DHS

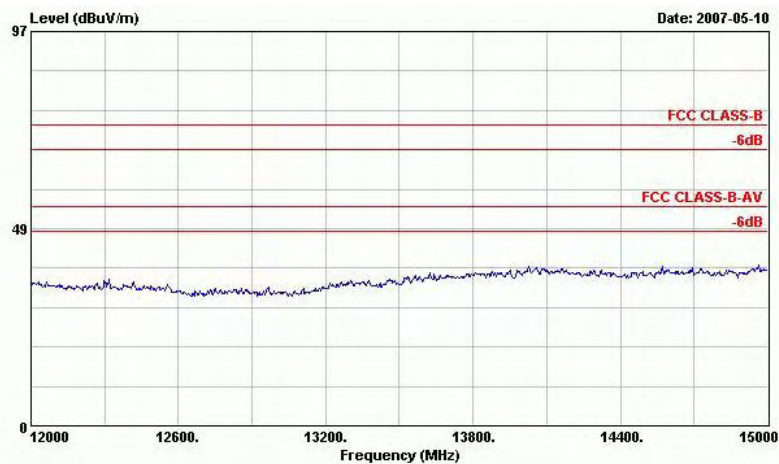

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch78;2480MHz
Data Rate: DHS

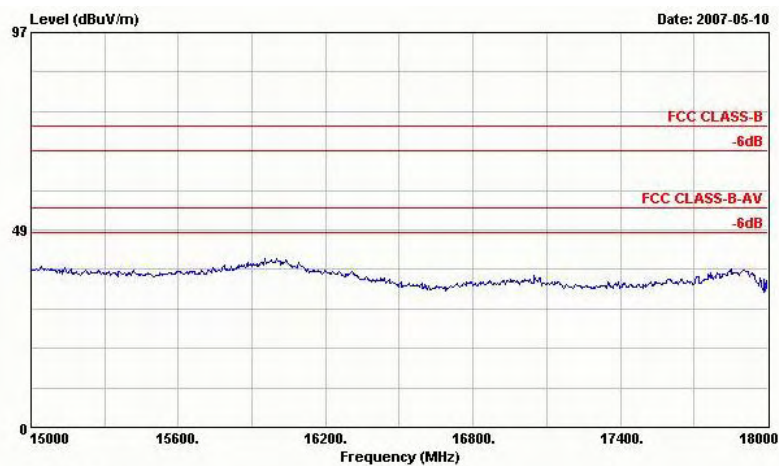

Site : 03CH04-HY
Condition: FCC CLASS-B 3m ACTIVE HORN HORIZONTAL
EUT : Notebook+WCDMA
POWER : 120Vac/60Hz
MODEL : FR 6D2906
MEMO : BT Tx_Ch78;2480MHz
Data Rate: DHS

