

Appendix A: Test Results of Bluetooth BR & EDR

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
<i>Test Result.....</i>	<i>2</i>
<i>Test Graphs.....</i>	<i>3</i>
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	5
<i>Test Result.....</i>	<i>5</i>
<i>Test Graphs.....</i>	<i>6</i>
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
<i>Test Result.....</i>	<i>8</i>
<i>Test Graphs.....</i>	<i>9</i>
APPENDIX A.4: TEST RESULTS OF TIME OF OCCUPANCY.....	10
<i>Test Result.....</i>	<i>10</i>
<i>Test Graphs.....</i>	<i>11</i>
APPENDIX A.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	15
<i>Test Result.....</i>	<i>15</i>
<i>Test Graphs.....</i>	<i>16</i>
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	17
<i>Test Result.....</i>	<i>17</i>
<i>Test Graphs.....</i>	<i>18</i>
APPENDIX A.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	21
<i>Test Result.....</i>	<i>21</i>
<i>Test Graphs.....</i>	<i>22</i>
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	28
30 MHz - 1GHz	28
1GHz - 18GHz	30
APPENDIX A.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	42
APPENDIX A.10: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	46

Appendix A.1: Test Results of 20dB Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.954	2401.529	2402.483	---	PASS
		2441	0.948	2440.532	2441.480	---	PASS
		2480	0.945	2479.535	2480.480	---	PASS
3DH5	Ant1	2402	1.341	2401.322	2402.663	---	PASS
		2441	1.284	2440.343	2441.627	---	PASS
		2480	1.275	2479.349	2480.624	---	PASS

Test Graphs






Appendix A.2: Test Results of 99% Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.88335	2401.5533	2402.4366	---	PASS
		2441	0.90506	2440.5467	2441.4518	---	PASS
		2480	0.89147	2479.5477	2480.4392	---	PASS
3DH5	Ant1	2402	1.2131	2401.3806	2402.5937	---	PASS
		2441	1.1940	2440.3920	2441.5860	---	PASS
		2480	1.2048	2479.3832	2480.5880	---	PASS

Test Graphs

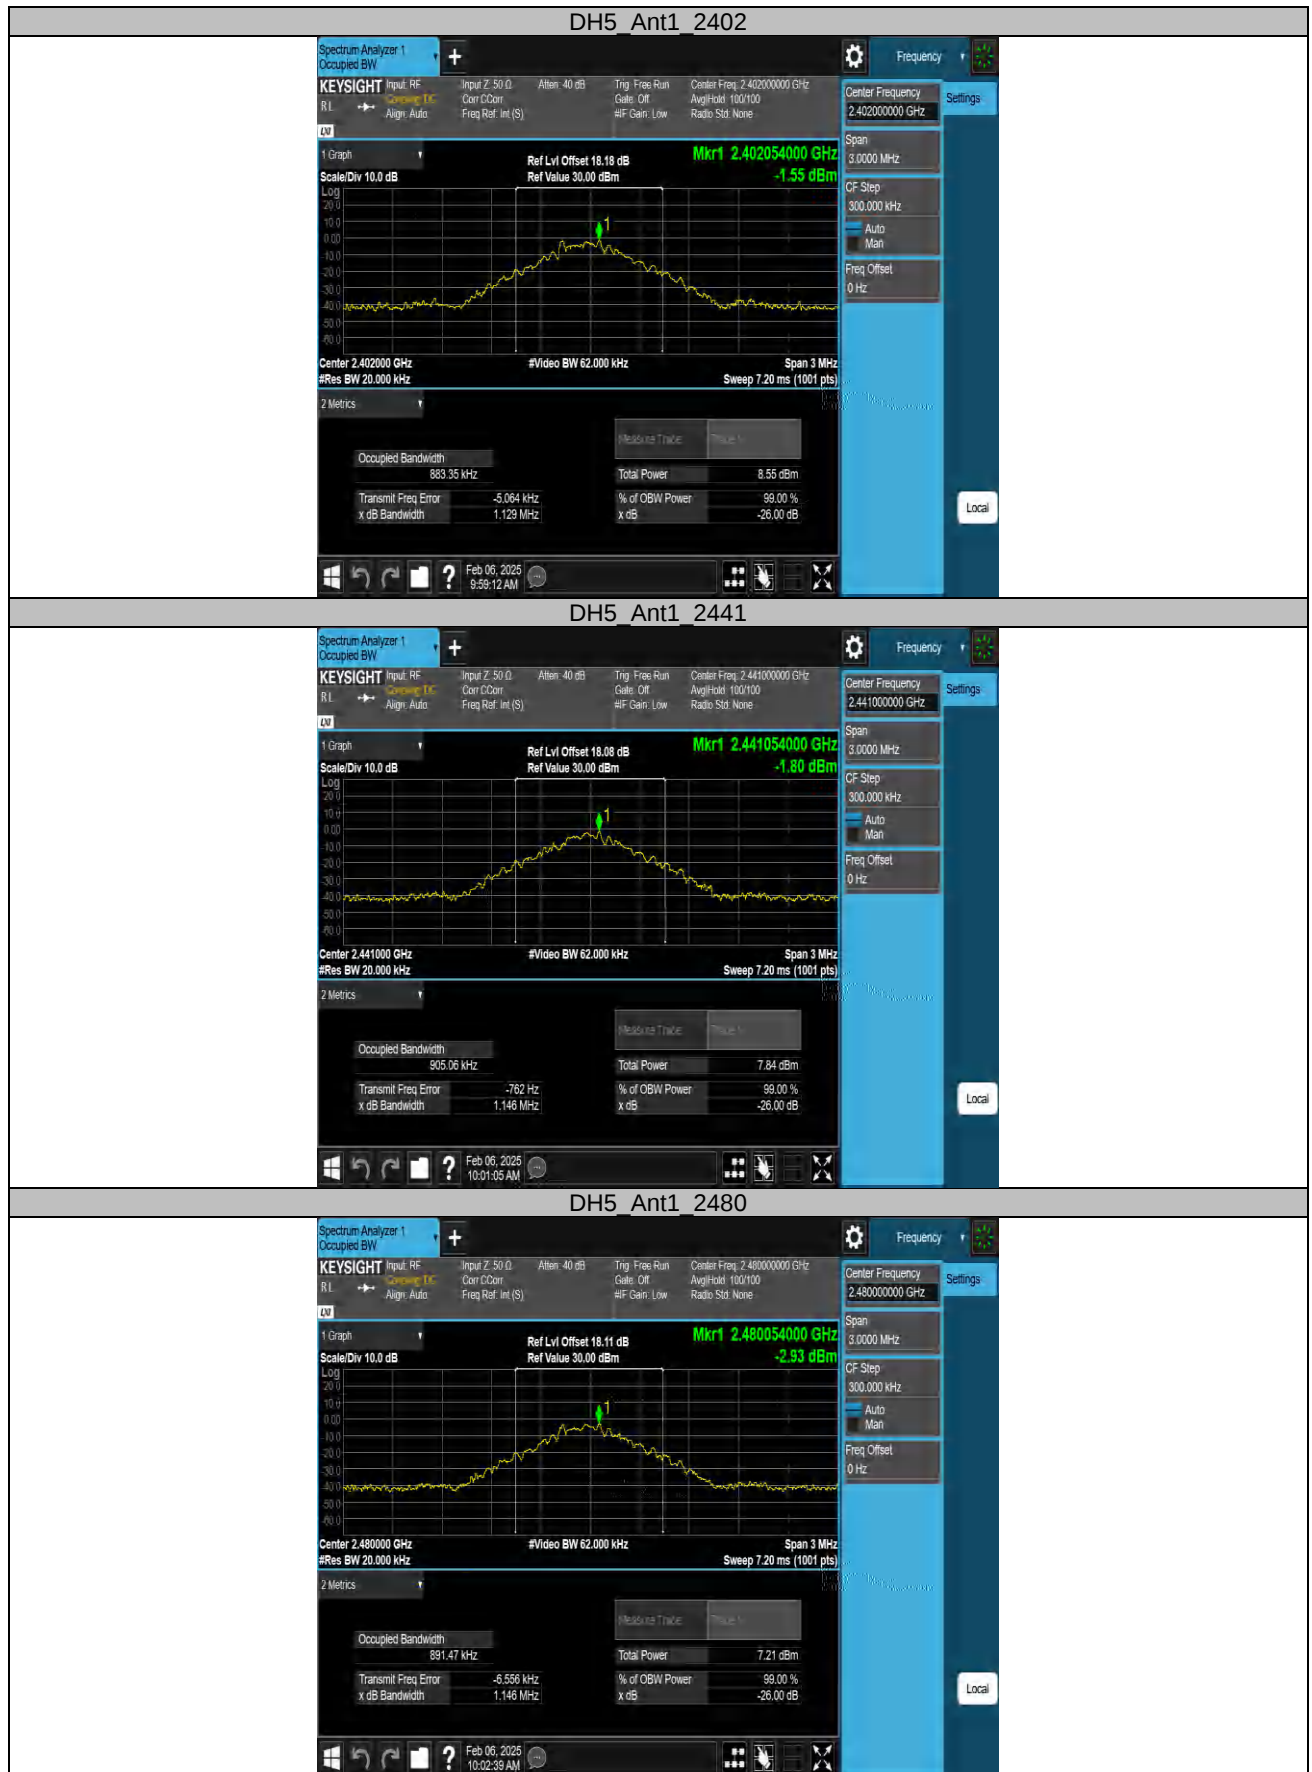



Appendix A.3: Test Results of Carrier Frequency Separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.916	≥ 0.636	PASS
3DH5	Ant1	Hop	1.176	≥ 0.894	PASS

Test Graphs




Appendix A.4: Test Results of Time of Occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.381	312	0.119	≤0.4	PASS
DH3	Ant1	Hop	1.637	164	0.268	≤0.4	PASS
DH5	Ant1	Hop	2.885	108	0.312	≤0.4	PASS
3DH1	Ant1	Hop	0.389	313	0.122	≤0.4	PASS
3DH3	Ant1	Hop	1.639	169	0.277	≤0.4	PASS
3DH5	Ant1	Hop	2.890	108	0.312	≤0.4	PASS

Test Graphs

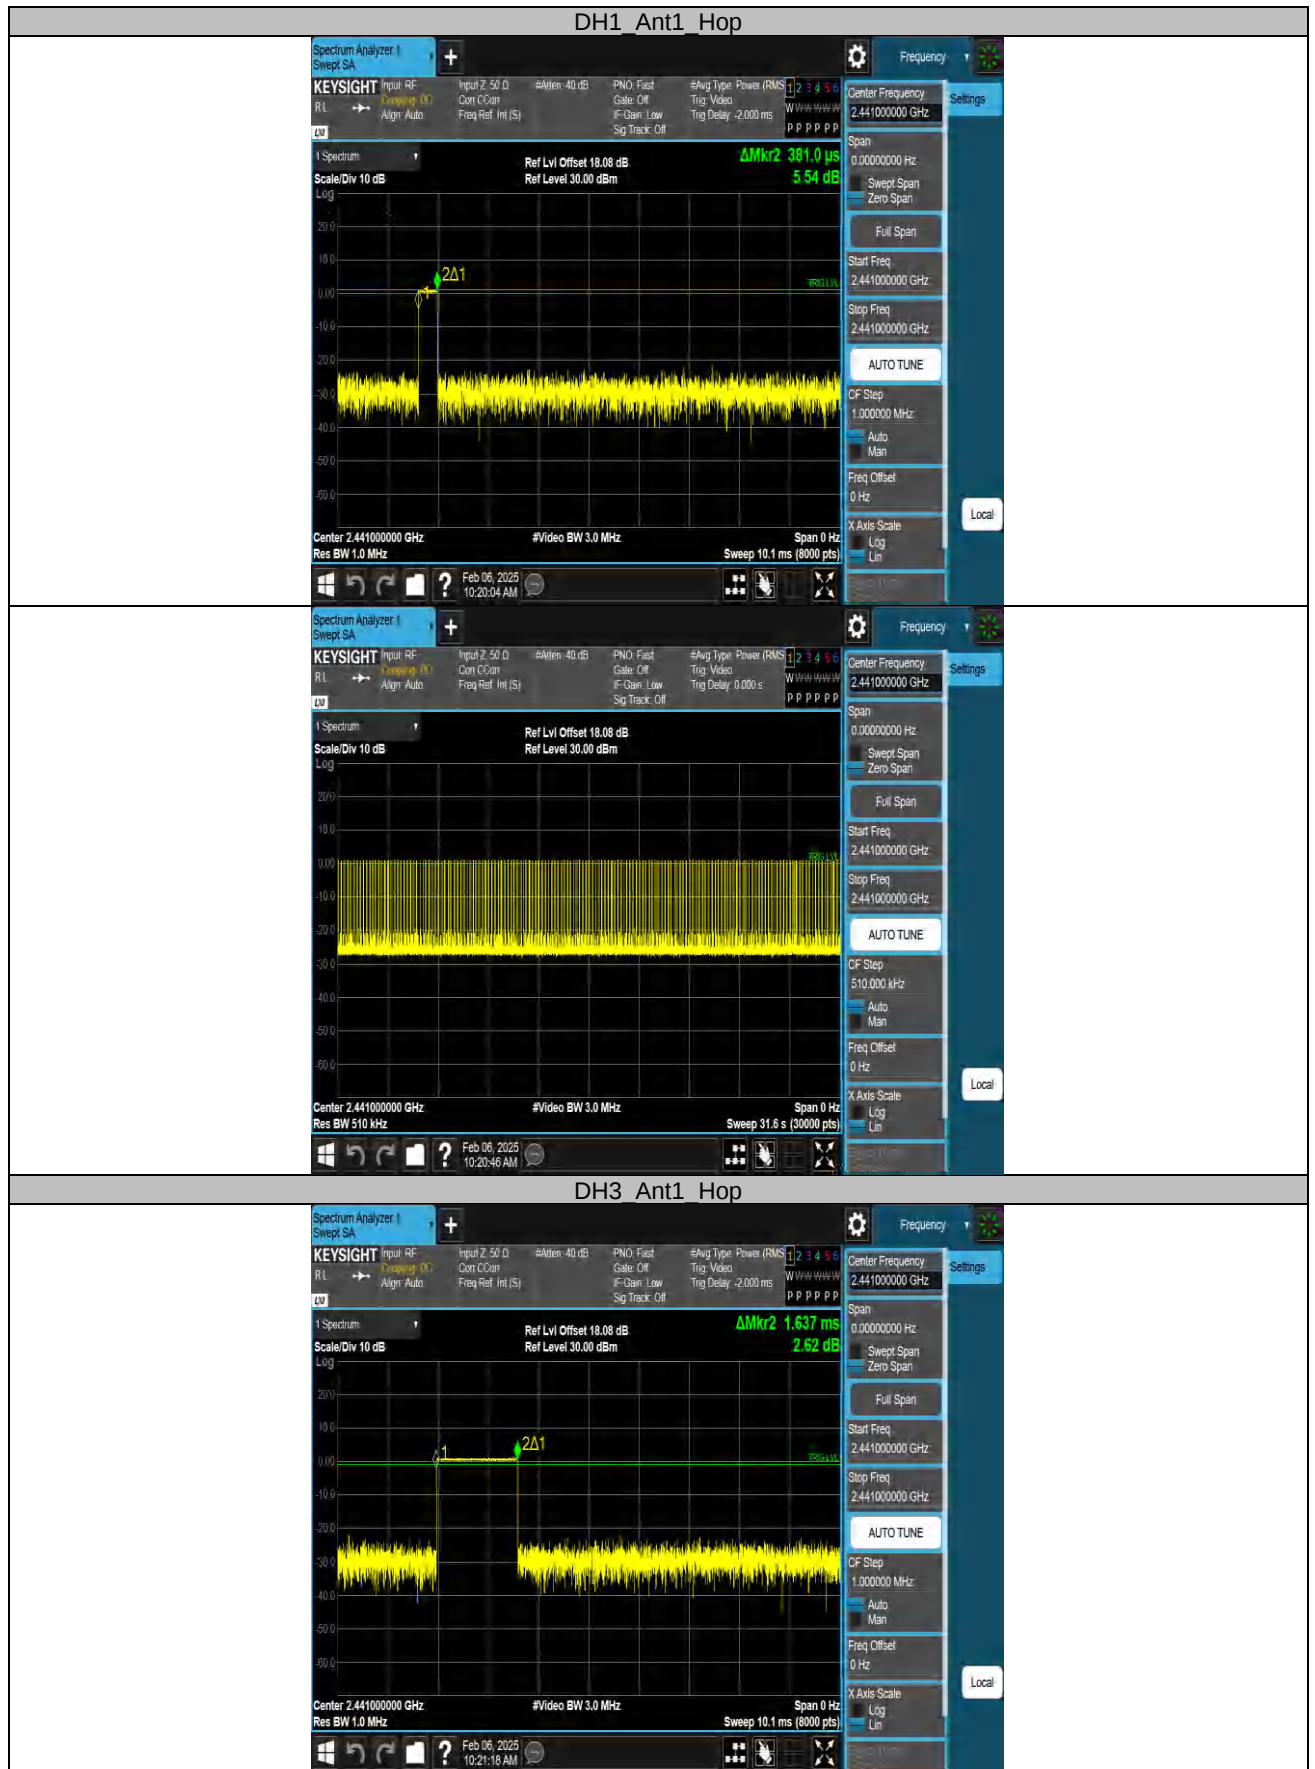




DH5 Ant1 Hop



3DH1 Ant1 Hop

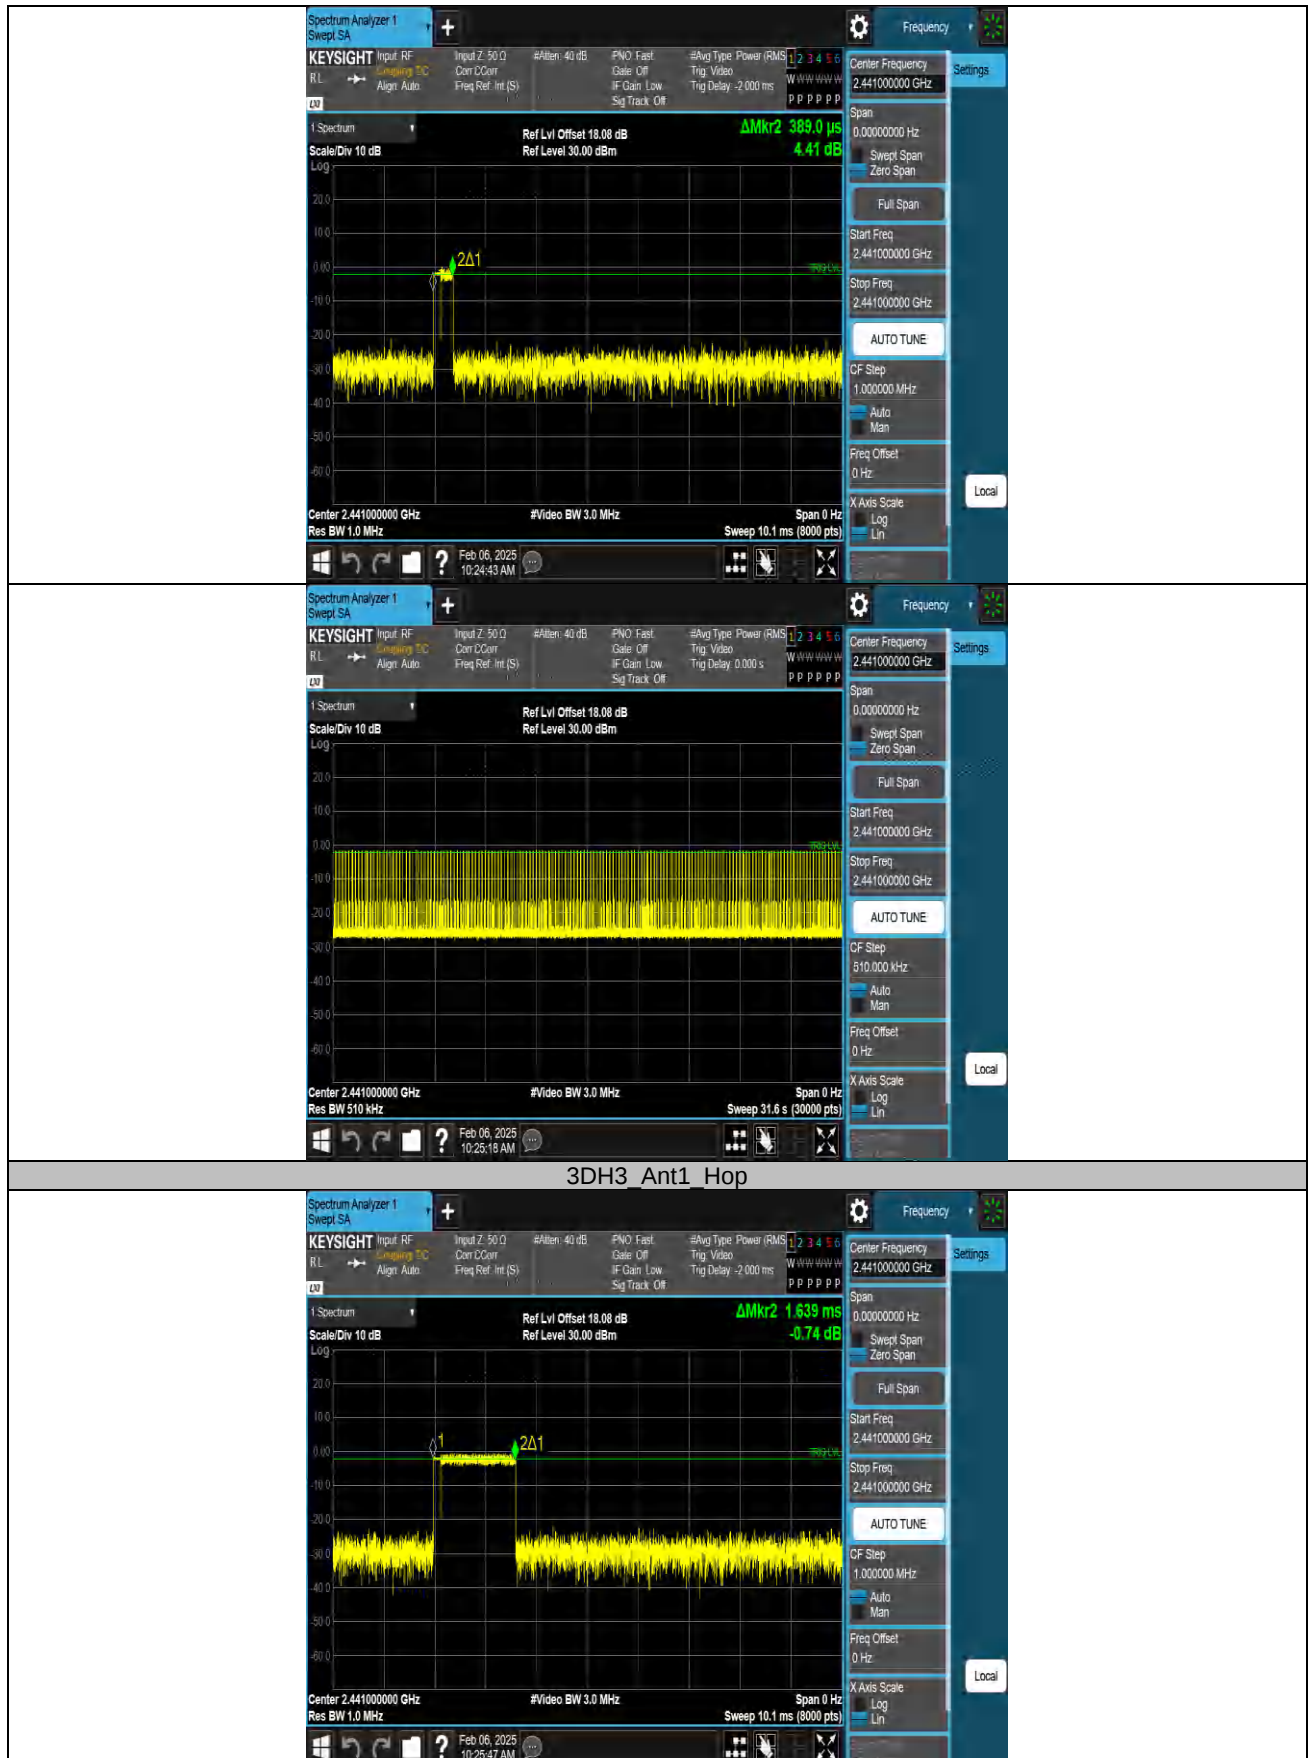



3DH5 Ant1 Hop



Appendix A.5: Test Results of Number of Hopping Frequency

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs



Appendix A.6: Test Results of Band Edge Measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	1.35	-44.12	≤-18.65	PASS
		High	2480	0.73	-43.86	≤-19.27	PASS
3DH5	Ant1	Low	2402	-1.29	-43.41	≤-21.29	PASS
		High	2480	-0.82	-43.55	≤-20.82	PASS
DH5	Ant1	Hopping	2402	0.38	-44.33	≤-19.62	PASS
		Hopping	2480	0.60	-42.28	≤-19.40	PASS
3DH5	Ant1	Hopping	2402	-6.38	-43.72	≤-26.38	PASS
		Hopping	2480	-7.82	-44.58	≤-27.82	PASS

Test Graphs








Appendix A.7: Test Results of Conducted Spurious Emission


Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	0.50	0.50	---	PASS
			30~1000	0.50	-41.88	≤-19.5	PASS
			1000~26500	0.50	-32.39	≤-19.5	PASS
		2441	Reference	0.99	0.99	---	PASS
			30~1000	0.99	-41.31	≤-19.01	PASS
			1000~26500	0.99	-33.49	≤-19.01	PASS
		2480	Reference	-0.13	-0.13	---	PASS
			30~1000	-0.13	-42.15	≤-20.13	PASS
			1000~26500	-0.13	-33.07	≤-20.13	PASS
3DH5	Ant1	2402	Reference	-2.61	-2.61	---	PASS
			30~1000	-2.61	-41.99	≤-22.61	PASS
			1000~26500	-2.61	-32.5	≤-22.61	PASS
		2441	Reference	-2.92	-2.92	---	PASS
			30~1000	-2.92	-42	≤-22.92	PASS
			1000~26500	-2.92	-33.5	≤-22.92	PASS
		2480	Reference	-3.29	-3.29	---	PASS
			30~1000	-3.29	-41.41	≤-23.29	PASS
			1000~26500	-3.29	-33.1	≤-23.29	PASS

Test Graphs



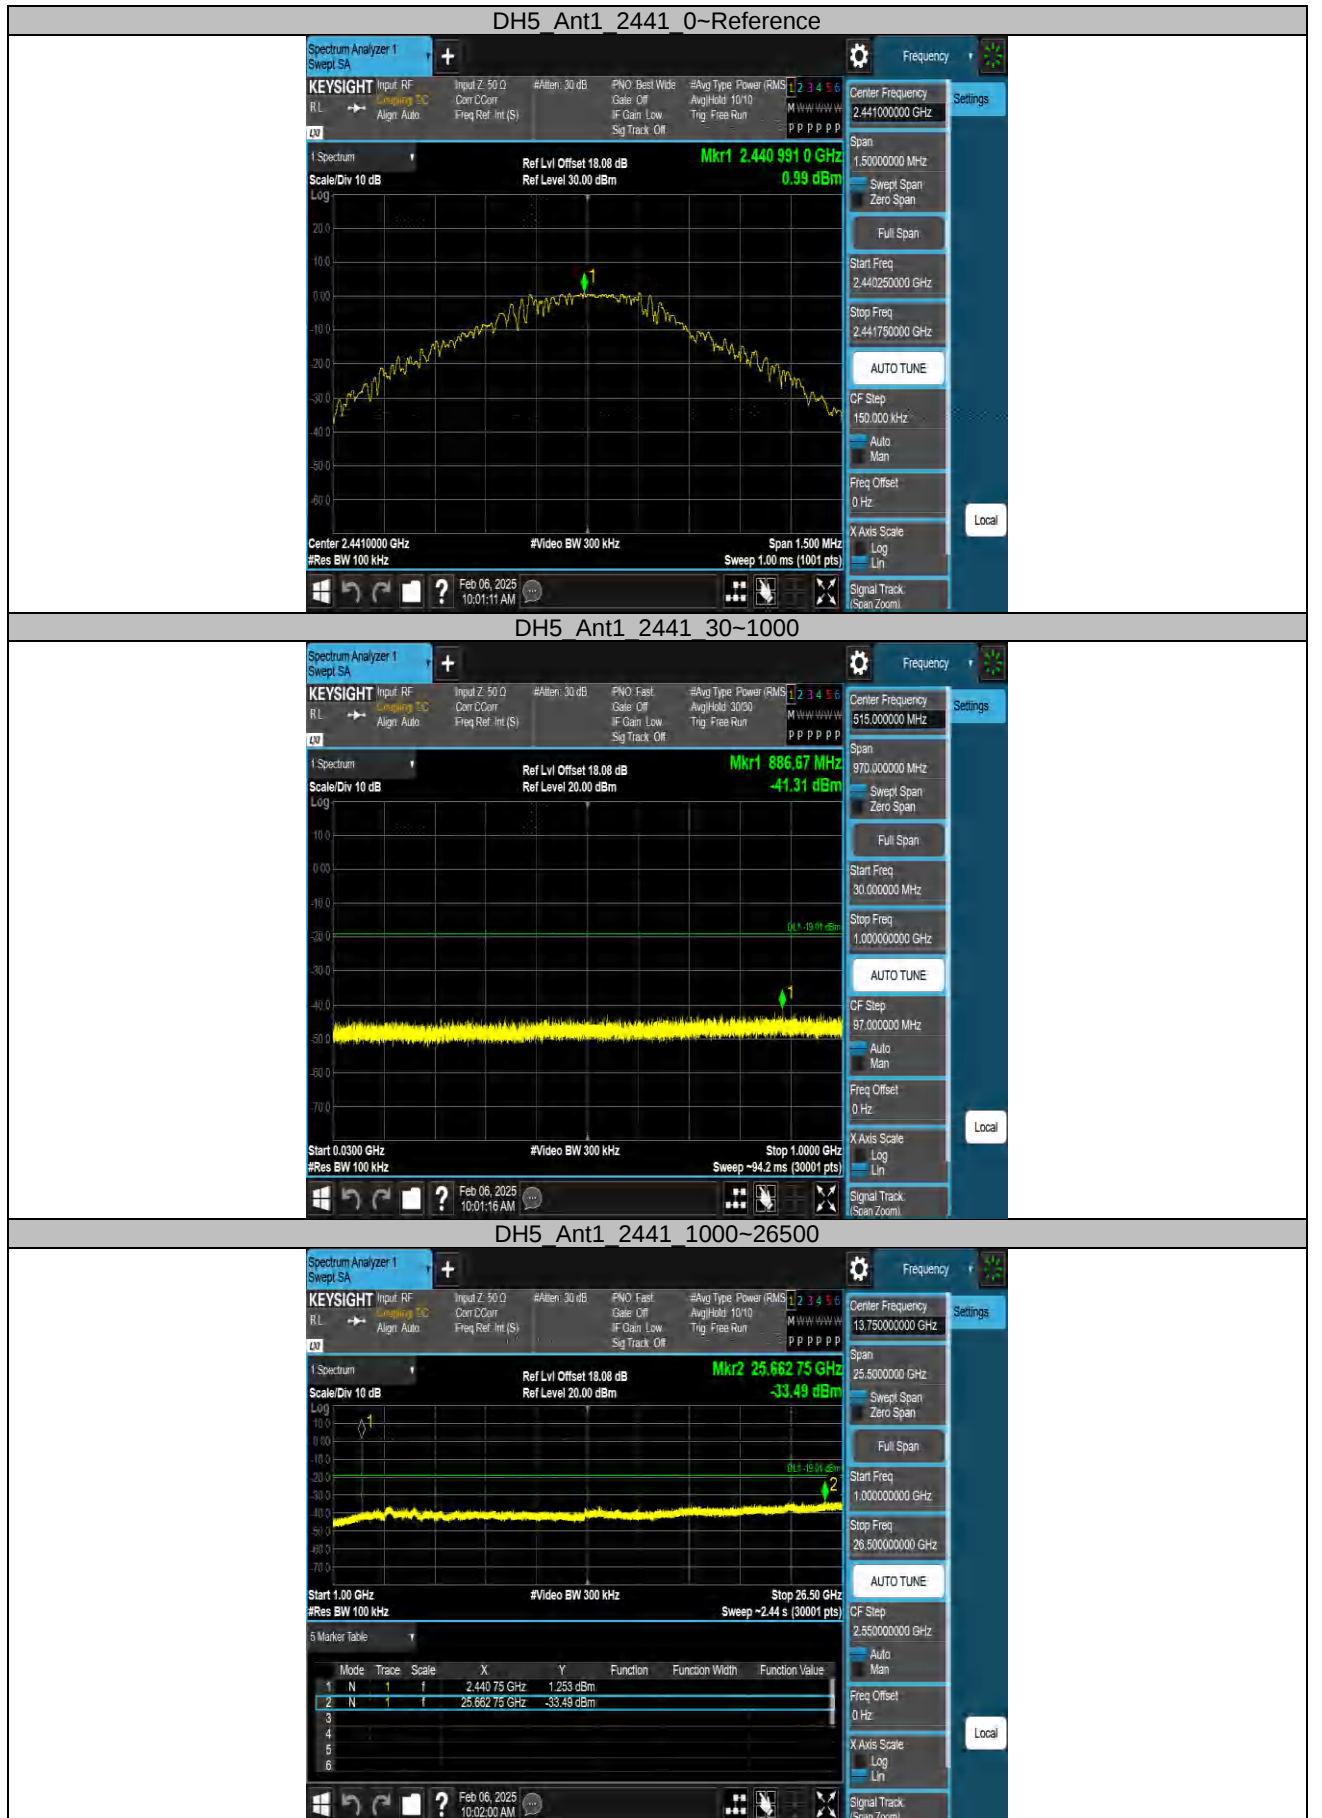

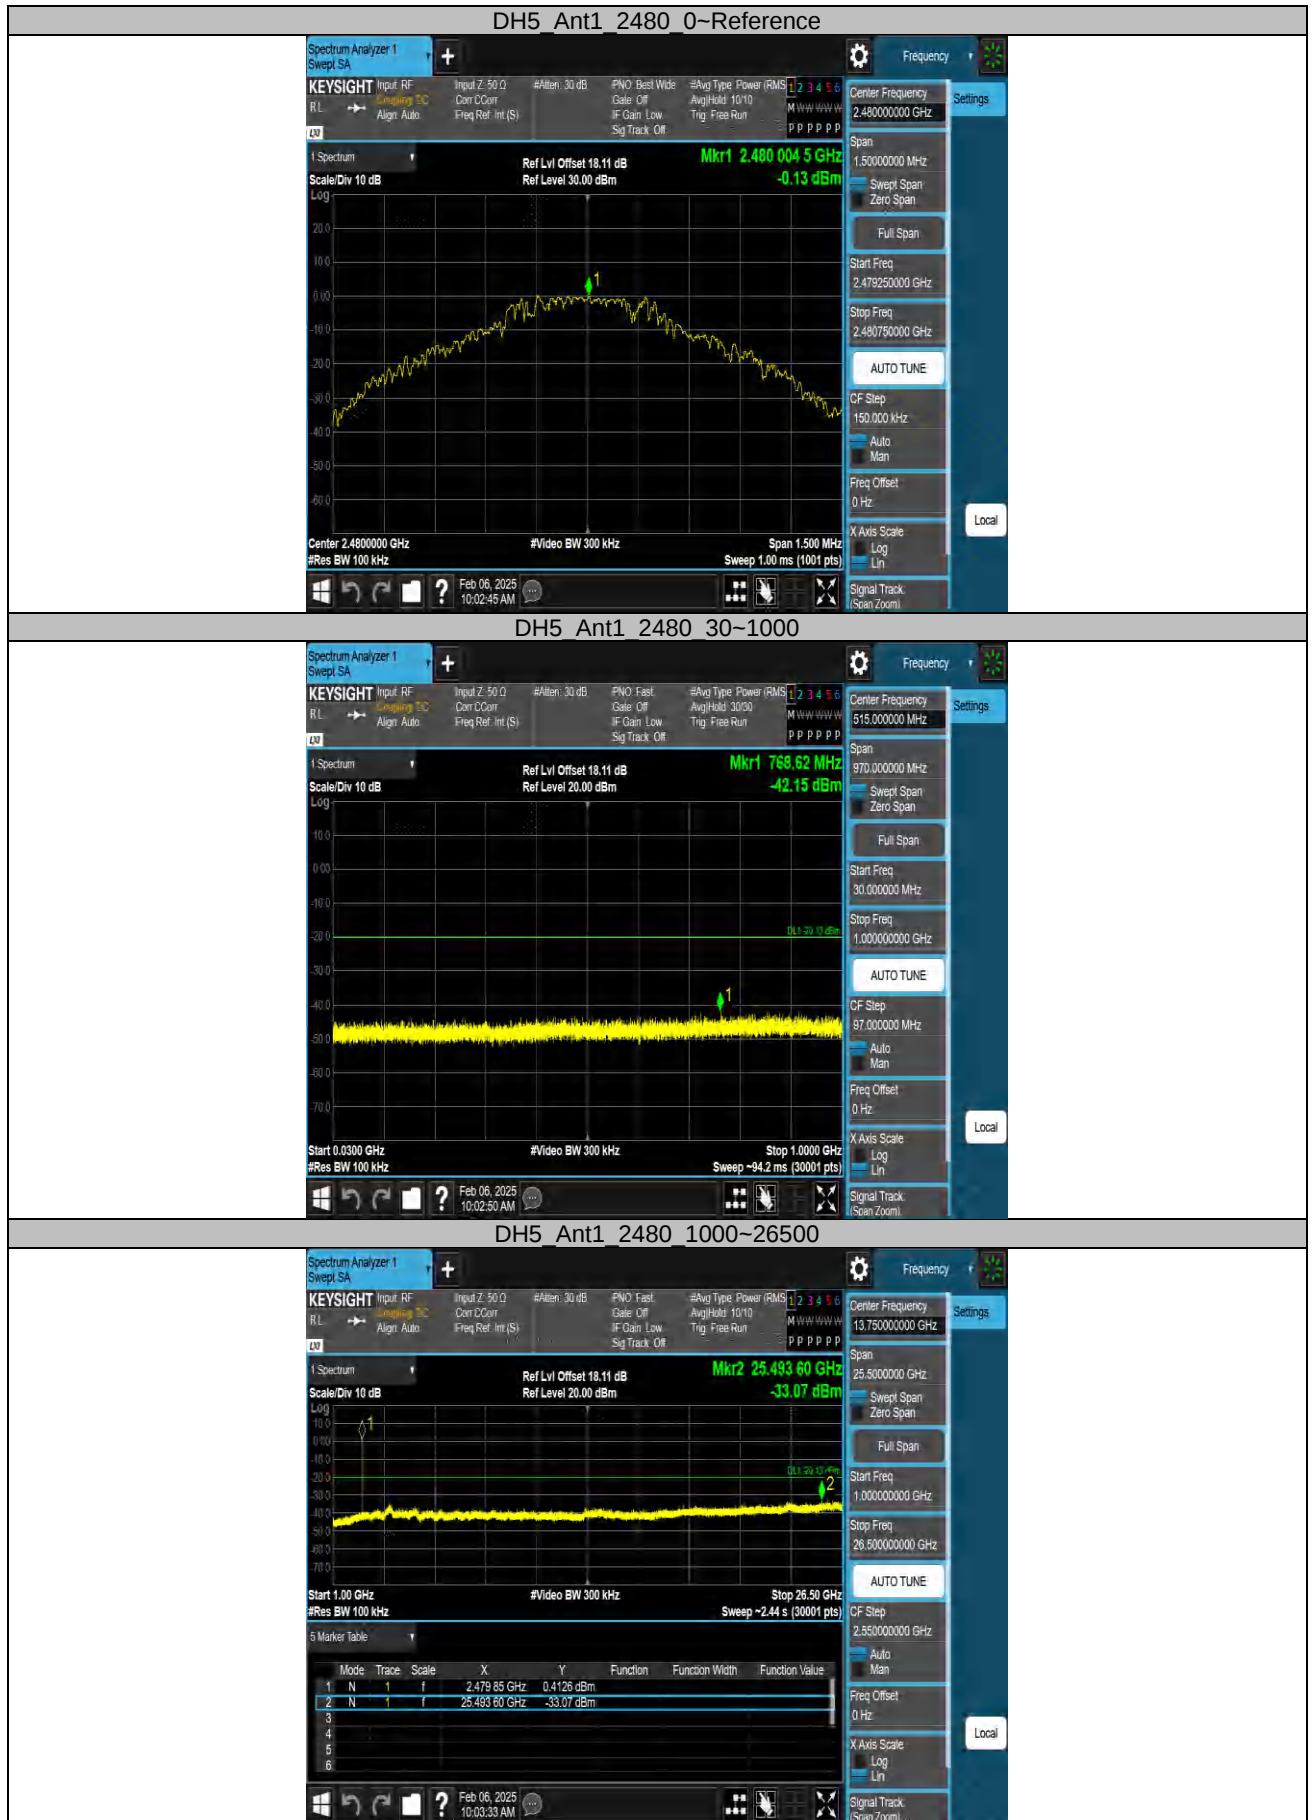

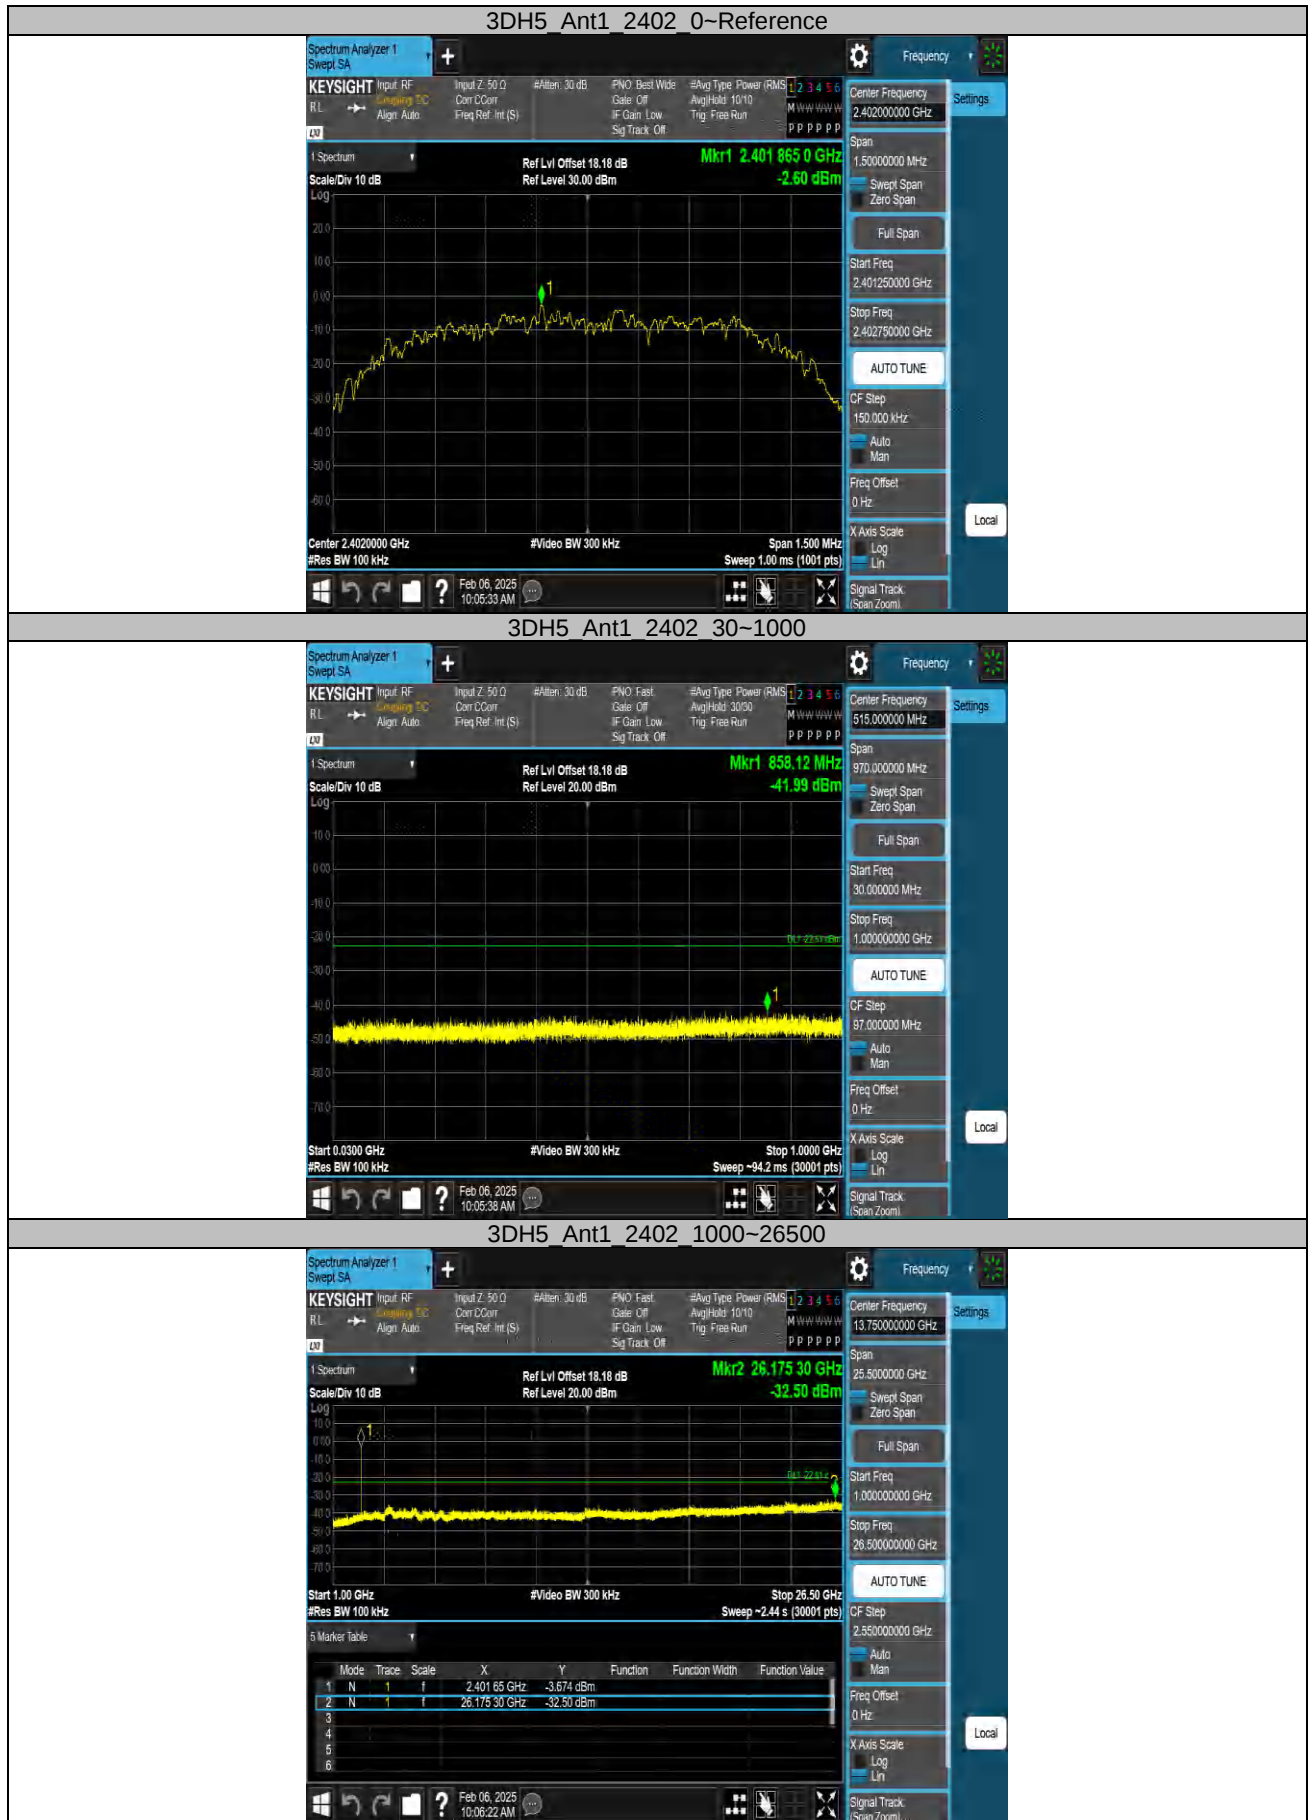




3DH5 Ant1 2480 0-Reference



3DH5 Ant1 2480 30-1000

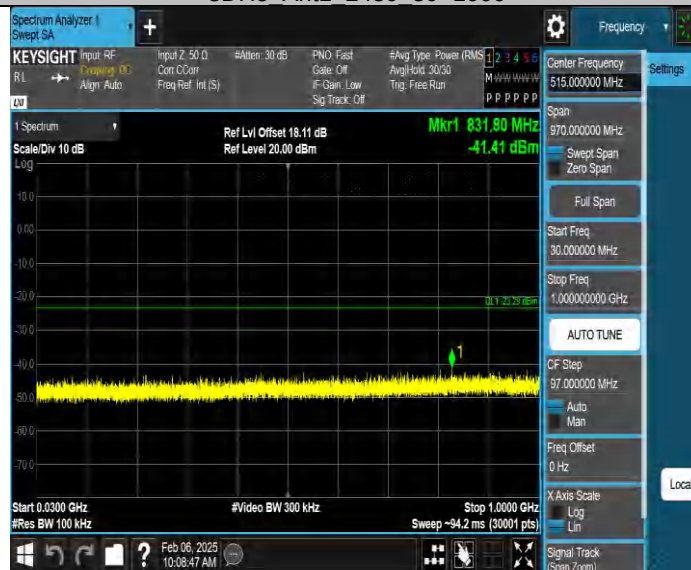

3DH5 Ant1 2480 1000-26500



Appendix A.8: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Headset
Model:	H410
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168521531/A003904311-010
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

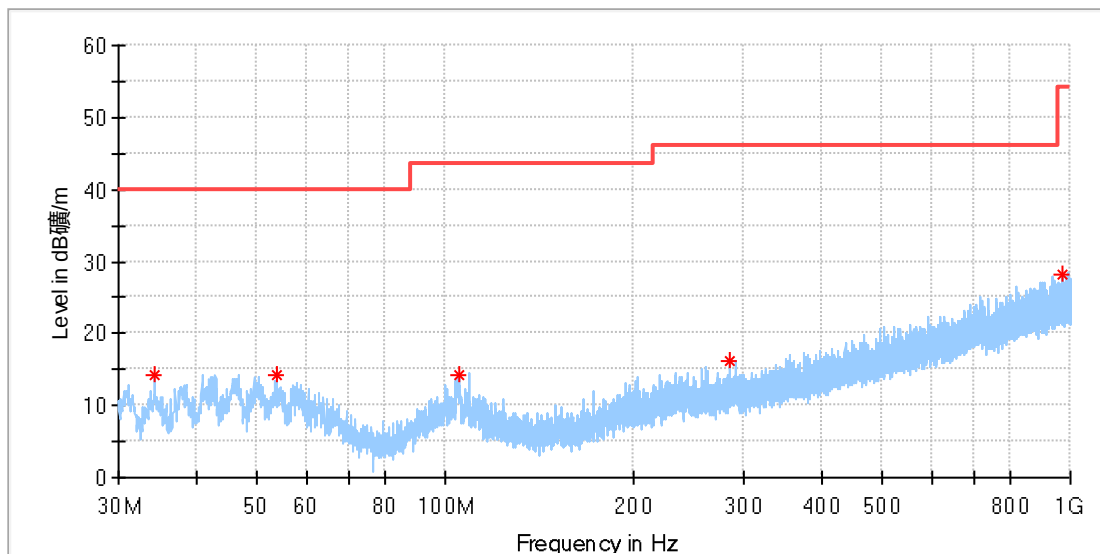

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.215769	14.28	40.00	25.72	100.0	H	354.0	-22.2
53.839615	14.37	40.00	25.63	100.0	H	157.0	-18.5
105.286923	14.29	43.50	29.21	100.0	H	180.0	-18.9
285.072692	16.14	46.00	29.86	100.0	H	354.0	-16.6
970.825385	28.32	54.00	25.68	100.0	H	172.0	-4.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Headset
Model:	H410
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168521531/A003904311-010
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

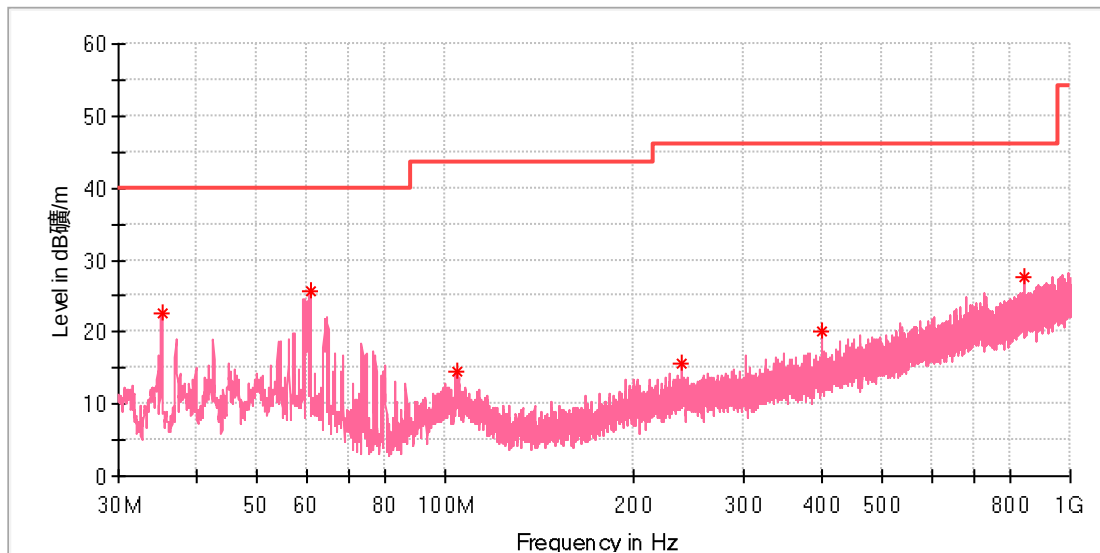

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
35.185769	22.61	40.00	17.39	100.0	V	192.0	-21.9
60.816154	25.81	40.00	14.19	100.0	V	99.0	-19.3
104.354231	14.44	43.50	29.06	100.0	V	73.0	-18.9
238.550000	15.74	46.00	30.26	100.0	V	129.0	-17.8
399.756539	20.01	46.00	25.99	100.0	V	90.0	-13.8
845.247692	27.55	46.00	18.45	100.0	V	99.0	-5.4

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Headset
Model:	H410
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168521531/A003904311-010
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

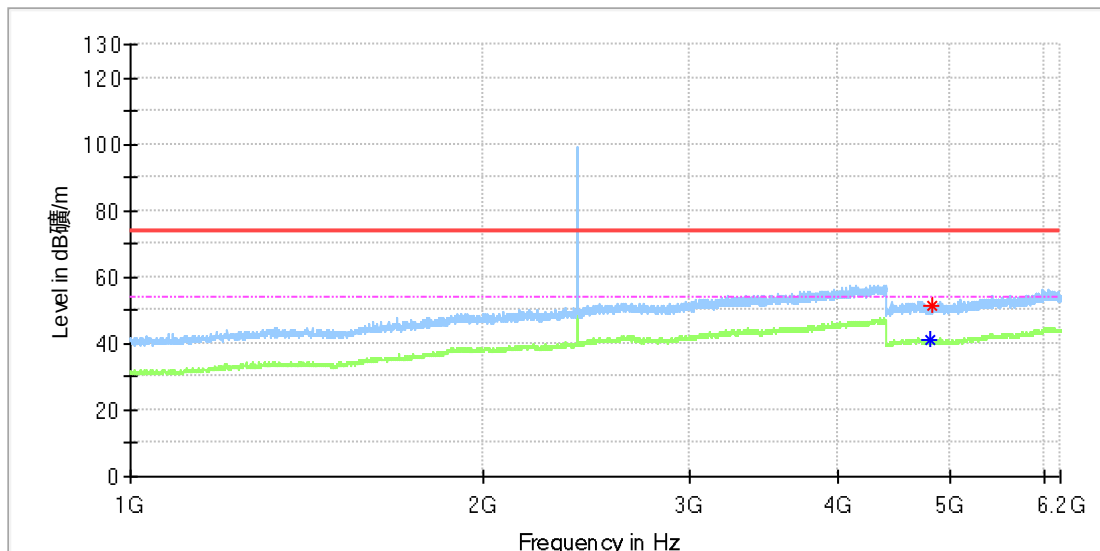

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4806.500000	---	40.99	54.00	13.01	150.0	H	41.0	13.3
4827.000000	51.63	---	74.00	22.37	150.0	H	89.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

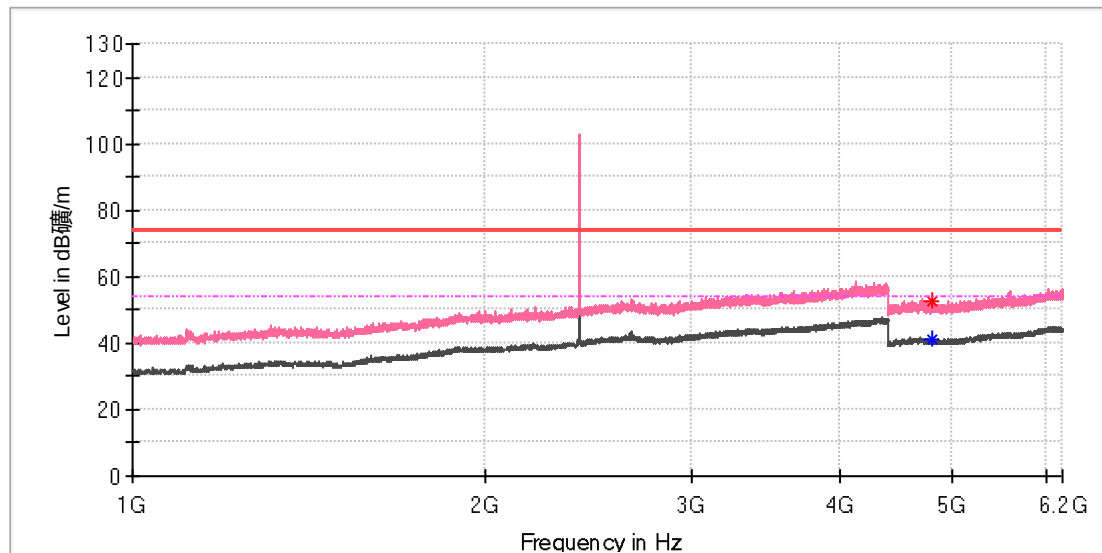

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	---	41.11	54.00	12.89	150.0	V	325.0	13.3
4806.500000	52.45	---	74.00	21.55	150.0	V	359.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

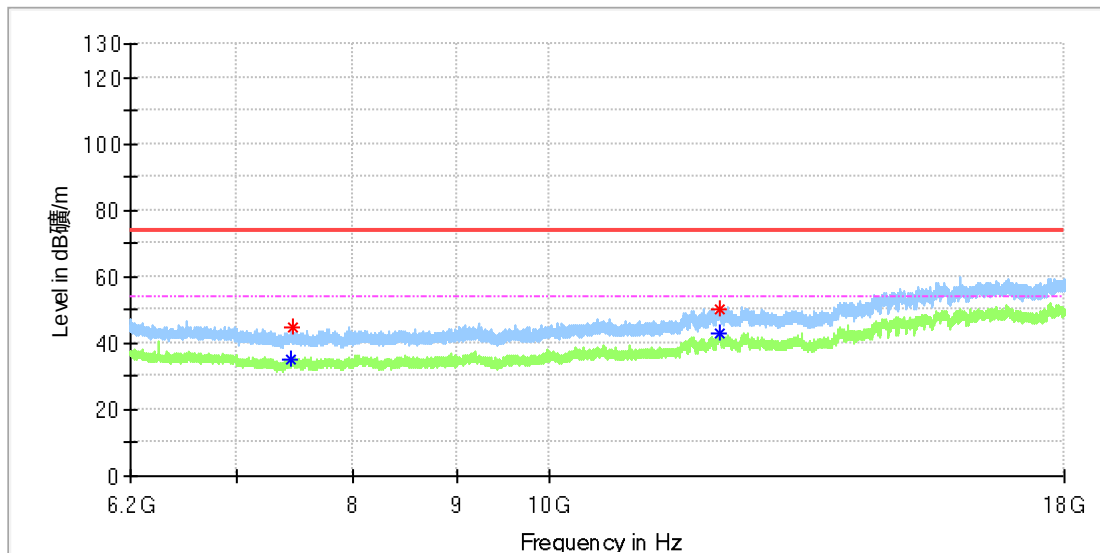

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7449.325000	---	35.29	54.00	18.71	150.0	H	308.0	8.5
7456.208333	44.45	---	74.00	29.55	150.0	H	4.0	8.5
12132.941667	50.42	---	74.00	23.58	150.0	H	213.0	16.3
12148.675000	---	43.08	54.00	10.92	150.0	H	98.0	16.7

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

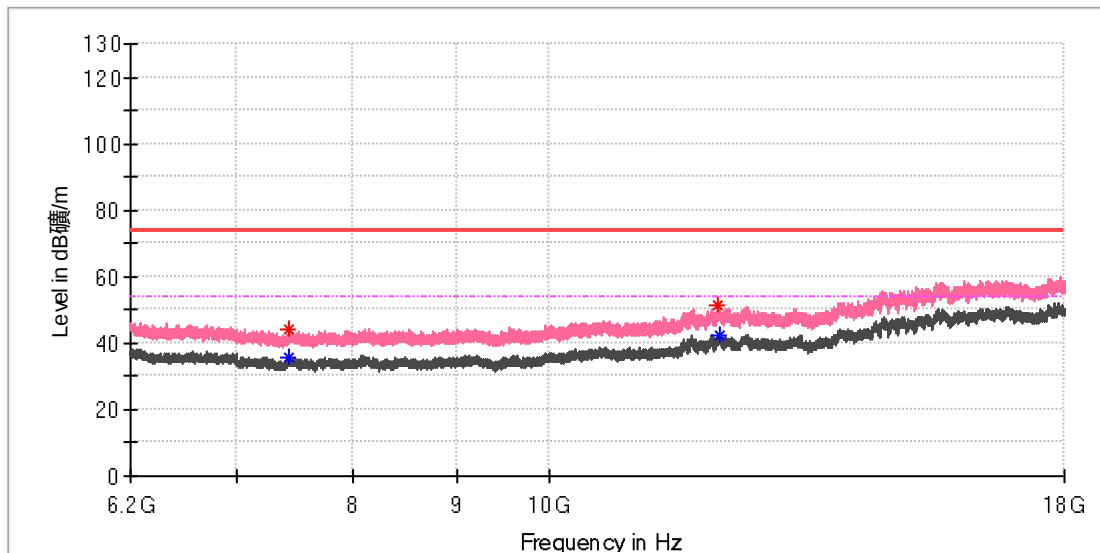

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7419.825000	---	35.79	54.00	18.21	150.0	V	317.0	8.4
7427.691667	44.19	---	74.00	29.81	150.0	V	162.0	8.4
12112.291667	51.49	---	74.00	22.51	150.0	V	237.0	15.8
12158.508333	---	42.37	54.00	11.63	150.0	V	339.0	16.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

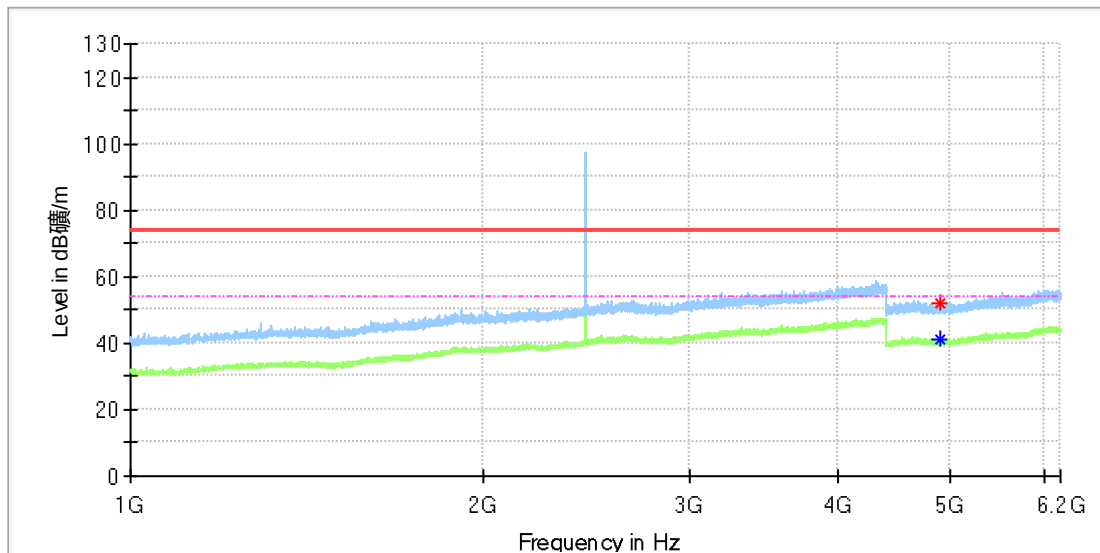

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4890.000000	51.95	---	74.00	22.05	150.0	H	151.0	13.3
4905.000000	---	41.23	54.00	12.77	150.0	H	300.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

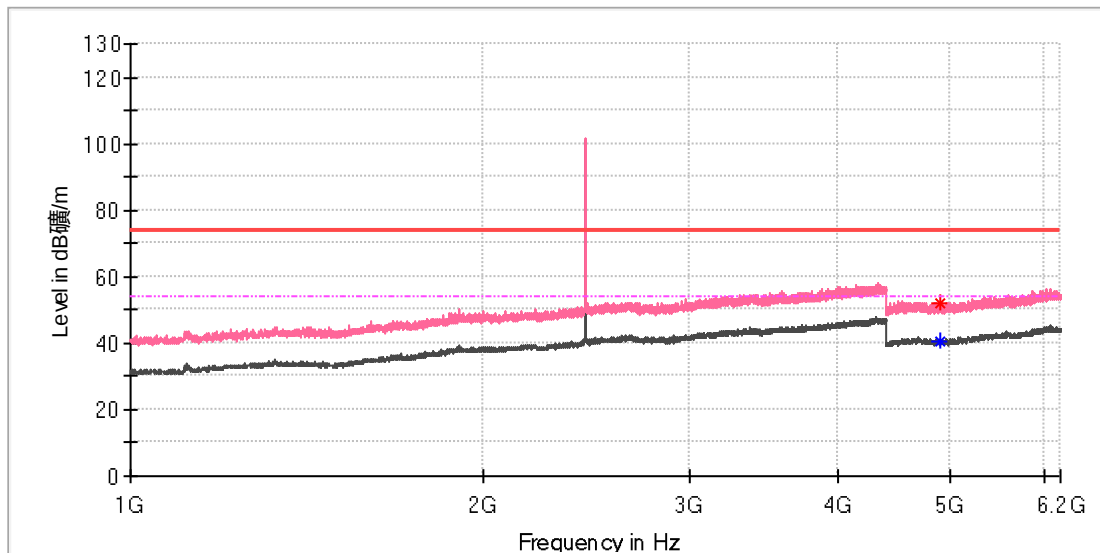

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4899.500000	52.17	---	74.00	21.83	150.0	V	194.0	13.3
4902.500000	---	40.75	54.00	13.25	150.0	V	120.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

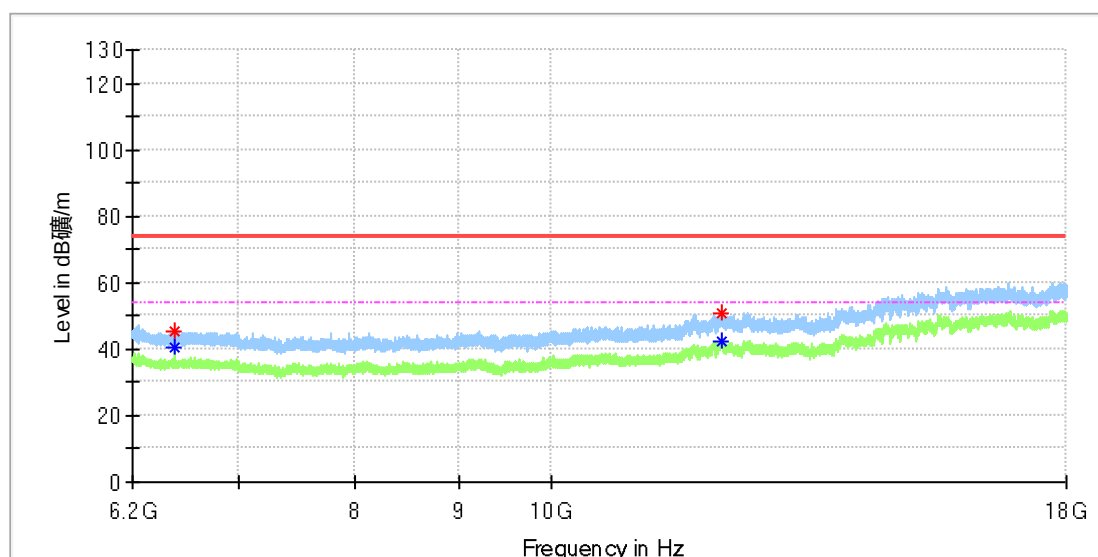

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6508.766667	45.30	---	74.00	28.70	150.0	H	236.0	8.8
6509.258333	---	40.49	54.00	13.51	150.0	H	294.0	8.8
12146.216667	---	42.26	54.00	11.74	150.0	H	50.0	16.6
12157.525000	50.65	---	74.00	23.35	150.0	H	105.0	16.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

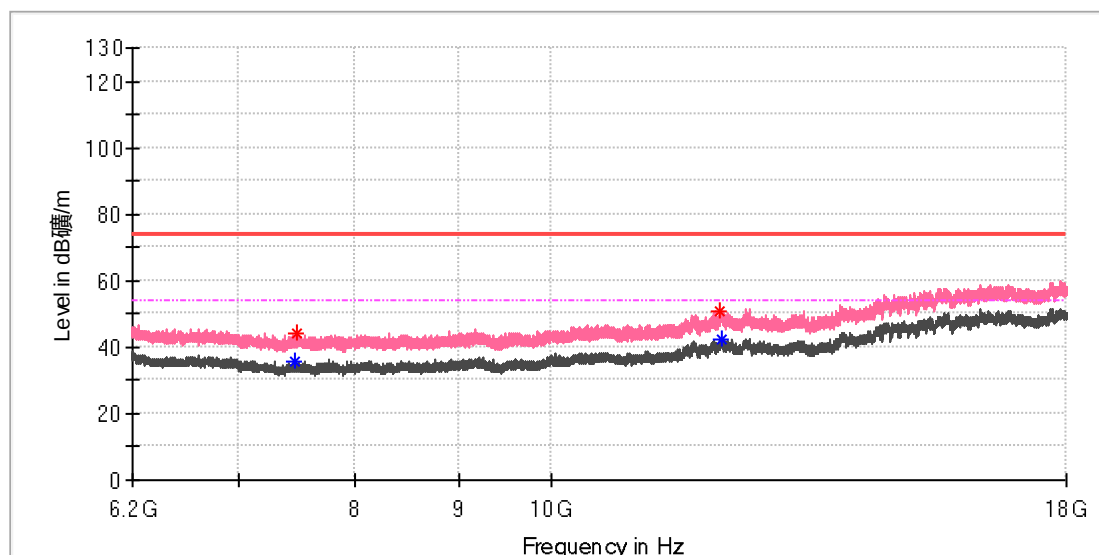

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7463.091667	---	35.38	54.00	18.62	150.0	V	283.0	8.6
7487.183333	44.08	---	74.00	29.92	150.0	V	305.0	8.7
12126.550000	50.74	---	74.00	23.26	150.0	V	316.0	16.1
12142.775000	---	42.59	54.00	11.41	150.0	V	195.0	16.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_High channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

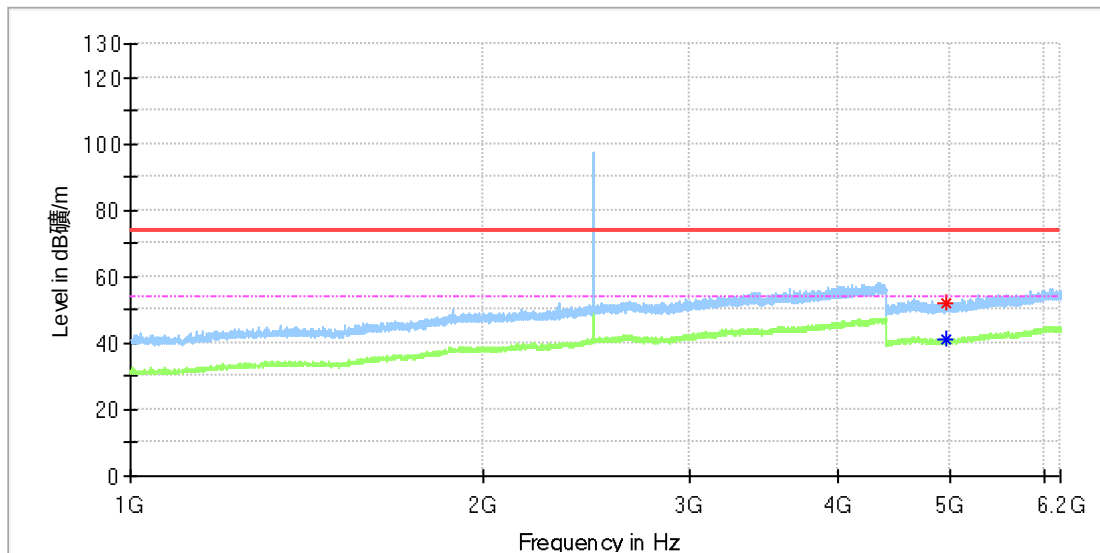

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4951.000000	---	40.96	54.00	13.04	150.0	H	151.0	13.3
4955.500000	51.82	---	74.00	22.18	150.0	H	91.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Headset
Model:	H410
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168521531/A003904311-010
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

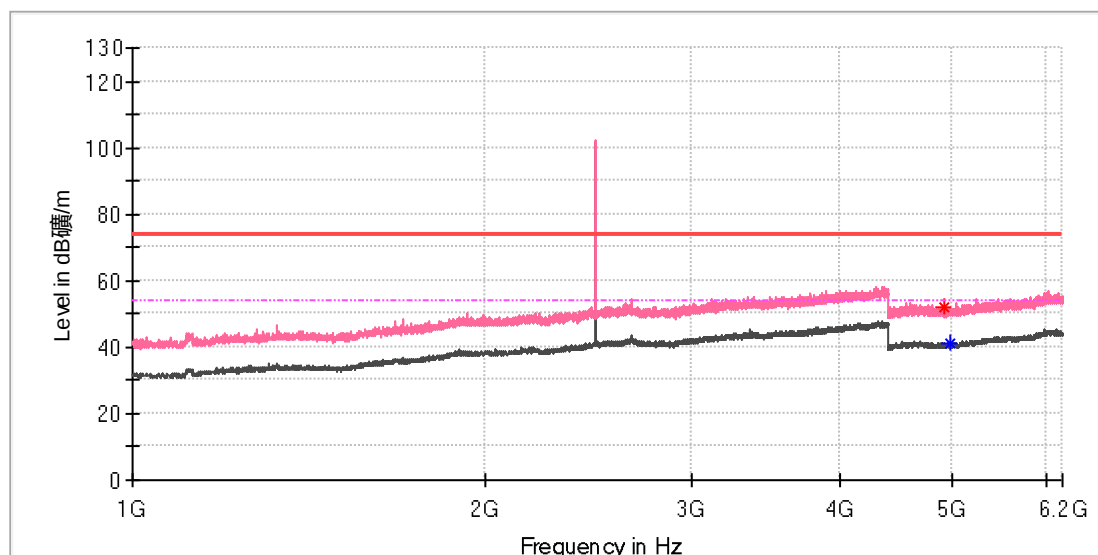

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.500000	51.90	---	74.00	22.10	150.0	V	88.0	13.3
4967.000000	---	41.23	54.00	12.77	150.0	V	312.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_High channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

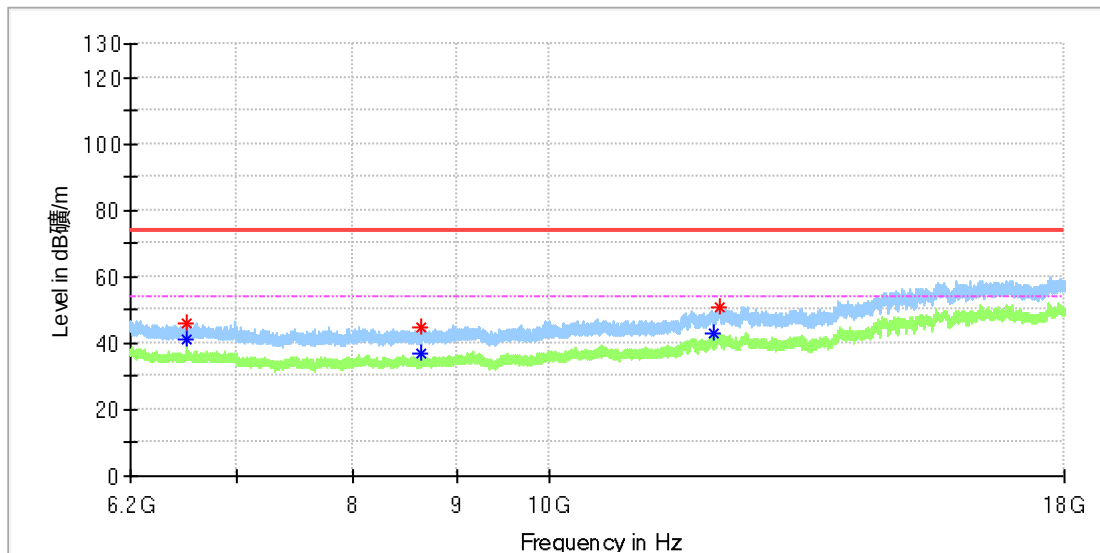

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6613.000000	45.93	---	74.00	28.07	150.0	H	205.0	8.8
6613.000000	---	40.96	54.00	13.04	150.0	H	205.0	8.8
8644.075000	45.03	---	74.00	28.97	150.0	H	273.0	8.8
8647.516667	---	37.15	54.00	16.85	150.0	H	216.0	8.9
12051.325000	---	42.77	54.00	11.23	150.0	H	89.0	16.3
12155.066667	50.87	---	74.00	23.13	150.0	H	79.0	16.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_High channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

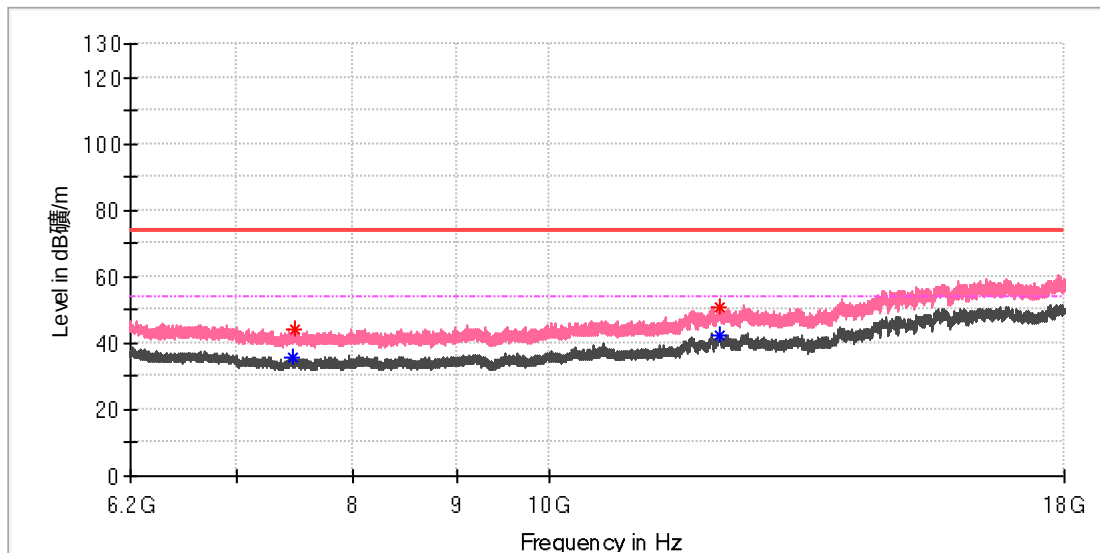

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7458.175000	---	35.65	54.00	18.35	150.0	V	116.0	8.5
7481.283333	43.85	---	74.00	30.15	150.0	V	211.0	8.7
12135.400000	50.55	---	74.00	23.45	150.0	V	278.0	16.3
12136.383333	---	42.48	54.00	11.52	150.0	V	188.0	16.4


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Headset
Model:	H410
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168521531/A003904311-010
Test Voltage:	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

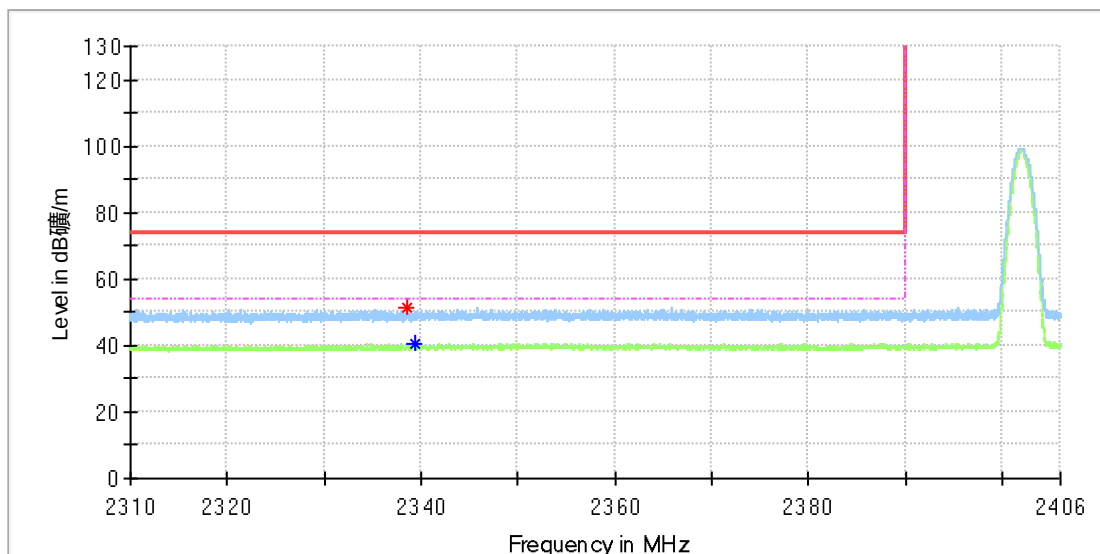

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.630588	51.27	---	74.00	22.73	150.0	H	104.0	8.4
2339.435294	---	40.35	54.00	13.65	150.0	H	201.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

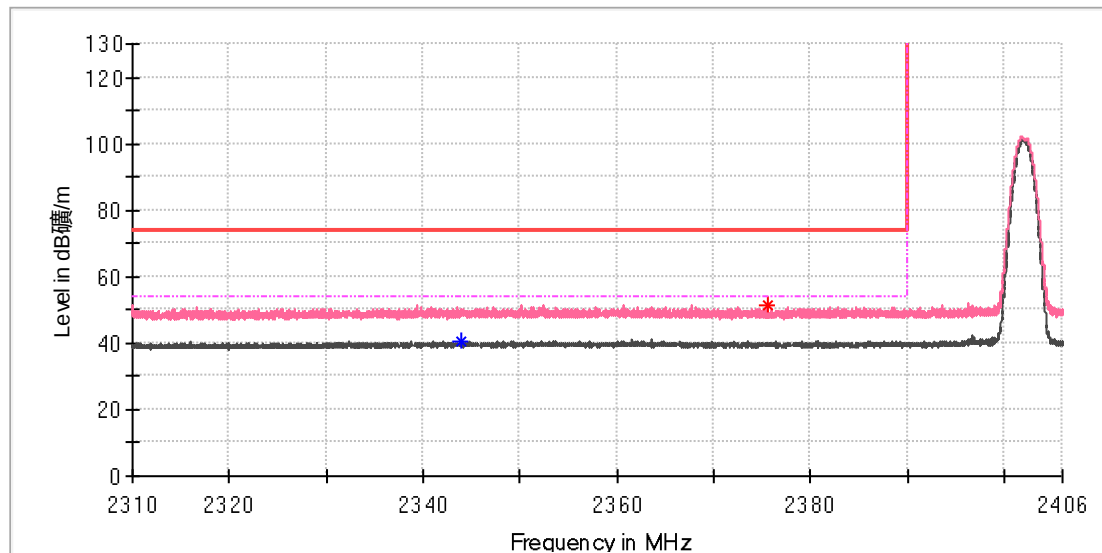

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2343.995294	---	40.77	54.00	13.23	150.0	V	357.0	8.4
2375.618824	51.54	---	74.00	22.46	150.0	V	153.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_High channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

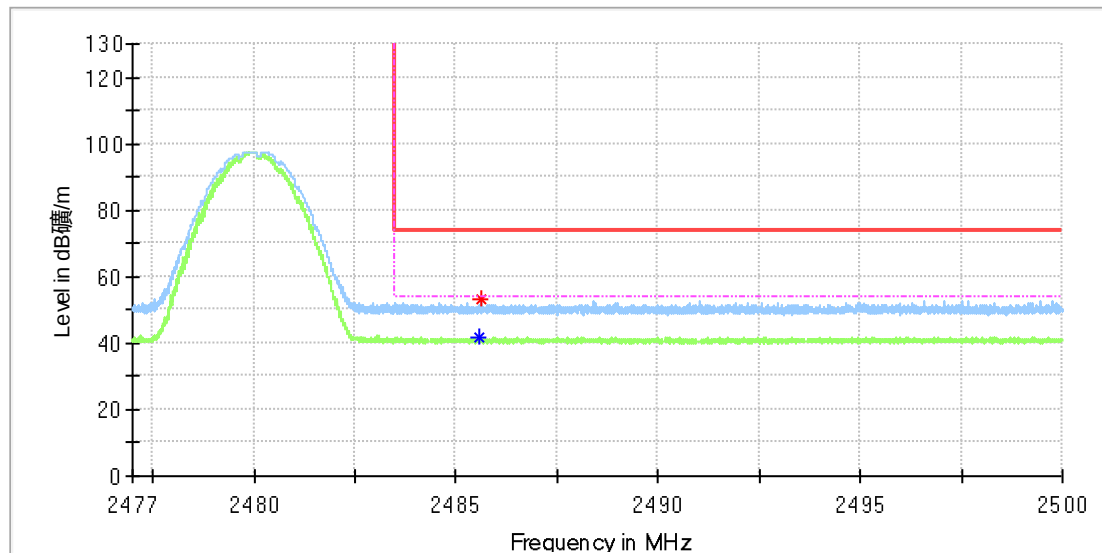

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.599265	---	41.72	54.00	12.29	150.0	H	0.0	9.0
2485.613971	52.95	---	74.00	21.05	150.0	H	1.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Headset
Model: H410
Test Mode: BR_DH5_High channel
Order No/Sample No: 168521531/A003904311-010
Test Voltage: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

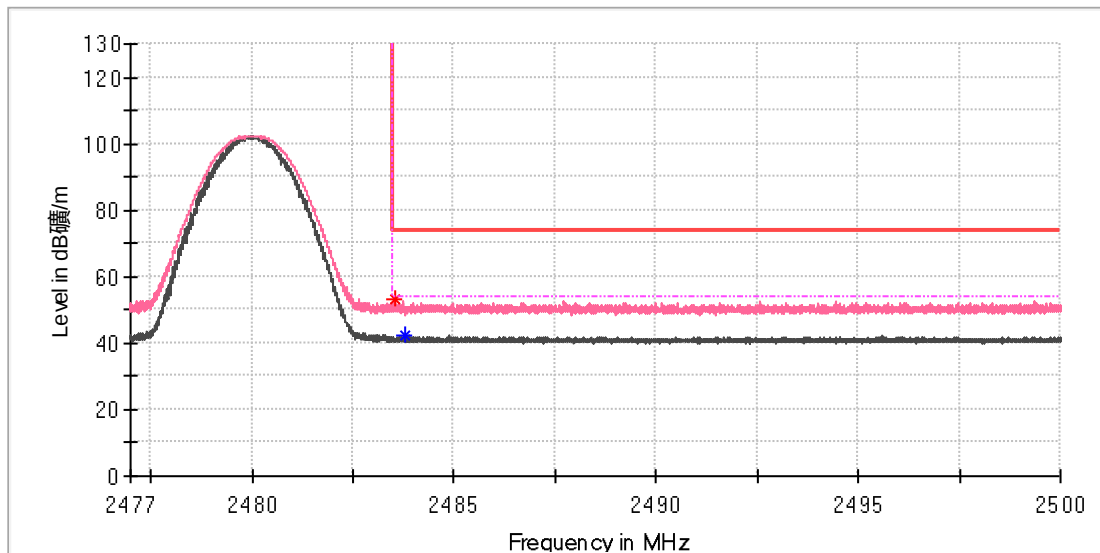

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.518382	53.16	---	74.00	20.84	150.0	V	249.0	9.0
2483.786765	---	42.26	54.00	11.74	150.0	V	241.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

